



FCC Test Report

FCC ID: QISCAN-LX1

Project No. : 1607C290
Equipment : Smart Phone
Model Name : HUAWEI CAN-L11, CAN-L11,HUAWEI
CAN-L01 ,CAN-L01
Applicant : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei
Technologies Co., Ltd., Bantian, Longgang District
Shenzhen China

Date of Receipt : Jul. 29, 2016
Date of Test : Jul. 29, 2016 ~ Aug. 11, 2016
Issued Date : Aug. 12, 2016
Tested by : BTL Inc.

Testing Engineer : 
(Bill Zhang)

Technical Manager : 
(James Chiu)

Authorized Signatory : 
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
REPORT ISSUED HISTORY	4
1 . CERIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.4 DESCRIPTION OF SUPPORT UNITS	12
4 . EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION	13
4.1.2 MEASUREMENT INSTRUMENTS LIST	13
4.1.3 TEST PROCEDURE	14
4.1.4 DEVIATION FROM TEST STANDARD	14
4.1.5 TEST SETUP	14
4.1.6 EUT OPERATING CONDITIONS	14
4.1.7 TEST RESULTS	15
4.2 RADIATED EMISSION MEASUREMENT	46
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	46
4.2.2 MEASUREMENT INSTRUMENTS LIST	47
4.2.3 TEST PROCEDURE	48
4.2.4 DEVIATION FROM TEST STANDARD	48
4.2.5 TEST SETUP	49
4.2.6 EUT OPERATING CONDITIONS	50
4.2.7 TEST RESULTS-BELOW 1GHZ	50
4.2.8 TEST RESULTS-ABOVE 1GHZ	81

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1607C290	Original Issue.	Aug. 12, 2016

1. CERIFICATION

Equipment : Smart Phone
Brand Name : HUAWEI
Model Name : HUAWEI CAN-L11, CAN-L11,HUAWEI CAN-L01 ,CAN-L01
Applicant : Huawei Technologies Co.,Ltd.
Manufacturer: Huawei Technologies Co.,Ltd.
Address : Administration Building, Huawei Base, Bantian, Longgang District ,Shenzhen
518129, P.R.China
Factory : Huawei Technologies Co.,Ltd.
Address : Administration Building, Huawei Base, Bantian, Longgang District ,Shenzhen
518129, P.R.China
Date of Test : Jul. 29, 2016 ~ Aug. 11, 2016
Test Sample : Engineering Sample
Standard(s) : FCC Part 15, Subpart B
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1607C290) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B ANSI C63.4-2014	Conducted Emission	Class B	PASS	
	Radiated emission Below 1 GHz	Class B	PASS	
	Radiated emission Above 1 GHz	Class B	PASS	NOTE(2)

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency exceeds 108 MHz, so the test will be performed.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-C02	CISPR	150 kHz ~ 30MHz	2.32

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68
		18GHz ~ 40GHz	V	4.15
		18GHz ~ 40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone			
Brand Name	HUAWEI			
Model Name	HUAWEI CAN-L11, CAN-L11,HUAWEI CAN-L01 ,CAN-L01			
Model Difference	The only differences as below: Model HUAWEI CAN-L11, CAN-L11 is a smart phone with dual SIM. Model HUAWEI CAN-L01, CAN-L01 is a smart phone with single SIM. The difference of them is only for SIM CARD. HUAWEI CAN-L01, CAN-L01 delete one SIM by software.			
HW Version	HL1CANL01M			
SW Version	CAN-L01C900B039 CAN-L11C900B039			
Frequency	Mode		Work Frequency(MHz)	
	GSM	GSM 850	TX Frequency	RX Frequency
		PCS1900		
	WCDMA B2		824 - 849	869 - 894
	WCDMA B5		1850-1910	1930-1990
	LTE B7		2500 -2570	2620 -2690
	LTE B38		2570-2620	2570-2620
	Bluetooth		2402-2480	
	2.4G Wi-Fi		2412-2462	
	GPS		1575.42	
NFC		13.56MHz		
Power Source	#1 DC voltage supplied from AC/DC adapter. Manufacturer: 1). Shen Zhen Huntkey Power Technology Co.,Ltd. 2). Huizhou BYD Electronic Co., Ltd. 3). dongguan phltek electronics co., ltd Model: HW-050200U01(US) HW-050200E01(EU) HW-050200B01(UK) HW-050200A01(AU) #2 Supplied from battery.			
Power Rating	#1 I/P: 100-240V~50/60Hz 0.5A O/P: 5V  2A #2 DC 3.8V			

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2.

Item	Mfr/Brand	Model.
Battery	Huawei Technologies Co., Ltd.	HB405979ECW
	DESAY..	HB405979ECW
	SUNWODA.	HB405979ECW
	SCUD	HB405979ECW
Earphone	Jiangxi Lianchuang Hongsheng Electronic Co.,LTD	MEMD1632B580C00
	BOLUO COUNTY QUANCHENG ELECTRONIC CO.,LTD	1311-3291-3.5mm-229
USB Cable	FOXCONN INTERCONNECT TECHNOLOGY LIMITED.	CUDU01B-HC212-EH
	HONGLIN TECHNOLOGY CO.,LTD	130-26988
	LUXSHAREICT	L99UC001-CS-H

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Mode	Description
Mode 1	USB Copy+Idle
Mode 2	Adapter+WIFI+BT+GPS+Camera On
Mode 3	Adapter+Playing+Speaker
Mode 4	Adapter+Playing+Earphone
Mode 5	Adapter+Traffic(GSM)
Mode 6	Adapter+Traffic(WCDMA)
Mode 7	Adapter+Traffic(LTE)

For Conducted Test	
Final Test Mode	Description
Mode 1	USB Copy+Idle
Mode 2	Adapter+WIFI+BT+GPS+Camera On
Mode 3	Adapter+Playing+Speaker
Mode 4	Adapter+Playing+Earphone
Mode 5	Adapter+Traffic(GSM)
Mode 6	Adapter+Traffic(WCDMA)
Mode 7	Adapter+Traffic(LTE)

For Radiated Test	
Final Test Mode	Description
Mode 1	USB Copy+Idle
Mode 2	Adapter+WIFI+BT+GPS+Camera On
Mode 3	Adapter+Playing+Speaker
Mode 4	Adapter+Playing+Earphone
Mode 5	Adapter+Traffic(GSM)
Mode 6	Adapter+Traffic(WCDMA)
Mode 7	Adapter+Traffic(LTE)

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Mode 1

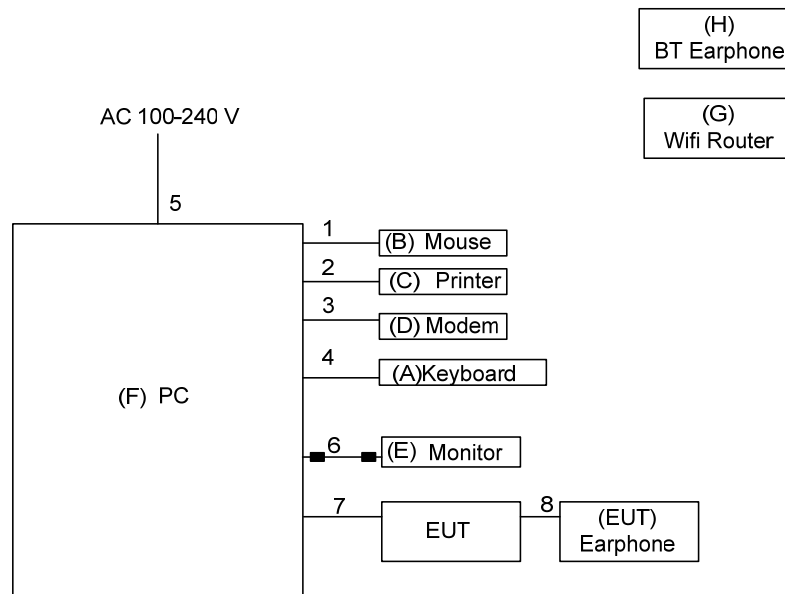

■ Ferrite core

----- Ground plane -----
Remote System

Mode 2-7

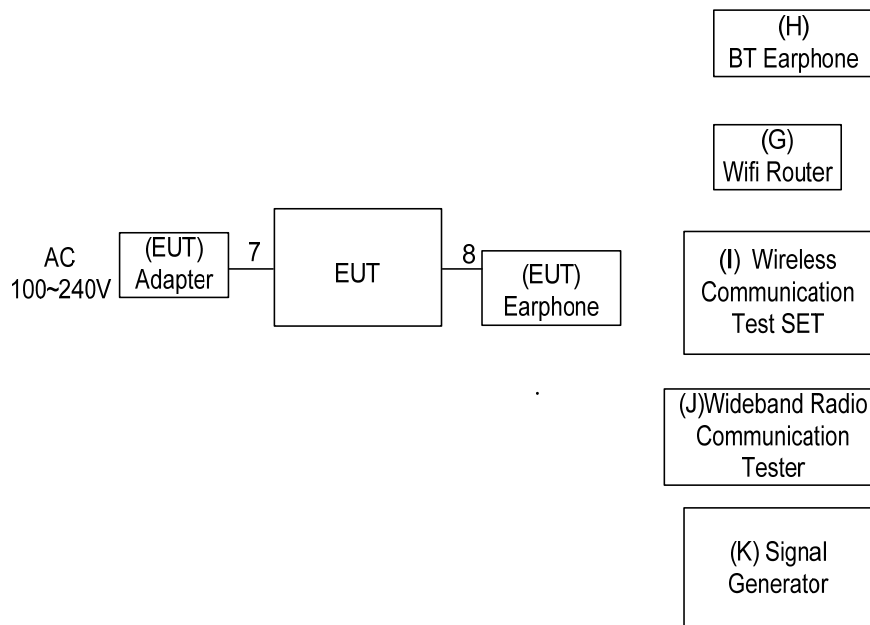

----- Ground plane -----
Remote System

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	FCC ID	Series No.
A	USB Keyboard	Dell	L100	DOC	CNORH6596589071T08NE
B	USB Mouse	Dell	MO56UOA	DOC	FQJ000BS
C	Printer	SII	DPU-414	DOC	3018507 B
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131
E	LCD monitor	Dell	E177FPc	DOC	CNOFJ179-64180-6AG-1WNS
F	PC	Dell	DCSM	DOC	G7K832X
G	WiFi Router	ASUS	RT-AC66U	MSQ-RTAC66U	E8ICGG000138
H	BT earphone	N/A	N/A	N/A	N/A
I	Wireless Communication Test SET	Agilent	8960 Series	N/A	MY48364183
J	Wideband Radio Communication Tester	RS	CMW500	N/A	122125
K	Signal Generator	Agilent	E4438C	N/A	MY49071316

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1m	USB Cable
8	NO	NO	1.1m	Audio Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	76.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	0052765	Mar. 27, 2017
2	LISN	R&S	ENV216	101447	Mar. 27, 2017
3	Test Cable	emci	RG223(9KHz-30MHz)	C_17	Mar. 10, 2017
4	EMI Test Receiver	R&S	ESCI	100382	Mar. 27, 2017
5	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 27, 2017
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.


4.1.3 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.
- First the whole spectrum of emission caused by equipment under test(EUT) is recorded with Detector set to peak. Peak value recorded in table if the margin from QP Limit is larger than 2dB,otherwise,QP value is recorded, Measuring frequency range from 150KHz to 30MHz.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

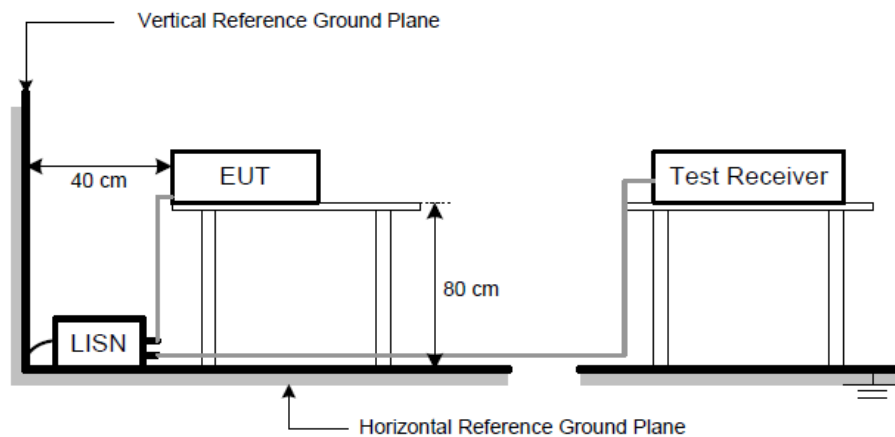

4.1.6 EUT OPERATING CONDITIONS


The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

4.1.7 TEST RESULTS

Remark


- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=10KHz, VBW =10KHz, Swp. Time = 0.3 sec./MHz.
Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz, VBW=10KHz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB Copy+Idle		
Note	USB Cable: FOXCONN		

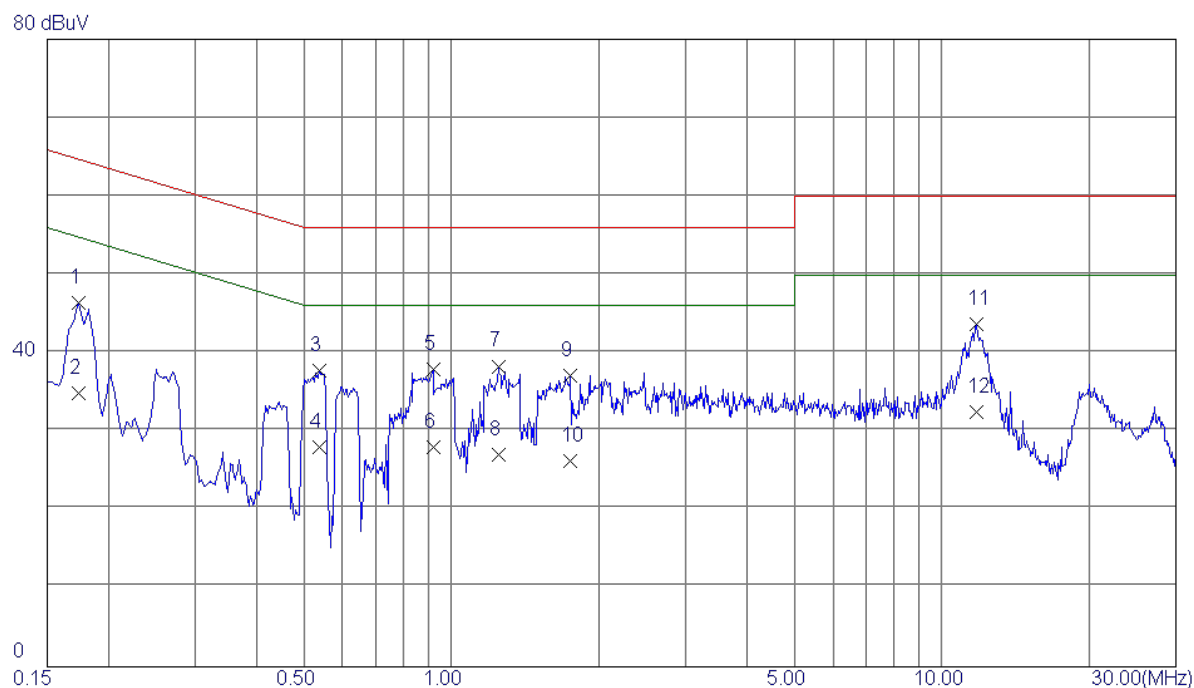


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1740	36.88	9.52	46.40	64.77	-18.37	QP
2	0.1740	25.32	9.52	34.84	54.77	-19.93	AVG
3	0.5380	28.07	9.64	37.71	56.00	-18.29	QP
4	0.5380	18.35	9.64	27.99	46.00	-18.01	AVG
5	0.9180	28.16	9.76	37.92	56.00	-18.08	QP
6	0.9180	18.25	9.76	28.01	46.00	-17.99	AVG
7	1.2460	28.54	9.78	38.32	56.00	-17.68	QP
8	1.2460	17.26	9.78	27.04	46.00	-18.96	AVG
9	1.7460	27.27	9.88	37.15	56.00	-18.85	QP
10	1.7460	16.34	9.88	26.22	46.00	-19.78	AVG
11 *	11.7780	33.48	10.26	43.74	60.00	-16.26	QP
12	11.7780	22.16	10.26	32.42	50.00	-17.58	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB Copy+Idle		
Note	USB Cable: FOXCONN		

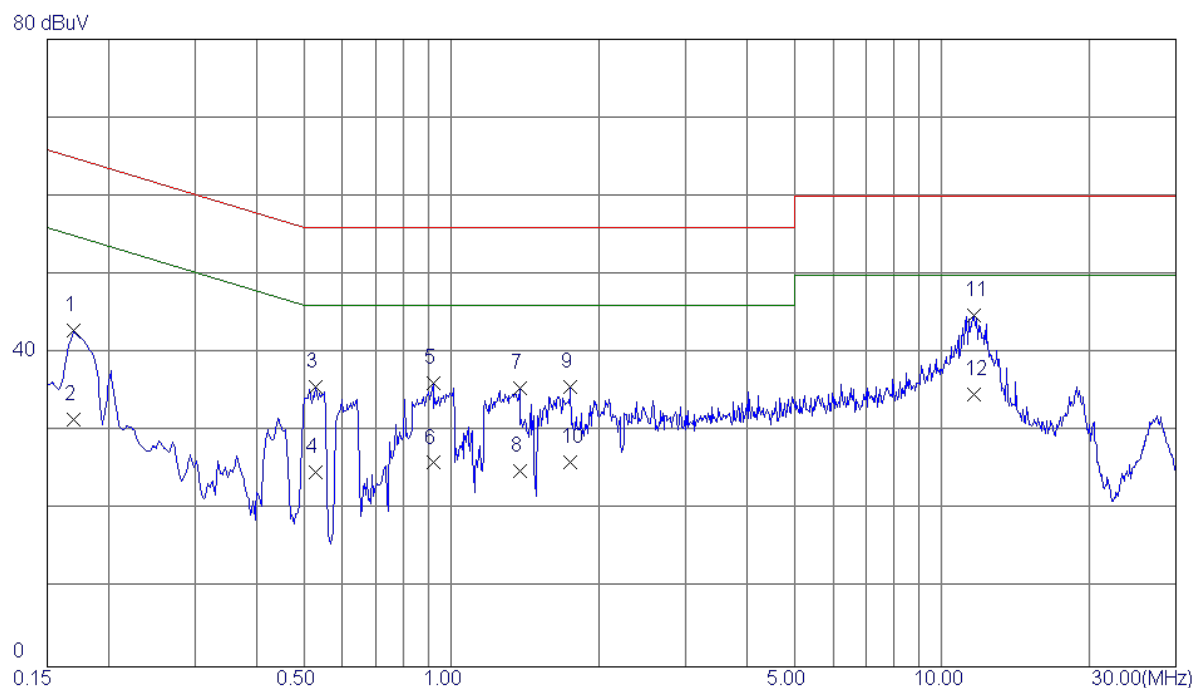


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1700	33.42	9.42	42.84	64.96	-22.12	QP
2	0.1700	22.15	9.42	31.57	54.96	-23.39	AVG
3	0.5299	26.21	9.44	35.65	56.00	-20.35	QP
4	0.5299	15.38	9.44	24.82	46.00	-21.18	AVG
5	0.9180	26.57	9.66	36.23	56.00	-19.77	QP
6	0.9180	16.34	9.66	26.00	46.00	-20.00	AVG
7	1.3779	25.88	9.67	35.55	56.00	-20.45	QP
8	1.3779	15.28	9.67	24.95	46.00	-21.05	AVG
9	1.7460	26.04	9.68	35.72	56.00	-20.28	QP
10	1.7460	16.38	9.68	26.06	46.00	-19.94	AVG
11 *	11.6459	34.50	10.33	44.83	60.00	-15.17	QP
12	11.6459	24.38	10.33	34.71	50.00	-15.29	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB Copy+Idle		
Note	USB Cable: HONGLIN		

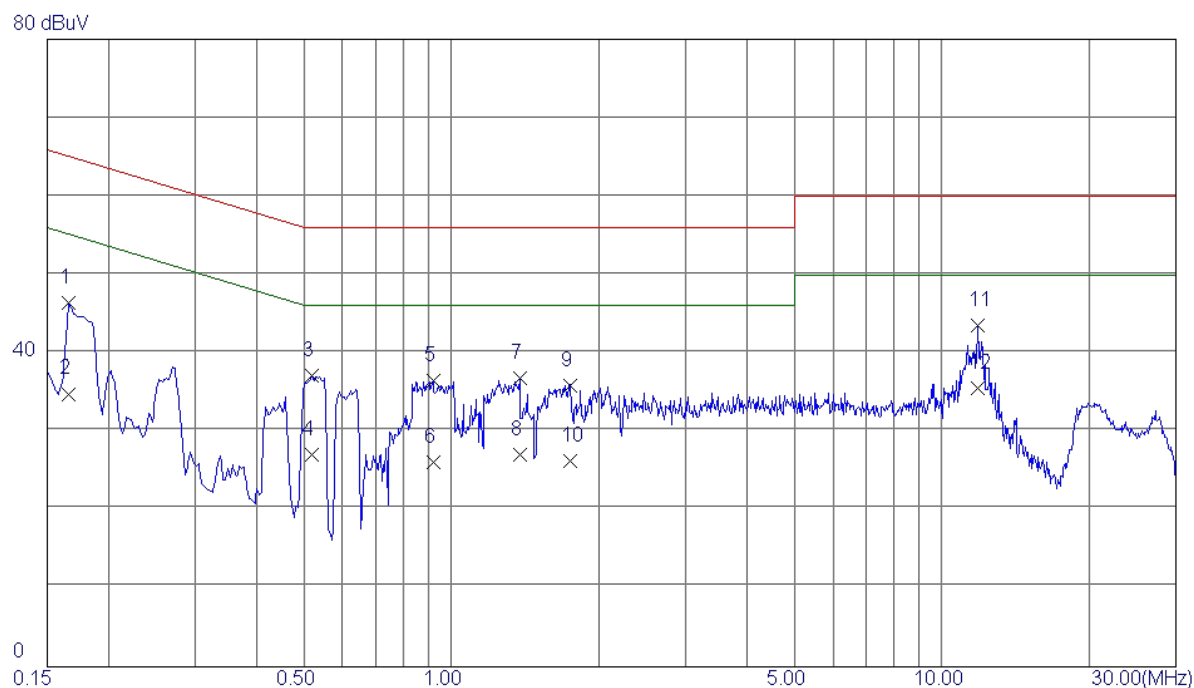

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1660	36.88	9.52	46.40	65.16	-18.76	QP
2	0.1660	25.28	9.52	34.80	55.16	-20.36	AVG
3	0.5180	27.47	9.64	37.11	56.00	-18.89	QP
4	0.5180	17.39	9.64	27.03	46.00	-18.97	AVG
5	0.9180	26.66	9.76	36.42	56.00	-19.58	QP
6	0.9180	16.28	9.76	26.04	46.00	-19.96	AVG
7	1.3779	27.03	9.83	36.86	56.00	-19.14	QP
8	1.3779	17.25	9.83	27.08	46.00	-18.92	AVG
9	1.7460	26.04	9.88	35.92	56.00	-20.08	QP
10	1.7460	16.38	9.88	26.26	46.00	-19.74	AVG
11	11.8380	33.27	10.27	43.54	60.00	-16.46	QP
12 *	11.8380	25.25	10.27	35.52	50.00	-14.48	AVG


EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB Copy+Idle		
Note	USB Cable: HONGLIN		

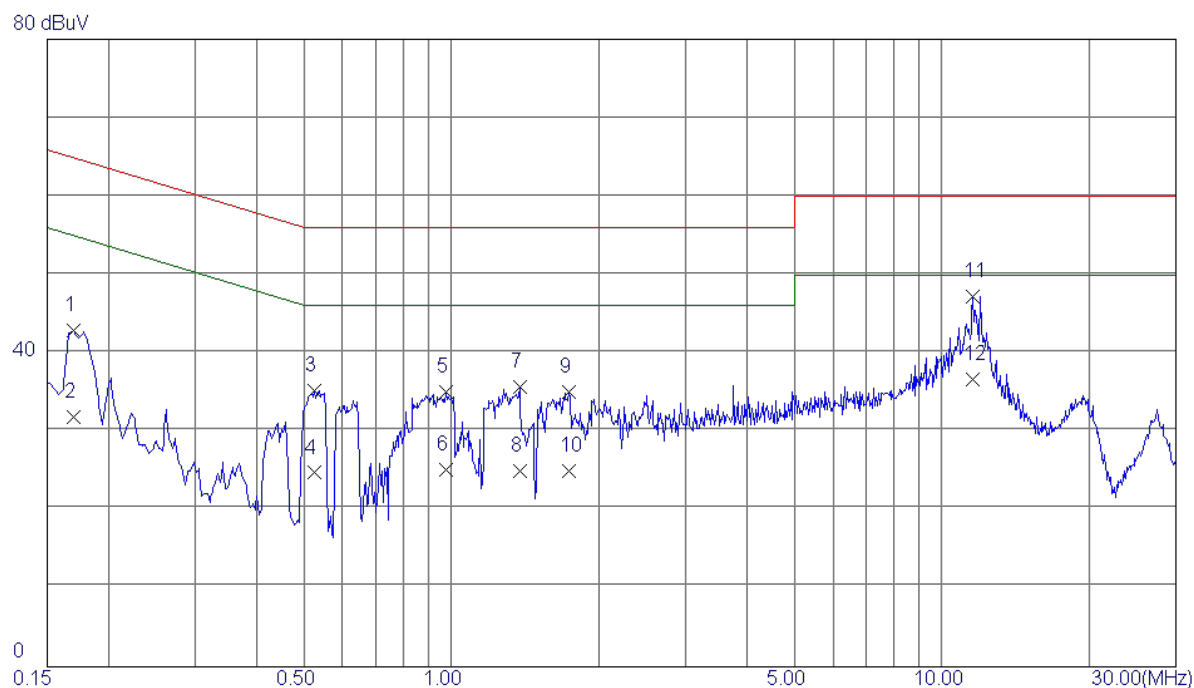

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1700	33.46	9.42	42.88	64.96	-22.08	QP
2	0.1700	22.38	9.42	31.80	54.96	-23.16	AVG
3	0.5260	25.82	9.44	35.26	56.00	-20.74	QP
4	0.5260	15.28	9.44	24.72	46.00	-21.28	AVG
5	0.9740	25.35	9.66	35.01	56.00	-20.99	QP
6	0.9740	15.39	9.66	25.05	46.00	-20.95	AVG
7	1.3779	25.98	9.67	35.65	56.00	-20.35	QP
8	1.3779	15.26	9.67	24.93	46.00	-21.07	AVG
9	1.7340	25.33	9.68	35.01	56.00	-20.99	QP
10	1.7340	15.28	9.68	24.96	46.00	-21.04	AVG
11 *	11.5700	36.91	10.33	47.24	60.00	-12.76	QP
12	11.5700	26.34	10.33	36.67	50.00	-13.33	AVG


EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB Copy+Idle		
Note	USB Cable: LUXSHAREICT		

80 dBuV

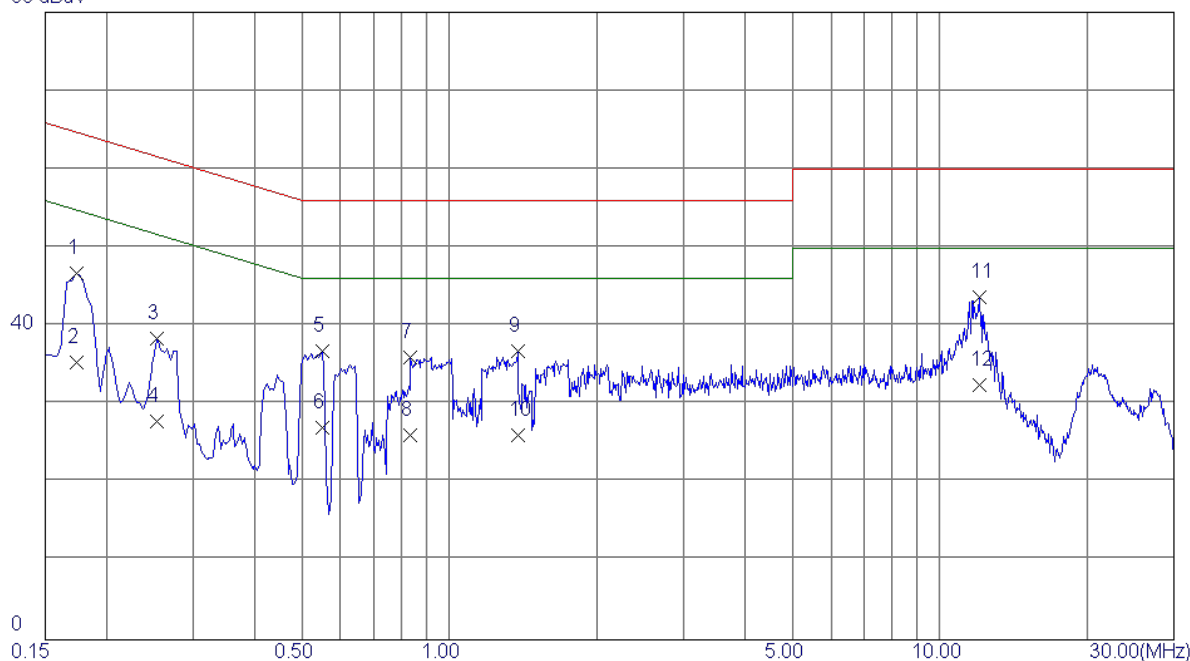


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1740	37.26	9.52	46.78	64.77	-17.99	QP
2	0.1740	25.83	9.52	35.35	54.77	-19.42	AVG
3	0.2540	28.85	9.53	38.38	61.63	-23.25	QP
4	0.2540	18.36	9.53	27.89	51.63	-23.74	AVG
5	0.5500	27.14	9.64	36.78	56.00	-19.22	QP
6	0.5500	17.35	9.64	26.99	46.00	-19.01	AVG
7	0.8340	26.23	9.75	35.98	56.00	-20.02	QP
8	0.8340	16.34	9.75	26.09	46.00	-19.91	AVG
9	1.3779	27.02	9.83	36.85	56.00	-19.15	QP
10	1.3779	16.32	9.83	26.15	46.00	-19.85	AVG
11 *	12.0180	33.35	10.27	43.62	60.00	-16.38	QP
12	12.0180	22.15	10.27	32.42	50.00	-17.58	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB Copy+Idle		
Note	USB Cable: LUXSHAREICT		

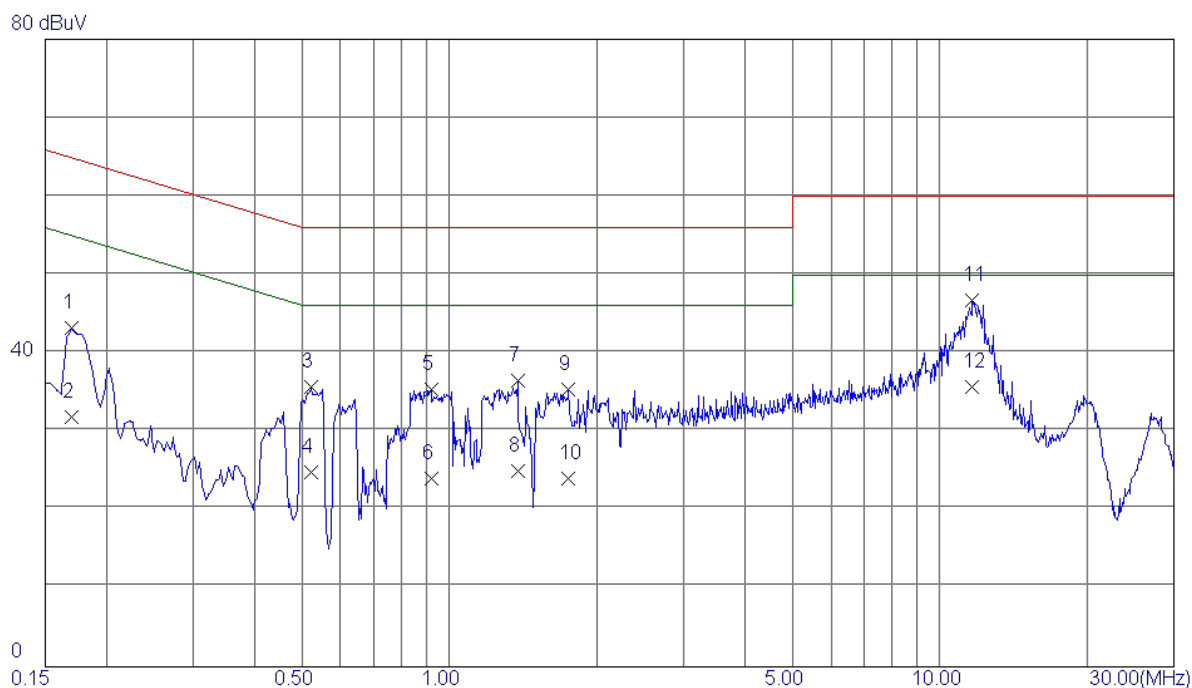


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1700	33.71	9.42	43.13	64.96	-21.83	QP
2	0.1700	22.38	9.42	31.80	54.96	-23.16	AVG
3	0.5220	26.31	9.44	35.75	56.00	-20.25	QP
4	0.5220	15.34	9.44	24.78	46.00	-21.22	AVG
5	0.9180	25.67	9.66	35.33	56.00	-20.67	QP
6	0.9180	14.38	9.66	24.04	46.00	-21.96	AVG
7	1.3779	26.75	9.67	36.42	56.00	-19.58	QP
8	1.3779	15.32	9.67	24.99	46.00	-21.01	AVG
9	1.7460	25.66	9.68	35.34	56.00	-20.66	QP
10	1.7460	14.25	9.68	23.93	46.00	-22.07	AVG
11 *	11.6300	36.43	10.33	46.76	60.00	-13.24	QP
12	11.6300	25.31	10.33	35.64	50.00	-14.36	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:BYD+USB Cable: HONGLIN		

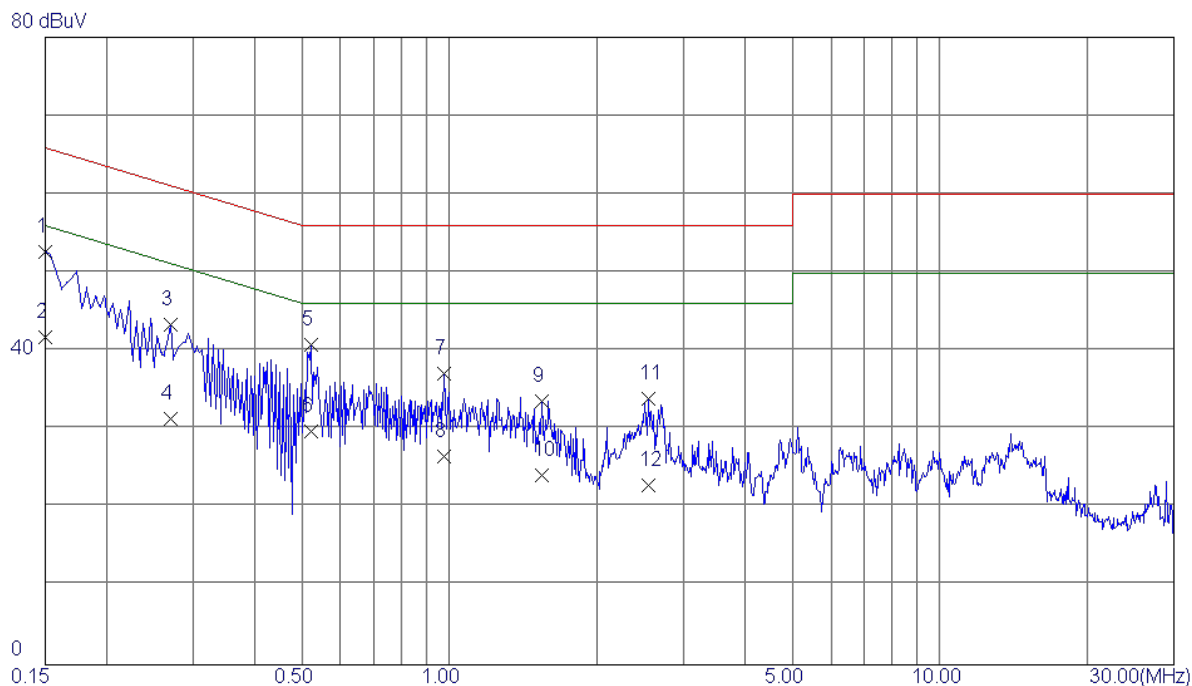


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1500	43.12	9.52	52.64	66.00	-13.36	QP
2	0.1500	32.23	9.52	41.75	56.00	-14.25	AVG
3	0.2700	33.80	9.53	43.33	61.12	-17.79	QP
4	0.2700	21.84	9.53	31.37	51.12	-19.75	AVG
5	0.5220	31.13	9.64	40.77	56.00	-15.23	QP
6	0.5220	20.15	9.64	29.79	46.00	-16.21	AVG
7	0.9780	27.40	9.76	37.16	56.00	-18.84	QP
8	0.9780	16.83	9.76	26.59	46.00	-19.41	AVG
9	1.5460	23.79	9.88	33.67	56.00	-22.33	QP
10	1.5460	14.35	9.88	24.23	46.00	-21.77	AVG
11	2.5500	23.90	10.09	33.99	56.00	-22.01	QP
12	2.5500	12.86	10.09	22.95	46.00	-23.05	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:BYD+USB Cable: HONGLIN		

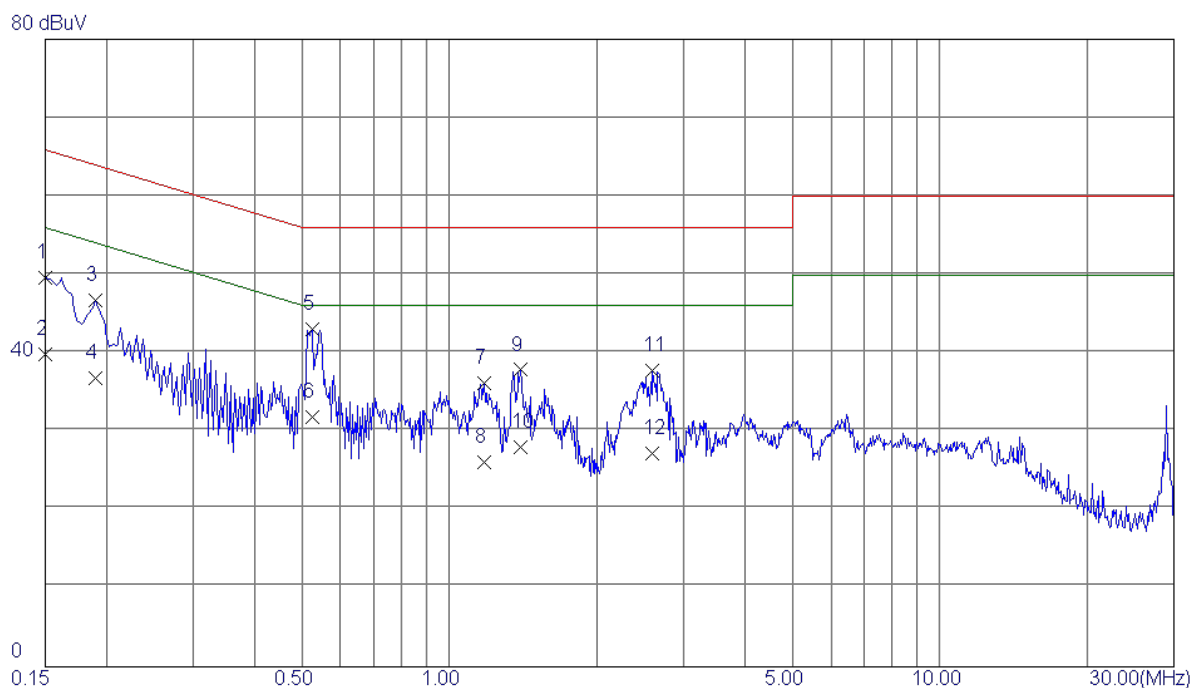


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	40.06	9.52	49.58	66.00	-16.42	QP
2	0.1500	30.25	9.52	39.77	56.00	-16.23	AVG
3	0.1900	37.24	9.49	46.73	64.04	-17.31	QP
4	0.1900	27.37	9.49	36.86	54.04	-17.18	AVG
5 *	0.5260	33.57	9.44	43.01	56.00	-12.99	QP
6	0.5260	22.35	9.44	31.79	46.00	-14.21	AVG
7	1.1780	26.43	9.67	36.10	56.00	-19.90	QP
8	1.1780	16.38	9.67	26.05	46.00	-19.95	AVG
9	1.3980	28.17	9.67	37.84	56.00	-18.16	QP
10	1.3980	18.38	9.67	28.05	46.00	-17.95	AVG
11	2.5980	27.90	9.79	37.69	56.00	-18.31	QP
12	2.5980	17.38	9.79	27.17	46.00	-18.83	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:Huntkey+USB Cable: HONGLIN		

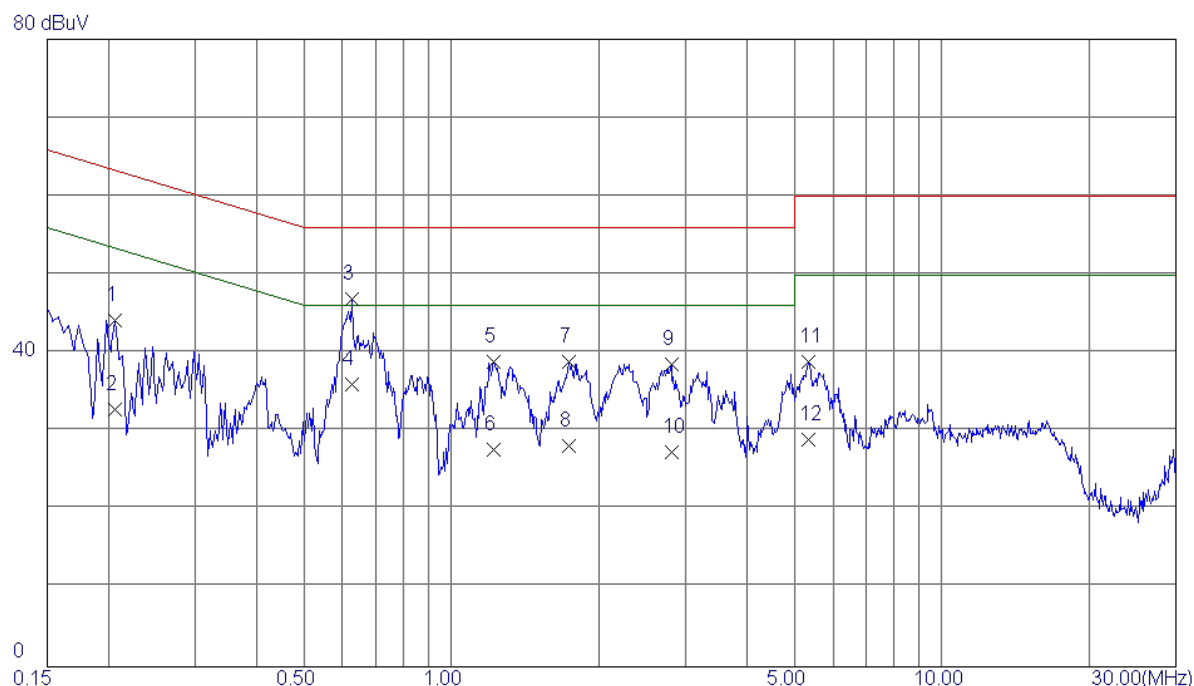


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.2060	34.68	9.53	44.21	63.37	-19.16	QP
2	0.2060	23.25	9.53	32.78	53.37	-20.59	AVG
3 *	0.6260	37.23	9.64	46.87	56.00	-9.13	QP
4	0.6260	26.38	9.64	36.02	46.00	-9.98	AVG
5	1.2180	29.06	9.77	38.83	56.00	-17.17	QP
6	1.2180	17.87	9.77	27.64	46.00	-18.36	AVG
7	1.7380	28.99	9.88	38.87	56.00	-17.13	QP
8	1.7380	18.35	9.88	28.23	46.00	-17.77	AVG
9	2.8060	28.45	10.09	38.54	56.00	-17.46	QP
10	2.8060	17.28	10.09	27.37	46.00	-18.63	AVG
11	5.3500	28.84	10.02	38.86	60.00	-21.14	QP
12	5.3500	18.96	10.02	28.98	50.00	-21.02	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:Huntkey+USB Cable: HONGLIN		

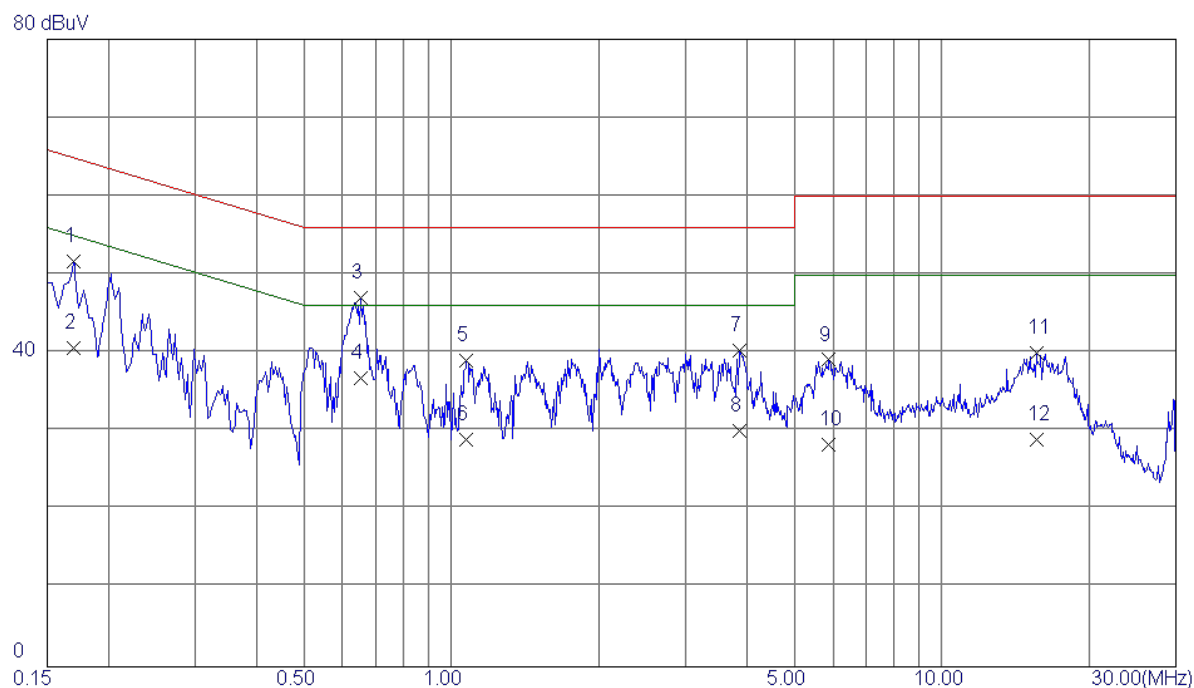


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1700	42.23	9.42	51.65	64.96	-13.31	QP
2	0.1700	31.26	9.42	40.68	54.96	-14.28	AVG
3 *	0.6540	37.59	9.45	47.04	56.00	-8.96	QP
4	0.6540	27.34	9.45	36.79	46.00	-9.21	AVG
5	1.0740	29.36	9.66	39.02	56.00	-16.98	QP
6	1.0740	19.28	9.66	28.94	46.00	-17.06	AVG
7	3.8700	30.42	9.88	40.30	56.00	-15.70	QP
8	3.8700	20.15	9.88	30.03	46.00	-15.97	AVG
9	5.8820	29.15	9.97	39.12	60.00	-20.88	QP
10	5.8820	18.39	9.97	28.36	50.00	-21.64	AVG
11	15.5660	29.67	10.38	40.05	60.00	-19.95	QP
12	15.5660	18.62	10.38	29.00	50.00	-21.00	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:phitek+USB Cable: HONGLIN		

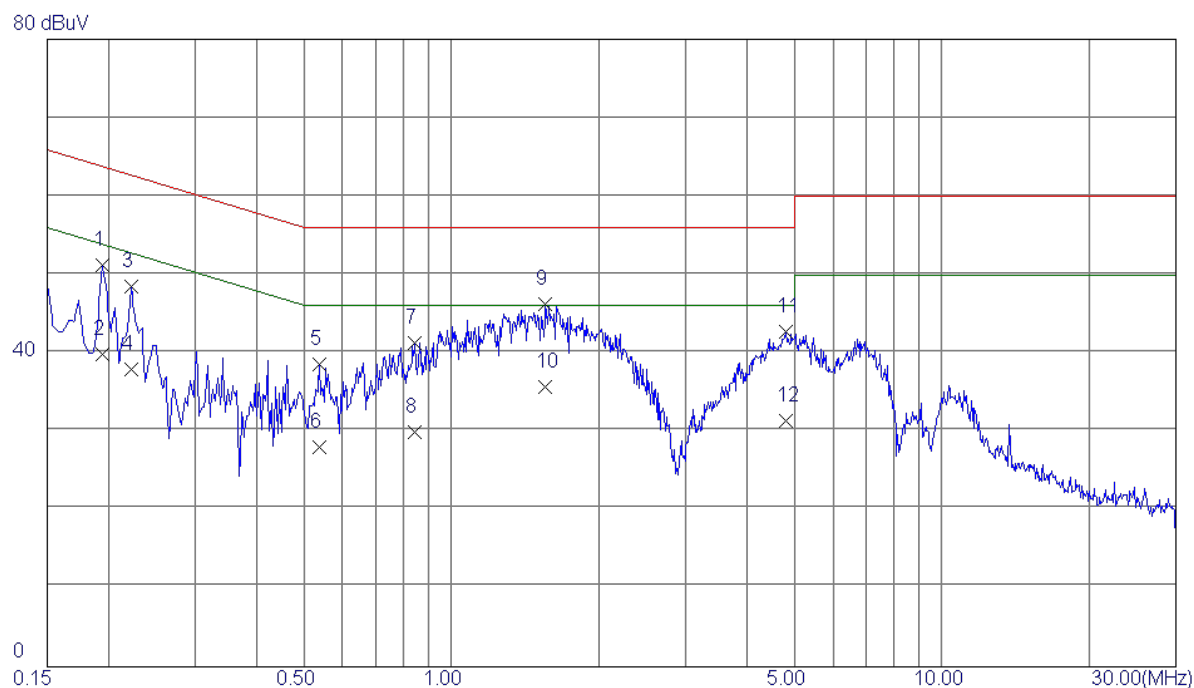


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1940	41.71	9.53	51.24	63.86	-12.62	QP
2	0.1940	30.28	9.53	39.81	53.86	-14.05	AVG
3	0.2220	38.89	9.53	48.42	62.74	-14.32	QP
4	0.2220	28.36	9.53	37.89	52.74	-14.85	AVG
5	0.5380	28.92	9.64	38.56	56.00	-17.44	QP
6	0.5380	18.34	9.64	27.98	46.00	-18.02	AVG
7	0.8420	31.54	9.75	41.29	56.00	-14.71	QP
8	0.8420	20.15	9.75	29.90	46.00	-16.10	AVG
9 *	1.5540	36.33	9.88	46.21	56.00	-9.79	QP
10	1.5540	25.86	9.88	35.74	46.00	-10.26	AVG
11	4.8060	32.74	10.03	42.77	56.00	-13.23	QP
12	4.8060	21.38	10.03	31.41	46.00	-14.59	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:phitek+USB Cable: HONGLIN		

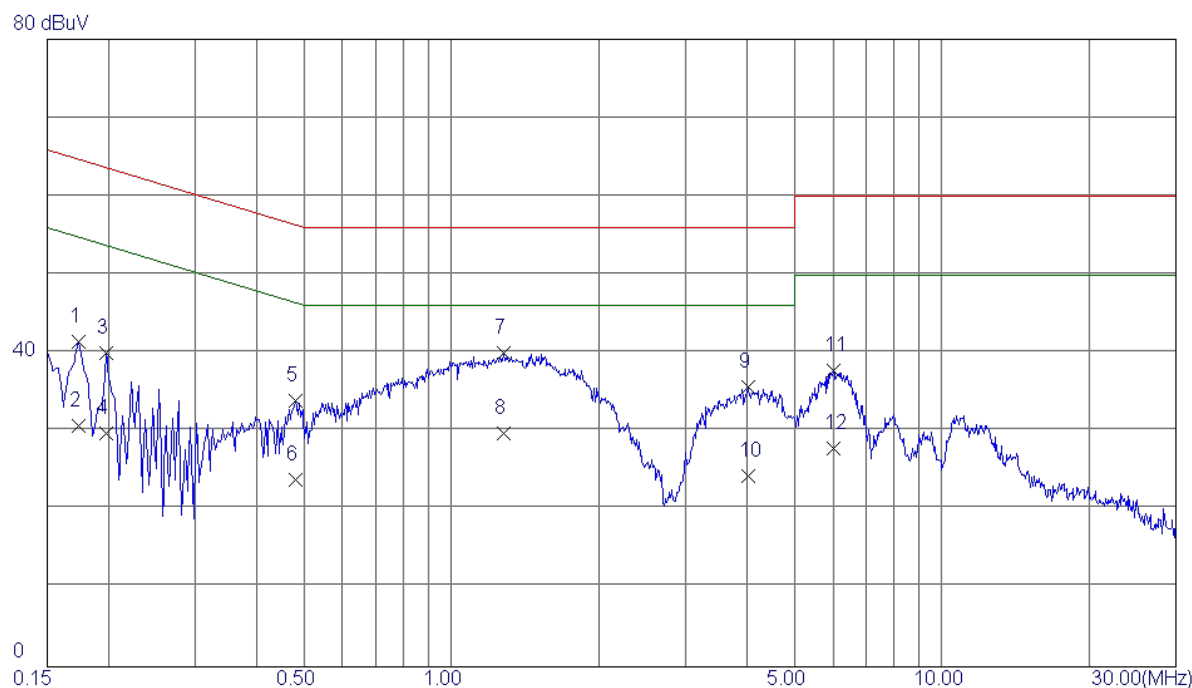


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1740	32.06	9.44	41.50	64.77	-23.27	QP
2	0.1740	21.33	9.44	30.77	54.77	-24.00	AVG
3	0.1980	30.48	9.52	40.00	63.69	-23.69	QP
4	0.1980	20.25	9.52	29.77	53.69	-23.92	AVG
5	0.4820	24.54	9.44	33.98	56.30	-22.32	QP
6	0.4820	14.38	9.44	23.82	46.30	-22.48	AVG
7 *	1.2820	30.38	9.67	40.05	56.00	-15.95	QP
8	1.2820	20.15	9.67	29.82	46.00	-16.18	AVG
9	4.0220	25.85	9.89	35.74	56.00	-20.26	QP
10	4.0220	14.38	9.89	24.27	46.00	-21.73	AVG
11	6.0140	27.82	9.97	37.79	60.00	-22.21	QP
12	6.0140	17.82	9.97	27.79	50.00	-22.21	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:Huntkey+USB Cable: HONGLIN		

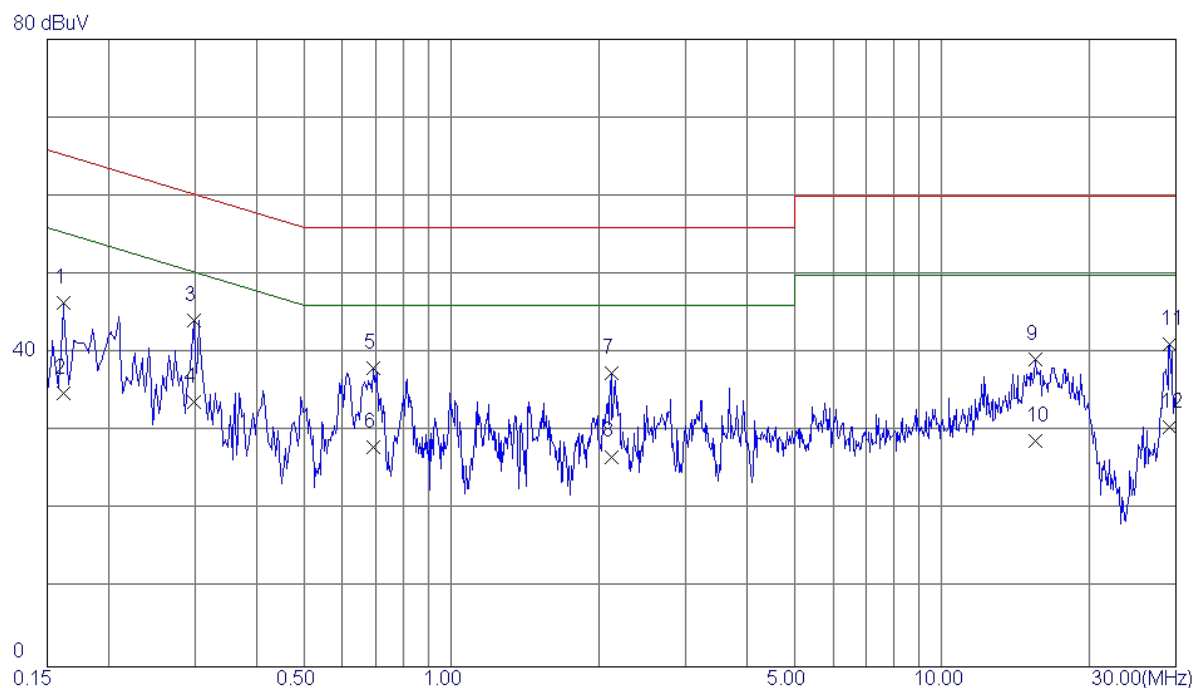


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1620	36.90	9.52	46.42	65.36	-18.94	QP
2	0.1620	25.34	9.52	34.86	55.36	-20.50	AVG
3 *	0.2980	34.69	9.53	44.22	60.30	-16.08	QP
4	0.2980	24.25	9.53	33.78	50.30	-16.52	AVG
5	0.6940	28.46	9.65	38.11	56.00	-17.89	QP
6	0.6940	18.35	9.65	28.00	46.00	-18.00	AVG
7	2.1180	27.53	9.94	37.47	56.00	-18.53	QP
8	2.1180	16.86	9.94	26.80	46.00	-19.20	AVG
9	15.5060	28.77	10.36	39.13	60.00	-20.87	QP
10	15.5060	18.37	10.36	28.73	50.00	-21.27	AVG
11	29.2020	30.71	10.38	41.09	60.00	-18.91	QP
12	29.2020	20.15	10.38	30.53	50.00	-19.47	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:Huntkey+USB Cable: HONGLIN		

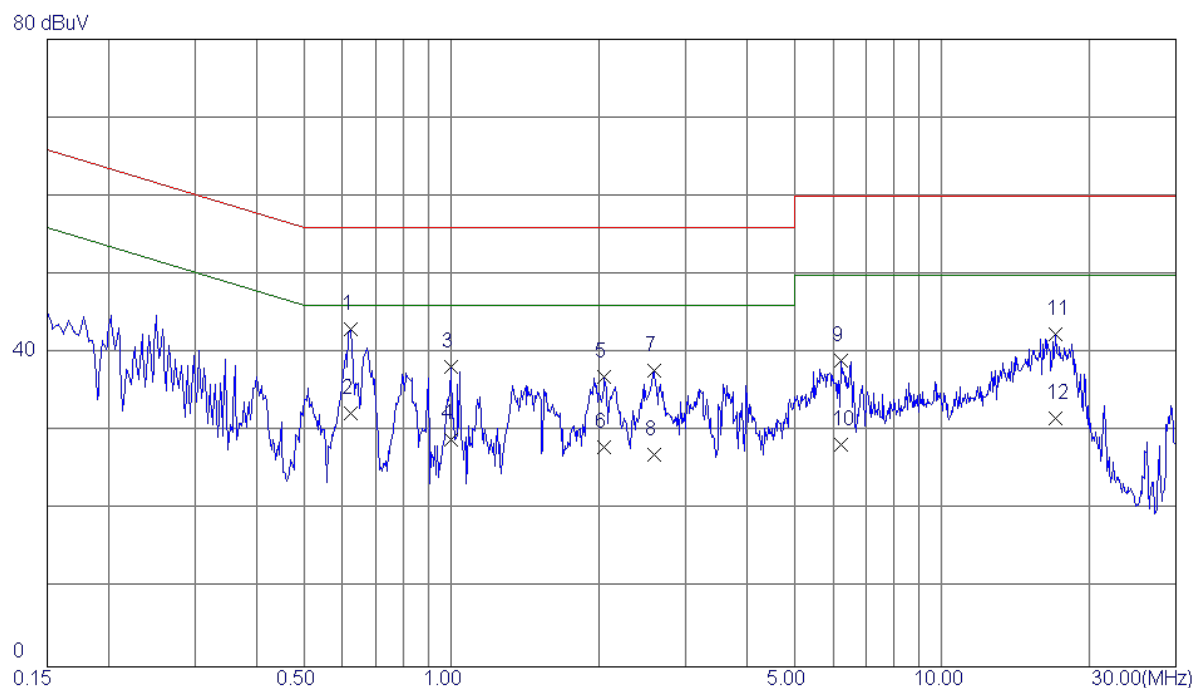


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0.6220	33.63	9.44	43.07	56.00	-12.93	QP
2	0.6220	22.86	9.44	32.30	46.00	-13.70	AVG
3	0.9980	28.59	9.66	38.25	56.00	-17.75	QP
4	0.9980	19.38	9.66	29.04	46.00	-16.96	AVG
5	2.0460	27.28	9.70	36.98	56.00	-19.02	QP
6	2.0460	18.36	9.70	28.06	46.00	-17.94	AVG
7	2.5860	27.98	9.79	37.77	56.00	-18.23	QP
8	2.5860	17.24	9.79	27.03	46.00	-18.97	AVG
9	6.2380	29.04	9.97	39.01	60.00	-20.99	QP
10	6.2380	18.35	9.97	28.32	50.00	-21.68	AVG
11	17.0860	32.02	10.42	42.44	60.00	-17.56	QP
12	17.0860	21.25	10.42	31.67	50.00	-18.33	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:Huntkey+USB Cable: HONGLIN+Earphone:Lianchuangang		

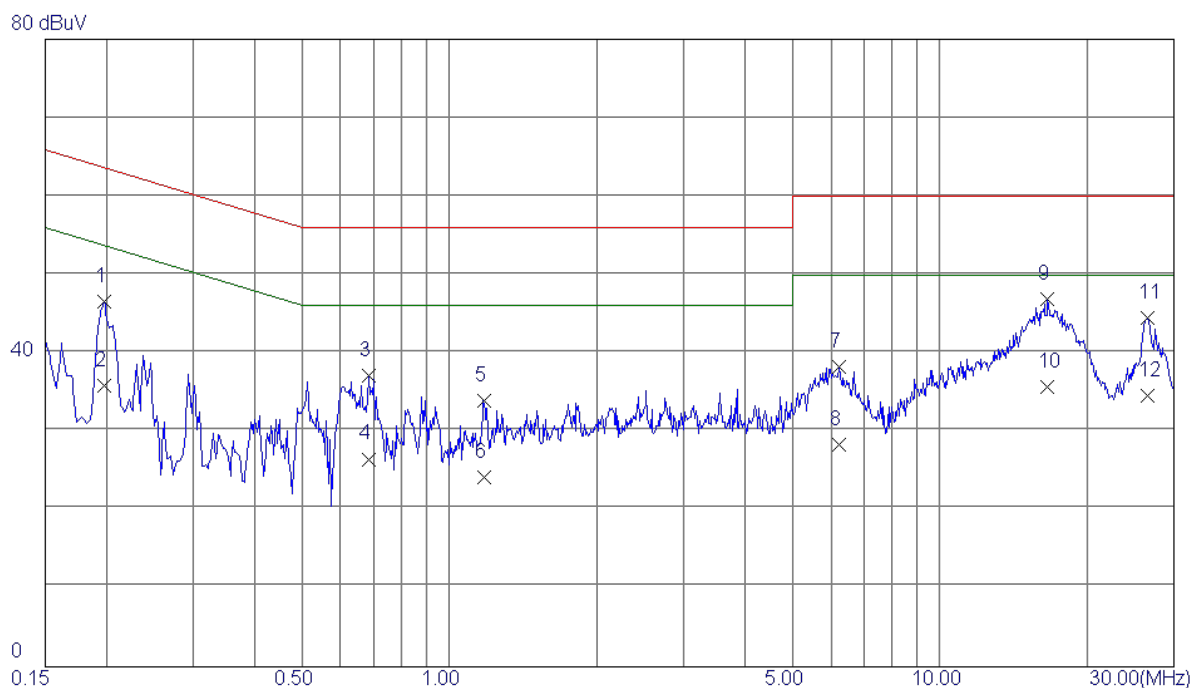


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1980	37.05	9.53	46.58	63.69	-17.11	QP
2	0.1980	26.34	9.53	35.87	53.69	-17.82	AVG
3	0.6860	27.41	9.65	37.06	56.00	-18.94	QP
4	0.6860	16.83	9.65	26.48	46.00	-19.52	AVG
5	1.1740	24.16	9.77	33.93	56.00	-22.07	QP
6	1.1740	14.35	9.77	24.12	46.00	-21.88	AVG
7	6.2380	28.12	10.09	38.21	60.00	-21.79	QP
8	6.2380	18.25	10.09	28.34	50.00	-21.66	AVG
9 *	16.5740	36.44	10.37	46.81	60.00	-13.19	QP
10	16.5740	25.34	10.37	35.71	50.00	-14.29	AVG
11	26.4820	34.06	10.39	44.45	60.00	-15.55	QP
12	26.4820	24.15	10.39	34.54	50.00	-15.46	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:Huntkey+USB Cable: HONGLIN+Earphone:Lianchuangang		

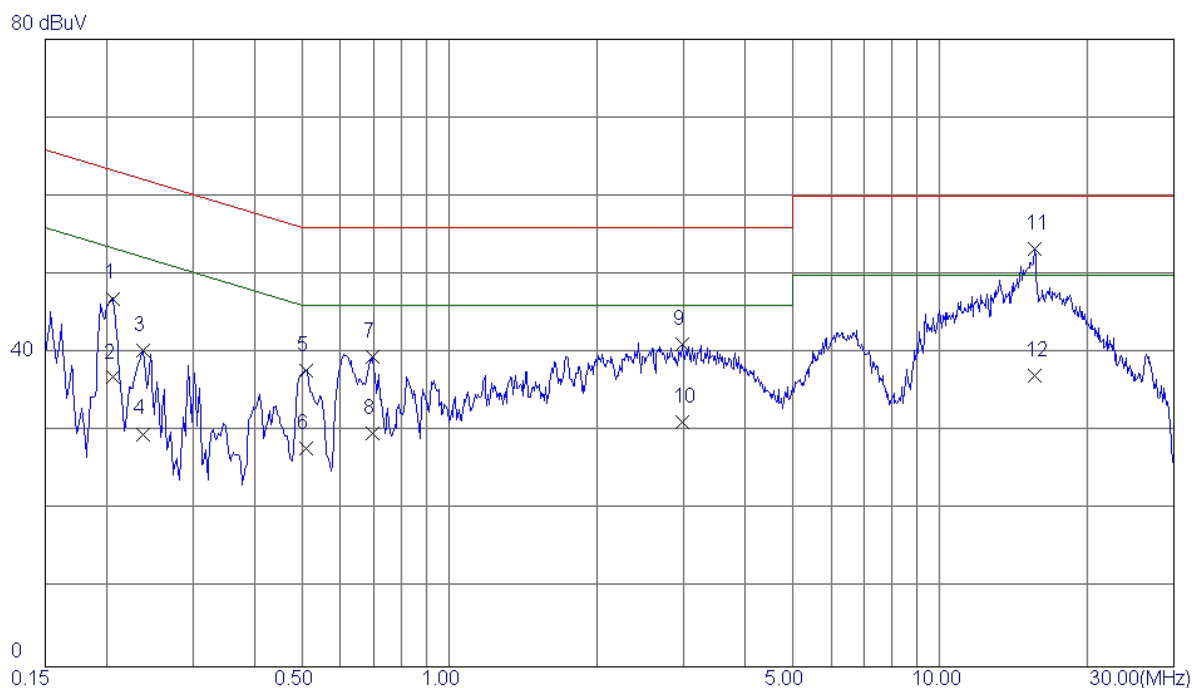


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.2060	37.43	9.53	46.96	63.37	-16.41	QP
2	0.2060	27.35	9.53	36.88	53.37	-16.49	AVG
3	0.2380	30.81	9.53	40.34	62.17	-21.83	QP
4	0.2380	20.15	9.53	29.68	52.17	-22.49	AVG
5	0.5100	28.32	9.44	37.76	56.00	-18.24	QP
6	0.5100	18.34	9.44	27.78	46.00	-18.22	AVG
7	0.6980	30.08	9.45	39.53	56.00	-16.47	QP
8	0.6980	20.25	9.45	29.70	46.00	-16.30	AVG
9	2.9820	31.38	9.79	41.17	56.00	-14.83	QP
10	2.9820	21.35	9.79	31.14	46.00	-14.86	AVG
11 *	15.5620	42.85	10.38	53.23	60.00	-6.77	QP
12	15.5620	26.79	10.38	37.17	50.00	-12.83	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:Huntkey+USB Cable: HONGLIN+Earphone:QUANCHENG		

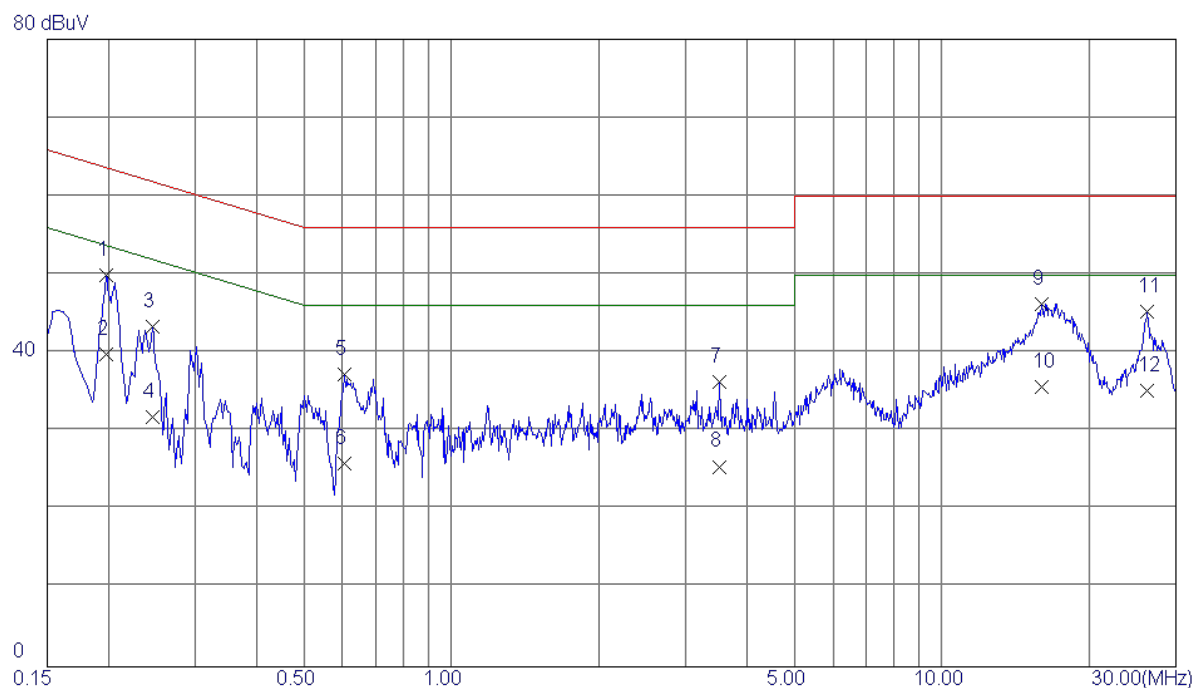


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1980	40.38	9.53	49.91	63.69	-13.78	QP
2	0.1980	30.25	9.53	39.78	53.69	-13.91	AVG
3	0.2460	33.79	9.53	43.32	61.89	-18.57	QP
4	0.2460	22.38	9.53	31.91	51.89	-19.98	AVG
5	0.6060	27.59	9.64	37.23	56.00	-18.77	QP
6	0.6060	16.34	9.64	25.98	46.00	-20.02	AVG
7	3.5180	26.23	10.14	36.37	56.00	-19.63	QP
8	3.5180	15.38	10.14	25.52	46.00	-20.48	AVG
9 *	15.9780	35.93	10.37	46.30	60.00	-13.70	QP
10	15.9780	25.35	10.37	35.72	50.00	-14.28	AVG
11	26.2260	34.85	10.39	45.24	60.00	-14.76	QP
12	26.2260	24.86	10.39	35.25	50.00	-14.75	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:Huntkey+USB Cable: HONGLIN+Earphone:QUANCHENG		

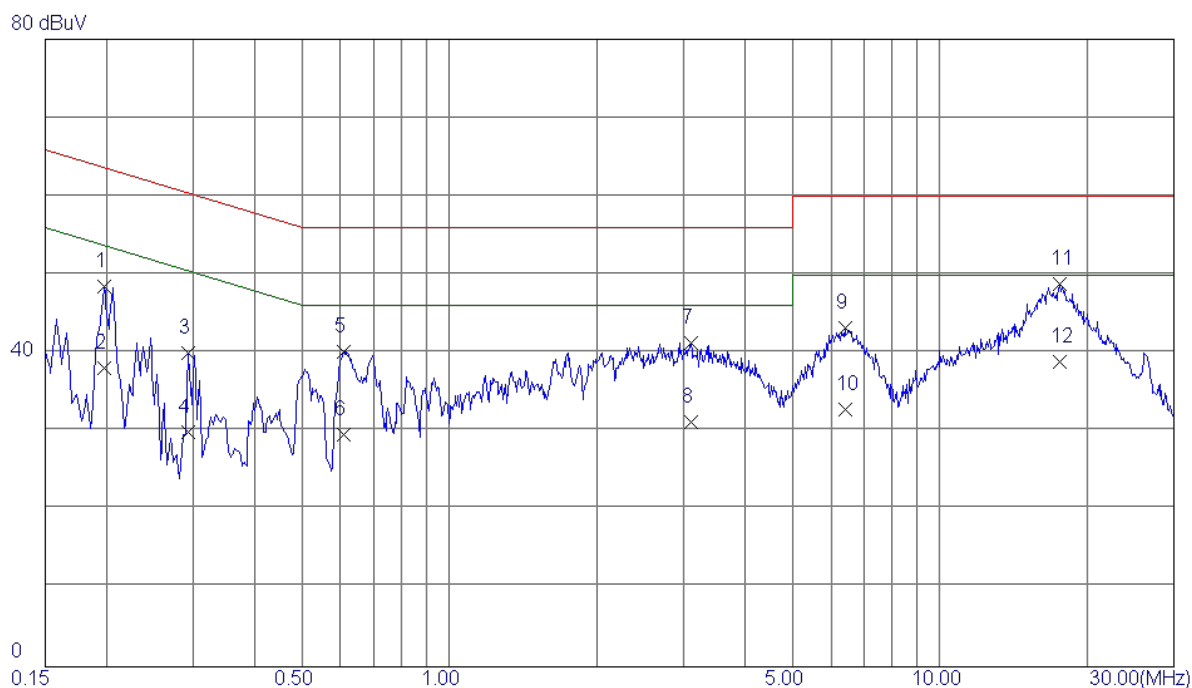


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1980	38.97	9.52	48.49	63.69	-15.20	QP
2	0.1980	28.56	9.52	38.08	53.69	-15.61	AVG
3	0.2940	30.44	9.53	39.97	60.41	-20.44	QP
4	0.2940	20.35	9.53	29.88	50.41	-20.53	AVG
5	0.6100	30.74	9.44	40.18	56.00	-15.82	QP
6	0.6100	20.15	9.44	29.59	46.00	-16.41	AVG
7	3.1060	31.46	9.80	41.26	56.00	-14.74	QP
8	3.1060	21.35	9.80	31.15	46.00	-14.85	AVG
9	6.4020	33.18	9.96	43.14	60.00	-16.86	QP
10	6.4020	22.86	9.96	32.82	50.00	-17.18	AVG
11 *	17.5660	38.42	10.43	48.85	60.00	-11.15	QP
12	17.5660	28.38	10.43	38.81	50.00	-11.19	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:HW-050200E01_BYD+USB Cable: HONGLIN+Earphone:Lianchuang		

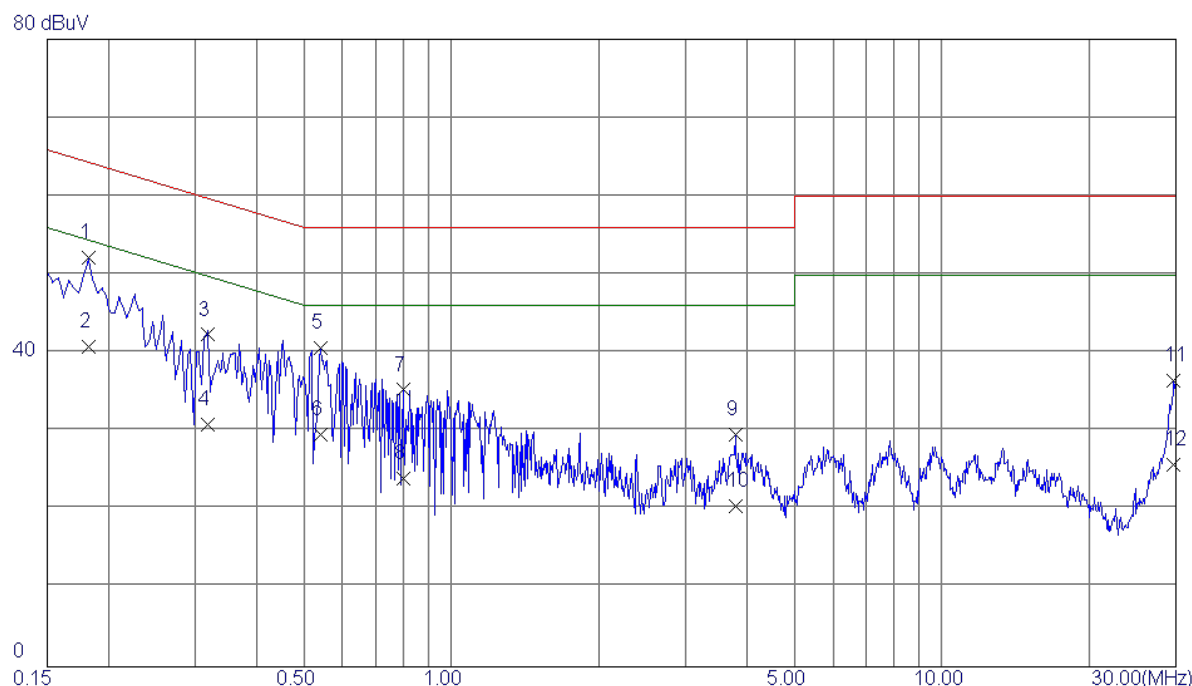


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1819	42.59	9.53	52.12	64.40	-12.28	QP
2	0.1819	31.26	9.53	40.79	54.40	-13.61	AVG
3	0.3183	32.79	9.53	42.32	59.75	-17.43	QP
4	0.3183	21.35	9.53	30.88	49.75	-18.87	AVG
5	0.5420	30.94	9.64	40.58	56.00	-15.42	QP
6	0.5420	20.03	9.64	29.67	46.00	-16.33	AVG
7	0.7980	25.53	9.75	35.28	56.00	-20.72	QP
8	0.7980	14.31	9.75	24.06	46.00	-21.94	AVG
9	3.7900	19.42	10.17	29.59	56.00	-26.41	QP
10	3.7900	10.25	10.17	20.42	46.00	-25.58	AVG
11	29.7060	26.05	10.38	36.43	60.00	-23.57	QP
12	29.7060	15.36	10.38	25.74	50.00	-24.26	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:HW-050200E01_BYD+USB Cable: HONGLIN+Earphone:Lianchuang		

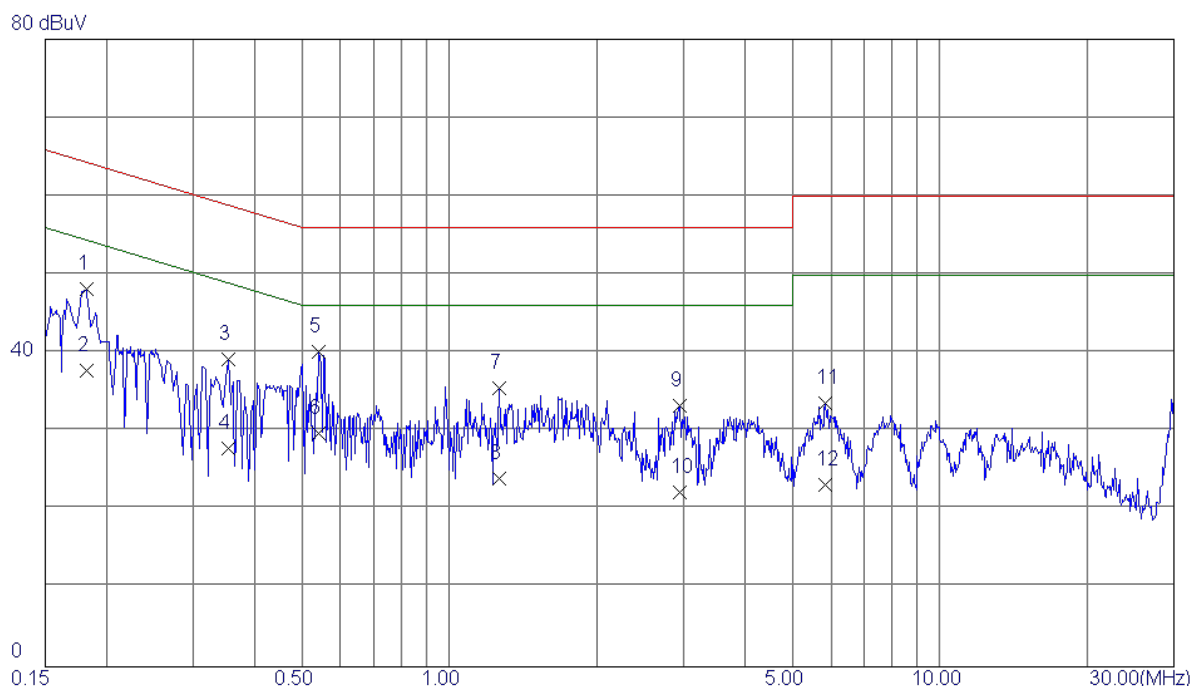


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1819	38.65	9.47	48.12	64.40	-16.28	QP
2	0.1819	28.34	9.47	37.81	54.40	-16.59	AVG
3	0.3540	29.69	9.53	39.22	58.87	-19.65	QP
4	0.3540	18.36	9.53	27.89	48.87	-20.98	AVG
5 *	0.5420	30.65	9.44	40.09	56.00	-15.91	QP
6	0.5420	20.34	9.44	29.78	46.00	-16.22	AVG
7	1.2660	25.88	9.67	35.55	56.00	-20.45	QP
8	1.2660	14.32	9.67	23.99	46.00	-22.01	AVG
9	2.9500	23.42	9.79	33.21	56.00	-22.79	QP
10	2.9500	12.38	9.79	22.17	46.00	-23.83	AVG
11	5.8380	23.56	9.97	33.53	60.00	-26.47	QP
12	5.8380	13.26	9.97	23.23	50.00	-26.77	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:HW-050200E01_HK+USB Cable: HONGLIN+Earphone:Lianchuang		

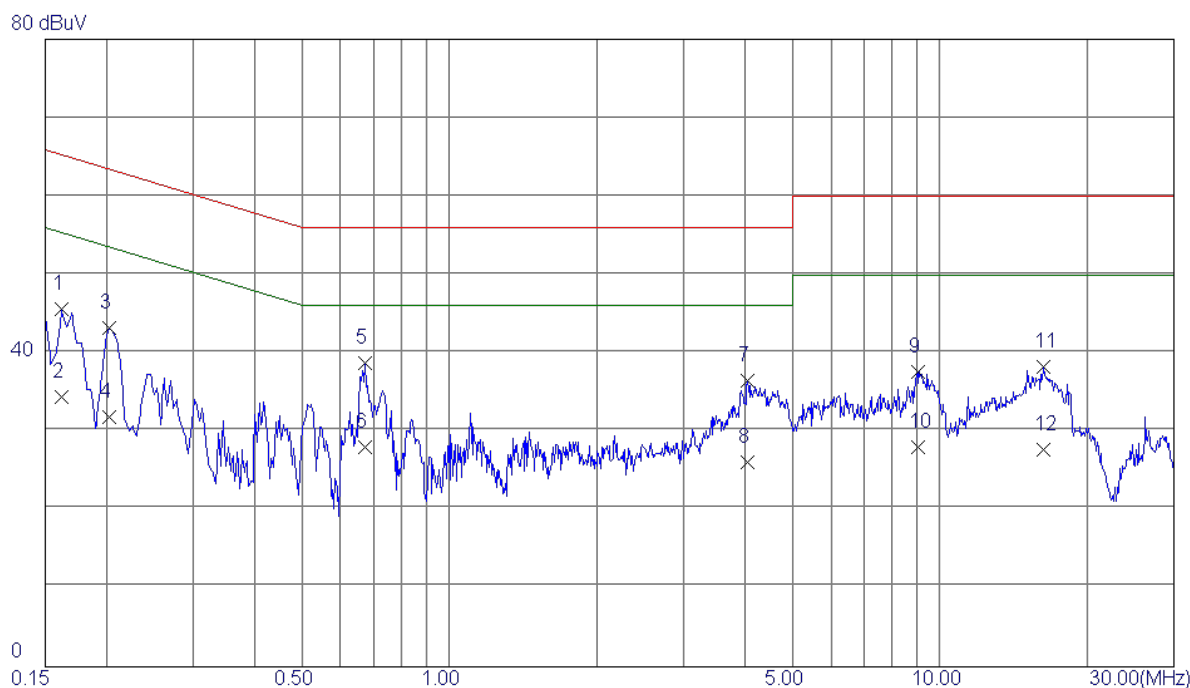


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1620	36.00	9.52	45.52	65.36	-19.84	QP
2	0.1620	24.86	9.52	34.38	55.36	-20.98	AVG
3	0.2020	33.66	9.53	43.19	63.53	-20.34	QP
4	0.2020	22.35	9.53	31.88	53.53	-21.65	AVG
5 *	0.6740	29.02	9.65	38.67	56.00	-17.33	QP
6	0.6740	18.39	9.65	28.04	46.00	-17.96	AVG
7	4.0620	26.29	10.18	36.47	56.00	-19.53	QP
8	4.0620	15.86	10.18	26.04	46.00	-19.96	AVG
9	9.0100	27.46	10.20	37.66	60.00	-22.34	QP
10	9.0100	17.83	10.20	28.03	50.00	-21.97	AVG
11	16.3100	27.88	10.37	38.25	60.00	-21.75	QP
12	16.3100	17.26	10.37	27.63	50.00	-22.37	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:HW-050200E01_HK+USB Cable: HONGLIN+Earphone:Lianchuang		

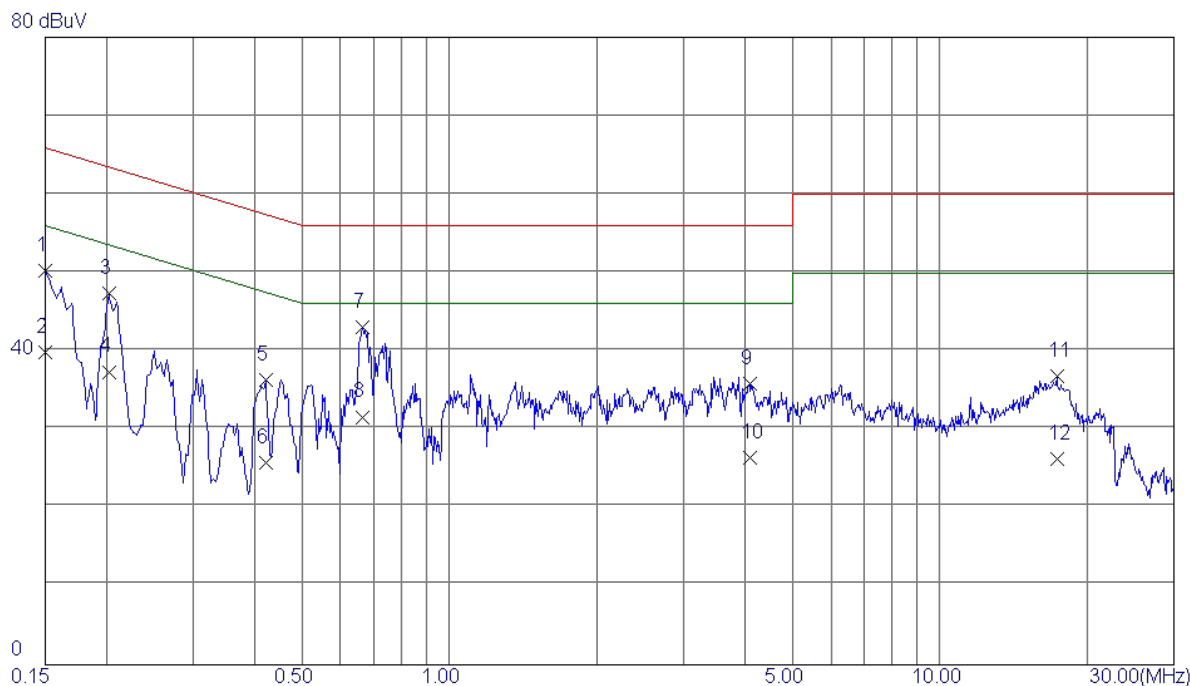


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	40.72	9.52	50.24	66.00	-15.76	QP
2	0.1500	30.25	9.52	39.77	56.00	-16.23	AVG
3	0.2020	37.78	9.53	47.31	63.53	-16.22	QP
4	0.2020	27.83	9.53	37.36	53.53	-16.17	AVG
5	0.4220	26.84	9.44	36.28	57.41	-21.13	QP
6	0.4220	16.38	9.44	25.82	47.41	-21.59	AVG
7 *	0.6660	33.66	9.45	43.11	56.00	-12.89	QP
8	0.6660	22.15	9.45	31.60	46.00	-14.40	AVG
9	4.0900	26.01	9.90	35.91	56.00	-20.09	QP
10	4.0900	16.52	9.90	26.42	46.00	-19.58	AVG
11	17.3460	26.30	10.43	36.73	60.00	-23.27	QP
12	17.3460	15.86	10.43	26.29	50.00	-23.71	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:phltek+USB Cable: HONGLIN+Earphone:Lianchuang		

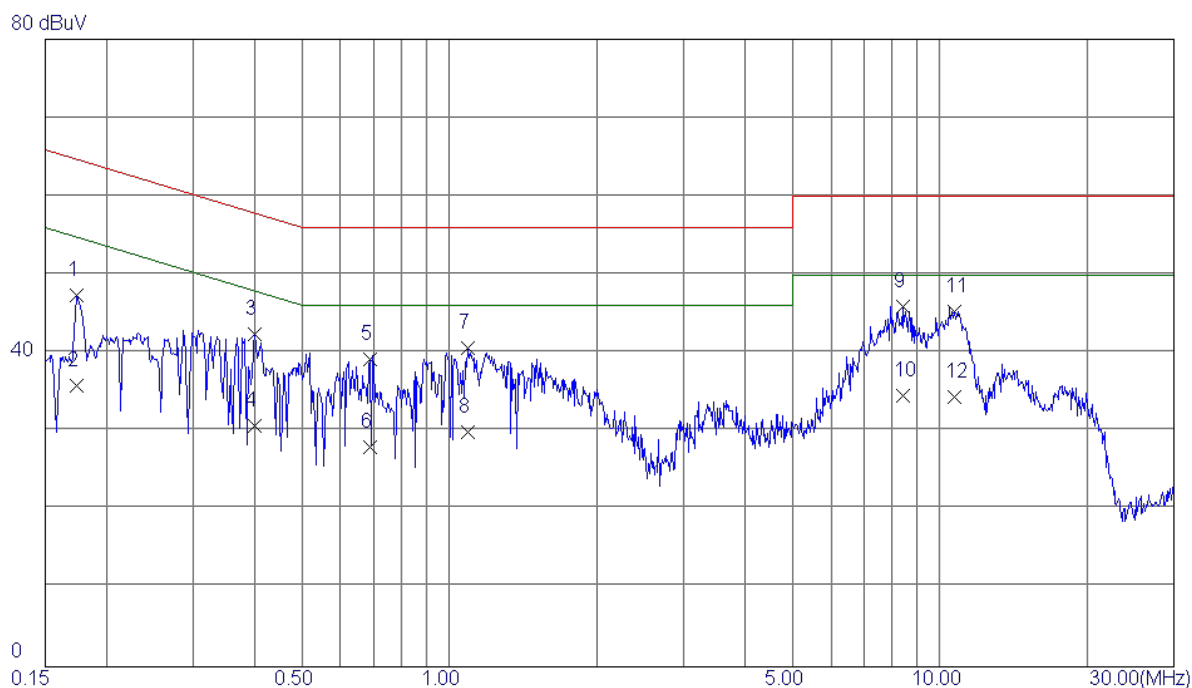


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1740	37.81	9.52	47.33	64.77	-17.44	QP
2	0.1740	26.35	9.52	35.87	54.77	-18.90	AVG
3	0.4020	32.80	9.54	42.34	57.81	-15.47	QP
4	0.4020	21.24	9.54	30.78	47.81	-17.03	AVG
5	0.6900	29.57	9.65	39.22	56.00	-16.78	QP
6	0.6900	18.36	9.65	28.01	46.00	-17.99	AVG
7	1.0900	30.85	9.76	40.61	56.00	-15.39	QP
8	1.0900	20.15	9.76	29.91	46.00	-16.09	AVG
9 *	8.4020	35.74	10.19	45.93	60.00	-14.07	QP
10	8.4020	24.38	10.19	34.57	50.00	-15.43	AVG
11	10.7060	35.09	10.23	45.32	60.00	-14.68	QP
12	10.7060	24.15	10.23	34.38	50.00	-15.62	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:phltek+USB Cable: HONGLIN+Earphone:Lianchuang		

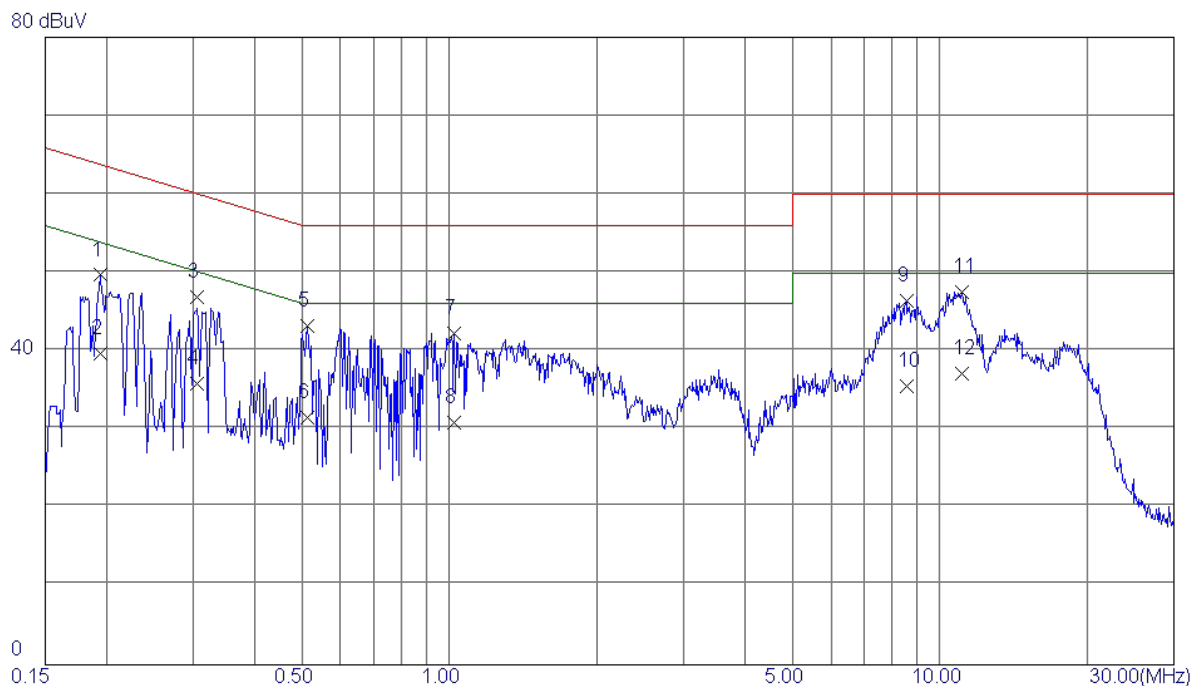


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1940	40.17	9.51	49.68	63.86	-14.18	QP
2	0.1940	30.25	9.51	39.76	53.86	-14.10	AVG
3	0.3060	37.34	9.53	46.87	60.08	-13.21	QP
4	0.3060	26.35	9.53	35.88	50.08	-14.20	AVG
5	0.5140	33.72	9.44	43.16	56.00	-12.84	QP
6	0.5140	22.14	9.44	31.58	46.00	-14.42	AVG
7	1.0220	32.57	9.66	42.23	56.00	-13.77	QP
8	1.0220	21.25	9.66	30.91	46.00	-15.09	AVG
9	8.5460	36.24	10.14	46.38	60.00	-13.62	QP
10	8.5460	25.35	10.14	35.49	50.00	-14.51	AVG
11 *	11.0900	37.22	10.32	47.54	60.00	-12.46	QP
12	11.0900	26.83	10.32	37.15	50.00	-12.85	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:Huntkey+USB Cable: HONGLIN		

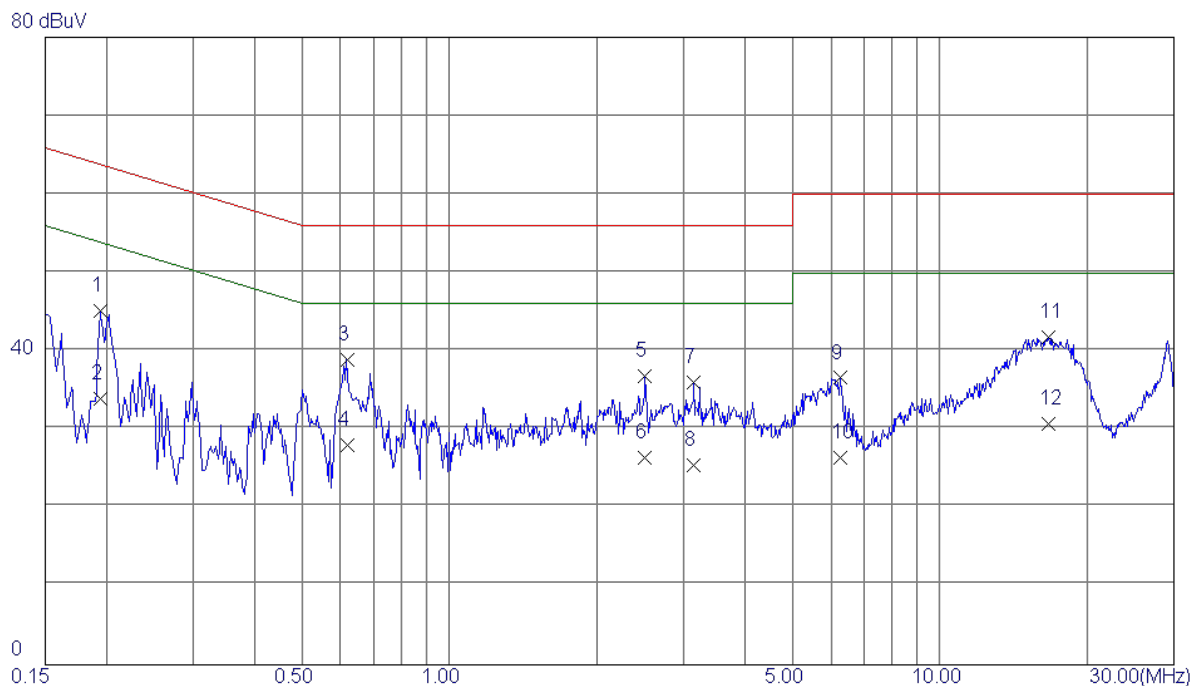


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1940	35.64	9.53	45.17	63.86	-18.69	QP
2	0.1940	24.35	9.53	33.88	53.86	-19.98	AVG
3 *	0.6180	29.27	9.64	38.91	56.00	-17.09	QP
4	0.6180	18.38	9.64	28.02	46.00	-17.98	AVG
5	2.5059	26.72	10.09	36.81	56.00	-19.19	QP
6	2.5059	16.38	10.09	26.47	46.00	-19.53	AVG
7	3.1540	25.91	10.11	36.02	56.00	-19.98	QP
8	3.1540	15.34	10.11	25.45	46.00	-20.55	AVG
9	6.2780	26.47	10.09	36.56	60.00	-23.44	QP
10	6.2780	16.28	10.09	26.37	50.00	-23.63	AVG
11	16.6140	31.40	10.37	41.77	60.00	-18.23	QP
12	16.6140	20.34	10.37	30.71	50.00	-19.29	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:Huntkey+USB Cable: HONGLIN		

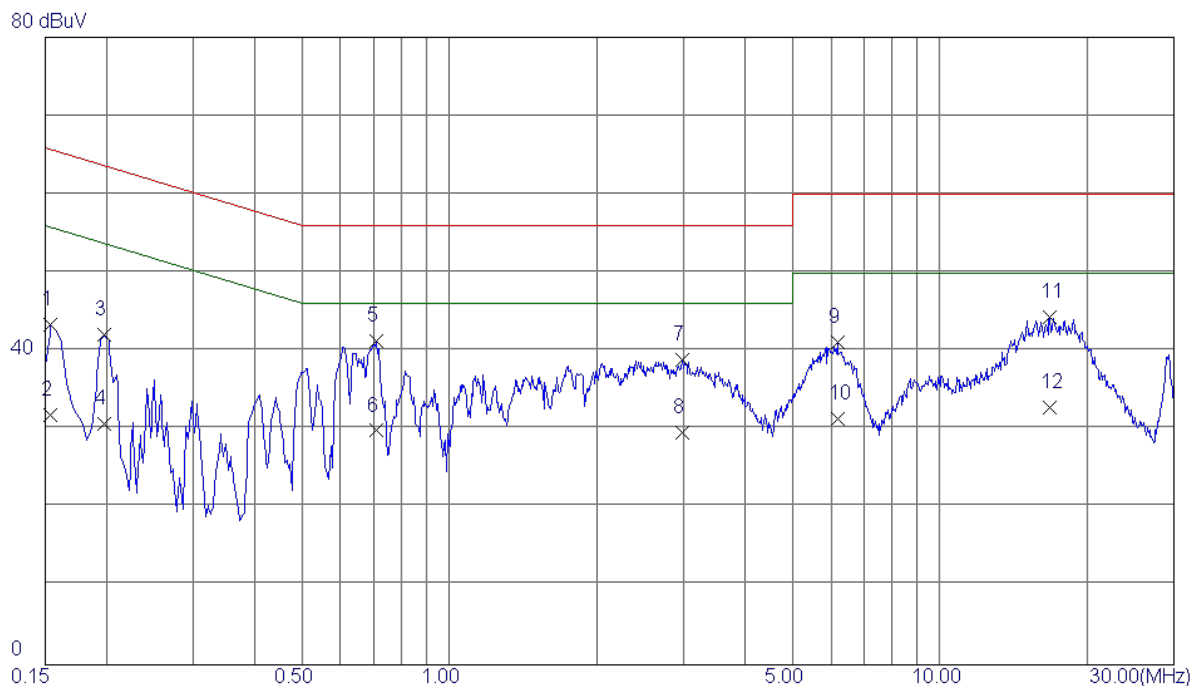


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1539	33.83	9.50	43.33	65.79	-22.46	QP
2	0.1539	22.35	9.50	31.85	55.79	-23.94	AVG
3	0.1980	32.53	9.52	42.05	63.69	-21.64	QP
4	0.1980	21.25	9.52	30.77	53.69	-22.92	AVG
5 *	0.7100	31.82	9.46	41.28	56.00	-14.72	QP
6	0.7100	20.38	9.46	29.84	46.00	-16.16	AVG
7	2.9820	29.12	9.79	38.91	56.00	-17.09	QP
8	2.9820	19.86	9.79	29.65	46.00	-16.35	AVG
9	6.1779	31.16	9.97	41.13	60.00	-18.87	QP
10	6.1779	21.34	9.97	31.31	50.00	-18.69	AVG
11	16.7740	33.87	10.41	44.28	60.00	-15.72	QP
12	16.7740	22.36	10.41	32.77	50.00	-17.23	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:Huntkey+USB Cable: HONGLIN		

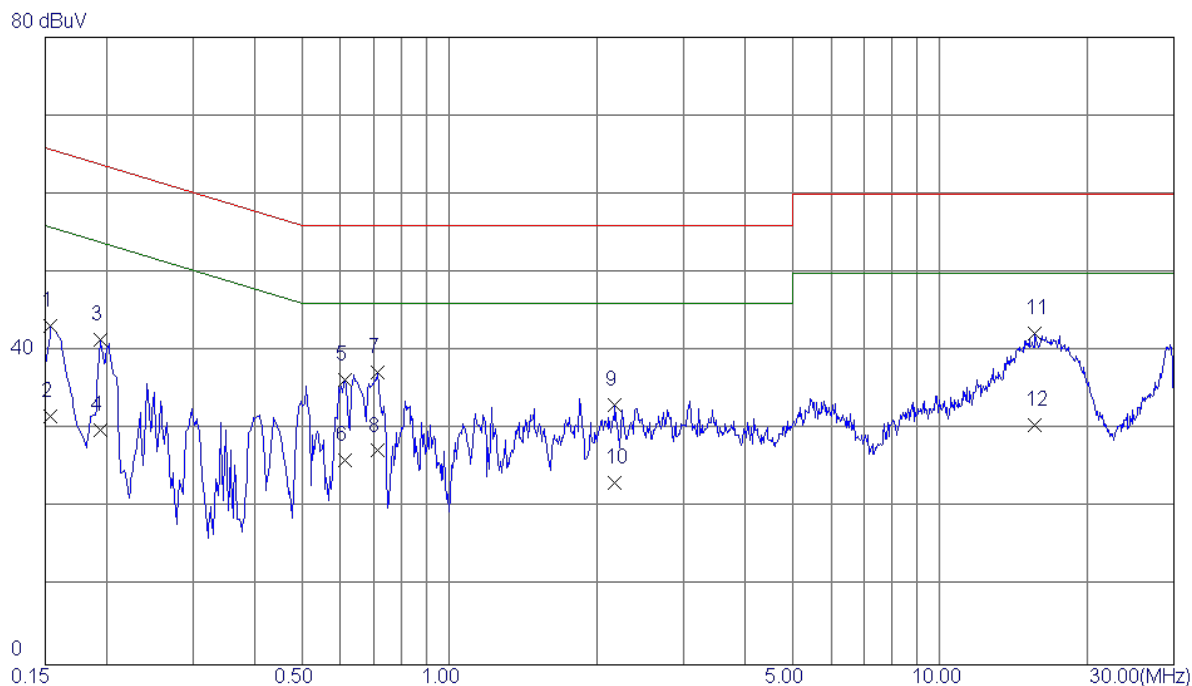


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1539	33.61	9.52	43.13	65.79	-22.66	QP
2	0.1539	22.15	9.52	31.67	55.79	-24.12	AVG
3	0.1940	31.96	9.53	41.49	63.86	-22.37	QP
4	0.1940	20.36	9.53	29.89	53.86	-23.97	AVG
5	0.6140	26.64	9.64	36.28	56.00	-19.72	QP
6	0.6140	16.38	9.64	26.02	46.00	-19.98	AVG
7	0.7140	27.60	9.66	37.26	56.00	-18.74	QP
8	0.7140	17.62	9.66	27.28	46.00	-18.72	AVG
9	2.1740	23.22	9.96	33.18	56.00	-22.82	QP
10	2.1740	13.25	9.96	23.21	46.00	-22.79	AVG
11 *	15.6420	31.92	10.37	42.29	60.00	-17.71	QP
12	15.6420	20.15	10.37	30.52	50.00	-19.48	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:Huntkey+USB Cable: HONGLIN		

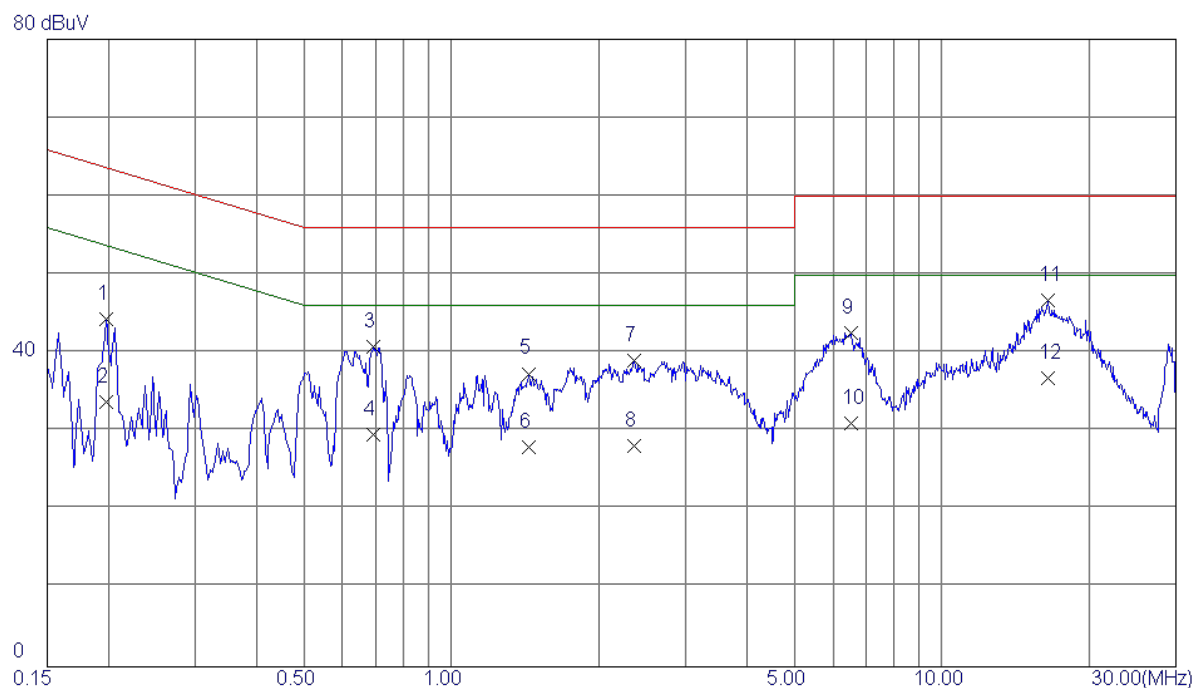


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1980	34.75	9.52	44.27	63.69	-19.42	QP
2	0.1980	24.23	9.52	33.75	53.69	-19.94	AVG
3	0.6940	31.31	9.45	40.76	56.00	-15.24	QP
4	0.6940	20.12	9.45	29.57	46.00	-16.43	AVG
5	1.4420	27.69	9.67	37.36	56.00	-18.64	QP
6	1.4420	18.33	9.67	28.00	46.00	-18.00	AVG
7	2.3620	29.28	9.76	39.04	56.00	-16.96	QP
8	2.3620	18.35	9.76	28.11	46.00	-17.89	AVG
9	6.5220	32.64	9.96	42.60	60.00	-17.40	QP
10	6.5220	21.05	9.96	31.01	50.00	-18.99	AVG
11	16.4220	36.29	10.40	46.69	60.00	-13.31	QP
12 *	16.4220	26.34	10.40	36.74	50.00	-13.26	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:Huntkey+USB Cable: HONGLIN		

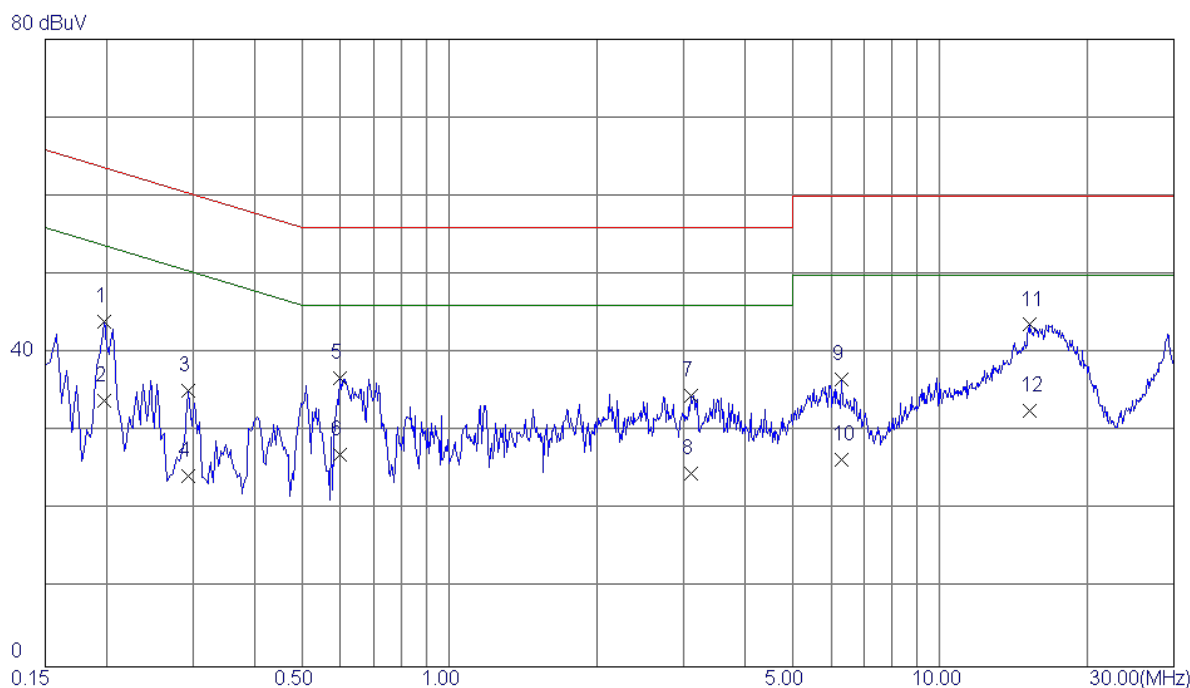

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1980	34.41	9.53	43.94	63.69	-19.75	QP
2	0.1980	24.38	9.53	33.91	53.69	-19.78	AVG
3	0.2940	25.68	9.53	35.21	60.41	-25.20	QP
4	0.2940	14.86	9.53	24.39	50.41	-26.02	AVG
5	0.5980	27.14	9.64	36.78	56.00	-19.22	QP
6	0.5980	17.38	9.64	27.02	46.00	-18.98	AVG
7	3.1180	24.41	10.10	34.51	56.00	-21.49	QP
8	3.1180	14.56	10.10	24.66	46.00	-21.34	AVG
9	6.3100	26.54	10.09	36.63	60.00	-23.37	QP
10	6.3100	16.33	10.09	26.42	50.00	-23.58	AVG
11 *	15.2140	33.24	10.36	43.60	60.00	-16.40	QP
12	15.2140	22.35	10.36	32.71	50.00	-17.29	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:Huntkey+USB Cable: HONGLIN		

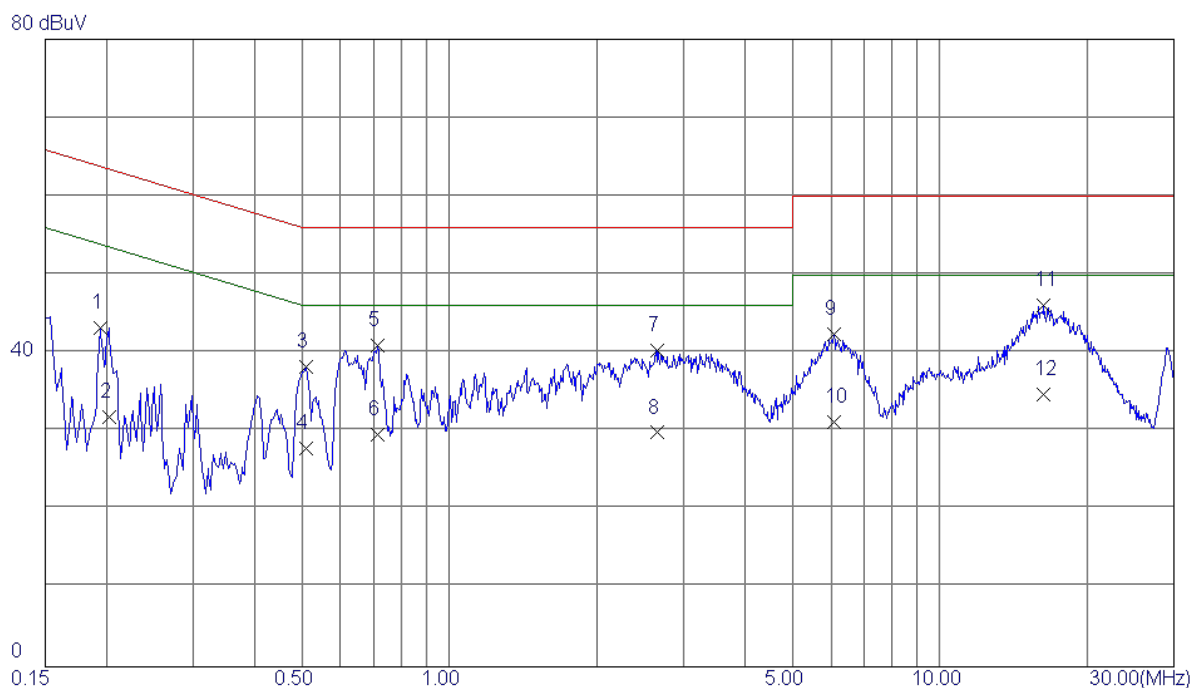

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1940	33.75	9.51	43.26	63.86	-20.60	QP
2	0.2020	22.35	9.53	31.88	53.53	-21.65	AVG
3	0.5100	28.78	9.44	38.22	56.00	-17.78	QP
4	0.5100	18.34	9.44	27.78	46.00	-18.22	AVG
5	0.7140	31.45	9.46	40.91	56.00	-15.09	QP
6	0.7140	20.15	9.46	29.61	46.00	-16.39	AVG
7	2.6540	30.55	9.79	40.34	56.00	-15.66	QP
8	2.6540	20.05	9.79	29.84	46.00	-16.16	AVG
9	6.0739	32.37	9.97	42.34	60.00	-17.66	QP
10	6.0739	21.25	9.97	31.22	50.00	-18.78	AVG
11 *	16.2380	35.64	10.39	46.03	60.00	-13.97	QP
12	16.2380	24.36	10.39	34.75	50.00	-15.25	AVG

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following:
FCC Part 15, Subpart B
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 27, 2017
2	Amplifier	HP	8447D	2944A09673	Nov. 09, 2016
3	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
4	Test Cable	emci	LMR-400(30 MHz-1GHz)	C-01	Jun. 27, 2017
5	Control	CT	SC100	N/A	N/A
6	Position Control	MF	MF-7802	MF780208416	N/A
7	Antenna	ETS	3115	00075789	Mar. 27, 2017
8	Amplifier	Agilent	8449B	3008A02274	Nov. 01, 2016
9	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
10	Test Cable	emci	EMC104-SM-SM-10000(1 GHz – 26.5GHz)	C-68	Jun. 27, 2017
11	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

4.2.3 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

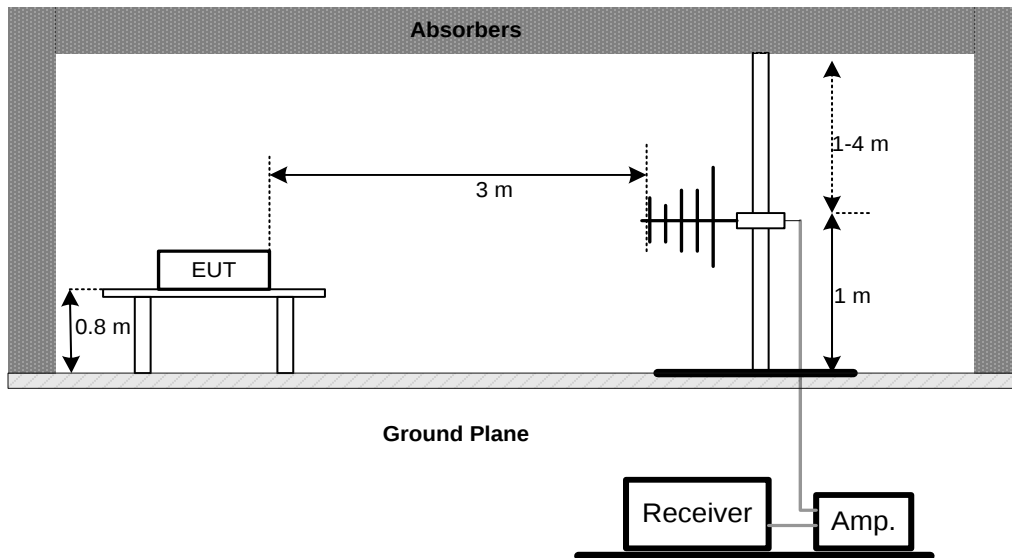

(B) Radiated Emission Test Set-Up Frequency 1 GHz

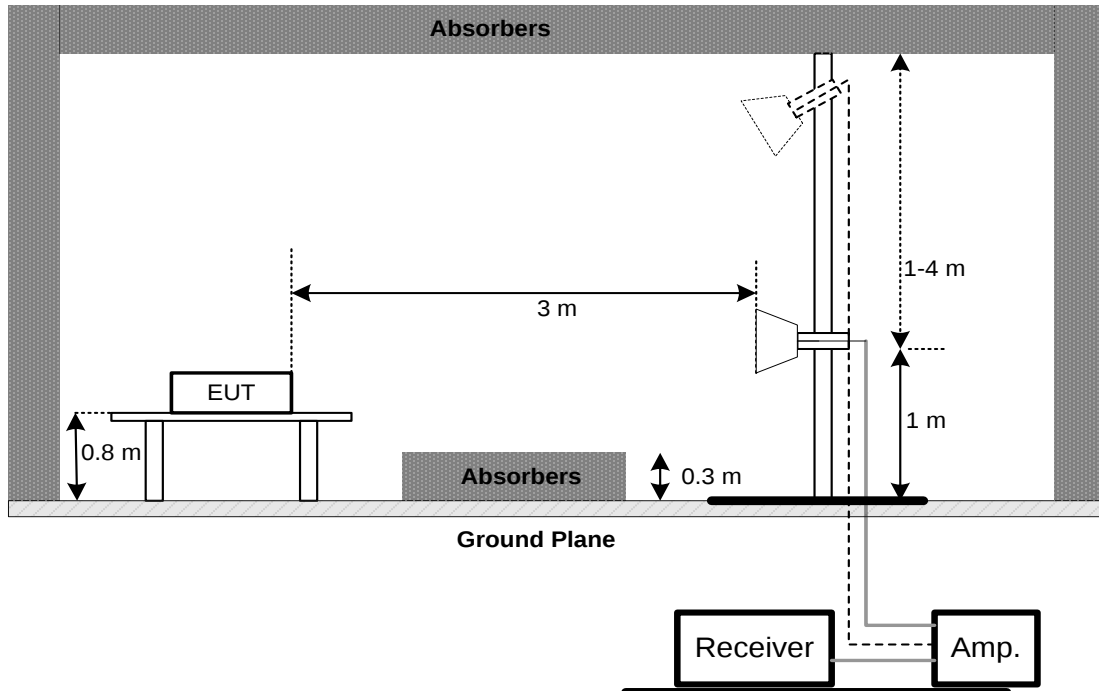

4.2.6 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of **4.1.6** unless otherwise a special operating condition is specified in the follows during the testing.

4.2.7 TEST RESULTS-BELOW 1GHZ

Remark :


- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (2) Measuring frequency range from 30MHz to 1000MHz ◦
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table ◦

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB Copy+Idle		
Note	USB Cable: FOXCONN		

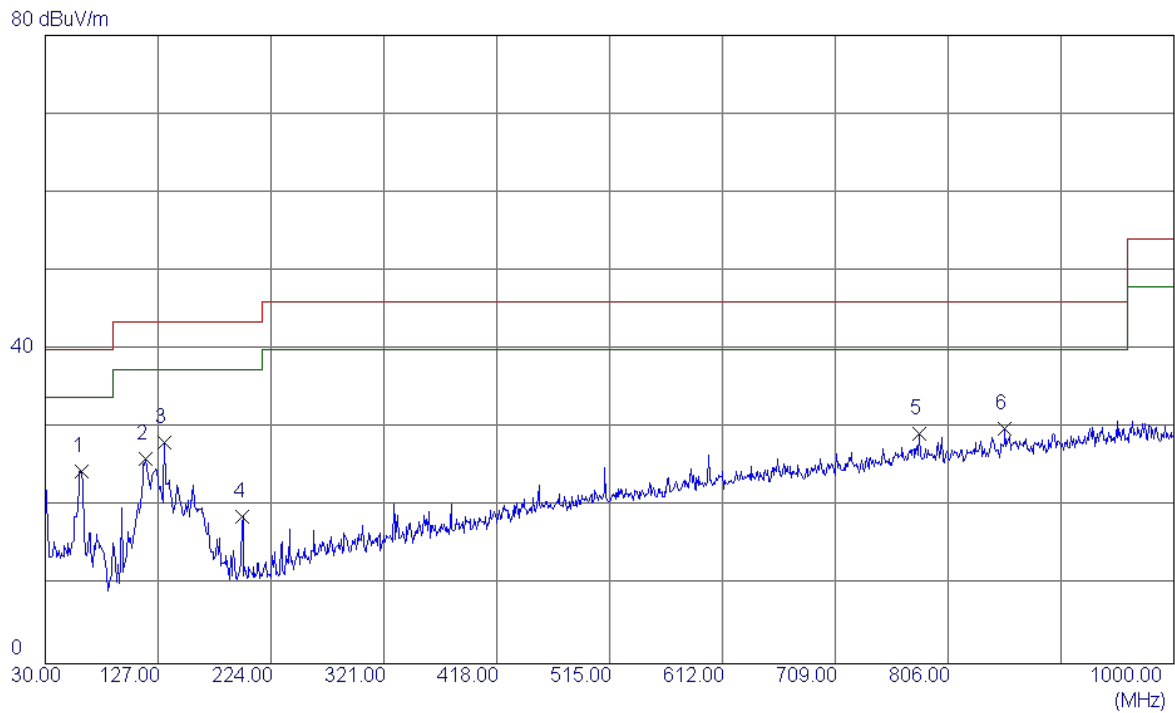


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	61.0400	41.41	-16.88	24.53	40.00	-15.47	QP
2	116.3300	44.22	-18.19	26.03	43.50	-17.47	QP
3 *	132.8200	44.87	-16.68	28.19	43.50	-15.31	QP
4	199.7500	36.55	-17.83	18.72	43.50	-24.78	QP
5	780.7800	33.22	-3.89	29.33	46.00	-16.67	QP
6	854.9850	32.80	-2.91	29.89	46.00	-16.11	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB Copy+Idle		
Note	USB Cable: FOXCONN		

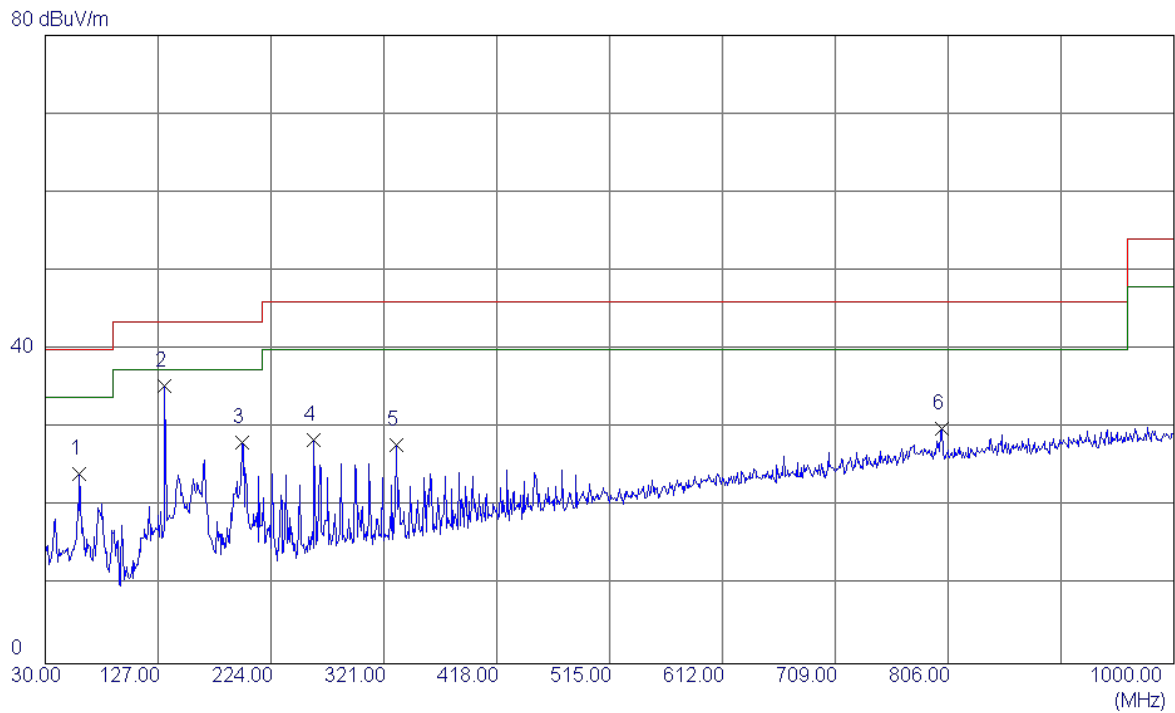


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	59.1000	40.88	-16.69	24.19	40.00	-15.81	QP
2 *	132.8200	51.99	-16.68	35.31	43.50	-8.19	QP
3	199.2650	45.99	-17.82	28.17	43.50	-15.33	QP
4	260.8599	43.91	-15.50	28.41	46.00	-17.59	QP
5	332.1550	41.18	-13.29	27.89	46.00	-18.11	QP
6	800.1800	33.68	-3.71	29.97	46.00	-16.03	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB Copy+Idle		
Note	USB Cable: HONGLIN		

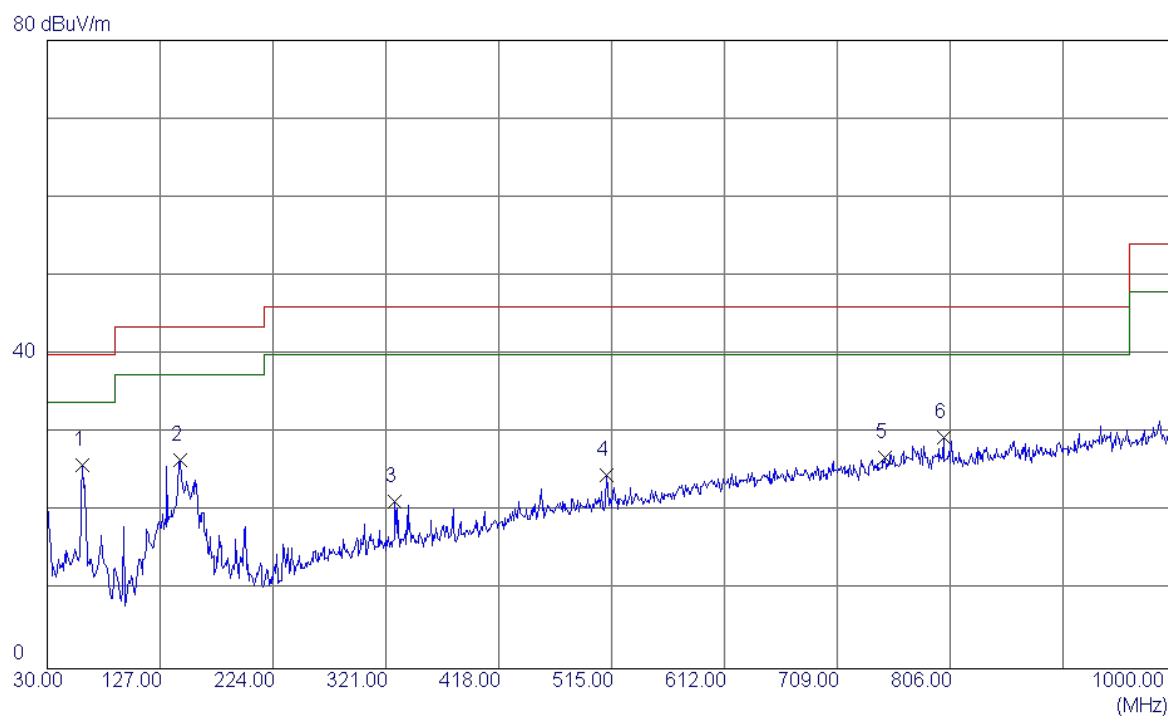


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	60.5550	42.73	-16.81	25.92	40.00	-14.08	QP
2	143.9750	42.33	-15.76	26.57	43.50	-16.93	QP
3	328.7600	34.63	-13.36	21.27	46.00	-24.73	QP
4	511.1200	33.13	-8.55	24.58	46.00	-21.42	QP
5	750.2250	31.01	-4.17	26.84	46.00	-19.16	QP
6	800.1800	33.15	-3.71	29.44	46.00	-16.56	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB Copy+Idle		
Note	USB Cable: HONGLIN		

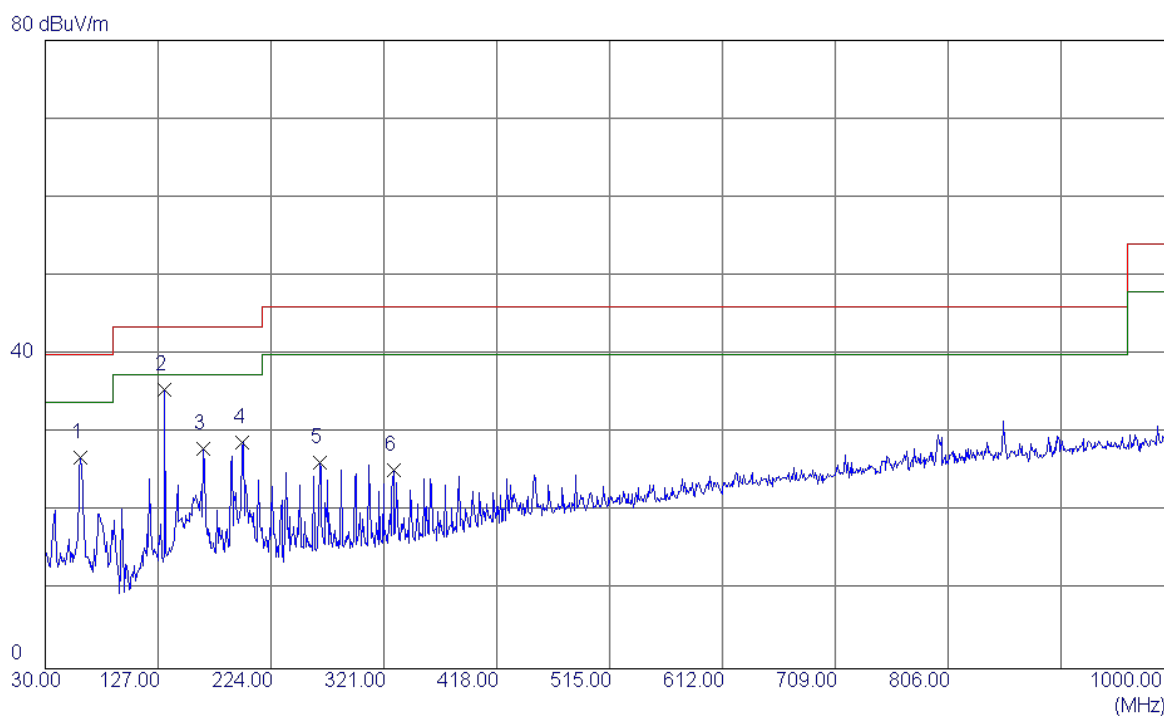


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	60.5550	43.72	-16.81	26.91	40.00	-13.09	QP
2 *	132.8200	52.25	-16.68	35.57	43.50	-7.93	QP
3	165.8000	43.60	-15.55	28.05	43.50	-15.45	QP
4	199.7500	46.63	-17.83	28.80	43.50	-14.70	QP
5	265.7100	41.53	-15.23	26.30	46.00	-19.70	QP
6	329.2450	38.58	-13.35	25.23	46.00	-20.77	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB Copy+Idle		
Note	USB Cable: LUXSHAREICT		

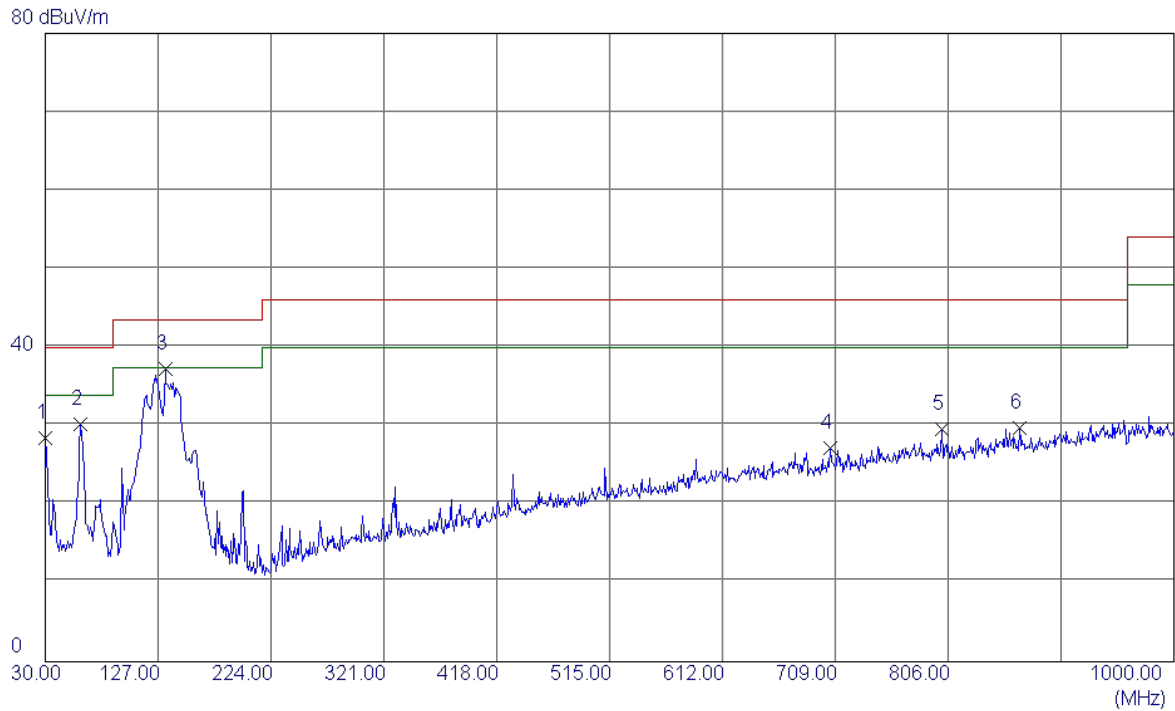


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.0000	46.74	-18.21	28.53	40.00	-11.47	QP
2	60.5550	47.04	-16.81	30.23	40.00	-9.77	QP
3 *	133.3049	53.87	-16.63	37.24	43.50	-6.26	QP
4	705.1200	32.45	-5.27	27.18	46.00	-18.82	QP
5	800.1800	33.28	-3.71	29.57	46.00	-16.43	QP
6	867.1100	32.46	-2.71	29.75	46.00	-16.25	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB Copy+Idle		
Note	USB Cable: LUXSHAREICT		

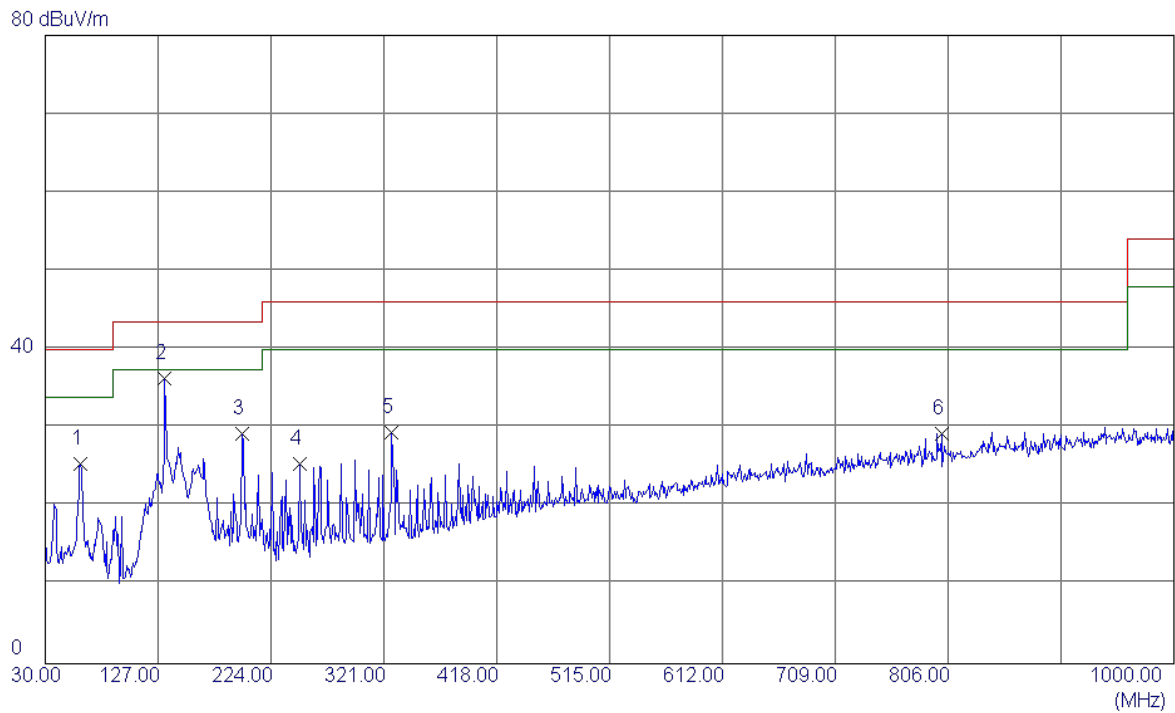


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	60.5550	42.30	-16.81	25.49	40.00	-14.51	QP
2 *	132.8200	53.01	-16.68	36.33	43.50	-7.17	QP
3	199.2650	47.12	-17.82	29.30	43.50	-14.20	QP
4	248.7350	41.50	-16.01	25.49	46.00	-20.51	QP
5	327.7900	42.83	-13.39	29.44	46.00	-16.56	QP
6	800.1800	33.01	-3.71	29.30	46.00	-16.70	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:BYD+USB Cable: LUXSHAREICT		

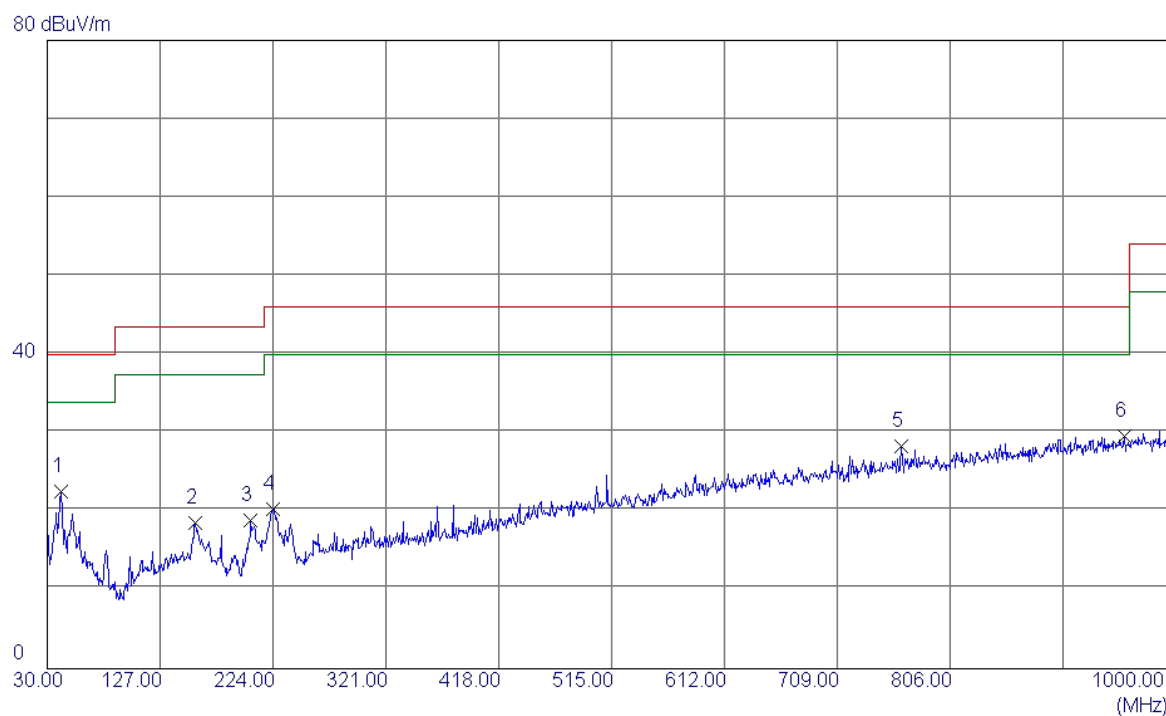


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	41.6400	39.70	-17.20	22.50	40.00	-17.50	QP
2	157.0700	33.79	-15.26	18.53	43.50	-24.97	QP
3	204.6000	36.78	-17.90	18.88	43.50	-24.62	QP
4	224.4850	38.13	-17.83	20.30	46.00	-25.70	QP
5	764.2900	32.39	-4.04	28.35	46.00	-17.65	QP
6 *	955.3800	30.78	-1.25	29.53	46.00	-16.47	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:BYD+USB Cable: LUXSHAREICT		

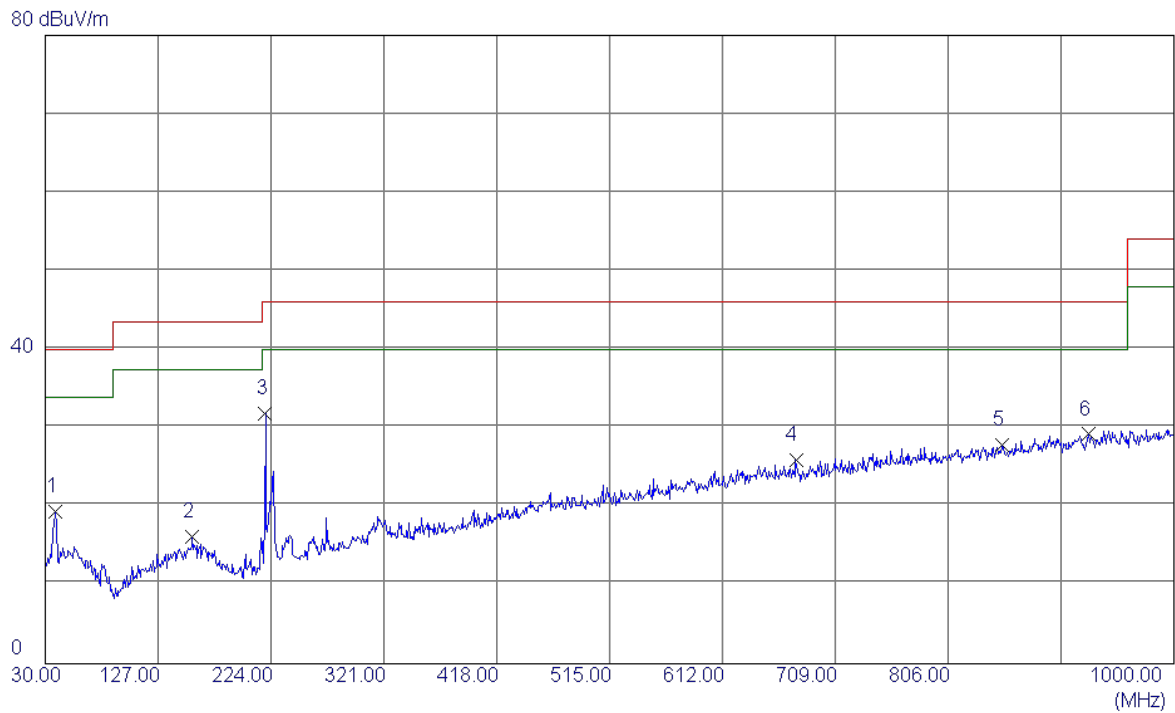


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	38.7300	36.92	-17.59	19.33	40.00	-20.67	QP
2	156.1000	31.43	-15.28	16.15	43.50	-27.35	QP
3 *	219.1500	49.86	-17.97	31.89	46.00	-14.11	QP
4	675.0500	31.51	-5.64	25.87	46.00	-20.13	QP
5	852.0750	30.86	-2.96	27.90	46.00	-18.10	QP
6	926.7650	30.90	-1.70	29.20	46.00	-16.80	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:Huntkey+USB Cable: LUXSHAREICT		

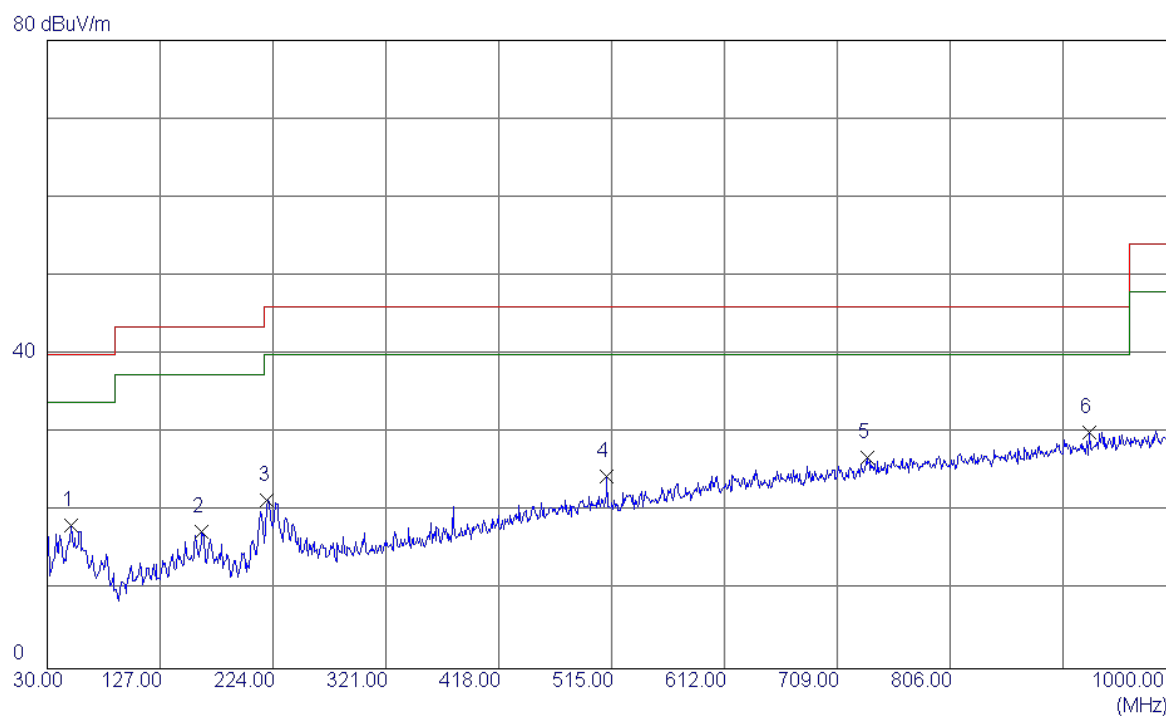


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	50.8550	34.63	-16.34	18.29	40.00	-21.71	QP
2	162.8900	32.87	-15.37	17.50	43.50	-26.00	QP
3	219.1500	39.43	-17.97	21.46	46.00	-24.54	QP
4	511.1200	33.10	-8.55	24.55	46.00	-21.45	QP
5	734.7050	31.42	-4.54	26.88	46.00	-19.12	QP
6 *	925.7950	31.85	-1.72	30.13	46.00	-15.87	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:Huntkey+USB Cable: LUXSHAREICT		

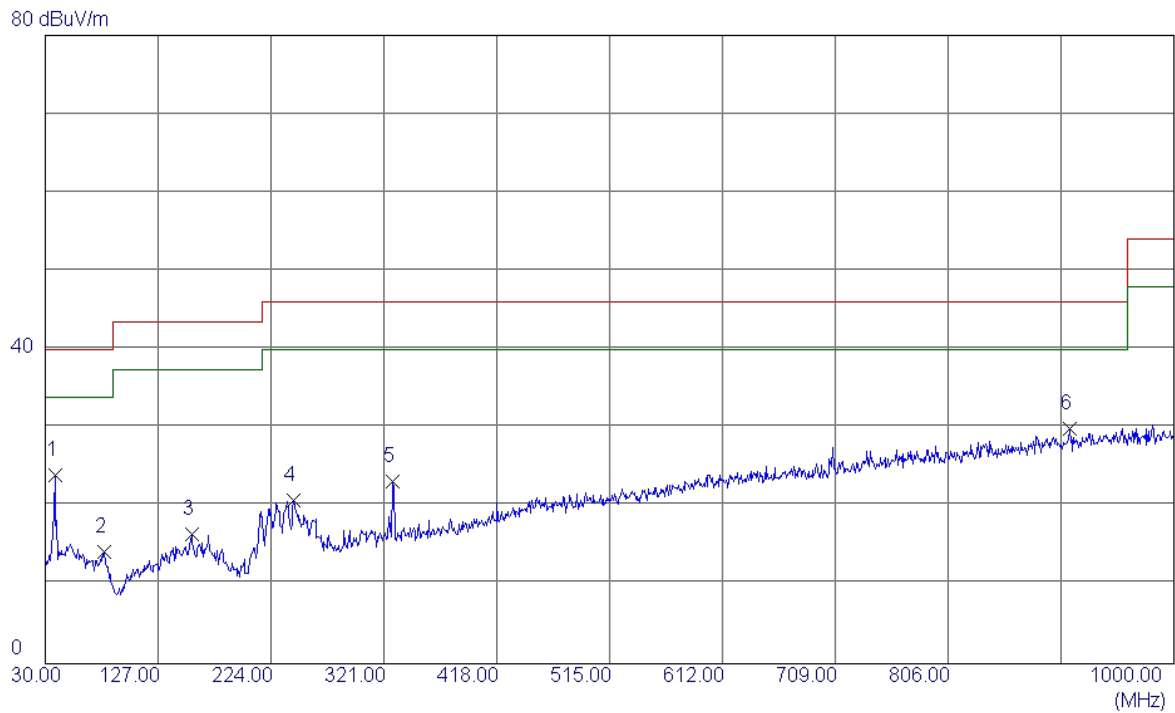


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	38.2450	41.66	-17.64	24.02	40.00	-15.98	QP
2	80.9250	34.50	-20.25	14.25	40.00	-25.75	QP
3	155.6150	31.82	-15.29	16.53	43.50	-26.97	QP
4	243.4000	37.07	-16.22	20.85	46.00	-25.15	QP
5	328.2750	36.56	-13.38	23.18	46.00	-22.82	QP
6	910.2750	31.94	-1.98	29.96	46.00	-16.04	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:HW-050200E01_BYD+USB Cable: LUXSHAREICT		

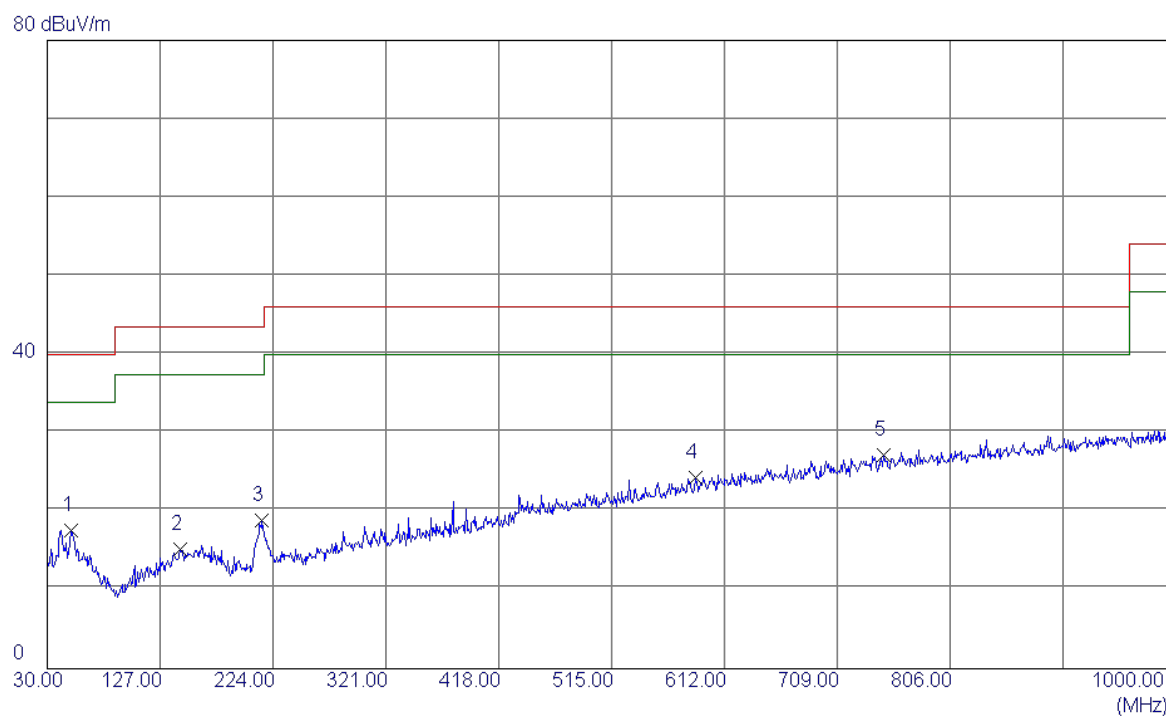


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	50.3700	33.90	-16.32	17.58	40.00	-22.42	QP
2	144.4600	30.89	-15.73	15.16	43.50	-28.34	QP
3	214.3000	36.93	-17.97	18.96	43.50	-24.54	QP
4	587.2650	31.30	-6.94	24.36	46.00	-21.64	QP
5 *	749.2550	31.35	-4.19	27.16	46.00	-18.84	QP
6	999.0300	31.14	-0.85	30.29	54.00	-23.71	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:HW-050200E01_BYD+USB Cable: LUXSHAREICT		

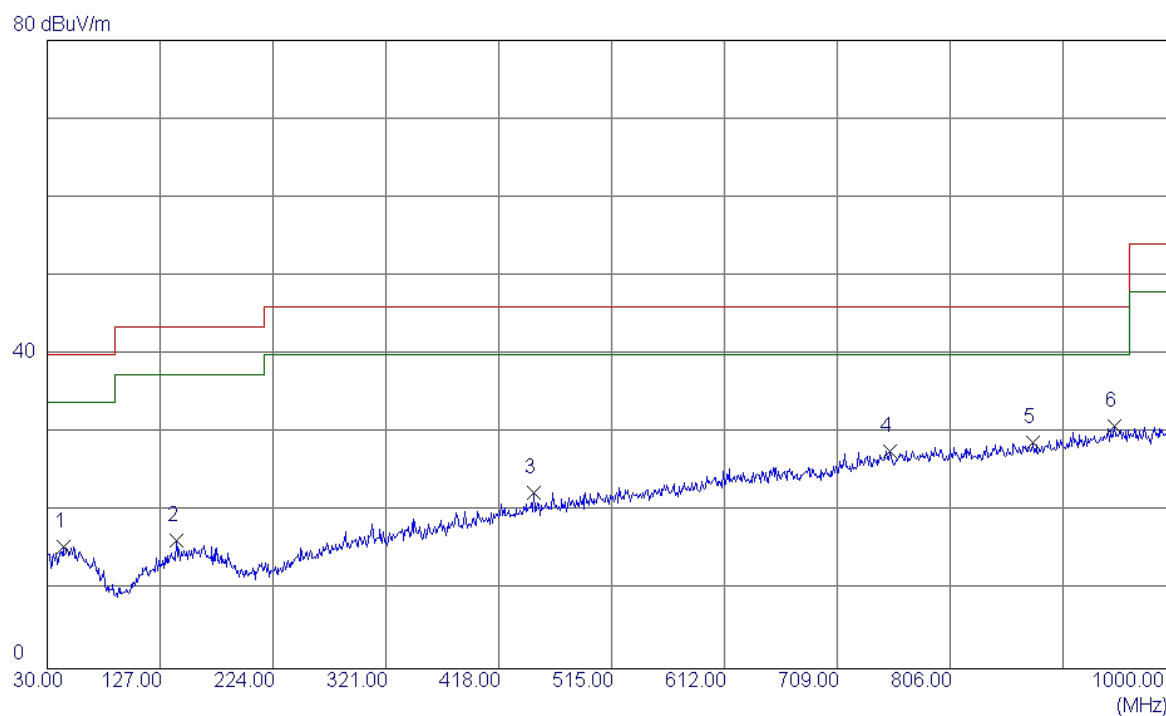


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	43.5800	32.25	-16.75	15.50	40.00	-24.50	QP
2	140.5800	32.00	-15.68	16.32	43.50	-27.18	QP
3	448.0700	31.94	-9.48	22.46	46.00	-23.54	QP
4	754.5900	31.16	-3.41	27.75	46.00	-18.25	QP
5	876.8100	30.83	-2.10	28.73	46.00	-17.27	QP
6 *	947.6200	31.25	-0.44	30.81	46.00	-15.19	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:HW-050200E01_HK+USB Cable: LUXSHAREICT		

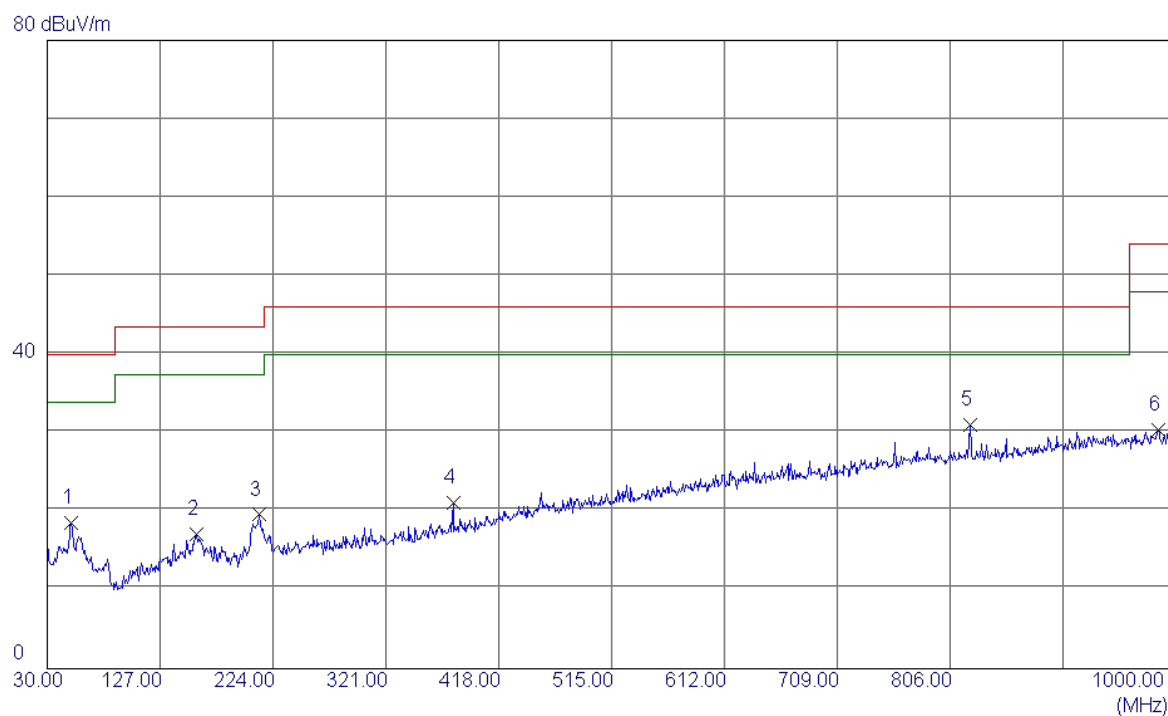


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	50.8550	34.86	-16.34	18.52	40.00	-21.48	QP
2	158.5250	32.31	-15.23	17.08	43.50	-26.42	QP
3	211.8750	37.58	-17.98	19.60	43.50	-23.90	QP
4	378.7150	33.24	-12.11	21.13	46.00	-24.87	QP
5 *	822.9750	34.42	-3.38	31.04	46.00	-14.96	QP
6	984.9650	31.43	-0.98	30.45	54.00	-23.55	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:HW-050200E01_HK+USB Cable: LUXSHAREICT		

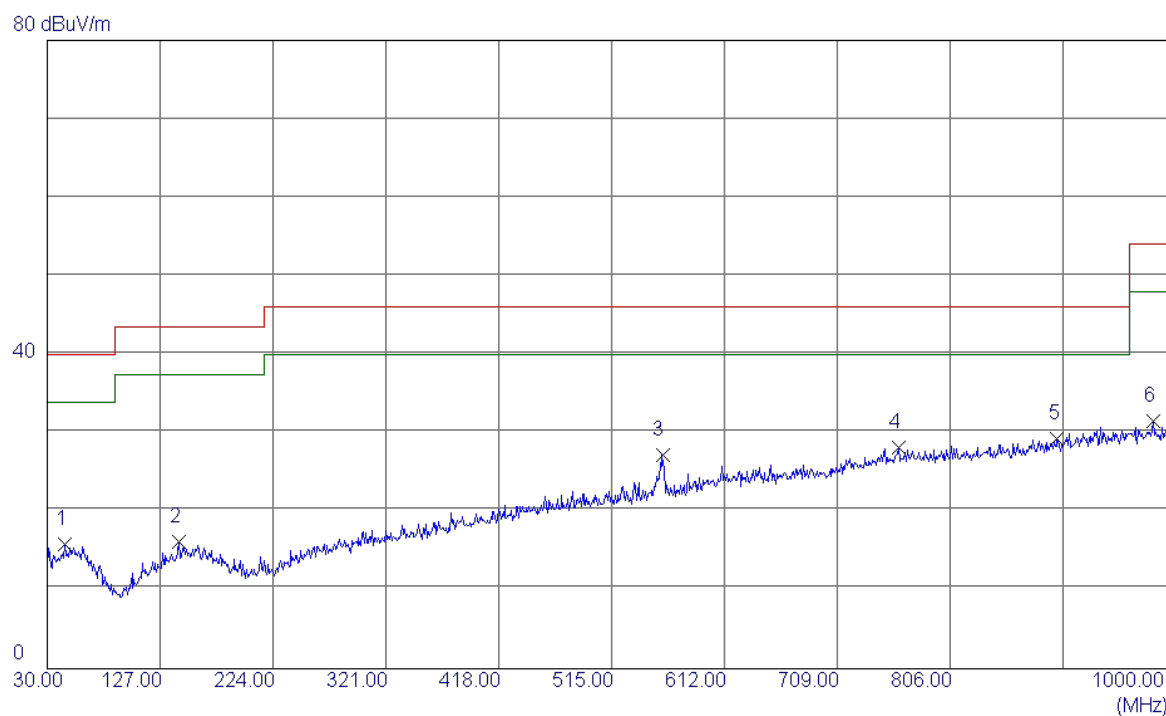


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	45.5200	32.34	-16.56	15.78	40.00	-24.22	QP
2	143.4900	31.65	-15.55	16.10	43.50	-27.40	QP
3	558.6500	34.82	-7.57	27.25	46.00	-18.75	QP
4	761.3800	31.57	-3.37	28.20	46.00	-17.80	QP
5 *	898.1500	31.00	-1.65	29.35	46.00	-16.65	QP
6	980.6000	31.68	-0.16	31.52	54.00	-22.48	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:phltek+USB Cable: LUXSHAREICT		

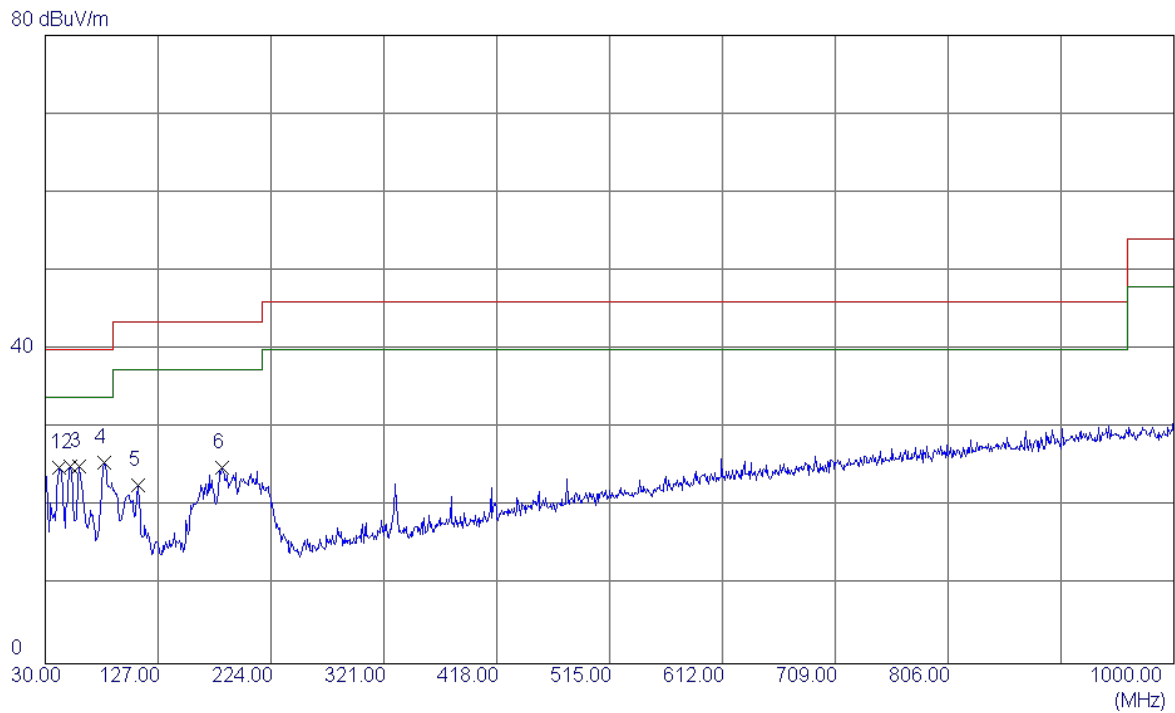


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	41.6400	42.11	-17.20	24.91	40.00	-15.09	QP
2	51.8250	41.42	-16.38	25.04	40.00	-14.96	QP
3	59.1000	41.79	-16.69	25.10	40.00	-14.90	QP
4 *	80.9250	45.83	-20.25	25.58	40.00	-14.42	QP
5	109.5400	41.53	-18.77	22.76	43.50	-20.74	QP
6	181.8049	41.80	-16.87	24.93	43.50	-18.57	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:phltek+USB Cable: LUXSHAREICT		

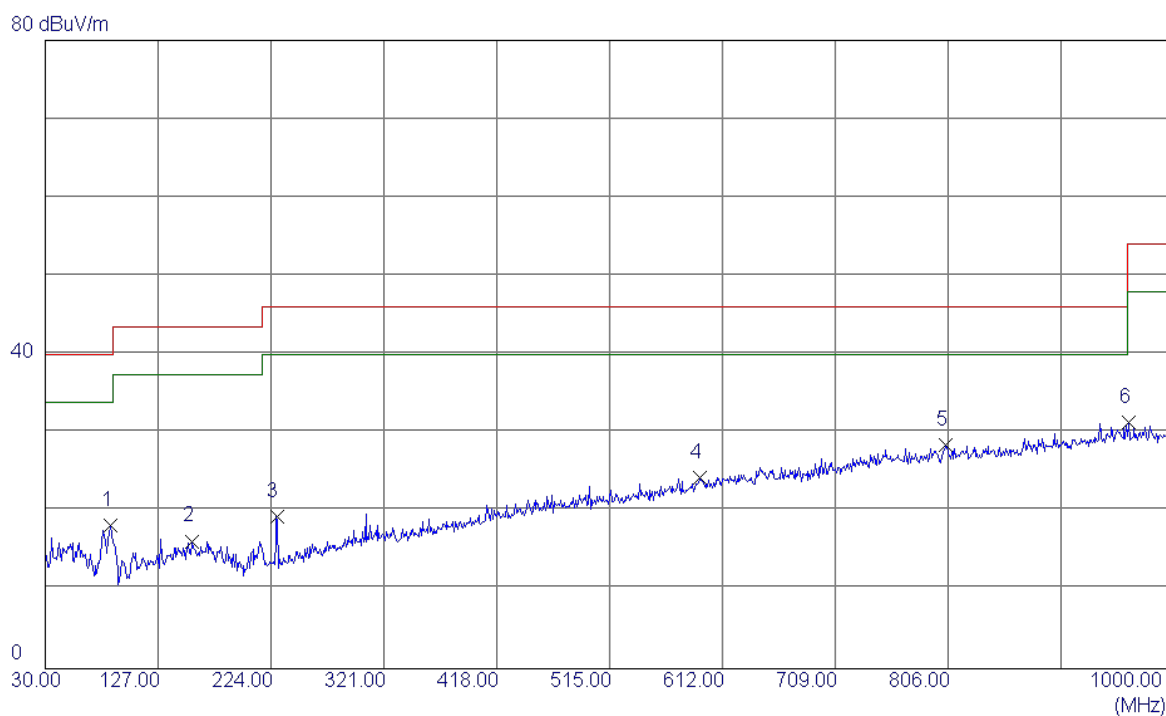


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	86.2600	39.23	-20.93	18.30	40.00	-21.70	QP
2	156.1000	31.41	-15.17	16.24	43.50	-27.26	QP
3	228.8500	36.76	-17.47	19.29	46.00	-26.71	QP
4	592.6000	30.87	-6.62	24.25	46.00	-21.75	QP
5 *	804.0600	31.66	-3.11	28.55	46.00	-17.45	QP
6	961.2000	31.64	-0.30	31.34	54.00	-22.66	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:phitek+USB Cable: LUXSHAREICT		

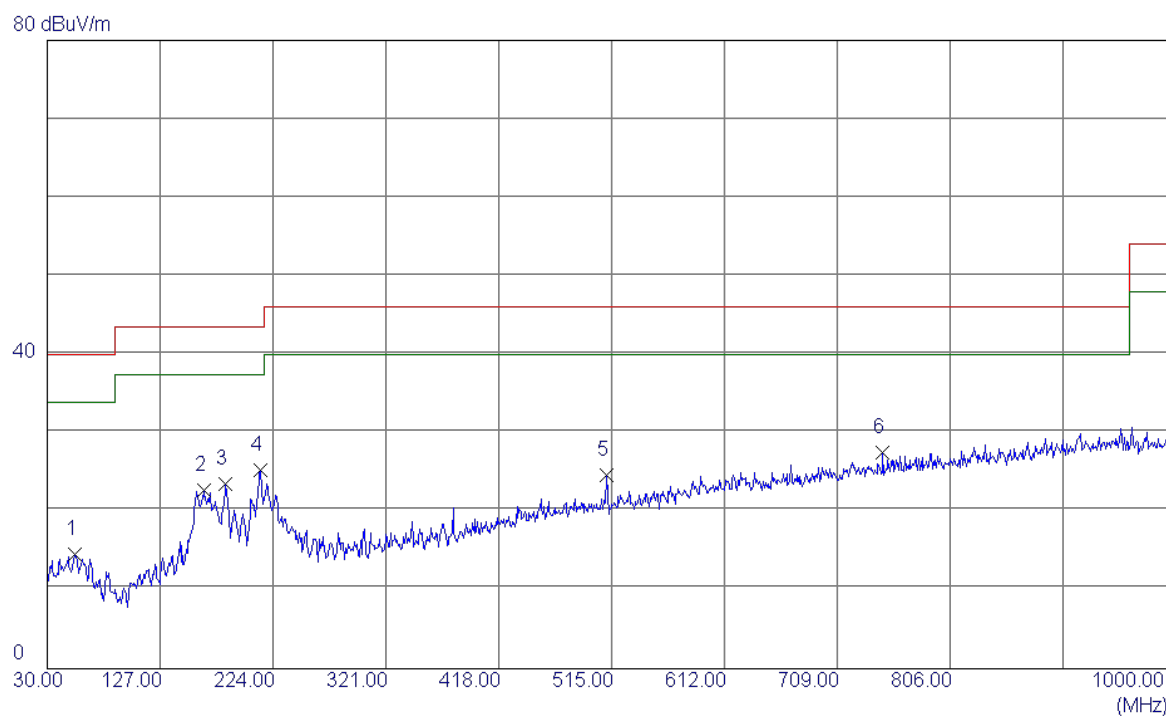


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	53.7650	30.97	-16.46	14.51	40.00	-25.49	QP
2	164.3450	38.20	-15.46	22.74	43.50	-20.76	QP
3	183.2600	40.55	-17.02	23.53	43.50	-19.97	QP
4 *	213.3300	43.29	-17.98	25.31	43.50	-18.19	QP
5	511.1200	33.13	-8.55	24.58	46.00	-21.42	QP
6	747.8000	31.74	-4.22	27.52	46.00	-18.48	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:phitek+USB Cable: LUXSHAREICT		

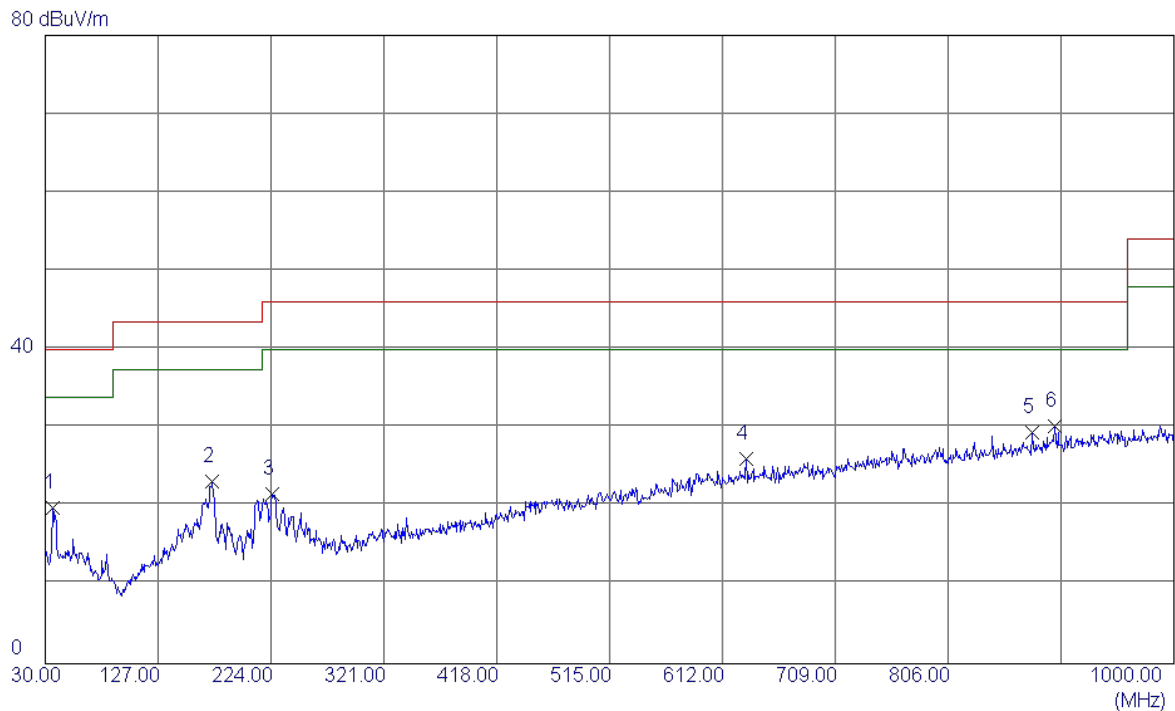


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	36.3050	37.71	-17.83	19.88	40.00	-20.12	QP
2	173.5600	39.35	-16.12	23.23	43.50	-20.27	QP
3	224.9700	39.35	-17.81	21.54	46.00	-24.46	QP
4	632.3700	32.15	-6.14	26.01	46.00	-19.99	QP
5	877.7800	31.98	-2.53	29.45	46.00	-16.55	QP
6 *	897.1800	32.45	-2.21	30.24	46.00	-15.76	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:BYD+USB Cable: LUXSHAREICT		

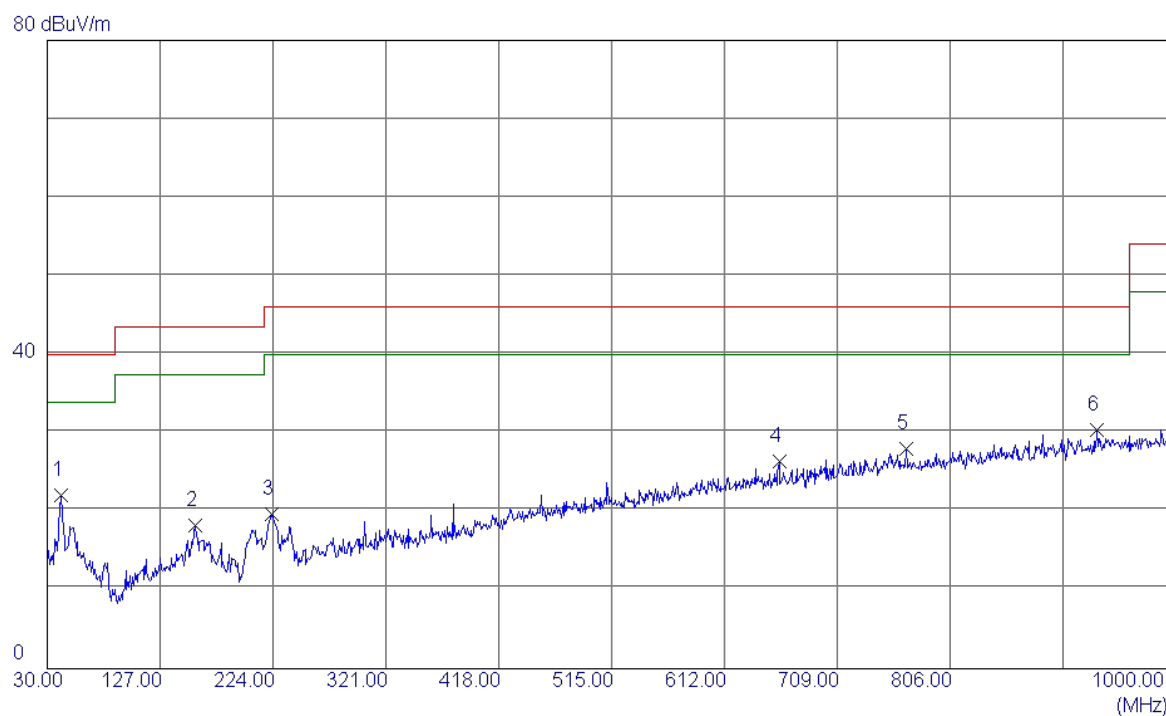


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	41.6400	39.26	-17.20	22.06	40.00	-17.94	QP
2	157.0700	33.56	-15.26	18.30	43.50	-25.20	QP
3	223.0300	37.52	-17.87	19.65	46.00	-26.35	QP
4	659.0450	32.16	-5.80	26.36	46.00	-19.64	QP
5	768.6550	31.95	-4.00	27.95	46.00	-18.05	QP
6 *	932.5850	32.07	-1.60	30.47	46.00	-15.53	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:BYD+USB Cable: LUXSHAREICT		

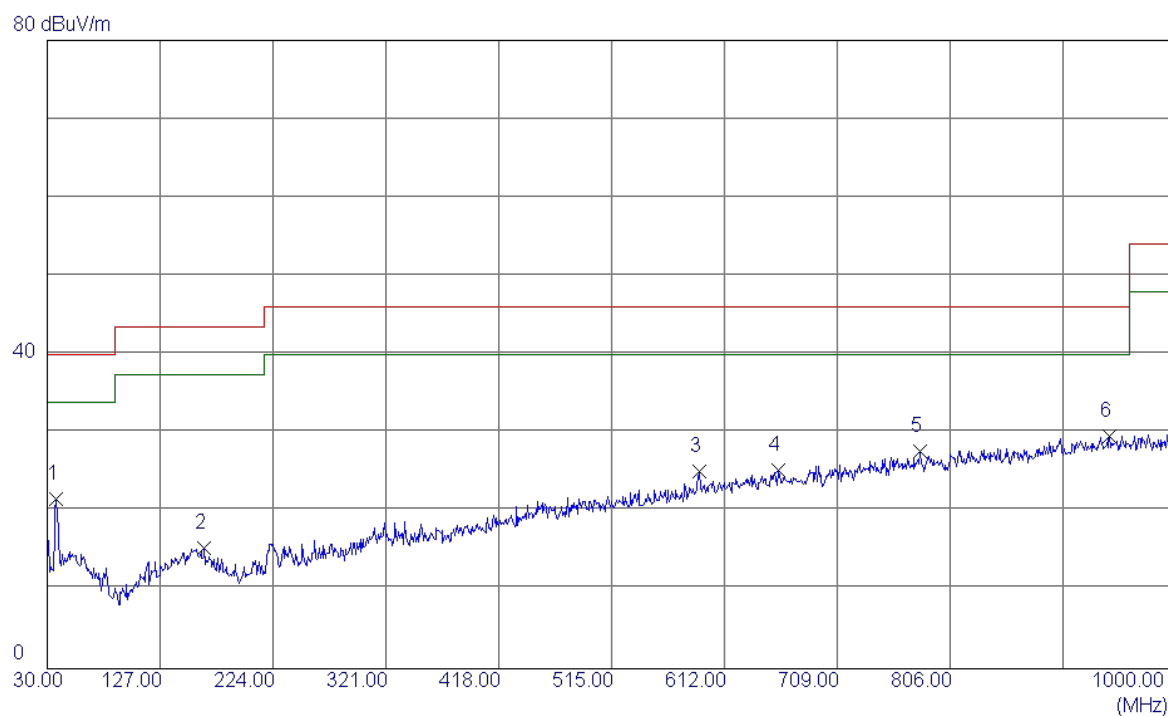


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	37.7599	39.35	-17.68	21.67	40.00	-18.33	QP
2	164.8300	30.81	-15.49	15.32	43.50	-28.18	QP
3	590.1750	31.98	-6.86	25.12	46.00	-20.88	QP
4	658.5600	31.08	-5.81	25.27	46.00	-20.73	QP
5	780.2950	31.55	-3.89	27.66	46.00	-18.34	QP
6 *	943.2550	31.06	-1.42	29.64	46.00	-16.36	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable: LUXSHAREICT+earphone:Lianchuang		

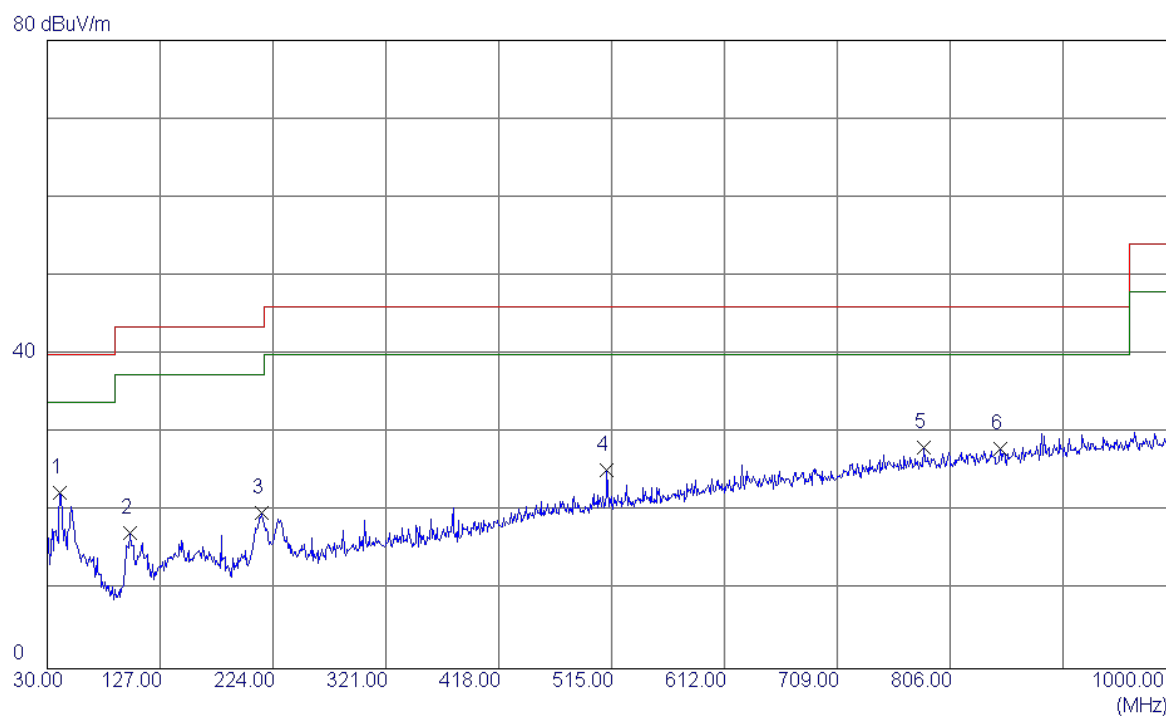


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	41.1550	39.67	-17.28	22.39	40.00	-17.61	QP
2	101.2950	37.43	-20.13	17.30	43.50	-26.20	QP
3	214.3000	37.86	-17.97	19.89	43.50	-23.61	QP
4	511.1200	33.77	-8.55	25.22	46.00	-20.78	QP
5	783.6900	32.07	-3.86	28.21	46.00	-17.79	QP
6	849.1650	31.00	-3.01	27.99	46.00	-18.01	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable: LUXSHAREICT+earphone:Lianchuang		

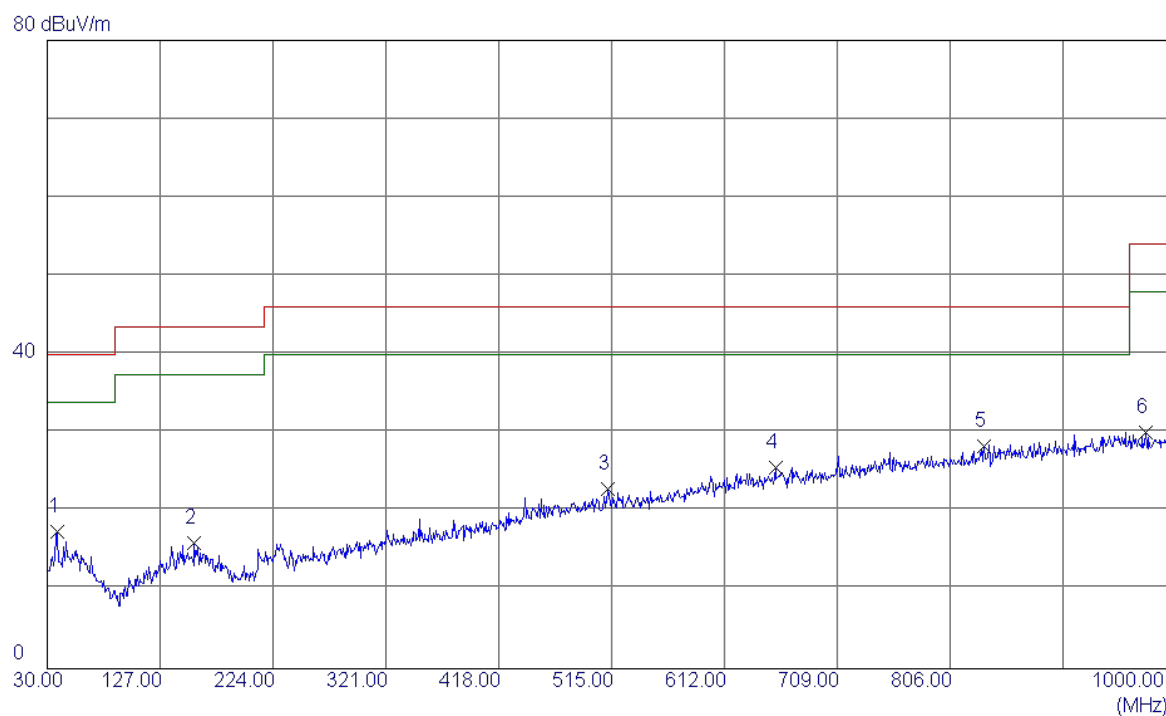


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	38.2450	35.06	-17.64	17.42	40.00	-22.58	QP
2	156.1000	31.25	-15.28	15.97	43.50	-27.53	QP
3	512.0900	31.50	-8.54	22.96	46.00	-23.04	QP
4	656.1350	31.46	-5.83	25.63	46.00	-20.37	QP
5 *	835.1000	31.53	-3.21	28.32	46.00	-17.68	QP
6	974.2950	31.12	-1.08	30.04	54.00	-23.96	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable: LUXSHAREICT+earphone:QUANCHENG		

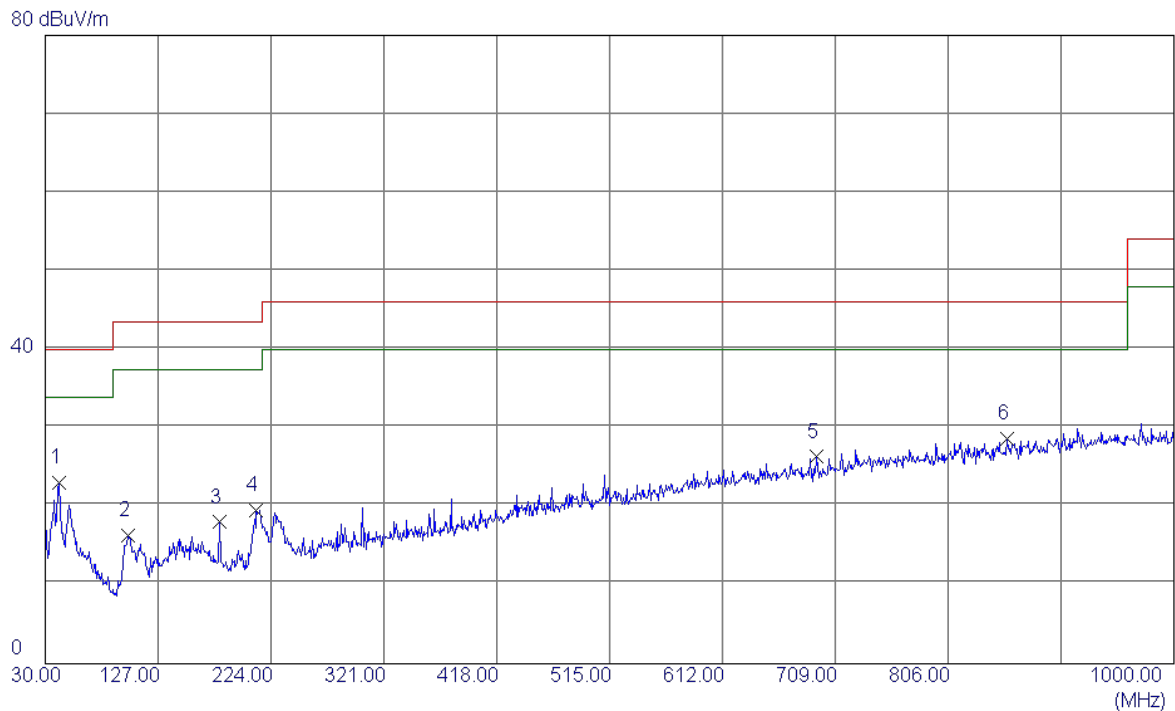


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	41.6400	40.18	-17.20	22.98	40.00	-17.02	QP
2	100.8100	36.57	-20.21	16.36	43.50	-27.14	QP
3	179.8650	34.68	-16.68	18.00	43.50	-25.50	QP
4	211.3900	37.48	-17.98	19.50	43.50	-24.00	QP
5	692.9950	31.78	-5.46	26.32	46.00	-19.68	QP
6	856.9250	31.54	-2.88	28.66	46.00	-17.34	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable: LUXSHAREICT+earphone:QUANCHENG		

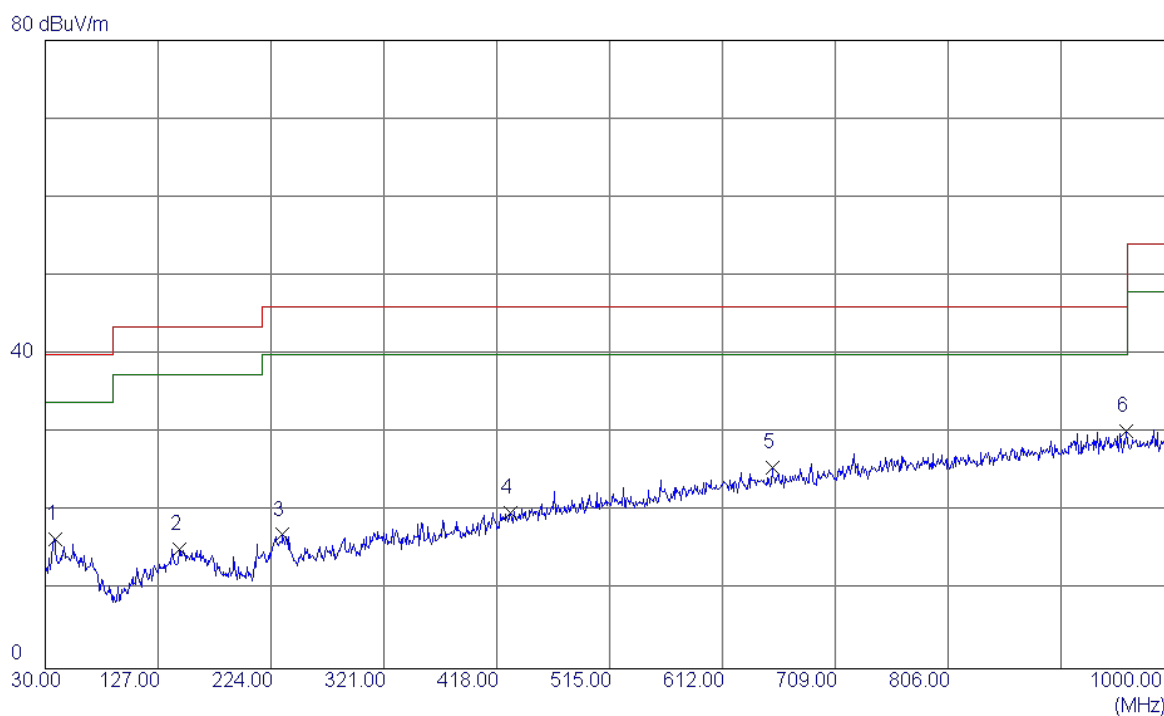


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	38.2450	34.12	-17.64	16.48	40.00	-23.52	QP
2	144.9450	30.92	-15.70	15.22	43.50	-28.28	QP
3	233.7000	34.22	-17.18	17.04	46.00	-28.96	QP
4	430.1250	30.23	-10.40	19.83	46.00	-26.17	QP
5	654.6800	31.45	-5.85	25.60	46.00	-20.40	QP
6 *	959.2600	31.44	-1.21	30.23	46.00	-15.77	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:BYD+USB Cable: LUXSHAREICT		

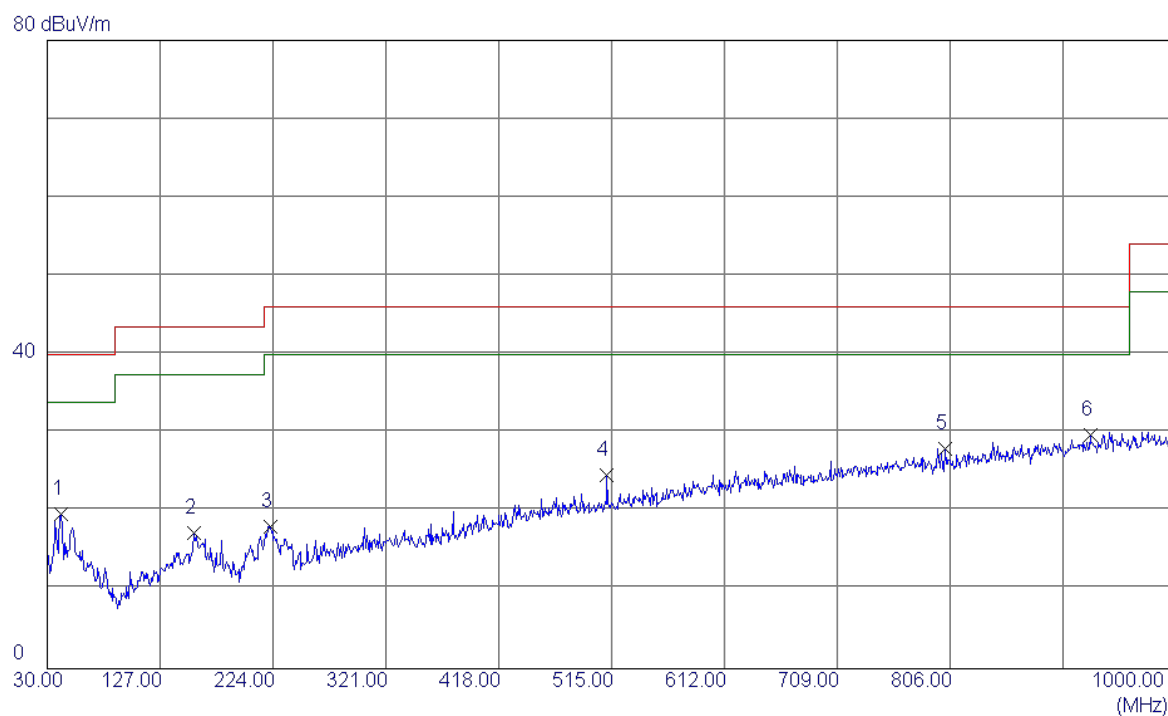


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	41.6400	36.94	-17.20	19.74	40.00	-20.26	QP
2	156.1000	32.54	-15.28	17.26	43.50	-26.24	QP
3	221.5750	36.06	-17.92	18.14	46.00	-27.86	QP
4	511.1200	33.19	-8.55	24.64	46.00	-21.36	QP
5	801.6350	31.69	-3.69	28.00	46.00	-18.00	QP
6 *	926.2800	31.40	-1.71	29.69	46.00	-16.31	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:BYD+USB Cable: LUXSHAREICT		

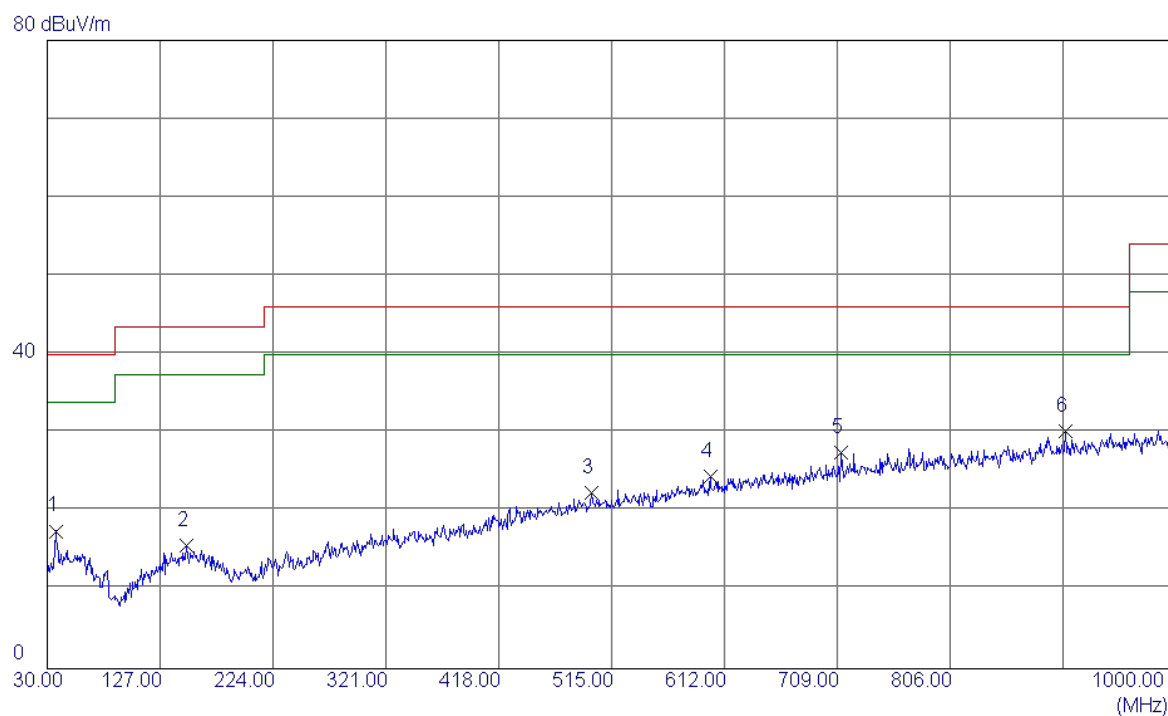


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	37.2750	35.25	-17.73	17.52	40.00	-22.48	QP
2	149.7950	31.05	-15.43	15.62	43.50	-27.88	QP
3	497.5400	31.19	-8.76	22.43	46.00	-23.57	QP
4	599.8750	31.10	-6.58	24.52	46.00	-21.48	QP
5	712.3950	32.68	-5.09	27.59	46.00	-18.41	QP
6 *	904.9400	32.26	-2.08	30.18	46.00	-15.82	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:BYD+USB Cable: LUXSHAREICT		

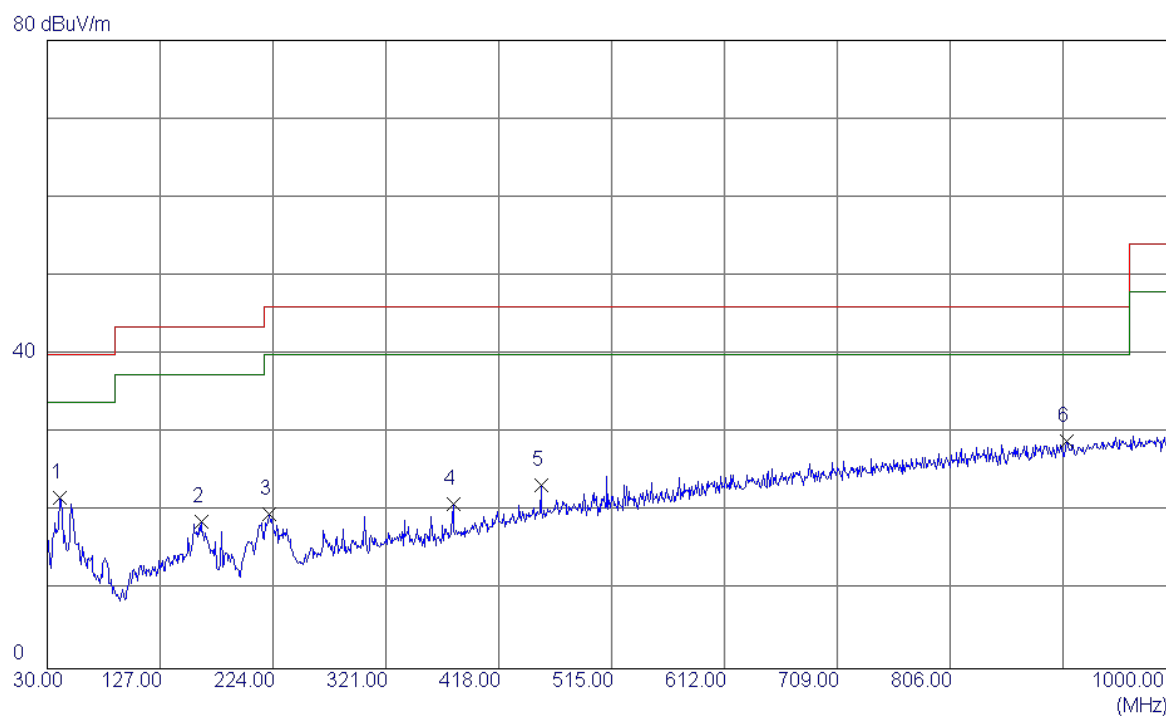


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	41.1550	39.07	-17.28	21.79	40.00	-18.21	QP
2	162.4050	34.04	-15.34	18.70	43.50	-24.80	QP
3	221.0900	37.66	-17.93	19.73	46.00	-26.27	QP
4	378.7150	33.12	-12.11	21.01	46.00	-24.99	QP
5	454.3750	32.87	-9.58	23.29	46.00	-22.71	QP
6 *	905.9100	30.98	-2.06	28.92	46.00	-17.08	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:BYD+USB Cable: LUXSHAREICT		

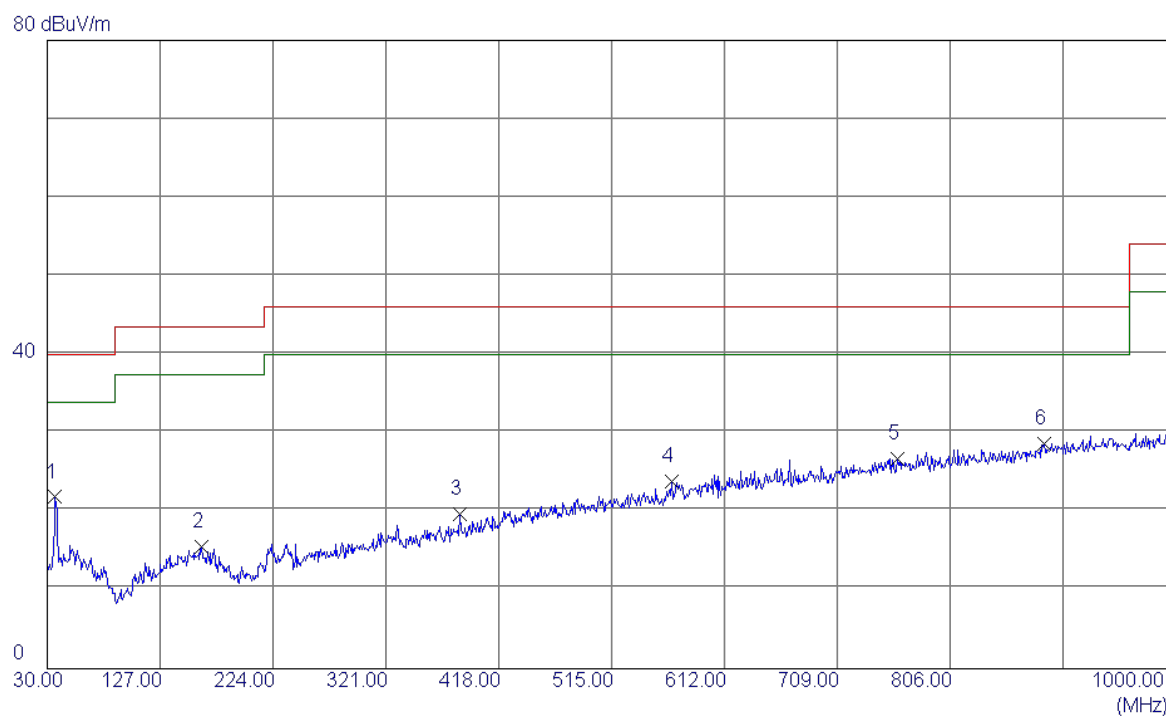


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	36.7900	39.62	-17.78	21.84	40.00	-18.16	QP
2	162.8900	30.86	-15.37	15.49	43.50	-28.01	QP
3	385.0200	31.62	-11.94	19.68	46.00	-26.32	QP
4	566.8950	31.34	-7.52	23.82	46.00	-22.18	QP
5	760.4099	30.75	-4.07	26.68	46.00	-19.32	QP
6 *	886.9950	31.06	-2.38	28.68	46.00	-17.32	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:BYD+USB Cable: LUXSHAREICT		

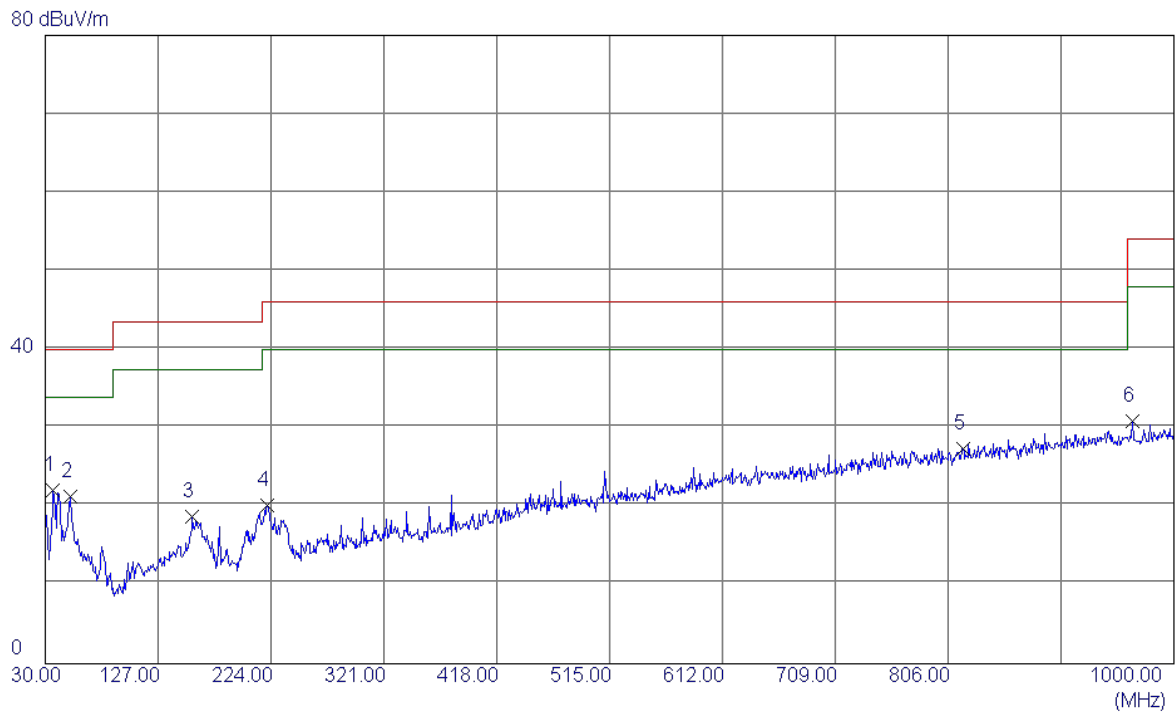

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	36.7900	39.79	-17.78	22.01	40.00	-17.99	QP
2	51.3400	37.58	-16.36	21.22	40.00	-18.78	QP
3	156.1000	34.05	-15.28	18.77	43.50	-24.73	QP
4	221.0900	38.04	-17.93	20.11	46.00	-25.89	QP
5	818.6100	30.83	-3.44	27.39	46.00	-18.61	QP
6	964.5950	32.06	-1.17	30.89	54.00	-23.11	QP

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:BYD+USB Cable: LUXSHAREICT		

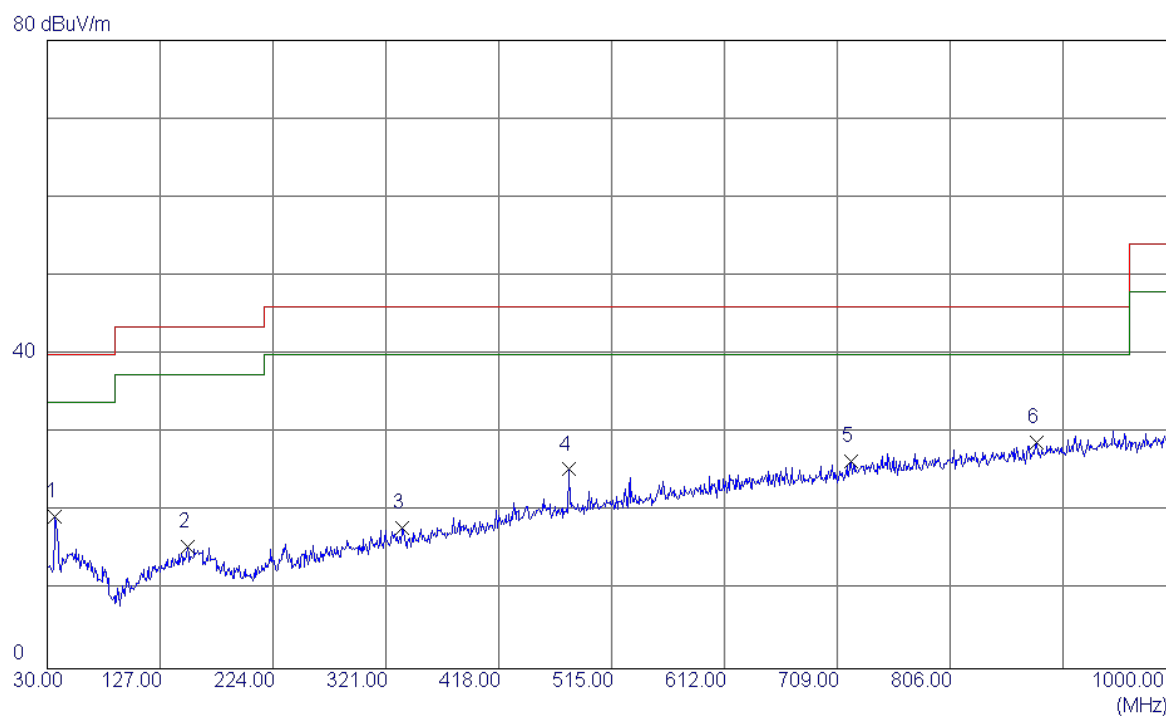


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	36.7900	37.17	-17.78	19.39	40.00	-20.61	QP
2	150.7650	30.99	-15.40	15.59	43.50	-27.91	QP
3	335.0650	31.10	-13.23	17.87	46.00	-28.13	QP
4	478.6250	34.48	-9.12	25.36	46.00	-20.64	QP
5	720.6400	31.25	-4.89	26.36	46.00	-19.64	QP
6 *	880.2050	31.33	-2.49	28.84	46.00	-17.16	QP

4.2.8 TEST RESULTS-ABOVE 1GHZ

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of『 Note 』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.


EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB Copy+Idle		
Note	USB Cable: FOXCONN		

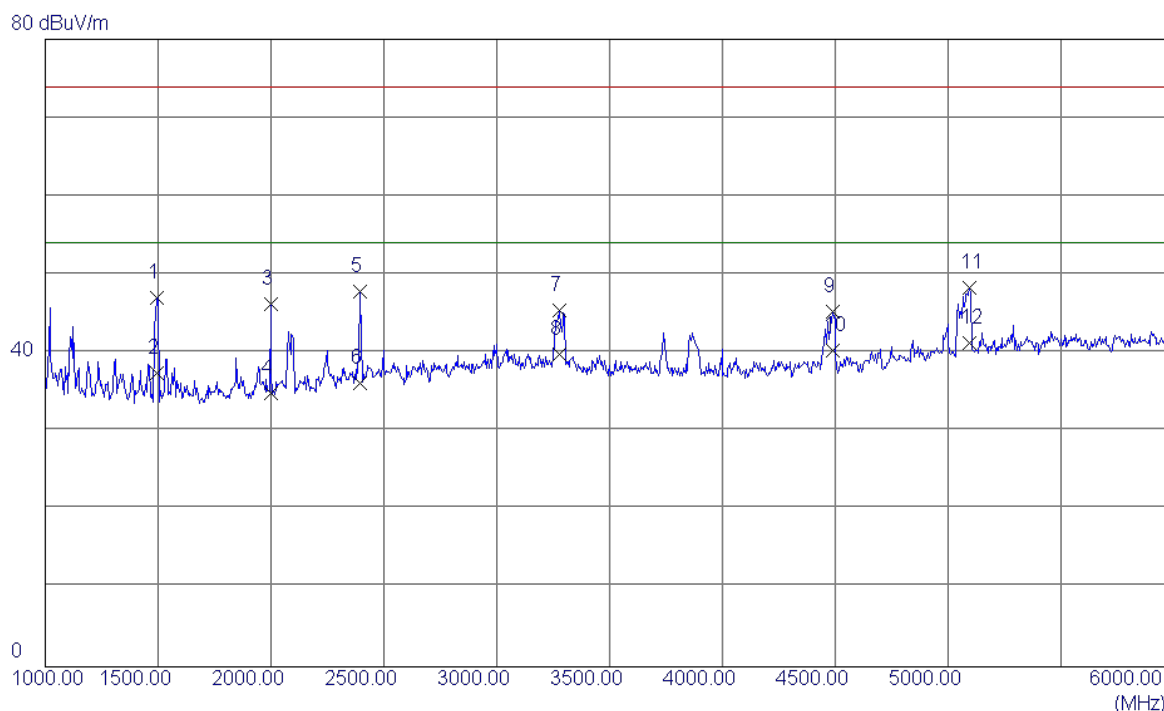

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1492.5000	52.05	-4.98	47.07	74.00	-26.93	Peak
2	1492.5000	42.40	-4.98	37.42	54.00	-16.58	AVG
3	1997.5000	48.81	-2.58	46.23	74.00	-27.77	Peak
4	1997.5000	37.50	-2.58	34.92	54.00	-19.08	AVG
5	2392.5000	48.33	-0.42	47.91	74.00	-26.09	Peak
6	2392.5000	36.51	-0.42	36.09	54.00	-17.91	AVG
7	3277.5000	43.13	2.32	45.45	74.00	-28.55	Peak
8	3277.5000	37.50	2.32	39.82	54.00	-14.18	AVG
9	4487.5000	41.44	3.85	45.29	74.00	-28.71	Peak
10	4487.5000	36.50	3.85	40.35	54.00	-13.65	AVG
11	5095.0000	41.65	6.63	48.28	74.00	-25.72	Peak
12 *	5095.0000	34.70	6.63	41.33	54.00	-12.67	AVG


EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB Copy+Idle		
Note	USB Cable: FOXCONN		

80 dBuV/m

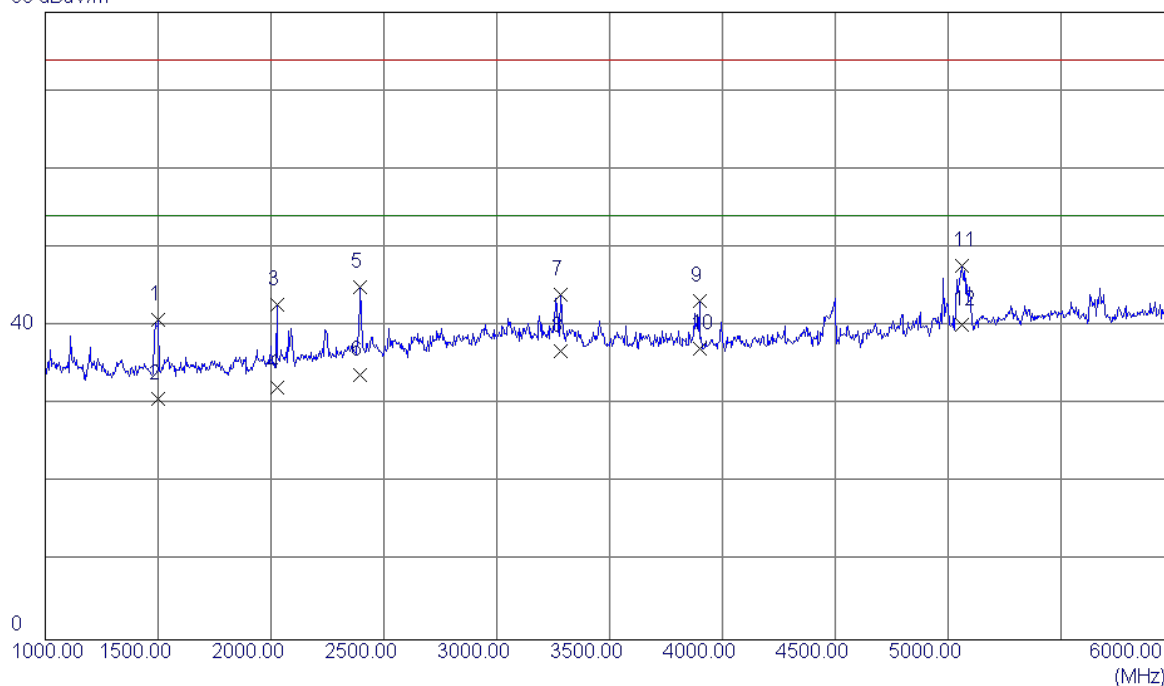


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1500.0000	45.72	-4.95	40.77	74.00	-33.23	Peak
2	1500.0000	35.60	-4.95	30.65	54.00	-23.35	AVG
3	2027.5000	45.21	-2.42	42.79	74.00	-31.21	Peak
4	2027.5000	34.60	-2.42	32.18	54.00	-21.82	AVG
5	2395.0000	45.43	-0.41	45.02	74.00	-28.98	Peak
6	2395.0000	34.21	-0.41	33.80	54.00	-20.20	AVG
7	3285.0000	41.63	2.32	43.95	74.00	-30.05	Peak
8	3285.0000	34.50	2.32	36.82	54.00	-17.18	AVG
9	3897.5000	40.62	2.62	43.24	74.00	-30.76	Peak
10	3897.5000	34.51	2.62	37.13	54.00	-16.87	AVG
11	5060.0000	41.15	6.51	47.66	74.00	-26.34	Peak
12 *	5060.0000	33.60	6.51	40.11	54.00	-13.89	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB Copy+Idle		
Note	USB Cable: HONGLIN		

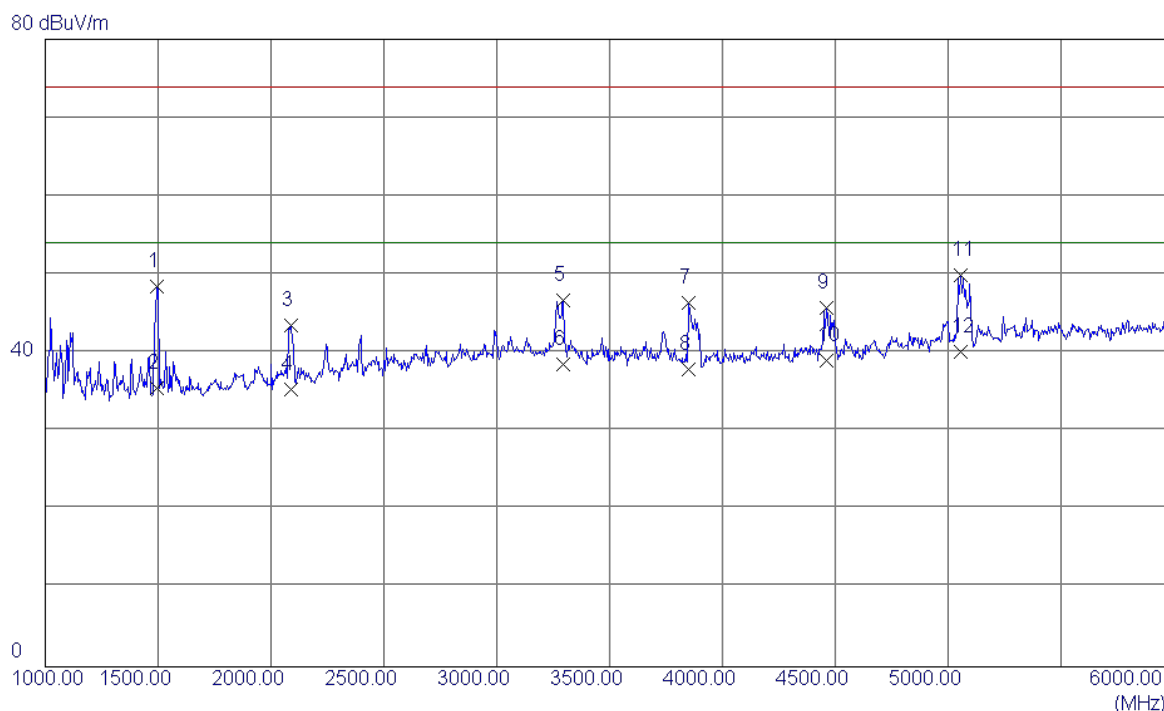


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1492.5000	53.50	-4.98	48.52	74.00	-25.48	Peak
2	1492.5000	40.50	-4.98	35.52	54.00	-18.48	AVG
3	2090.0000	45.59	-2.08	43.51	74.00	-30.49	Peak
4	2090.0000	37.49	-2.08	35.41	54.00	-18.59	AVG
5	3295.0000	44.36	2.31	46.67	74.00	-27.33	Peak
6	3295.0000	36.31	2.31	38.62	54.00	-15.38	AVG
7	3852.5000	43.86	2.58	46.44	74.00	-27.56	Peak
8	3852.5000	35.41	2.58	37.99	54.00	-16.01	AVG
9	4462.5000	42.00	3.79	45.79	74.00	-28.21	Peak
10	4462.5000	35.21	3.79	39.00	54.00	-15.00	AVG
11	5055.0000	43.48	6.50	49.98	74.00	-24.02	Peak
12 *	5055.0000	33.59	6.50	40.09	54.00	-13.91	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB Copy+Idle		
Note	USB Cable: HONGLIN		

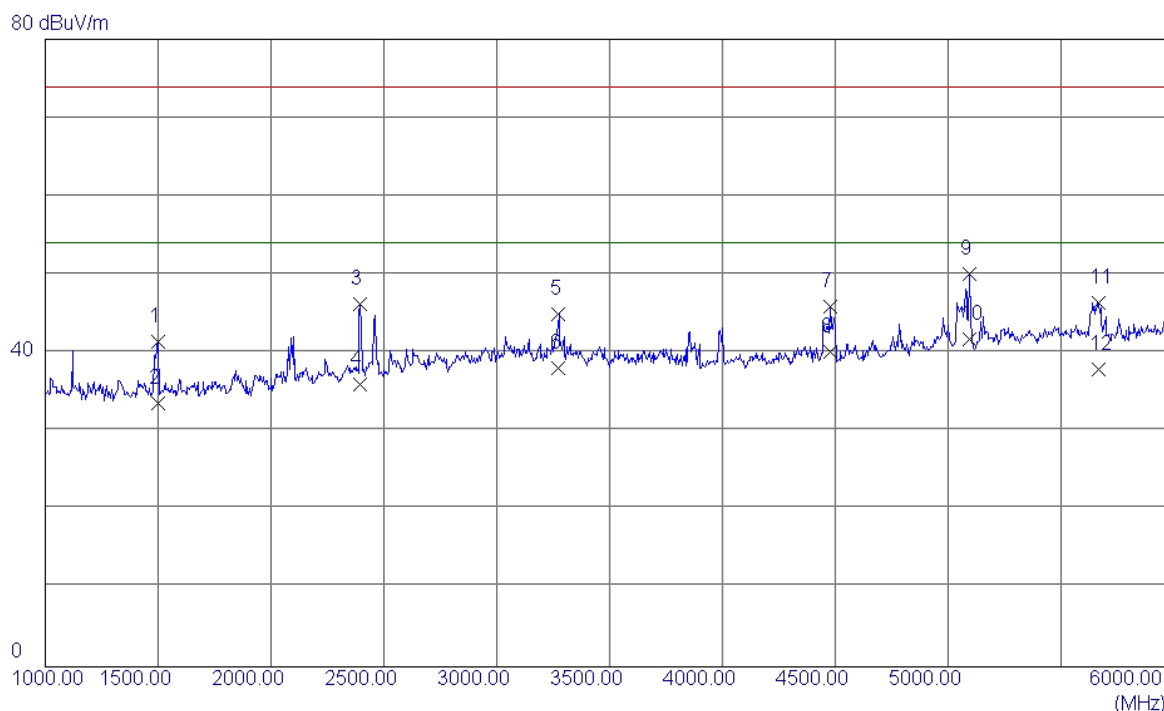


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1500.0000	46.38	-4.95	41.43	74.00	-32.57	Peak
2	1500.0000	38.50	-4.95	33.55	54.00	-20.45	AVG
3	2395.0000	46.61	-0.41	46.20	74.00	-27.80	Peak
4	2395.0000	36.38	-0.41	35.97	54.00	-18.03	AVG
5	3275.0000	42.67	2.32	44.99	74.00	-29.01	Peak
6	3275.0000	35.70	2.32	38.02	54.00	-15.98	AVG
7	4477.5000	42.05	3.83	45.88	74.00	-28.12	Peak
8	4477.5000	36.40	3.83	40.23	54.00	-13.77	AVG
9	5095.0000	43.52	6.63	50.15	74.00	-23.85	Peak
10 *	5095.0000	35.20	6.63	41.83	54.00	-12.17	AVG
11	5667.5000	38.22	8.16	46.38	74.00	-27.62	Peak
12	5667.5000	29.79	8.16	37.95	54.00	-16.05	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB Copy+Idle		
Note	USB Cable: LUXSHAREICT		

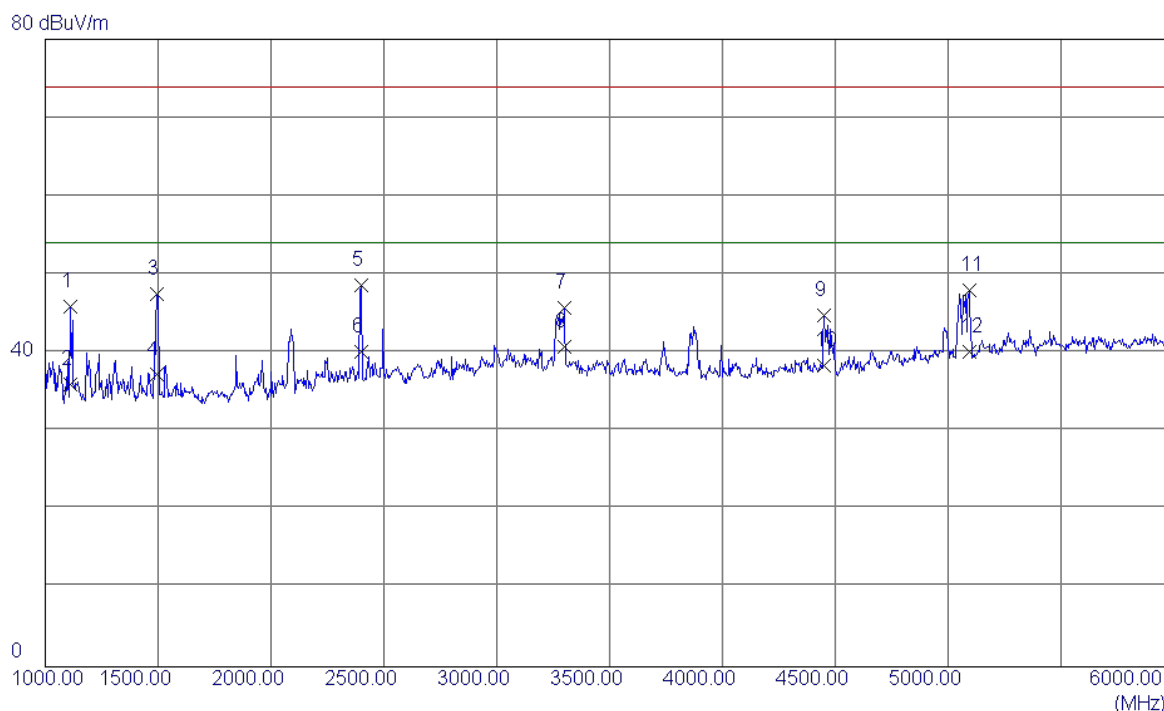


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1112.5000	52.32	-6.33	45.99	74.00	-28.01	Peak
2	1112.5000	42.40	-6.33	36.07	54.00	-17.93	AVG
3	1492.5000	52.49	-4.98	47.51	74.00	-26.49	Peak
4	1492.5000	42.30	-4.98	37.32	54.00	-16.68	AVG
5	2397.5000	49.00	-0.39	48.61	74.00	-25.39	Peak
6	2397.5000	40.60	-0.39	40.21	54.00	-13.79	AVG
7	3297.5000	43.38	2.31	45.69	74.00	-28.31	Peak
8 *	3297.5000	38.50	2.31	40.81	54.00	-13.19	AVG
9	4452.5000	41.03	3.77	44.80	74.00	-29.20	Peak
10	4452.5000	34.59	3.77	38.36	54.00	-15.64	AVG
11	5092.5000	41.43	6.62	48.05	74.00	-25.95	Peak
12	5092.5000	33.60	6.62	40.22	54.00	-13.78	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB Copy+Idle		
Note	USB Cable: LUXSHAREICT		

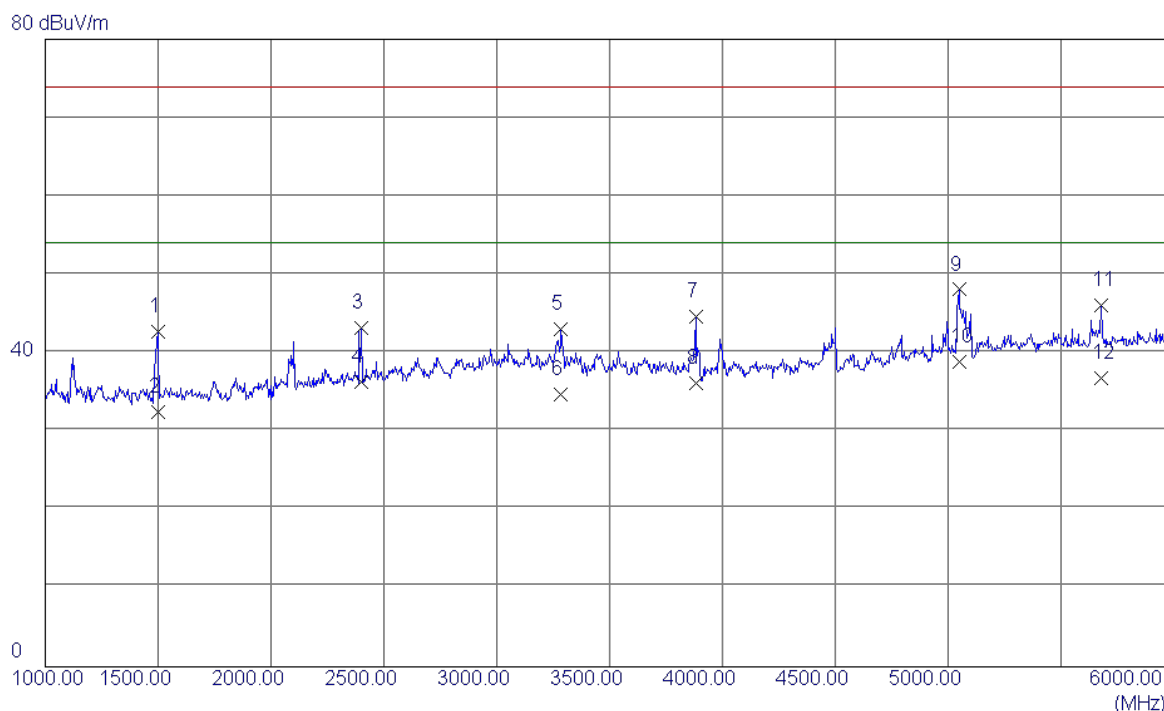

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1497.5000	47.70	-4.96	42.74	74.00	-31.26	Peak
2	1497.5000	37.51	-4.96	32.55	54.00	-21.45	AVG
3	2400.0000	43.59	-0.38	43.21	74.00	-30.79	Peak
4	2400.0000	36.70	-0.38	36.32	54.00	-17.68	AVG
5	3285.0000	40.72	2.32	43.04	74.00	-30.96	Peak
6	3285.0000	32.40	2.32	34.72	54.00	-19.28	AVG
7	3882.5000	42.07	2.61	44.68	74.00	-29.32	Peak
8	3882.5000	33.50	2.61	36.11	54.00	-17.89	AVG
9	5047.5000	41.61	6.47	48.08	74.00	-25.92	Peak
10 *	5047.5000	32.40	6.47	38.87	54.00	-15.13	AVG
11	5677.5000	37.85	8.17	46.02	74.00	-27.98	Peak
12	5677.5000	28.60	8.17	36.77	54.00	-17.23	AVG


EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:BYD+USB Cable: LUXSHAREICT		

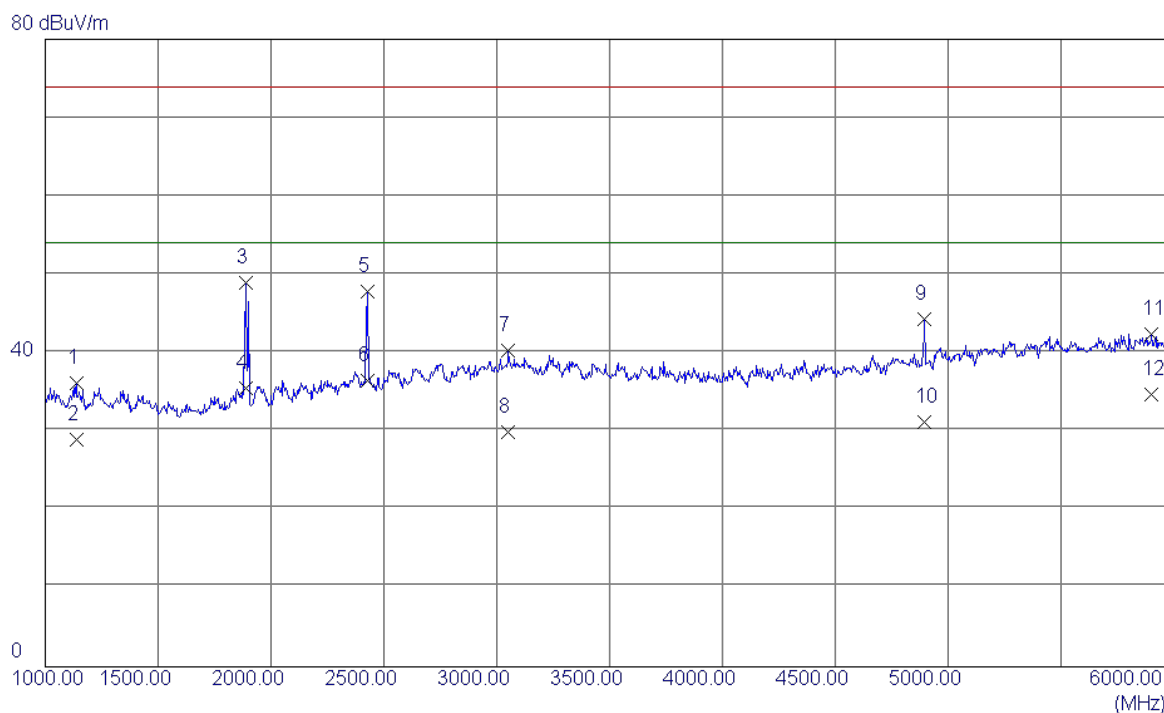

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1137.5000	42.33	-6.24	36.09	74.00	-37.91	Peak
2	1137.5000	35.20	-6.24	28.96	54.00	-25.04	AVG
3	1887.5000	52.01	-3.11	48.90	74.00	-25.10	Peak
4	1887.5000	38.70	-3.11	35.59	54.00	-18.41	AVG
5	2427.5000	48.09	-0.23	47.86	74.00	-26.14	Peak
6 *	2427.5000	36.71	-0.23	36.48	54.00	-17.52	AVG
7	3052.5000	37.90	2.38	40.28	74.00	-33.72	Peak
8	3052.5000	27.57	2.38	29.95	54.00	-24.05	AVG
9	4895.0000	38.45	5.80	44.25	74.00	-29.75	Peak
10	4895.0000	25.40	5.80	31.20	54.00	-22.80	AVG
11	5902.5000	34.02	8.37	42.39	74.00	-31.61	Peak
12	5902.5000	26.40	8.37	34.77	54.00	-19.23	AVG


EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:BYD+USB Cable: LUXSHAREICT		

80 dBuV/m

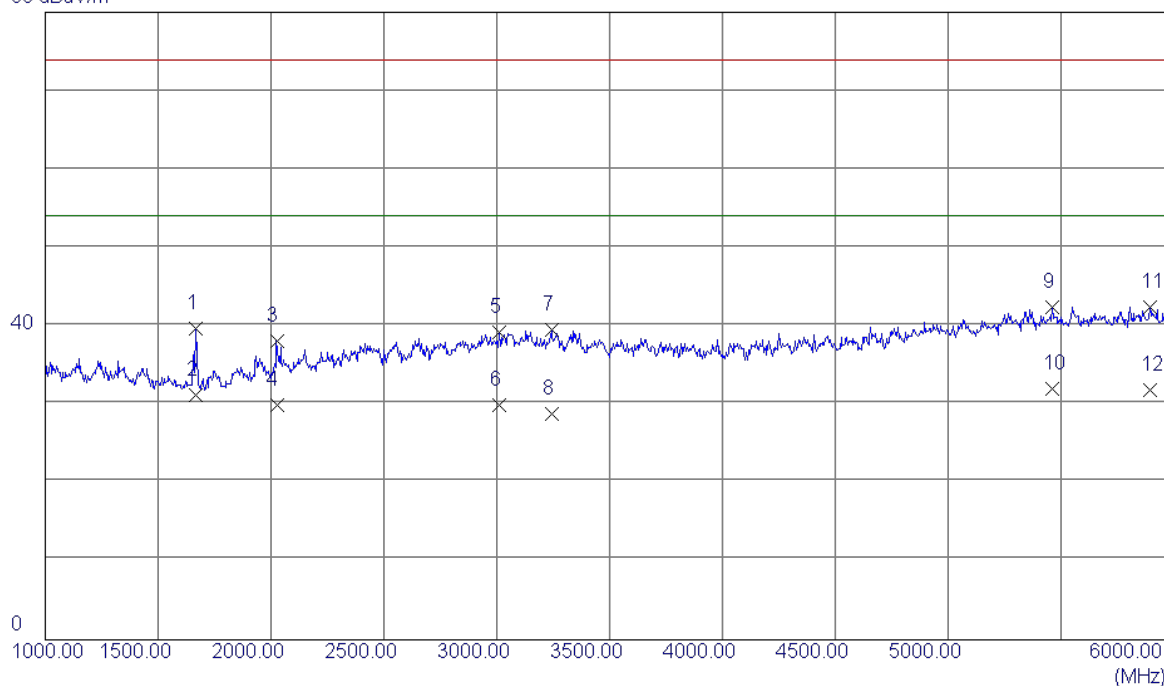


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1667.5000	43.83	-4.15	39.68	74.00	-34.32	Peak
2	1667.5000	35.40	-4.15	31.25	54.00	-22.75	AVG
3	2025.0000	40.49	-2.43	38.06	74.00	-35.94	Peak
4	2025.0000	32.39	-2.43	29.96	54.00	-24.04	AVG
5	3010.0000	36.82	2.40	39.22	74.00	-34.78	Peak
6	3010.0000	27.49	2.40	29.89	54.00	-24.11	AVG
7	3242.5000	37.14	2.33	39.47	74.00	-34.53	Peak
8	3242.5000	26.50	2.33	28.83	54.00	-25.17	AVG
9	5462.5000	34.59	7.88	42.47	74.00	-31.53	Peak
10 *	5462.5000	24.10	7.88	31.98	54.00	-22.02	AVG
11	5892.5000	34.09	8.36	42.45	74.00	-31.55	Peak
12	5892.5000	23.51	8.36	31.87	54.00	-22.13	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:Huntkey+USB Cable: LUXSHAREICT		

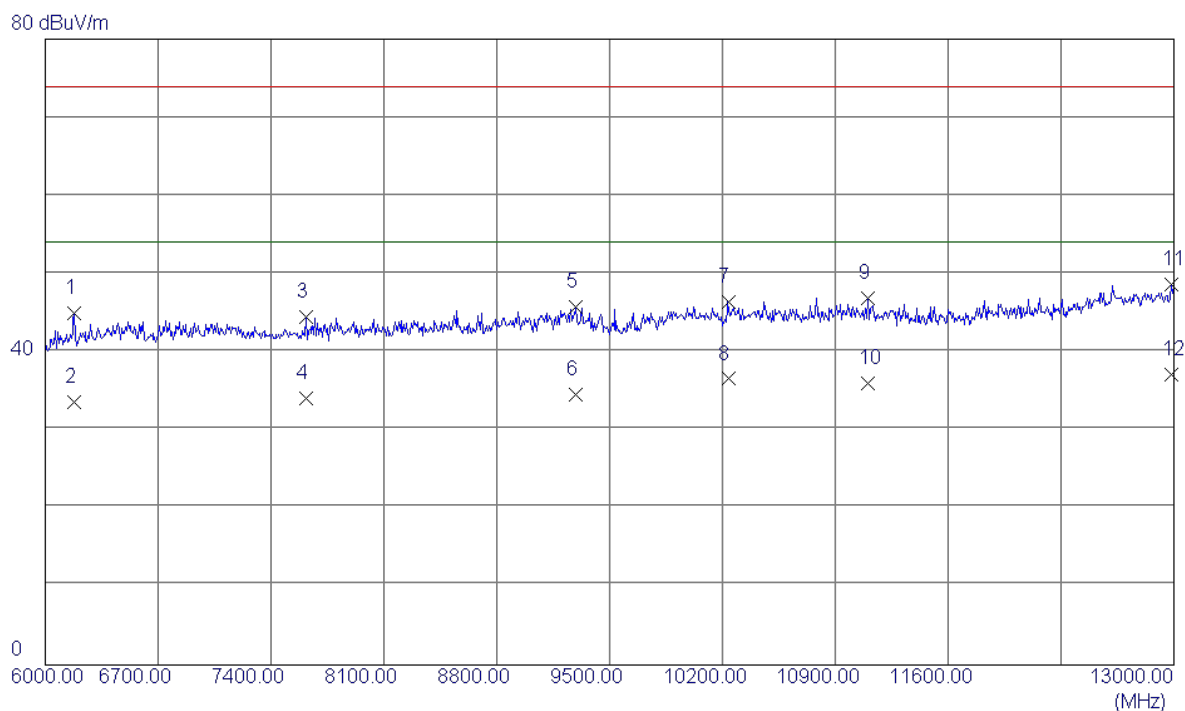


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	6182.0000	35.20	9.69	44.89	74.00	-29.11	Peak
2	6182.0000	23.98	9.69	33.67	54.00	-20.33	AVG
3	7617.0000	32.74	11.74	44.48	74.00	-29.52	Peak
4	7617.0000	22.36	11.74	34.10	54.00	-19.90	AVG
5	9290.0000	32.43	13.28	45.71	74.00	-28.29	Peak
6	9290.0000	21.30	13.28	34.58	54.00	-19.42	AVG
7	10235.0000	31.80	14.67	46.47	74.00	-27.53	Peak
8	10235.0000	21.89	14.67	36.56	54.00	-17.44	AVG
9	11103.0000	31.02	15.84	46.86	74.00	-27.14	Peak
10	11103.0000	20.13	15.84	35.97	54.00	-18.03	AVG
11	12986.0000	30.61	18.09	48.70	74.00	-25.30	Peak
12 *	12986.0000	19.07	18.09	37.16	54.00	-16.84	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:Huntkey+USB Cable: LUXSHAREICT		

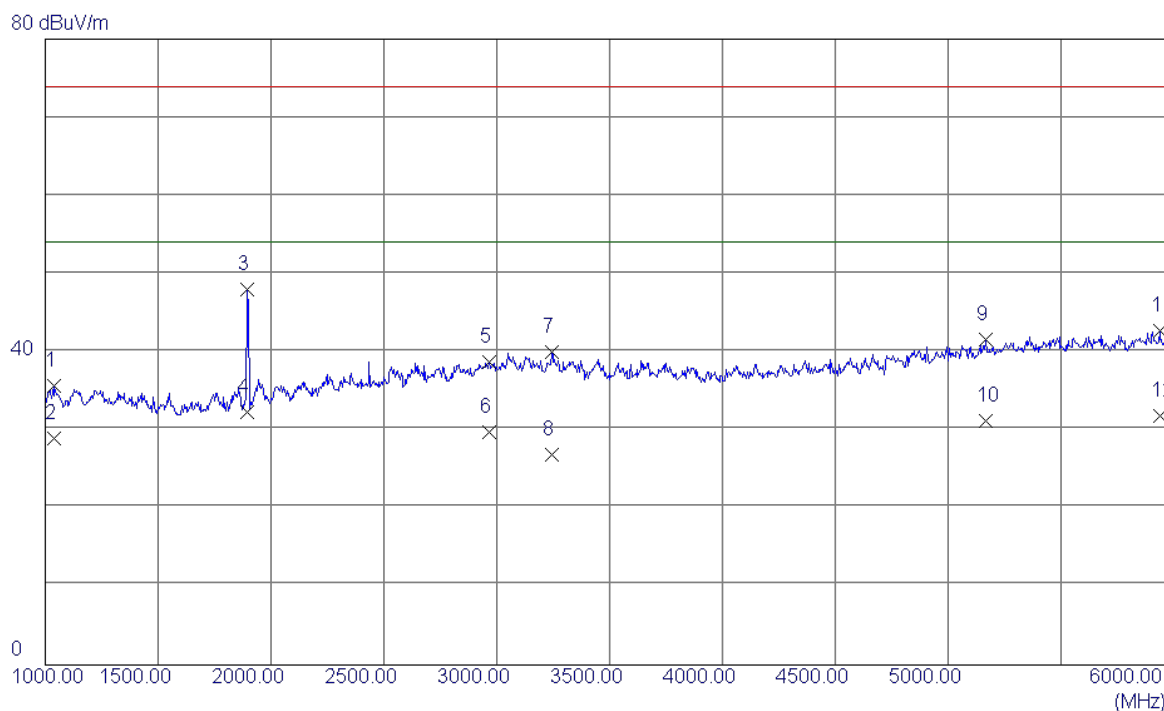


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1037.5000	42.30	-6.60	35.70	74.00	-38.30	Peak
2	1037.5000	35.60	-6.60	29.00	54.00	-25.00	AVG
3	1895.0000	51.05	-3.07	47.98	74.00	-26.02	Peak
4 *	1895.0000	35.40	-3.07	32.33	54.00	-21.67	AVG
5	2965.0000	36.41	2.24	38.65	74.00	-35.35	Peak
6	2965.0000	27.50	2.24	29.74	54.00	-24.26	AVG
7	3242.5000	37.61	2.33	39.94	74.00	-34.06	Peak
8	3242.5000	24.50	2.33	26.83	54.00	-27.17	AVG
9	5165.0000	34.78	6.87	41.65	74.00	-32.35	Peak
10	5165.0000	24.30	6.87	31.17	54.00	-22.83	AVG
11	5937.5000	34.27	8.40	42.67	74.00	-31.33	Peak
12	5937.5000	23.51	8.40	31.91	54.00	-22.09	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:Huntkey+USB Cable: LUXSHAREICT		

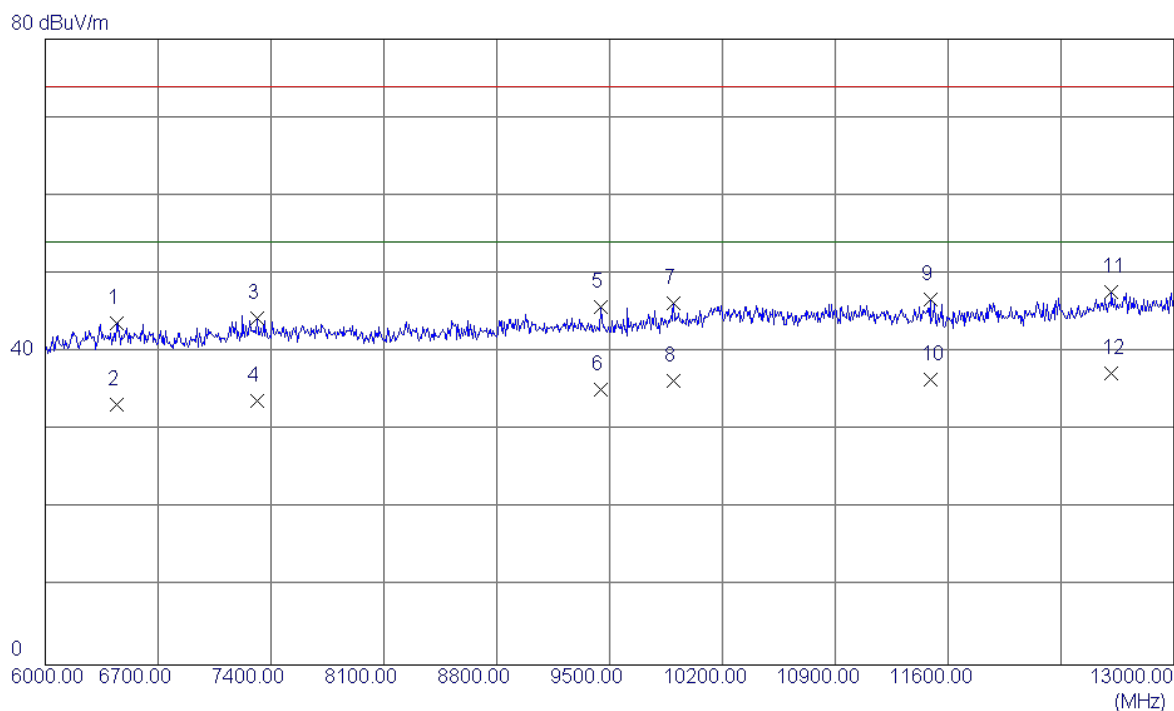


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	6441.0000	33.05	10.68	43.73	74.00	-30.27	Peak
2	6441.0000	22.57	10.68	33.25	54.00	-20.75	AVG
3	7316.0000	32.95	11.38	44.33	74.00	-29.67	Peak
4	7316.0000	22.37	11.38	33.75	54.00	-20.25	AVG
5	9444.0000	32.50	13.22	45.72	74.00	-28.28	Peak
6	9444.0000	22.04	13.22	35.26	54.00	-18.74	AVG
7	9899.0000	32.24	13.94	46.18	74.00	-27.82	Peak
8	9899.0000	22.41	13.94	36.35	54.00	-17.65	AVG
9	11488.0000	31.20	15.49	46.69	74.00	-27.31	Peak
10	11488.0000	20.98	15.49	36.47	54.00	-17.53	AVG
11	12615.0000	30.77	16.85	47.62	74.00	-26.38	Peak
12 *	12615.0000	20.38	16.85	37.23	54.00	-16.77	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:Huntkey+USB Cable: LUXSHAREICT		

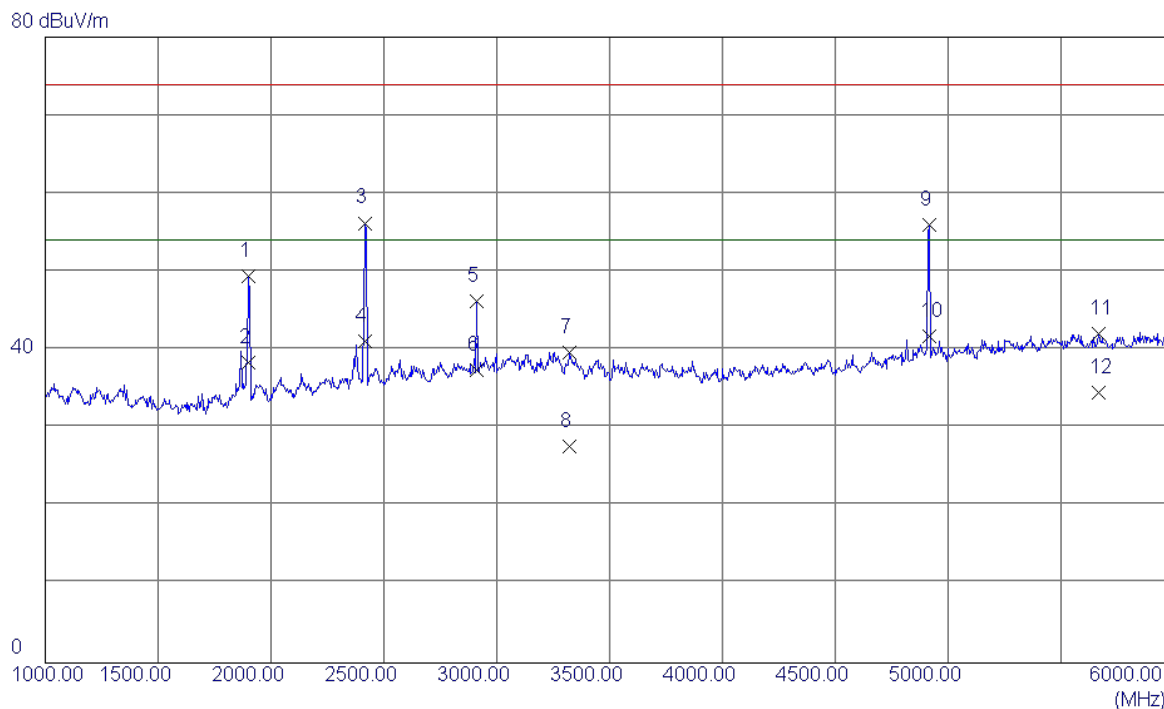


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1900.0000	52.54	-3.05	49.49	74.00	-24.51	Peak
2	1900.0000	41.51	-3.05	38.46	54.00	-15.54	AVG
3	2417.5000	56.52	-0.28	56.24	74.00	-17.76	Peak
4	2417.5000	41.39	-0.28	41.11	54.00	-12.89	AVG
5	2912.5000	44.17	2.01	46.18	74.00	-27.82	Peak
6	2912.5000	35.40	2.01	37.41	54.00	-16.59	AVG
7	3320.0000	37.36	2.31	39.67	74.00	-34.33	Peak
8	3320.0000	25.40	2.31	27.71	54.00	-26.29	AVG
9	4915.0000	50.14	5.90	56.04	74.00	-17.96	Peak
10 *	4915.0000	35.80	5.90	41.70	54.00	-12.30	AVG
11	5665.0000	33.87	8.16	42.03	74.00	-31.97	Peak
12	5665.0000	26.39	8.16	34.55	54.00	-19.45	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:HW-050200E01_BYD+USB Cable: LUXSHAREICT		

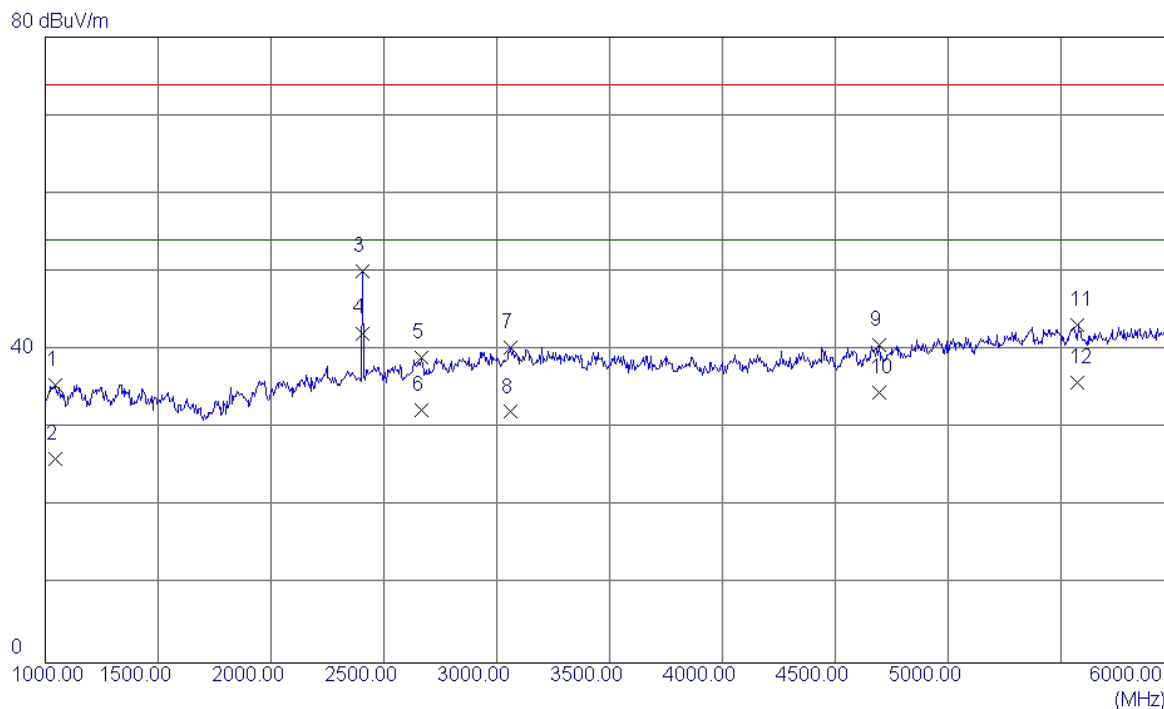


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1042.5000	42.16	-6.58	35.58	74.00	-38.42	Peak
2	1042.5000	32.70	-6.58	26.12	54.00	-27.88	AVG
3	2407.5000	50.43	-0.34	50.09	74.00	-23.91	Peak
4 *	2407.5000	42.50	-0.34	42.16	54.00	-11.84	AVG
5	2667.5000	38.12	0.92	39.04	74.00	-34.96	Peak
6	2667.5000	31.39	0.92	32.31	54.00	-21.69	AVG
7	3062.5000	38.00	2.38	40.38	74.00	-33.62	Peak
8	3062.5000	29.70	2.38	32.08	54.00	-21.92	AVG
9	4692.5000	35.87	4.82	40.69	74.00	-33.31	Peak
10	4692.5000	29.70	4.82	34.52	54.00	-19.48	AVG
11	5575.0000	35.08	8.08	43.16	74.00	-30.84	Peak
12	5575.0000	27.80	8.08	35.88	54.00	-18.12	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:HW-050200E01_BYD+USB Cable: LUXSHAREICT		

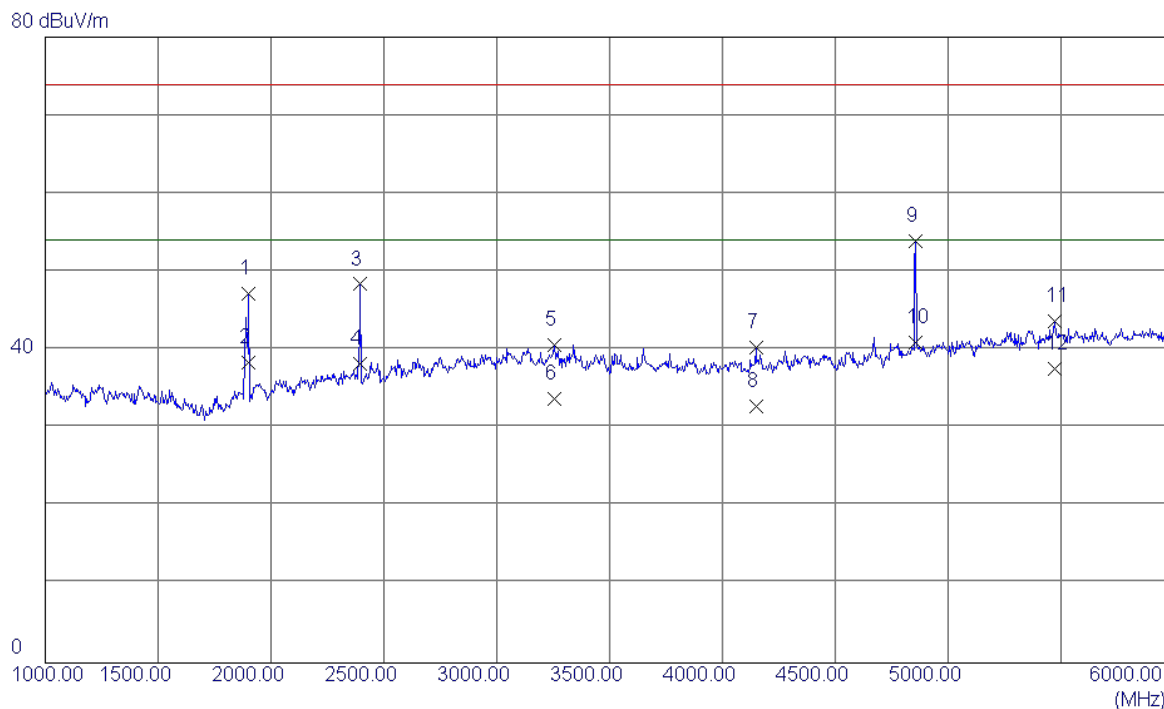


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1900.0000	50.21	-3.05	47.16	74.00	-26.84	Peak
2	1900.0000	41.51	-3.05	38.46	54.00	-15.54	AVG
3	2395.0000	48.81	-0.41	48.40	74.00	-25.60	Peak
4	2395.0000	38.71	-0.41	38.30	54.00	-15.70	AVG
5	3257.5000	38.37	2.33	40.70	74.00	-33.30	Peak
6	3257.5000	31.50	2.33	33.83	54.00	-20.17	AVG
7	4147.5000	37.25	3.06	40.31	74.00	-33.69	Peak
8	4147.5000	29.71	3.06	32.77	54.00	-21.23	AVG
9	4857.5000	48.32	5.62	53.94	74.00	-20.06	Peak
10 *	4857.5000	35.39	5.62	41.01	54.00	-12.99	AVG
11	5472.5000	35.75	7.92	43.67	74.00	-30.33	Peak
12	5472.5000	29.69	7.92	37.61	54.00	-16.39	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:HW-050200E01_HK+USB Cable: LUXSHAREICT		

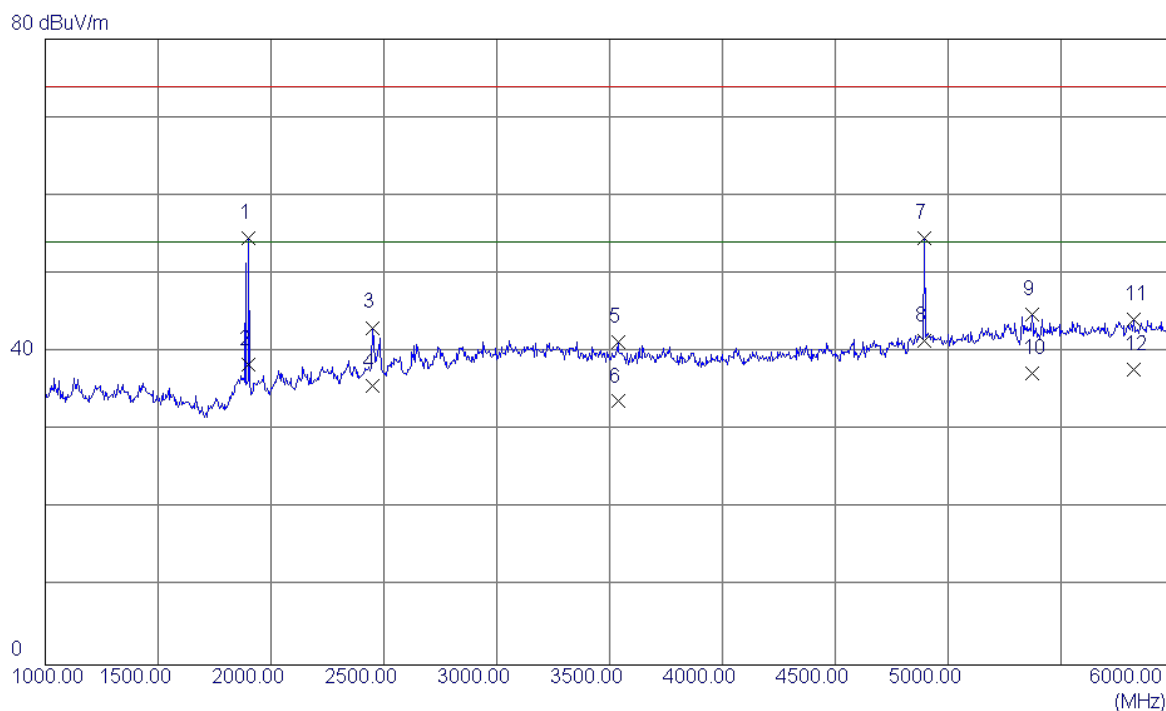


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1900.0000	57.57	-3.05	54.52	74.00	-19.48	Peak
2	1900.0000	41.51	-3.05	38.46	54.00	-15.54	AVG
3	2452.5000	43.21	-0.09	43.12	74.00	-30.88	Peak
4	2452.5000	35.69	-0.09	35.60	54.00	-18.40	AVG
5	3537.5000	38.98	2.29	41.27	74.00	-32.73	Peak
6	3537.5000	31.39	2.29	33.68	54.00	-20.32	AVG
7	4895.0000	48.76	5.80	54.56	74.00	-19.44	Peak
8 *	4895.0000	35.70	5.80	41.50	54.00	-12.50	AVG
9	5372.5000	37.17	7.58	44.75	74.00	-29.25	Peak
10	5372.5000	29.70	7.58	37.28	54.00	-16.72	AVG
11	5822.5000	35.88	8.30	44.18	74.00	-29.82	Peak
12	5822.5000	29.40	8.30	37.70	54.00	-16.30	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:HW-050200E01_HK+USB Cable: LUXSHAREICT		

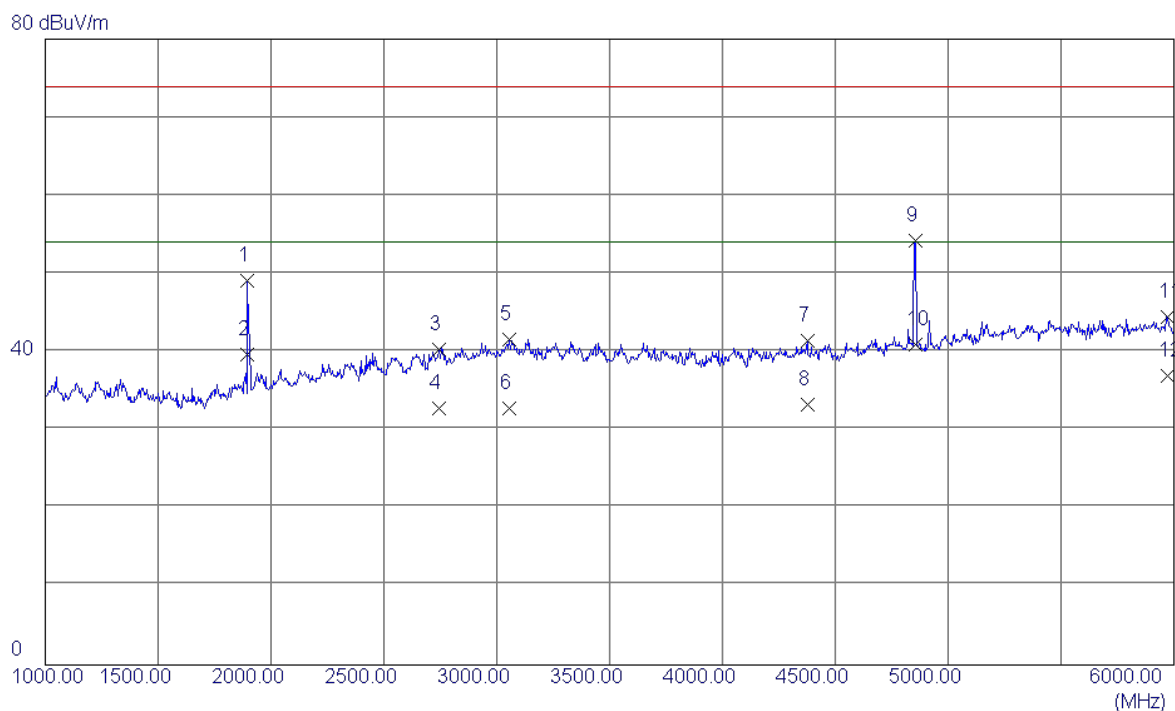


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1895.0000	52.12	-3.07	49.05	74.00	-24.95	Peak
2	1895.0000	42.70	-3.07	39.63	54.00	-14.37	AVG
3	2745.0000	39.10	1.26	40.36	74.00	-33.64	Peak
4	2745.0000	31.50	1.26	32.76	54.00	-21.24	AVG
5	3055.0000	39.18	2.38	41.56	74.00	-32.44	Peak
6	3055.0000	30.40	2.38	32.78	54.00	-21.22	AVG
7	4377.5000	37.87	3.60	41.47	74.00	-32.53	Peak
8	4377.5000	29.69	3.60	33.29	54.00	-20.71	AVG
9	4855.0000	48.65	5.61	54.26	74.00	-19.74	Peak
10 *	4855.0000	35.39	5.61	41.00	54.00	-13.00	AVG
11	5970.0000	36.07	8.43	44.50	74.00	-29.50	Peak
12	5970.0000	28.50	8.43	36.93	54.00	-17.07	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:phltek+USB Cable: LUXSHAREICT		

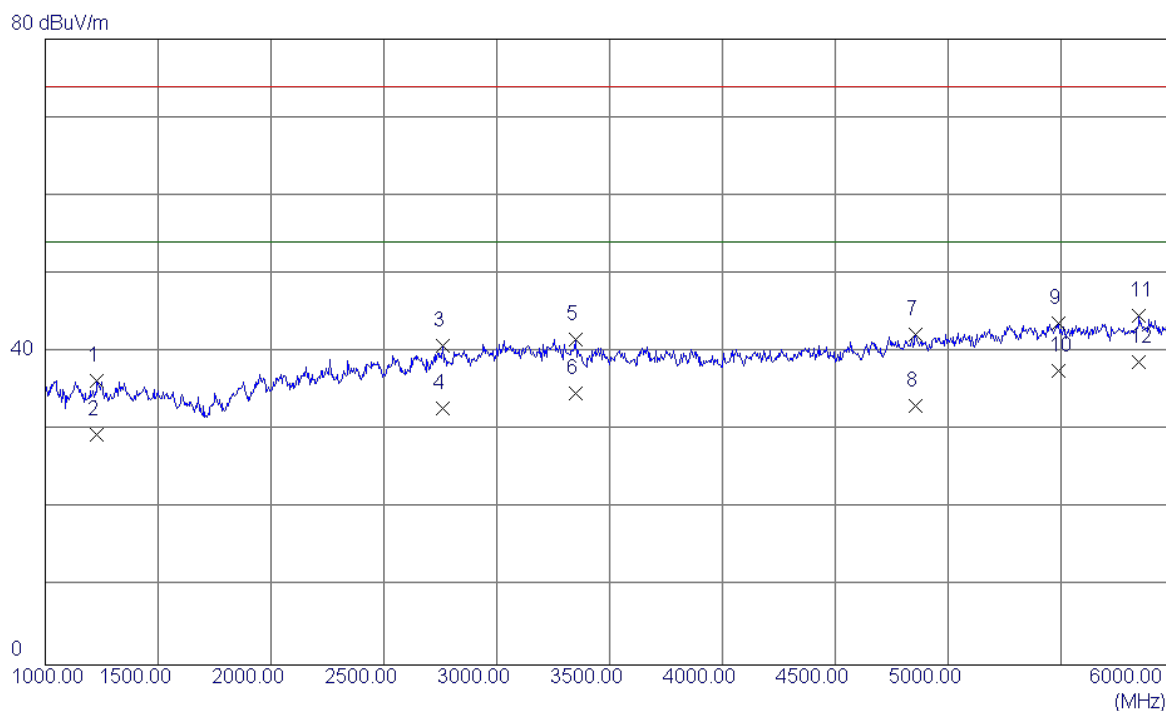


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1230.0000	42.16	-5.91	36.25	74.00	-37.75	Peak
2	1230.0000	35.40	-5.91	29.49	54.00	-24.51	AVG
3	2762.5000	39.48	1.34	40.82	74.00	-33.18	Peak
4	2762.5000	31.50	1.34	32.84	54.00	-21.16	AVG
5	3350.0000	39.28	2.30	41.58	74.00	-32.42	Peak
6	3350.0000	32.40	2.30	34.70	54.00	-19.30	AVG
7	4855.0000	36.60	5.61	42.21	74.00	-31.79	Peak
8	4855.0000	27.49	5.61	33.10	54.00	-20.90	AVG
9	5487.5000	35.65	7.97	43.62	74.00	-30.38	Peak
10	5487.5000	29.70	7.97	37.67	54.00	-16.33	AVG
11	5845.0000	36.32	8.32	44.64	74.00	-29.36	Peak
12 *	5845.0000	30.40	8.32	38.72	54.00	-15.28	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:phltek+USB Cable: LUXSHAREICT		

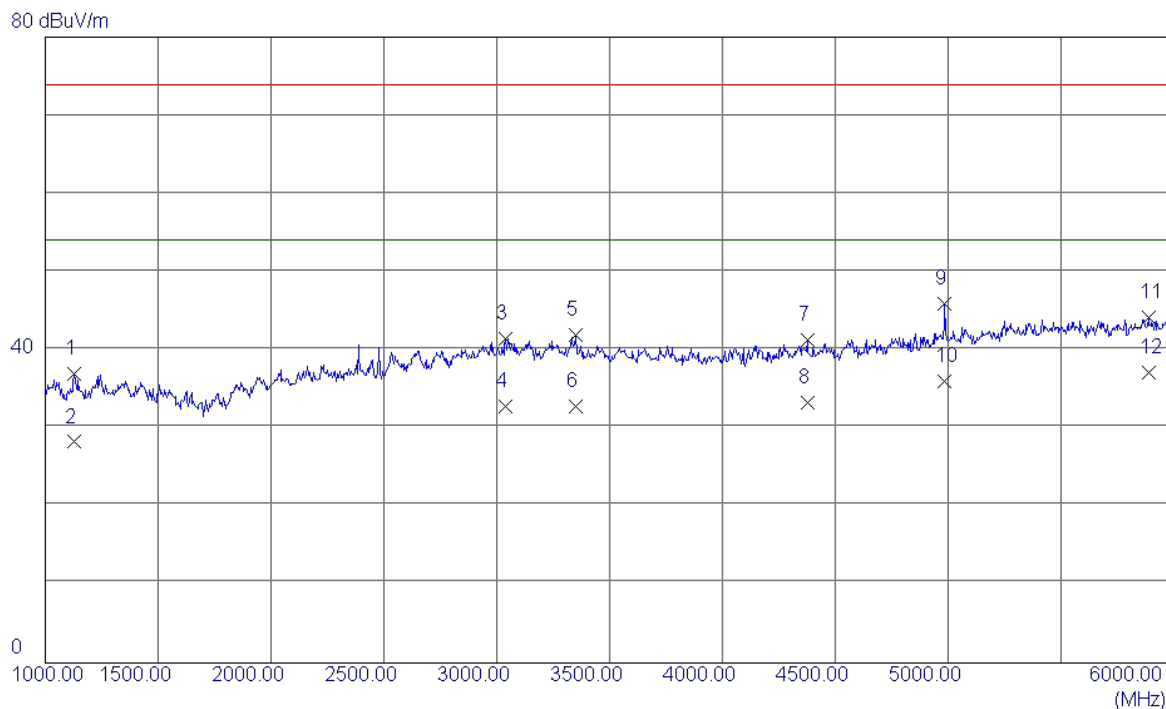


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1130.0000	43.16	-6.27	36.89	74.00	-37.11	Peak
2	1130.0000	34.51	-6.27	28.24	54.00	-25.76	AVG
3	3040.0000	39.11	2.39	41.50	74.00	-32.50	Peak
4	3040.0000	30.40	2.39	32.79	54.00	-21.21	AVG
5	3350.0000	39.55	2.30	41.85	74.00	-32.15	Peak
6	3350.0000	30.50	2.30	32.80	54.00	-21.20	AVG
7	4377.5000	37.63	3.60	41.23	74.00	-32.77	Peak
8	4377.5000	29.69	3.60	33.29	54.00	-20.71	AVG
9	4985.0000	39.69	6.24	45.93	74.00	-28.07	Peak
10	4985.0000	29.69	6.24	35.93	54.00	-18.07	AVG
11	5887.5000	35.86	8.36	44.22	74.00	-29.78	Peak
12 *	5887.5000	28.70	8.36	37.06	54.00	-16.94	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:phitek+USB Cable: LUXSHAREICT		

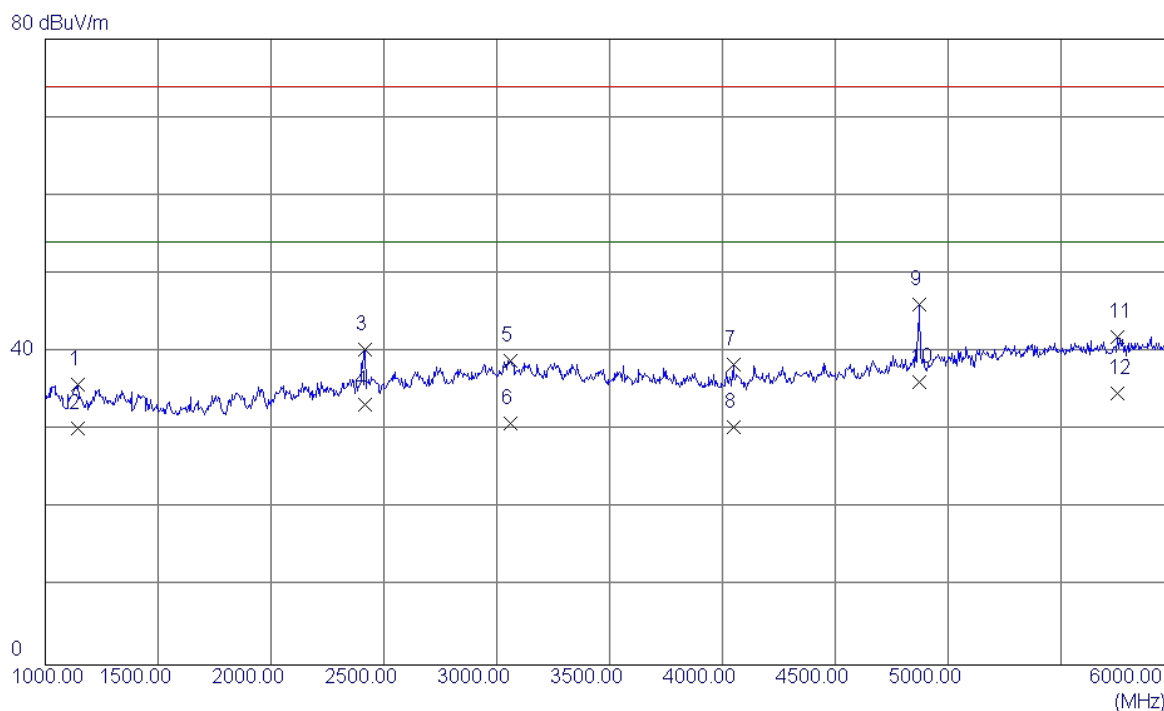


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1142.5000	42.13	-6.22	35.91	74.00	-38.09	Peak
2	1142.5000	36.50	-6.22	30.28	54.00	-23.72	AVG
3	2417.5000	40.60	-0.28	40.32	74.00	-33.68	Peak
4	2417.5000	33.49	-0.28	33.21	54.00	-20.79	AVG
5	3060.0000	36.49	2.38	38.87	74.00	-35.13	Peak
6	3060.0000	28.49	2.38	30.87	54.00	-23.13	AVG
7	4047.5000	35.53	2.83	38.36	74.00	-35.64	Peak
8	4047.5000	27.61	2.83	30.44	54.00	-23.56	AVG
9	4870.0000	40.46	5.68	46.14	74.00	-27.86	Peak
10 *	4870.0000	30.50	5.68	36.18	54.00	-17.82	AVG
11	5750.0000	33.62	8.23	41.85	74.00	-32.15	Peak
12	5750.0000	26.50	8.23	34.73	54.00	-19.27	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:phitek+USB Cable: LUXSHAREICT		

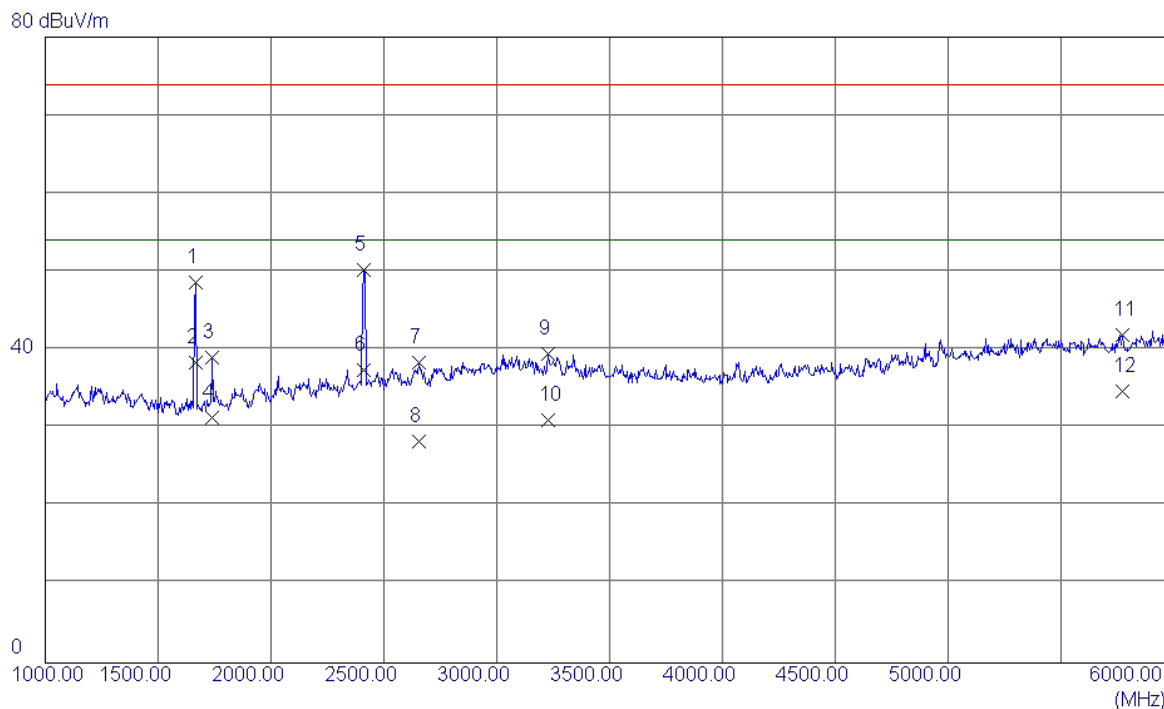


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1665.0000	52.77	-4.16	48.61	74.00	-25.39	Peak
2 *	1665.0000	42.49	-4.16	38.33	54.00	-15.67	AVG
3	1740.0000	42.87	-3.81	39.06	74.00	-34.94	Peak
4	1740.0000	35.21	-3.81	31.40	54.00	-22.60	AVG
5	2412.5000	50.61	-0.31	50.30	74.00	-23.70	Peak
6	2412.5000	37.80	-0.31	37.49	54.00	-16.51	AVG
7	2655.0000	37.60	0.86	38.46	74.00	-35.54	Peak
8	2655.0000	27.50	0.86	28.36	54.00	-25.64	AVG
9	3230.0000	37.26	2.33	39.59	74.00	-34.41	Peak
10	3230.0000	28.70	2.33	31.03	54.00	-22.97	AVG
11	5772.5000	33.73	8.26	41.99	74.00	-32.01	Peak
12	5772.5000	26.50	8.26	34.76	54.00	-19.24	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:Huntkey+USB Cable: LUXSHAREICT		

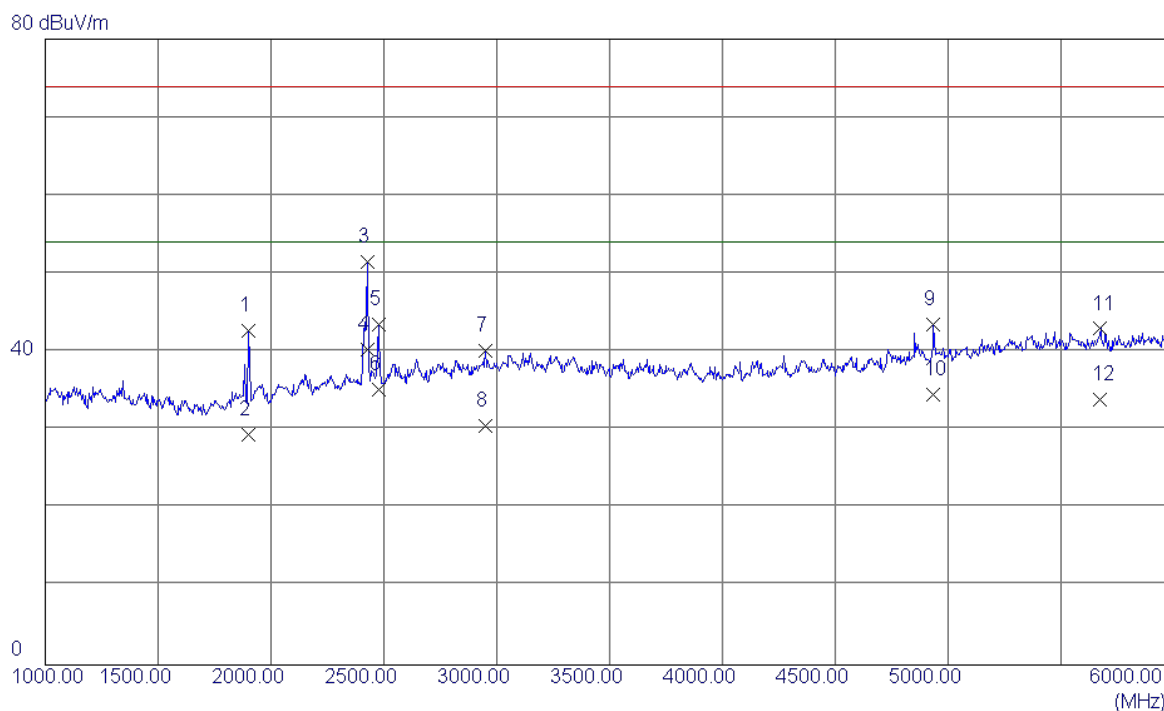


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1902.5000	45.73	-3.03	42.70	74.00	-31.30	Peak
2	1902.5000	32.40	-3.03	29.37	54.00	-24.63	AVG
3	2427.5000	51.74	-0.23	51.51	74.00	-22.49	Peak
4 *	2427.5000	40.51	-0.23	40.28	54.00	-13.72	AVG
5	2477.5000	43.40	0.05	43.45	74.00	-30.55	Peak
6	2477.5000	35.20	0.05	35.25	54.00	-18.75	AVG
7	2950.0000	37.99	2.18	40.17	74.00	-33.83	Peak
8	2950.0000	28.39	2.18	30.57	54.00	-23.43	AVG
9	4935.0000	37.49	5.99	43.48	74.00	-30.52	Peak
10	4935.0000	28.50	5.99	34.49	54.00	-19.51	AVG
11	5675.0000	34.79	8.17	42.96	74.00	-31.04	Peak
12	5675.0000	25.70	8.17	33.87	54.00	-20.13	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:Huntkey+USB Cable: LUXSHAREICT		

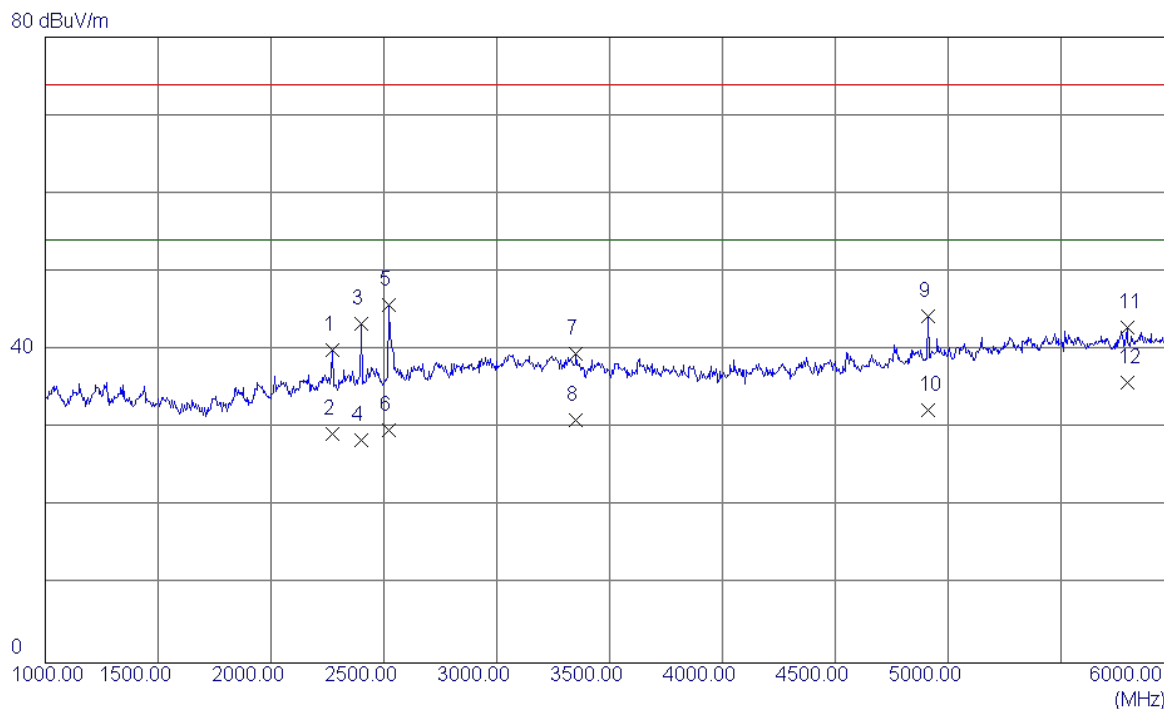


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2270.0000	41.02	-1.09	39.93	74.00	-34.07	Peak
2	2270.0000	30.39	-1.09	29.30	54.00	-24.70	AVG
3	2402.5000	43.71	-0.36	43.35	74.00	-30.65	Peak
4	2402.5000	28.90	-0.36	28.54	54.00	-25.46	AVG
5	2520.0000	45.47	0.26	45.73	74.00	-28.27	Peak
6	2520.0000	29.49	0.26	29.75	54.00	-24.25	AVG
7	3350.0000	37.15	2.30	39.45	74.00	-34.55	Peak
8	3350.0000	28.70	2.30	31.00	54.00	-23.00	AVG
9	4912.5000	38.49	5.88	44.37	74.00	-29.63	Peak
10	4912.5000	26.51	5.88	32.39	54.00	-21.61	AVG
11	5792.5000	34.57	8.27	42.84	74.00	-31.16	Peak
12 *	5792.5000	27.51	8.27	35.78	54.00	-18.22	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:Huntkey+USB Cable: LUXSHAREICT+Earphone:Lianchuangang		

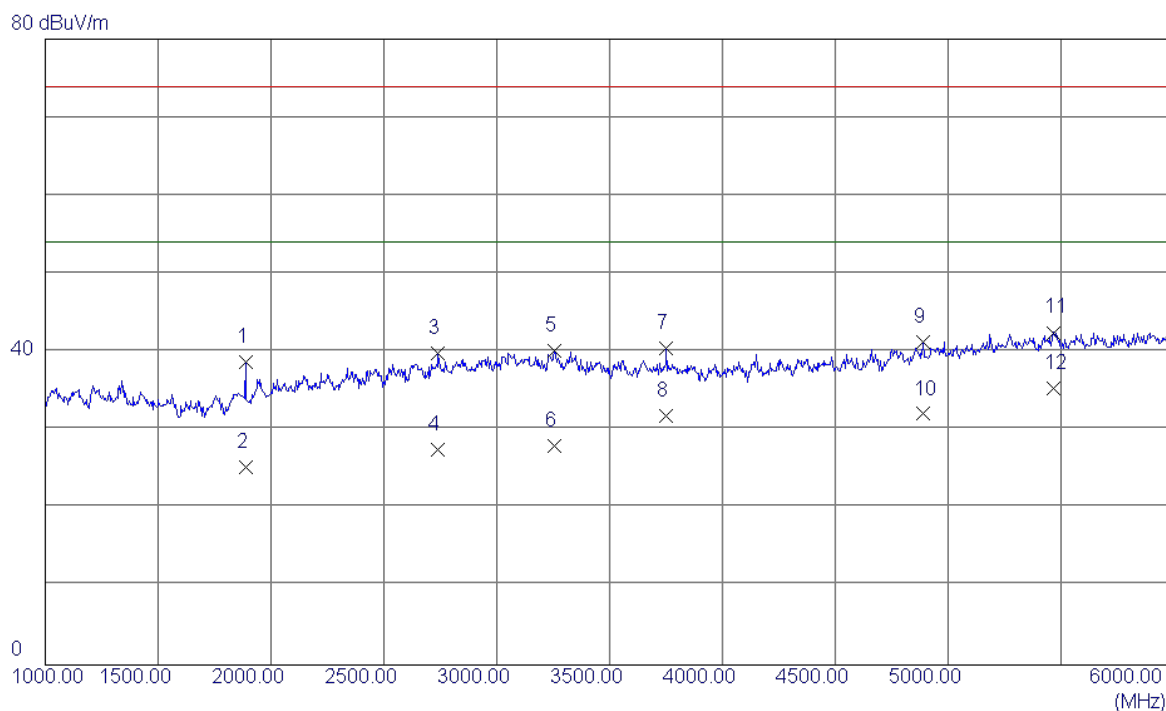

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1887.5000	41.88	-3.11	38.77	74.00	-35.23	Peak
2	1887.5000	28.45	-3.11	25.34	54.00	-28.66	AVG
3	2740.0000	38.66	1.24	39.90	74.00	-34.10	Peak
4	2740.0000	26.30	1.24	27.54	54.00	-26.46	AVG
5	3255.0000	37.79	2.33	40.12	74.00	-33.88	Peak
6	3255.0000	25.60	2.33	27.93	54.00	-26.07	AVG
7	3752.5000	37.94	2.49	40.43	74.00	-33.57	Peak
8	3752.5000	29.40	2.49	31.89	54.00	-22.11	AVG
9	4890.0000	35.48	5.78	41.26	74.00	-32.74	Peak
10	4890.0000	26.30	5.78	32.08	54.00	-21.92	AVG
11	5467.5000	34.58	7.90	42.48	74.00	-31.52	Peak
12 *	5467.5000	27.50	7.90	35.40	54.00	-18.60	AVG


EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:Huntkey+USB Cable: LUXSHAREICT+Earphone:Lianchuangang		

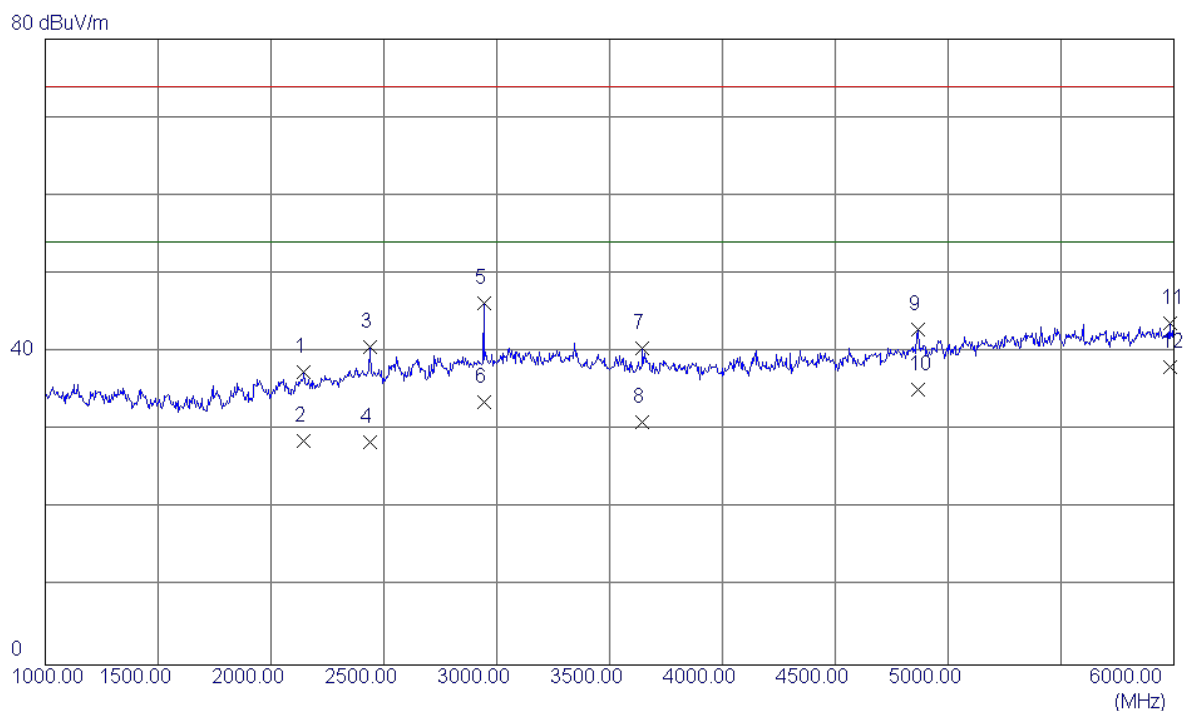

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2145.0000	39.29	-1.78	37.51	74.00	-36.49	Peak
2	2145.0000	30.41	-1.78	28.63	54.00	-25.37	AVG
3	2437.5000	40.87	-0.17	40.70	74.00	-33.30	Peak
4	2437.5000	28.60	-0.17	28.43	54.00	-25.57	AVG
5	2942.5000	44.03	2.14	46.17	74.00	-27.83	Peak
6	2942.5000	31.51	2.14	33.65	54.00	-20.35	AVG
7	3645.0000	38.09	2.39	40.48	74.00	-33.52	Peak
8	3645.0000	28.70	2.39	31.09	54.00	-22.91	AVG
9	4865.0000	37.24	5.65	42.89	74.00	-31.11	Peak
10	4865.0000	29.61	5.65	35.26	54.00	-18.74	AVG
11	5982.5000	35.22	8.44	43.66	74.00	-30.34	Peak
12 *	5982.5000	29.71	8.44	38.15	54.00	-15.85	AVG


EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:Huntkey+USB Cable: LUXSHAREICT+Earphone:QUANCHENG		

80 dBuV/m

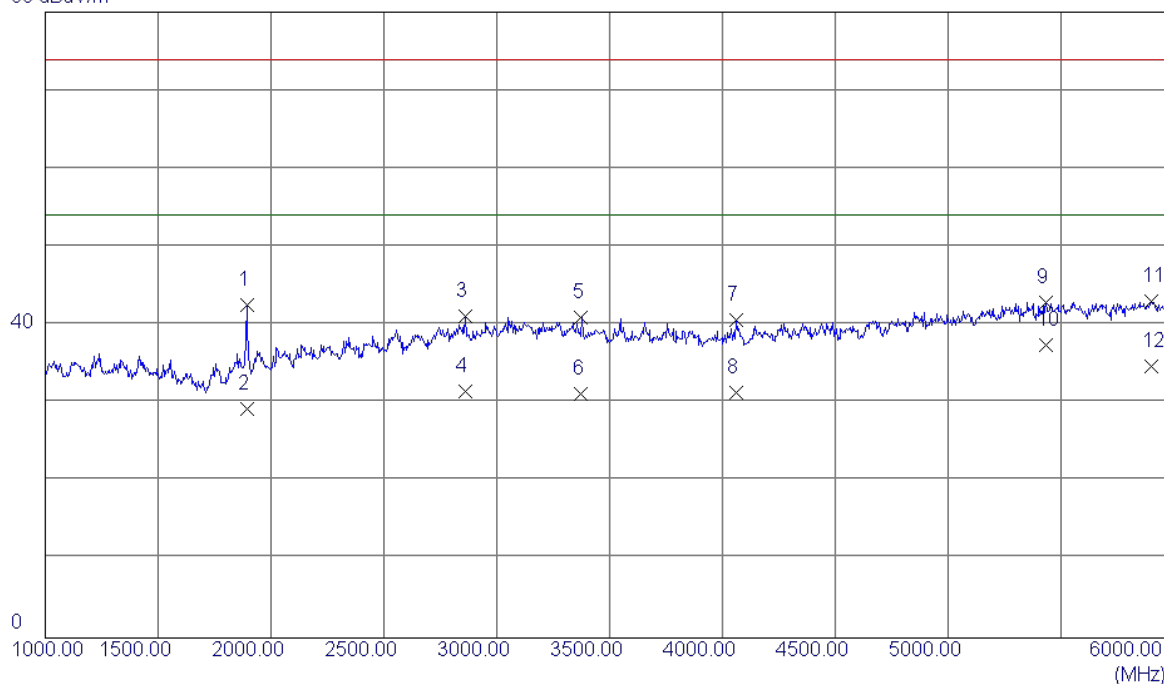


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1892.5000	45.70	-3.08	42.62	74.00	-31.38	Peak
2	1892.5000	32.40	-3.08	29.32	54.00	-24.68	AVG
3	2860.0000	39.39	1.78	41.17	74.00	-32.83	Peak
4	2860.0000	29.70	1.78	31.48	54.00	-22.52	AVG
5	3375.0000	38.63	2.29	40.92	74.00	-33.08	Peak
6	3375.0000	28.91	2.29	31.20	54.00	-22.80	AVG
7	4060.0000	37.71	2.86	40.57	74.00	-33.43	Peak
8	4060.0000	28.49	2.86	31.35	54.00	-22.65	AVG
9	5435.0000	35.02	7.79	42.81	74.00	-31.19	Peak
10 *	5435.0000	29.70	7.79	37.49	54.00	-16.51	AVG
11	5902.5000	34.65	8.37	43.02	74.00	-30.98	Peak
12	5902.5000	26.40	8.37	34.77	54.00	-19.23	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:Huntkey+USB Cable: LUXSHAREICT+Earphone:QUANCHENG		

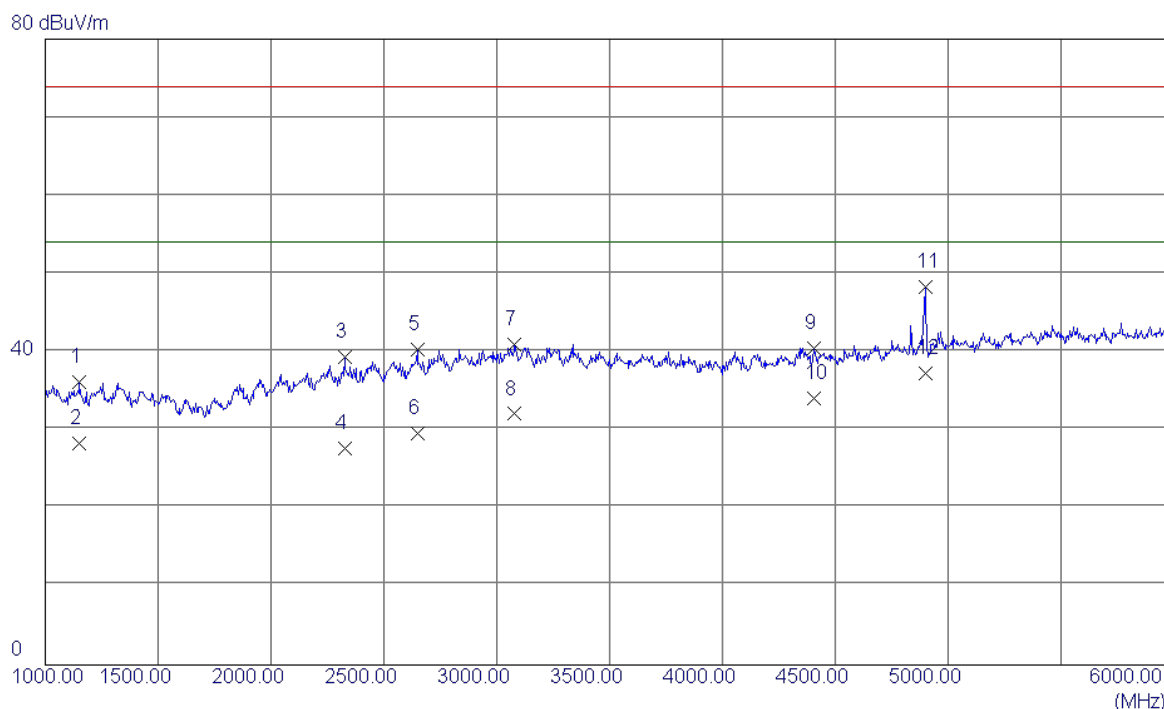


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1152.5000	42.30	-6.19	36.11	74.00	-37.89	Peak
2	1152.5000	34.50	-6.19	28.31	54.00	-25.69	AVG
3	2327.5000	40.12	-0.78	39.34	74.00	-34.66	Peak
4	2327.5000	28.51	-0.78	27.73	54.00	-26.27	AVG
5	2647.5000	39.52	0.83	40.35	74.00	-33.65	Peak
6	2647.5000	28.70	0.83	29.53	54.00	-24.47	AVG
7	3080.0000	38.62	2.38	41.00	74.00	-33.00	Peak
8	3080.0000	29.70	2.38	32.08	54.00	-21.92	AVG
9	4405.0000	36.89	3.66	40.55	74.00	-33.45	Peak
10	4405.0000	30.41	3.66	34.07	54.00	-19.93	AVG
11	4897.5000	42.57	5.81	48.38	74.00	-25.62	Peak
12 *	4897.5000	31.50	5.81	37.31	54.00	-16.69	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:Huntkey+USB Cable: LUXSHAREICT		

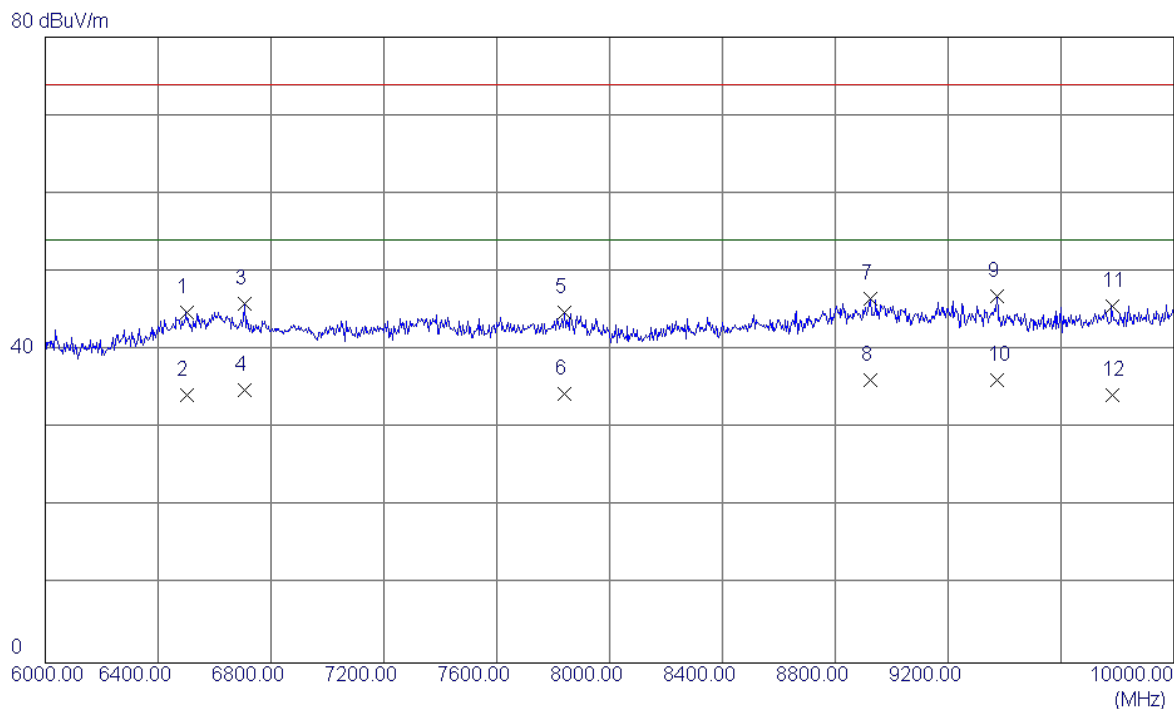


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	6500.0000	33.89	10.90	44.79	74.00	-29.21	Peak
2	6500.0000	23.35	10.90	34.25	54.00	-19.75	AVG
3	6708.0000	35.04	10.84	45.88	74.00	-28.12	Peak
4	6708.0000	24.01	10.84	34.85	54.00	-19.15	AVG
5	7840.0000	33.04	11.73	44.77	74.00	-29.23	Peak
6	7840.0000	22.62	11.73	34.35	54.00	-19.65	AVG
7	8924.0000	33.24	13.32	46.56	74.00	-27.44	Peak
8 *	8924.0000	22.91	13.32	36.23	54.00	-17.77	AVG
9	9372.0000	33.65	13.25	46.90	74.00	-27.10	Peak
10	9372.0000	22.92	13.25	36.17	54.00	-17.83	AVG
11	9780.0000	31.91	13.72	45.63	74.00	-28.37	Peak
12	9780.0000	20.51	13.72	34.23	54.00	-19.77	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:Huntkey+USB Cable: LUXSHAREICT		

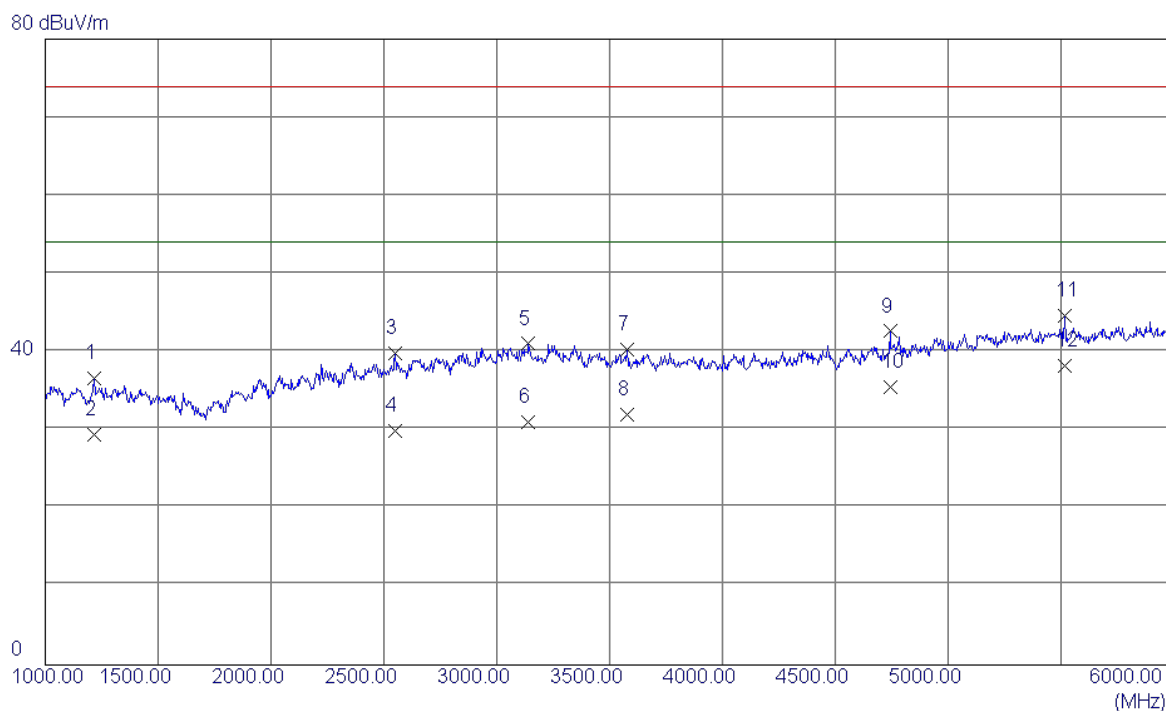


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1215.0000	42.60	-5.96	36.64	74.00	-37.36	Peak
2	1215.0000	35.39	-5.96	29.43	54.00	-24.57	AVG
3	2552.5000	39.46	0.40	39.86	74.00	-34.14	Peak
4	2552.5000	29.51	0.40	29.91	54.00	-24.09	AVG
5	3140.0000	38.68	2.36	41.04	74.00	-32.96	Peak
6	3140.0000	28.70	2.36	31.06	54.00	-22.94	AVG
7	3577.5000	37.97	2.33	40.30	74.00	-33.70	Peak
8	3577.5000	29.70	2.33	32.03	54.00	-21.97	AVG
9	4742.5000	37.58	5.06	42.64	74.00	-31.36	Peak
10	4742.5000	30.40	5.06	35.46	54.00	-18.54	AVG
11	5515.0000	36.65	8.02	44.67	74.00	-29.33	Peak
12 *	5515.0000	30.20	8.02	38.22	54.00	-15.78	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:Huntkey+USB Cable: LUXSHAREICT		

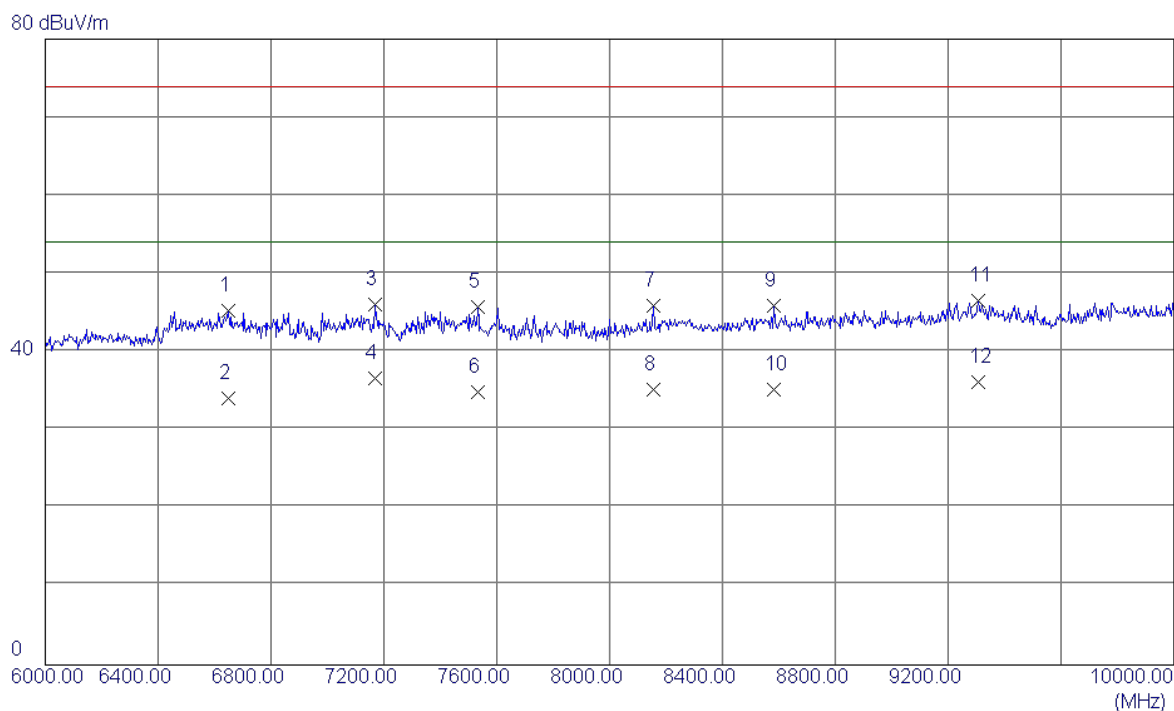


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	6648.0000	34.46	10.86	45.32	74.00	-28.68	Peak
2	6648.0000	23.26	10.86	34.12	54.00	-19.88	AVG
3	7168.0000	34.99	11.09	46.08	74.00	-27.92	Peak
4 *	7168.0000	25.49	11.09	36.58	54.00	-17.42	AVG
5	7532.0000	33.95	11.75	45.70	74.00	-28.30	Peak
6	7532.0000	23.20	11.75	34.95	54.00	-19.05	AVG
7	8156.0000	33.85	12.12	45.97	74.00	-28.03	Peak
8	8156.0000	23.11	12.12	35.23	54.00	-18.77	AVG
9	8584.0000	32.82	13.06	45.88	74.00	-28.12	Peak
10	8584.0000	22.18	13.06	35.24	54.00	-18.76	AVG
11	9308.0000	33.30	13.27	46.57	74.00	-27.43	Peak
12	9308.0000	22.95	13.27	36.22	54.00	-17.78	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:Huntkey+USB Cable: LUXSHAREICT		

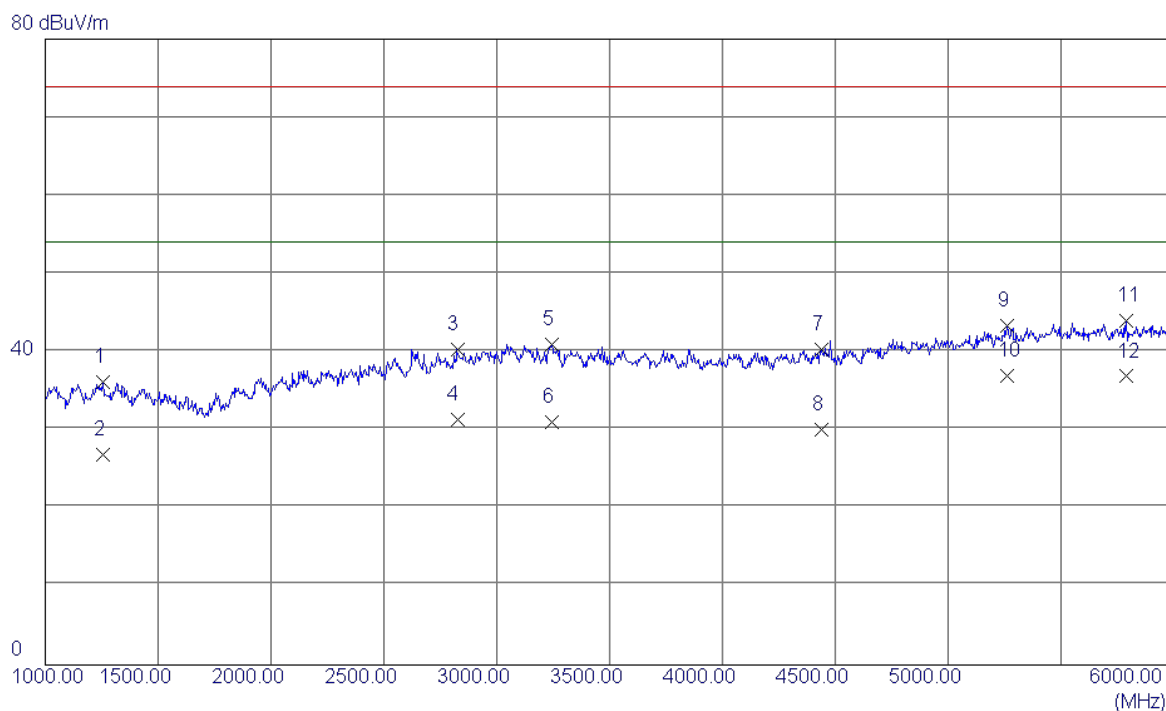


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1255.0000	42.03	-5.82	36.21	74.00	-37.79	Peak
2	1255.0000	32.70	-5.82	26.88	54.00	-27.12	AVG
3	2825.0000	38.76	1.62	40.38	74.00	-33.62	Peak
4	2825.0000	29.70	1.62	31.32	54.00	-22.68	AVG
5	3242.5000	38.58	2.33	40.91	74.00	-33.09	Peak
6	3242.5000	28.70	2.33	31.03	54.00	-22.97	AVG
7	4437.5000	36.63	3.73	40.36	74.00	-33.64	Peak
8	4437.5000	26.41	3.73	30.14	54.00	-23.86	AVG
9	5262.5000	36.23	7.20	43.43	74.00	-30.57	Peak
10 *	5262.5000	29.81	7.20	37.01	54.00	-16.99	AVG
11	5790.0000	35.68	8.27	43.95	74.00	-30.05	Peak
12	5790.0000	28.61	8.27	36.88	54.00	-17.12	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:Huntkey+USB Cable: LUXSHAREICT		

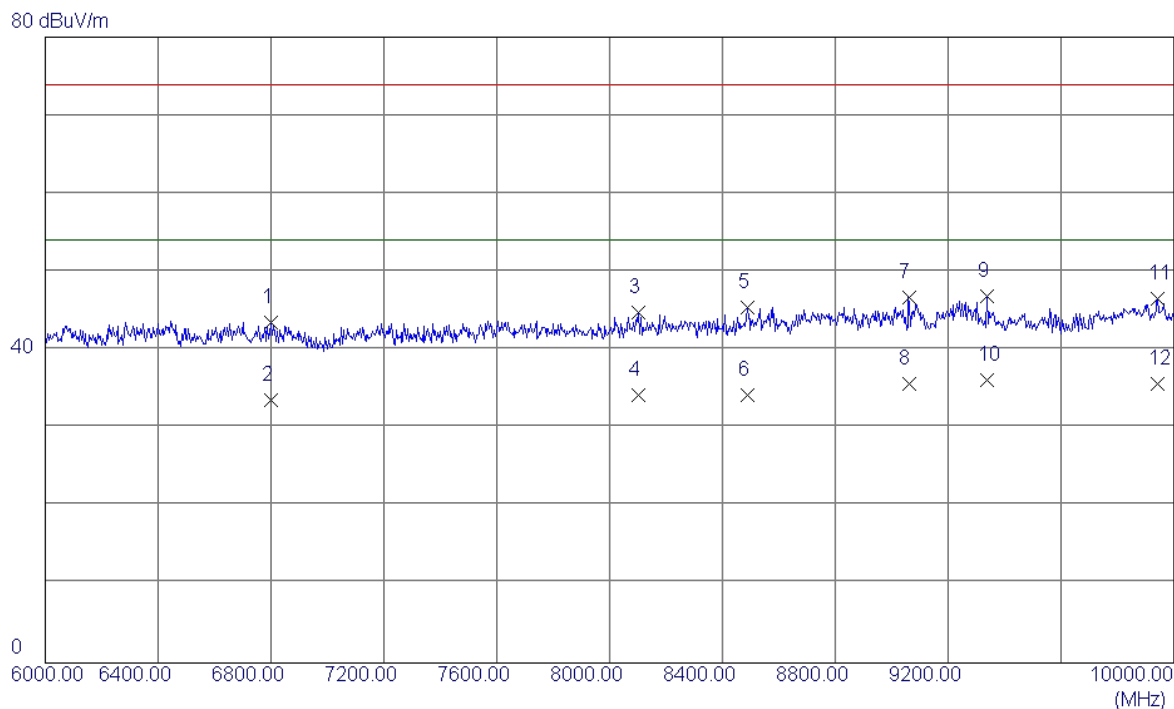


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	6800.0000	32.77	10.81	43.58	74.00	-30.42	Peak
2	6800.0000	22.73	10.81	33.54	54.00	-20.46	AVG
3	8104.0000	32.81	11.99	44.80	74.00	-29.20	Peak
4	8104.0000	22.28	11.99	34.27	54.00	-19.73	AVG
5	8488.0000	32.43	12.97	45.40	74.00	-28.60	Peak
6	8488.0000	21.29	12.97	34.26	54.00	-19.74	AVG
7	9060.0000	33.40	13.36	46.76	74.00	-27.24	Peak
8	9060.0000	22.35	13.36	35.71	54.00	-18.29	AVG
9	9336.0000	33.58	13.26	46.84	74.00	-27.16	Peak
10 *	9336.0000	22.96	13.26	36.22	54.00	-17.78	AVG
11	9944.0000	32.57	14.02	46.59	74.00	-27.41	Peak
12	9944.0000	21.72	14.02	35.74	54.00	-18.26	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:Huntkey+USB Cable: LUXSHAREICT		

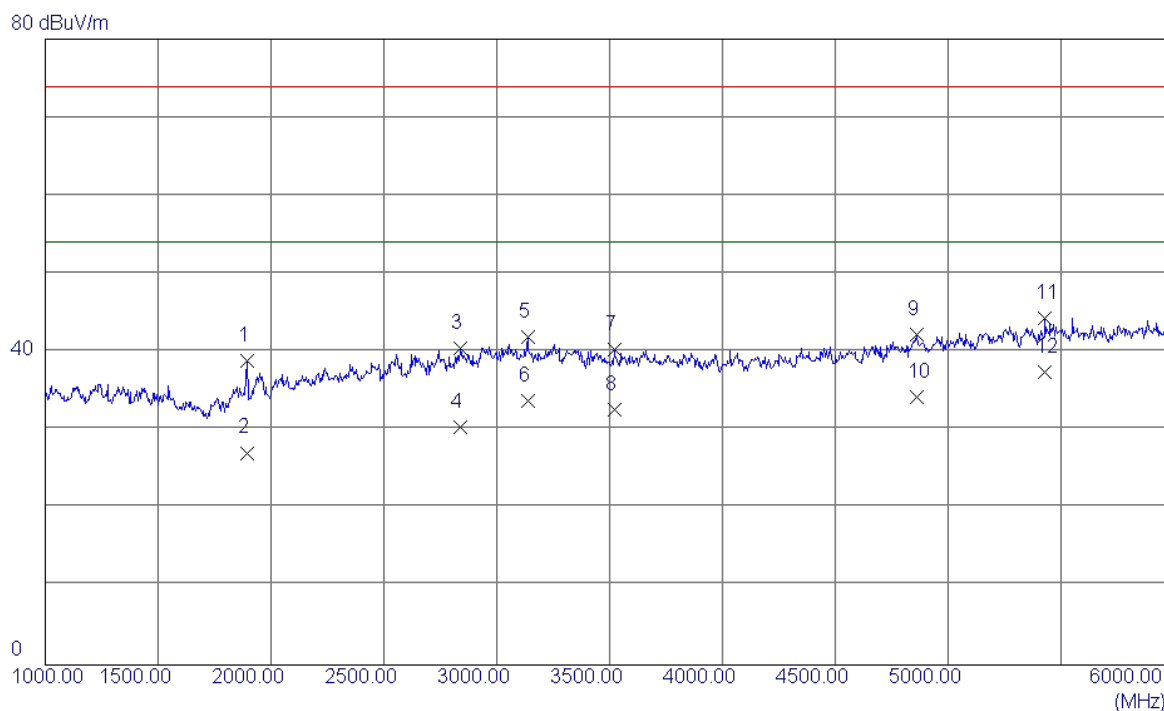


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1892.5000	41.94	-3.08	38.86	74.00	-35.14	Peak
2	1892.5000	30.20	-3.08	27.12	54.00	-26.88	AVG
3	2840.0000	38.79	1.69	40.48	74.00	-33.52	Peak
4	2840.0000	28.69	1.69	30.38	54.00	-23.62	AVG
5	3137.5000	39.56	2.36	41.92	74.00	-32.08	Peak
6	3137.5000	31.40	2.36	33.76	54.00	-20.24	AVG
7	3522.5000	38.07	2.28	40.35	74.00	-33.65	Peak
8	3522.5000	30.39	2.28	32.67	54.00	-21.33	AVG
9	4860.0000	36.56	5.63	42.19	74.00	-31.81	Peak
10	4860.0000	28.60	5.63	34.23	54.00	-19.77	AVG
11	5430.0000	36.53	7.77	44.30	74.00	-29.70	Peak
12 *	5430.0000	29.70	7.77	37.47	54.00	-16.53	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:Huntkey+USB Cable: LUXSHAREICT		

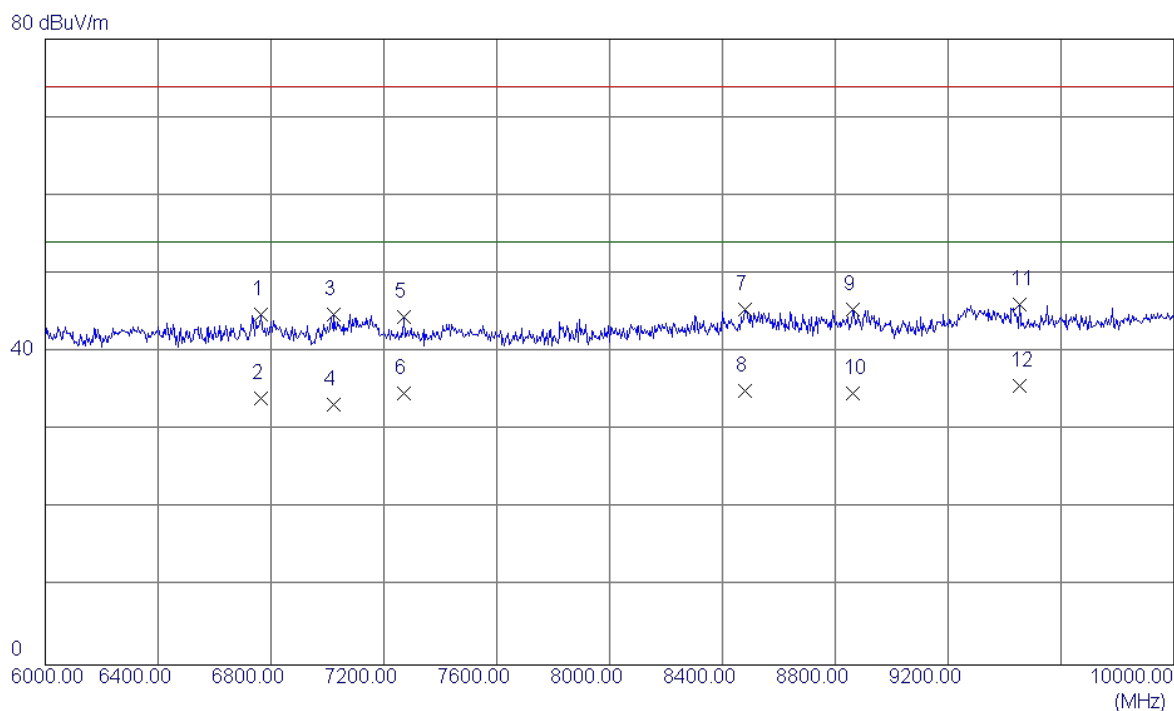


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	6764.0000	34.04	10.82	44.86	74.00	-29.14	Peak
2	6764.0000	23.30	10.82	34.12	54.00	-19.88	AVG
3	7024.0000	34.00	10.80	44.80	74.00	-29.20	Peak
4	7024.0000	22.45	10.80	33.25	54.00	-20.75	AVG
5	7272.0000	33.14	11.29	44.43	74.00	-29.57	Peak
6	7272.0000	23.45	11.29	34.74	54.00	-19.26	AVG
7	8480.0000	32.54	12.95	45.49	74.00	-28.51	Peak
8	8480.0000	22.16	12.95	35.11	54.00	-18.89	AVG
9	8864.0000	32.16	13.28	45.44	74.00	-28.56	Peak
10	8864.0000	21.37	13.28	34.65	54.00	-19.35	AVG
11	9452.0000	32.80	13.22	46.02	74.00	-27.98	Peak
12 *	9452.0000	22.50	13.22	35.72	54.00	-18.28	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:Huntkey+USB Cable: LUXSHAREICT		

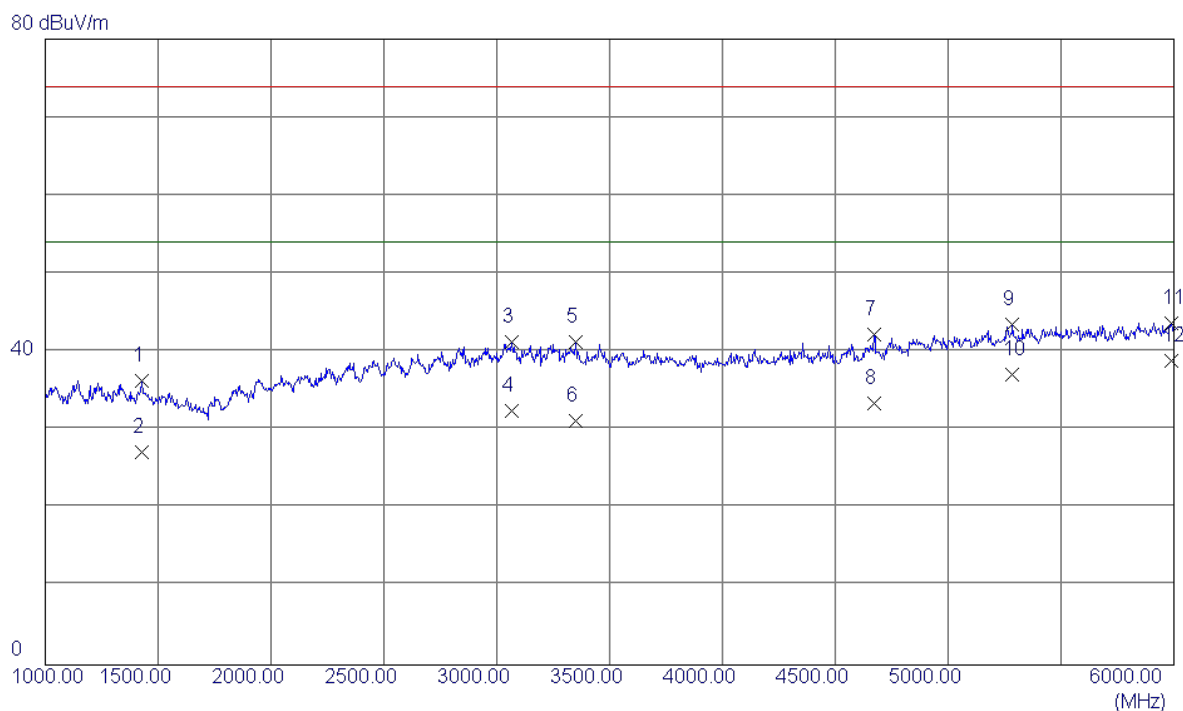


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1430.0000	41.56	-5.20	36.36	74.00	-37.64	Peak
2	1430.0000	32.40	-5.20	27.20	54.00	-26.80	AVG
3	3067.5000	38.92	2.38	41.30	74.00	-32.70	Peak
4	3067.5000	30.10	2.38	32.48	54.00	-21.52	AVG
5	3352.5000	38.93	2.30	41.23	74.00	-32.77	Peak
6	3352.5000	28.90	2.30	31.20	54.00	-22.80	AVG
7	4672.5000	37.52	4.72	42.24	74.00	-31.76	Peak
8	4672.5000	28.70	4.72	33.42	54.00	-20.58	AVG
9	5285.0000	36.20	7.28	43.48	74.00	-30.52	Peak
10	5285.0000	29.80	7.28	37.08	54.00	-16.92	AVG
11	5987.5000	35.27	8.45	43.72	74.00	-30.28	Peak
12 *	5987.5000	30.40	8.45	38.85	54.00	-15.15	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:Huntkey+USB Cable: LUXSHAREICT		

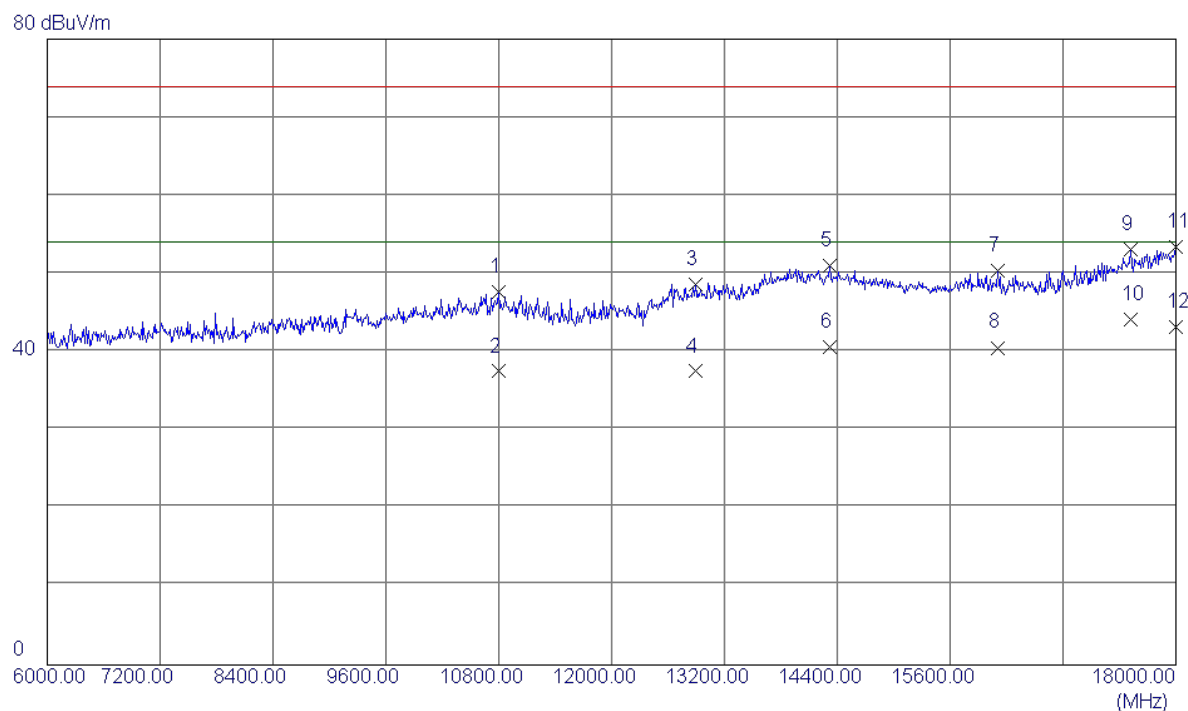


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	10800.0000	31.99	15.67	47.66	74.00	-26.34	Peak
2	10800.0000	21.85	15.67	37.52	54.00	-16.48	AVG
3	12888.0000	30.87	17.77	48.64	74.00	-25.36	Peak
4	12888.0000	19.75	17.77	37.52	54.00	-16.48	AVG
5	14316.0000	30.08	20.97	51.05	74.00	-22.95	Peak
6	14316.0000	19.67	20.97	40.64	54.00	-13.36	AVG
7	16104.0000	32.47	17.88	50.35	74.00	-23.65	Peak
8	16104.0000	22.68	17.88	40.56	54.00	-13.44	AVG
9	17520.0000	31.10	22.07	53.17	74.00	-20.83	Peak
10 *	17520.0000	22.05	22.07	44.12	54.00	-9.88	AVG
11	18000.0000	30.69	22.70	53.39	74.00	-20.61	Peak
12	18000.0000	20.51	22.70	43.21	54.00	-10.79	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:Huntkey+USB Cable: LUXSHAREICT		

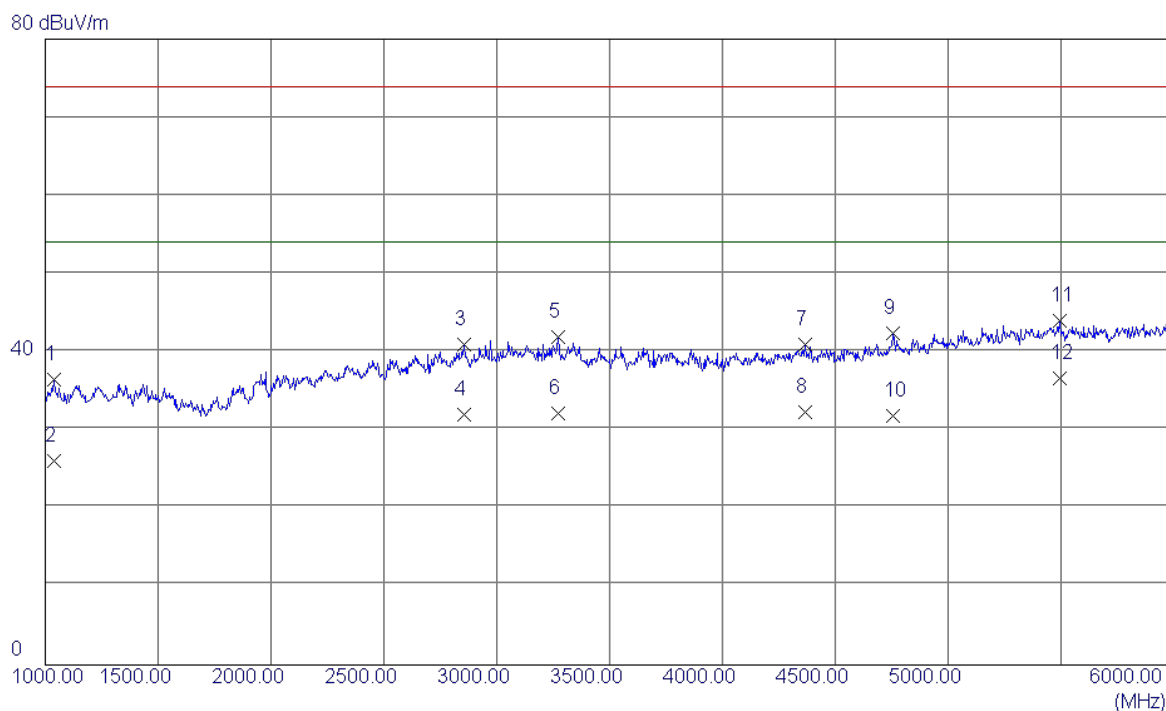


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1037.5000	43.11	-6.60	36.51	74.00	-37.49	Peak
2	1037.5000	32.70	-6.60	26.10	54.00	-27.90	AVG
3	2855.0000	39.16	1.75	40.91	74.00	-33.09	Peak
4	2855.0000	30.20	1.75	31.95	54.00	-22.05	AVG
5	3272.5000	39.60	2.32	41.92	74.00	-32.08	Peak
6	3272.5000	29.79	2.32	32.11	54.00	-21.89	AVG
7	4365.0000	37.42	3.57	40.99	74.00	-33.01	Peak
8	4365.0000	28.70	3.57	32.27	54.00	-21.73	AVG
9	4755.0000	37.30	5.12	42.42	74.00	-31.58	Peak
10	4755.0000	26.70	5.12	31.82	54.00	-22.18	AVG
11	5495.0000	35.99	7.99	43.98	74.00	-30.02	Peak
12 *	5495.0000	28.71	7.99	36.70	54.00	-17.30	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:Huntkey+USB Cable: LUXSHAREICT		

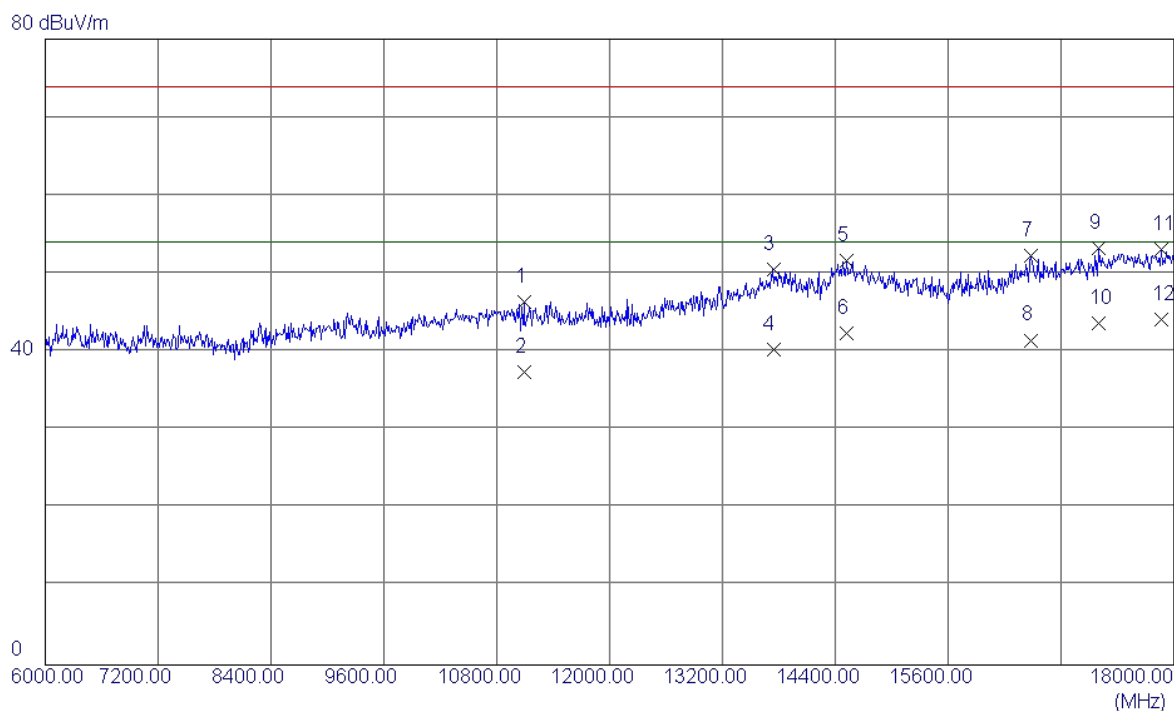

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	11088.0000	30.59	15.85	46.44	74.00	-27.56	Peak
2	11088.0000	21.66	15.85	37.51	54.00	-16.49	AVG
3	13740.0000	30.00	20.61	50.61	74.00	-23.39	Peak
4	13740.0000	19.64	20.61	40.25	54.00	-13.75	AVG
5	14520.0000	31.30	20.37	51.67	74.00	-22.33	Peak
6	14520.0000	21.96	20.37	42.33	54.00	-11.67	AVG
7	16476.0000	34.37	17.93	52.30	74.00	-21.70	Peak
8	16476.0000	23.59	17.93	41.52	54.00	-12.48	AVG
9	17196.0000	32.25	20.97	53.22	74.00	-20.78	Peak
10	17196.0000	22.77	20.97	43.74	54.00	-10.26	AVG
11	17868.0000	30.65	22.53	53.18	74.00	-20.82	Peak
12 *	17868.0000	21.70	22.53	44.23	54.00	-9.77	AVG

EUT	Smart Phone	Model Name	CAN-L01
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:Huntkey+USB Cable: LUXSHAREICT		

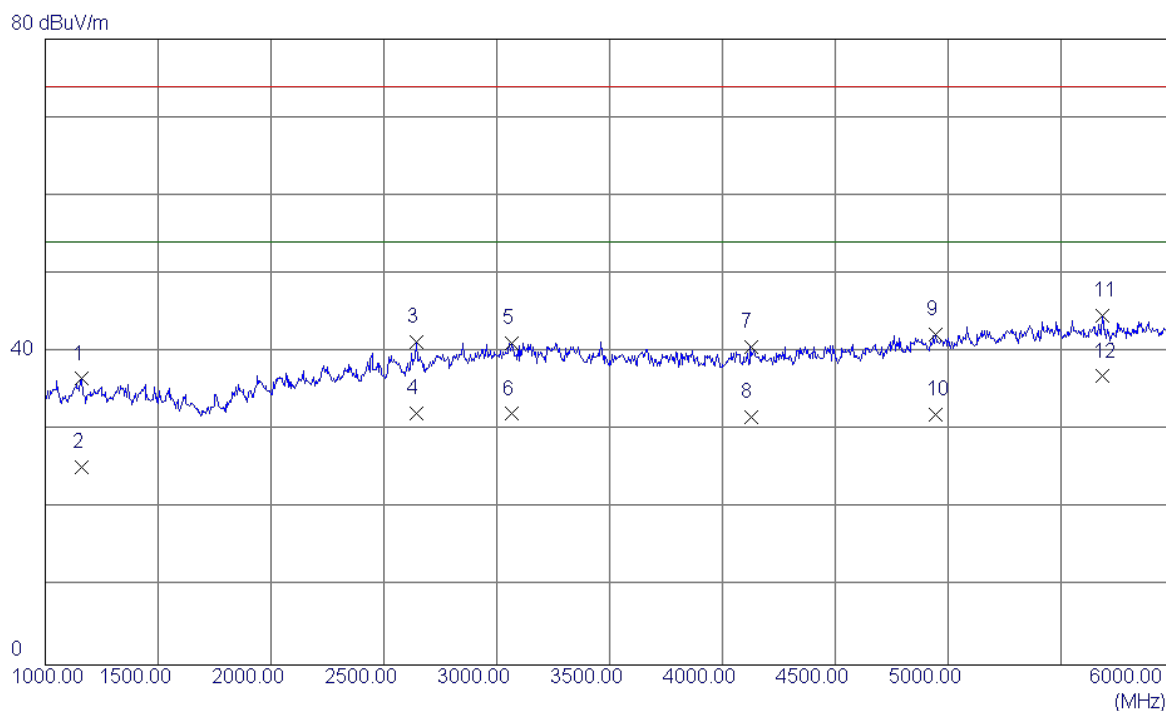

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1160.0000	42.72	-6.16	36.56	74.00	-37.44	Peak
2	1160.0000	31.40	-6.16	25.24	54.00	-28.76	AVG
3	2645.0000	40.39	0.82	41.21	74.00	-32.79	Peak
4	2645.0000	31.40	0.82	32.22	54.00	-21.78	AVG
5	3065.0000	38.79	2.38	41.17	74.00	-32.83	Peak
6	3065.0000	29.70	2.38	32.08	54.00	-21.92	AVG
7	4125.0000	37.59	3.01	40.60	74.00	-33.40	Peak
8	4125.0000	28.61	3.01	31.62	54.00	-22.38	AVG
9	4945.0000	36.25	6.04	42.29	74.00	-31.71	Peak
10	4945.0000	25.91	6.04	31.95	54.00	-22.05	AVG
11	5685.0000	36.51	8.18	44.69	74.00	-29.31	Peak
12 *	5685.0000	28.70	8.18	36.88	54.00	-17.12	AVG