

# FCC Test Report

## FCC ID: QISVIE-L29

**Project No.** : 1602C121  
**Equipment** : Smart Phone  
**Model Name** : VIE-L29  
**Applicant** : Huawei Technologies Co., Ltd.  
**Address** : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

**Date of Receipt** : Feb. 26, 2016  
**Date of Test** : Feb. 26, 2016 ~ Mar. 14, 2016  
**Issued Date** : Mar. 15, 2016  
**Tested by** : BTL Inc.

**Testing Engineer** : Pike Lee  
(Pike Lee)

**Technical Manager** : Jeff Yang  
(Jeff Yang)

**Authorized Signatory** : Andy Chiu  
(Andy Chiu)

# **B T L I N C .**

B1, No. 37, Lane 365, Yang-Guang St.,  
Nei-Hu District, Taipei City 114, Taiwan.

TEL: +886-2-2657-3299 FAX: +886-2-2657-3331



Testing Laboratory

0659

### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

<b>Table of Contents</b>	<b>Page</b>
<b>1 . CERTIFICATION</b>	<b>5</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>6</b>
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
<b>3 . GENERAL INFORMATION</b>	<b>8</b>
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS	11
<b>4 . EMC EMISSION TEST</b>	<b>12</b>
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 TEST RESULTS	13
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	14
4.2.2 TEST PROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD	15
4.2.4 TEST SETUP	16
4.2.5 EUT OPERATING CONDITIONS	16
4.2.6 TEST RESULTS (30MHZ TO 1000 MHZ)	17
4.2.7 TEST RESULTS (ABOVE 1000 MHZ)	17
<b>5 . MEASUREMENT INSTRUMENTS LIST</b>	<b>18</b>
<b>ATTACHMENT A - CONDUCTED EMISSION</b>	<b>19</b>
<b>ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)</b>	<b>44</b>
<b>ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)</b>	<b>69</b>

## REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1602C121	Original Issue.	Mar. 15, 2016

## 1. CERTIFICATION

Equipment : Smart Phone  
Brand Name : HUAWEI  
Model Name : VIE-L29  
Applicant : Huawei Technologies Co., Ltd.  
Manufacturer : Huawei Technologies Co., Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District, Shenzhen, 518129, P.R.C  
Date of Test : Feb. 26, 2016 ~ Mar. 14, 2016  
Test Sample : Engineering Sample  
Standard(s) : FCC Part 15, Subpart B  
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1602C121) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B ANSI C63.4-2014	Conducted Emission	Class B	PASS	
	Radiated emission Below 1 GHz	Class B	PASS	
	Radiated emission Above 1 GHz	Class B	PASS	<b>NOTE (2)</b>

**NOTE:**

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency is 5850MHz which exceeds 108 MHz, so the test will be performed.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{\text{CISPR}}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95%**.

### A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U,(dB)
C05	CISPR	150 kHz ~ 30MHz	2.04

### B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
CB08 (3m)	CISPR	30 MHz ~ 200 MHz	V	3.06
		30 MHz ~ 200 MHz	H	2.58
		200 MHz ~ 1, 000 MHz	V	3.50
		200 MHz ~ 1, 000 MHz	H	3.10

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
CB08 (3m)	CISPR	1GHz ~ 6GHz	V	4.14
		1GHz ~ 6GHz	H	4.14
		6GHz ~ 18GHz	V	5.34
		6GHz ~ 18GHz	H	5.34

Test Site	Method	Measurement Frequency Range	U,(dB)
CB08 (3m)	CISPR	18 ~ 26.5 GHz	4.66
		26.5 ~ 40 GHz	4.74

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone
Brand Name	HUAWEI
Model Name	VIE-L29
Model Difference	N/A
Power Source	#1 DC Voltage supplied from AC/DC adapter. Manufacturer: (1) HUIZHOU BYD ELECTRONIC CO., LTD. (2) Salcomp (Shenzhen)Co.,Ltd Model: (1) HW-059200BHQ (UK) (2) HW-059200EHQ (EU) (3) HW-059200UHQ (US) (4) HW-059200AHQ (AU) #2 Supplied from battery.
Power Rating	#1 I/P: 100V~240V~ 50/60 Hz,0.2A O/P: 5V $\overline{=}$ 1A #2 DC 3.8V
HW Version	HL1AVIENNAM
SW Version	VIE-L29C900B071

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- 2.

Item	Mfr/Brand	Model.
USB Cable	FOXCONN INTERCONNECT TECHNOLOGY LIMITED.	CUDU01B-HC212-EH
	LUXSHARE-ICT Co., Ltd.	L99UC001-CS-H
	Chang Shu Honglin Technology Co.,Ltd.	130-26988
Earphone	JIANGXI LIANCHUANG HONGSHENG ELECTRONIC CO., LTD	MEMD1632B580C00
	BOLUO COUNTY QUANCHENG ELECTRONIC CO., LTD	1311-3291-3.5mm-229
Battery	Sunwoda Electronic Co., LTD	HB376883ECW
	SCUD (FUJIAN) Electronics Co., Ltd	
	Desay Battery Co., Ltd.	

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone
Mode 2	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Speaker
Mode 3	Adapter+Idle+BT+2.4GHz WIFI+GPS+Camera on
Mode 4	Adapter+GSM+BT+2.4GHz WIFI+GPS
Mode 5	Adapter+WCDMA+BT+2.4GHz WIFI+GPS
Mode 6	Adapter+LTE+BT+2.4GHz WIFI+GPS
Mode 7	USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS
Mode 8	USB copy(EUT with PC)+BT+5GHz WIFI+GPS


The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 1	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone
Mode 2	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Speaker
Mode 3	Adapter+Idle+BT+2.4GHz WIFI+GPS+Camera on
Mode 4	Adapter+GSM+BT+2.4GHz WIFI+GPS
Mode 5	Adapter+WCDMA+BT+2.4GHz WIFI+GPS
Mode 6	Adapter+LTE+BT+2.4GHz WIFI+GPS
Mode 7	USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS
Mode 8	USB copy(EUT with PC)+BT+5GHz WIFI+GPS


For Radiated Test	
Final Test Mode	Description
Mode 1	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone
Mode 2	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Speaker
Mode 3	Adapter+Idle+BT+2.4GHz WIFI+GPS+Camera on
Mode 4	Adapter+GSM+BT+2.4GHz WIFI+GPS
Mode 5	Adapter+WCDMA+BT+2.4GHz WIFI+GPS
Mode 6	Adapter+LTE+BT+2.4GHz WIFI+GPS
Mode 7	USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS
Mode 8	USB copy(EUT with PC)+BT+5GHz WIFI+GPS

### 3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

#### Mode 1-6

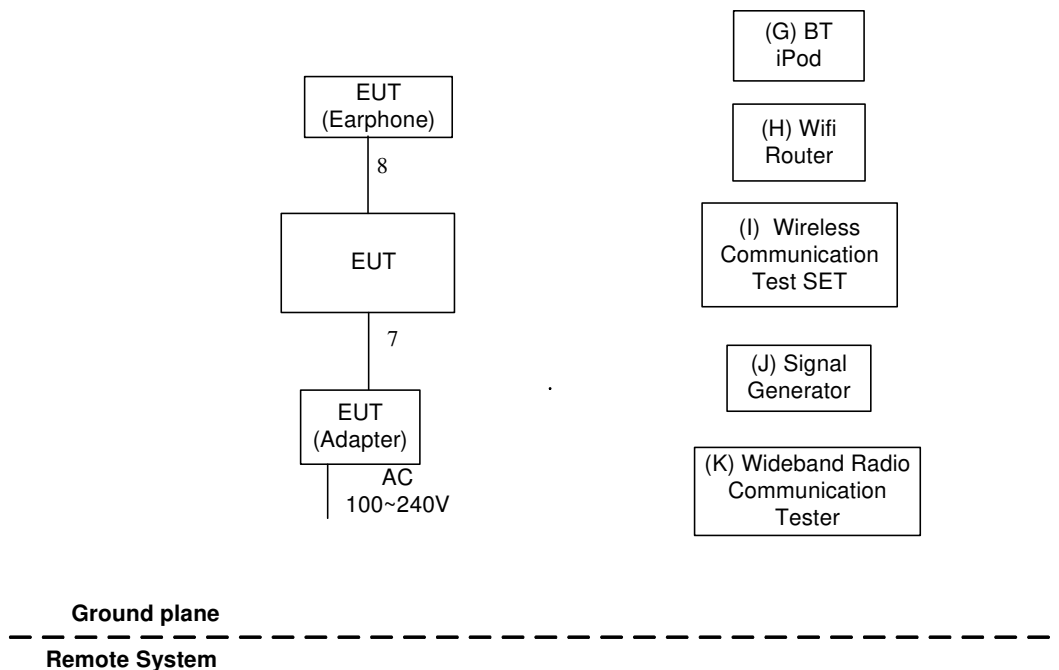

#### Mode 7/8

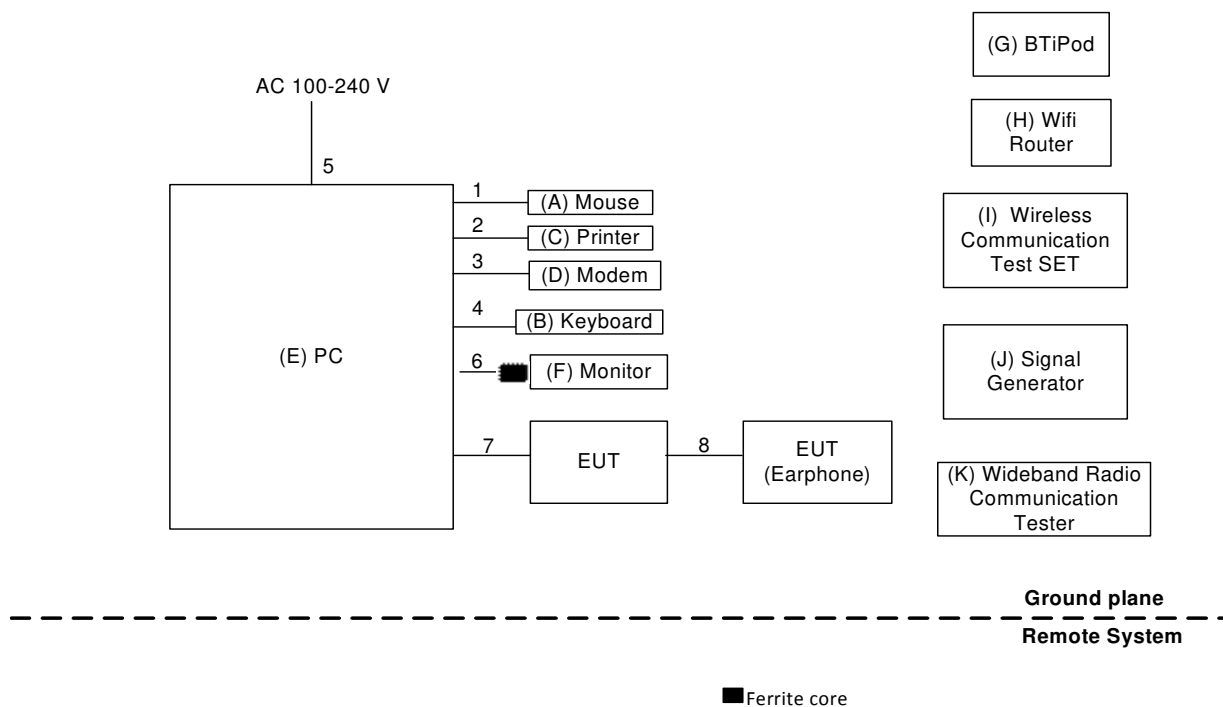

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	USB Mouse	DELL	MS111-P	DOC	CN011D3V71581279 OLOT
B	USB Keyboard	DELL	KB212-B	DOC	CN0HTXH97158125 004DXA01
C	Printer	SII	DPU-414	DOC	3018507 B
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131
E	PC	DELL	DCSM 745	DOC	G7K832X
F	LCD monitor	DELL	E177FPc	DOC	CNOFJ179-64180-6 AG-1WNS
G	iPod	Apple	A1446	BCG-A1446A	DCYJGOPCFOGV
H	Router	ASUS	RT-AC66U	MSQ-RTAC66U	E8ICGG000138
I	Wireless Communication Test SET	Agilent	(8960 Series) E5515C	N/A	MY48364183
J	Signal Generator	Agilent	E4438C	N/A	MY49071316
K	Wideband Radio Communication Tester	RS	CMW500	N/A	122125

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC power Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1m	USB Cable
8	NO	NO	1.2m	Earphone Cable

Note:

(1) For detachable type I/O cable should be specified the length m in 『Length』 column.

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)  
 Margin Level = Measurement Value – Limit Value


#### 4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

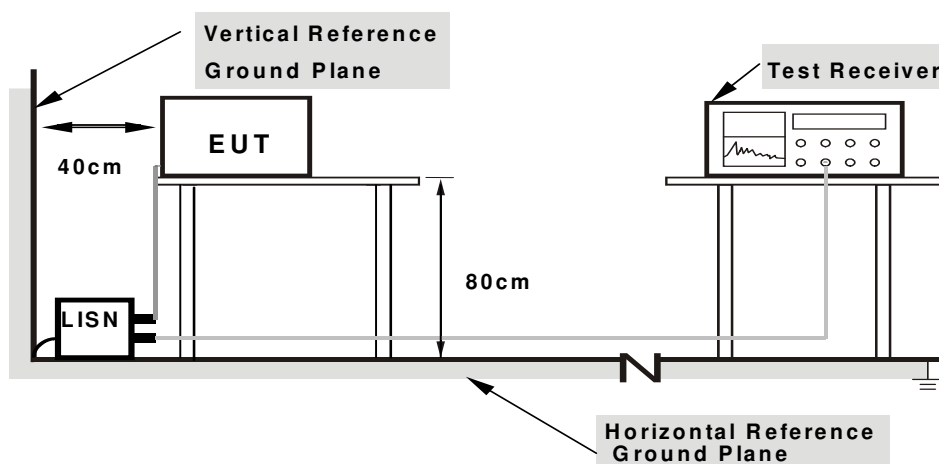

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

#### 4.1.5 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

#### 4.1.6 TEST RESULTS

Please refer to the Attachment A.

Temperature: 24°C Relative Humidity: 60%

Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ \* ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

**Below 1 GHz**

**Measurement Method and Applied Limits:**

**ANSI C63.4:**

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

**CISPR 22 or CAN/CSA-CISPR 22-10:**

Frequency (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	
30 - 230	40	30
230 - 1000	47	37

**Above 1 GHz**

**Measurement Method and Applied Limits:**

**ANSI C63.4:**

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

### FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower

**NOTE:**

- (1) The limit for radiated test was performed according to as following:  
FCC Part 15, Subpart B
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).  
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:  
Measurement Value = Reading Level + Correct Factor  
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
Margin Level = Measurement Value - Limit Value

#### **4.2.2 TEST PROCEDURE**


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### **4.2.3 DEVIATION FROM TEST STANDARD**


No deviation

#### 4.2.4 TEST SETUP

##### (A) Radiated Emission Test Set-Up Frequency Below 1 GHz

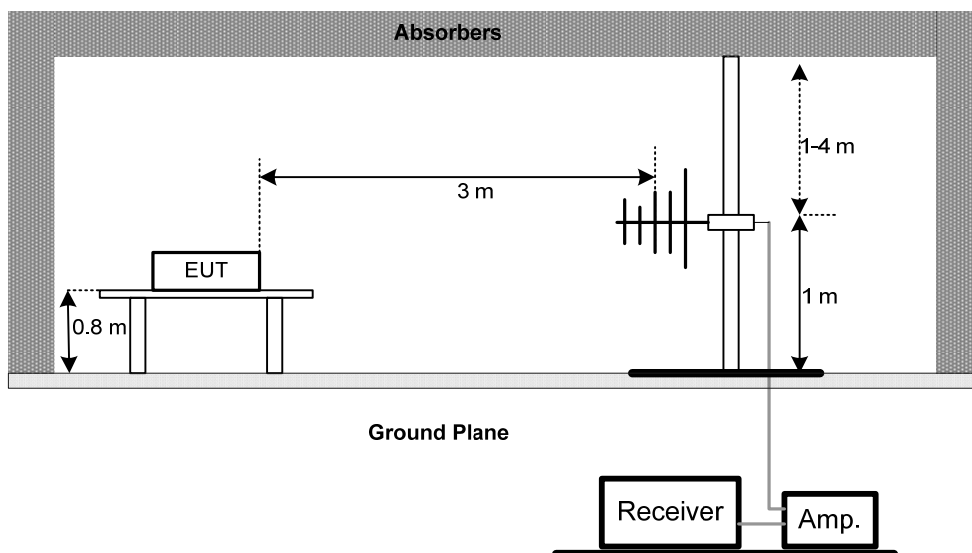

##### (B) Radiated Emission Test Set-Up Frequency Above 1 GHz

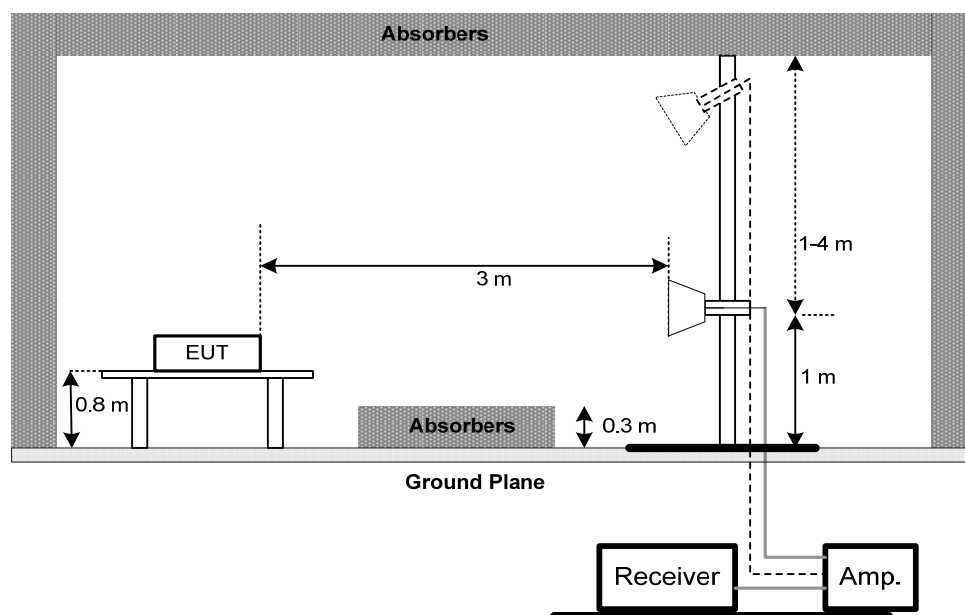

#### 4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### **4.2.6 TEST RESULTS (30MHZ TO 1000 MHZ)**

Please refer to the Attachment B.

Temperature: 25°C Relative Humidity: 60%

#### **4.2.7 TEST RESULTS (ABOVE 1000 MHZ)**

Please refer to the Attachment C

Temperature: 25°C Relative Humidity: 60%

Remark :

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (2) Data of measurement within this frequency range shown “ \* ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

## 5. MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	Feb. 01, 2017
2	Test Cable	TIMES	CFD300-NL	C05	Jun. 14, 2016
3	EMI Test Receiver	R&S	ESR3	101854	Dec. 10, 2016
4	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A


Radiated Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	Schwarzbeck	VULB 9168	9168-641	Sep. 10, 2016
2	Log-Bicon Antenna	Schwarzbeck	VULB 9168	9168-642	Sep. 10, 2016
3	Attenuator	Inmet	AT-N0507	01	Sep. 10, 2016
4	Attenuator	Inmet	AT-N0508	02	Sep. 10, 2016
5	Pre-Amplifier	EMCI	EMC9135	980281	Oct. 05, 2016
6	Pre-Amplifier	EMCI	EMC9135	980282	Oct. 05, 2016
7	Test Cable	EMCI	EMC8D-NM-NM-800	150102	Jan. 22, 2017
8	Test Cable	EMCI	EMC8D-NM-NM-800	150103	Jan. 22, 2017
9	Test Cable	EMCI	EMC8D-NM-NM-5000	150105	Jan. 22, 2017
10	Test Cable	EMCI	EMC8D-NM-NM-5000	150106	Jan. 22, 2017
11	Test Cable	EMCI	EMC8D-NM-NM-10000	150107	Jan. 22, 2017
12	Test Cable	EMCI	EMC8D-NM-NM-20000	150116	Jan. 22, 2017
13	EXA Spectrum Analyzer	Keysight Technologies	N9010A	MY54200483	Sep. 21, 2016
14	EMI Receiver	Keysight Technologies	N9038A	MY54130009	Oct. 02, 2016
15	Horn Antenna	Schwarzbeck	BBHA-9120D	120D-1297	Aug. 03, 2016
16	Pre-Amplifier	Agilent	8449B	3008A02331	Jan. 22, 2017
17	Test Cable	EMCI	EMC104-SM-SM-800	150110	Jan. 22, 2017
18	Test Cable	EMCI	EMC104-SM-SM-15000	150111	Jan. 22, 2017
19	Test Cable	EMCI	EMC104-SM-SM-5000	141210	Jan. 22, 2017
20	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
All calibration period of equipment list is one year.

## ATTACHMENT A - CONDUCTED EMISSION

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: LIANCHUANG


## Line

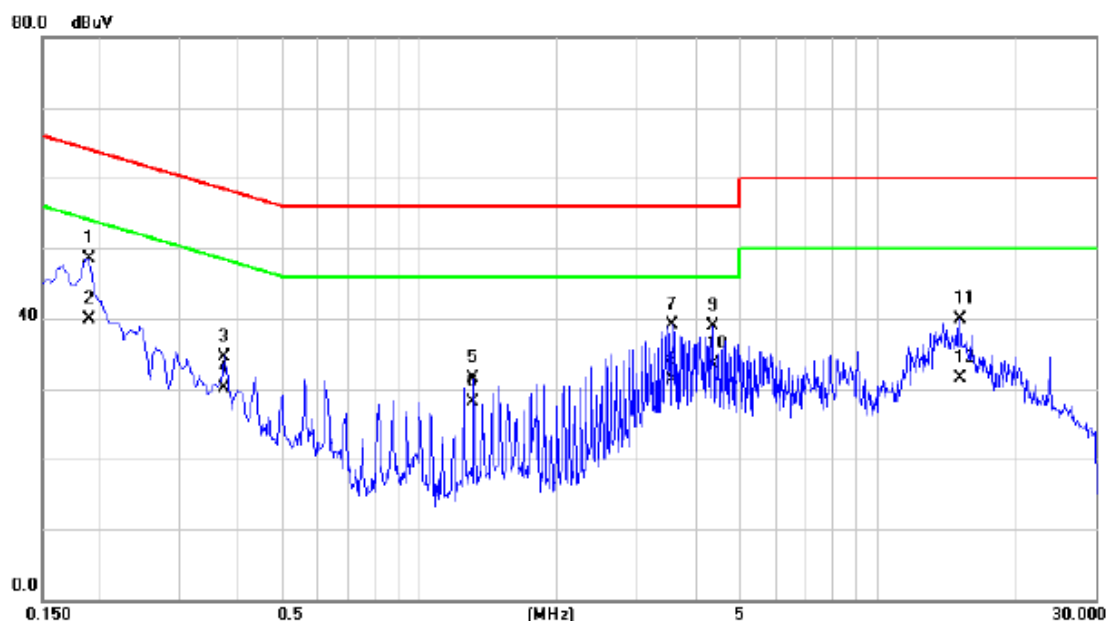

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1900	38.99	9.57	48.56	64.04	-15.48	QP	
2		0.1900	30.40	9.57	39.97	54.04	-14.07	AVG	
3		0.3740	24.94	9.66	34.60	58.41	-23.81	QP	
4		0.3740	20.40	9.66	30.06	48.41	-18.35	AVG	
5		1.3140	21.74	9.83	31.57	56.00	-24.43	QP	
6		1.3140	18.20	9.83	28.03	46.00	-17.97	AVG	
7		3.5700	29.18	9.99	39.17	56.00	-16.83	QP	
8		3.5700	21.40	9.99	31.39	46.00	-14.61	AVG	
9		4.3820	28.91	9.97	38.88	56.00	-17.12	QP	
10	*	4.3820	23.60	9.97	33.57	46.00	-12.43	AVG	
11		15.2060	30.17	9.82	39.99	60.00	-20.01	QP	
12		15.2060	21.70	9.82	31.52	50.00	-18.48	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: LIANCHUANG

## Neutral

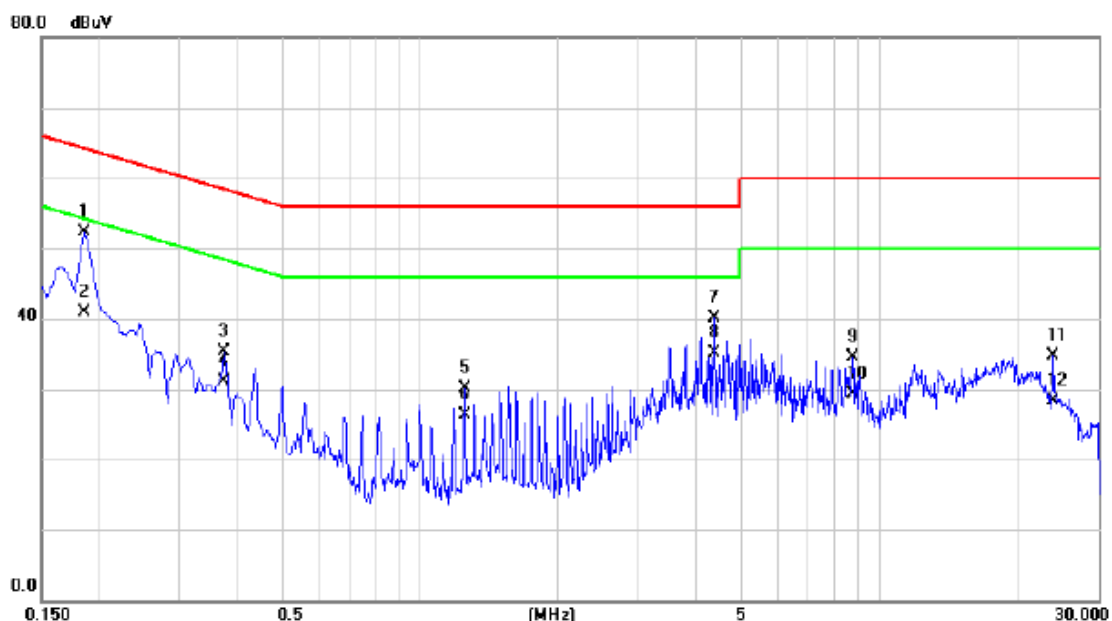

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1860	42.79	9.49	52.28	64.21	-11.93	QP	
2		0.1860	31.40	9.49	40.89	54.21	-13.32	AVG	
3		0.3740	25.82	9.54	35.36	58.41	-23.05	QP	
4		0.3740	21.60	9.54	31.14	48.41	-17.27	AVG	
5		1.2500	20.54	9.64	30.18	56.00	-25.82	QP	
6		1.2500	16.70	9.64	26.34	46.00	-19.66	AVG	
7		4.3820	30.29	9.91	40.20	56.00	-15.80	QP	
8	*	4.3820	25.10	9.91	35.01	46.00	-10.99	AVG	
9		8.7700	24.74	9.85	34.59	60.00	-25.41	QP	
10		8.7700	19.50	9.85	29.35	50.00	-20.65	AVG	
11		23.9700	24.79	9.99	34.78	60.00	-25.22	QP	
12		23.9700	18.30	9.99	28.29	50.00	-21.71	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD + Earphone: QUANCHENG

### Line



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1540	46.32	9.54	55.86	65.78	-9.92	QP	
2		0.1540	34.20	9.54	43.74	55.78	-12.04	AVG	
3		0.6100	35.50	9.72	45.22	56.00	-10.78	QP	
4		0.6100	21.90	9.72	31.62	46.00	-14.38	AVG	
5		1.0340	30.38	9.80	40.18	56.00	-15.82	QP	
6		1.0340	21.50	9.80	31.30	46.00	-14.70	AVG	
7		3.7660	32.17	9.98	42.15	56.00	-13.85	QP	
8		3.7660	21.60	9.98	31.58	46.00	-14.42	AVG	
9		8.2940	29.53	9.90	39.43	60.00	-20.57	QP	
10		8.2940	21.30	9.90	31.20	50.00	-18.80	AVG	
11		13.3540	32.43	9.84	42.27	60.00	-17.73	QP	
12		13.3540	21.50	9.84	31.34	50.00	-18.66	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD + Earphone: QUANCHENG


## Neutral



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1580	41.44	9.49	50.93	65.57	-14.64	QP	
2		0.1580	26.20	9.49	35.69	55.57	-19.88	AVG	
3		0.2220	34.41	9.50	43.91	62.74	-18.83	QP	
4		0.2220	23.50	9.50	33.00	52.74	-19.74	AVG	
5		0.4140	32.80	9.53	42.33	57.57	-15.24	QP	
6		0.4140	21.70	9.53	31.23	47.57	-16.34	AVG	
7	*	0.5580	37.04	9.56	46.60	56.00	-9.40	QP	
8		0.5580	22.60	9.56	32.16	46.00	-13.84	AVG	
9		0.6940	33.41	9.53	42.94	56.00	-13.06	QP	
10		0.6940	22.50	9.53	32.03	46.00	-13.97	AVG	
11		3.6460	34.28	9.88	44.16	56.00	-11.84	QP	
12		3.6460	21.60	9.88	31.48	46.00	-14.52	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay + Earphone: QUANCHENG


### Line

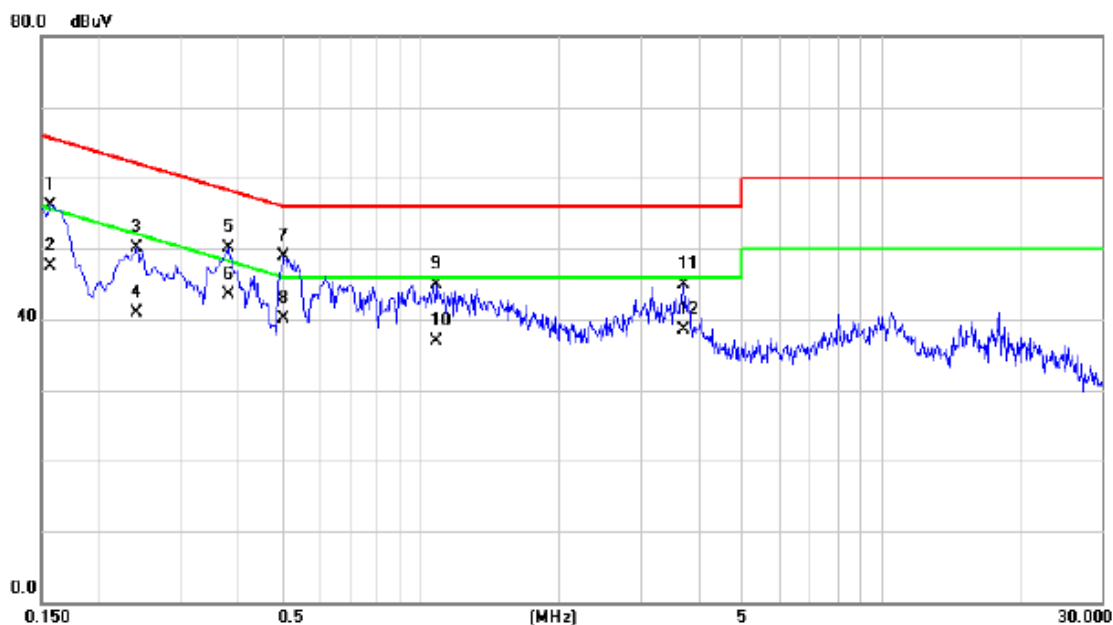

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1580	46.51	9.55	56.06	65.57	-9.51	QP	
2		0.1580	37.90	9.55	47.45	55.57	-8.12	AVG	
3		0.2420	40.54	9.60	50.14	62.03	-11.89	QP	
4		0.2420	31.30	9.60	40.90	52.03	-11.13	AVG	
5		0.3820	40.41	9.67	50.08	58.24	-8.16	QP	
6	*	0.3820	33.90	9.67	43.57	48.24	-4.67	AVG	
7		0.5060	39.15	9.68	48.83	56.00	-7.17	QP	
8		0.5060	30.50	9.68	40.18	46.00	-5.82	AVG	
9		1.0860	35.06	9.80	44.86	56.00	-11.14	QP	
10		1.0860	27.10	9.80	36.90	46.00	-9.10	AVG	
11		3.7380	35.01	9.98	44.99	56.00	-11.01	QP	
12		3.7380	28.60	9.98	38.58	46.00	-7.42	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay + Earphone: QUANCHENG


## Neutral

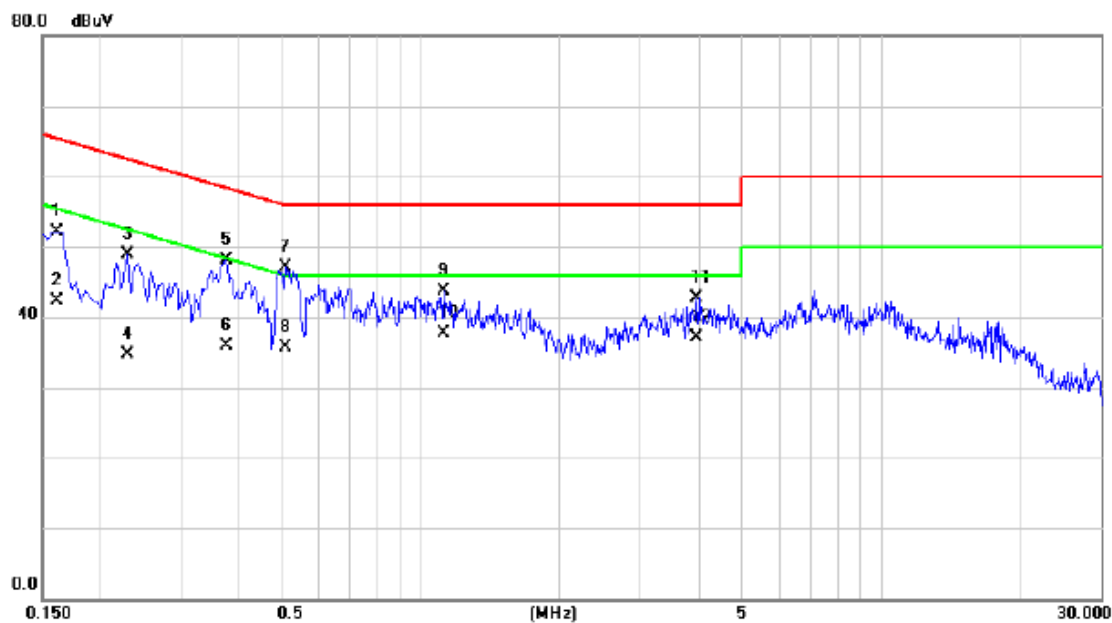

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1620	42.71	9.48	52.19	65.36	-13.17	QP	
2		0.1620	32.90	9.48	42.38	55.36	-12.98	AVG	
3		0.2300	39.45	9.51	48.96	62.45	-13.49	QP	
4		0.2300	25.20	9.51	34.71	52.45	-17.74	AVG	
5		0.3780	38.60	9.53	48.13	58.32	-10.19	QP	
6		0.3780	26.40	9.53	35.93	48.32	-12.39	AVG	
7		0.5100	37.45	9.56	47.01	56.00	-8.99	QP	
8		0.5100	26.10	9.56	35.66	46.00	-10.34	AVG	
9		1.1180	34.17	9.60	43.77	56.00	-12.23	QP	
10	*	1.1180	28.20	9.60	37.80	46.00	-8.20	AVG	
11		3.9740	32.80	9.92	42.72	56.00	-13.28	QP	
12		3.9740	27.20	9.92	37.12	46.00	-8.88	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Speaker
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay


## Line

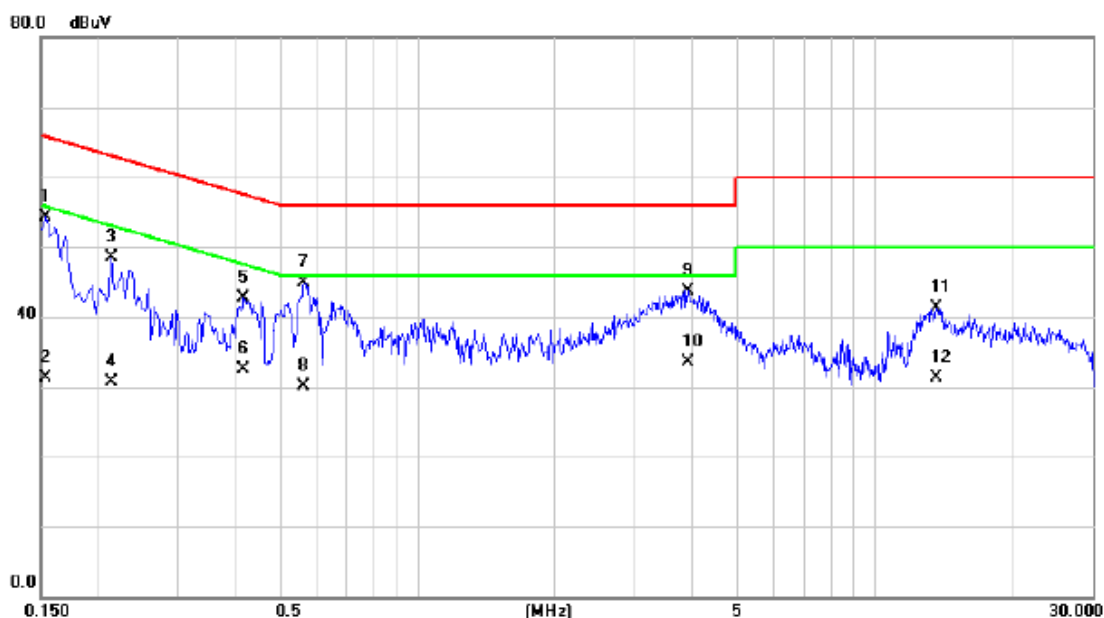

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1540	44.75	9.54	54.29	65.78	-11.49	QP	
2		0.1540	21.80	9.54	31.34	55.78	-24.44	AVG	
3		0.2140	38.87	9.58	48.45	63.05	-14.60	QP	
4		0.2140	21.20	9.58	30.78	53.05	-22.27	AVG	
5		0.4180	33.02	9.68	42.70	57.49	-14.79	QP	
6		0.4180	22.80	9.68	32.48	47.49	-15.01	AVG	
7	*	0.5660	35.27	9.71	44.98	56.00	-11.02	QP	
8		0.5660	20.30	9.71	30.01	46.00	-15.99	AVG	
9		3.9020	33.80	9.98	43.78	56.00	-12.22	QP	
10		3.9020	23.60	9.98	33.58	46.00	-12.42	AVG	
11		13.6660	31.48	9.83	41.31	60.00	-18.69	QP	
12		13.6660	21.40	9.83	31.23	50.00	-18.77	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Speaker
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay

## Neutral

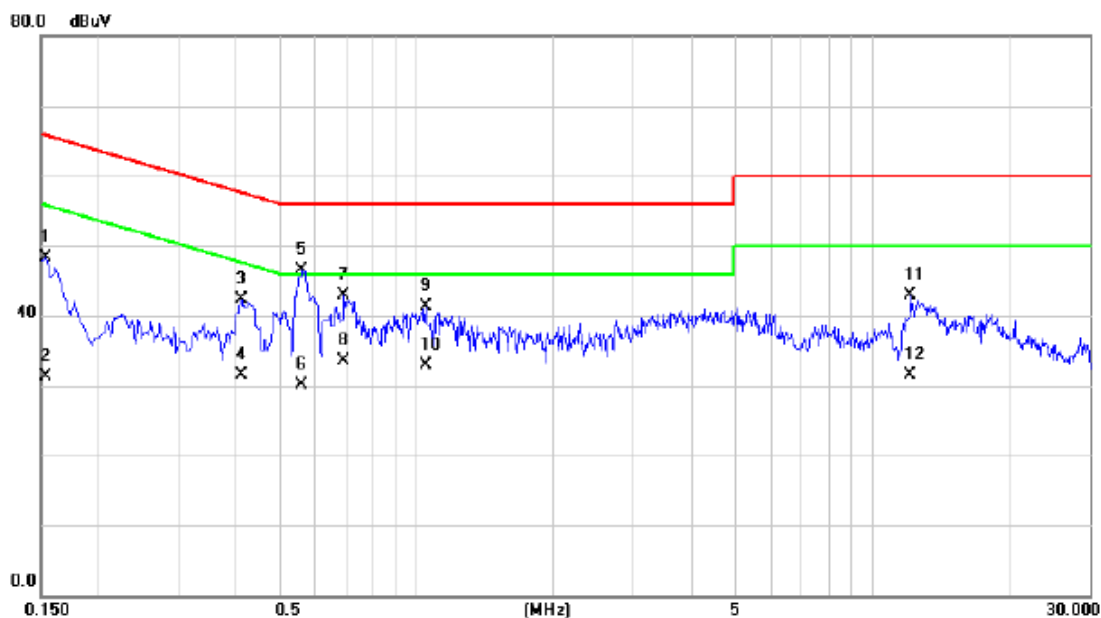

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1540	38.74	9.49	48.23	65.78	-17.55	QP	
2		0.1540	21.80	9.49	31.29	55.78	-24.49	AVG	
3		0.4140	32.86	9.53	42.39	57.57	-15.18	QP	
4		0.4140	21.90	9.53	31.43	47.57	-16.14	AVG	
5	*	0.5620	36.90	9.56	46.46	56.00	-9.54	QP	
6		0.5620	20.60	9.56	30.16	46.00	-15.84	AVG	
7		0.6940	33.38	9.53	42.91	56.00	-13.09	QP	
8		0.6940	23.90	9.53	33.43	46.00	-12.57	AVG	
9		1.0540	31.66	9.59	41.25	56.00	-14.75	QP	
10		1.0540	23.40	9.59	32.99	46.00	-13.01	AVG	
11		12.1420	33.00	9.88	42.88	60.00	-17.12	QP	
12		12.1420	21.60	9.88	31.48	50.00	-18.52	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Camera on
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay


## Line



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1620	35.30	9.55	44.85	65.36	-20.51	QP	
2		0.1620	24.10	9.55	33.65	55.36	-21.71	AVG	
3		0.4900	35.87	9.68	45.55	56.17	-10.62	QP	
4		0.4900	26.30	9.68	35.98	46.17	-10.19	AVG	
5	*	0.6180	36.33	9.73	46.06	56.00	-9.94	QP	
6		0.6180	25.50	9.73	35.23	46.00	-10.77	AVG	
7		1.0940	29.38	9.80	39.18	56.00	-16.82	QP	
8		1.0940	21.70	9.80	31.50	46.00	-14.50	AVG	
9		3.7980	30.69	9.98	40.67	56.00	-15.33	QP	
10		3.7980	19.80	9.98	29.78	46.00	-16.22	AVG	
11		12.1380	30.15	9.86	40.01	60.00	-19.99	QP	
12		12.1380	21.70	9.86	31.56	50.00	-18.44	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Camera on
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay


## Neutral

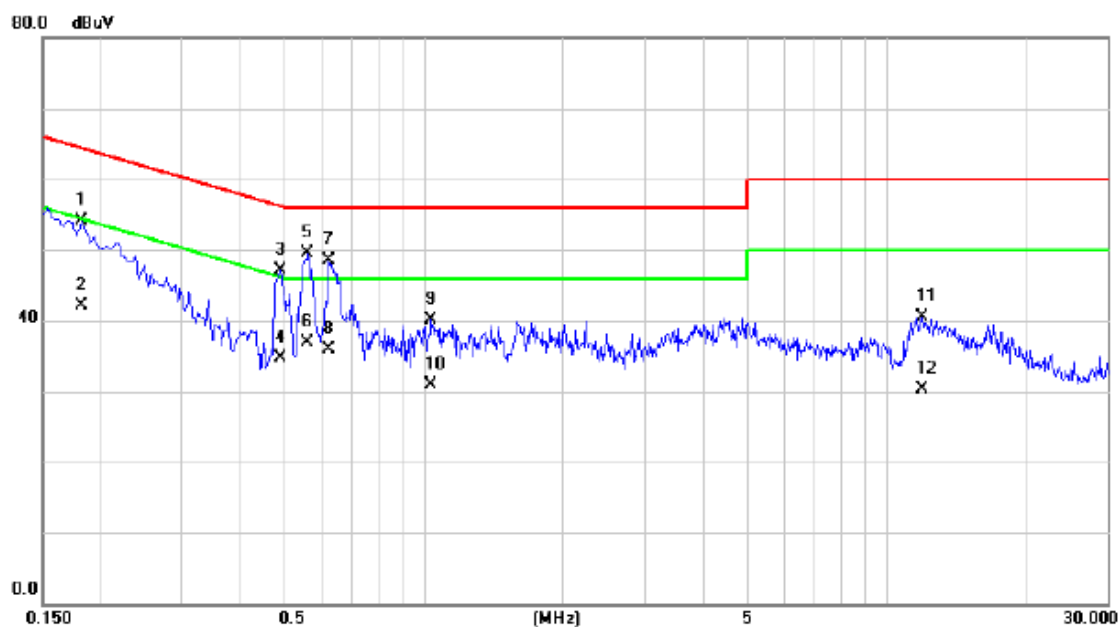

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1820	44.67	9.49	54.16	64.39	-10.23	QP	
2		0.1820	32.70	9.49	42.19	54.39	-12.20	AVG	
3		0.4900	37.50	9.56	47.06	56.17	-9.11	QP	
4		0.4900	25.10	9.56	34.66	46.17	-11.51	AVG	
5	*	0.5620	39.90	9.56	49.46	56.00	-6.54	QP	
6		0.5620	27.30	9.56	36.86	46.00	-9.14	AVG	
7		0.6260	38.95	9.55	48.50	56.00	-7.50	QP	
8		0.6260	26.40	9.55	35.95	46.00	-10.05	AVG	
9		1.0420	30.53	9.59	40.12	56.00	-15.88	QP	
10		1.0420	21.40	9.59	30.99	46.00	-15.01	AVG	
11		11.9540	30.70	9.87	40.57	60.00	-19.43	QP	
12		11.9540	20.50	9.87	30.37	50.00	-19.63	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+2.4GHz WIFI+GPS
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay


## Line

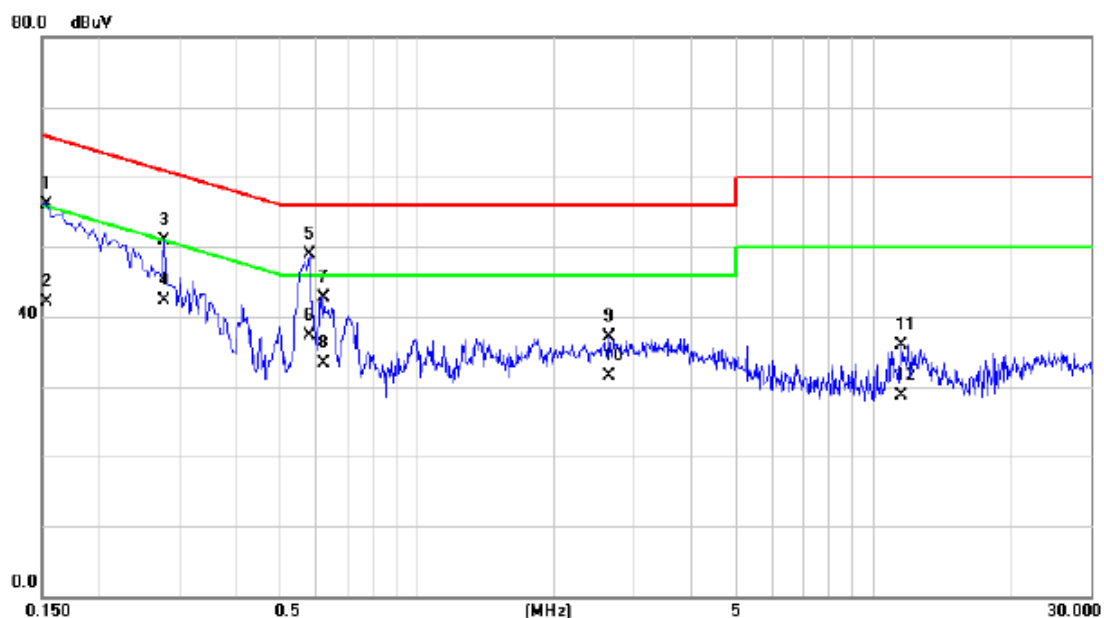

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1540	46.50	9.54	56.04	65.78	-9.74	QP	
2	0.1540	32.50	9.54	42.04	55.78	-13.74	AVG	
3	0.2780	41.20	9.63	50.83	60.88	-10.05	QP	
4	0.2780	32.60	9.63	42.23	50.88	-8.65	AVG	
5 *	0.5820	39.15	9.71	48.86	56.00	-7.14	QP	
6	0.5820	27.60	9.71	37.31	46.00	-8.69	AVG	
7	0.6260	32.97	9.73	42.70	56.00	-13.30	QP	
8	0.6260	23.50	9.73	33.23	46.00	-12.77	AVG	
9	2.6460	27.19	10.01	37.20	56.00	-18.80	QP	
10	2.6460	21.40	10.01	31.41	46.00	-14.59	AVG	
11	11.5260	26.03	9.86	35.89	60.00	-24.11	QP	
12	11.5260	18.90	9.86	28.76	50.00	-21.24	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+2.4GHz WIFI+GPS
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay


## Neutral

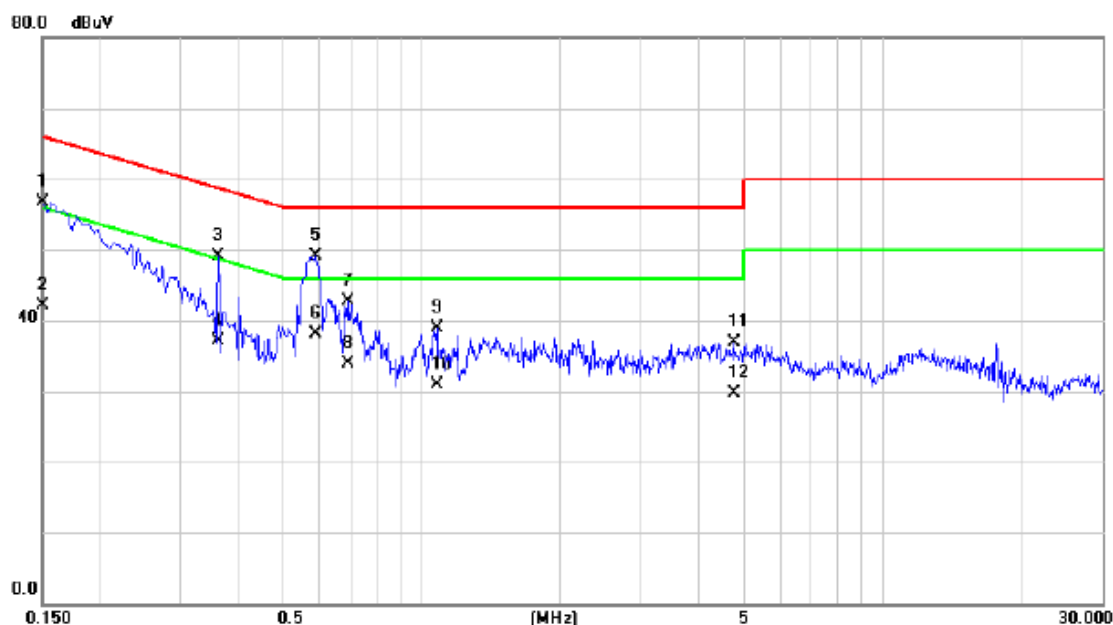

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	47.31	9.49	56.80	66.00	-9.20	QP	
2		0.1500	32.70	9.49	42.19	56.00	-13.81	AVG	
3		0.3620	39.52	9.54	49.06	58.68	-9.62	QP	
4		0.3620	27.60	9.54	37.14	48.68	-11.54	AVG	
5	*	0.5900	39.51	9.56	49.07	56.00	-6.93	QP	
6		0.5900	28.60	9.56	38.16	46.00	-7.84	AVG	
7		0.6900	33.20	9.53	42.73	56.00	-13.27	QP	
8		0.6900	24.30	9.53	33.83	46.00	-12.17	AVG	
9		1.0820	29.39	9.60	38.99	56.00	-17.01	QP	
10		1.0820	21.40	9.60	31.00	46.00	-15.00	AVG	
11		4.7500	26.96	9.92	36.88	56.00	-19.12	QP	
12		4.7500	19.70	9.92	29.62	46.00	-16.38	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+2.4GHz WIFI+GPS
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay

## Line

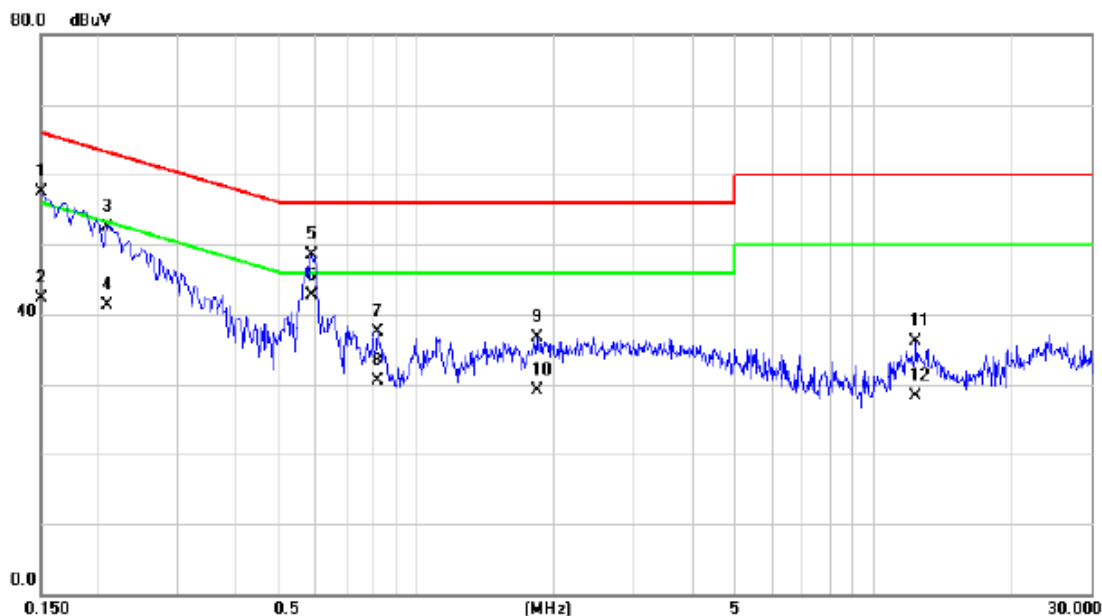

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	47.92	9.54	57.46	66.00	-8.54	QP	
2		0.1500	32.70	9.54	42.24	56.00	-13.76	AVG	
3		0.2100	42.85	9.58	52.43	63.21	-10.78	QP	
4		0.2100	31.80	9.58	41.38	53.21	-11.83	AVG	
5		0.5900	38.85	9.72	48.57	56.00	-7.43	QP	
6	*	0.5900	32.90	9.72	42.62	46.00	-3.38	AVG	
7		0.8180	27.83	9.75	37.58	56.00	-18.42	QP	
8		0.8180	20.70	9.75	30.45	46.00	-15.55	AVG	
9		1.8340	26.84	9.90	36.74	56.00	-19.26	QP	
10		1.8340	19.30	9.90	29.20	46.00	-16.80	AVG	
11		12.4340	26.23	9.85	36.08	60.00	-23.92	QP	
12		12.4340	18.50	9.85	28.35	50.00	-21.65	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+2.4GHz WIFI+GPS
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay


## Neutral



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	48.45	9.49	57.94	66.00	-8.06	QP	
2		0.1500	36.70	9.49	46.19	56.00	-9.81	AVG	
3		0.2300	41.90	9.51	51.41	62.45	-11.04	QP	
4		0.2300	32.10	9.51	41.61	52.45	-10.84	AVG	
5		0.5940	41.28	9.56	50.84	56.00	-5.16	QP	
6	*	0.5940	33.70	9.56	43.26	46.00	-2.74	AVG	
7		0.6580	32.33	9.54	41.87	56.00	-14.13	QP	
8		0.6580	24.50	9.54	34.04	46.00	-11.96	AVG	
9		1.1980	29.51	9.62	39.13	56.00	-16.87	QP	
10		1.1980	21.60	9.62	31.22	46.00	-14.78	AVG	
11		1.8420	29.07	9.70	38.77	56.00	-17.23	QP	
12		1.8420	18.70	9.70	28.40	46.00	-17.60	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+LTE+BT+2.4GHz WIFI+GPS
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay


## Line

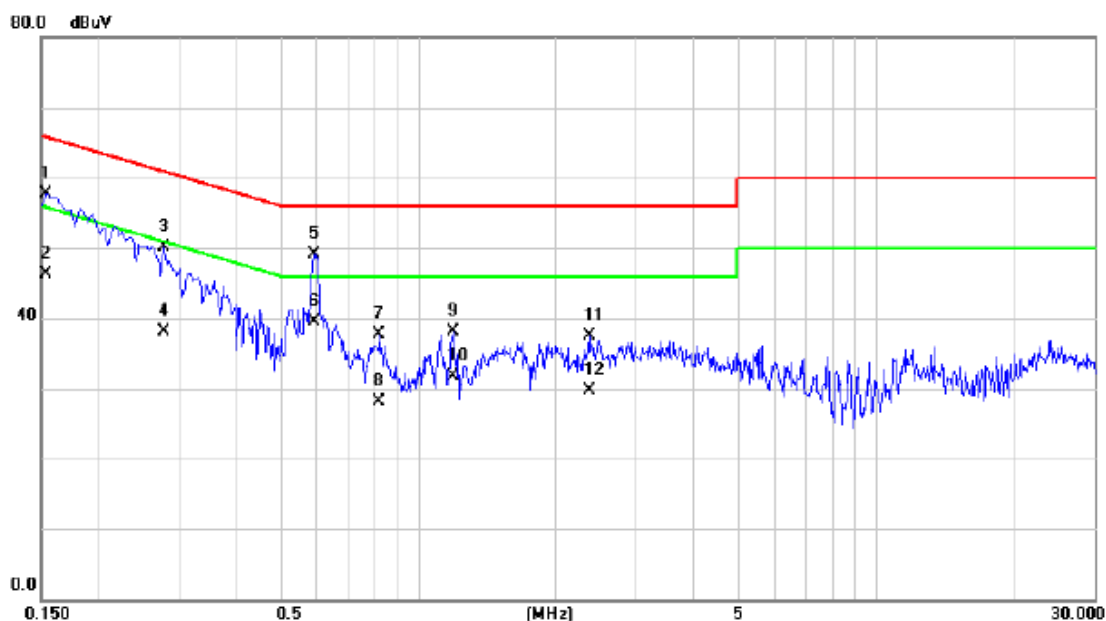

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1540	48.21	9.54	57.75	65.78	-8.03	QP	
2	0.1540	36.70	9.54	46.24	55.78	-9.54	AVG	
3	0.2780	40.45	9.63	50.08	60.88	-10.80	QP	
4	0.2780	28.50	9.63	38.13	50.88	-12.75	AVG	
5	0.5940	39.30	9.72	49.02	56.00	-6.98	QP	
6 *	0.5940	29.80	9.72	39.52	46.00	-6.48	AVG	
7	0.8220	27.91	9.75	37.66	56.00	-18.34	QP	
8	0.8220	18.40	9.75	28.15	46.00	-17.85	AVG	
9	1.1940	28.24	9.81	38.05	56.00	-17.95	QP	
10	1.1940	21.90	9.81	31.71	46.00	-14.29	AVG	
11	2.3620	27.62	9.97	37.59	56.00	-18.41	QP	
12	2.3620	19.80	9.97	29.77	46.00	-16.23	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+LTE+BT+2.4GHz WIFI+GPS
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay


## Neutral

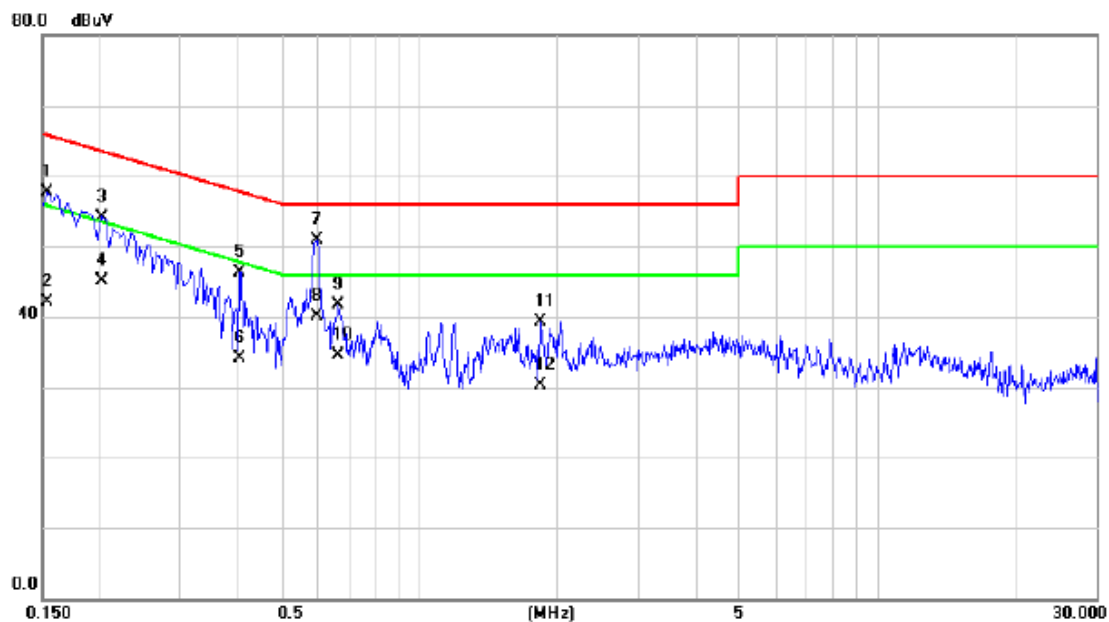

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1540	48.27	9.49	57.76	65.78	-8.02	QP	
2	0.1540	32.60	9.49	42.09	55.78	-13.69	AVG	
3	0.2030	44.67	9.50	54.17	63.49	-9.32	QP	
4	0.2030	35.70	9.50	45.20	53.49	-8.29	AVG	
5	0.4060	36.77	9.53	46.30	57.73	-11.43	QP	
6	0.4060	24.60	9.53	34.13	47.73	-13.60	AVG	
7 *	0.5980	41.29	9.56	50.85	56.00	-5.15	QP	
8	0.5980	30.50	9.56	40.06	46.00	-5.94	AVG	
9	0.6660	32.26	9.54	41.80	56.00	-14.20	QP	
10	0.6660	24.90	9.54	34.44	46.00	-11.56	AVG	
11	1.8420	29.59	9.70	39.29	56.00	-16.71	QP	
12	1.8420	20.60	9.70	30.30	46.00	-15.70	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS
Note:	USB Cable: HONGLIN


### Line

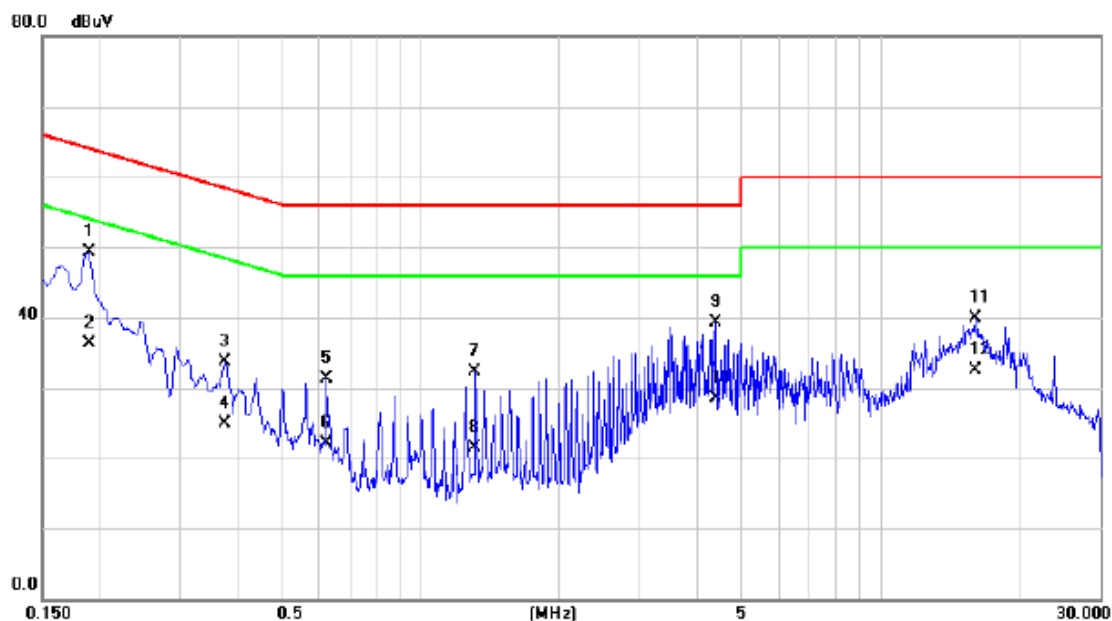

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1900	39.69	9.57	49.26	64.04	-14.78	QP	
2		0.1900	26.70	9.57	36.27	54.04	-17.77	AVG	
3		0.3740	24.11	9.66	33.77	58.41	-24.64	QP	
4		0.3740	15.20	9.66	24.86	48.41	-23.55	AVG	
5		0.6260	21.66	9.73	31.39	56.00	-24.61	QP	
6		0.6260	12.40	9.73	22.13	46.00	-23.87	AVG	
7		1.3140	22.48	9.83	32.31	56.00	-23.69	QP	
8		1.3140	11.60	9.83	21.43	46.00	-24.57	AVG	
9		4.3820	29.42	9.97	39.39	56.00	-16.61	QP	
10		4.3820	18.60	9.97	28.57	46.00	-17.43	AVG	
11		16.0780	30.06	9.83	39.89	60.00	-20.11	QP	
12		16.0780	22.60	9.83	32.43	50.00	-17.57	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS
Note:	USB Cable: HONGLIN


### Neutral

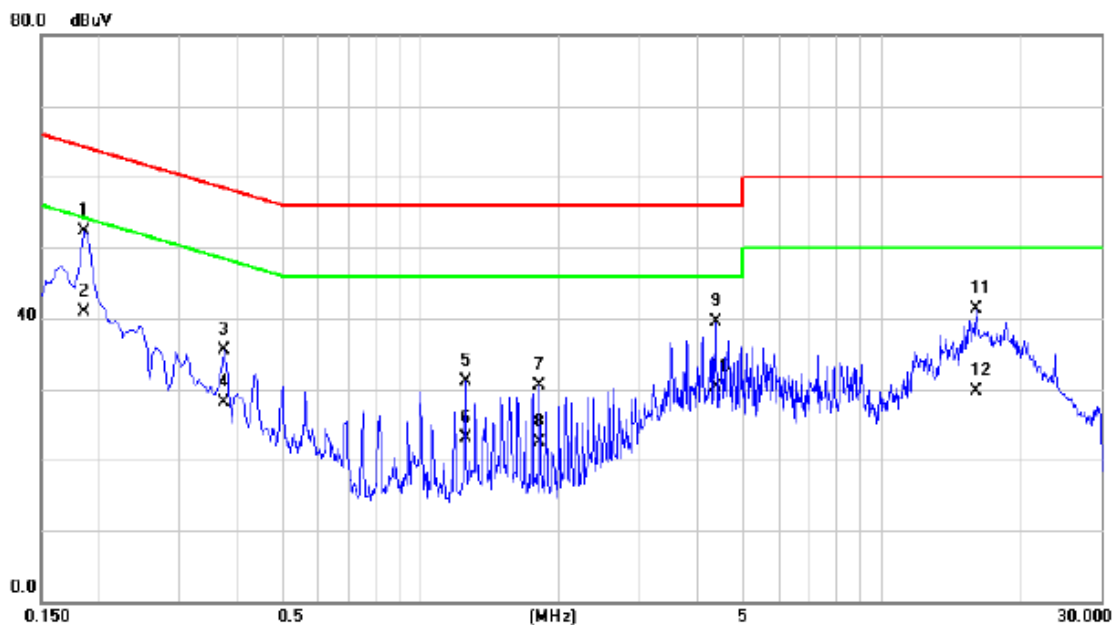

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1860	42.79	9.49	52.28	64.21	-11.93	QP	
2		0.1860	31.50	9.49	40.99	54.21	-13.22	AVG	
3		0.3740	26.00	9.54	35.54	58.41	-22.87	QP	
4		0.3740	18.60	9.54	28.14	48.41	-20.27	AVG	
5		1.2500	21.41	9.64	31.05	56.00	-24.95	QP	
6		1.2500	13.40	9.64	23.04	46.00	-22.96	AVG	
7		1.8140	20.77	9.70	30.47	56.00	-25.53	QP	
8		1.8140	12.80	9.70	22.50	46.00	-23.50	AVG	
9		4.3820	29.65	9.91	39.56	56.00	-16.44	QP	
10		4.3820	20.40	9.91	30.31	46.00	-15.69	AVG	
11		16.0820	31.31	9.93	41.24	60.00	-18.76	QP	
12		16.0820	19.80	9.93	29.73	50.00	-20.27	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS
Note:	USB Cable: FOXCONN


## Line

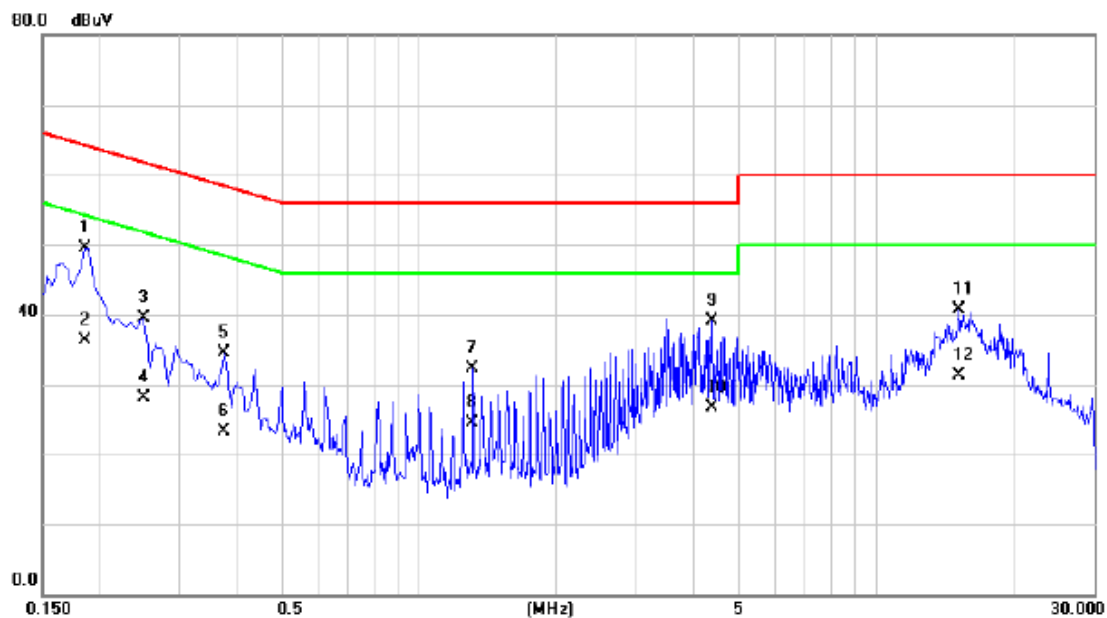

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1860	39.89	9.57	49.46	64.21	-14.75	QP	
2		0.1860	26.70	9.57	36.27	54.21	-17.94	AVG	
3		0.2500	29.91	9.61	39.52	61.76	-22.24	QP	
4		0.2500	18.50	9.61	28.11	51.76	-23.65	AVG	
5		0.3740	24.79	9.66	34.45	58.41	-23.96	QP	
6		0.3740	13.70	9.66	23.36	48.41	-25.05	AVG	
7		1.3140	22.43	9.83	32.26	56.00	-23.74	QP	
8		1.3140	14.60	9.83	24.43	46.00	-21.57	AVG	
9		4.3820	29.16	9.97	39.13	56.00	-16.87	QP	
10		4.3820	16.80	9.97	26.77	46.00	-19.23	AVG	
11		15.2020	30.95	9.82	40.77	60.00	-19.23	QP	
12		15.2020	21.50	9.82	31.32	50.00	-18.68	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS
Note:	USB Cable: FOXCONN


## Neutral

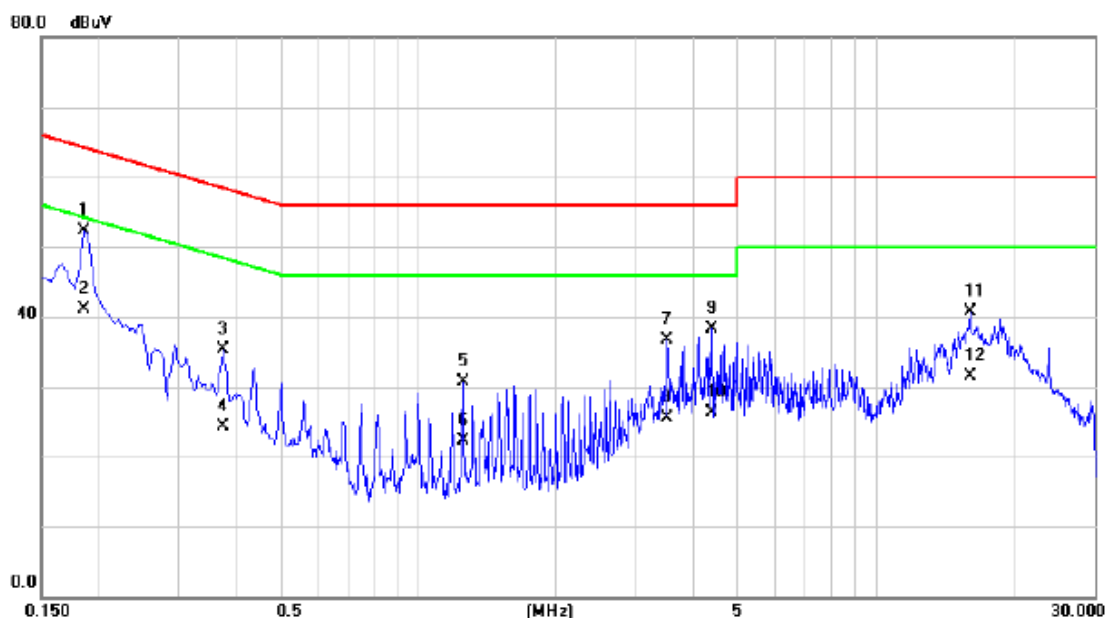

No.	Mk.	Freq.	Reading	Correct	Measurement	Limit	Margin		
		MHz	dBuV	Factor	dBuV	dBuV	dB	Detector	Comment
1	*	0.1860	42.87	9.49	52.36	64.21	-11.85	QP	
2		0.1860	31.70	9.49	41.19	54.21	-13.02	AVG	
3		0.3740	25.80	9.54	35.34	58.41	-23.07	QP	
4		0.3740	14.80	9.54	24.34	48.41	-24.07	AVG	
5		1.2500	21.11	9.64	30.75	56.00	-25.25	QP	
6		1.2500	12.60	9.64	22.24	46.00	-23.76	AVG	
7		3.5060	26.85	9.87	36.72	56.00	-19.28	QP	
8		3.5060	15.70	9.87	25.57	46.00	-20.43	AVG	
9		4.3820	28.31	9.91	38.22	56.00	-17.78	QP	
10		4.3820	16.40	9.91	26.31	46.00	-19.69	AVG	
11		16.0820	30.86	9.93	40.79	60.00	-19.21	QP	
12		16.0820	21.50	9.93	31.43	50.00	-18.57	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS
Note:	USB Cable: LUXSHARE-ICT


### Line

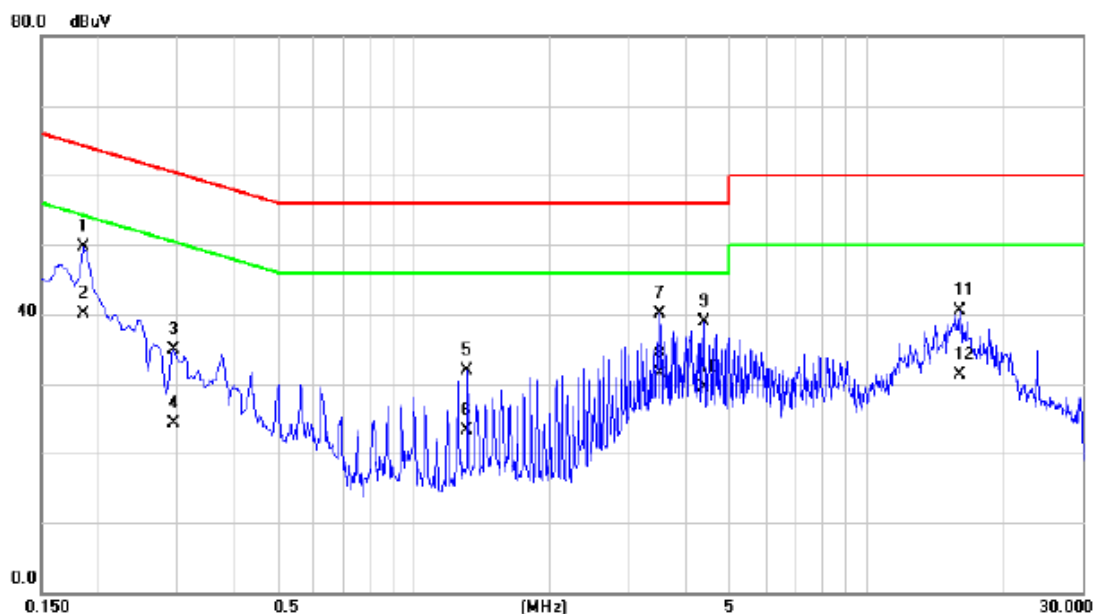

No.	Mk.	Freq.	Reading	Correct	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1860	40.11	9.57	49.68	64.21	-14.53	QP	
2	*	0.1860	30.60	9.57	40.17	54.21	-14.04	AVG	
3		0.2940	25.27	9.64	34.91	60.41	-25.50	QP	
4		0.2940	14.70	9.64	24.34	50.41	-26.07	AVG	
5		1.3140	22.14	9.83	31.97	56.00	-24.03	QP	
6		1.3140	13.50	9.83	23.33	46.00	-22.67	AVG	
7		3.5060	30.05	10.00	40.05	56.00	-15.95	QP	
8		3.5060	21.60	10.00	31.60	46.00	-14.40	AVG	
9		4.3820	28.97	9.97	38.94	56.00	-17.06	QP	
10		4.3820	19.50	9.97	29.47	46.00	-16.53	AVG	
11		16.0780	30.65	9.83	40.48	60.00	-19.52	QP	
12		16.0780	21.40	9.83	31.23	50.00	-18.77	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS
Note:	USB Cable: LUXSHARE-ICT


### Neutral

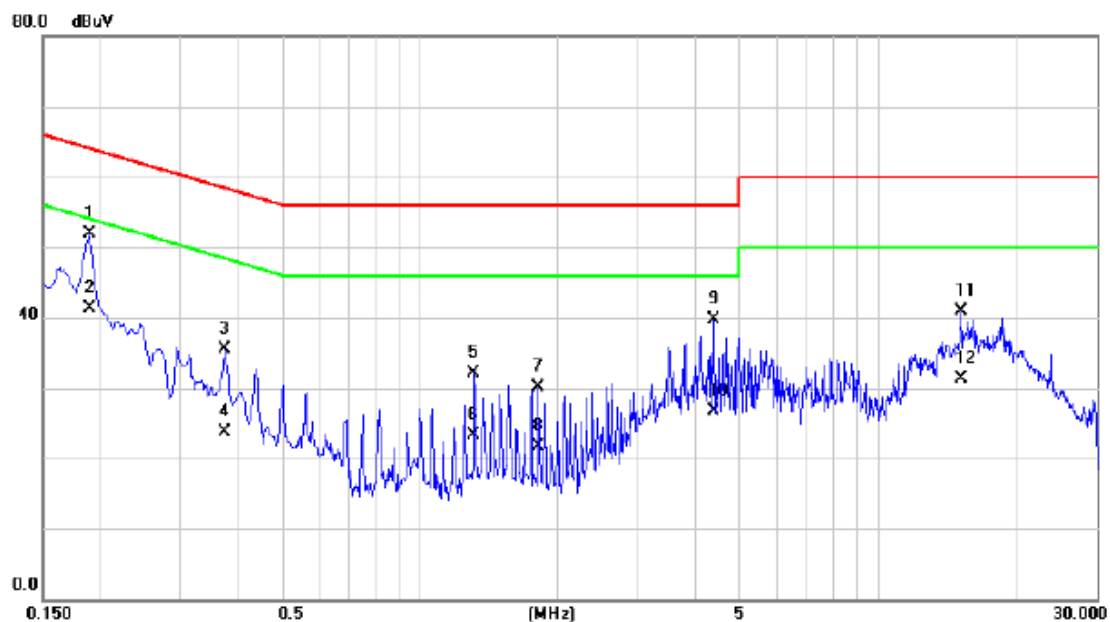

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1900	42.43	9.49	51.92	64.04	-12.12	QP	
2		0.1900	31.80	9.49	41.29	54.04	-12.75	AVG	
3		0.3740	25.97	9.54	35.51	58.41	-22.90	QP	
4		0.3740	14.20	9.54	23.74	48.41	-24.67	AVG	
5		1.3140	22.42	9.64	32.06	56.00	-23.94	QP	
6		1.3140	13.60	9.64	23.24	46.00	-22.76	AVG	
7		1.8140	20.42	9.70	30.12	56.00	-25.88	QP	
8		1.8140	12.10	9.70	21.80	46.00	-24.20	AVG	
9		4.3820	29.72	9.91	39.63	56.00	-16.37	QP	
10		4.3820	16.80	9.91	26.71	46.00	-19.29	AVG	
11		15.2060	30.94	9.92	40.86	60.00	-19.14	QP	
12		15.2060	21.40	9.92	31.32	50.00	-18.68	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+5GHz WIFI+GPS
Note:	USB Cable: FOXCONN


### Line

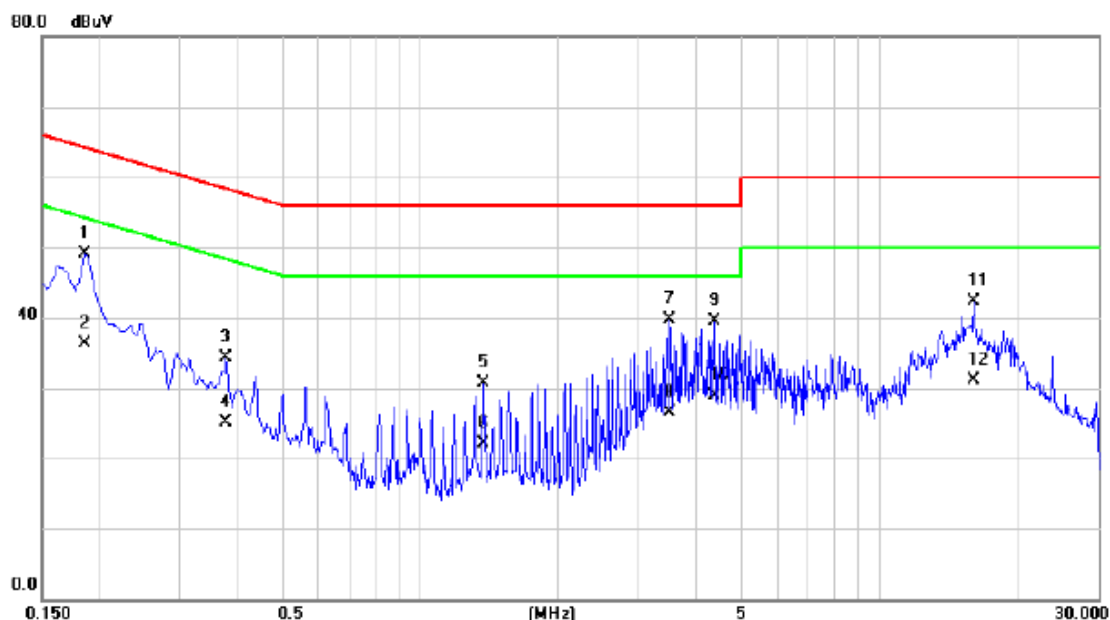

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1860	39.45	9.57	49.02	64.21	-15.19	QP	
2		0.1860	26.70	9.57	36.27	54.21	-17.94	AVG	
3		0.3780	24.57	9.67	34.24	58.32	-24.08	QP	
4		0.3780	15.40	9.67	25.07	48.32	-23.25	AVG	
5		1.3780	20.78	9.83	30.61	56.00	-25.39	QP	
6		1.3780	12.30	9.83	22.13	46.00	-23.87	AVG	
7		3.5060	29.72	10.00	39.72	56.00	-16.28	QP	
8		3.5060	16.50	10.00	26.50	46.00	-19.50	AVG	
9		4.3820	29.51	9.97	39.48	56.00	-16.52	QP	
10		4.3820	18.90	9.97	28.87	46.00	-17.13	AVG	
11		16.0820	32.44	9.83	42.27	60.00	-17.73	QP	
12		16.0820	21.30	9.83	31.13	50.00	-18.87	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+5GHz WIFI+GPS
Note:	USB Cable: FOXCONN

## Neutral

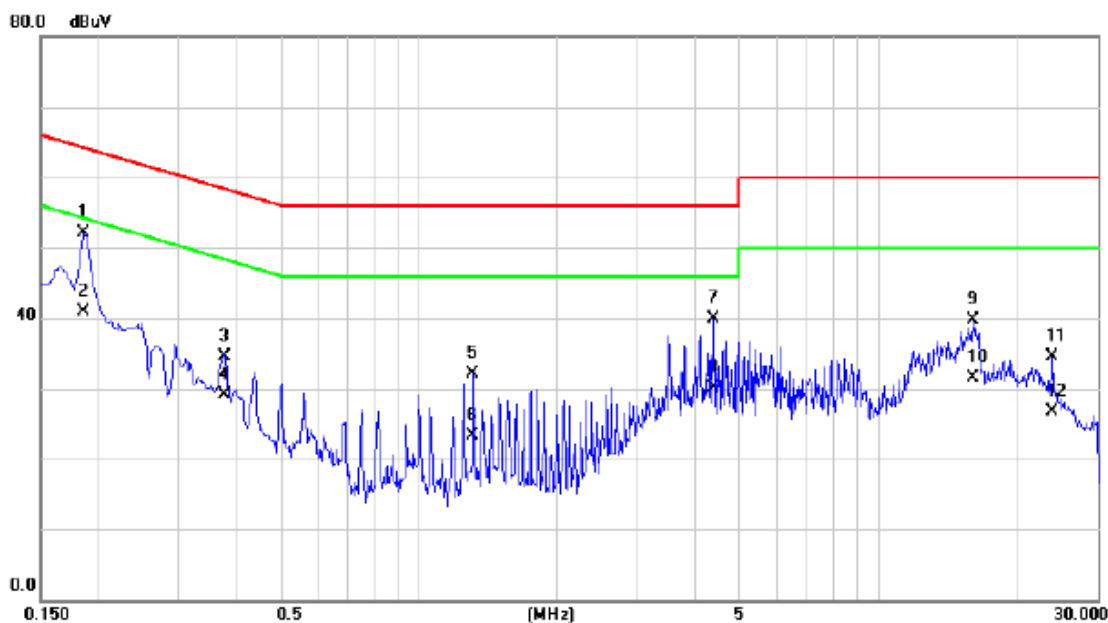


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1860	42.60	9.49	52.09	64.21	-12.12	QP	
2	0.1860	31.40	9.49	40.89	54.21	-13.32	AVG	
3	0.3780	25.04	9.53	34.57	58.32	-23.75	QP	
4	0.3780	19.50	9.53	29.03	48.32	-19.29	AVG	
5	1.3140	22.54	9.64	32.18	56.00	-23.82	QP	
6	1.3140	13.70	9.64	23.34	46.00	-22.66	AVG	
7	4.3820	29.95	9.91	39.86	56.00	-16.14	QP	
8	4.3820	20.10	9.91	30.01	46.00	-15.99	AVG	
9	16.0780	29.69	9.93	39.62	60.00	-20.38	QP	
10	16.0780	21.50	9.93	31.43	50.00	-18.57	AVG	
11	23.9700	24.52	9.99	34.51	60.00	-25.49	QP	
12	23.9700	16.80	9.99	26.79	50.00	-23.21	AVG	

**ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)**

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: LIANCHUANG


## Vertical

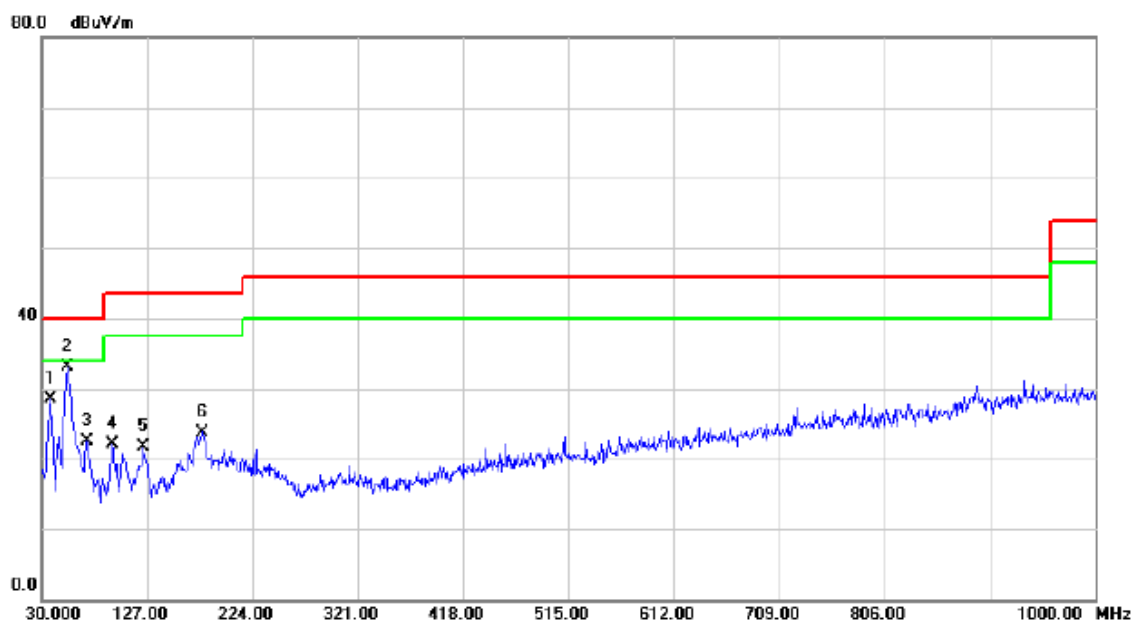

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		37.7600	43.08	-14.62	28.46	40.00	-11.54	QP	
2	*	53.2800	47.07	-14.03	33.04	40.00	-6.96	QP	
3		71.7100	39.02	-16.58	22.44	40.00	-17.56	QP	
4		94.9900	41.71	-19.58	22.13	43.50	-21.37	QP	
5		123.1200	37.62	-15.94	21.68	43.50	-21.82	QP	
6		178.4100	39.06	-15.26	23.80	43.50	-19.70	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: LIANCHUANG


### Horizontal

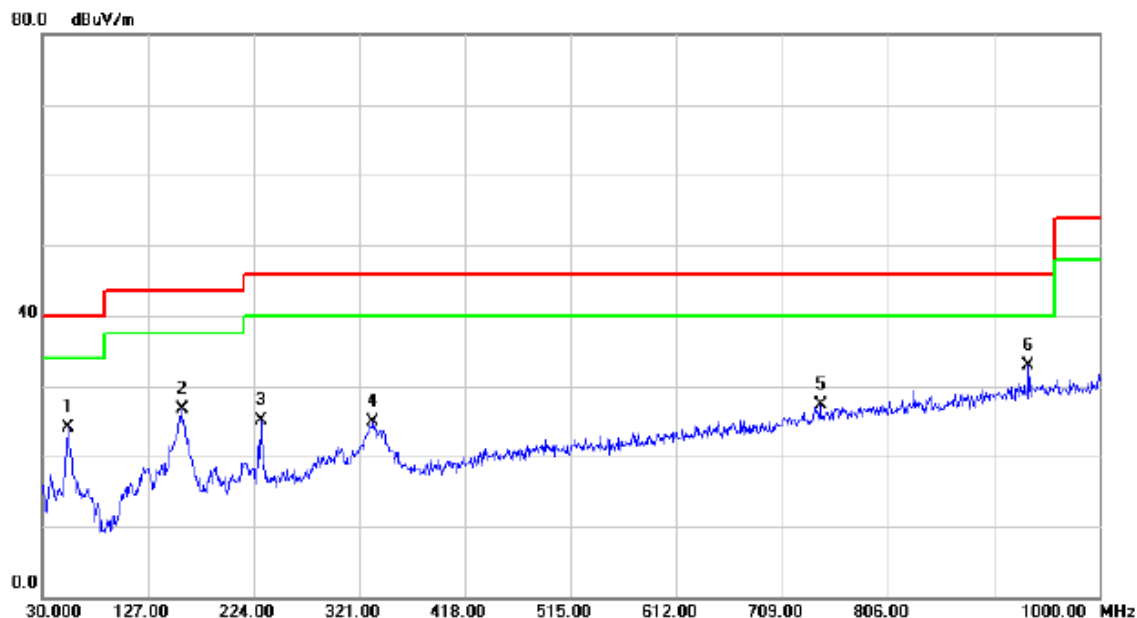

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		53.2800	38.17	-14.03	24.14	40.00	-15.86	QP	
2		158.0400	40.57	-13.94	26.63	43.50	-16.87	QP	
3		230.7900	40.80	-15.78	25.02	46.00	-20.98	QP	
4		333.6100	37.56	-12.62	24.94	46.00	-21.06	QP	
5		743.9200	32.41	-5.06	27.35	46.00	-18.65	QP	
6	*	935.0100	35.07	-2.08	32.99	46.00	-13.01	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD + Earphone: QUANCHENG


## Vertical

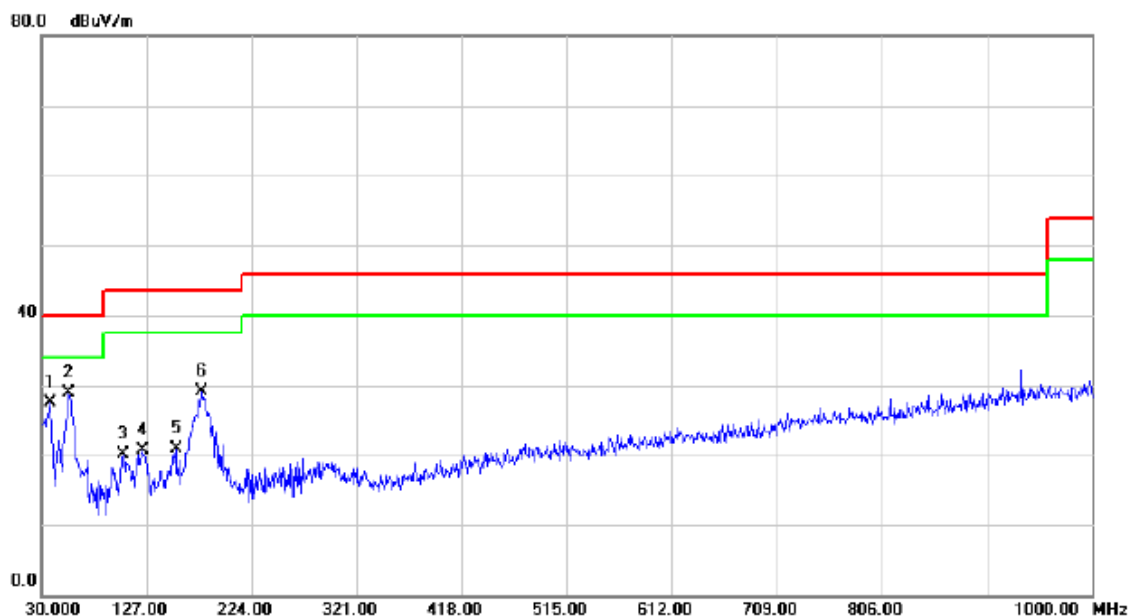

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		37.7600	42.13	-14.62	27.51	40.00	-12.49	QP	
2	*	55.2200	43.22	-14.24	28.98	40.00	-11.02	QP	
3		105.6600	38.01	-17.97	20.04	43.50	-23.46	QP	
4		124.0900	36.47	-15.84	20.63	43.50	-22.87	QP	
5		154.1600	34.87	-14.00	20.87	43.50	-22.63	QP	
6		178.4100	44.42	-15.26	29.16	43.50	-14.34	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD + Earphone: QUANCHENG


## Horizontal

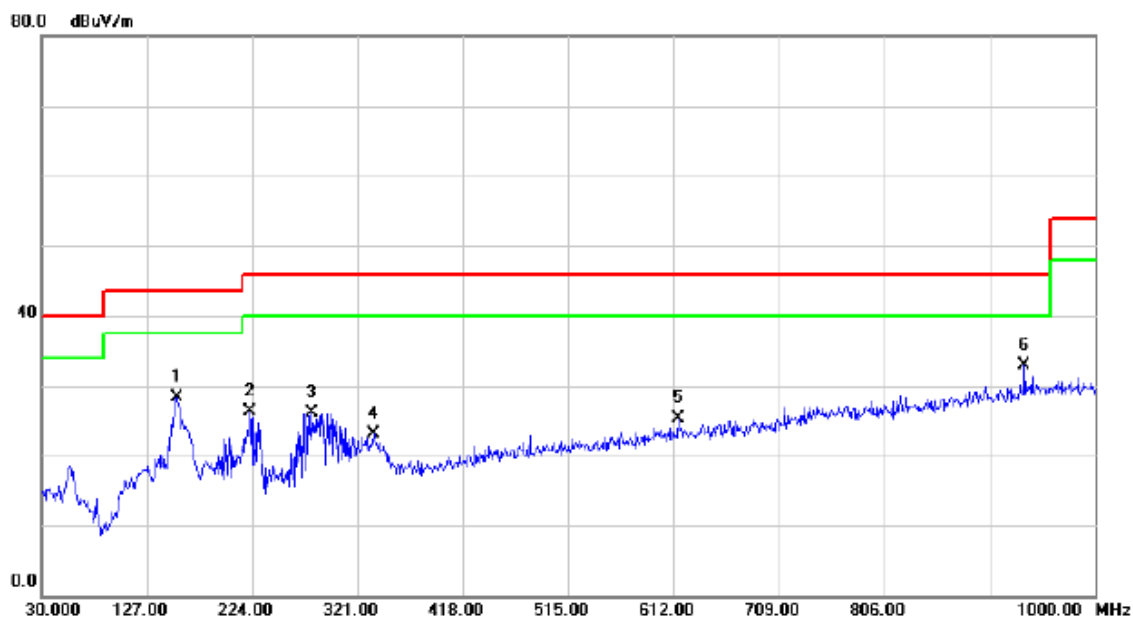

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		154.1600	42.33	-14.00	28.33	43.50	-15.17	QP	
2		222.0600	42.81	-16.43	26.38	46.00	-19.62	QP	
3		279.2900	40.18	-13.98	26.20	46.00	-19.80	QP	
4		335.5500	35.59	-12.57	23.02	46.00	-22.98	QP	
5		615.8800	32.57	-7.28	25.29	46.00	-20.71	QP	
6	*	935.0100	35.04	-2.08	32.96	46.00	-13.04	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: Desay + Earphone: LIANCHUANG


## Vertical

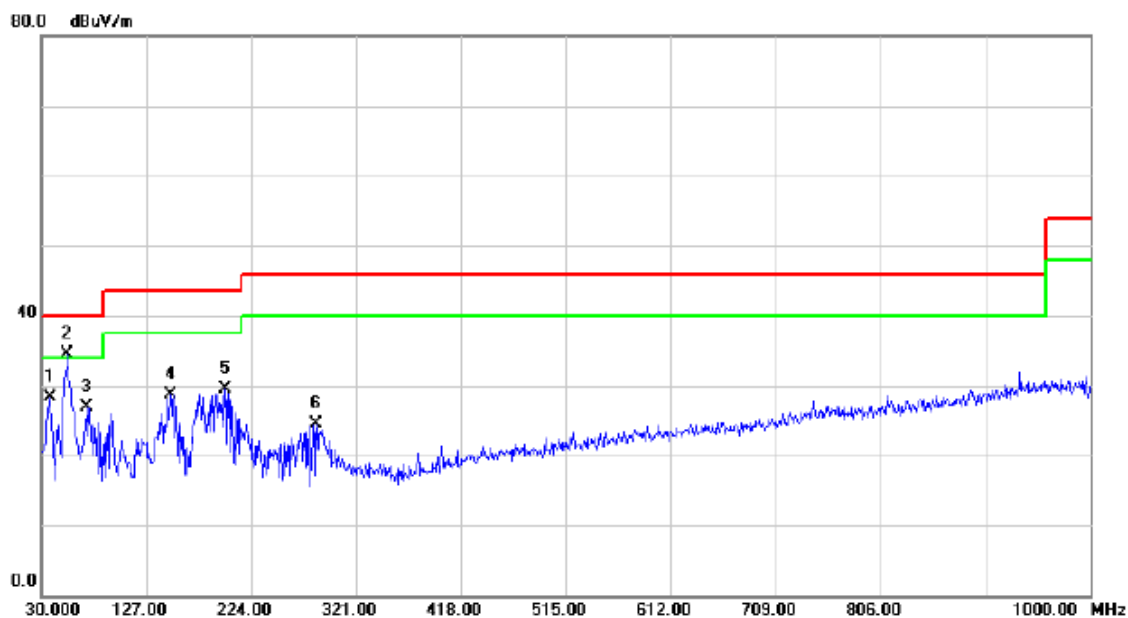

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		37.7600	42.86	-14.62	28.24	40.00	-11.76	QP	
2	*	54.2500	48.57	-14.14	34.43	40.00	-5.57	QP	
3		71.7100	43.50	-16.58	26.92	40.00	-13.08	QP	
4		149.3100	42.83	-14.07	28.76	43.50	-14.74	QP	
5		199.7500	46.27	-16.72	29.55	43.50	-13.95	QP	
6		284.1400	38.32	-13.85	24.47	46.00	-21.53	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: Desay + Earphone: LIANCHUANG


## Horizontal

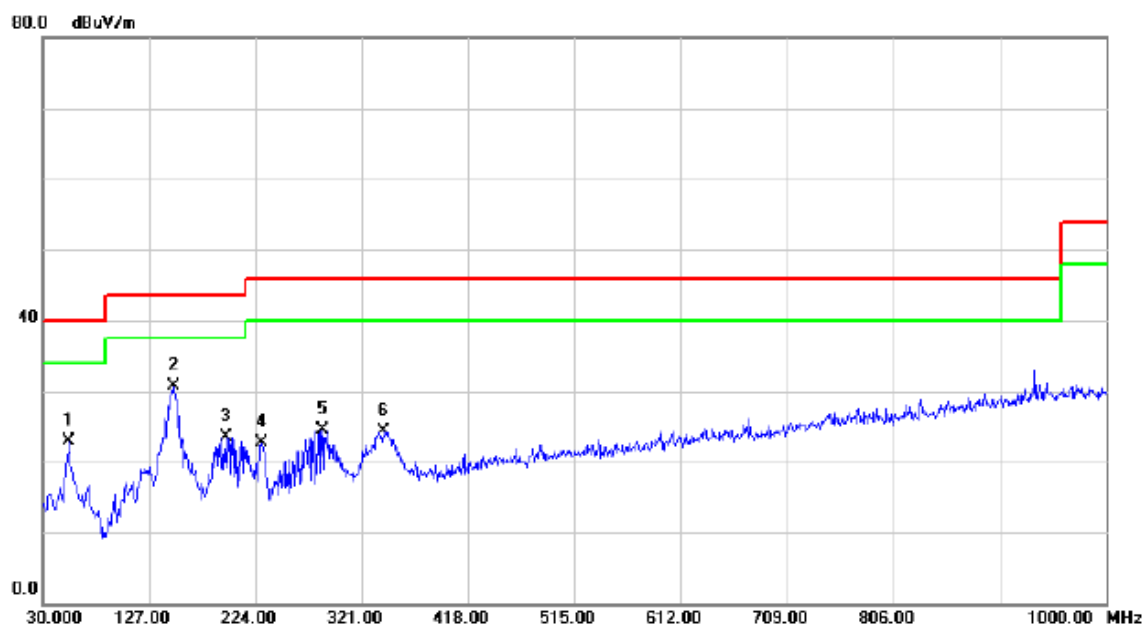

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		54.2500	37.11	-14.14	22.97	40.00	-17.03	QP	
2	*	149.3100	44.74	-14.07	30.67	43.50	-12.83	QP	
3		196.8400	40.19	-16.71	23.48	43.50	-20.02	QP	
4		229.8200	38.53	-15.84	22.69	46.00	-23.31	QP	
5		285.1100	38.26	-13.82	24.44	46.00	-21.56	QP	
6		340.4000	36.67	-12.44	24.23	46.00	-21.77	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Speaker
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: Desay


## Vertical

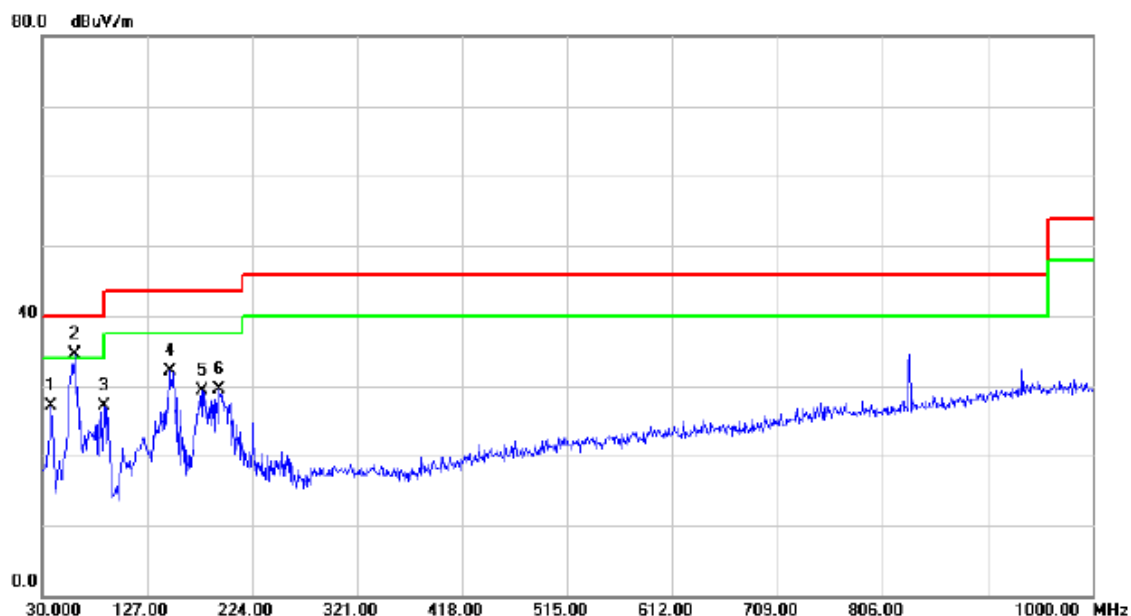

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		37.7600	41.64	-14.62	27.02	40.00	-12.98	QP	
2	*	60.0700	49.33	-14.75	34.58	40.00	-5.42	QP	
3		87.2300	46.88	-19.70	27.18	40.00	-12.82	QP	
4		148.3400	46.24	-14.11	32.13	43.50	-11.37	QP	
5		178.4100	44.54	-15.26	29.28	43.50	-14.22	QP	
6		193.9300	46.21	-16.70	29.51	43.50	-13.99	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Speaker
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: Desay


## Horizontal

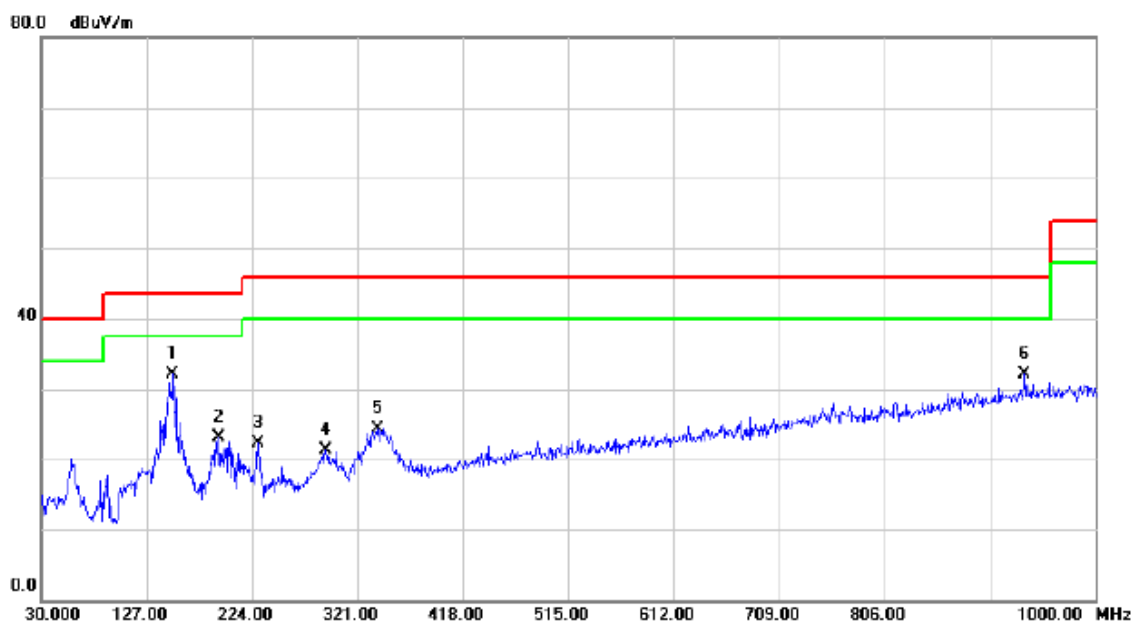

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	151.2500	46.17	-14.04	32.13	43.50	-11.37	QP	
2		193.9300	39.77	-16.70	23.07	43.50	-20.43	QP	
3		229.8200	38.05	-15.84	22.21	46.00	-23.79	QP	
4		291.9000	35.01	-13.65	21.36	46.00	-24.64	QP	
5		339.4300	36.85	-12.47	24.38	46.00	-21.62	QP	
6		935.0100	34.15	-2.08	32.07	46.00	-13.93	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Camera on
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: Desay

## Vertical

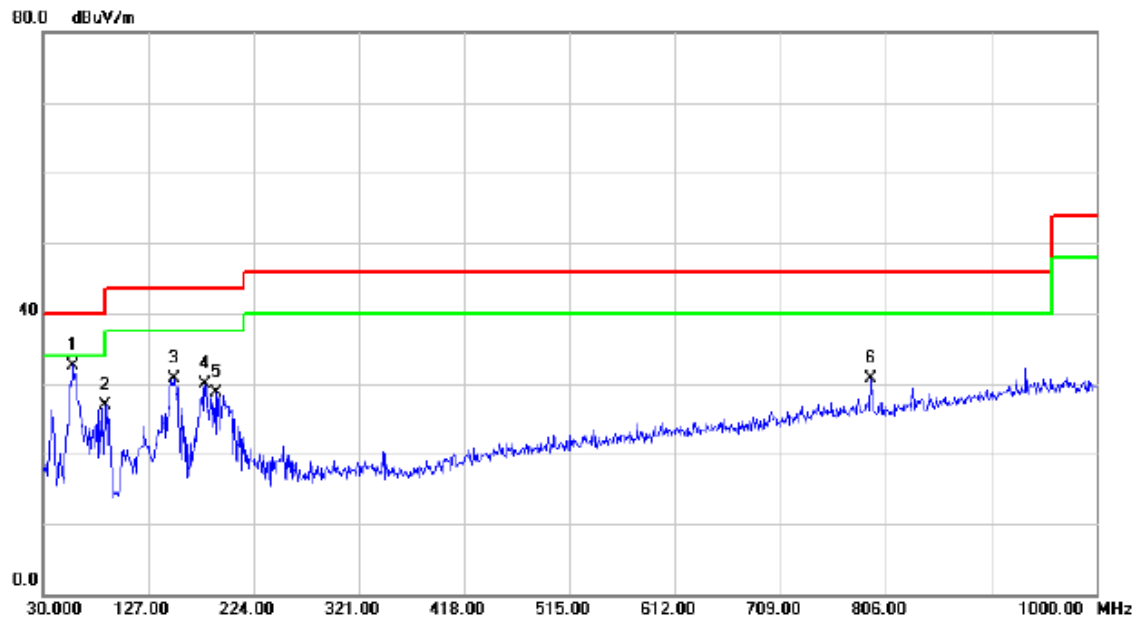

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	58.1300	47.15	-14.55	32.60	40.00	-7.40	QP	
2		87.2300	46.69	-19.70	26.99	40.00	-13.01	QP	
3		151.2500	44.69	-14.04	30.65	43.50	-12.85	QP	
4		179.3800	45.20	-15.36	29.84	43.50	-13.66	QP	
5		190.0500	45.43	-16.68	28.75	43.50	-14.75	QP	
6		792.4200	35.57	-4.78	30.79	46.00	-15.21	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Camera on
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: Desay


## Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		58.1300	33.90	-14.55	19.35	40.00	-20.65	QP	
2	*	151.2500	44.42	-14.04	30.38	43.50	-13.12	QP	
3		192.9600	38.82	-16.70	22.12	43.50	-21.38	QP	
4		226.9100	38.81	-16.07	22.74	46.00	-23.26	QP	
5		337.4900	37.43	-12.52	24.91	46.00	-21.09	QP	
6		792.4200	36.07	-4.78	31.29	46.00	-14.71	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+2.4GHz WIFI+GPS
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: Desay


### Vertical

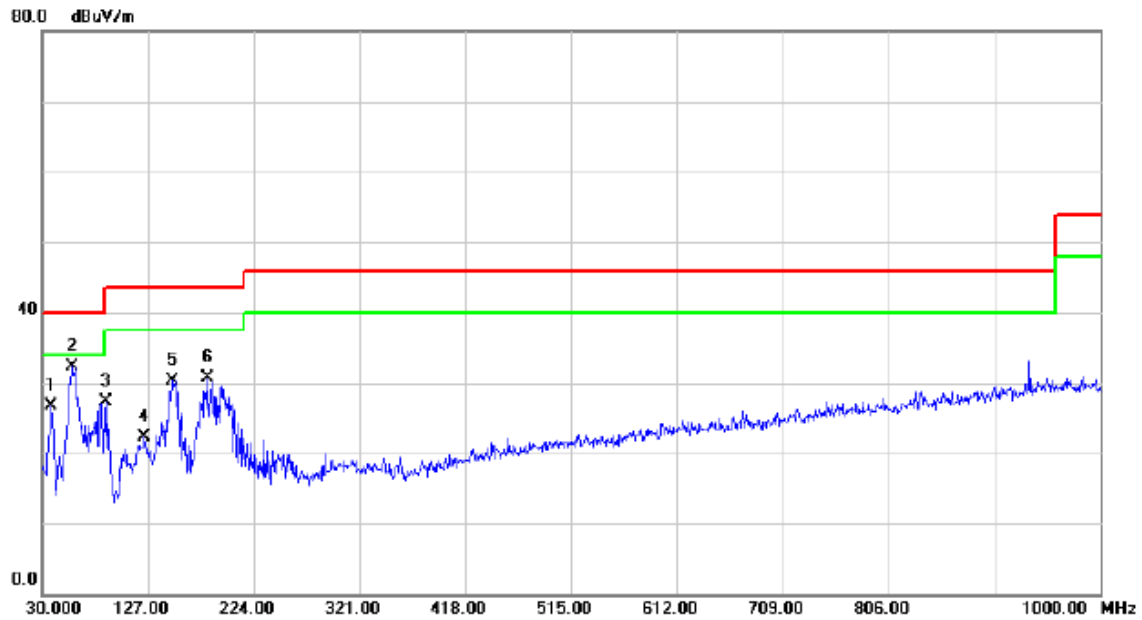

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		37.7600	41.38	-14.62	26.76	40.00	-13.24	QP	
2	*	58.1300	46.81	-14.55	32.26	40.00	-7.74	QP	
3		88.2000	47.28	-19.92	27.36	43.50	-16.14	QP	
4		124.0900	38.09	-15.84	22.25	43.50	-21.25	QP	
5		149.3100	44.46	-14.07	30.39	43.50	-13.11	QP	
6		181.3200	46.39	-15.60	30.79	43.50	-12.71	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+2.4GHz WIFI+GPS
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: Desay


## Horizontal

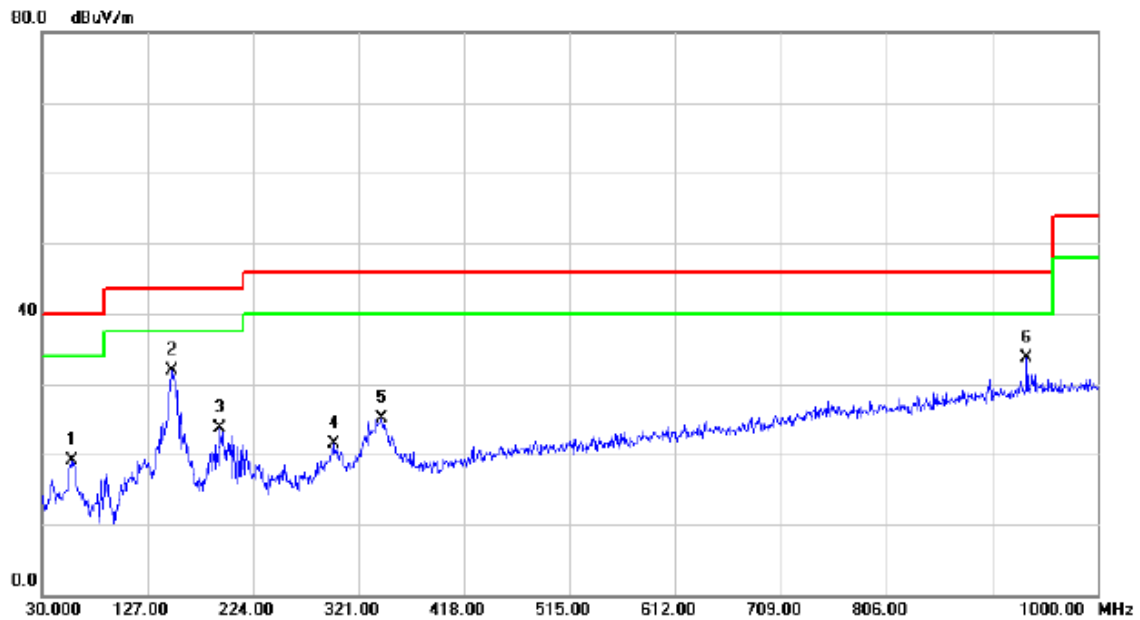

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		58.1300	33.73	-14.55	19.18	40.00	-20.82	QP	
2	*	149.3100	45.97	-14.07	31.90	43.50	-11.60	QP	
3		192.9600	40.41	-16.70	23.71	43.50	-19.79	QP	
4		297.7200	35.13	-13.54	21.59	46.00	-24.41	QP	
5		342.3400	37.54	-12.41	25.13	46.00	-20.87	QP	
6		935.0100	35.83	-2.08	33.75	46.00	-12.25	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+2.4GHz WIFI+GPS
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: Desay


## Vertical

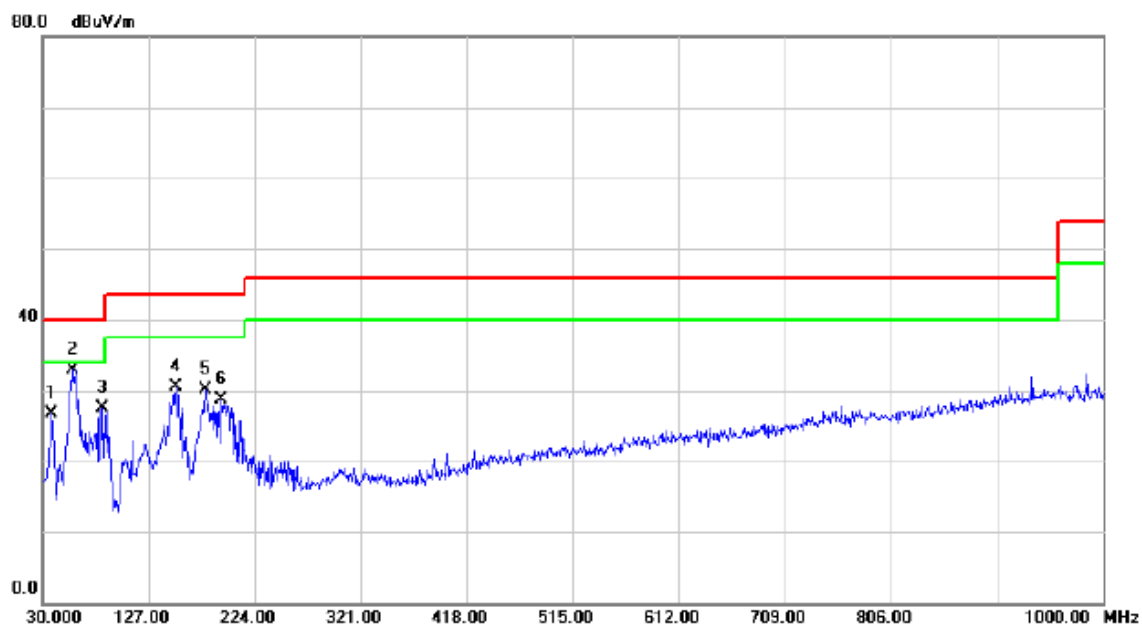

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		38.7300	41.08	-14.44	26.64	40.00	-13.36	QP	
2	*	57.1600	47.40	-14.44	32.96	40.00	-7.04	QP	
3		85.2900	46.79	-19.27	27.52	40.00	-12.48	QP	
4		152.2200	44.62	-14.03	30.59	43.50	-12.91	QP	
5		179.3800	45.42	-15.36	30.06	43.50	-13.44	QP	
6		193.9300	45.36	-16.70	28.66	43.50	-14.84	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+2.4GHz WIFI+GPS
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: Desay


## Horizontal

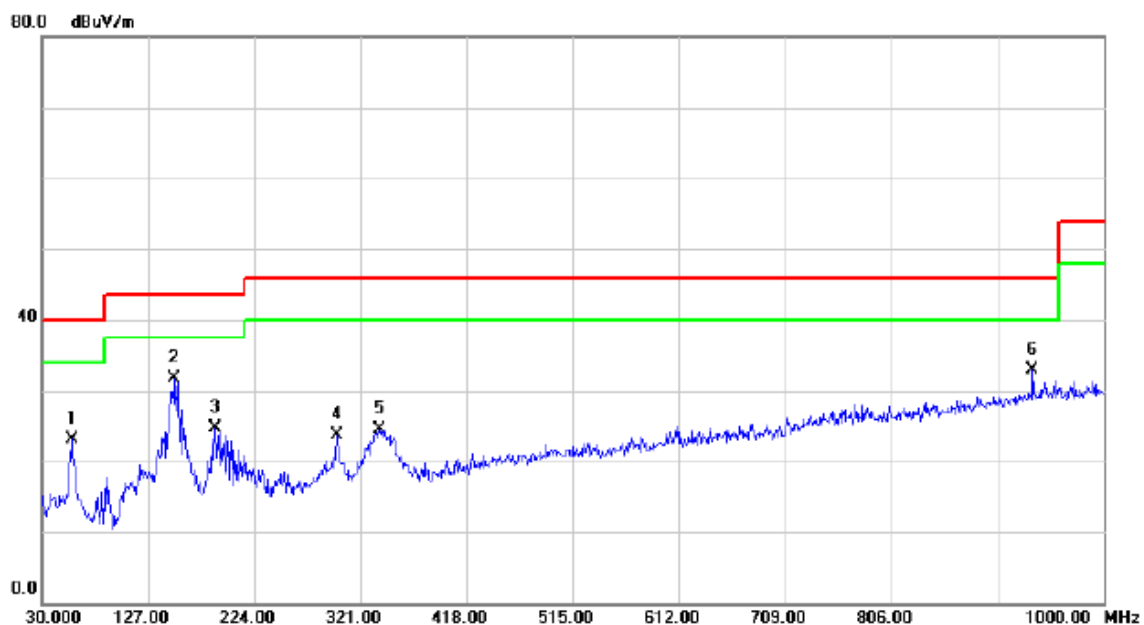

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		57.1600	37.49	-14.44	23.05	40.00	-16.95	QP	
2	*	151.2500	45.76	-14.04	31.72	43.50	-11.78	QP	
3		188.1100	41.14	-16.44	24.70	43.50	-18.80	QP	
4		299.6600	37.11	-13.50	23.61	46.00	-22.39	QP	
5		338.4600	37.07	-12.49	24.58	46.00	-21.42	QP	
6		935.0100	35.00	-2.08	32.92	46.00	-13.08	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+LTE+BT+2.4GHz WIFI+GPS
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: Desay


## Vertical

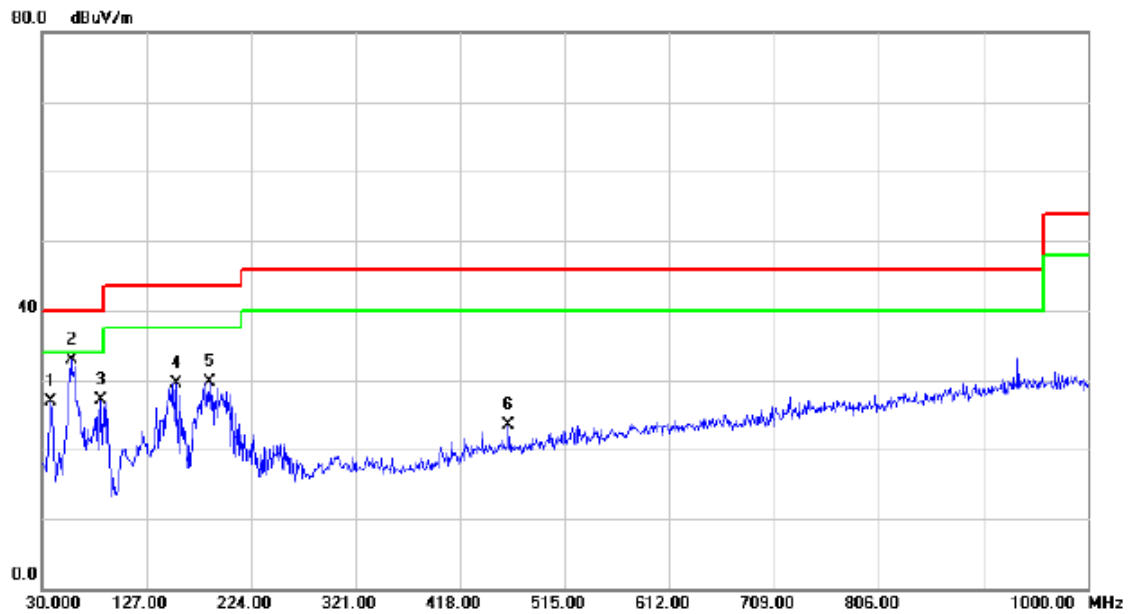

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		38.7300	41.44	-14.44	27.00	40.00	-13.00	QP	
2	*	57.1600	47.30	-14.44	32.86	40.00	-7.14	QP	
3		85.2900	46.44	-19.27	27.17	40.00	-12.83	QP	
4		154.1600	43.58	-14.00	29.58	43.50	-13.92	QP	
5		185.2000	45.79	-16.07	29.72	43.50	-13.78	QP	
6		462.6200	33.13	-9.58	23.55	46.00	-22.45	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+LTE+BT+2.4GHz WIFI+GPS
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: Desay


## Horizontal

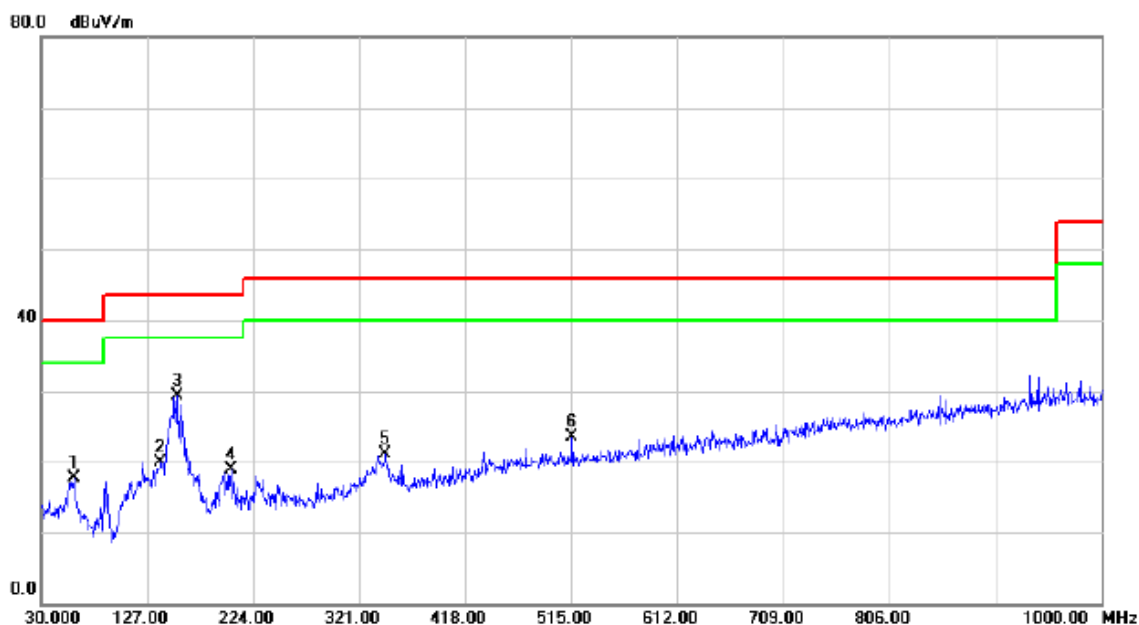

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		60.0700	32.39	-14.75	17.64	40.00	-22.36	peak	
2		139.6100	34.43	-14.48	19.95	43.50	-23.55	peak	
3	*	154.1600	43.40	-14.00	29.40	43.50	-14.10	peak	
4		203.6300	35.49	-16.66	18.83	43.50	-24.67	peak	
5		345.2500	33.46	-12.34	21.12	46.00	-24.88	peak	
6		515.9700	32.39	-8.89	23.50	46.00	-22.50	peak	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS
Note:	USB Cable: HONGLIN


## Vertical

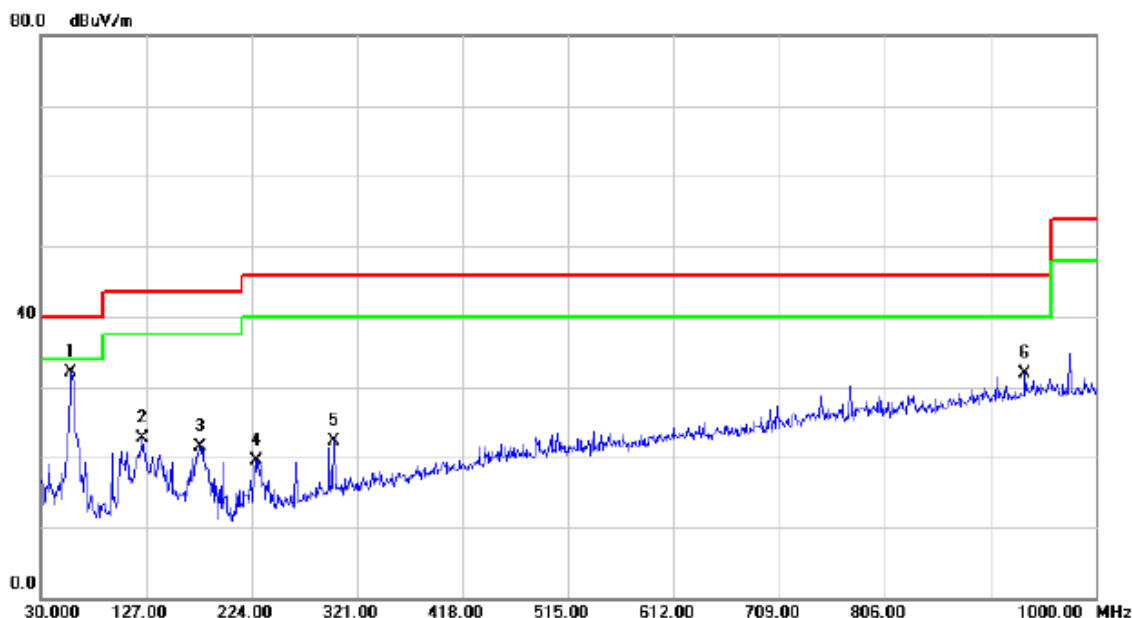

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	58.1300	46.66	-14.55	32.11	40.00	-7.89	QP	
2		124.0900	38.56	-15.84	22.72	43.50	-20.78	QP	
3		176.4700	36.64	-15.07	21.57	43.50	-21.93	QP	
4		228.8500	35.52	-15.92	19.60	46.00	-26.40	QP	
5		299.6600	35.78	-13.50	22.28	46.00	-23.72	QP	
6		935.0100	33.93	-2.08	31.85	46.00	-14.15	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS
Note:	USB Cable: HONGLIN


## Horizontal

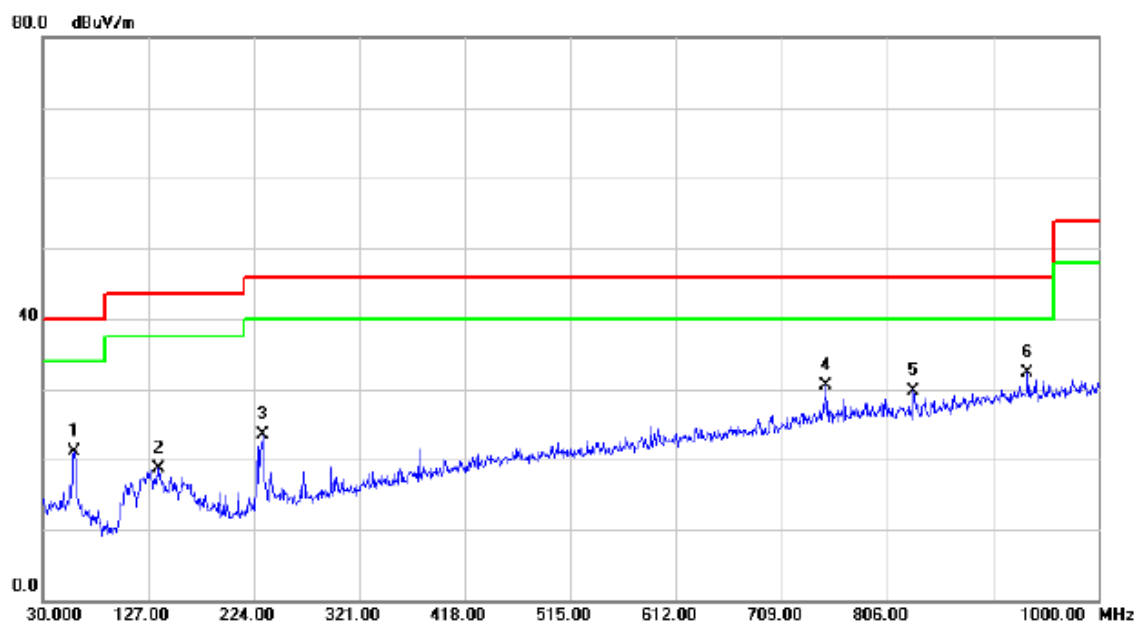

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		59.1000	35.71	-14.64	21.07	40.00	-18.93	QP	
2		136.7000	33.42	-14.73	18.69	43.50	-24.81	QP	
3		231.7600	39.22	-15.72	23.50	46.00	-22.50	QP	
4		749.7400	35.47	-5.01	30.46	46.00	-15.54	QP	
5		830.2500	34.00	-4.20	29.80	46.00	-16.20	QP	
6	*	935.0100	34.36	-2.08	32.28	46.00	-13.72	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS
Note:	USB Cable: FOXCONN


### Vertical

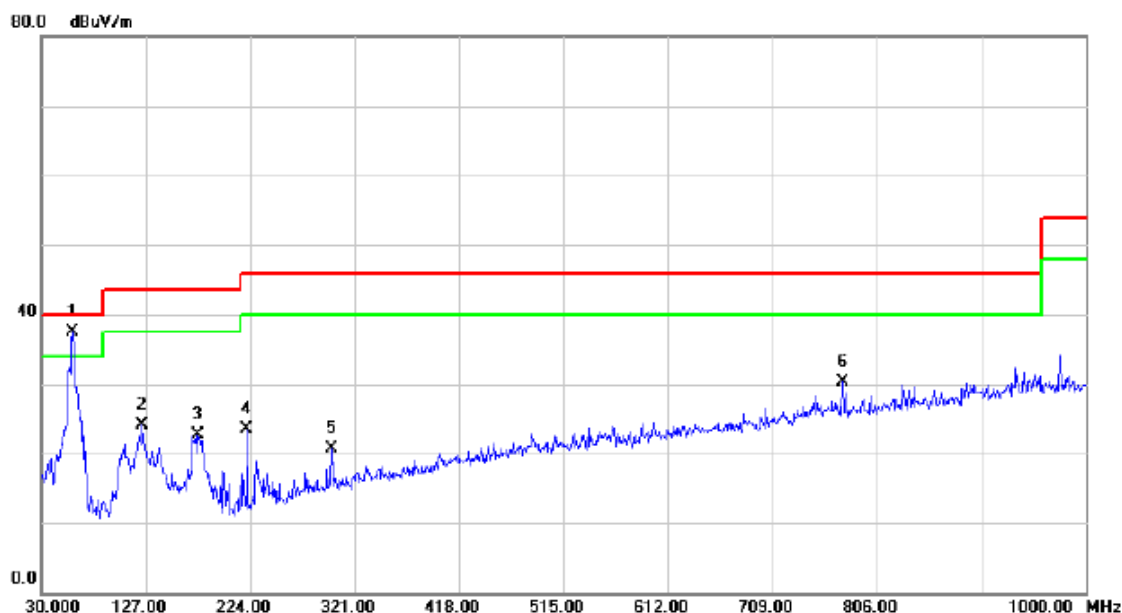

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	59.1000	52.07	-14.64	37.43	40.00	-2.57	QP	
2		124.0900	39.86	-15.84	24.02	43.50	-19.48	QP	
3		175.5000	37.76	-14.97	22.79	43.50	-20.71	QP	
4		221.0900	39.96	-16.49	23.47	46.00	-22.53	QP	
5		299.6600	34.12	-13.50	20.62	46.00	-25.38	QP	
6		773.9900	35.26	-4.88	30.38	46.00	-15.62	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS
Note:	USB Cable: FOXCONN


## Horizontal

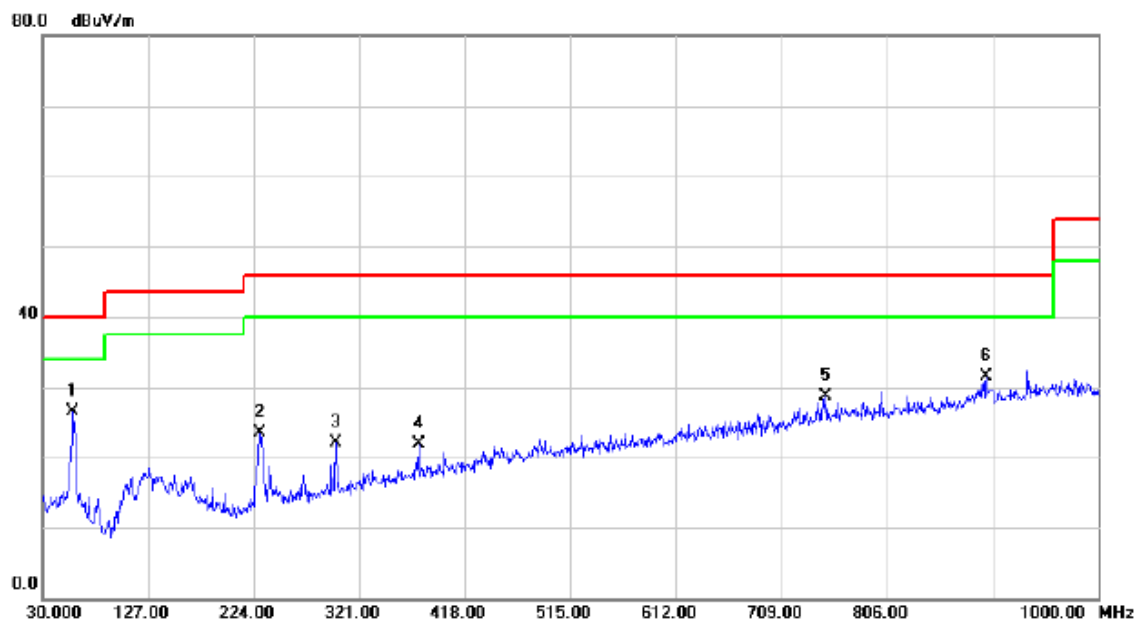

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	58.1300	40.99	-14.55	26.44	40.00	-13.56	QP	
2		229.8200	39.36	-15.84	23.52	46.00	-22.48	QP	
3		299.6600	35.51	-13.50	22.01	46.00	-23.99	QP	
4		375.3200	33.69	-11.71	21.98	46.00	-24.02	QP	
5		749.7400	33.70	-5.01	28.69	46.00	-17.31	QP	
6		897.1800	34.40	-2.89	31.51	46.00	-14.49	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS
Note:	USB Cable: LUXSHARE-ICT


### Vertical

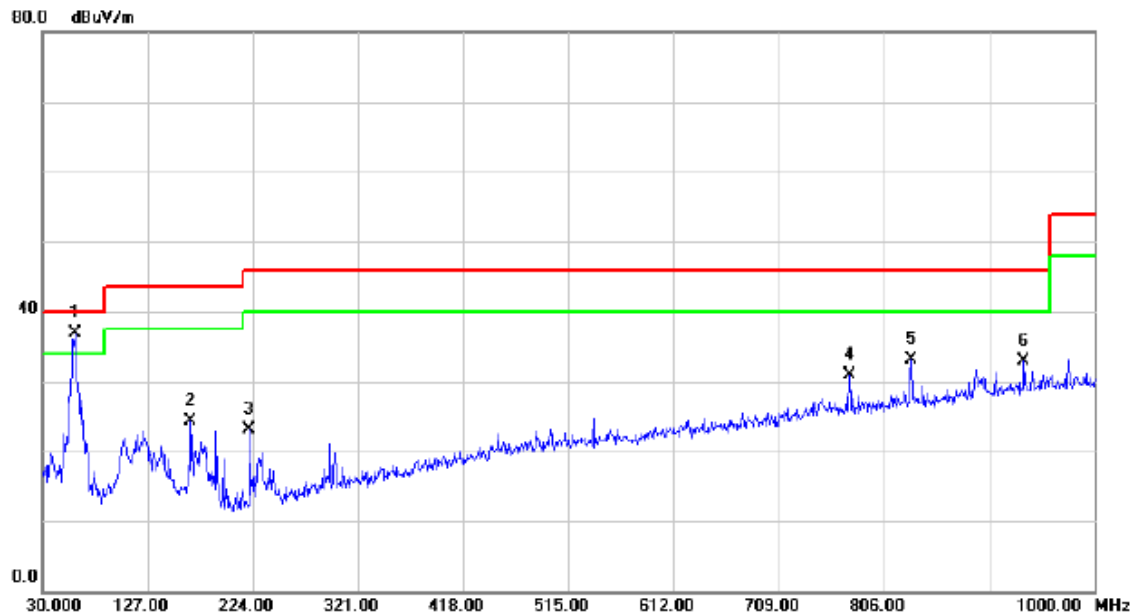

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	60.0700	51.66	-14.75	36.91	40.00	-3.09	QP	
2		166.7700	38.51	-14.26	24.25	43.50	-19.25	QP	
3		221.0900	39.56	-16.49	23.07	46.00	-22.93	QP	
4		773.9900	35.69	-4.88	30.81	46.00	-15.19	QP	
5		831.2200	37.34	-4.18	33.16	46.00	-12.84	QP	
6		935.0100	34.94	-2.08	32.86	46.00	-13.14	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS
Note:	USB Cable: LUXSHARE-ICT


## Horizontal

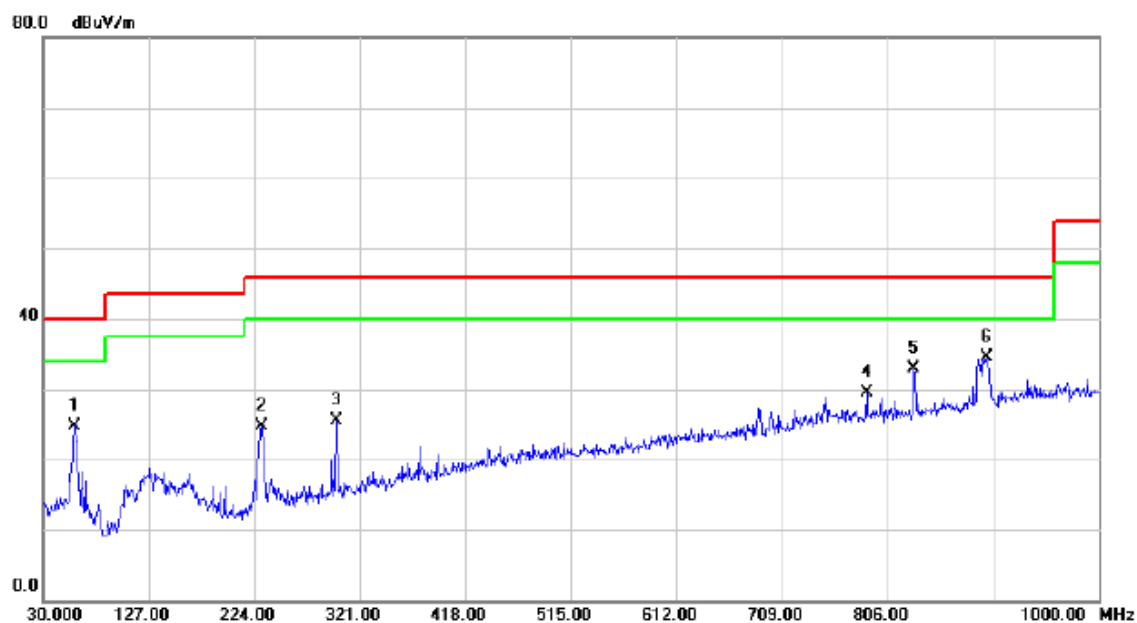

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		59.1000	39.44	-14.64	24.80	40.00	-15.20	QP	
2		230.7900	40.52	-15.78	24.74	46.00	-21.26	QP	
3		299.6600	39.03	-13.50	25.53	46.00	-20.47	QP	
4		786.6000	34.29	-4.81	29.48	46.00	-16.52	QP	
5		830.2500	37.04	-4.20	32.84	46.00	-13.16	QP	
6	*	897.1800	37.31	-2.89	34.42	46.00	-11.58	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+5GHz WIFI+GPS
Note:	USB Cable: FOXCONN


## Vertical

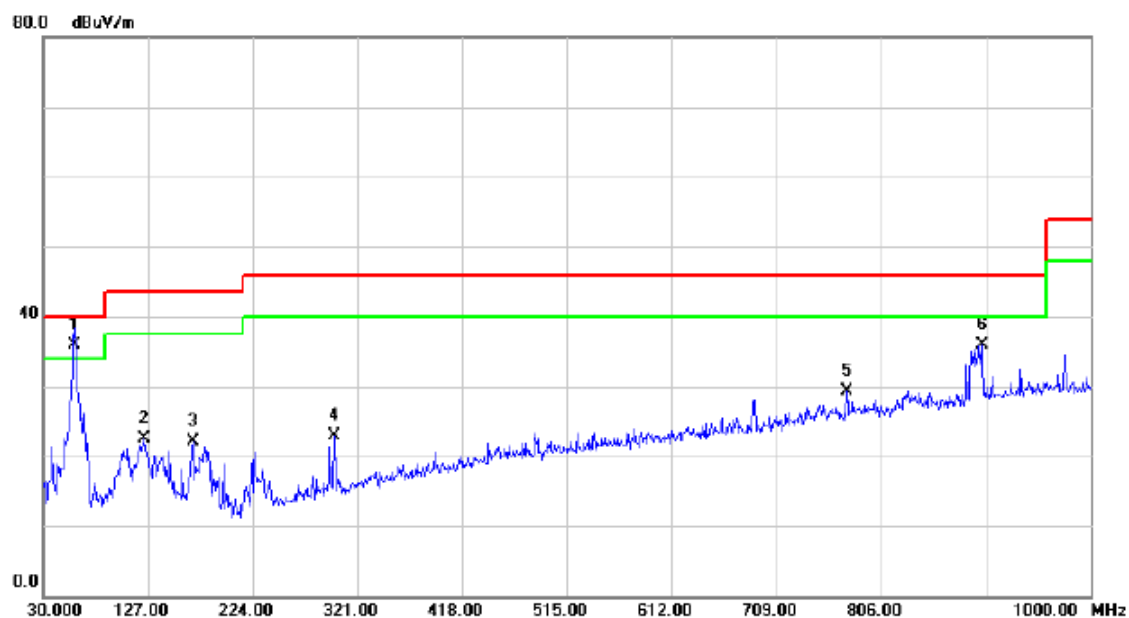

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	59.1000	50.64	-14.64	36.00	40.00	-4.00	QP	
2		124.0900	38.34	-15.84	22.50	43.50	-21.00	QP	
3		168.7100	36.43	-14.36	22.07	43.50	-21.43	QP	
4		299.6600	36.40	-13.50	22.90	46.00	-23.10	QP	
5		773.9900	34.16	-4.88	29.28	46.00	-16.72	QP	
6		899.1200	38.74	-2.85	35.89	46.00	-10.11	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+5GHz WIFI+GPS
Note:	USB Cable: FOXCONN

## Horizontal

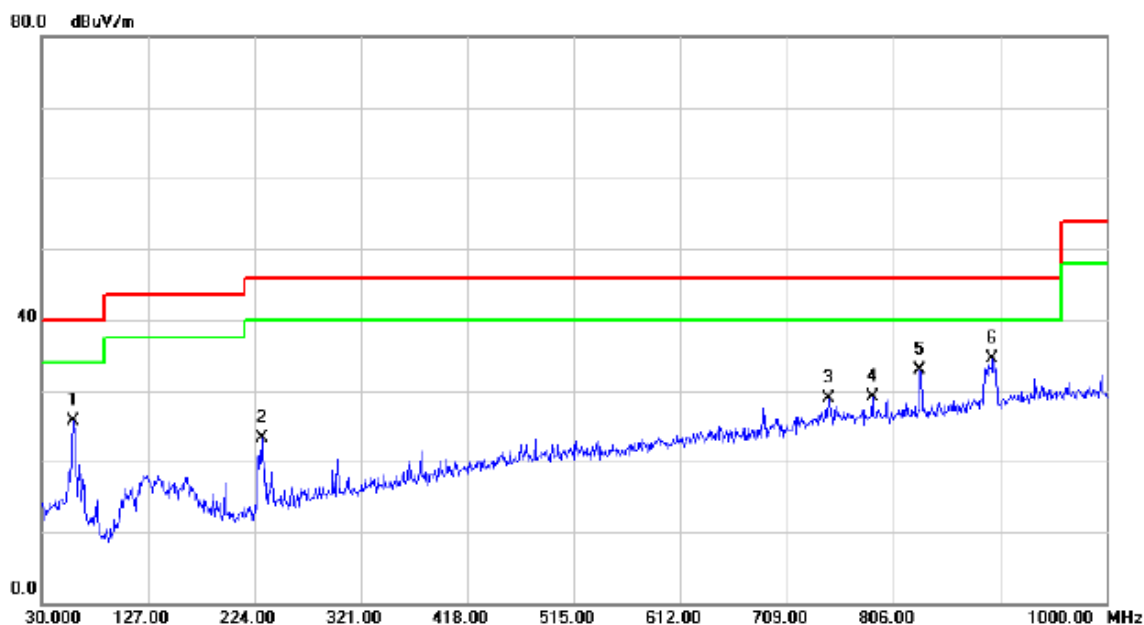


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		59.1000	40.39	-14.64	25.75	40.00	-14.25	QP	
2		230.7900	39.10	-15.78	23.32	46.00	-22.68	QP	
3		746.8300	34.04	-5.04	29.00	46.00	-17.00	QP	
4		786.6000	33.84	-4.81	29.03	46.00	-16.97	QP	
5		830.2500	37.05	-4.20	32.85	46.00	-13.15	QP	
6	*	896.2100	37.49	-2.90	34.59	46.00	-11.41	QP	

**ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)**

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: LIANCHUANG


## Vertical

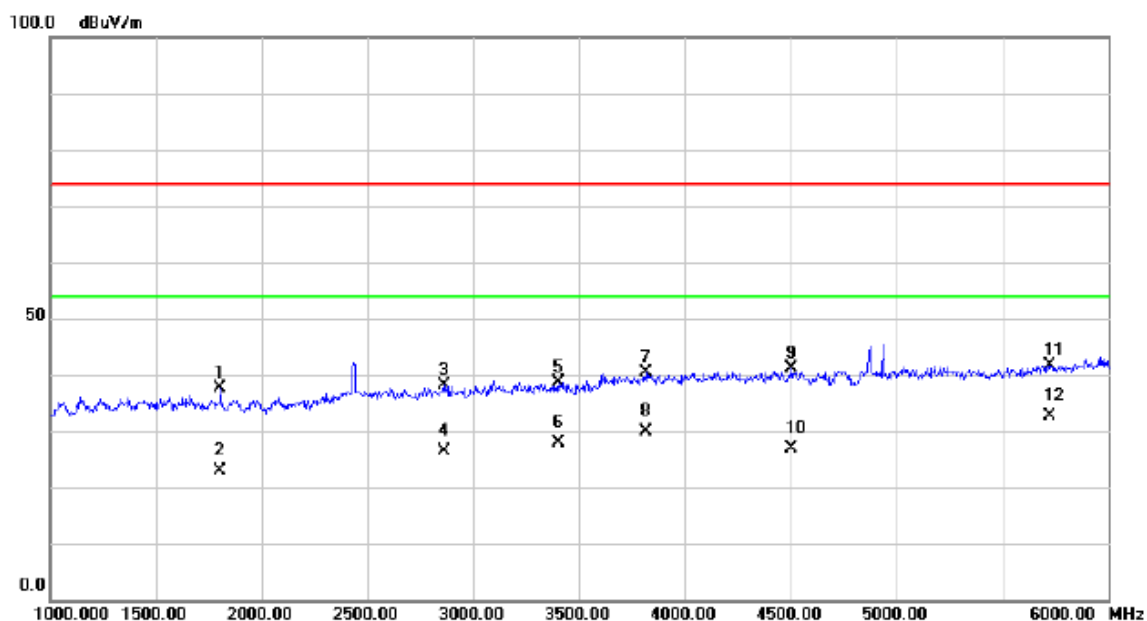

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1805.000	41.00	-3.33	37.67	74.00	-36.33	peak	
2		1805.000	26.30	-3.33	22.97	54.00	-31.03	AVG	
3		2860.000	37.16	0.97	38.13	74.00	-35.87	peak	
4		2860.000	25.40	0.97	26.37	54.00	-27.63	AVG	
5		3400.000	36.09	2.64	38.73	74.00	-35.27	peak	
6		3400.000	25.30	2.64	27.94	54.00	-26.06	AVG	
7		3815.000	36.28	4.19	40.47	74.00	-33.53	peak	
8		3815.000	25.60	4.19	29.79	54.00	-24.21	AVG	
9		4505.000	35.35	5.67	41.02	74.00	-32.98	peak	
10		4505.000	21.30	5.67	26.97	54.00	-27.03	AVG	
11		5720.000	32.82	8.88	41.70	74.00	-32.30	peak	
12	*	5720.000	23.70	8.88	32.58	54.00	-21.42	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: LIANCHUANG


## Horizontal

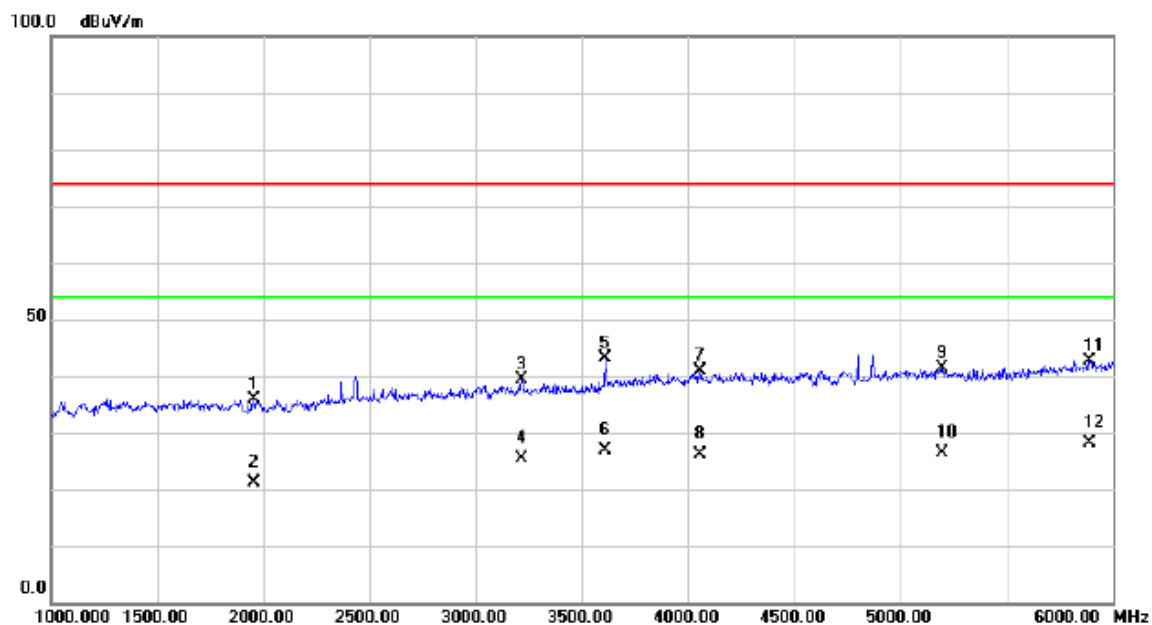

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1957.500	39.01	-3.12	35.89	74.00	-38.11	peak	
2	1957.500	24.30	-3.12	21.18	54.00	-32.82	AVG	
3	3217.500	37.24	2.10	39.34	74.00	-34.66	peak	
4	3217.500	23.20	2.10	25.30	54.00	-28.70	AVG	
5	3610.000	39.66	3.37	43.03	74.00	-30.97	peak	
6	3610.000	23.60	3.37	26.97	54.00	-27.03	AVG	
7	4057.500	35.99	5.00	40.99	74.00	-33.01	peak	
8	4057.500	21.10	5.00	26.10	54.00	-27.90	AVG	
9	5197.500	33.91	7.57	41.48	74.00	-32.52	peak	
10	5197.500	18.90	7.57	26.47	54.00	-27.53	AVG	
11	5892.500	33.09	9.57	42.66	74.00	-31.34	peak	
12 *	5892.500	18.50	9.57	28.07	54.00	-25.93	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: LIANCHUANG


## Vertical

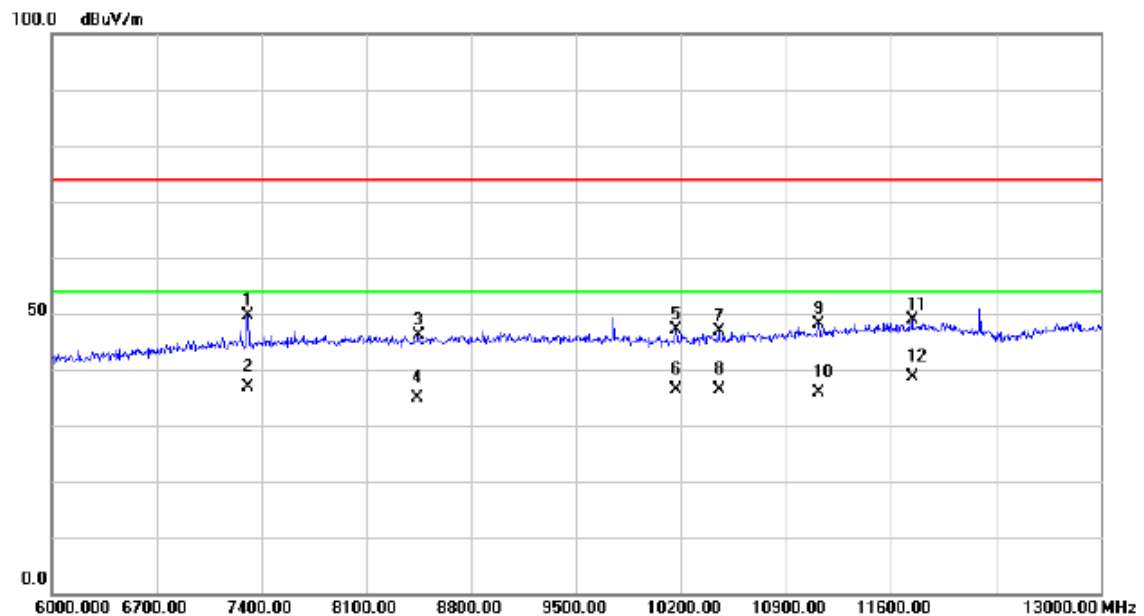

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7312.500	36.16	13.55	49.71	74.00	-24.29	peak	
2		7312.500	23.29	13.55	36.84	54.00	-17.16	AVG	
3		8446.500	31.64	14.44	46.08	74.00	-27.92	peak	
4		8446.500	20.40	14.44	34.84	54.00	-19.16	AVG	
5		10168.50	31.24	15.82	47.06	74.00	-26.94	peak	
6		10168.50	20.60	15.82	36.42	54.00	-17.58	AVG	
7		10455.50	30.24	16.56	46.80	74.00	-27.20	peak	
8		10455.50	19.80	16.56	36.36	54.00	-17.64	AVG	
9		11117.00	29.76	18.32	48.08	74.00	-25.92	peak	
10		11117.00	17.60	18.32	35.92	54.00	-18.08	AVG	
11		11740.00	28.67	20.11	48.78	74.00	-25.22	peak	
12	*	11740.00	18.50	20.11	38.61	54.00	-15.39	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone
Note:	Adapter: BYD +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: LIANCHUANG


## Horizontal

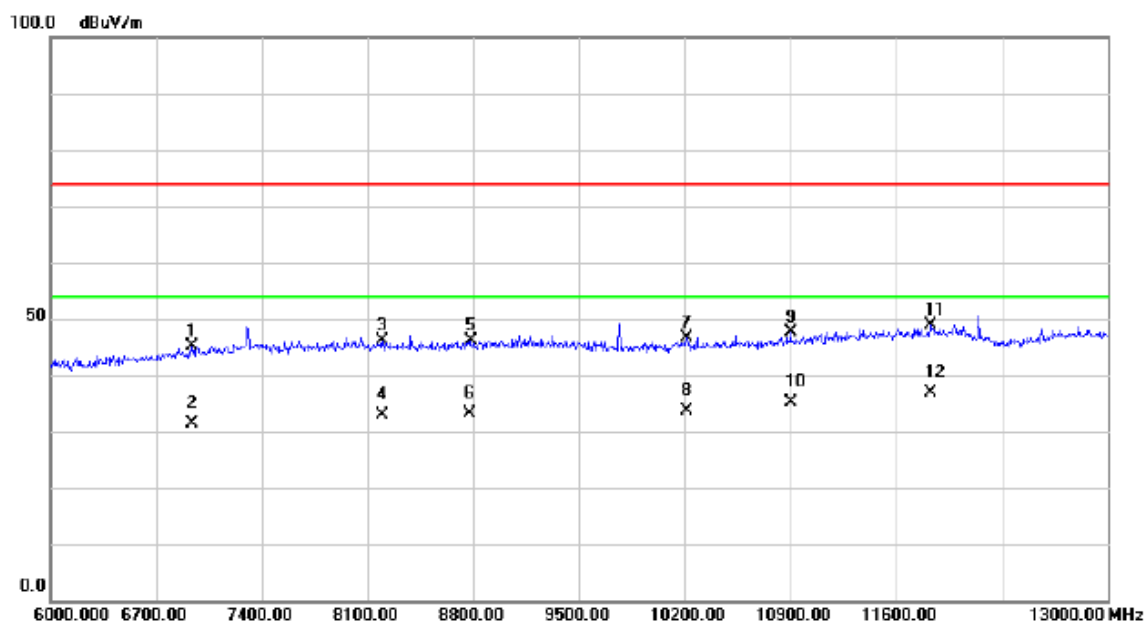

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6938.000	32.24	12.89	45.13	74.00	-28.87	peak	
2		6938.000	18.60	12.89	31.49	54.00	-22.51	AVG	
3		8201.500	31.72	14.46	46.18	74.00	-27.82	peak	
4		8201.500	18.30	14.46	32.76	54.00	-21.24	AVG	
5		8782.500	31.18	14.93	46.11	74.00	-27.89	peak	
6		8782.500	18.10	14.93	33.03	54.00	-20.97	AVG	
7		10214.00	30.77	15.93	46.70	74.00	-27.30	peak	
8		10214.00	17.60	15.93	33.53	54.00	-20.47	AVG	
9		10903.50	29.90	17.72	47.62	74.00	-26.38	peak	
10		10903.50	17.40	17.72	35.12	54.00	-18.88	AVG	
11		11831.00	28.40	20.36	48.76	74.00	-25.24	peak	
12	*	11831.00	16.50	20.36	36.86	54.00	-17.14	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD + Earphone: QUANCHENG


## Vertical

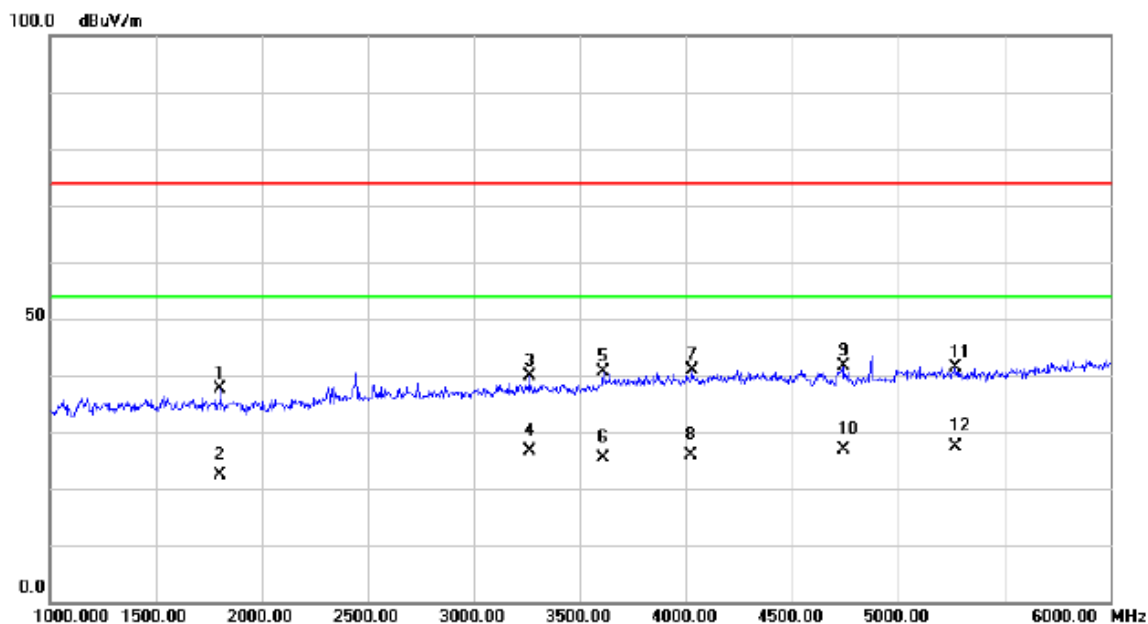

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1805.000	40.86	-3.33	37.53	74.00	-36.47	peak	
2		1805.000	25.60	-3.33	22.27	54.00	-31.73	AVG	
3		3262.500	37.60	2.24	39.84	74.00	-34.16	peak	
4		3262.500	24.30	2.24	26.54	54.00	-27.46	AVG	
5		3610.000	37.20	3.37	40.57	74.00	-33.43	peak	
6		3610.000	22.10	3.37	25.47	54.00	-28.53	AVG	
7		4027.500	35.81	4.96	40.77	74.00	-33.23	peak	
8		4027.500	20.80	4.96	25.76	54.00	-28.24	AVG	
9		4742.500	35.08	6.44	41.52	74.00	-32.48	peak	
10		4742.500	20.50	6.44	26.94	54.00	-27.06	AVG	
11		5270.000	33.78	7.67	41.45	74.00	-32.55	peak	
12	*	5270.000	19.80	7.67	27.47	54.00	-26.53	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD + Earphone: QUANCHENG


## Horizontal

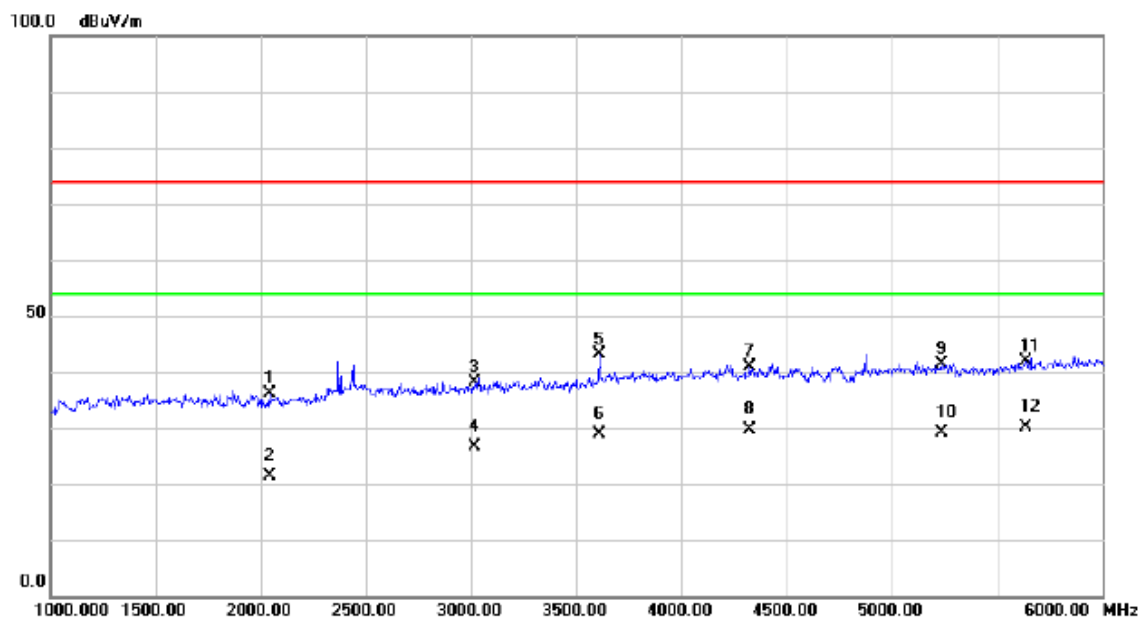

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2042.500	38.84	-2.83	36.01	74.00	-37.99	peak	
2		2042.500	24.30	-2.83	21.47	54.00	-32.53	AVG	
3		3017.500	36.65	1.52	38.17	74.00	-35.83	peak	
4		3017.500	25.10	1.52	26.62	54.00	-27.38	AVG	
5		3610.000	39.66	3.37	43.03	74.00	-30.97	peak	
6		3610.000	25.60	3.37	28.97	54.00	-25.03	AVG	
7		4322.500	35.57	5.39	40.96	74.00	-33.04	peak	
8		4322.500	24.20	5.39	29.59	54.00	-24.41	AVG	
9		5235.000	33.71	7.62	41.33	74.00	-32.67	peak	
10		5235.000	21.50	7.62	29.12	54.00	-24.88	AVG	
11		5635.000	33.23	8.54	41.77	74.00	-32.23	peak	
12	*	5635.000	21.60	8.54	30.14	54.00	-23.86	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD + Earphone: QUANCHENG


## Vertical

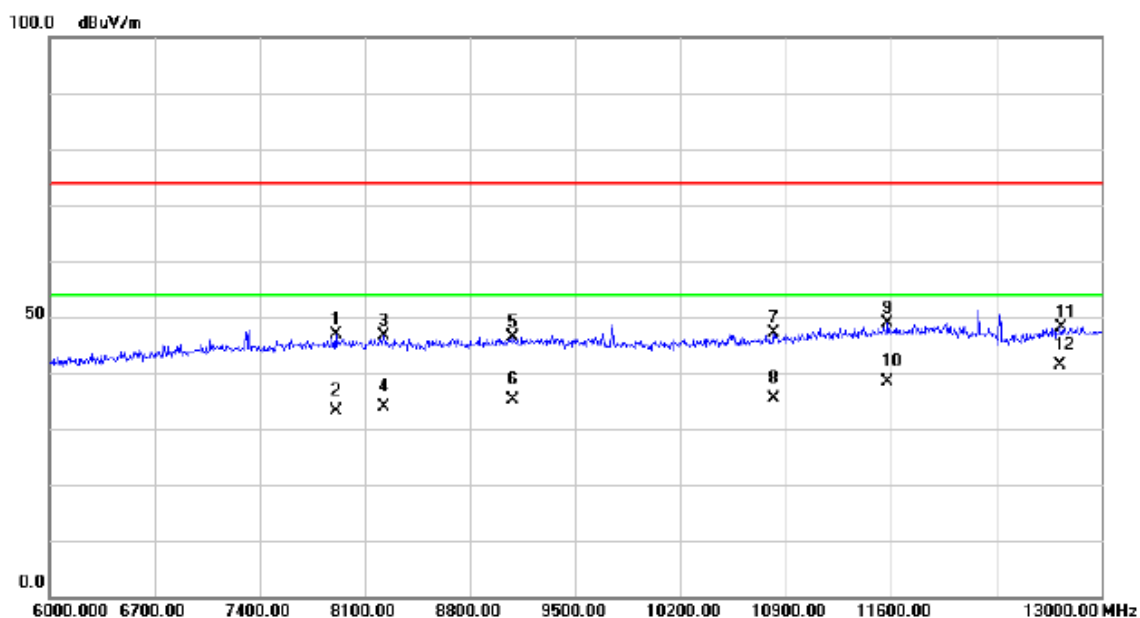

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7907.500	32.44	14.35	46.79	74.00	-27.21	peak	
2		7907.500	18.70	14.35	33.05	54.00	-20.95	AVG	
3		8229.500	32.27	14.45	46.72	74.00	-27.28	peak	
4		8229.500	19.40	14.45	33.85	54.00	-20.15	AVG	
5		9087.000	31.04	15.34	46.38	74.00	-27.62	peak	
6		9087.000	19.90	15.34	35.24	54.00	-18.76	AVG	
7		10819.500	29.58	17.49	47.07	74.00	-26.93	peak	
8		10819.500	17.80	17.49	35.29	54.00	-18.71	AVG	
9		11579.000	29.18	19.68	48.86	74.00	-25.14	peak	
10		11579.000	18.60	19.68	38.28	54.00	-15.72	AVG	
11		12730.500	26.88	21.21	48.09	74.00	-25.91	peak	
12	*	12730.500	20.20	21.21	41.41	54.00	-12.59	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD + Earphone: QUANCHENG


## Horizontal

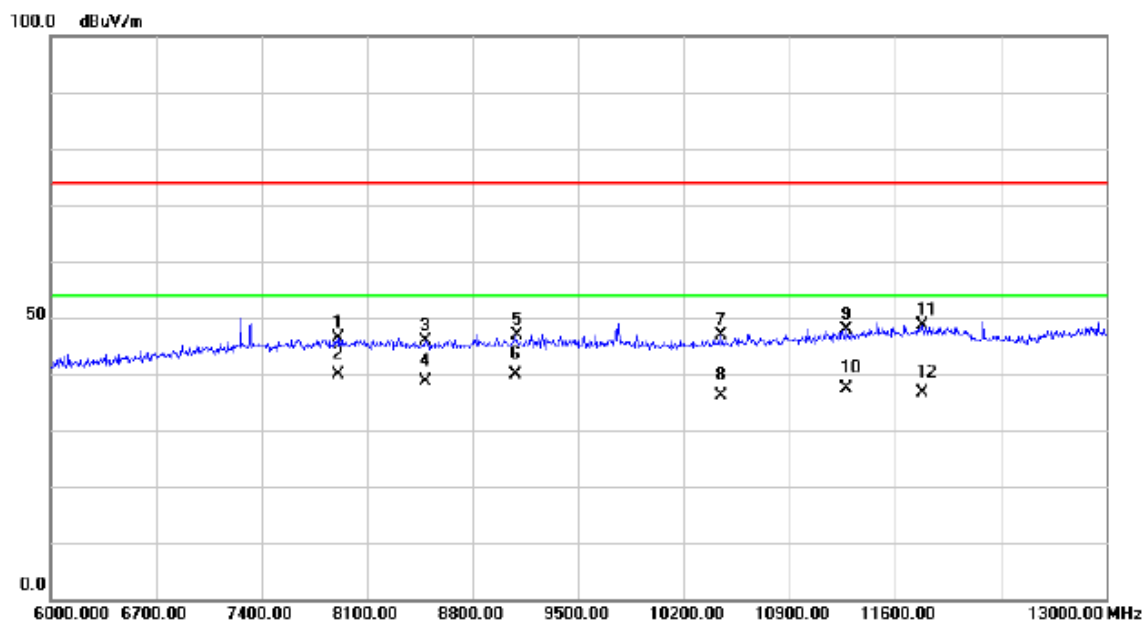

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7904.000	31.95	14.35	46.30	74.00	-27.70	peak	
2	*	7904.000	25.60	14.35	39.95	54.00	-14.05	AVG	
3		8488.500	31.37	14.43	45.80	74.00	-28.20	peak	
4		8488.500	24.30	14.43	38.73	54.00	-15.27	AVG	
5		9090.500	31.48	15.35	46.83	74.00	-27.17	peak	
6		9090.500	24.50	15.35	39.85	54.00	-14.15	AVG	
7		10448.50	30.34	16.54	46.88	74.00	-27.12	peak	
8		10448.50	19.70	16.54	36.24	54.00	-17.76	AVG	
9		11281.50	29.17	18.80	47.97	74.00	-26.03	peak	
10		11281.50	18.60	18.80	37.40	54.00	-16.60	AVG	
11		11782.00	28.36	20.22	48.58	74.00	-25.42	peak	
12		11782.00	16.50	20.22	36.72	54.00	-17.28	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay + Earphone: QUANCHENG


## Vertical

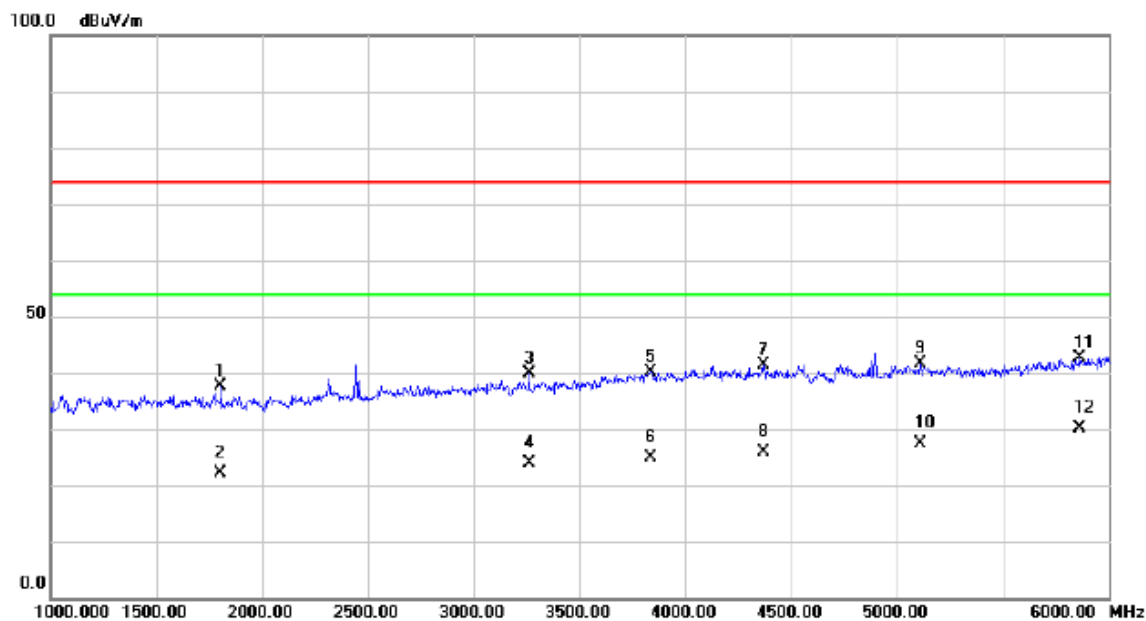

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1805.000	41.06	-3.33	37.73	74.00	-36.27	peak	
2		1805.000	25.50	-3.33	22.17	54.00	-31.83	AVG	
3		3262.500	37.66	2.24	39.90	74.00	-34.10	peak	
4		3262.500	21.60	2.24	23.84	54.00	-30.16	AVG	
5		3835.000	35.84	4.26	40.10	74.00	-33.90	peak	
6		3835.000	20.70	4.26	24.96	54.00	-29.04	AVG	
7		4370.000	35.80	5.46	41.26	74.00	-32.74	peak	
8		4370.000	20.50	5.46	25.96	54.00	-28.04	AVG	
9		5112.500	34.16	7.46	41.62	74.00	-32.38	peak	
10		5112.500	19.80	7.46	27.26	54.00	-26.74	AVG	
11		5862.500	33.16	9.45	42.61	74.00	-31.39	peak	
12	*	5862.500	20.60	9.45	30.05	54.00	-23.95	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay + Earphone: QUANCHENG


## Horizontal

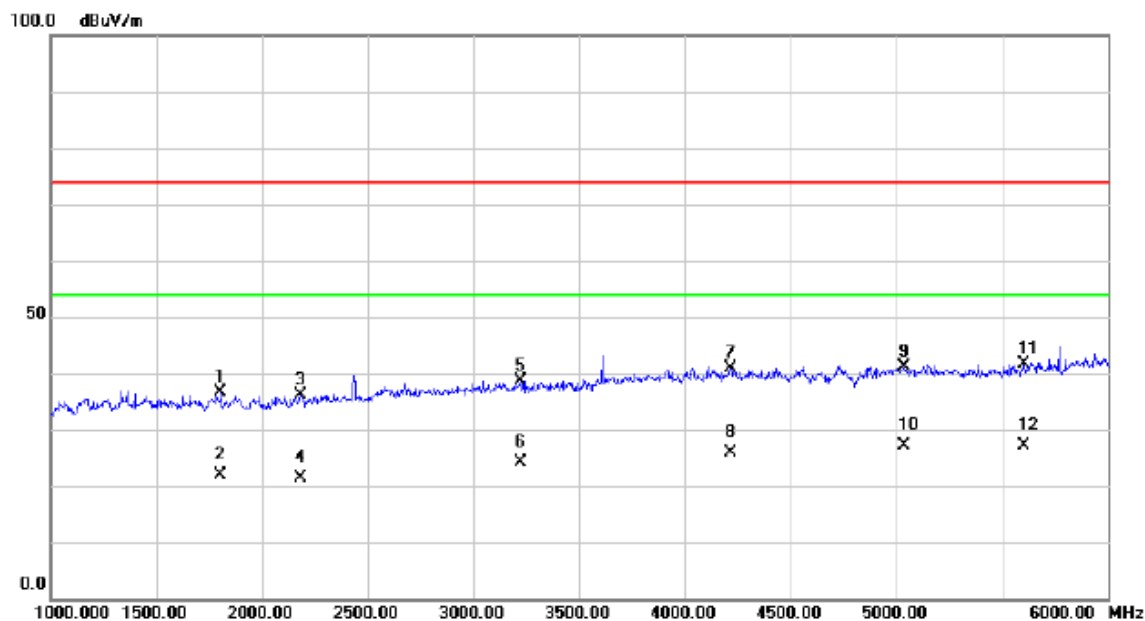

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1805.000	39.85	-3.33	36.52	74.00	-37.48	peak	
2		1805.000	25.30	-3.33	21.97	54.00	-32.03	AVG	
3		2182.500	38.28	-2.06	36.22	74.00	-37.78	peak	
4		2182.500	23.40	-2.06	21.34	54.00	-32.66	AVG	
5		3220.000	36.60	2.12	38.72	74.00	-35.28	peak	
6		3220.000	22.10	2.12	24.22	54.00	-29.78	AVG	
7		4217.500	35.55	5.23	40.78	74.00	-33.22	peak	
8		4217.500	20.60	5.23	25.83	54.00	-28.17	AVG	
9		5035.000	33.85	7.34	41.19	74.00	-32.81	peak	
10		5035.000	19.70	7.34	27.04	54.00	-26.96	AVG	
11		5605.000	33.27	8.42	41.69	74.00	-32.31	peak	
12	*	5605.000	18.80	8.42	27.22	54.00	-26.78	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay + Earphone: QUANCHENG


## Vertical

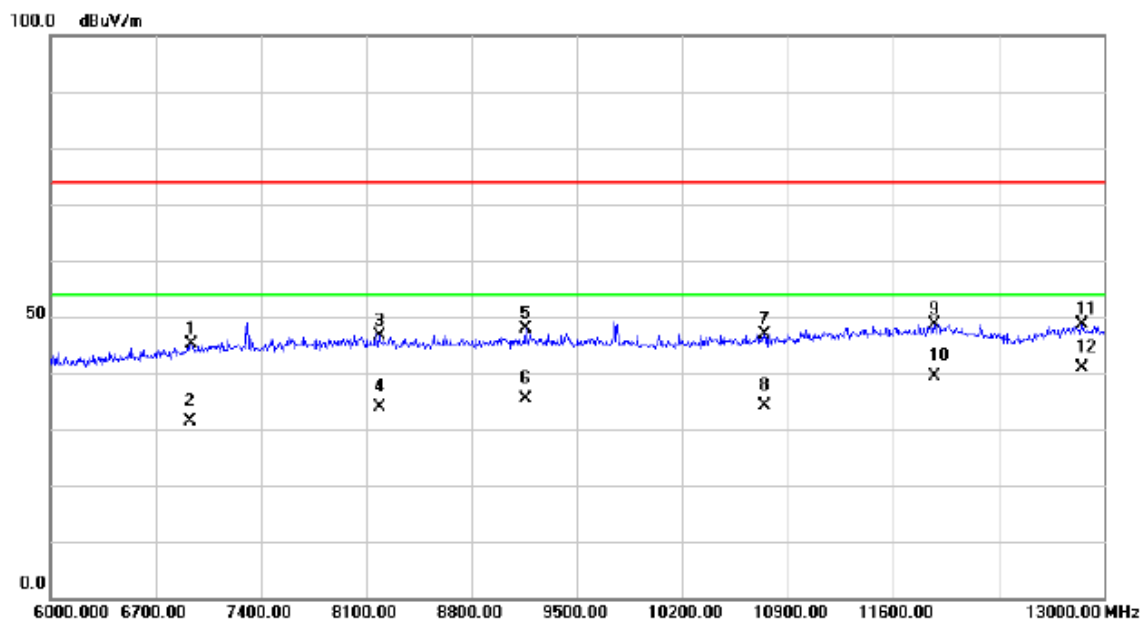

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6934.500	32.32	12.88	45.20	74.00	-28.80	peak	
2		6934.500	18.60	12.88	31.48	54.00	-22.52	AVG	
3		8187.500	32.08	14.47	46.55	74.00	-27.45	peak	
4		8187.500	19.30	14.47	33.77	54.00	-20.23	AVG	
5		9160.500	32.47	15.35	47.82	74.00	-26.18	peak	
6		9160.500	20.10	15.35	35.45	54.00	-18.55	AVG	
7		10749.500	29.61	17.32	46.93	74.00	-27.07	peak	
8		10749.500	16.70	17.32	34.02	54.00	-19.98	AVG	
9		11876.500	28.25	20.48	48.73	74.00	-25.27	peak	
10		11876.500	18.90	20.48	39.38	54.00	-14.62	AVG	
11		12856.500	27.22	21.38	48.60	74.00	-25.40	peak	
12	*	12856.500	19.40	21.38	40.78	54.00	-13.22	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay + Earphone: QUANCHENG


## Horizontal

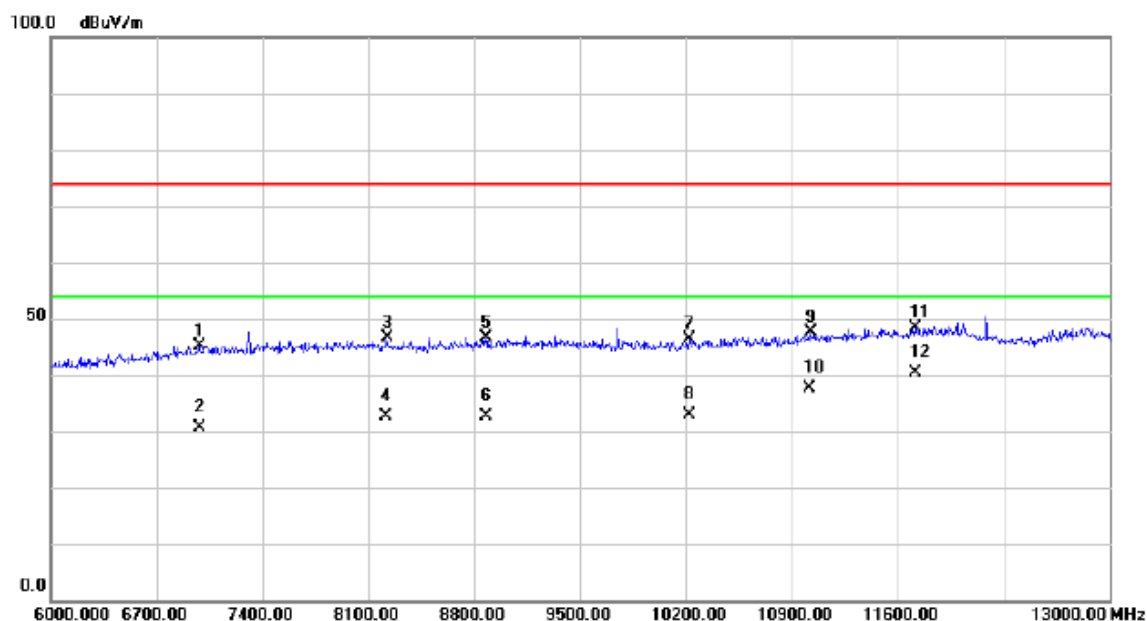

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6980.000	32.08	13.07	45.15	74.00	-28.85	peak	
2		6980.000	17.60	13.07	30.67	54.00	-23.33	AVG	
3		8222.500	32.18	14.46	46.64	74.00	-27.36	peak	
4		8222.500	18.20	14.46	32.66	54.00	-21.34	AVG	
5		8880.500	31.47	15.12	46.59	74.00	-27.41	peak	
6		8880.500	17.60	15.12	32.72	54.00	-21.28	AVG	
7		10221.000	30.39	15.95	46.34	74.00	-27.66	peak	
8		10221.000	16.90	15.95	32.85	54.00	-21.15	AVG	
9		11022.500	29.57	18.03	47.60	74.00	-26.40	peak	
10		11022.500	19.70	18.03	37.73	54.00	-16.27	AVG	
11		11712.000	28.44	20.03	48.47	74.00	-25.53	peak	
12	*	11712.000	20.30	20.03	40.33	54.00	-13.67	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Speaker
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD


## Vertical

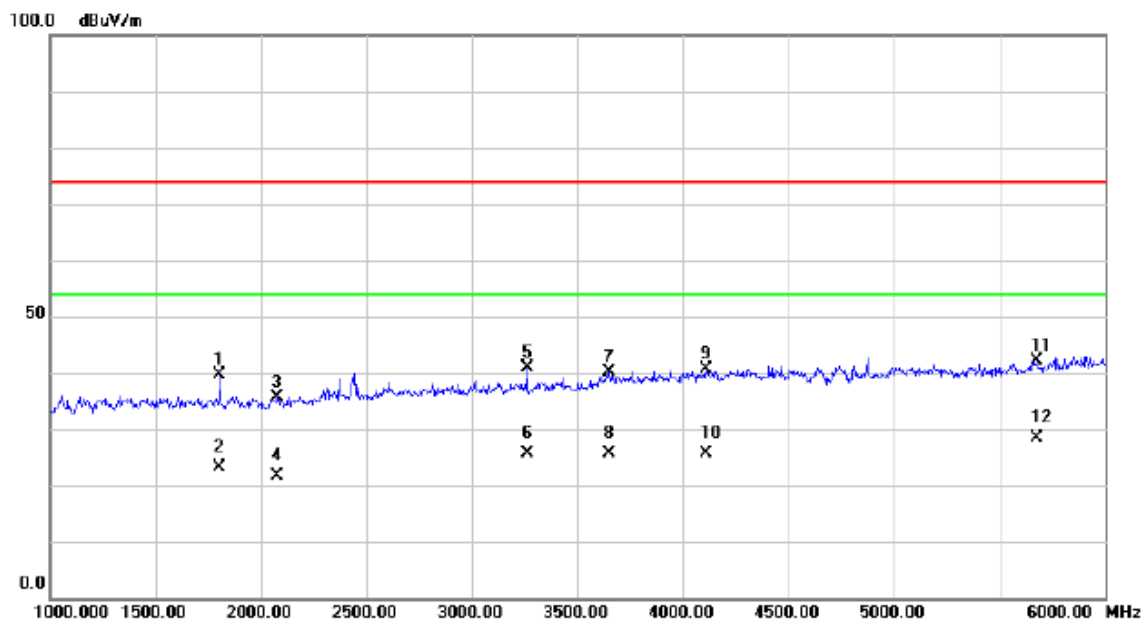

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1805.000	42.88	-3.33	39.55	74.00	-34.45	peak	
2		1805.000	26.50	-3.33	23.17	54.00	-30.83	AVG	
3		2077.500	38.35	-2.64	35.71	74.00	-38.29	peak	
4		2077.500	24.30	-2.64	21.66	54.00	-32.34	AVG	
5		3262.500	38.75	2.24	40.99	74.00	-33.01	peak	
6		3262.500	23.50	2.24	25.74	54.00	-28.26	AVG	
7		3652.500	36.68	3.54	40.22	74.00	-33.78	peak	
8		3652.500	22.10	3.54	25.64	54.00	-28.36	AVG	
9		4110.000	35.48	5.08	40.56	74.00	-33.44	peak	
10		4110.000	20.60	5.08	25.68	54.00	-28.32	AVG	
11		5675.000	33.36	8.70	42.06	74.00	-31.94	peak	
12	*	5675.000	19.80	8.70	28.50	54.00	-25.50	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Speaker
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD


## Horizontal

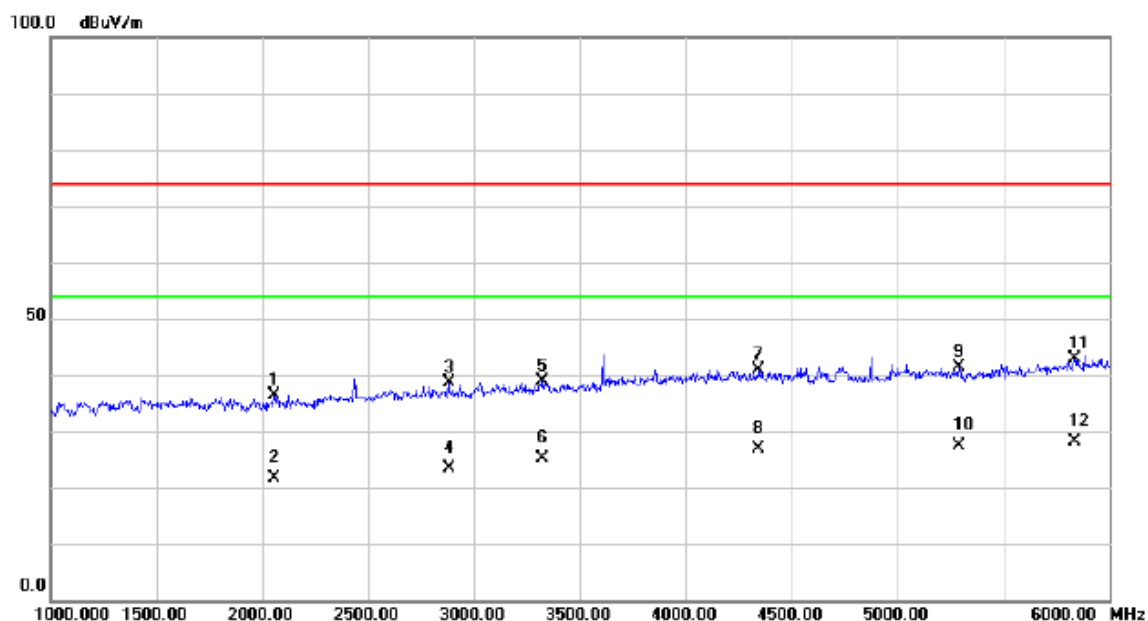

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2055.000	39.05	-2.76	36.29	74.00	-37.71	peak	
2		2055.000	24.30	-2.76	21.54	54.00	-32.46	AVG	
3		2880.000	37.60	1.03	38.63	74.00	-35.37	peak	
4		2880.000	22.40	1.03	23.43	54.00	-30.57	AVG	
5		3325.000	36.36	2.42	38.78	74.00	-35.22	peak	
6		3325.000	22.60	2.42	25.02	54.00	-28.98	AVG	
7		4345.000	35.34	5.43	40.77	74.00	-33.23	peak	
8		4345.000	21.50	5.43	26.93	54.00	-27.07	AVG	
9		5292.500	33.60	7.70	41.30	74.00	-32.70	peak	
10		5292.500	19.80	7.70	27.50	54.00	-26.50	AVG	
11		5835.000	33.49	9.34	42.83	74.00	-31.17	peak	
12	*	5835.000	18.70	9.34	28.04	54.00	-25.96	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Speaker
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD


## Vertical

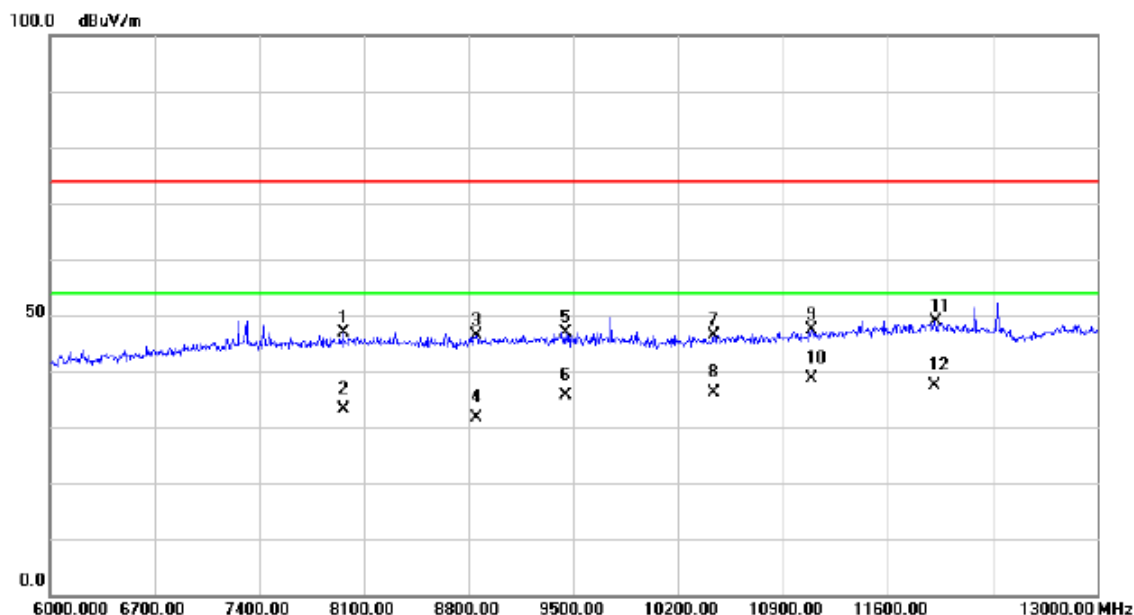

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7960.000	32.58	14.42	47.00	74.00	-27.00	peak	
2		7960.000	18.60	14.42	33.02	54.00	-20.98	AVG	
3		8852.500	31.22	15.06	46.28	74.00	-27.72	peak	
4		8852.500	16.50	15.06	31.56	54.00	-22.44	AVG	
5		9444.000	31.48	15.41	46.89	74.00	-27.11	peak	
6		9444.000	20.30	15.41	35.71	54.00	-18.29	AVG	
7		10441.500	29.82	16.52	46.34	74.00	-27.66	peak	
8		10441.500	19.60	16.52	36.12	54.00	-17.88	AVG	
9		11089.000	29.06	18.23	47.29	74.00	-26.71	peak	
10	*	11089.000	20.30	18.23	38.53	54.00	-15.47	AVG	
11		11918.500	28.16	20.60	48.76	74.00	-25.24	peak	
12		11918.500	16.80	20.60	37.40	54.00	-16.60	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Speaker
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD


## Horizontal

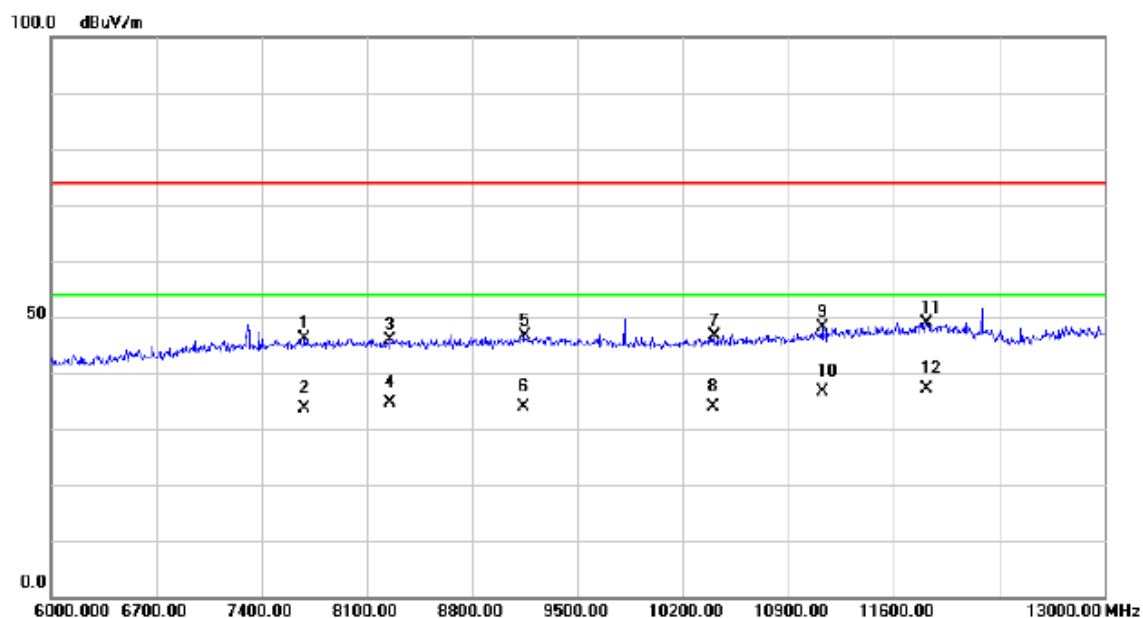

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7687.000	31.98	14.04	46.02	74.00	-27.98	peak	
2		7687.000	19.70	14.04	33.74	54.00	-20.26	AVG	
3		8257.500	31.48	14.46	45.94	74.00	-28.06	peak	
4		8257.500	20.10	14.46	34.56	54.00	-19.44	AVG	
5		9146.500	31.19	15.36	46.55	74.00	-27.45	peak	
6		9146.500	18.60	15.36	33.96	54.00	-20.04	AVG	
7		10406.50	30.28	16.43	46.71	74.00	-27.29	peak	
8		10406.50	17.40	16.43	33.83	54.00	-20.17	AVG	
9		11124.00	29.73	18.33	48.06	74.00	-25.94	peak	
10		11124.00	18.20	18.33	36.53	54.00	-17.47	AVG	
11		11817.00	28.66	20.33	48.99	74.00	-25.01	peak	
12	*	11817.00	16.90	20.33	37.23	54.00	-16.77	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Camera on
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD


## Vertical

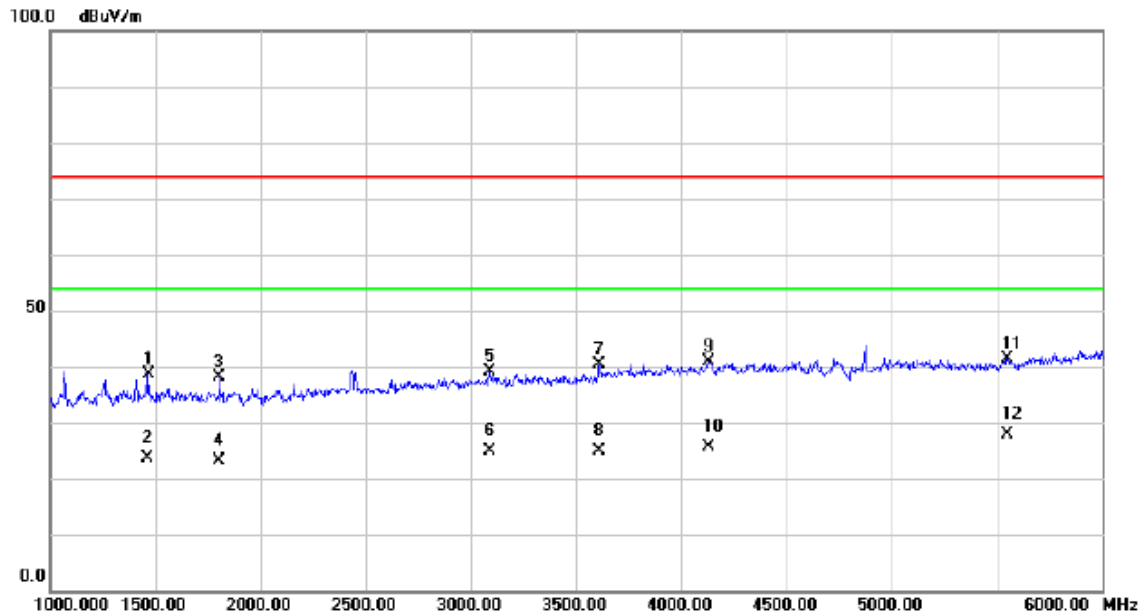

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1467.500	42.46	-3.87	38.59	74.00	-35.41	peak	
2		1467.500	27.60	-3.87	23.73	54.00	-30.27	AVG	
3		1805.000	41.47	-3.33	38.14	74.00	-35.86	peak	
4		1805.000	26.40	-3.33	23.07	54.00	-30.93	AVG	
5		3090.000	37.47	1.73	39.20	74.00	-34.80	peak	
6		3090.000	23.10	1.73	24.83	54.00	-29.17	AVG	
7		3610.000	36.92	3.37	40.29	74.00	-33.71	peak	
8		3610.000	21.40	3.37	24.77	54.00	-29.23	AVG	
9		4132.500	35.77	5.12	40.89	74.00	-33.11	peak	
10		4132.500	20.60	5.12	25.72	54.00	-28.28	AVG	
11		5552.500	33.24	8.20	41.44	74.00	-32.56	peak	
12	*	5552.500	19.70	8.20	27.90	54.00	-26.10	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Camera on
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD


## Horizontal

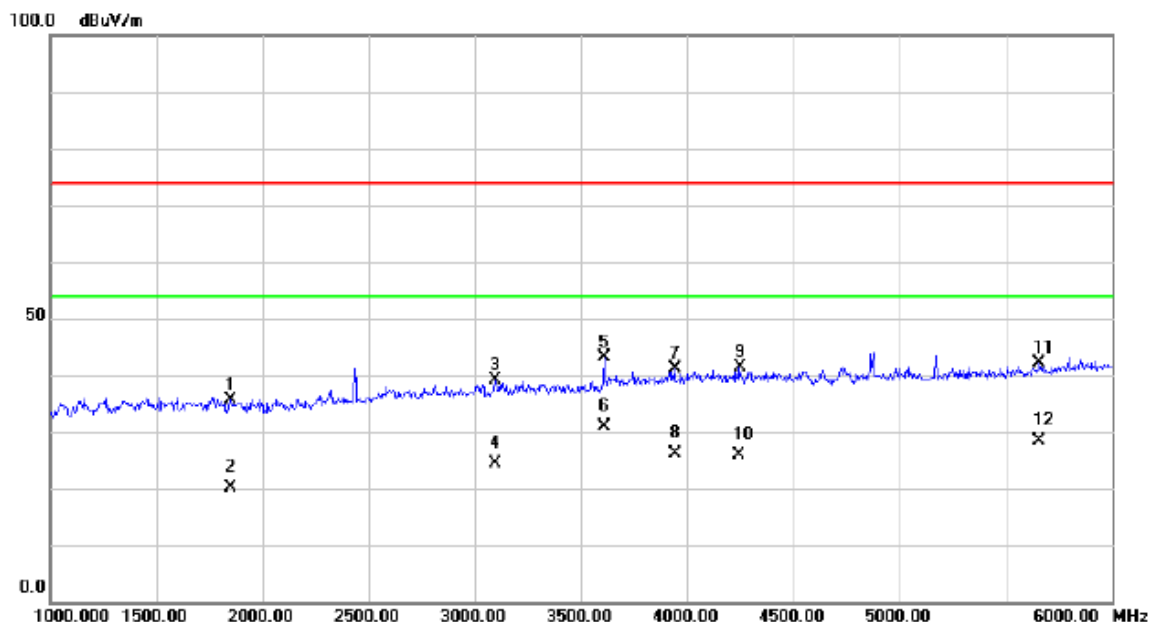

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1852.500	39.02	-3.27	35.75	74.00	-38.25	peak	
2		1852.500	23.40	-3.27	20.13	54.00	-33.87	AVG	
3		3097.500	37.30	1.75	39.05	74.00	-34.95	peak	
4		3097.500	22.60	1.75	24.35	54.00	-29.65	AVG	
5		3610.000	39.85	3.37	43.22	74.00	-30.78	peak	
6	*	3610.000	27.50	3.37	30.87	54.00	-23.13	AVG	
7		3940.000	36.36	4.69	41.05	74.00	-32.95	peak	
8		3940.000	21.40	4.69	26.09	54.00	-27.91	AVG	
9		4247.500	36.19	5.29	41.48	74.00	-32.52	peak	
10		4247.500	20.50	5.29	25.79	54.00	-28.21	AVG	
11		5655.000	33.39	8.62	42.01	74.00	-31.99	peak	
12		5655.000	19.70	8.62	28.32	54.00	-25.68	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Camera on
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD


## Vertical

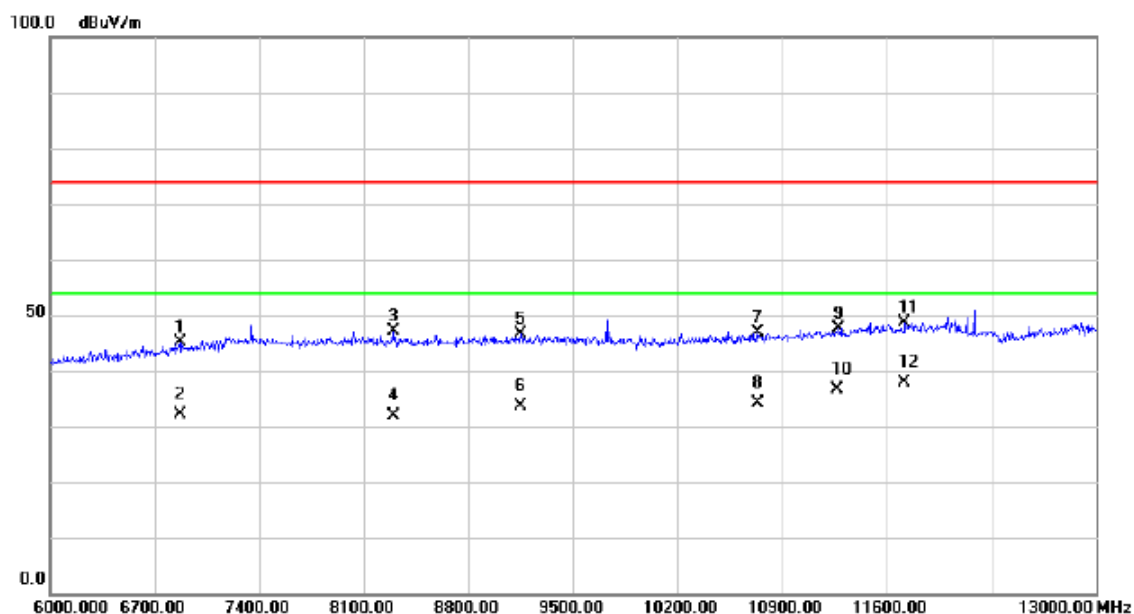

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	6871.500	32.45	12.61	45.06	74.00	-28.94	peak	
2	6871.500	19.60	12.61	32.21	54.00	-21.79	AVG	
3	8296.000	32.62	14.46	47.08	74.00	-26.92	peak	
4	8296.000	17.50	14.46	31.96	54.00	-22.04	AVG	
5	9153.500	31.31	15.36	46.67	74.00	-27.33	peak	
6	9153.500	18.30	15.36	33.66	54.00	-20.34	AVG	
7	10735.500	29.52	17.28	46.80	74.00	-27.20	peak	
8	10735.500	16.90	17.28	34.18	54.00	-19.82	AVG	
9	11274.500	28.79	18.78	47.57	74.00	-26.43	peak	
10	11274.500	17.80	18.78	36.58	54.00	-17.42	AVG	
11	11719.000	28.50	20.06	48.56	74.00	-25.44	peak	
12 *	11719.000	17.70	20.06	37.76	54.00	-16.24	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+2.4GHz WIFI+GPS+Camera on
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD


## Horizontal

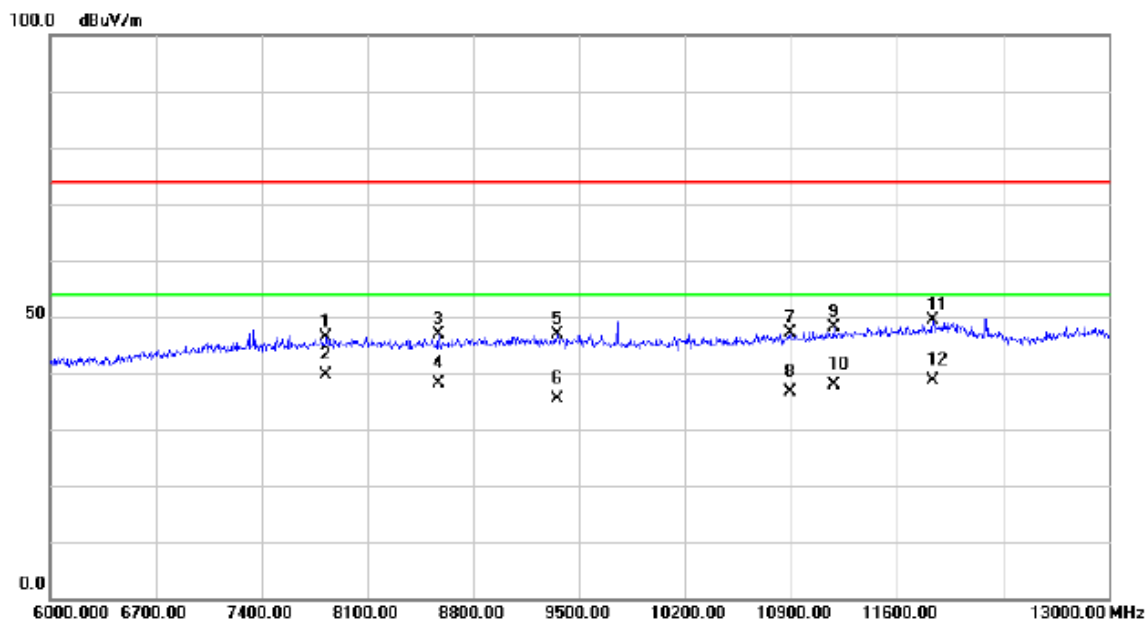

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7827.000	32.21	14.24	46.45	74.00	-27.55	peak	
2	*	7827.000	25.40	14.24	39.64	54.00	-14.36	AVG	
3		8572.500	32.25	14.57	46.82	74.00	-27.18	peak	
4		8572.500	23.50	14.57	38.07	54.00	-15.93	AVG	
5		9353.000	31.53	15.39	46.92	74.00	-27.08	peak	
6		9353.000	20.10	15.39	35.49	54.00	-18.51	AVG	
7		10893.000	29.45	17.68	47.13	74.00	-26.87	peak	
8		10893.000	18.90	17.68	36.58	54.00	-17.42	AVG	
9		11183.500	29.56	18.50	48.06	74.00	-25.94	peak	
10		11183.500	19.50	18.50	38.00	54.00	-16.00	AVG	
11		11838.000	28.91	20.38	49.29	74.00	-24.71	peak	
12		11838.000	18.30	20.38	38.68	54.00	-15.32	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+2.4GHz WIFI+GPS
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD


## Vertical

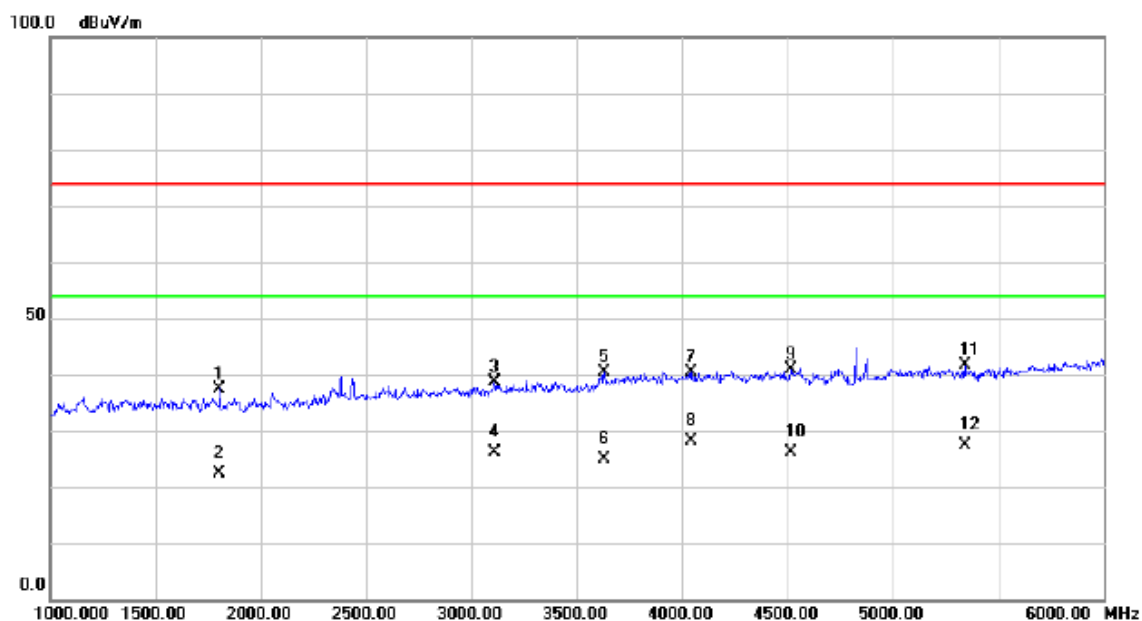

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1805.000	40.83	-3.33	37.50	74.00	-36.50	peak	
2	1805.000	25.60	-3.33	22.27	54.00	-31.73	AVG	
3	3110.000	36.77	1.79	38.56	74.00	-35.44	peak	
4	3110.000	24.30	1.79	26.09	54.00	-27.91	AVG	
5	3632.500	36.86	3.46	40.32	74.00	-33.68	peak	
6	3632.500	21.30	3.46	24.76	54.00	-29.24	AVG	
7	4045.000	35.43	4.99	40.42	74.00	-33.58	peak	
8 *	4045.000	23.10	4.99	28.09	54.00	-25.91	AVG	
9	4515.000	35.24	5.71	40.95	74.00	-33.05	peak	
10	4515.000	20.50	5.71	26.21	54.00	-27.79	AVG	
11	5340.000	33.74	7.77	41.51	74.00	-32.49	peak	
12	5340.000	19.70	7.77	27.47	54.00	-26.53	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+2.4GHz WIFI+GPS
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD


## Horizontal

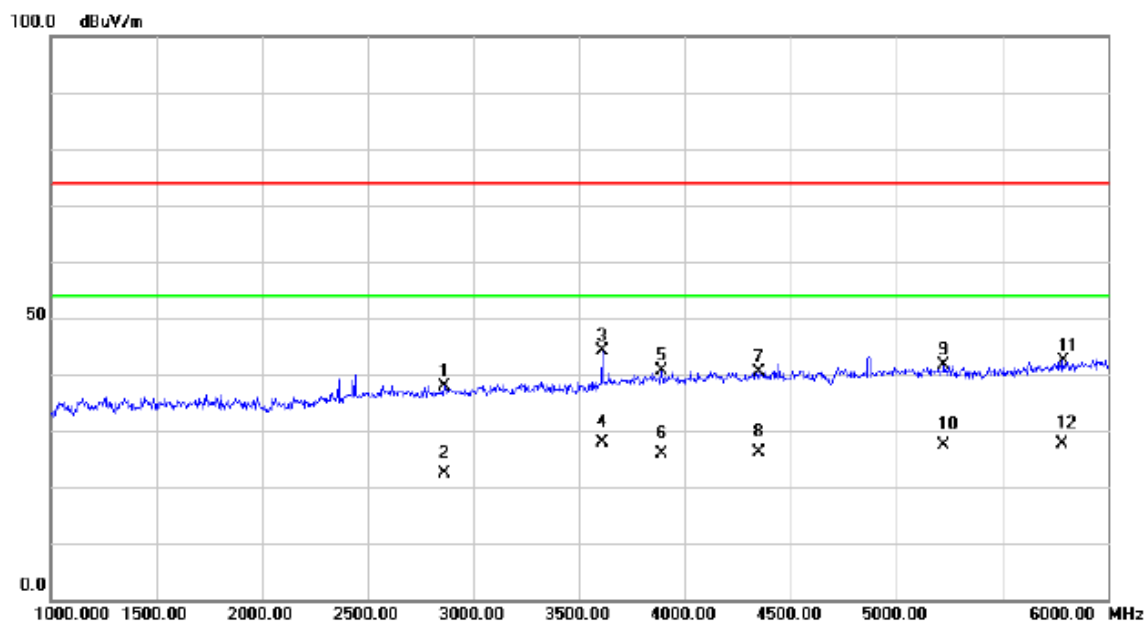

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2862.500	36.95	0.97	37.92	74.00	-36.08	peak	
2	2862.500	21.30	0.97	22.27	54.00	-31.73	AVG	
3	3610.000	40.69	3.37	44.06	74.00	-29.94	peak	
4 *	3610.000	24.60	3.37	27.97	54.00	-26.03	AVG	
5	3892.500	36.05	4.49	40.54	74.00	-33.46	peak	
6	3892.500	21.50	4.49	25.99	54.00	-28.01	AVG	
7	4352.500	35.05	5.43	40.48	74.00	-33.52	peak	
8	4352.500	20.60	5.43	26.03	54.00	-27.97	AVG	
9	5225.000	34.10	7.60	41.70	74.00	-32.30	peak	
10	5225.000	19.80	7.60	27.40	54.00	-26.60	AVG	
11	5787.500	33.15	9.15	42.30	74.00	-31.70	peak	
12	5787.500	18.50	9.15	27.65	54.00	-26.35	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+2.4GHz WIFI+GPS
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD


## Vertical

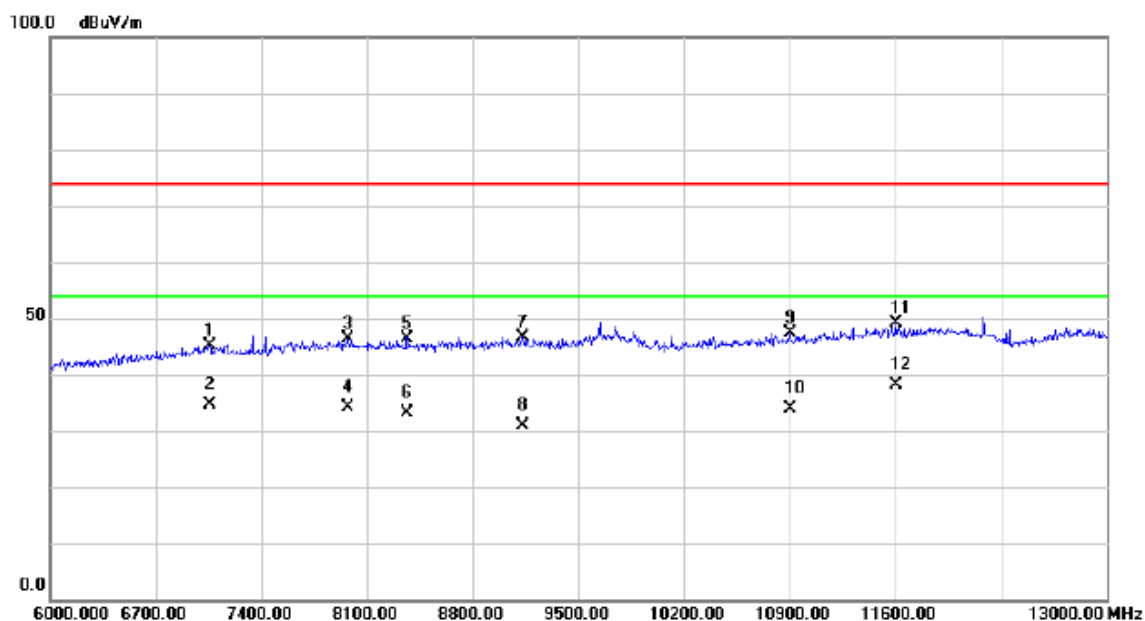

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7057.000	31.94	13.22	45.16	74.00	-28.84	peak	
2		7057.000	21.30	13.22	34.52	54.00	-19.48	AVG	
3		7977.500	32.00	14.45	46.45	74.00	-27.55	peak	
4		7977.500	19.80	14.45	34.25	54.00	-19.75	AVG	
5		8366.000	32.06	14.44	46.50	74.00	-27.50	peak	
6		8366.000	18.60	14.44	33.04	54.00	-20.96	AVG	
7		9129.000	31.34	15.35	46.69	74.00	-27.31	peak	
8		9129.000	15.60	15.35	30.95	54.00	-23.05	AVG	
9		10900.000	29.62	17.70	47.32	74.00	-26.68	peak	
10		10900.000	16.20	17.70	33.90	54.00	-20.10	AVG	
11		11603.500	29.41	19.74	49.15	74.00	-24.85	peak	
12	*	11603.500	18.30	19.74	38.04	54.00	-15.96	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+GSM+BT+2.4GHz WIFI+GPS
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD


## Horizontal

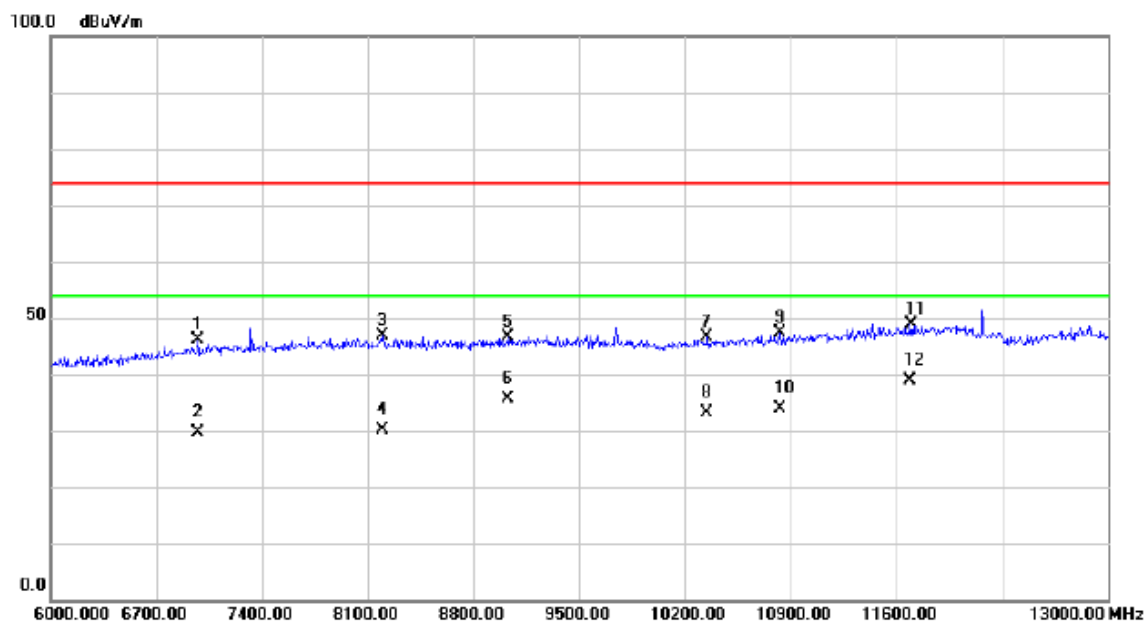

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6976.500	33.06	13.04	46.10	74.00	-27.90	peak	
2		6976.500	16.50	13.04	29.54	54.00	-24.46	AVG	
3		8198.000	32.46	14.46	46.92	74.00	-27.08	peak	
4		8198.000	15.70	14.46	30.16	54.00	-23.84	AVG	
5		9031.000	31.26	15.33	46.59	74.00	-27.41	peak	
6		9031.000	20.30	15.33	35.63	54.00	-18.37	AVG	
7		10347.00	30.46	16.28	46.74	74.00	-27.26	peak	
8		10347.00	16.80	16.28	33.08	54.00	-20.92	AVG	
9		10833.50	29.87	17.52	47.39	74.00	-26.61	peak	
10		10833.50	16.40	17.52	33.92	54.00	-20.08	AVG	
11		11694.50	29.01	19.99	49.00	74.00	-25.00	peak	
12	*	11694.50	18.90	19.99	38.89	54.00	-15.11	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+2.4GHz WIFI+GPS
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD


## Vertical

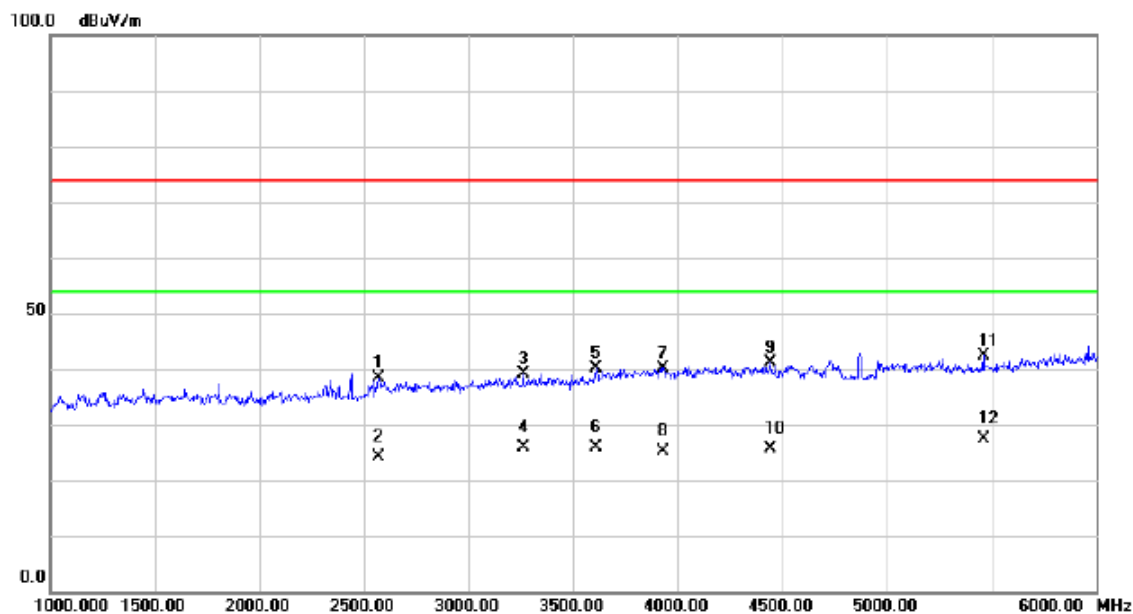

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2572.500	38.46	-0.07	38.39	74.00	-35.61	peak	
2		2572.500	24.30	-0.07	24.23	54.00	-29.77	AVG	
3		3262.500	36.99	2.24	39.23	74.00	-34.77	peak	
4		3262.500	23.60	2.24	25.84	54.00	-28.16	AVG	
5		3610.000	36.71	3.37	40.08	74.00	-33.92	peak	
6		3610.000	22.50	3.37	25.87	54.00	-28.13	AVG	
7		3930.000	35.59	4.65	40.24	74.00	-33.76	peak	
8		3930.000	20.60	4.65	25.25	54.00	-28.75	AVG	
9		4442.500	35.66	5.58	41.24	74.00	-32.76	peak	
10		4442.500	20.10	5.58	25.68	54.00	-28.32	AVG	
11		5462.500	34.52	7.94	42.46	74.00	-31.54	peak	
12	*	5462.500	19.40	7.94	27.34	54.00	-26.66	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+2.4GHz WIFI+GPS
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD


## Horizontal

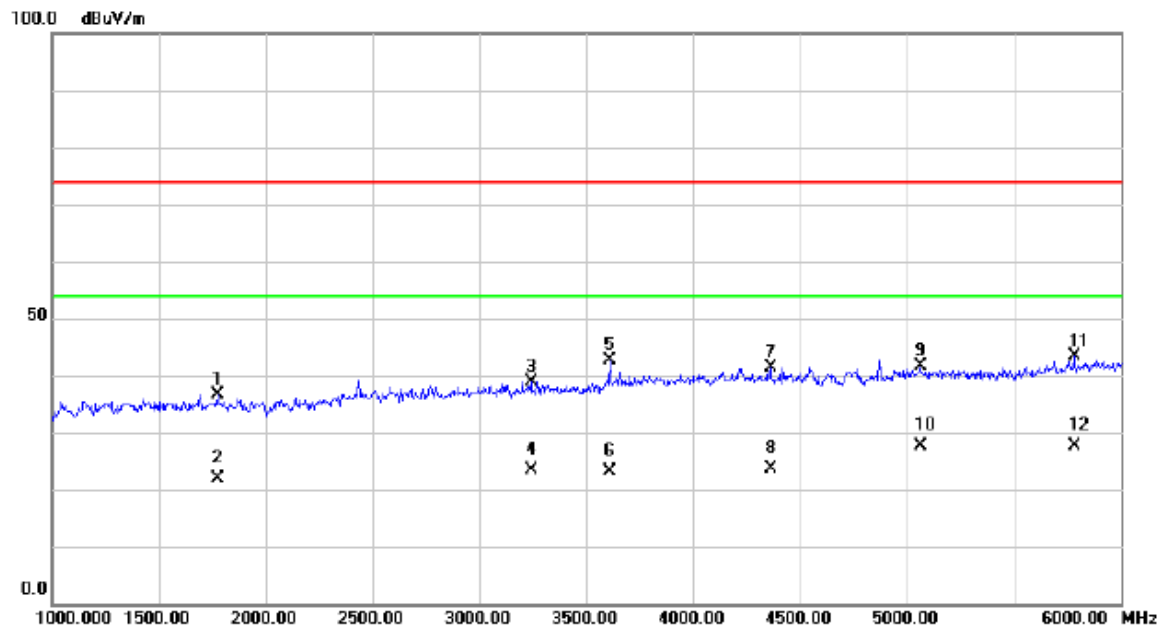

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1777.500	40.02	-3.38	36.64	74.00	-37.36	peak	
2		1777.500	25.30	-3.38	21.92	54.00	-32.08	AVG	
3		3242.500	36.74	2.18	38.92	74.00	-35.08	peak	
4		3242.500	21.20	2.18	23.38	54.00	-30.62	AVG	
5		3610.000	39.31	3.37	42.68	74.00	-31.32	peak	
6		3610.000	19.80	3.37	23.17	54.00	-30.83	AVG	
7		4362.500	36.03	5.45	41.48	74.00	-32.52	peak	
8		4362.500	18.30	5.45	23.75	54.00	-30.25	AVG	
9		5060.000	34.18	7.37	41.55	74.00	-32.45	peak	
10		5060.000	20.30	7.37	27.67	54.00	-26.33	AVG	
11		5782.500	34.26	9.13	43.39	74.00	-30.61	peak	
12	*	5782.500	18.60	9.13	27.73	54.00	-26.27	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+2.4GHz WIFI+GPS
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD


## Vertical

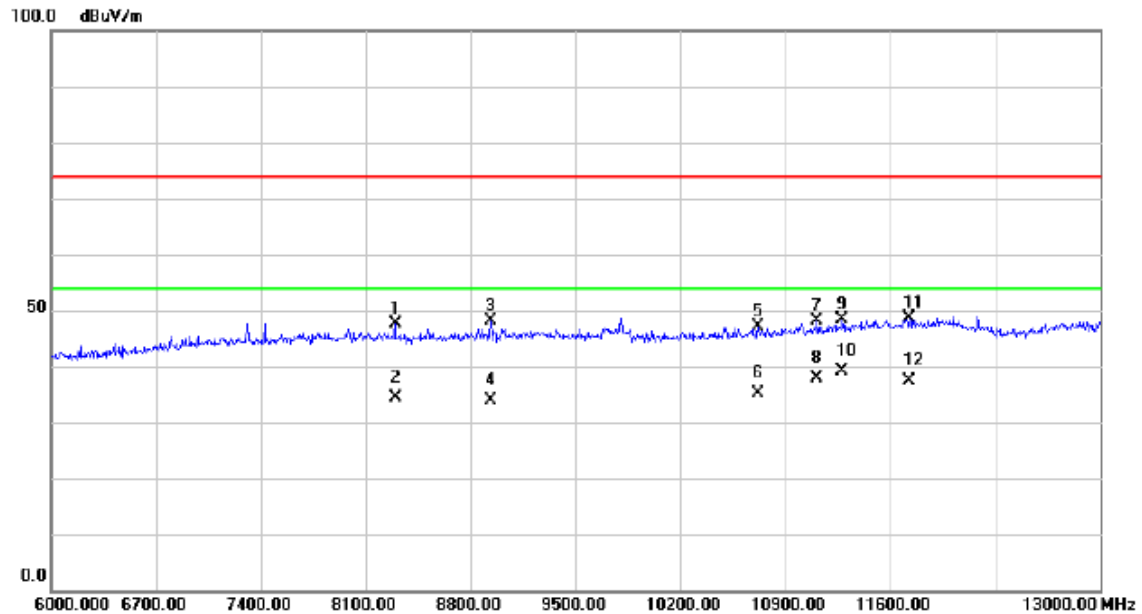

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBuV	Factor	ment	dBuV/m	dB	Detector	Comment
1		8296.000	33.12	14.46	47.58	74.00	-26.42	peak	
2		8296.000	19.80	14.46	34.26	54.00	-19.74	AVG	
3		8936.500	32.88	15.21	48.09	74.00	-25.91	peak	
4		8936.500	18.60	15.21	33.81	54.00	-20.19	AVG	
5		10721.50	29.81	17.24	47.05	74.00	-26.95	peak	
6		10721.50	17.90	17.24	35.14	54.00	-18.86	AVG	
7		11110.00	29.96	18.29	48.25	74.00	-25.75	peak	
8		11110.00	19.50	18.29	37.79	54.00	-16.21	AVG	
9		11278.00	29.69	18.79	48.48	74.00	-25.52	peak	
10	*	11278.00	20.30	18.79	39.09	54.00	-14.91	AVG	
11		11729.50	28.55	20.09	48.64	74.00	-25.36	peak	
12		11729.50	17.20	20.09	37.29	54.00	-16.71	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+WCDMA+BT+2.4GHz WIFI+GPS
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD


## Horizontal

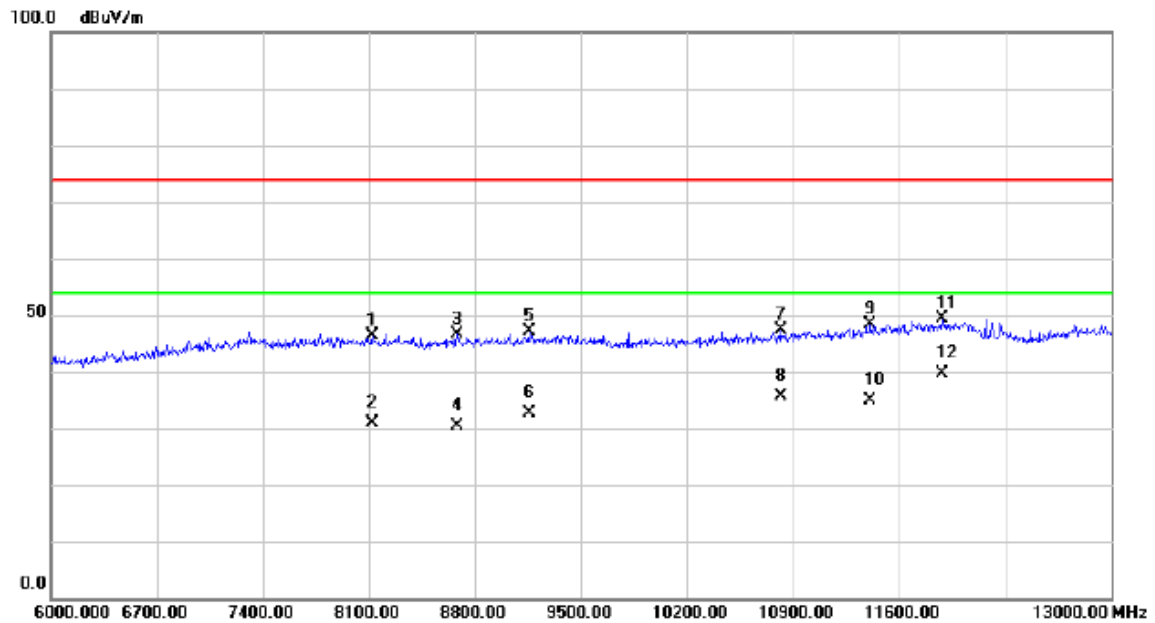

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	8124.500	31.87	14.47	46.34	74.00	-27.66	peak	
2	8124.500	16.50	14.47	30.97	54.00	-23.03	AVG	
3	8681.000	31.85	14.75	46.60	74.00	-27.40	peak	
4	8681.000	15.60	14.75	30.35	54.00	-23.65	AVG	
5	9160.500	31.73	15.35	47.08	74.00	-26.92	peak	
6	9160.500	17.30	15.35	32.65	54.00	-21.35	AVG	
7	10816.00	29.78	17.48	47.26	74.00	-26.74	peak	
8	10816.00	18.20	17.48	35.68	54.00	-18.32	AVG	
9	11411.00	29.22	19.19	48.41	74.00	-25.59	peak	
10	11411.00	15.60	19.19	34.79	54.00	-19.21	AVG	
11	11880.00	28.90	20.49	49.39	74.00	-24.61	peak	
12 *	11880.00	19.20	20.49	39.69	54.00	-14.31	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+LTE+BT+2.4GHz WIFI+GPS
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD


## Vertical

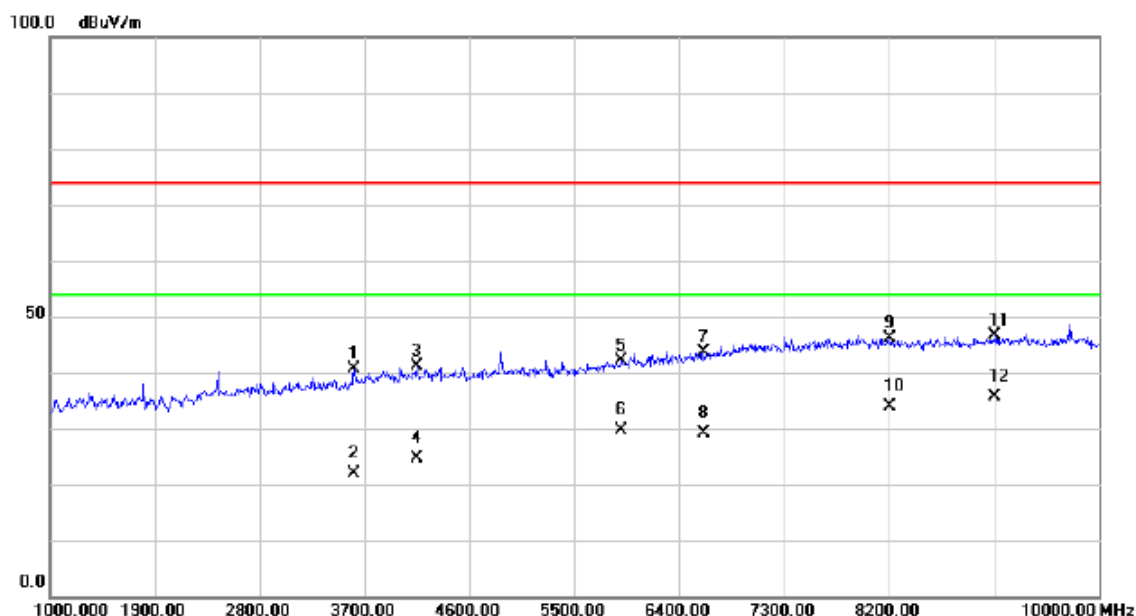

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	3610.000	37.22	3.37	40.59	74.00	-33.41	peak	
2	3610.000	18.60	3.37	21.97	54.00	-32.03	AVG	
3	4154.500	36.10	5.14	41.24	74.00	-32.76	peak	
4	4154.500	19.50	5.14	24.64	54.00	-29.36	AVG	
5	5905.000	32.51	9.63	42.14	74.00	-31.86	peak	
6	5905.000	20.10	9.63	29.73	54.00	-24.27	AVG	
7	6607.000	32.07	11.48	43.55	74.00	-30.45	peak	
8	6607.000	17.60	11.48	29.08	54.00	-24.92	AVG	
9	8209.000	31.69	14.46	46.15	74.00	-27.85	peak	
10	8209.000	19.40	14.46	33.86	54.00	-20.14	AVG	
11	9109.000	31.17	15.35	46.52	74.00	-27.48	peak	
12 *	9109.000	20.40	15.35	35.75	54.00	-18.25	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+LTE+BT+2.4GHz WIFI+GPS
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD


## Horizontal

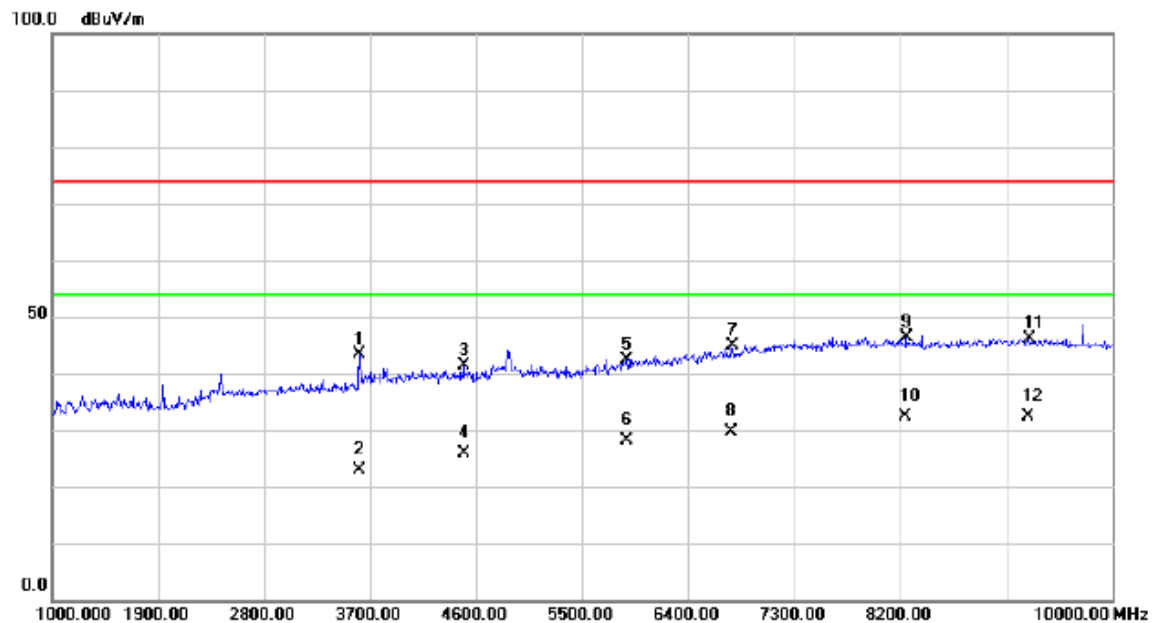

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		3610.000	39.97	3.37	43.34	74.00	-30.66	peak	
2		3610.000	19.60	3.37	22.97	54.00	-31.03	AVG	
3		4492.000	35.67	5.64	41.31	74.00	-32.69	peak	
4		4492.000	20.30	5.64	25.94	54.00	-28.06	AVG	
5		5878.000	32.88	9.51	42.39	74.00	-31.61	peak	
6		5878.000	18.60	9.51	28.11	54.00	-25.89	AVG	
7		6773.500	32.59	12.20	44.79	74.00	-29.21	peak	
8		6773.500	17.50	12.20	29.70	54.00	-24.30	AVG	
9		8249.500	31.98	14.46	46.44	74.00	-27.56	peak	
10	*	8249.500	17.90	14.46	32.36	54.00	-21.64	AVG	
11		9293.500	30.75	15.39	46.14	74.00	-27.86	peak	
12		9293.500	16.90	15.39	32.29	54.00	-21.71	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+LTE+BT+2.4GHz WIFI+GPS
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD


## Vertical

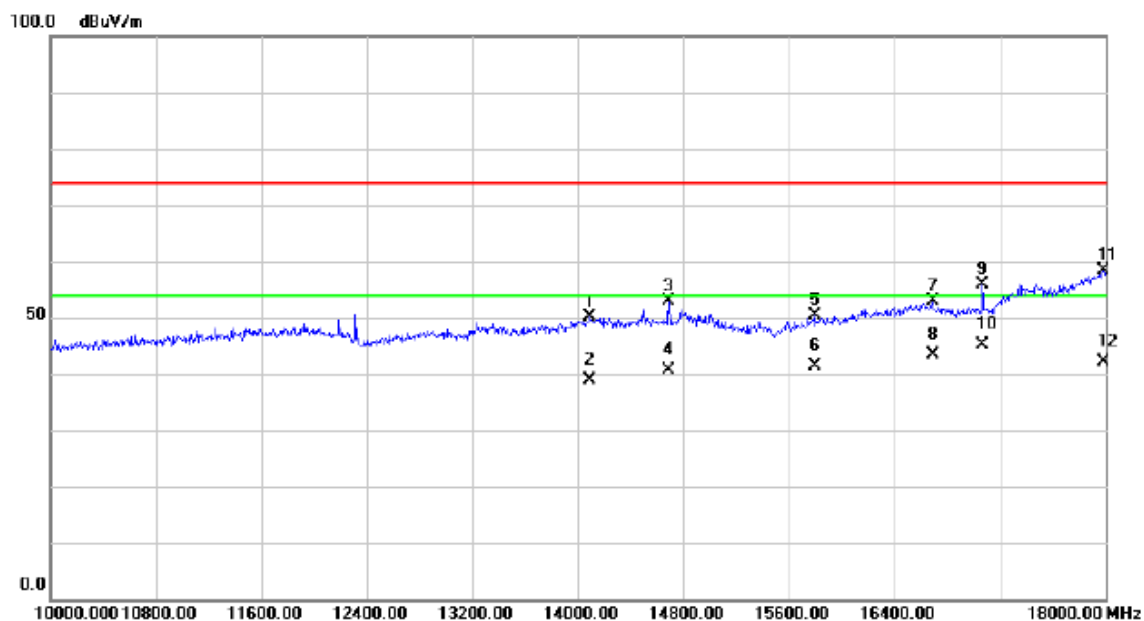

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	14092.00	27.34	22.70	50.04	74.00	-23.96	peak	
2	14092.00	16.30	22.70	39.00	54.00	-15.00	AVG	
3	14692.00	29.65	23.25	52.90	74.00	-21.10	peak	
4	14692.00	17.26	23.25	40.51	54.00	-13.49	AVG	
5	15792.00	28.19	22.09	50.28	74.00	-23.72	peak	
6	15792.00	19.20	22.09	41.29	54.00	-12.71	AVG	
7	16692.00	27.95	24.90	52.85	74.00	-21.15	peak	
8	16692.00	18.50	24.90	43.40	54.00	-10.60	AVG	
9	17068.00	30.04	25.90	55.94	74.00	-18.06	peak	
10 *	17068.00	19.24	25.90	45.14	54.00	-8.86	AVG	
11	17984.00	26.84	31.49	58.33	74.00	-15.67	peak	
12	17984.00	10.75	31.49	42.24	54.00	-11.76	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+LTE+BT+2.4GHz WIFI+GPS
Note:	Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD


## Horizontal

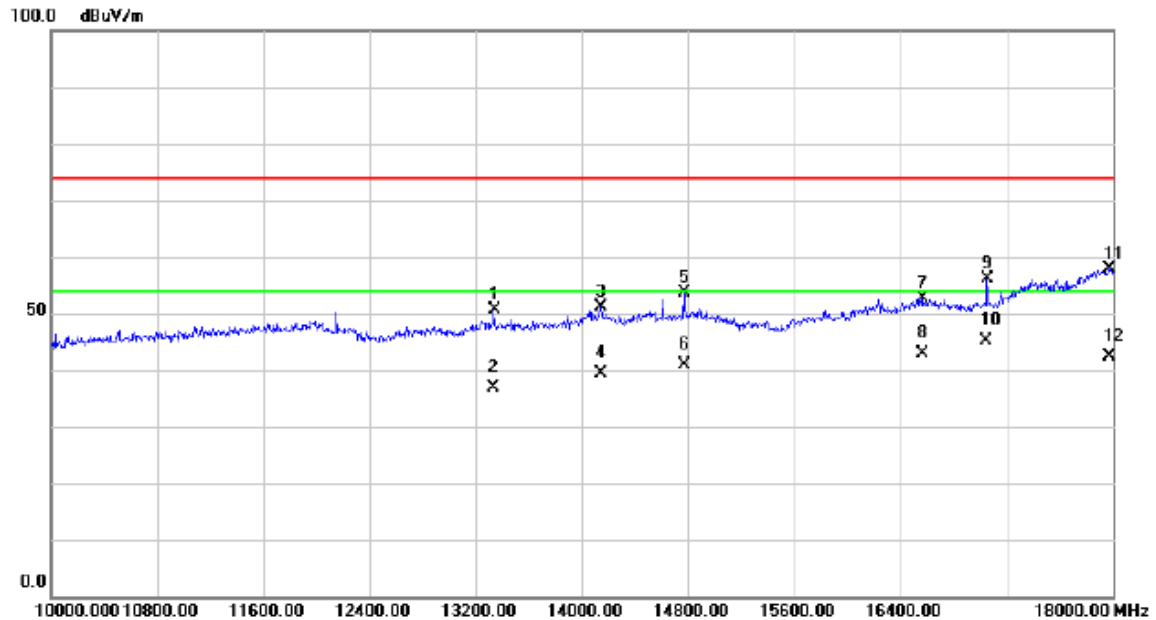

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	13340.00	28.88	21.64	50.52	74.00	-23.48	peak	
2	13340.00	15.20	21.64	36.84	54.00	-17.16	AVG	
3	14144.00	28.26	22.79	51.05	74.00	-22.95	peak	
4	14144.00	16.50	22.79	39.29	54.00	-14.71	AVG	
5	14772.00	30.50	23.16	53.66	74.00	-20.34	peak	
6	14772.00	17.61	23.16	40.77	54.00	-13.23	AVG	
7	16564.00	28.02	24.63	52.65	74.00	-21.35	peak	
8	16564.00	18.30	24.63	42.93	54.00	-11.07	AVG	
9	17052.00	30.40	25.82	56.22	74.00	-17.78	peak	
10 *	17052.00	19.43	25.82	45.25	54.00	-8.75	AVG	
11	17972.00	26.54	31.41	57.95	74.00	-16.05	peak	
12	17972.00	10.93	31.41	42.34	54.00	-11.66	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS
Note:	USB Cable: HONGLIN


## Vertical

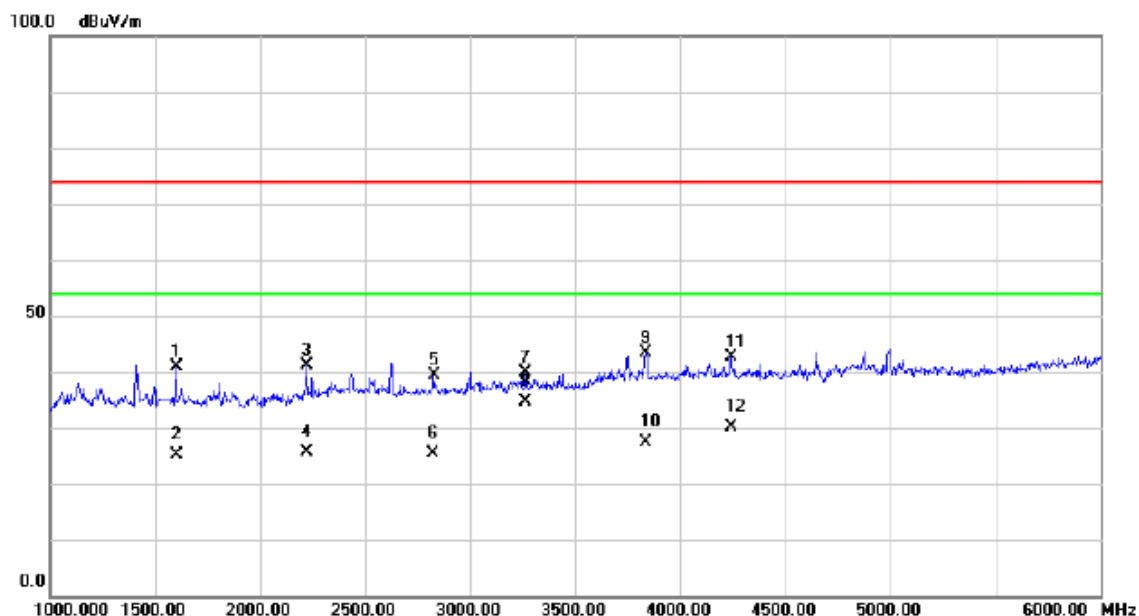

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1600.000	44.44	-3.62	40.82	74.00	-33.18	peak	
2	1600.000	28.70	-3.62	25.08	54.00	-28.92	AVG	
3	2222.500	43.07	-1.85	41.22	74.00	-32.78	peak	
4	2222.500	27.60	-1.85	25.75	54.00	-28.25	AVG	
5	2827.500	38.44	0.84	39.28	74.00	-34.72	peak	
6	2827.500	24.60	0.84	25.44	54.00	-28.56	AVG	
7	3262.500	37.55	2.24	39.79	74.00	-34.21	peak	
8 *	3262.500	32.40	2.24	34.64	54.00	-19.36	AVG	
9	3837.500	39.03	4.27	43.30	74.00	-30.70	peak	
10	3837.500	23.10	4.27	27.37	54.00	-26.63	AVG	
11	4240.000	37.31	5.28	42.59	74.00	-31.41	peak	
12	4240.000	24.80	5.28	30.08	54.00	-23.92	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS
Note:	USB Cable: HONGLIN


## Horizontal

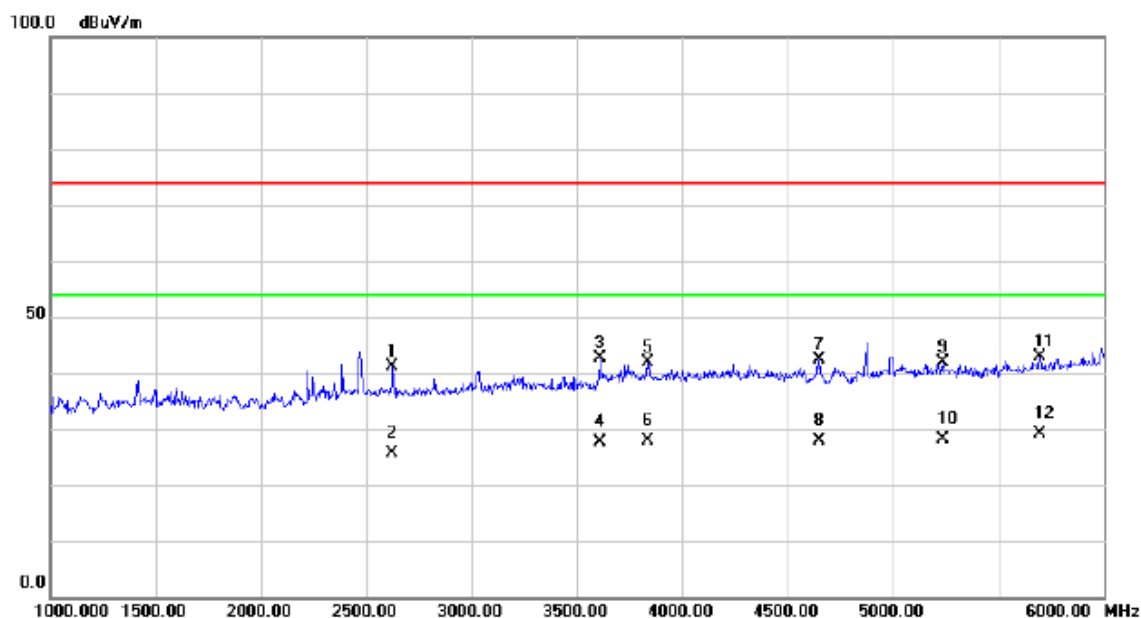

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2625.000	40.91	0.11	41.02	74.00	-32.98	peak	
2		2625.000	25.40	0.11	25.51	54.00	-28.49	AVG	
3		3610.000	39.20	3.37	42.57	74.00	-31.43	peak	
4		3610.000	24.30	3.37	27.67	54.00	-26.33	AVG	
5		3835.000	37.64	4.26	41.90	74.00	-32.10	peak	
6		3835.000	23.70	4.26	27.96	54.00	-26.04	AVG	
7		4652.500	36.30	6.16	42.46	74.00	-31.54	peak	
8		4652.500	21.60	6.16	27.76	54.00	-26.24	AVG	
9		5237.500	34.28	7.63	41.91	74.00	-32.09	peak	
10		5237.500	20.40	7.63	28.03	54.00	-25.97	AVG	
11		5697.500	34.17	8.78	42.95	74.00	-31.05	peak	
12	*	5697.500	20.30	8.78	29.08	54.00	-24.92	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS
Note:	USB Cable: HONGLIN


## Vertical

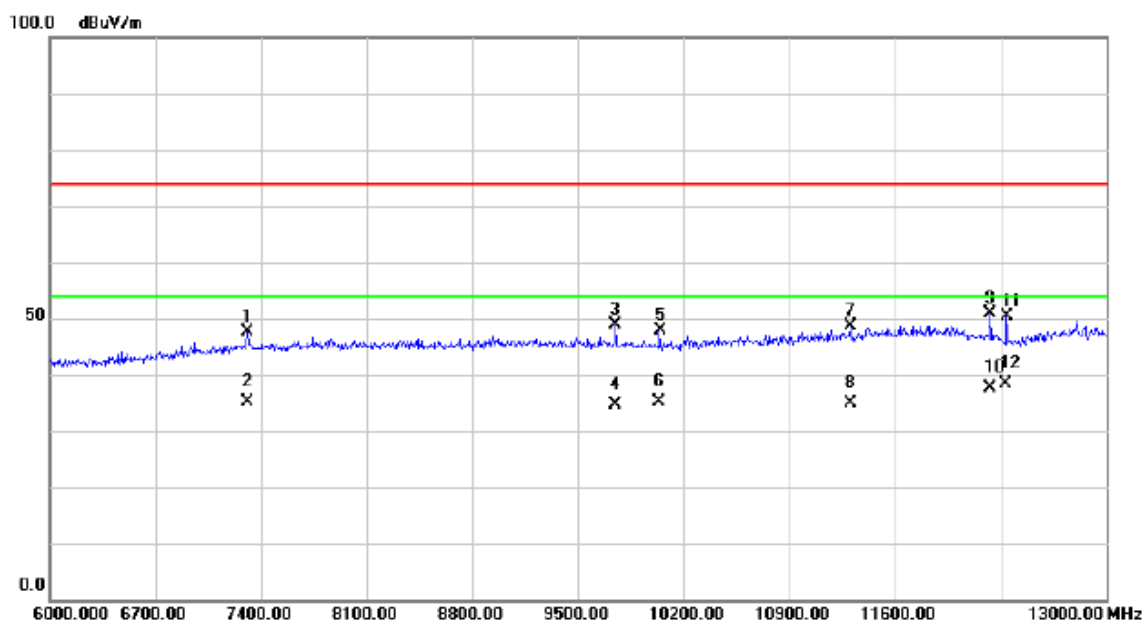

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7312.500	34.02	13.55	47.57	74.00	-26.43	peak	
2		7312.500	21.57	13.55	35.12	54.00	-18.88	AVG	
3		9748.500	33.44	15.41	48.85	74.00	-25.15	peak	
4		9748.500	19.34	15.41	34.75	54.00	-19.25	AVG	
5		10042.50	32.29	15.50	47.79	74.00	-26.21	peak	
6		10042.50	19.61	15.50	35.11	54.00	-18.89	AVG	
7		11306.00	29.81	18.88	48.69	74.00	-25.31	peak	
8		11306.00	15.90	18.88	34.78	54.00	-19.22	AVG	
9		12233.50	30.02	20.85	50.87	74.00	-23.13	peak	
10		12233.50	16.68	20.85	37.53	54.00	-16.47	AVG	
11		12338.50	29.42	20.87	50.29	74.00	-23.71	peak	
12	*	12338.50	17.39	20.87	38.26	54.00	-15.74	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS
Note:	USB Cable: HONGLIN


## Horizontal

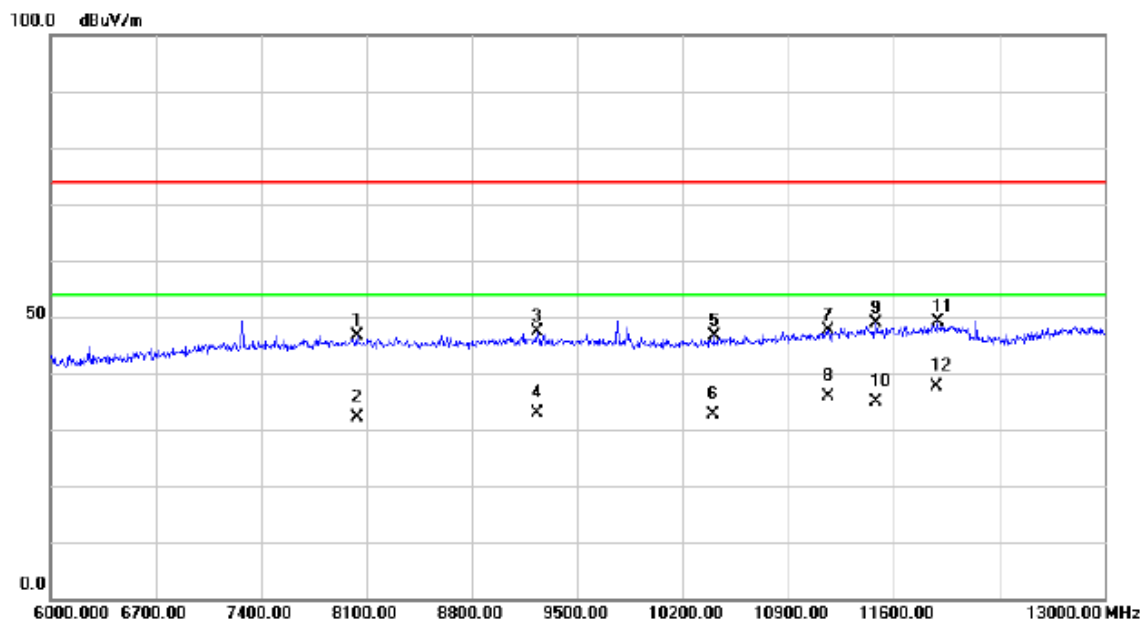

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		8037.000	32.19	14.47	46.66	74.00	-27.34	peak	
2		8037.000	17.60	14.47	32.07	54.00	-21.93	AVG	
3		9234.000	32.04	15.37	47.41	74.00	-26.59	peak	
4		9234.000	17.60	15.37	32.97	54.00	-21.03	AVG	
5		10406.50	30.20	16.43	46.63	74.00	-27.37	peak	
6		10406.50	16.30	16.43	32.73	54.00	-21.27	AVG	
7		11169.50	29.04	18.47	47.51	74.00	-26.49	peak	
8		11169.50	17.50	18.47	35.97	54.00	-18.03	AVG	
9		11484.50	29.50	19.41	48.91	74.00	-25.09	peak	
10		11484.50	15.40	19.41	34.81	54.00	-19.19	AVG	
11		11890.50	28.58	20.52	49.10	74.00	-24.90	peak	
12	*	11890.50	17.10	20.52	37.62	54.00	-16.38	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS
Note:	USB Cable: FOXCONN


## Vertical

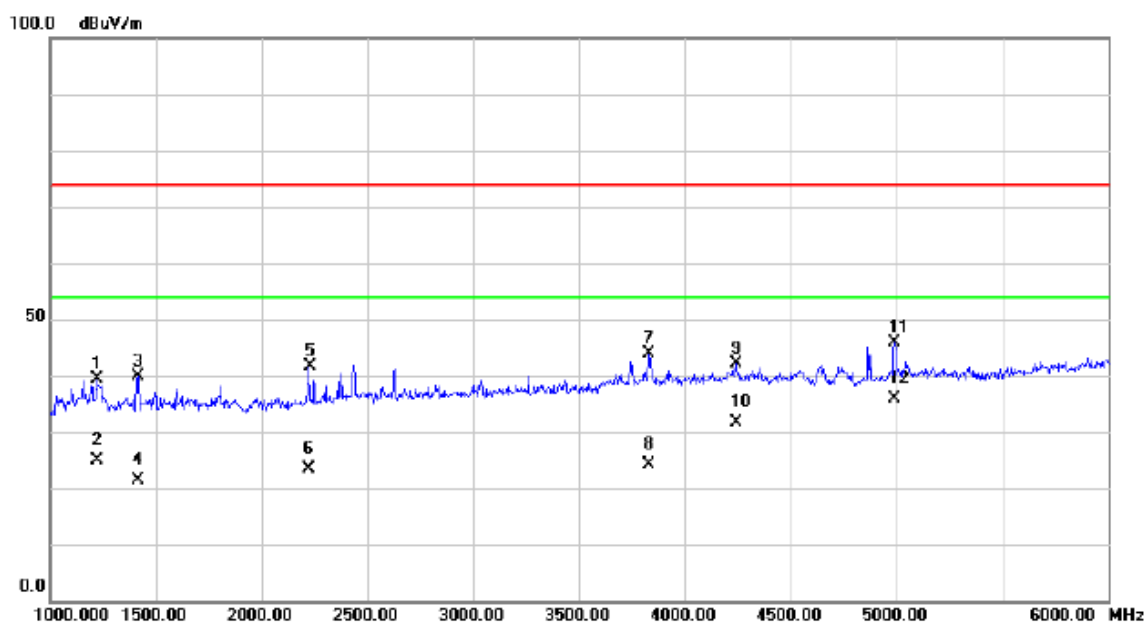

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1220.000	44.08	-4.65	39.43	74.00	-34.57	peak	
2		1220.000	29.60	-4.65	24.95	54.00	-29.05	AVG	
3		1417.500	43.85	-4.03	39.82	74.00	-34.18	peak	
4		1417.500	25.40	-4.03	21.37	54.00	-32.63	AVG	
5		2227.500	43.37	-1.82	41.55	74.00	-32.45	peak	
6		2227.500	25.30	-1.82	23.48	54.00	-30.52	AVG	
7		3832.500	39.54	4.25	43.79	74.00	-30.21	peak	
8		3832.500	20.00	4.25	24.25	54.00	-29.75	AVG	
9		4242.500	36.89	5.28	42.17	74.00	-31.83	peak	
10		4242.500	26.40	5.28	31.68	54.00	-22.32	AVG	
11		4992.500	38.64	7.26	45.90	74.00	-28.10	peak	
12	*	4992.500	28.63	7.26	35.89	54.00	-18.11	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS
Note:	USB Cable: FOXCONN


## Horizontal

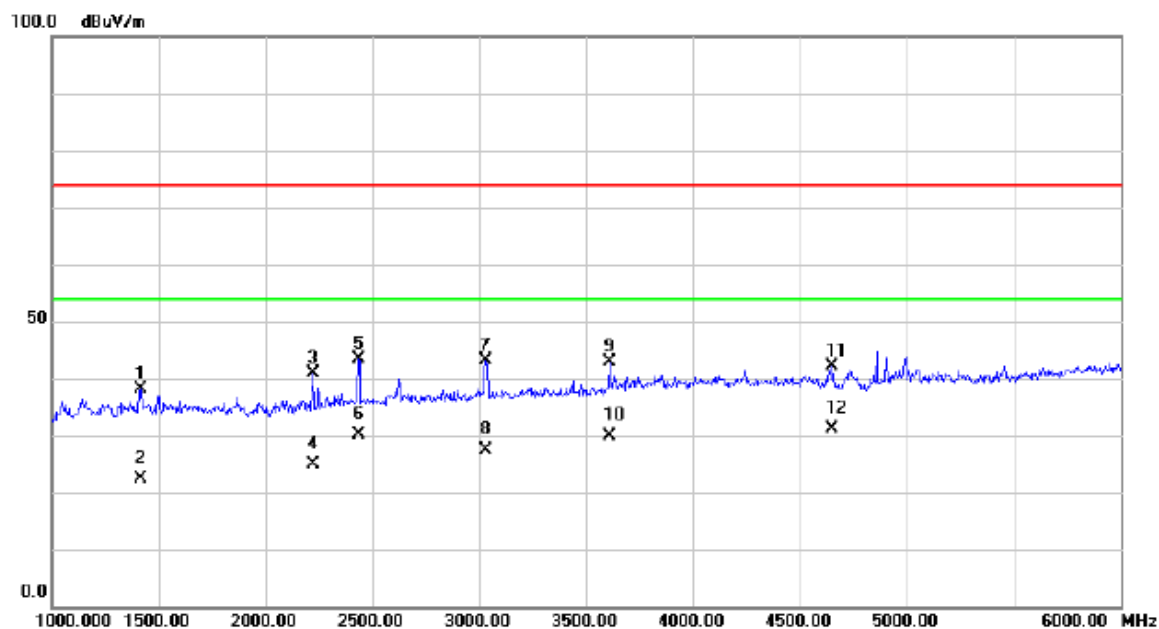

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1415.000	42.04	-4.03	38.01	74.00	-35.99	peak	
2	1415.000	26.50	-4.03	22.47	54.00	-31.53	AVG	
3	2225.000	42.70	-1.83	40.87	74.00	-33.13	peak	
4	2225.000	26.70	-1.83	24.87	54.00	-29.13	AVG	
5	2437.500	43.98	-0.68	43.30	74.00	-30.70	peak	
6	2437.500	30.84	-0.68	30.16	54.00	-23.84	AVG	
7	3032.500	41.58	1.57	43.15	74.00	-30.85	peak	
8	3032.500	25.70	1.57	27.27	54.00	-26.73	AVG	
9	3610.000	39.47	3.37	42.84	74.00	-31.16	peak	
10	3610.000	26.50	3.37	29.87	54.00	-24.13	AVG	
11	4652.500	36.00	6.16	42.16	74.00	-31.84	peak	
12 *	4652.500	24.90	6.16	31.06	54.00	-22.94	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS
Note:	USB Cable: FOXCONN


## Vertical

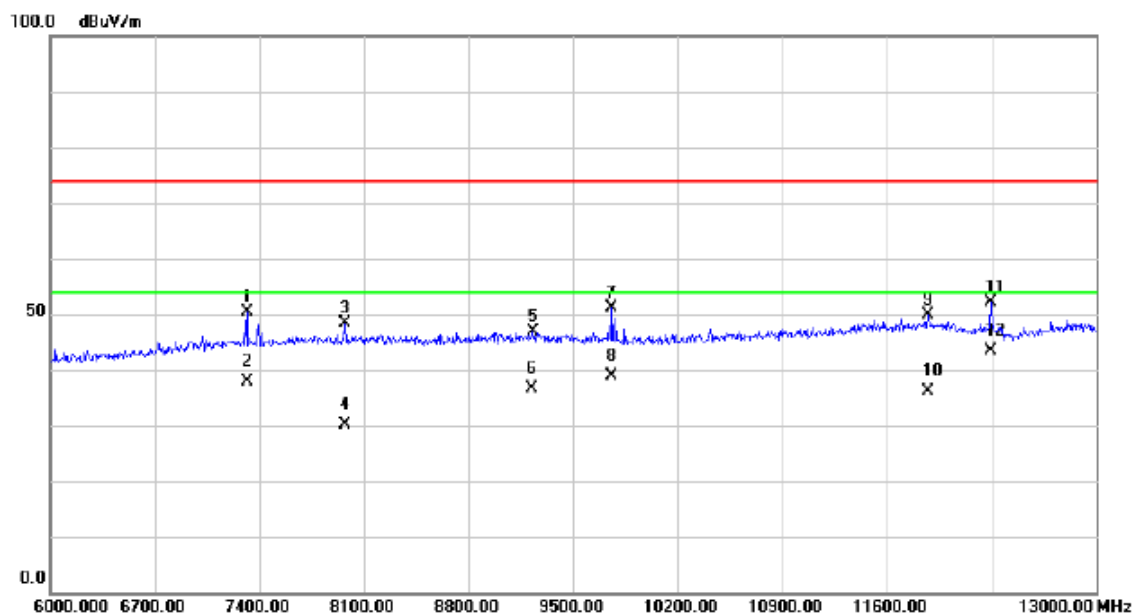

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7316.000	36.80	13.55	50.35	74.00	-23.65	peak	
2	7316.000	24.23	13.55	37.78	54.00	-16.22	AVG	
3	7974.000	33.82	14.44	48.26	74.00	-25.74	peak	
4	7974.000	15.60	14.44	30.04	54.00	-23.96	AVG	
5	9230.500	31.45	15.37	46.82	74.00	-27.18	peak	
6	9230.500	21.30	15.37	36.67	54.00	-17.33	AVG	
7	9759.000	35.61	15.40	51.01	74.00	-22.99	peak	
8	9759.000	23.57	15.40	38.97	54.00	-15.03	AVG	
9	11876.500	29.43	20.48	49.91	74.00	-24.09	peak	
10	11876.500	15.70	20.48	36.18	54.00	-17.82	AVG	
11	12296.500	31.25	20.87	52.12	74.00	-21.88	peak	
12 *	12296.500	22.46	20.87	43.33	54.00	-10.67	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS
Note:	USB Cable: FOXCONN


## Horizontal

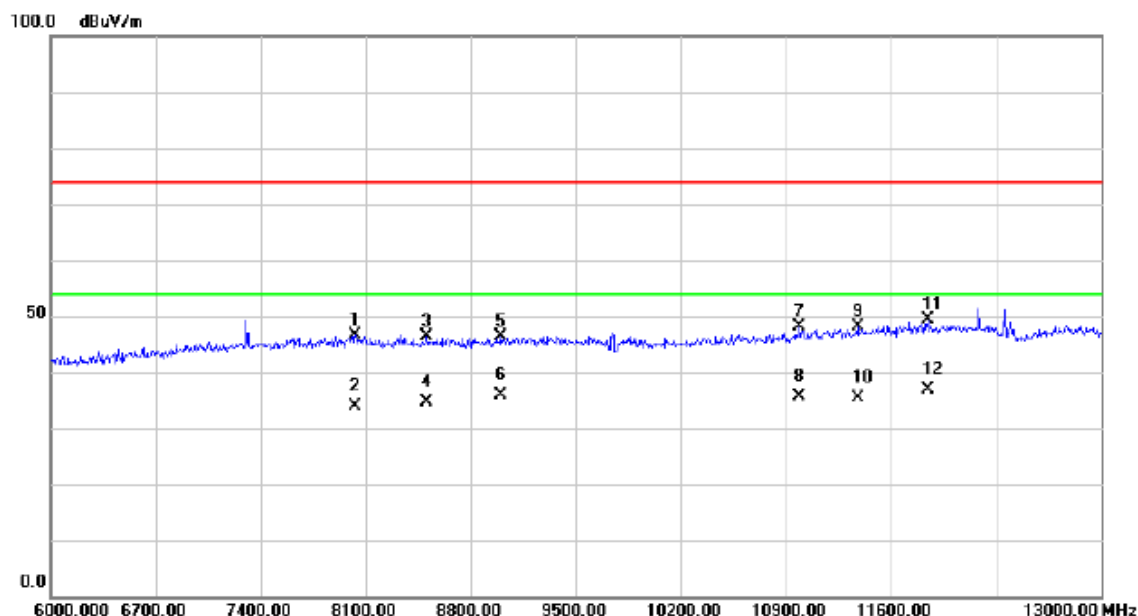

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		8030.000	32.14	14.47	46.61	74.00	-27.39	peak	
2		8030.000	19.50	14.47	33.97	54.00	-20.03	AVG	
3		8509.500	31.97	14.45	46.42	74.00	-27.58	peak	
4		8509.500	20.10	14.45	34.55	54.00	-19.45	AVG	
5		8996.000	31.07	15.32	46.39	74.00	-27.61	peak	
6		8996.000	20.50	15.32	35.82	54.00	-18.18	AVG	
7		10991.00	30.16	17.94	48.10	74.00	-25.90	peak	
8		10991.00	17.60	17.94	35.54	54.00	-18.46	AVG	
9		11376.00	28.99	19.09	48.08	74.00	-25.92	peak	
10		11376.00	16.30	19.09	35.39	54.00	-18.61	AVG	
11		11848.50	28.99	20.41	49.40	74.00	-24.60	peak	
12	*	11848.50	16.40	20.41	36.81	54.00	-17.19	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS
Note:	USB Cable: LUXSHARE-ICT


## Vertical

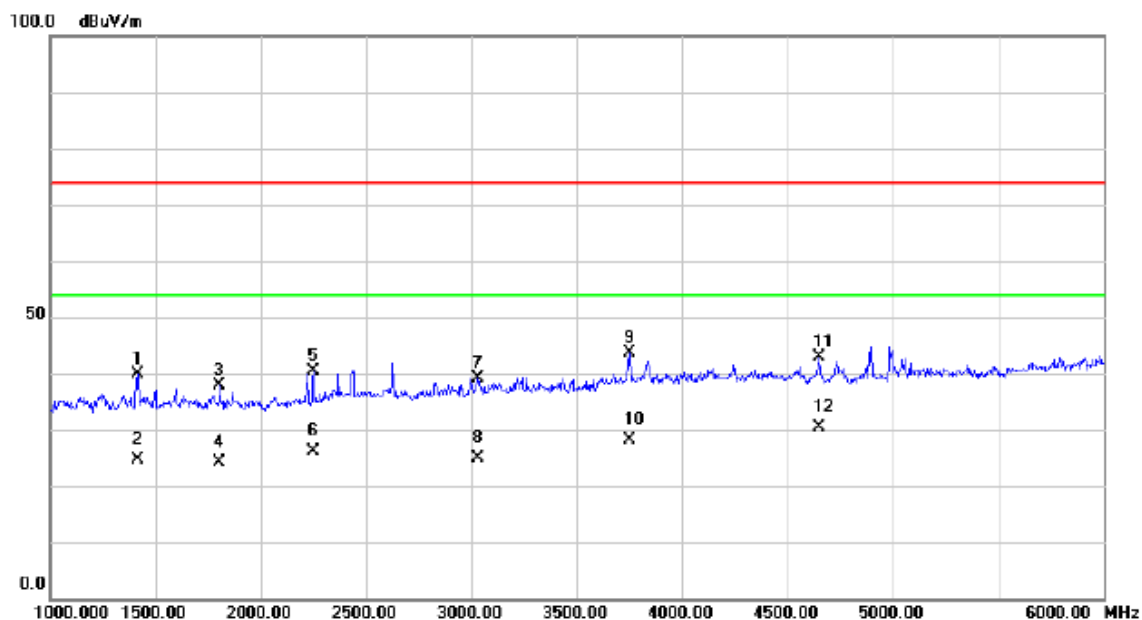

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1415.000	43.94	-4.03	39.91	74.00	-34.09	peak	
2		1415.000	28.60	-4.03	24.57	54.00	-29.43	AVG	
3		1805.000	41.31	-3.33	37.98	74.00	-36.02	peak	
4		1805.000	27.50	-3.33	24.17	54.00	-29.83	AVG	
5		2250.000	42.00	-1.70	40.30	74.00	-33.70	peak	
6		2250.000	27.90	-1.70	26.20	54.00	-27.80	AVG	
7		3030.000	37.53	1.55	39.08	74.00	-34.92	peak	
8		3030.000	23.40	1.55	24.95	54.00	-29.05	AVG	
9		3750.000	39.61	3.93	43.54	74.00	-30.46	peak	
10		3750.000	24.10	3.93	28.03	54.00	-25.97	AVG	
11		4650.000	36.75	6.15	42.90	74.00	-31.10	peak	
12	*	4650.000	24.30	6.15	30.45	54.00	-23.55	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS
Note:	USB Cable: LUXSHARE-ICT


## Horizontal

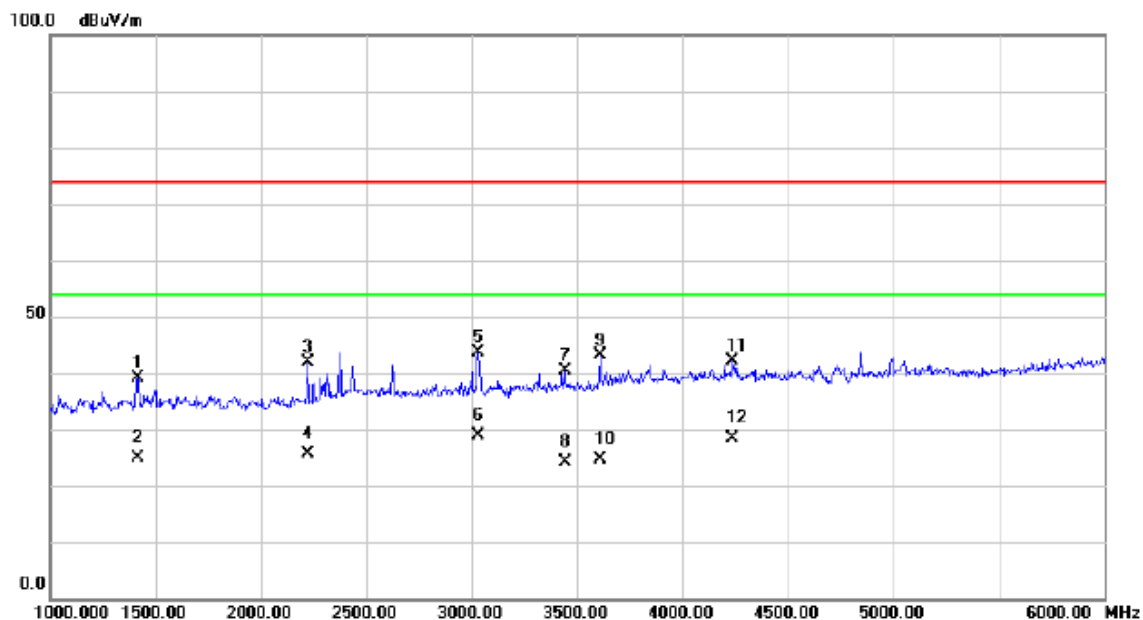

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1415.000	43.27	-4.03	39.24	74.00	-34.76	peak	
2		1415.000	28.90	-4.03	24.87	54.00	-29.13	AVG	
3		2220.000	43.81	-1.86	41.95	74.00	-32.05	peak	
4		2220.000	27.50	-1.86	25.64	54.00	-28.36	AVG	
5		3032.500	42.09	1.57	43.66	74.00	-30.34	peak	
6	*	3032.500	27.30	1.57	28.87	54.00	-25.13	AVG	
7		3442.500	37.55	2.76	40.31	74.00	-33.69	peak	
8		3442.500	21.40	2.76	24.16	54.00	-29.84	AVG	
9		3610.000	39.64	3.37	43.01	74.00	-30.99	peak	
10		3610.000	21.30	3.37	24.67	54.00	-29.33	AVG	
11		4237.500	36.91	5.28	42.19	74.00	-31.81	peak	
12		4237.500	23.20	5.28	28.48	54.00	-25.52	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS
Note:	USB Cable: LUXSHARE-ICT


## Vertical

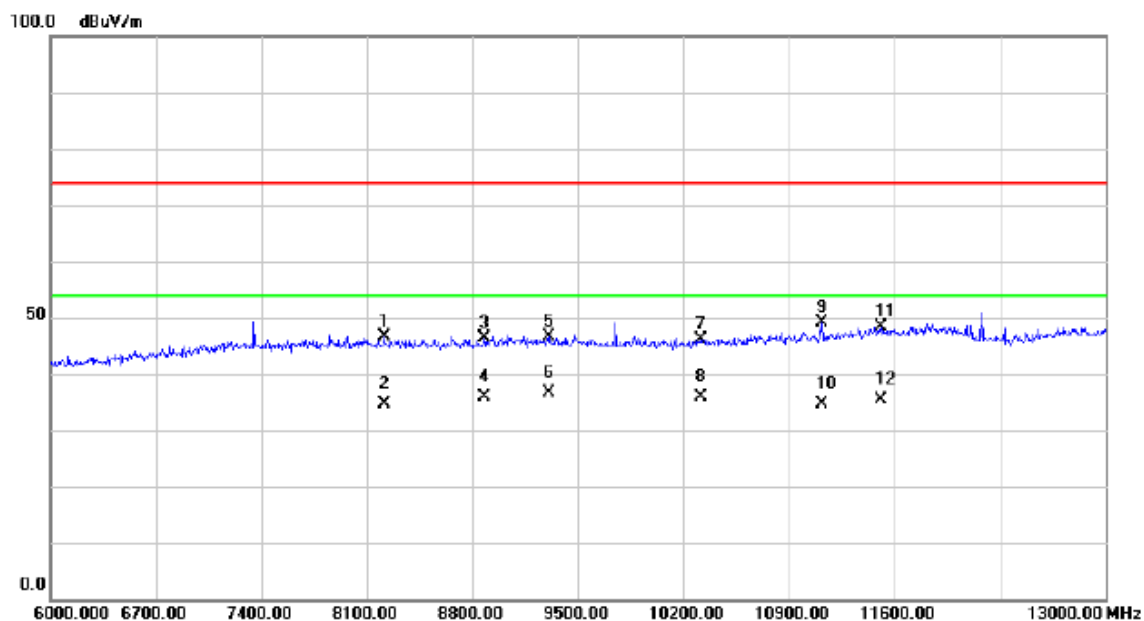

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	8215.500	32.21	14.46	46.67	74.00	-27.33	peak	
2	8215.500	20.10	14.46	34.56	54.00	-19.44	AVG	
3	8880.500	31.19	15.12	46.31	74.00	-27.69	peak	
4	8880.500	20.80	15.12	35.92	54.00	-18.08	AVG	
5	9307.500	31.28	15.38	46.66	74.00	-27.34	peak	
6 *	9307.500	21.30	15.38	36.68	54.00	-17.32	AVG	
7	10315.500	29.84	16.19	46.03	74.00	-27.97	peak	
8	10315.500	19.80	16.19	35.99	54.00	-18.01	AVG	
9	11117.000	30.91	18.32	49.23	74.00	-24.77	peak	
10	11117.000	16.40	18.32	34.72	54.00	-19.28	AVG	
11	11512.500	28.98	19.50	48.48	74.00	-25.52	peak	
12	11512.500	15.90	19.50	35.40	54.00	-18.60	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS
Note:	USB Cable: LUXSHARE-ICT


## Horizontal

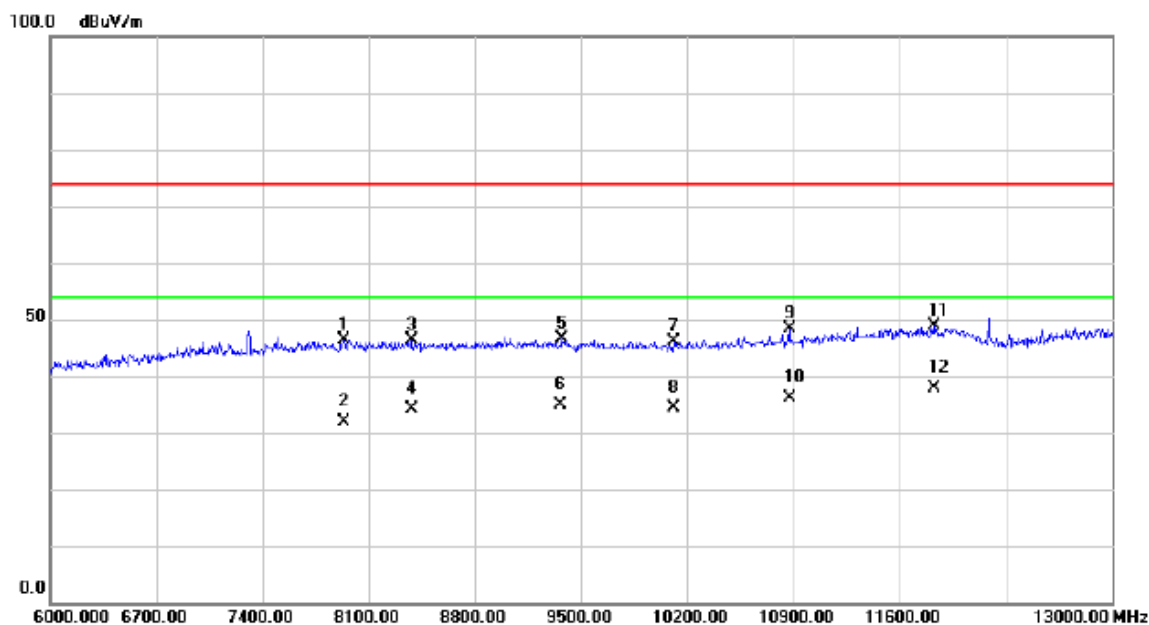

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7939.000	31.88	14.40	46.28	74.00	-27.72	peak	
2		7939.000	17.60	14.40	32.00	54.00	-22.00	AVG	
3		8383.500	31.89	14.44	46.33	74.00	-27.67	peak	
4		8383.500	19.60	14.44	34.04	54.00	-19.96	AVG	
5		9370.500	31.35	15.40	46.75	74.00	-27.25	peak	
6		9370.500	19.50	15.40	34.90	54.00	-19.10	AVG	
7		10109.000	30.46	15.67	46.13	74.00	-27.87	peak	
8		10109.000	18.70	15.67	34.37	54.00	-19.63	AVG	
9		10875.500	30.66	17.64	48.30	74.00	-25.70	peak	
10		10875.500	18.60	17.64	36.24	54.00	-17.76	AVG	
11		11827.500	28.50	20.35	48.85	74.00	-25.15	peak	
12	*	11827.500	17.60	20.35	37.95	54.00	-16.05	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+5GHz WIFI+GPS
Note:	USB Cable: FOXCONN


## Vertical

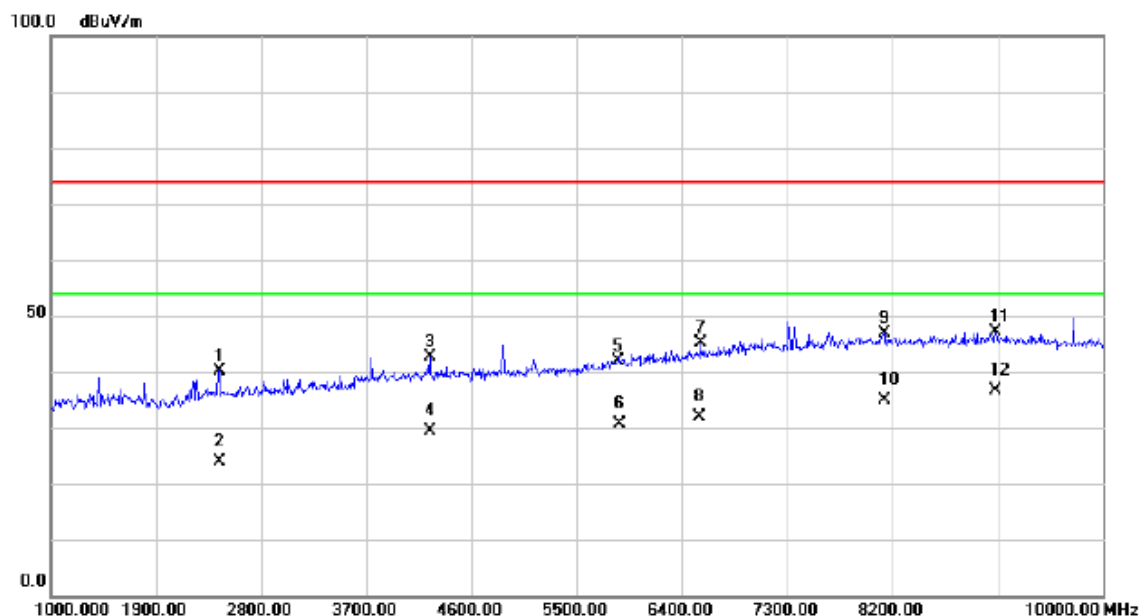

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2440.000	40.89	-0.66	40.23	74.00	-33.77	peak	
2	2440.000	24.50	-0.66	23.84	54.00	-30.16	AVG	
3	4244.500	37.27	5.28	42.55	74.00	-31.45	peak	
4	4244.500	24.20	5.28	29.48	54.00	-24.52	AVG	
5	5851.000	32.59	9.40	41.99	74.00	-32.01	peak	
6	5851.000	21.30	9.40	30.70	54.00	-23.30	AVG	
7	6557.500	33.75	11.28	45.03	74.00	-28.97	peak	
8	6557.500	20.70	11.28	31.98	54.00	-22.02	AVG	
9	8132.500	32.51	14.47	46.98	74.00	-27.02	peak	
10	8132.500	20.50	14.47	34.97	54.00	-19.03	AVG	
11	9086.500	31.87	15.34	47.21	74.00	-26.79	peak	
12 *	9086.500	21.30	15.34	36.64	54.00	-17.36	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+5GHz WIFI+GPS
Note:	USB Cable: FOXCONN


## Horizontal

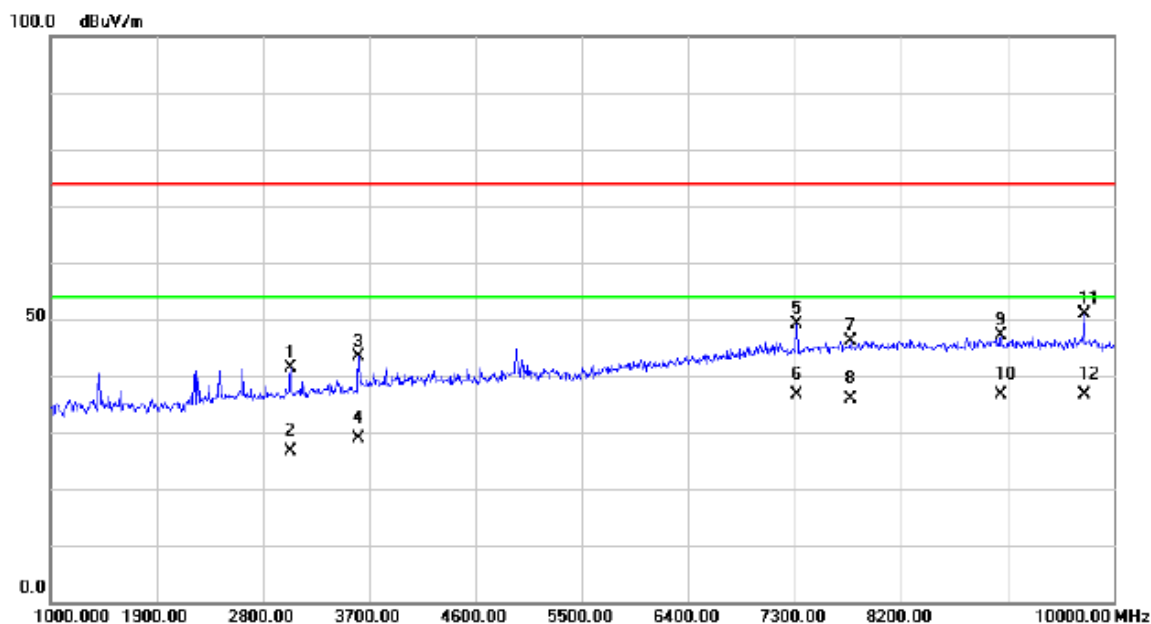

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		3038.500	39.91	1.58	41.49	74.00	-32.51	peak	
2		3038.500	25.10	1.58	26.68	54.00	-27.32	AVG	
3		3610.000	39.90	3.37	43.27	74.00	-30.73	peak	
4		3610.000	25.40	3.37	28.77	54.00	-25.23	AVG	
5		7318.000	35.67	13.55	49.22	74.00	-24.78	peak	
6		7318.000	23.19	13.55	36.74	54.00	-17.26	AVG	
7		7772.500	31.99	14.16	46.15	74.00	-27.85	peak	
8		7772.500	21.60	14.16	35.76	54.00	-18.24	AVG	
9		9050.500	31.74	15.33	47.07	74.00	-26.93	peak	
10		9050.500	21.40	15.33	36.73	54.00	-17.27	AVG	
11		9748.000	35.44	15.41	50.85	74.00	-23.15	peak	
12	*	9748.000	21.34	15.41	36.75	54.00	-17.25	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+5GHz WIFI+GPS
Note:	USB Cable: FOXCONN


## Vertical

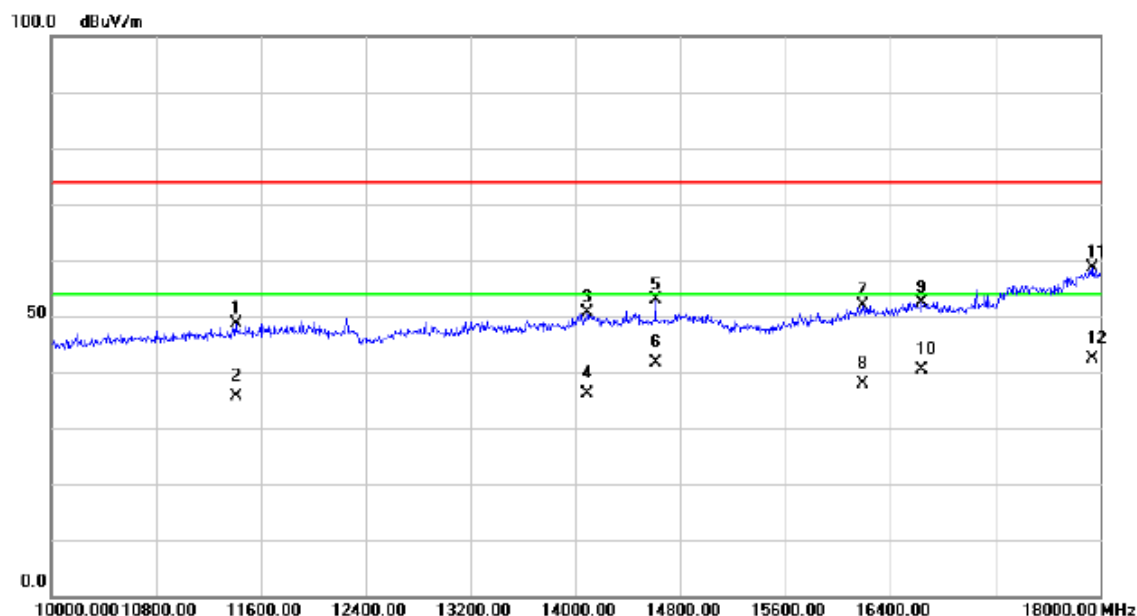

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11408.00	29.52	19.18	48.70	74.00	-25.30	peak	
2		11408.00	16.40	19.18	35.58	54.00	-18.42	AVG	
3		14092.00	28.00	22.70	50.70	74.00	-23.30	peak	
4		14092.00	13.50	22.70	36.20	54.00	-17.80	AVG	
5		14608.00	29.52	23.33	52.85	74.00	-21.15	peak	
6		14608.00	18.34	23.33	41.67	54.00	-12.33	AVG	
7		16192.00	28.14	23.62	51.76	74.00	-22.24	peak	
8		16192.00	14.30	23.62	37.92	54.00	-16.08	AVG	
9		16640.00	27.62	24.79	52.41	74.00	-21.59	peak	
10		16640.00	15.70	24.79	40.49	54.00	-13.51	AVG	
11		17936.00	27.59	31.15	58.74	74.00	-15.26	peak	
12	*	17936.00	11.29	31.15	42.44	54.00	-11.56	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+5GHz WIFI+GPS
Note:	USB Cable: FOXCONN


## Horizontal

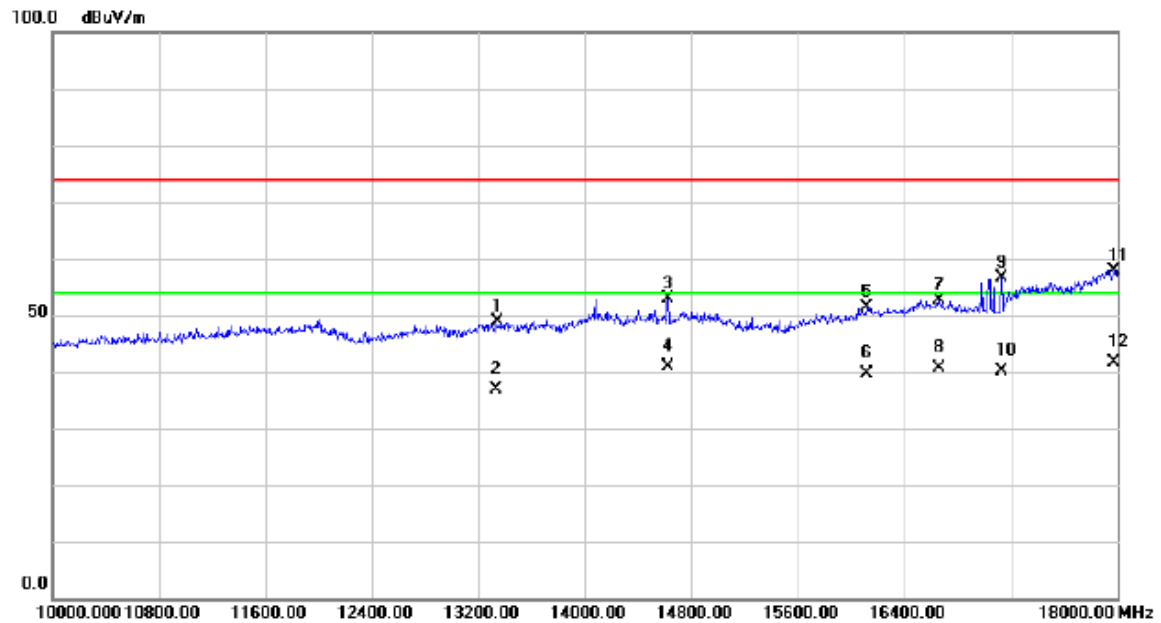

No.	Mk.	Freq.	Reading	Correct	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		13340.00	27.32	21.64	48.96	74.00	-25.04	peak	
2		13340.00	15.20	21.64	36.84	54.00	-17.16	AVG	
3		14624.00	29.63	23.32	52.95	74.00	-21.05	peak	
4		14624.00	17.45	23.32	40.77	54.00	-13.23	AVG	
5		16116.00	28.03	23.41	51.44	74.00	-22.56	peak	
6		16116.00	16.20	23.41	39.61	54.00	-14.39	AVG	
7		16660.00	27.75	24.84	52.59	74.00	-21.41	peak	
8		16660.00	15.80	24.84	40.64	54.00	-13.36	AVG	
9		17128.00	30.40	26.20	56.60	74.00	-17.40	peak	
10		17128.00	13.81	26.20	40.01	54.00	-13.99	AVG	
11		17972.00	26.59	31.41	58.00	74.00	-16.00	peak	
12	*	17972.00	10.15	31.41	41.56	54.00	-12.44	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+5GHz WIFI+GPS
Note:	USB Cable: FOXCONN


## Vertical

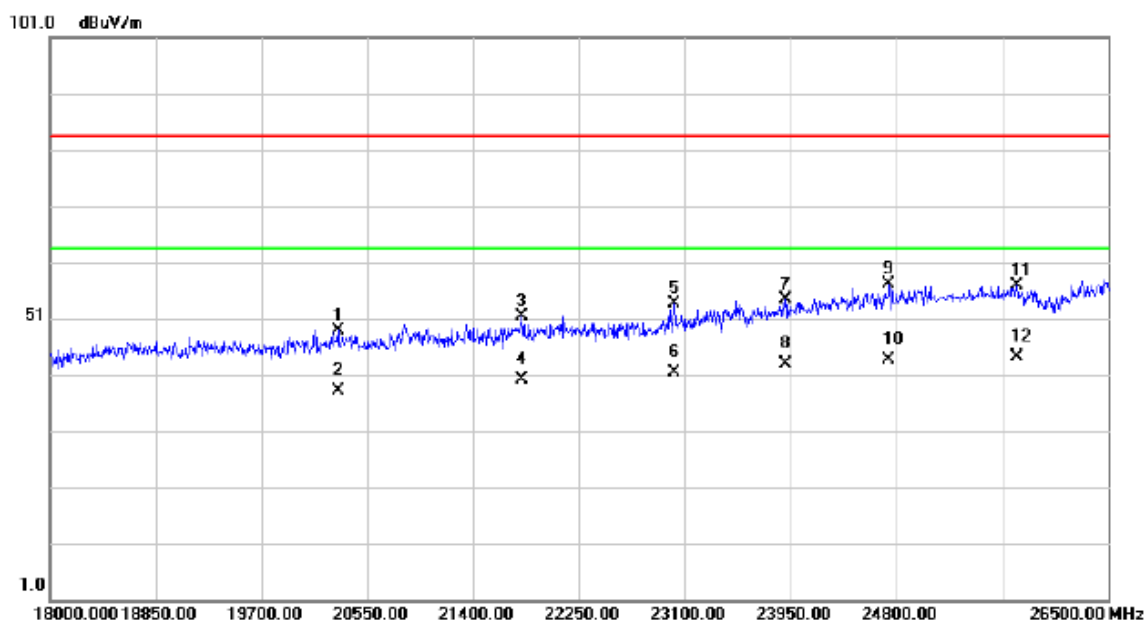

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		20312.00	29.46	19.48	48.94	83.50	-34.56	peak	
2		20312.00	18.59	19.48	38.07	63.50	-25.43	AVG	
3		21791.00	30.05	21.22	51.27	83.50	-32.23	peak	
4		21791.00	18.85	21.22	40.07	63.50	-23.43	AVG	
5		23015.00	29.91	23.65	53.56	83.50	-29.94	peak	
6		23015.00	17.67	23.65	41.32	63.50	-22.18	AVG	
7		23907.50	29.64	24.78	54.42	83.50	-29.08	peak	
8		23907.50	18.05	24.78	42.83	63.50	-20.67	AVG	
9		24740.50	31.14	25.92	57.06	83.50	-26.44	peak	
10		24740.50	17.79	25.92	43.71	63.50	-19.79	AVG	
11		25769.00	30.01	26.97	56.98	83.50	-26.52	peak	
12	*	25769.00	17.10	26.97	44.07	63.50	-19.43	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+5GHz WIFI+GPS
Note:	USB Cable: FOXCONN


## Horizontal

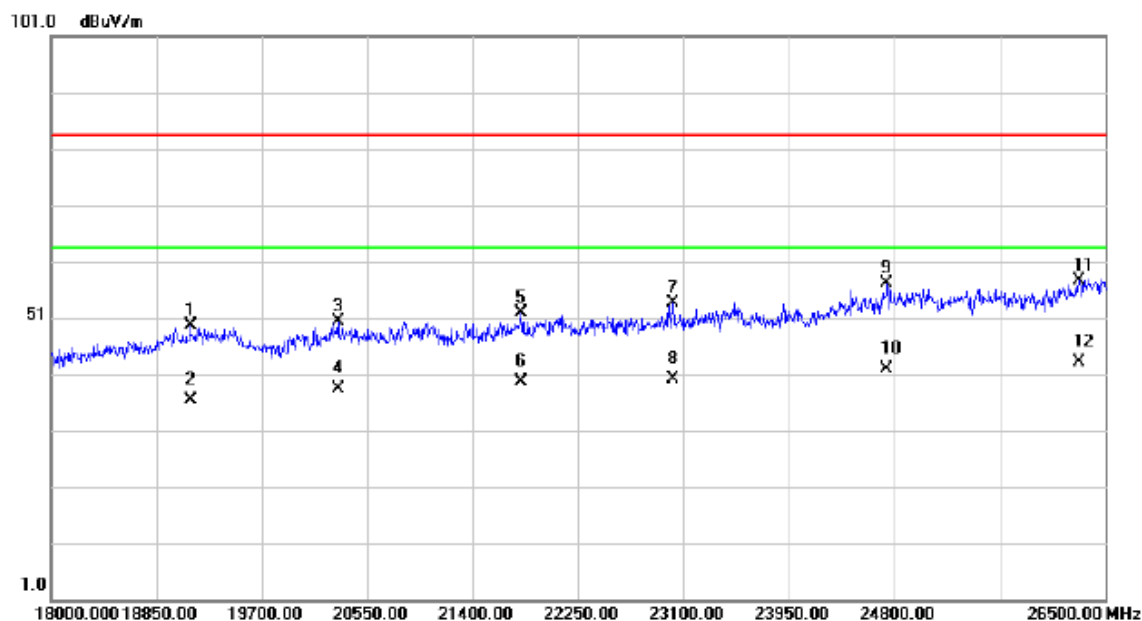

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		19122.00	29.60	20.06	49.66	83.50	-33.84	peak	
2		19122.00	16.21	20.06	36.27	63.50	-27.23	AVG	
3		20312.00	30.96	19.48	50.44	83.50	-33.06	peak	
4		20312.00	18.79	19.48	38.27	63.50	-25.23	AVG	
5		21791.00	30.55	21.22	51.77	83.50	-31.73	peak	
6		21791.00	18.40	21.22	39.62	63.50	-23.88	AVG	
7		23015.00	29.91	23.65	53.56	83.50	-29.94	peak	
8		23015.00	16.59	23.65	40.24	63.50	-23.26	AVG	
9		24740.50	31.14	25.92	57.06	83.50	-26.44	peak	
10		24740.50	16.04	25.92	41.96	63.50	-21.54	AVG	
11		26287.50	30.25	27.43	57.68	83.50	-25.82	peak	
12	*	26287.50	15.64	27.43	43.07	63.50	-20.43	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+5GHz WIFI+GPS
Note:	USB Cable: FOXCONN


## Vertical

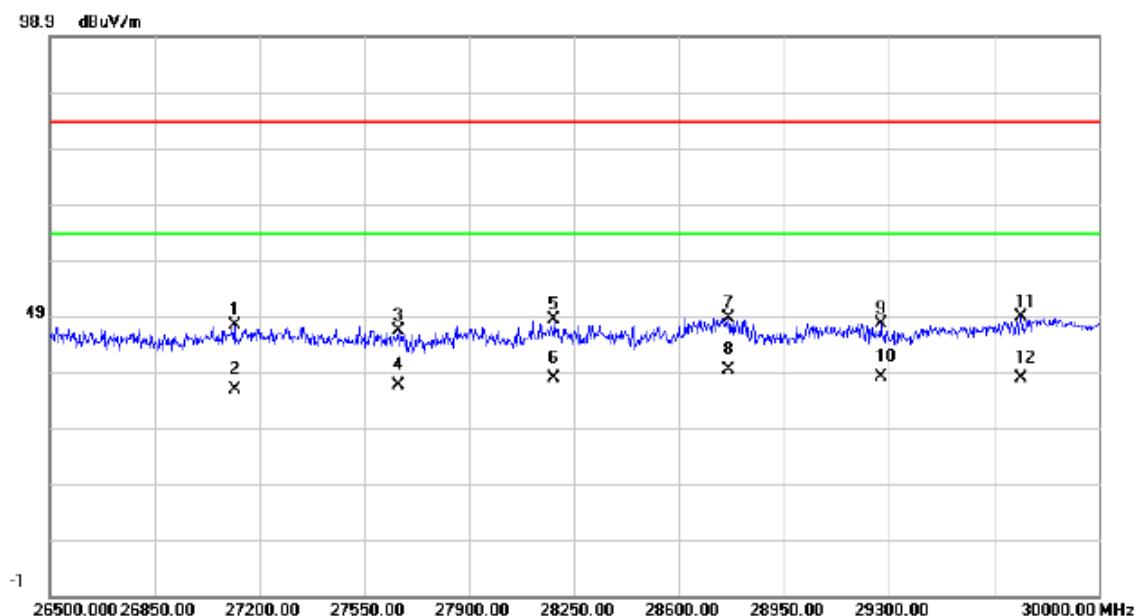

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	27116.00	43.55	3.74	47.29	83.50	-36.21	peak	
2	27116.00	32.07	3.74	35.81	63.50	-27.69	AVG	
3	27662.00	42.70	3.69	46.39	83.50	-37.11	peak	
4	27662.00	32.90	3.69	36.59	63.50	-26.91	AVG	
5	28183.50	43.76	4.46	48.22	83.50	-35.28	peak	
6	28183.50	33.24	4.46	37.70	63.50	-25.80	AVG	
7	28764.50	43.15	5.47	48.62	83.50	-34.88	peak	
8 *	28764.50	33.76	5.47	39.23	63.50	-24.27	AVG	
9	29272.00	41.23	6.36	47.59	83.50	-35.91	peak	
10	29272.00	31.57	6.36	37.93	63.50	-25.57	AVG	
11	29741.00	41.46	7.23	48.69	83.50	-34.81	peak	
12	29741.00	30.47	7.23	37.70	63.50	-25.80	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+5GHz WIFI+GPS
Note:	USB Cable: FOXCONN

## Horizontal

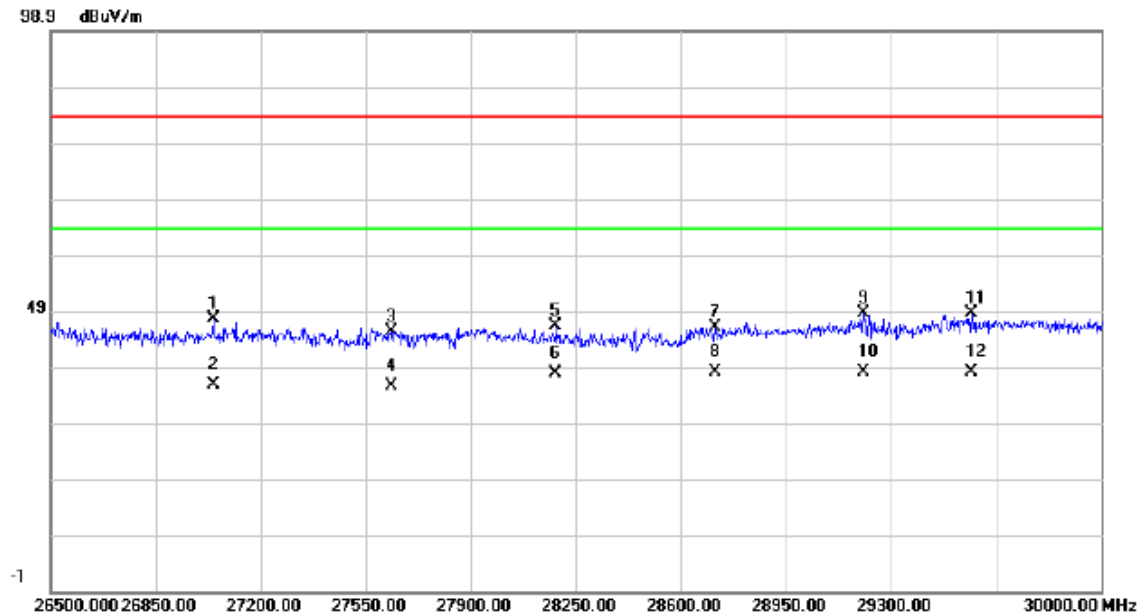

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		27042.50	43.70	3.80	47.50	83.50	-36.00	peak	
2		27042.50	31.98	3.80	35.78	63.50	-27.72	AVG	
3		27634.00	41.70	3.65	45.35	83.50	-38.15	peak	
4		27634.00	31.95	3.65	35.60	63.50	-27.90	AVG	
5		28183.50	41.76	4.46	46.22	83.50	-37.28	peak	
6		28183.50	33.37	4.46	37.83	63.50	-25.67	AVG	
7		28712.00	40.71	5.37	46.08	83.50	-37.42	peak	
8		28712.00	32.55	5.37	37.92	63.50	-25.58	AVG	
9		29209.00	42.25	6.27	48.52	83.50	-34.98	peak	
10	*	29209.00	31.87	6.27	38.14	63.50	-25.36	AVG	
11		29566.00	41.71	6.86	48.57	83.50	-34.93	peak	
12		29566.00	31.06	6.86	37.92	63.50	-25.58	AVG	