

**FCC CFR47 PART 15 SUBPART C  
CERTIFICATION**



**TEST REPORT**

**FOR**

**CLARINET SYSTEMS, INC.**

**INFRARED ACCESS POINT WITH IEEE 802.11b UPLINK**

**MODEL NUMBER: ES3011b**

**BRAND NAME: CLARINET SYSTEMS, INC.**

**FCC ID: QNC-ES3011b**

**REPORT NUMBER: 02U1521-1**

**ISSUE DATE: SEPTEMBER 27, 2002**

*Prepared for*  
**CLARINET SYSTEMS, INC.  
44040 FREMONT BLVD.  
FREMONT, CA 94038  
USA**

*Prepared by*  
**COMPLIANCE CERTIFICATION SERVICES  
561F MONTEREY ROAD,  
MORGAN HILL, CA 95037, USA  
TEL: (408) 463-0885  
FAX: (408) 463-0888**

## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION .....</b>	<b>3</b>
<b>2. EUT DESCRIPTION .....</b>	<b>4</b>
<b>3. TEST METHODOLOGY .....</b>	<b>4</b>
<b>4. FACILITIES AND ACCREDITATION .....</b>	<b>4</b>
4.1. <i>FACILITIES AND EQUIPMENT .....</i>	<i>4</i>
4.2. <i>LABORATORY ACCREDITATIONS AND LISTINGS .....</i>	<i>4</i>
4.3. <i>TABLE OF ACCREDITATIONS AND LISTINGS .....</i>	<i>5</i>
<b>5. CALIBRATION AND UNCERTAINTY .....</b>	<b>6</b>
5.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>6</i>
5.2. <i>MEASUREMENT UNCERTAINTY .....</i>	<i>6</i>
5.3. <i>TEST AND MEASUREMENT EQUIPMENT .....</i>	<i>7</i>
<b>6. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>8</b>
<b>7. APPLICABLE RULES .....</b>	<b>11</b>
<b>8. TEST SETUP, PROCEDURE AND RESULT .....</b>	<b>14</b>
8.1. <i>6 dB BANDWIDTH .....</i>	<i>14</i>
8.2. <i>PEAK POWER .....</i>	<i>16</i>
8.3. <i>PEAK POWER SPECTRAL DENSITY .....</i>	<i>17</i>
8.4. <i>MAXIMUM PERMISSIBLE EXPOSURE .....</i>	<i>19</i>
8.5. <i>SPURIOUS EMISSIONS – CONDUCTED MEASUREMENTS .....</i>	<i>21</i>
8.6. <i>UNDESIRABLE EMISSIONS – RADIATED MEASUREMENTS .....</i>	<i>25</i>
8.7. <i>POWER LINE CONDUCTED EMISSIONS .....</i>	<i>38</i>
8.8. <i>SETUP PHOTOS .....</i>	<i>41</i>

## 1. TEST RESULT CERTIFICATION

**COMPANY NAME:** CLARINET SYSTEMS, INC.  
44040 FREMONT BLVD.  
FREMONT, CA 94038, USA

**EUT DESCRIPTION:** INFRARED ACCESS POINT WITH IEEE 802.11B UPLINK

**MODEL NUMBER:** ES3011B


**DATE TESTED:** SEPTEMBER 10-18, 2002

TYPE OF EQUIPMENT	INTENTIONAL RADIATOR
EQUIPMENT TYPE	2.4 - 2.4835 GHz TRANSCEIVER
MEASUREMENT PROCEDURE	ANSI 63.4 / 1992, TIA/EIA 603
PROCEDURE	CERTIFICATION
FCC RULE	CFR 47 PART 15.C

Compliance Certification Services, Inc. tested the above equipment for compliance with the requirements set forth in CFR 47, PART 15, Subpart C. The equipment in the configuration described in this report, shows the measured emission levels emanating from the equipment do not exceed the specified limit.

**Note:** This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

Approved & Released For CCS By:



MIKE HECKROTTE  
CHIEF ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

Tested By:



NEELESH RAJ  
TEST ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. EUT DESCRIPTION

ES3011b is part of the EthIR LAN family that provides dedicated high-speed network access for PDA and laptop users. Utilizing infrared technology and TCP/IP/PPP ensure platform independence and compatibility with devices that are IR and TCP/IP capable. Minimum client setup is needed since IR connectivity is build-in on most PDA devices and laptops. ESB3011b utilize 802.11b uplink instead of cable-based Ethernet uplink. The mobility of 802.11b and IR enabled by default on PDA and laptop makes ESB3011b the most powerful single port switch to date. This completely eliminates the need for end user to purchase expansive and power-hungry 802.11b add-on. Therefore this device is the perfect choice for the environment where Ethernet cable is not pre-wired or accessible, or an existing 802.11b network.

The ES3011b operates in the frequency range of 2.4 - 2.4835 GHz and has a peak power of 16.6 dBm and an antenna gain of 2.6dBi.

## 3. TEST METHODOLOGY

Conducted and radiated testing were performed according to the procedures documented on chapter 13 of ANSI C63.4 and FCC CFR 47 Parts 2 and 15.

## 4. FACILITIES AND ACCREDITATION

### 4.1. FACILITIES AND EQUIPMENT








The open area test sites and conducted measurement facilities used to collect the radiated data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

Receiving equipment (i.e., receiver, analyzer, quasi-peak adapter, pre-selector) and LISNs conform to CISPR specifications for "Radio Interference Measuring Apparatus and Measurement Methods," Publication 16.

### 4.2. LABORATORY ACCREDITATIONS AND LISTINGS

The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code: 200065-0 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission (reference no: 31040/SIT (1300B3) and 31040/SIT (1300F2)).

### 4.3. TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	NVLAP*	FCC Part 15, CISPR 22, AS/NZS 3548, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11, CNS 13438	 200065-0
USA	FCC	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 1300
Japan	VCCI	CISPR 22 Two OATS and one conducted Site	 R-1014, R-619, C-640
Norway	NEMKO	EN50081-1, EN50081-2, EN50082-1, EN50082-2, IEC61000-6-1, IEC61000-6-2, EN50083-2, EN50091-2, EN50130-4, EN55011, EN55013, EN55014-1, EN55104, EN55015, EN61547, EN55022, EN55024, EN61000-3-2, EN61000-3-3, EN60945, EN61326-1	 ELA 117
Norway	NEMKO	EN60601-1-2 and IEC 60601-1-2, the Collateral Standards for Electro-Medical Products. MDD, 93/42/EEC, AIMD 90/385/EEC	 ELA-171
Taiwan	BSMI	CNS 13438	 SL2-IN-E-1012
Canada	Industry Canada	RSS210 Low Power Transmitter and Receiver	 IC2324 A,B,C, and F

\* No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.

## 5. CALIBRATION AND UNCERTAINTY

### 5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Radiated Emission	
30MHz – 200 MHz	+/- 3.3dB
200MHz – 1000MHz	+4.5/-2.9dB
1000MHz – 2000MHz	+4.6/-2.2dB
Power Line Conducted Emission	
150kHz – 30MHz	+/-2.9

Any results falling within the above values are deemed to be marginal.

### 5.3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENTS LIST				
Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
Quasi-Peak Detector	HP9K - 1GHz	85650A	2811A01335	5/23/03
Spectrum Display	HP	85662A	3026A19146	5/23/03
Spectrum Analyzer	HP100Hz - 22GHz	8566B	2140A01296	5/23/03
Antenna, LP	EMCO200 - 2000MHz	3146	9107-3163	3/30/03
Antenna, Bicon	Eaton30 - 200MHz	94455-1	1197	3/30/03
Horn Antenna,(18 - 26GHz)	EMCO	3115	6717	1/31/03
Line Filter	Lindgren 10k - 10GHz	LMF-3489	497	N.C.R.
LISN	Fischer 9k - 100MHz	FCC-LISN-50/250-25-2	114	4/23/03
LISN	Solar Elec. Co.	8012-50-R-24-BNC	837990	4/25/03
EMI Test Receiver	Rohde & Schwarz	ESHS 20	827129/006	4/17/03
Spectrum Analyzer	HP	8593EM	3710A00205	7/11/03
High Pass Filter (4.57GHz)	FSY Microwave	FM-4570-9SS	3	NCR
Power Meter	Aglient	E441	gb41291160	8/29/03

## 6. SETUP OF EQUIPMENT UNDER TEST

### SUPPORT EQUIPMENT

Device Type	Manufacturer	Model	Serial Number	FCC ID
INFRARED ACCESS POINT WITH IEEE 802.11b UPLINK	CLARINET SYSTEMS, INC.	ES3011b	N/A	QNC-ES3011b
AC ADAPTER	N/A	MW48-0751200	N/A	N/A
ETHIR BEAM	CLARINET SYSTEMS, INC.	EB100	EB100007	N/A

### I/O CABLES


Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	PWR	1	DC PWR	Unshielded	6 feet	
2	IR PORT	1	6 pin mini din	Shielded	6 feet	

### TEST SETUP


The EUT was connected to the ac adapter and ethir beam during the test.



**SETUP DIAGRAM FOR DIGITAL DEVICE TESTS**

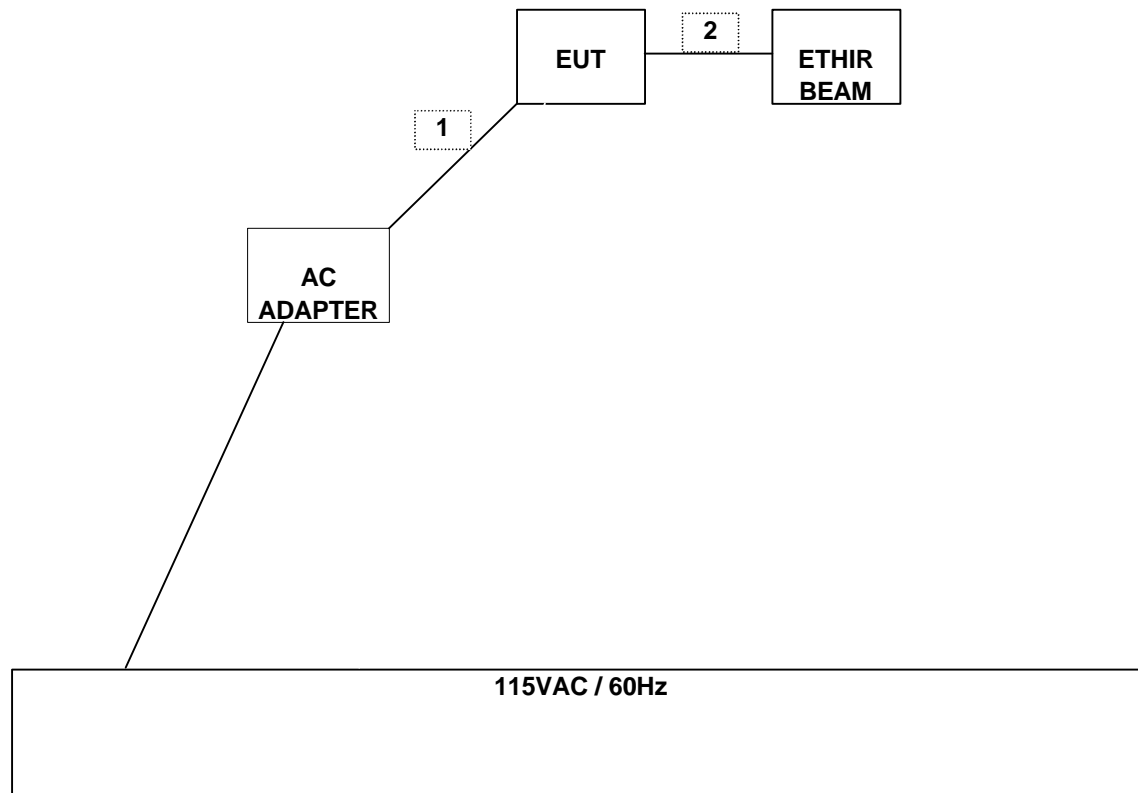

**SETUP DIAGRAM FOR TRANSMITTER TESTS**

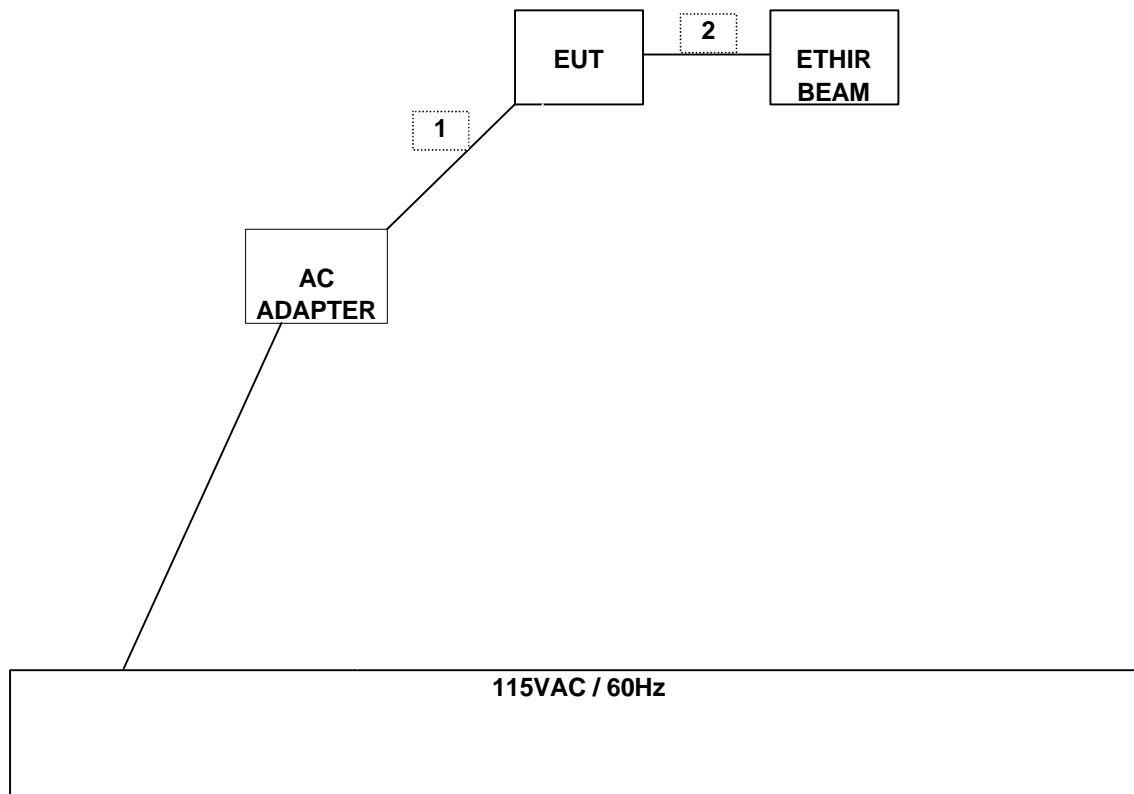

## **7. APPLICABLE RULES**

### **§15.247 (a)- BANDWIDTH**

(2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

### **§15.247 (b)- POWER OUTPUT**

The maximum peak output power of the intentional radiator shall not exceed the following:

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

(4) Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Specification Limit: Antenna Gain = 2.6 dBi, therefore the limit is 30 dBm

### **§15.247 (b)- RADIO FREQUENCY EXPOSURE**

(5) Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §1.1307(b)(1) of this chapter.

### **§15.247 (c)- SPURIOUS EMISSIONS**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see

### **§15.247 (d)- PEAK POWER SPECTRAL DENSITY**

(d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

**§15.205- RESTRICTED BANDS OF OPERATIONS**

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

**§15.207- CONDUCTED LIMITS**

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Quasi-Peak Limit (dBuV)	Average Limit (dBuV)
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

\* Decreases with the logarithm of the frequency.

**§15.209- RADIATED EMISSION LIMITS**

(a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


(b) In the emission table above, the tighter limit applies at the band edges.

Frequency Range (MHz)	Field Strength (uV/m at 3 m)	Field Strength (dBuV/m at 3 m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

## 8. TEST SETUP, PROCEDURE AND RESULT

### 8.1. 6 dB BANDWIDTH

#### TEST SETUP






#### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection is used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

#### RESULTS


No non-compliance noted:

Channel	Frequency (MHz)	B (kHz)	Limit (kHz)	Margin (kHz)
Low	2412	10300	500	9800
Middle	2437	9150	500	8650
High	2462	11050	500	10550

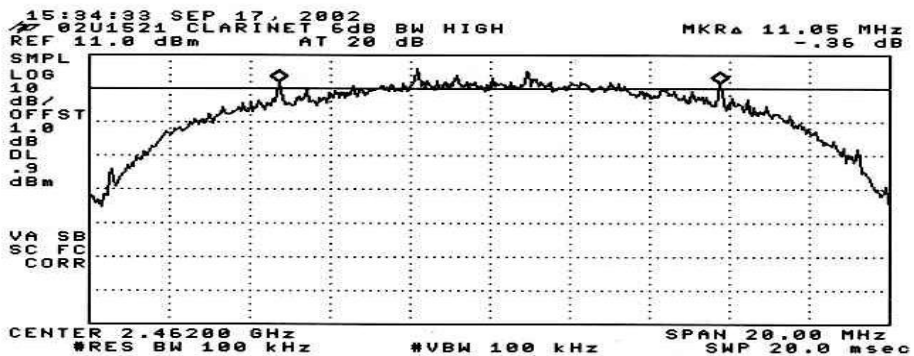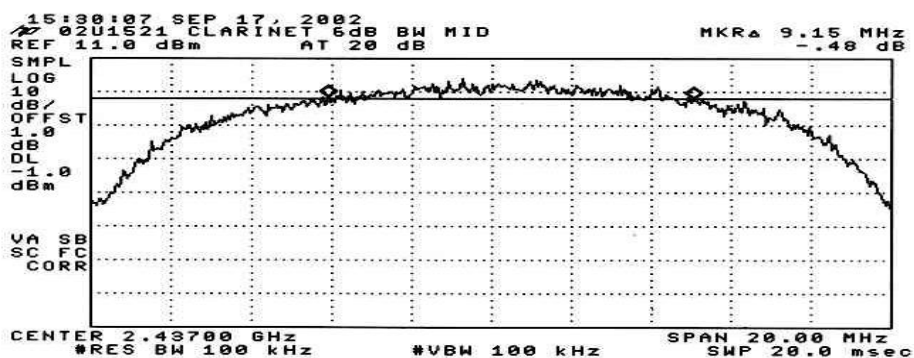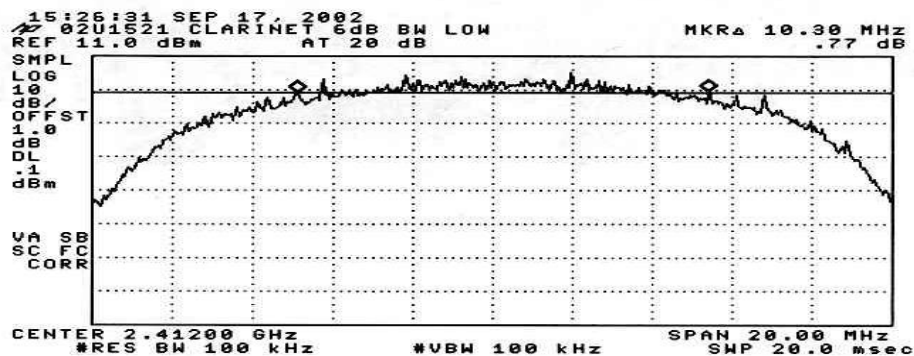

## 8.2. PEAK POWER

### TEST SETUP



### TEST PROCEDURE

The transmitter output is connected to the peak power meter.

### RESULTS


No non-compliance noted:

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin dB
Low	2412	15.8	30	-14.2
Middle	2437	16.6	30	-13.4
High	2462	16.0	30	-14



### 8.3. PEAK POWER SPECTRAL DENSITY

#### TEST SETUP






#### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = VBW = 3KHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

#### RESULTS

No non-compliance noted:

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin dB
Low	2412	-11.08	8	-19.08
Middle	2437	-10.92	8	-18.92
High	2462	-9.69	8	-17.69

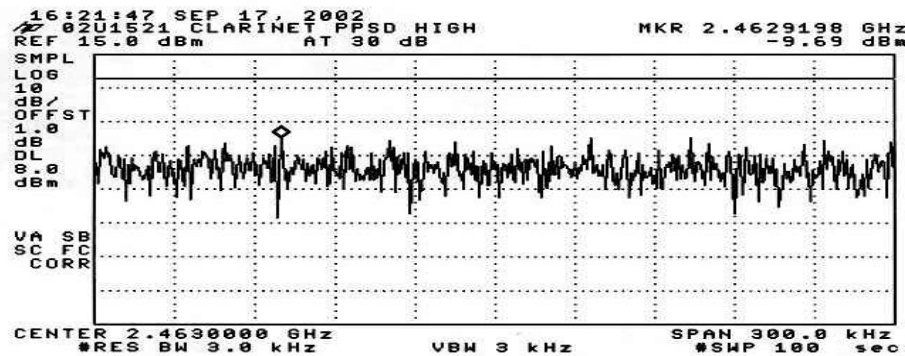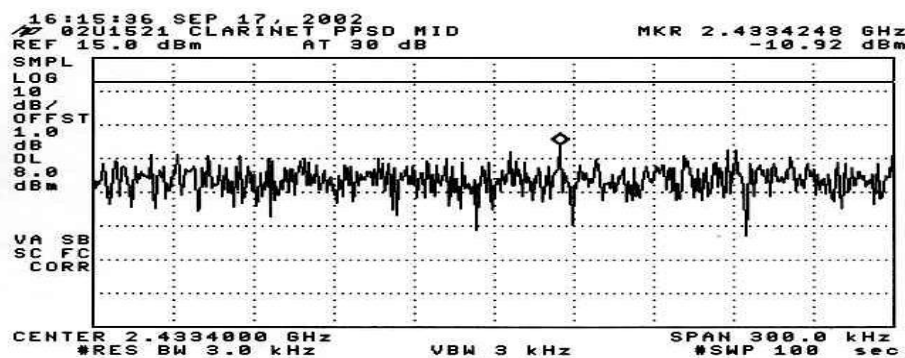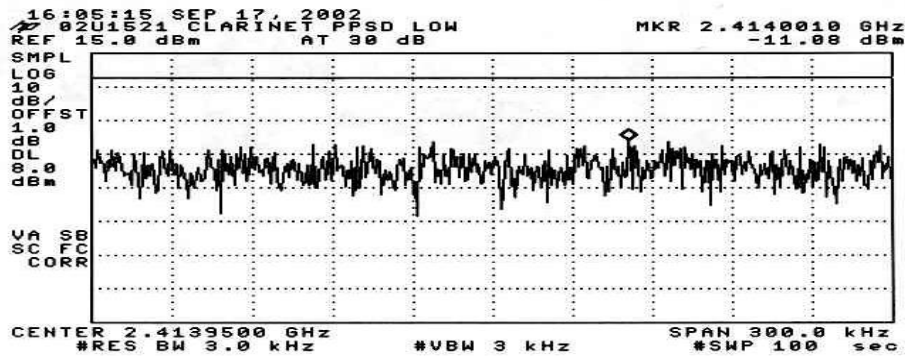

## 8.4. MAXIMUM PERMISSIBLE EXPOSURE

### CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts / meter

P = Power in Watts

G = Numeric antenna gain

d = distance in meters

S = Power Density in milliwatts / square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of mW and cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = 100 * d \text{ (m)}$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW / cm<sup>2</sup>

Substituting the logarithmic form of power and gain using:

$$P \text{ (mW)} = 10^{(P \text{ (dBm)} / 10)} \text{ and}$$

$$G \text{ (numeric)} = 10^{(G \text{ (dBi)} / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S} \quad \text{Equation (1)}$$

where

d = MPE safe distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW / cm<sup>2</sup>

## **RESULTS**

No non-compliance noted:

EUT output power = 16.6 dBm

Antenna Gain = 2.6 dBi

S = 1.0 mW / cm<sup>2</sup> from 1.1310 Table 1

Substituting these parameters into Equation (1) above:

MPE Safe Distance = 2.6 cm


NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

## 8.5. SPURIOUS EMISSIONS – CONDUCTED MEASUREMENTS

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit.

Also, conducted RF measurements of the transmitter output over the 30 MHz to 26.5 GHz band were made in order to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

### TEST SETUP



### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.




Measurements are made at the lower band edge with the transmitter set to the lowest channel.




Measurements are made at the upper band edge with the transmitter set to the highest channel.



Measurements are made over the 30 MHz to 26.5 GHz range with the transmitter set to the lowest, middle, and highest channels.

### RESULTS

No non-compliance noted:

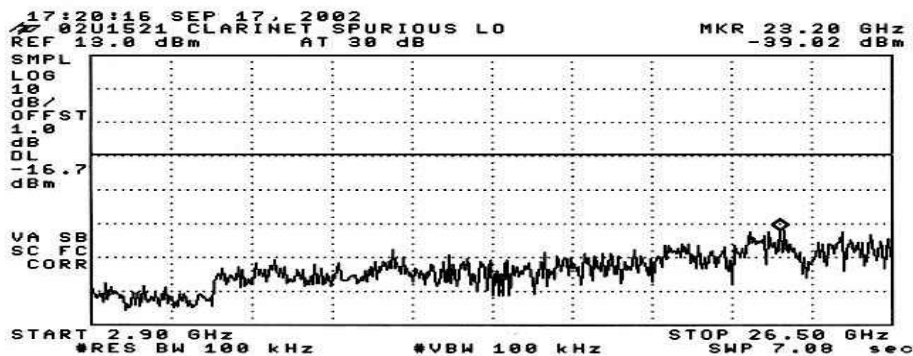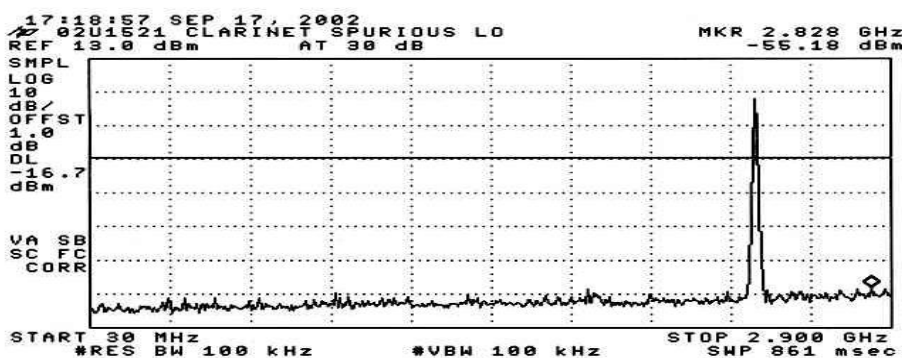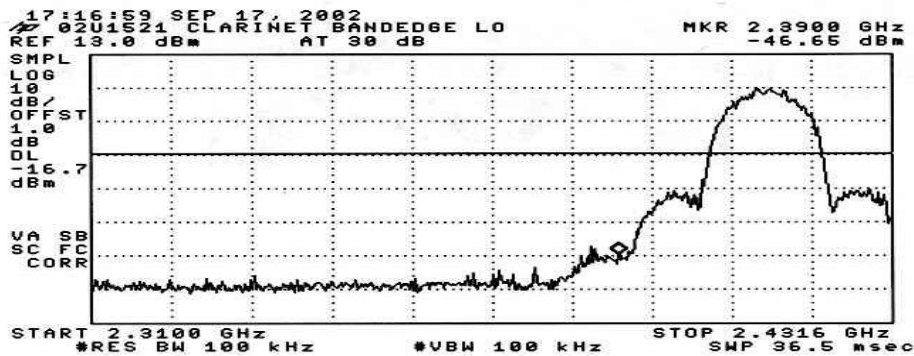

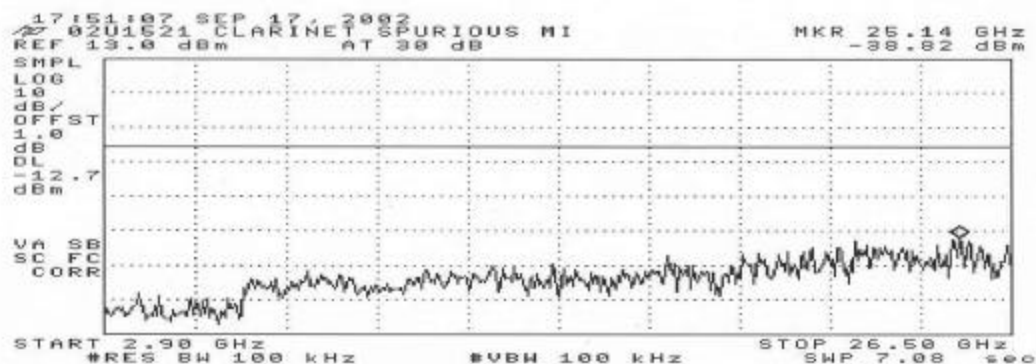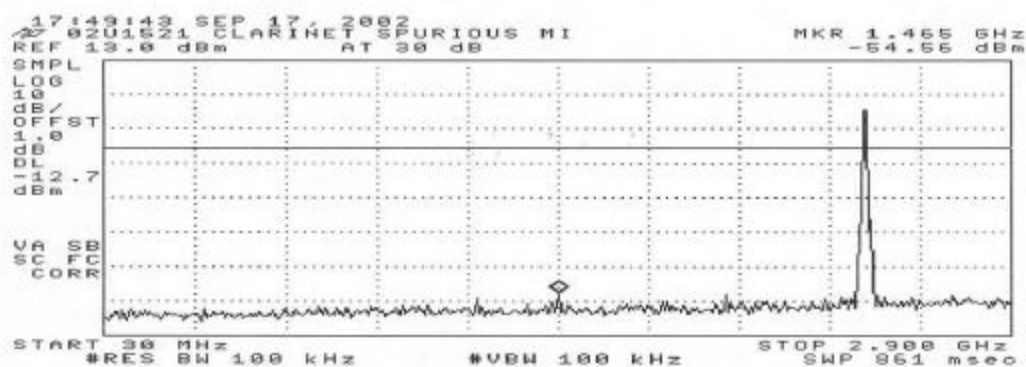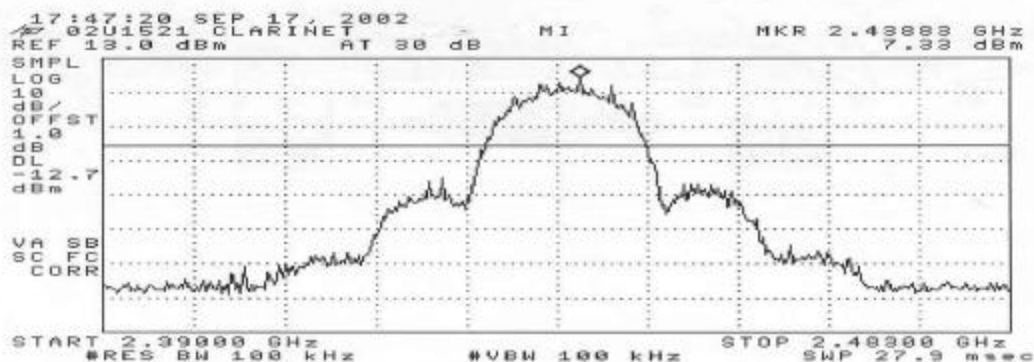

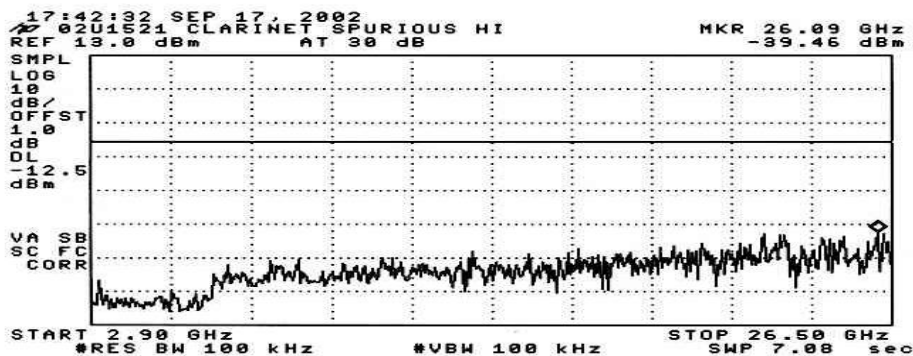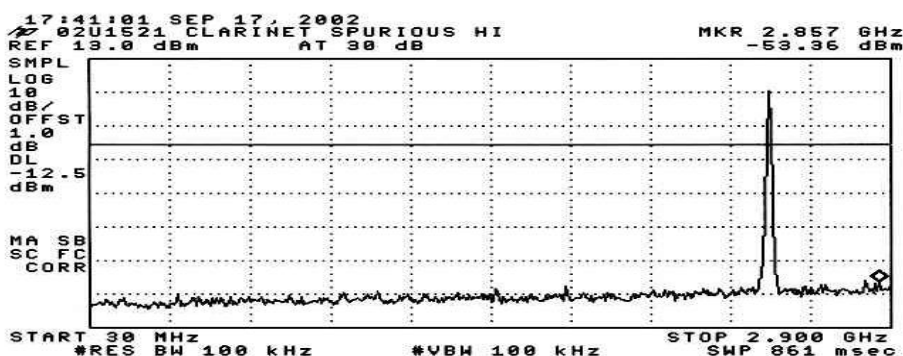



## **8.6. UNDESIRABLE EMISSIONS – RADIATED MEASUREMENTS**

### **TEST SETUP**

For measurements of the EUT as a digital device, the EUT and all other support equipment were placed on a wooden table 80 cm above the ground plane. For measurements of the EUT as a transmitter, the EUT and the laptop were placed on the wooden table. The antenna to EUT distance is 3 meters for measurements below 1 GHz and 1 meter for measurements above 1 GHz. The EUT is configured in accordance with Section 8 of ANSI C63.4/1992.

The EUT is set to transmit in a continuous mode.

### **TEST PROCEDURE**

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz within restricted bands, the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The frequency span is set small enough to easily differentiate between broadcast stations, intermittent ambient signals and EUT emissions. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the suspected signal. Measurements were made with the antenna polarized in both the vertical and the horizontal positions.

## **SYSTEM NOISE FLOOR FOR HARMONIC AND SPURIOUS MEASUREMENTS**

### **Compliance Certification Services**

Worst Case Radiated Emissions System Noise Floor

Each band below corresponds to each horn antenna band

Uses the lowest gain preamplifier; actual preamp used may have higher gain

Uses the longest typical cable configuration; actual cables used may have less loss

Noise floor field strength results are compared to the FCC 15.205 Restricted Band limit

Specification Distance: 3 meters

Freq GHz	SA dBuV	AF dB/m	Distance m	Distance dB	Preamp dB	Cable dB	Field dBuV/m	Limit dBuV/m	Margin dB
1 to 18 GHz band									
RBW = 1 MHz, peak detection									
18	41.9	47.8	1	-9.5	32.6	13.5	61.06	74	-12.94
RBW = 1 MHz, average detection									
18	28.7	47.8	1	-9.5	32.6	13.5	47.86	54	-6.14
18 to 26.5 GHz band									
RBW = 1 MHz, peak detection									
26.5	44.6	33.4	1	-9.5	35.0	19.5	52.96	74	-21.04
RBW = 1 MHz, average detection									
26.5	32.4	33.4	1	-9.5	35.0	19.5	40.76	54	-13.24

## **TEST RESULTS**

No non-compliance noted:

## HARMONIC AND SPURIOUS RADIATED EMISSIONS

### LOW CHANNEL

09/16/02 FCC Measurement

Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: NEELESH RAJ

Project #: 02U1521

Company: CLARIENT SYSTEM, INC.

EUT Descrip.: INFRARED ACCESS POINT WITH IEEE 802.11b UPLINK

EUT M/N: ES3011b

Test Target: FCC 15.247

#### Equipment for 1-22 GHz:

HP8566B Analyzer  
Miteq NSP2600-44 Preamp  
EMCO 3115 Antenna  
Cable: 15.0 feet

#### Equipment for 22 - 58 GHz:

HP8566B Analyzer  
HP 11973A Amplifier (LO)  
HP 11970K External mixer/antenna  
Cable: IF Only (321 MHz)

#### Peak Measurements:

1 MHz Resolution Bandwidth  
1MHz Video Bandwidth


#### Average Measurements:

1MHz Resolution Bandwidth  
10Hz Video Bandwidth


f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
FUNDAMENTAL ( LOW CHANNEL )															
2.410	3.3	71.8		28.9	3.1		-9.5	0.0	94.3						V (RBW=VBW=100KHz)
2.410	3.3	70.9		28.9	3.1		-9.5	0.0	93.4						H (RBW=VBW=100KHz)
HARMONICS															
4.824	3.3	42.3	31.8	33.8	5.7	-36.1	-9.5	1.0	37.3	26.8	74.0	54.0	-36.7	-27.2	V
4.824	3.3	42.5	31.7	33.8	5.7	-36.1	-9.5	1.0	37.5	26.7	74.0	54.0	-36.5	-27.3	H
7.236	3.3	46.7		37.0	7.2	-36.3	-9.5	1.0	46.2		74.3		-28.1		V
7.236	3.3	44.3		37.0	7.2	-36.3	-9.5	1.0	43.8		74.3		-30.5		H
9.648	3.3	42.1		39.7	8.5	-35.4	-9.5	1.0	46.4		74.3		-27.9		V
9.648	3.3	42.0		39.7	8.5	-35.4	-9.5	1.0	46.3		74.3		-28.0		H
NO OTHER HARMONIC EMISSIONS WERE SEEN															
SPURIOUS EMISSIONS															
4.075	3.3	54.2	52.3	33.2	5.2	-36.1	-9.5	1.0	48.0	46.1	74.0	54.0	-26.0	-7.9	V
4.075	3.3	52.9	51.7	33.2	5.2	-36.1	-9.5	1.0	46.7	45.5	74.0	54.0	-27.3	-8.5	H
4.490	3.3	54.6		32.9	5.5	-36.1	-9.5	1.0	48.4		74.3		-25.9		V
4.490	3.3	51.1		32.9	5.5	-36.1	-9.5	1.0	44.9		74.3		-29.4		H
6.113	3.3	45.4		35.4	6.7	-36.3	-9.5	1.0	42.7		74.3		-31.6		V
6.113	3.3	44.9		35.4	6.7	-36.3	-9.5	1.0	42.2		74.3		-32.1		H

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

LOW CHANNEL RESTRICTED BAND (VERTICAL PEAK)

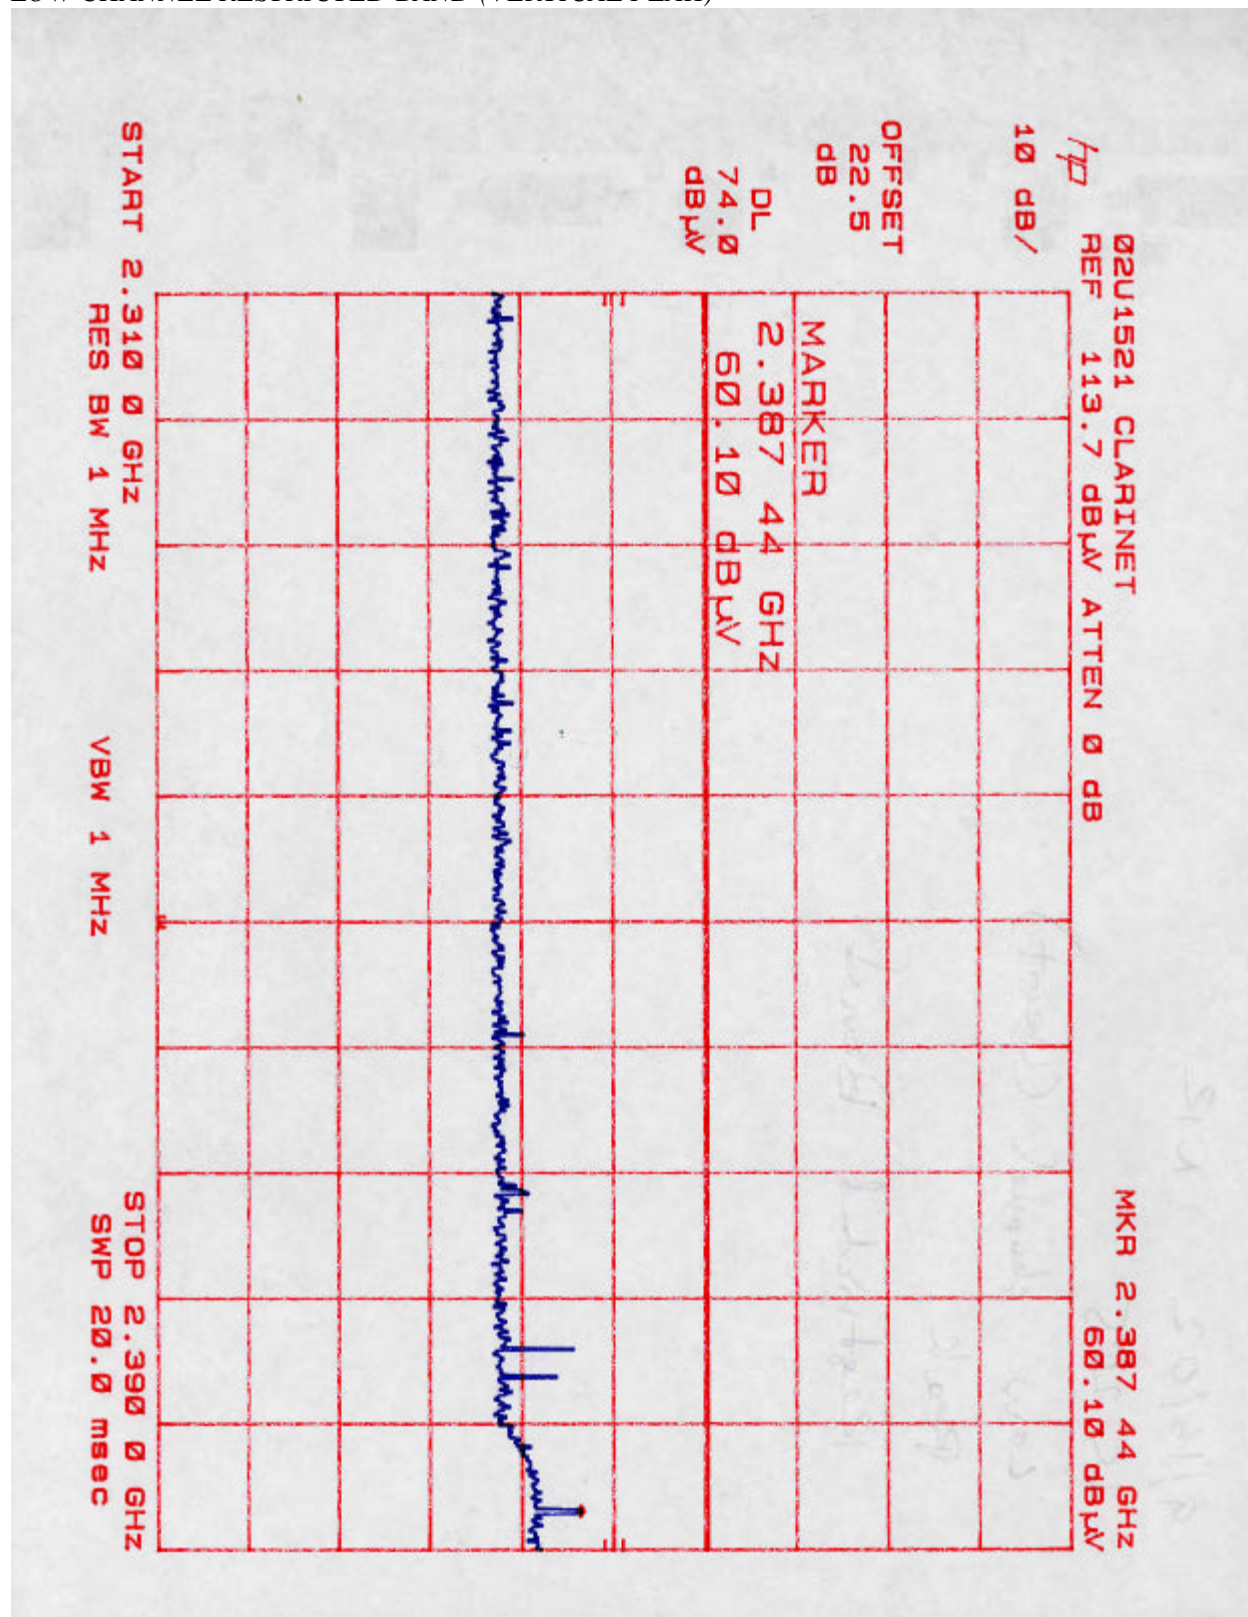

LOW CHANNEL RESTRICTED BAND (VERTICAL AVG)

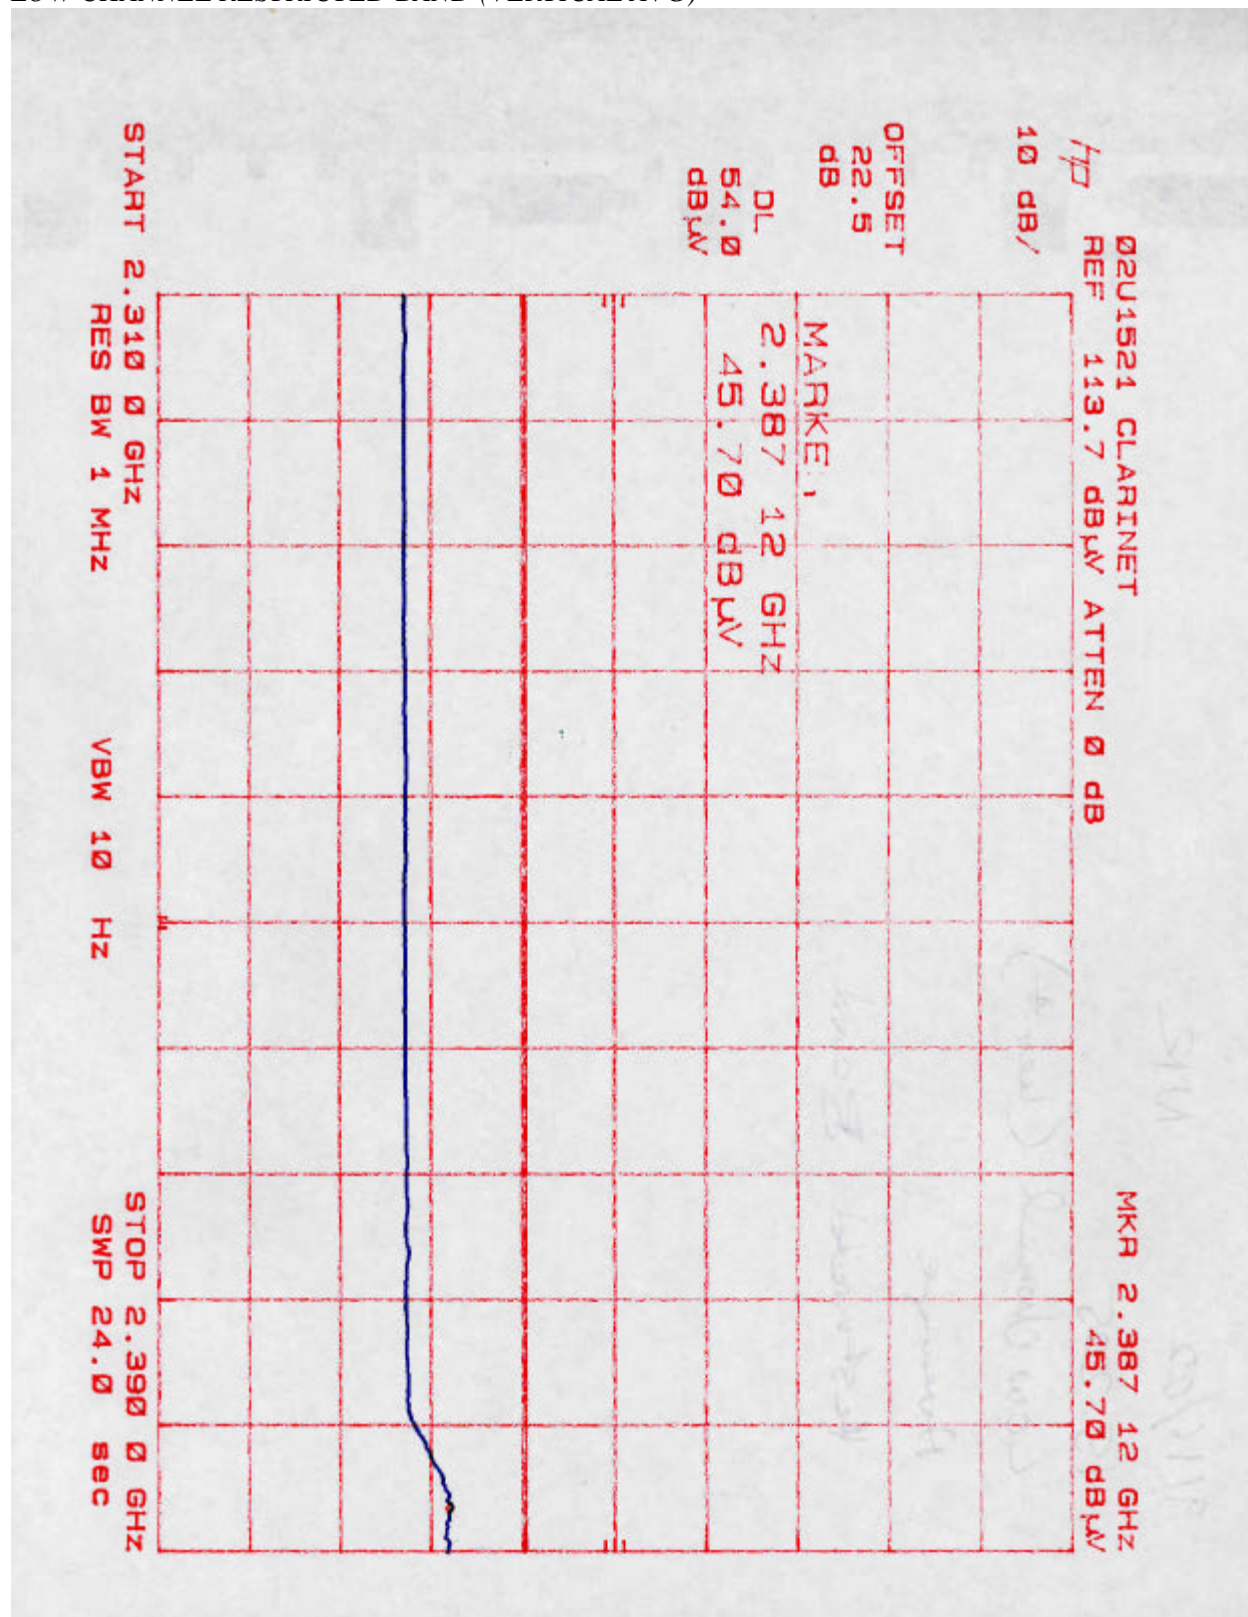



LOW CHANNEL RESTRICTED BAND (HORIZONTAL PEAK)

Note: PEAK LEVEL IS LESS THAN AVERAGE LIMIT

