




BUREAU  
VERITAS


### Chain 0



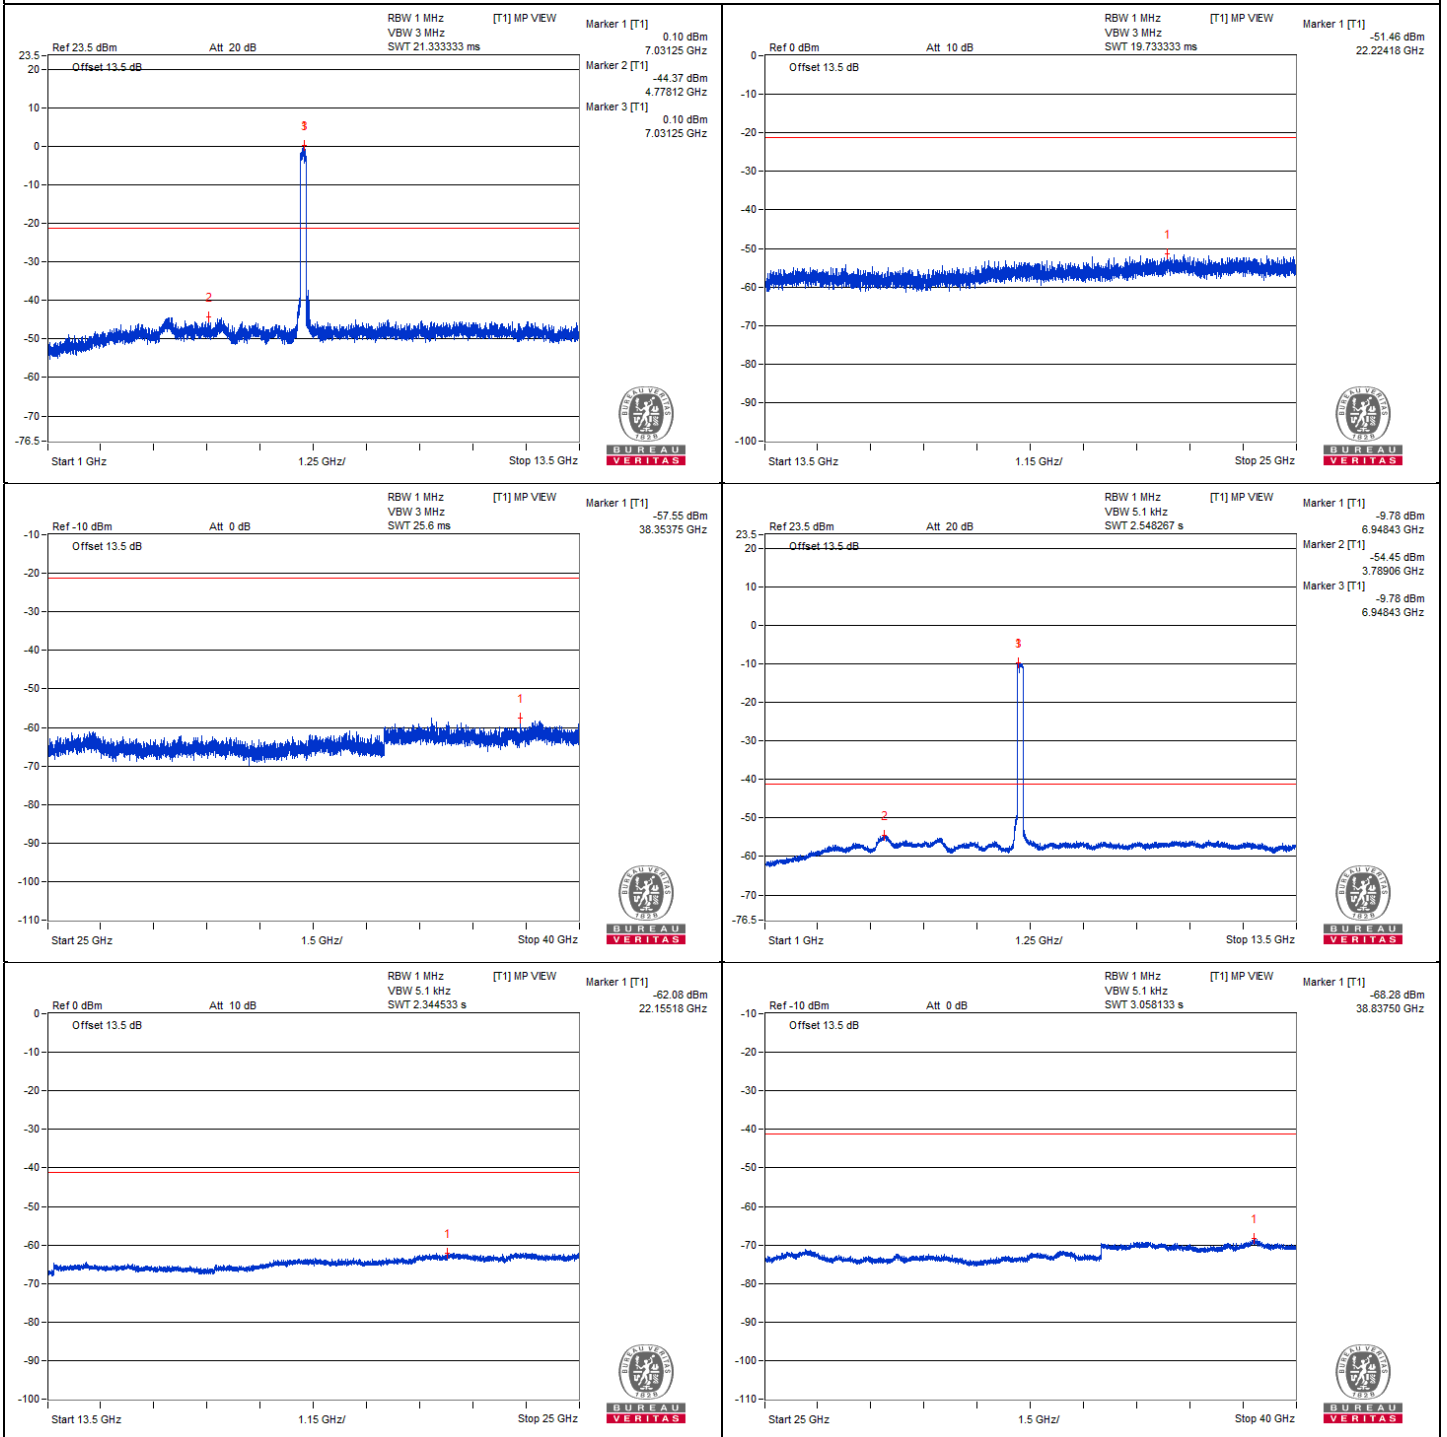

BUREAU  
VERITAS

### Chain 1

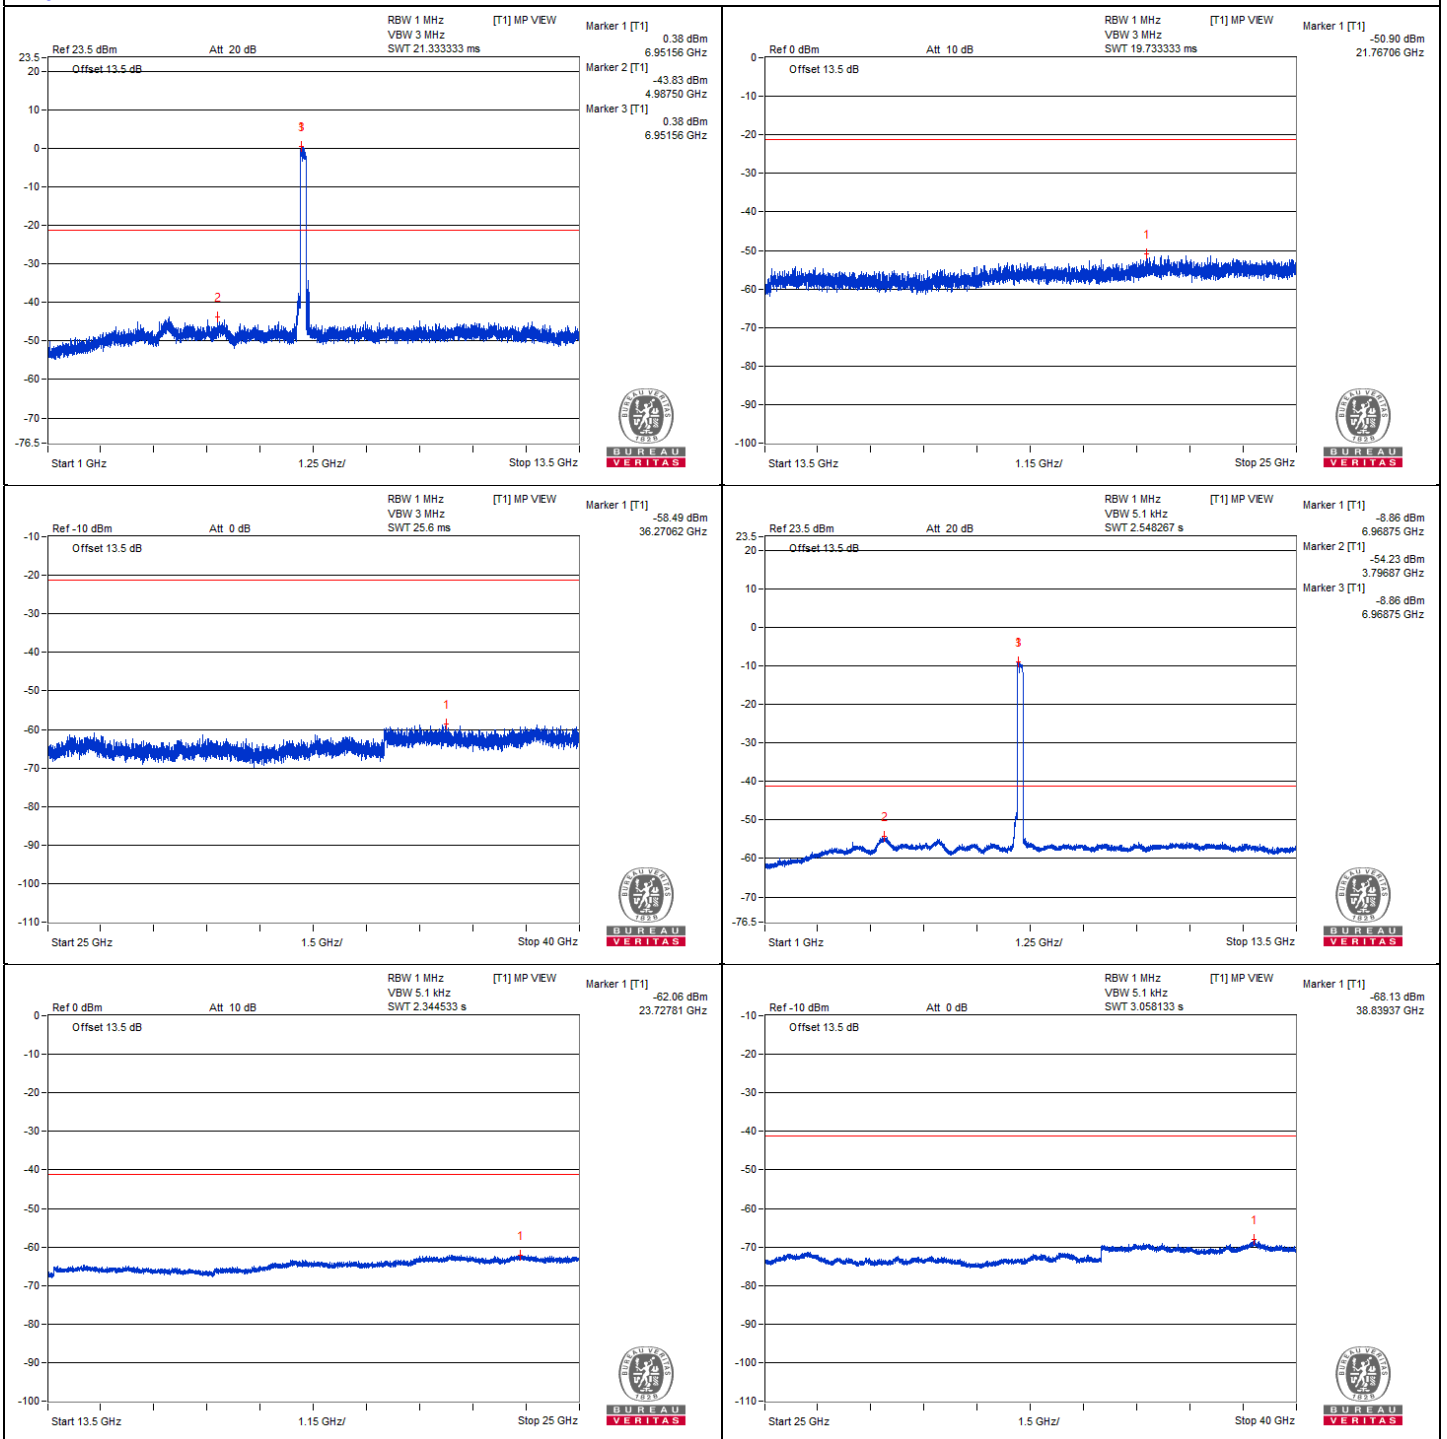



### Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#7125.92	65.05 PK	88.2	-23.15	-39.19	-36	4.09	-30.21
2	#7141.05	47.15 AV	68.2	-21.05	-55.11	-55.32	4.09	-48.11



### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

### Chain 0

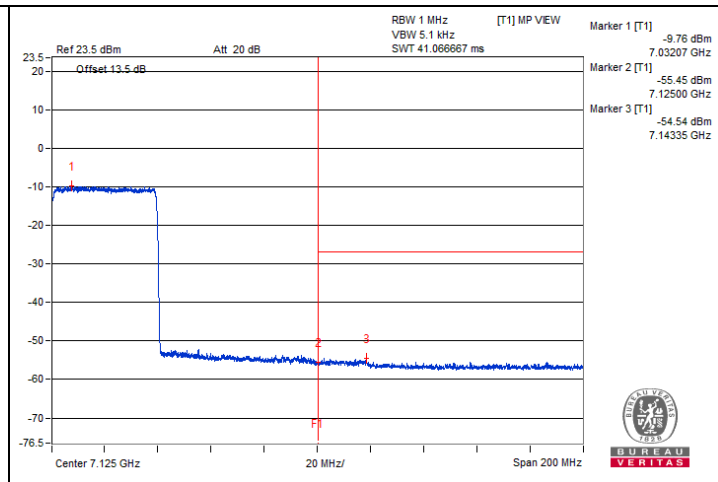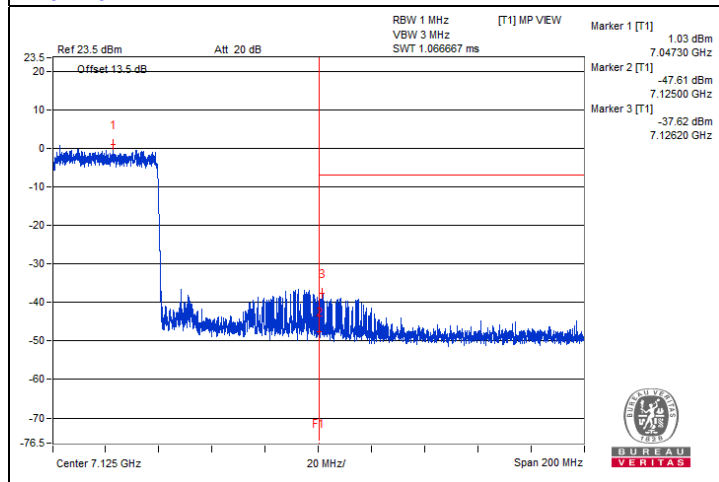

### Chain 1

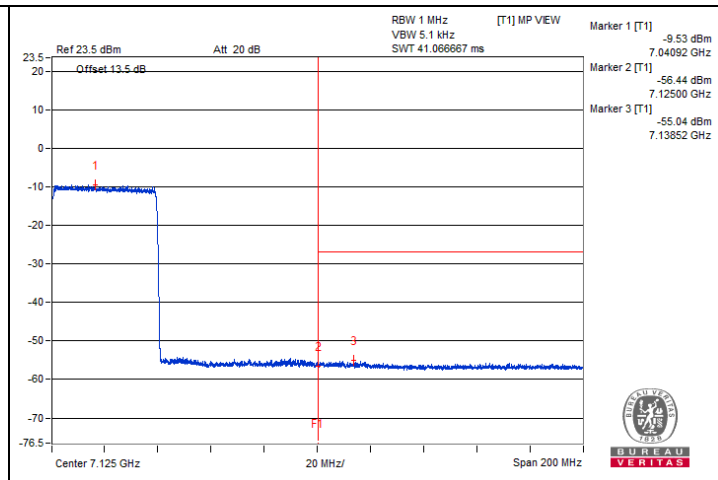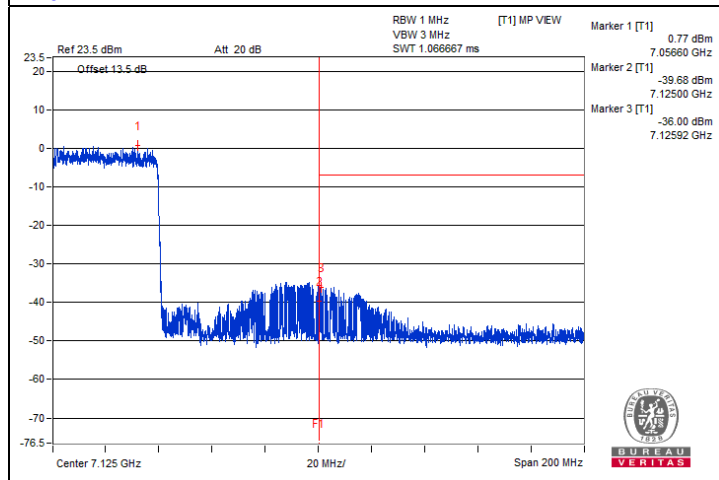

### 160 MHz Preamble 802.11be (RU996+484+242) - Channel 15

#### Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12045.31	55.82 PK	74	-18.18	-47.57	-46.87	4.76	-39.44
2	12048.43	45.66 AV	54	-8.34	-57.51	-57.23	4.76	-49.60
3	18066.93	46.49 PK	74	-27.51	-58.61	-55.15	4.76	-48.77
4	18072.68	37.36 AV	54	-16.64	-65.99	-65.37	4.76	-57.90

#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




### Chain 0

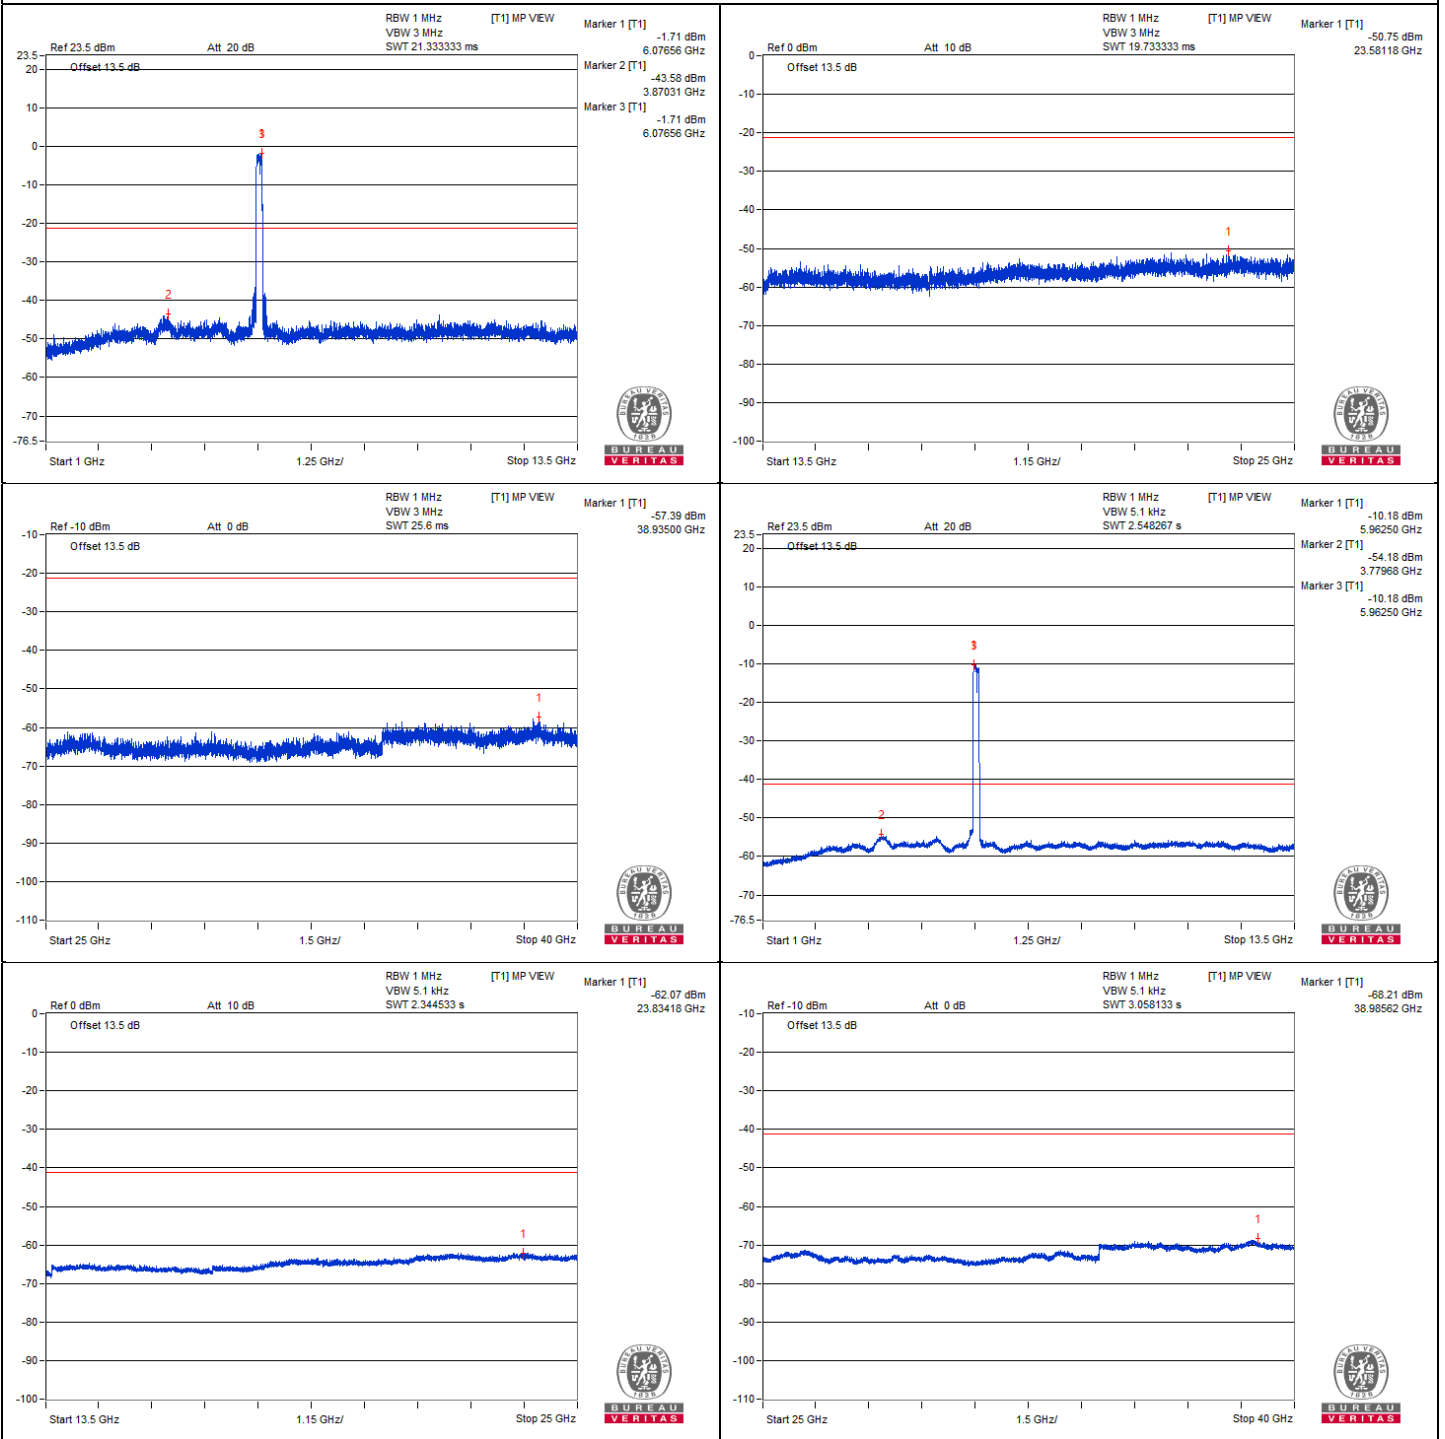



### Chain 1

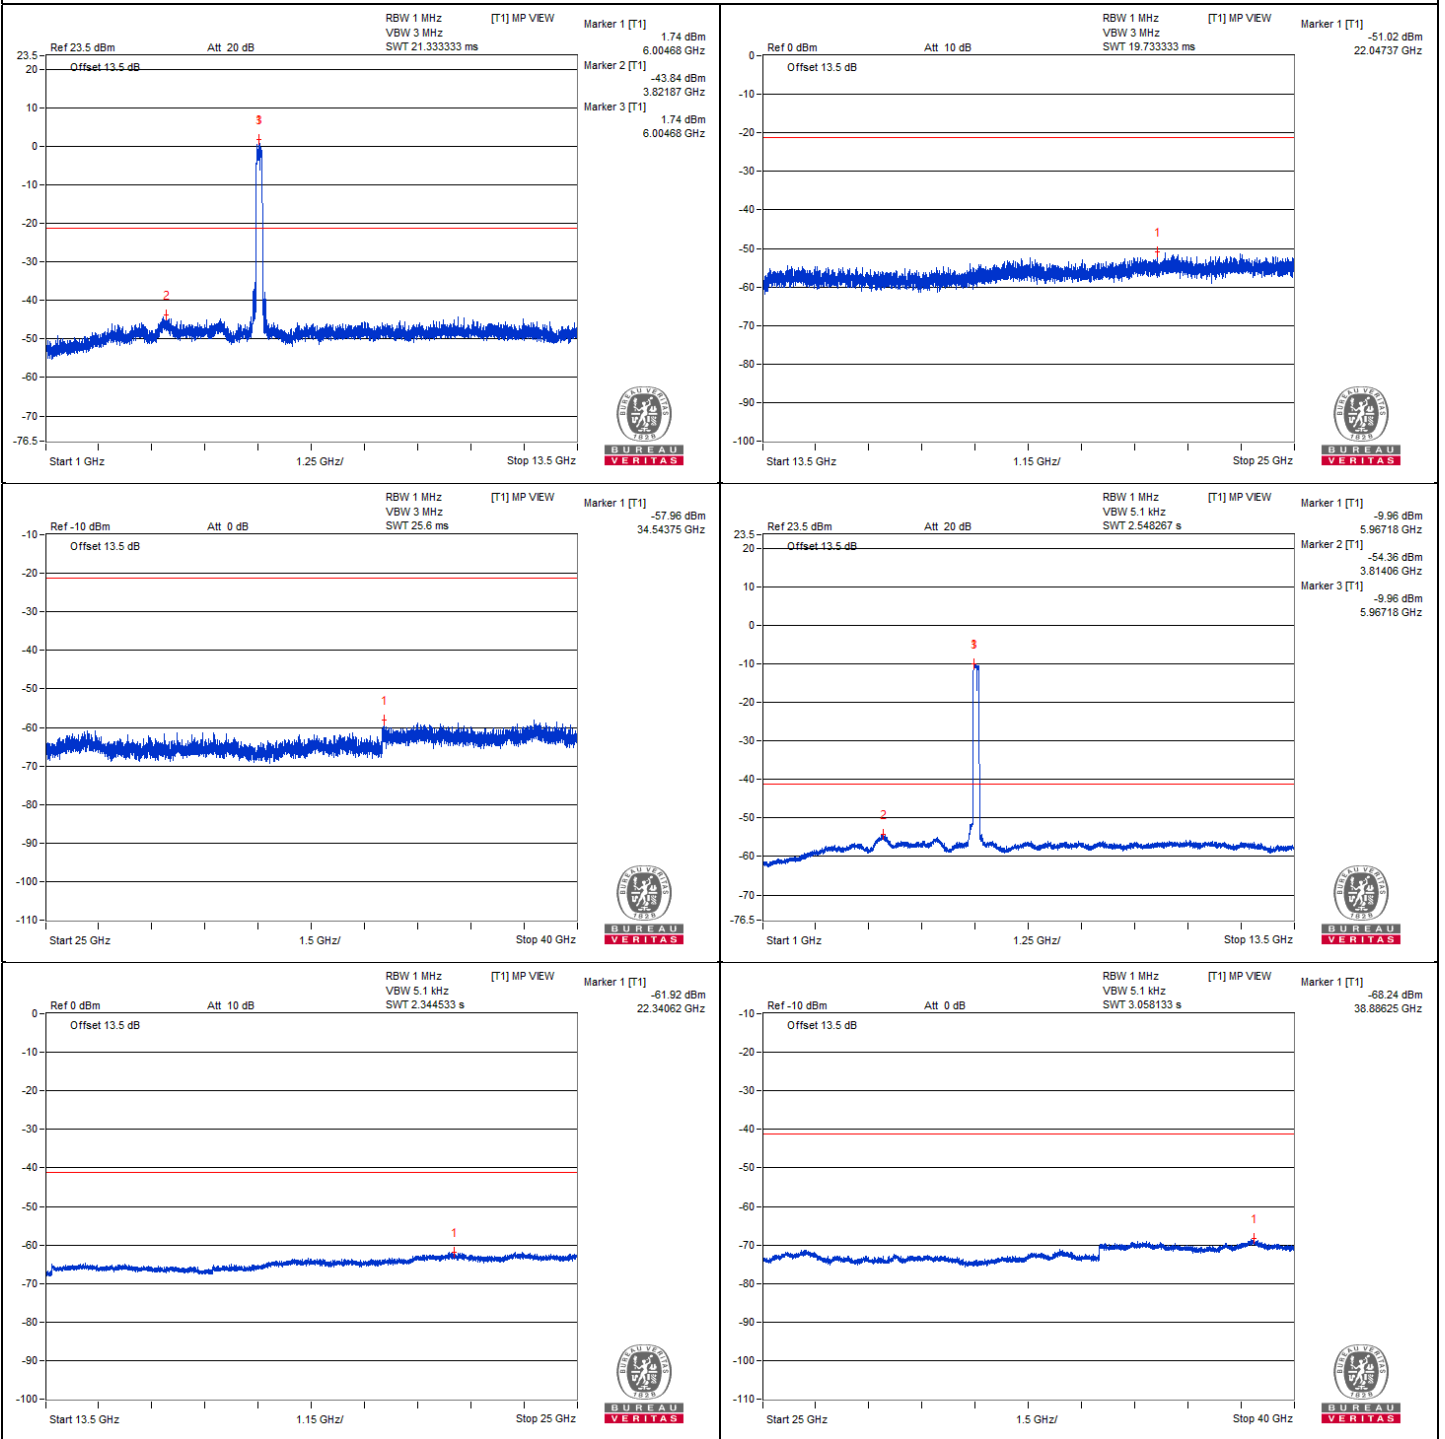



**Bandedge table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5919.1	67.89 PK	88.2	-20.31	-34.4	-36.03	4.76	-27.37
2	#5919.3	51.36 AV	68.2	-16.84	-52.74	-50.81	4.76	-43.90



Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

**Chain 0**

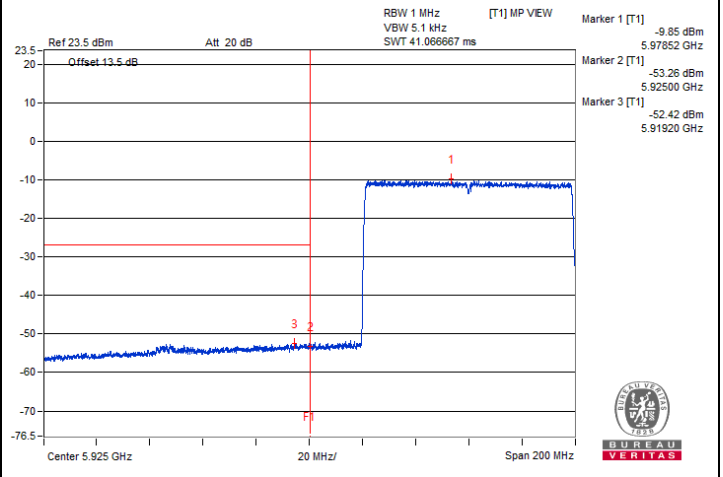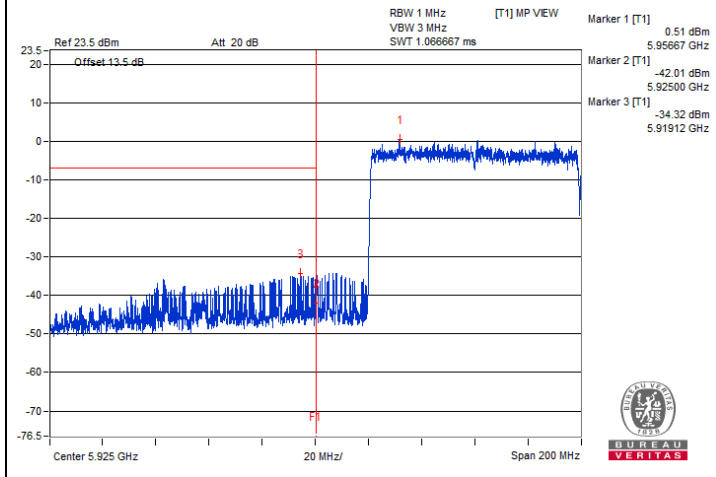

**Chain 1**

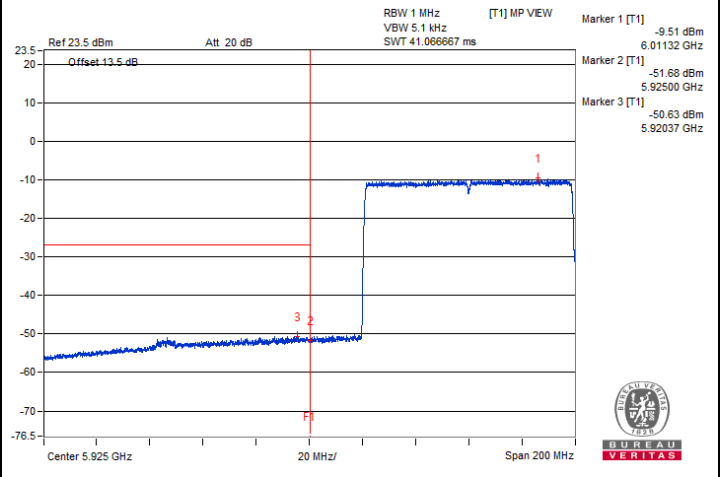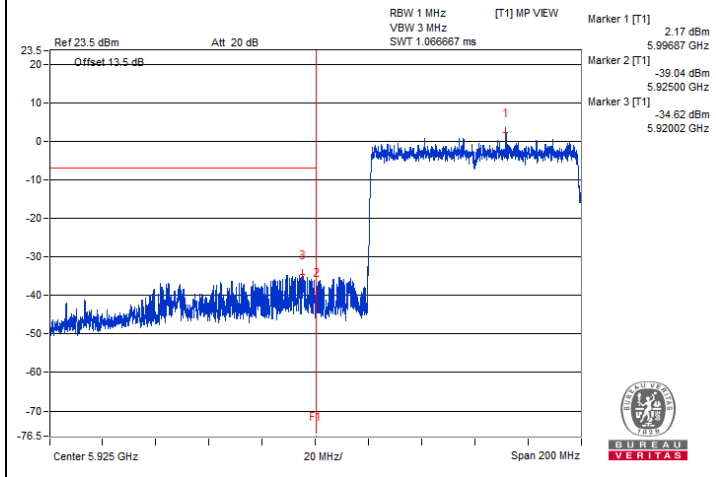

### 160 MHz Preamble 802.11be (RU996+484+242) - Channel 79

#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12689.06	55.91 PK	74	-18.09	-47.53	-46.75	4.76	-39.35
2	12693.75	46.05 AV	54	-7.95	-56.67	-57.31	4.76	-49.21
3	19027.18	48.72 PK	74	-25.28	-53.95	-54.7	4.76	-46.54
4	19041.56	38.85 AV	54	-15.15	-64.74	-63.69	4.76	-56.41


#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.






### Chain 0

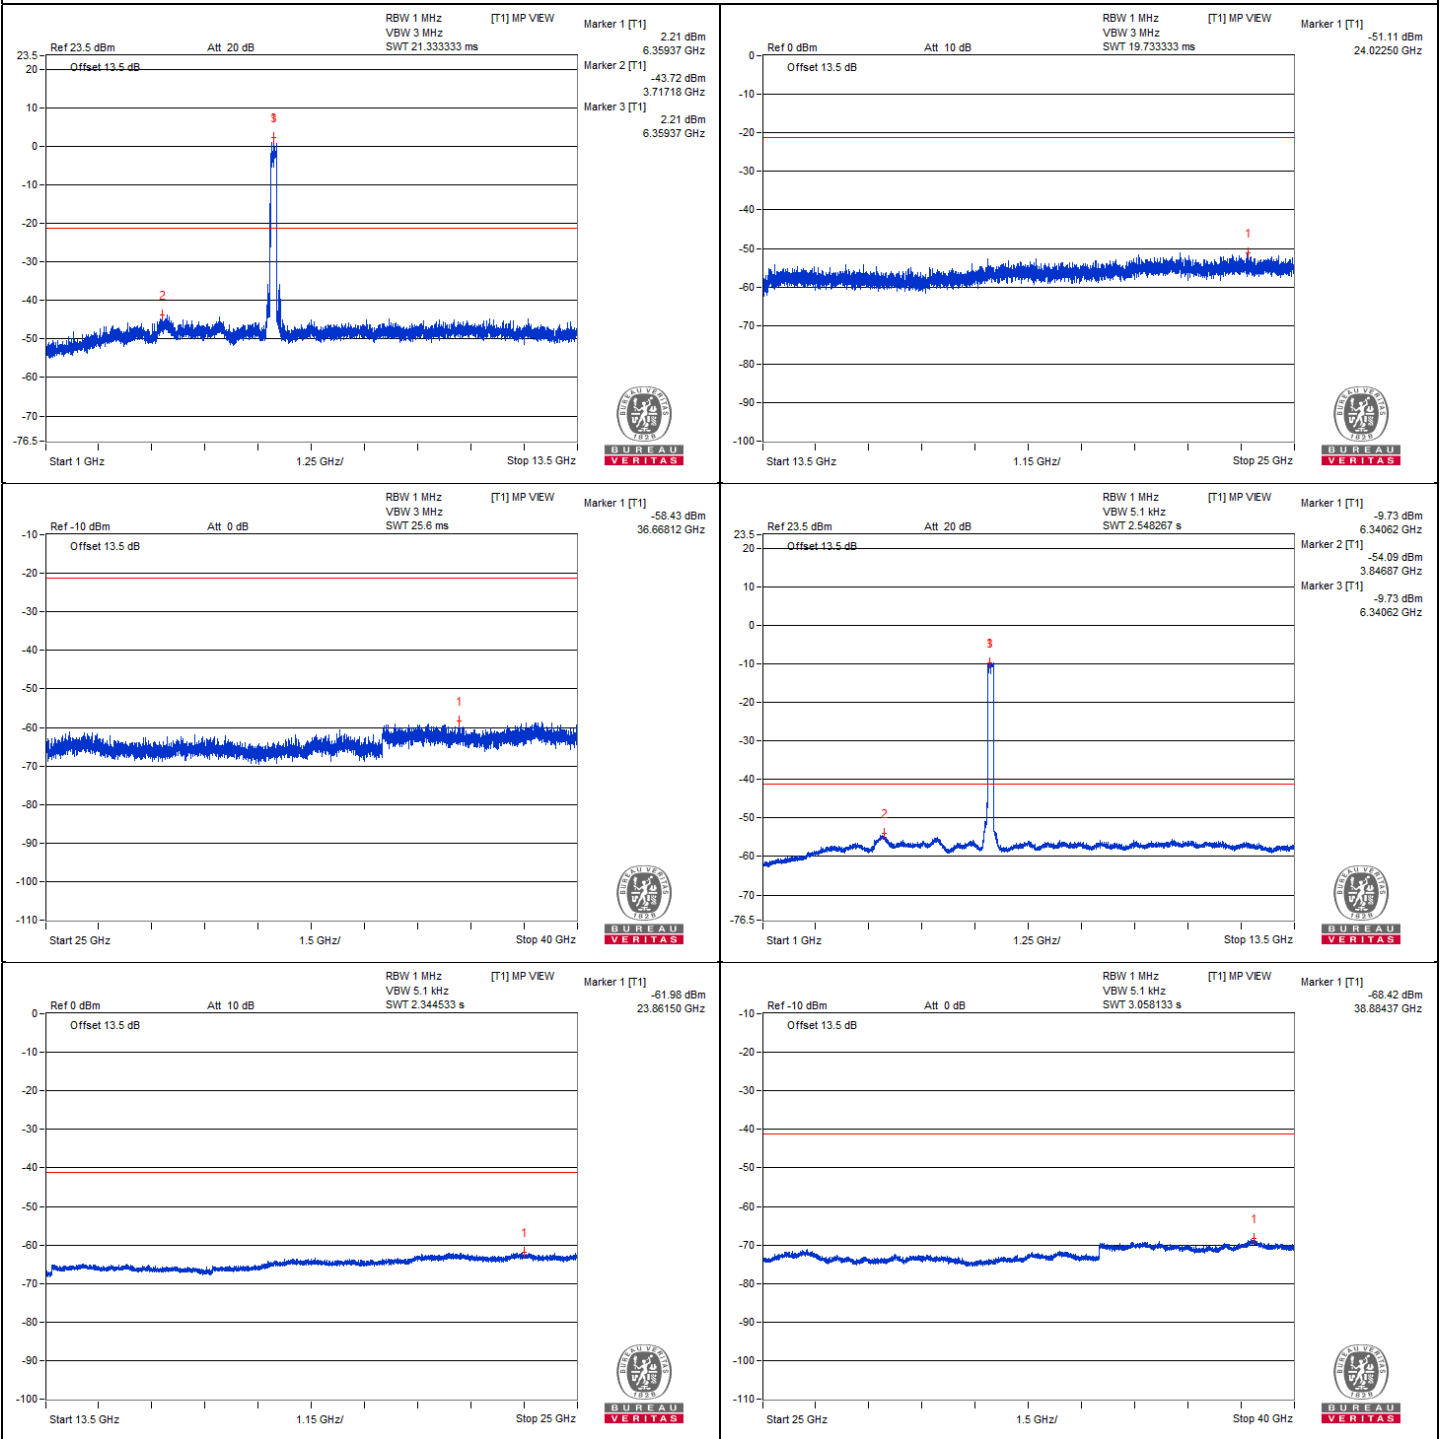



### Chain 1

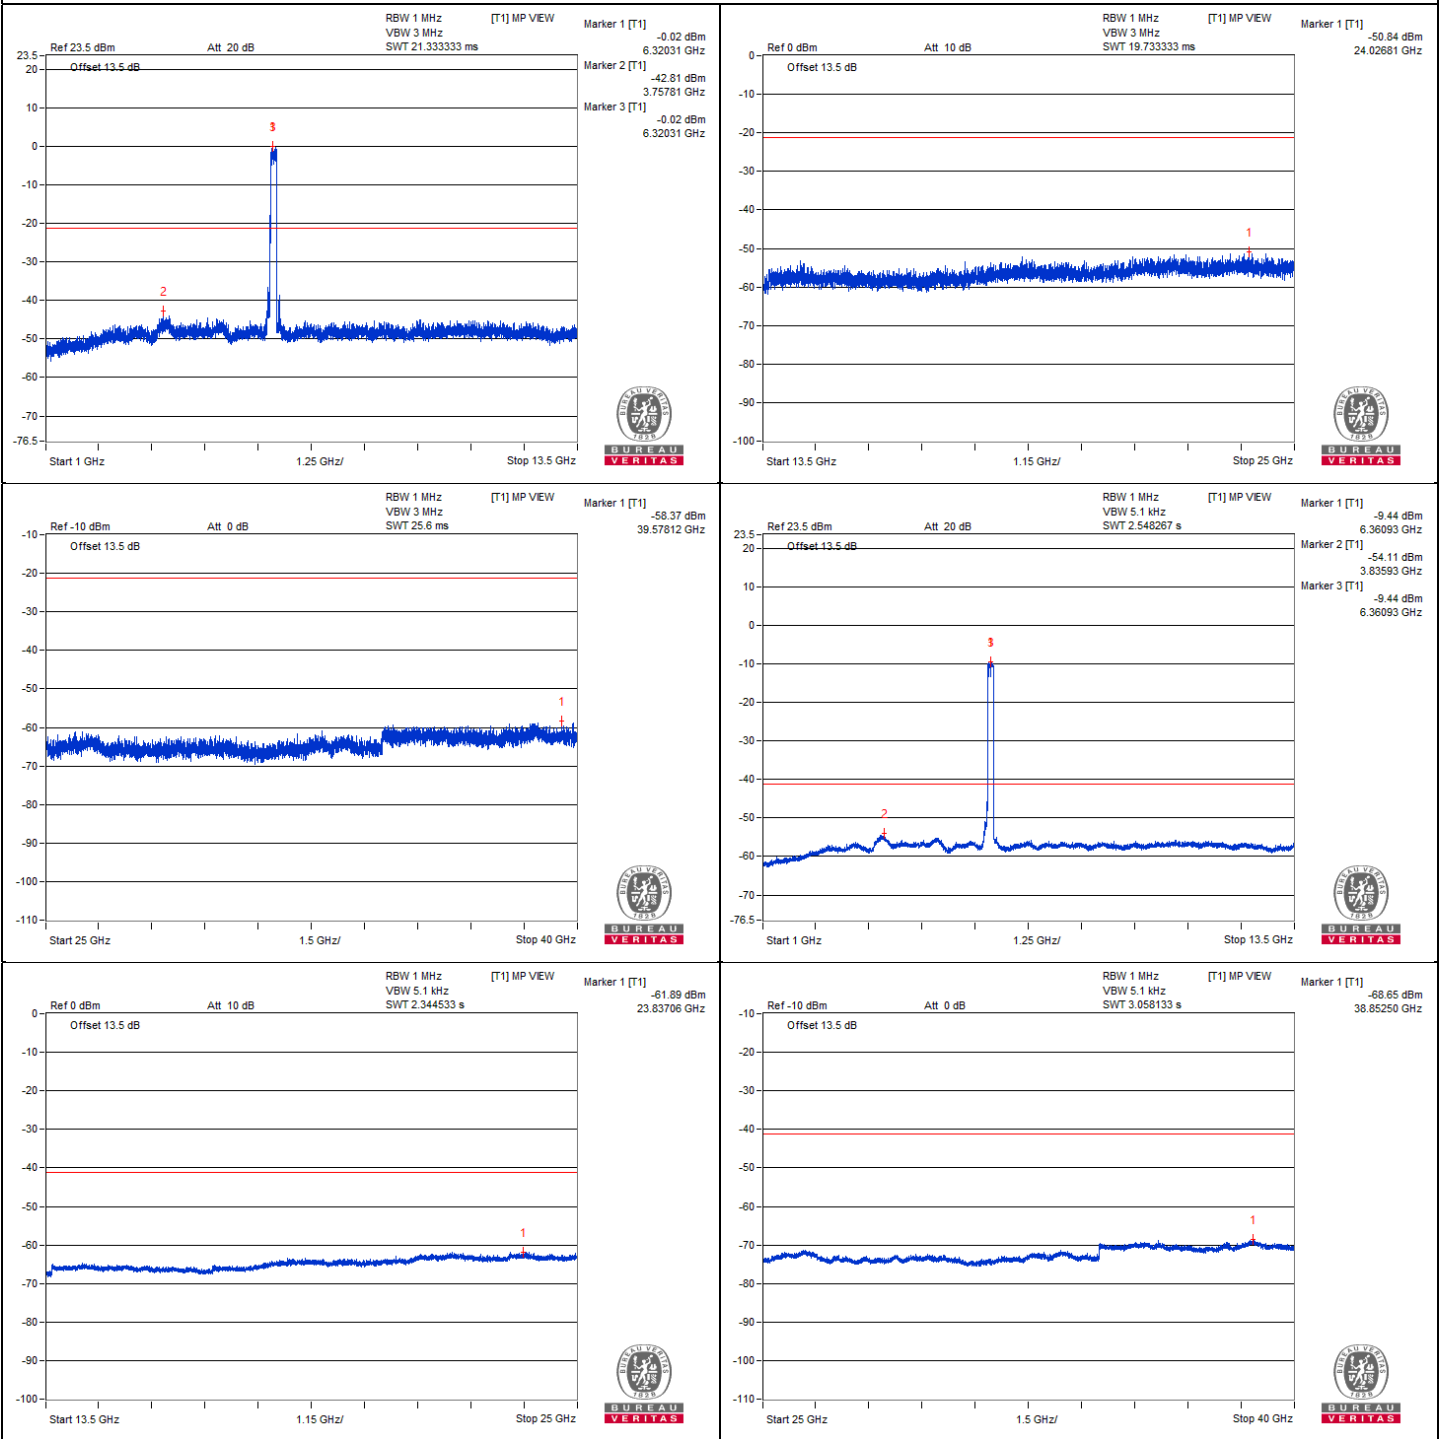

### 160 MHz Preamble 802.11be (RU996+484+242) - Channel 143

#### Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13334.37	54.93 PK	74	-19.07	-49.34	-47.14	4.76	-40.33
2	13328.12	45.76 AV	54	-8.24	-57.12	-57.42	4.76	-49.50
3	20003.25	48.14 PK	74	-25.86	-53.68	-56.58	4.76	-47.12
4	19988.87	38.69 AV	54	-15.31	-64.81	-63.91	4.76	-56.57

#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




### Chain 0

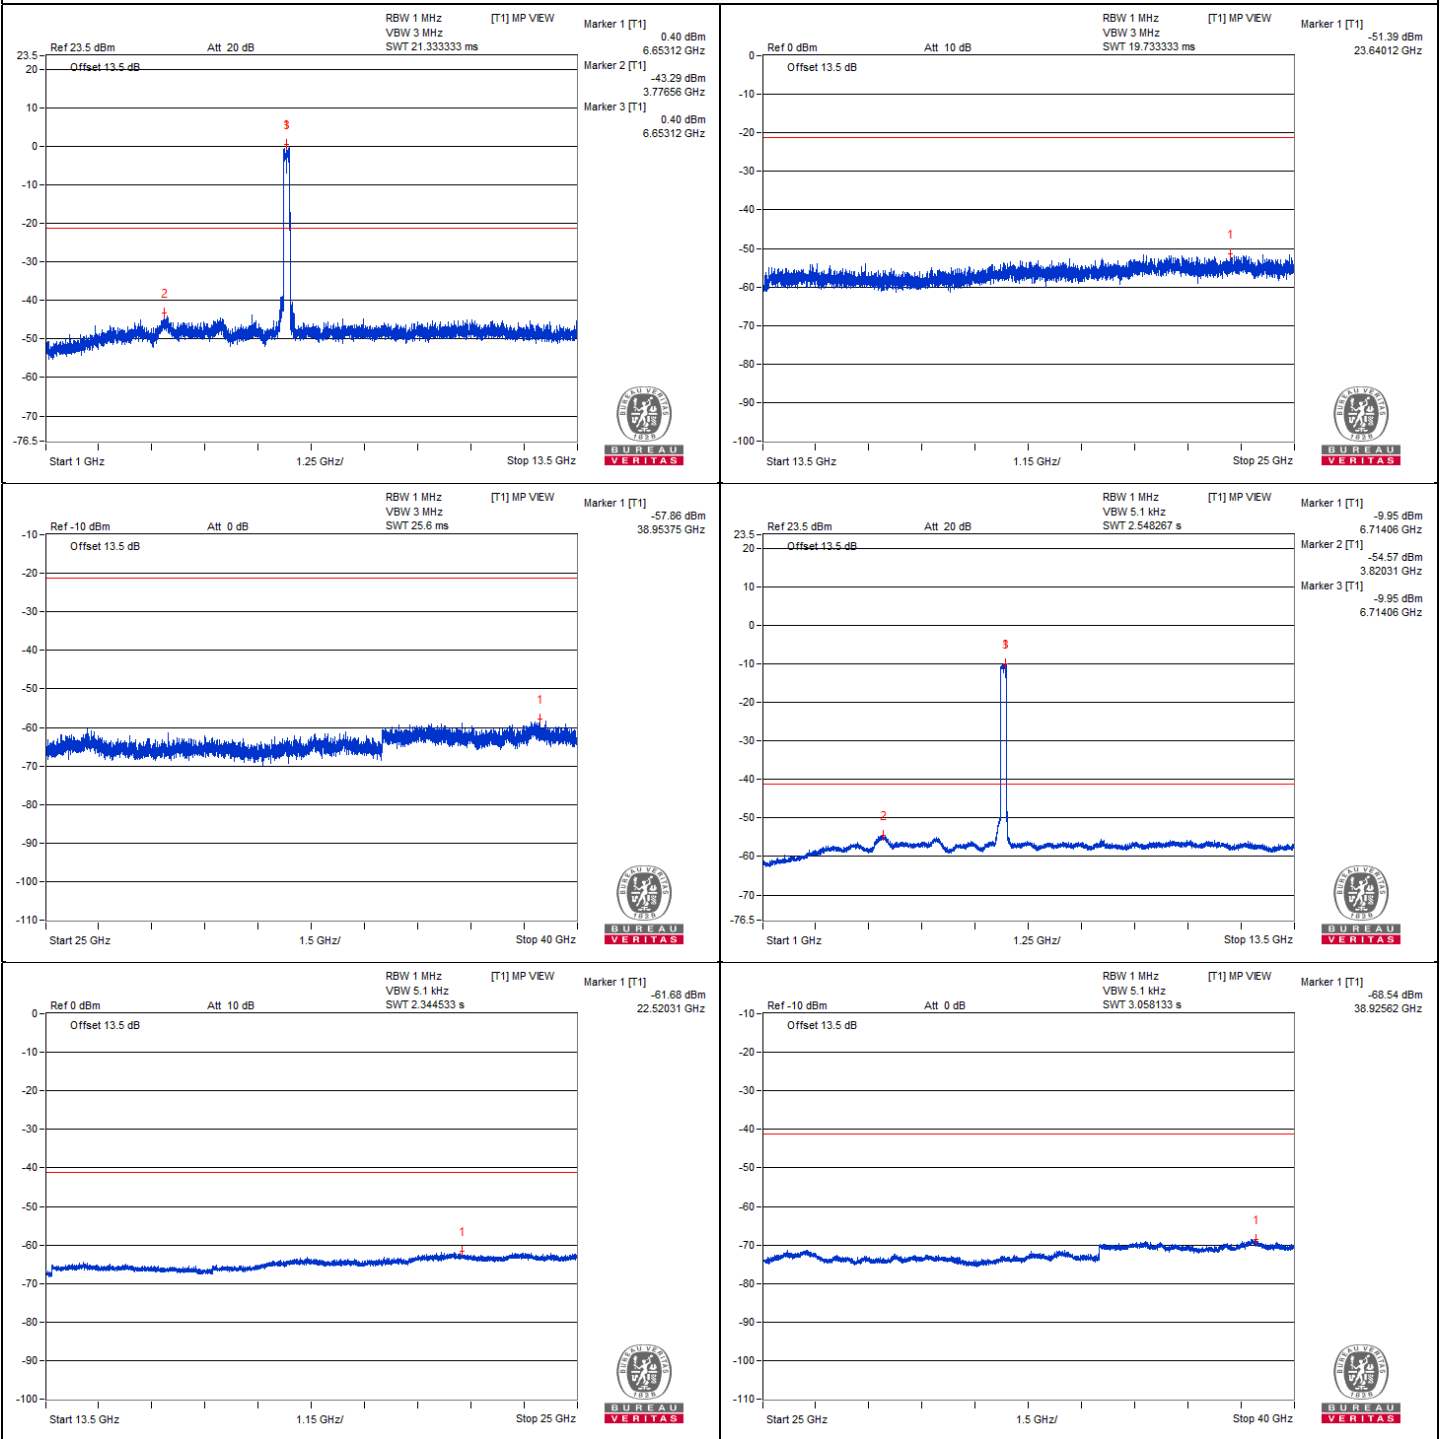



### Chain 1

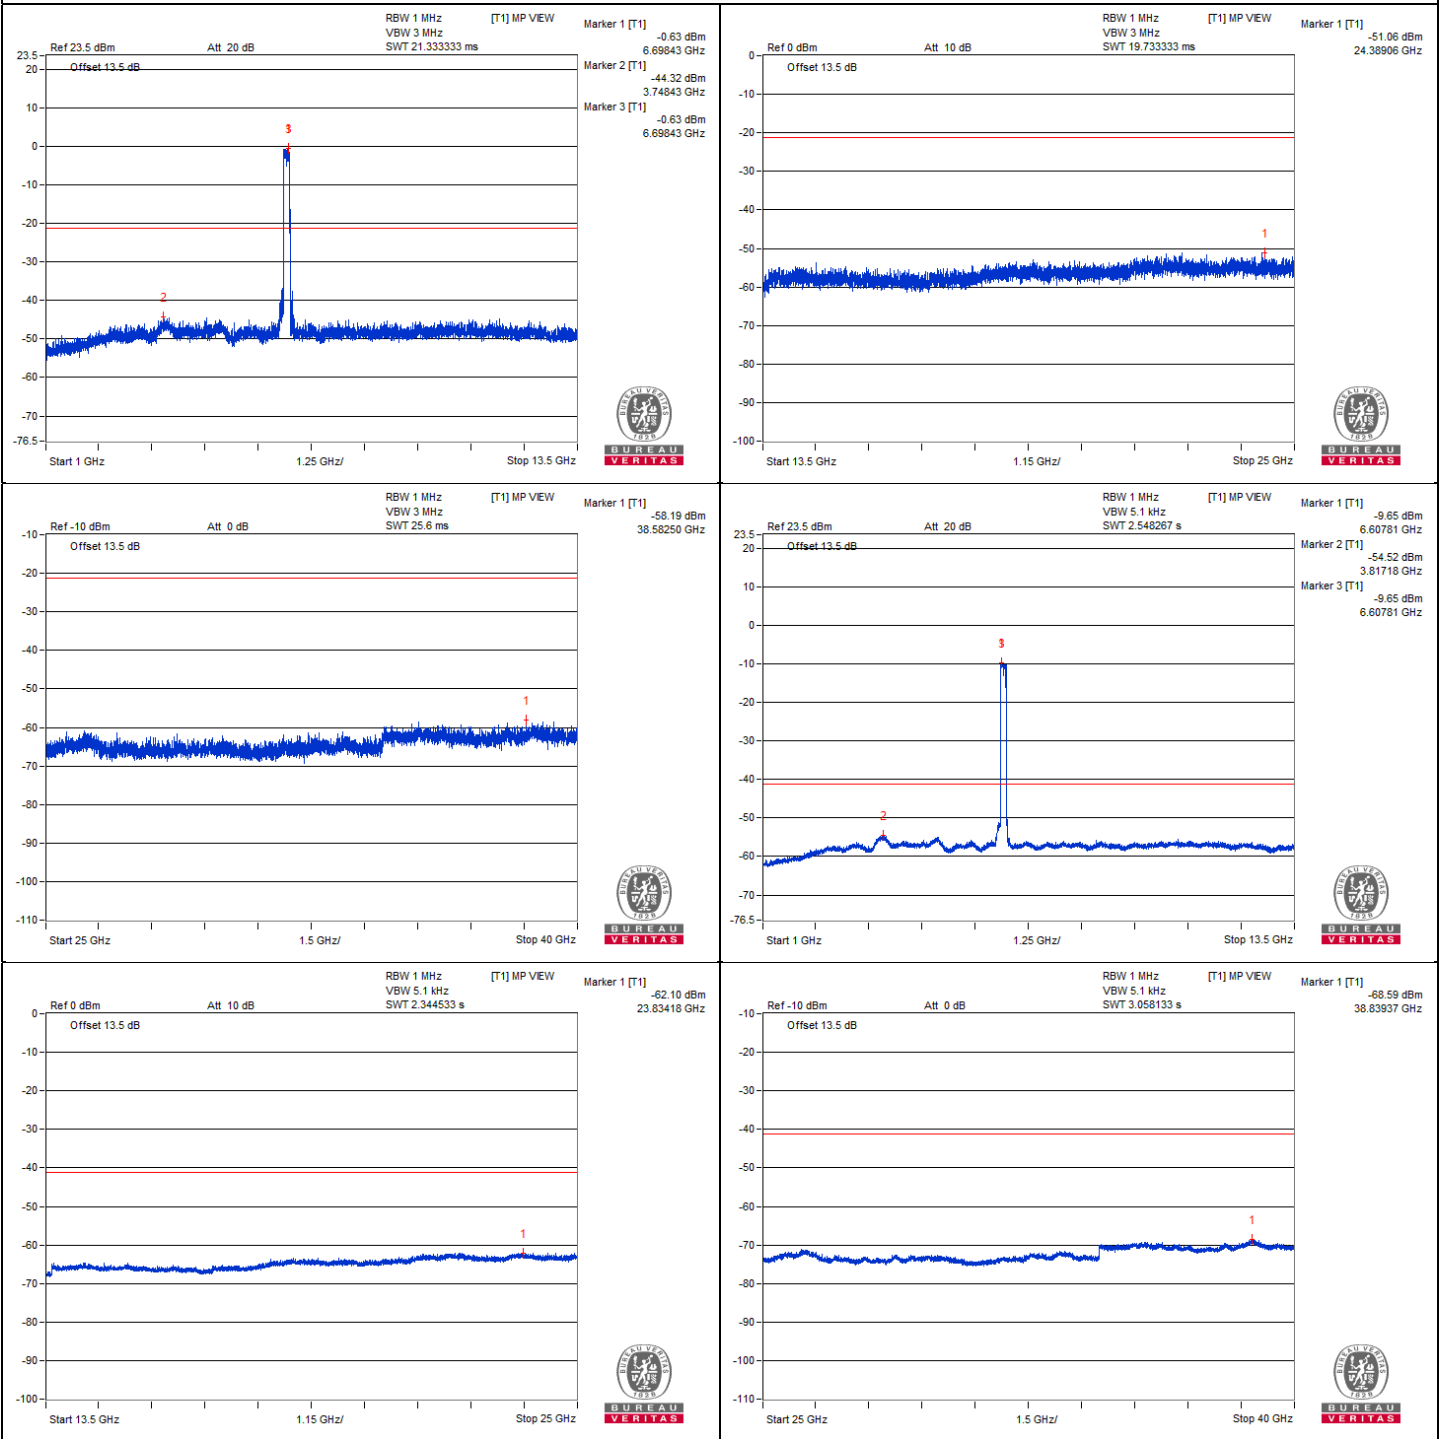

### 160 MHz Preamble 802.11be (RU996+484+242) - Channel 207

#### Conducted spurious emission table







No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#13978.68	46.23 PK	88.2	-41.97	-56.56	-57.06	4.76	-49.03
2	#13977.25	37.27 AV	68.2	-30.93	-66.44	-65.17	4.76	-57.99
3	20952	48.87 PK	74	-25.13	-54.49	-53.86	4.76	-46.39
4	20952	38.97 AV	54	-15.03	-63.59	-64.58	4.76	-56.29

#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

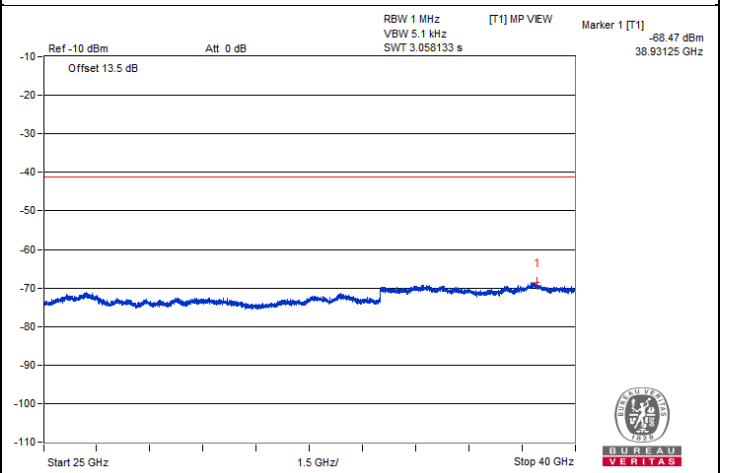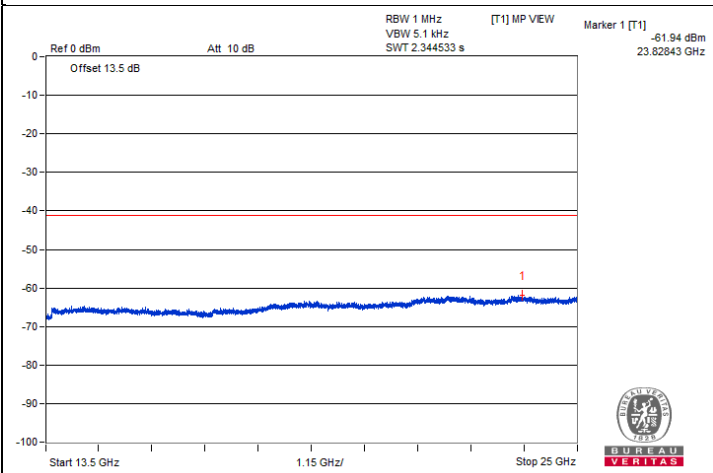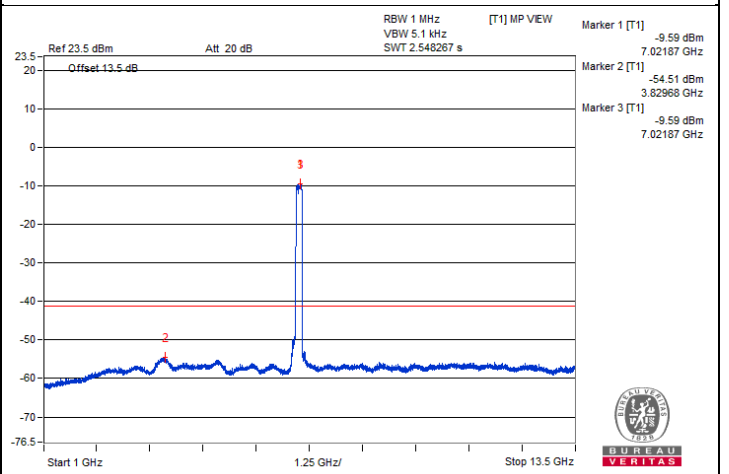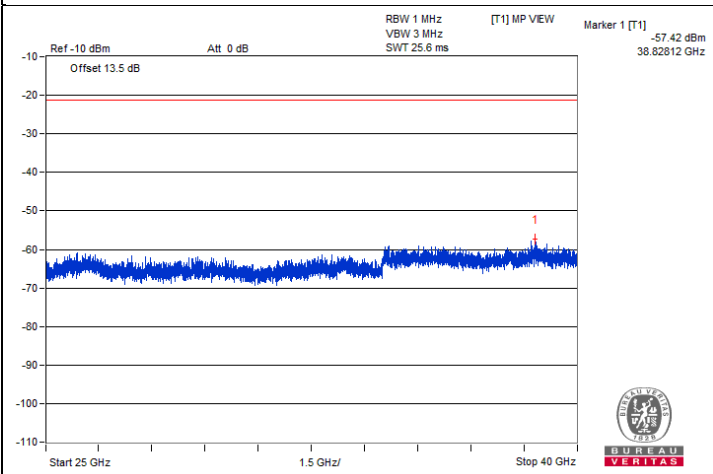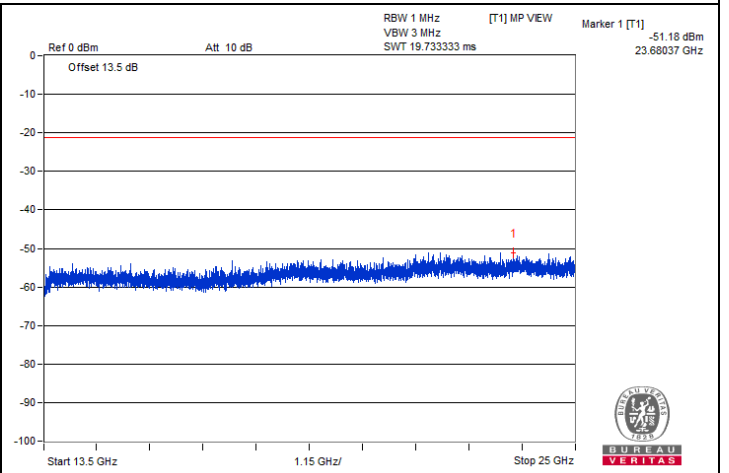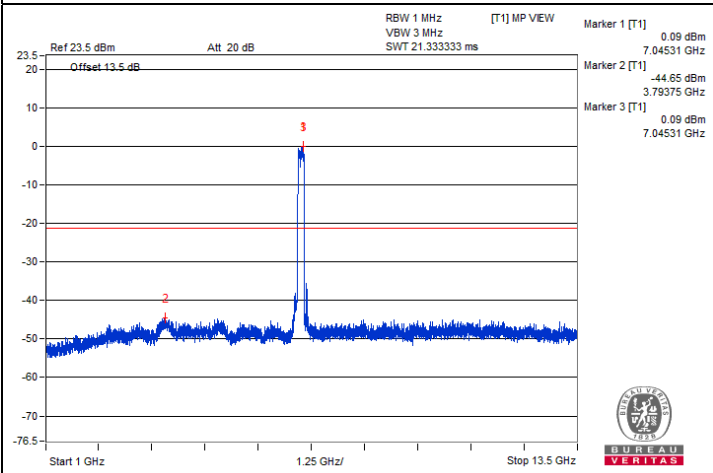



### Chain 1

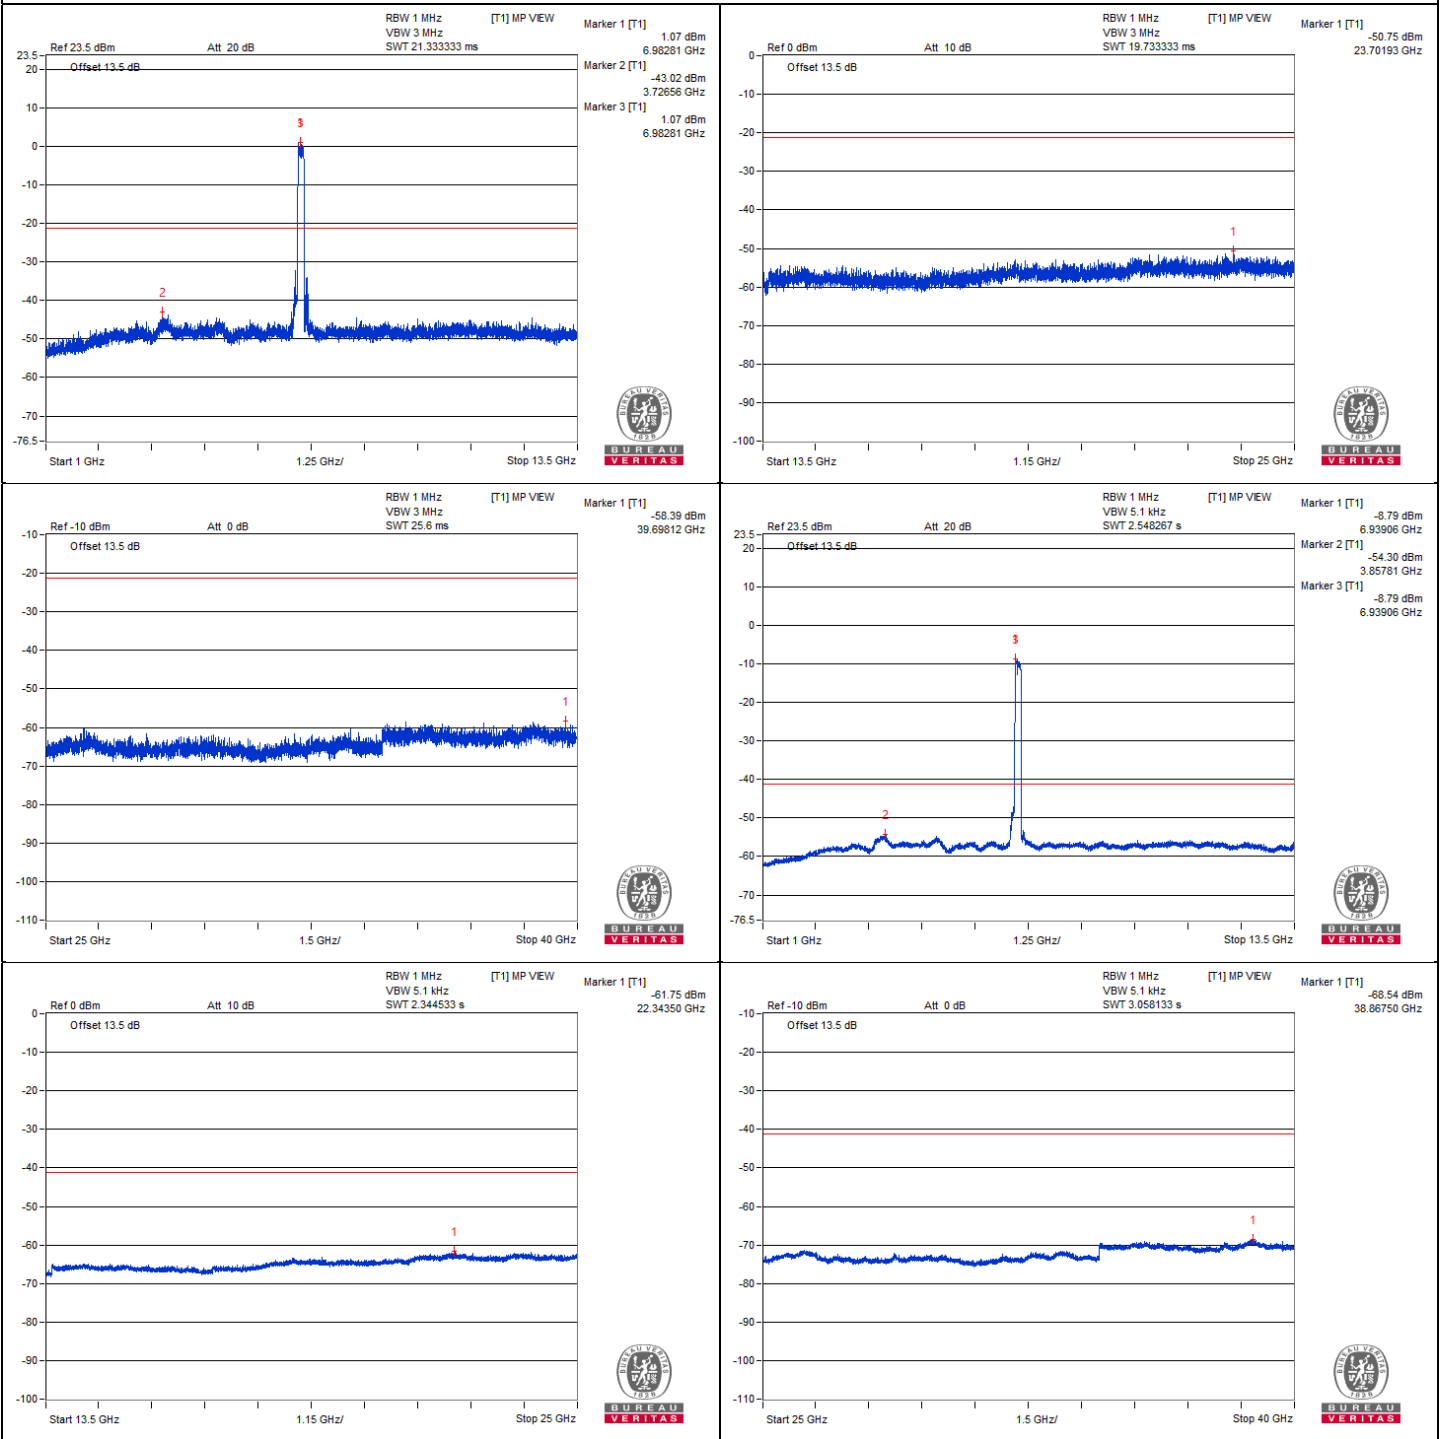




### Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#7133.27	67.63 PK	88.2	-20.57	-36.49	-33.48	4.09	-27.63
2	#7133.67	48.84 AV	68.2	-19.36	-53.81	-53.24	4.09	-46.42


### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. "#": The frequency is out of the restricted band.

### Chain 0

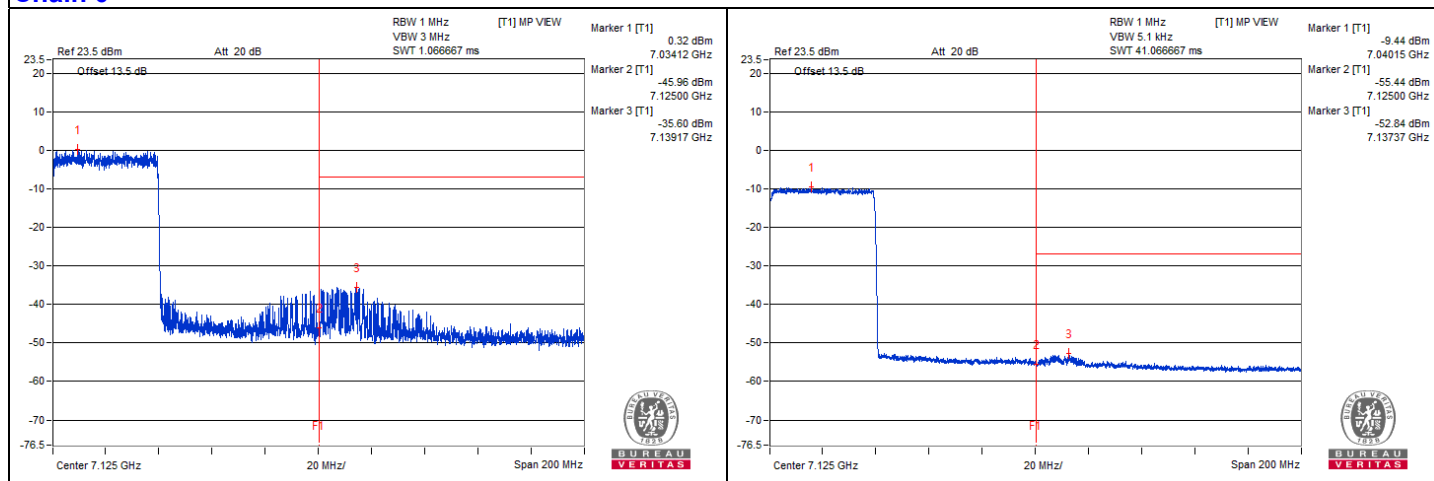

### Chain 1

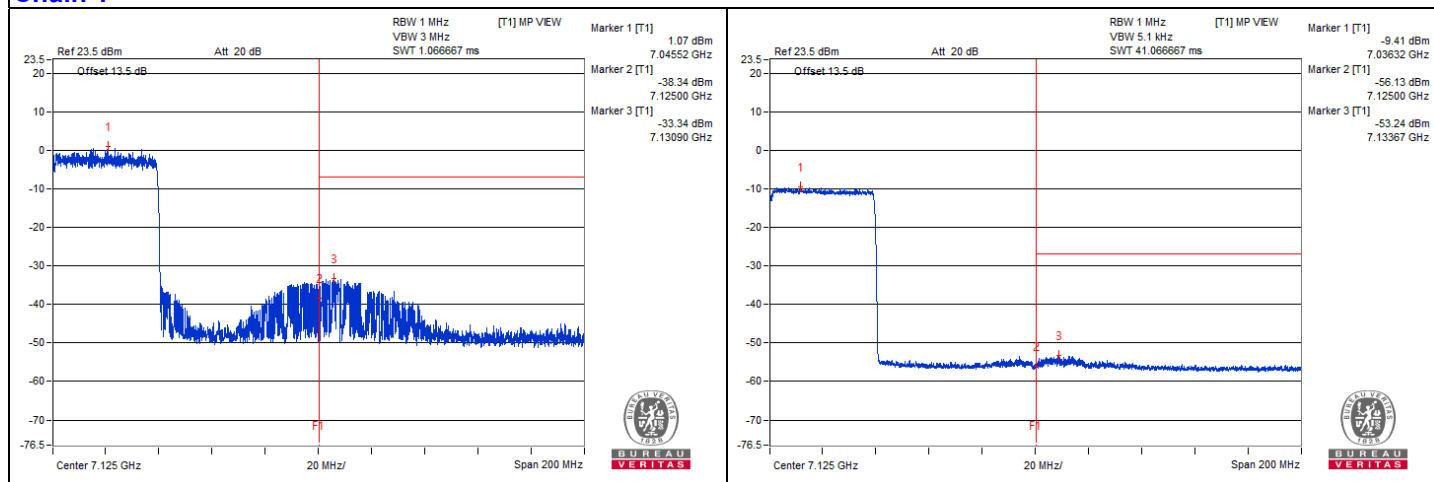

### 320 MHz Preamble 802.11be (RU996\*2+484) - Channel 31

#### Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12201.56	55.45 PK	74	-18.55	-47.06	-48.18	4.76	-39.81
2	12217.18	45.91 AV	54	-8.09	-57.28	-56.97	4.76	-49.35
3	18319.93	46.79 PK	74	-27.21	-55.19	-57.62	4.76	-48.47
4	18312.75	38.11 AV	54	-15.89	-65.01	-64.83	4.76	-57.15

#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




### Chain 0

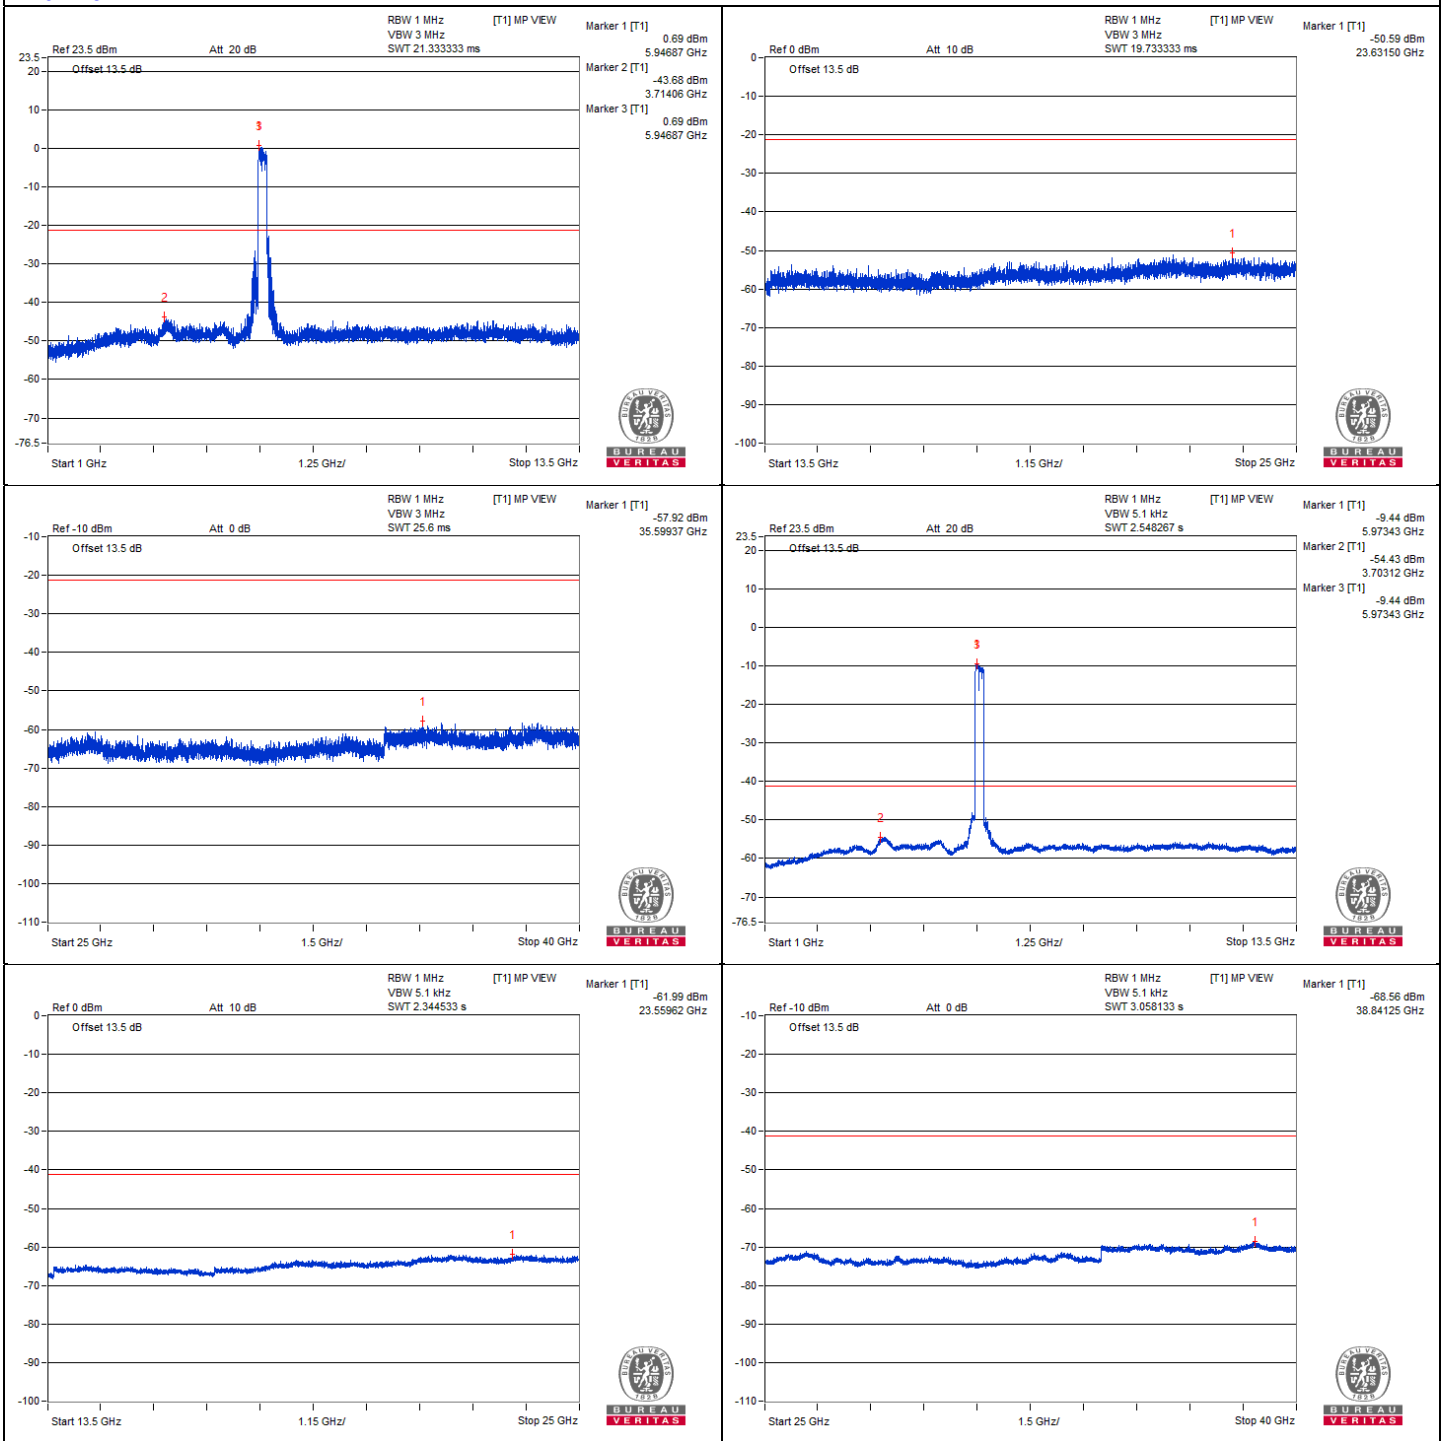



### Chain 1

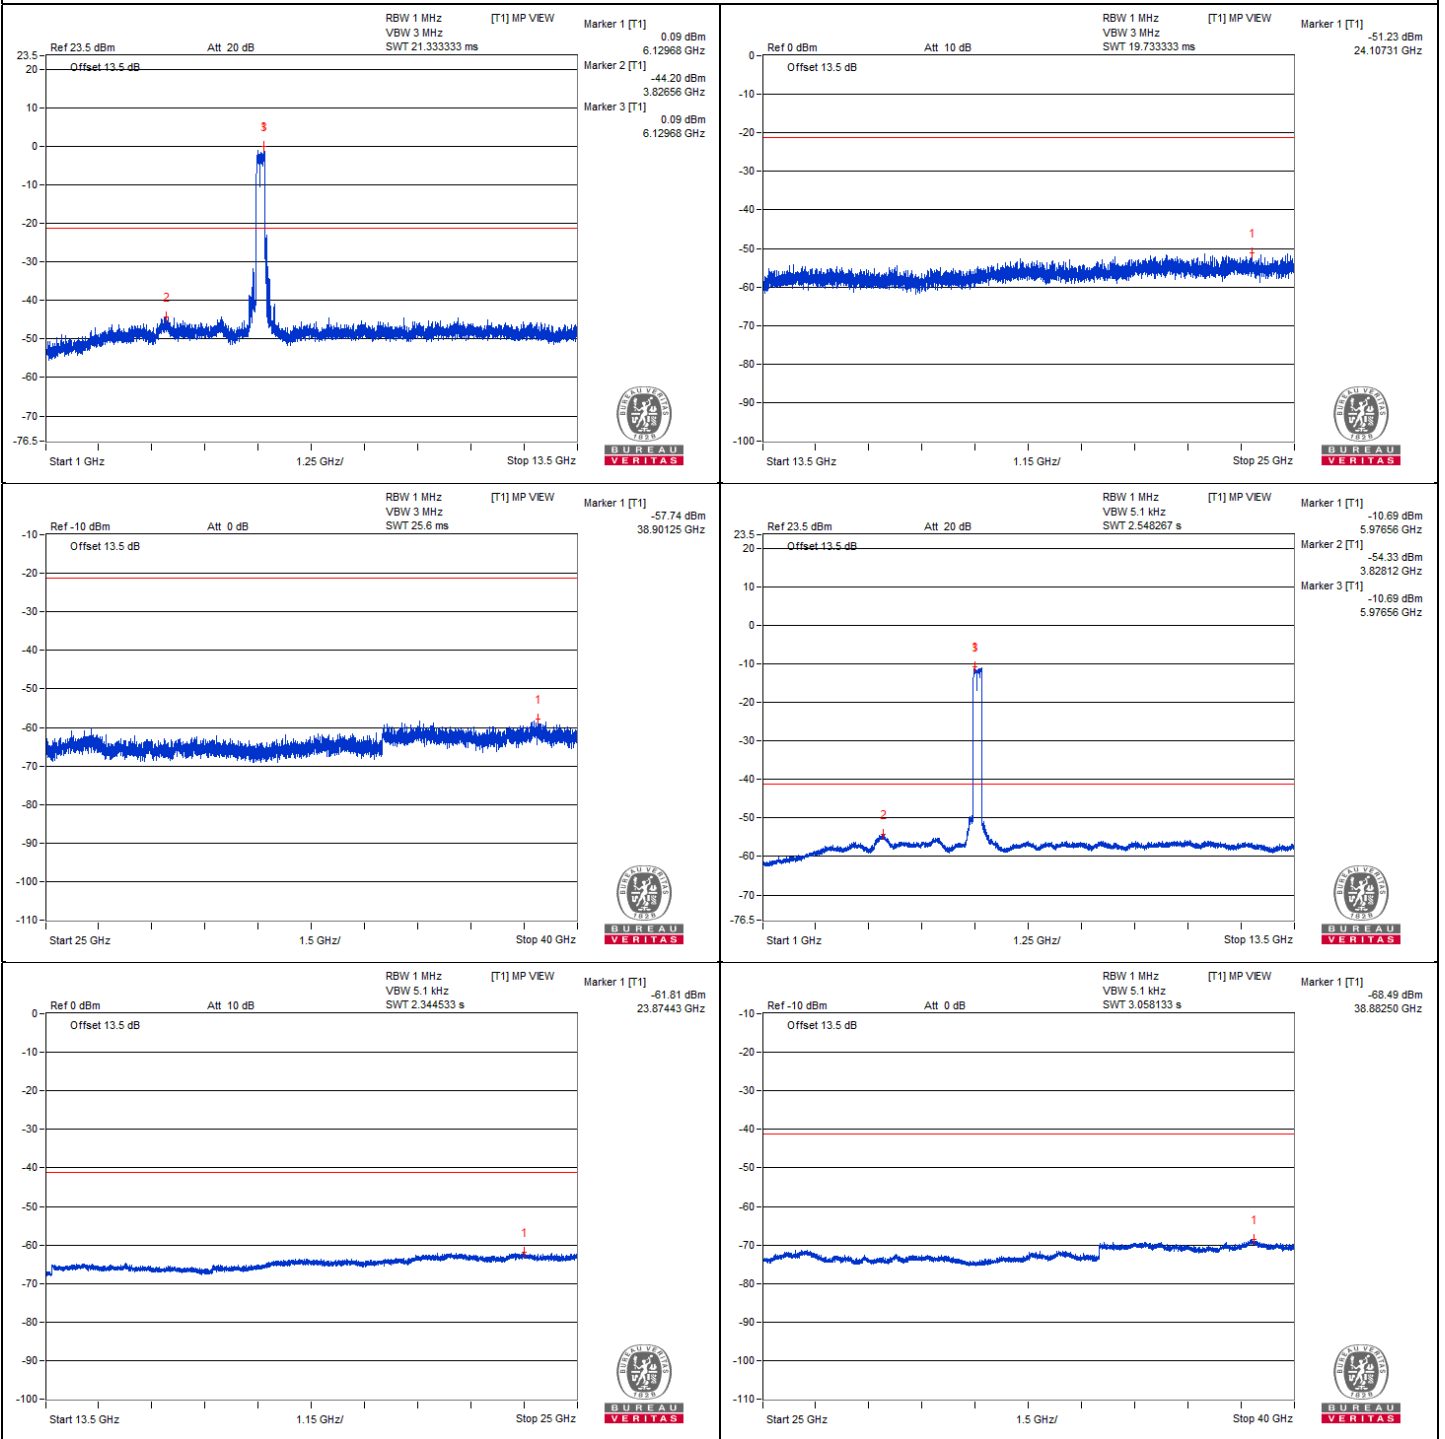


### Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5874.35	74.77 PK	88.2	-13.43	-26.32	-31.88	4.76	-20.49
2	#5871.42	54.62 AV	68.2	-13.58	-47.41	-49.7	4.76	-40.64


### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. "#": The frequency is out of the restricted band.

### Chain 0

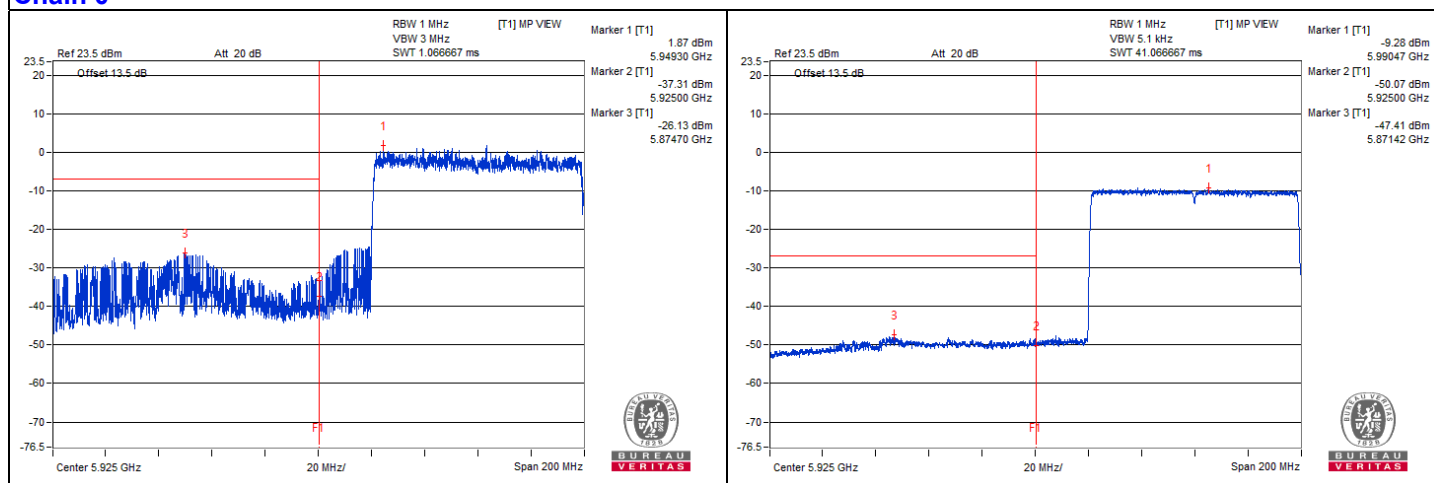

### Chain 1

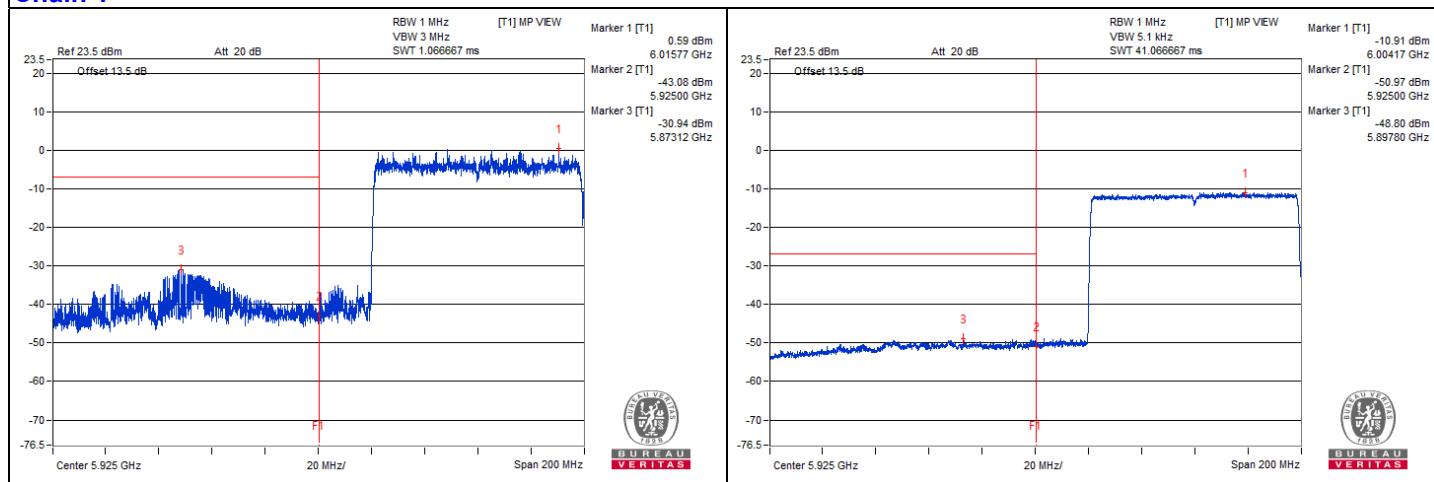

### 320 MHz Preamble 802.11be (RU996\*2+484) - Channel 63

#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12520.31	55.78 PK	74	-18.22	-46.46	-48.21	4.76	-39.48
2	12520.31	45.94 AV	54	-8.06	-57.11	-57.07	4.76	-49.32
3	18797.18	48.29 PK	74	-25.71	-54.88	-54.61	4.76	-46.97
4	18798.62	38.88 AV	54	-15.12	-63.91	-64.4	4.76	-56.38


#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




BUREAU  
VERITAS

### Chain 0

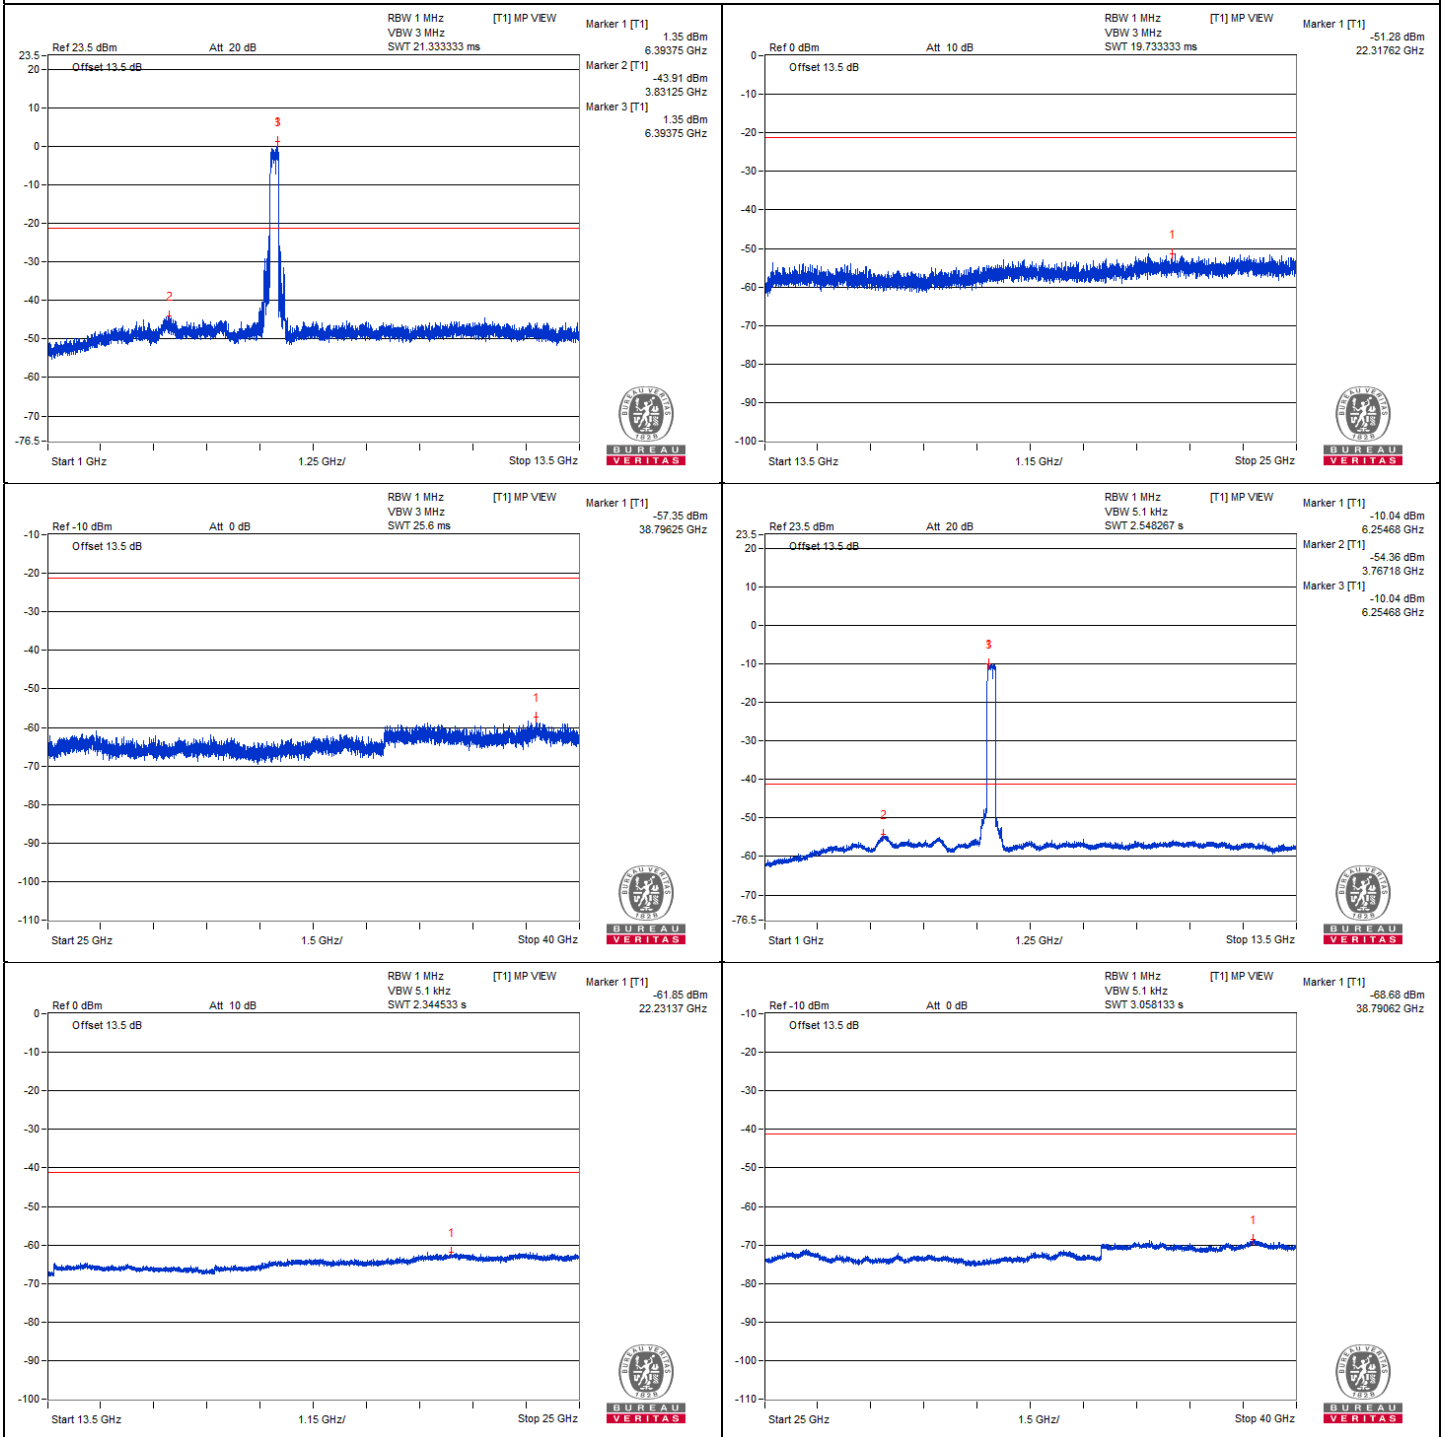



### Chain 1

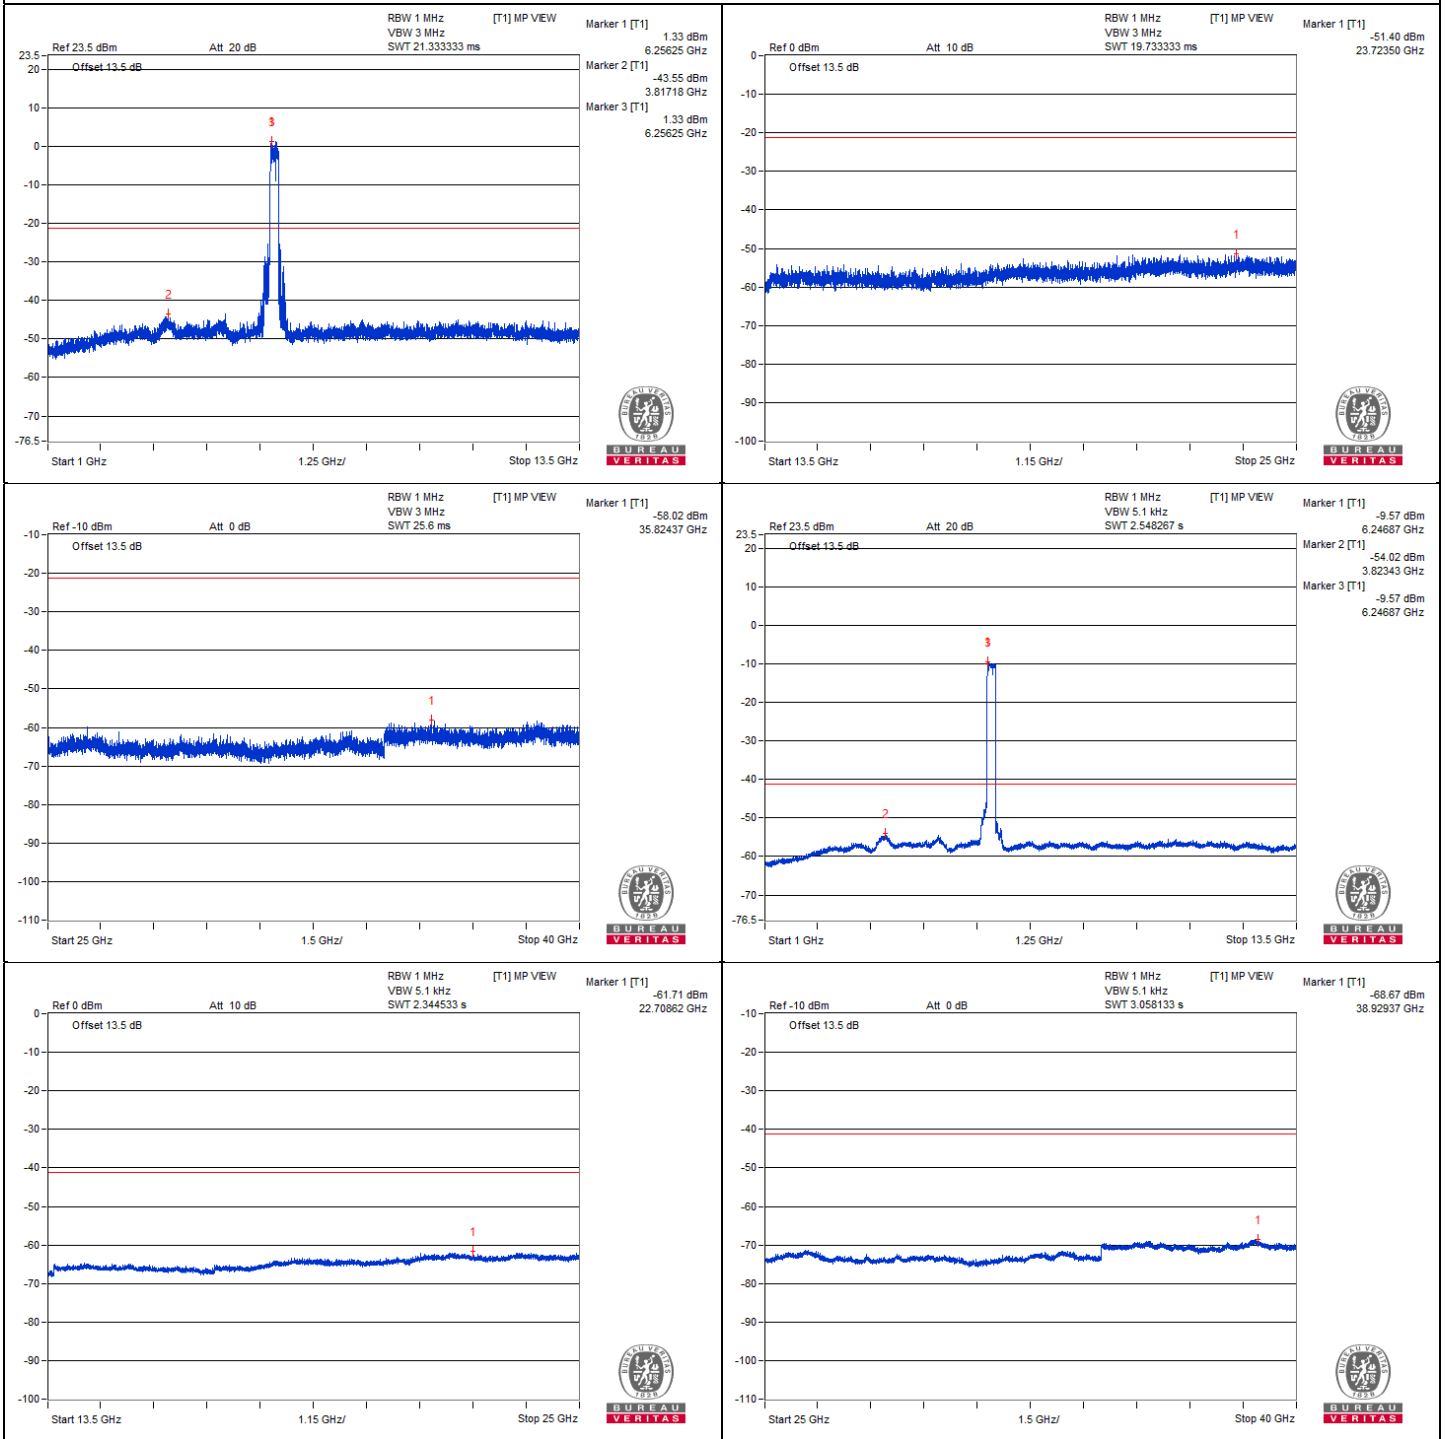



### 320 MHz Preamble 802.11be (RU996\*2+484) - Channel 127

#### Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#13165.62	55.7 PK	88.2	-32.5	-46.97	-47.72	4.76	-39.56
2	#13168.75	45.6 AV	68.2	-22.6	-57.83	-57.06	4.76	-49.66
3	19763.18	47.83 PK	74	-26.17	-55.31	-55.09	4.76	-47.43
4	19756	38.59 AV	54	-15.41	-64.48	-64.4	4.76	-56.67

#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.









### Chain 0

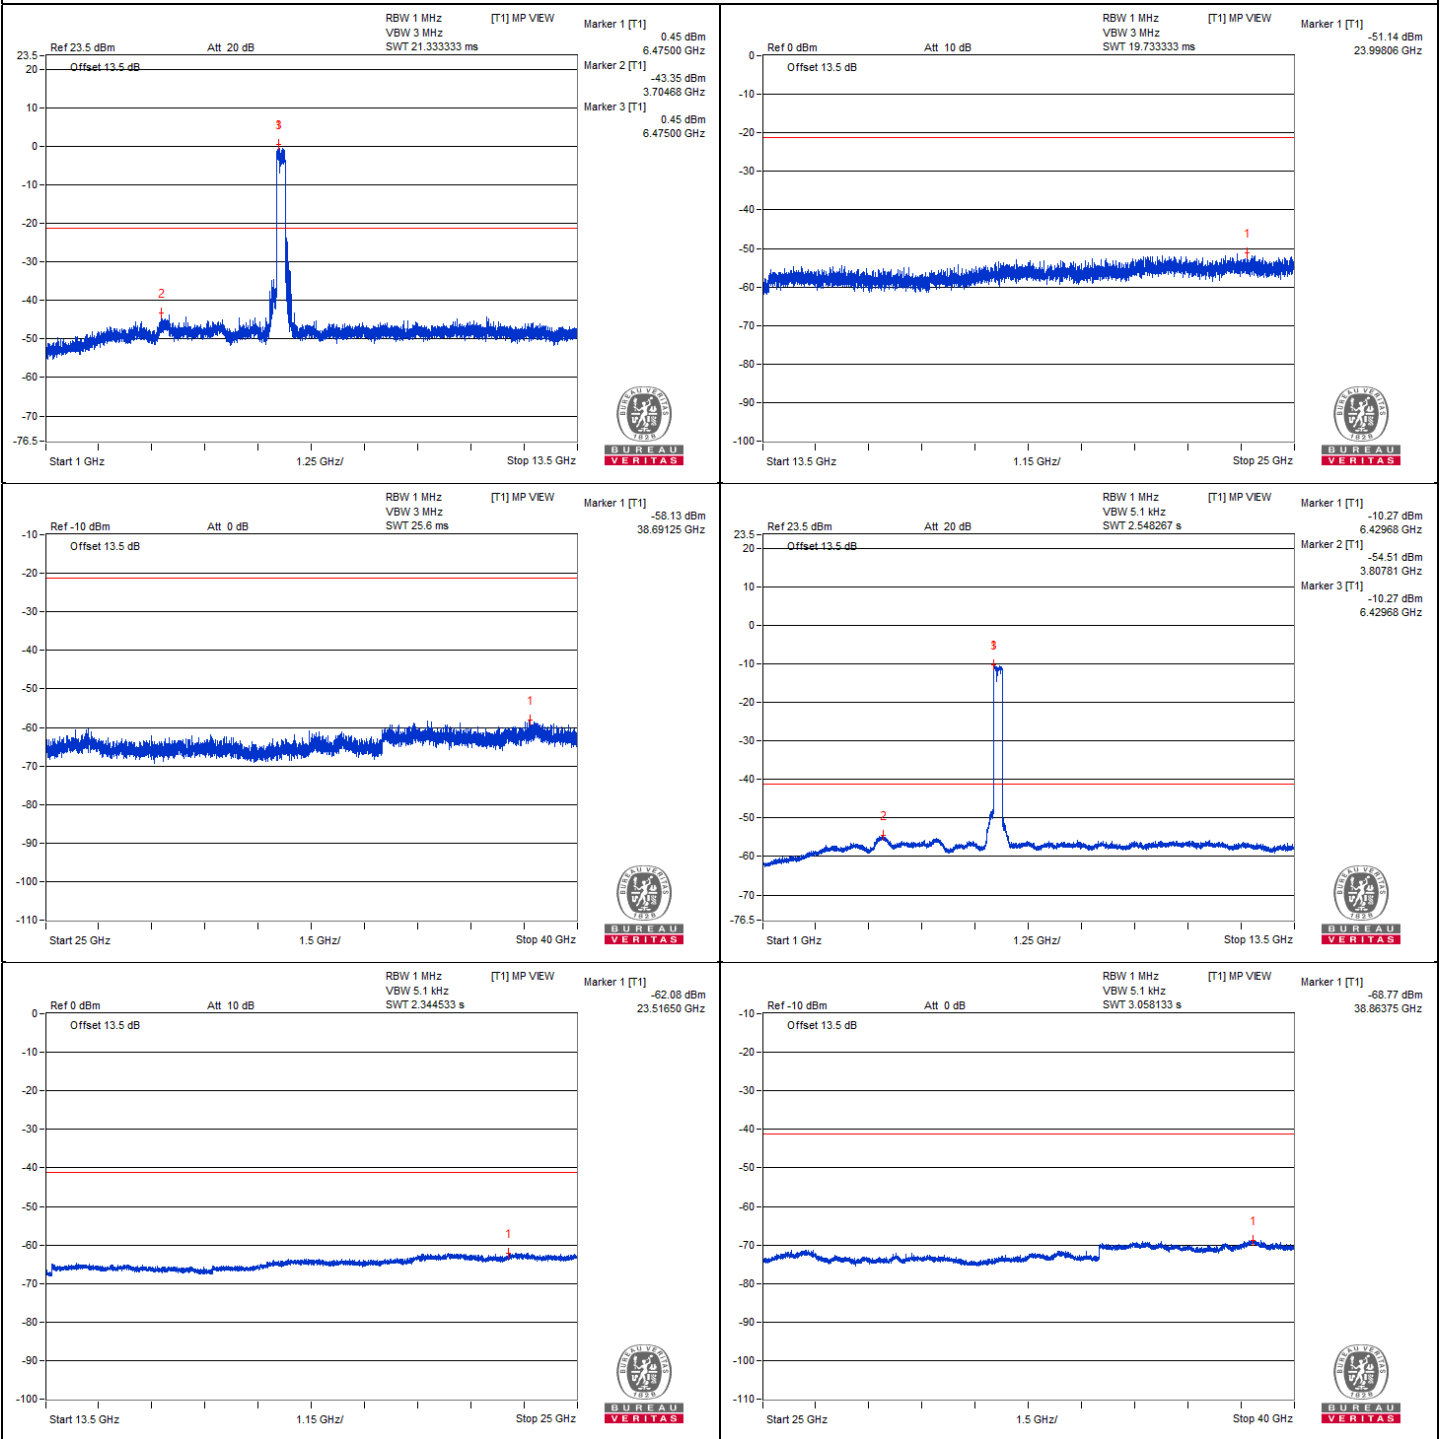



### Chain 1

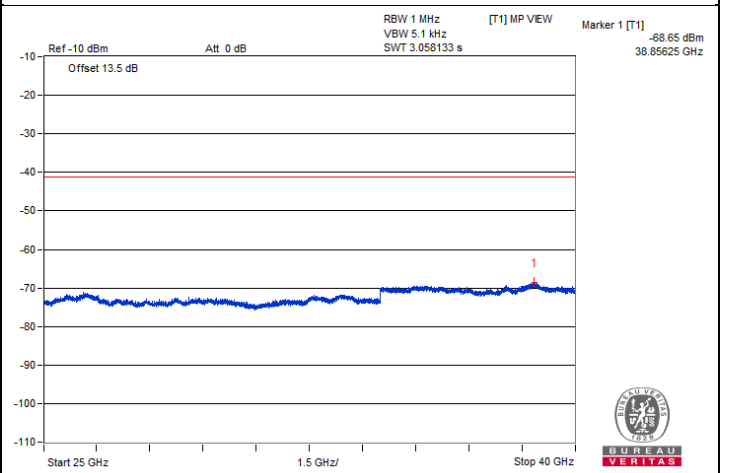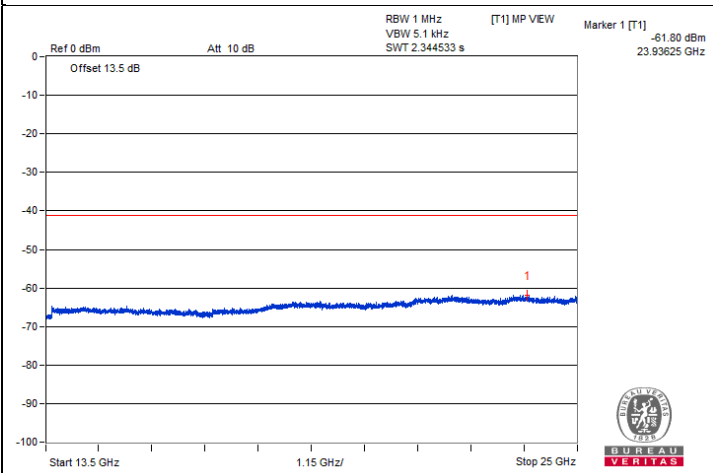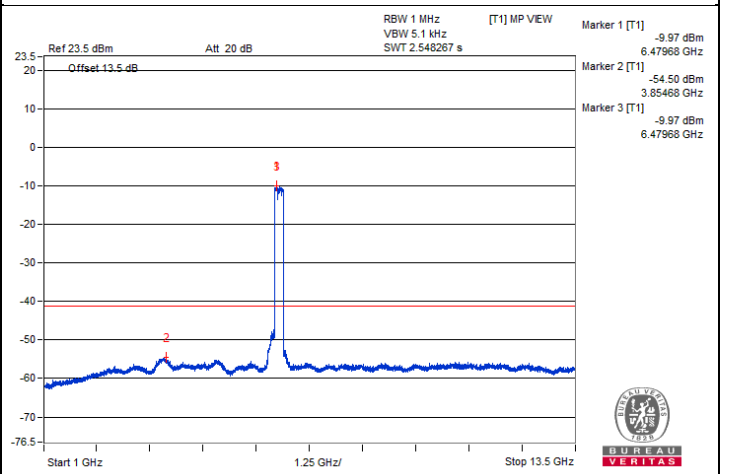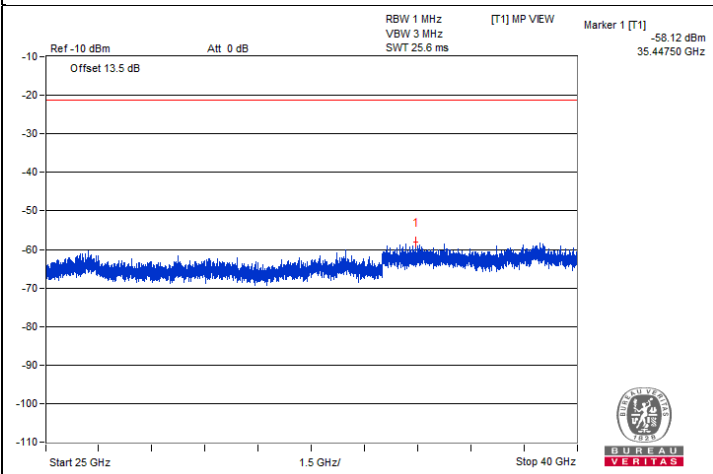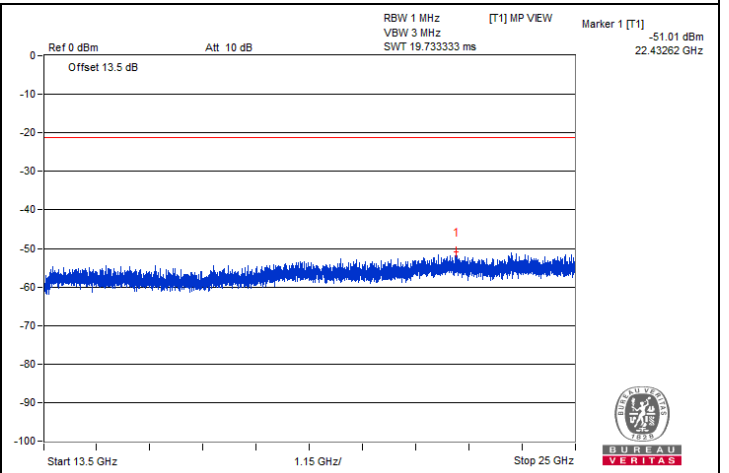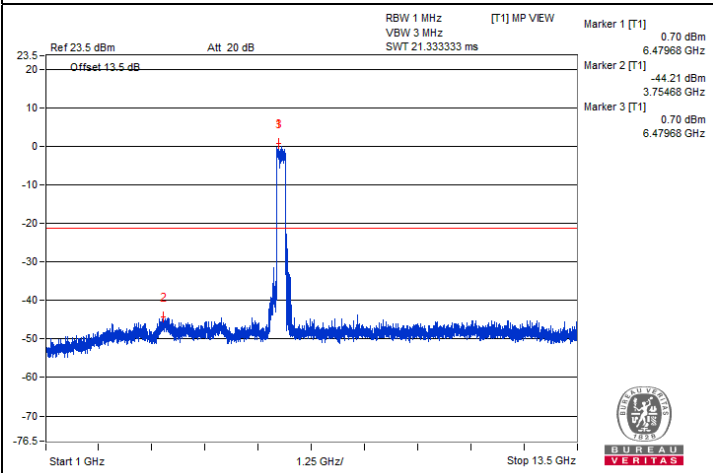

### 320 MHz Preamble 802.11be (RU996\*2+484) - Channel 191

#### Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#13800.43	46.52 PK	88.2	-41.68	-57.19	-55.93	4.76	-48.74
2	#13804.75	37 AV	68.2	-31.2	-66.42	-65.67	4.76	-58.26
3	20716.25	48.32 PK	74	-25.68	-53.29	-56.85	4.76	-46.94
4	20724.87	38.74 AV	54	-15.26	-64.12	-64.46	4.76	-56.52

#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

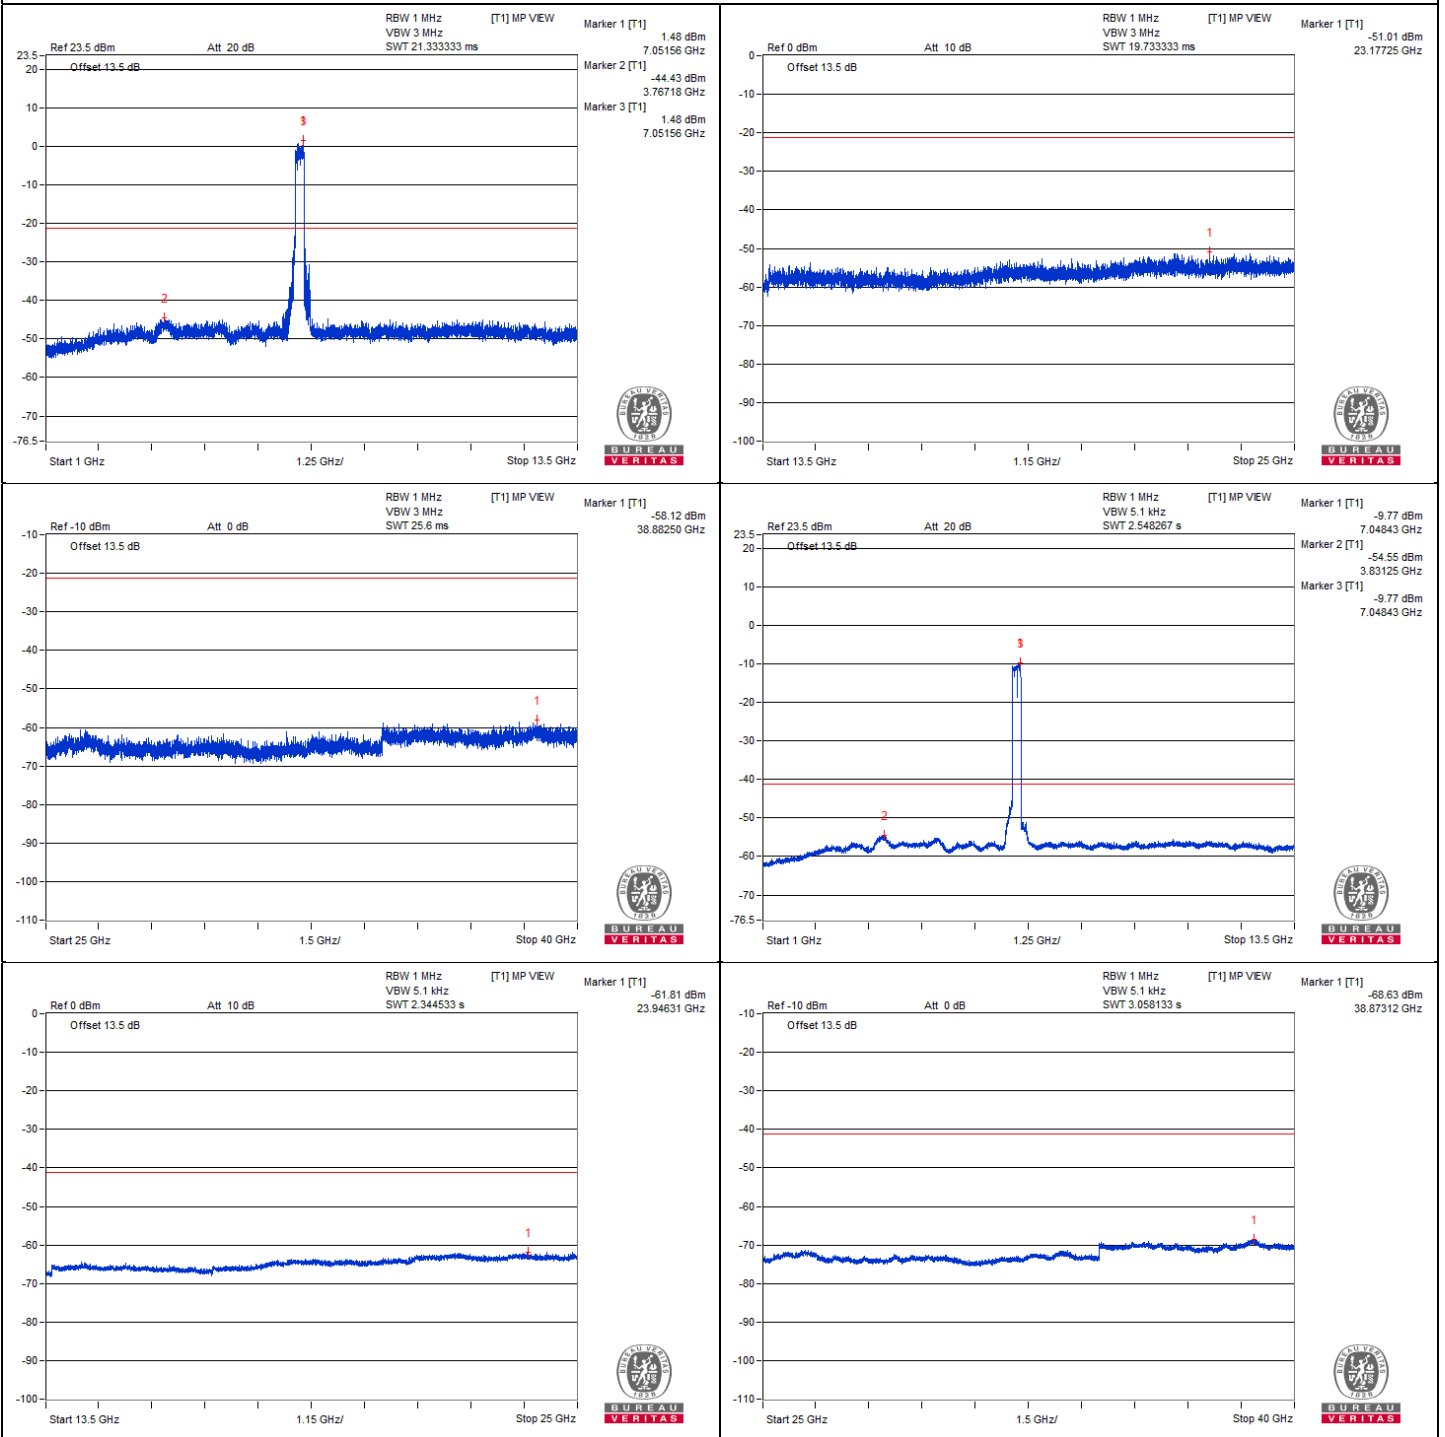



### Chain 1

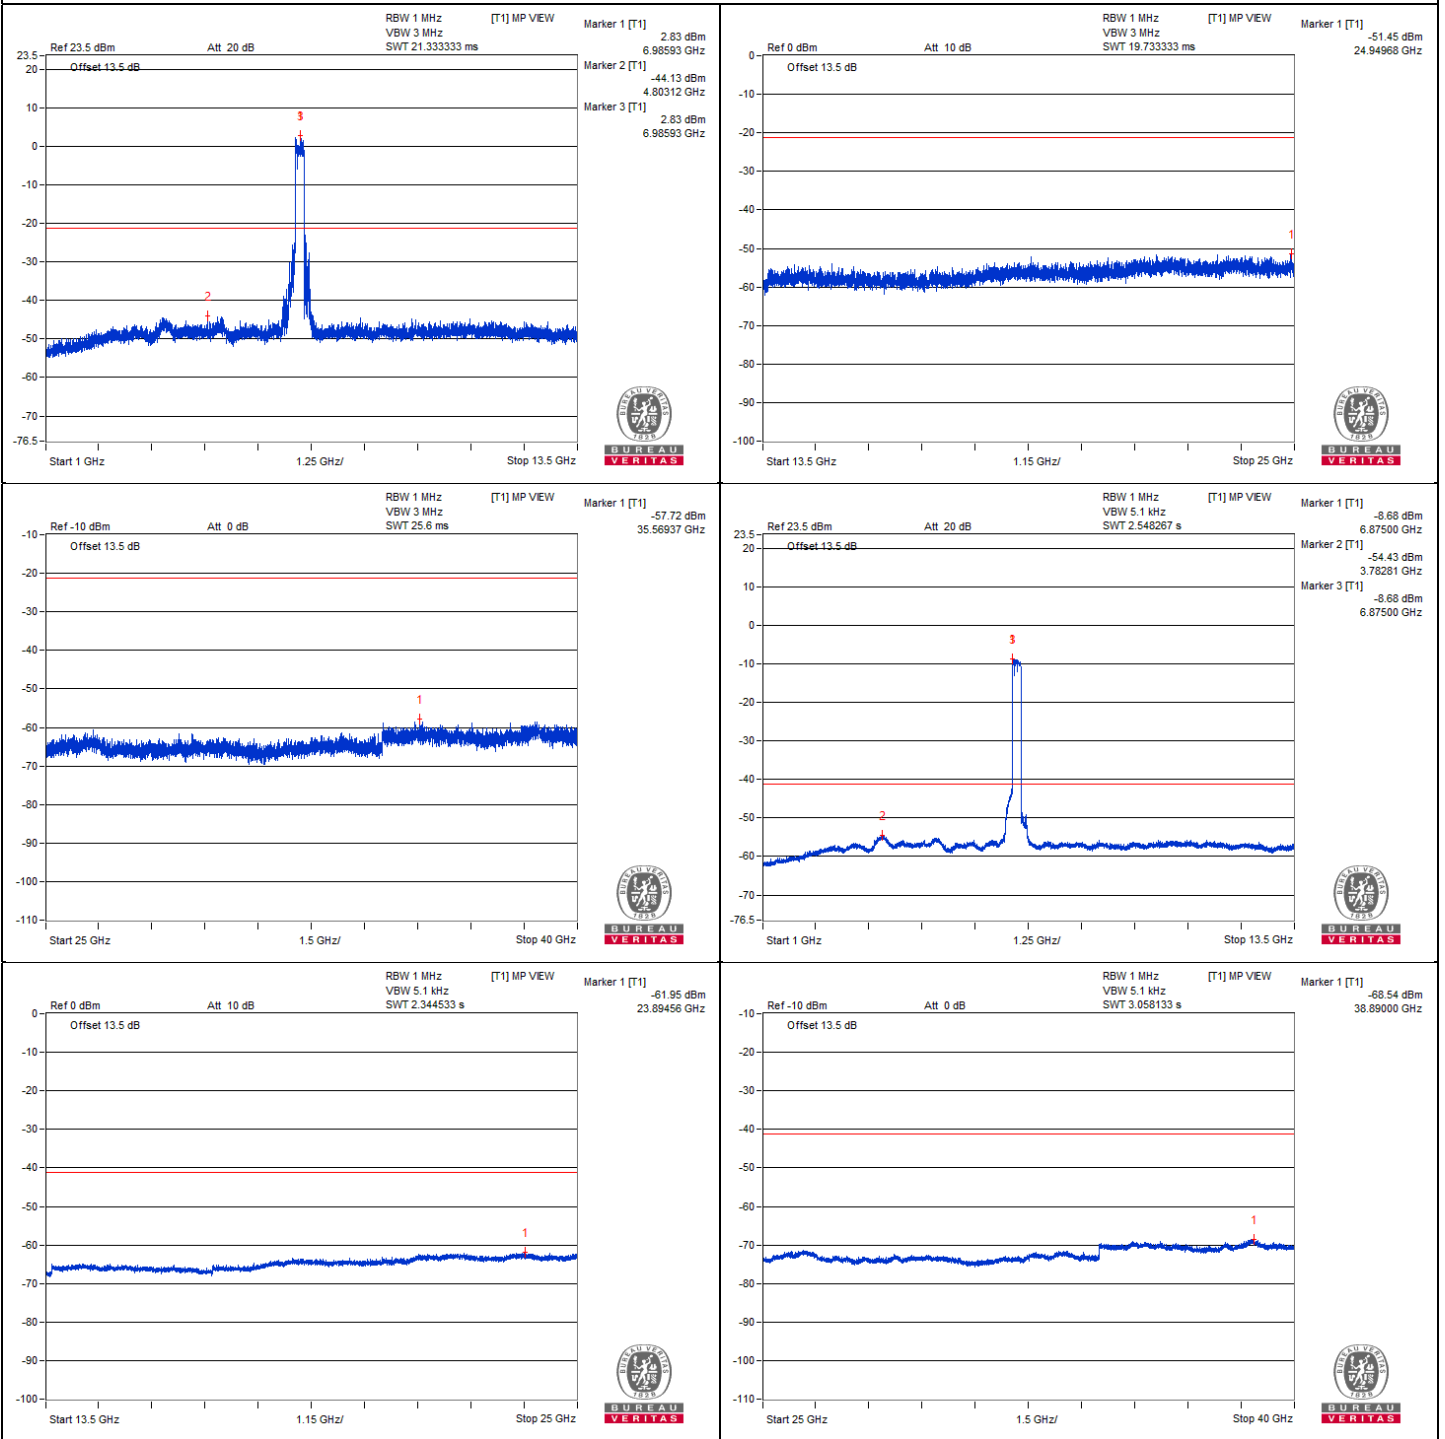


### Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#7181.77	73.4 PK	88.2	-14.8	-29.9	-28.19	4.09	-21.86
2	#7192.37	52.36 AV	68.2	-15.84	-51.52	-48.87	4.09	-42.90


### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

### Chain 0

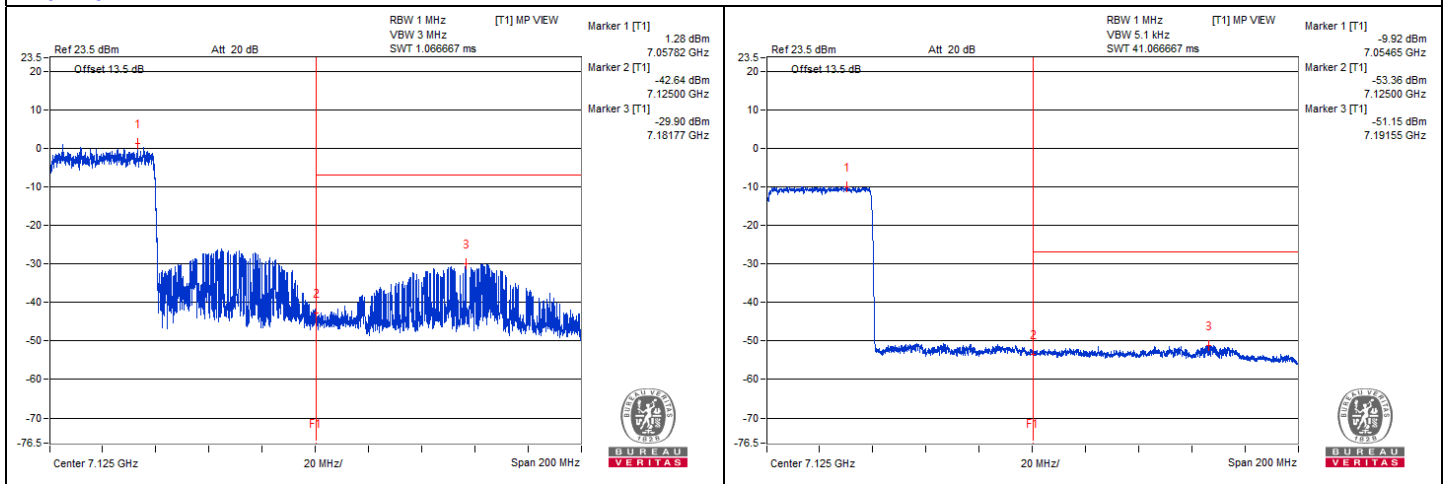

### Chain 1

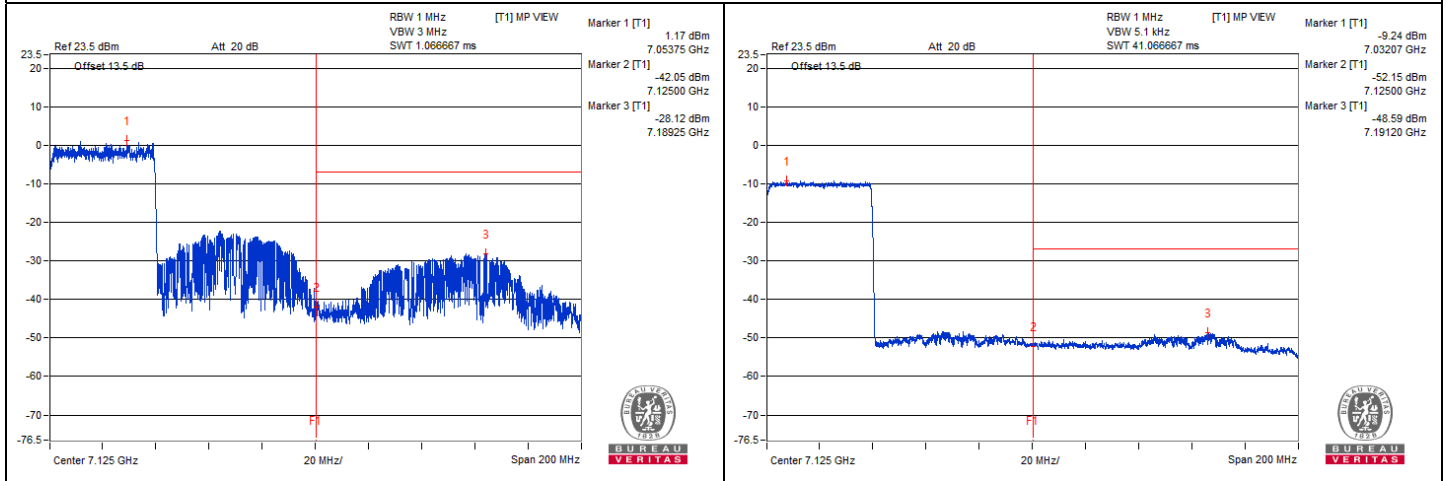

### 320 MHz Preamble 802.11be (RU996\*3) - Channel 31

#### Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12206.25	56.28 PK	74	-17.72	-46.67	-46.84	4.76	-38.98
2	12209.37	45.76 AV	54	-8.24	-57.03	-57.52	4.76	-49.50
3	18314.18	47.75 PK	74	-26.25	-54.99	-55.59	4.76	-47.51
4	18308.43	38.19 AV	54	-15.81	-65.13	-64.56	4.76	-57.07

#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




### Chain 0

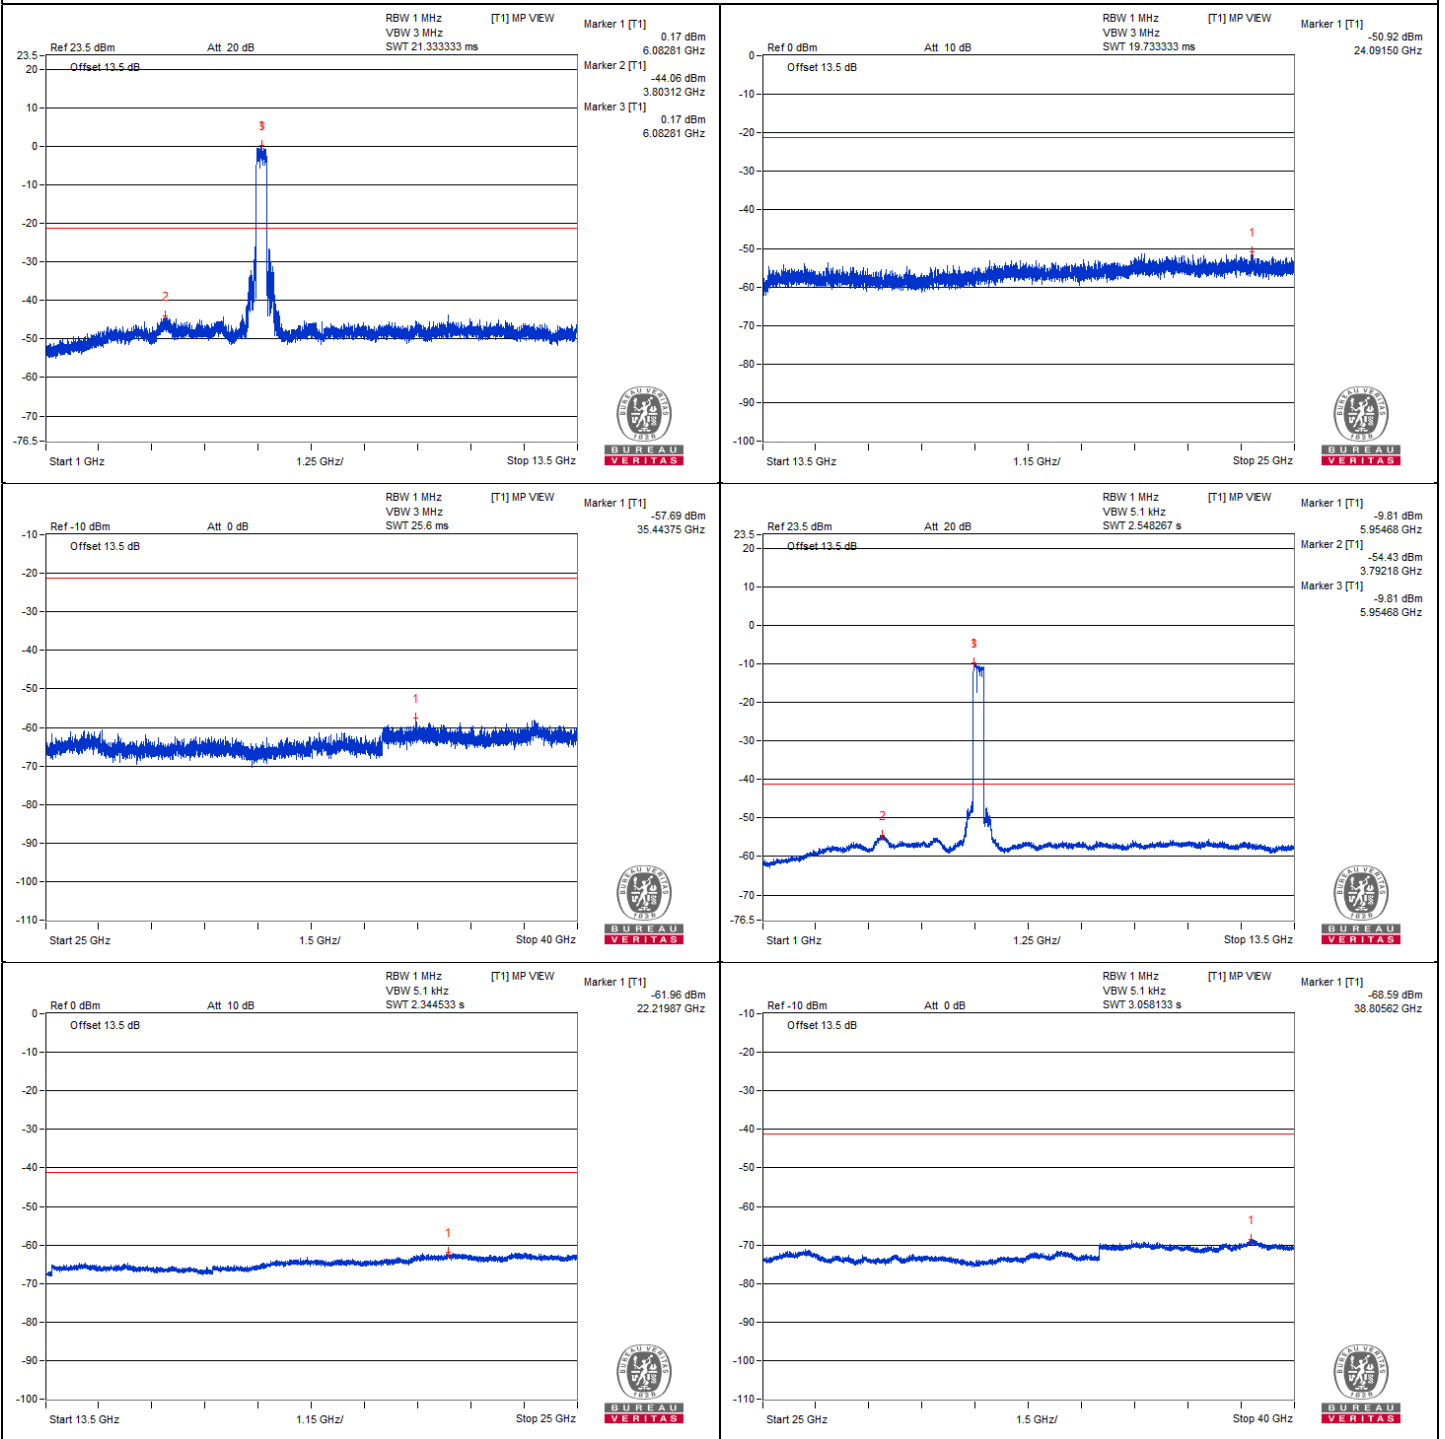



### Chain 1

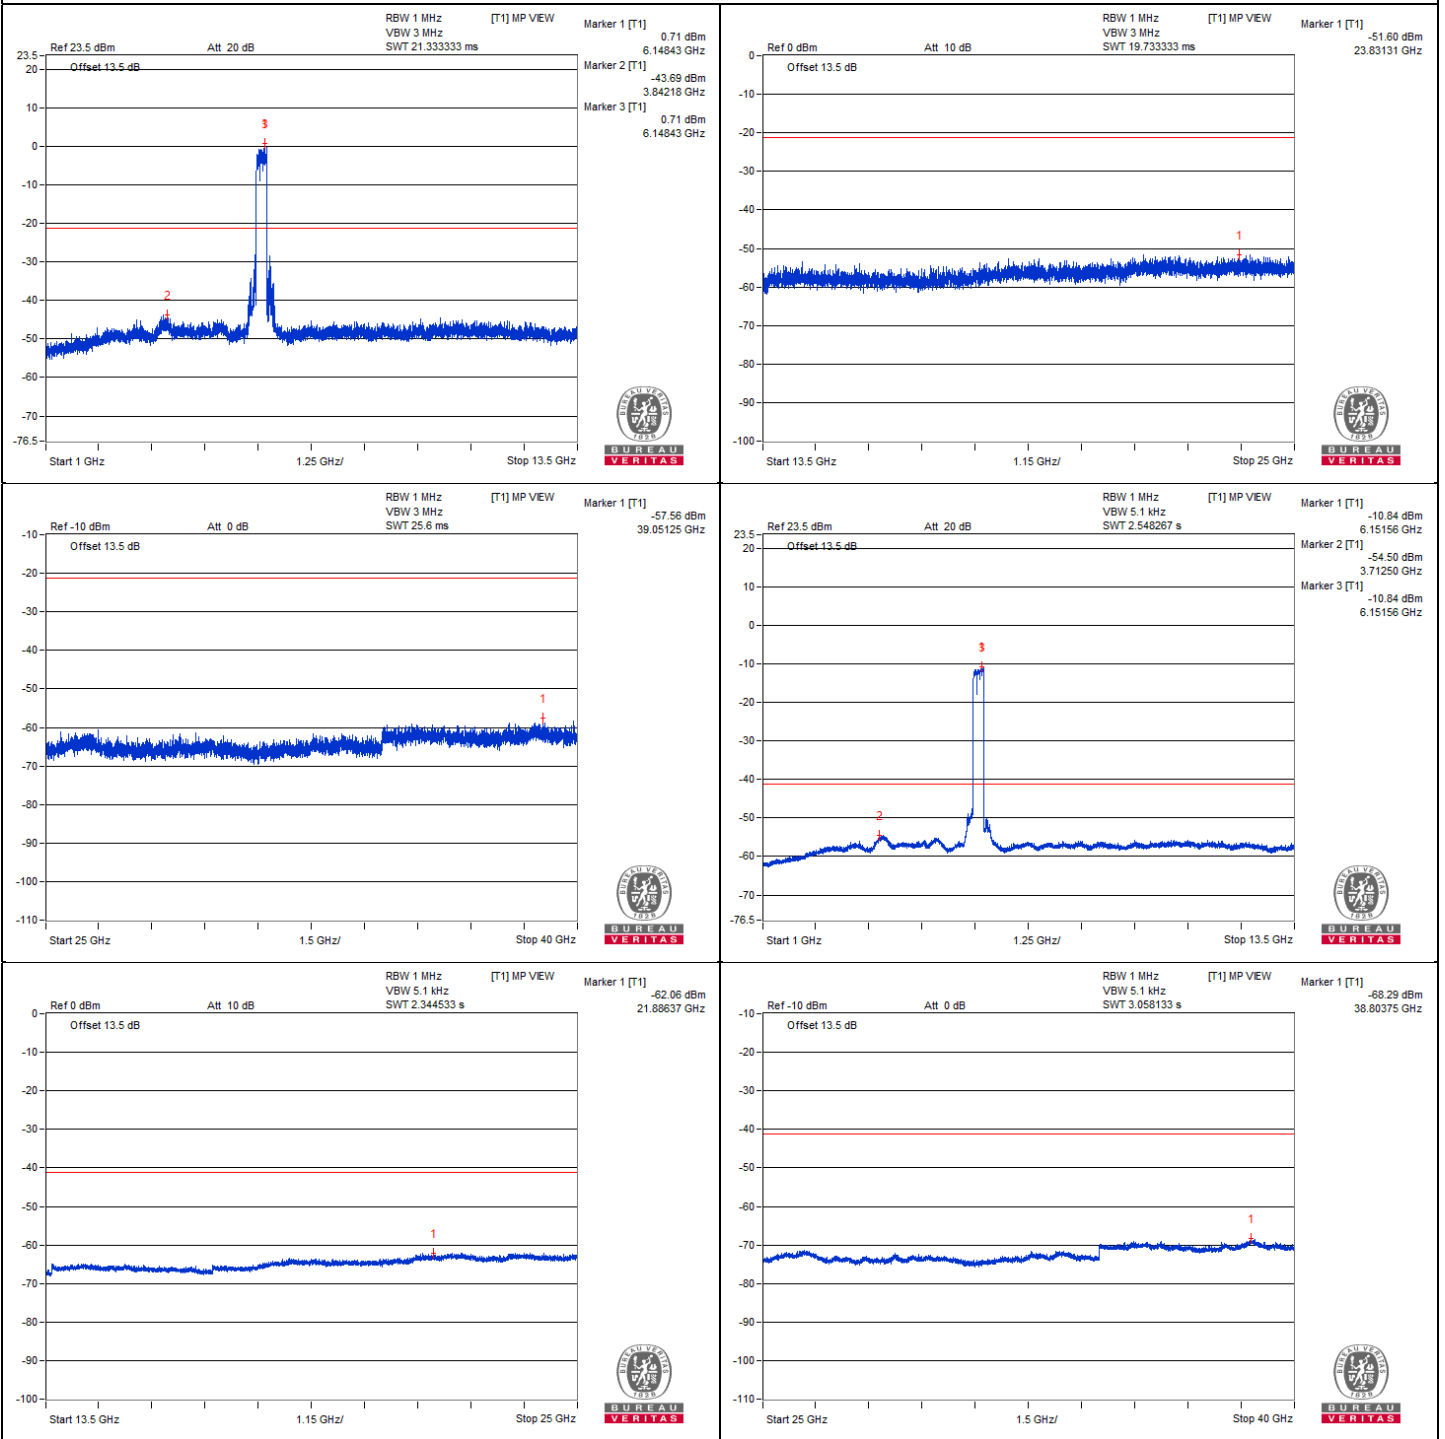


### Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5921.5	76.95 PK	88.2	-11.25	-24.67	-28.19	4.76	-18.31
2	#5919.92	56.13 AV	68.2	-12.07	-45.93	-48.14	4.76	-39.13


### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. "#": The frequency is out of the restricted band.

### Chain 0

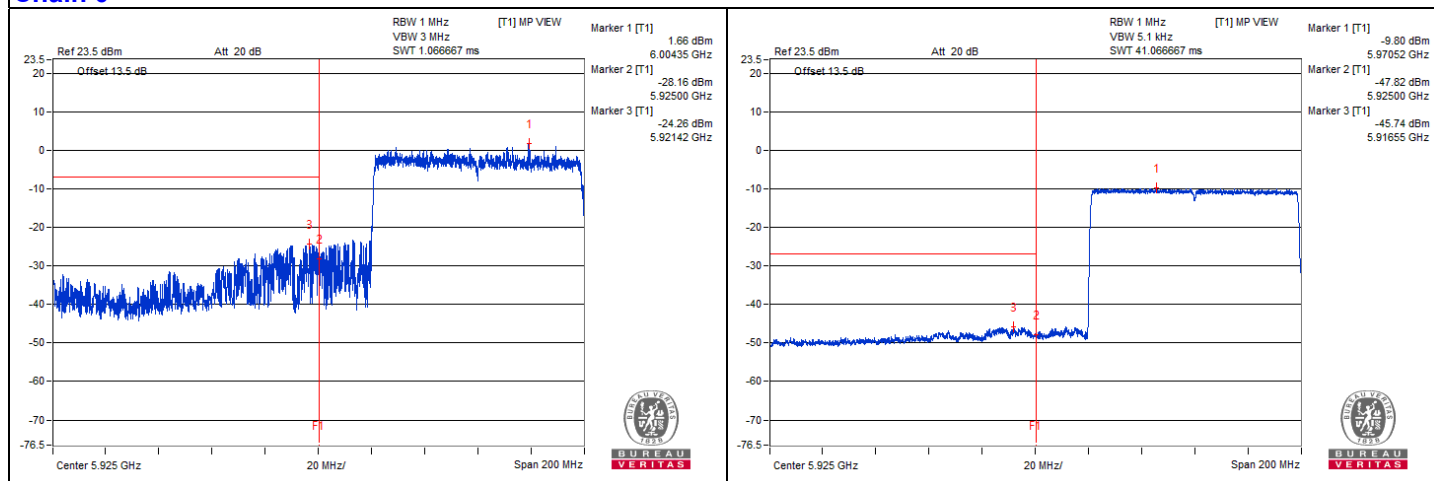

### Chain 1

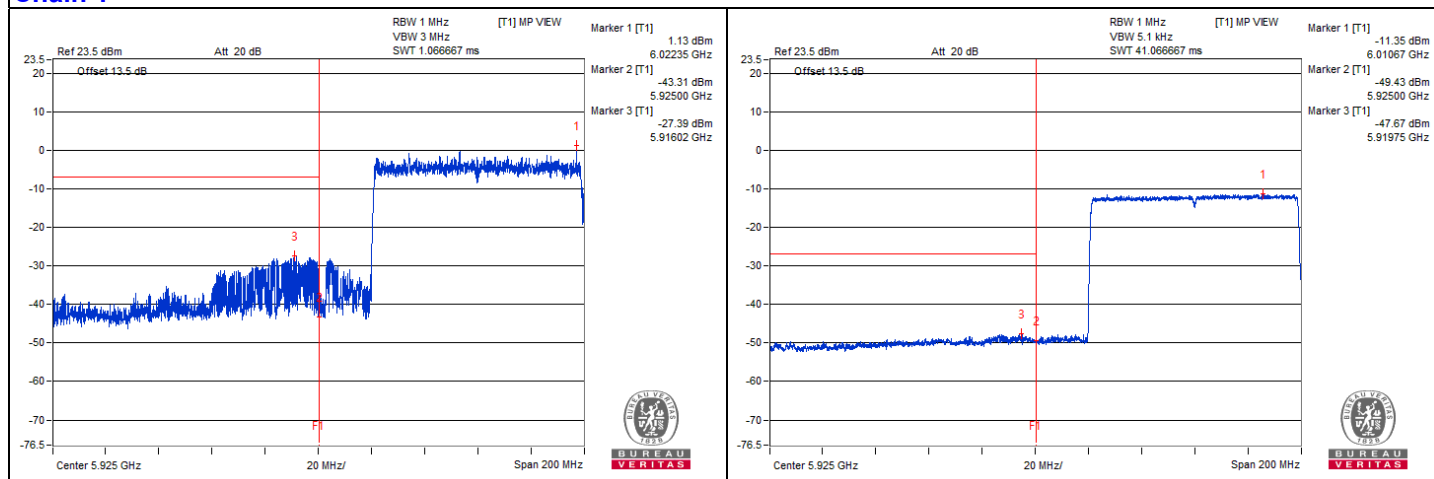

### 320 MHz Preamble 802.11be (RU996\*3) - Channel 63

#### Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12532.81	55.09 PK	74	-18.91	-47.58	-48.33	4.76	-40.17
2	12531.25	46.02 AV	54	-7.98	-57.35	-56.7	4.76	-49.24
3	18800.06	47.76 PK	74	-26.24	-55.54	-55.01	4.76	-47.50
4	18804.37	39.11 AV	54	-14.89	-64.09	-63.75	4.76	-56.15

#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




### Chain 0

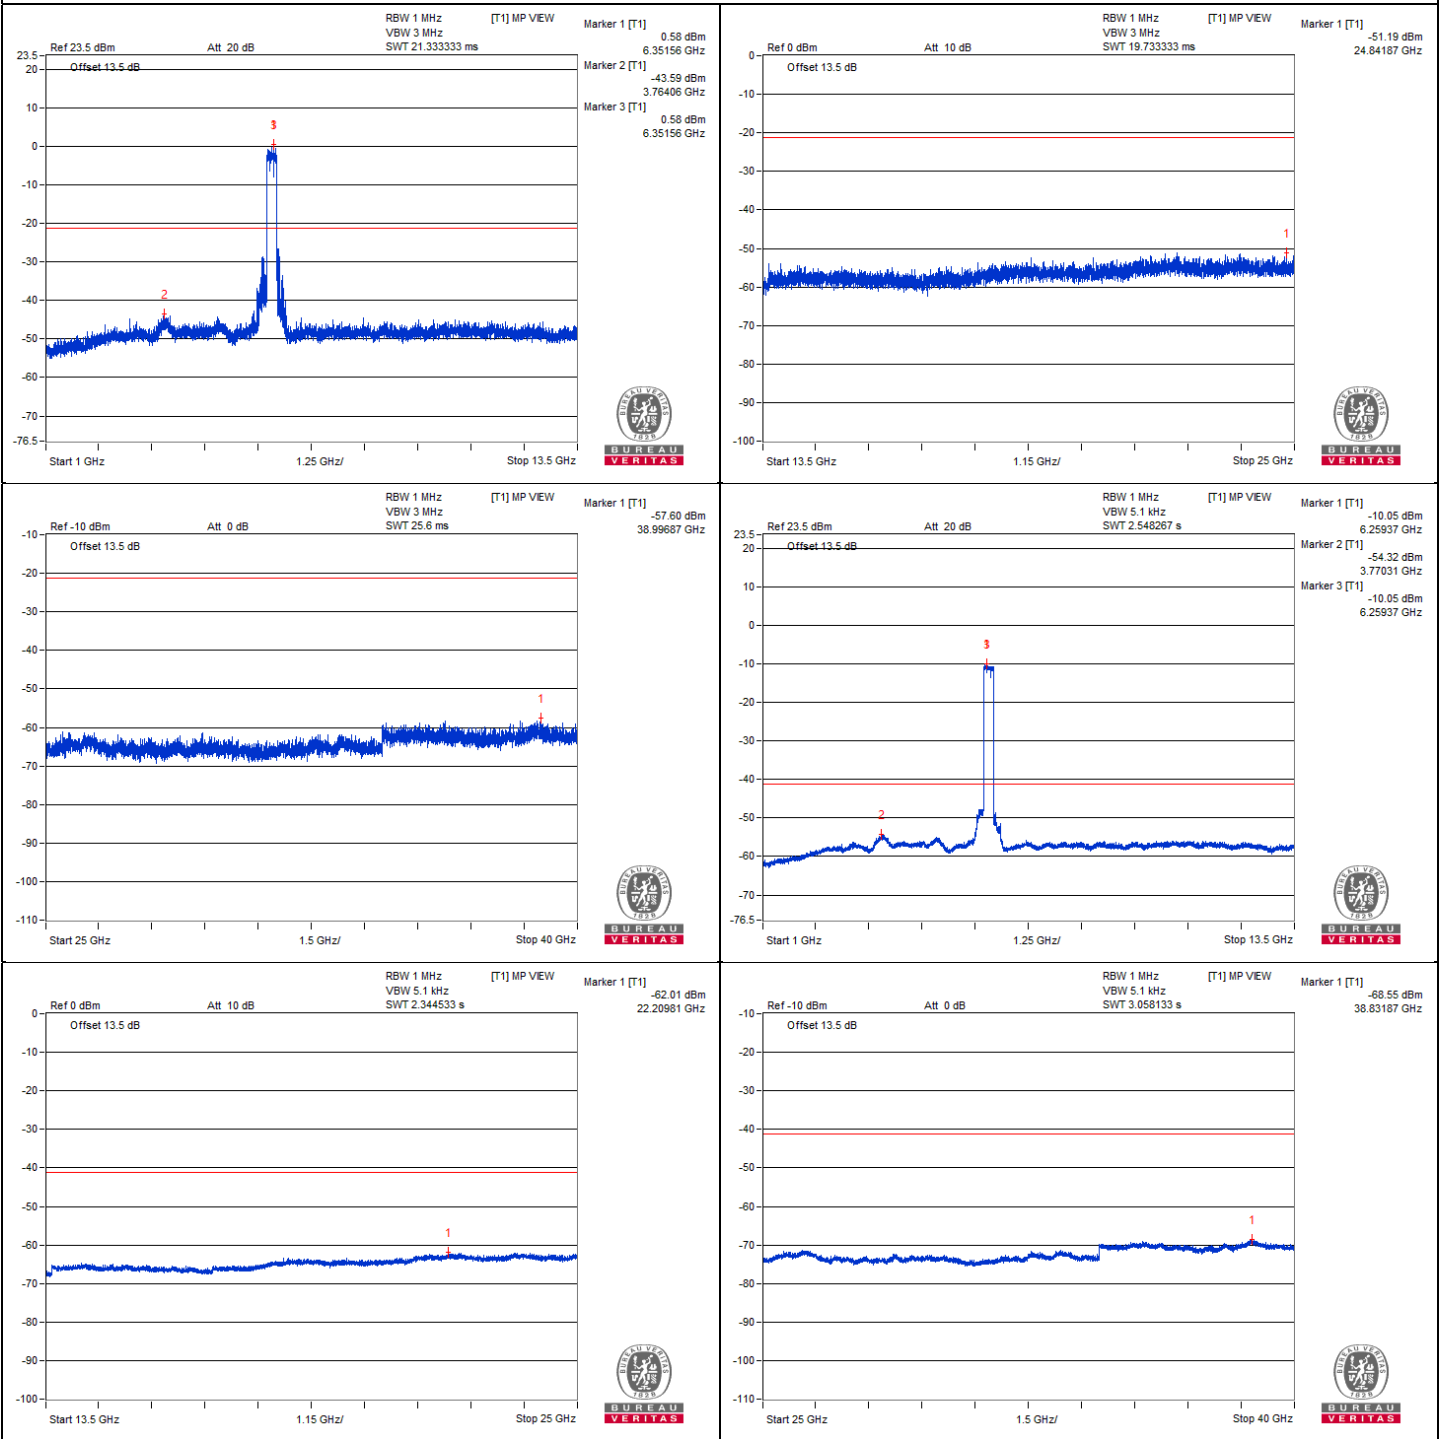



### Chain 1

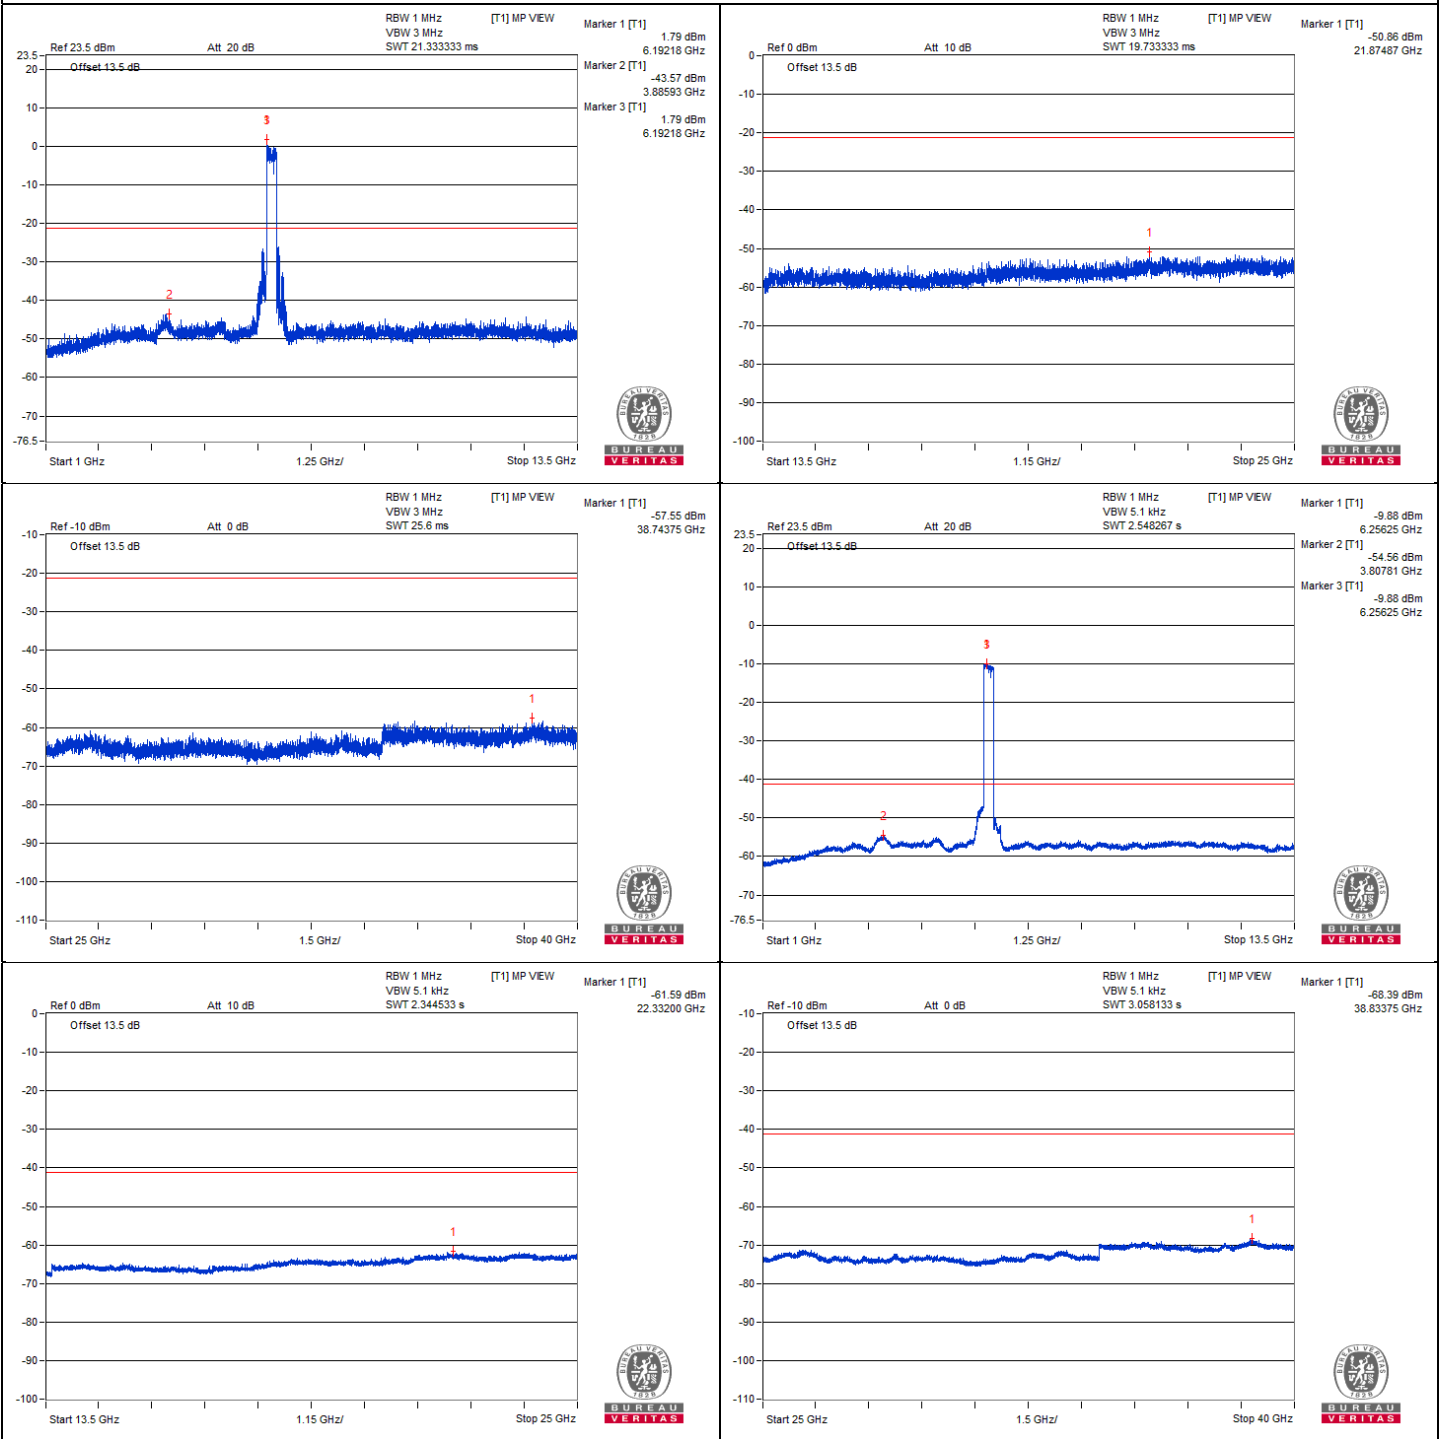

### 320 MHz Preamble 802.11be (RU996\*3) - Channel 127

#### Conducted spurious emission table







No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#13175	55.52 PK	88.2	-32.68	-46.76	-48.41	4.76	-39.74
2	#13168.75	45.5 AV	68.2	-22.7	-57.63	-57.44	4.76	-49.76
3	19761.75	47.3 PK	74	-26.7	-58.38	-54.1	4.76	-47.96
4	19754.56	38.7 AV	54	-15.3	-64	-64.69	4.76	-56.56

#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

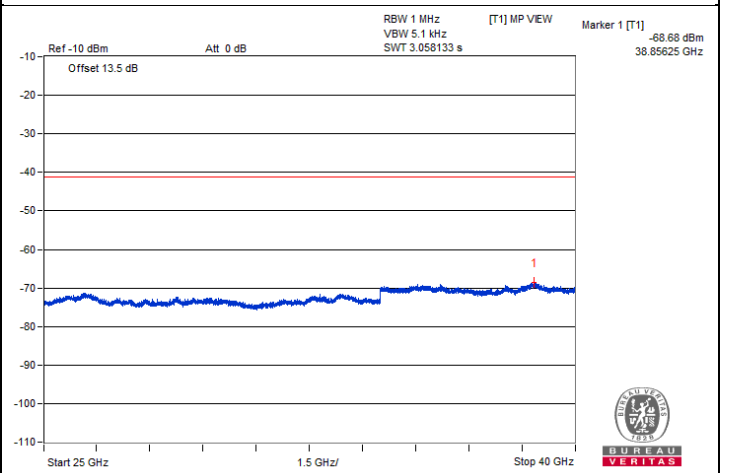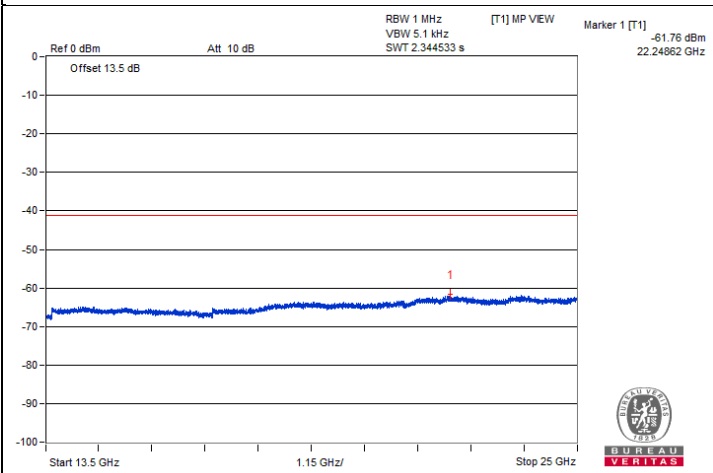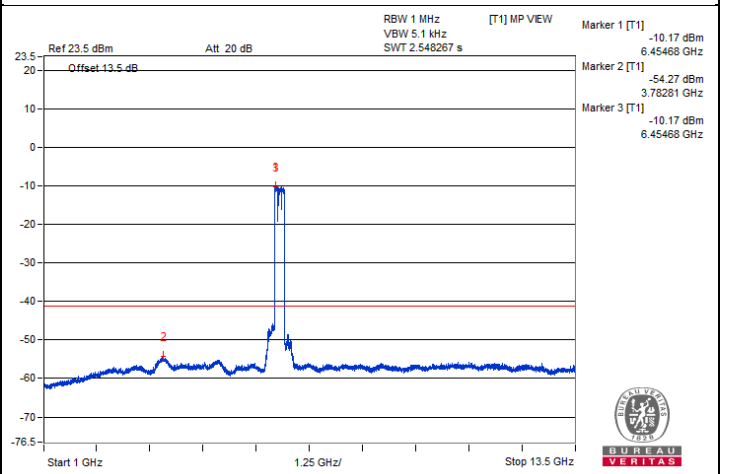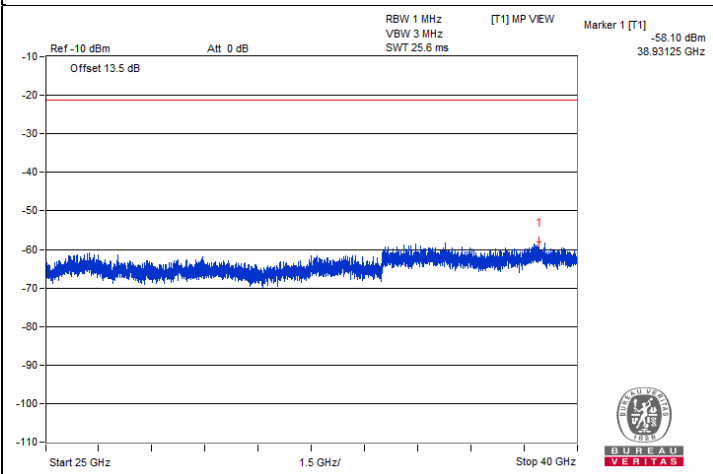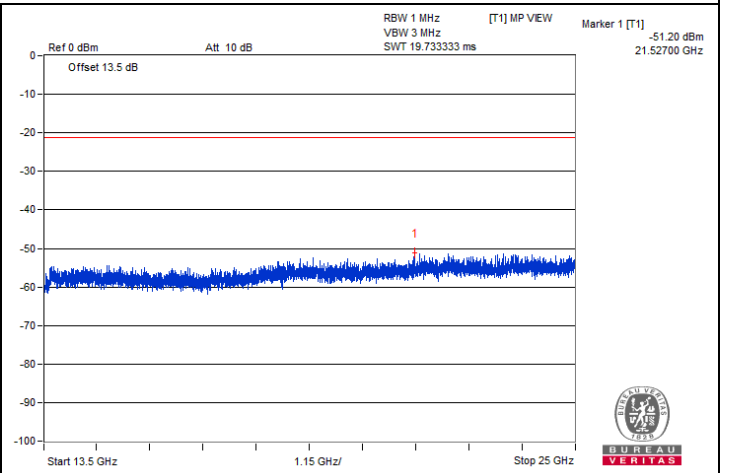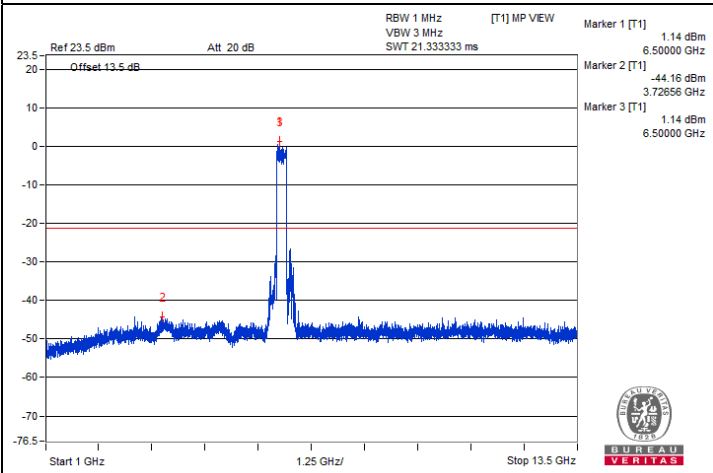





### Chain 1

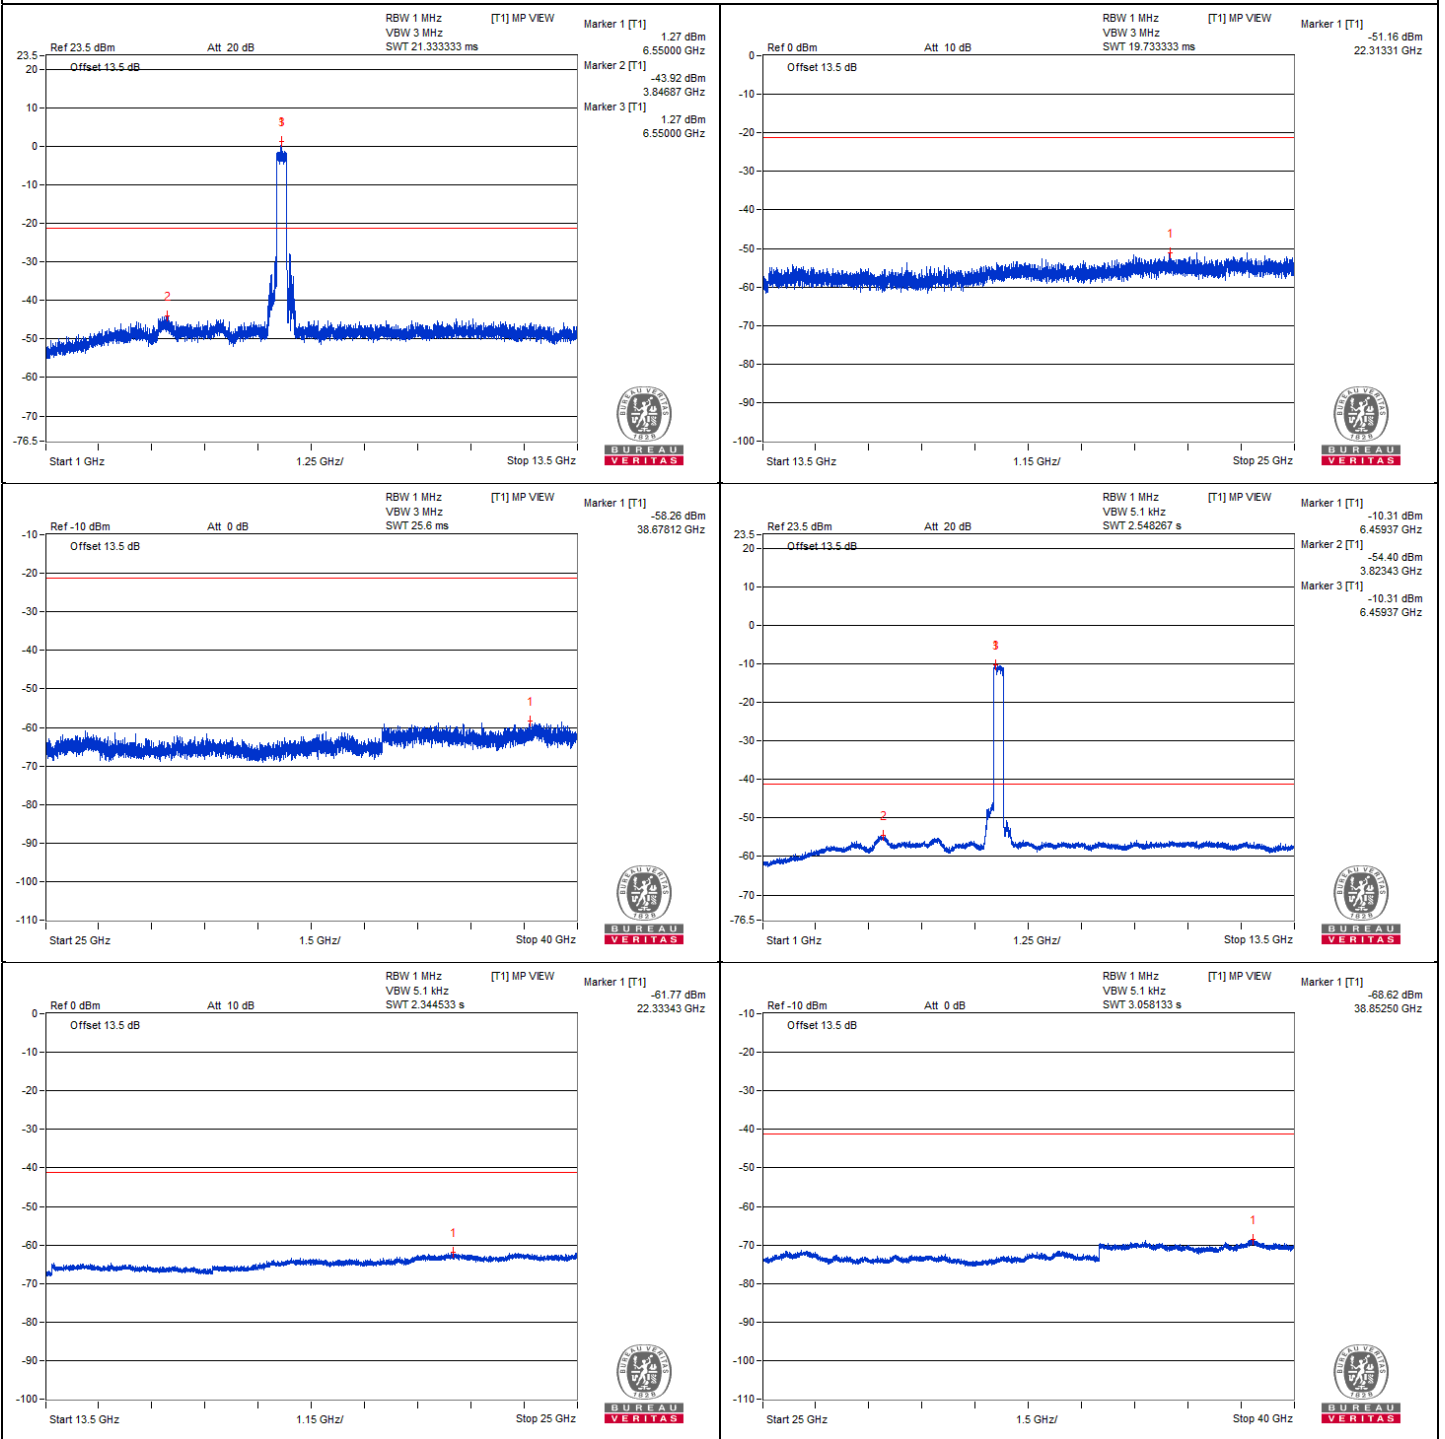

### 320 MHz Preamble 802.11be (RU996\*3) - Channel 191


#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#13811.93	45.78 PK	88.2	-42.42	-56.87	-57.66	4.76	-49.48
2	#13803.31	37.29 AV	68.2	-30.91	-66.2	-65.32	4.76	-57.97
3	20723.43	48.25 PK	74	-25.75	-54.88	-54.68	4.76	-47.01
4	20711.93	38.66 AV	54	-15.34	-64.56	-64.19	4.76	-56.60

#### Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

### Chain 0

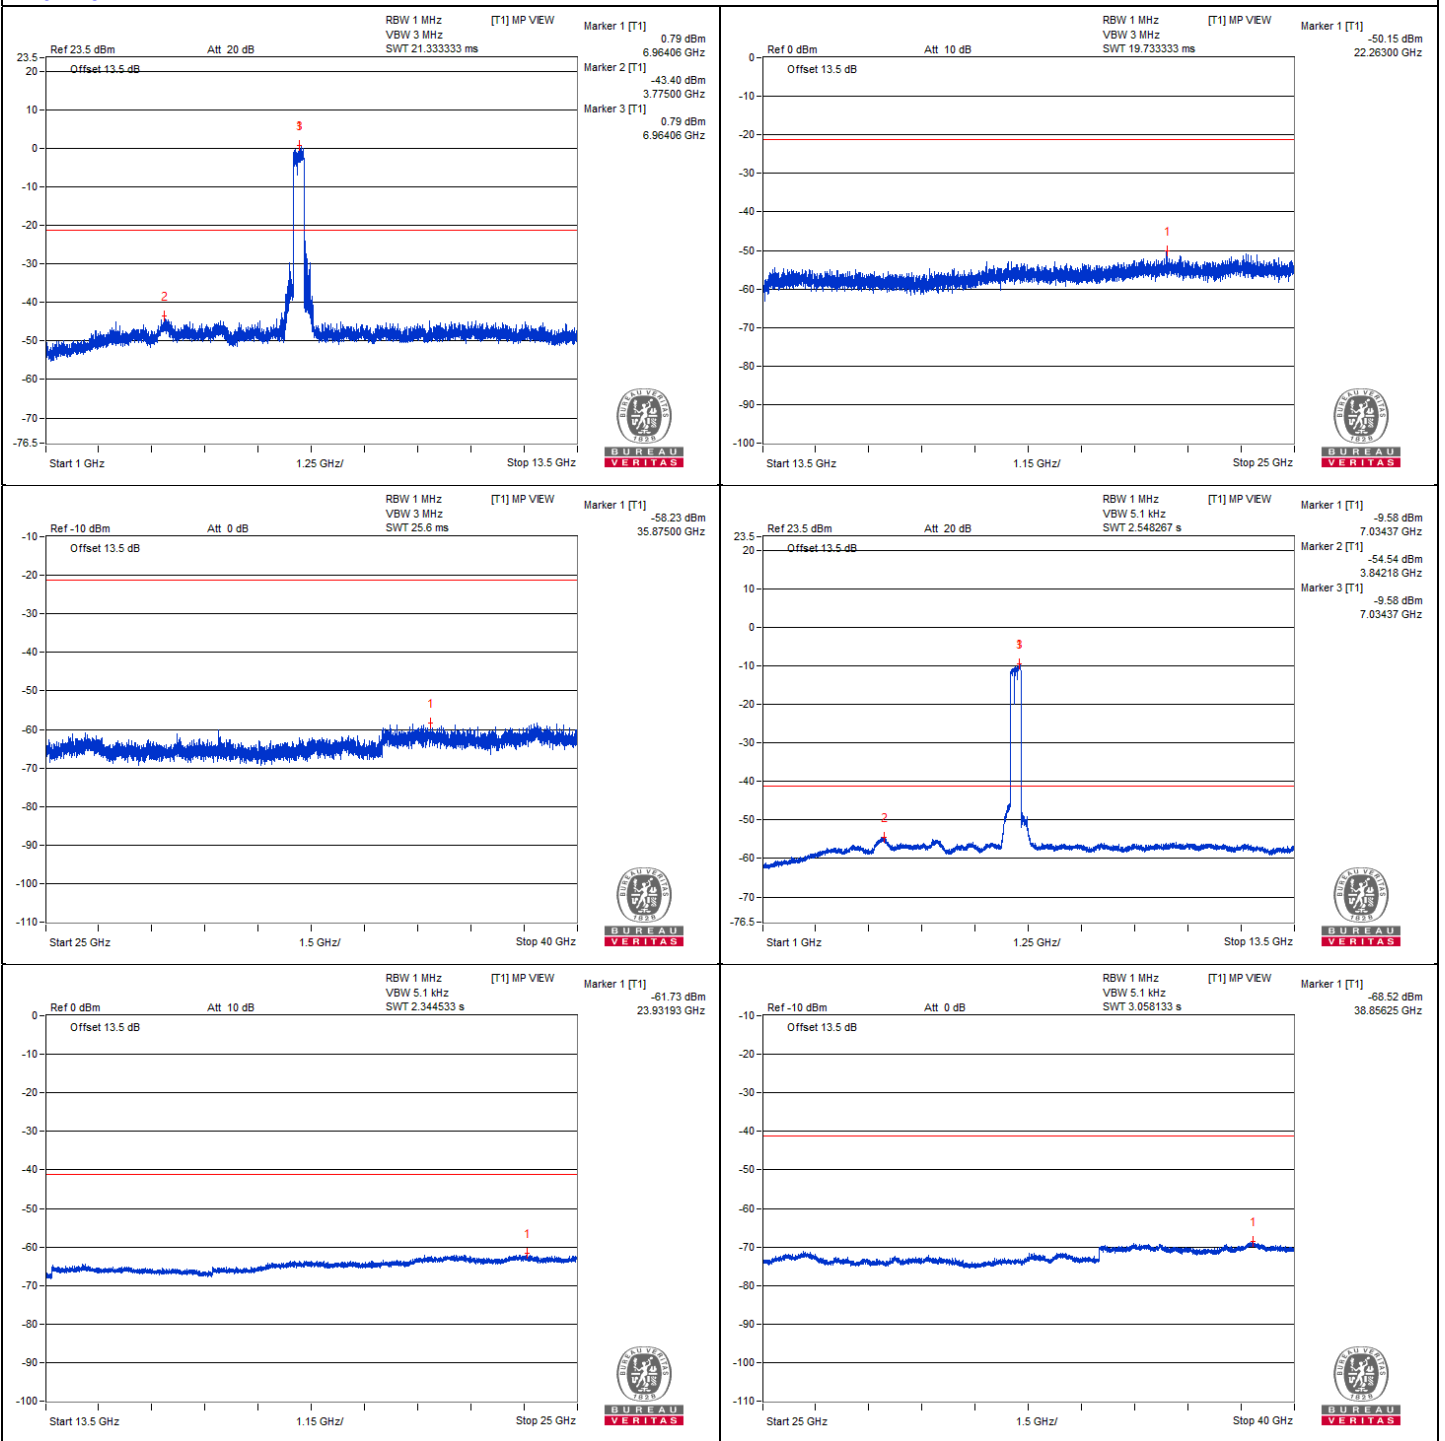



### Chain 1

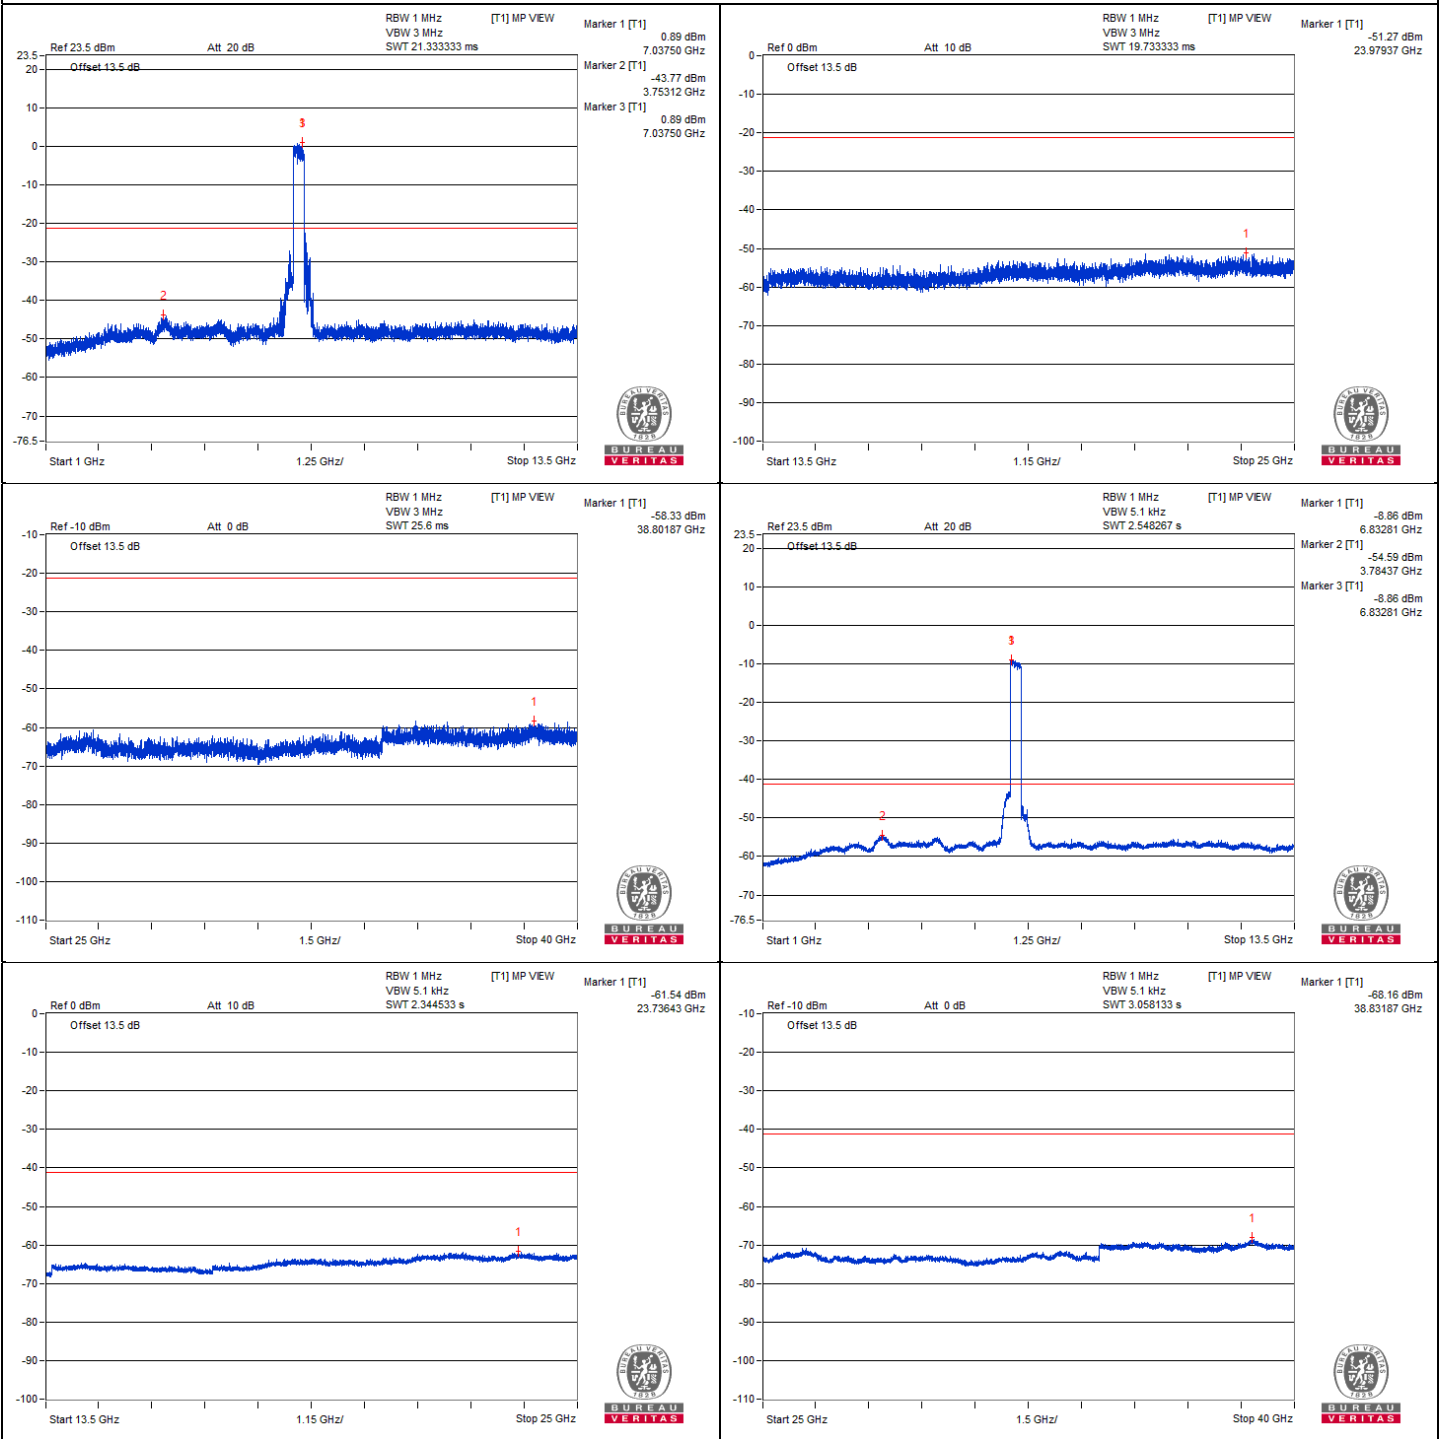


### Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#7129.22	76.15 PK	88.2	-12.05	-26.65	-25.82	4.09	-19.11
2	#7221.45	54.15 AV	68.2	-14.05	-48.65	-47.82	4.09	-41.11


### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. "#": The frequency is out of the restricted band.

### Chain 0

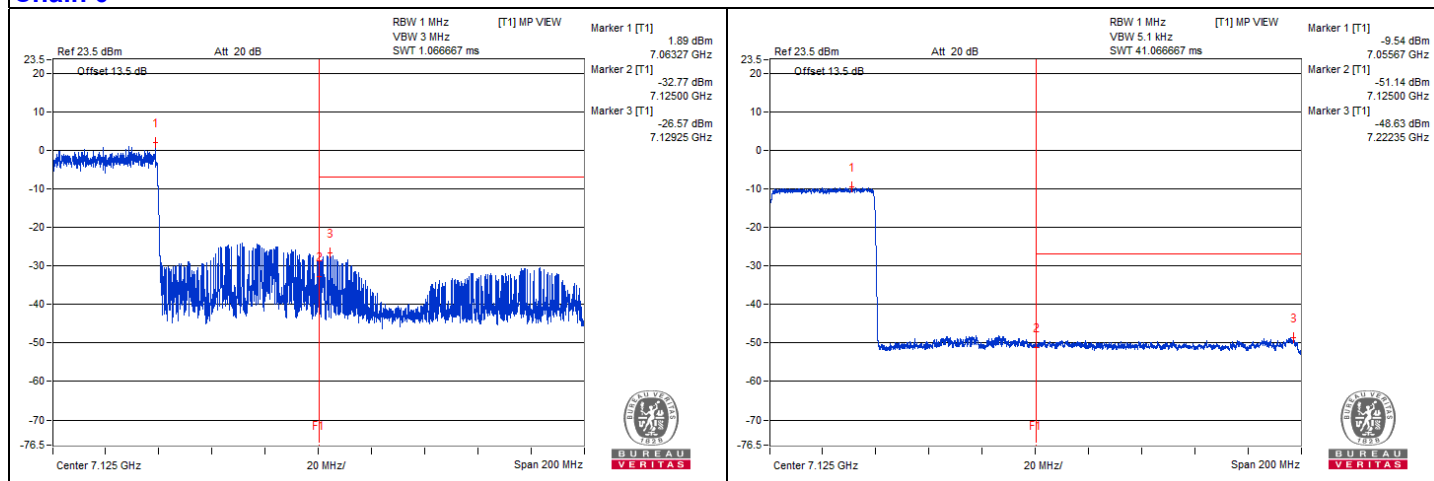

### Chain 1

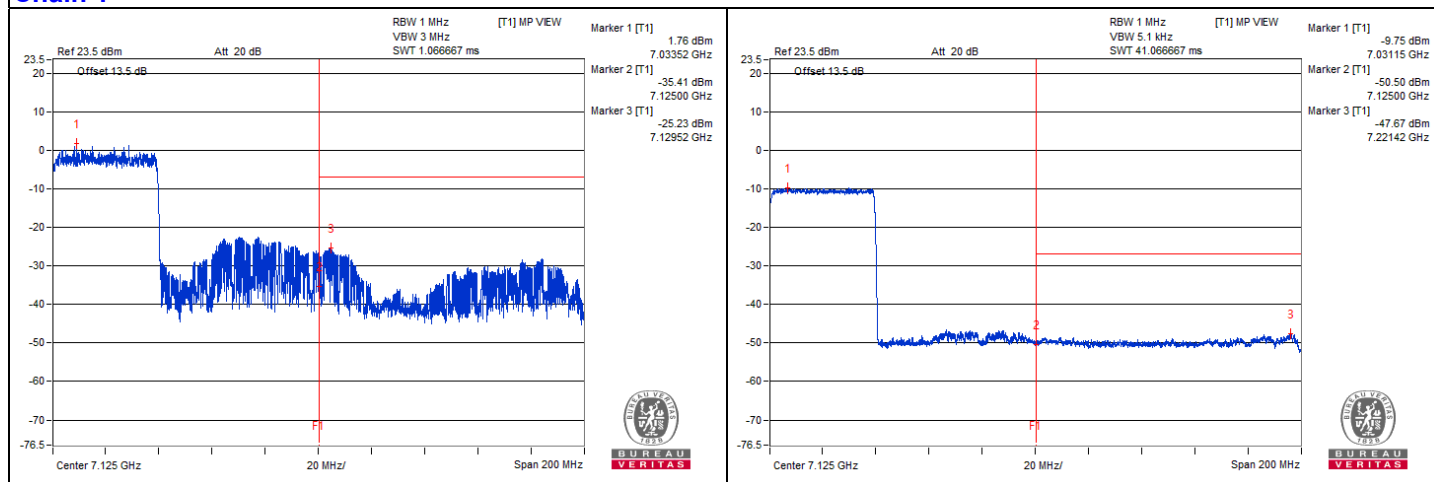

### 320 MHz Preamble 802.11be (RU996\*3+484) - Channel 31

#### Conducted spurious emission table







No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12206.25	56.28 PK	74	-17.72	-46.67	-46.84	4.76	-38.98
2	12209.37	45.76 AV	54	-8.24	-57.03	-57.52	4.76	-49.50
3	18314.18	47.75 PK	74	-26.25	-54.99	-55.59	4.76	-47.51
4	18308.43	38.19 AV	54	-15.81	-65.13	-64.56	4.76	-57.07

#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




### Chain 0

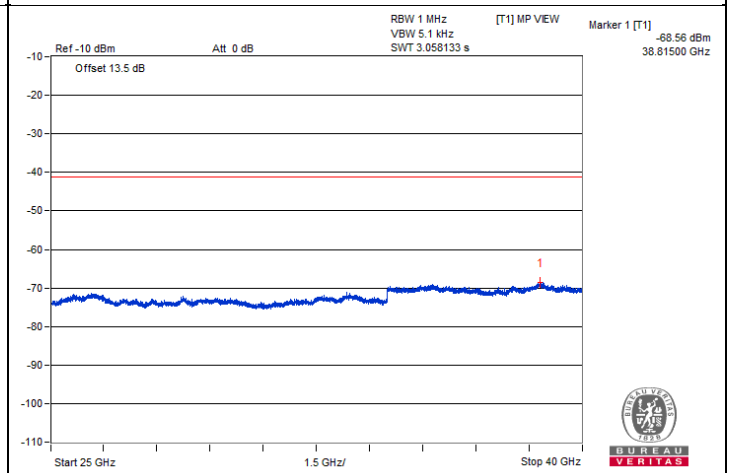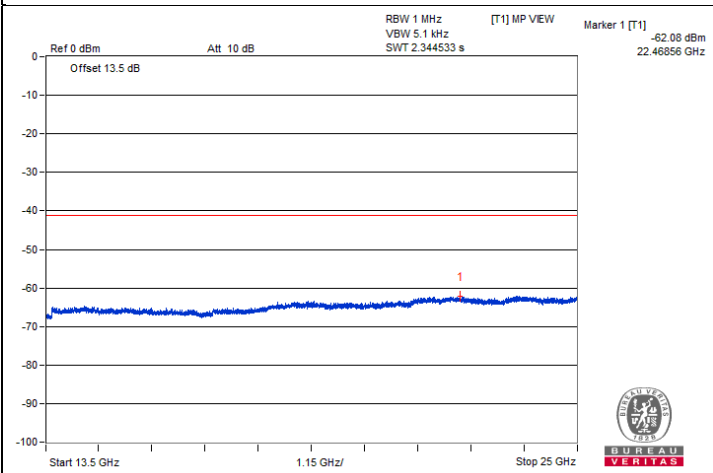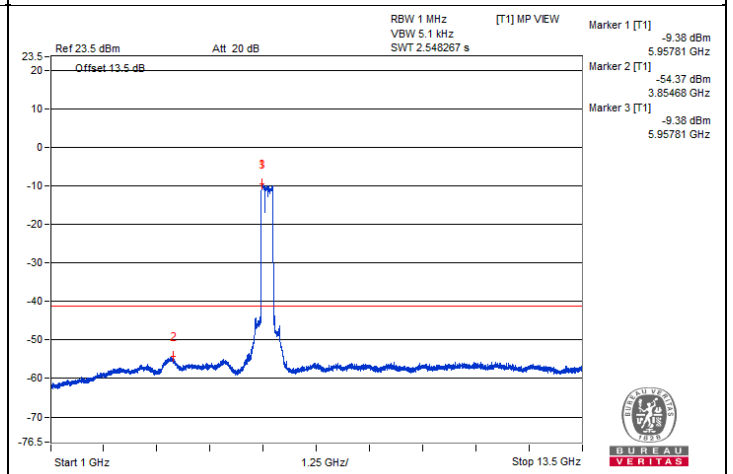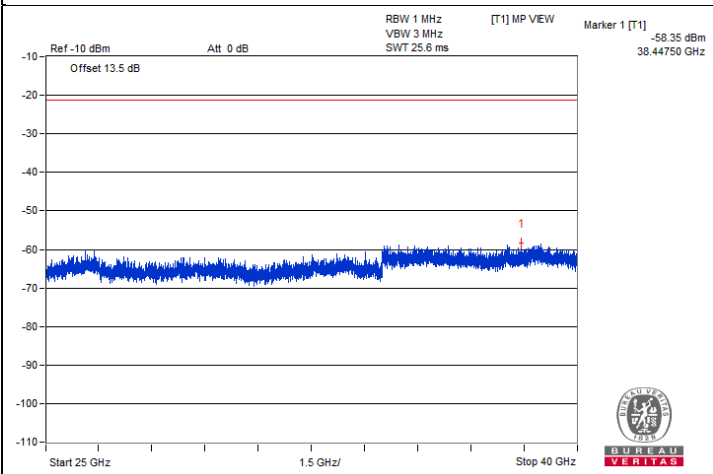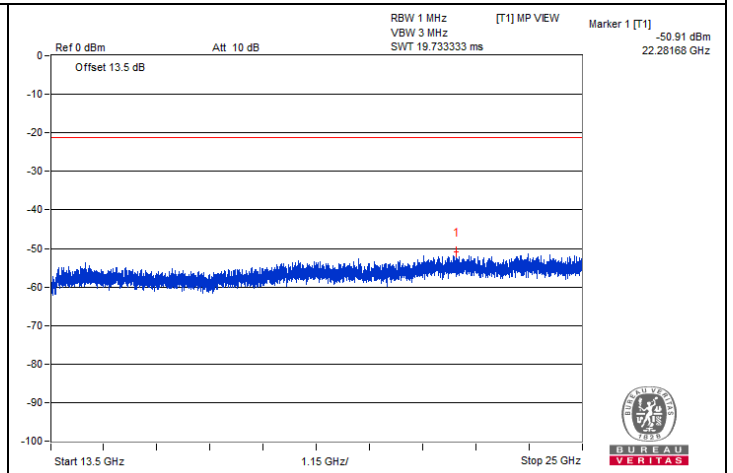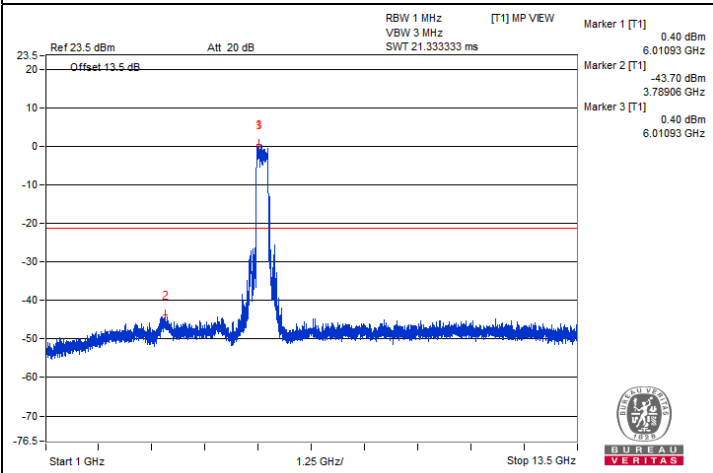



### Chain 1

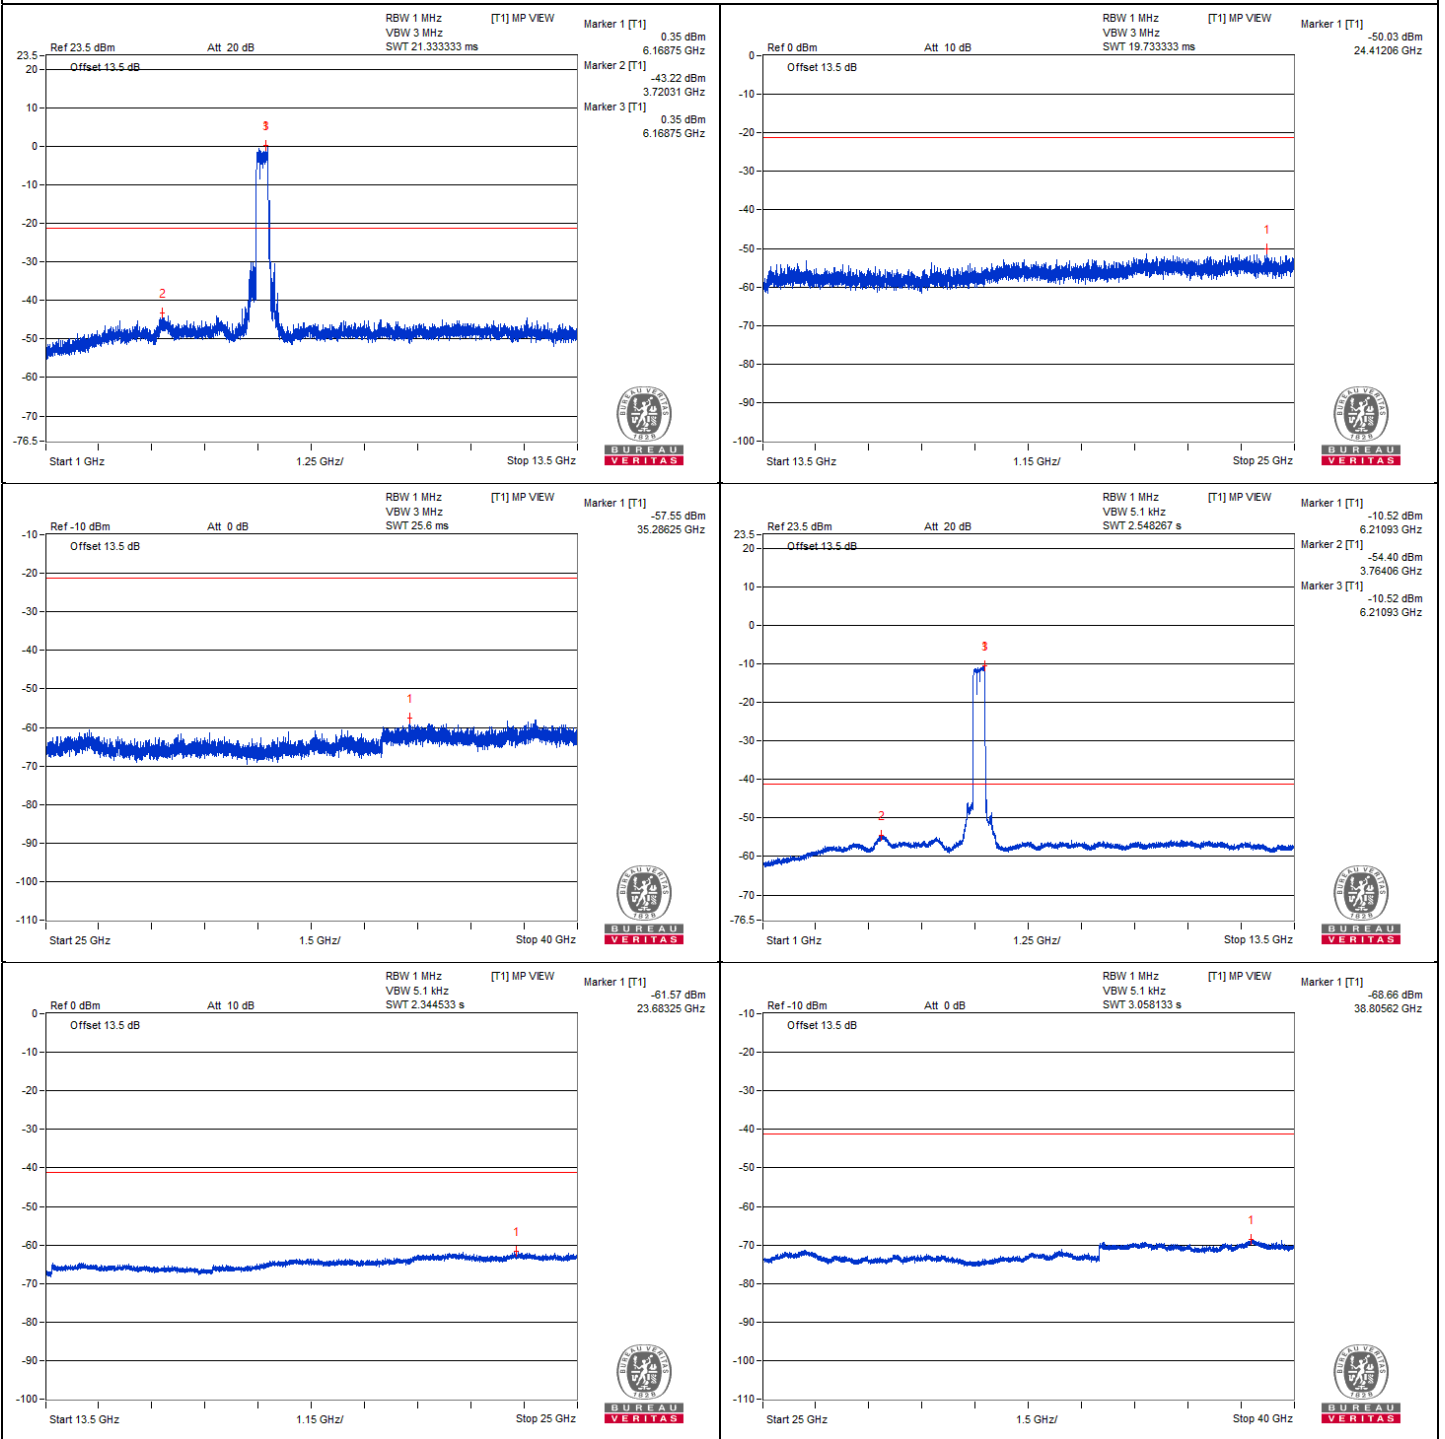




### Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5873.07	76.3 PK	88.2	-11.9	-25.05	-29.51	4.76	-18.96
2	#5909.22	58.14 AV	68.2	-10.06	-43.95	-46.09	4.76	-37.12


### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. "#": The frequency is out of the restricted band.

### Chain 0

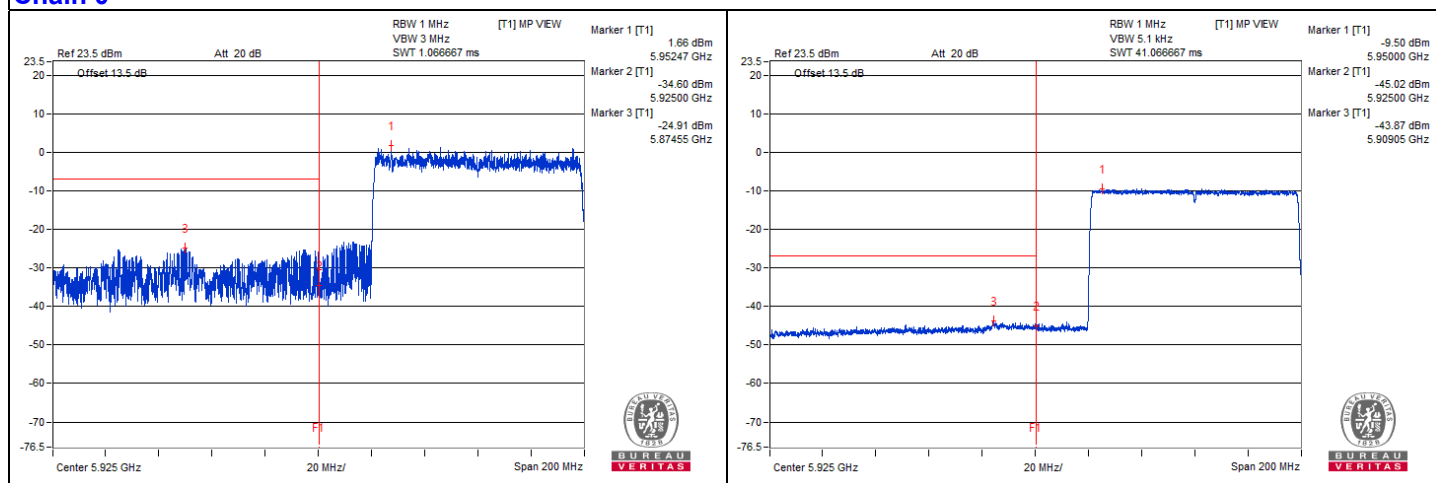

### Chain 1

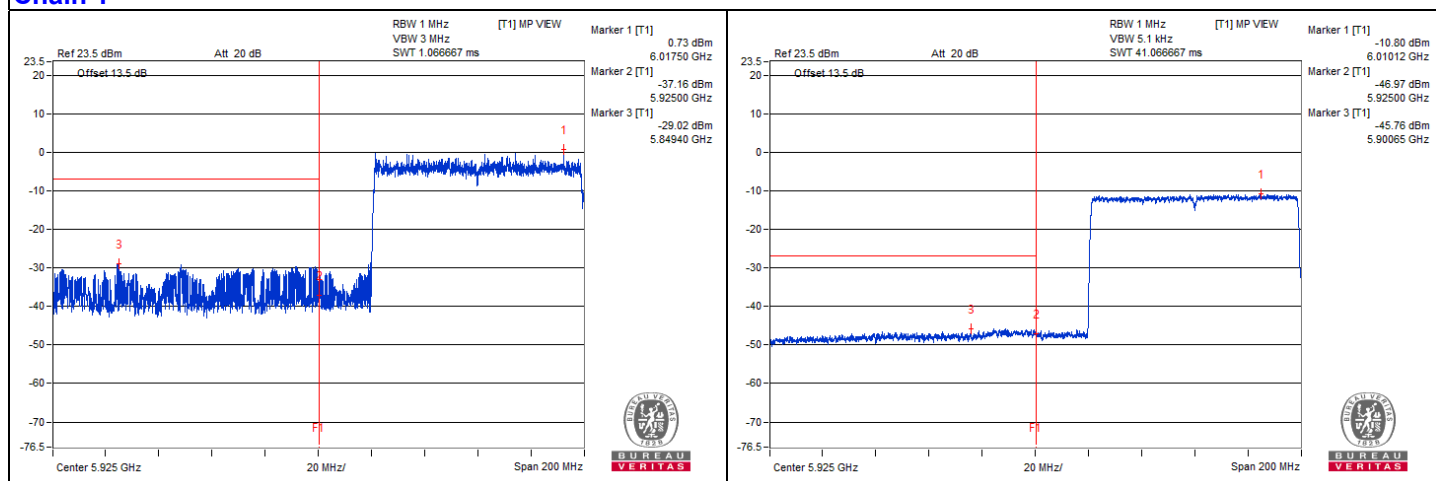

### 320 MHz Preamble 802.11be (RU996\*3+484) - Channel 63

#### Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12532.81	55.09 PK	74	-18.91	-47.58	-48.33	4.76	-40.17
2	12531.25	46.02 AV	54	-7.98	-57.35	-56.7	4.76	-49.24
3	18800.06	47.76 PK	74	-26.24	-55.54	-55.01	4.76	-47.50
4	18804.37	39.11 AV	54	-14.89	-64.09	-63.75	4.76	-56.15

#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




### Chain 0

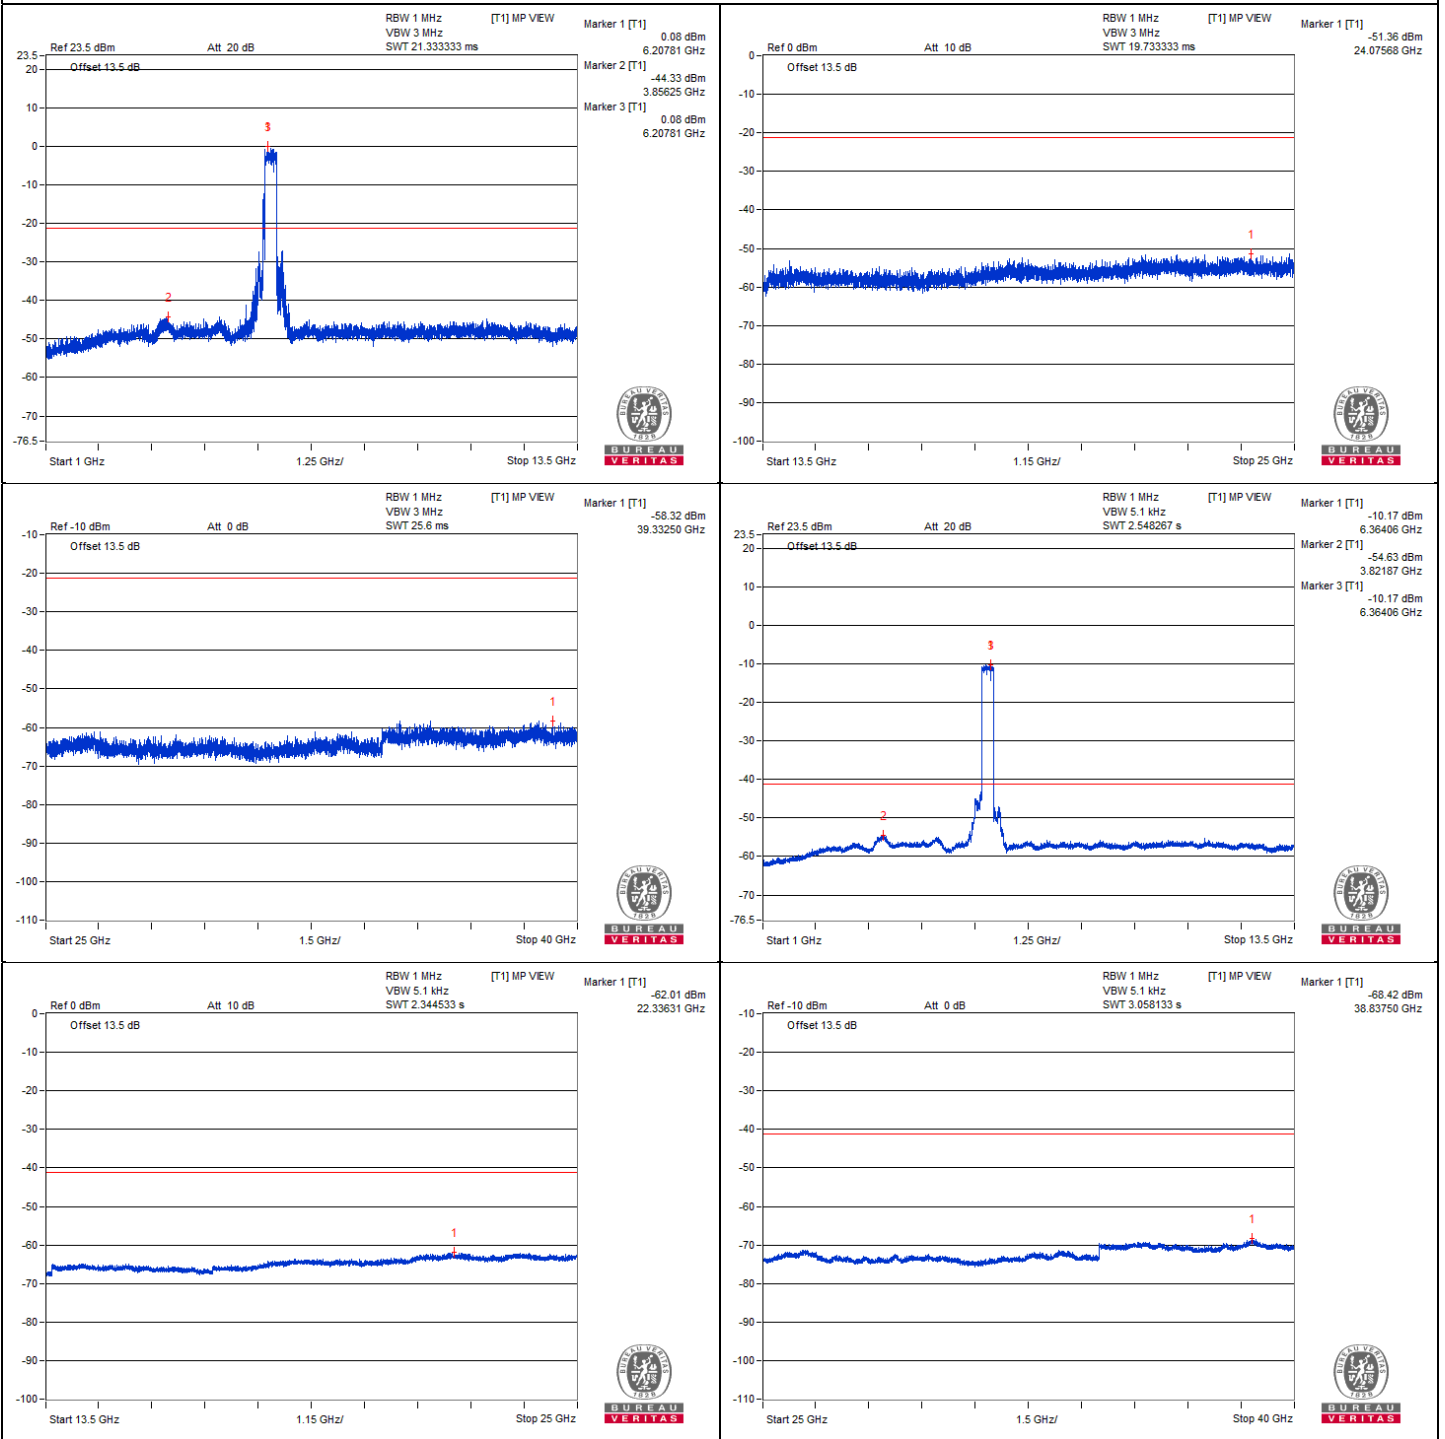



### Chain 1

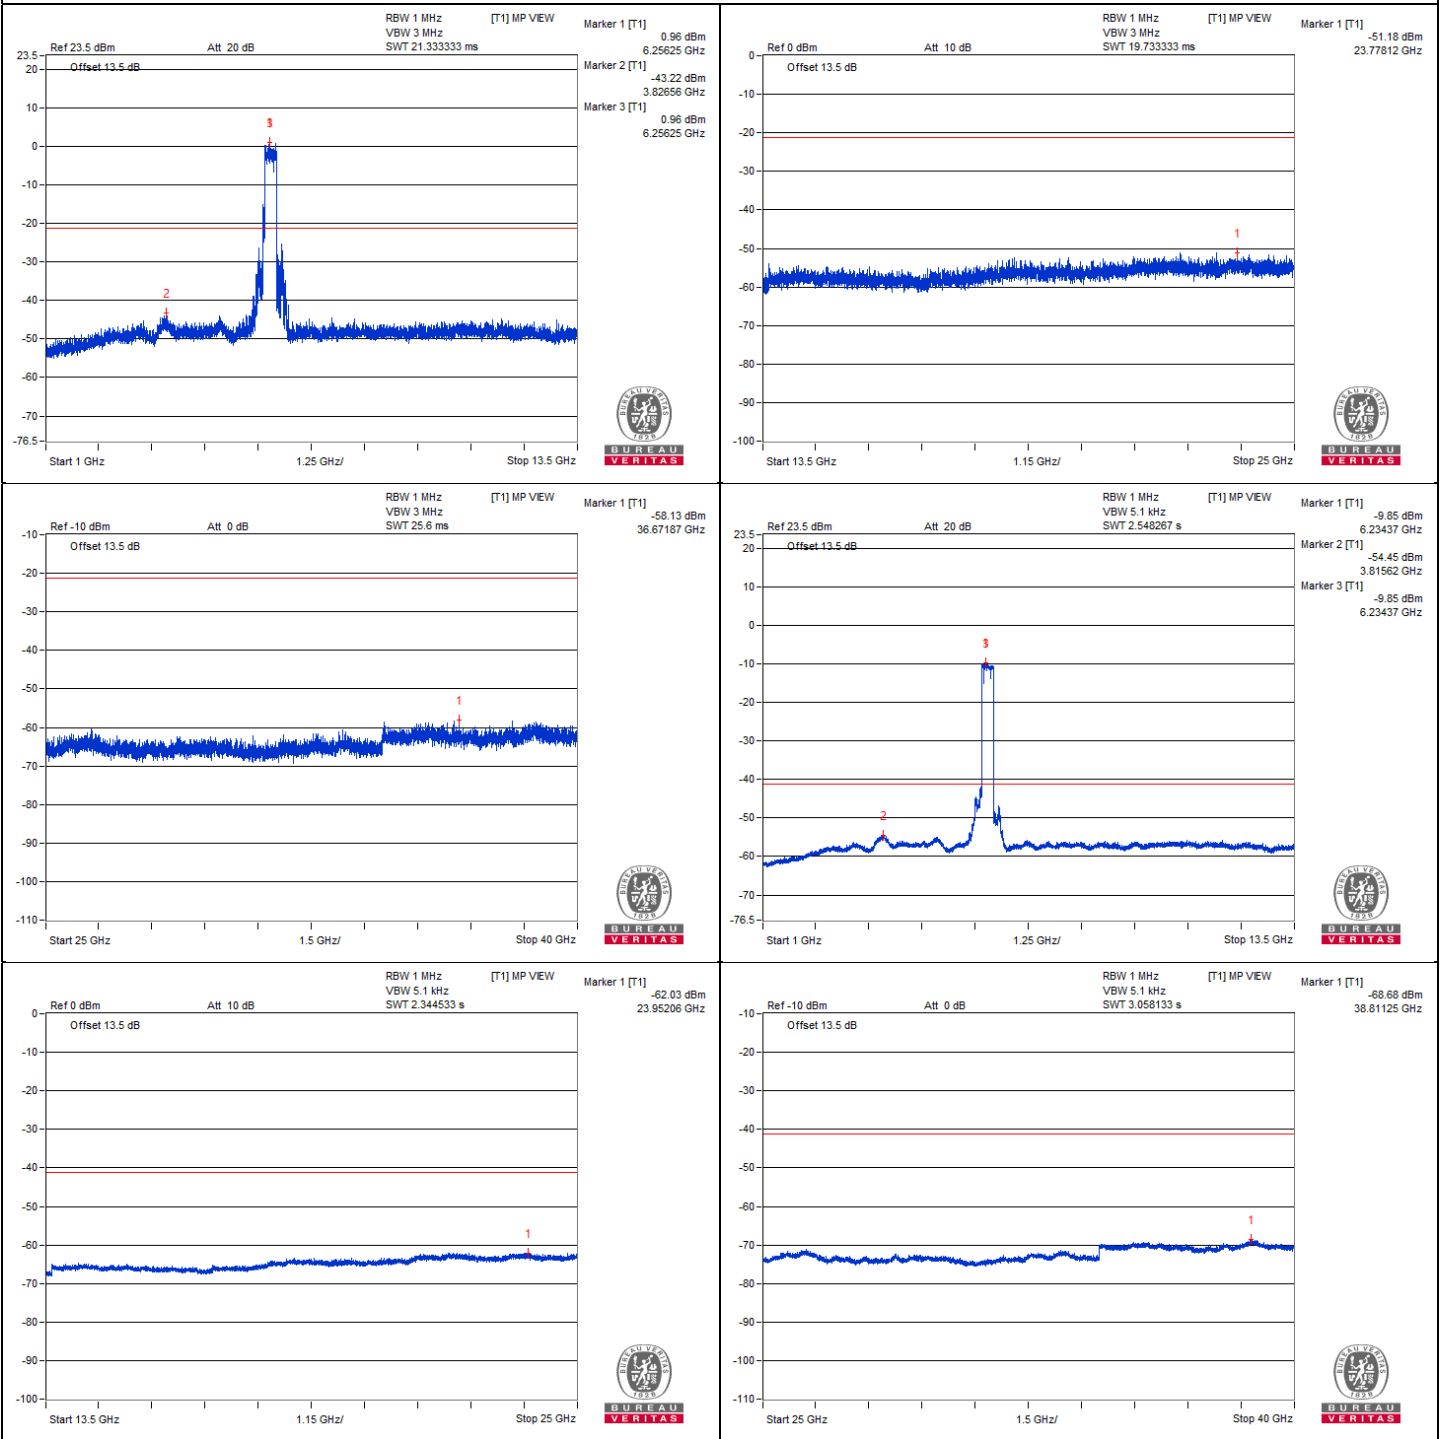

### 320 MHz Preamble 802.11be (RU996\*3+484) - Channel 127

#### Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#13175	55.52 PK	88.2	-32.68	-46.76	-48.41	4.76	-39.74
2	#13168.75	45.5 AV	68.2	-22.7	-57.63	-57.44	4.76	-49.76
3	19761.75	47.3 PK	74	-26.7	-58.38	-54.1	4.76	-47.96
4	19754.56	38.7 AV	54	-15.3	-64	-64.69	4.76	-56.56

#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

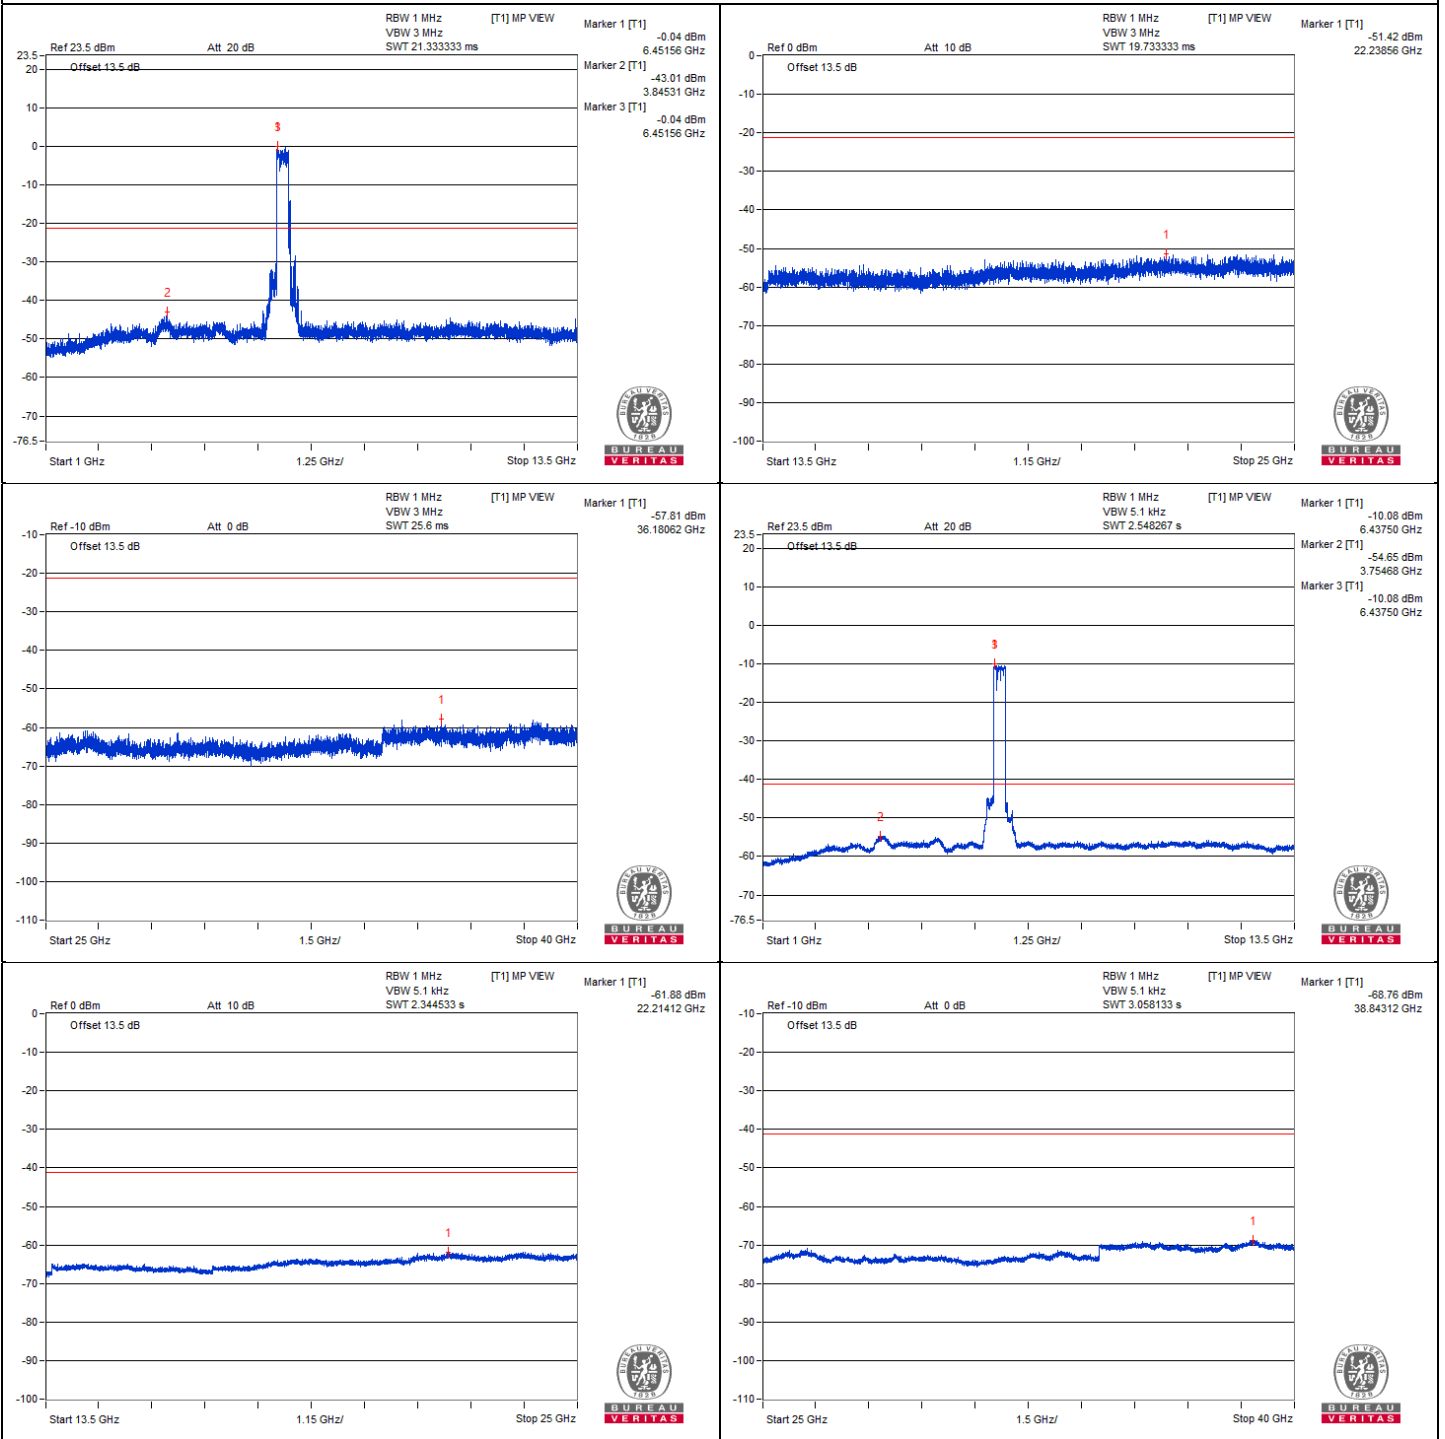



### Chain 1

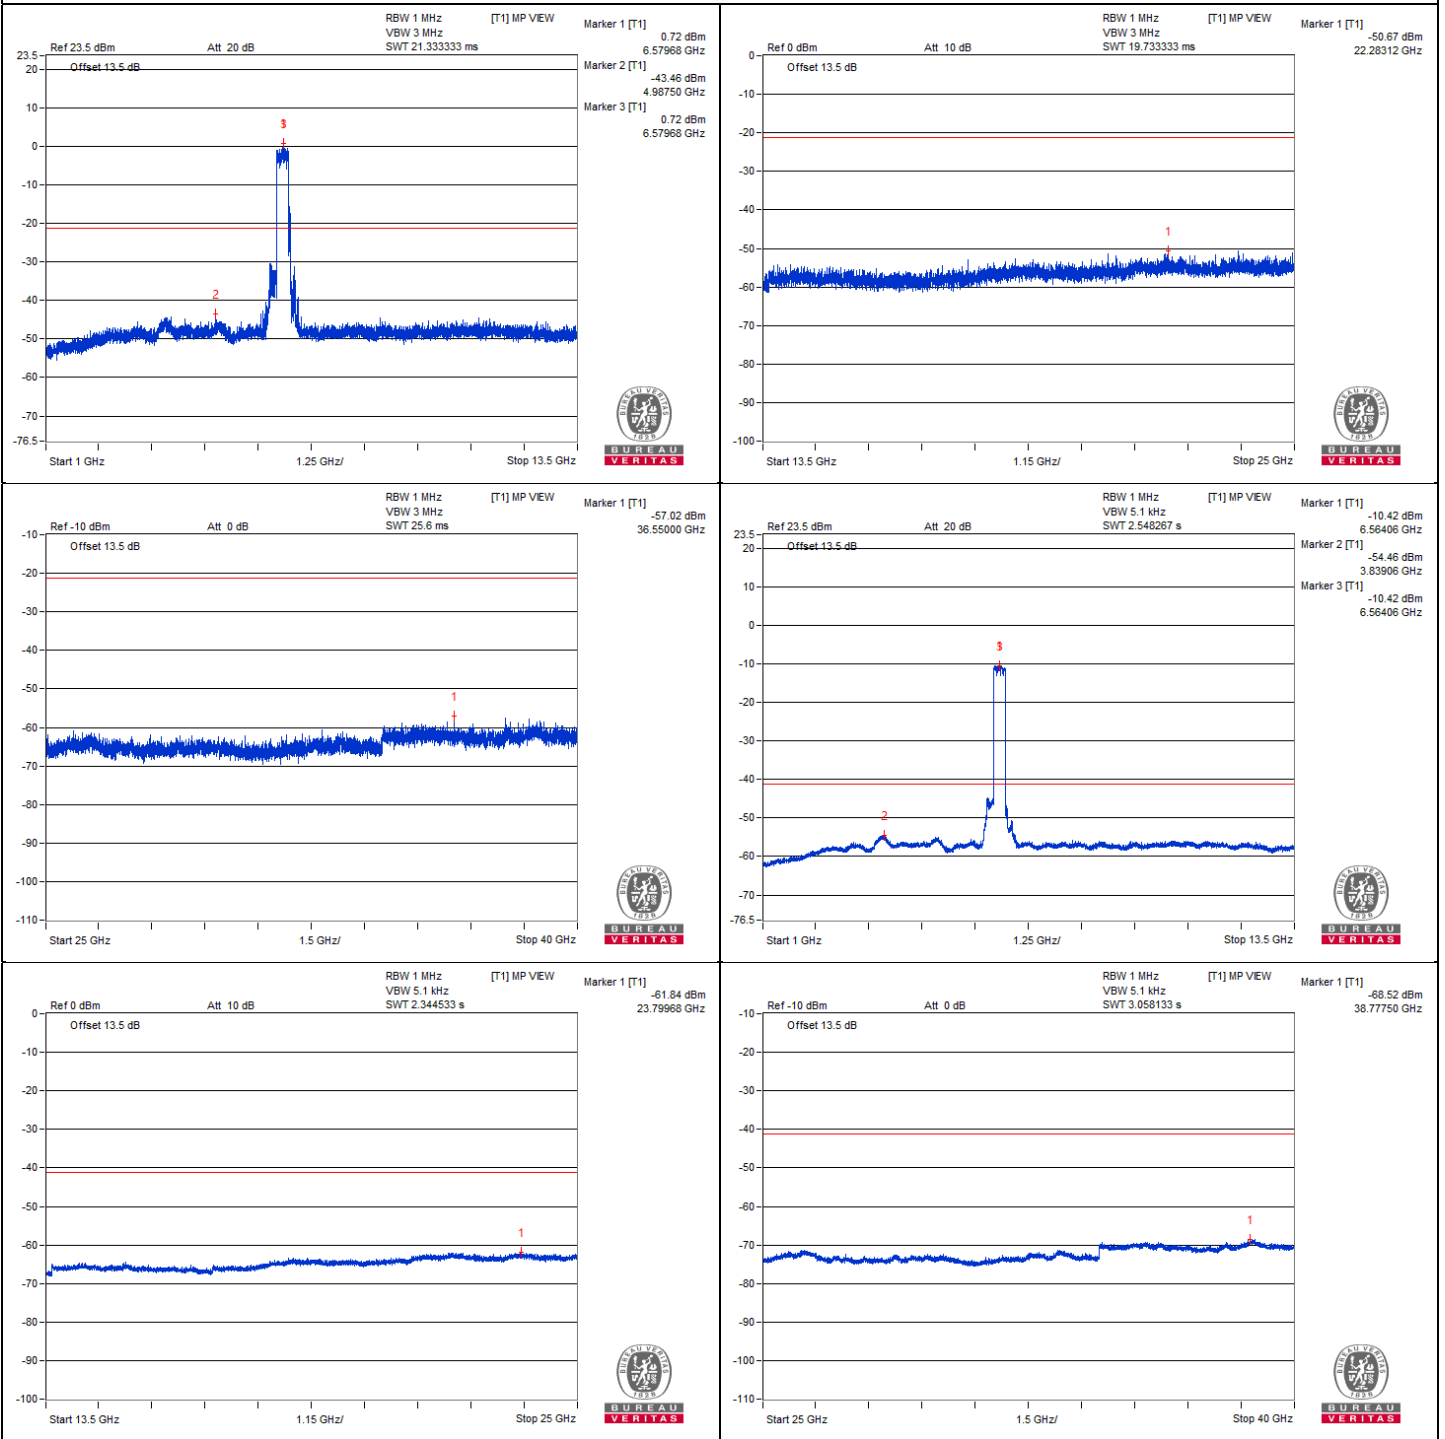

### 320 MHz Preamble 802.11be (RU996\*3+484) - Channel 191

#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#13811.93	45.78 PK	88.2	-42.42	-56.87	-57.66	4.76	-49.48
2	#13803.31	37.29 AV	68.2	-30.91	-66.2	-65.32	4.76	-57.97
3	20723.43	48.25 PK	74	-25.75	-54.88	-54.68	4.76	-47.01
4	20711.93	38.66 AV	54	-15.34	-64.56	-64.19	4.76	-56.60







#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.






### Chain 0

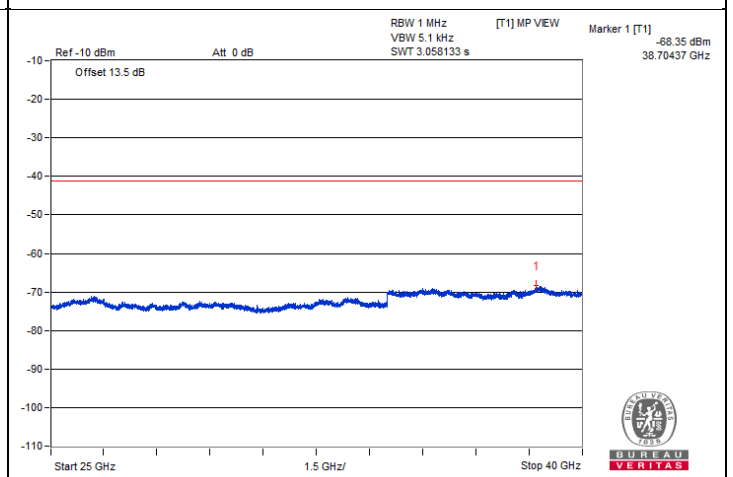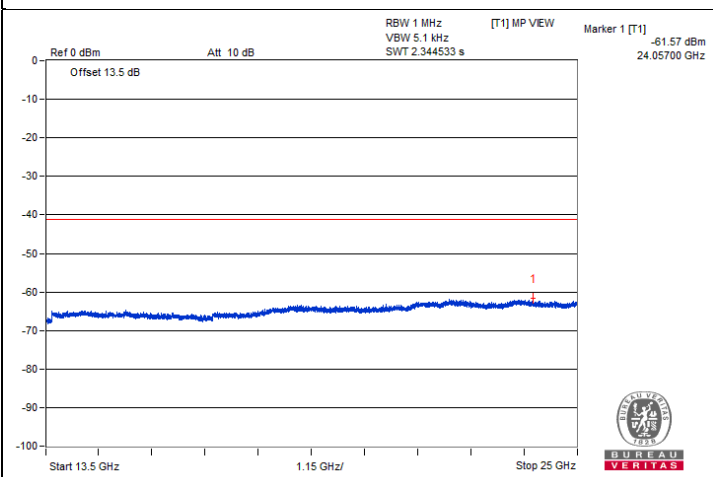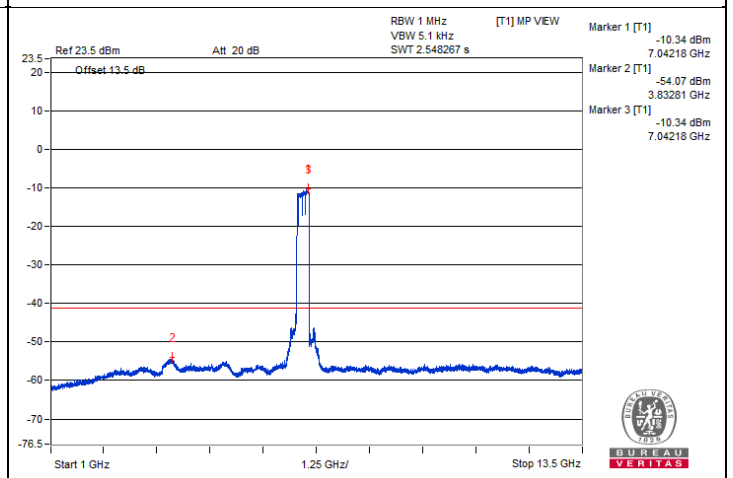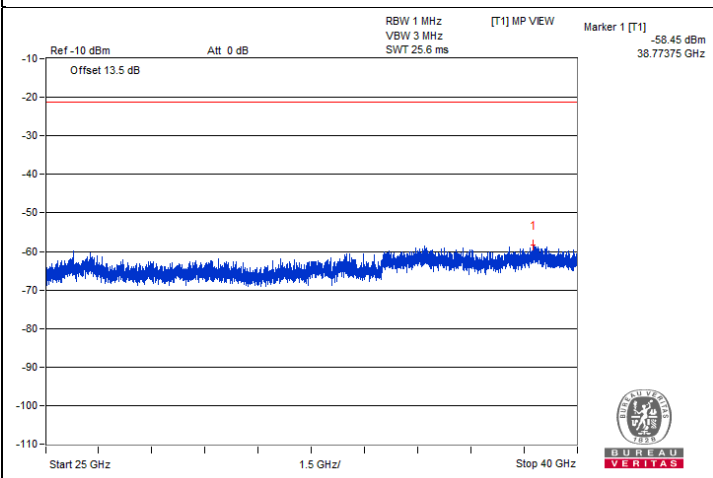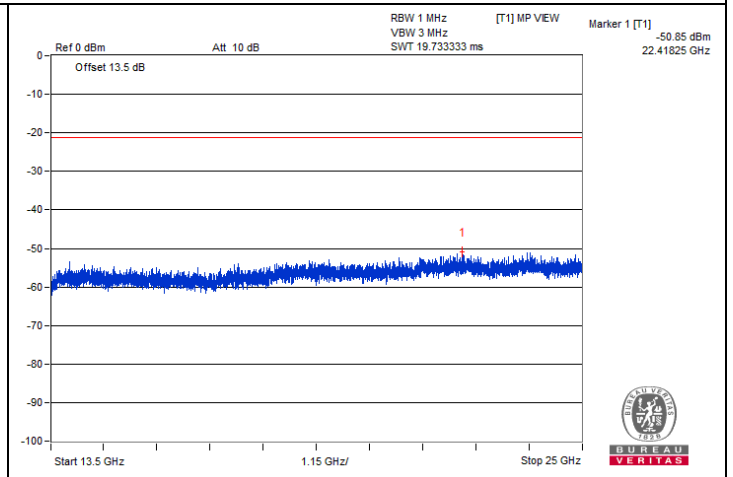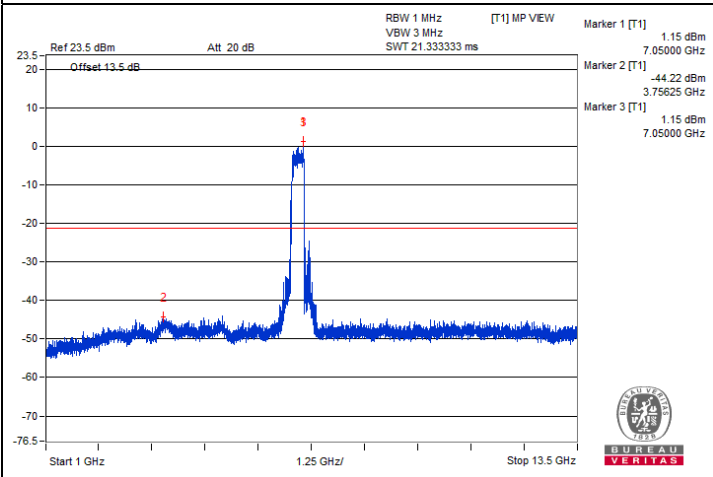



### Chain 1

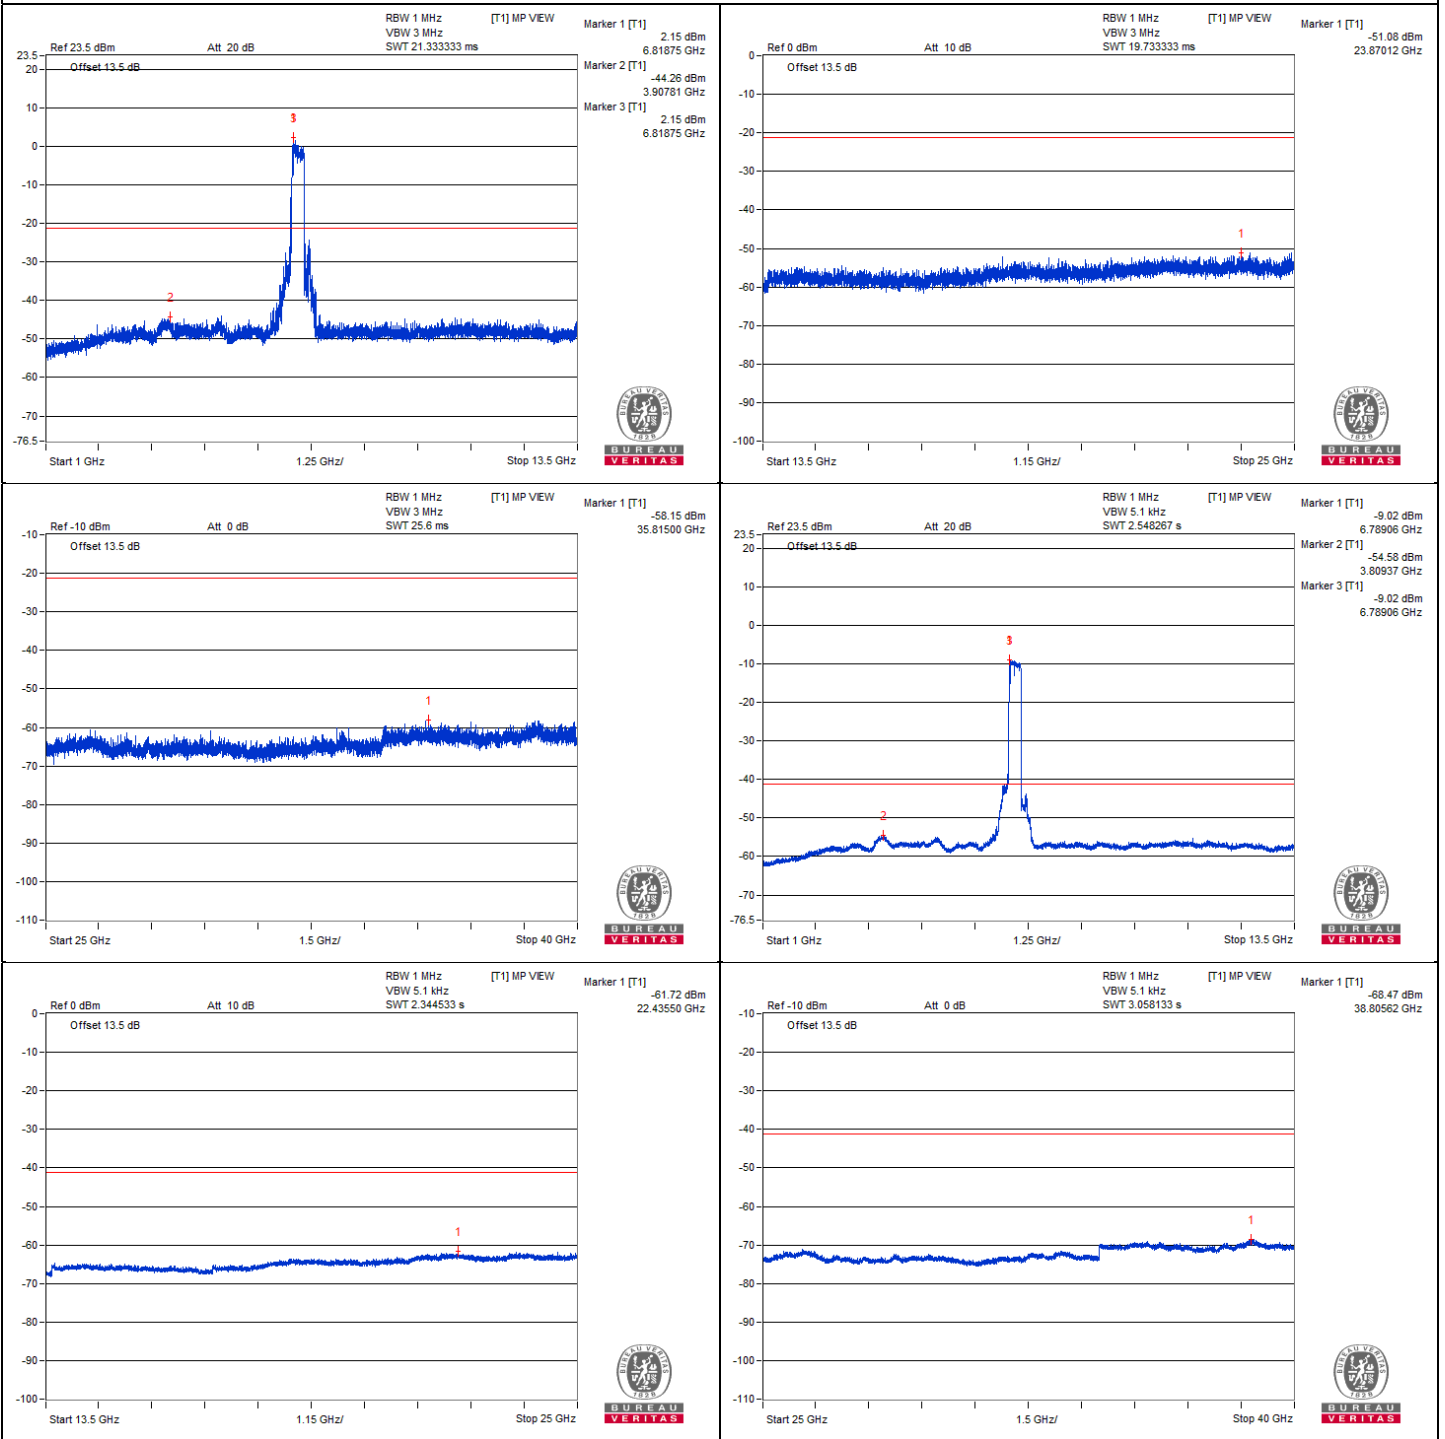


### Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#7187.45	77.84 PK	88.2	-10.36	-25.57	-23.67	4.09	-17.42
2	#7191.1	57.9 AV	68.2	-10.3	-46.1	-43.28	4.09	-37.36


### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. "#": The frequency is out of the restricted band.

### Chain 0

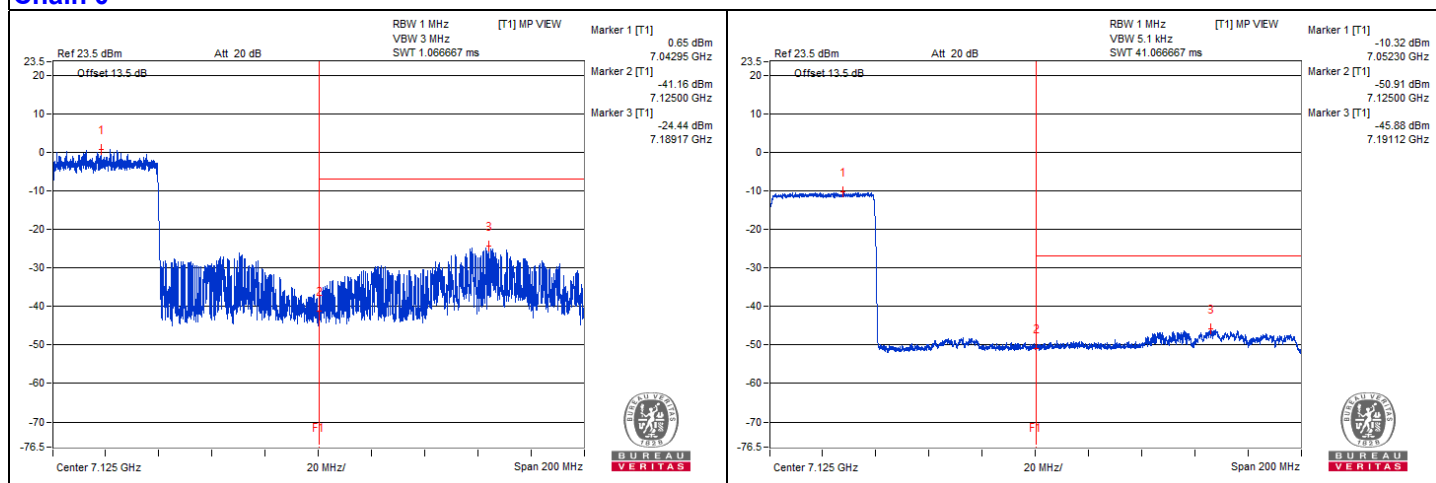

### Chain 1

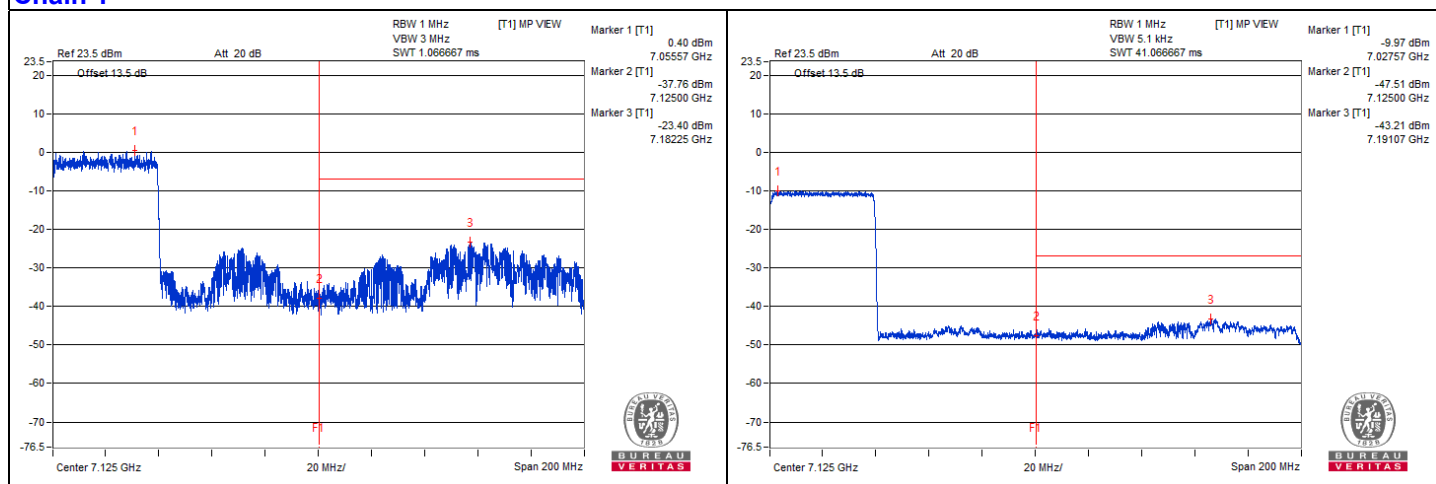

**Mode B**


**1T1S with 50 ohm**

<b>RF Mode</b>	802.11be (EHT) 26-tone RU	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	43.8 PK	74.0	-30.2	1.73 H	276	32.9	10.9
2	11910.00	35.4 AV	54.0	-18.6	1.73 H	276	24.5	10.9
3	17865.00	47.0 PK	74.0	-27.0	1.93 H	154	25.4	21.6
4	17865.00	38.1 AV	54.0	-15.9	1.93 H	154	16.5	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

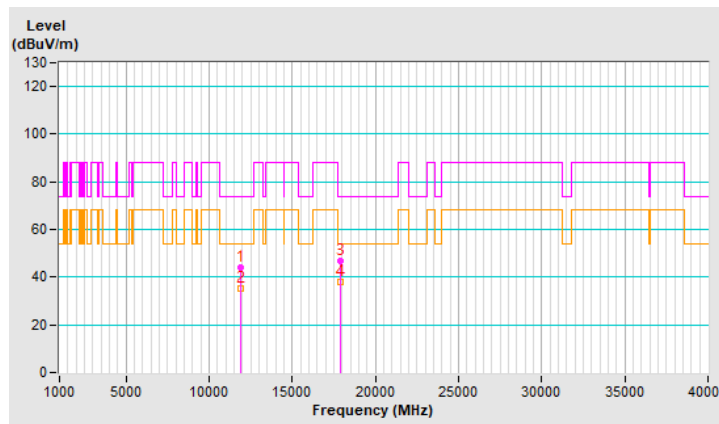


<b>RF Mode</b>	802.11be (EHT) 26-tone RU	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	44.6 PK	74.0	-29.4	1.94 V	273	33.7	10.9
2	11910.00	34.2 AV	54.0	-19.8	1.94 V	273	23.3	10.9
3	17865.00	47.3 PK	74.0	-26.7	1.64 V	173	25.7	21.6
4	17865.00	36.8 AV	54.0	-17.2	1.64 V	173	15.2	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

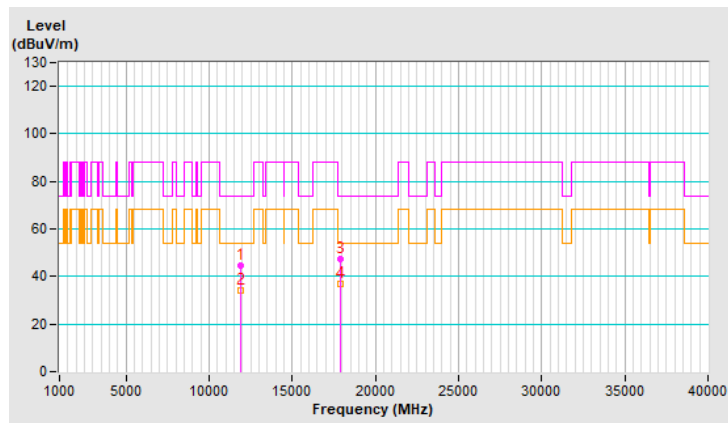


<b>RF Mode</b>	802.11be (EHT) 26-tone RU	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12830.00	43.4 PK	88.2	-44.8	1.70 H	281	32.9	10.5
2	#12830.00	35.3 AV	68.2	-32.9	1.70 H	281	24.8	10.5
3	19245.00	46.4 PK	74.0	-27.6	1.94 H	154	52.9	-6.5
4	19245.00	37.9 AV	54.0	-16.1	1.94 H	154	44.4	-6.5

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

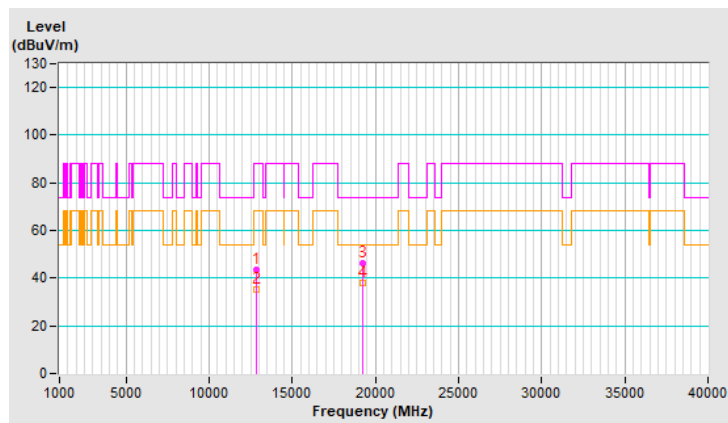


<b>RF Mode</b>	802.11be (EHT) 26-tone RU	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	43.9 PK	88.2	-44.3	1.94 V	272	33.4	10.5
2	#12830.00	34.8 AV	68.2	-33.4	1.94 V	272	24.3	10.5
3	19245.00	46.7 PK	74.0	-27.3	1.65 V	160	53.2	-6.5
4	19245.00	36.5 AV	54.0	-17.5	1.65 V	160	43.0	-6.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

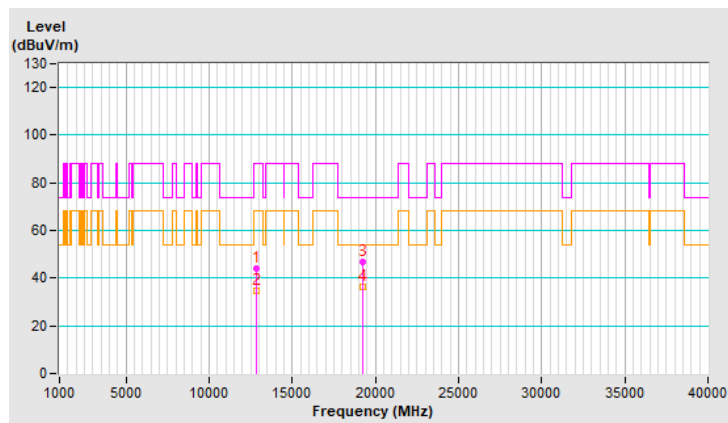


<b>RF Mode</b>	802.11be (EHT) 26-tone RU	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12870.00	44.1 PK	88.2	-44.1	1.76 H	284	33.6	10.5
2	#12870.00	35.8 AV	68.2	-32.4	1.76 H	284	25.3	10.5
3	19305.00	47.3 PK	74.0	-26.7	1.88 H	158	54.1	-6.8
4	19305.00	38.6 AV	54.0	-15.4	1.88 H	158	45.4	-6.8

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

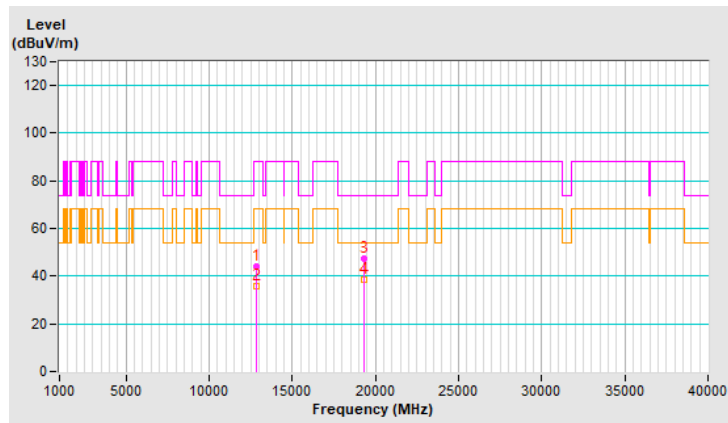




<b>RF Mode</b>	802.11be (EHT) 26-tone RU	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	43.8 PK	88.2	-44.4	1.90 V	278	33.3	10.5
2	#12870.00	34.9 AV	68.2	-33.3	1.90 V	278	24.4	10.5
3	19305.00	46.5 PK	74.0	-27.5	1.69 V	166	53.3	-6.8
4	19305.00	36.1 AV	54.0	-17.9	1.69 V	166	42.9	-6.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

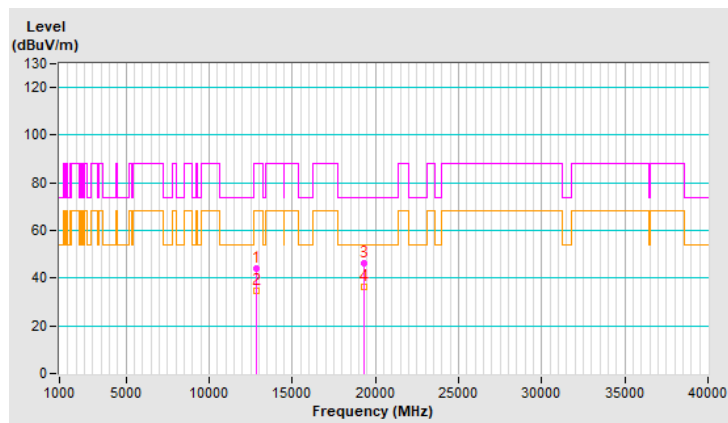


<b>RF Mode</b>	802.11be (EHT) 26-tone RU	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13070.00	44.0 PK	88.2	-44.2	1.74 H	291	33.2	10.8
2	#13070.00	36.0 AV	68.2	-32.2	1.74 H	291	25.2	10.8
3	19605.00	46.4 PK	74.0	-27.6	1.88 H	161	52.4	-6.0
4	19605.00	38.1 AV	54.0	-15.9	1.88 H	161	44.1	-6.0

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

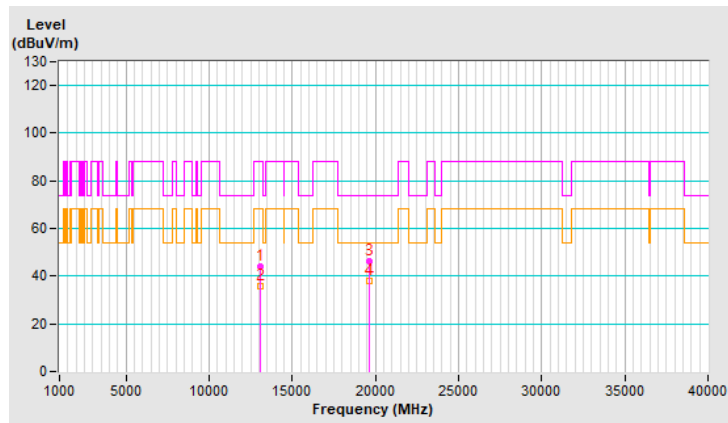


<b>RF Mode</b>	802.11be (EHT) 26-tone RU	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13070.00	44.1 PK	88.2	-44.1	1.89 V	267	33.3	10.8
2	#13070.00	35.3 AV	68.2	-32.9	1.89 V	267	24.5	10.8
3	19605.00	46.7 PK	74.0	-27.3	1.63 V	176	52.7	-6.0
4	19605.00	36.8 AV	54.0	-17.2	1.63 V	176	42.8	-6.0

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

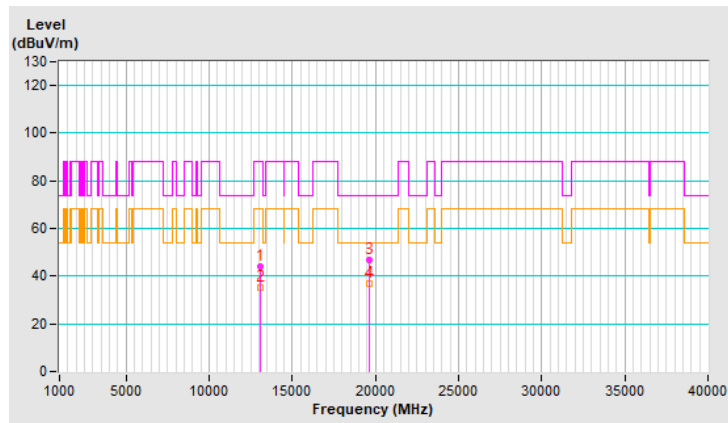


<b>RF Mode</b>	802.11be (EHT) 26-tone RU	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	44.2 PK	88.2	-44.0	1.75 H	291	31.4	12.8
2	#13710.00	36.0 AV	68.2	-32.2	1.75 H	291	23.2	12.8
3	20565.00	46.8 PK	74.0	-27.2	1.89 H	161	51.5	-4.7
4	20565.00	38.2 AV	54.0	-15.8	1.89 H	161	42.9	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

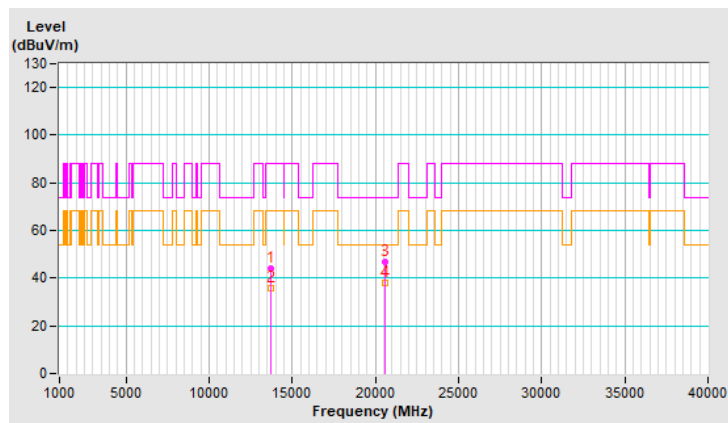


<b>RF Mode</b>	802.11be (EHT) 26-tone RU	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	44.1 PK	88.2	-44.1	1.90 V	287	31.3	12.8
2	#13710.00	34.1 AV	68.2	-34.1	1.90 V	287	21.3	12.8
3	20565.00	47.8 PK	74.0	-26.2	1.67 V	174	52.5	-4.7
4	20565.00	37.1 AV	54.0	-16.9	1.67 V	174	41.8	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

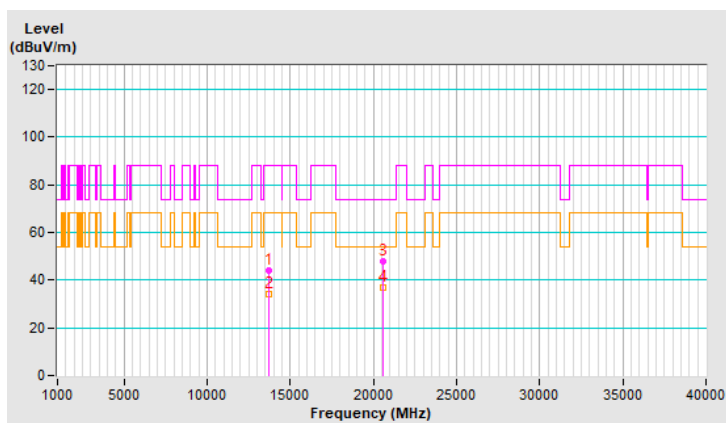


<b>RF Mode</b>	802.11be (EHT) 26-tone RU	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	43.8 PK	88.2	-44.4	1.76 H	277	30.3	13.5
2	#14230.00	35.8 AV	68.2	-32.4	1.76 H	277	22.3	13.5
3	21345.00	46.8 PK	74.0	-27.2	1.92 H	145	50.6	-3.8
4	21345.00	38.1 AV	54.0	-15.9	1.92 H	145	41.9	-3.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

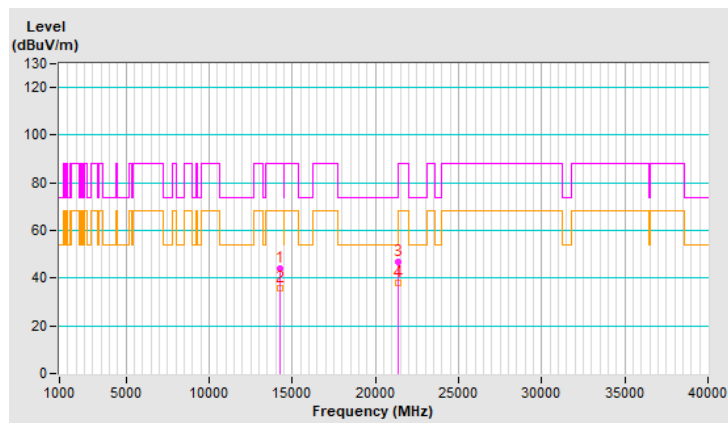


<b>RF Mode</b>	802.11be (EHT) 26-tone RU	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	44.1 PK	88.2	-44.1	1.96 V	272	30.6	13.5
2	#14230.00	34.2 AV	68.2	-34.0	1.96 V	272	20.7	13.5
3	21345.00	47.6 PK	74.0	-26.4	1.68 V	180	51.4	-3.8
4	21345.00	36.8 AV	54.0	-17.2	1.68 V	180	40.6	-3.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

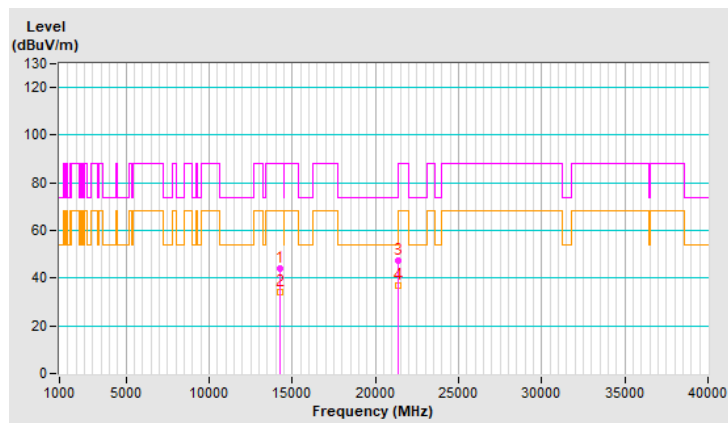


<b>RF Mode</b>	802.11be (EHT) 52-tone RU	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	44.1 PK	74.0	-29.9	1.69 H	281	33.2	10.9
2	11910.00	36.0 AV	54.0	-18.0	1.69 H	281	25.1	10.9
3	17865.00	46.2 PK	74.0	-27.8	1.88 H	163	24.6	21.6
4	17865.00	37.8 AV	54.0	-16.2	1.88 H	163	16.2	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

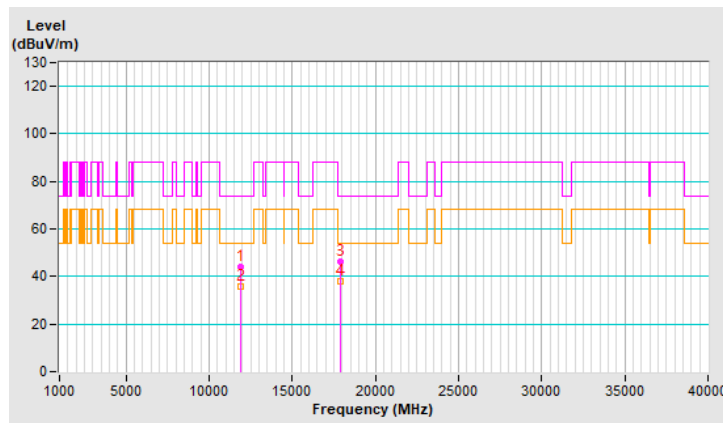




<b>RF Mode</b>	802.11be (EHT) 52-tone RU	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	44.4 PK	74.0	-29.6	1.94 V	272	33.5	10.9
2	11910.00	34.3 AV	54.0	-19.7	1.94 V	272	23.4	10.9
3	17865.00	46.7 PK	74.0	-27.3	1.60 V	191	25.1	21.6
4	17865.00	36.2 AV	54.0	-17.8	1.60 V	191	14.6	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

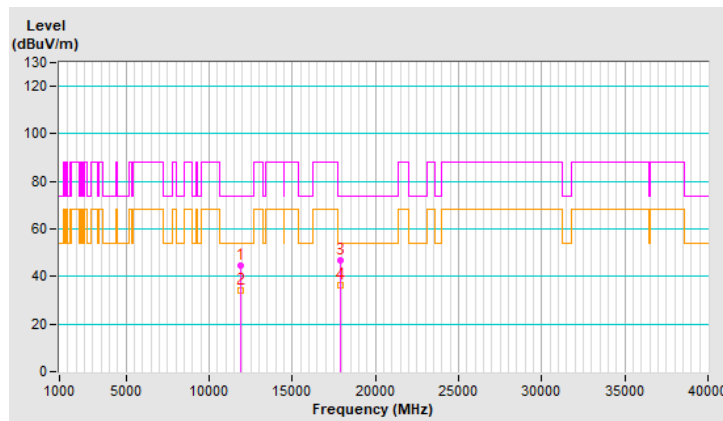


<b>RF Mode</b>	802.11be (EHT) 52-tone RU	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12830.00	44.0 PK	88.2	-44.2	1.71 H	262	33.5	10.5
2	#12830.00	35.8 AV	68.2	-32.4	1.71 H	262	25.3	10.5
3	19245.00	46.5 PK	74.0	-27.5	1.90 H	159	53.0	-6.5
4	19245.00	37.8 AV	54.0	-16.2	1.90 H	159	44.3	-6.5

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

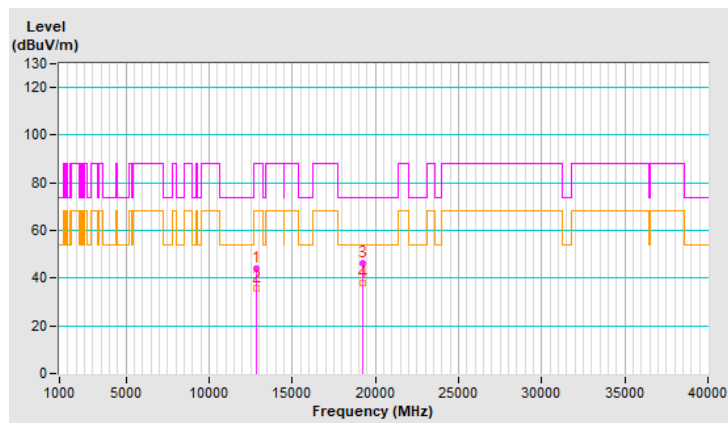


<b>RF Mode</b>	802.11be (EHT) 52-tone RU	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	44.7 PK	88.2	-43.5	1.86 V	263	34.2	10.5
2	#12830.00	34.5 AV	68.2	-33.7	1.86 V	263	24.0	10.5
3	19245.00	46.9 PK	74.0	-27.1	1.62 V	177	53.4	-6.5
4	19245.00	36.4 AV	54.0	-17.6	1.62 V	177	42.9	-6.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

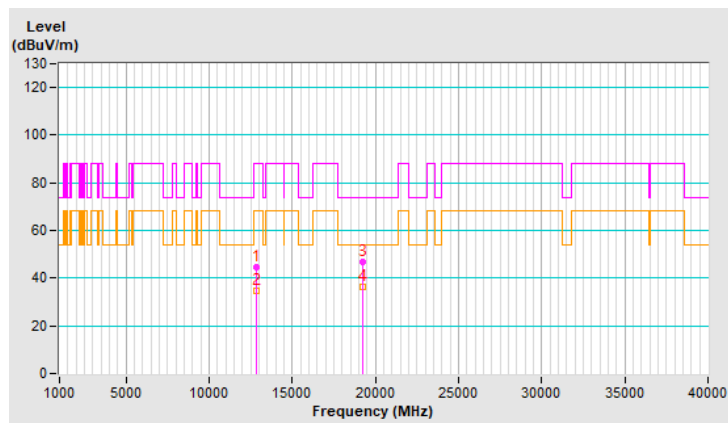


<b>RF Mode</b>	802.11be (EHT) 52-tone RU	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	43.8 PK	88.2	-44.4	1.76 H	282	33.3	10.5
2	#12870.00	35.9 AV	68.2	-32.3	1.76 H	282	25.4	10.5
3	19305.00	46.7 PK	74.0	-27.3	1.95 H	153	53.5	-6.8
4	19305.00	37.8 AV	54.0	-16.2	1.95 H	153	44.6	-6.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

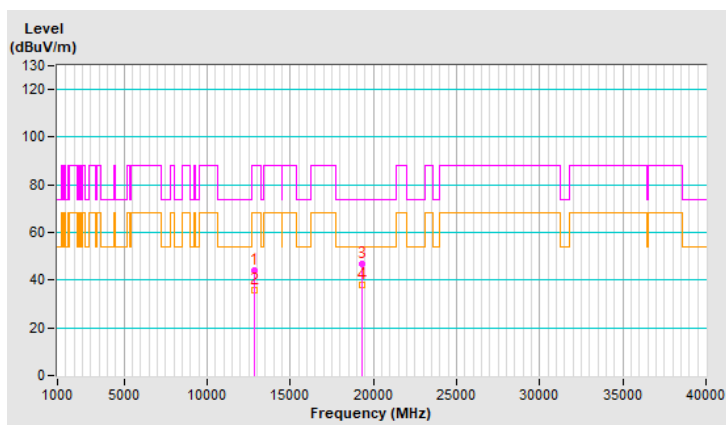


<b>RF Mode</b>	802.11be (EHT) 52-tone RU	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	44.6 PK	88.2	-43.6	1.92 V	265	34.1	10.5
2	#12870.00	34.4 AV	68.2	-33.8	1.92 V	265	23.9	10.5
3	19305.00	46.7 PK	74.0	-27.3	1.63 V	190	53.5	-6.8
4	19305.00	36.3 AV	54.0	-17.7	1.63 V	190	43.1	-6.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

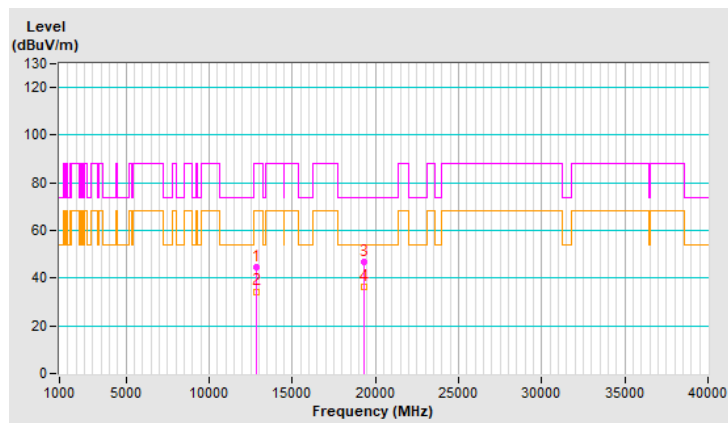


<b>RF Mode</b>	802.11be (EHT) 52-tone RU	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.0 PK	88.2	-44.2	1.69 H	272	33.2	10.8
2	#13070.00	36.1 AV	68.2	-32.1	1.69 H	272	25.3	10.8
3	19605.00	46.2 PK	74.0	-27.8	1.99 H	154	52.2	-6.0
4	19605.00	37.7 AV	54.0	-16.3	1.99 H	154	43.7	-6.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

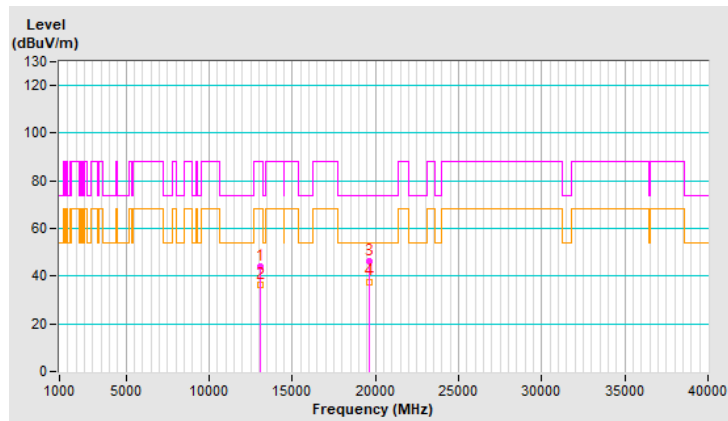


<b>RF Mode</b>	802.11be (EHT) 52-tone RU	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.6 PK	88.2	-43.6	1.89 V	269	33.8	10.8
2	#13070.00	34.3 AV	68.2	-33.9	1.89 V	269	23.5	10.8
3	19605.00	47.6 PK	74.0	-26.4	1.67 V	188	53.6	-6.0
4	19605.00	37.0 AV	54.0	-17.0	1.67 V	188	43.0	-6.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

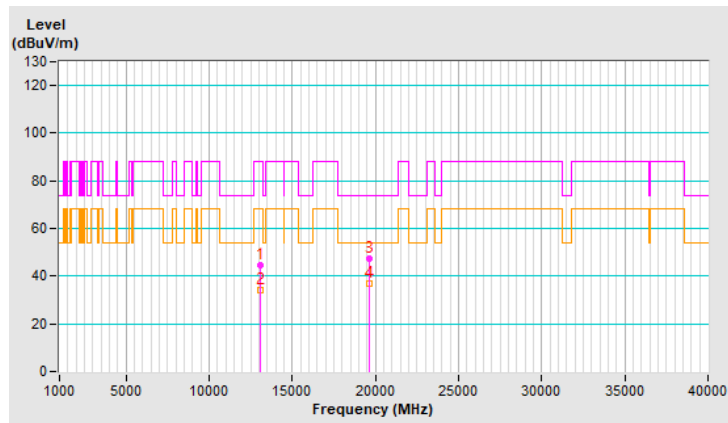


<b>RF Mode</b>	802.11be (EHT) 52-tone RU	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13710.00	43.5 PK	88.2	-44.7	1.76 H	286	30.7	12.8
2	#13710.00	35.5 AV	68.2	-32.7	1.76 H	286	22.7	12.8
3	20565.00	47.2 PK	74.0	-26.8	1.90 H	164	51.9	-4.7
4	20565.00	38.3 AV	54.0	-15.7	1.90 H	164	43.0	-4.7

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

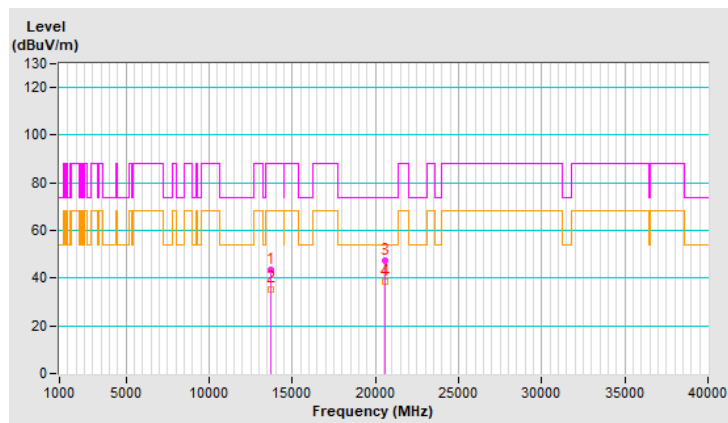




<b>RF Mode</b>	802.11be (EHT) 52-tone RU	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	44.7 PK	88.2	-43.5	2.00 V	263	31.9	12.8
2	#13710.00	34.4 AV	68.2	-33.8	2.00 V	263	21.6	12.8
3	20565.00	47.3 PK	74.0	-26.7	1.65 V	204	52.0	-4.7
4	20565.00	36.5 AV	54.0	-17.5	1.65 V	204	41.2	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

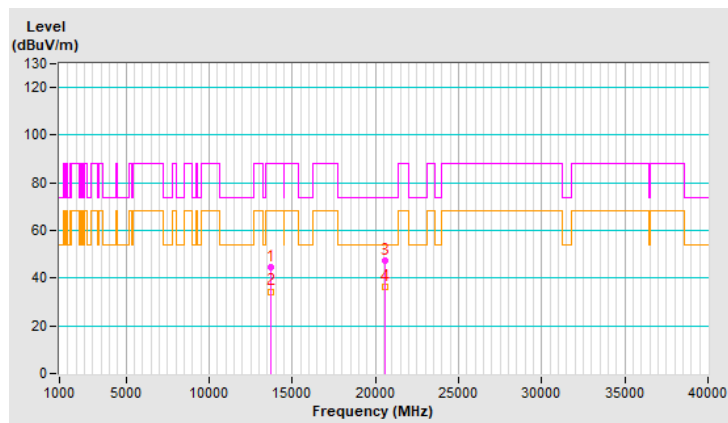


<b>RF Mode</b>	802.11be (EHT) 52-tone RU	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	43.8 PK	88.2	-44.4	1.78 H	270	30.3	13.5
2	#14230.00	35.6 AV	68.2	-32.6	1.78 H	270	22.1	13.5
3	21345.00	46.3 PK	74.0	-27.7	1.97 H	165	50.1	-3.8
4	21345.00	37.8 AV	54.0	-16.2	1.97 H	165	41.6	-3.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

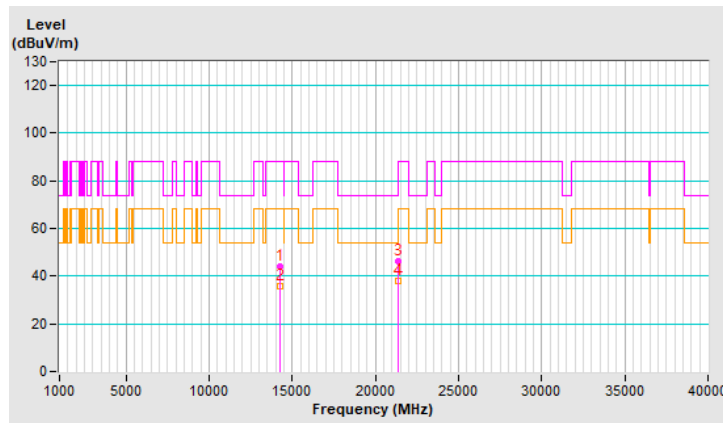


<b>RF Mode</b>	802.11be (EHT) 52-tone RU	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	44.8 PK	88.2	-43.4	1.91 V	280	31.3	13.5
2	#14230.00	34.8 AV	68.2	-33.4	1.91 V	280	21.3	13.5
3	21345.00	46.7 PK	74.0	-27.3	1.55 V	184	50.5	-3.8
4	21345.00	36.3 AV	54.0	-17.7	1.55 V	184	40.1	-3.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

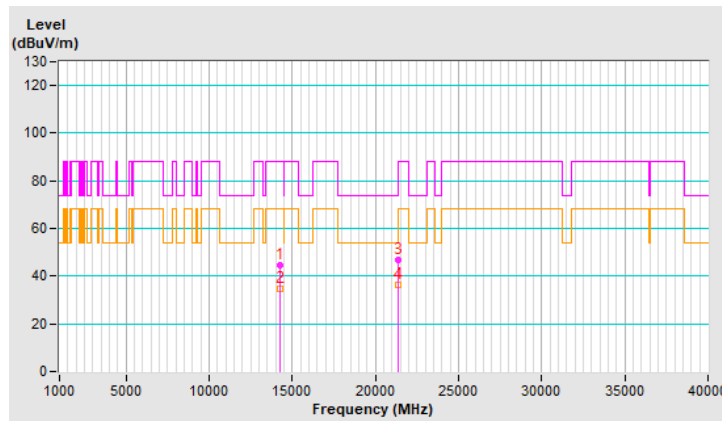


<b>RF Mode</b>	802.11be (EHT) 106-tone RU	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	43.9 PK	74.0	-30.1	1.69 H	271	33.0	10.9
2	11910.00	36.1 AV	54.0	-17.9	1.69 H	271	25.2	10.9
3	17865.00	46.9 PK	74.0	-27.1	1.90 H	167	25.3	21.6
4	17865.00	38.3 AV	54.0	-15.7	1.90 H	167	16.7	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

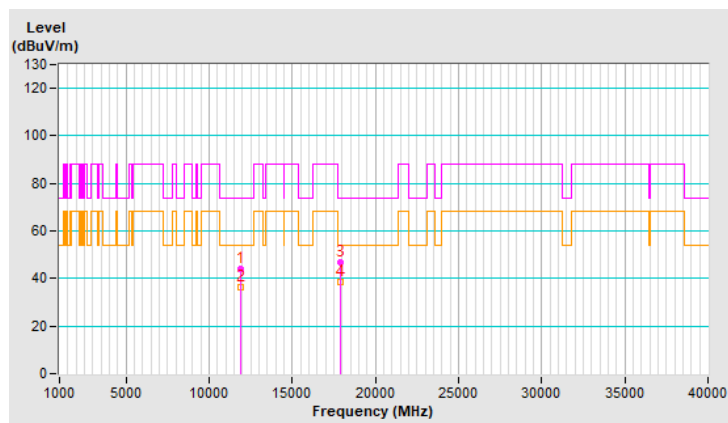


<b>RF Mode</b>	802.11be (EHT) 106-tone RU	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	44.2 PK	74.0	-29.8	1.95 V	281	33.3	10.9
2	11910.00	34.2 AV	54.0	-19.8	1.95 V	281	23.3	10.9
3	17865.00	46.9 PK	74.0	-27.1	1.55 V	204	25.3	21.6
4	17865.00	36.3 AV	54.0	-17.7	1.55 V	204	14.7	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

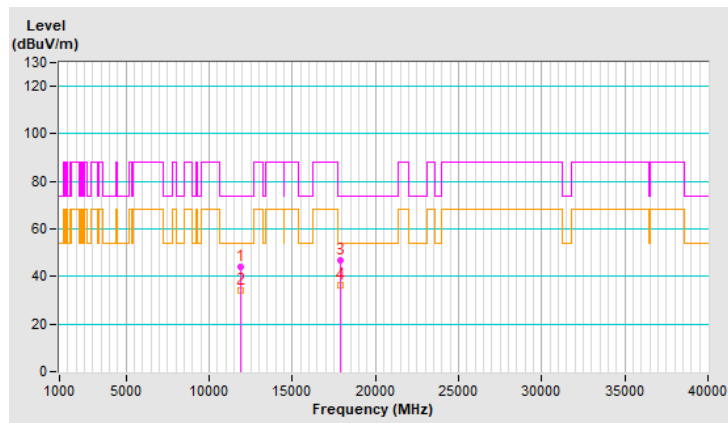


<b>RF Mode</b>	802.11be (EHT) 106-tone RU	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12830.00	44.3 PK	88.2	-43.9	1.70 H	267	33.8	10.5
2	#12830.00	36.2 AV	68.2	-32.0	1.70 H	267	25.7	10.5
3	19245.00	47.4 PK	74.0	-26.6	1.85 H	158	53.9	-6.5
4	19245.00	38.4 AV	54.0	-15.6	1.85 H	158	44.9	-6.5

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

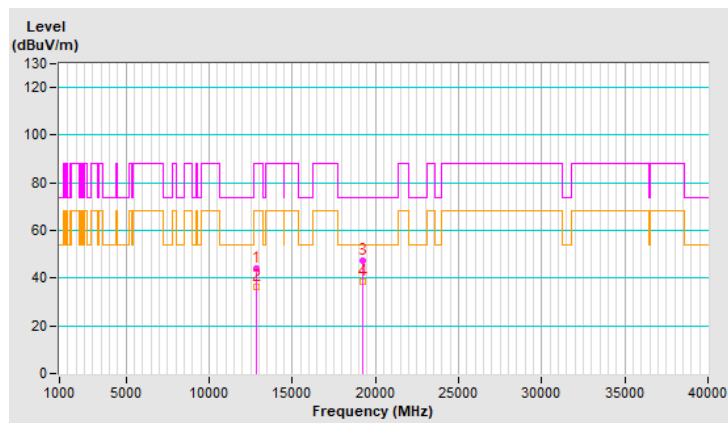


<b>RF Mode</b>	802.11be (EHT) 106-tone RU	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	44.6 PK	88.2	-43.6	1.90 V	257	34.1	10.5
2	#12830.00	34.2 AV	68.2	-34.0	1.90 V	257	23.7	10.5
3	19245.00	46.7 PK	74.0	-27.3	1.65 V	202	53.2	-6.5
4	19245.00	36.4 AV	54.0	-17.6	1.65 V	202	42.9	-6.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

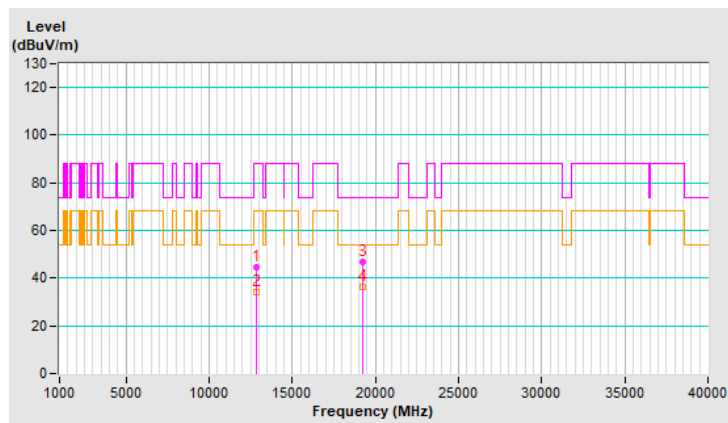


<b>RF Mode</b>	802.11be (EHT) 106-tone RU	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	43.7 PK	88.2	-44.5	1.82 H	296	33.2	10.5
2	#12870.00	36.0 AV	68.2	-32.2	1.82 H	296	25.5	10.5
3	19305.00	46.9 PK	74.0	-27.1	1.90 H	157	53.7	-6.8
4	19305.00	38.4 AV	54.0	-15.6	1.90 H	157	45.2	-6.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

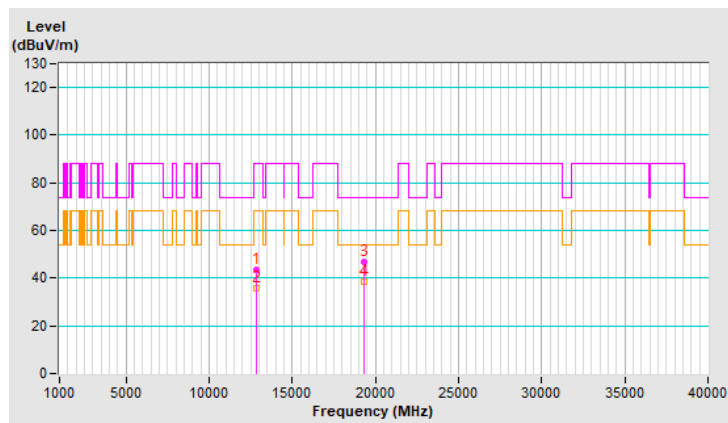




<b>RF Mode</b>	802.11be (EHT) 106-tone RU	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	44.8 PK	88.2	-43.4	1.92 V	265	34.3	10.5
2	#12870.00	34.5 AV	68.2	-33.7	1.92 V	265	24.0	10.5
3	19305.00	47.1 PK	74.0	-26.9	1.52 V	194	53.9	-6.8
4	19305.00	36.5 AV	54.0	-17.5	1.52 V	194	43.3	-6.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

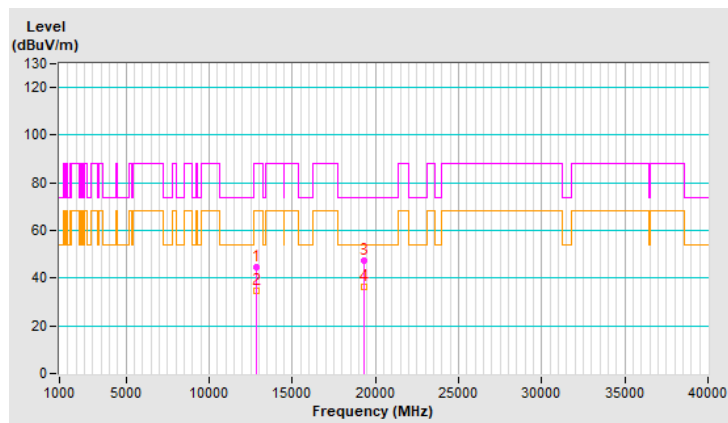


<b>RF Mode</b>	802.11be (EHT) 106-tone RU	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	43.8 PK	88.2	-44.4	1.69 H	266	33.0	10.8
2	#13070.00	35.6 AV	68.2	-32.6	1.69 H	266	24.8	10.8
3	19605.00	47.4 PK	74.0	-26.6	1.93 H	161	53.4	-6.0
4	19605.00	38.4 AV	54.0	-15.6	1.93 H	161	44.4	-6.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

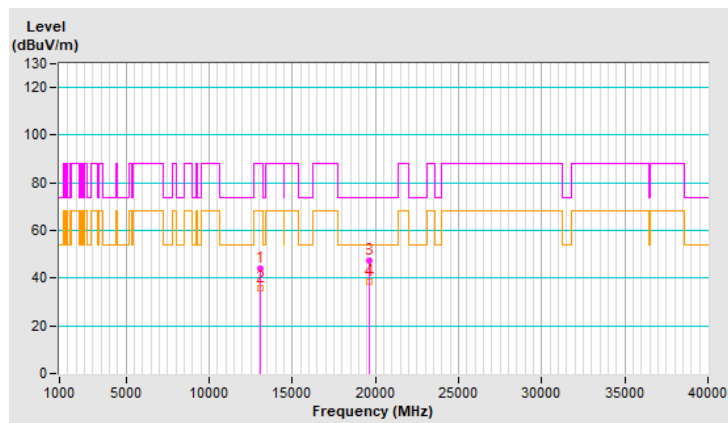


<b>RF Mode</b>	802.11be (EHT) 106-tone RU	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.6 PK	88.2	-43.6	1.89 V	290	33.8	10.8
2	#13070.00	34.3 AV	68.2	-33.9	1.89 V	290	23.5	10.8
3	19605.00	47.1 PK	74.0	-26.9	1.55 V	185	53.1	-6.0
4	19605.00	36.8 AV	54.0	-17.2	1.55 V	185	42.8	-6.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

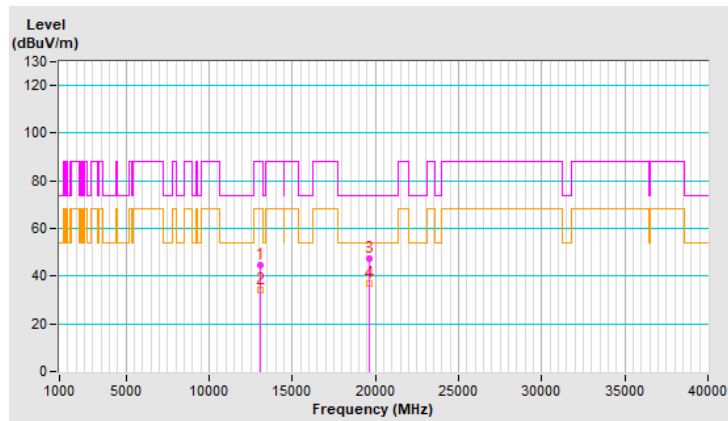


<b>RF Mode</b>	802.11be (EHT) 106-tone RU	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	43.3 PK	88.2	-44.9	1.65 H	270	30.5	12.8
2	#13710.00	35.5 AV	68.2	-32.7	1.65 H	270	22.7	12.8
3	20565.00	46.4 PK	74.0	-27.6	1.86 H	161	51.1	-4.7
4	20565.00	37.9 AV	54.0	-16.1	1.86 H	161	42.6	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

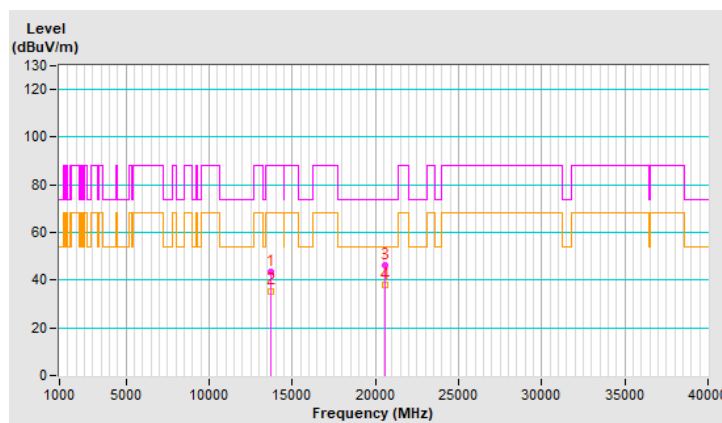


<b>RF Mode</b>	802.11be (EHT) 106-tone RU	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	44.7 PK	88.2	-43.5	1.86 V	276	31.9	12.8
2	#13710.00	34.3 AV	68.2	-33.9	1.86 V	276	21.5	12.8
3	20565.00	47.3 PK	74.0	-26.7	1.50 V	196	52.0	-4.7
4	20565.00	36.7 AV	54.0	-17.3	1.50 V	196	41.4	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

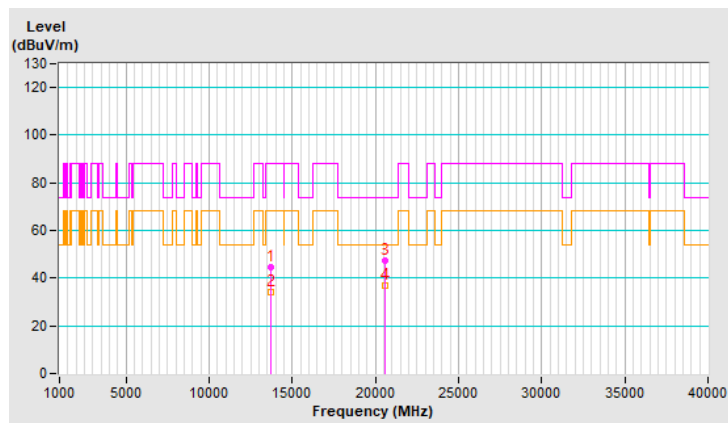


<b>RF Mode</b>	802.11be (EHT) 106-tone RU	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	43.8 PK	88.2	-44.4	1.65 H	281	30.3	13.5
2	#14230.00	35.7 AV	68.2	-32.5	1.65 H	281	22.2	13.5
3	21345.00	47.2 PK	74.0	-26.8	1.94 H	159	51.0	-3.8
4	21345.00	38.5 AV	54.0	-15.5	1.94 H	159	42.3	-3.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

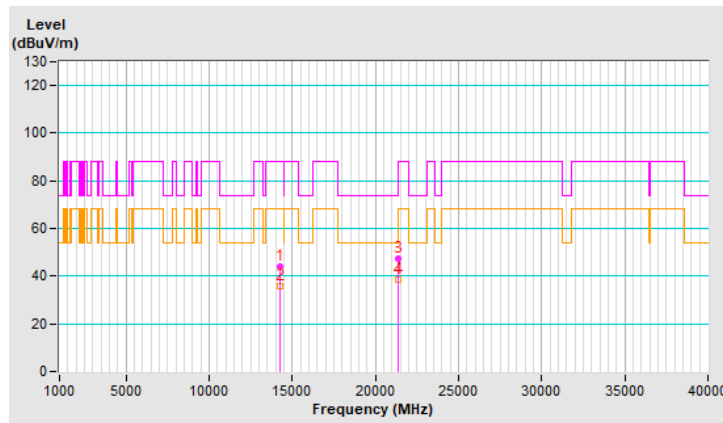


<b>RF Mode</b>	802.11be (EHT) 106-tone RU	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	44.9 PK	88.2	-43.3	1.96 V	245	31.4	13.5
2	#14230.00	34.5 AV	68.2	-33.7	1.96 V	245	21.0	13.5
3	21345.00	46.6 PK	74.0	-27.4	1.65 V	187	50.4	-3.8
4	21345.00	36.3 AV	54.0	-17.7	1.65 V	187	40.1	-3.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

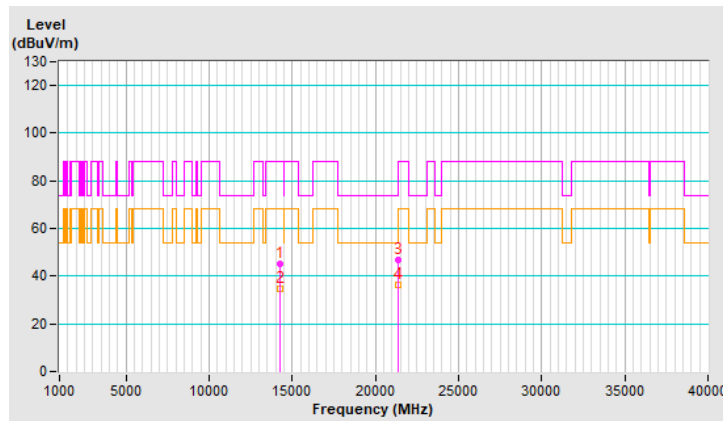


<b>RF Mode</b>	802.11be (EHT) 106+26-tone MRU	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	43.3 PK	74.0	-30.7	1.61 H	259	32.4	10.9
2	11910.00	35.5 AV	54.0	-18.5	1.61 H	259	24.6	10.9
3	17865.00	47.1 PK	74.0	-26.9	1.99 H	177	25.5	21.6
4	17865.00	38.2 AV	54.0	-15.8	1.99 H	177	16.6	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

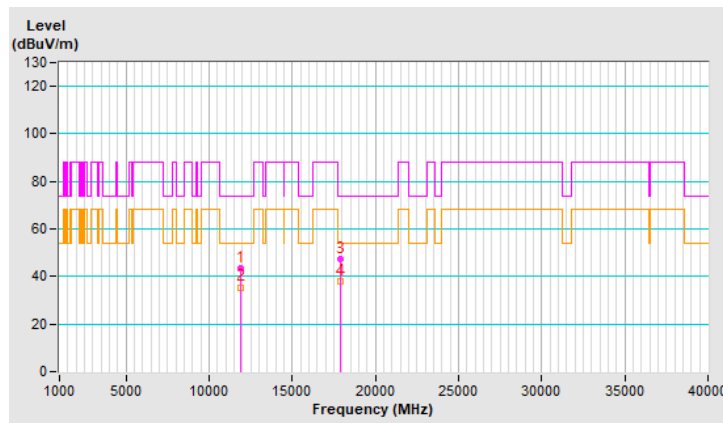




<b>RF Mode</b>	802.11be (EHT) 106+26-tone MRU	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	44.8 PK	74.0	-29.2	1.92 V	289	33.9	10.9
2	11910.00	34.4 AV	54.0	-19.6	1.92 V	289	23.5	10.9
3	17865.00	47.1 PK	74.0	-26.9	1.50 V	177	25.5	21.6
4	17865.00	36.7 AV	54.0	-17.3	1.50 V	177	15.1	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

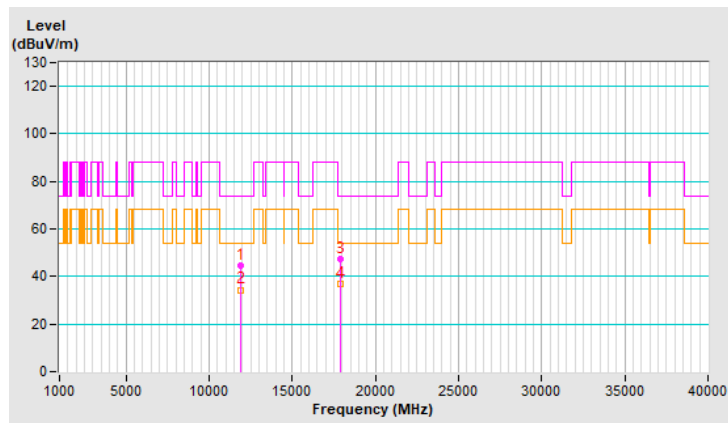


<b>RF Mode</b>	802.11be (EHT) 106+26-tone MRU	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12830.00	43.9 PK	88.2	-44.3	1.58 H	264	33.4	10.5
2	#12830.00	35.7 AV	68.2	-32.5	1.58 H	264	25.2	10.5
3	19245.00	47.2 PK	74.0	-26.8	1.90 H	187	53.7	-6.5
4	19245.00	38.3 AV	54.0	-15.7	1.90 H	187	44.8	-6.5

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

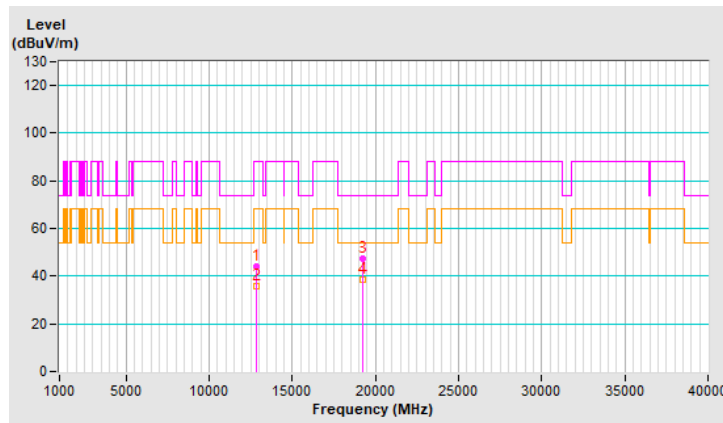


<b>RF Mode</b>	802.11be (EHT) 106+26-tone MRU	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	44.9 PK	88.2	-43.3	1.88 V	266	34.4	10.5
2	#12830.00	34.8 AV	68.2	-33.4	1.88 V	266	24.3	10.5
3	19245.00	46.6 PK	74.0	-27.4	1.62 V	187	53.1	-6.5
4	19245.00	36.4 AV	54.0	-17.6	1.62 V	187	42.9	-6.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

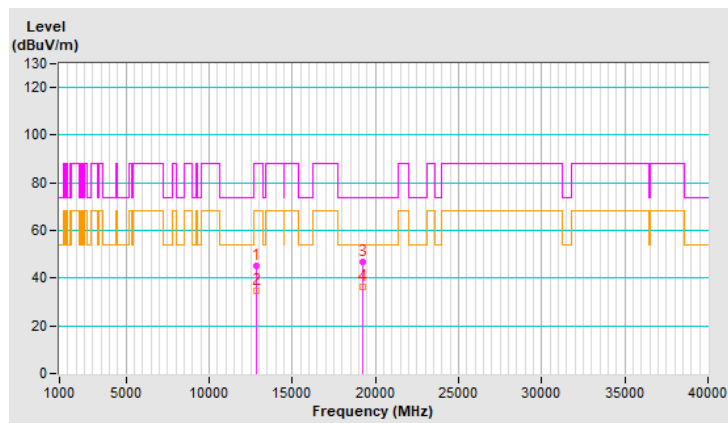


<b>RF Mode</b>	802.11be (EHT) 106+26-tone MRU	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12870.00	43.8 PK	88.2	-44.4	1.58 H	279	33.3	10.5
2	#12870.00	36.0 AV	68.2	-32.2	1.58 H	279	25.5	10.5
3	19305.00	46.8 PK	74.0	-27.2	1.93 H	187	53.6	-6.8
4	19305.00	38.0 AV	54.0	-16.0	1.93 H	187	44.8	-6.8

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

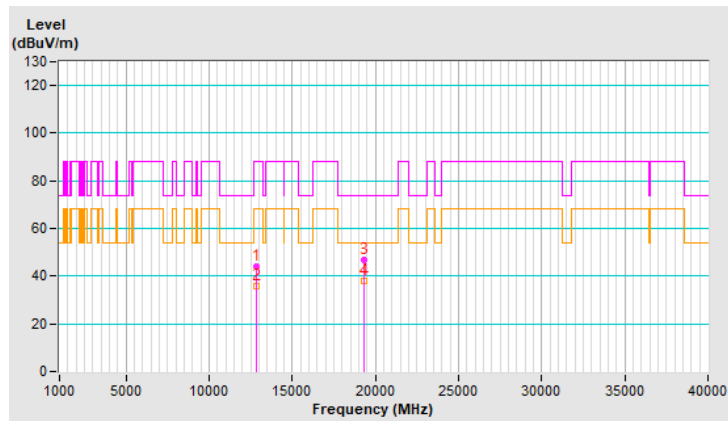


<b>RF Mode</b>	802.11be (EHT) 106+26-tone MRU	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12870.00	44.6 PK	88.2	-43.6	1.89 V	292	34.1	10.5
2	#12870.00	34.4 AV	68.2	-33.8	1.89 V	292	23.9	10.5
3	19305.00	46.8 PK	74.0	-27.2	1.45 V	183	53.6	-6.8
4	19305.00	36.4 AV	54.0	-17.6	1.45 V	183	43.2	-6.8

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

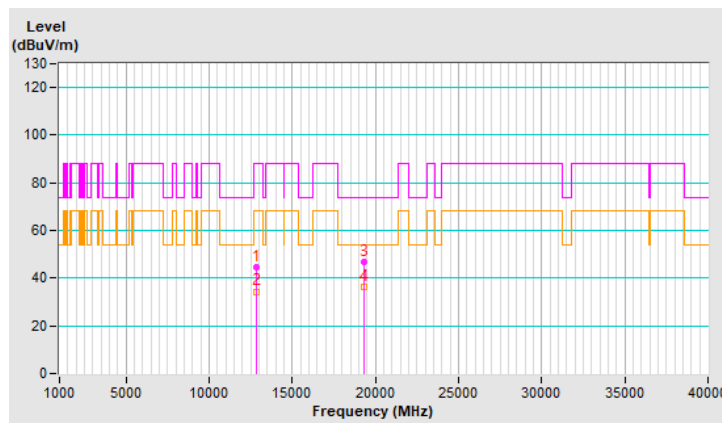


<b>RF Mode</b>	802.11be (EHT) 106+26-tone MRU	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	43.9 PK	88.2	-44.3	1.65 H	271	33.1	10.8
2	#13070.00	35.9 AV	68.2	-32.3	1.65 H	271	25.1	10.8
3	19605.00	47.3 PK	74.0	-26.7	1.93 H	196	53.3	-6.0
4	19605.00	38.5 AV	54.0	-15.5	1.93 H	196	44.5	-6.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

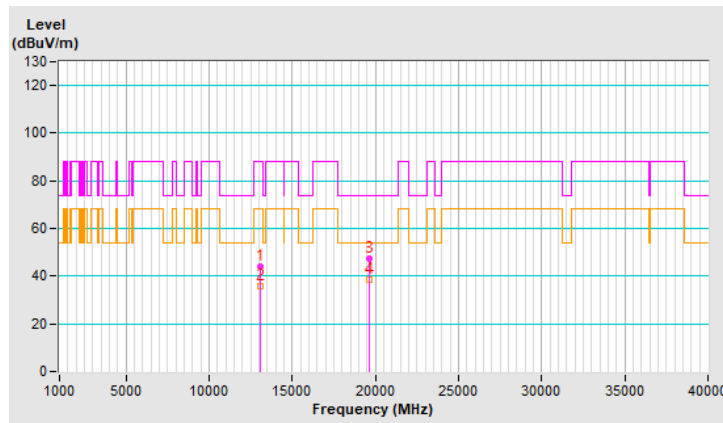


<b>RF Mode</b>	802.11be (EHT) 106+26-tone MRU	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.4 PK	88.2	-43.8	1.86 V	263	33.6	10.8
2	#13070.00	34.0 AV	68.2	-34.2	1.86 V	263	23.2	10.8
3	19605.00	46.6 PK	74.0	-27.4	1.69 V	214	52.6	-6.0
4	19605.00	36.3 AV	54.0	-17.7	1.69 V	214	42.3	-6.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

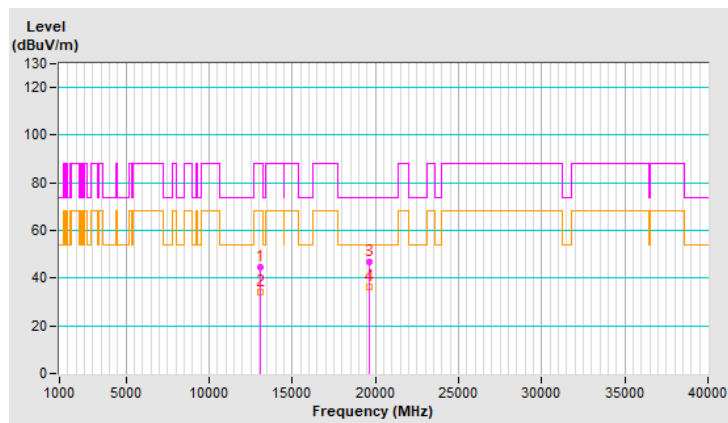


<b>RF Mode</b>	802.11be (EHT) 106+26-tone MRU	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	44.4 PK	88.2	-43.8	1.58 H	273	31.6	12.8
2	#13710.00	36.2 AV	68.2	-32.0	1.58 H	273	23.4	12.8
3	20565.00	46.6 PK	74.0	-27.4	1.86 H	197	51.3	-4.7
4	20565.00	37.9 AV	54.0	-16.1	1.86 H	197	42.6	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

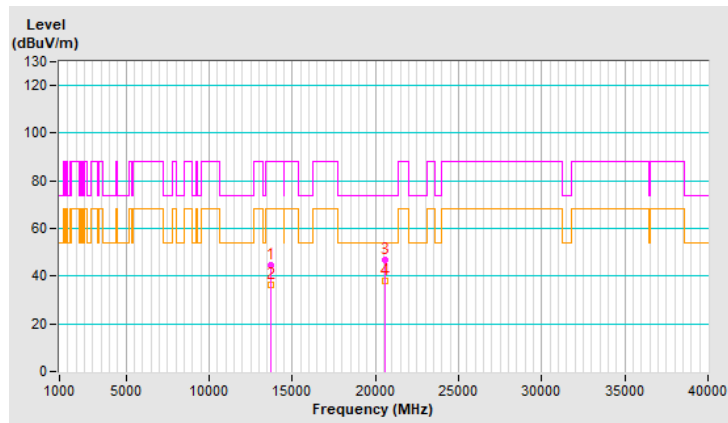




<b>RF Mode</b>	802.11be (EHT) 106+26-tone MRU	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	45.0 PK	88.2	-43.2	1.88 V	267	32.2	12.8
2	#13710.00	34.7 AV	68.2	-33.5	1.88 V	267	21.9	12.8
3	20565.00	47.0 PK	74.0	-27.0	1.56 V	199	51.7	-4.7
4	20565.00	36.6 AV	54.0	-17.4	1.56 V	199	41.3	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

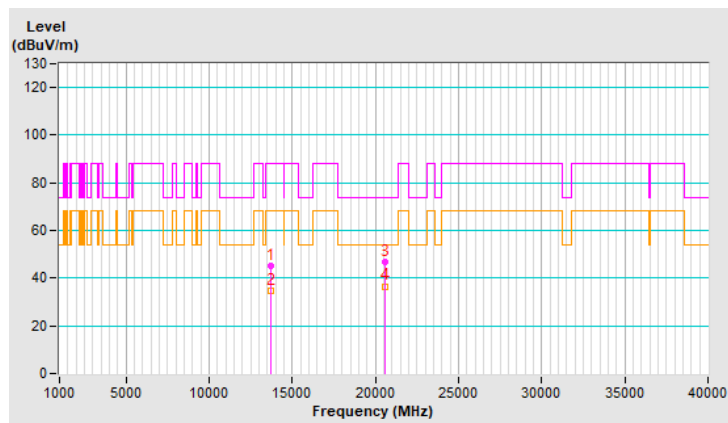


<b>RF Mode</b>	802.11be (EHT) 106+26-tone MRU	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#14230.00	44.1 PK	88.2	-44.1	1.52 H	259	30.6	13.5
2	#14230.00	36.1 AV	68.2	-32.1	1.52 H	259	22.6	13.5
3	21345.00	46.7 PK	74.0	-27.3	1.83 H	192	50.5	-3.8
4	21345.00	38.1 AV	54.0	-15.9	1.83 H	192	41.9	-3.8

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

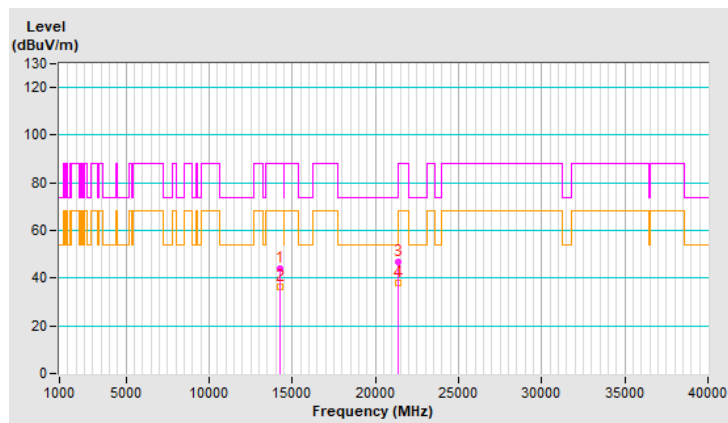


<b>RF Mode</b>	802.11be (EHT) 106+26-tone MRU	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	44.9 PK	88.2	-43.3	1.92 V	301	31.4	13.5
2	#14230.00	34.6 AV	68.2	-33.6	1.92 V	301	21.1	13.5
3	21345.00	47.4 PK	74.0	-26.6	1.46 V	171	51.2	-3.8
4	21345.00	36.9 AV	54.0	-17.1	1.46 V	171	40.7	-3.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

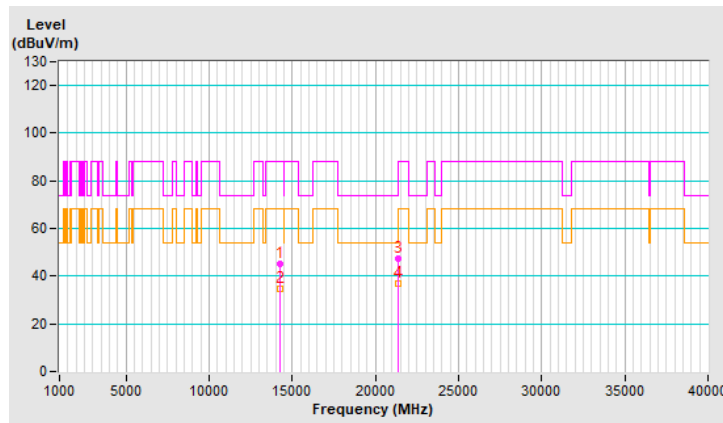


<b>RF Mode</b>	802.11be (EHT) 52+26-tone MRU	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	43.6 PK	74.0	-30.4	1.63 H	256	32.7	10.9
2	11910.00	35.6 AV	54.0	-18.4	1.63 H	256	24.7	10.9
3	17865.00	47.2 PK	74.0	-26.8	1.95 H	162	25.6	21.6
4	17865.00	38.2 AV	54.0	-15.8	1.95 H	162	16.6	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

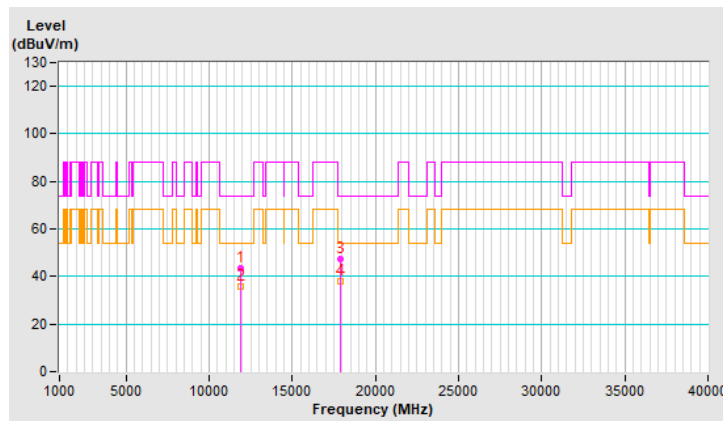


<b>RF Mode</b>	802.11be (EHT) 52+26-tone MRU	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	44.2 PK	74.0	-29.8	1.91 V	260	33.3	10.9
2	11910.00	34.2 AV	54.0	-19.8	1.91 V	260	23.3	10.9
3	17865.00	47.4 PK	74.0	-26.6	1.53 V	187	25.8	21.6
4	17865.00	37.2 AV	54.0	-16.8	1.53 V	187	15.6	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

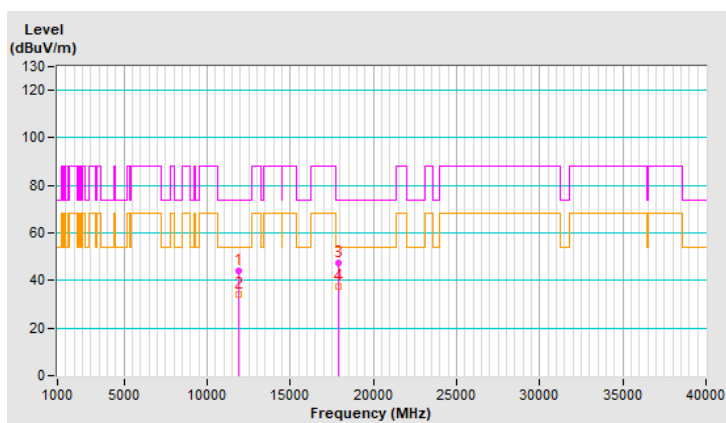


<b>RF Mode</b>	802.11be (EHT) 52+26-tone MRU	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	43.7 PK	88.2	-44.5	1.67 H	271	33.2	10.5
2	#12830.00	36.0 AV	68.2	-32.2	1.67 H	271	25.5	10.5
3	19245.00	47.1 PK	74.0	-26.9	1.93 H	173	53.6	-6.5
4	19245.00	38.6 AV	54.0	-15.4	1.93 H	173	45.1	-6.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

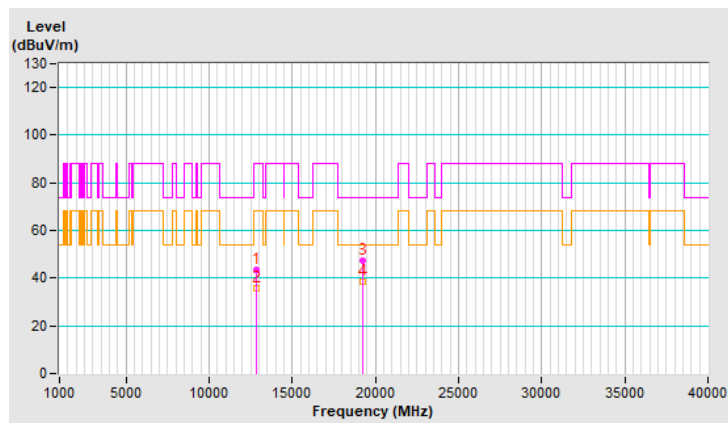


<b>RF Mode</b>	802.11be (EHT) 52+26-tone MRU	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12830.00	45.0 PK	88.2	-43.2	1.86 V	263	34.5	10.5
2	#12830.00	34.5 AV	68.2	-33.7	1.86 V	263	24.0	10.5
3	19245.00	47.1 PK	74.0	-26.9	1.55 V	190	53.6	-6.5
4	19245.00	36.7 AV	54.0	-17.3	1.55 V	190	43.2	-6.5

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

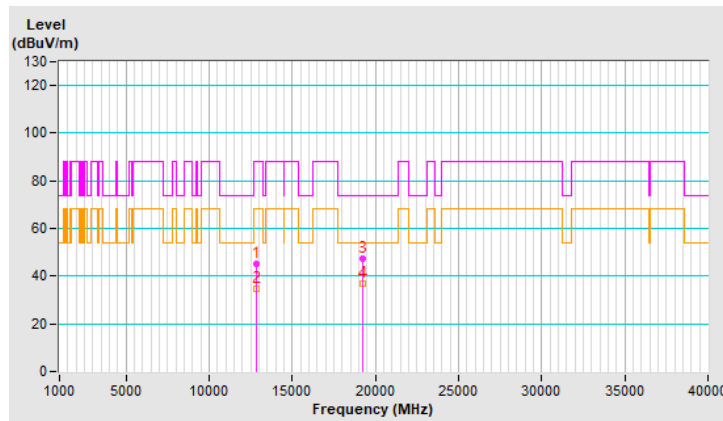


<b>RF Mode</b>	802.11be (EHT) 52+26-tone MRU	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12870.00	43.6 PK	88.2	-44.6	1.65 H	263	33.1	10.5
2	#12870.00	35.7 AV	68.2	-32.5	1.65 H	263	25.2	10.5
3	19305.00	46.3 PK	74.0	-27.7	1.94 H	172	53.1	-6.8
4	19305.00	37.6 AV	54.0	-16.4	1.94 H	172	44.4	-6.8

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

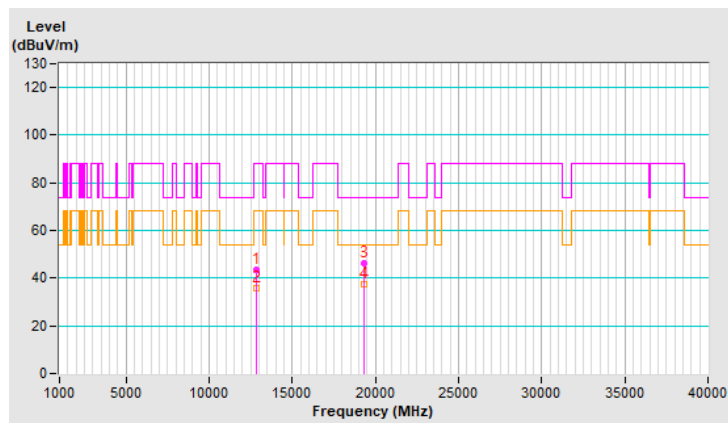




<b>RF Mode</b>	802.11be (EHT) 52+26-tone MRU	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	44.6 PK	88.2	-43.6	1.88 V	278	34.1	10.5
2	#12870.00	34.2 AV	68.2	-34.0	1.88 V	278	23.7	10.5
3	19305.00	46.9 PK	74.0	-27.1	1.50 V	194	53.7	-6.8
4	19305.00	36.8 AV	54.0	-17.2	1.50 V	194	43.6	-6.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

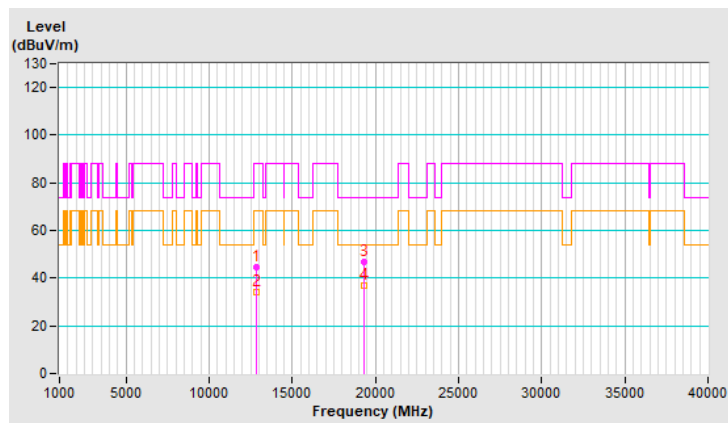


<b>RF Mode</b>	802.11be (EHT) 52+26-tone MRU	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13070.00	43.7 PK	88.2	-44.5	1.64 H	251	32.9	10.8
2	#13070.00	35.9 AV	68.2	-32.3	1.64 H	251	25.1	10.8
3	19605.00	46.7 PK	74.0	-27.3	1.90 H	152	52.7	-6.0
4	19605.00	38.0 AV	54.0	-16.0	1.90 H	152	44.0	-6.0

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

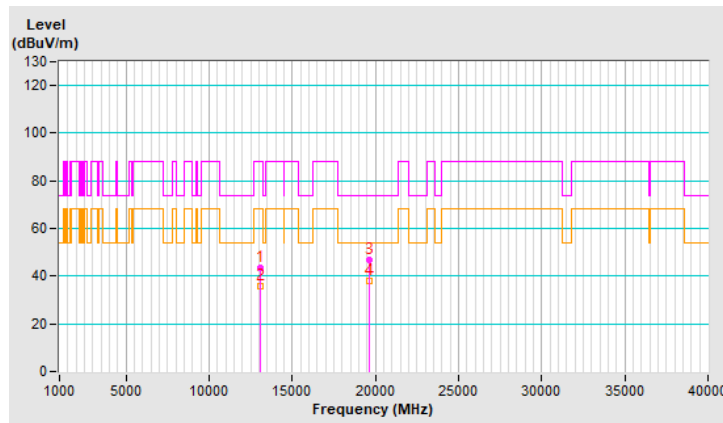


<b>RF Mode</b>	802.11be (EHT) 52+26-tone MRU	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.7 PK	88.2	-43.5	1.91 V	259	33.9	10.8
2	#13070.00	34.5 AV	68.2	-33.7	1.91 V	259	23.7	10.8
3	19605.00	46.8 PK	74.0	-27.2	1.57 V	198	52.8	-6.0
4	19605.00	36.6 AV	54.0	-17.4	1.57 V	198	42.6	-6.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

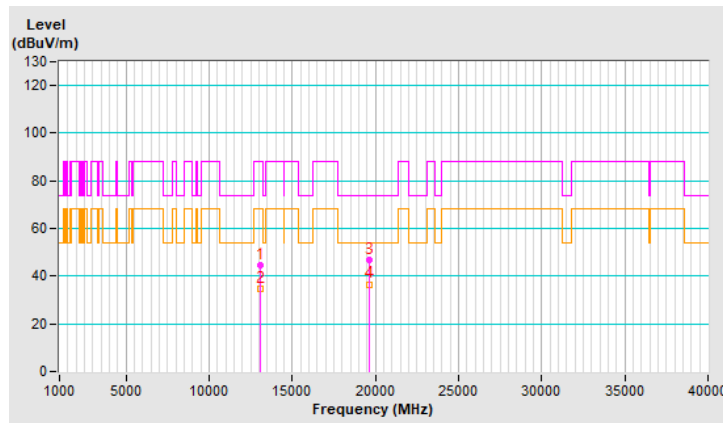


<b>RF Mode</b>	802.11be (EHT) 52+26-tone MRU	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	43.3 PK	88.2	-44.9	1.59 H	260	30.5	12.8
2	#13710.00	35.5 AV	68.2	-32.7	1.59 H	260	22.7	12.8
3	20565.00	47.1 PK	74.0	-26.9	1.89 H	173	51.8	-4.7
4	20565.00	38.6 AV	54.0	-15.4	1.89 H	173	43.3	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

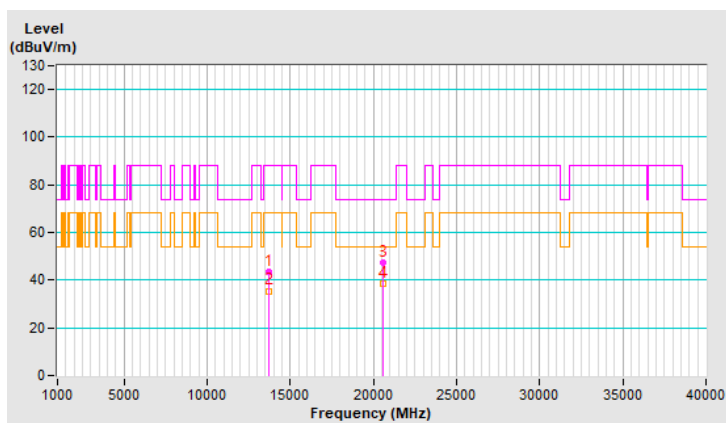


<b>RF Mode</b>	802.11be (EHT) 52+26-tone MRU	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	44.9 PK	88.2	-43.3	1.89 V	282	32.1	12.8
2	#13710.00	34.5 AV	68.2	-33.7	1.89 V	282	21.7	12.8
3	20565.00	47.4 PK	74.0	-26.6	1.50 V	181	52.1	-4.7
4	20565.00	37.3 AV	54.0	-16.7	1.50 V	181	42.0	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

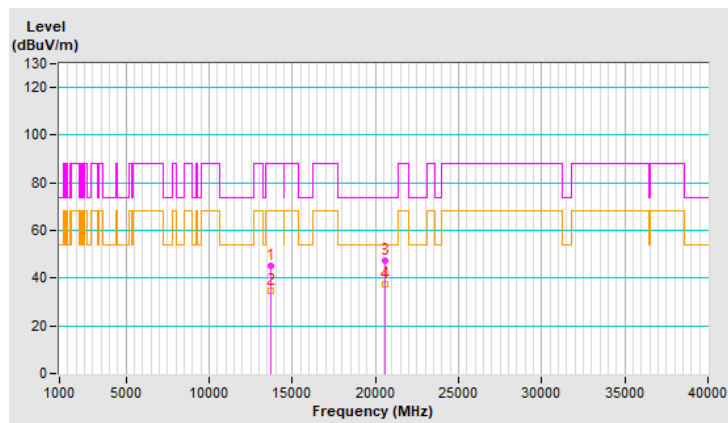


<b>RF Mode</b>	802.11be (EHT) 52+26-tone MRU	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#14230.00	43.9 PK	88.2	-44.3	1.60 H	274	30.4	13.5
2	#14230.00	35.8 AV	68.2	-32.4	1.60 H	274	22.3	13.5
3	21345.00	47.5 PK	74.0	-26.5	1.92 H	187	51.3	-3.8
4	21345.00	38.5 AV	54.0	-15.5	1.92 H	187	42.3	-3.8

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

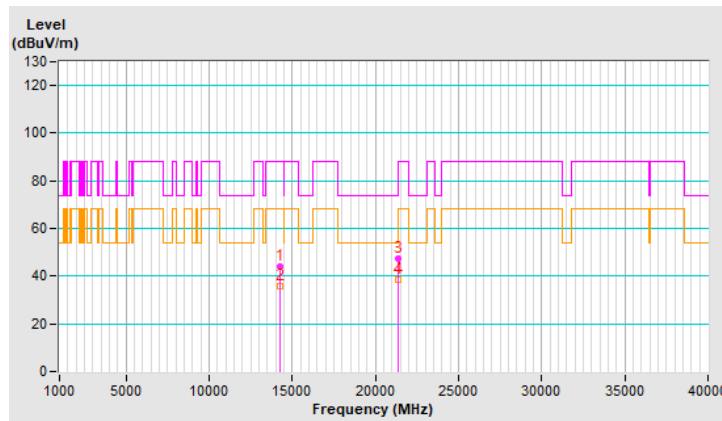


<b>RF Mode</b>	802.11be (EHT) 52+26-tone MRU	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	44.5 PK	88.2	-43.7	1.88 V	262	31.0	13.5
2	#14230.00	34.0 AV	68.2	-34.2	1.88 V	262	20.5	13.5
3	21345.00	47.2 PK	74.0	-26.8	1.59 V	196	51.0	-3.8
4	21345.00	36.8 AV	54.0	-17.2	1.59 V	196	40.6	-3.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

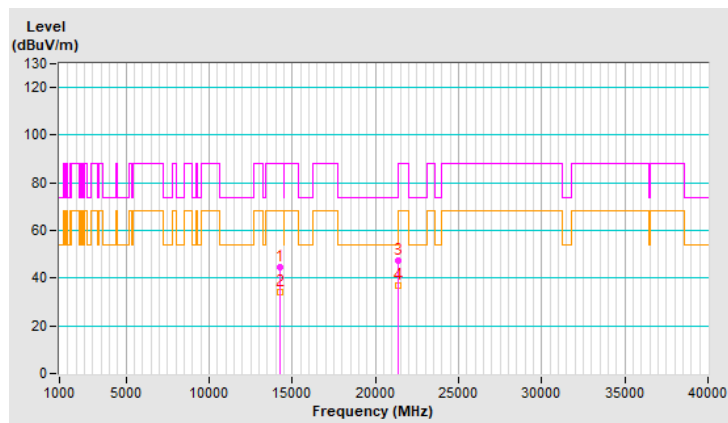


<b>RF Mode</b>	802.11be (EHT) 484+242-tone MRU	<b>Channel</b>	CH 7 : 5985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	43.5 PK	74.0	-30.5	1.54 H	289	32.7	10.8
2	11970.00	35.6 AV	54.0	-18.4	1.54 H	289	24.8	10.8
3	17955.00	46.1 PK	74.0	-27.9	1.87 H	195	22.6	23.5
4	17955.00	37.7 AV	54.0	-16.3	1.87 H	195	14.2	23.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

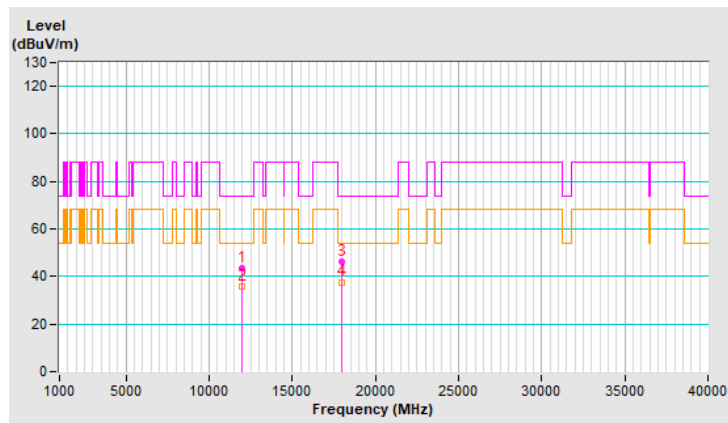




<b>RF Mode</b>	802.11be (EHT) 484+242-tone MRU	<b>Channel</b>	CH 7 : 5985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	44.7 PK	74.0	-29.3	1.91 V	294	33.9	10.8
2	11970.00	34.6 AV	54.0	-19.4	1.91 V	294	23.8	10.8
3	17955.00	47.4 PK	74.0	-26.6	1.73 V	168	23.9	23.5
4	17955.00	36.5 AV	54.0	-17.5	1.73 V	168	13.0	23.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

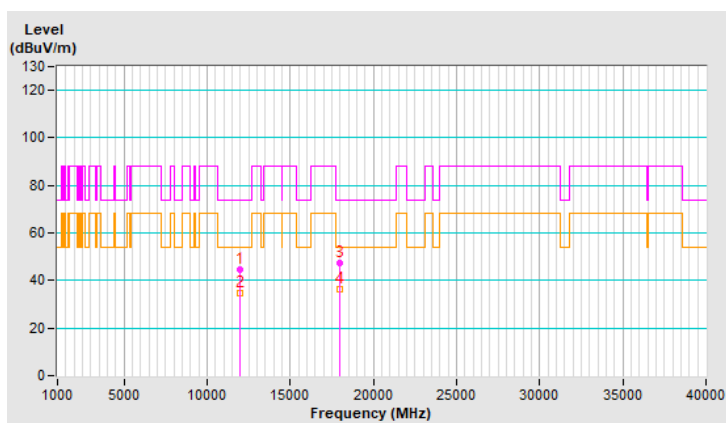


<b>RF Mode</b>	802.11be (EHT) 484+242-tone MRU	<b>Channel</b>	CH 87 : 6385 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12770.00	44.1 PK	88.2	-44.1	1.52 H	263	33.7	10.4
2	#12770.00	36.1 AV	68.2	-32.1	1.52 H	263	25.7	10.4
3	19155.00	46.9 PK	74.0	-27.1	1.89 H	193	53.3	-6.4
4	19155.00	38.2 AV	54.0	-15.8	1.89 H	193	44.6	-6.4

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

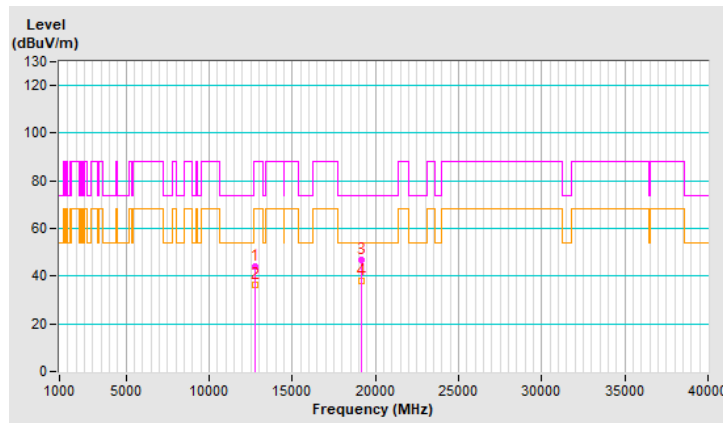


<b>RF Mode</b>	802.11be (EHT) 484+242-tone MRU	<b>Channel</b>	CH 87 : 6385 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	44.7 PK	88.2	-43.5	1.85 V	296	34.3	10.4
2	#12770.00	34.2 AV	68.2	-34.0	1.85 V	296	23.8	10.4
3	19155.00	47.4 PK	74.0	-26.6	1.45 V	197	53.8	-6.4
4	19155.00	36.6 AV	54.0	-17.4	1.45 V	197	43.0	-6.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

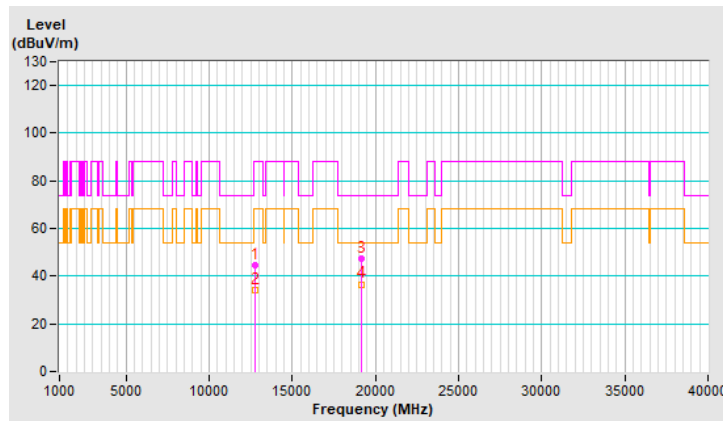


<b>RF Mode</b>	802.11be (EHT) 484+242-tone MRU	<b>Channel</b>	CH 103 : 6465 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	44.2 PK	88.2	-44.0	1.47 H	266	33.7	10.5
2	#12930.00	36.1 AV	68.2	-32.1	1.47 H	266	25.6	10.5
3	19395.00	46.4 PK	74.0	-27.6	1.83 H	194	53.1	-6.7
4	19395.00	37.9 AV	54.0	-16.1	1.83 H	194	44.6	-6.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

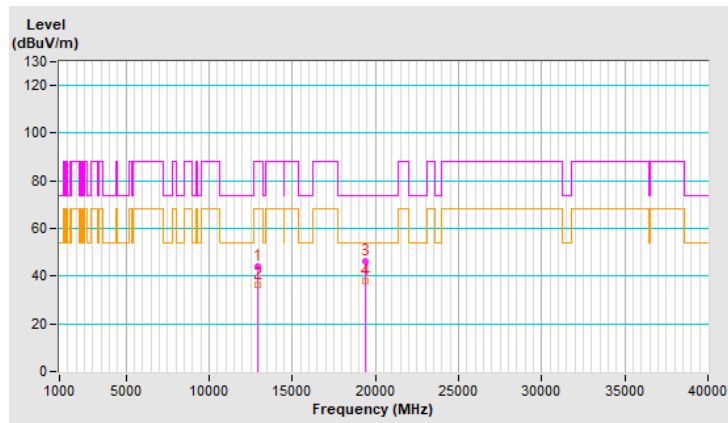


<b>RF Mode</b>	802.11be (EHT) 484+242-tone MRU	<b>Channel</b>	CH 103 : 6465 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	45.1 PK	88.2	-43.1	1.93 V	265	34.6	10.5
2	#12930.00	34.6 AV	68.2	-33.6	1.93 V	265	24.1	10.5
3	19395.00	46.9 PK	74.0	-27.1	1.45 V	201	53.6	-6.7
4	19395.00	36.2 AV	54.0	-17.8	1.45 V	201	42.9	-6.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

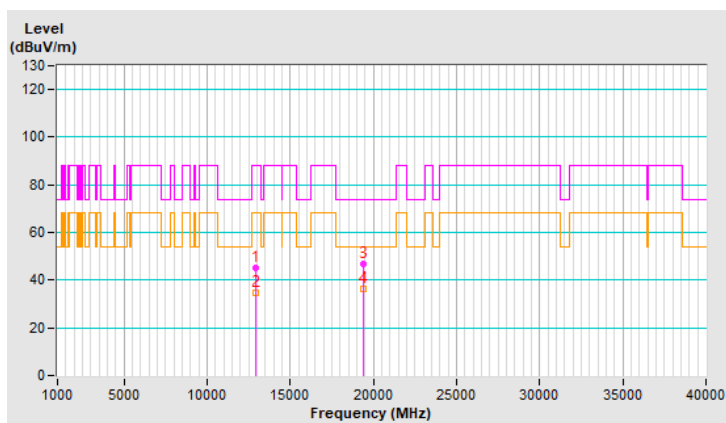


<b>RF Mode</b>	802.11be (EHT) 484+242-tone MRU	<b>Channel</b>	CH 135 : 6625 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	43.3 PK	74.0	-30.7	1.56 H	258	31.8	11.5
2	13250.00	35.4 AV	54.0	-18.6	1.56 H	258	23.9	11.5
3	19875.00	47.1 PK	74.0	-26.9	1.95 H	185	53.1	-6.0
4	19875.00	38.5 AV	54.0	-15.5	1.95 H	185	44.5	-6.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

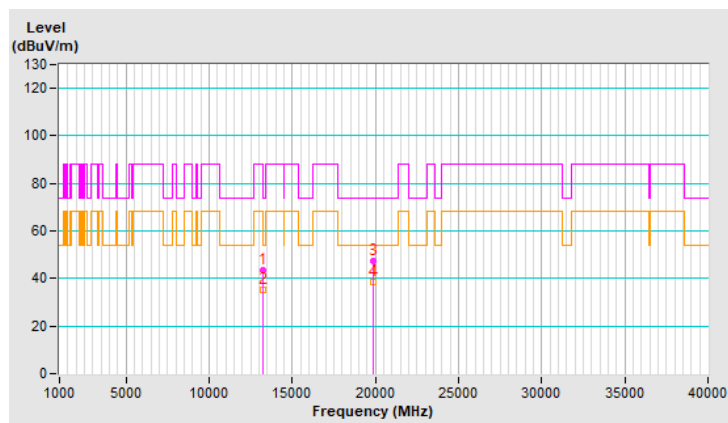


<b>RF Mode</b>	802.11be (EHT) 484+242-tone MRU	<b>Channel</b>	CH 135 : 6625 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	45.0 PK	74.0	-29.0	1.92 V	267	33.5	11.5
2	13250.00	34.6 AV	54.0	-19.4	1.92 V	267	23.1	11.5
3	19875.00	47.3 PK	74.0	-26.7	1.55 V	200	53.3	-6.0
4	19875.00	36.4 AV	54.0	-17.6	1.55 V	200	42.4	-6.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

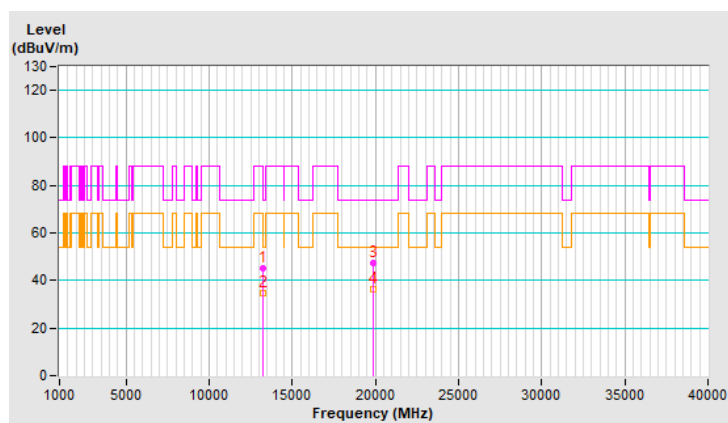


<b>RF Mode</b>	802.11be (EHT) 484+242-tone MRU	<b>Channel</b>	CH 215 : 7025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#14050.00	44.0 PK	88.2	-44.2	1.57 H	273	30.8	13.2
2	#14050.00	36.1 AV	68.2	-32.1	1.57 H	273	22.9	13.2
3	21075.00	46.8 PK	74.0	-27.2	1.82 H	182	50.9	-4.1
4	21075.00	37.8 AV	54.0	-16.2	1.82 H	182	41.9	-4.1

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

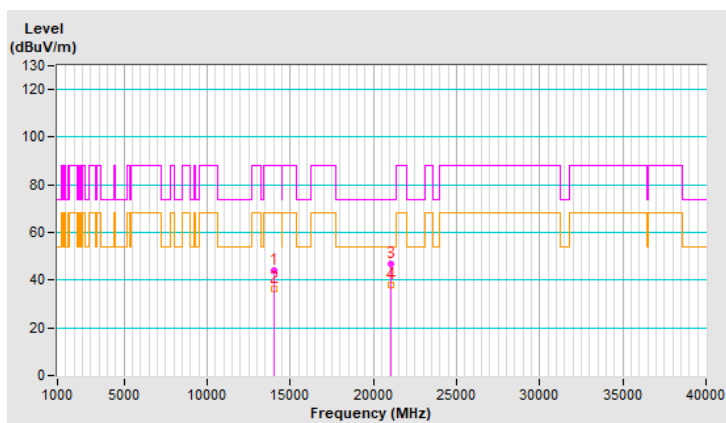




<b>RF Mode</b>	802.11be (EHT) 484+242-tone MRU	<b>Channel</b>	CH 215 : 7025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	45.0 PK	88.2	-43.2	1.88 V	308	31.8	13.2
2	#14050.00	34.9 AV	68.2	-33.3	1.88 V	308	21.7	13.2
3	21075.00	47.4 PK	74.0	-26.6	1.73 V	182	51.5	-4.1
4	21075.00	36.6 AV	54.0	-17.4	1.73 V	182	40.7	-4.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

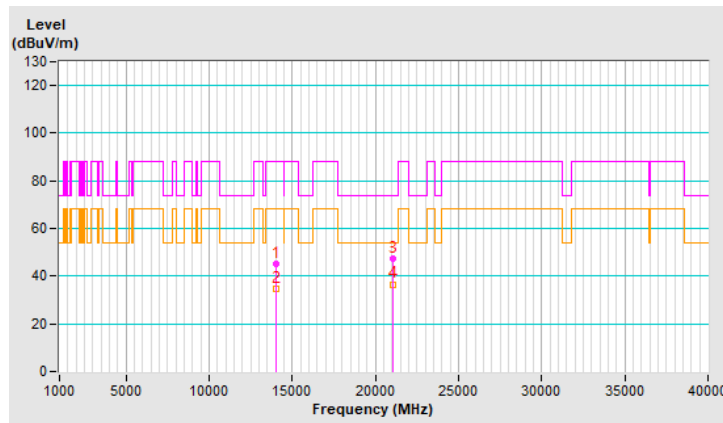


<b>RF Mode</b>	802.11be (EHT) 996+484-tone MRU	<b>Channel</b>	CH 15 : 6025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	43.9 PK	74.0	-30.1	1.56 H	256	33.0	10.9
2	12050.00	35.7 AV	54.0	-18.3	1.56 H	256	24.8	10.9
3	18075.00	46.6 PK	74.0	-27.4	1.92 H	179	40.8	5.8
4	18075.00	38.0 AV	54.0	-16.0	1.92 H	179	32.2	5.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

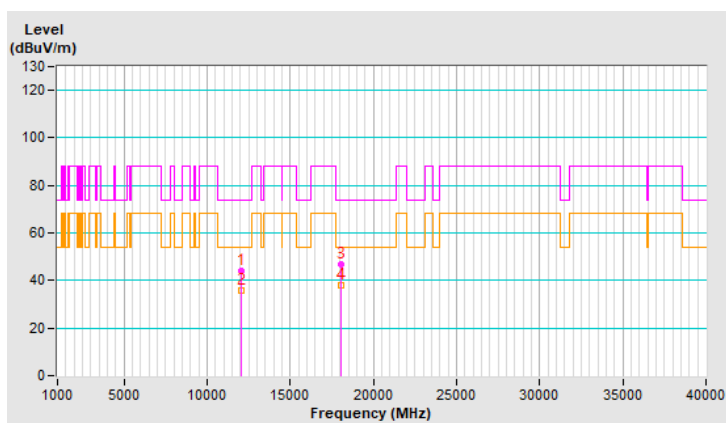


<b>RF Mode</b>	802.11be (EHT) 996+484-tone MRU	<b>Channel</b>	CH 15 : 6025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	44.8 PK	74.0	-29.2	1.89 V	296	33.9	10.9
2	12050.00	34.6 AV	54.0	-19.4	1.89 V	296	23.7	10.9
3	18075.00	47.6 PK	74.0	-26.4	1.68 V	168	41.8	5.8
4	18075.00	36.6 AV	54.0	-17.4	1.68 V	168	30.8	5.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

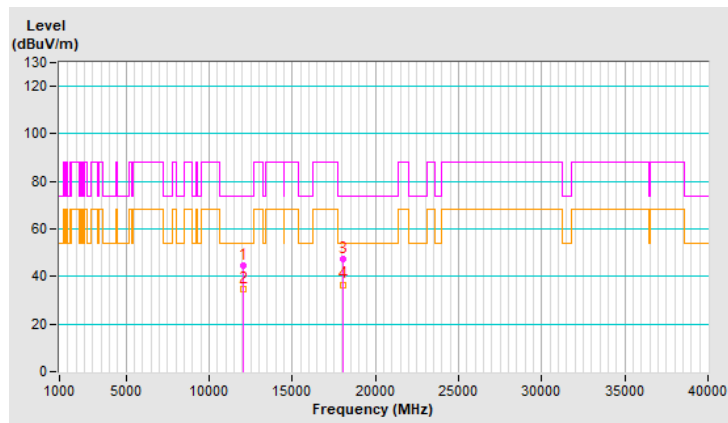


<b>RF Mode</b>	802.11be (EHT) 996+484-tone MRU	<b>Channel</b>	CH 79 : 6345 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	43.4 PK	74.0	-30.6	1.59 H	258	33.1	10.3
2	12690.00	35.3 AV	54.0	-18.7	1.59 H	258	25.0	10.3
3	19035.00	47.2 PK	74.0	-26.8	1.99 H	193	53.8	-6.6
4	19035.00	38.7 AV	54.0	-15.3	1.99 H	193	45.3	-6.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

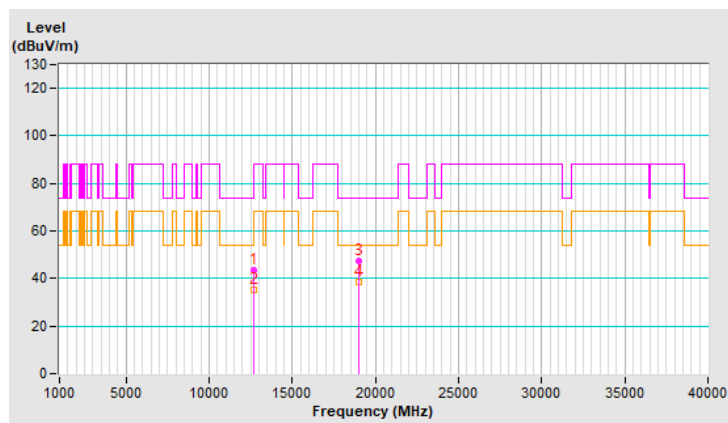


<b>RF Mode</b>	802.11be (EHT) 996+484-tone MRU	<b>Channel</b>	CH 79 : 6345 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	45.3 PK	74.0	-28.7	1.89 V	278	35.0	10.3
2	12690.00	34.9 AV	54.0	-19.1	1.89 V	278	24.6	10.3
3	19035.00	47.7 PK	74.0	-26.3	1.55 V	192	54.3	-6.6
4	19035.00	36.8 AV	54.0	-17.2	1.55 V	192	43.4	-6.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

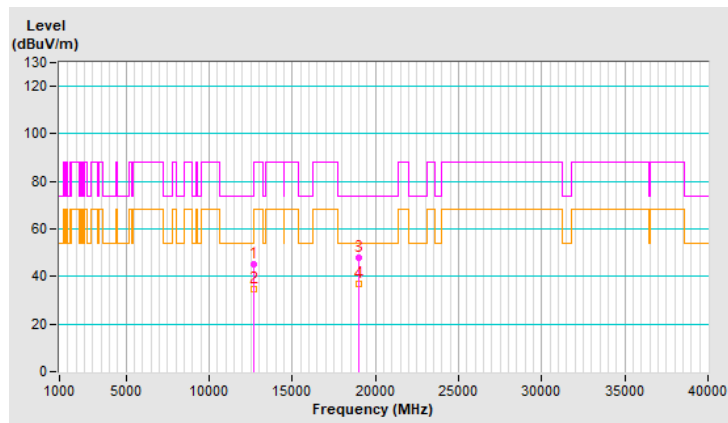


<b>RF Mode</b>	802.11be (EHT) 996+484-tone MRU	<b>Channel</b>	CH 143 : 6665 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	43.9 PK	74.0	-30.1	1.59 H	284	32.2	11.7
2	13330.00	35.8 AV	54.0	-18.2	1.59 H	284	24.1	11.7
3	19995.00	47.2 PK	74.0	-26.8	1.89 H	186	52.8	-5.6
4	19995.00	38.8 AV	54.0	-15.2	1.89 H	186	44.4	-5.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

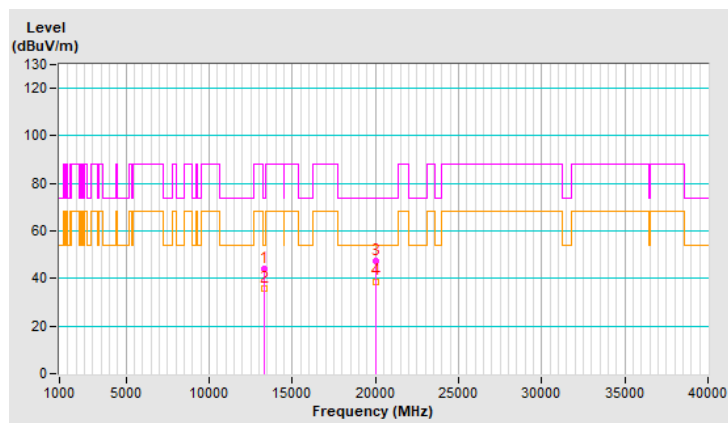


<b>RF Mode</b>	802.11be (EHT) 996+484-tone MRU	<b>Channel</b>	CH 143 : 6665 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	45.0 PK	74.0	-29.0	1.82 V	248	33.3	11.7
2	13330.00	34.7 AV	54.0	-19.3	1.82 V	248	23.0	11.7
3	19995.00	47.5 PK	74.0	-26.5	1.64 V	201	53.1	-5.6
4	19995.00	36.7 AV	54.0	-17.3	1.64 V	201	42.3	-5.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

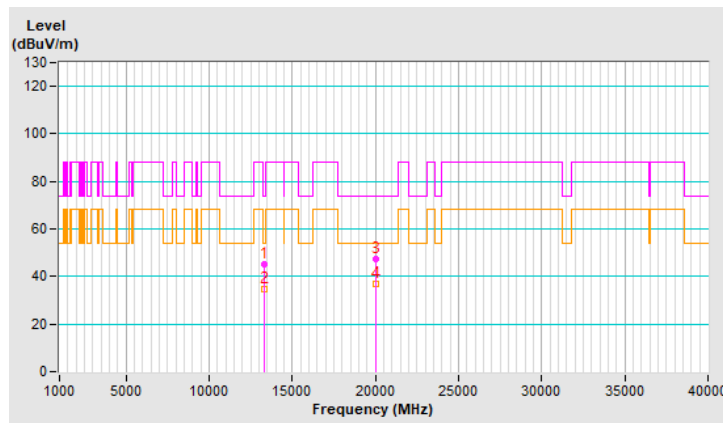


<b>RF Mode</b>	802.11be (EHT) 996+484-tone MRU	<b>Channel</b>	CH 207 : 6985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	42.5 PK	88.2	-45.7	1.49 H	270	29.4	13.1
2	#13970.00	34.9 AV	68.2	-33.3	1.49 H	270	21.8	13.1
3	20955.00	46.9 PK	74.0	-27.1	1.82 H	205	51.0	-4.1
4	20955.00	38.4 AV	54.0	-15.6	1.82 H	205	42.5	-4.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

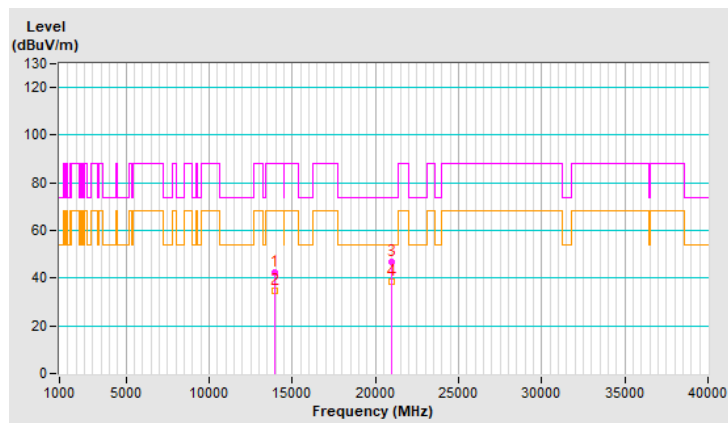




<b>RF Mode</b>	802.11be (EHT) 996+484-tone MRU	<b>Channel</b>	CH 207 : 6985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13970.00	45.6 PK	88.2	-42.6	1.93 V	287	32.5	13.1
2	#13970.00	35.3 AV	68.2	-32.9	1.93 V	287	22.2	13.1
3	20955.00	47.5 PK	74.0	-26.5	1.54 V	180	51.6	-4.1
4	20955.00	36.7 AV	54.0	-17.3	1.54 V	180	40.8	-4.1

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

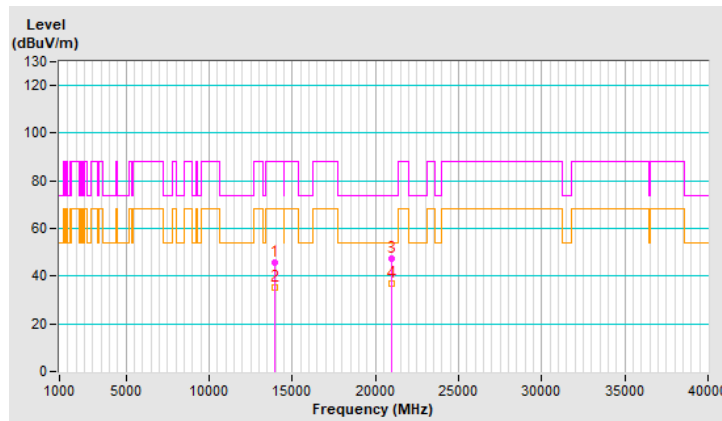


<b>RF Mode</b>	802.11be (EHT) 996+484+242-tone MRU	<b>Channel</b>	CH 15 : 6025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	43.0 PK	74.0	-31.0	1.45 H	265	32.1	10.9
2	12050.00	35.3 AV	54.0	-18.7	1.45 H	265	24.4	10.9
3	18075.00	46.5 PK	74.0	-27.5	1.86 H	178	40.7	5.8
4	18075.00	38.2 AV	54.0	-15.8	1.86 H	178	32.4	5.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

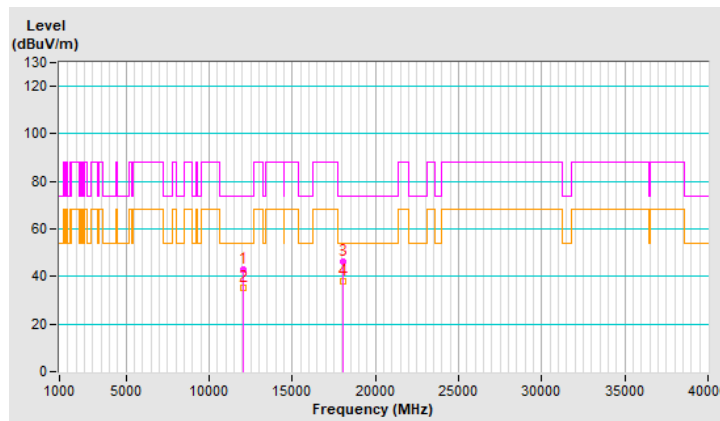


<b>RF Mode</b>	802.11be (EHT) 996+484+242-tone MRU	<b>Channel</b>	CH 15 : 6025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	45.3 PK	74.0	-28.7	1.87 V	305	34.4	10.9
2	12050.00	35.0 AV	54.0	-19.0	1.87 V	305	24.1	10.9
3	18075.00	47.7 PK	74.0	-26.3	1.50 V	163	41.9	5.8
4	18075.00	37.1 AV	54.0	-16.9	1.50 V	163	31.3	5.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

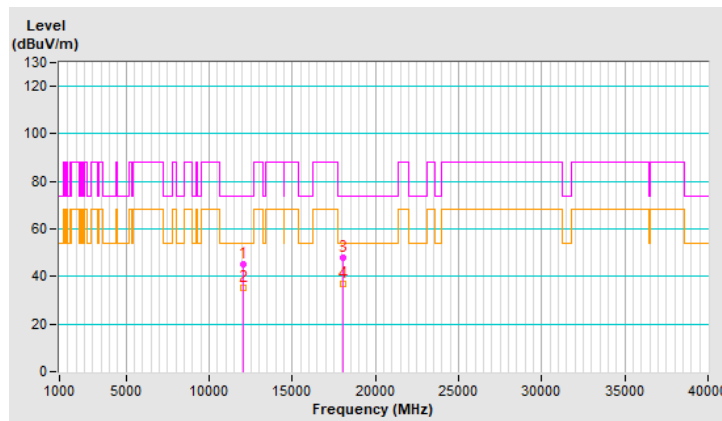


<b>RF Mode</b>	802.11be (EHT) 996+484+242-tone MRU	<b>Channel</b>	CH 79 : 6345 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	43.5 PK	74.0	-30.5	1.56 H	248	33.2	10.3
2	12690.00	35.4 AV	54.0	-18.6	1.56 H	248	25.1	10.3
3	19035.00	47.5 PK	74.0	-26.5	1.95 H	182	54.1	-6.6
4	19035.00	38.7 AV	54.0	-15.3	1.95 H	182	45.3	-6.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

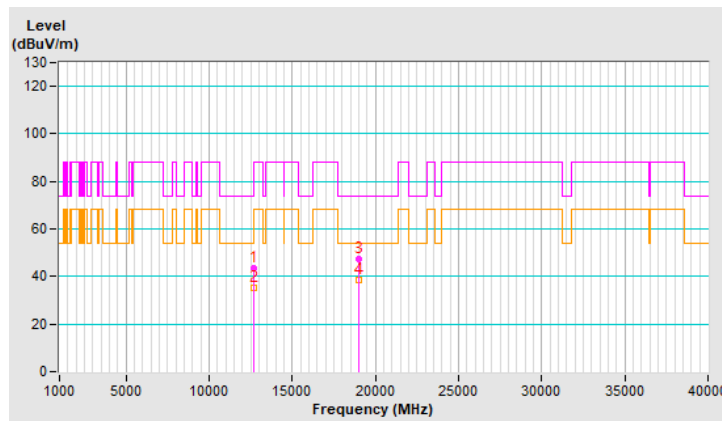


<b>RF Mode</b>	802.11be (EHT) 996+484+242-tone MRU	<b>Channel</b>	CH 79 : 6345 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	45.6 PK	74.0	-28.4	1.92 V	302	35.3	10.3
2	12690.00	35.1 AV	54.0	-18.9	1.92 V	302	24.8	10.3
3	19035.00	47.8 PK	74.0	-26.2	1.46 V	184	54.4	-6.6
4	19035.00	36.6 AV	54.0	-17.4	1.46 V	184	43.2	-6.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

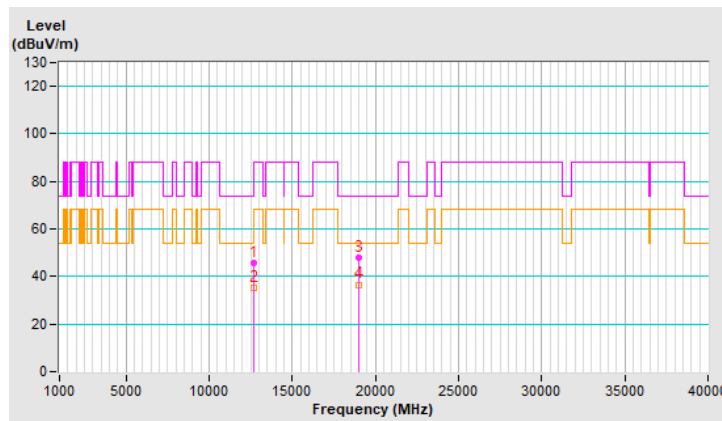


<b>RF Mode</b>	802.11be (EHT) 996+484+242-tone MRU	<b>Channel</b>	CH 143 : 6665 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	43.4 PK	74.0	-30.6	1.44 H	259	31.7	11.7
2	13330.00	35.3 AV	54.0	-18.7	1.44 H	259	23.6	11.7
3	19995.00	47.4 PK	74.0	-26.6	1.84 H	167	53.0	-5.6
4	19995.00	38.8 AV	54.0	-15.2	1.84 H	167	44.4	-5.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

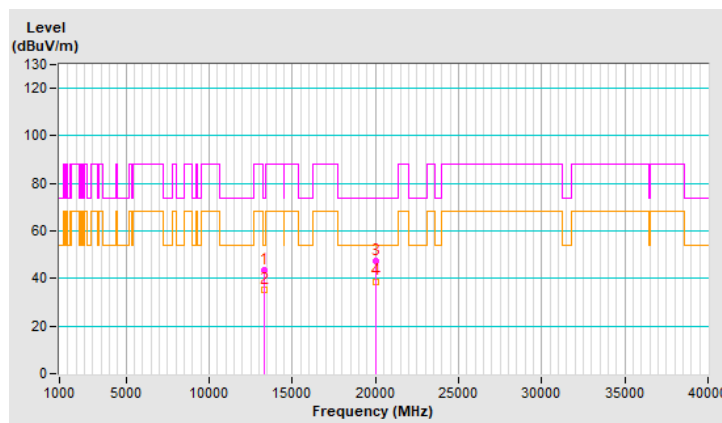


<b>RF Mode</b>	802.11be (EHT) 996+484+242-tone MRU	<b>Channel</b>	CH 143 : 6665 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	45.2 PK	74.0	-28.8	1.96 V	290	33.5	11.7
2	13330.00	34.8 AV	54.0	-19.2	1.96 V	290	23.1	11.7
3	19995.00	47.6 PK	74.0	-26.4	1.48 V	180	53.2	-5.6
4	19995.00	36.4 AV	54.0	-17.6	1.48 V	180	42.0	-5.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

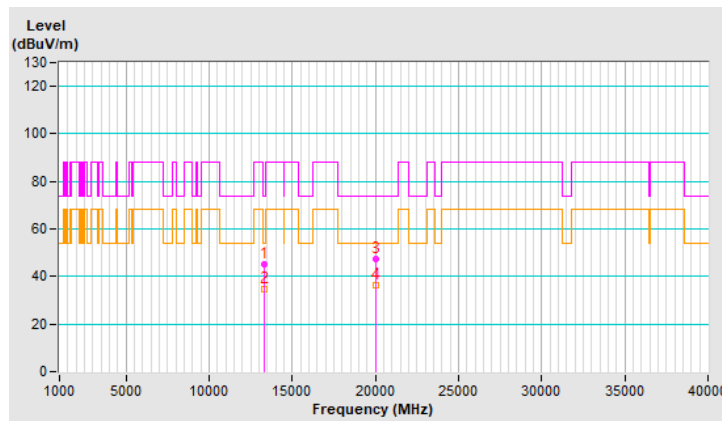


<b>RF Mode</b>	802.11be (EHT) 996+484+242-tone MRU	<b>Channel</b>	CH 207 : 6985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	43.1 PK	88.2	-45.1	1.63 H	270	30.0	13.1
2	#13970.00	35.2 AV	68.2	-33.0	1.63 H	270	22.1	13.1
3	20955.00	47.4 PK	74.0	-26.6	2.02 H	186	51.5	-4.1
4	20955.00	38.8 AV	54.0	-15.2	2.02 H	186	42.9	-4.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

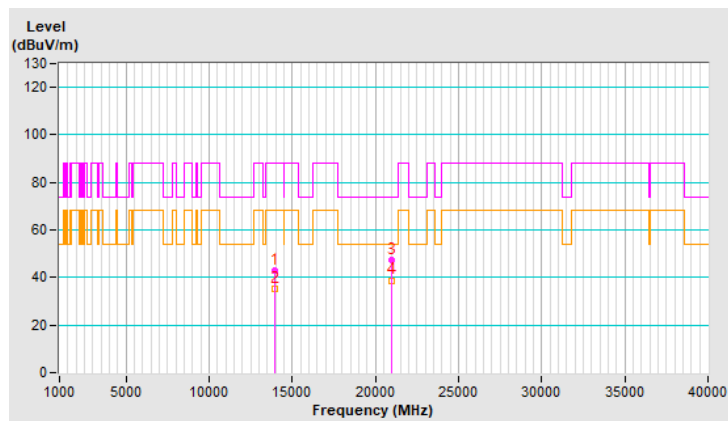




<b>RF Mode</b>	802.11be (EHT) 996+484+242-tone MRU	<b>Channel</b>	CH 207 : 6985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	45.5 PK	88.2	-42.7	1.91 V	289	32.4	13.1
2	#13970.00	35.2 AV	68.2	-33.0	1.91 V	289	22.1	13.1
3	20955.00	47.7 PK	74.0	-26.3	1.55 V	162	51.8	-4.1
4	20955.00	37.1 AV	54.0	-16.9	1.55 V	162	41.2	-4.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

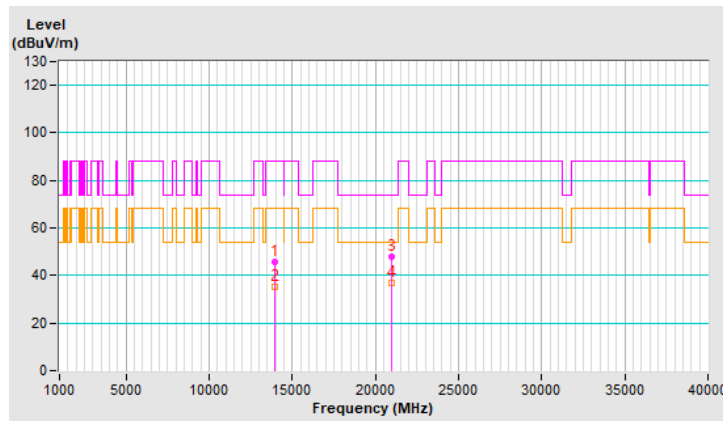


<b>RF Mode</b>	802.11be (EHT) 2x996+484-tone MRU	<b>Channel</b>	CH 31 : 6105 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12210.00	42.7 PK	74.0	-31.3	1.62 H	270	32.3	10.4
2	12210.00	34.9 AV	54.0	-19.1	1.62 H	270	24.5	10.4
3	18315.00	46.6 PK	74.0	-27.4	1.84 H	201	53.7	-7.1
4	18315.00	38.2 AV	54.0	-15.8	1.84 H	201	45.3	-7.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

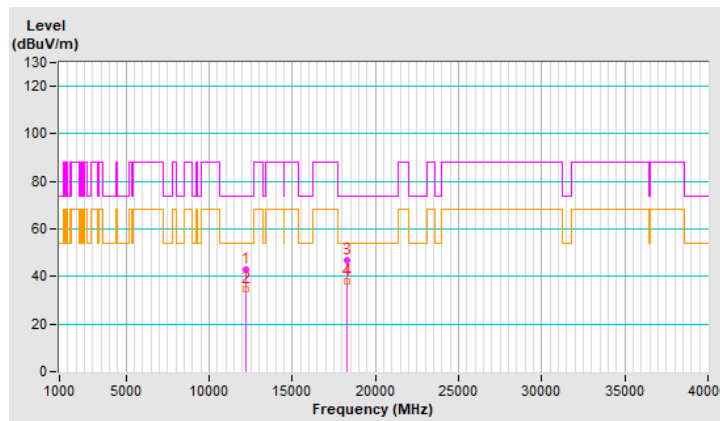


<b>RF Mode</b>	802.11be (EHT) 2x996+484-tone MRU	<b>Channel</b>	CH 31 : 6105 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12210.00	45.0 PK	74.0	-29.0	1.95 V	303	34.6	10.4
2	12210.00	34.9 AV	54.0	-19.1	1.95 V	303	24.5	10.4
3	18315.00	48.2 PK	74.0	-25.8	1.43 V	196	55.3	-7.1
4	18315.00	37.0 AV	54.0	-17.0	1.43 V	196	44.1	-7.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

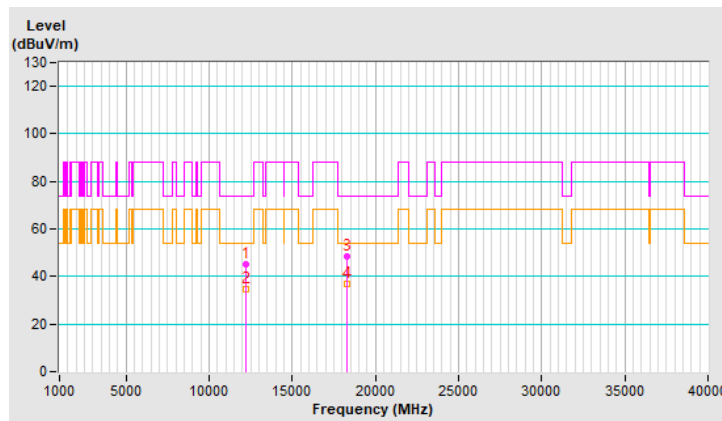


<b>RF Mode</b>	802.11be (EHT) 2x996+484-tone MRU	<b>Channel</b>	CH 63 : 6265 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	43.7 PK	74.0	-30.3	1.64 H	269	33.8	9.9
2	12530.00	35.8 AV	54.0	-18.2	1.64 H	269	25.9	9.9
3	18795.00	47.1 PK	74.0	-26.9	2.03 H	195	54.0	-6.9
4	18795.00	38.6 AV	54.0	-15.4	2.03 H	195	45.5	-6.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

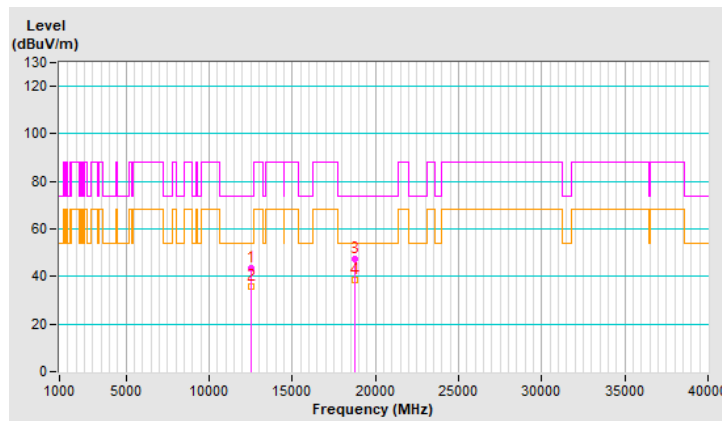


<b>RF Mode</b>	802.11be (EHT) 2x996+484-tone MRU	<b>Channel</b>	CH 63 : 6265 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	45.4 PK	74.0	-28.6	1.98 V	314	35.5	9.9
2	12530.00	34.7 AV	54.0	-19.3	1.98 V	314	24.8	9.9
3	18795.00	47.9 PK	74.0	-26.1	1.47 V	187	54.8	-6.9
4	18795.00	37.0 AV	54.0	-17.0	1.47 V	187	43.9	-6.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

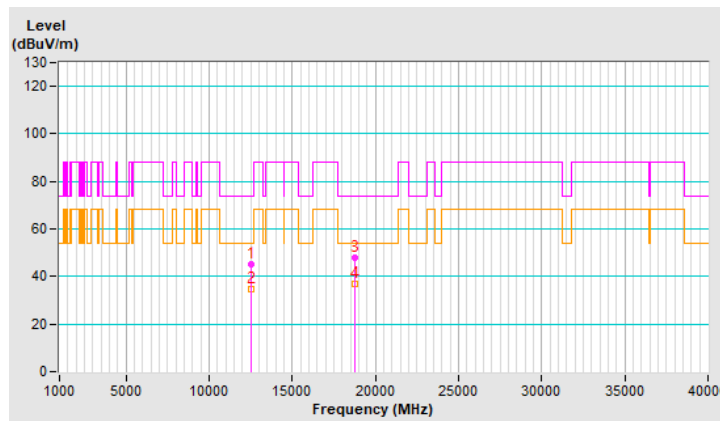


<b>RF Mode</b>	802.11be (EHT) 2x996+484-tone MRU	<b>Channel</b>	CH 127 : 6585 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13170.00	43.4 PK	88.2	-44.8	1.62 H	296	32.1	11.3
2	#13170.00	35.6 AV	68.2	-32.6	1.62 H	296	24.3	11.3
3	19755.00	47.5 PK	74.0	-26.5	1.88 H	182	53.6	-6.1
4	<b>19755.00</b>	<b>39.1 AV</b>	<b>54.0</b>	<b>-14.9</b>	<b>1.88 H</b>	<b>182</b>	<b>45.2</b>	<b>-6.1</b>

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

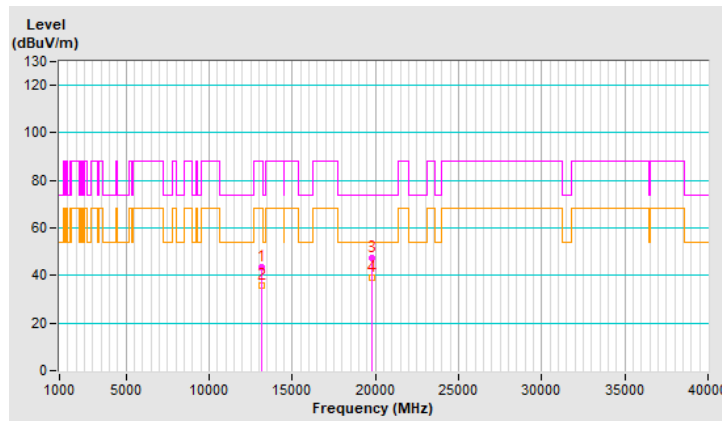


<b>RF Mode</b>	802.11be (EHT) 2x996+484-tone MRU	<b>Channel</b>	CH 127 : 6585 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13170.00	45.3 PK	88.2	-42.9	1.92 V	315	34.0	11.3
2	#13170.00	35.1 AV	68.2	-33.1	1.92 V	315	23.8	11.3
3	19755.00	48.3 PK	74.0	-25.7	1.41 V	177	54.4	-6.1
4	19755.00	37.1 AV	54.0	-16.9	1.41 V	177	43.2	-6.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

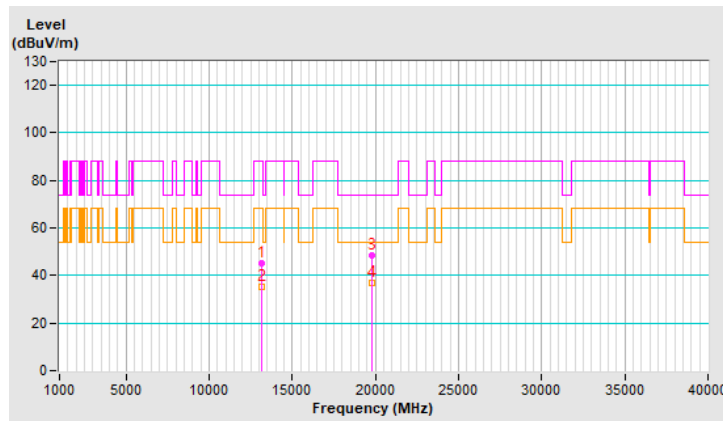


<b>RF Mode</b>	802.11be (EHT) 2x996+484-tone MRU	<b>Channel</b>	CH 191 : 6905 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13810.00	44.4 PK	88.2	-43.8	1.54 H	277	31.4	13.0
2	#13810.00	36.2 AV	68.2	-32.0	1.54 H	277	23.2	13.0
3	20715.00	46.8 PK	74.0	-27.2	1.86 H	201	51.5	-4.7
4	20715.00	38.2 AV	54.0	-15.8	1.86 H	201	42.9	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

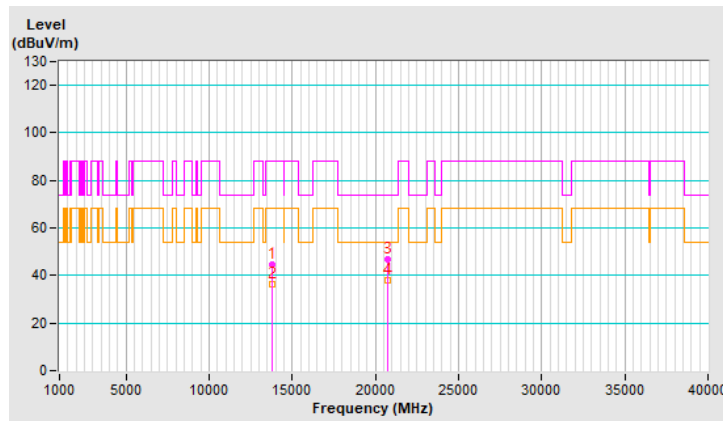




<b>RF Mode</b>	802.11be (EHT) 2x996+484-tone MRU	<b>Channel</b>	CH 191 : 6905 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13810.00	45.8 PK	88.2	-42.4	1.87 V	315	32.8	13.0
2	#13810.00	35.3 AV	68.2	-32.9	1.87 V	315	22.3	13.0
3	20715.00	48.0 PK	74.0	-26.0	1.41 V	192	52.7	-4.7
4	20715.00	37.3 AV	54.0	-16.7	1.41 V	192	42.0	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

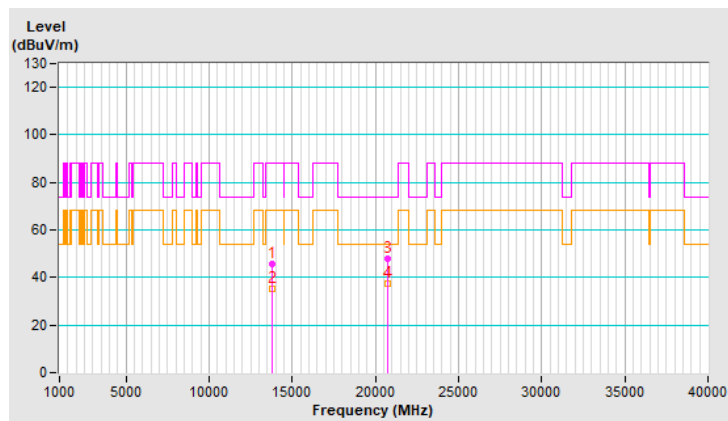


<b>RF Mode</b>	802.11be (EHT) 3x996-tone MRU	<b>Channel</b>	CH 31 : 6105 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12210.00	43.5 PK	74.0	-30.5	1.54 H	270	33.1	10.4
2	12210.00	35.5 AV	54.0	-18.5	1.54 H	270	25.1	10.4
3	18315.00	47.5 PK	74.0	-26.5	1.82 H	203	54.6	-7.1
4	18315.00	39.0 AV	54.0	-15.0	1.82 H	203	46.1	-7.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

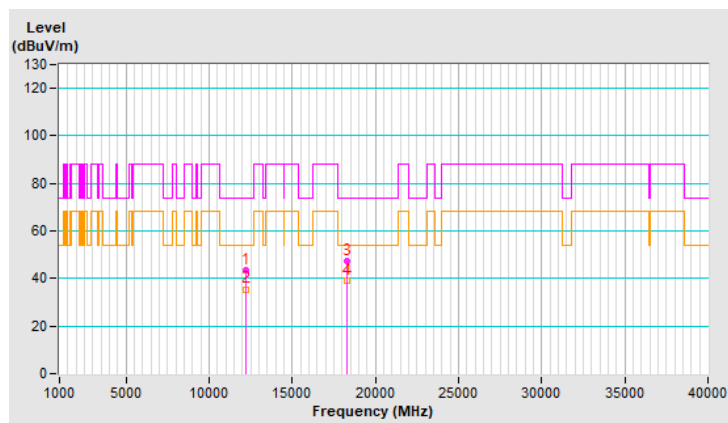


<b>RF Mode</b>	802.11be (EHT) 3x996-tone MRU	<b>Channel</b>	CH 31 : 6105 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12210.00	45.9 PK	74.0	-28.1	1.86 V	311	35.5	10.4
2	12210.00	35.4 AV	54.0	-18.6	1.86 V	311	25.0	10.4
3	18315.00	47.4 PK	74.0	-26.6	1.40 V	178	54.5	-7.1
4	18315.00	36.5 AV	54.0	-17.5	1.40 V	178	43.6	-7.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

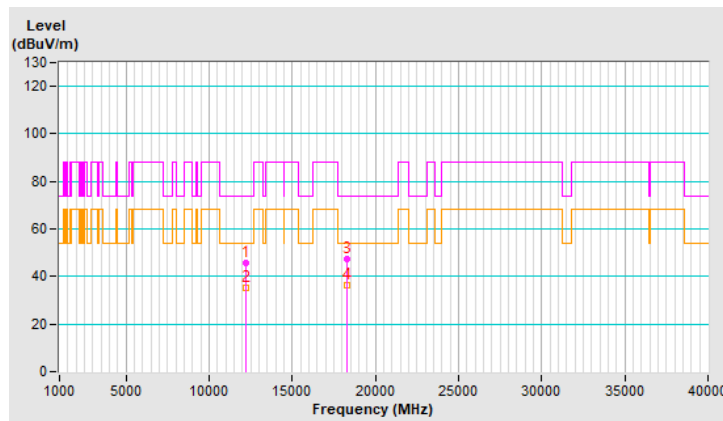


<b>RF Mode</b>	802.11be (EHT) 3x996-tone MRU	<b>Channel</b>	CH 63 : 6265 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	43.3 PK	74.0	-30.7	1.63 H	301	33.4	9.9
2	12530.00	35.5 AV	54.0	-18.5	1.63 H	301	25.6	9.9
3	18795.00	47.1 PK	74.0	-26.9	1.86 H	189	54.0	-6.9
4	18795.00	38.8 AV	54.0	-15.2	1.86 H	189	45.7	-6.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

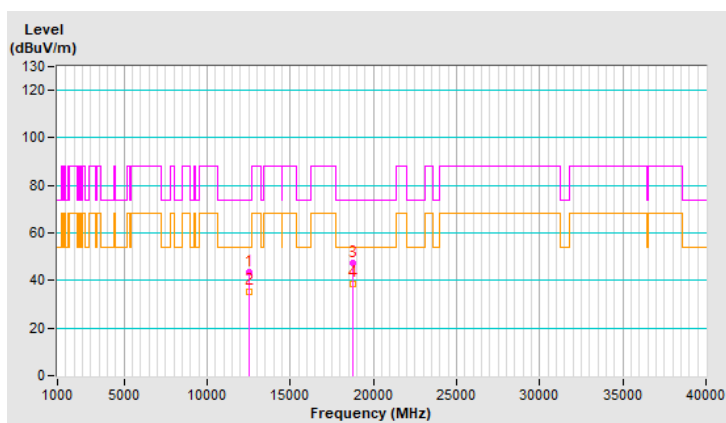


<b>RF Mode</b>	802.11be (EHT) 3x996-tone MRU	<b>Channel</b>	CH 63 : 6265 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	45.4 PK	74.0	-28.6	1.97 V	315	35.5	9.9
2	12530.00	34.7 AV	54.0	-19.3	1.97 V	315	24.8	9.9
3	18795.00	48.3 PK	74.0	-25.7	1.36 V	183	55.2	-6.9
4	18795.00	37.2 AV	54.0	-16.8	1.36 V	183	44.1	-6.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

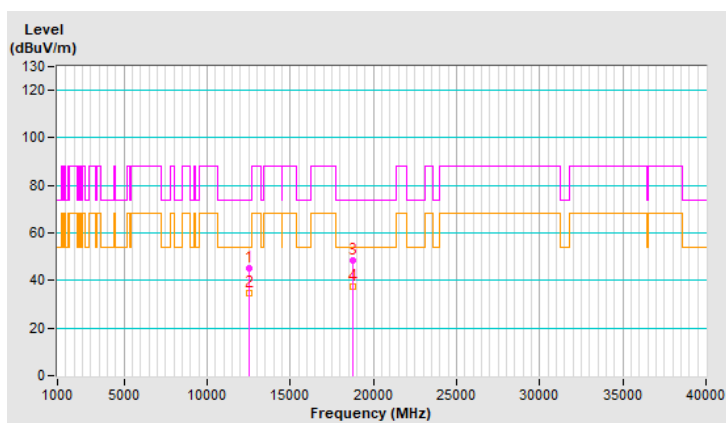


<b>RF Mode</b>	802.11be (EHT) 3x996-tone MRU	<b>Channel</b>	CH 127 : 6585 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13170.00	44.7 PK	88.2	-43.5	1.53 H	293	33.4	11.3
2	#13170.00	36.5 AV	68.2	-31.7	1.53 H	293	25.2	11.3
3	19755.00	46.9 PK	74.0	-27.1	1.85 H	202	53.0	-6.1
4	19755.00	38.1 AV	54.0	-15.9	1.85 H	202	44.2	-6.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

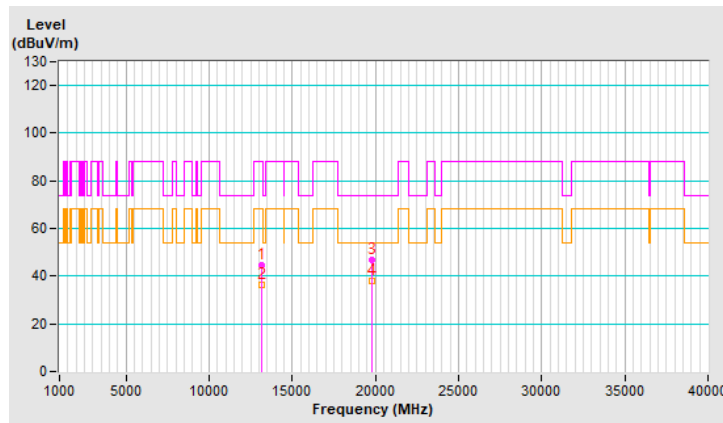


<b>RF Mode</b>	802.11be (EHT) 3x996-tone MRU	<b>Channel</b>	CH 127 : 6585 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13170.00	45.4 PK	88.2	-42.8	1.95 V	320	34.1	11.3
2	#13170.00	35.2 AV	68.2	-33.0	1.95 V	320	23.9	11.3
3	19755.00	47.9 PK	74.0	-26.1	1.41 V	187	54.0	-6.1
4	19755.00	36.8 AV	54.0	-17.2	1.41 V	187	42.9	-6.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

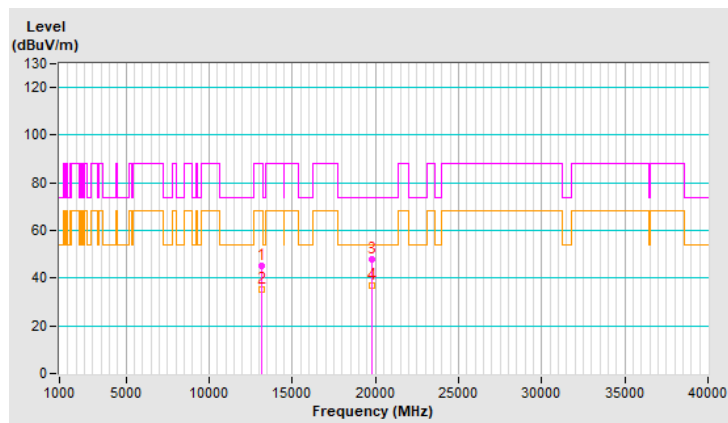


<b>RF Mode</b>	802.11be (EHT) 3x996-tone MRU	<b>Channel</b>	CH 191 : 6905 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13810.00	44.3 PK	88.2	-43.9	1.66 H	294	31.3	13.0
2	#13810.00	36.0 AV	68.2	-32.2	1.66 H	294	23.0	13.0
3	20715.00	46.3 PK	74.0	-27.7	1.83 H	192	51.0	-4.7
4	20715.00	37.7 AV	54.0	-16.3	1.83 H	192	42.4	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

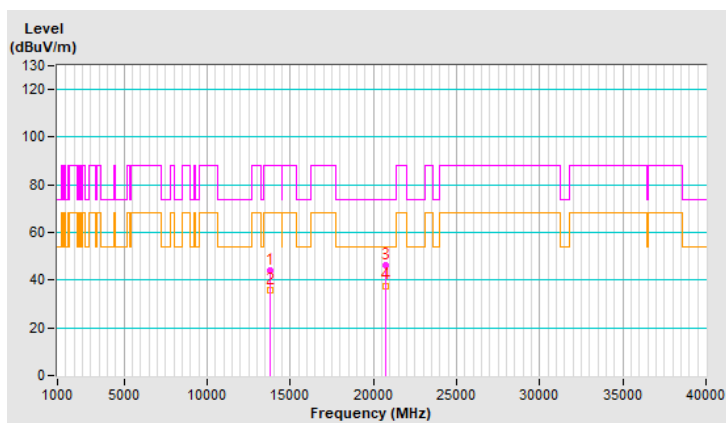




<b>RF Mode</b>	802.11be (EHT) 3x996-tone MRU	<b>Channel</b>	CH 191 : 6905 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13810.00	45.0 PK	88.2	-43.2	1.89 V	301	32.0	13.0
2	#13810.00	34.5 AV	68.2	-33.7	1.89 V	301	21.5	13.0
3	20715.00	47.6 PK	74.0	-26.4	1.43 V	169	52.3	-4.7
4	20715.00	36.4 AV	54.0	-17.6	1.43 V	169	41.1	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

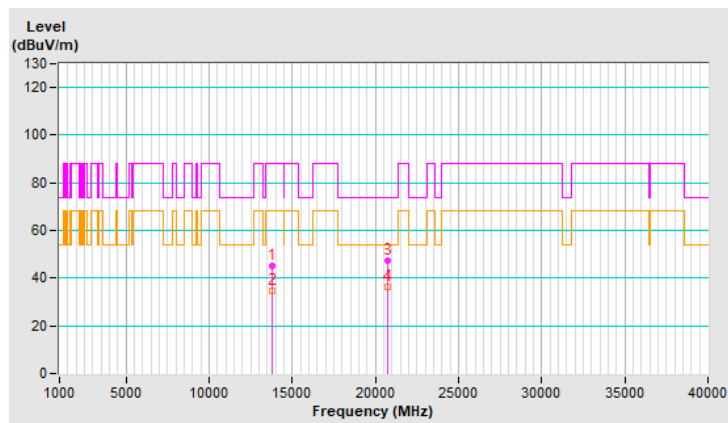


<b>RF Mode</b>	802.11be (EHT) 3x996+484-tone MRU	<b>Channel</b>	CH 31 : 6105 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12210.00	43.8 PK	74.0	-30.2	1.69 H	256	33.4	10.4
2	12210.00	35.9 AV	54.0	-18.1	1.69 H	256	25.5	10.4
3	18315.00	46.9 PK	74.0	-27.1	1.98 H	205	54.0	-7.1
4	18315.00	38.2 AV	54.0	-15.8	1.98 H	205	45.3	-7.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

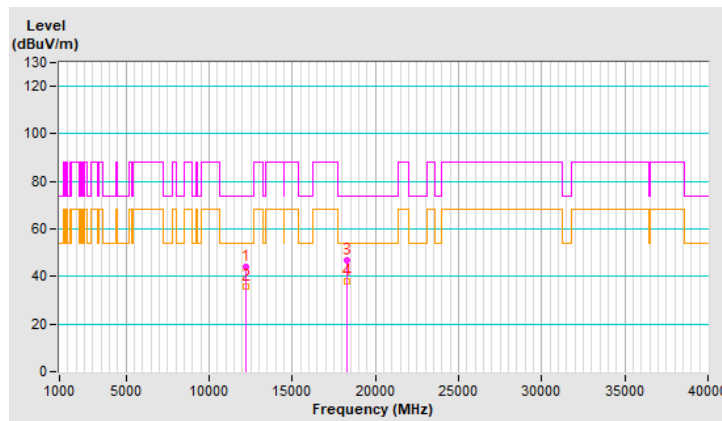


<b>RF Mode</b>	802.11be (EHT) 3x996+484-tone MRU	<b>Channel</b>	CH 31 : 6105 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12210.00	45.0 PK	74.0	-29.0	1.93 V	296	34.6	10.4
2	12210.00	34.5 AV	54.0	-19.5	1.93 V	296	24.1	10.4
3	18315.00	47.1 PK	74.0	-26.9	1.49 V	177	54.2	-7.1
4	18315.00	36.4 AV	54.0	-17.6	1.49 V	177	43.5	-7.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

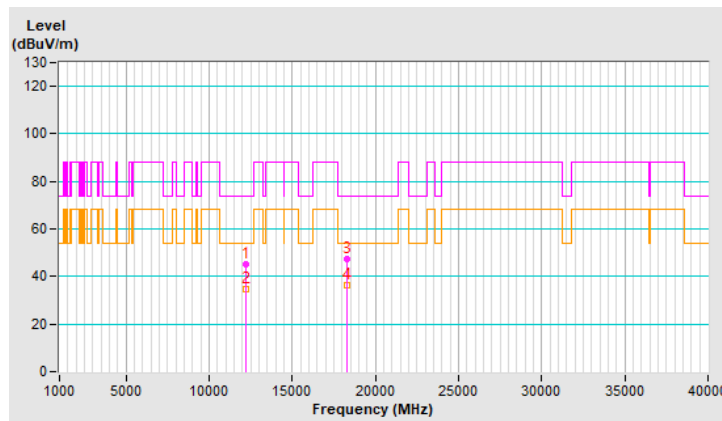


<b>RF Mode</b>	802.11be (EHT) 3x996+484-tone MRU	<b>Channel</b>	CH 63 : 6265 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	44.8 PK	74.0	-29.2	1.54 H	293	34.9	9.9
2	12530.00	36.6 AV	54.0	-17.4	1.54 H	293	26.7	9.9
3	18795.00	46.8 PK	74.0	-27.2	1.83 H	212	53.7	-6.9
4	18795.00	38.4 AV	54.0	-15.6	1.83 H	212	45.3	-6.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

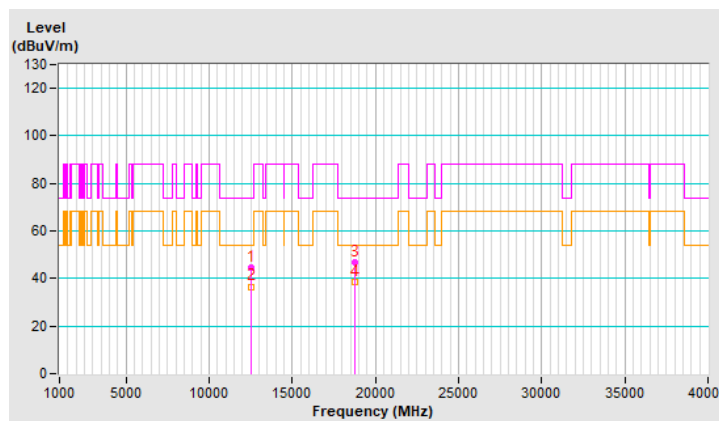


<b>RF Mode</b>	802.11be (EHT) 3x996+484-tone MRU	<b>Channel</b>	CH 63 : 6265 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	45.6 PK	74.0	-28.4	1.89 V	287	35.7	9.9
2	12530.00	35.1 AV	54.0	-18.9	1.89 V	287	25.2	9.9
3	18795.00	47.8 PK	74.0	-26.2	1.37 V	164	54.7	-6.9
4	18795.00	36.6 AV	54.0	-17.4	1.37 V	164	43.5	-6.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

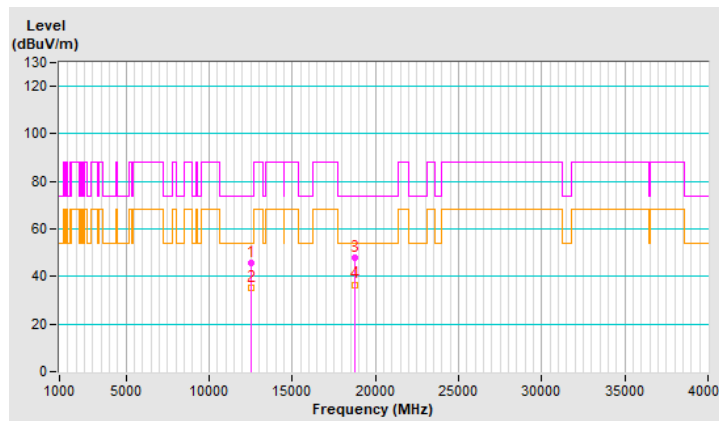


<b>RF Mode</b>	802.11be (EHT) 3x996+484-tone MRU	<b>Channel</b>	CH 127 : 6585 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13170.00	43.7 PK	88.2	-44.5	1.57 H	307	32.4	11.3
2	#13170.00	35.7 AV	68.2	-32.5	1.57 H	307	24.4	11.3
3	19755.00	46.5 PK	74.0	-27.5	1.81 H	199	52.6	-6.1
4	19755.00	38.1 AV	54.0	-15.9	1.81 H	199	44.2	-6.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

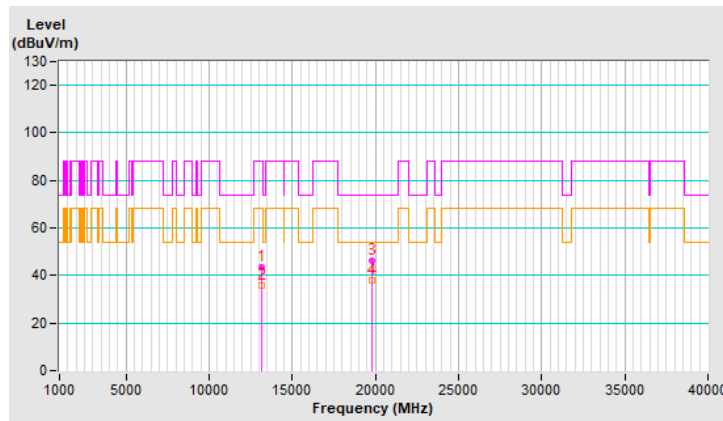


<b>RF Mode</b>	802.11be (EHT) 3x996+484-tone MRU	<b>Channel</b>	CH 127 : 6585 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13170.00	45.5 PK	88.2	-42.7	2.02 V	309	34.2	11.3
2	#13170.00	35.0 AV	68.2	-33.2	2.02 V	309	23.7	11.3
3	19755.00	47.8 PK	74.0	-26.2	1.41 V	174	53.9	-6.1
4	19755.00	37.1 AV	54.0	-16.9	1.41 V	174	43.2	-6.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

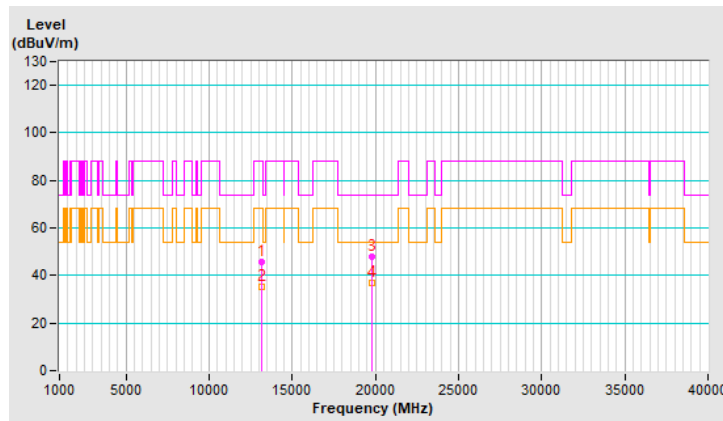


<b>RF Mode</b>	802.11be (EHT) 3x996+484-tone MRU	<b>Channel</b>	CH 191 : 6905 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13810.00	44.4 PK	88.2	-43.8	1.64 H	269	31.4	13.0
2	#13810.00	36.0 AV	68.2	-32.2	1.64 H	269	23.0	13.0
3	20715.00	47.0 PK	74.0	-27.0	2.07 H	203	51.7	-4.7
4	20715.00	38.2 AV	54.0	-15.8	2.07 H	203	42.9	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

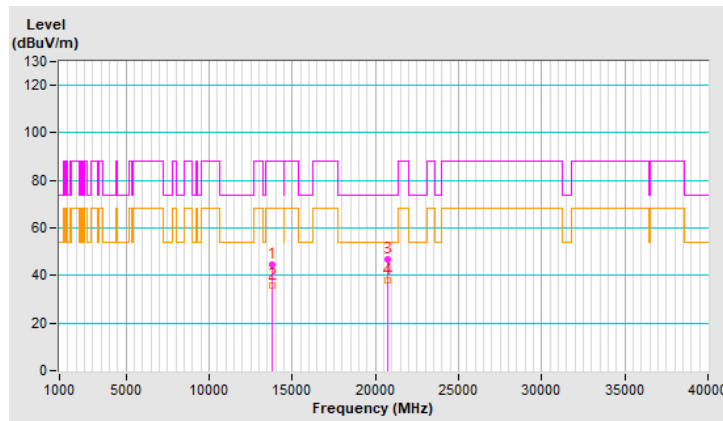




<b>RF Mode</b>	802.11be (EHT) 3x996+484-tone MRU	<b>Channel</b>	CH 191 : 6905 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13810.00	45.2 PK	88.2	-43.0	2.02 V	328	32.2	13.0
2	#13810.00	34.9 AV	68.2	-33.3	2.02 V	328	21.9	13.0
3	20715.00	48.1 PK	74.0	-25.9	1.30 V	188	52.8	-4.7
4	20715.00	37.1 AV	54.0	-16.9	1.30 V	188	41.8	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

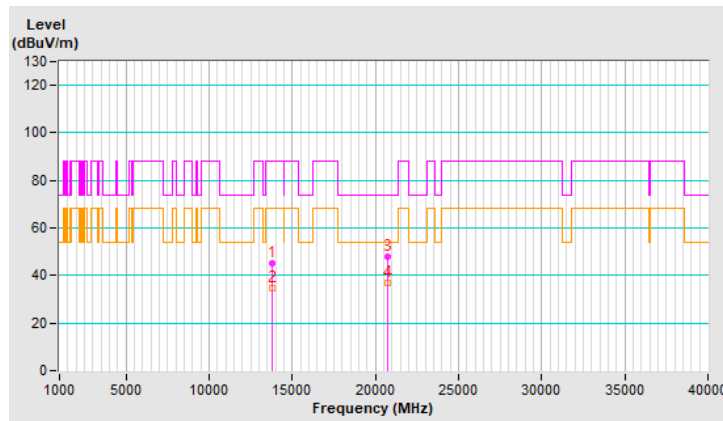

2T2S with 50 ohm


<b>RF Mode</b>	802.11be (EHT) 26-tone RU	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	44.1 PK	74.0	-29.9	1.77 H	291	33.2	10.9
2	11910.00	35.8 AV	54.0	-18.2	1.77 H	291	24.9	10.9
3	17865.00	46.6 PK	74.0	-27.4	1.83 H	155	25.0	21.6
4	17865.00	37.9 AV	54.0	-16.1	1.83 H	155	16.3	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

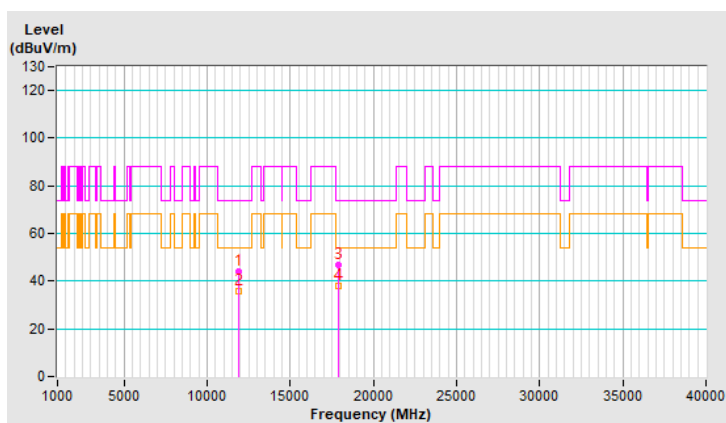


<b>RF Mode</b>	802.11be (EHT) 26-tone RU	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	45.4 PK	74.0	-28.6	1.90 V	276	34.5	10.9
2	11910.00	35.1 AV	54.0	-18.9	1.90 V	276	24.2	10.9
3	17865.00	47.3 PK	74.0	-26.7	1.65 V	159	25.7	21.6
4	17865.00	36.9 AV	54.0	-17.1	1.65 V	159	15.3	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

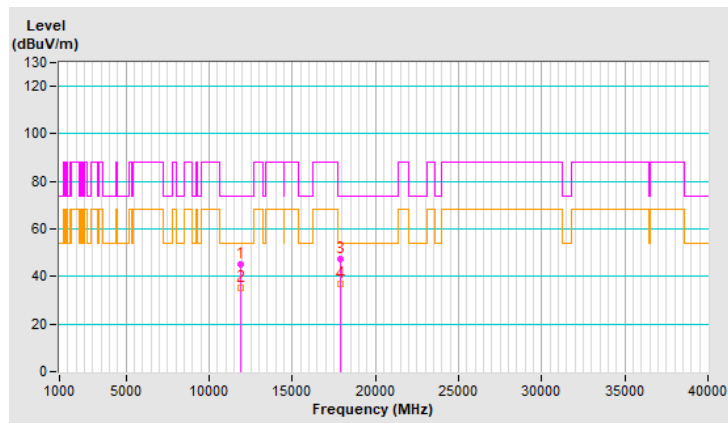


<b>RF Mode</b>	802.11be (EHT) 26-tone RU	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12830.00	44.0 PK	88.2	-44.2	1.80 H	273	33.5	10.5
2	#12830.00	35.8 AV	68.2	-32.4	1.80 H	273	25.3	10.5
3	19245.00	46.7 PK	74.0	-27.3	1.97 H	143	53.2	-6.5
4	19245.00	38.2 AV	54.0	-15.8	1.97 H	143	44.7	-6.5

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

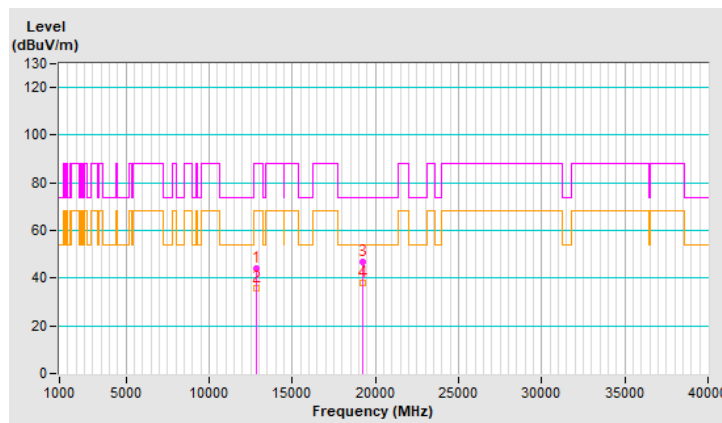


<b>RF Mode</b>	802.11be (EHT) 26-tone RU	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	45.9 PK	88.2	-42.3	1.97 V	261	35.4	10.5
2	#12830.00	35.3 AV	68.2	-32.9	1.97 V	261	24.8	10.5
3	19245.00	47.2 PK	74.0	-26.8	1.64 V	197	53.7	-6.5
4	19245.00	36.9 AV	54.0	-17.1	1.64 V	197	43.4	-6.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

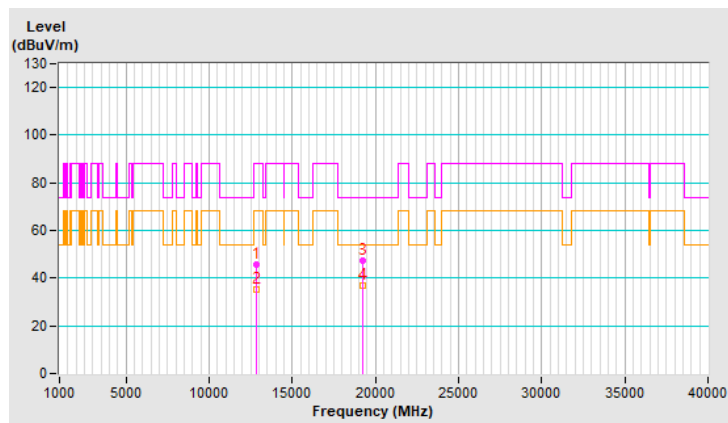


<b>RF Mode</b>	802.11be (EHT) 26-tone RU	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12870.00	44.3 PK	88.2	-43.9	1.68 H	295	33.8	10.5
2	#12870.00	35.7 AV	68.2	-32.5	1.68 H	295	25.2	10.5
3	19305.00	46.3 PK	74.0	-27.7	2.00 H	160	53.1	-6.8
4	19305.00	37.5 AV	54.0	-16.5	2.00 H	160	44.3	-6.8

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

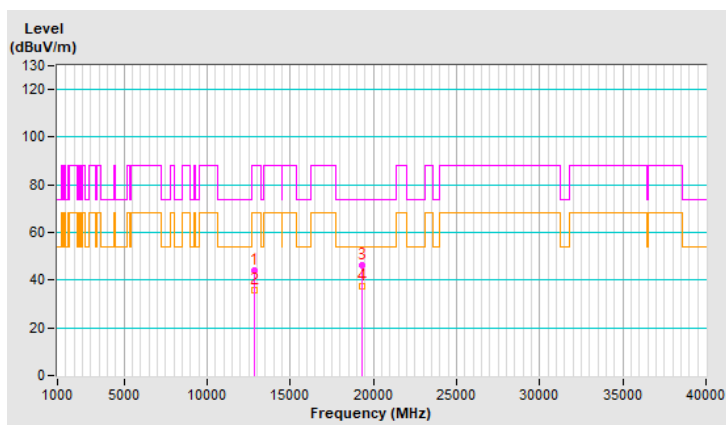


<b>RF Mode</b>	802.11be (EHT) 26-tone RU	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	45.7 PK	88.2	-42.5	1.89 V	282	35.2	10.5
2	#12870.00	35.4 AV	68.2	-32.8	1.89 V	282	24.9	10.5
3	19305.00	47.8 PK	74.0	-26.2	1.72 V	187	54.6	-6.8
4	19305.00	37.3 AV	54.0	-16.7	1.72 V	187	44.1	-6.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

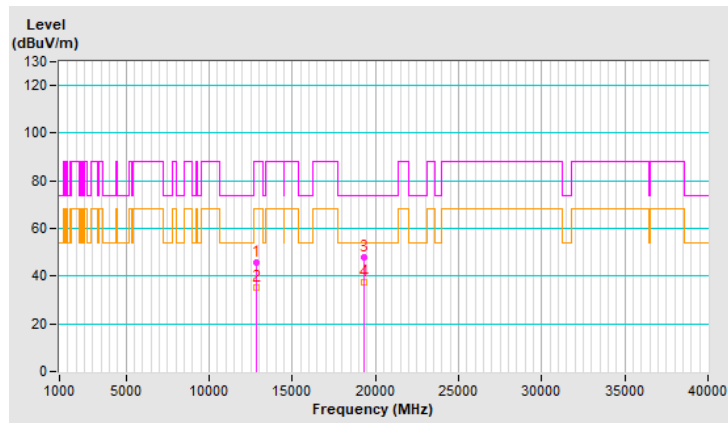


<b>RF Mode</b>	802.11be (EHT) 26-tone RU	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.8 PK	88.2	-43.4	1.66 H	251	34.0	10.8
2	#13070.00	36.1 AV	68.2	-32.1	1.66 H	251	25.3	10.8
3	19605.00	46.5 PK	74.0	-27.5	1.85 H	162	52.5	-6.0
4	19605.00	37.6 AV	54.0	-16.4	1.85 H	162	43.6	-6.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

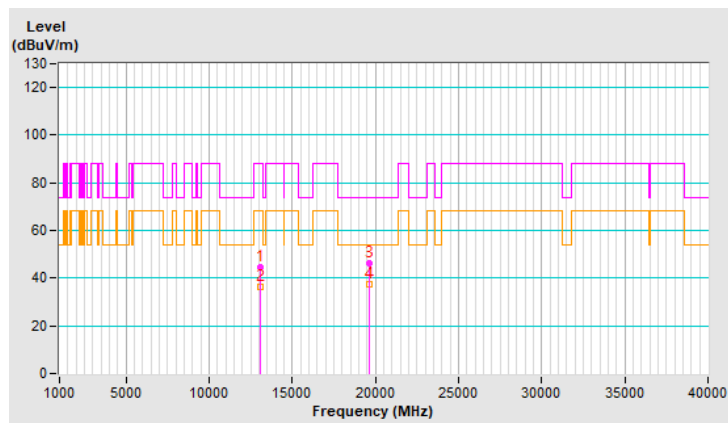




<b>RF Mode</b>	802.11be (EHT) 26-tone RU	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	45.4 PK	88.2	-42.8	1.95 V	282	34.6	10.8
2	#13070.00	34.9 AV	68.2	-33.3	1.95 V	282	24.1	10.8
3	19605.00	46.9 PK	74.0	-27.1	1.60 V	167	52.9	-6.0
4	19605.00	36.6 AV	54.0	-17.4	1.60 V	167	42.6	-6.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

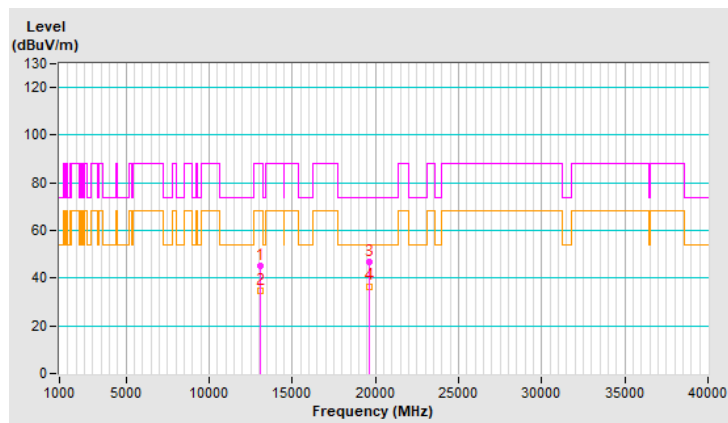


<b>RF Mode</b>	802.11be (EHT) 26-tone RU	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	44.1 PK	88.2	-44.1	1.73 H	257	31.3	12.8
2	#13710.00	35.7 AV	68.2	-32.5	1.73 H	257	22.9	12.8
3	20565.00	46.7 PK	74.0	-27.3	1.86 H	167	51.4	-4.7
4	20565.00	38.1 AV	54.0	-15.9	1.86 H	167	42.8	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

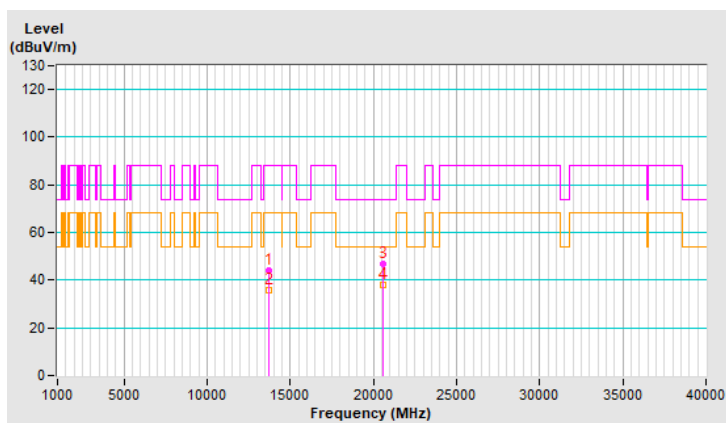


<b>RF Mode</b>	802.11be (EHT) 26-tone RU	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	45.2 PK	88.2	-43.0	1.91 V	274	32.4	12.8
2	#13710.00	35.1 AV	68.2	-33.1	1.91 V	274	22.3	12.8
3	20565.00	46.7 PK	74.0	-27.3	1.50 V	173	51.4	-4.7
4	20565.00	36.5 AV	54.0	-17.5	1.50 V	173	41.2	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

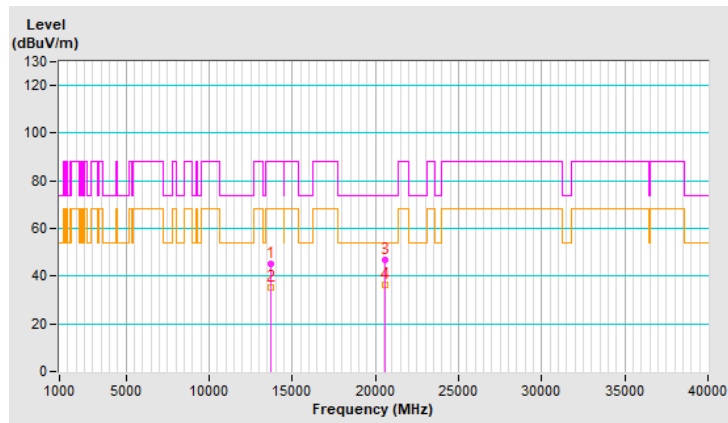


<b>RF Mode</b>	802.11be (EHT) 26-tone RU	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	43.6 PK	88.2	-44.6	1.68 H	273	30.1	13.5
2	#14230.00	35.5 AV	68.2	-32.7	1.68 H	273	22.0	13.5
3	21345.00	46.1 PK	74.0	-27.9	1.96 H	141	49.9	-3.8
4	21345.00	37.4 AV	54.0	-16.6	1.96 H	141	41.2	-3.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

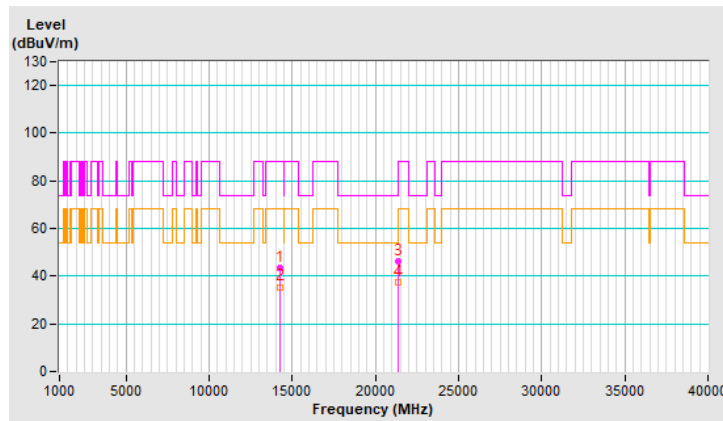


<b>RF Mode</b>	802.11be (EHT) 26-tone RU	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 3 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	45.3 PK	88.2	-42.9	1.84 V	266	31.8	13.5
2	#14230.00	35.2 AV	68.2	-33.0	1.84 V	266	21.7	13.5
3	21345.00	47.8 PK	74.0	-26.2	1.65 V	206	51.6	-3.8
4	21345.00	37.2 AV	54.0	-16.8	1.65 V	206	41.0	-3.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

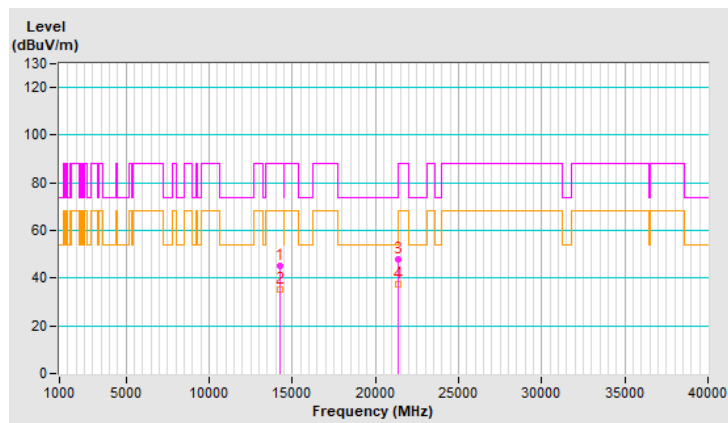


<b>RF Mode</b>	802.11be (EHT) 52-tone RU	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	44.0 PK	74.0	-30.0	1.70 H	279	33.1	10.9
2	11910.00	35.6 AV	54.0	-18.4	1.70 H	279	24.7	10.9
3	17865.00	46.7 PK	74.0	-27.3	1.82 H	150	25.1	21.6
4	17865.00	37.9 AV	54.0	-16.1	1.82 H	150	16.3	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

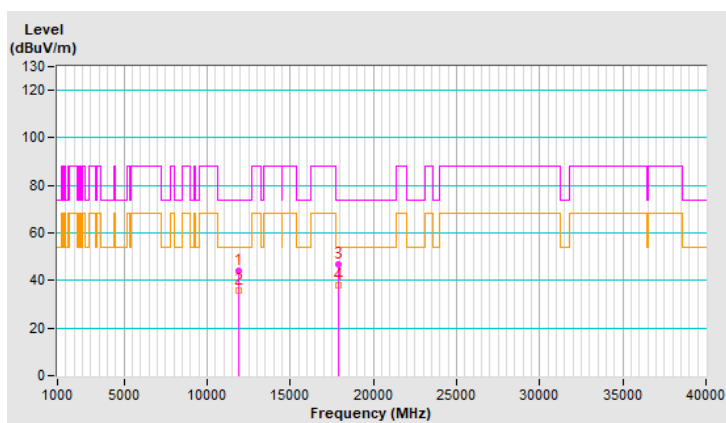


<b>RF Mode</b>	802.11be (EHT) 52-tone RU	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	45.7 PK	74.0	-28.3	1.82 V	249	34.8	10.9
2	11910.00	35.3 AV	54.0	-18.7	1.82 V	249	24.4	10.9
3	17865.00	47.0 PK	74.0	-27.0	1.63 V	196	25.4	21.6
4	17865.00	36.5 AV	54.0	-17.5	1.63 V	196	14.9	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

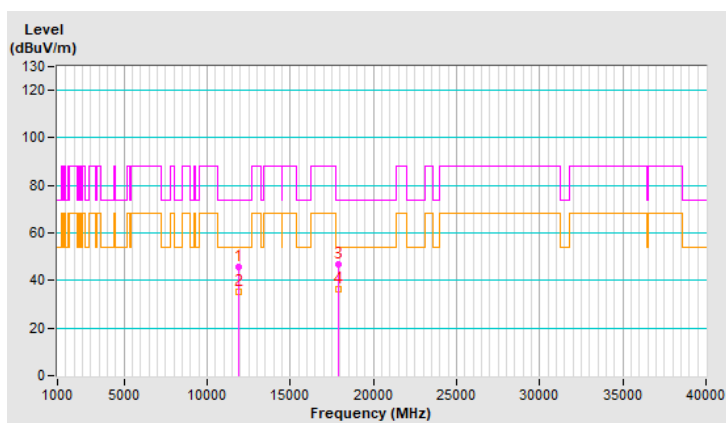


<b>RF Mode</b>	802.11be (EHT) 52-tone RU	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	44.2 PK	88.2	-44.0	1.58 H	265	33.7	10.5
2	#12830.00	35.7 AV	68.2	-32.5	1.58 H	265	25.2	10.5
3	19245.00	46.8 PK	74.0	-27.2	1.88 H	176	53.3	-6.5
4	19245.00	38.1 AV	54.0	-15.9	1.88 H	176	44.6	-6.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

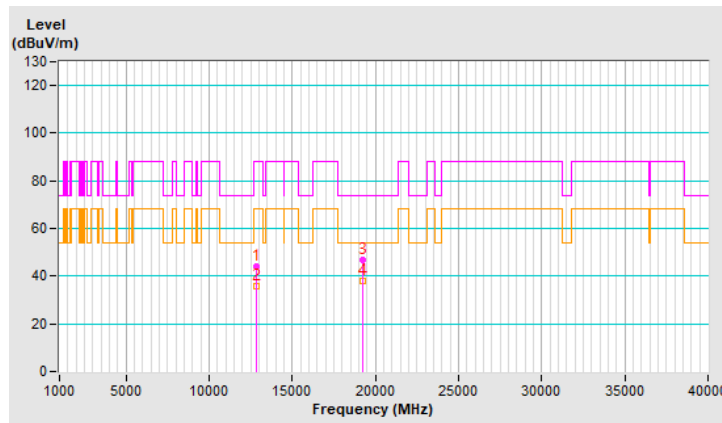




<b>RF Mode</b>	802.11be (EHT) 52-tone RU	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	45.6 PK	88.2	-42.6	1.95 V	295	35.1	10.5
2	#12830.00	35.5 AV	68.2	-32.7	1.95 V	295	25.0	10.5
3	19245.00	47.3 PK	74.0	-26.7	1.70 V	181	53.8	-6.5
4	19245.00	37.2 AV	54.0	-16.8	1.70 V	181	43.7	-6.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

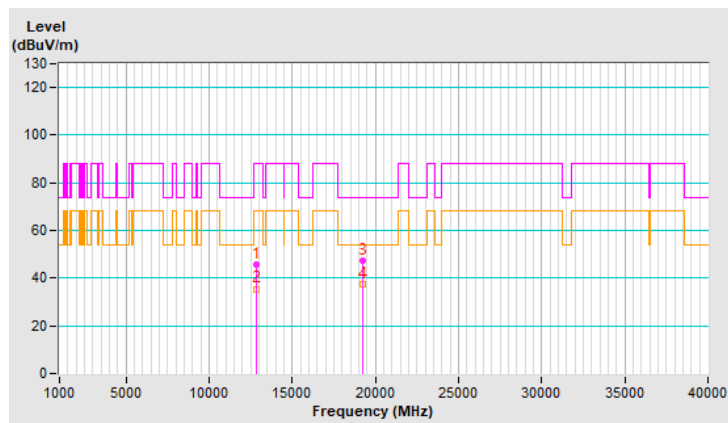


<b>RF Mode</b>	802.11be (EHT) 52-tone RU	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	44.7 PK	88.2	-43.5	1.64 H	245	34.2	10.5
2	#12870.00	36.1 AV	68.2	-32.1	1.64 H	245	25.6	10.5
3	19305.00	46.6 PK	74.0	-27.4	1.94 H	185	53.4	-6.8
4	19305.00	37.9 AV	54.0	-16.1	1.94 H	185	44.7	-6.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

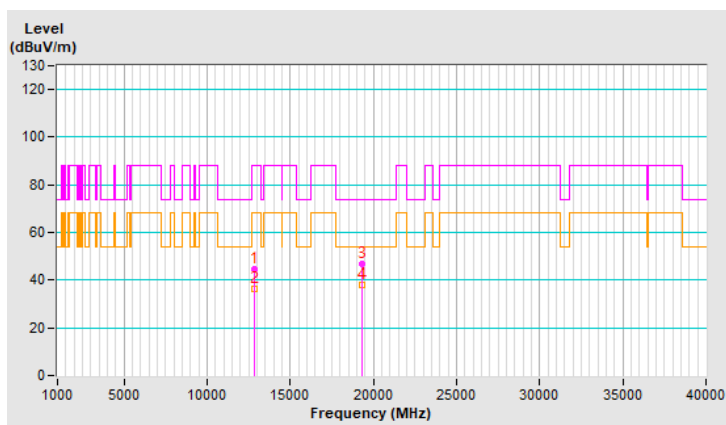


<b>RF Mode</b>	802.11be (EHT) 52-tone RU	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	44.9 PK	88.2	-43.3	1.86 V	236	34.4	10.5
2	#12870.00	34.8 AV	68.2	-33.4	1.86 V	236	24.3	10.5
3	19305.00	47.2 PK	74.0	-26.8	1.65 V	203	54.0	-6.8
4	19305.00	36.7 AV	54.0	-17.3	1.65 V	203	43.5	-6.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

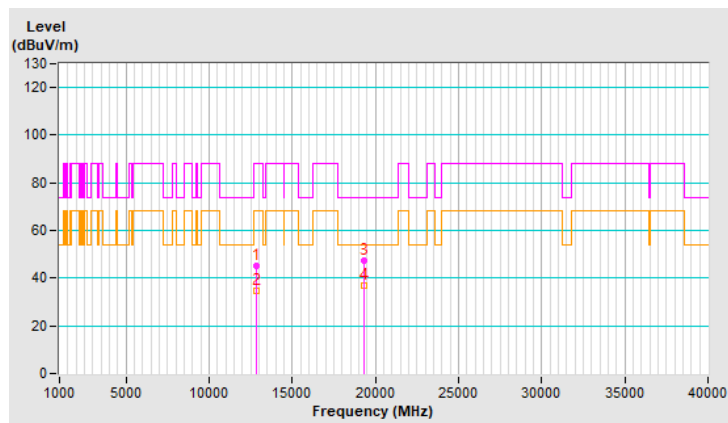


<b>RF Mode</b>	802.11be (EHT) 52-tone RU	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	43.6 PK	88.2	-44.6	1.54 H	289	32.8	10.8
2	#13070.00	35.5 AV	68.2	-32.7	1.54 H	289	24.7	10.8
3	19605.00	46.2 PK	74.0	-27.8	1.91 H	190	52.2	-6.0
4	19605.00	37.7 AV	54.0	-16.3	1.91 H	190	43.7	-6.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

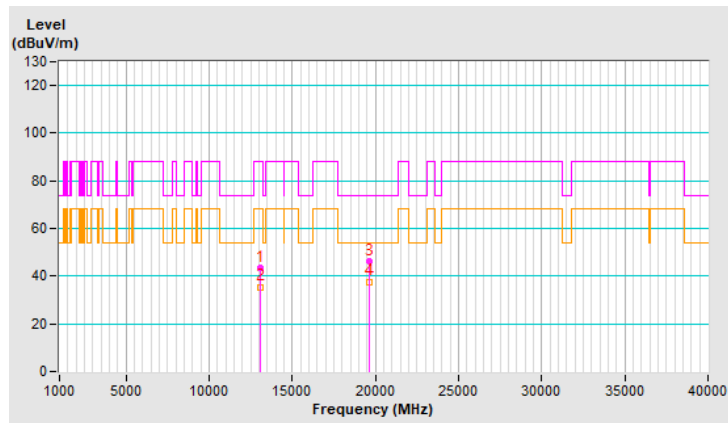


<b>RF Mode</b>	802.11be (EHT) 52-tone RU	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13070.00	45.7 PK	88.2	-42.5	1.84 V	251	34.9	10.8
2	#13070.00	35.4 AV	68.2	-32.8	1.84 V	251	24.6	10.8
3	19605.00	47.2 PK	74.0	-26.8	1.60 V	206	53.2	-6.0
4	19605.00	36.9 AV	54.0	-17.1	1.60 V	206	42.9	-6.0

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

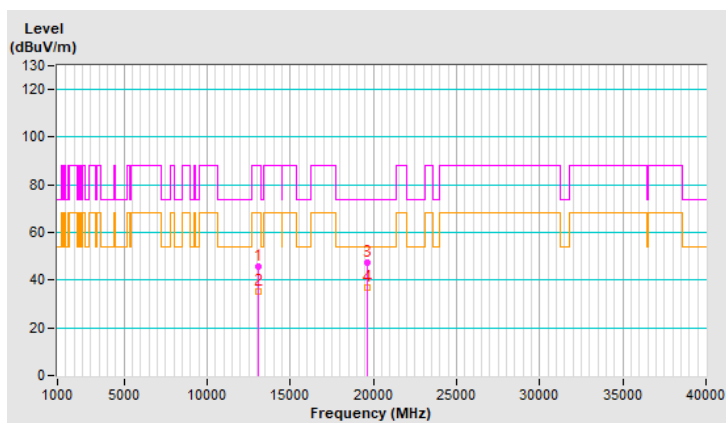


<b>RF Mode</b>	802.11be (EHT) 52-tone RU	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13710.00	44.7 PK	88.2	-43.5	1.56 H	269	31.9	12.8
2	#13710.00	36.2 AV	68.2	-32.0	1.56 H	269	23.4	12.8
3	20565.00	47.0 PK	74.0	-27.0	1.86 H	204	51.7	-4.7
4	20565.00	38.4 AV	54.0	-15.6	1.86 H	204	43.1	-4.7

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

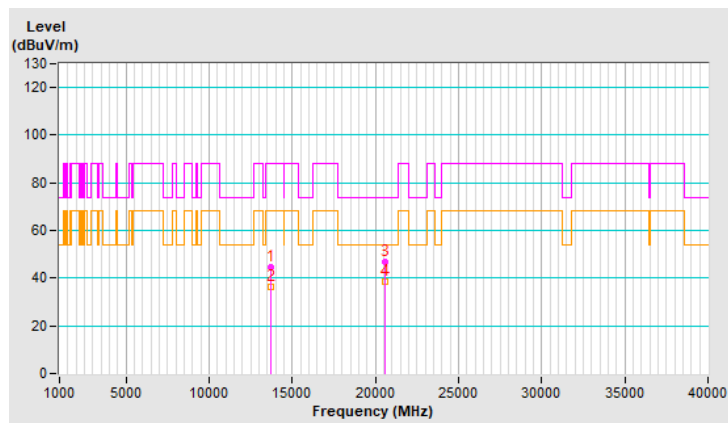


<b>RF Mode</b>	802.11be (EHT) 52-tone RU	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	45.1 PK	88.2	-43.1	1.85 V	276	32.3	12.8
2	#13710.00	34.9 AV	68.2	-33.3	1.85 V	276	22.1	12.8
3	20565.00	47.7 PK	74.0	-26.3	1.54 V	157	52.4	-4.7
4	20565.00	37.1 AV	54.0	-16.9	1.54 V	157	41.8	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

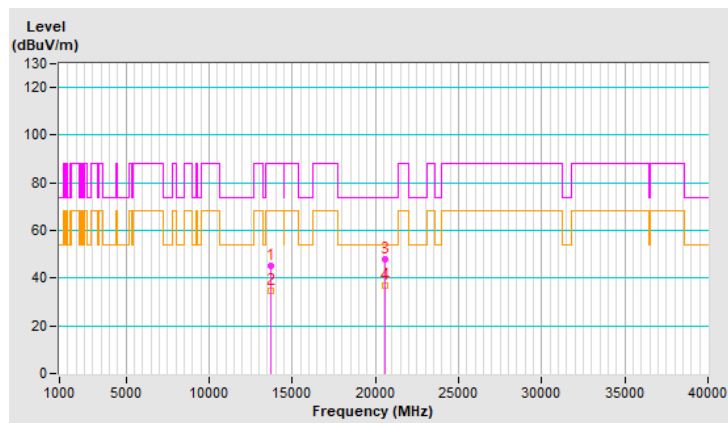


<b>RF Mode</b>	802.11be (EHT) 52-tone RU	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#14230.00	44.1 PK	88.2	-44.1	1.56 H	253	30.6	13.5
2	#14230.00	35.9 AV	68.2	-32.3	1.56 H	253	22.4	13.5
3	21345.00	46.5 PK	74.0	-27.5	1.81 H	183	50.3	-3.8
4	21345.00	37.8 AV	54.0	-16.2	1.81 H	183	41.6	-3.8

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

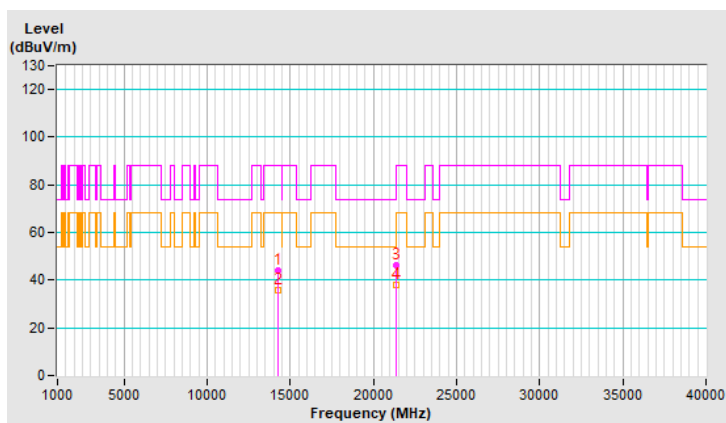




<b>RF Mode</b>	802.11be (EHT) 52-tone RU	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	46.5 PK	88.2	-41.7	1.85 V	283	33.0	13.5
2	#14230.00	35.9 AV	68.2	-32.3	1.85 V	283	22.4	13.5
3	21345.00	47.5 PK	74.0	-26.5	1.70 V	195	51.3	-3.8
4	21345.00	37.1 AV	54.0	-16.9	1.70 V	195	40.9	-3.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

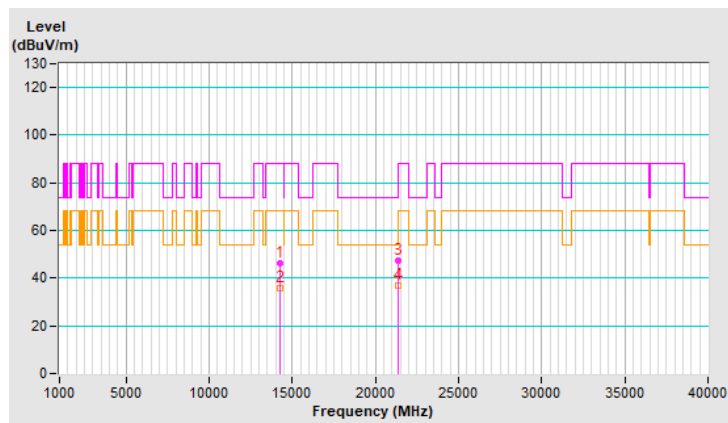


<b>RF Mode</b>	802.11be (EHT) 106-tone RU	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	44.2 PK	74.0	-29.8	1.63 H	250	33.3	10.9
2	11910.00	36.0 AV	54.0	-18.0	1.63 H	250	25.1	10.9
3	17865.00	46.6 PK	74.0	-27.4	2.01 H	174	25.0	21.6
4	17865.00	37.9 AV	54.0	-16.1	2.01 H	174	16.3	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

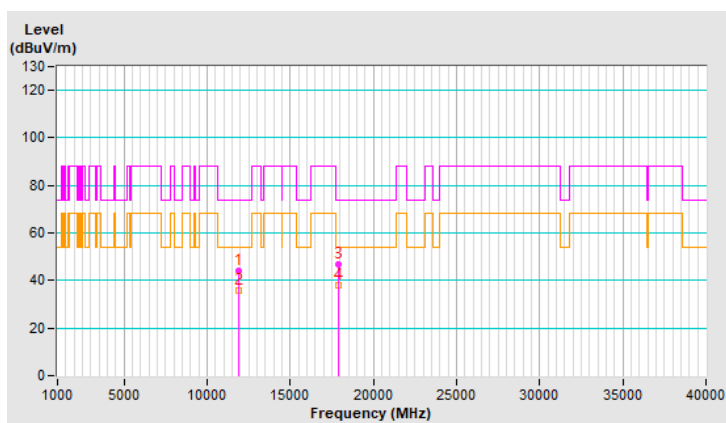


<b>RF Mode</b>	802.11be (EHT) 106-tone RU	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	45.7 PK	74.0	-28.3	1.87 V	245	34.8	10.9
2	11910.00	35.4 AV	54.0	-18.6	1.87 V	245	24.5	10.9
3	17865.00	47.1 PK	74.0	-26.9	1.68 V	219	25.5	21.6
4	17865.00	36.7 AV	54.0	-17.3	1.68 V	219	15.1	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

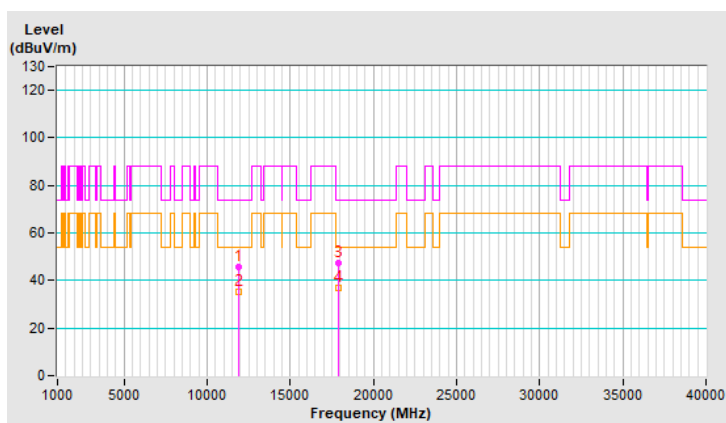


<b>RF Mode</b>	802.11be (EHT) 106-tone RU	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12830.00	43.8 PK	88.2	-44.4	1.52 H	295	33.3	10.5
2	#12830.00	35.2 AV	68.2	-33.0	1.52 H	295	24.7	10.5
3	19245.00	46.7 PK	74.0	-27.3	1.86 H	210	53.2	-6.5
4	19245.00	38.4 AV	54.0	-15.6	1.86 H	210	44.9	-6.5

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

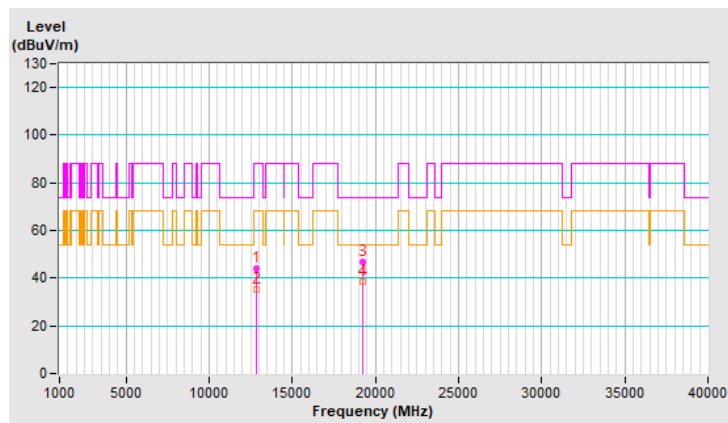


<b>RF Mode</b>	802.11be (EHT) 106-tone RU	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12830.00	45.5 PK	88.2	-42.7	1.81 V	285	35.0	10.5
2	#12830.00	35.3 AV	68.2	-32.9	1.81 V	285	24.8	10.5
3	19245.00	47.5 PK	74.0	-26.5	1.58 V	151	54.0	-6.5
4	19245.00	37.1 AV	54.0	-16.9	1.58 V	151	43.6	-6.5

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

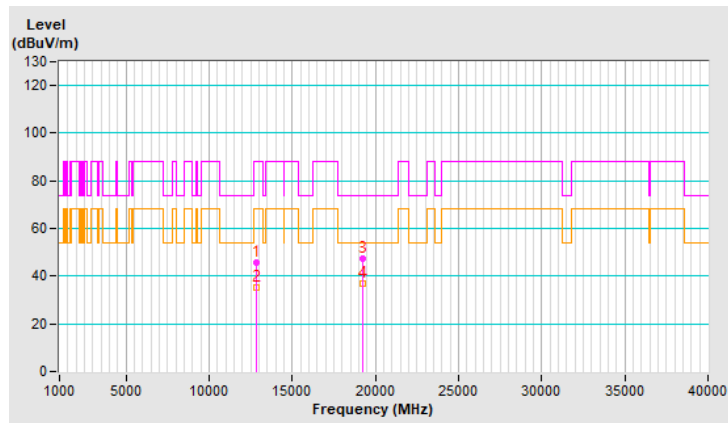


<b>RF Mode</b>	802.11be (EHT) 106-tone RU	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	44.3 PK	88.2	-43.9	1.64 H	282	33.8	10.5
2	#12870.00	36.1 AV	68.2	-32.1	1.64 H	282	25.6	10.5
3	19305.00	46.5 PK	74.0	-27.5	2.11 H	188	53.3	-6.8
4	19305.00	38.1 AV	54.0	-15.9	2.11 H	188	44.9	-6.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

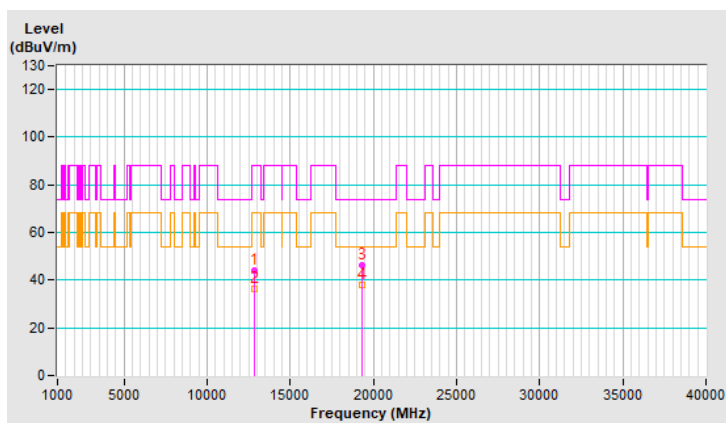


<b>RF Mode</b>	802.11be (EHT) 106-tone RU	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12870.00	45.2 PK	88.2	-43.0	1.91 V	226	34.7	10.5
2	#12870.00	34.9 AV	68.2	-33.3	1.91 V	226	24.4	10.5
3	19305.00	47.1 PK	74.0	-26.9	1.64 V	206	53.9	-6.8
4	19305.00	36.6 AV	54.0	-17.4	1.64 V	206	43.4	-6.8

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

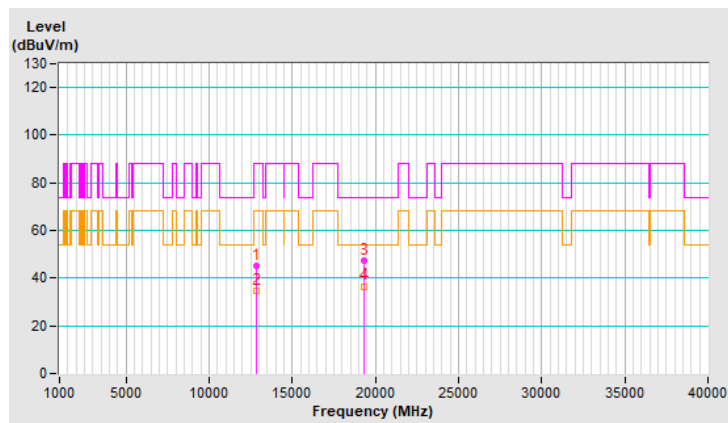


<b>RF Mode</b>	802.11be (EHT) 106-tone RU	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	43.6 PK	88.2	-44.6	1.57 H	272	32.8	10.8
2	#13070.00	35.5 AV	68.2	-32.7	1.57 H	272	24.7	10.8
3	19605.00	46.0 PK	74.0	-28.0	1.83 H	205	52.0	-6.0
4	19605.00	37.6 AV	54.0	-16.4	1.83 H	205	43.6	-6.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

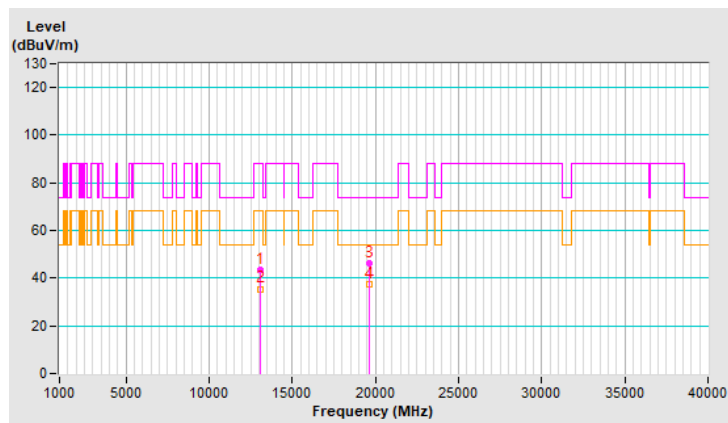




<b>RF Mode</b>	802.11be (EHT) 106-tone RU	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	46.1 PK	88.2	-42.1	1.80 V	273	35.3	10.8
2	#13070.00	35.8 AV	68.2	-32.4	1.80 V	273	25.0	10.8
3	19605.00	47.3 PK	74.0	-26.7	1.53 V	137	53.3	-6.0
4	19605.00	37.0 AV	54.0	-17.0	1.53 V	137	43.0	-6.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

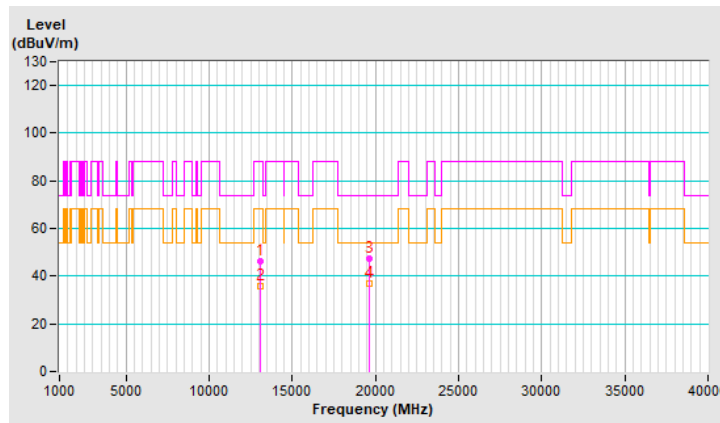


<b>RF Mode</b>	802.11be (EHT) 106-tone RU	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	43.9 PK	88.2	-44.3	1.53 H	265	31.1	12.8
2	#13710.00	35.5 AV	68.2	-32.7	1.53 H	265	22.7	12.8
3	20565.00	46.5 PK	74.0	-27.5	1.90 H	194	51.2	-4.7
4	20565.00	37.5 AV	54.0	-16.5	1.90 H	194	42.2	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

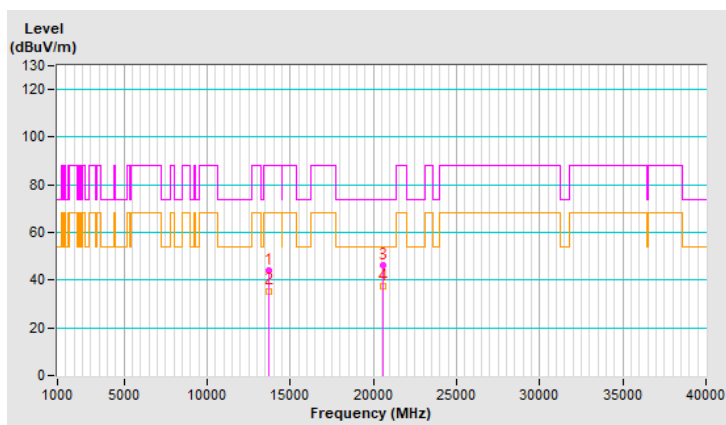


<b>RF Mode</b>	802.11be (EHT) 106-tone RU	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	46.1 PK	88.2	-42.1	1.99 V	272	33.3	12.8
2	#13710.00	35.7 AV	68.2	-32.5	1.99 V	272	22.9	12.8
3	20565.00	47.4 PK	74.0	-26.6	1.68 V	195	52.1	-4.7
4	20565.00	37.1 AV	54.0	-16.9	1.68 V	195	41.8	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

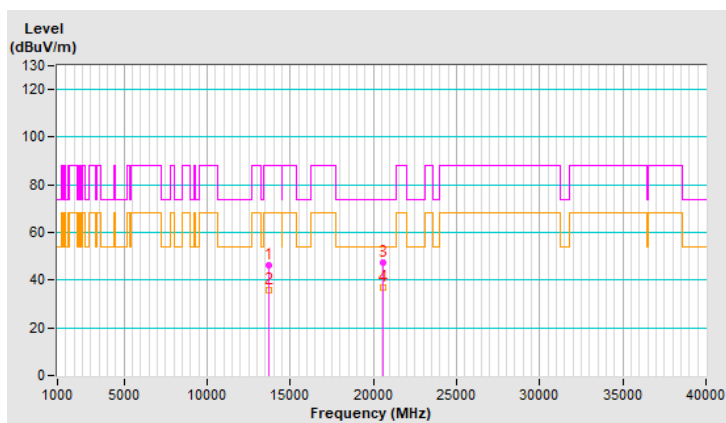


<b>RF Mode</b>	802.11be (EHT) 106-tone RU	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	44.2 PK	88.2	-44.0	1.60 H	266	30.7	13.5
2	#14230.00	36.1 AV	68.2	-32.1	1.60 H	266	22.6	13.5
3	21345.00	46.1 PK	74.0	-27.9	2.02 H	200	49.9	-3.8
4	21345.00	37.5 AV	54.0	-16.5	2.02 H	200	41.3	-3.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

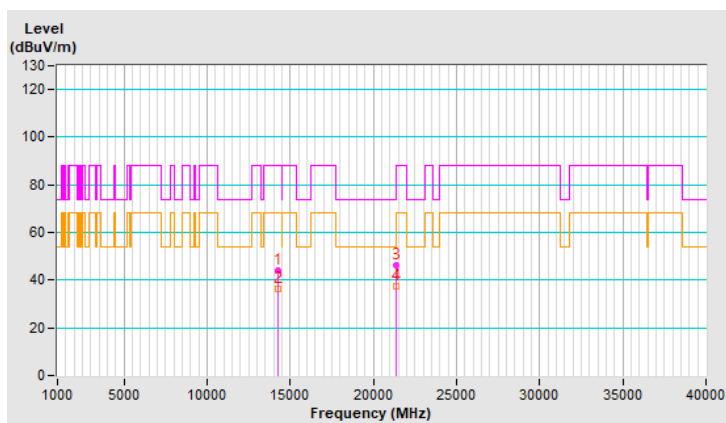


<b>RF Mode</b>	802.11be (EHT) 106-tone RU	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	45.3 PK	88.2	-42.9	1.82 V	238	31.8	13.5
2	#14230.00	35.3 AV	68.2	-32.9	1.82 V	238	21.8	13.5
3	21345.00	47.7 PK	74.0	-26.3	1.62 V	206	51.5	-3.8
4	21345.00	37.1 AV	54.0	-16.9	1.62 V	206	40.9	-3.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

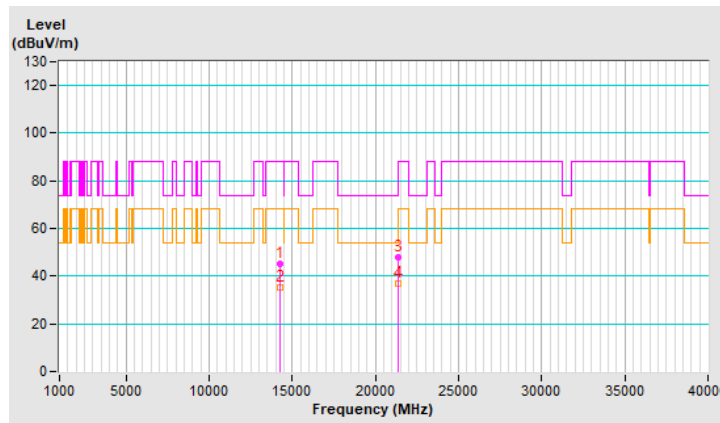


<b>RF Mode</b>	802.11be (EHT) 106+26-tone MRU	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	43.7 PK	74.0	-30.3	1.50 H	255	32.8	10.9
2	11910.00	35.7 AV	54.0	-18.3	1.50 H	255	24.8	10.9
3	17865.00	46.8 PK	74.0	-27.2	1.84 H	207	25.2	21.6
4	17865.00	38.1 AV	54.0	-15.9	1.84 H	207	16.5	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

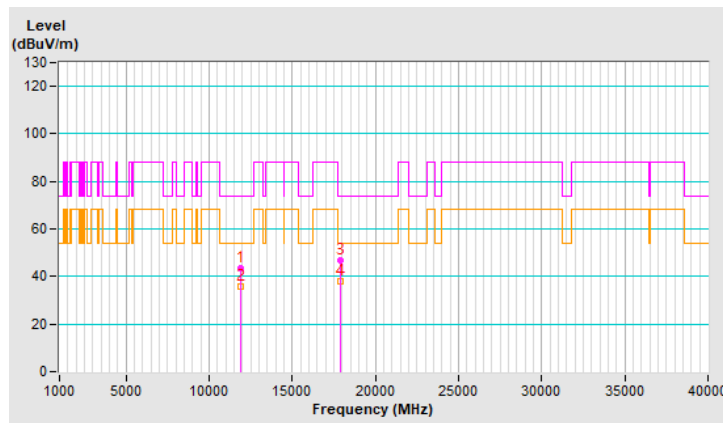


<b>RF Mode</b>	802.11be (EHT) 106+26-tone MRU	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	44.7 PK	74.0	-29.3	2.04 V	263	33.8	10.9
2	11910.00	34.5 AV	54.0	-19.5	2.04 V	263	23.6	10.9
3	17865.00	47.7 PK	74.0	-26.3	1.66 V	176	26.1	21.6
4	17865.00	36.9 AV	54.0	-17.1	1.66 V	176	15.3	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

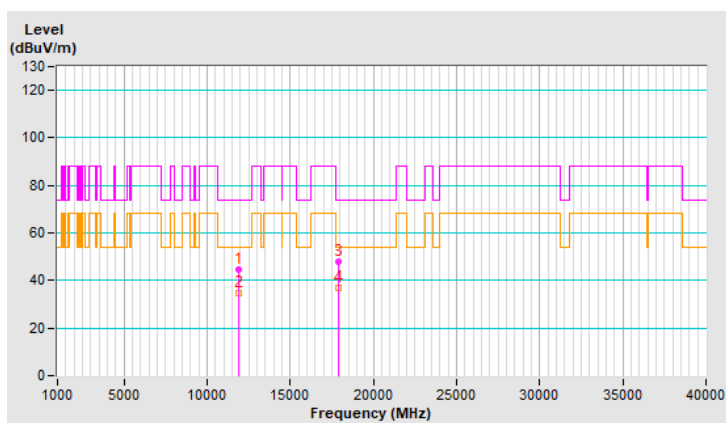


<b>RF Mode</b>	802.11be (EHT) 106+26-tone MRU	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12830.00	44.2 PK	88.2	-44.0	1.44 H	247	33.7	10.5
2	#12830.00	35.9 AV	68.2	-32.3	1.44 H	247	25.4	10.5
3	19245.00	46.9 PK	74.0	-27.1	1.87 H	166	53.4	-6.5
4	19245.00	38.0 AV	54.0	-16.0	1.87 H	166	44.5	-6.5

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

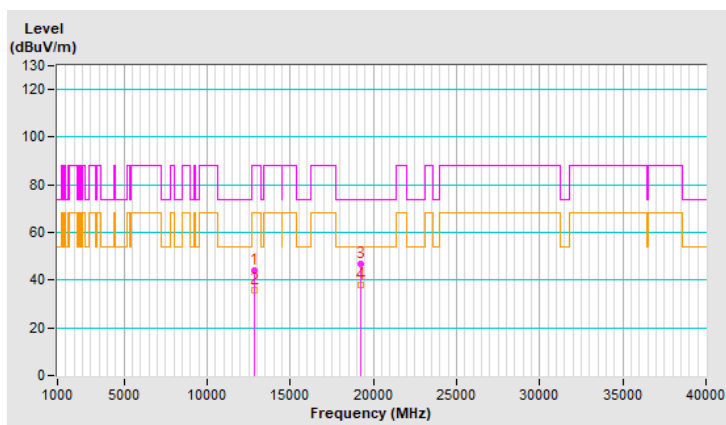




<b>RF Mode</b>	802.11be (EHT) 106+26-tone MRU	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12830.00	45.1 PK	88.2	-43.1	1.78 V	272	34.6	10.5
2	#12830.00	34.6 AV	68.2	-33.6	1.78 V	272	24.1	10.5
3	19245.00	47.2 PK	74.0	-26.8	1.54 V	129	53.7	-6.5
4	19245.00	36.6 AV	54.0	-17.4	1.54 V	129	43.1	-6.5

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

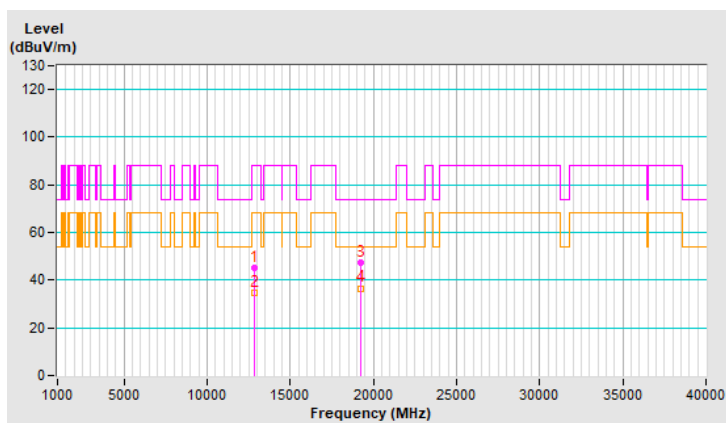


<b>RF Mode</b>	802.11be (EHT) 106+26-tone MRU	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12870.00	44.1 PK	88.2	-44.1	1.50 H	275	33.6	10.5
2	#12870.00	35.8 AV	68.2	-32.4	1.50 H	275	25.3	10.5
3	19305.00	46.4 PK	74.0	-27.6	1.81 H	205	53.2	-6.8
4	19305.00	37.5 AV	54.0	-16.5	1.81 H	205	44.3	-6.8

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

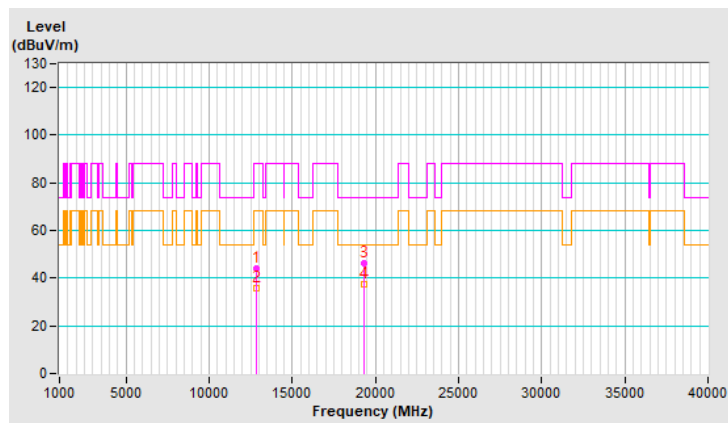


<b>RF Mode</b>	802.11be (EHT) 106+26-tone MRU	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	45.1 PK	88.2	-43.1	1.78 V	254	34.6	10.5
2	#12870.00	34.6 AV	68.2	-33.6	1.78 V	254	24.1	10.5
3	19305.00	46.6 PK	74.0	-27.4	1.62 V	214	53.4	-6.8
4	19305.00	36.2 AV	54.0	-17.8	1.62 V	214	43.0	-6.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

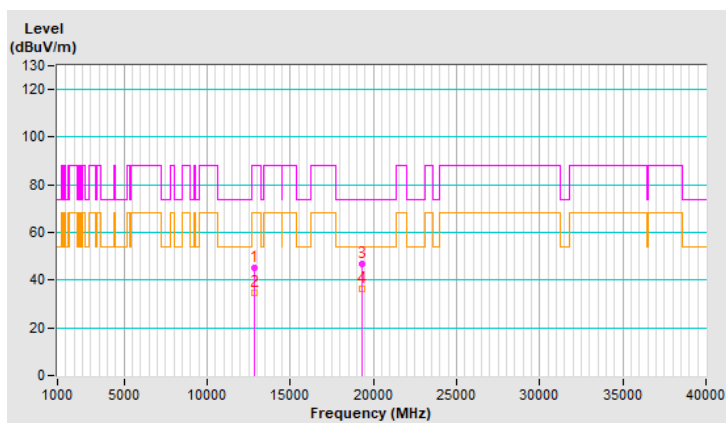


<b>RF Mode</b>	802.11be (EHT) 106+26-tone MRU	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	43.8 PK	88.2	-44.4	1.56 H	269	33.0	10.8
2	#13070.00	35.7 AV	68.2	-32.5	1.56 H	269	24.9	10.8
3	19605.00	47.0 PK	74.0	-27.0	1.93 H	162	53.0	-6.0
4	19605.00	38.3 AV	54.0	-15.7	1.93 H	162	44.3	-6.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

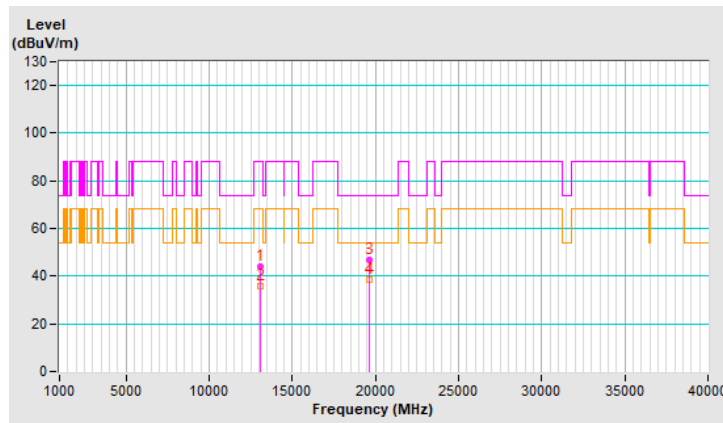


<b>RF Mode</b>	802.11be (EHT) 106+26-tone MRU	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	45.1 PK	88.2	-43.1	1.78 V	297	34.3	10.8
2	#13070.00	34.4 AV	68.2	-33.8	1.78 V	297	23.6	10.8
3	19605.00	46.7 PK	74.0	-27.3	1.57 V	149	52.7	-6.0
4	19605.00	36.4 AV	54.0	-17.6	1.57 V	149	42.4	-6.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

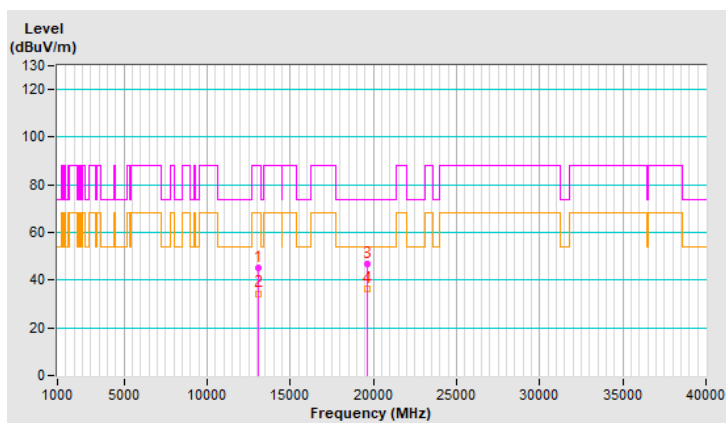


<b>RF Mode</b>	802.11be (EHT) 106+26-tone MRU	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	44.3 PK	88.2	-43.9	1.62 H	290	31.5	12.8
2	#13710.00	36.2 AV	68.2	-32.0	1.62 H	290	23.4	12.8
3	20565.00	47.1 PK	74.0	-26.9	1.89 H	168	51.8	-4.7
4	20565.00	38.3 AV	54.0	-15.7	1.89 H	168	43.0	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

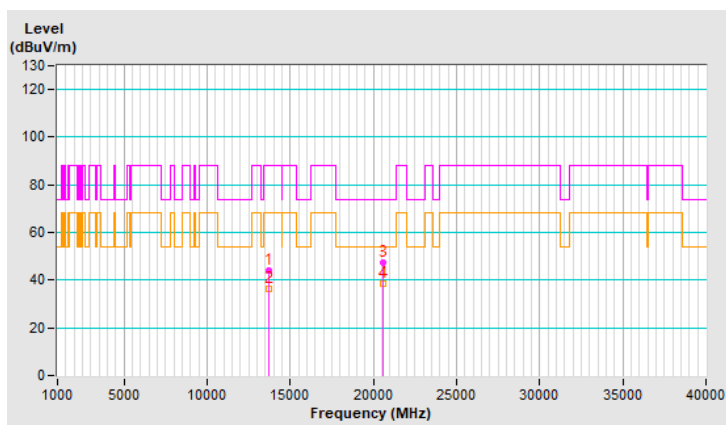


<b>RF Mode</b>	802.11be (EHT) 106+26-tone MRU	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	44.9 PK	88.2	-43.3	2.08 V	277	32.1	12.8
2	#13710.00	34.5 AV	68.2	-33.7	2.08 V	277	21.7	12.8
3	20565.00	47.3 PK	74.0	-26.7	1.69 V	181	52.0	-4.7
4	20565.00	36.8 AV	54.0	-17.2	1.69 V	181	41.5	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

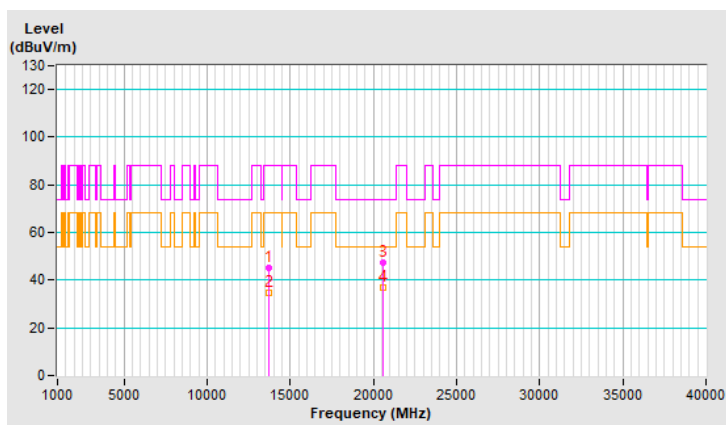


<b>RF Mode</b>	802.11be (EHT) 106+26-tone MRU	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#14230.00	44.3 PK	88.2	-43.9	1.65 H	258	30.8	13.5
2	#14230.00	36.0 AV	68.2	-32.2	1.65 H	258	22.5	13.5
3	21345.00	46.9 PK	74.0	-27.1	1.83 H	161	50.7	-3.8
4	21345.00	38.2 AV	54.0	-15.8	1.83 H	161	42.0	-3.8

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

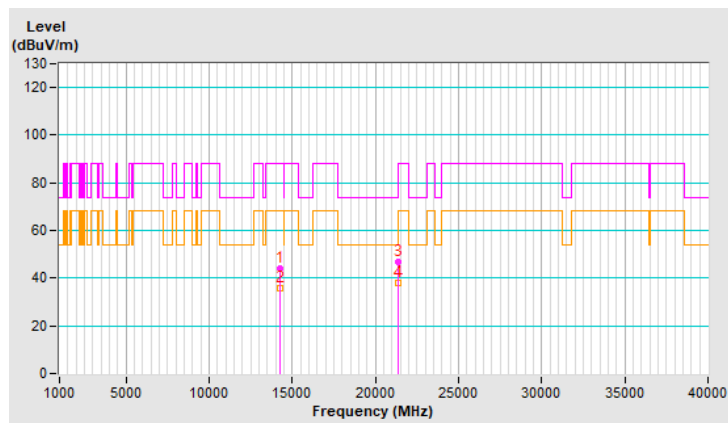




<b>RF Mode</b>	802.11be (EHT) 106+26-tone MRU	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	44.8 PK	88.2	-43.4	1.76 V	274	31.3	13.5
2	#14230.00	34.3 AV	68.2	-33.9	1.76 V	274	20.8	13.5
3	21345.00	47.0 PK	74.0	-27.0	1.56 V	148	50.8	-3.8
4	21345.00	36.4 AV	54.0	-17.6	1.56 V	148	40.2	-3.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

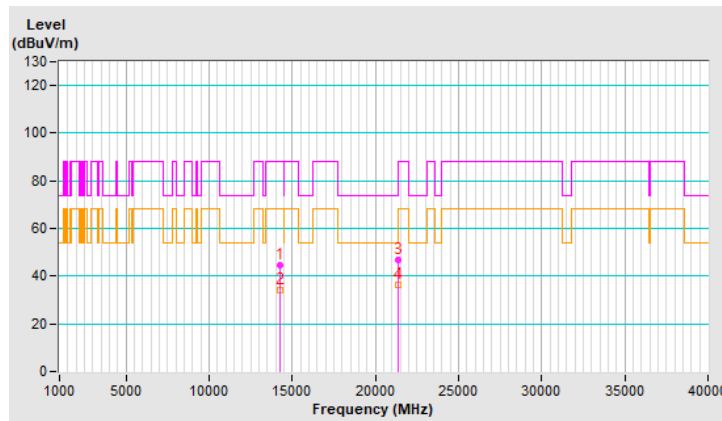


<b>RF Mode</b>	802.11be (EHT) 52+26-tone MRU	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	44.8 PK	74.0	-29.2	1.53 H	242	33.9	10.9
2	11910.00	36.2 AV	54.0	-17.8	1.53 H	242	25.3	10.9
3	17865.00	46.5 PK	74.0	-27.5	1.98 H	194	24.9	21.6
4	17865.00	37.6 AV	54.0	-16.4	1.98 H	194	16.0	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

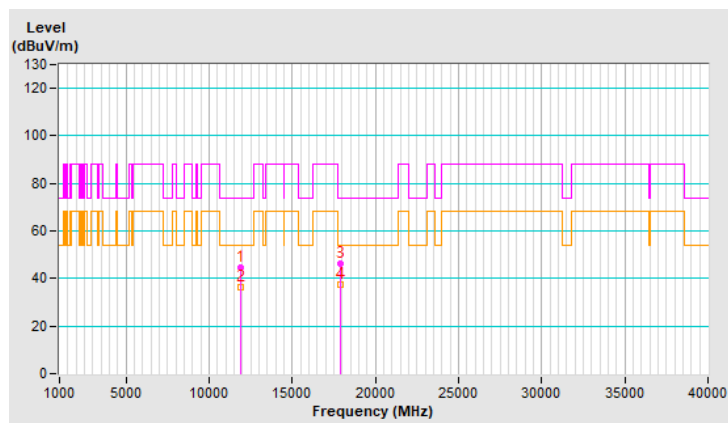


<b>RF Mode</b>	802.11be (EHT) 52+26-tone MRU	<b>Channel</b>	CH 1 : 5955 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	45.1 PK	74.0	-28.9	2.04 V	263	34.2	10.9
2	11910.00	34.8 AV	54.0	-19.2	2.04 V	263	23.9	10.9
3	17865.00	46.9 PK	74.0	-27.1	1.70 V	194	25.3	21.6
4	17865.00	36.3 AV	54.0	-17.7	1.70 V	194	14.7	21.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

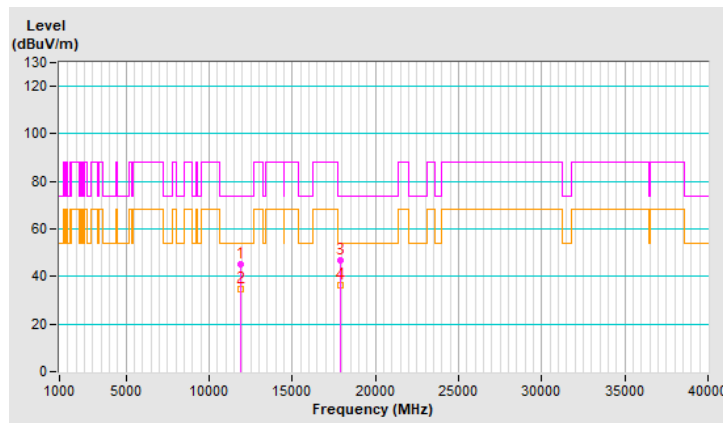


<b>RF Mode</b>	802.11be (EHT) 52+26-tone MRU	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	43.8 PK	88.2	-44.4	1.49 H	265	33.3	10.5
2	#12830.00	35.5 AV	68.2	-32.7	1.49 H	265	25.0	10.5
3	19245.00	46.6 PK	74.0	-27.4	1.79 H	199	53.1	-6.5
4	19245.00	37.9 AV	54.0	-16.1	1.79 H	199	44.4	-6.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

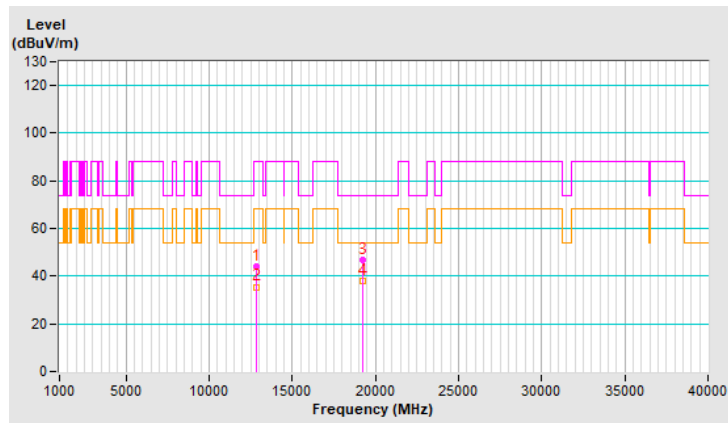


<b>RF Mode</b>	802.11be (EHT) 52+26-tone MRU	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	44.9 PK	88.2	-43.3	1.83 V	250	34.4	10.5
2	#12830.00	34.7 AV	68.2	-33.5	1.83 V	250	24.2	10.5
3	19245.00	47.4 PK	74.0	-26.6	1.66 V	223	53.9	-6.5
4	19245.00	36.8 AV	54.0	-17.2	1.66 V	223	43.3	-6.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

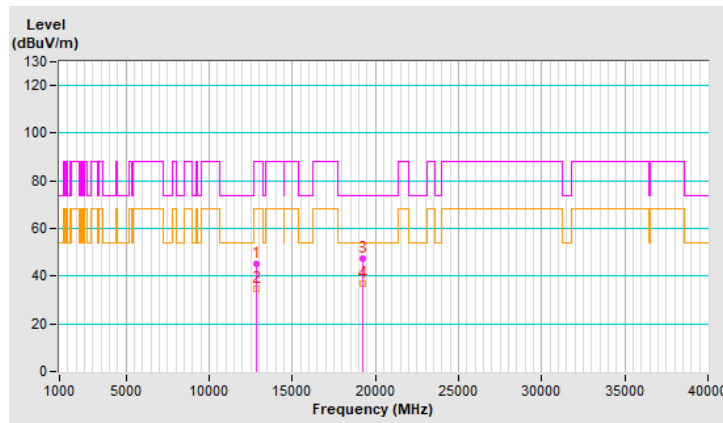


<b>RF Mode</b>	802.11be (EHT) 52+26-tone MRU	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12870.00	44.0 PK	88.2	-44.2	1.65 H	254	33.5	10.5
2	#12870.00	35.7 AV	68.2	-32.5	1.65 H	254	25.2	10.5
3	19305.00	46.8 PK	74.0	-27.2	2.04 H	193	53.6	-6.8
4	19305.00	38.0 AV	54.0	-16.0	2.04 H	193	44.8	-6.8

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

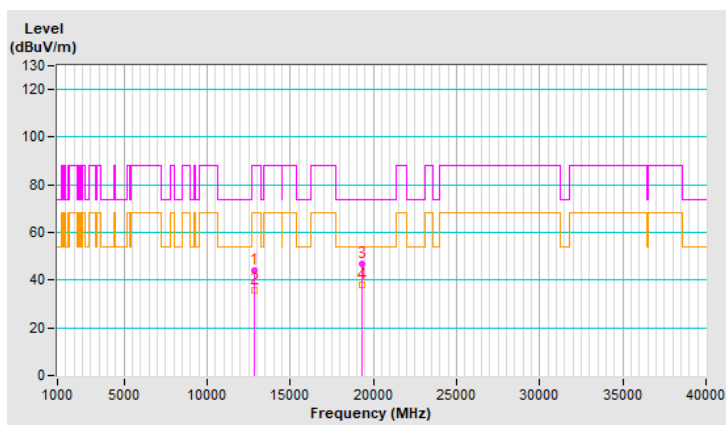


<b>RF Mode</b>	802.11be (EHT) 52+26-tone MRU	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	44.9 PK	88.2	-43.3	1.87 V	265	34.4	10.5
2	#12870.00	34.6 AV	68.2	-33.6	1.87 V	265	24.1	10.5
3	19305.00	46.8 PK	74.0	-27.2	1.63 V	226	53.6	-6.8
4	19305.00	36.5 AV	54.0	-17.5	1.63 V	226	43.3	-6.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

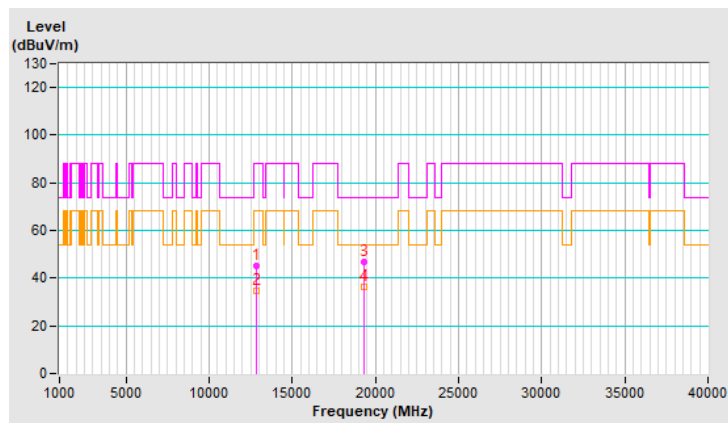


<b>RF Mode</b>	802.11be (EHT) 52+26-tone MRU	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13070.00	44.3 PK	88.2	-43.9	1.53 H	269	33.5	10.8
2	#13070.00	35.9 AV	68.2	-32.3	1.53 H	269	25.1	10.8
3	19605.00	46.6 PK	74.0	-27.4	1.89 H	207	52.6	-6.0
4	19605.00	37.8 AV	54.0	-16.2	1.89 H	207	43.8	-6.0

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

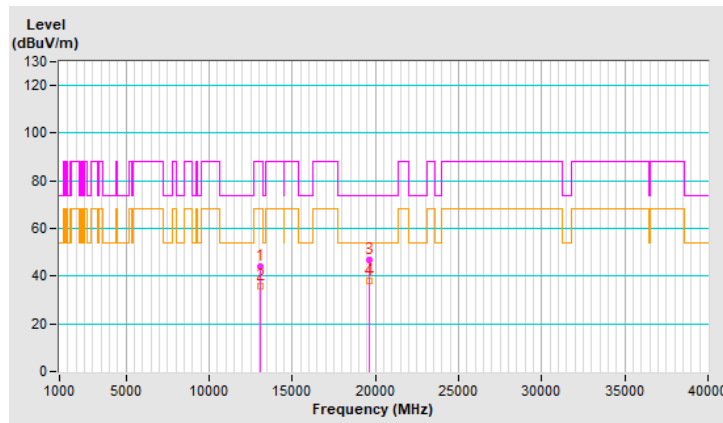




<b>RF Mode</b>	802.11be (EHT) 52+26-tone MRU	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13070.00	45.3 PK	88.2	-42.9	2.07 V	254	34.5	10.8
2	#13070.00	35.1 AV	68.2	-33.1	2.07 V	254	24.3	10.8
3	19605.00	47.0 PK	74.0	-27.0	1.67 V	179	53.0	-6.0
4	19605.00	36.6 AV	54.0	-17.4	1.67 V	179	42.6	-6.0

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

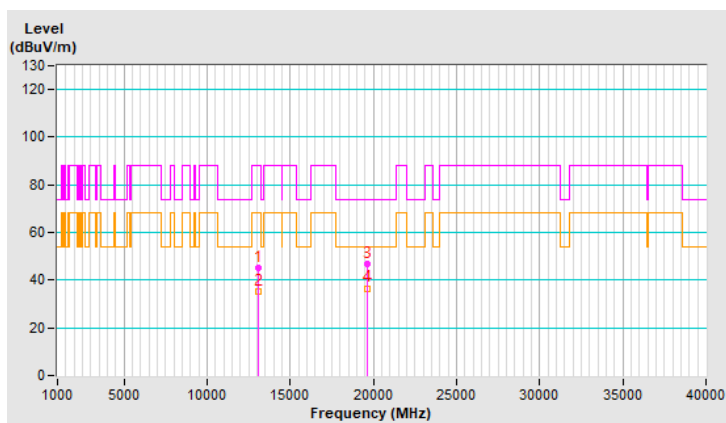


<b>RF Mode</b>	802.11be (EHT) 52+26-tone MRU	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	44.5 PK	88.2	-43.7	1.57 H	267	31.7	12.8
2	#13710.00	36.2 AV	68.2	-32.0	1.57 H	267	23.4	12.8
3	20565.00	46.1 PK	74.0	-27.9	1.87 H	190	50.8	-4.7
4	20565.00	37.7 AV	54.0	-16.3	1.87 H	190	42.4	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

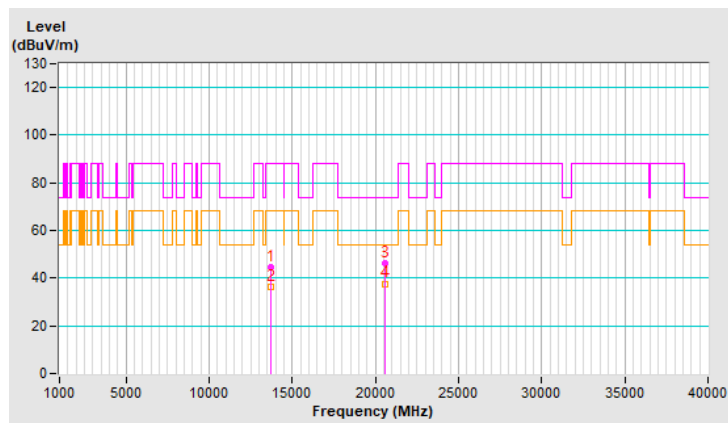


<b>RF Mode</b>	802.11be (EHT) 52+26-tone MRU	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13710.00	45.4 PK	88.2	-42.8	2.09 V	267	32.6	12.8
2	#13710.00	35.3 AV	68.2	-32.9	2.09 V	267	22.5	12.8
3	20565.00	47.4 PK	74.0	-26.6	1.66 V	179	52.1	-4.7
4	20565.00	36.7 AV	54.0	-17.3	1.66 V	179	41.4	-4.7

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

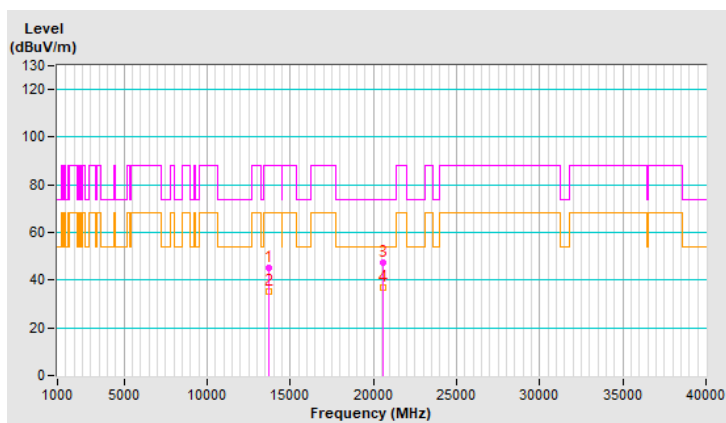


<b>RF Mode</b>	802.11be (EHT) 52+26-tone MRU	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	44.0 PK	88.2	-44.2	1.58 H	278	30.5	13.5
2	#14230.00	35.5 AV	68.2	-32.7	1.58 H	278	22.0	13.5
3	21345.00	46.6 PK	74.0	-27.4	1.94 H	196	50.4	-3.8
4	21345.00	38.1 AV	54.0	-15.9	1.94 H	196	41.9	-3.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

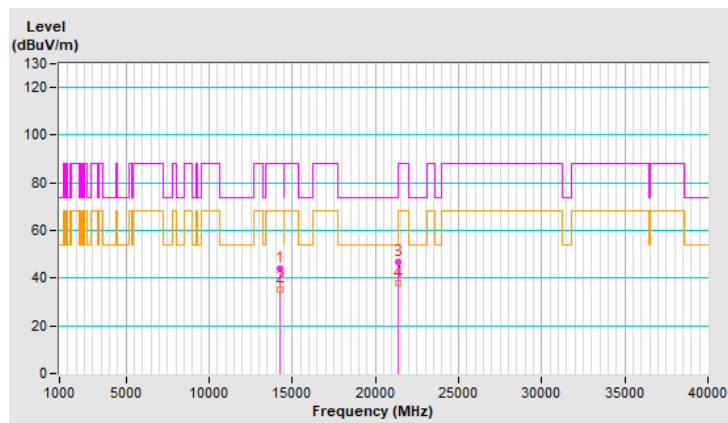


<b>RF Mode</b>	802.11be (EHT) 52+26-tone MRU	<b>Channel</b>	CH 233 : 7115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	45.0 PK	88.2	-43.2	1.82 V	283	31.5	13.5
2	#14230.00	34.5 AV	68.2	-33.7	1.82 V	283	21.0	13.5
3	21345.00	47.3 PK	74.0	-26.7	1.50 V	129	51.1	-3.8
4	21345.00	36.9 AV	54.0	-17.1	1.50 V	129	40.7	-3.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

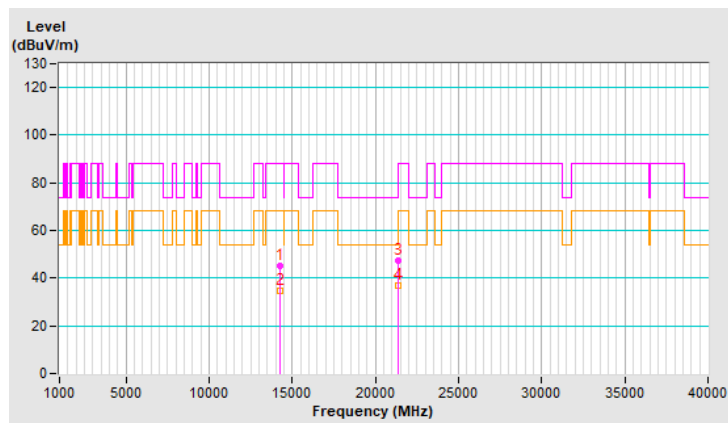


<b>RF Mode</b>	802.11be (EHT) 484+242-tone MRU	<b>Channel</b>	CH 7 : 5985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	43.7 PK	74.0	-30.3	1.73 H	258	32.9	10.8
2	11970.00	35.7 AV	54.0	-18.3	1.73 H	258	24.9	10.8
3	17955.00	46.7 PK	74.0	-27.3	2.05 H	170	23.2	23.5
4	17955.00	38.1 AV	54.0	-15.9	2.05 H	170	14.6	23.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

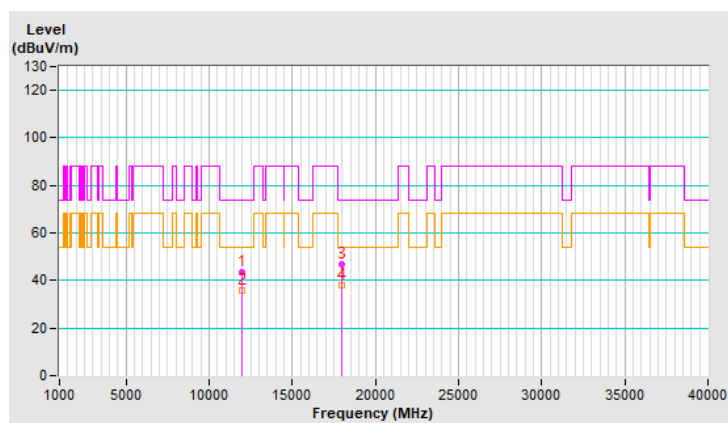


<b>RF Mode</b>	802.11be (EHT) 484+242-tone MRU	<b>Channel</b>	CH 7 : 5985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	45.2 PK	74.0	-28.8	2.06 V	288	34.4	10.8
2	11970.00	34.5 AV	54.0	-19.5	2.06 V	288	23.7	10.8
3	17955.00	46.7 PK	74.0	-27.3	1.65 V	165	23.2	23.5
4	17955.00	36.3 AV	54.0	-17.7	1.65 V	165	12.8	23.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

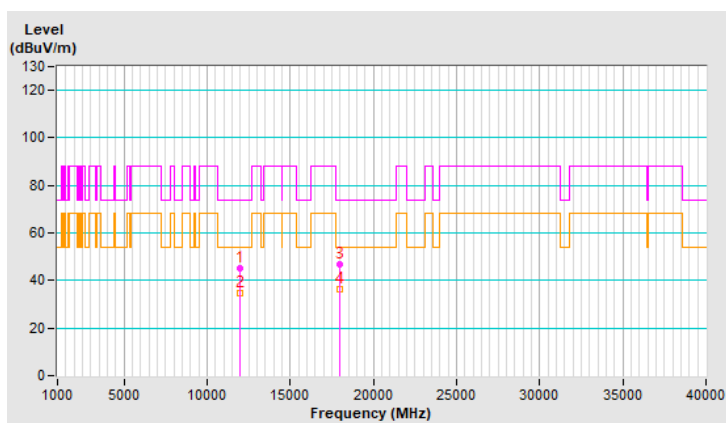


<b>RF Mode</b>	802.11be (EHT) 484+242-tone MRU	<b>Channel</b>	CH 87 : 6385 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	43.6 PK	88.2	-44.6	1.69 H	271	33.2	10.4
2	#12770.00	35.4 AV	68.2	-32.8	1.69 H	271	25.0	10.4
3	19155.00	46.7 PK	74.0	-27.3	2.04 H	164	53.1	-6.4
4	19155.00	37.9 AV	54.0	-16.1	2.04 H	164	44.3	-6.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

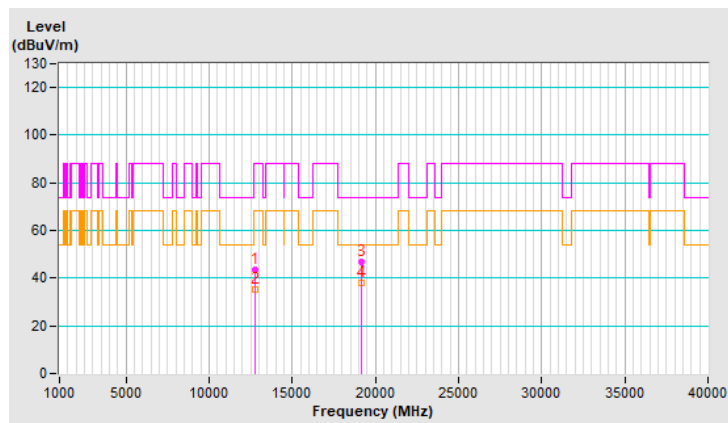




<b>RF Mode</b>	802.11be (EHT) 484+242-tone MRU	<b>Channel</b>	CH 87 : 6385 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	44.4 PK	88.2	-43.8	2.04 V	285	34.0	10.4
2	#12770.00	34.2 AV	68.2	-34.0	2.04 V	285	23.8	10.4
3	19155.00	47.4 PK	74.0	-26.6	1.66 V	186	53.8	-6.4
4	19155.00	37.0 AV	54.0	-17.0	1.66 V	186	43.4	-6.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

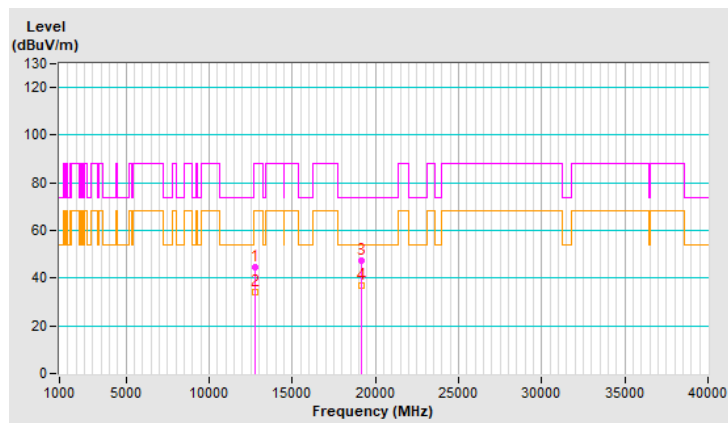


<b>RF Mode</b>	802.11be (EHT) 484+242-tone MRU	<b>Channel</b>	CH 103 : 6465 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	43.8 PK	88.2	-44.4	1.79 H	281	33.3	10.5
2	#12930.00	35.5 AV	68.2	-32.7	1.79 H	281	25.0	10.5
3	19395.00	46.4 PK	74.0	-27.6	1.86 H	167	53.1	-6.7
4	19395.00	37.5 AV	54.0	-16.5	1.86 H	167	44.2	-6.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

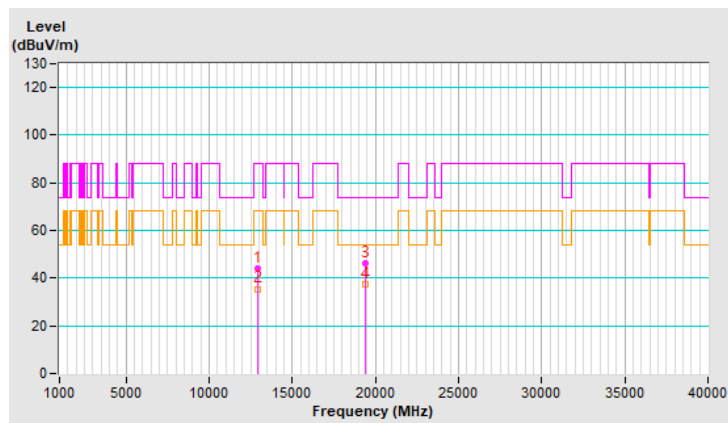


<b>RF Mode</b>	802.11be (EHT) 484+242-tone MRU	<b>Channel</b>	CH 103 : 6465 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	45.2 PK	88.2	-43.0	1.76 V	267	34.7	10.5
2	#12930.00	34.9 AV	68.2	-33.3	1.76 V	267	24.4	10.5
3	19395.00	46.8 PK	74.0	-27.2	1.60 V	147	53.5	-6.7
4	19395.00	36.4 AV	54.0	-17.6	1.60 V	147	43.1	-6.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

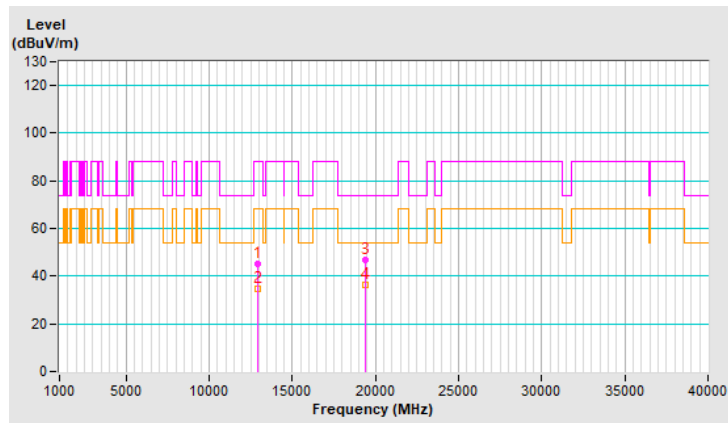


<b>RF Mode</b>	802.11be (EHT) 484+242-tone MRU	<b>Channel</b>	CH 135 : 6625 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	44.0 PK	74.0	-30.0	1.72 H	287	32.5	11.5
2	13250.00	35.5 AV	54.0	-18.5	1.72 H	287	24.0	11.5
3	19875.00	46.8 PK	74.0	-27.2	1.95 H	147	52.8	-6.0
4	19875.00	37.9 AV	54.0	-16.1	1.95 H	147	43.9	-6.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

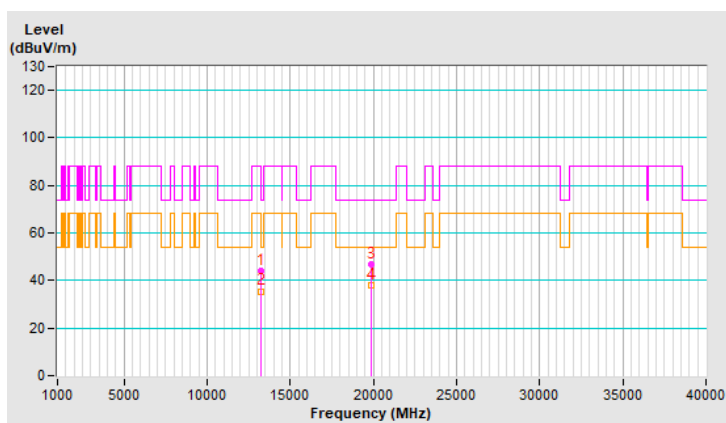


<b>RF Mode</b>	802.11be (EHT) 484+242-tone MRU	<b>Channel</b>	CH 135 : 6625 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	44.5 PK	74.0	-29.5	1.72 V	277	33.0	11.5
2	13250.00	34.3 AV	54.0	-19.7	1.72 V	277	22.8	11.5
3	19875.00	46.5 PK	74.0	-27.5	1.56 V	150	52.5	-6.0
4	19875.00	36.2 AV	54.0	-17.8	1.56 V	150	42.2	-6.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

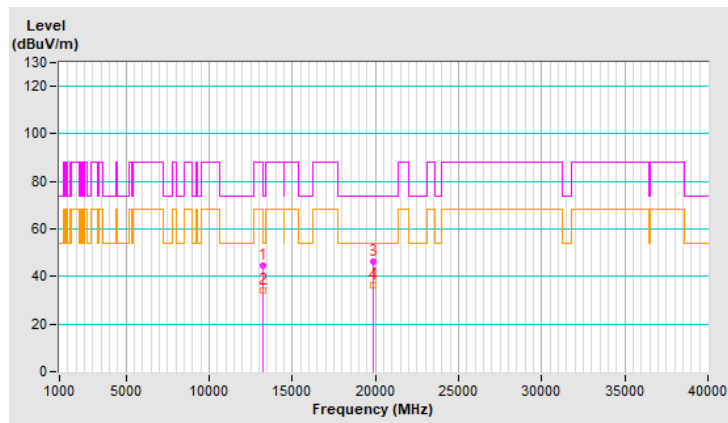


<b>RF Mode</b>	802.11be (EHT) 484+242-tone MRU	<b>Channel</b>	CH 215 : 7025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#14050.00	43.9 PK	88.2	-44.3	1.75 H	262	30.7	13.2
2	#14050.00	35.7 AV	68.2	-32.5	1.75 H	262	22.5	13.2
3	21075.00	46.5 PK	74.0	-27.5	2.07 H	156	50.6	-4.1
4	21075.00	37.6 AV	54.0	-16.4	2.07 H	156	41.7	-4.1

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

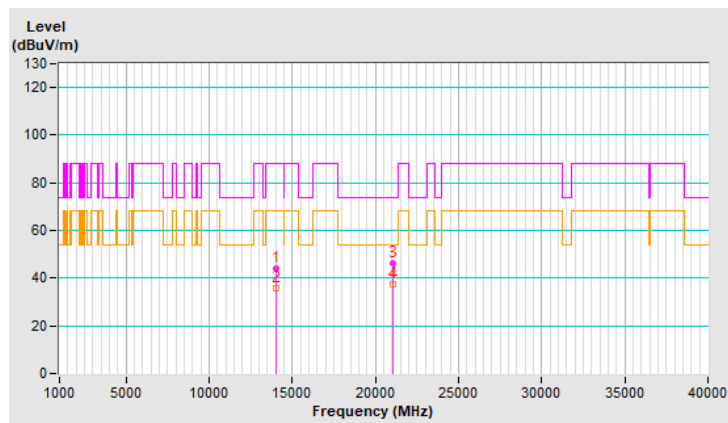


<b>RF Mode</b>	802.11be (EHT) 484+242-tone MRU	<b>Channel</b>	CH 215 : 7025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	45.4 PK	88.2	-42.8	1.74 V	263	32.2	13.2
2	#14050.00	35.0 AV	68.2	-33.2	1.74 V	263	21.8	13.2
3	21075.00	47.4 PK	74.0	-26.6	1.50 V	156	51.5	-4.1
4	21075.00	36.8 AV	54.0	-17.2	1.50 V	156	40.9	-4.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

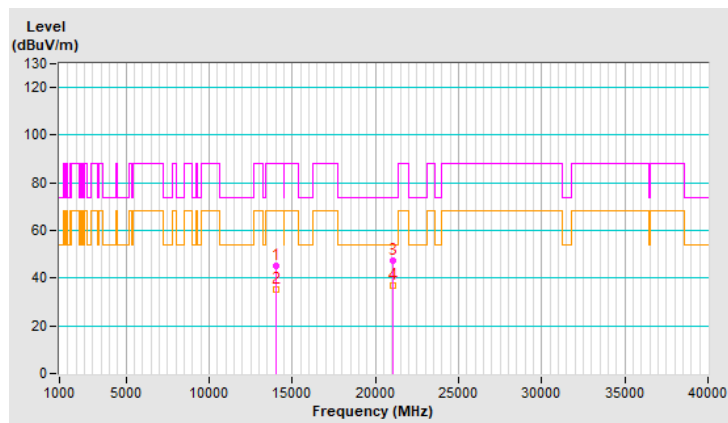


<b>RF Mode</b>	802.11be (EHT) 996+484-tone MRU	<b>Channel</b>	CH 15 : 6025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	43.9 PK	74.0	-30.1	1.63 H	264	33.0	10.9
2	12050.00	35.4 AV	54.0	-18.6	1.63 H	264	24.5	10.9
3	18075.00	46.6 PK	74.0	-27.4	2.03 H	169	40.8	5.8
4	18075.00	37.7 AV	54.0	-16.3	2.03 H	169	31.9	5.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

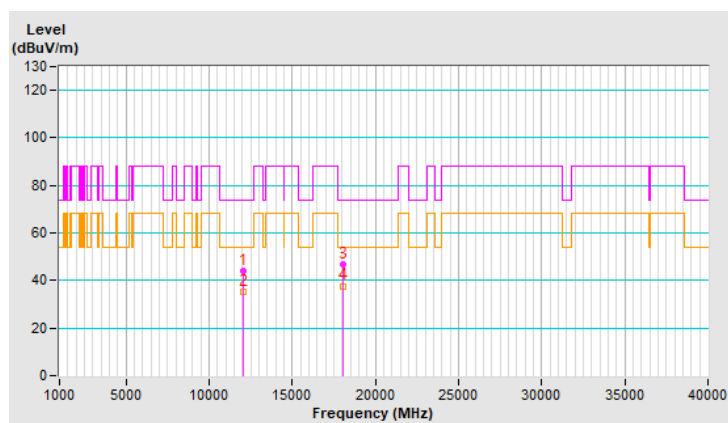




<b>RF Mode</b>	802.11be (EHT) 996+484-tone MRU	<b>Channel</b>	CH 15 : 6025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	44.5 PK	74.0	-29.5	1.72 V	291	33.6	10.9
2	12050.00	34.3 AV	54.0	-19.7	1.72 V	291	23.4	10.9
3	18075.00	47.7 PK	74.0	-26.3	1.56 V	137	41.9	5.8
4	18075.00	36.8 AV	54.0	-17.2	1.56 V	137	31.0	5.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

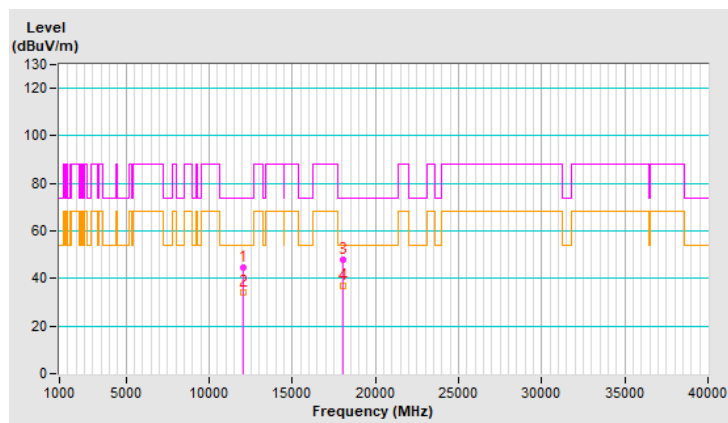


<b>RF Mode</b>	802.11be (EHT) 996+484-tone MRU	<b>Channel</b>	CH 79 : 6345 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	44.0 PK	74.0	-30.0	1.71 H	298	33.7	10.3
2	12690.00	35.7 AV	54.0	-18.3	1.71 H	298	25.4	10.3
3	19035.00	46.1 PK	74.0	-27.9	1.96 H	160	52.7	-6.6
4	19035.00	37.5 AV	54.0	-16.5	1.96 H	160	44.1	-6.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

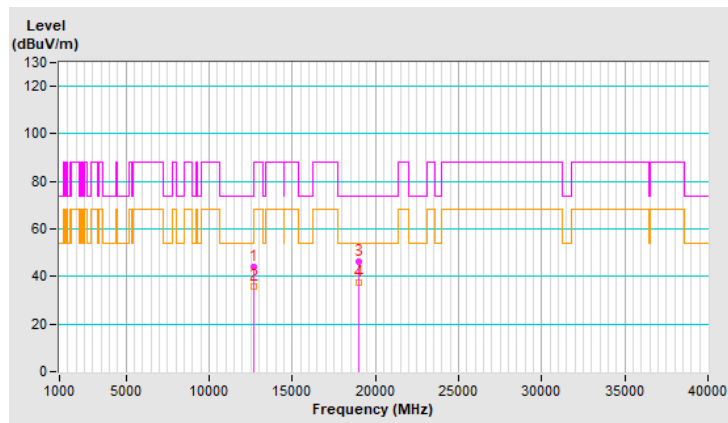


<b>RF Mode</b>	802.11be (EHT) 996+484-tone MRU	<b>Channel</b>	CH 79 : 6345 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	44.8 PK	74.0	-29.2	1.72 V	267	34.5	10.3
2	12690.00	34.1 AV	54.0	-19.9	1.72 V	267	23.8	10.3
3	19035.00	46.7 PK	74.0	-27.3	1.47 V	147	53.3	-6.6
4	19035.00	36.1 AV	54.0	-17.9	1.47 V	147	42.7	-6.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

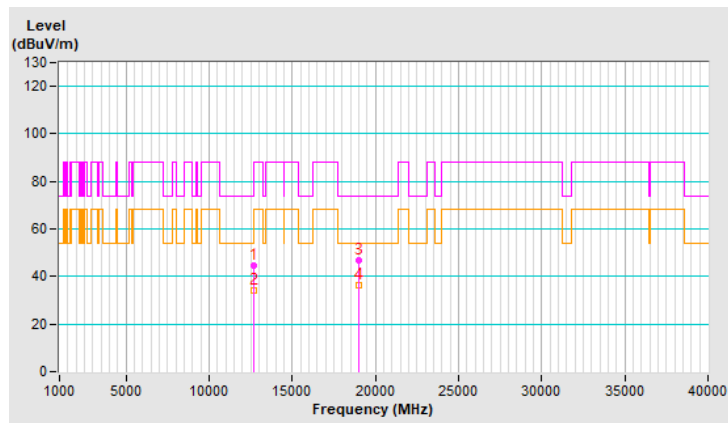


<b>RF Mode</b>	802.11be (EHT) 996+484-tone MRU	<b>Channel</b>	CH 143 : 6665 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	43.9 PK	74.0	-30.1	1.70 H	255	32.2	11.7
2	13330.00	35.4 AV	54.0	-18.6	1.70 H	255	23.7	11.7
3	19995.00	46.2 PK	74.0	-27.8	2.10 H	147	51.8	-5.6
4	19995.00	37.6 AV	54.0	-16.4	2.10 H	147	43.2	-5.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

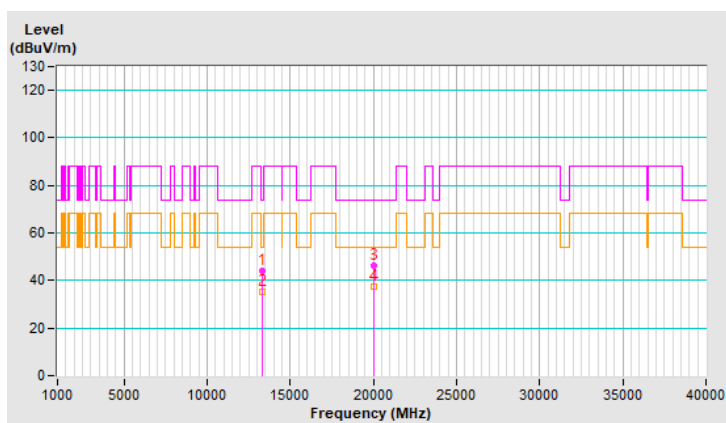


<b>RF Mode</b>	802.11be (EHT) 996+484-tone MRU	<b>Channel</b>	CH 143 : 6665 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	44.4 PK	74.0	-29.6	1.81 V	258	32.7	11.7
2	13330.00	34.2 AV	54.0	-19.8	1.81 V	258	22.5	11.7
3	19995.00	46.6 PK	74.0	-27.4	1.65 V	162	52.2	-5.6
4	19995.00	36.2 AV	54.0	-17.8	1.65 V	162	41.8	-5.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

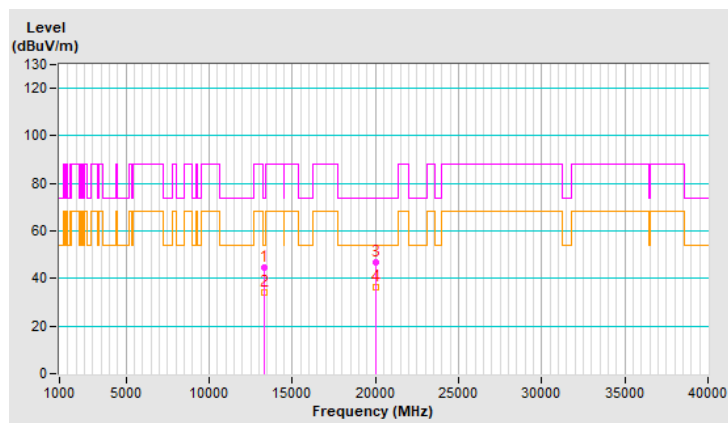


<b>RF Mode</b>	802.11be (EHT) 996+484-tone MRU	<b>Channel</b>	CH 207 : 6985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	44.0 PK	88.2	-44.2	1.79 H	260	30.9	13.1
2	#13970.00	36.0 AV	68.2	-32.2	1.79 H	260	22.9	13.1
3	20955.00	46.8 PK	74.0	-27.2	2.06 H	162	50.9	-4.1
4	20955.00	38.3 AV	54.0	-15.7	2.06 H	162	42.4	-4.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

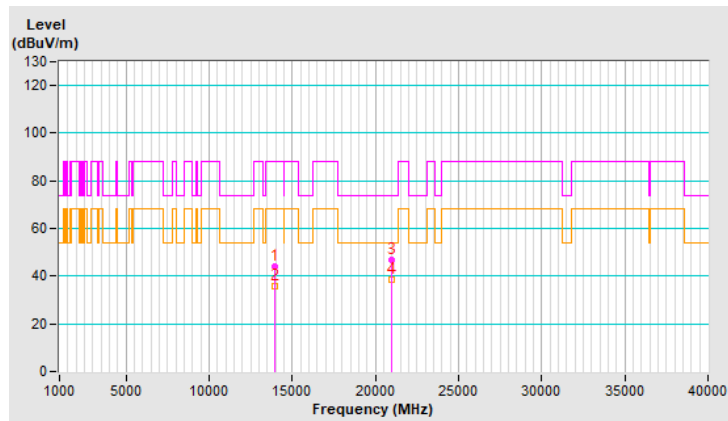


<b>RF Mode</b>	802.11be (EHT) 996+484-tone MRU	<b>Channel</b>	CH 207 : 6985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	44.9 PK	88.2	-43.3	2.07 V	274	31.8	13.1
2	#13970.00	34.5 AV	68.2	-33.7	2.07 V	274	21.4	13.1
3	20955.00	46.9 PK	74.0	-27.1	1.62 V	191	51.0	-4.1
4	20955.00	36.5 AV	54.0	-17.5	1.62 V	191	40.6	-4.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

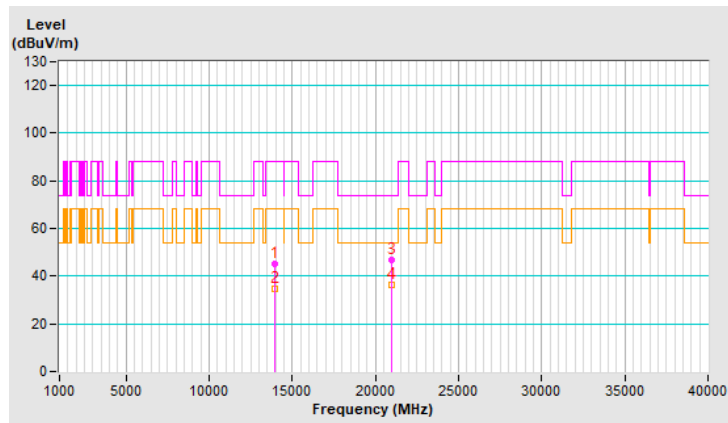


<b>RF Mode</b>	802.11be (EHT) 996+484+242-tone MRU	<b>Channel</b>	CH 15 : 6025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	43.5 PK	74.0	-30.5	1.73 H	264	32.6	10.9
2	12050.00	35.3 AV	54.0	-18.7	1.73 H	264	24.4	10.9
3	18075.00	46.7 PK	74.0	-27.3	2.06 H	152	40.9	5.8
4	18075.00	38.3 AV	54.0	-15.7	2.06 H	152	32.5	5.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

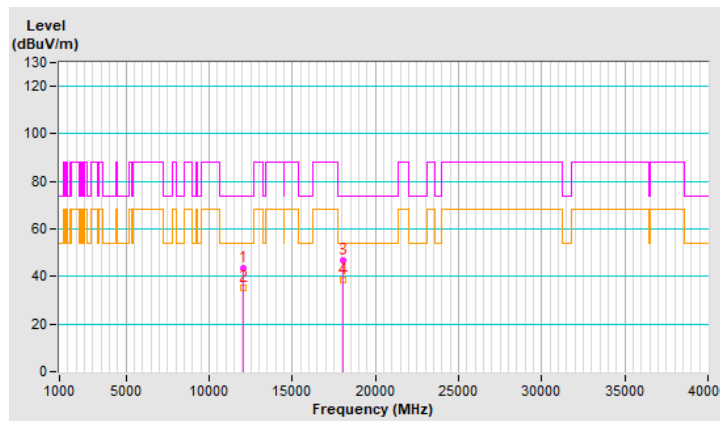




<b>RF Mode</b>	802.11be (EHT) 996+484+242-tone MRU	<b>Channel</b>	CH 15 : 6025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	44.6 PK	74.0	-29.4	2.07 V	266	33.7	10.9
2	12050.00	34.5 AV	54.0	-19.5	2.07 V	266	23.6	10.9
3	18075.00	46.1 PK	74.0	-27.9	1.65 V	190	40.3	5.8
4	18075.00	35.8 AV	54.0	-18.2	1.65 V	190	30.0	5.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

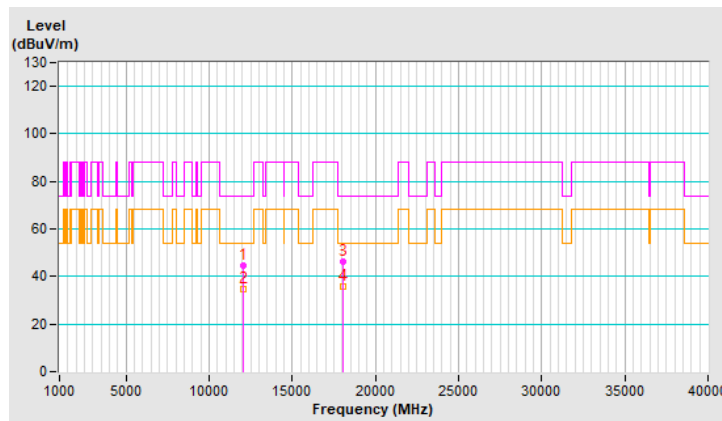


<b>RF Mode</b>	802.11be (EHT) 996+484+242-tone MRU	<b>Channel</b>	CH 79 : 6345 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	44.3 PK	74.0	-29.7	1.71 H	303	34.0	10.3
2	12690.00	36.3 AV	54.0	-17.7	1.71 H	303	26.0	10.3
3	19035.00	46.7 PK	74.0	-27.3	2.00 H	169	53.3	-6.6
4	19035.00	37.7 AV	54.0	-16.3	2.00 H	169	44.3	-6.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

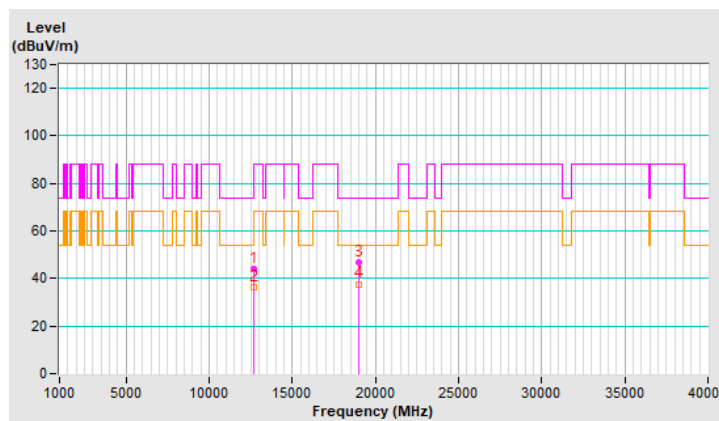


<b>RF Mode</b>	802.11be (EHT) 996+484+242-tone MRU	<b>Channel</b>	CH 79 : 6345 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	44.4 PK	74.0	-29.6	2.07 V	273	34.1	10.3
2	12690.00	34.3 AV	54.0	-19.7	2.07 V	273	24.0	10.3
3	19035.00	46.0 PK	74.0	-28.0	1.65 V	171	52.6	-6.6
4	19035.00	35.8 AV	54.0	-18.2	1.65 V	171	42.4	-6.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

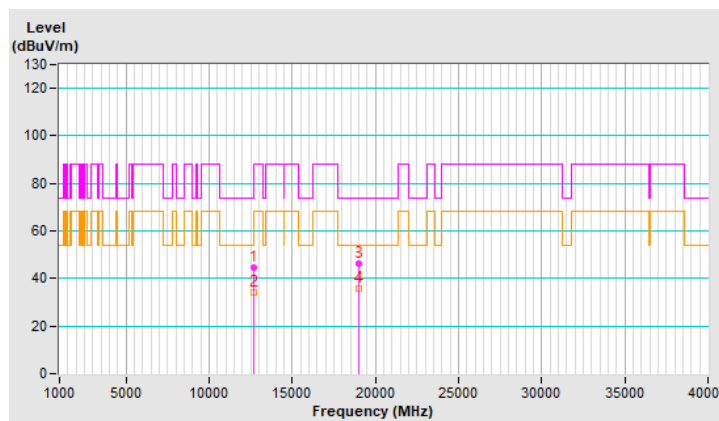


<b>RF Mode</b>	802.11be (EHT) 996+484+242-tone MRU	<b>Channel</b>	CH 143 : 6665 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	44.2 PK	74.0	-29.8	1.73 H	264	32.5	11.7
2	13330.00	35.6 AV	54.0	-18.4	1.73 H	264	23.9	11.7
3	19995.00	46.6 PK	74.0	-27.4	2.05 H	164	52.2	-5.6
4	19995.00	38.2 AV	54.0	-15.8	2.05 H	164	43.8	-5.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

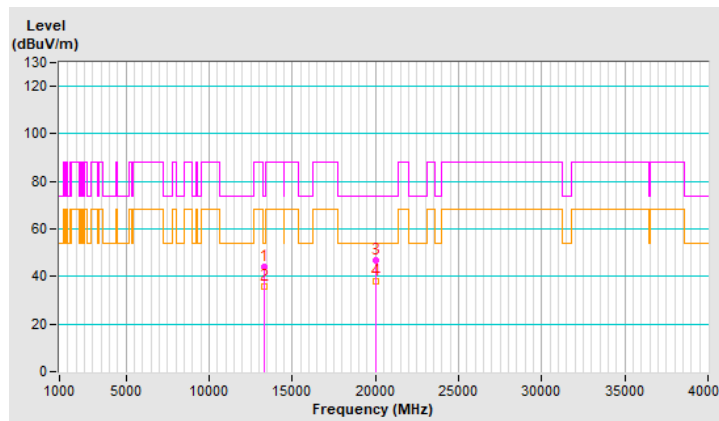


<b>RF Mode</b>	802.11be (EHT) 996+484+242-tone MRU	<b>Channel</b>	CH 143 : 6665 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	44.9 PK	74.0	-29.1	2.09 V	284	33.2	11.7
2	13330.00	34.6 AV	54.0	-19.4	2.09 V	284	22.9	11.7
3	19995.00	46.2 PK	74.0	-27.8	1.67 V	176	51.8	-5.6
4	19995.00	35.9 AV	54.0	-18.1	1.67 V	176	41.5	-5.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

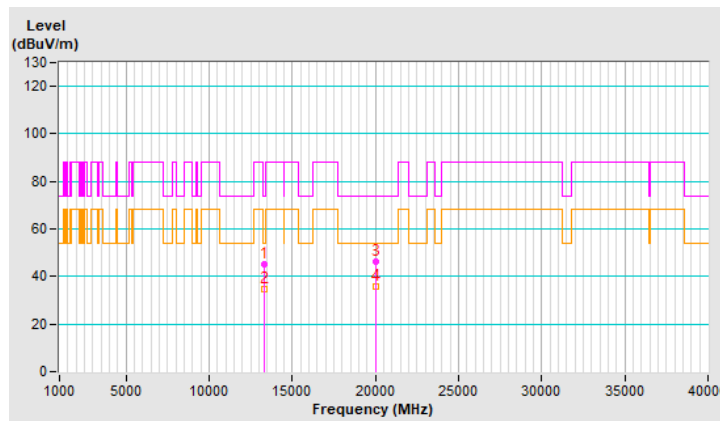


<b>RF Mode</b>	802.11be (EHT) 996+484+242-tone MRU	<b>Channel</b>	CH 207 : 6985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	43.8 PK	88.2	-44.4	1.74 H	302	30.7	13.1
2	#13970.00	35.4 AV	68.2	-32.8	1.74 H	302	22.3	13.1
3	20955.00	46.5 PK	74.0	-27.5	1.94 H	159	50.6	-4.1
4	20955.00	37.5 AV	54.0	-16.5	1.94 H	159	41.6	-4.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

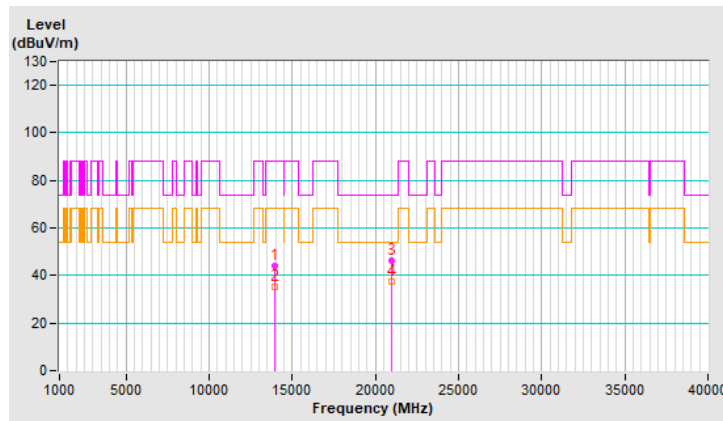


<b>RF Mode</b>	802.11be (EHT) 996+484+242-tone MRU	<b>Channel</b>	CH 207 : 6985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	45.0 PK	88.2	-43.2	1.82 V	242	31.9	13.1
2	#13970.00	34.7 AV	68.2	-33.5	1.82 V	242	21.6	13.1
3	20955.00	46.5 PK	74.0	-27.5	1.68 V	155	50.6	-4.1
4	20955.00	36.2 AV	54.0	-17.8	1.68 V	155	40.3	-4.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

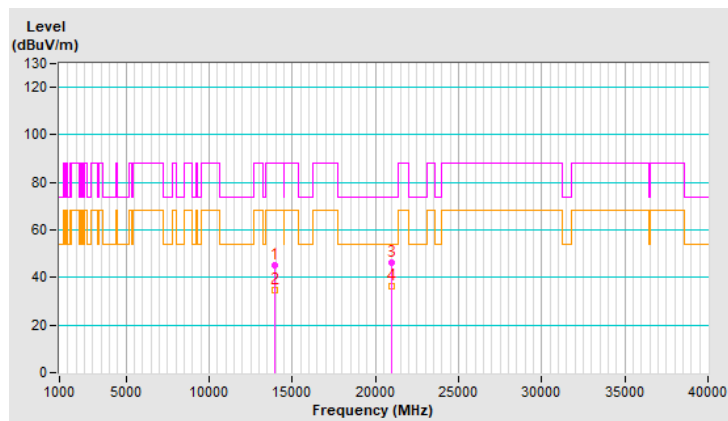


<b>RF Mode</b>	802.11be (EHT) 2x996+484-tone MRU	<b>Channel</b>	CH 31 : 6105 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12210.00	44.7 PK	74.0	-29.3	1.68 H	278	34.3	10.4
2	12210.00	36.2 AV	54.0	-17.8	1.68 H	278	25.8	10.4
3	18315.00	47.1 PK	74.0	-26.9	2.01 H	165	54.2	-7.1
4	18315.00	38.3 AV	54.0	-15.7	2.01 H	165	45.4	-7.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

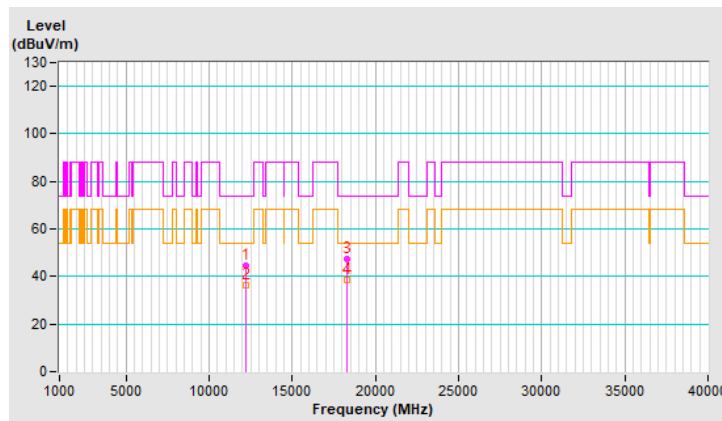




<b>RF Mode</b>	802.11be (EHT) 2x996+484-tone MRU	<b>Channel</b>	CH 31 : 6105 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12210.00	44.9 PK	74.0	-29.1	2.07 V	264	34.5	10.4
2	12210.00	34.6 AV	54.0	-19.4	2.07 V	264	24.2	10.4
3	18315.00	46.1 PK	74.0	-27.9	1.69 V	180	53.2	-7.1
4	18315.00	35.8 AV	54.0	-18.2	1.69 V	180	42.9	-7.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

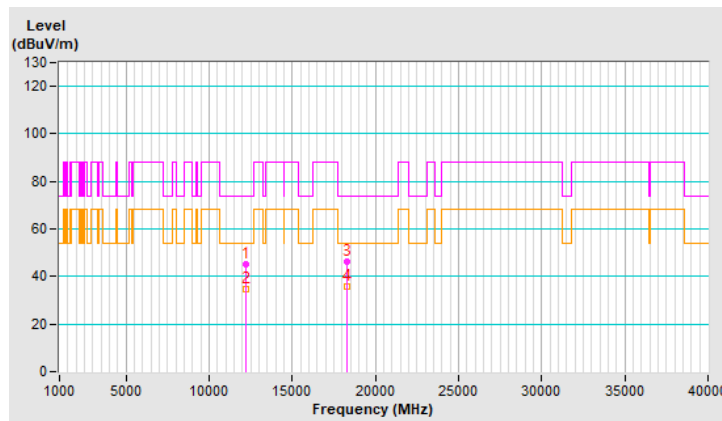


<b>RF Mode</b>	802.11be (EHT) 2x996+484-tone MRU	<b>Channel</b>	CH 63 : 6265 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	44.4 PK	74.0	-29.6	1.77 H	311	34.5	9.9
2	12530.00	36.2 AV	54.0	-17.8	1.77 H	311	26.3	9.9
3	18795.00	46.1 PK	74.0	-27.9	1.89 H	168	53.0	-6.9
4	18795.00	37.6 AV	54.0	-16.4	1.89 H	168	44.5	-6.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

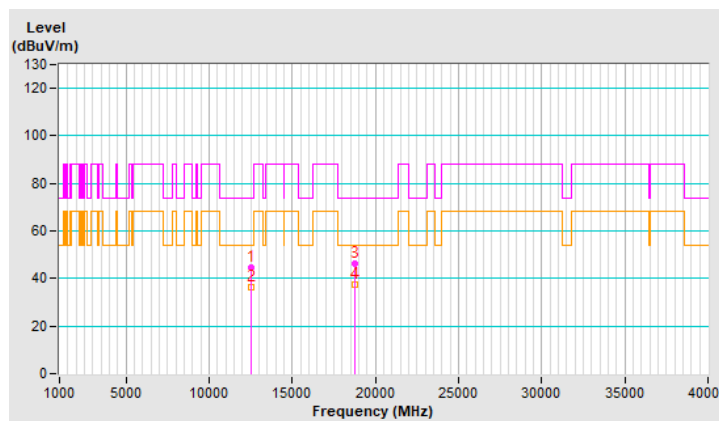


<b>RF Mode</b>	802.11be (EHT) 2x996+484-tone MRU	<b>Channel</b>	CH 63 : 6265 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	44.3 PK	74.0	-29.7	2.12 V	280	34.4	9.9
2	12530.00	34.1 AV	54.0	-19.9	2.12 V	280	24.2	9.9
3	18795.00	47.1 PK	74.0	-26.9	1.71 V	160	54.0	-6.9
4	18795.00	36.4 AV	54.0	-17.6	1.71 V	160	43.3	-6.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

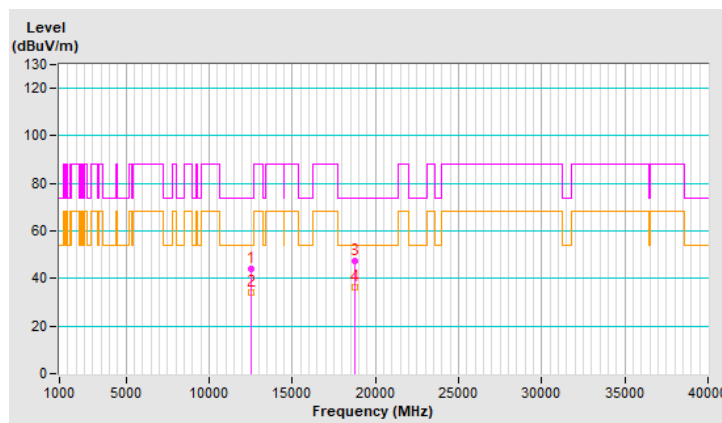


<b>RF Mode</b>	802.11be (EHT) 2x996+484-tone MRU	<b>Channel</b>	CH 127 : 6585 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13170.00	43.6 PK	88.2	-44.6	1.76 H	304	32.3	11.3
2	#13170.00	35.4 AV	68.2	-32.8	1.76 H	304	24.1	11.3
3	19755.00	46.7 PK	74.0	-27.3	2.02 H	173	52.8	-6.1
4	19755.00	37.9 AV	54.0	-16.1	2.02 H	173	44.0	-6.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

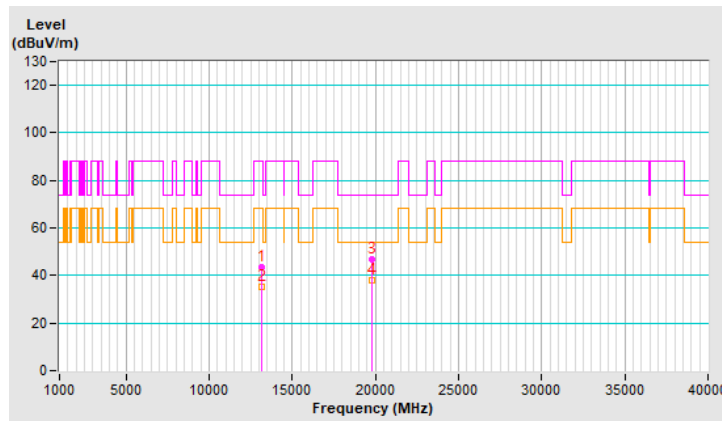


<b>RF Mode</b>	802.11be (EHT) 2x996+484-tone MRU	<b>Channel</b>	CH 127 : 6585 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13170.00	44.4 PK	88.2	-43.8	1.81 V	256	33.1	11.3
2	#13170.00	34.1 AV	68.2	-34.1	1.81 V	256	22.8	11.3
3	19755.00	46.5 PK	74.0	-27.5	1.64 V	164	52.6	-6.1
4	19755.00	35.8 AV	54.0	-18.2	1.64 V	164	41.9	-6.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

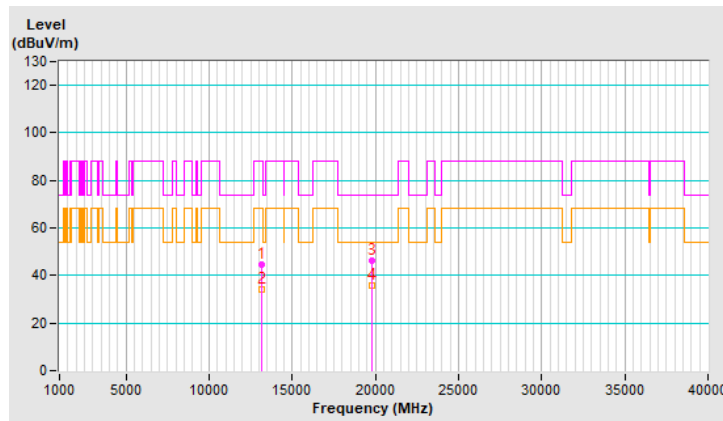


<b>RF Mode</b>	802.11be (EHT) 2x996+484-tone MRU	<b>Channel</b>	CH 191 : 6905 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13810.00	43.9 PK	88.2	-44.3	1.64 H	265	30.9	13.0
2	#13810.00	35.4 AV	68.2	-32.8	1.64 H	265	22.4	13.0
3	20715.00	46.1 PK	74.0	-27.9	2.05 H	157	50.8	-4.7
4	20715.00	37.5 AV	54.0	-16.5	2.05 H	157	42.2	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

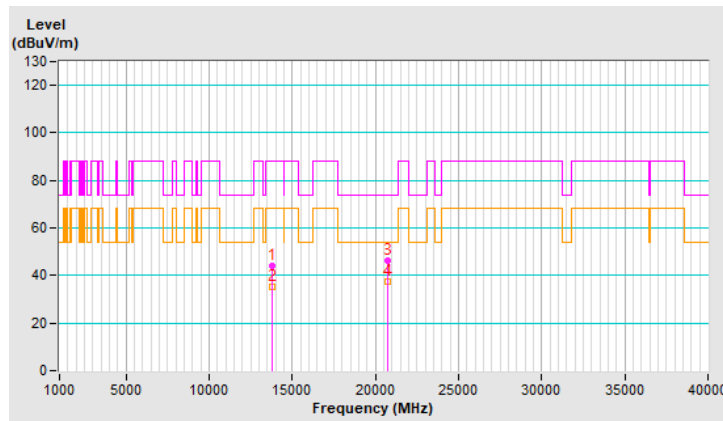


<b>RF Mode</b>	802.11be (EHT) 2x996+484-tone MRU	<b>Channel</b>	CH 191 : 6905 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13810.00	44.1 PK	88.2	-44.1	2.07 V	275	31.1	13.0
2	#13810.00	33.7 AV	68.2	-34.5	2.07 V	275	20.7	13.0
3	20715.00	46.5 PK	74.0	-27.5	1.65 V	178	51.2	-4.7
4	20715.00	36.2 AV	54.0	-17.8	1.65 V	178	40.9	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

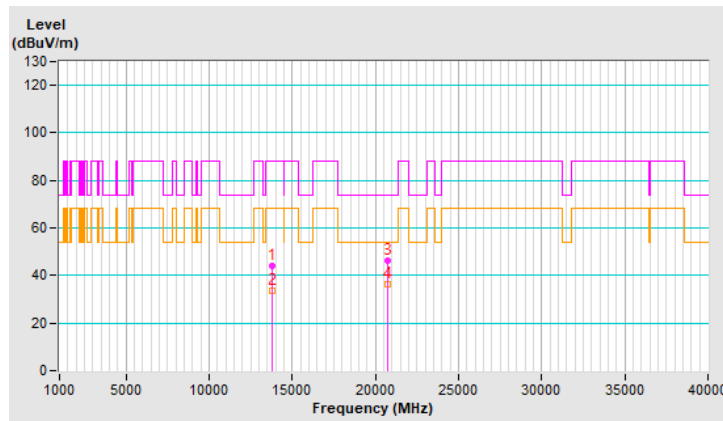


<b>RF Mode</b>	802.11be (EHT) 3x996-tone MRU	<b>Channel</b>	CH 31 : 6105 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12210.00	44.4 PK	74.0	-29.6	1.79 H	300	34.0	10.4
2	12210.00	35.8 AV	54.0	-18.2	1.79 H	300	25.4	10.4
3	18315.00	46.0 PK	74.0	-28.0	1.85 H	159	53.1	-7.1
4	18315.00	37.5 AV	54.0	-16.5	1.85 H	159	44.6	-7.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

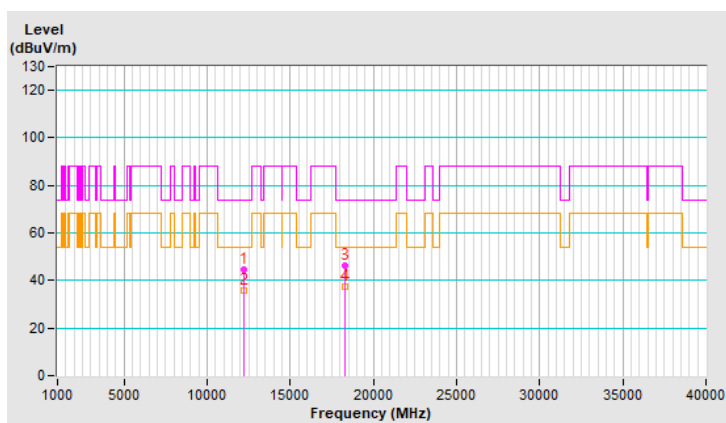




<b>RF Mode</b>	802.11be (EHT) 3x996-tone MRU	<b>Channel</b>	CH 31 : 6105 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12210.00	44.7 PK	74.0	-29.3	2.17 V	271	34.3	10.4
2	12210.00	34.2 AV	54.0	-19.8	2.17 V	271	23.8	10.4
3	18315.00	47.0 PK	74.0	-27.0	1.75 V	153	54.1	-7.1
4	18315.00	36.4 AV	54.0	-17.6	1.75 V	153	43.5	-7.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

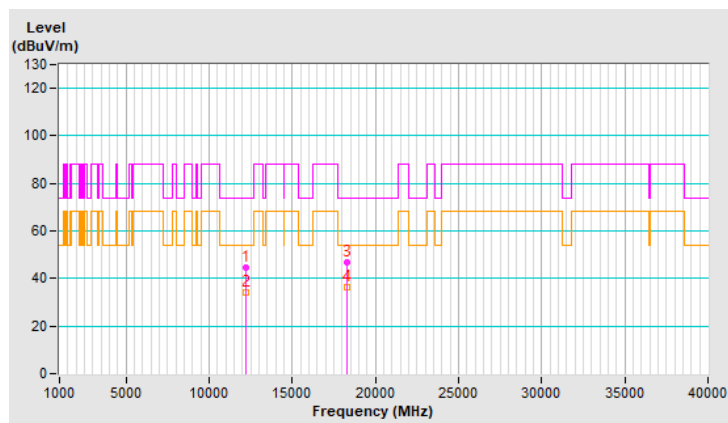


<b>RF Mode</b>	802.11be (EHT) 3x996-tone MRU	<b>Channel</b>	CH 63 : 6265 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	44.0 PK	74.0	-30.0	1.63 H	279	34.1	9.9
2	12530.00	35.6 AV	54.0	-18.4	1.63 H	279	25.7	9.9
3	18795.00	47.0 PK	74.0	-27.0	2.07 H	161	53.9	-6.9
4	18795.00	38.2 AV	54.0	-15.8	2.07 H	161	45.1	-6.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

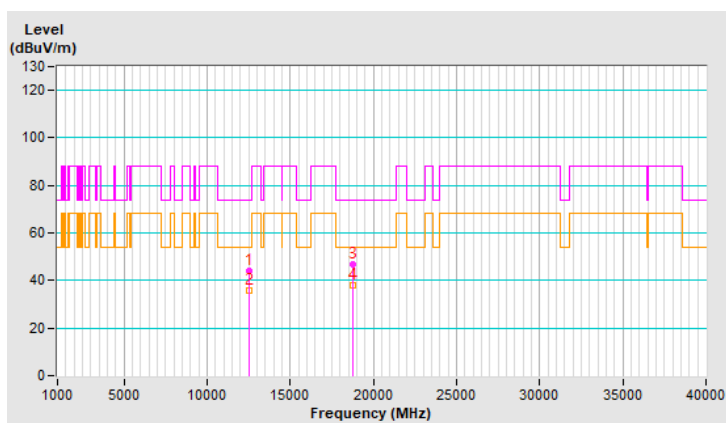


<b>RF Mode</b>	802.11be (EHT) 3x996-tone MRU	<b>Channel</b>	CH 63 : 6265 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	44.3 PK	74.0	-29.7	1.79 V	247	34.4	9.9
2	12530.00	34.0 AV	54.0	-20.0	1.79 V	247	24.1	9.9
3	18795.00	46.5 PK	74.0	-27.5	1.60 V	172	53.4	-6.9
4	18795.00	36.2 AV	54.0	-17.8	1.60 V	172	43.1	-6.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

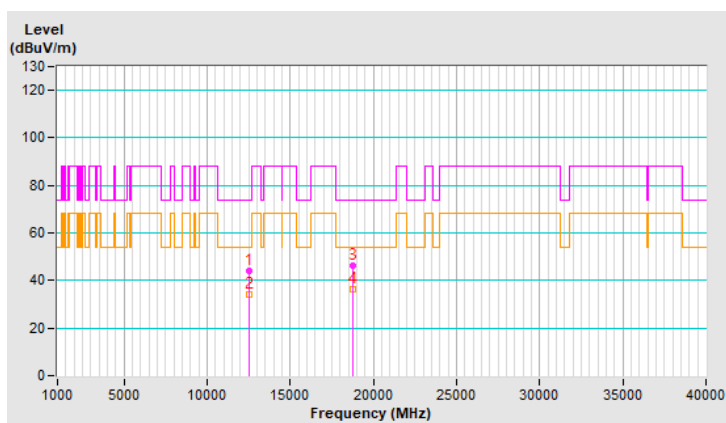


<b>RF Mode</b>	802.11be (EHT) 3x996-tone MRU	<b>Channel</b>	CH 127 : 6585 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13170.00	44.1 PK	88.2	-44.1	1.82 H	311	32.8	11.3
2	#13170.00	35.6 AV	68.2	-32.6	1.82 H	311	24.3	11.3
3	19755.00	47.3 PK	74.0	-26.7	1.87 H	159	53.4	-6.1
4	19755.00	38.4 AV	54.0	-15.6	1.87 H	159	44.5	-6.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

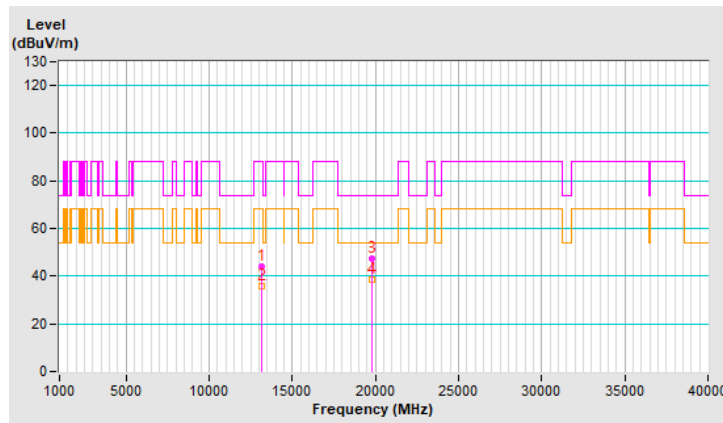


<b>RF Mode</b>	802.11be (EHT) 3x996-tone MRU	<b>Channel</b>	CH 127 : 6585 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13170.00	44.0 PK	88.2	-44.2	2.01 V	285	32.7	11.3
2	#13170.00	33.9 AV	68.2	-34.3	2.01 V	285	22.6	11.3
3	19755.00	46.1 PK	74.0	-27.9	1.62 V	186	52.2	-6.1
4	19755.00	35.8 AV	54.0	-18.2	1.62 V	186	41.9	-6.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

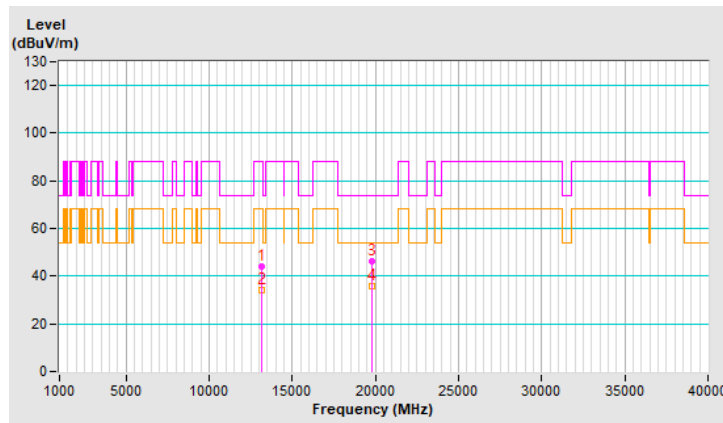


<b>RF Mode</b>	802.11be (EHT) 3x996-tone MRU	<b>Channel</b>	CH 191 : 6905 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13810.00	44.3 PK	88.2	-43.9	1.65 H	278	31.3	13.0
2	#13810.00	35.8 AV	68.2	-32.4	1.65 H	278	22.8	13.0
3	20715.00	46.4 PK	74.0	-27.6	1.95 H	181	51.1	-4.7
4	20715.00	38.0 AV	54.0	-16.0	1.95 H	181	42.7	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

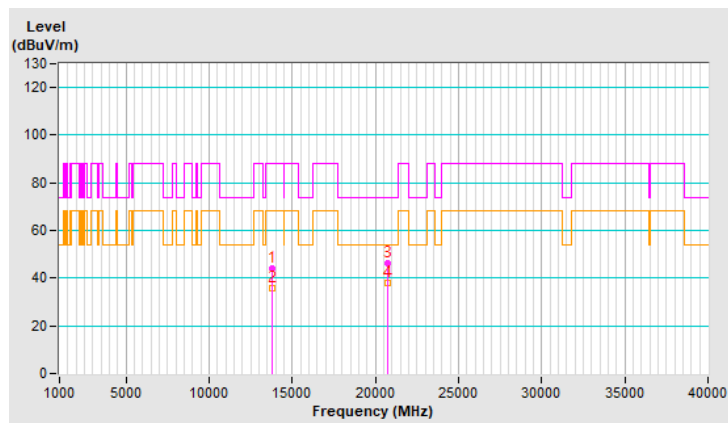


<b>RF Mode</b>	802.11be (EHT) 3x996-tone MRU	<b>Channel</b>	CH 191 : 6905 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13810.00	44.7 PK	88.2	-43.5	2.11 V	276	31.7	13.0
2	#13810.00	34.7 AV	68.2	-33.5	2.11 V	276	21.7	13.0
3	20715.00	47.0 PK	74.0	-27.0	1.64 V	188	51.7	-4.7
4	20715.00	36.5 AV	54.0	-17.5	1.64 V	188	41.2	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

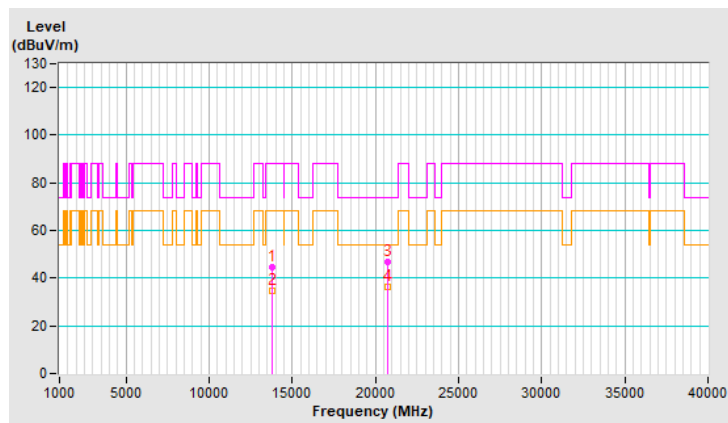


<b>RF Mode</b>	802.11be (EHT) 3x996+484-tone MRU	<b>Channel</b>	CH 31 : 6105 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12210.00	44.2 PK	74.0	-29.8	1.68 H	269	33.8	10.4
2	12210.00	36.0 AV	54.0	-18.0	1.68 H	269	25.6	10.4
3	18315.00	46.3 PK	74.0	-27.7	2.03 H	162	53.4	-7.1
4	18315.00	37.8 AV	54.0	-16.2	2.03 H	162	44.9	-7.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

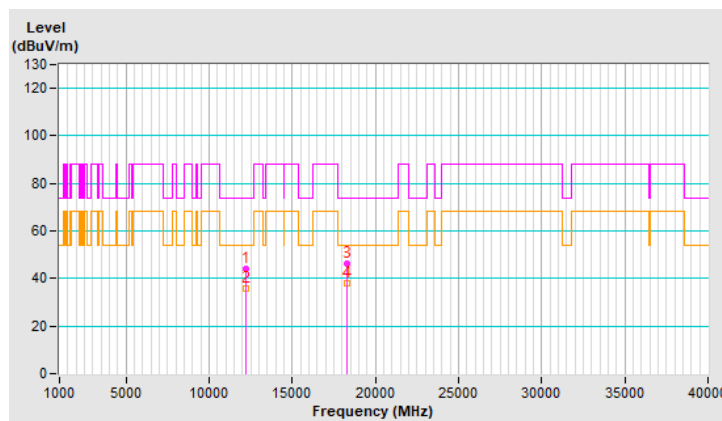




<b>RF Mode</b>	802.11be (EHT) 3x996+484-tone MRU	<b>Channel</b>	CH 31 : 6105 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12210.00	44.4 PK	74.0	-29.6	2.05 V	263	34.0	10.4
2	12210.00	34.2 AV	54.0	-19.8	2.05 V	263	23.8	10.4
3	18315.00	46.7 PK	74.0	-27.3	1.67 V	165	53.8	-7.1
4	18315.00	36.4 AV	54.0	-17.6	1.67 V	165	43.5	-7.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

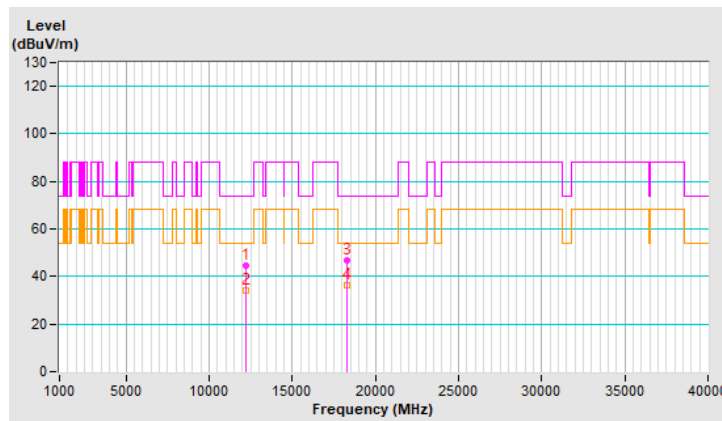


<b>RF Mode</b>	802.11be (EHT) 3x996+484-tone MRU	<b>Channel</b>	CH 63 : 6265 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	43.9 PK	74.0	-30.1	1.80 H	308	34.0	9.9
2	12530.00	35.8 AV	54.0	-18.2	1.80 H	308	25.9	9.9
3	18795.00	46.4 PK	74.0	-27.6	1.92 H	162	53.3	-6.9
4	18795.00	37.6 AV	54.0	-16.4	1.92 H	162	44.5	-6.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

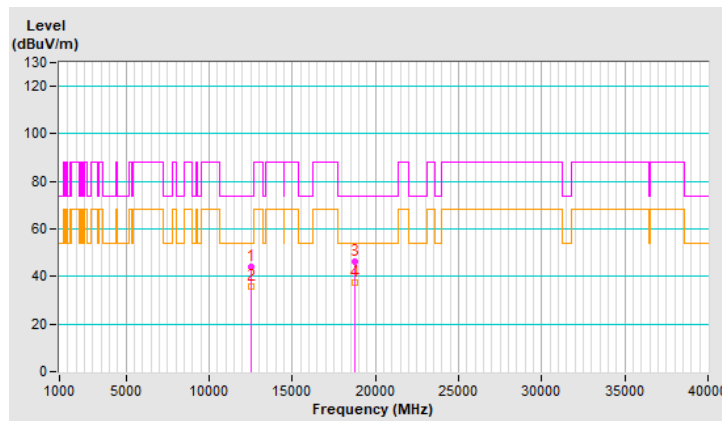


<b>RF Mode</b>	802.11be (EHT) 3x996+484-tone MRU	<b>Channel</b>	CH 63 : 6265 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	44.6 PK	74.0	-29.4	2.06 V	272	34.7	9.9
2	12530.00	34.4 AV	54.0	-19.6	2.06 V	272	24.5	9.9
3	18795.00	47.1 PK	74.0	-26.9	1.56 V	198	54.0	-6.9
4	18795.00	36.6 AV	54.0	-17.4	1.56 V	198	43.5	-6.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

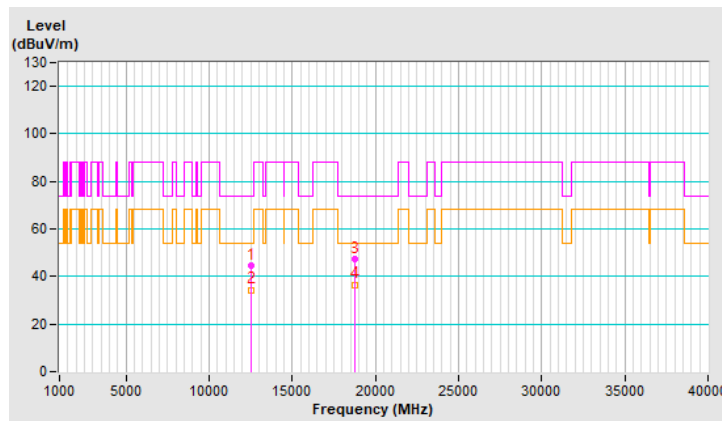


<b>RF Mode</b>	802.11be (EHT) 3x996+484-tone MRU	<b>Channel</b>	CH 127 : 6585 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13170.00	44.6 PK	88.2	-43.6	1.63 H	275	33.3	11.3
2	#13170.00	36.3 AV	68.2	-31.9	1.63 H	275	25.0	11.3
3	19755.00	47.0 PK	74.0	-27.0	1.94 H	186	53.1	-6.1
4	19755.00	38.3 AV	54.0	-15.7	1.94 H	186	44.4	-6.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

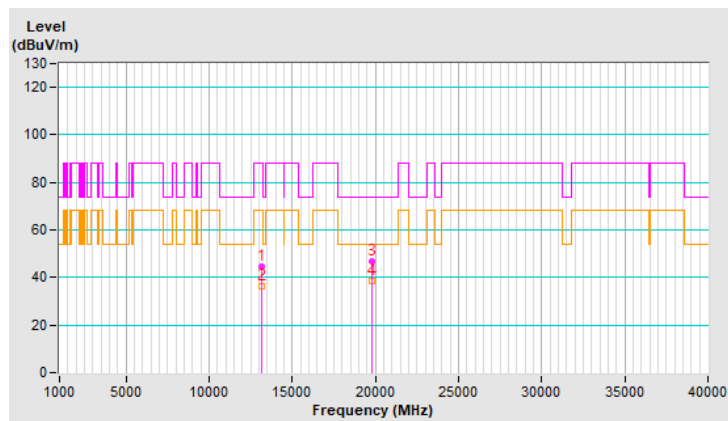


<b>RF Mode</b>	802.11be (EHT) 3x996+484-tone MRU	<b>Channel</b>	CH 127 : 6585 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13170.00	44.4 PK	88.2	-43.8	2.18 V	255	33.1	11.3
2	#13170.00	34.2 AV	68.2	-34.0	2.18 V	255	22.9	11.3
3	19755.00	46.1 PK	74.0	-27.9	1.77 V	151	52.2	-6.1
4	19755.00	36.1 AV	54.0	-17.9	1.77 V	151	42.2	-6.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

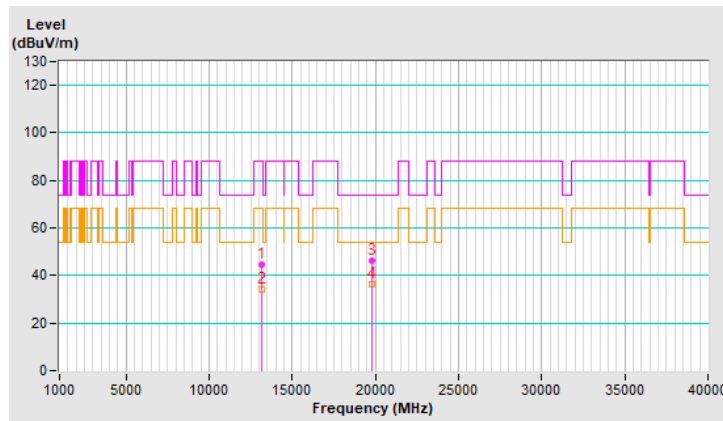


<b>RF Mode</b>	802.11be (EHT) 3x996+484-tone MRU	<b>Channel</b>	CH 191 : 6905 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13810.00	44.4 PK	88.2	-43.8	1.64 H	290	31.4	13.0
2	#13810.00	36.2 AV	68.2	-32.0	1.64 H	290	23.2	13.0
3	20715.00	46.1 PK	74.0	-27.9	1.98 H	167	50.8	-4.7
4	20715.00	37.5 AV	54.0	-16.5	1.98 H	167	42.2	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

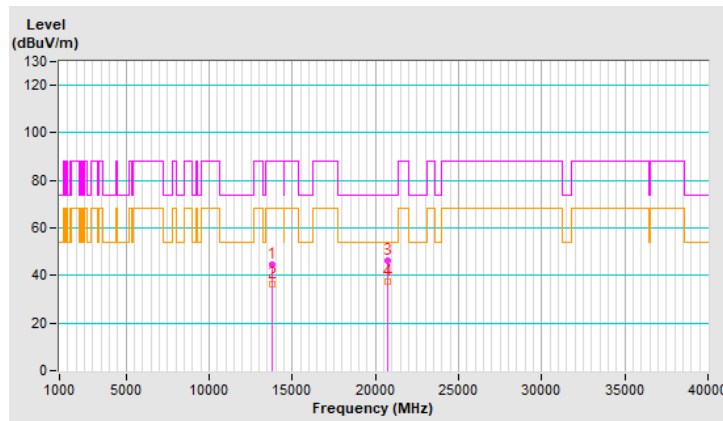


<b>RF Mode</b>	802.11be (EHT) 3x996+484-tone MRU	<b>Channel</b>	CH 191 : 6905 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 66% RH
<b>Tested By</b>	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13810.00	43.7 PK	88.2	-44.5	2.19 V	264	30.7	13.0
2	#13810.00	33.6 AV	68.2	-34.6	2.19 V	264	20.6	13.0
3	20715.00	46.2 PK	74.0	-27.8	1.77 V	164	50.9	-4.7
4	20715.00	36.0 AV	54.0	-18.0	1.77 V	164	40.7	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

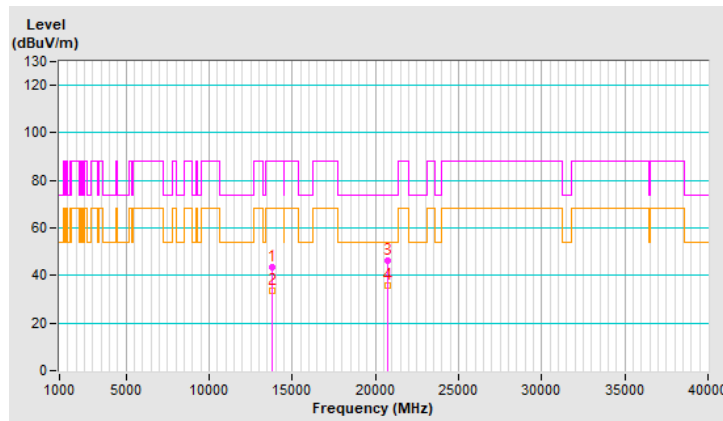

## 8 Operational Restrictions for 6 GHz U-NII Devices

- (1) Operation of transmitters in the 5.925-7.125 GHz band is prohibited for control of or communications with unmanned aircraft systems.
- (2) Transmitters operating under indoor client are limited to indoor locations.
- (3) In the 5.925-7.125 GHz band, client devices must operate under the control of an indoor access point or subordinate devices; In all cases, an exception exists for transmitting brief messages to an access point when attempting to join its network after detecting a signal that confirms that an access point is operating on a particular channel. Client devices are prohibited from connecting directly to another client device.
- (4) Client devices operating in the 5.925-7.125 GHz band must employ a contention-based protocol.

Device is a Client Device (controlled of an indoor AP), all restrictions are meet the §15.407 (d) requirements. Please refer to the Attestation letter exhibit supplied within this application.



## 9 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

## 10 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@bureauveritas.com](mailto:service.adt@bureauveritas.com)

**Web Site:** <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---