

Cellphone-Mate, Inc.

EMC TEST REPORT FOR

Mobile Wideband Consumer Booster Model: Fusion2go

Tested To The Following Standards:

FCC Part 20.21(e)8

Report No.: 97222-11

Date of issue: August 5, 2015



This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of EMC testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

TABLE OF CONTENTS

Administrative Information	3
Test Report Information	3
Report Authorization	3
Test Facility Information	4
Software Versions	4
Site Registration & Accreditation Information	4
Summary of Results	5
Modifications During Testing.....	6
Conditions During Testing.....	6
Equipment Under Test.....	6
FCC Part 20.21.....	7
Clause 7.1 Authorized Frequency Band Verification	7
Summary of Results	8
Clause 7.2 Maximum Power	17
Summary of Results	20
Clause 7.3 Maximum Gain	42
Summary of Results	43
Clause 7.4 Intermodulation Product.....	44
Summary of Results	45
Clause 7.5 Out of Band Emissions.....	56
Summary of Results	57
Clause 7.7 Noise limit	119
Summary of Results	121
Clause 7.8 Uplink Inactivity.....	139
Summary of Results	140
Clause 7.9 Booster Gain Limit.....	143
Summary of Results	146
Clause 7.11 Oscillation Detection	152
Summary of Results	154
Clause 7.13 Spectrum Block Filter	207
Exhibit A: Test Setup Photos	208

ADMINISTRATIVE INFORMATION

Test Report Information

REPORT PREPARED FOR:

Cellphone-Mate, Inc.
48346 Milmont Drive
Fremont, CA 94538

Representative: Dennis Findley
Customer Reference Number: SC20150623

DATE OF EQUIPMENT RECEIPT:**DATE(S) OF TESTING:****REPORT PREPARED BY:**

Morgan Tramontin
CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338

Project Number: 97222

June 23, 2015

June 23-30, 2015

Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the sample equipment tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.

A handwritten signature in black ink that reads "Steve Behm". The signature is written in a cursive style and is positioned above a horizontal line.

Steve Behm
Director of Quality Assurance & Engineering Services
CKC Laboratories, Inc.

Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

TEST LOCATION(S):
CKC Laboratories, Inc.
1120 Fulton Place
Fremont, CA 94539

Software Versions

CKC Laboratories Proprietary Software	Version
EMITest Emissions	5.02.00
EMITest Immunity	5.02.00

Site Registration & Accreditation Information

Location	CB #	TAIWAN	CANADA	FCC	JAPAN
Fremont	US0082	SL2-IN-E-1148R	3082B-1	958979	A-0149

SUMMARY OF RESULTS

Standard / Specification: FCC Part 20.21

KDB 935210 D03 Wideband Consumer Signal Booster Measurement Guidance v03, June 5, 2015		FCC Part 20.21 Section Correlation		Modifications	Results
Guidance Sec #	Guidance Description	FCC Sec #	FCC Rule Description		
7.1 a) – k)	Authorized Frequency band Verification test	20.21(e)(3)	Frequency Bands	NA	Pass
7.2.2 a) - k)	Maximum Power Measurement procedure	20.21(e)(8)(i)(D)	Power Limit	NA	Pass
7.3 a) – d)	Maximum Booster Gain Computation	20.21(e)(8)(i)(B)	Bidirectional Capabilities	NA	Pass
7.4 a) – n)	Intermodulation Product	20.21(e)(8)(i)(F)	Intermodulation Limit	NA	Pass
7.5 a) – n)	Out of Band Emissions	20.21(e)(8)(i)(E)	Out of Band Emission	NA	Pass
7.6 a) – e)	Conducted Spurious emission	Part 22/24/27	Spurious Emission	NA	NA ¹
7.7.1 a) – g)	Noise Limit procedure	20.21(e)(8)(i)(A)(2)	Noise Limits	NA	Pass
7.7.1 h) – n)	Variable Noise	(ii)			Pass
7.7.2 a) – g)	Variable Noise Timing	20.21(e)(8)(i)(A)(1) 20.21(e)(8)(i)(H)	Transmit Power Off Mode		Pass
7.8 a) – l)	Uplink inactivity	20.21(e)(8)(i)(I)	Uplink inactivity	NA	Pass
7.9.1 a) – l)	Variable Booster gain	20.21(e)(8)(i)(C)	Booster Gain	NA	Pass
7.9.2 a) – f)	Variable Uplink Gain Timing	(1), (2)(iii) 20.21(e)(8)(i)(H)	Transmit Power Off Mode		Pass
7.10.a) – j)	Occupied Band width.	2.1049 Part 22/24/27	Occupied Bandwidth	NA	NA ¹
7.11.2 a) – r)	Anti-Oscillation	20.21(e)(8)(ii)(A)	Anti Oscillation	NA	Pass
7.11.3 a) – h)					Pass
7.11.4 a) – h)					
(Alternate to 7.11.3)					
7.12a) – f)	Radiated Spurious emission	Part 22/24/27	Spurious Emission	NA	NA ¹
7.13 a) – c)	Spectrum block filter	NA	NA	NA	NA ²

NA¹ = A different standard applies; see applicable test report.

NA² = Not applicable. See the section in the report for the reason.

Modifications During Testing

This list is a summary of the modifications made to the equipment during testing.

Summary of Conditions
No modifications were made during testing.

Modifications listed above must be incorporated into all production units.

Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

Summary of Conditions
None

EQUIPMENT UNDER TEST (EUT)

During testing numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

Configuration 1

Equipment Tested:

Device	Manufacturer	Model #	S/N
Mobile Wideband Consumer Booster	Cellphone-Mate, Inc.	Fusion2go	1

Support Equipment:

Device	Manufacturer	Model #	S/N
Switching Power Adapter	SureCall	GFP451DA-1238-1	1406-0000611
Signal Generator	Agilent	E4438C	MY42082260
Signal Generator	Agilent	E4433B	US40052164

FCC PART 20.21

Clause 7.1 Authorized Frequency Band Verification

Test Equipment					
Asset #	Description	Model	Manufacturer	Cal Date	Cal Due
ANP05389	Attenuator	766-10	Narda	02/27/2014	02/27/2016
ANP05713	Attenuator	PE7015-20	Pasternack	03/24/2015	03/24/2017
ANP06709	Cable	32026-29094K-29094K-72TC	AstroLab	09/18/2014	09/18/2016
ANP06710	Cable	32026-29094K-29094K-72TC	AstroLab	09/18/2014	09/18/2016
AN02869	Spectrum Analyzer	E4440A	Agilent	07/10/2014	07/10/2015

Test Conditions / Setup

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170
 Customer: Cellphone-Mate, Inc.
 Specification: **7.1 Authorized Frequency Band Verification**
 Work Order #: **97222** Date: 6/23/2015
 Test Type: **Conducted Emissions** Time: 11:54:28
 Tested By: Daniel Bertran Sequence#: 1
 Software: EMITest 5.02.00

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:**Configuration 1**

The equipment under test (EUT) is a Mobile Wideband Consumer Booster.

The EUT is placed on the test bench. Evaluation performed at the Outside (Donor) and Inside (Server) antenna port.

Part 22

UL: 824-849MHz

DL: 869-894MHz

Part 24

UL: 1850-1915MHz

DL: 1930-1995MHz

Part 27

UL: 1710-1755MHz, 698-716MHz, 776-787MHz

DL: 2110-2155MHz, 728-746MHz, 746-757MHz

All adjustable settings on the test sample are set at max gain.

Test environment conditions: Temperature: 20.8°C, Relative Humidity: 42%, Atmospheric Pressure: 101.5kPa

Test procedure: The test was performed in accordance with section 7.1 of the FCC document: 935210 D03 Wideband Consumer Signal Booster Measurement Guidance v03 Dated June 5, 2015.


Firmware: V1.0

Summary of Results


Pass: The plots above show the device only operates on the CMRS frequency bands authorized for use by the NPS.

Test Data


UL

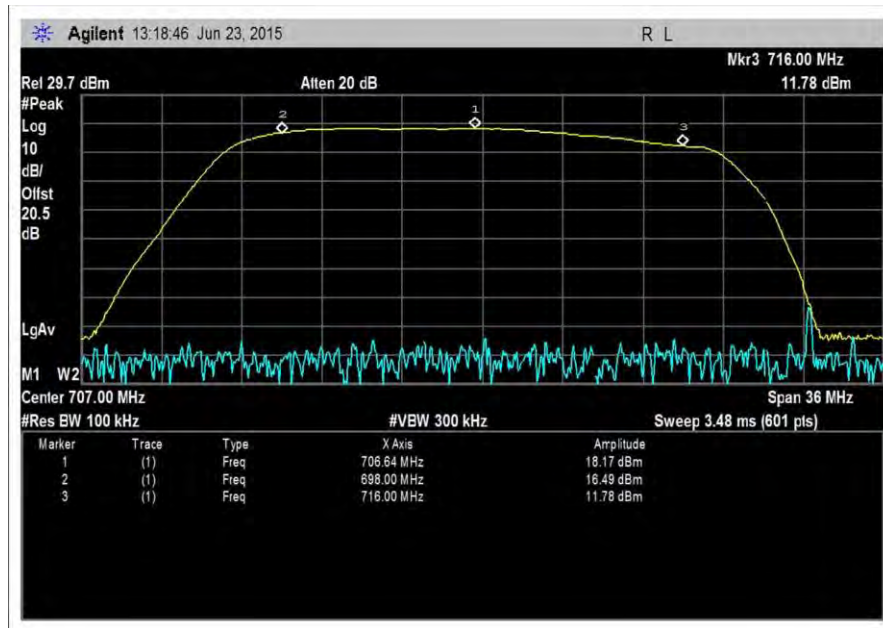


UL_698-716MHz

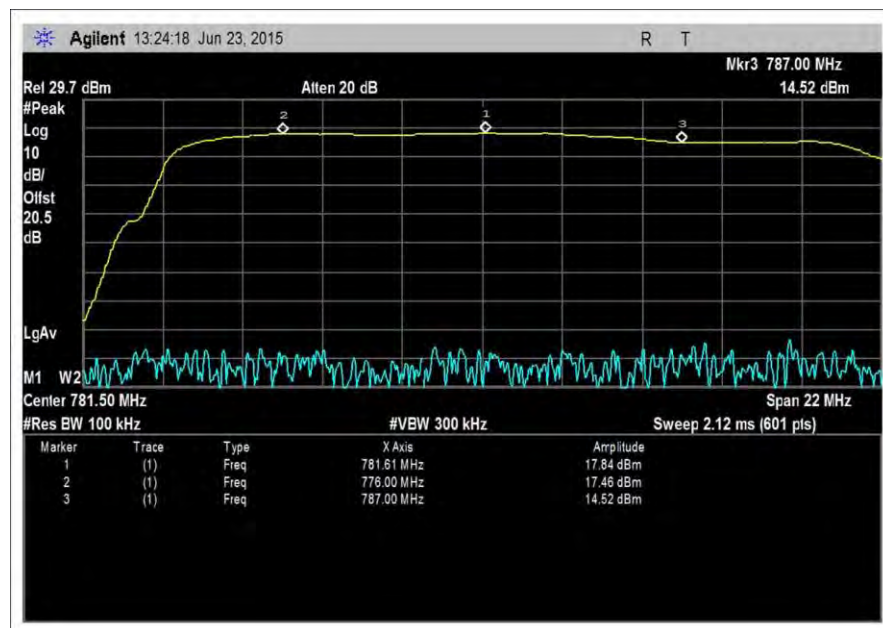


UL_776-787MHz

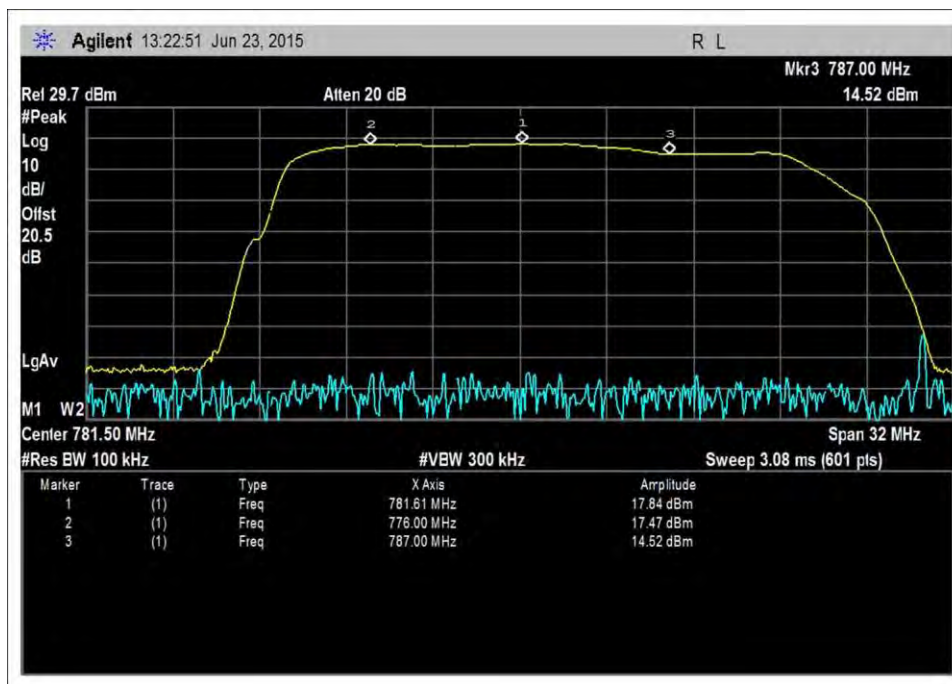


UL_776-787MHz_Zoom

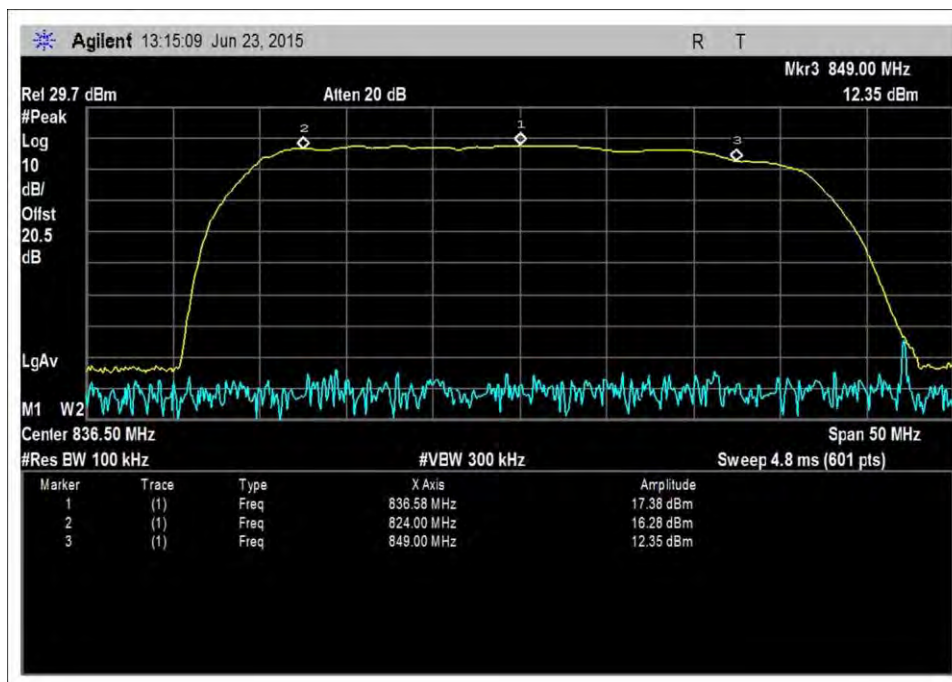


UL_824-849MHz

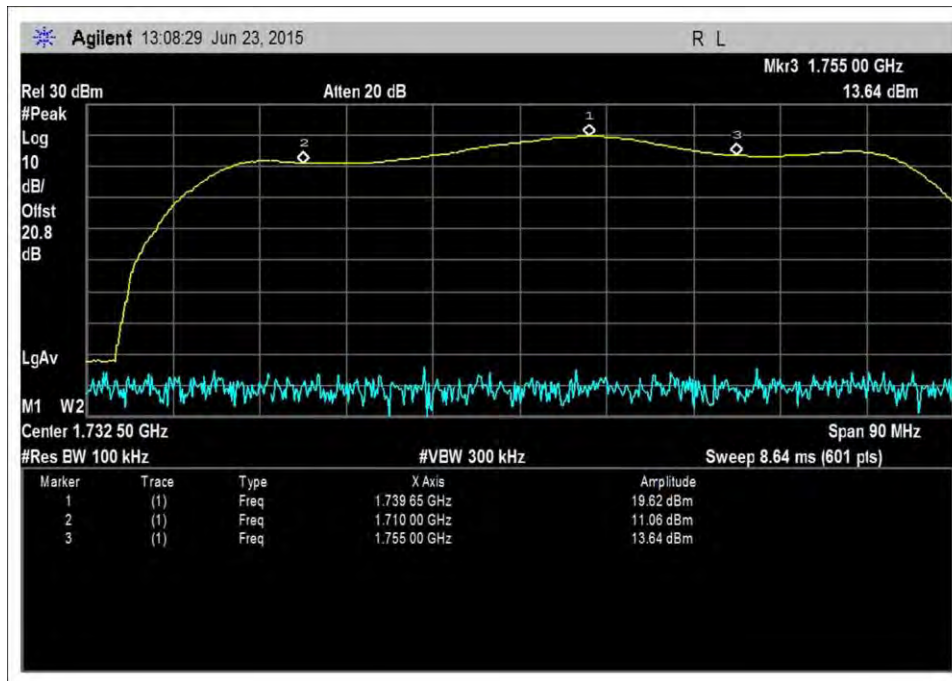

UL_1710-1755MHz

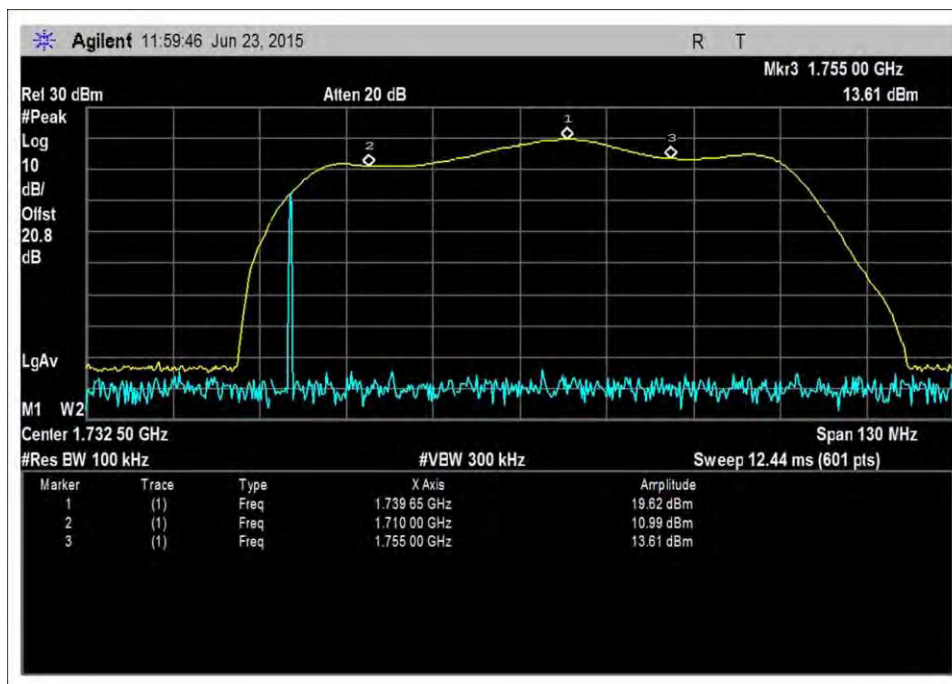


UL_1710-1755MHz_Zoom

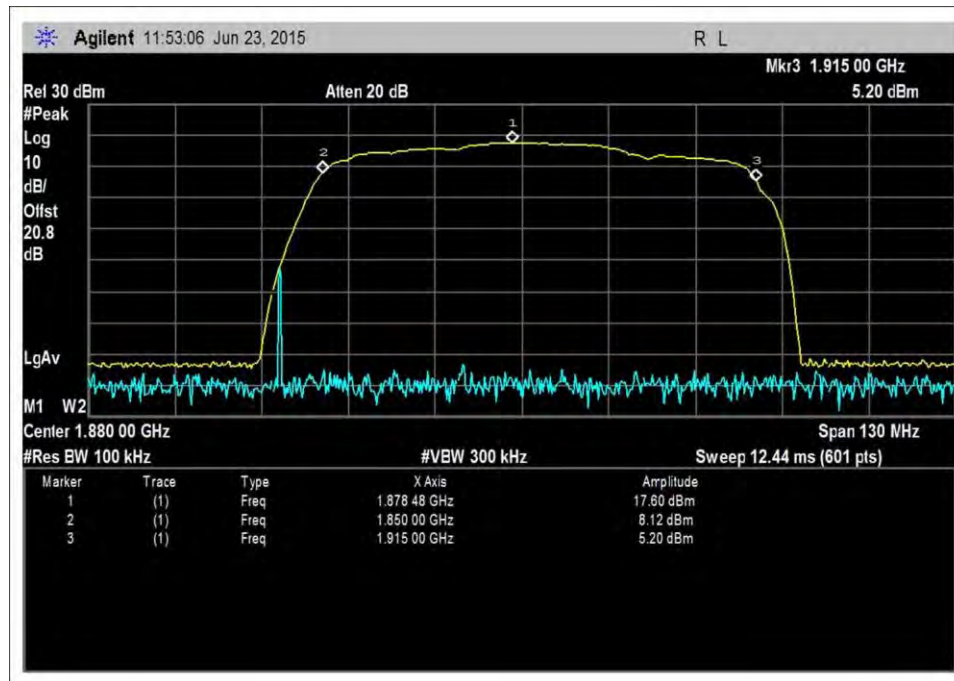


UL_1850-1915MHz


DL

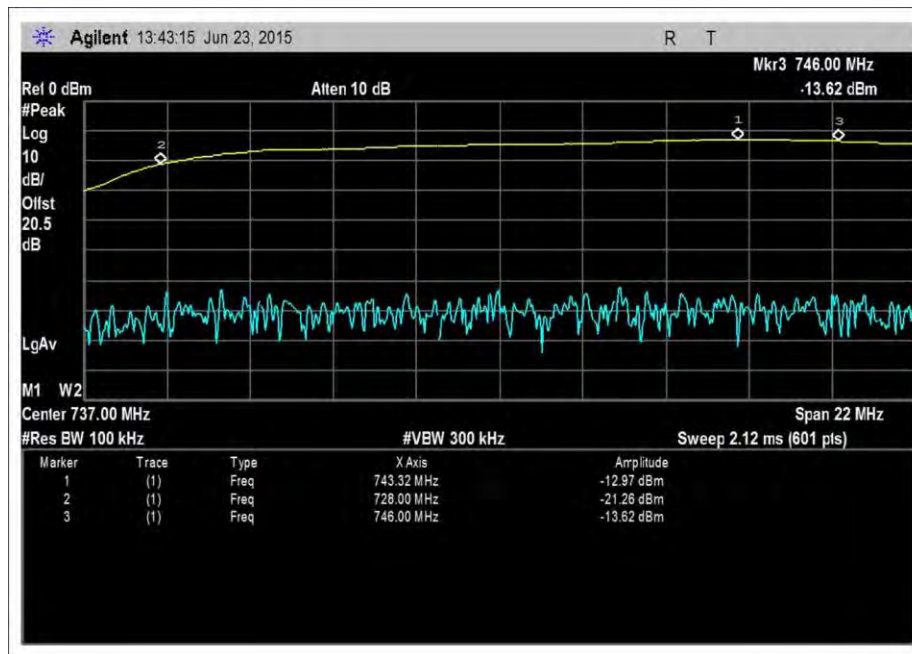


DL_728-746MHz

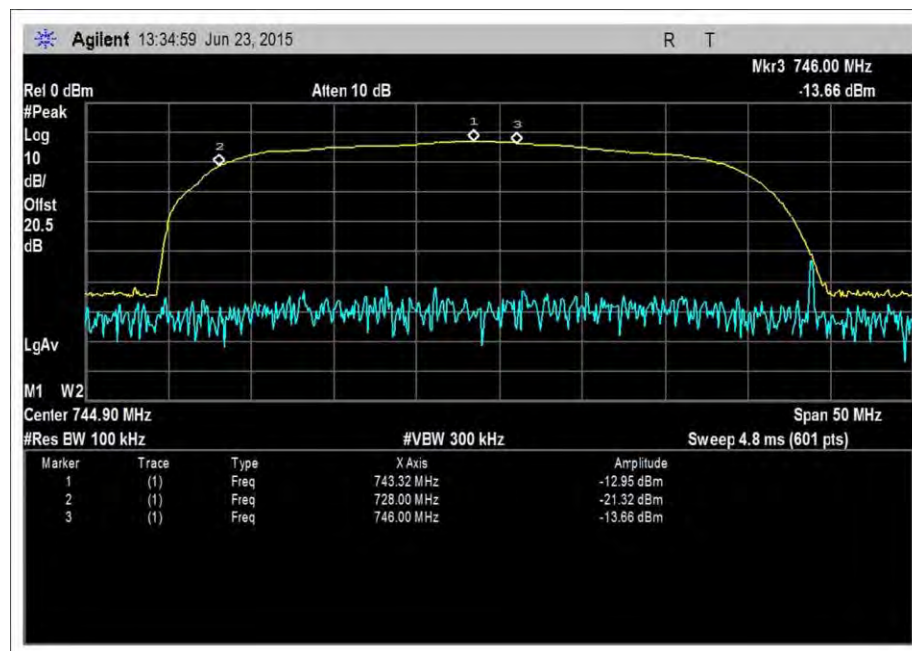


DL_728-746MHz_Zoom

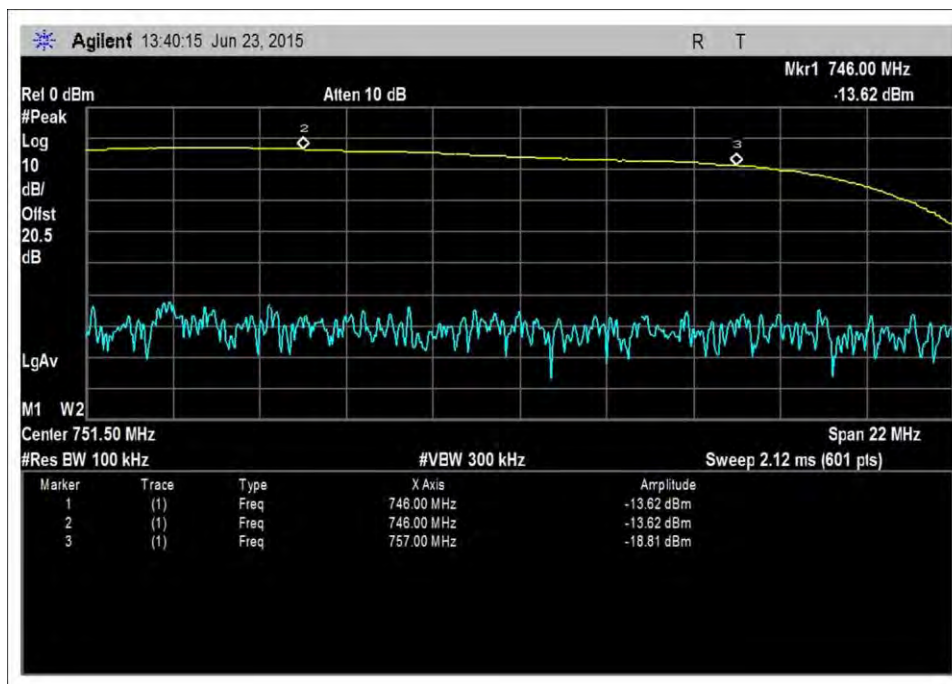


DL_746-757MHz

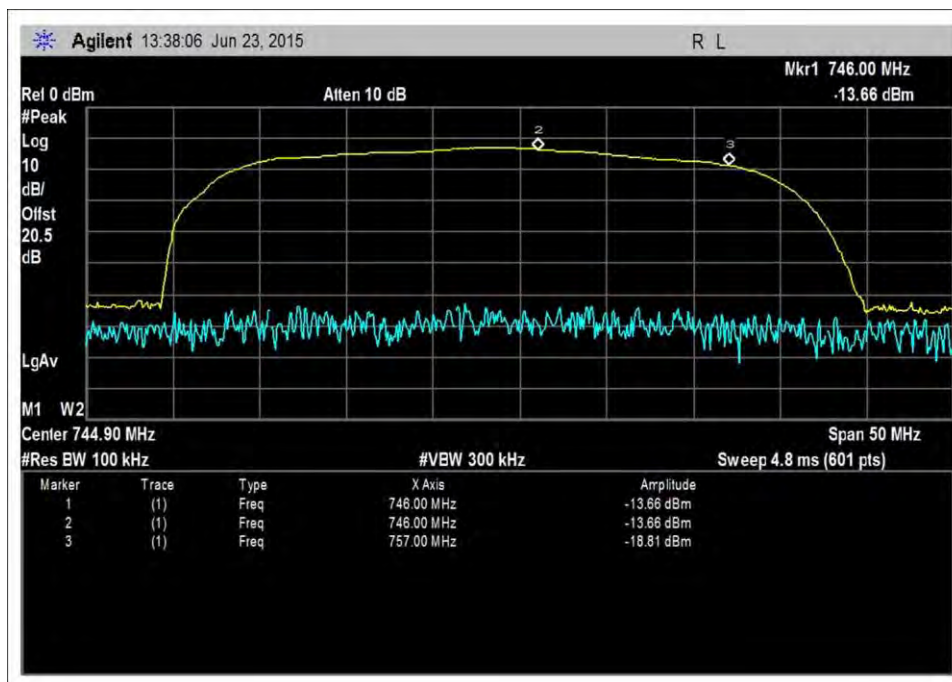


DL_746-757MHz_Zoom

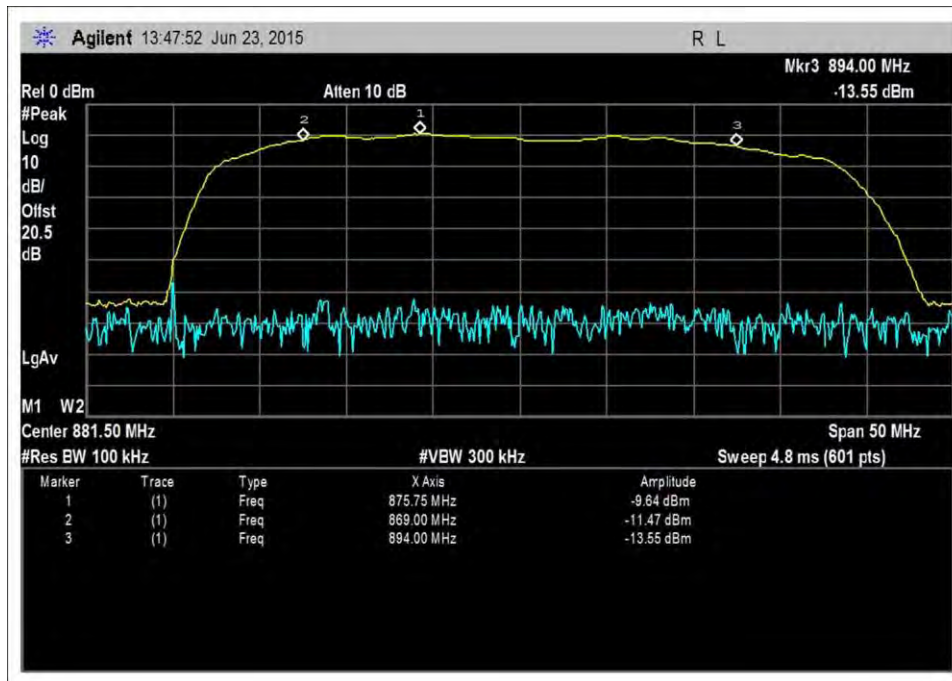


DL_869-894MHz

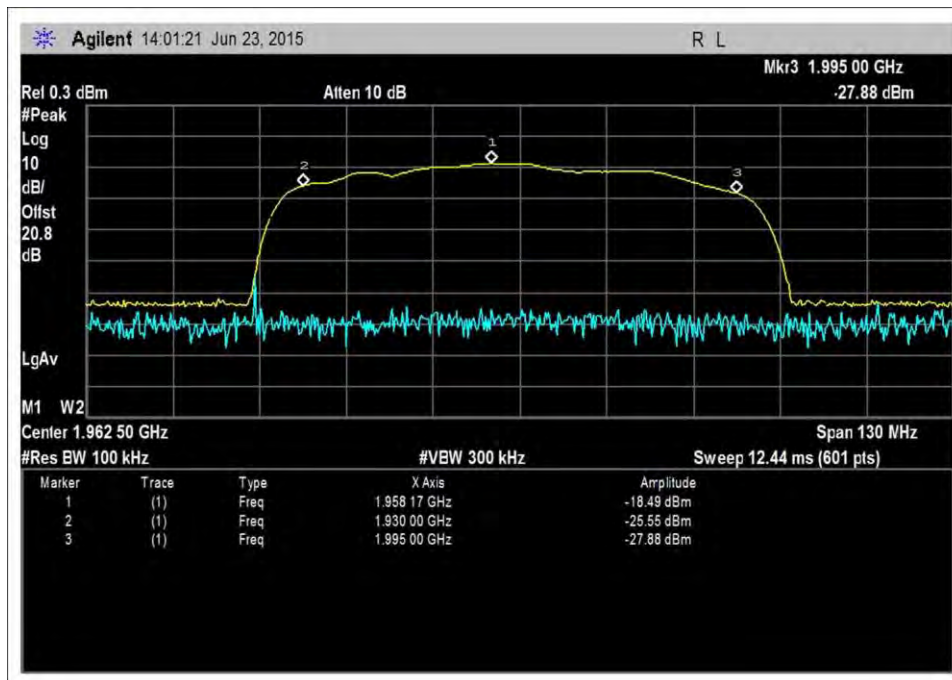

DL_1930-1995MHz

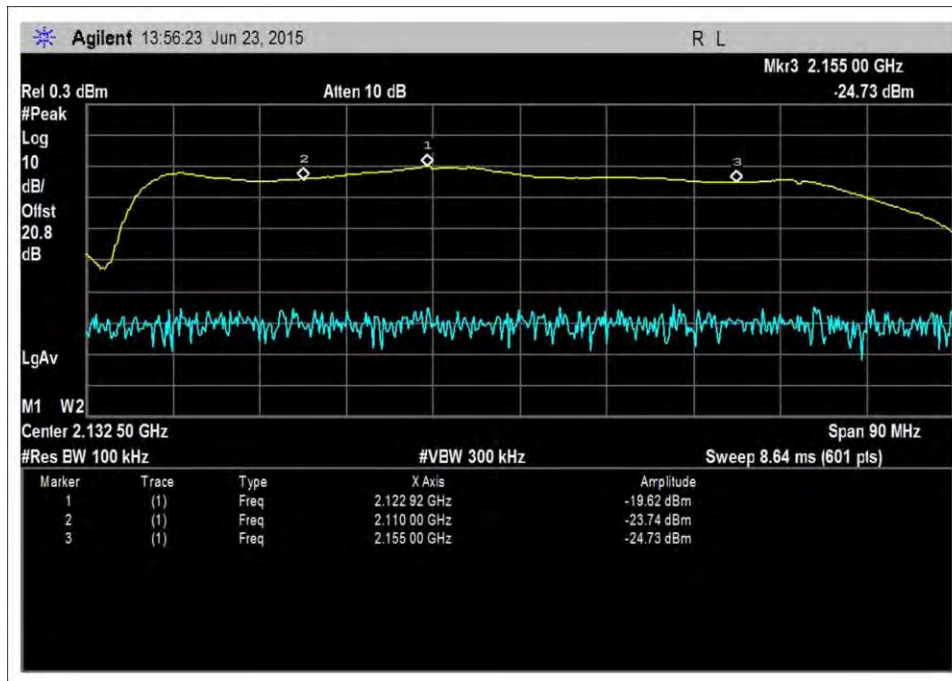

DL_2110-2155MHz

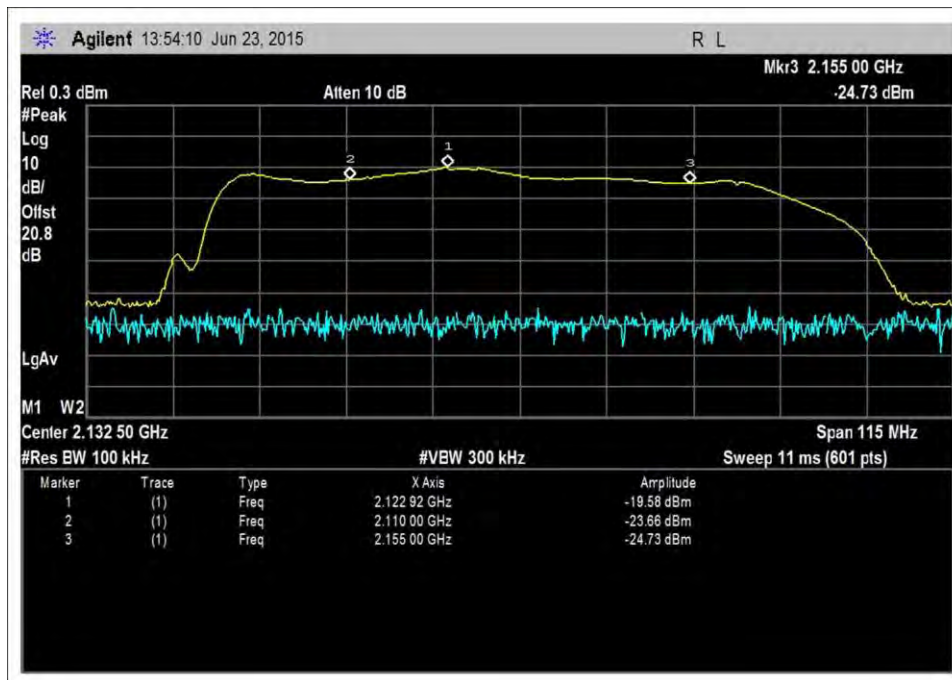

DL_2110-2155MHz_Zoom

Clause 7.2 Maximum Power

Test Equipment

Asset #	Description	Model	Manufacturer	Cal Date	Cal Due
ANP05389	Attenuator	766-10	Narda	02/27/2014	02/27/2016
ANP05713	Attenuator	PE7015-20	Pasternack	03/24/2015	03/24/2017
ANP06709	Cable	32026-29094K-29094K-72TC	AstroLab	09/18/2014	09/18/2016
ANP06710	Cable	32026-29094K-29094K-72TC	AstroLab	09/18/2014	09/18/2016
AN02869	Spectrum Analyzer	E4440A	Agilent	07/10/2014	07/10/2015

Test Conditions / Setup

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170
 Customer: Cellphone-Mate, Inc.
 Specification: **7.2 Maximum Power Measurement**
 Work Order #: **97222** Date: 6/23/2015
 Test Type: **Conducted Emissions** Time: 11:54:28
 Tested By: Daniel Bertran Sequence#: 1
 Software: EMITest 5.02.00

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Configuration 1
The equipment under test (EUT) is a Mobile Wideband Consumer Booster.
The EUT is placed on the test bench. Evaluation performed at the Outside (Donor) and Inside (Server) antenna port.
Part 22
UL: 824-849MHz
DL: 869-894MHz
Part 24
UL: 1850-1915MHz
DL: 1930-1995MHz
Part 27
UL: 1710-1755MHz, 698-716MHz, 776-787MHz
DL: 2110-2155MHz, 728-746MHz, 746-757MHz
All adjustable settings on the test sample are set at max gain.
Test environment conditions: Temperature: 20.8°C, Relative Humidity: 42%, Atmospheric Pressure: 101.5kPa
Test procedure: The test was performed in accordance with section 7.2 of the FCC document: 935210 D03 Wideband Consumer Signal Booster Measurement Guidance v03 Dated June 5, 2015.
Firmware: V1.0

The booster is to be deployed with antenna kit with the following characteristic:

Antenna Kitting Information

Vehicle Kit							
Component	Prod No. Description	Gain/Loss					Notes
		LTE-A	LTE-V	800MHz	1900MHz	1700MHz\2100MHz	
Outdoor Antenna	SC-200W	3dBi	3dBi	3dBi	5dBi	5dBi\5dBi	
Outdoor Cable	RG-174-10FT 10Feet	3.8dB	3.8dB	4.3dB	8.8dB	6.98dB\8.96dB	
Indoor Antenna	SC-110W	1.1dBi	1.1dBi	1.1dBi	3dBi	3dBi\3dBi	Table Top Antenna
Indoor Cable	RG-174-10FT 10Feet	3.8dB	3.8dB	4.3dB	8.8dB	6.98dB\8.96dB	

Marine Kit							
Component	Prod No. Description	Gain/Loss					Notes
		LTE-A	LTE-V	800MHz	1900MHz	1700MHz\2100MHz	
Outdoor Antenna	SC-288W or Galaxy 5412-P	3dBi	3dBi	3dBi	4dBi	4dBi\4dBi	
Outdoor Cable	RG-240-40FN 40Feet	3.52dB	3.52dB	3.98dB	6.52dB	6.12dB\6.92dB	
Indoor Antenna	SC-248W	7dBi	7dBi	7dBi	10dBi	10dBi\10dBi	Wall Mounted Antenna
Indoor Cable	RG-240-20FN 20Feet	2.06dB	2.06dB	2.29dB	3.56dB	3.36dB\ 3.76dB	

Desk top/RV Kit							
Component	Prod No. Description	Gain/Loss					Notes
		LTE-A	LTE-V	800MHz	1900MHz	1700MHz\2100MHz	
Outdoor Antenna	SC-288W	3dBi	3dBi	3dBi	4dBi	4dBi\4dBi	
Outdoor Cable	RG-240-40FN 40Feet	3.52dB	3.52dB	3.98dB	6.52dB	6.12dB\6.92dB	
Indoor Antenna	SC-120W	1.2dBi	1.2dBi	1.2dBi	3dBi	3dBi\3dBi	Table Top Antenna

Summary of Results

Pass: as summarized in table below, measured EIRP, Gain and UL/DL gain ratio are within limits.

Pre AGC						
Pulse GSM				4.1 MHz AWGN		
Frequency (MHz)	Input (dBm)	Output (dBm)	Gain (dB)	Input (dBm)	Output (dBm)	Gain (dB)
UL1710-1755	-25.6	18.6	44.2	-25.7	18.3	44.0
UL1850-1915	-24.3	17.5	41.8	-24.1	18.1	42.2
UL824-894	-23.4	19.3	42.7	-23.1	18.2	41.3
UL 698-716	-21.5	19.6	41.1	-21.8	18.8	40.6
UL776-787	-25.9	18.8	44.7	-26.4	18.2	44.6
DL2110-2155	-59.9	-18.8	41.2	-59.4	-17.8	41.7
DL1930-1995	-58.7	-17.6	41.1	-60.1	-18.7	41.4
DL869-894	-54.1	-9.5	44.6	-52.0	-8.8	43.2
DL:728-746	-57.0	-11.6	45.4	-57.4	-12.4	45.0
DL 746-757	-57.5	-13.5	44.0	-58.0	-14.0	44.0

Pulse GSM						
					Conducted	Conducted and EIRP
Frequency (MHz)	Output Power (dBm)	Ant Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit Min (dBm)	Limit Max (dBm)
UL1710-1755	18.6	5	6.5	17.1	17	30
UL1850-1915	17.5	5	6.1	16.4	17	30
UL824-894	19.3	3	4	18.3	17	30
UL 698-716	19.6	3	3.5	19.1	17	30
UL776-787	18.8	3	3.5	18.3	17	30
DL2110-2155	-18.8	10	3.5	-12.3	NA	17
DL1930-1995	-17.6	10	3.4	-11.0	NA	17
DL869-894	-9.5	7	2.3	-4.8	NA	17
DL:728-746	-11.6	7	2	-6.6	NA	17
DL 746-757	-13.5	7	2	-8.5	NA	17


4.1MHz AWGN						
					Conducted	Conducted and EIRP
Frequency (MHz)	Output Power (dBm)	Ant Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit Min (dBm)	Limit Max (dBm)
UL1710-1755	18.3	5	6.12	17.2	17	30
UL1850-1915	18.1	5	6.52	16.6	17	30
UL824-894	18.2	3	3.98	17.2	17	30
UL 698-716	18.8	3	3.52	18.3	17	30
UL776-787	18.2	3	3.52	17.7	17	30
DL2110-2155	-17.8	10	3.76	-11.5	NA	17
DL1930-1995	-18.7	10	3.56	-12.2	NA	17
DL869-894	-8.8	7	2.29	-4.1	NA	17
DL:728-746	-12.4	7	2.06	-7.5	NA	17
DL 746-757	-14.0	7	2.06	-9.1	NA	17

Section 5.5 power						
Pulse GSM				4.1 MHz AWGN		
Frequency (MHz)	Input (dBm)	Output (dBm)	Gain (dB)	Input (dBm)	Output (dBm)	Gain (dB)
UL1710-1755	-13.5	18.3	31.8	-14.0	17.9	31.9
UL1850-1915	-12.3	18.3	30.6	-12.5	19.3	31.8
UL824-894	-11.5	18.9	30.4	-12.2	17.8	30.0
UL 698-716	-11.3	19.7	31.0	-11.0	19.0	30.0
UL776-787	-14.0	18.2	32.2	-14.6	18.0	32.6
DL2110-2155	-54.2	-18.2	36.1	-54.1	-20.5	33.7
DL1930-1995	-53.9	-18.2	35.7	-53.9	-17.5	36.5
DL869-894	-47.7	-8.7	39.0	-50.0	-9.0	41.0
DL:728-746	-51.9	-11.9	40.0	-52.8	-15.1	37.8
DL 746-757	-51.7	-12.4	39.3	-53.4	-13.5	39.9

Note: The booster went into Transmitter off mode at Max input power of +10dBm (UL) and -20dBm (DL). Results presented on the above table are at 1 dB below the Transmit off RF input level. This table it is for reference only.

Test Data

UL-GSM

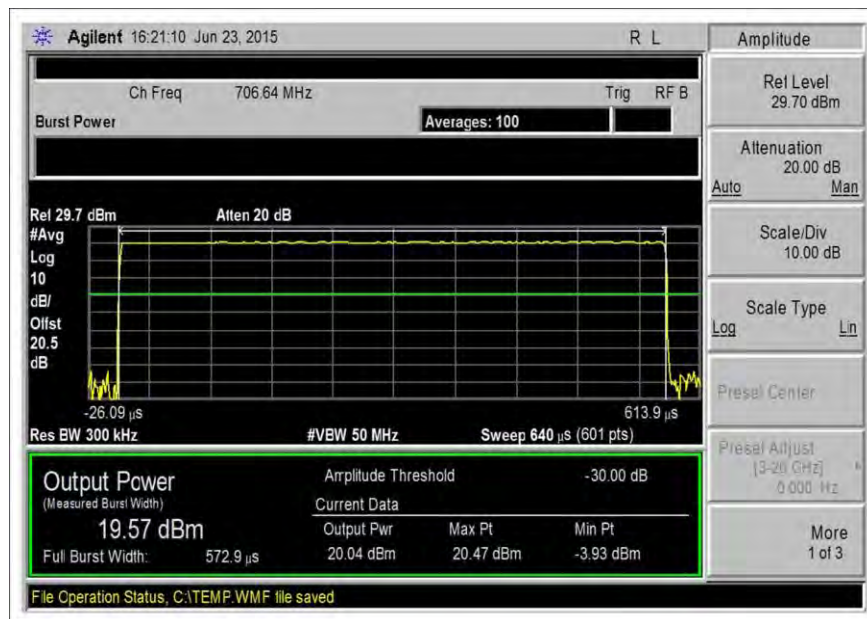


UL_698-716_GSM



UL_698-716_GSM-Max




UL_776-787_GSM

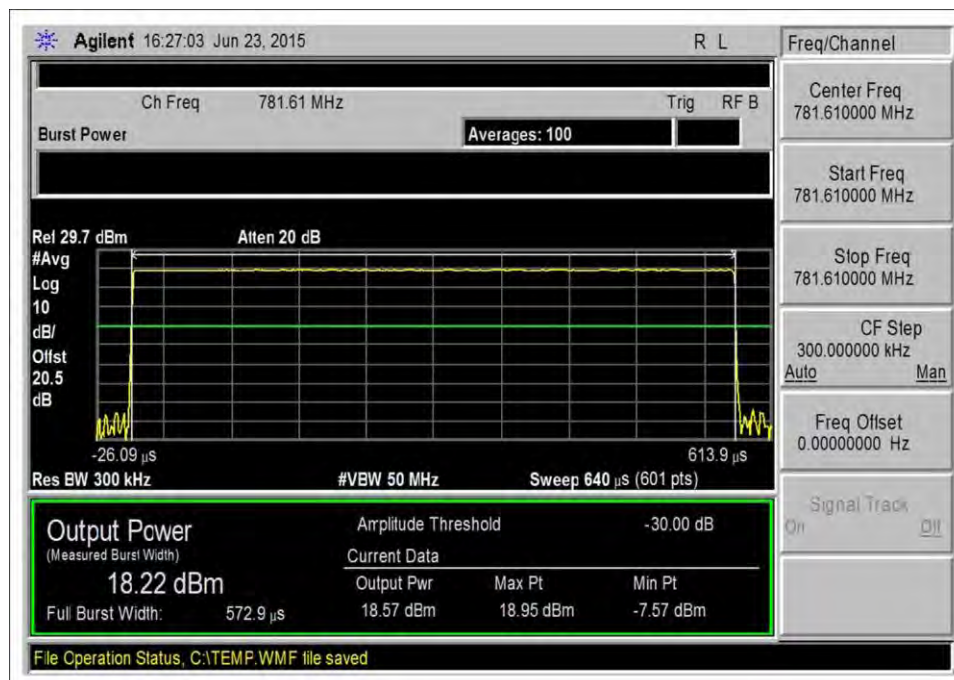


UL_776-787_GSM-Max




UL_824-849_GSM

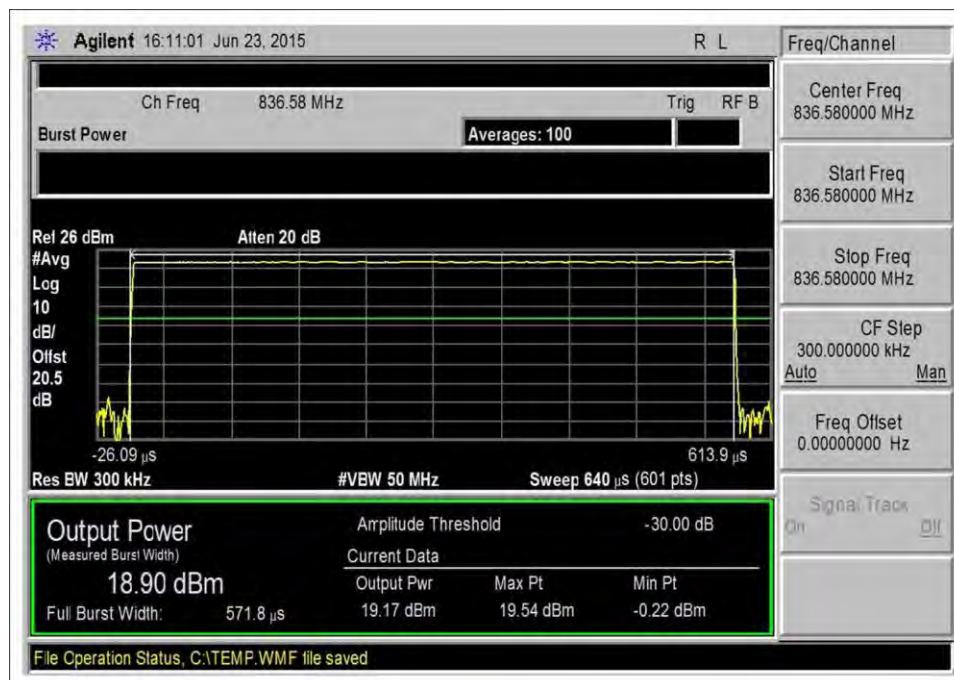


UL_824-849_GSM-Max

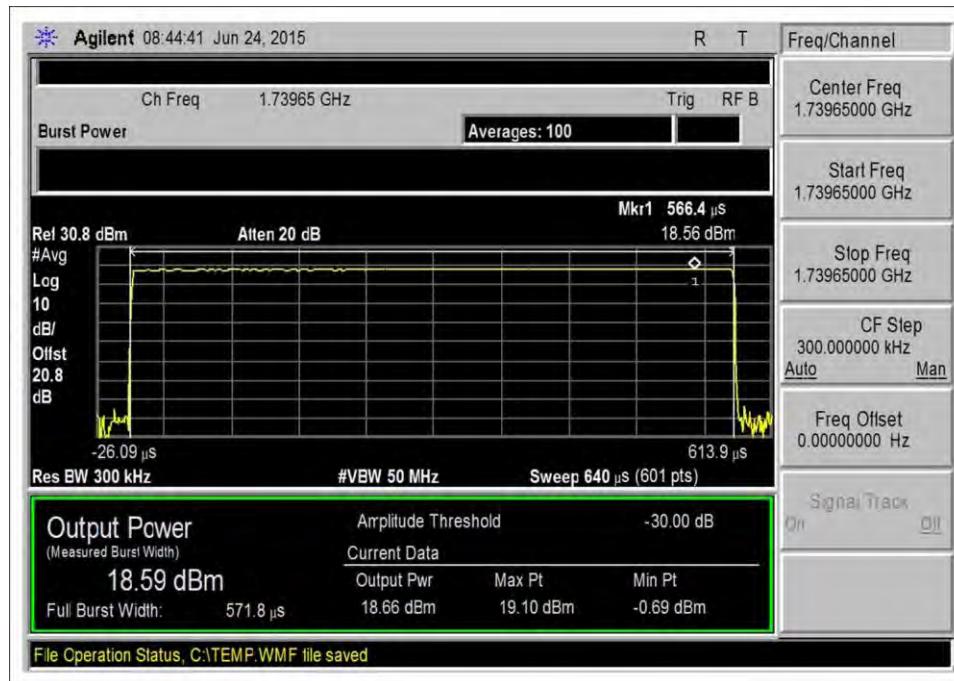


UL_1710-1755_GSM

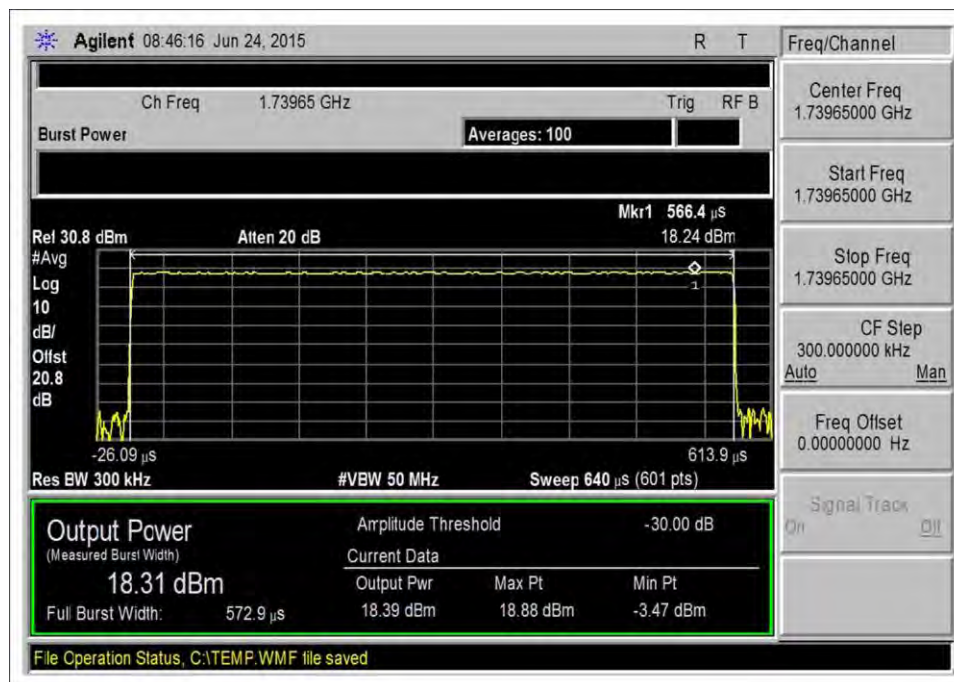

UL_1710-1755_GSM-Max

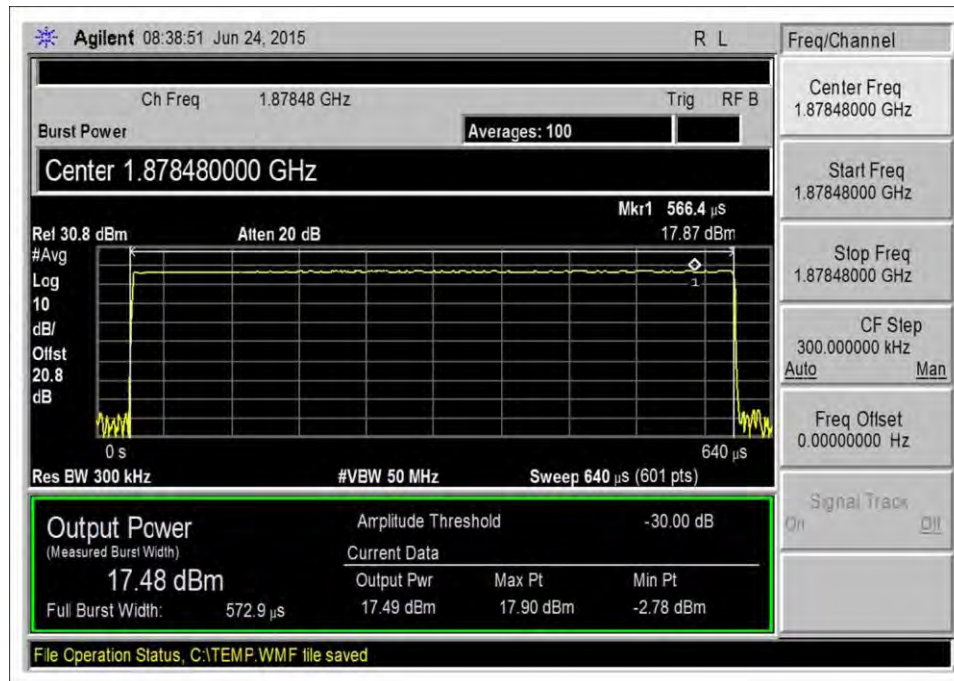


UL_1850-1915_GSM

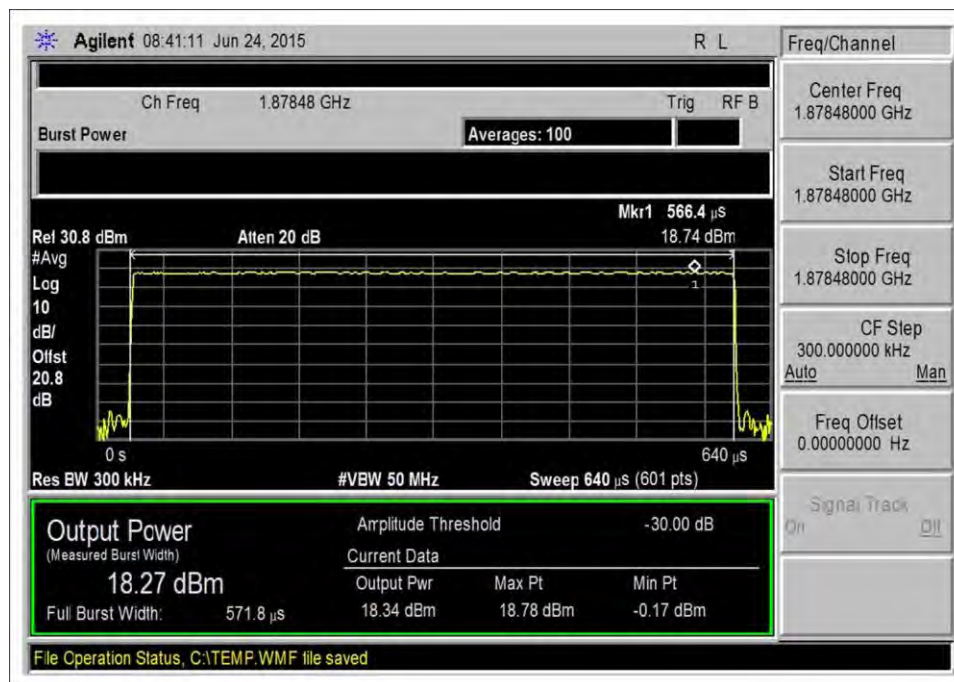

UL_1850-1915_GSM-Max


DL-GSM

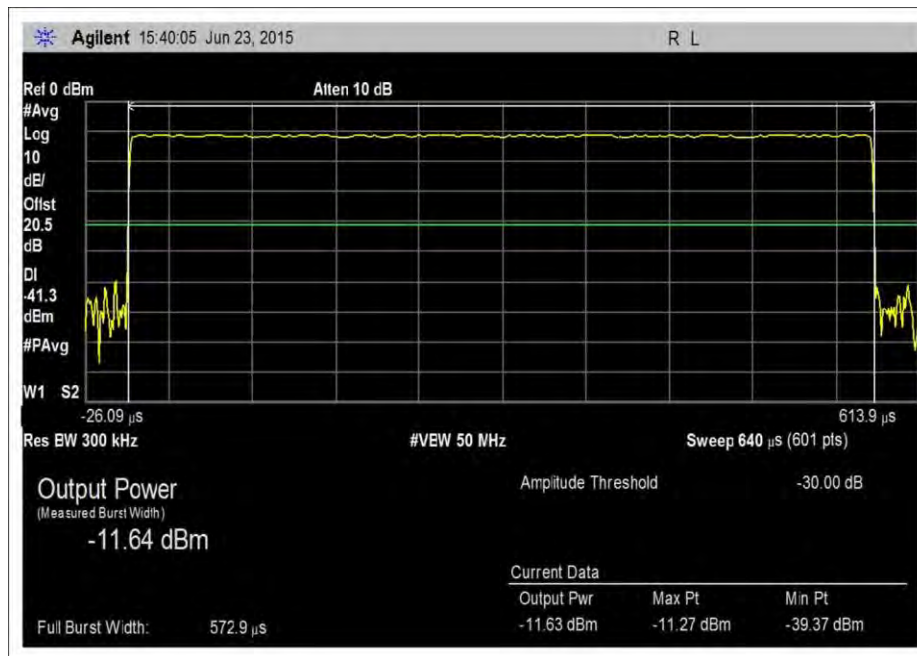


DL_728-746_GSM




DL_728-746_GSM-Max

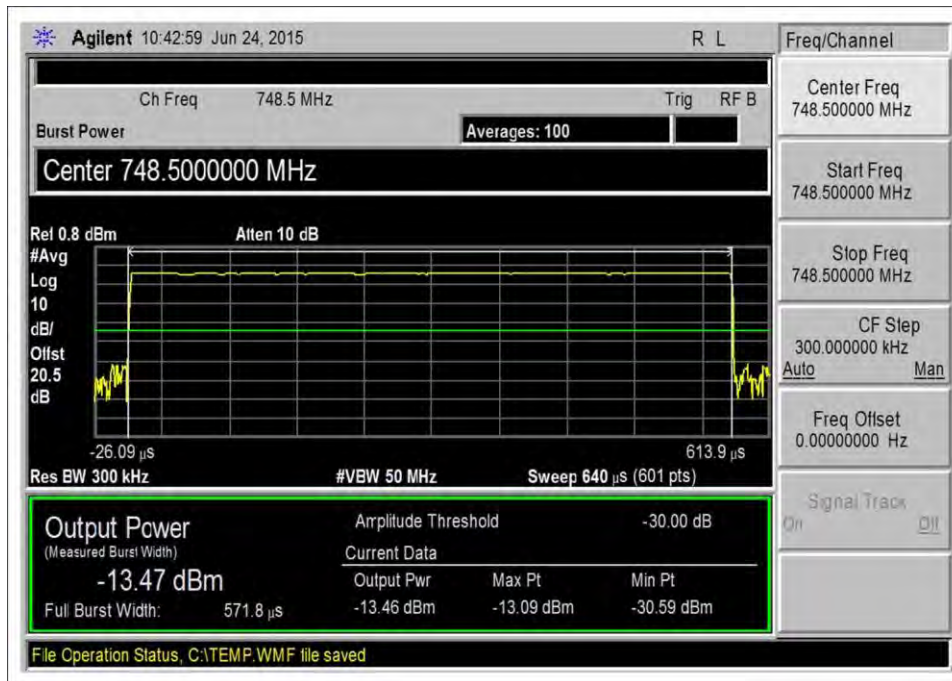

DL_746-757_GSM

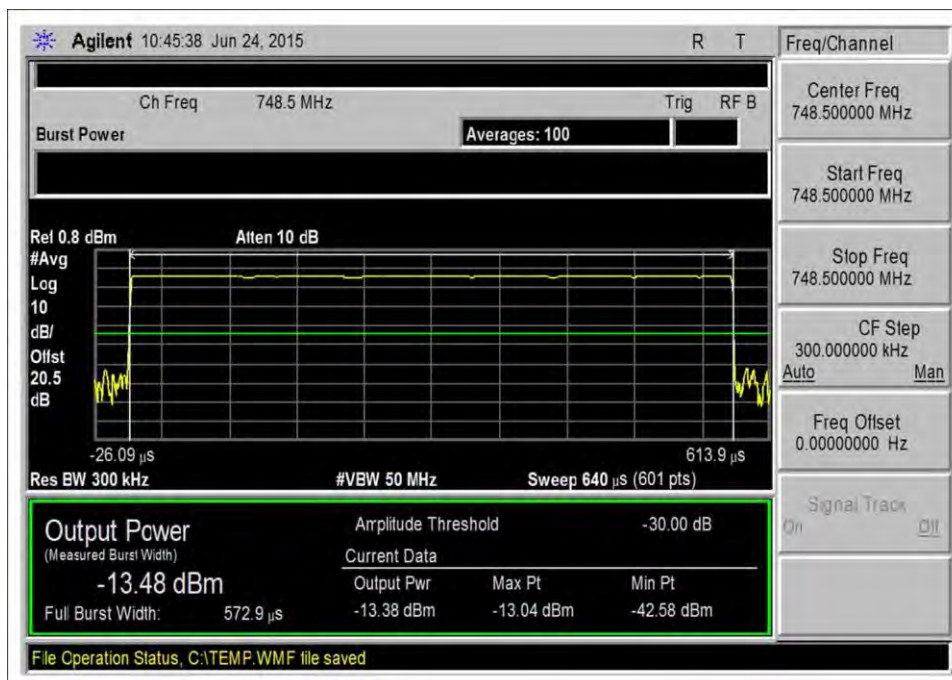


DL_746-757_GSM-Max

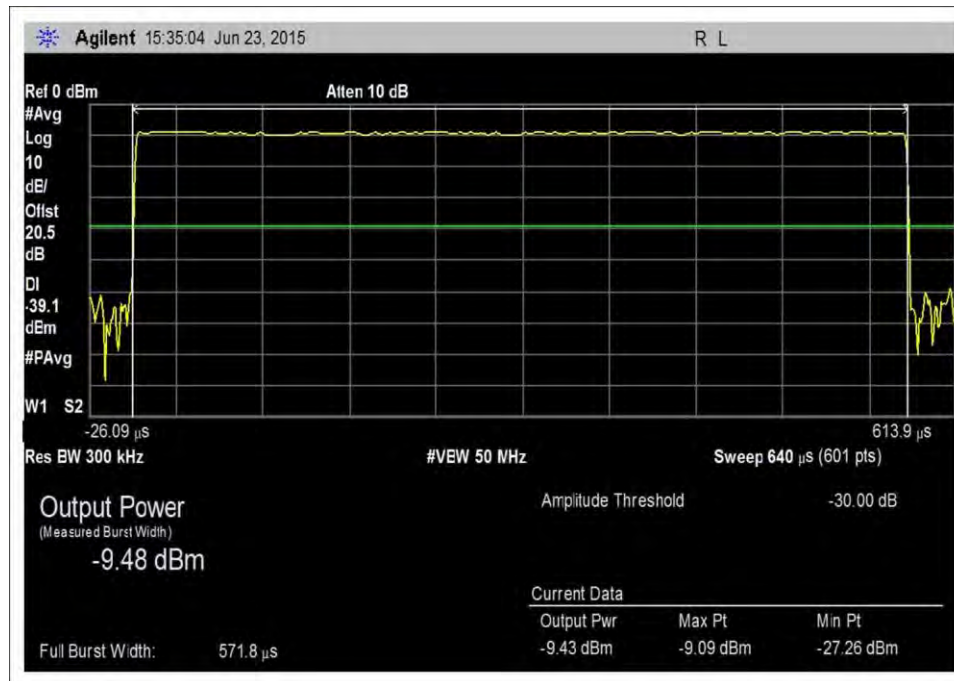


DL_869-894_GSM



DL_869-894_GSM-Max

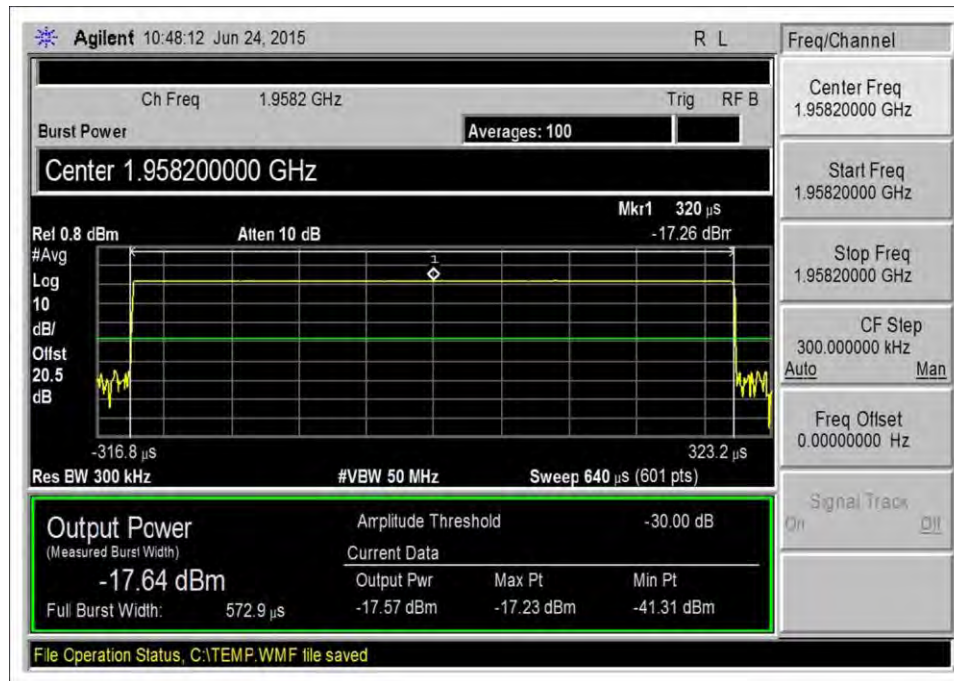

DL_1930-1995_GSM

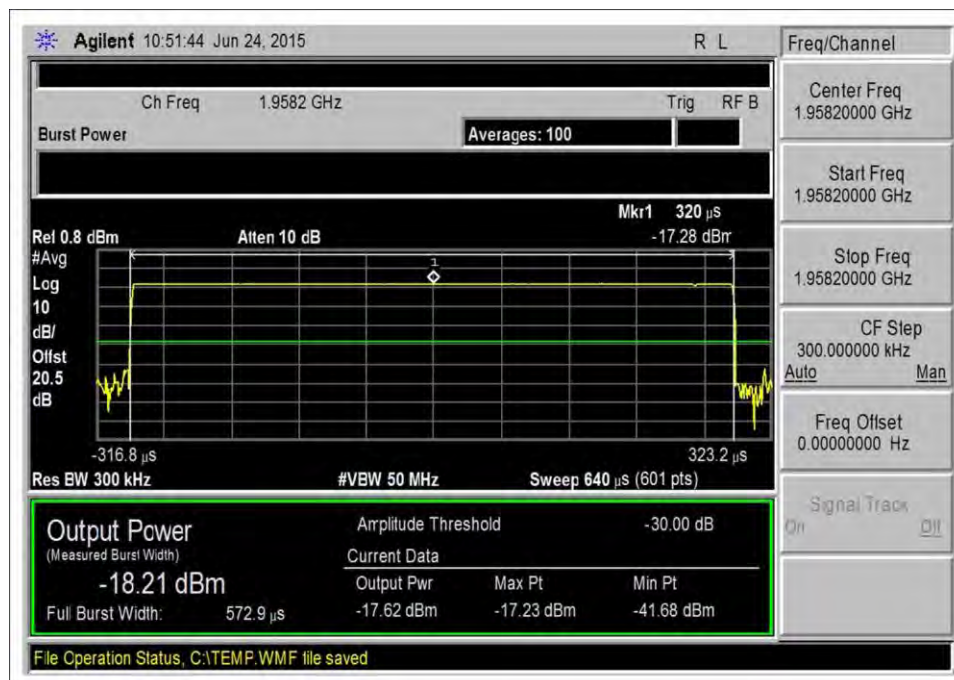

DL_1930-1995_GSM-Max




DL_2110-2155_GSM




DL_2110-2155_GSM-Max


UL-AWGN

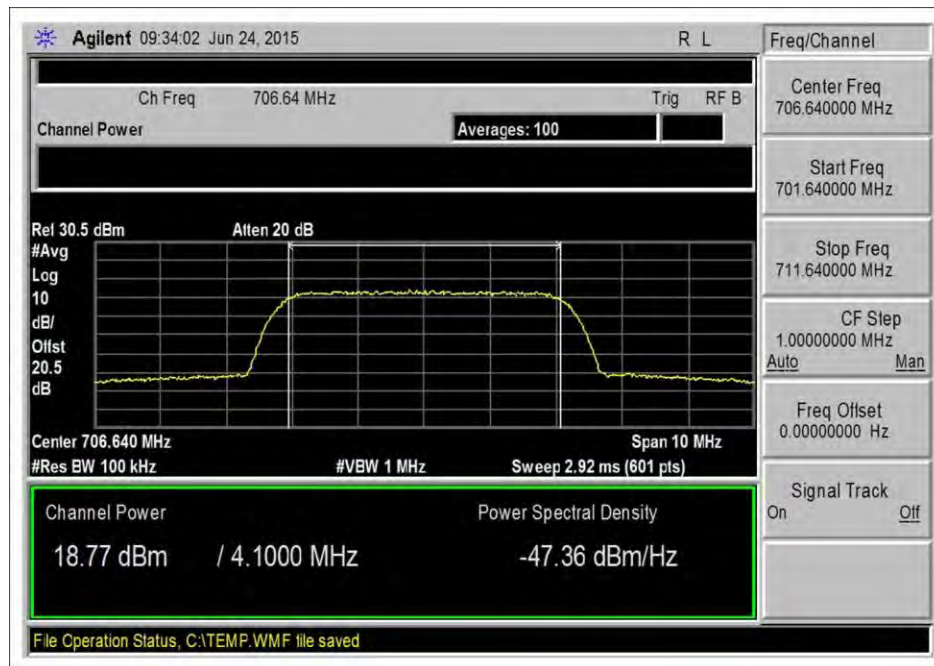


UL_698-716_AWGN

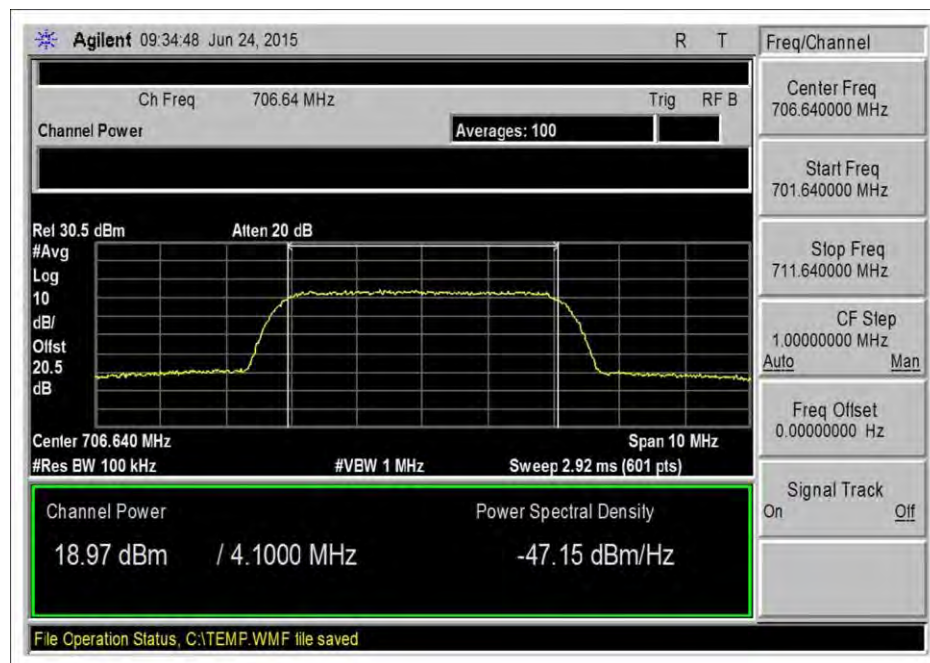


UL_698-716_AWGN-Max

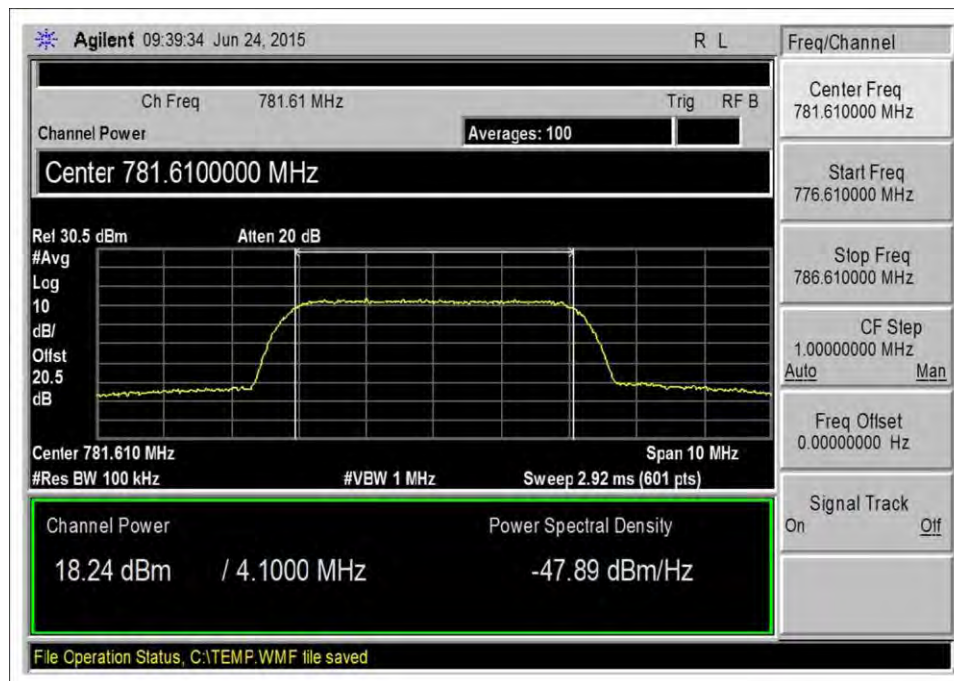


UL_776-787_AWGN

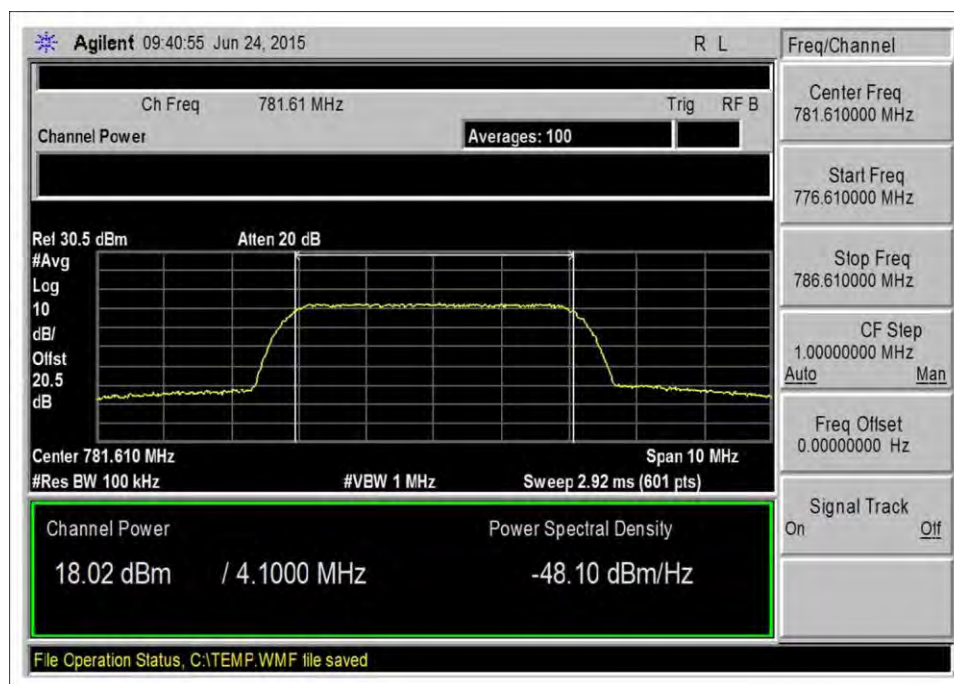


UL_776-787_AWGN-Max

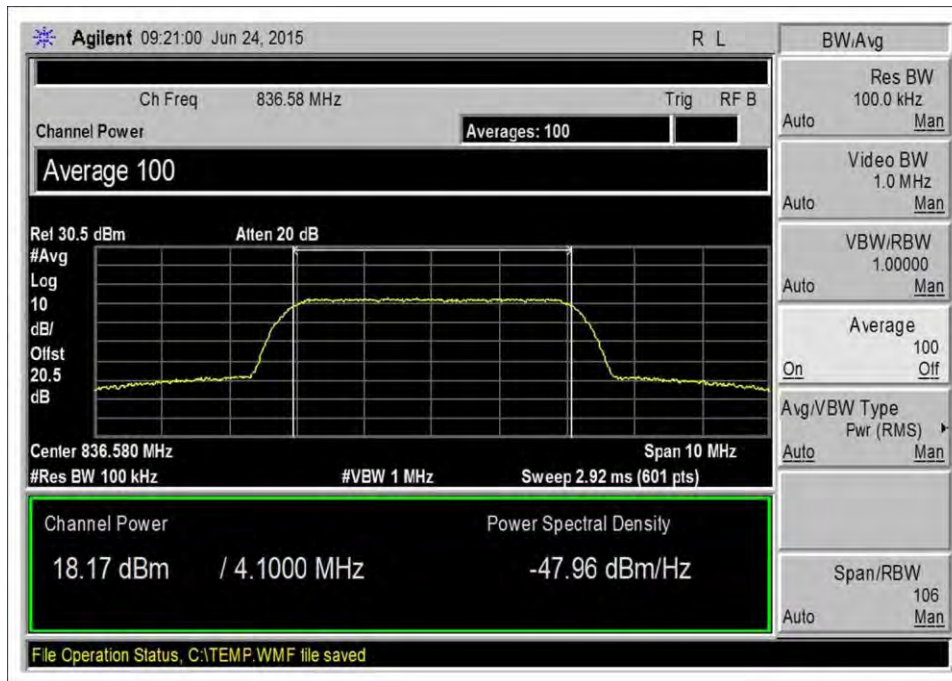


UL_824-829_AWGN

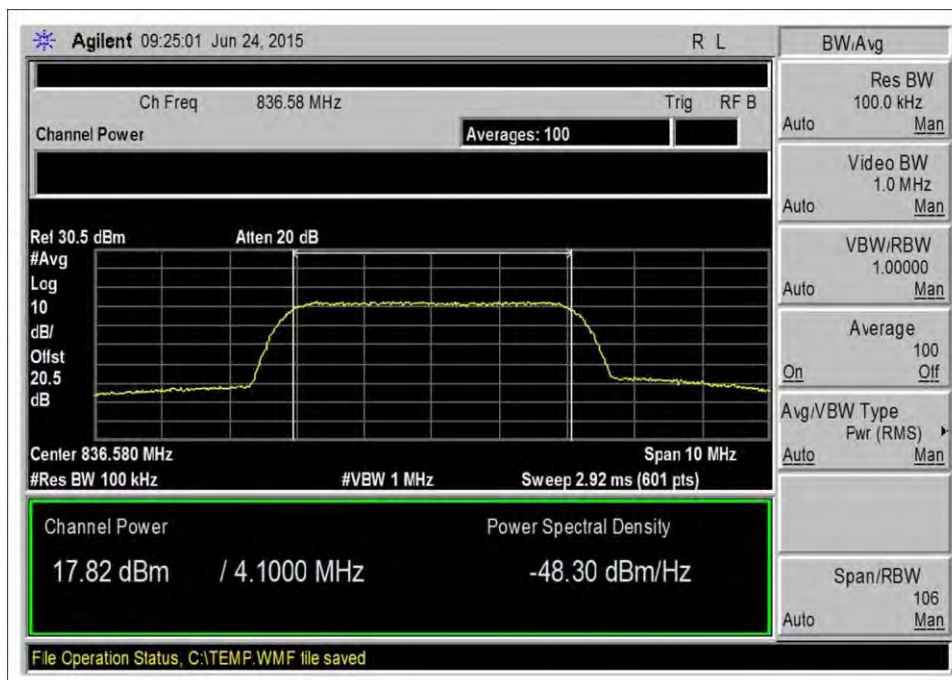


UL_824-849_AWGN-Max

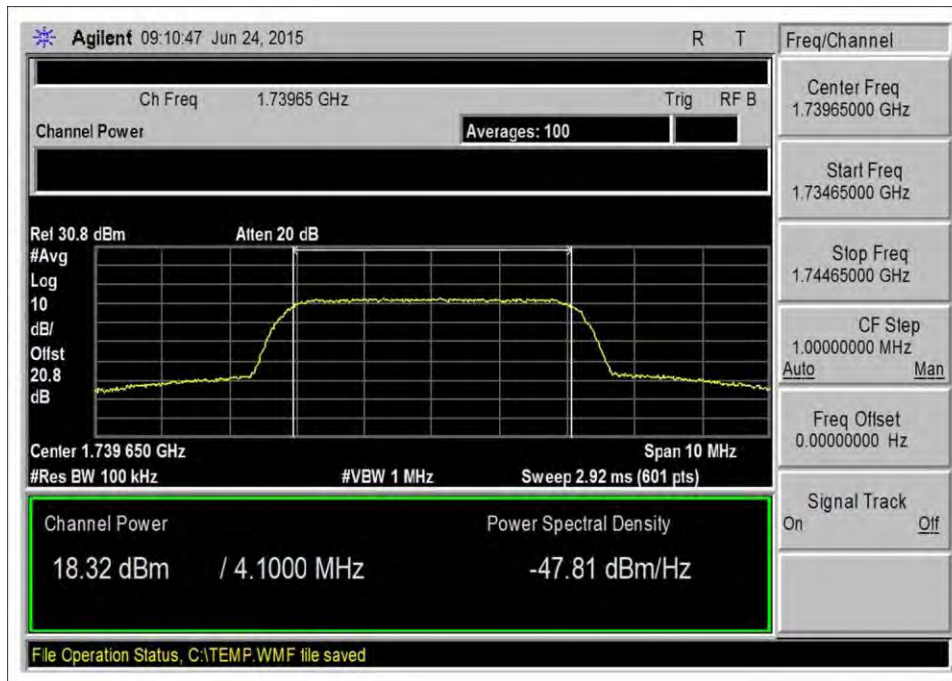


UL_1710-1755_AWGN

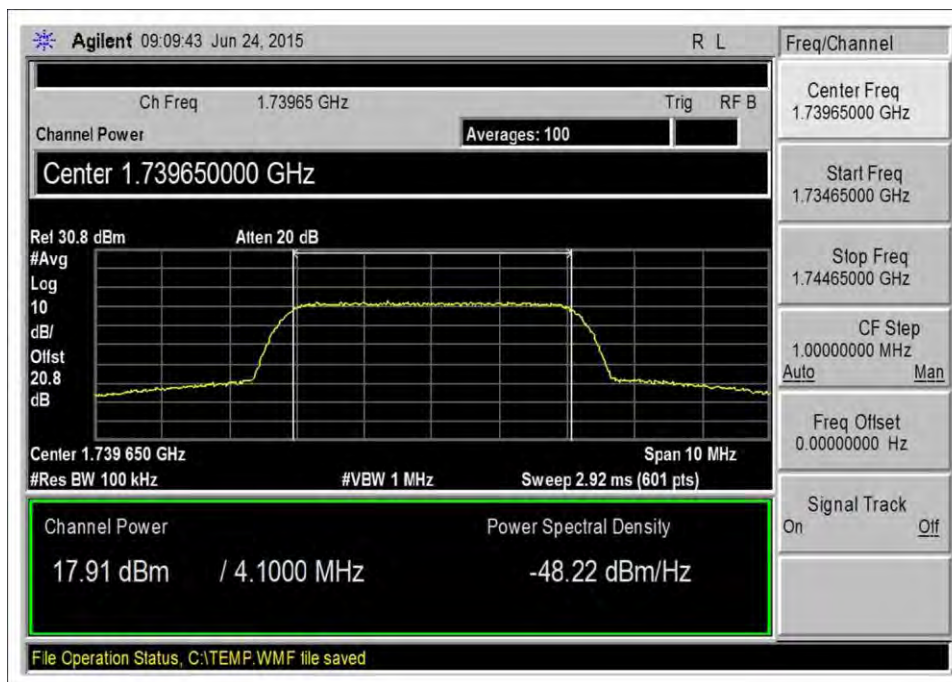

UL_1710-1755_AWGN-Max

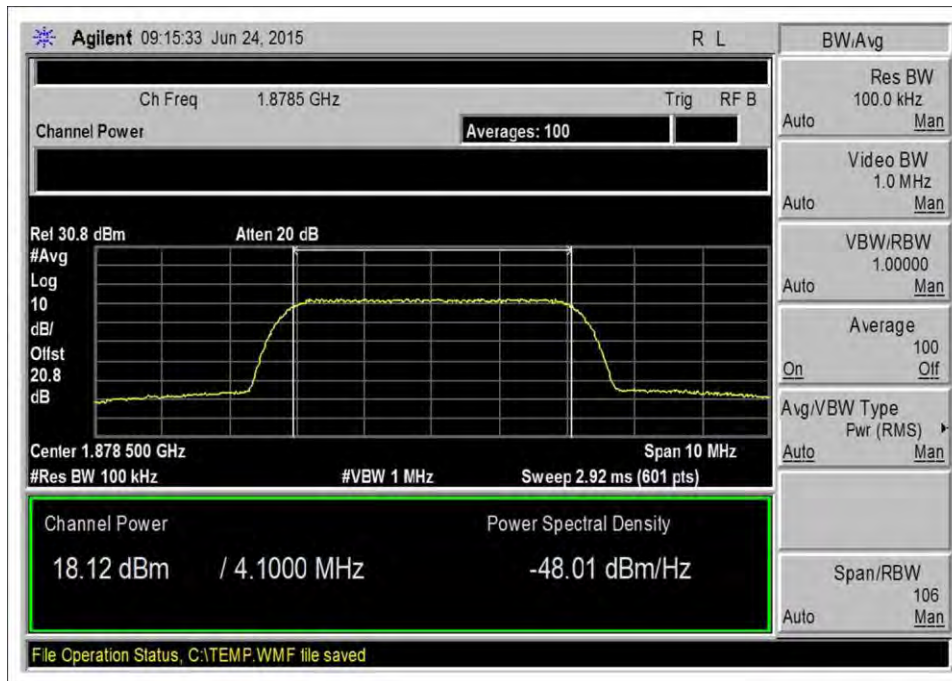


UL_1850-1915_AWGN

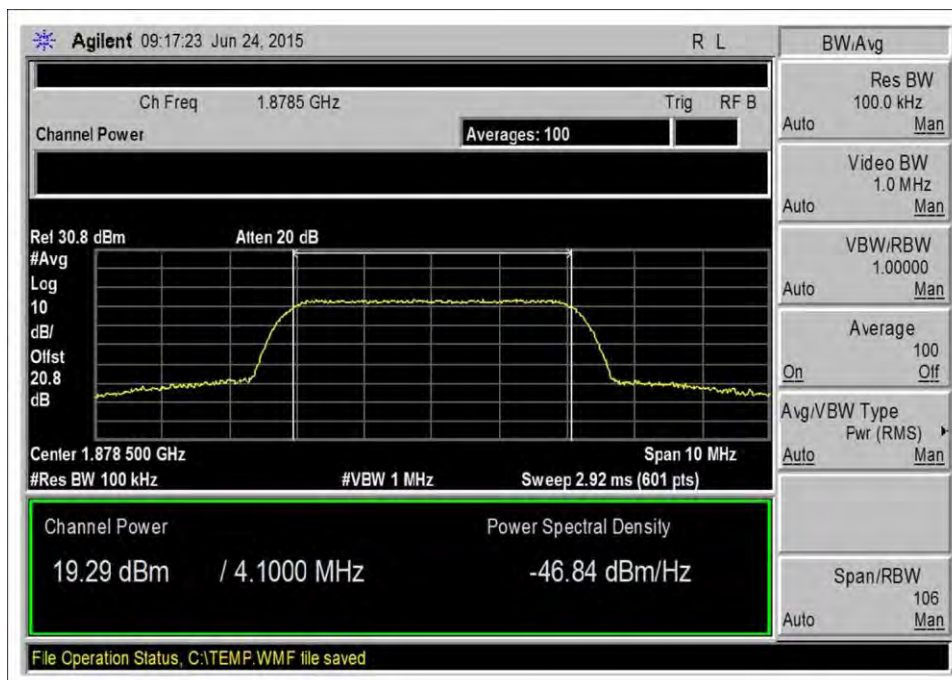


UL_1850-1915_AWGN-Max


DL-AWGN

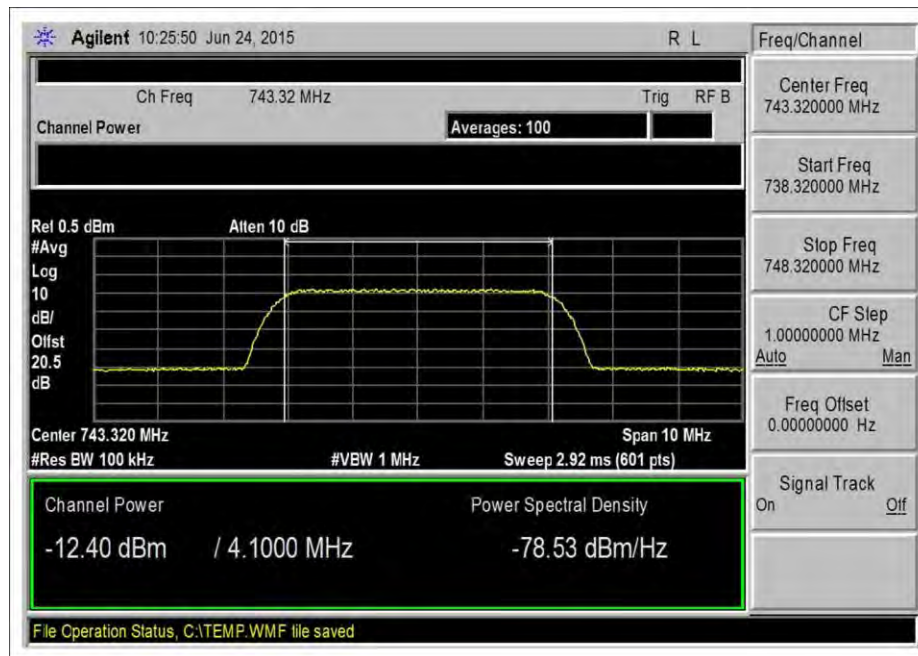


DL_728-746_AWGN

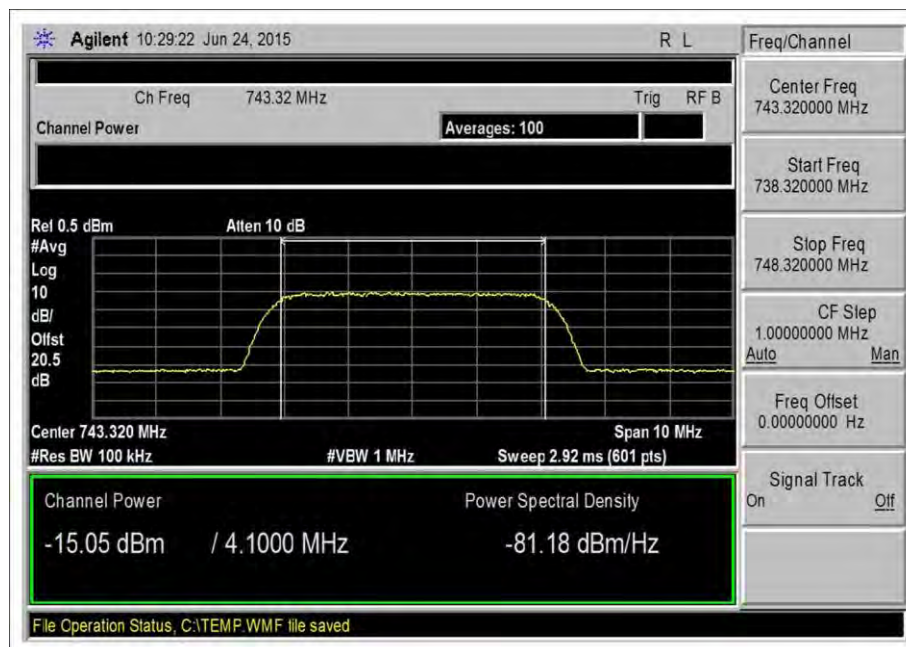


DL_728-746_AWGN-Max

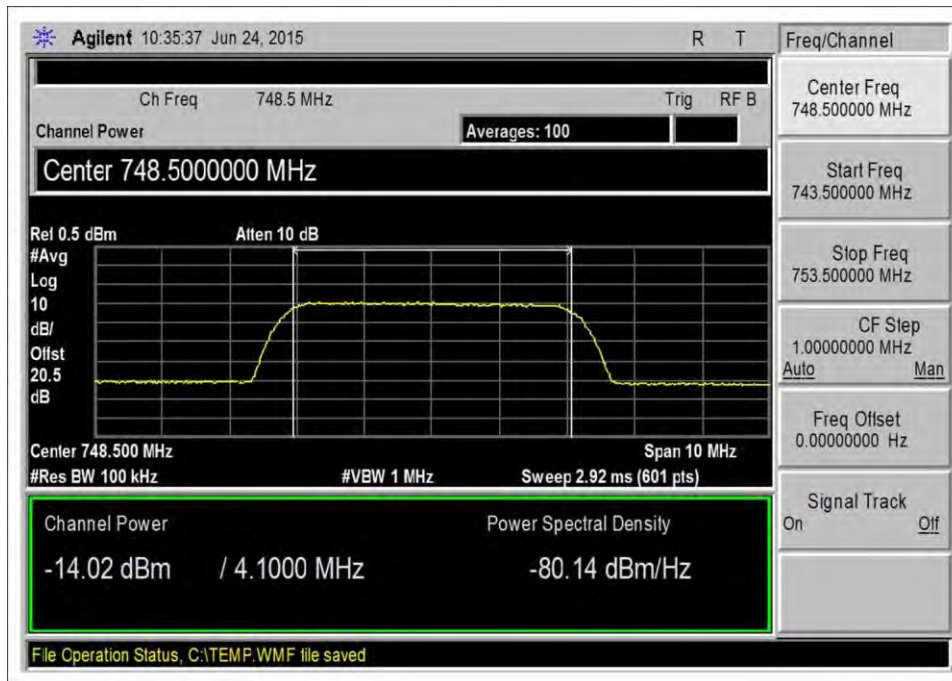


DL_746-757_AWGN

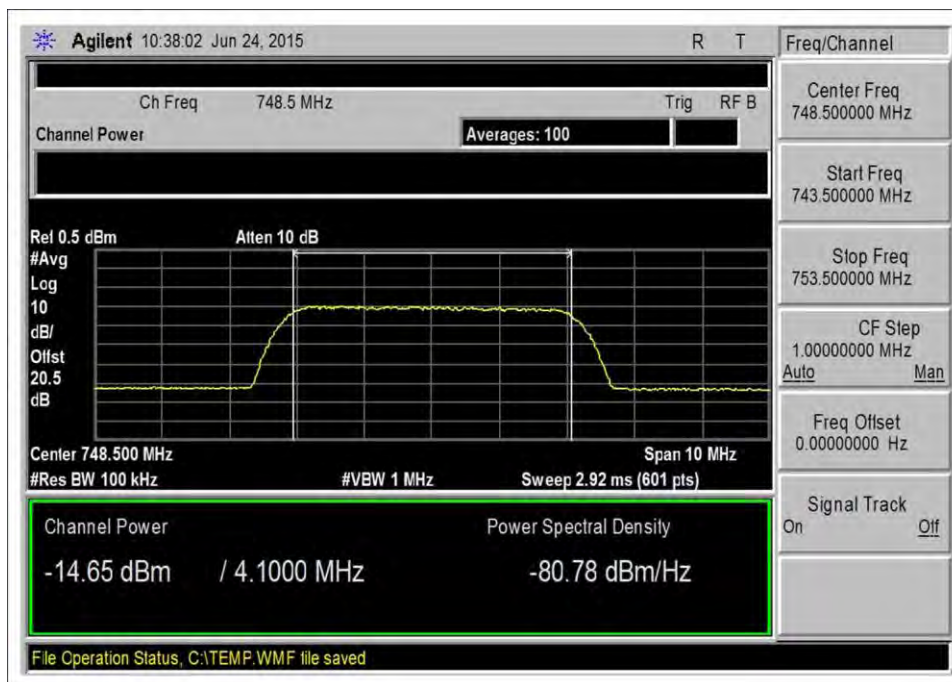


DL_746-757_AWGN-Max

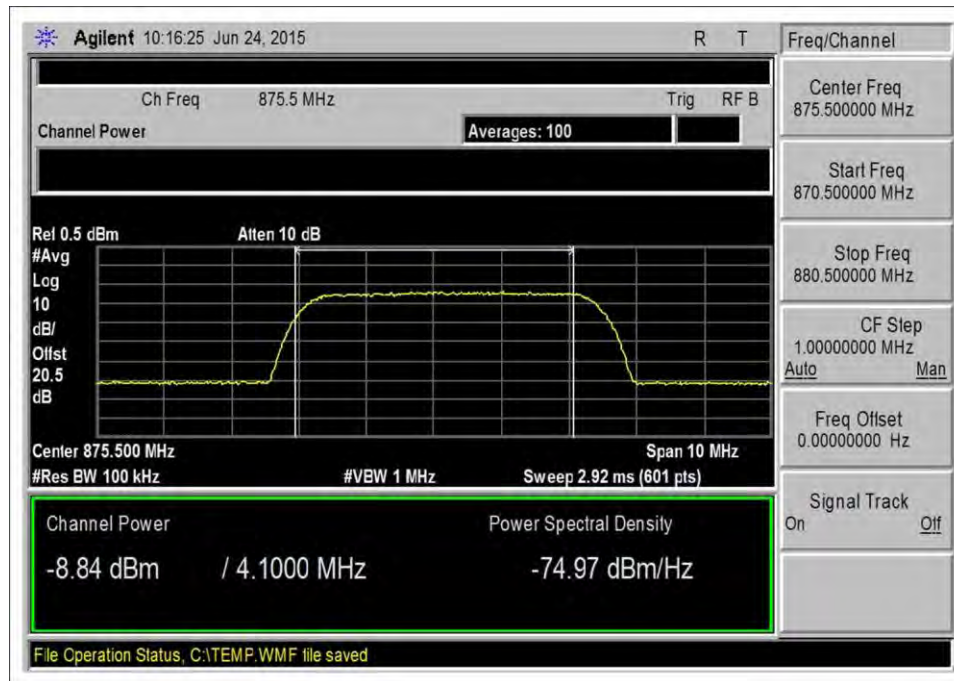


DL_869-894_AWGN

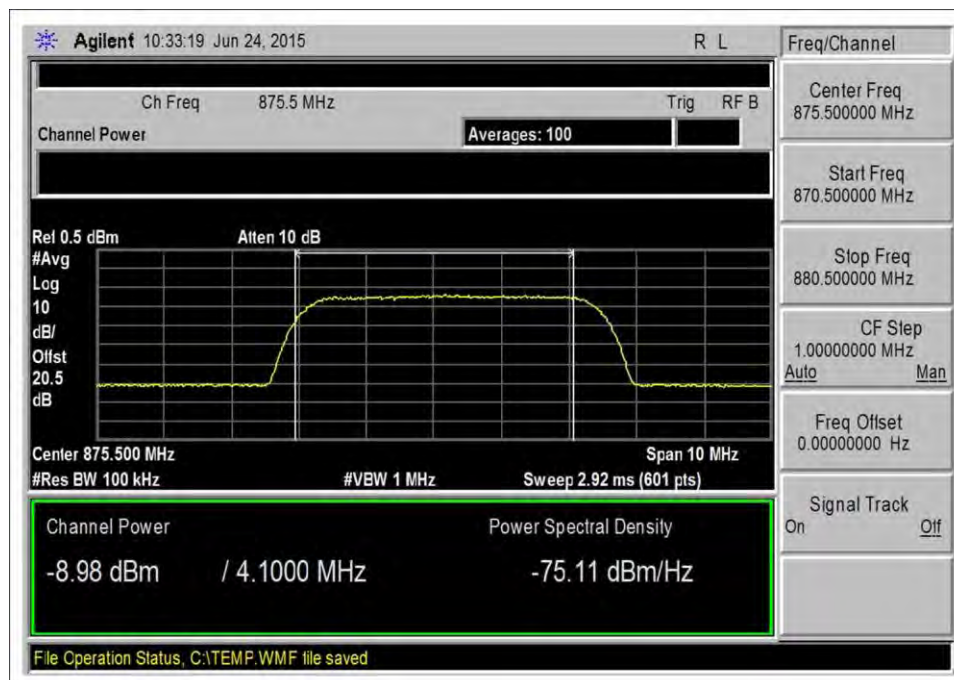


DL_869-894_AWGN-Max

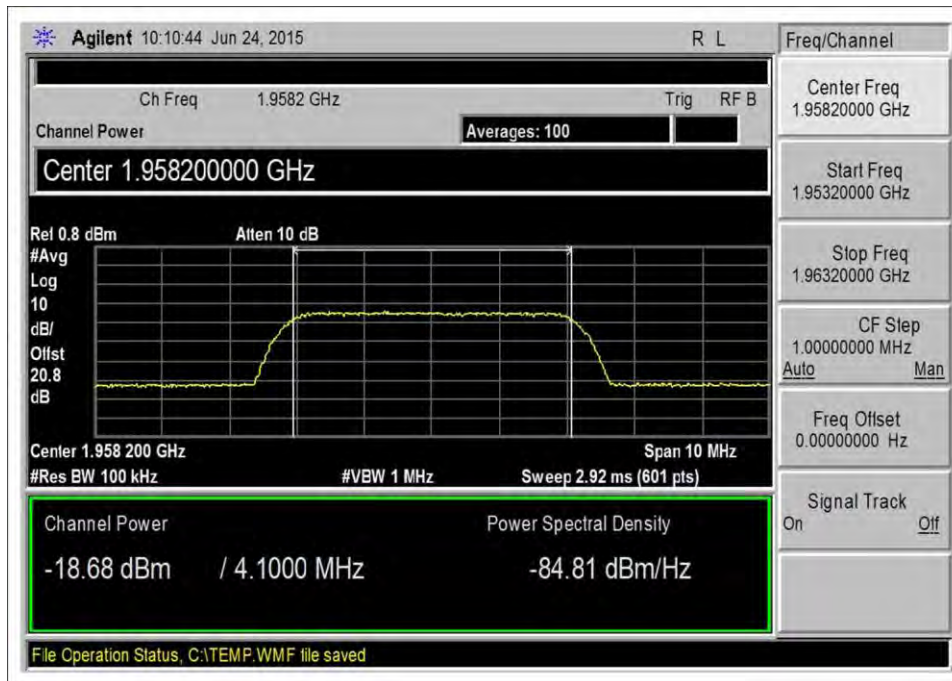


DL_1930-1995_AWGN

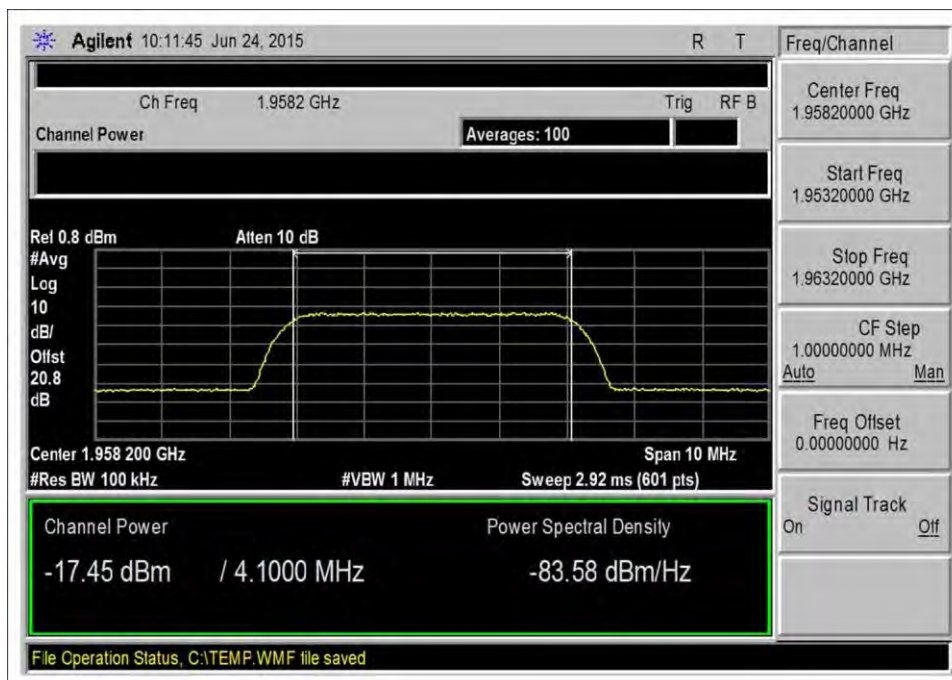

DL_1930-1995_AWGN-Max

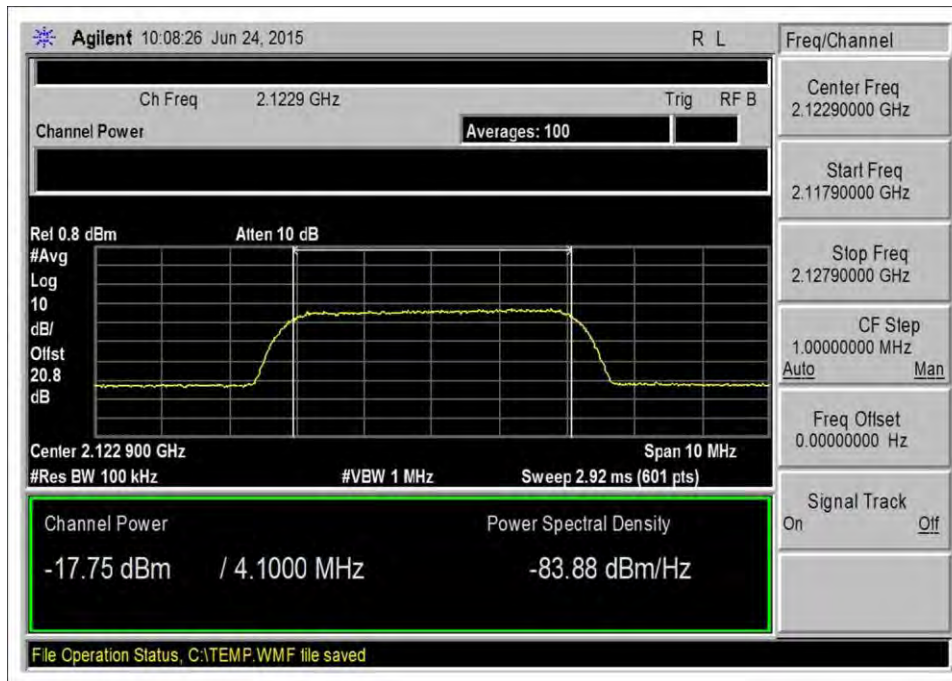

DL_2110-2155_AWGN

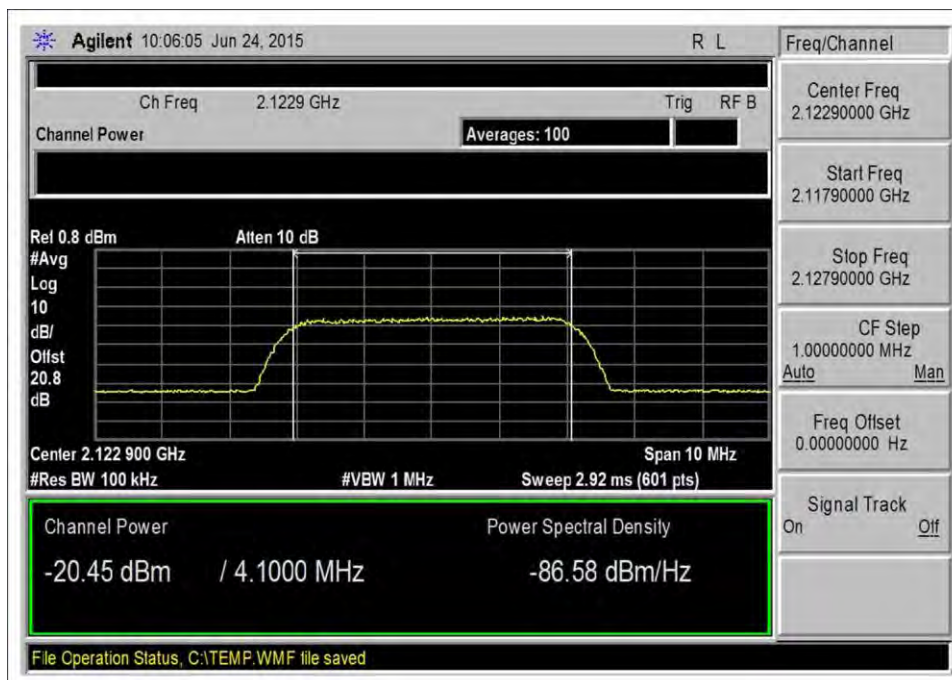

DL_2110-2155_AWGN-Max

Clause 7.3 Maximum Gain

Test Equipment

Asset #	Description	Model	Manufacturer	Cal Date	Cal Due
ANP05389	Attenuator	766-10	Narda	02/27/2014	02/27/2016
ANP05713	Attenuator	PE7015-20	Pasternack	03/24/2015	03/24/2017
ANP06709	Cable	32026-29094K-29094K-72TC	AstroLab	09/18/2014	09/18/2016
ANP06710	Cable	32026-29094K-29094K-72TC	AstroLab	09/18/2014	09/18/2016
AN02869	Spectrum Analyzer	E4440A	Agilent	07/10/2014	07/10/2015

Test Conditions / Setup

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170
 Customer: Cellphone-Mate, Inc.
 Specification: **7.3 Maximum Booster Gain Computation**
 Work Order #: **97222** Date: 6/23/2015
 Test Type: **Conducted Emissions** Time: 11:54:28
 Tested By: Daniel Bertran Sequence#: 1
 Software: EMITest 5.02.00

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Configuration 1
 The equipment under test (EUT) is a Mobile Wideband Consumer Booster.
 The EUT is placed on the test bench. Evaluation performed at the Outside (Donor) and Inside (Server) antenna port.

Part 22
 UL: 824-849MHz
 DL: 869-894MHz

Part 24
 UL: 1850-1915MHz
 DL: 1930-1995MHz

Part 27
 UL: 1710-1755MHz, 698-716MHz, 776-787MHz
 DL: 2110-2155MHz, 728-746MHz, 746-757MHz

All adjustable settings on the test sample are set at max gain.
 Test environment conditions: Temperature: 20.8°C, Relative Humidity: 42%, Atmospheric Pressure: 101.5kPa
 Test procedure: The test was performed in accordance with section 7.3 of the FCC document: 935210 D03 Wideband Consumer Signal Booster Measurement Guidance v03 Dated June 5, 2015.

Firmware: V1.0

Summary of Results

Pass: as summarized in table below.

Test Data

Pre AGC				Pre AGC		
Pulse GSM				4.1 MHz AWGN		
Frequency (MHz)	Input (dBm)	Output (dBm)	*Gain (dB)	Input (dBm)	Output (dBm)	*Gain (dB)
UL1710-1755	-25.6	18.6	44.2	-25.7	18.3	44.0
UL1850-1915	-24.3	17.5	41.8	-24.1	18.1	42.2
UL824-894	-23.4	19.3	42.7	-23.1	18.2	41.3
UL 698-716	-21.5	19.6	41.1	-21.8	18.8	40.6
UL776-787	-25.9	18.8	44.7	-26.4	18.2	44.6
DL2110-2155	-59.9	-18.8	41.2	-59.4	-17.8	41.7
DL1930-1995	-58.7	-17.6	41.1	-60.1	-18.7	41.4
DL869-894	-54.1	-9.5	44.6	-52.0	-8.8	43.2
DL:728-746	-57.0	-11.6	45.4	-57.4	-12.4	45.0
DL 746-757	-57.5	-13.5	44.0	-58.0	-14.0	44.0

*50 dB limit for Mobile Booster maximum gain using an inside antenna

		Pulse GSM	4.1MHz AWGN	Limit (dB)
UL gain vs DL gain 1710/2110		3.04	2.37	9
UL gain vs DL gain 1850/1930		0.72	0.8	9
UL gain vs DL gain 824/869		-1.89	-1.89	9
UL gain vs DL gain 776/728		-4.29	-4.43	9
UL gain vs DL gain 776/746		0.68	0.66	9

Clause 7.4 Intermodulation Product

Test Equipment

Asset #	Description	Model	Manufacturer	Cal Date	Cal Due
ANP05389	Attenuator	766-10	Narda	02/27/2014	02/27/2016
ANP05713	Attenuator	PE7015-20	Pasternack	03/24/2015	03/24/2017
ANP06709	Cable	32026-29094K-29094K-72TC	AstroLab	09/18/2014	09/18/2016
ANP06710	Cable	32026-29094K-29094K-72TC	AstroLab	09/18/2014	09/18/2016
ANP06711	Cable	32022-29094K-29094K-132TC	AstroLab	11/21/2014	11/21/2016
C00087	Combiner	44000	Anaren	01/09/2014	01/09/2016
AN02869	Spectrum Analyzer	E4440A	Agilent	07/10/2014	07/10/2015

Test Conditions / Setup

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170
 Customer: Cellphone-Mate, Inc.
 Specification: **7.4 Intermodulation Product**
 Work Order #: **97222** Date: 6/24/2015
 Test Type: **Conducted Emissions** Time: 13:14:49
 Tested By: Daniel Bertran Sequence#: 1
 Software: EMITest 5.02.00

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Configuration 1
The equipment under test (EUT) is a Mobile Wideband Consumer Booster.
The EUT is placed on the test bench. Evaluation performed at the Outside (Donor) and Inside (Server) antenna port.

Part 22
UL: 824-849MHz
DL: 869-894MHz

Part 24
UL: 1850-1915MHz
DL: 1930-1995MHz

Part 27
UL: 1710-1755MHz, 698-716MHz, 776-787MHz
DL: 2110-2155MHz, 728-746MHz, 746-757MHz

All adjustable settings on the test sample are set at max gain.

Test environment conditions: Temperature: 20.8°C, Relative Humidity: 42%, Atmospheric Pressure: 101.5kPa

Test procedure: The test was performed in accordance with section 7.4 of the FCC document: 935210 D03 Wideband Consumer Signal Booster Measurement Guidance v03 Dated June 5, 2015.

Firmware: V1.0


Summary of Results

Pass: All intermodulation products are measured below -19dbm limit.


	Max Inter modulation product		
Freq	Pre AGC	AGC+10	Limit
MHz	dBm	dBm	dBm
UL1710-1755	-24.90	-25.29	-19.0
UL1850-1915	-37.77	-38.04	-19.0
UL824-894	-27.18	-25.44	-19.0
UL 698-716	-25.23	-26.16	-19.0
UL776-787	-26.06	-33.61	-19.0
DL2110-2155	-78.13	-78.20	-19.0
DL1930-1995	-80.50	-84.17	-19.0
DL869-894	-82.02	-79.88	-19.0
DL:728-746	-83.74	-84.71	-19.0
DL 746-757	-84.31	-86.18	-19.0

Test Data


UL

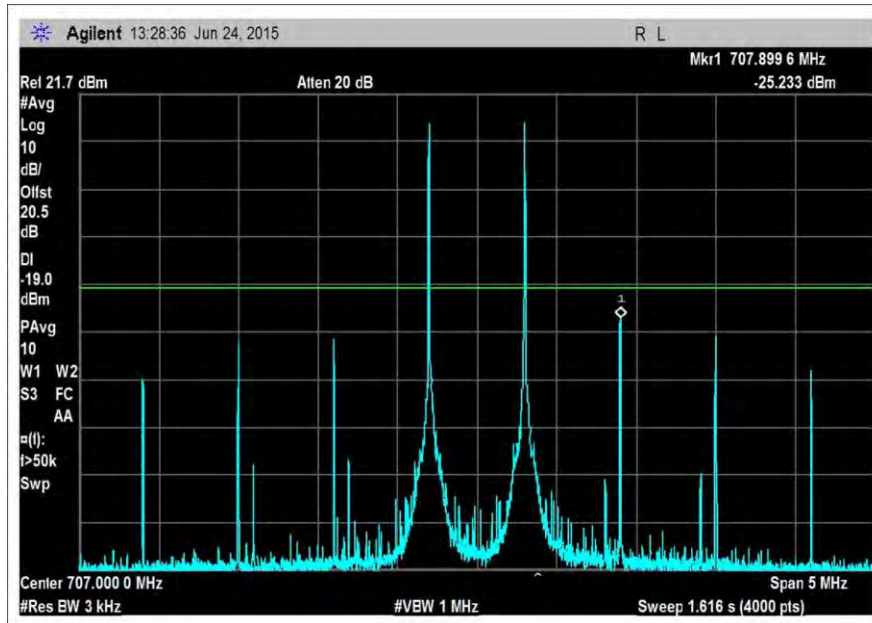


UL_698-716MHz

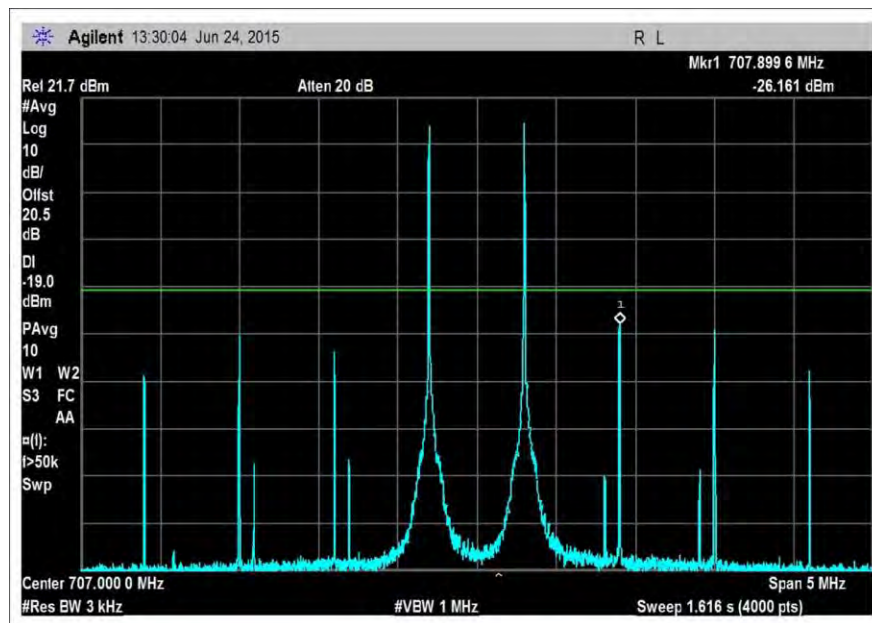


UL_698-716MHz+10dB

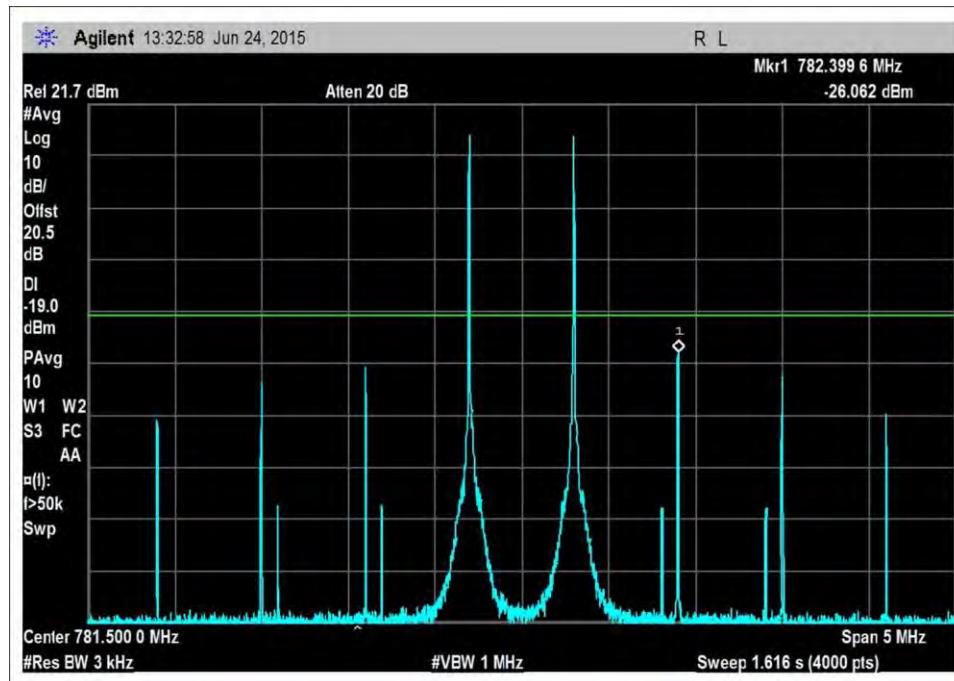


UL_776-787MHz

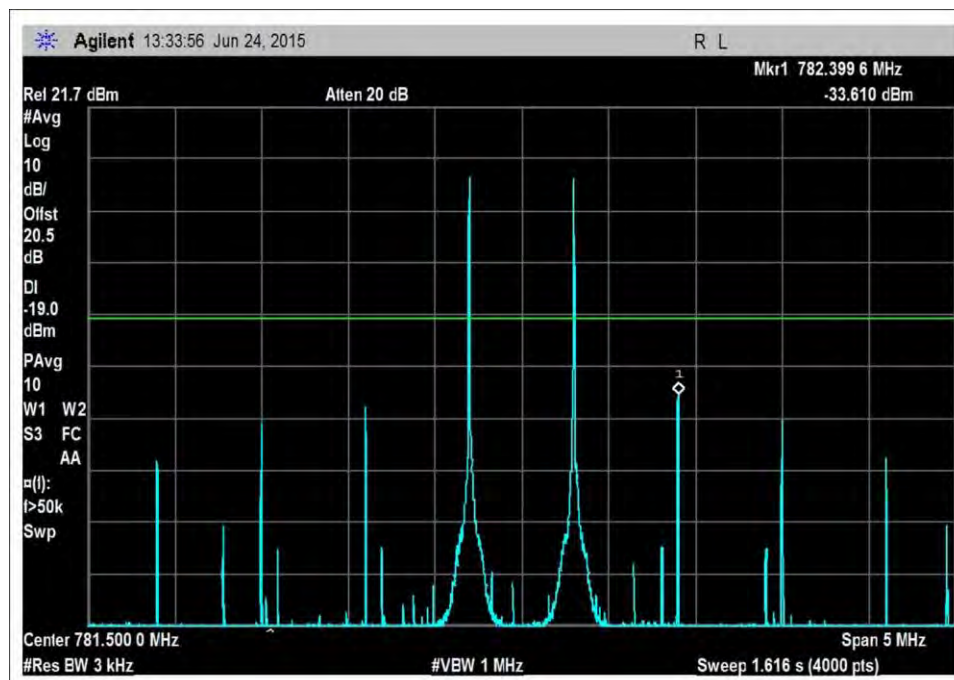


UL_776-787MHz+10dB

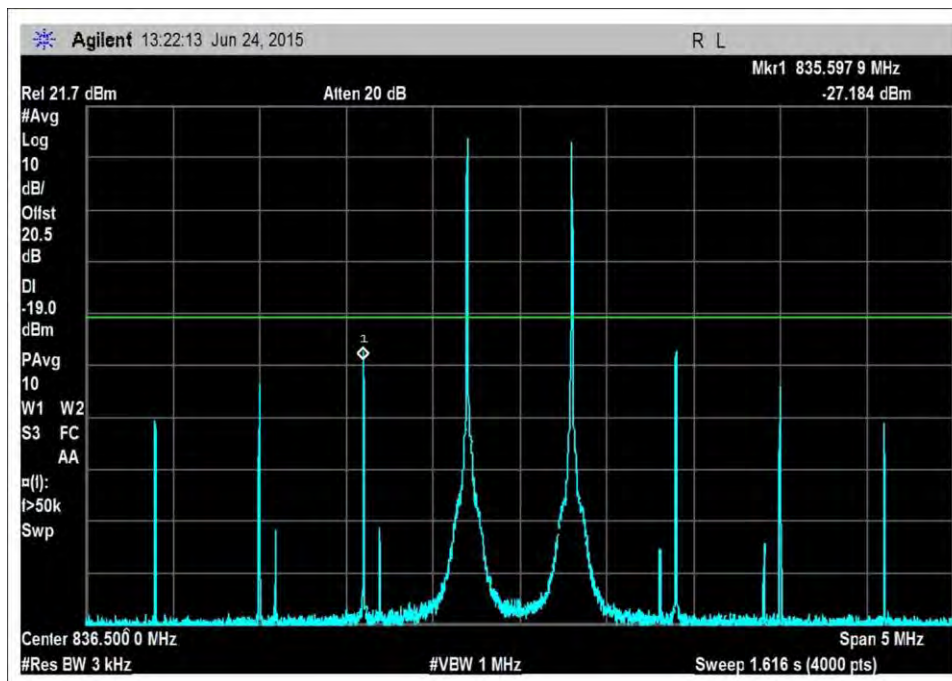


UL_824-849MHz

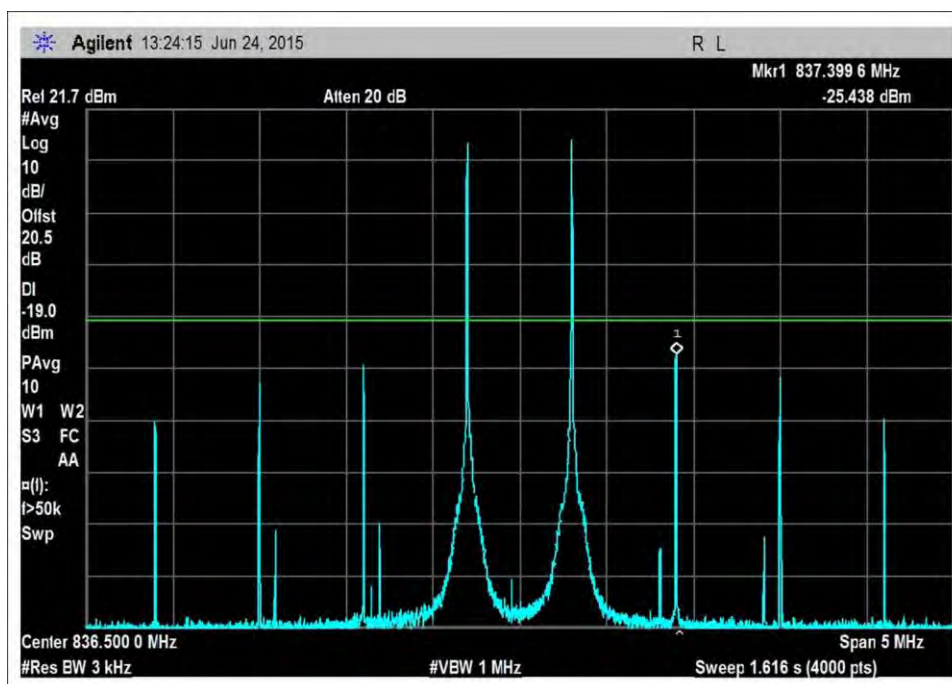


UL_824-849MHz+10dB

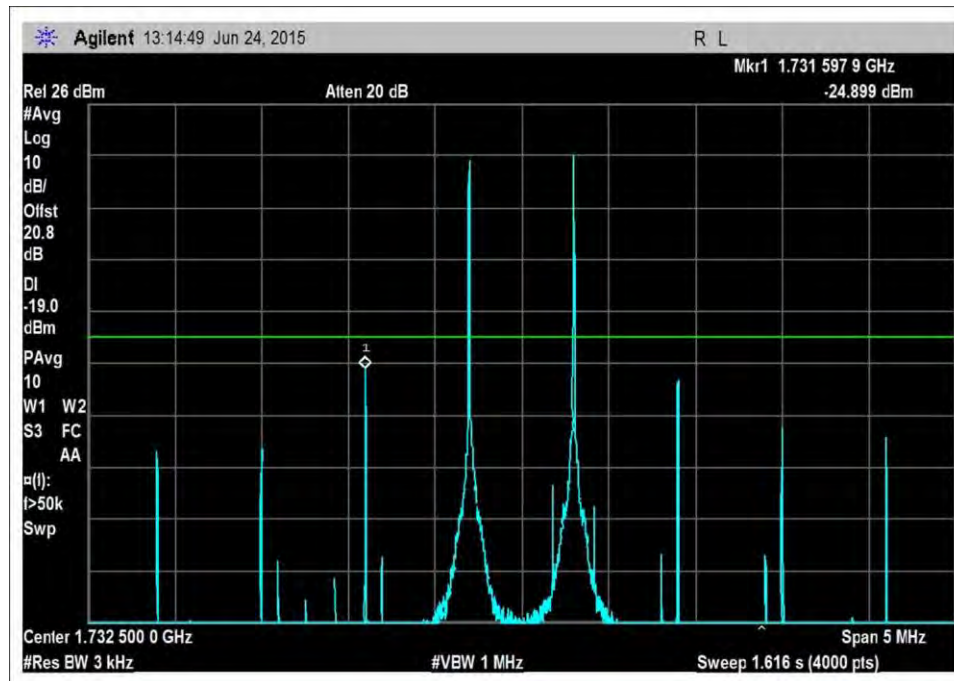


UL_1710-1755MHz

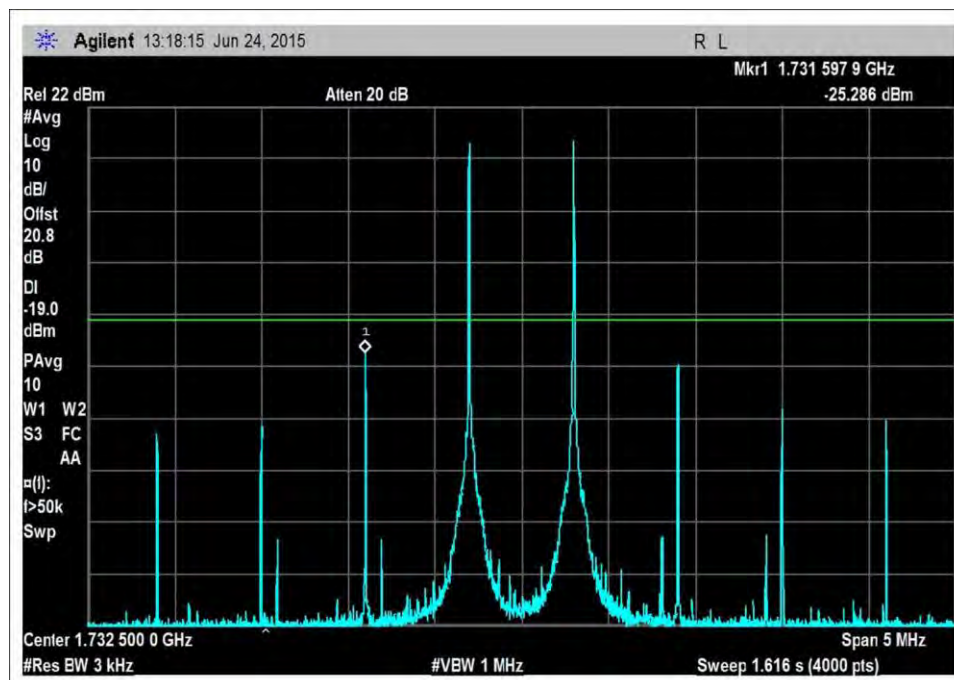

UL_1710-1755MHz+10dB

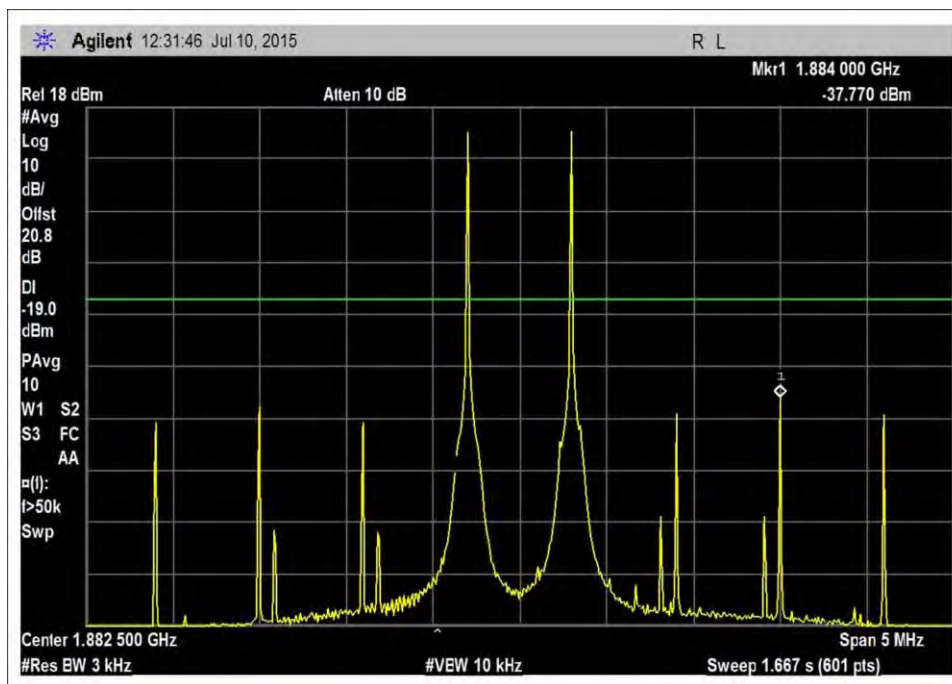


UL_1850-1915MHz

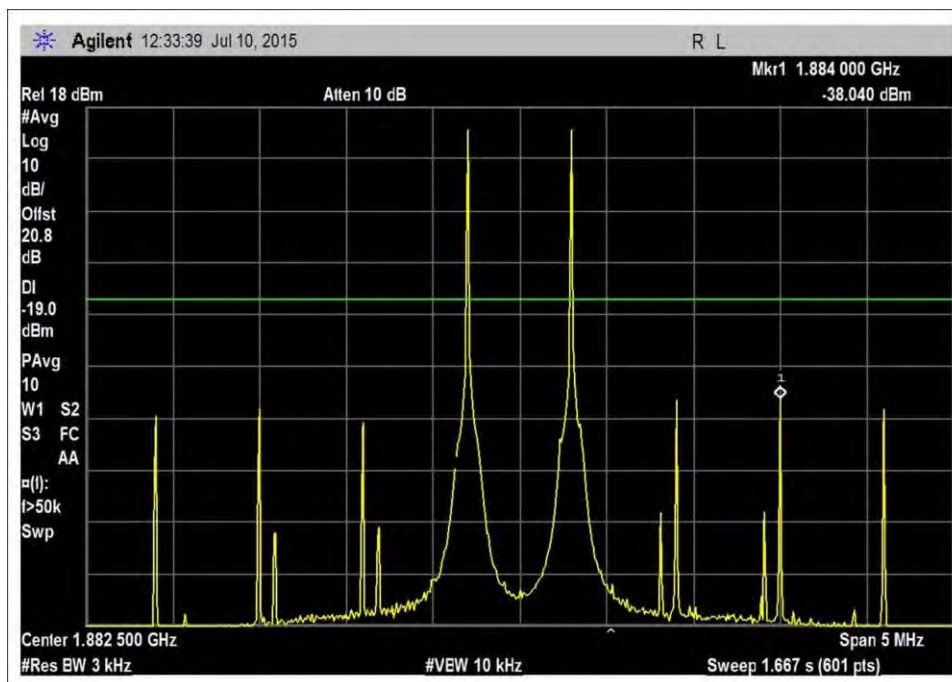


UL_1850-1915MHz+10dB


DL

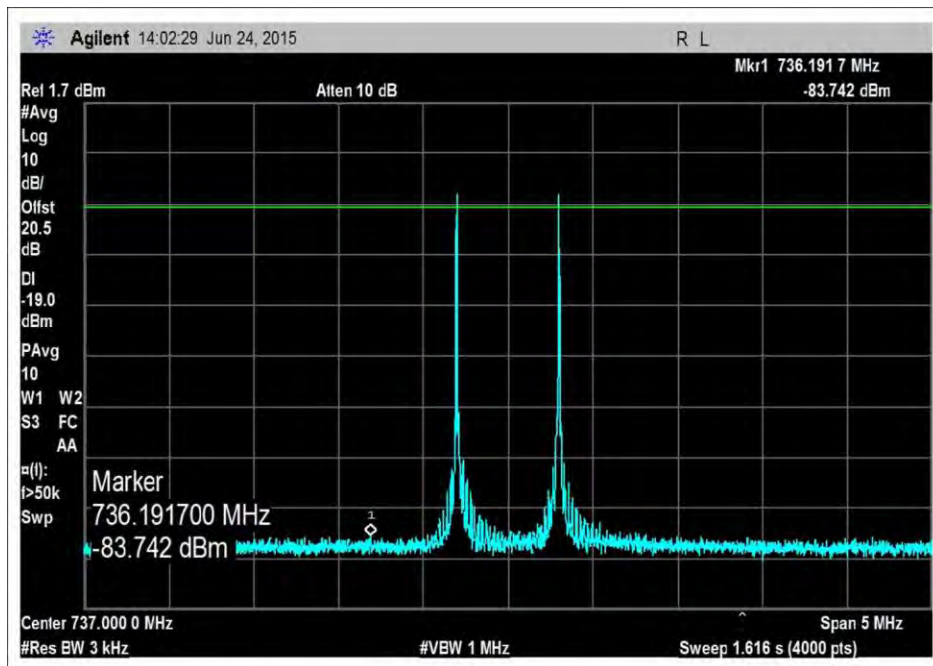


DL_728-746MHz

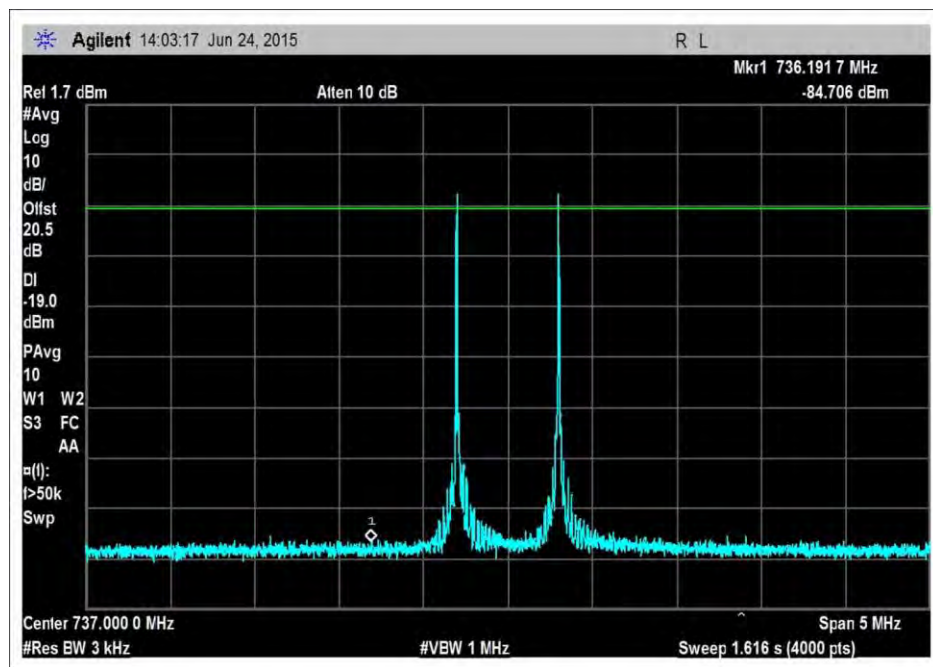


DL_728-746MHz+10dB

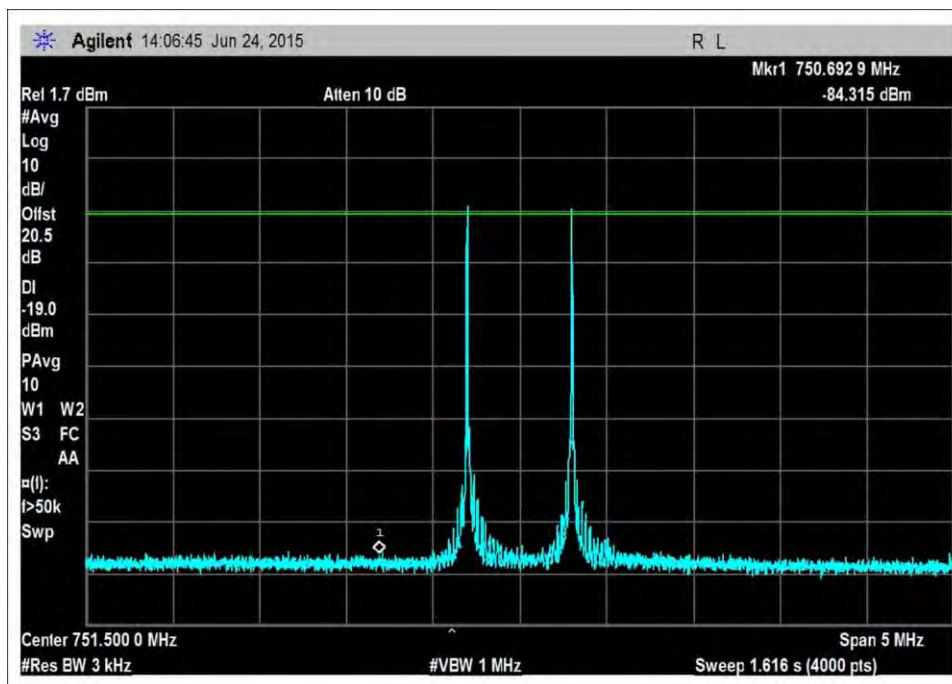


DL_746-757MHz

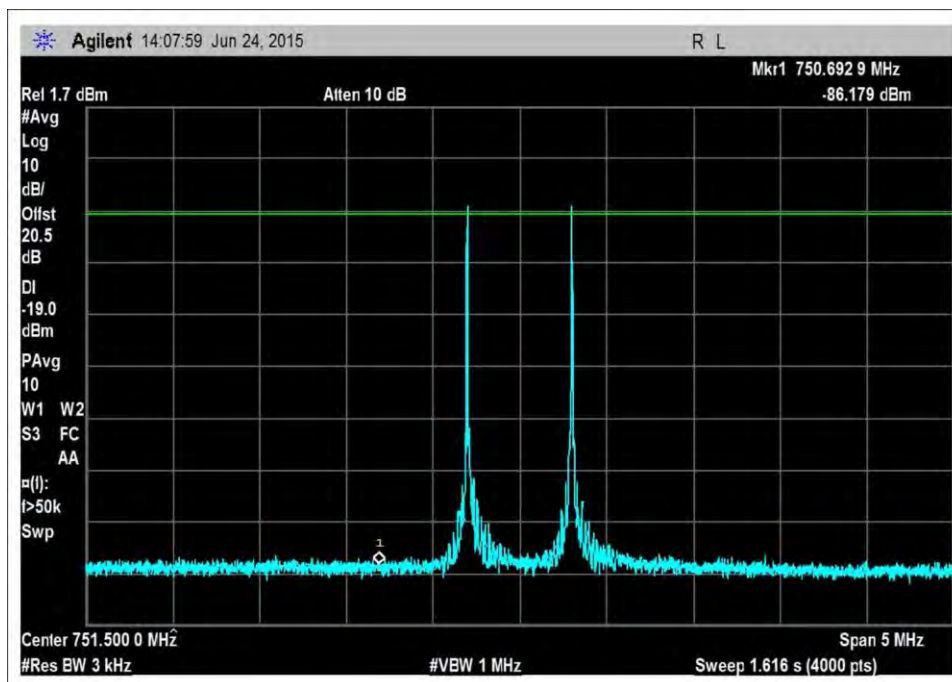


DL_746-757MHz+10dB

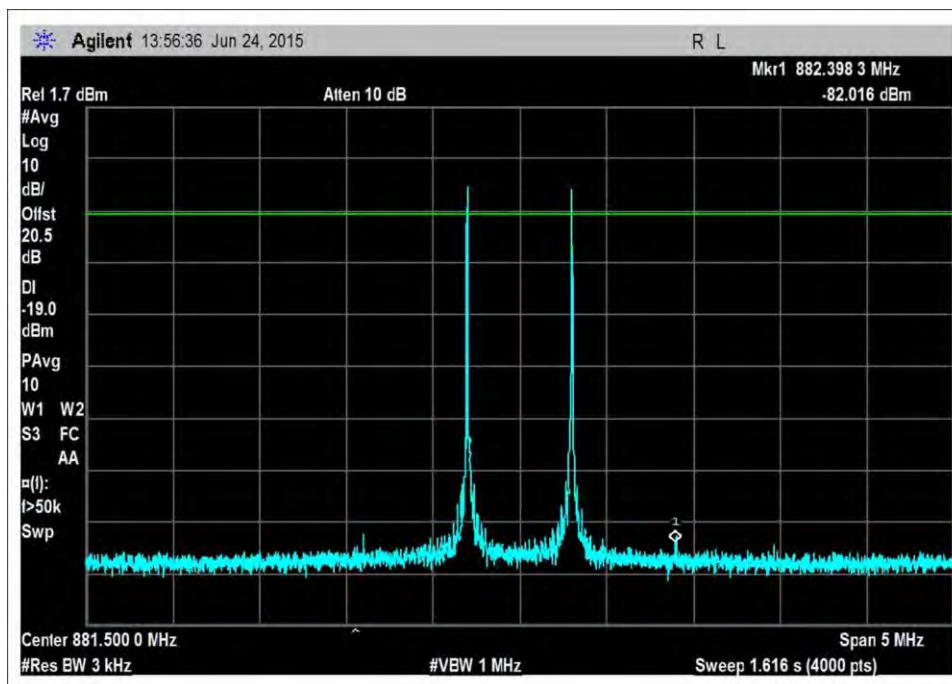


DL_869-894MHz

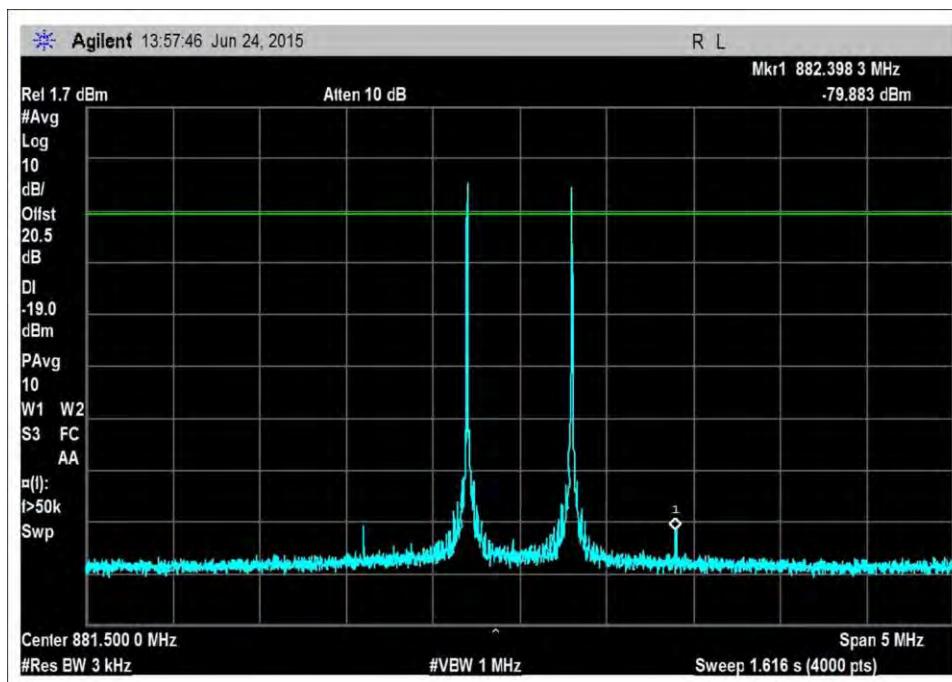


DL_869-894MHz+10dB

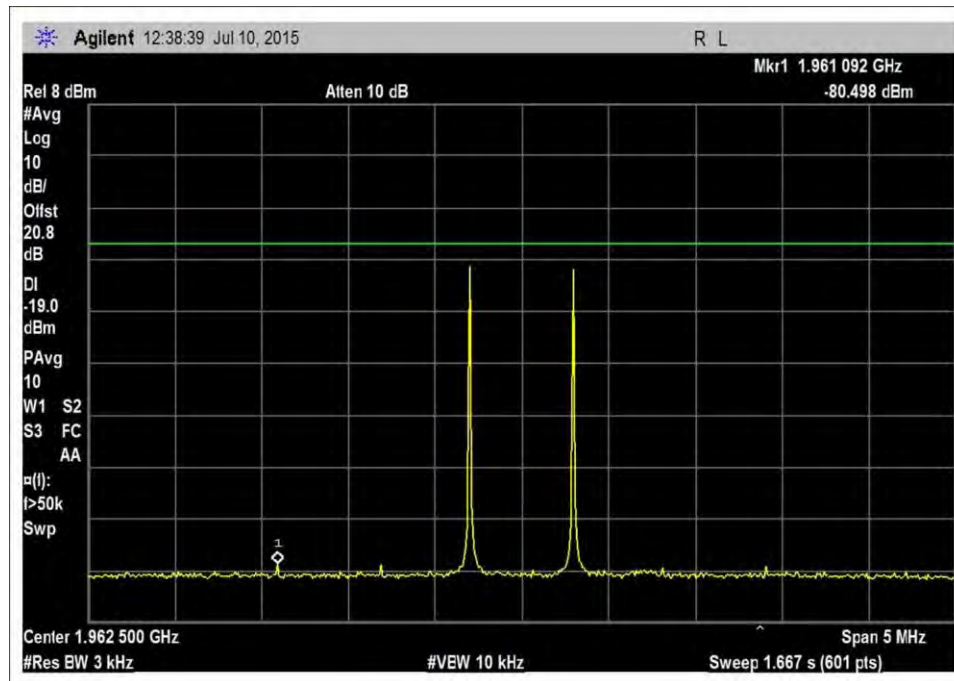


DL_1930-1995MHz

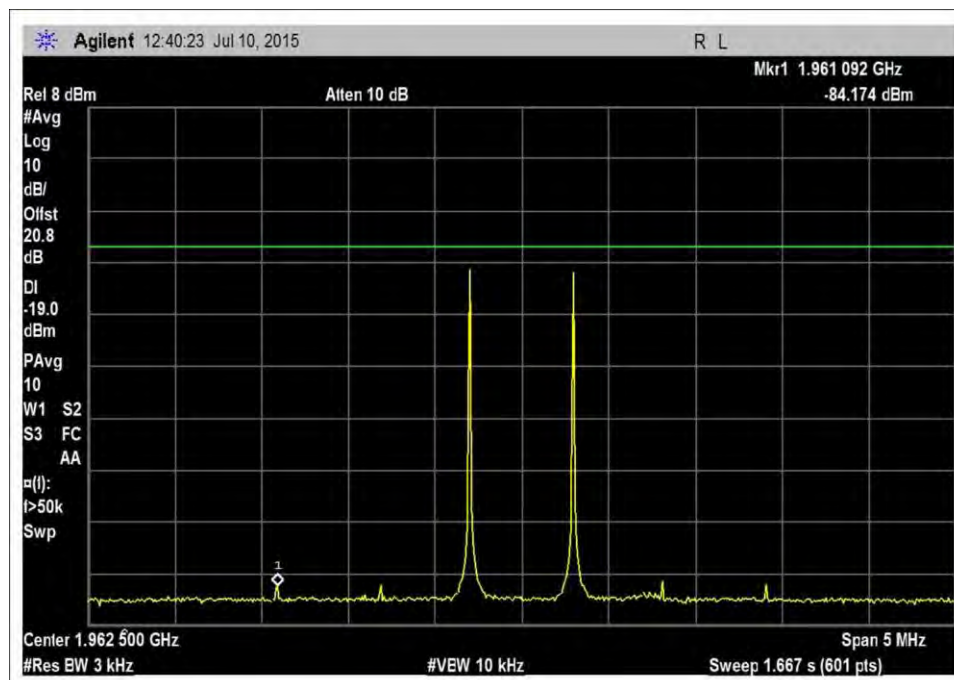

DL_1930-1995MHz+10dB

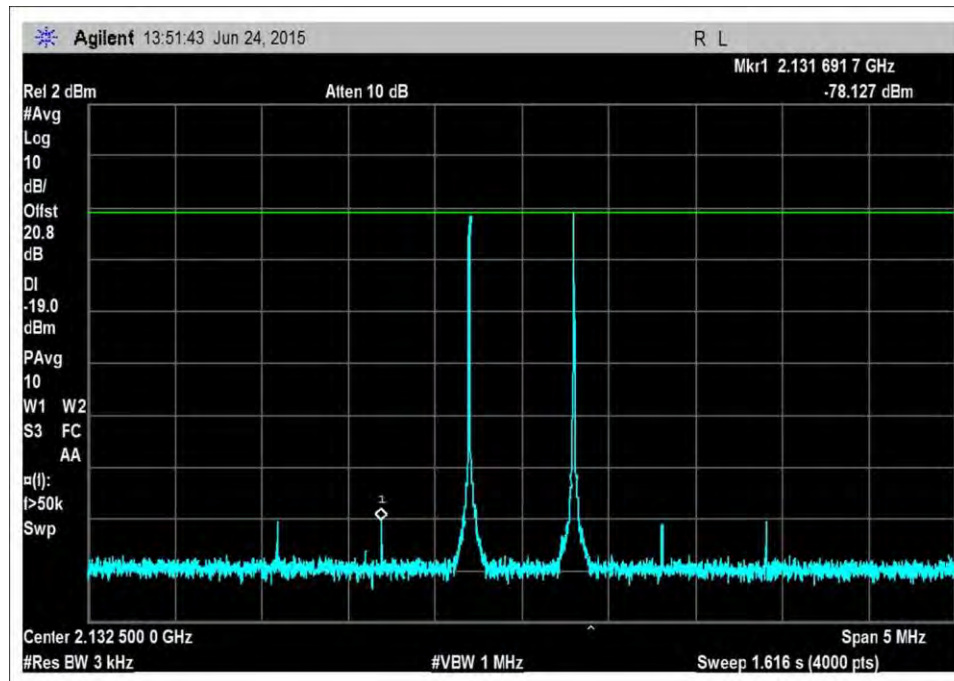

DL_2110-2155MHz

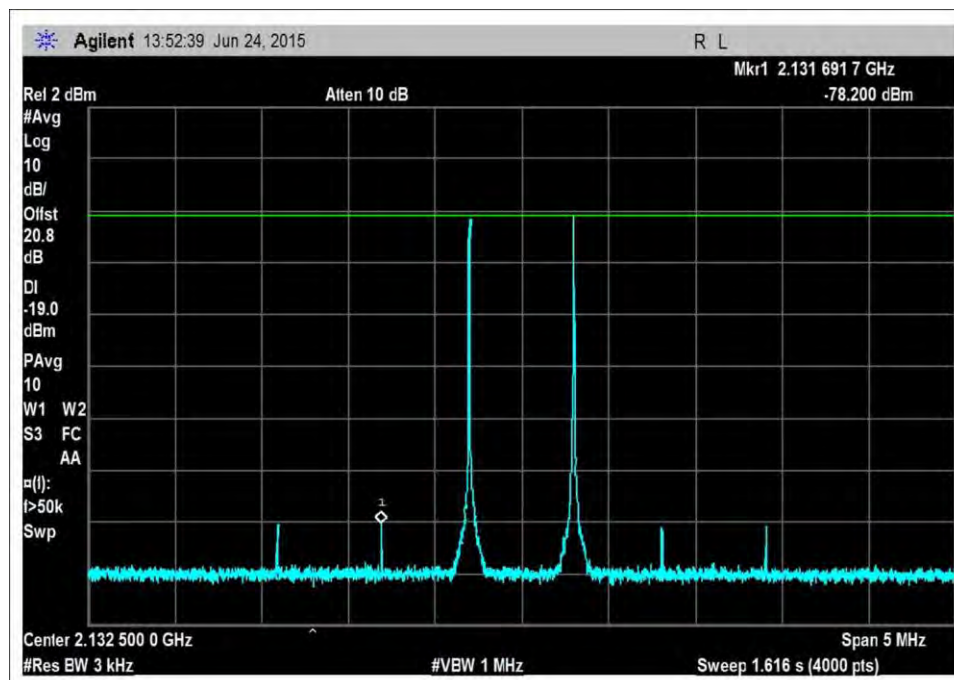

DL_2110-2155MHz+10dB

Clause 7.5 Out of Band Emissions

Test Equipment

Asset #	Description	Model	Manufacturer	Cal Date	Cal Due
ANP05389	Attenuator	766-10	Narda	02/27/2014	02/27/2016
ANP05713	Attenuator	PE7015-20	Pasternack	3/24/2015	03/24/2017
ANP06709	Cable	32026-29094K-29094K-72TC	AstroLab	09/18/2014	09/18/2016
ANP06710	Cable	32026-29094K-29094K-72TC	AstroLab	09/18/2014	09/18/2016
AN02869	Spectrum Analyzer	E4440A	Agilent	07/10/2014	07/10/2015

Test Conditions / Setup

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170
 Customer: Cellphone-Mate, Inc.
 Specification: **7.5 Out-of-band Emissions**
 Work Order #: **97222** Date: 6/24/2015
 Test Type: **Conducted Emissions** Time: 15:36:20
 Tested By: Daniel Bertran Sequence#: 1
 Software: EMITest 5.02.00

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Configuration 1

The equipment under test (EUT) is a Mobile Wideband Consumer Booster.

The EUT is placed on the test bench. Evaluation performed at the Outside (Donor) and Inside (Server) antenna port.

Part 22
 UL: 824-849MHz
 DL: 869-894MHz

Part 24
 UL: 1850-1915MHz
 DL: 1930-1995MHz

Part 27
 UL: 1710-1755MHz, 698-716MHz, 776-787MHz
 DL: 2110-2155MHz, 728-746MHz, 746-757MHz

All adjustable settings on the test sample are set at max gain.

Test environment conditions: Temperature: 20.8°C, Relative Humidity: 42%, Atmospheric Pressure: 101.5kPa

Test procedure: The test was performed in accordance with section 7.5 of the FCC document: 935210 D03 Wideband Consumer Signal Booster Measurement Guidance v03 Dated June 5, 2015.

Firmware: V1.0

Additional plots taken at 1dB before EUT shuts down and before reaching the maximum input level indicated in section 5.5 of above document.

- Maximum uplink transmitter test levels for Mobile using inside antenna(s): +10 dBm
- The maximum downlink input level for all device types is -20 dBm

Lower RBW was used as applicable per rule part, in addition integration power function of the Spectrum Analyzers' Adjacent Channel Power tool was used to show compliance in instances where accuracy can be improved by integrating power measured in smaller RBW and linearly summed into standard bandwidth.

Used for testing the alternative test modulation types:

- CDMA (alternative 1.25 MHz AWGN*)
- LTE 5 MHz (alternative 4.1 MHz AWGN*)

*AWGN test signal, the bandwidth was measured 99% occupied bandwidth.

Summary of Results

Pass: as indicated in plots above, all OBE are under the limit of -19dBm.

GSM							
Low				High			
Out of Band Emission				Out of Band Emission			
Freq	Pre AGC	Max input	Limit	Freq	Pre AGC	Max input	Limit
MHz	dBm	+10dBm	dBm	MHz	dBm	+10dBm	dBm
UL1710-1755	-25.9	-23.8	-19.0	UL1710-1755	-24.9	-22.9	-19.0
UL1850-1915	-29.3	-27.6	-19.0	UL1850-1915	-30.6	-29.9	-19.0
UL824-894	-35.1	-31.4	-19.0	UL824-894	-38.9	-39.0	-19.0
UL 698-716	-23.2	-26.3	-19.0	UL 698-716	-24.6	-24.8	-19.0
UL776-787	-24.9	-24.1	-19.0	UL776-787	-25.6	-24.7	-19.0
		-20dBm				-20dBm	
DL2110-2155	-57.6	-55.3	-19.0	DL2110-2155	-57.9	-54.0	-19.0
DL1930-1995	-61.9	-56.7	-19.0	DL1930-1995	-58.6	-61.2	-19.0
DL869-894	-31.7	-32.5	-19.0	DL869-894	-36.1	-34.1	-19.0
DL:728-746	-38.2	-37.8	-19.0	DL:728-746	-35.0	-35.0	-19.0
DL 746-757	-35.1	-35.3	-19.0	DL 746-757	-37.1	-37.3	-19.0

CDMA							
Low				High			
Out of Band Emission				Out of Band Emission			
Freq	Pre AGC	Max input	Limit	Freq	Pre AGC	Max input	Limit
MHz	dBm	+10dBm	dBm	MHz	dBm	+10dBm	dBm
UL1710-1755	-25.7	-21.9	-19.0	UL1710-1755	-38.1	-37.1	-19.0
UL1850-1915	-38.8	-39.4	-19.0	UL1850-1915	-41.2	-41.9	-19.0
UL824-894	-31.0	-31.6	-19.0	UL824-894	-43.3	-42.4	-19.0
UL 698-716	-44.1	-42.5	-19.0	UL 698-716	-46.0	-43.5	-19.0
UL776-787	-44.4	-44.6	-19.0	UL776-787	-43.5	-43.4	-19.0
		-20dBm				-20dBm	
DL2110-2155	-62.7	-62.8	-19.0	DL2110-2155	-61.9	-62.6	-19.0
DL1930-1995	-62.6	-62.5	-19.0	DL1930-1995	-63.3	-63.7	-19.0
DL869-894	-69.6	-69.9	-19.0	DL869-894	-70.8	-70.8	-19.0
DL:728-746	-72.4	-73.3	-19.0	DL:728-746	-70.5	-71.1	-19.0
DL 746-757	-70.5	-71.2	-19.0	DL 746-757	-71.7	-72.5	-19.0


LTE							
Low				High			
Out of Band Emission				Out of Band Emission			
Freq	Pre AGC	Max input	Limit	Freq	Pre AGC	Max input	Limit
MHz	dBm	+10dBm	dBm	MHz	dBm	+10dBm	dBm
UL1710-1755	-19.7	-19.5	-19.0	UL1710-1755	-31.5	-29.2	-19.0
UL1850-1915	-30.9	-29.9	-19.0	UL1850-1915	-39.8	-37.1	-19.0
UL824-894	-26.0	-24.0	-19.0	UL824-894	-32.0	-32.2	-19.0
UL 698-716	-29.5	-30.2	-19.0	UL 698-716	-30.7	-30.7	-19.0
UL776-787	-29.6	-29.3	-19.0	UL776-787	-32.2	-31.9	-19.0
		-20dBm				-20dBm	
DL2110-2155	-60.9	-60.5	-19.0	DL2110-2155	-60.7	-60.1	-19.0
DL1930-1995	-62.8	-62.0	-19.0	DL1930-1995	-61.8	-62.9	-19.0
DL869-894	-50.9	-51.1	-19.0	DL869-894	-54.1	-53.3	-19.0
DL:728-746	-60.7	-59.1	-19.0	DL:728-746	-53.6	-54.4	-19.0
DL 746-757	-62.1	-60.8	-19.0	DL 746-757	-65.1	-65.1	-19.0

Test Data

UL-GSM




UL_698-716MHz_L_PreAGC

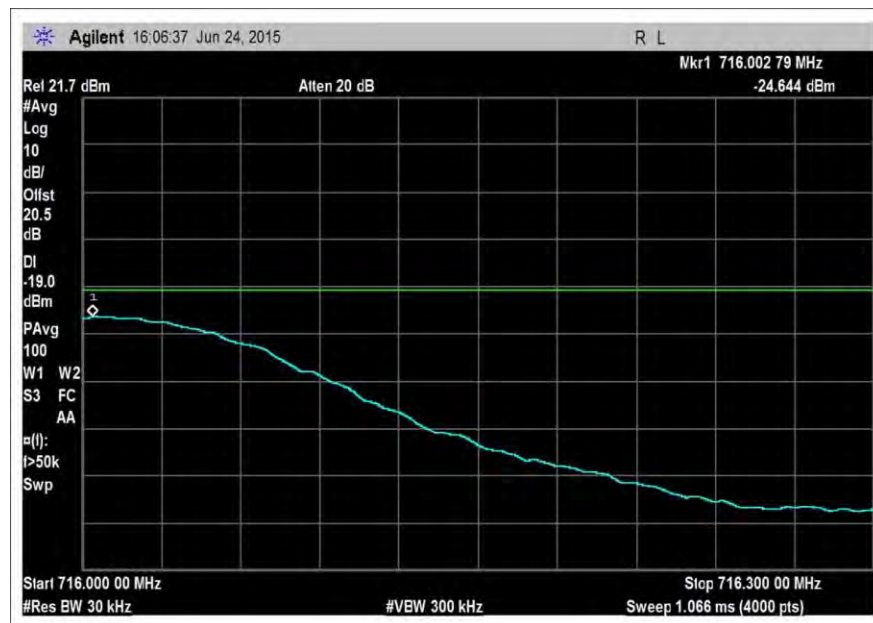

UL_698-716MHz_H_PreAGC




UL_698-716MHz_L_Max

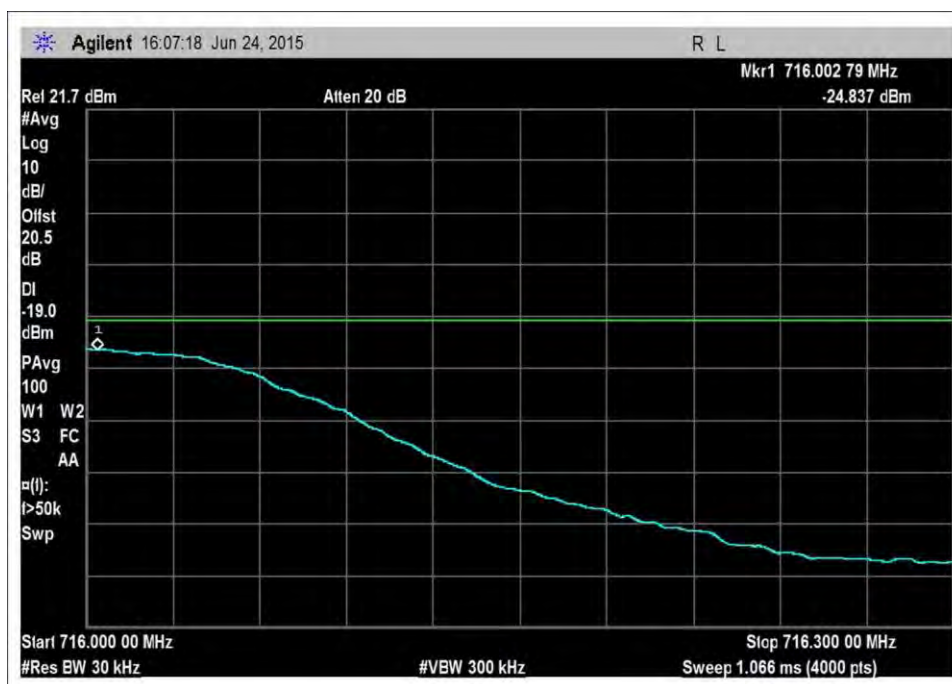

UL_698-716MHz_H_Max




UL_776-787MHz_L_PreAGC

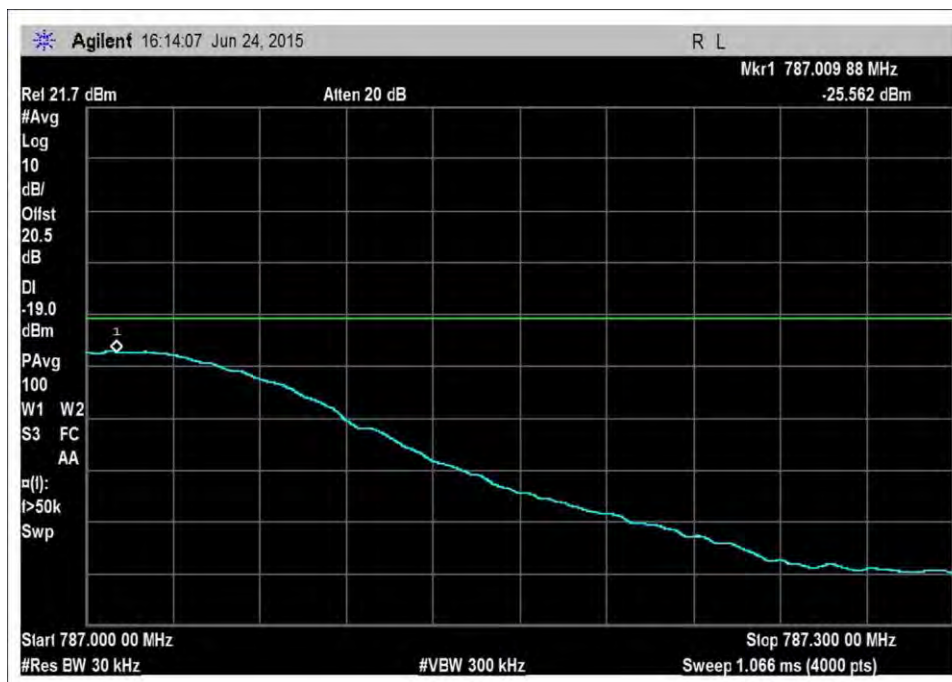


UL_776-787MHz_H_PreAGC




UL_776-787MHz_L_Max

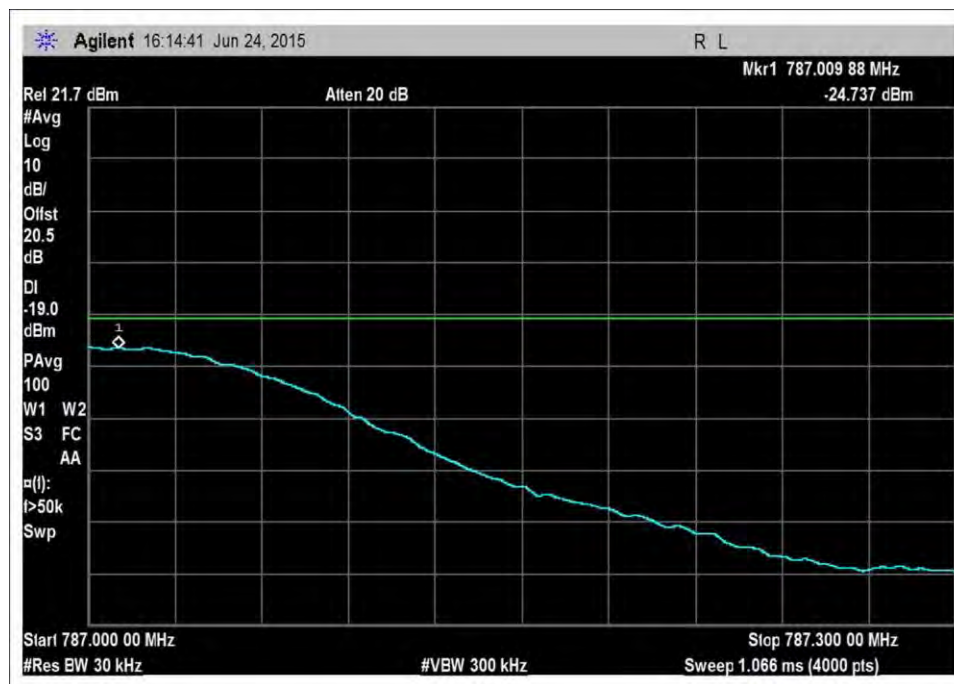


UL_776-787MHz_H_Max

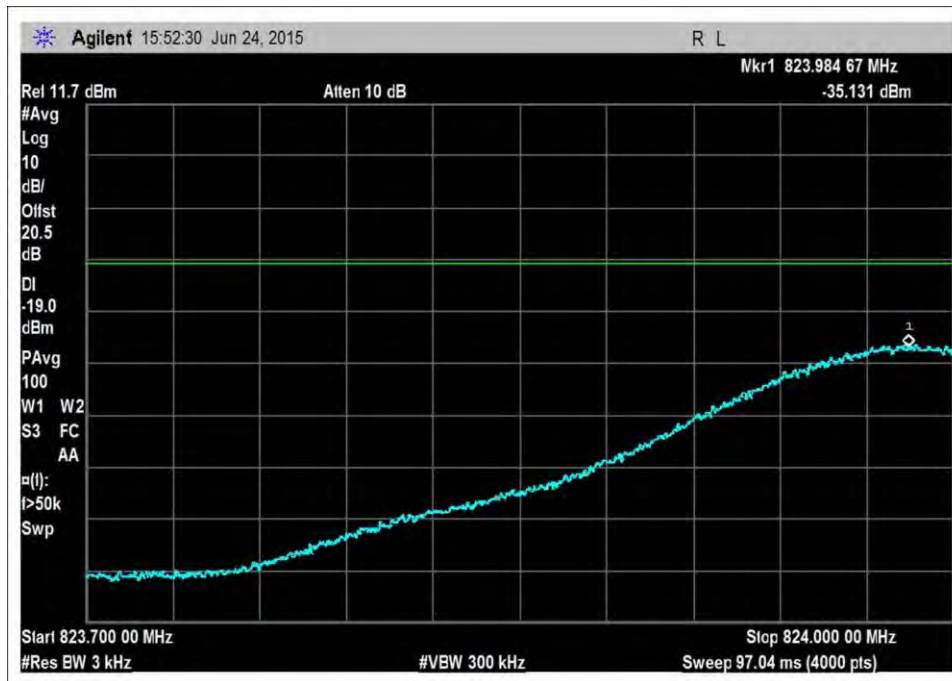


UL_824-849_L_PreAGC

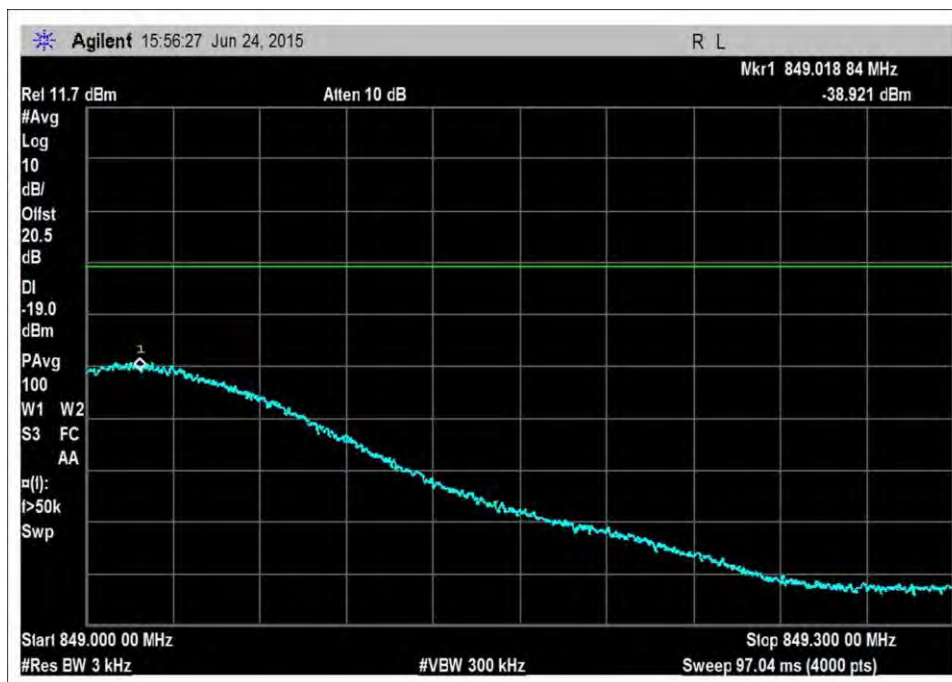


UL_824-849_H_PreAGC

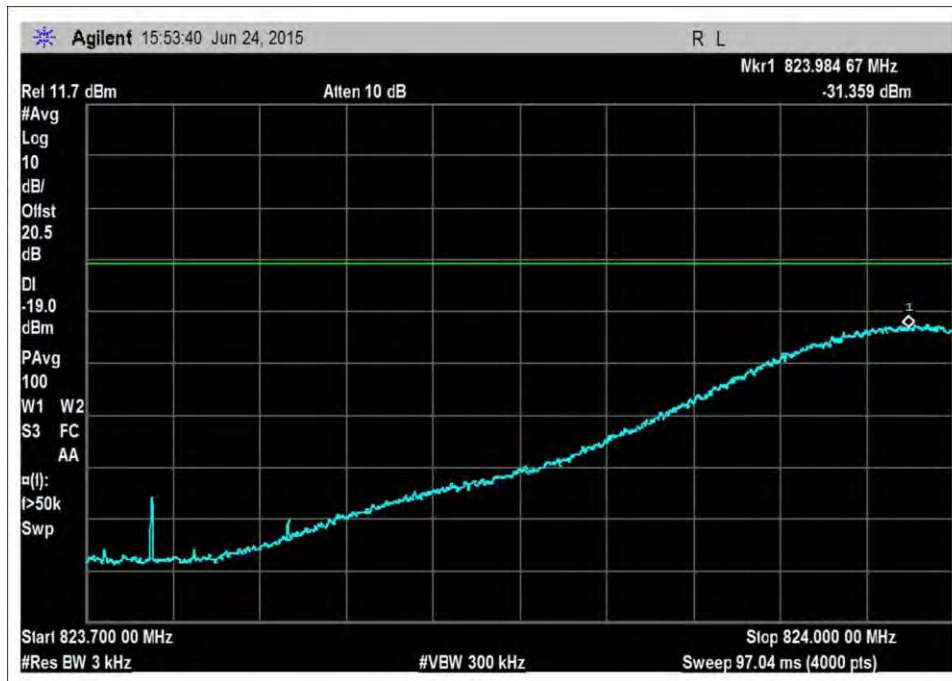


UL_824-849MHz_L_Max

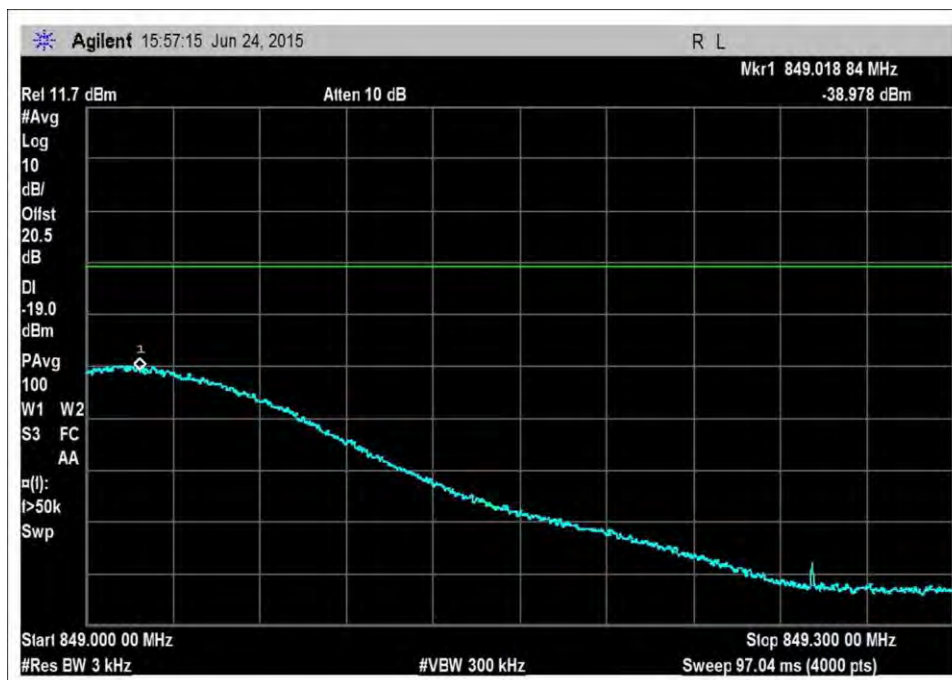


UL_824-849MHz_H_Max

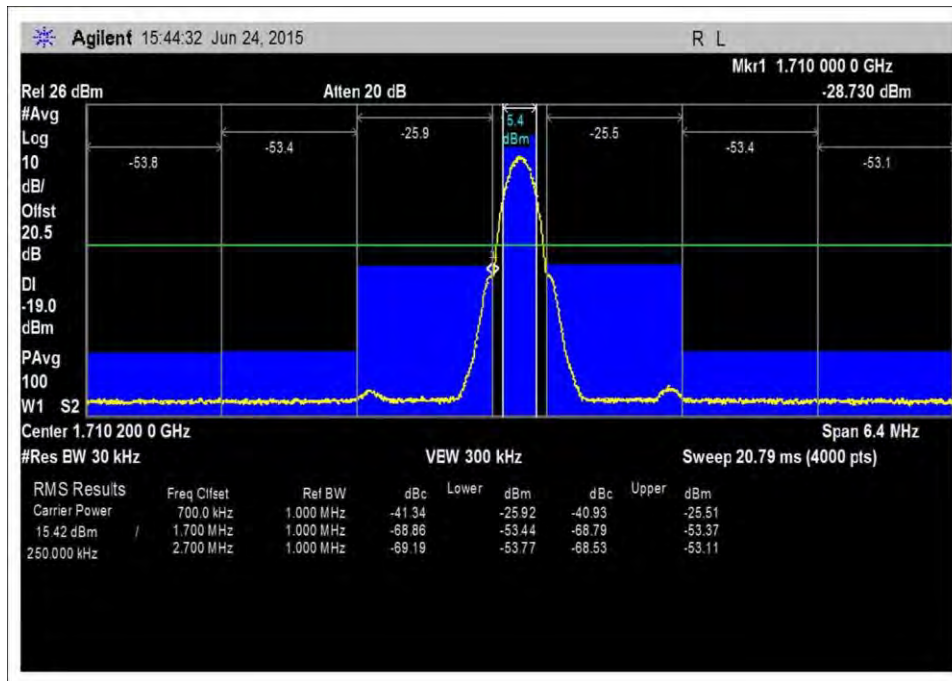


UL_1710-1755MHz_L_PreAGC

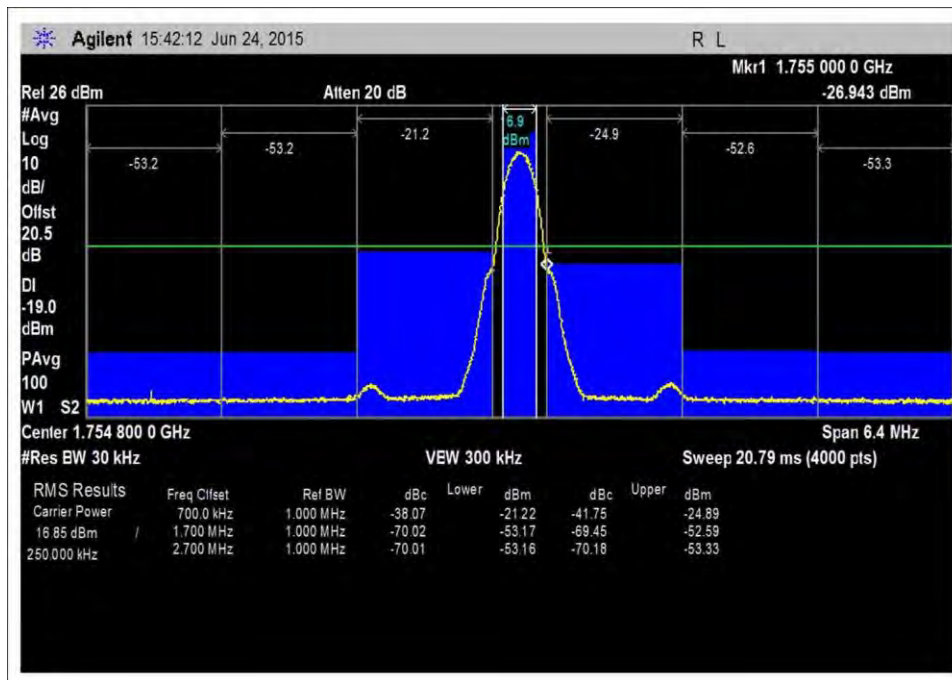


UL_1710-1755MHz_H_PreAGC

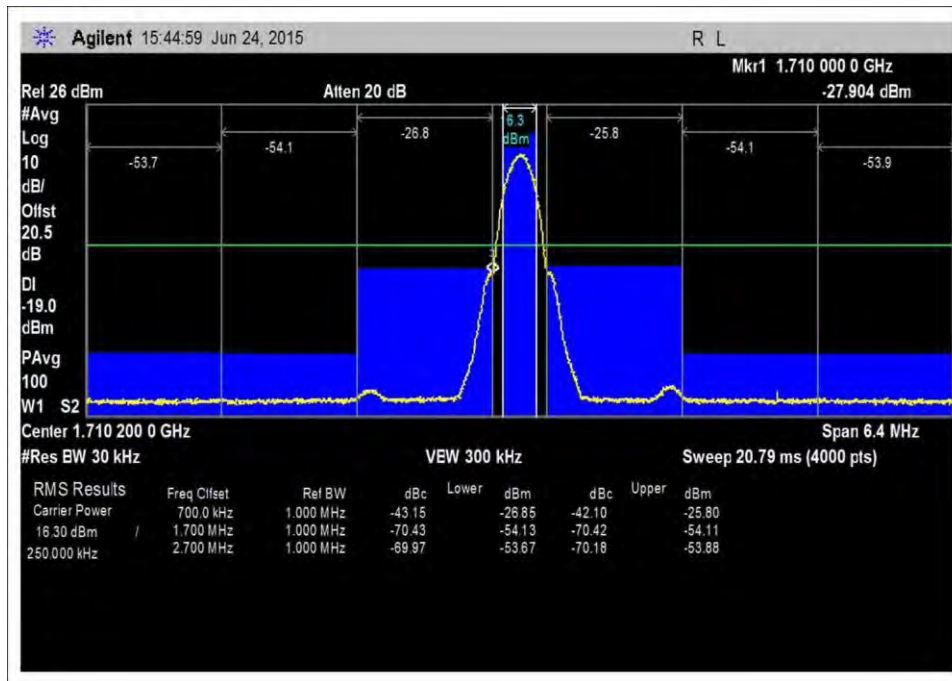


UL_1710-1755MHz_L_Max

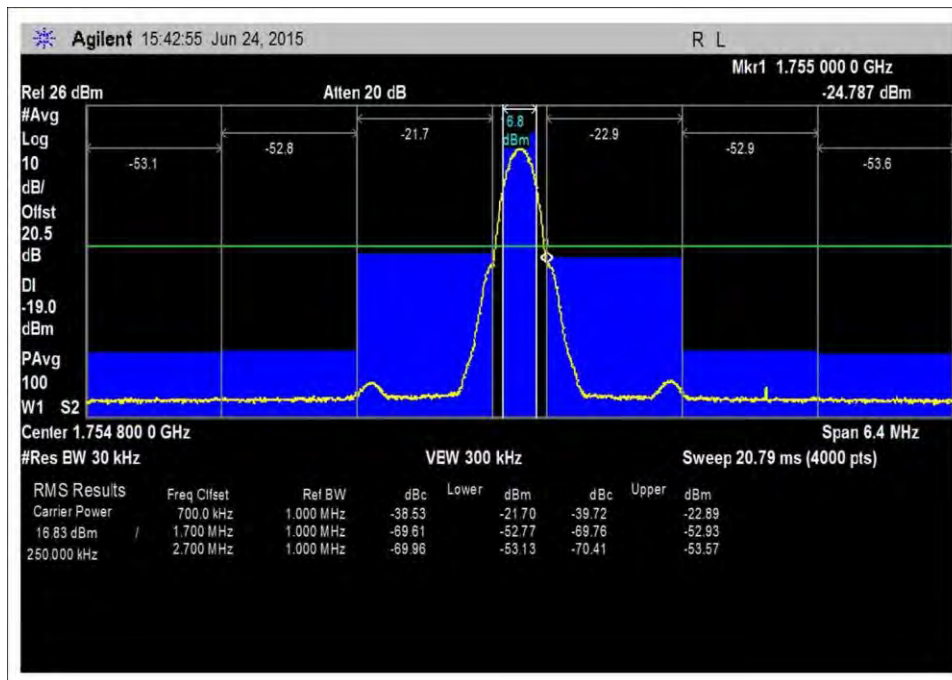


UL_1710-1755MHz_H_Max

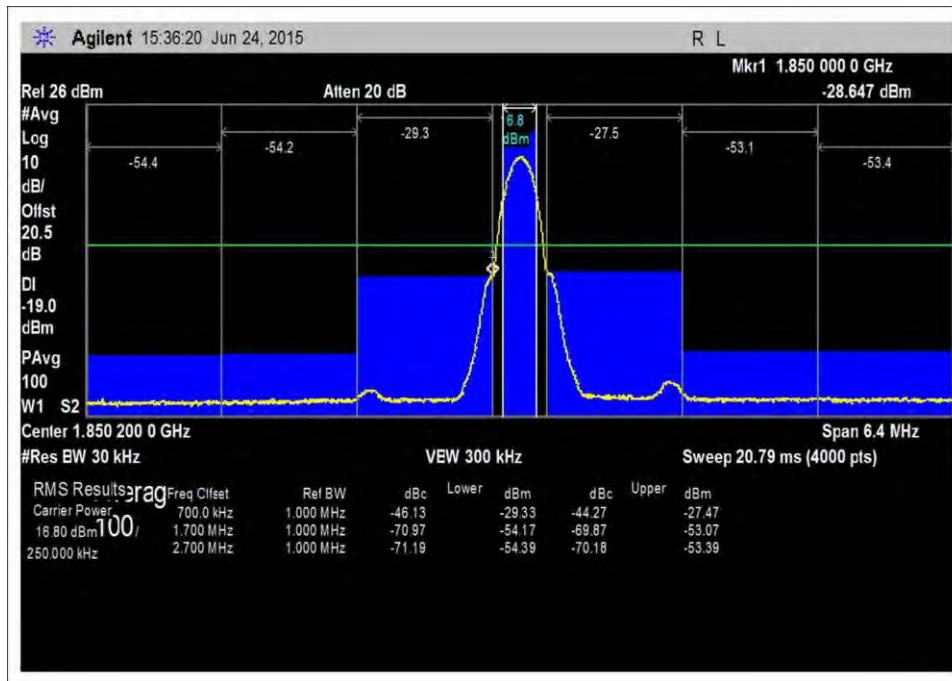


UL_1850-1915MHz_L_PreAGC

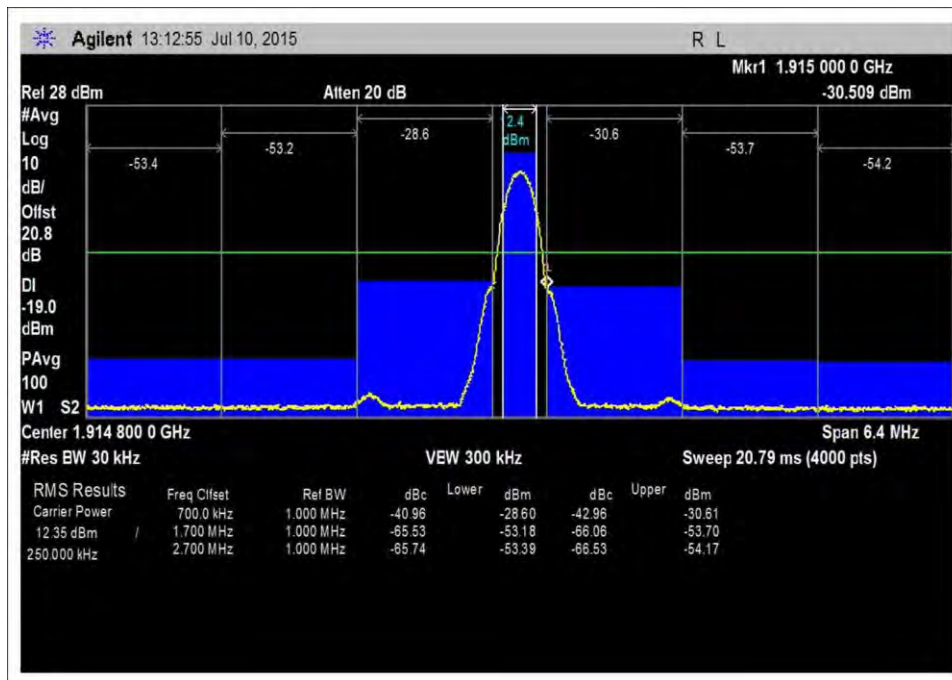

UL_1850-1915MHz_H_PreAGC

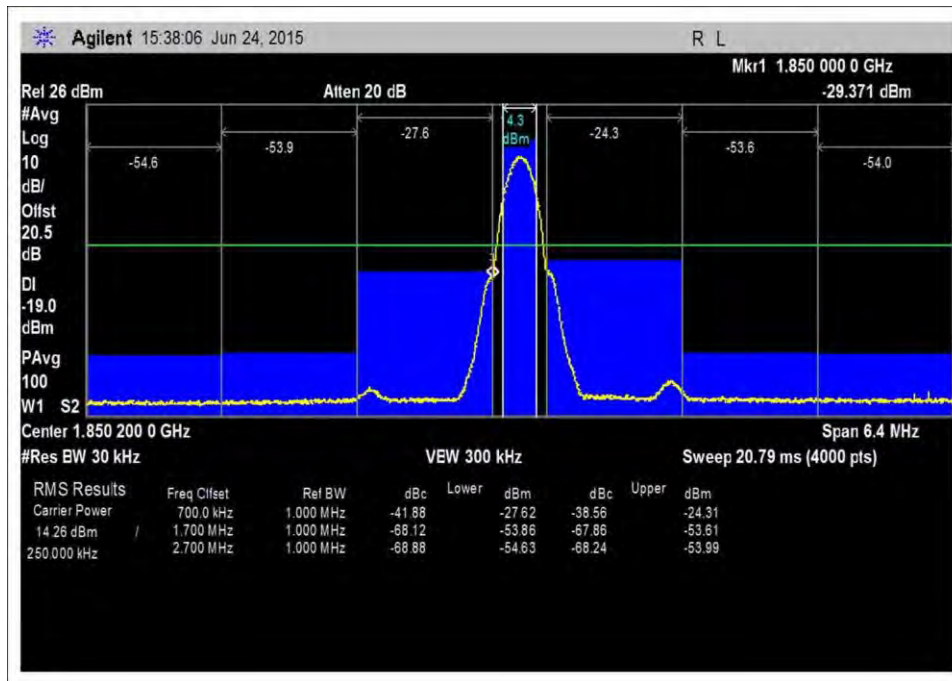

UL_1850-1915MHz_L_Max

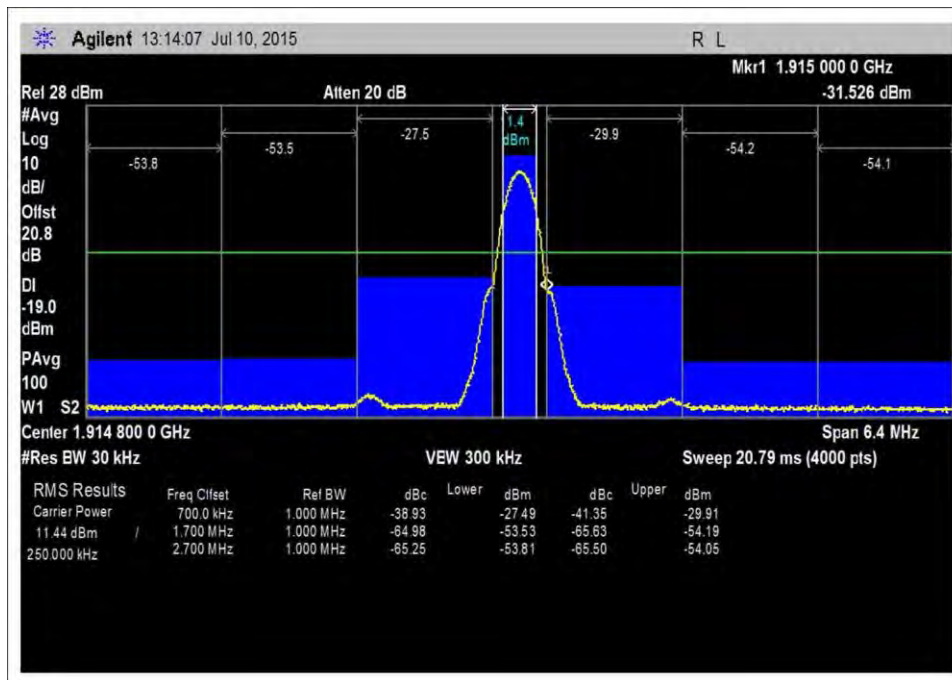


UL_1850-1915MHz_H_Max


DL-GSM




DL_728-746MHz_L_PreAGC

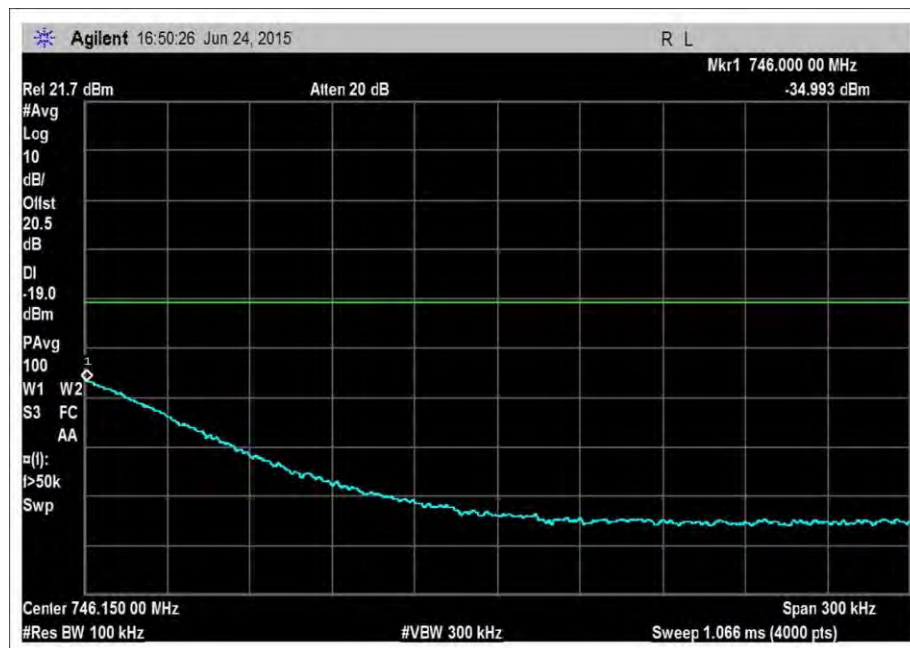


DL_728-746MHz_H_PreAGC

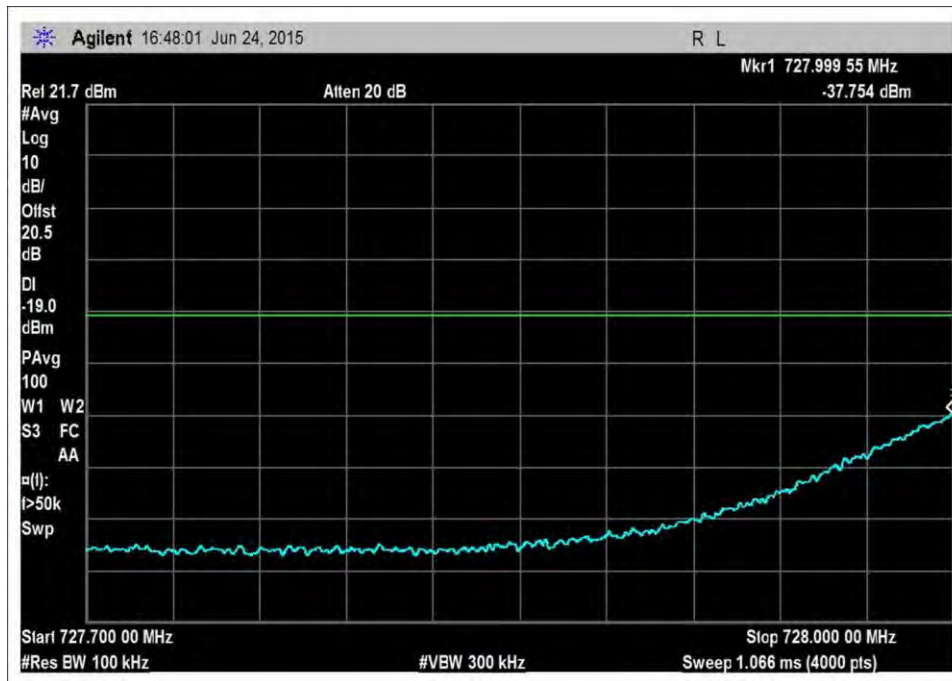

DL_728-746MHz_L_Max

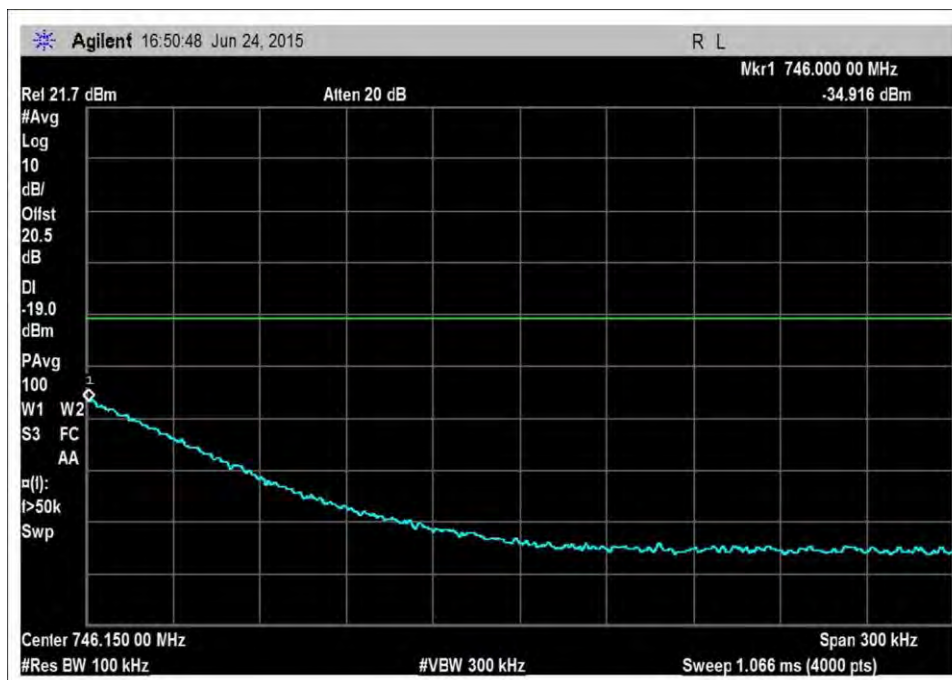


DL_728-746MHz_H_Max

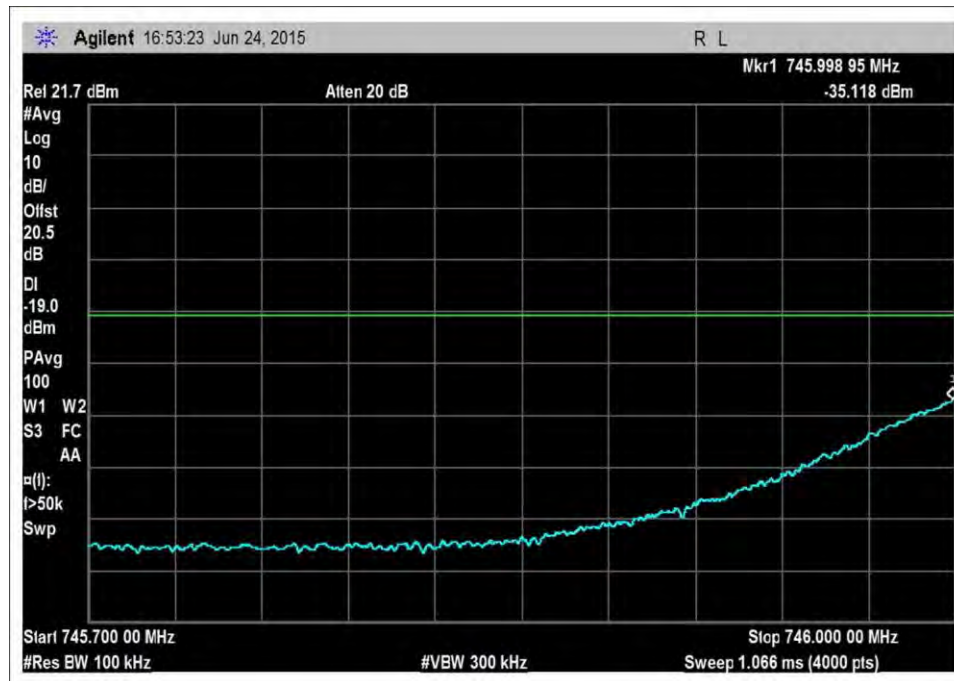


DL_746-757MHz_L_PreAGC




DL_746-757MHz_H_PreAGC

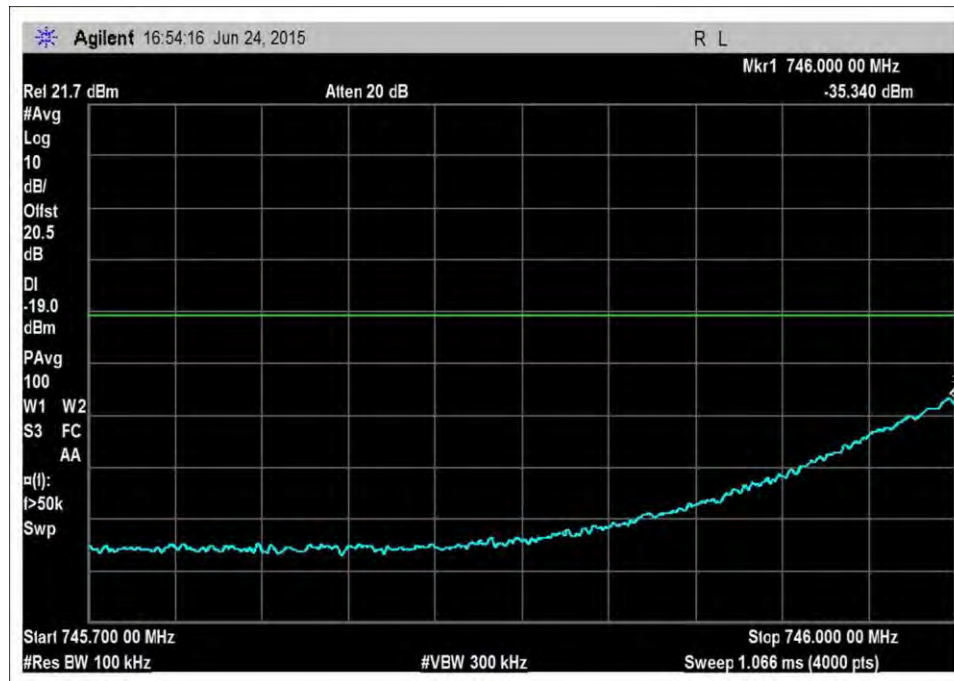


DL_746-757MHz_L_Max

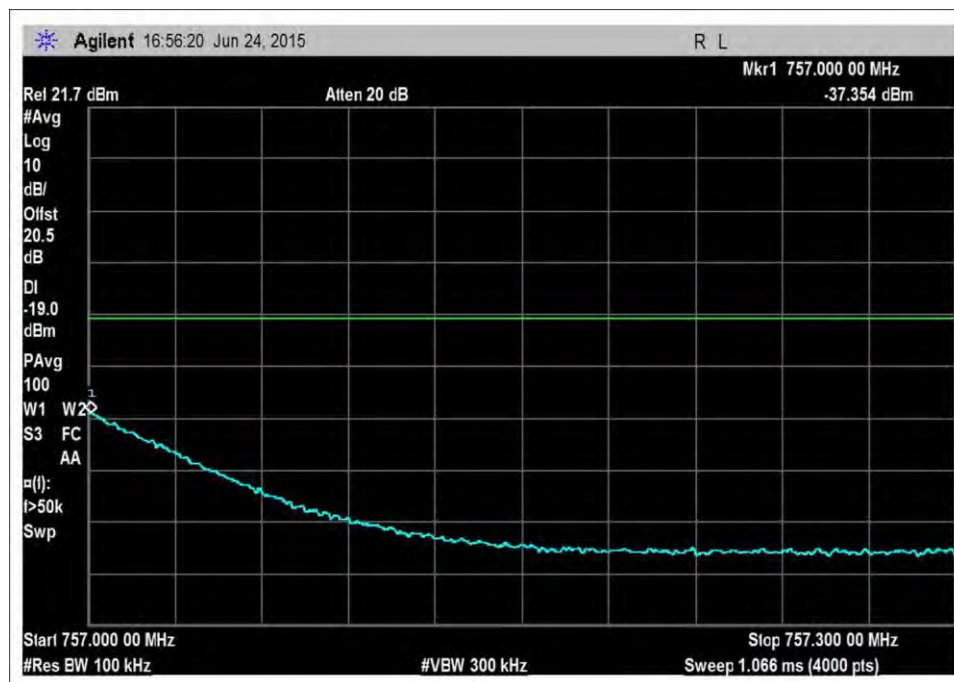


DL_746-757MHz_H_Max

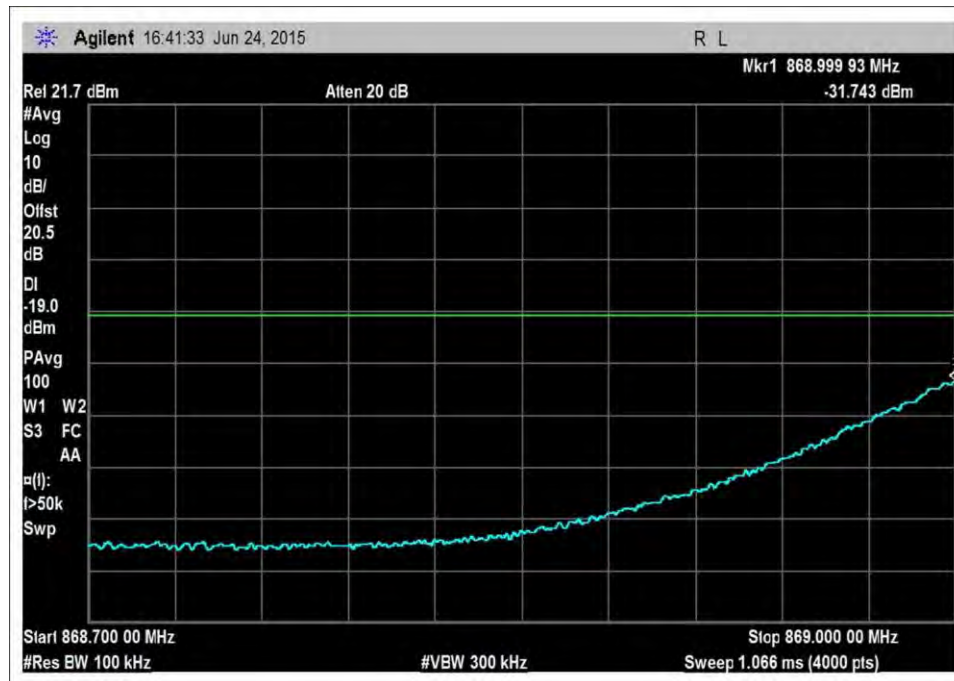


DL_869-894MHz_L_PreAGC

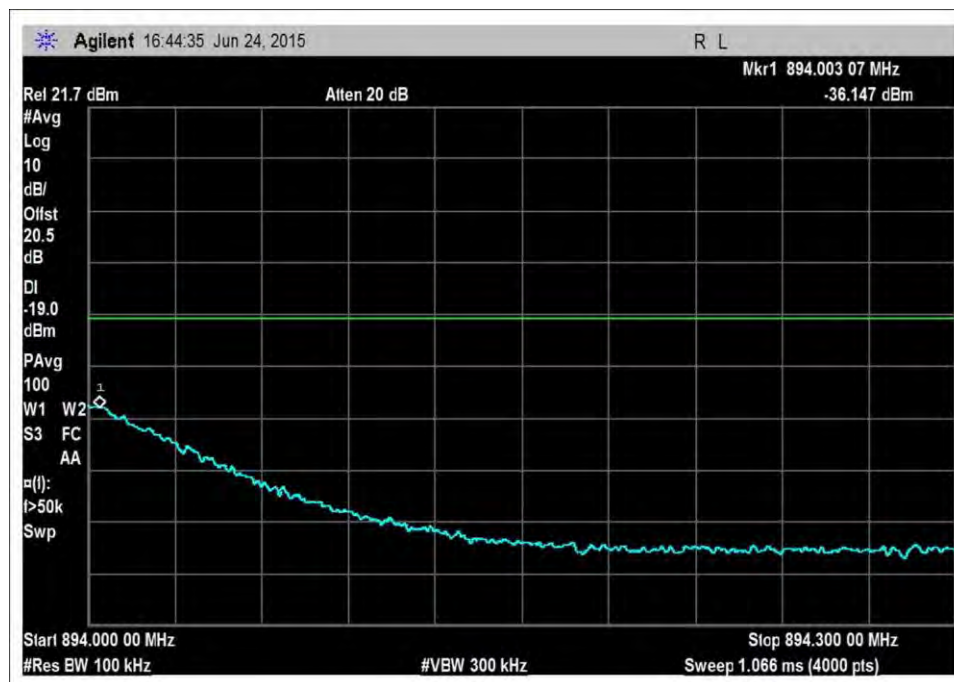


DL_869-894MHz_H_PreAGC

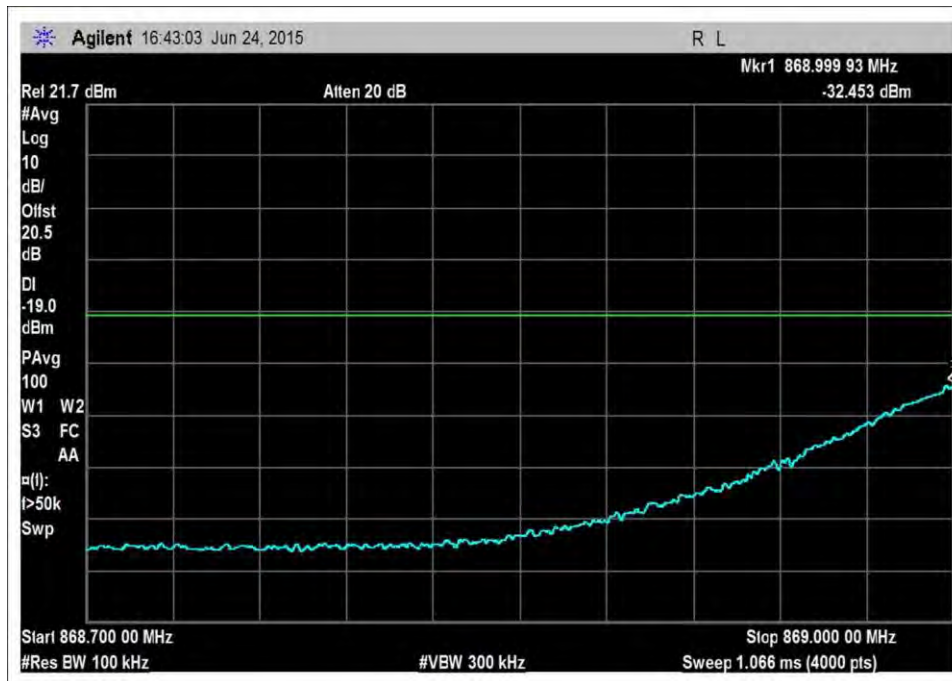


DL_869-894MHz_L_Max

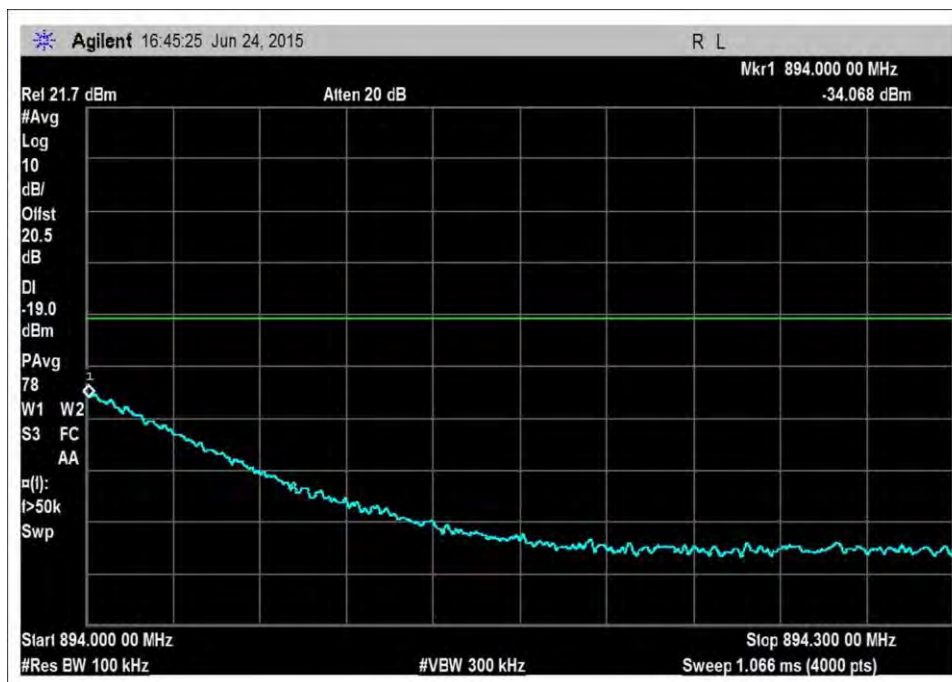


DL_869-894MHz_H_Max

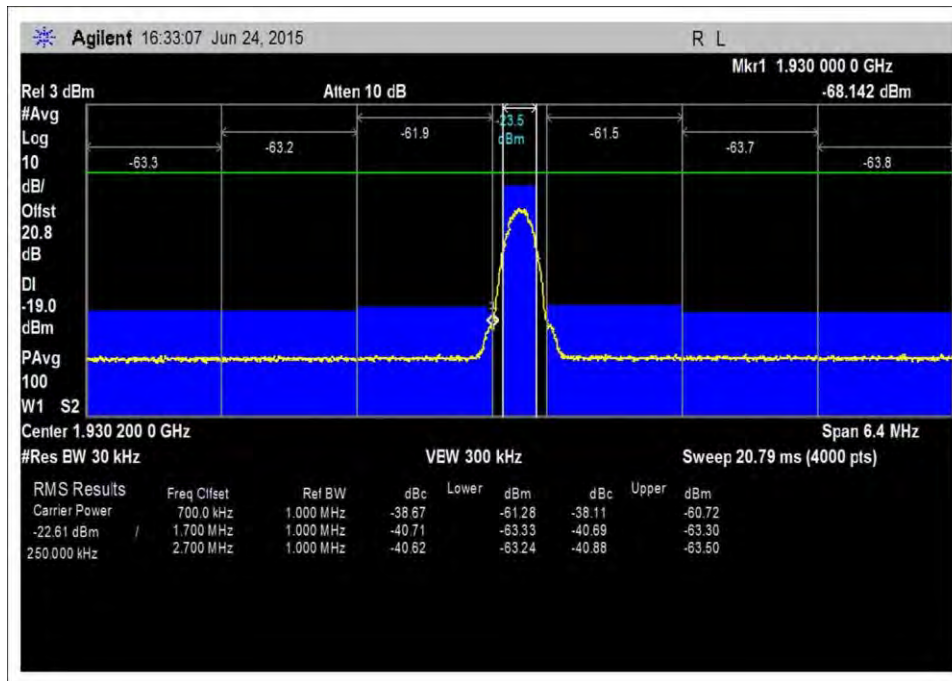


DL_1930-1995MHz_L_PreAGC

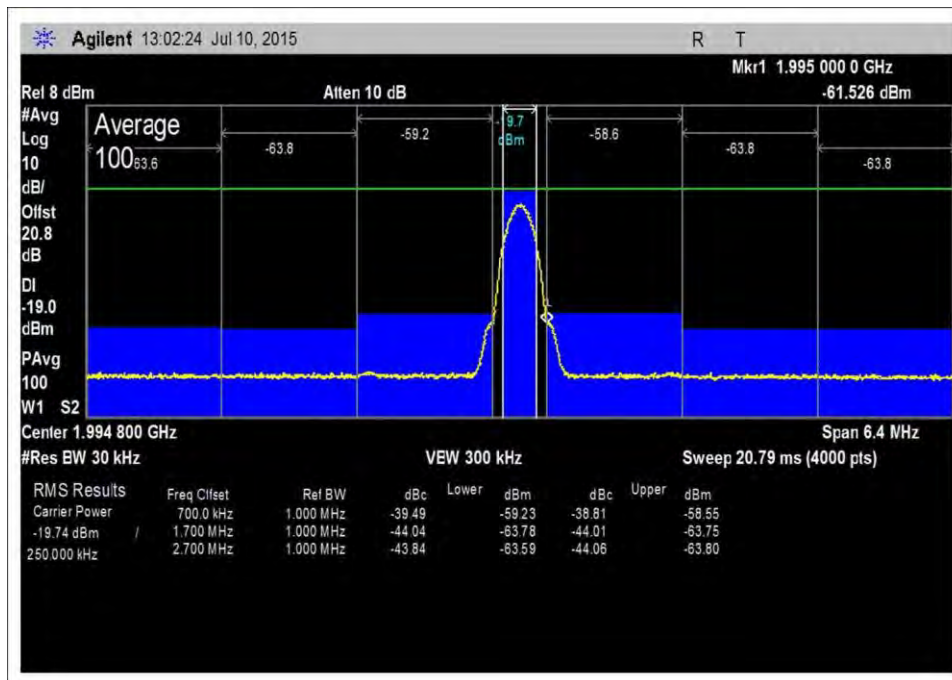


DL_1930-1995MHz_H_PreAGC

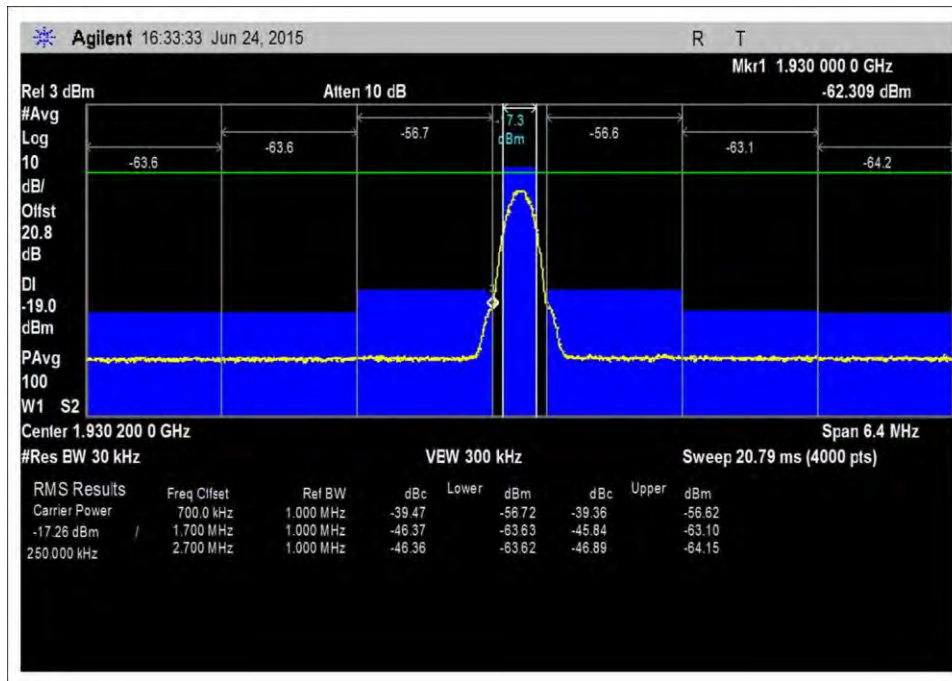


DL_1930-1995MHz_L_Max

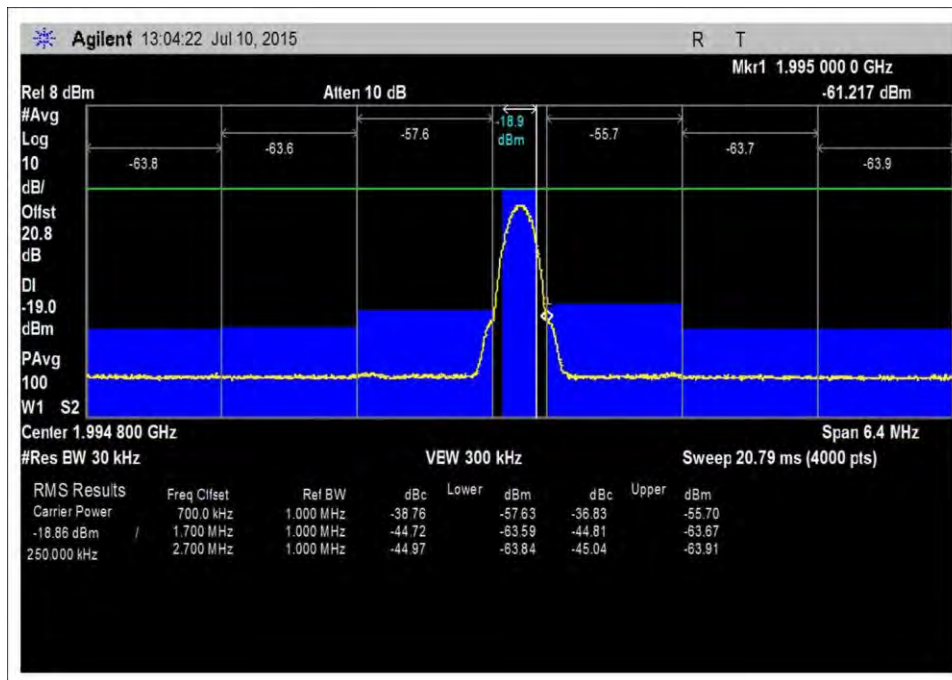


DL_1930-1995MHz_L_Max

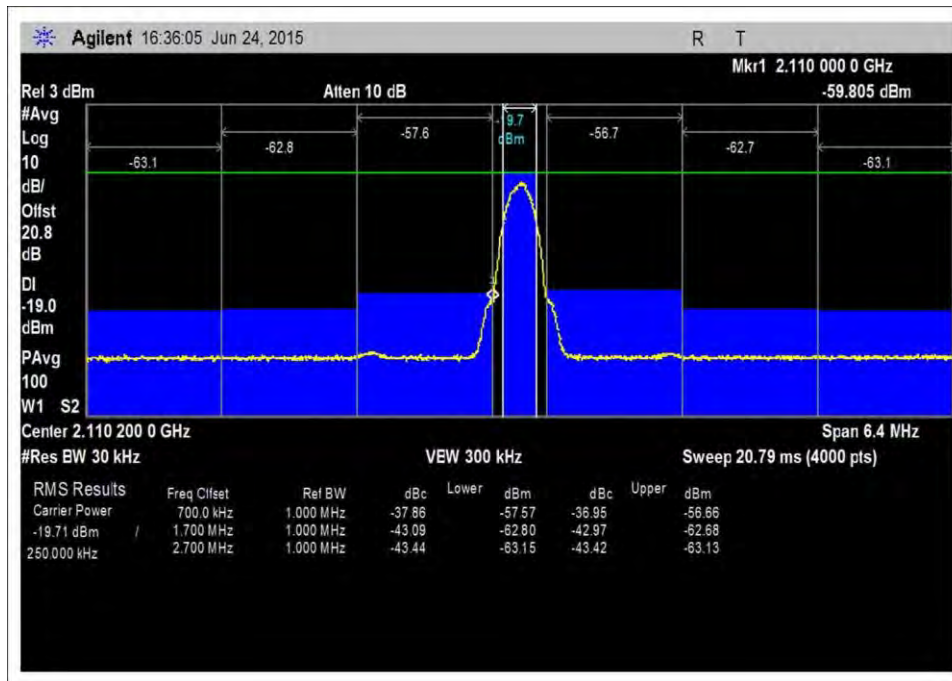


DL_2110-2155MHz_L_PreAGC

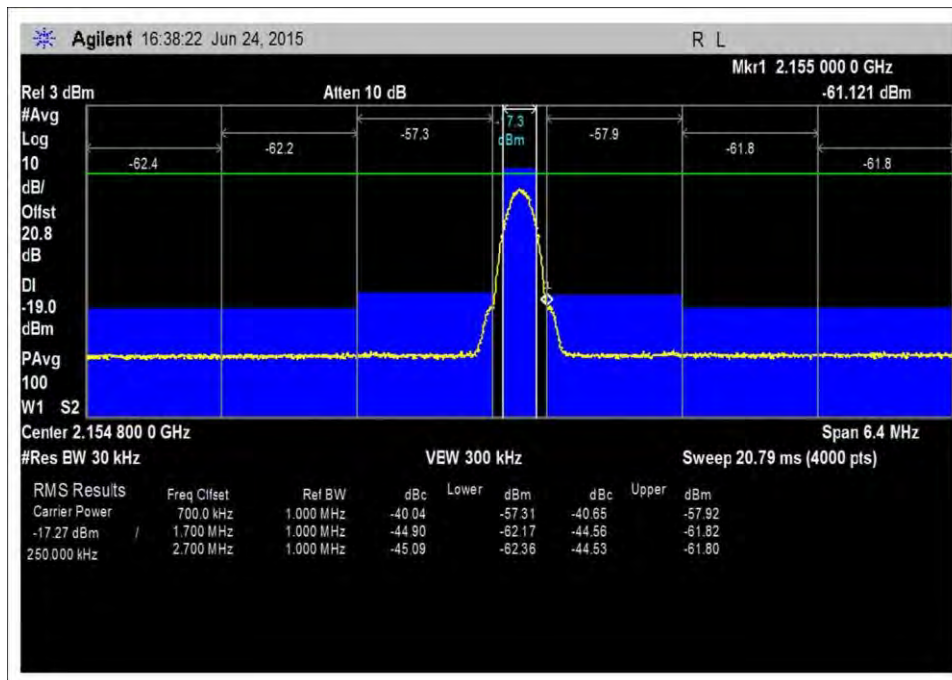

DL_2110-2155MHz_H_PreAGC

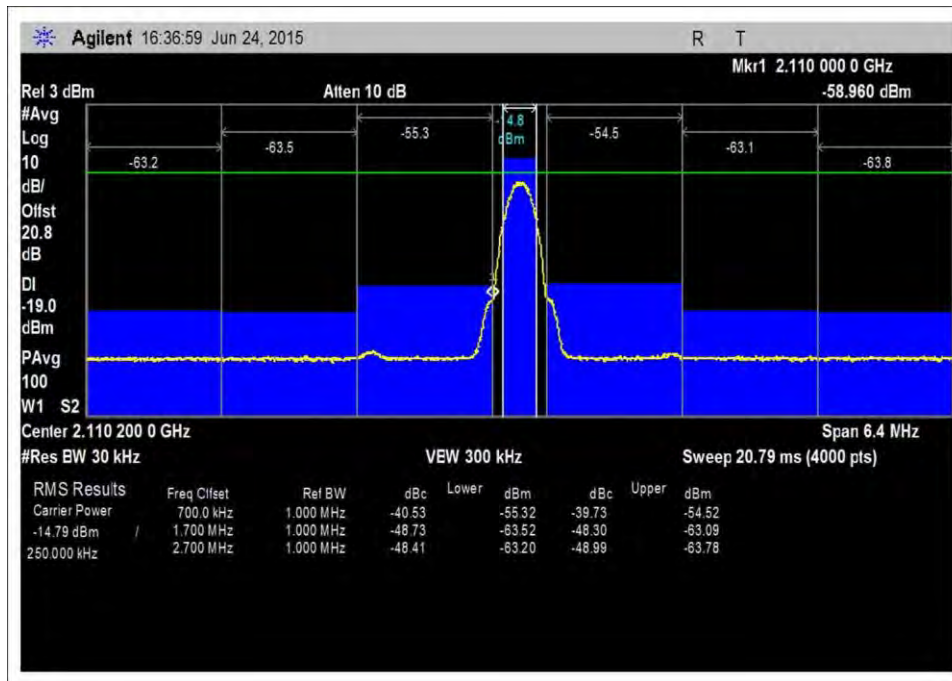


DL_2110-2155MHz_L_Max

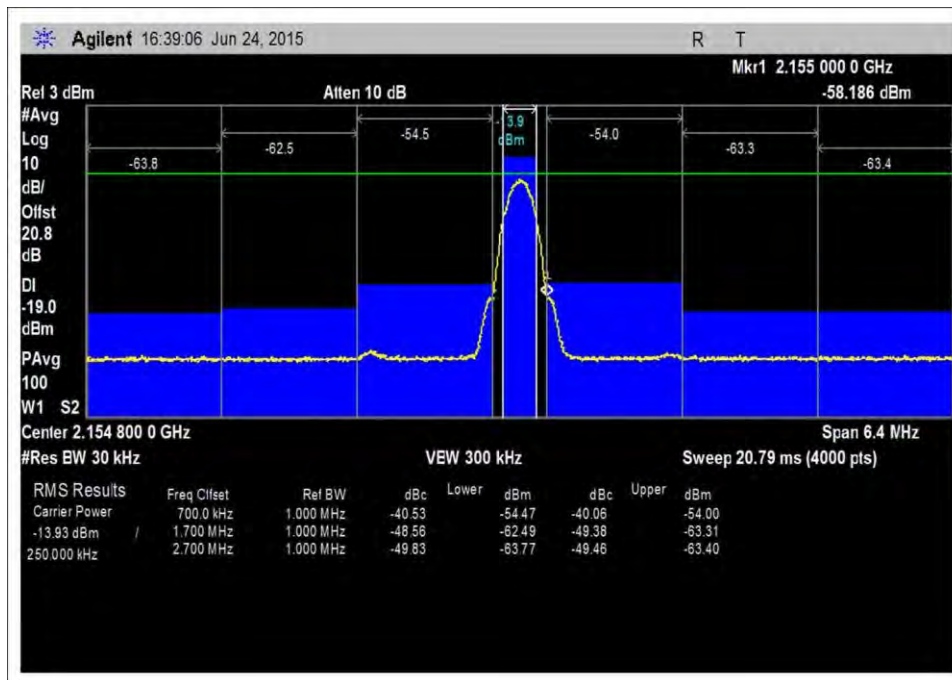


DL_2110-2155MHz_H_Max


UL-CDMA

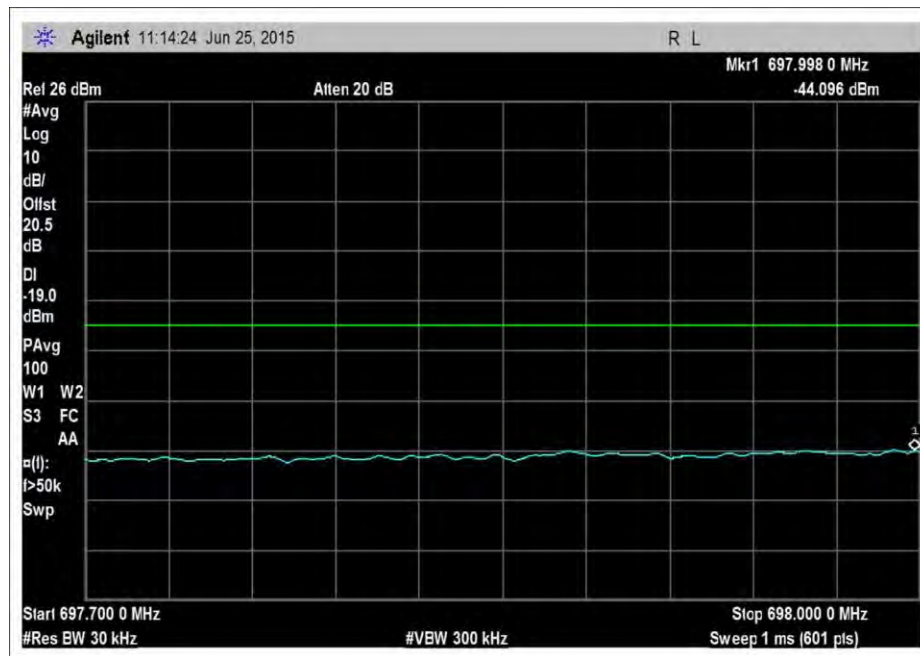


UL_698-716MHz_L_PreAGC

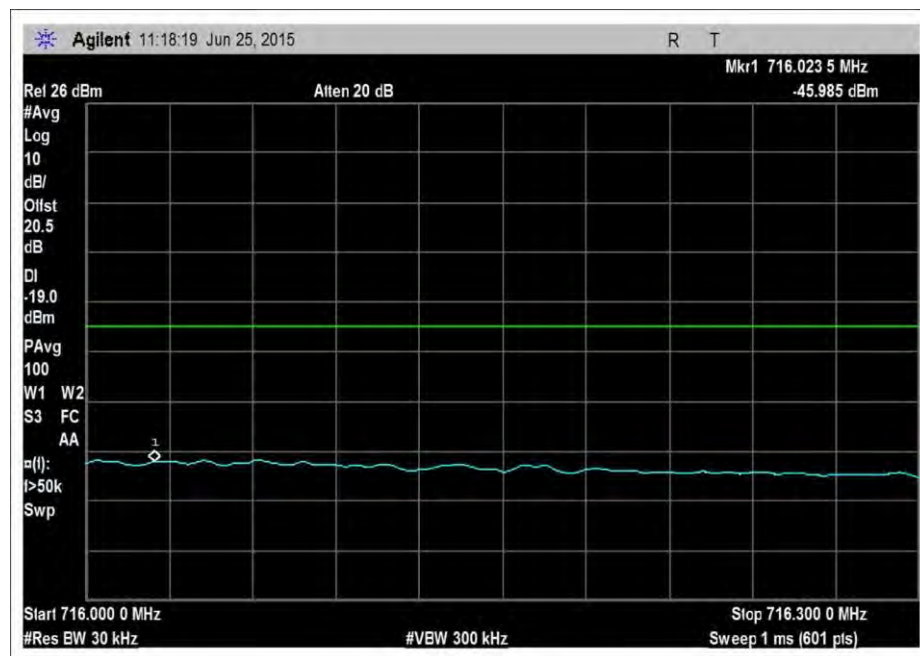


UL_698-716MHz_H_PreAGC

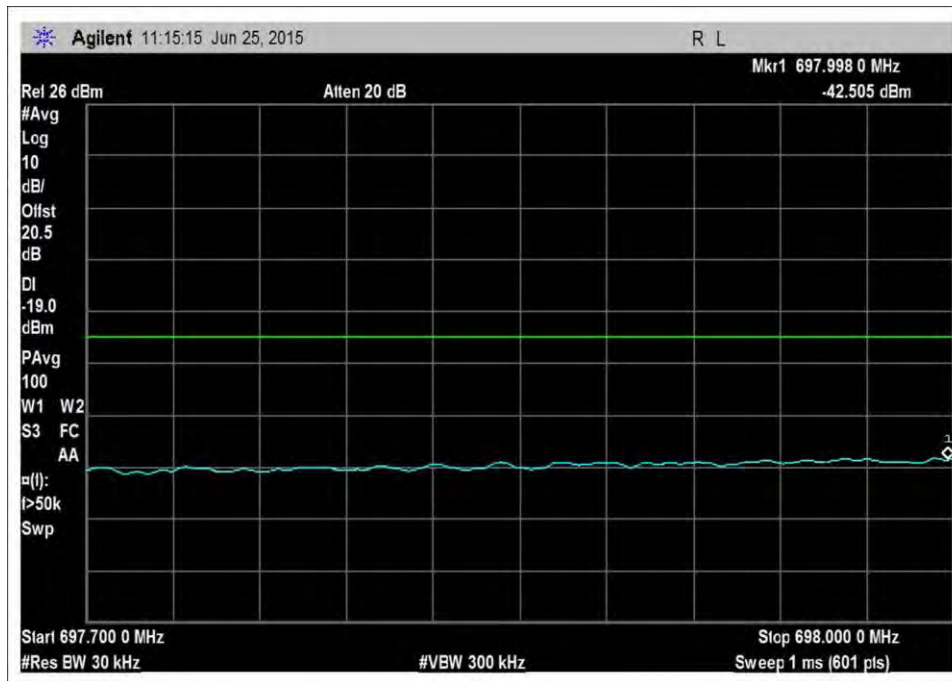


UL_698-716MHz_L_Max

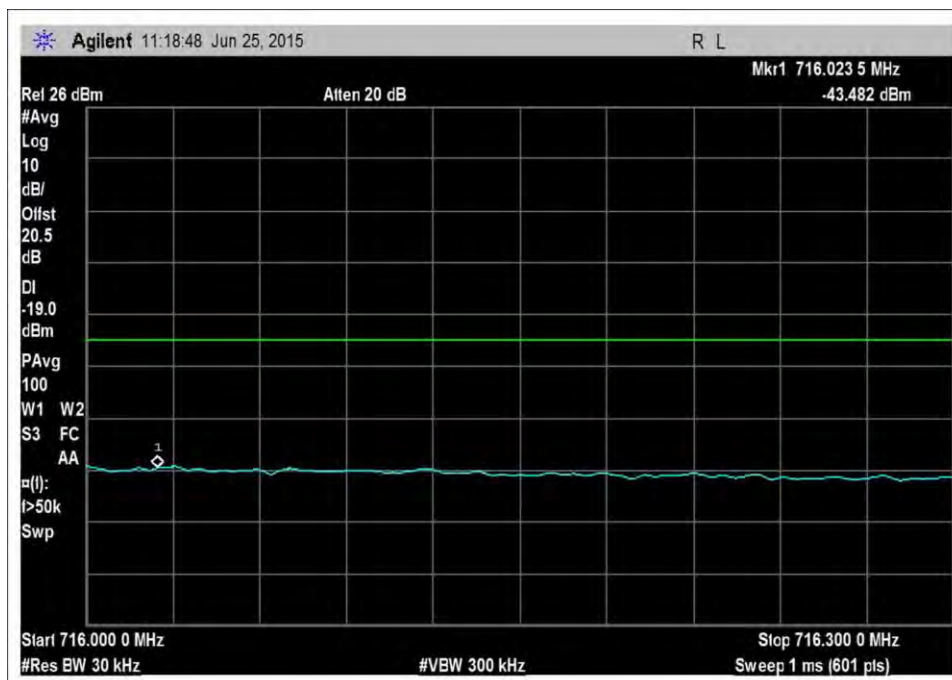


UL_698-716MHz_H_Max

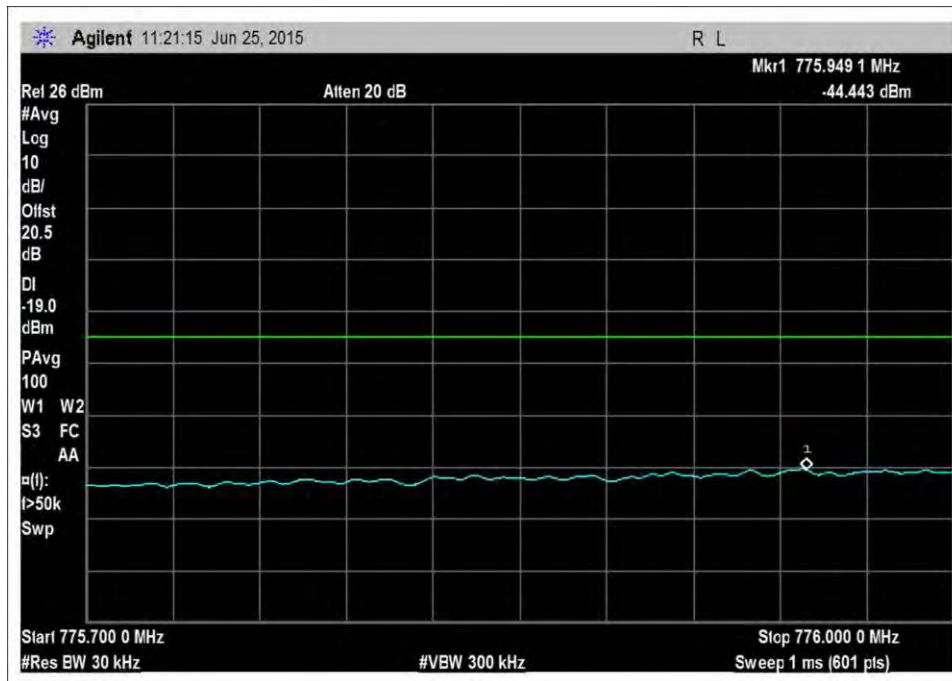


UL_776-787MHz_L_PreAGC

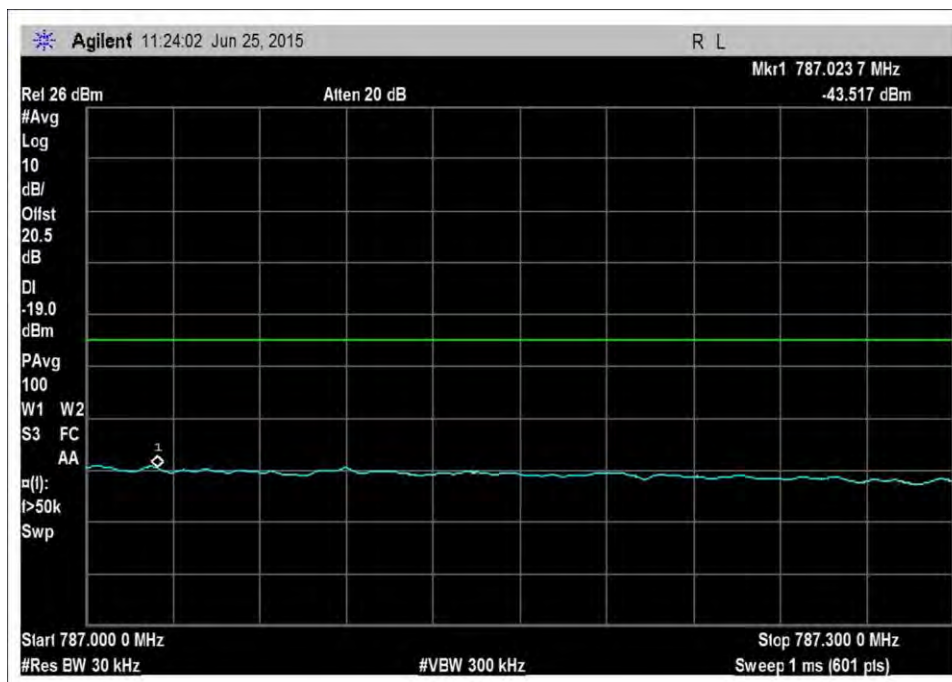


UL_776-787MHz_H_PreAGC

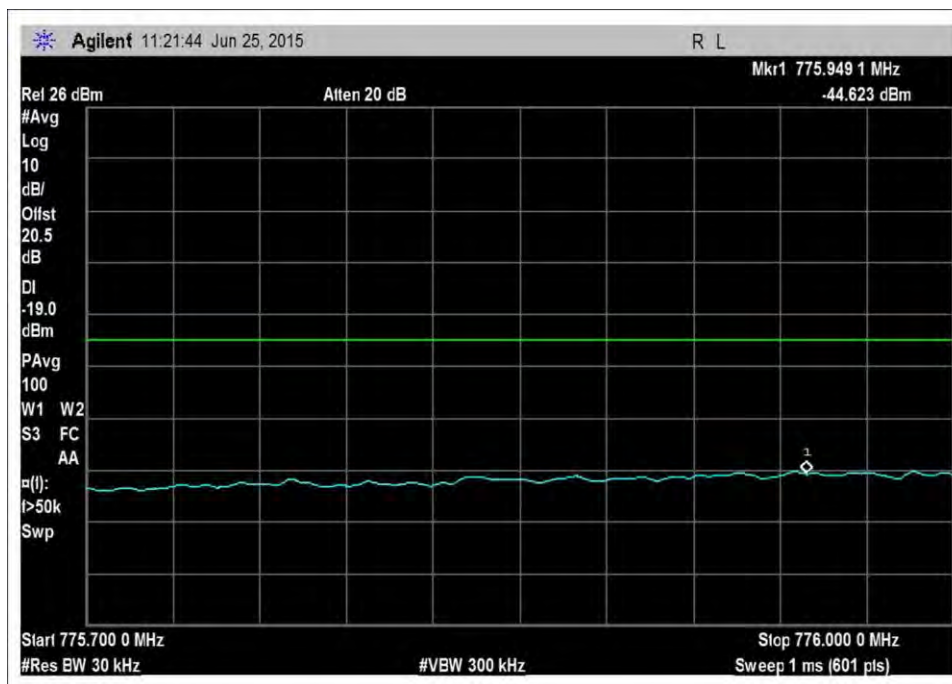


UL_776-787MHz_L_Max

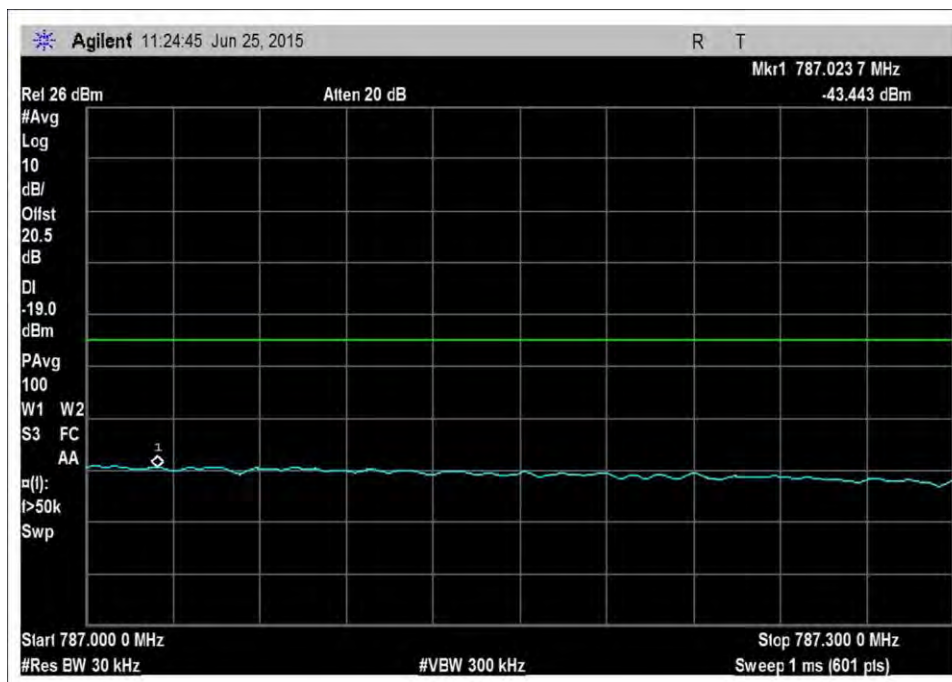


UL_776-787MHz_H_Max

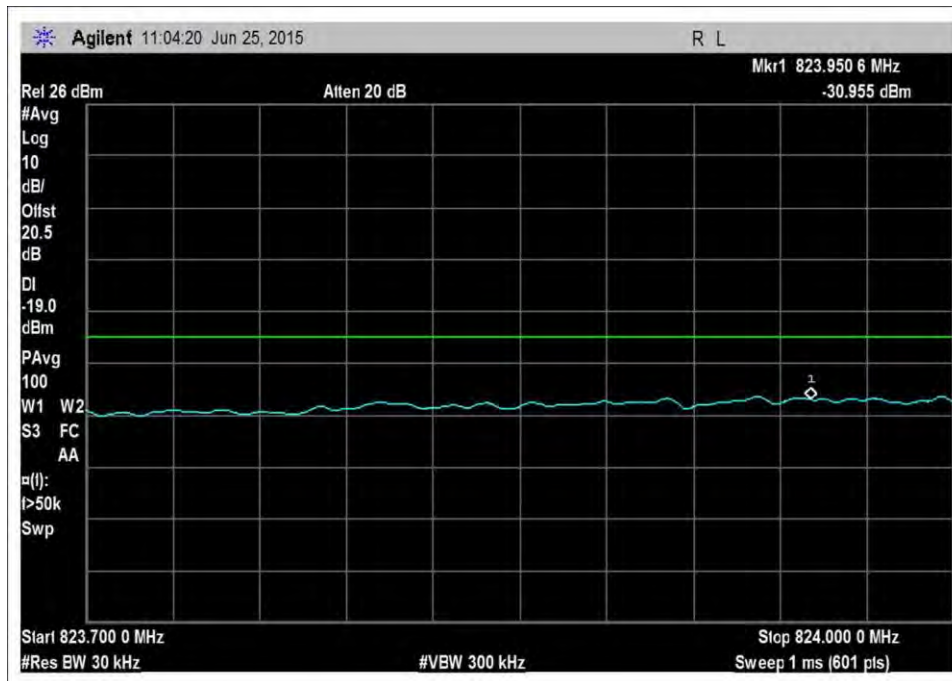


UL_824-849MHz_L_PreAGC

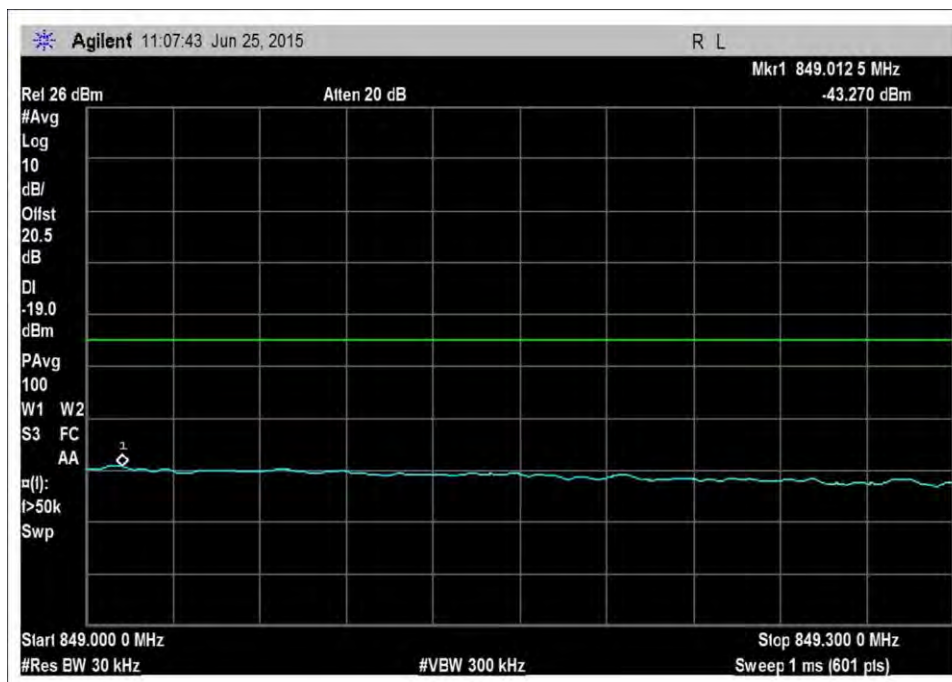


UL_824-849MHz_H_PreAGC

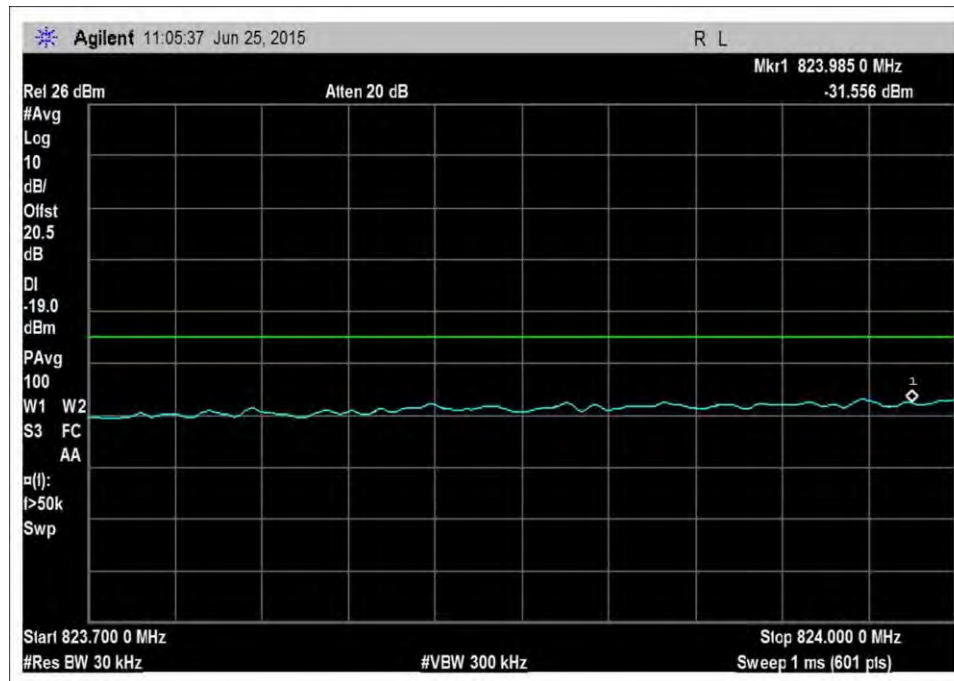


UL_824-849MHz_L_Max

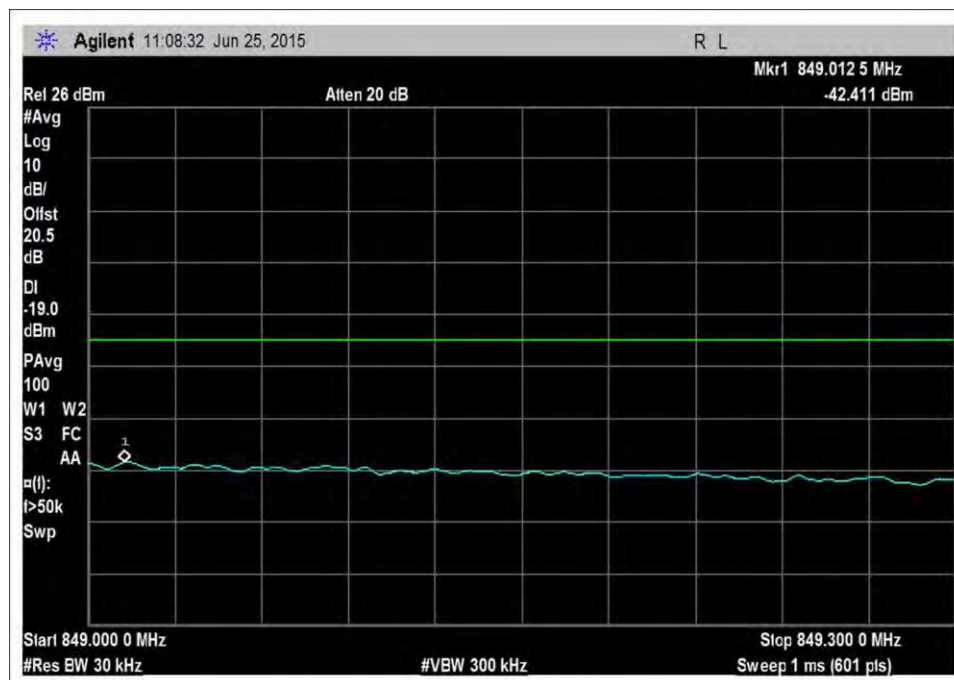


UL_824-849MHz_H_Max

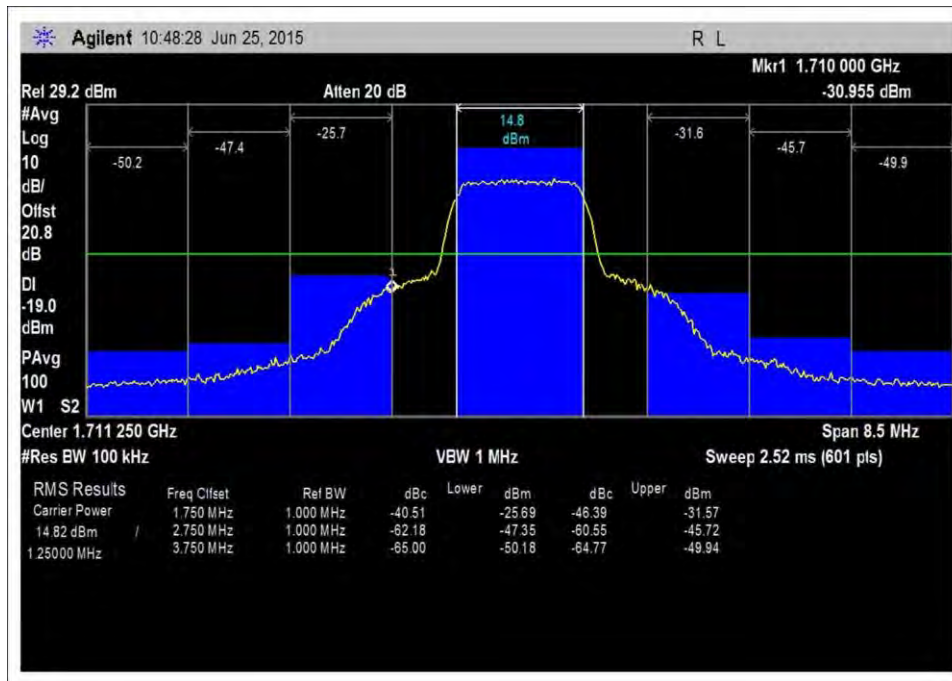


UL_1710-1755MHz_L_PreAGC

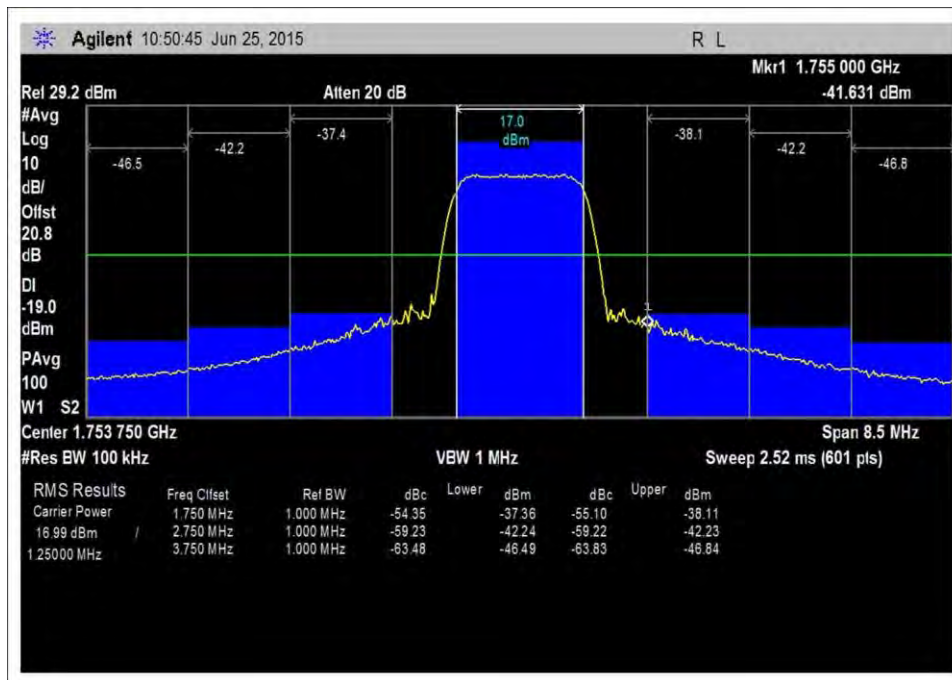


UL_1710-1755MHz_H_PreAGC

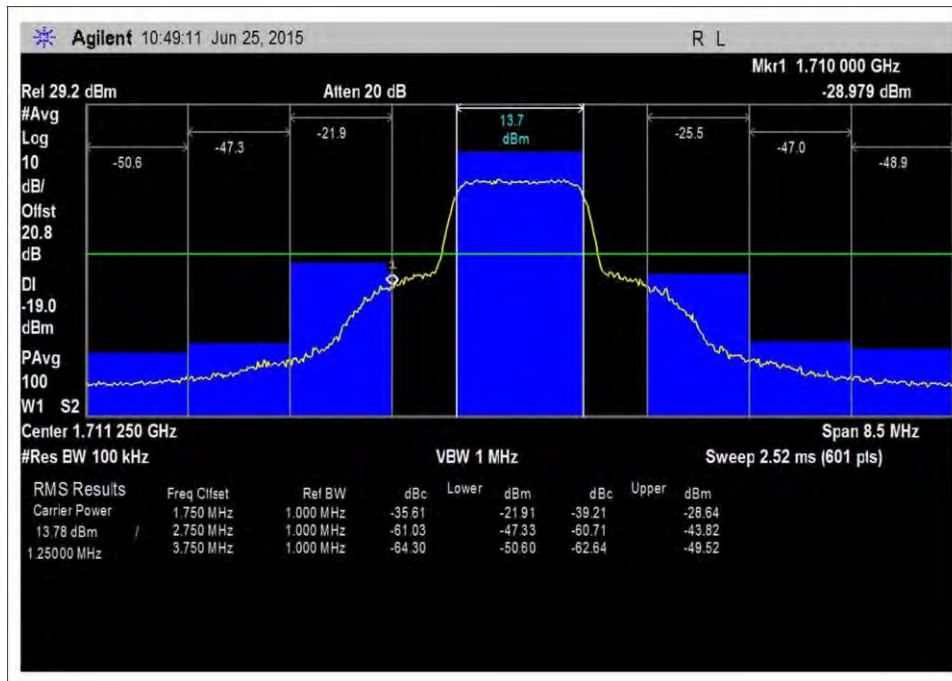


UL_1710-1755MHz_L_Max

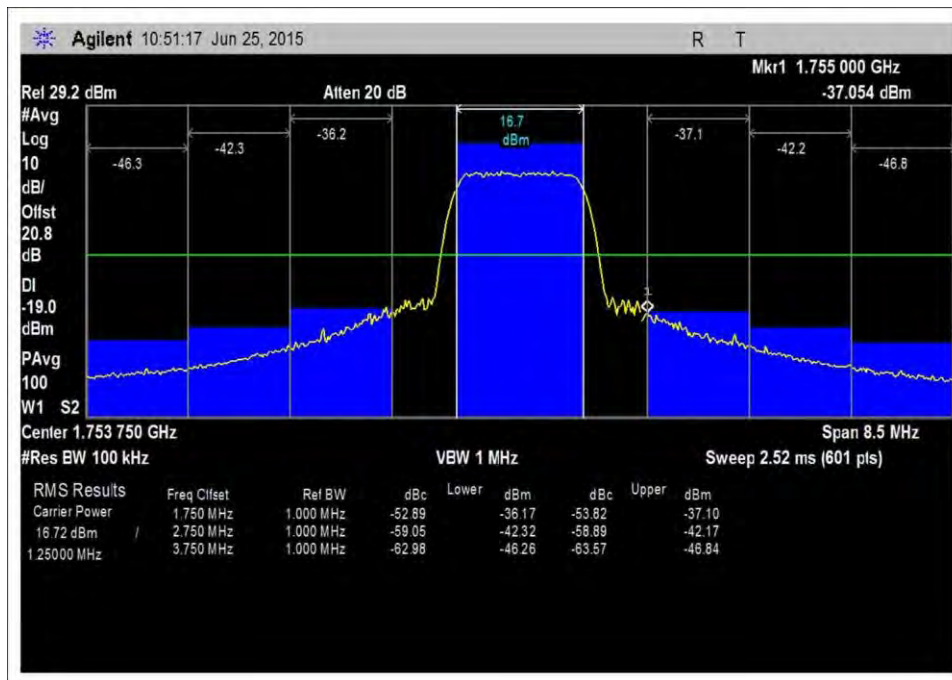


UL_1710-1755MHz_H_Max

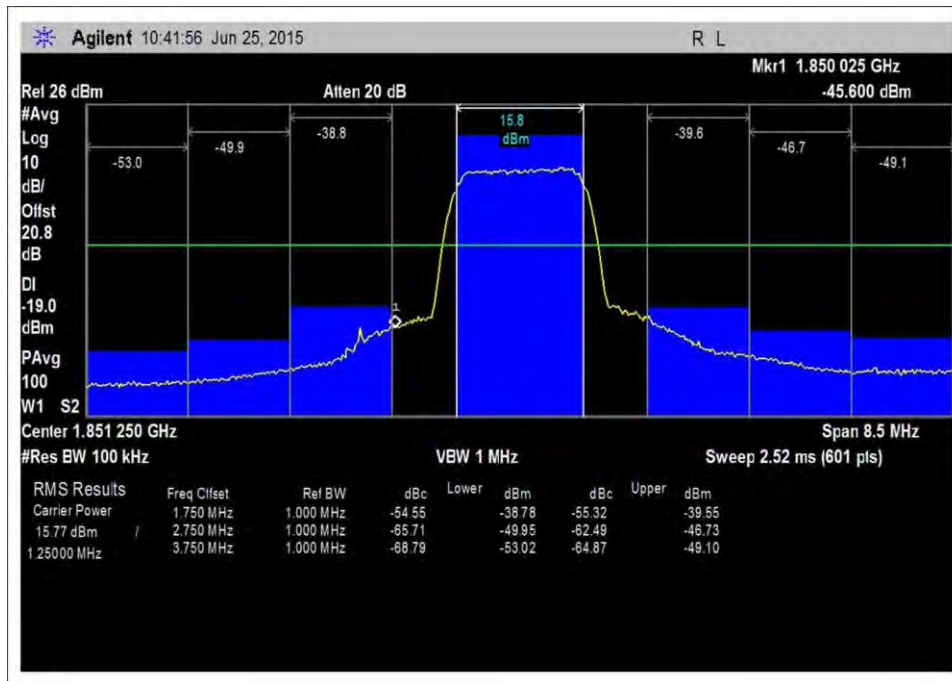


UL_1850-1915MHz_L_PreAGC

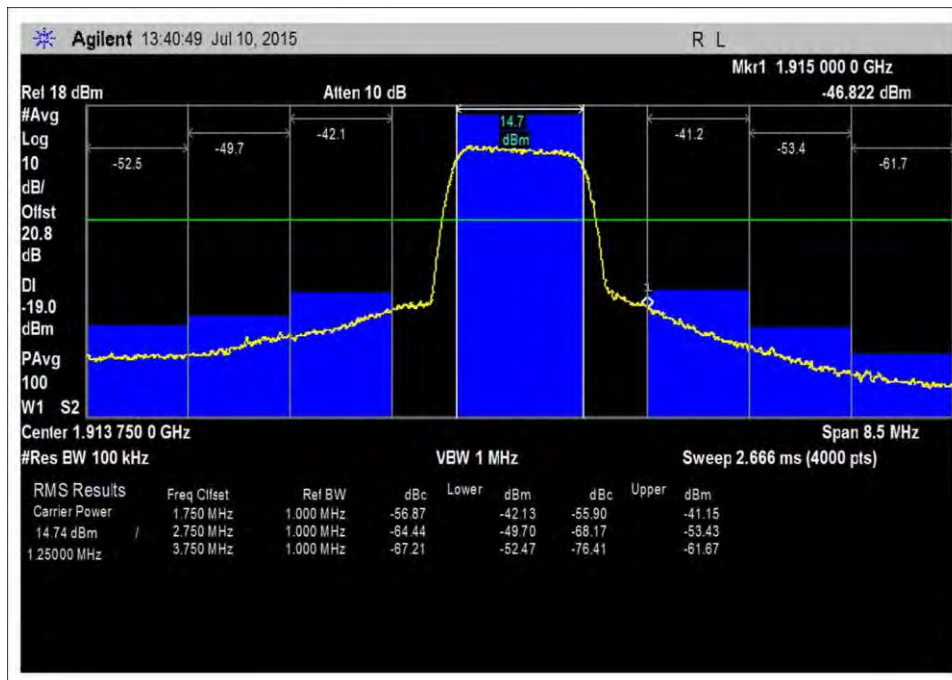

UL_1850-1915MHz_H_PreAGC

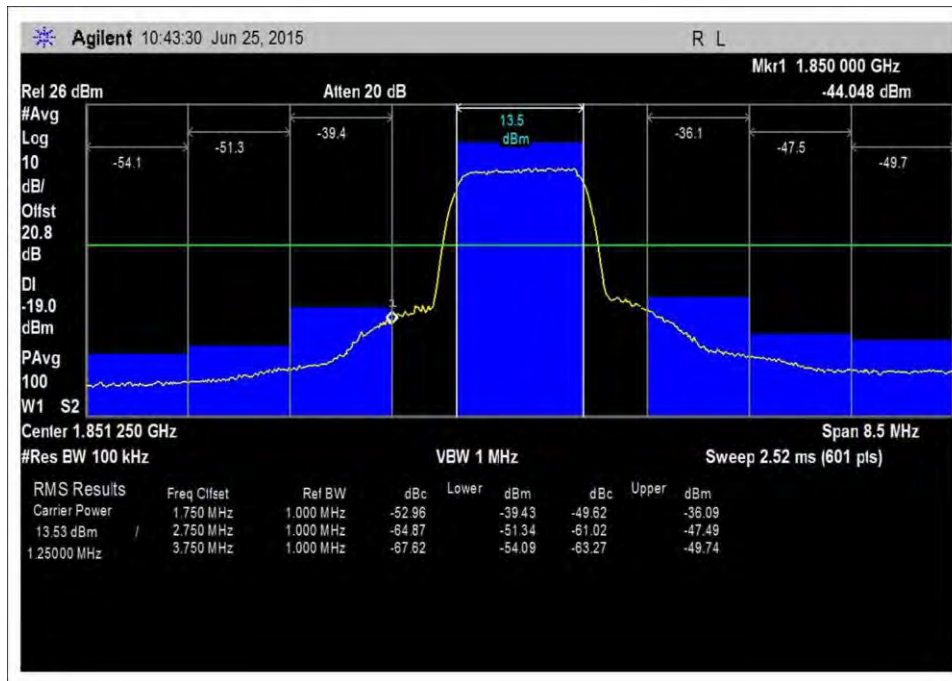


UL_1850-1915MHz_L_Max

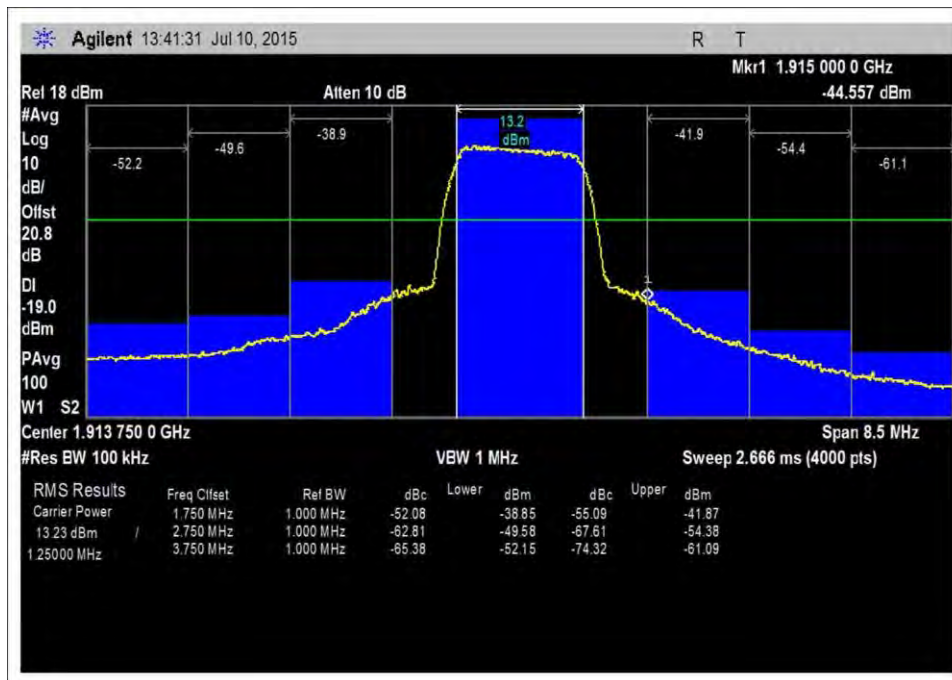


UL_1850-1915MHz_H_Max


DL-CDMA

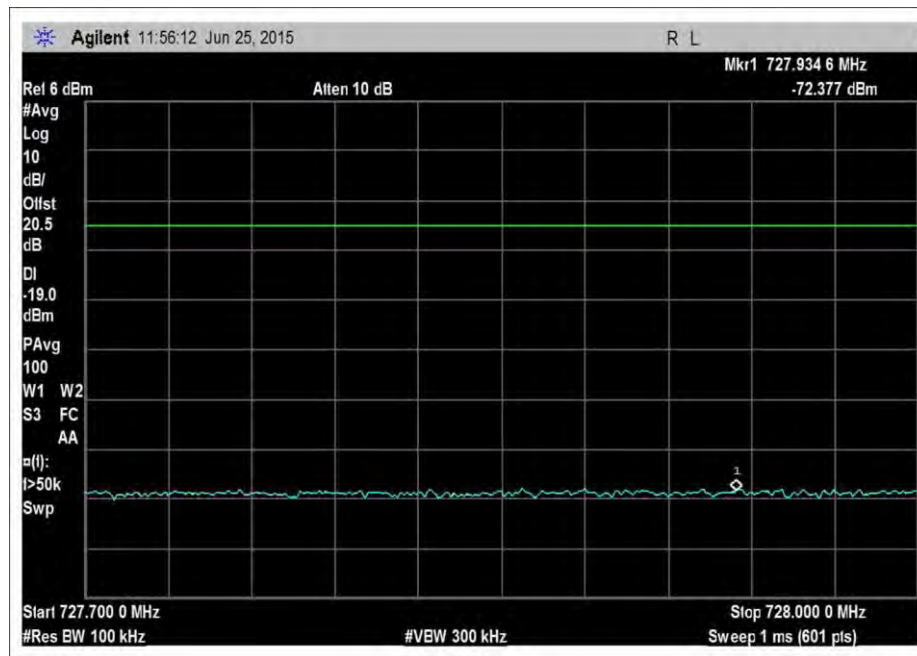


DL_728-746MHz_L_PreAGC

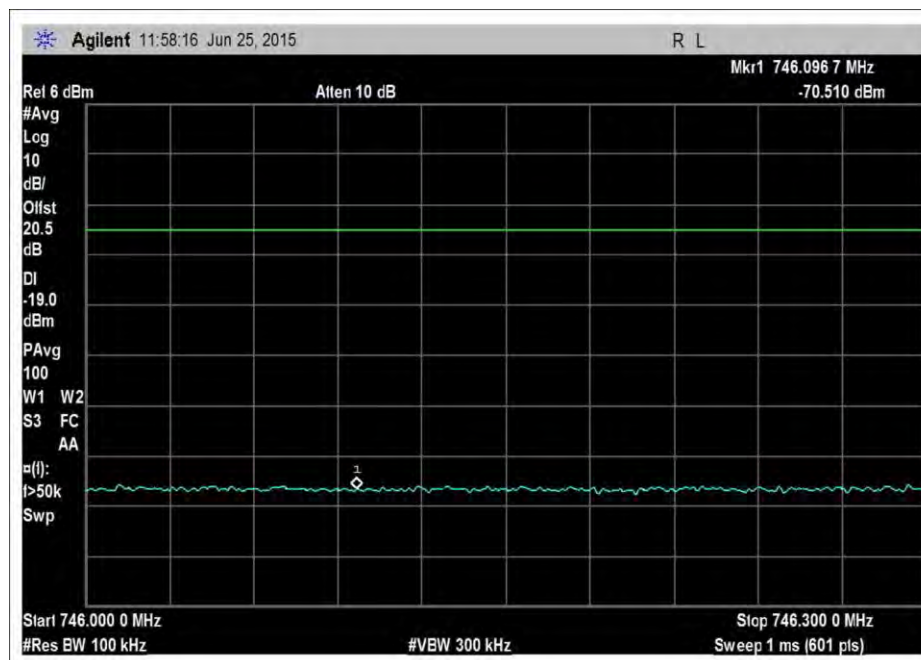


DL_728-746MHz_H_PreAGC

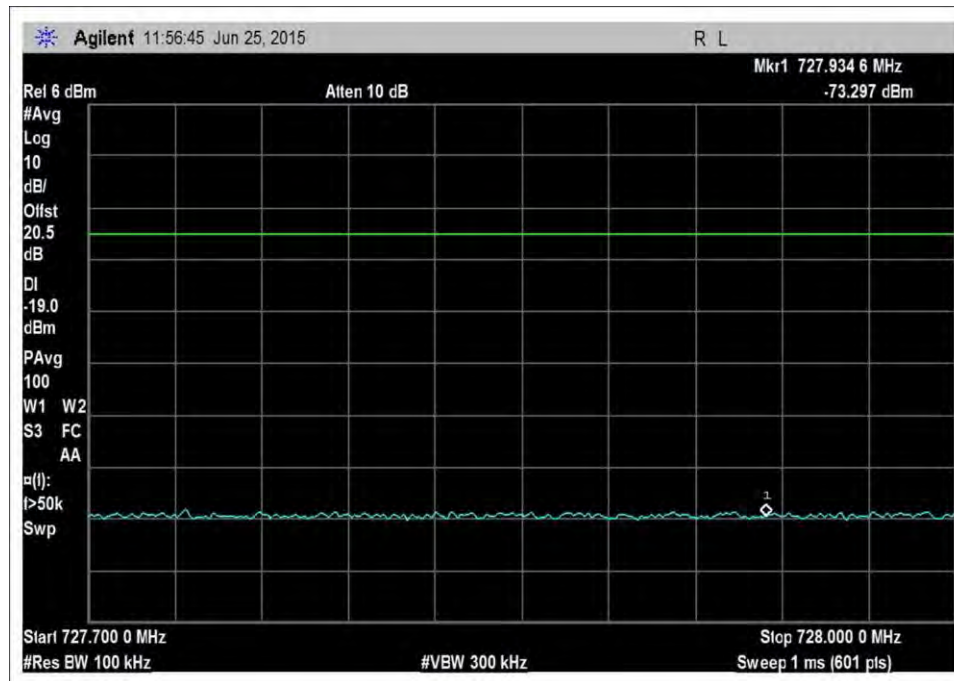


DL_728-746MHz_L_Max

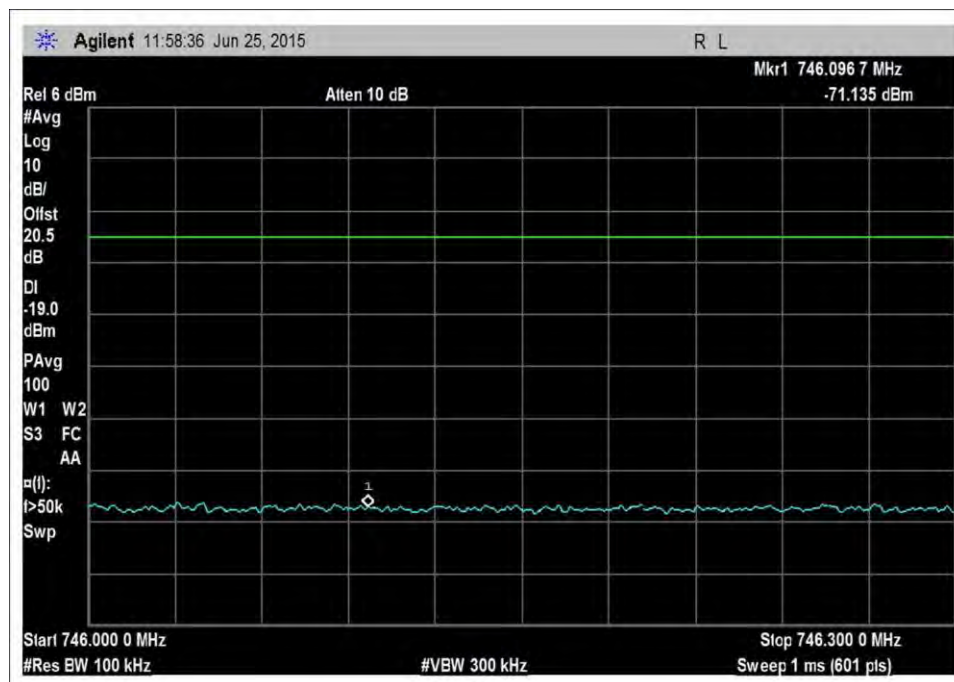


DL_728-746MHz_H_Max

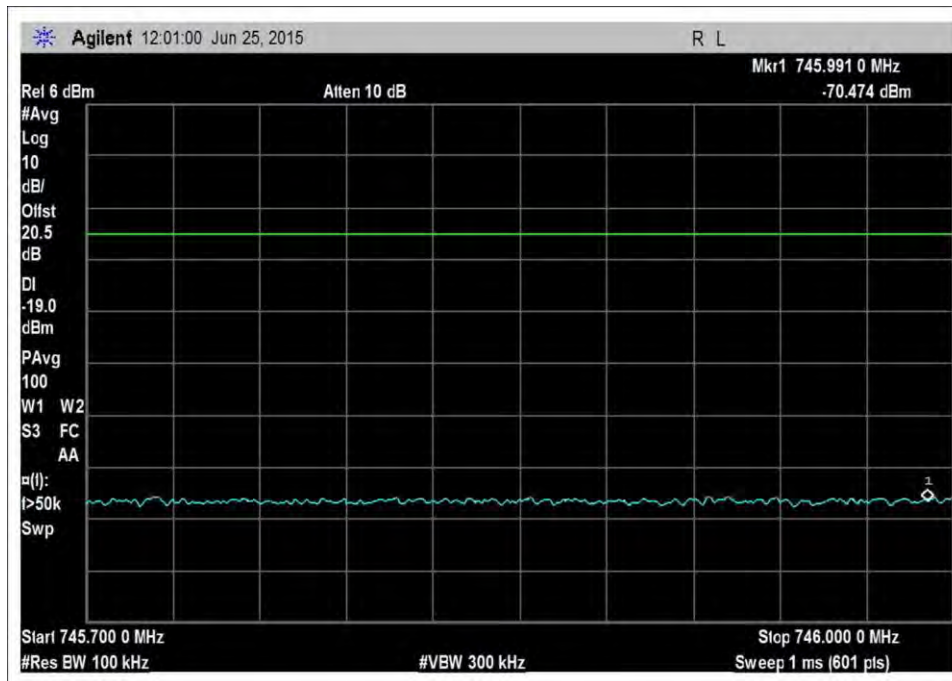


DL_746-757MHz_L_PreAGC

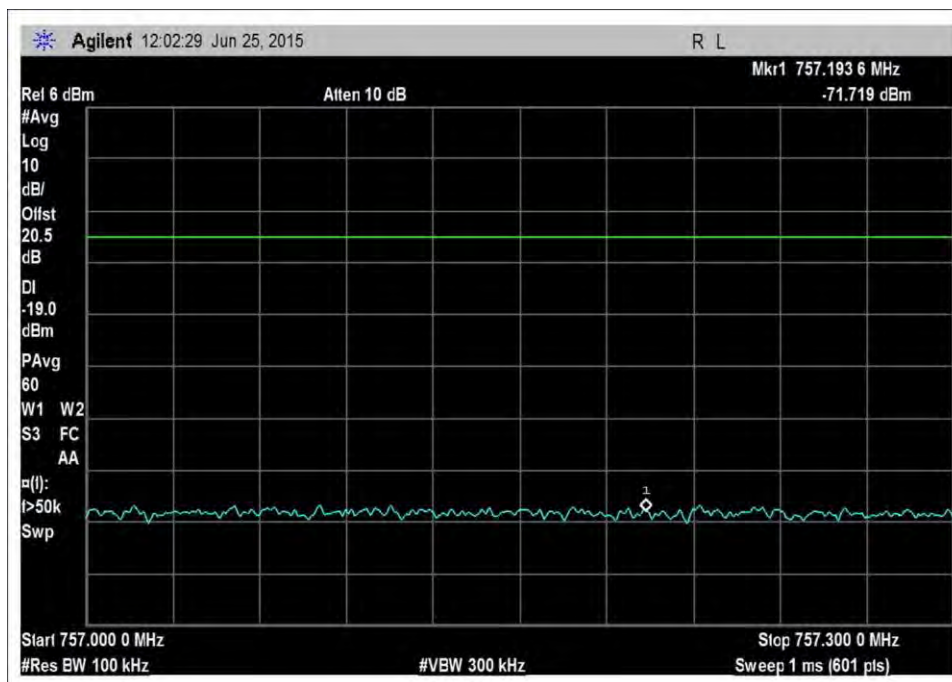


DL_746-757MHz_H_PreAGC

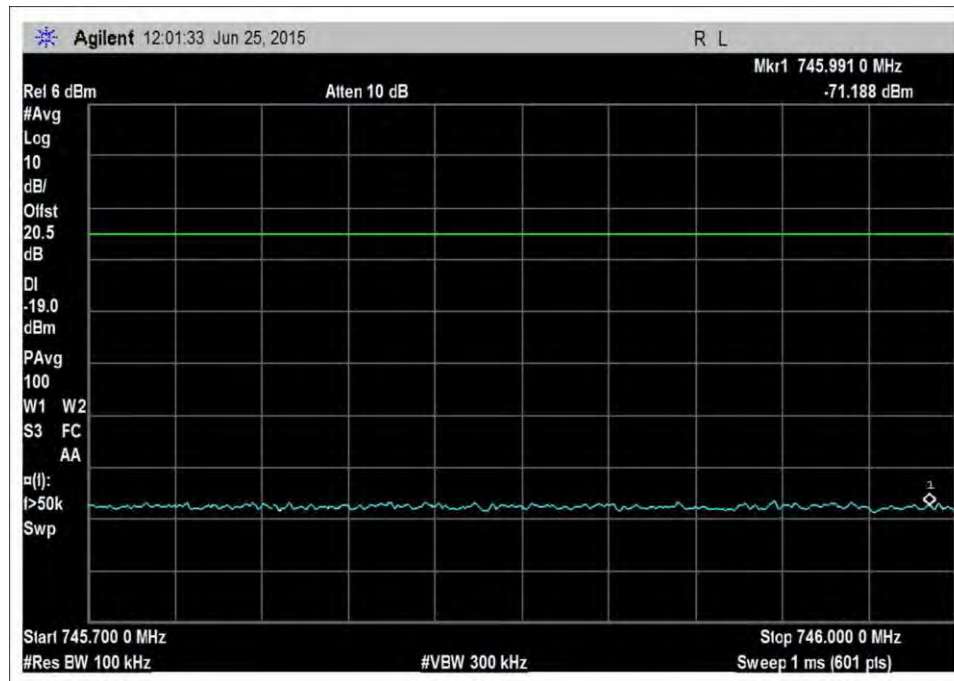


DL_746-757MHz_L_Max

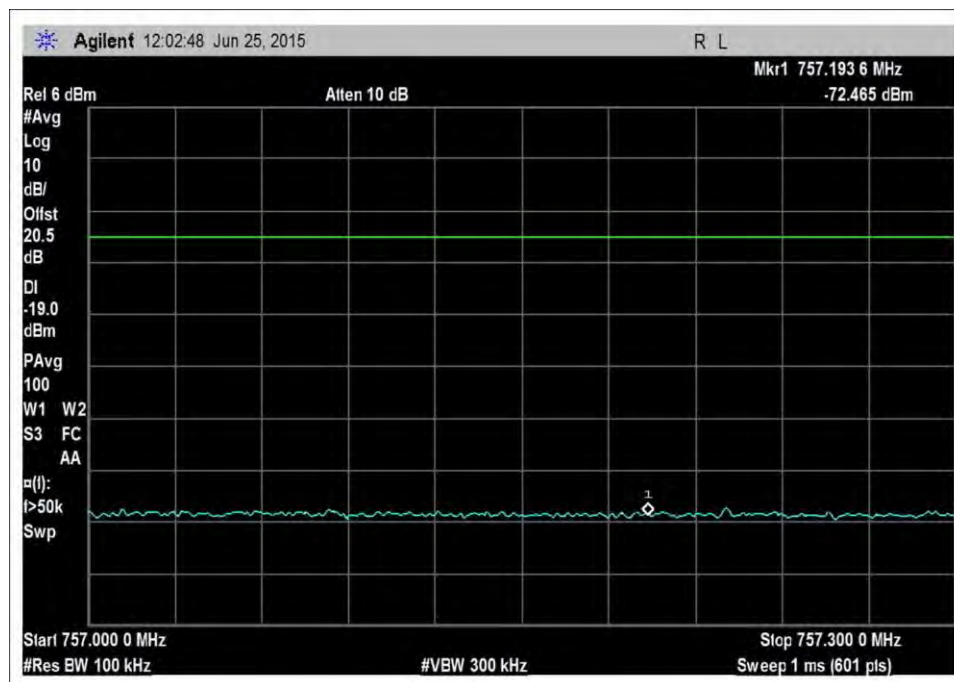


DL_746-757MHz_H_Max

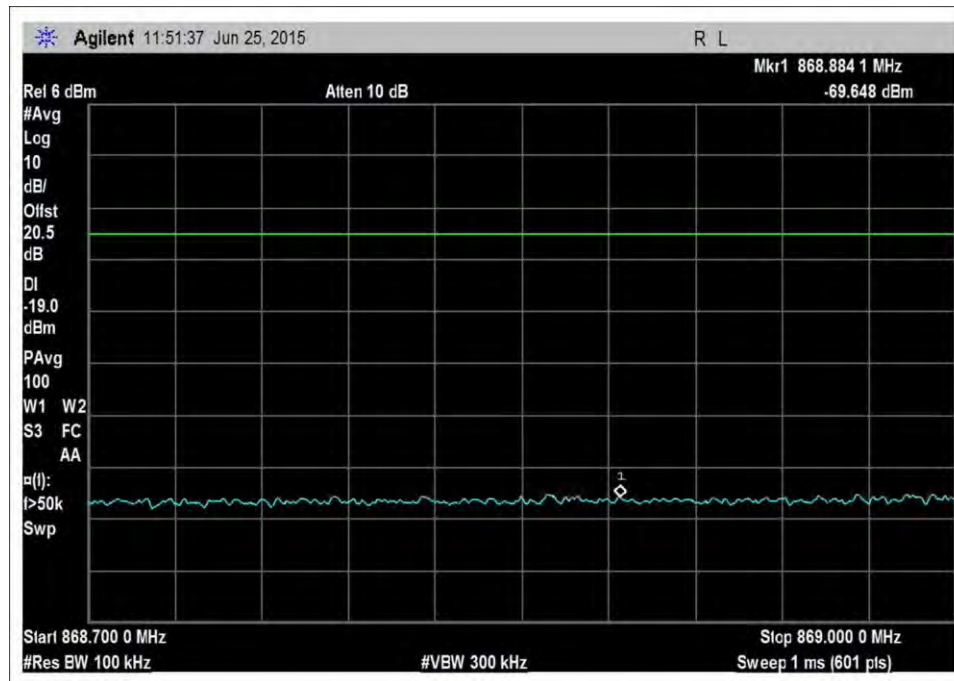


DL_869-894MHz_L_PreAGC

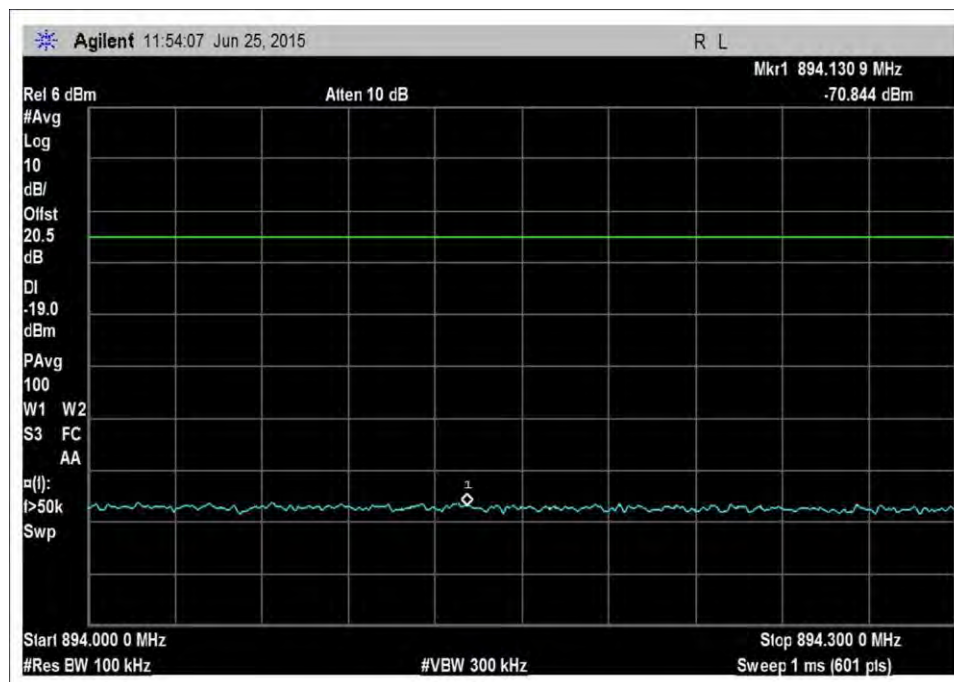


DL_869-894MHz_H_PreAGC

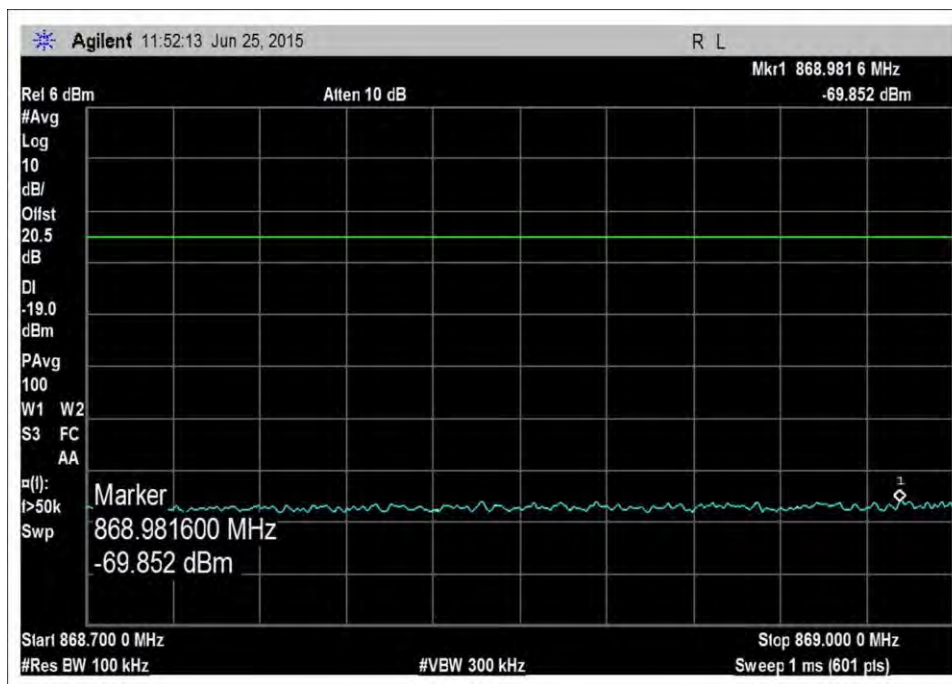


DL_869-894MHz_L_Max

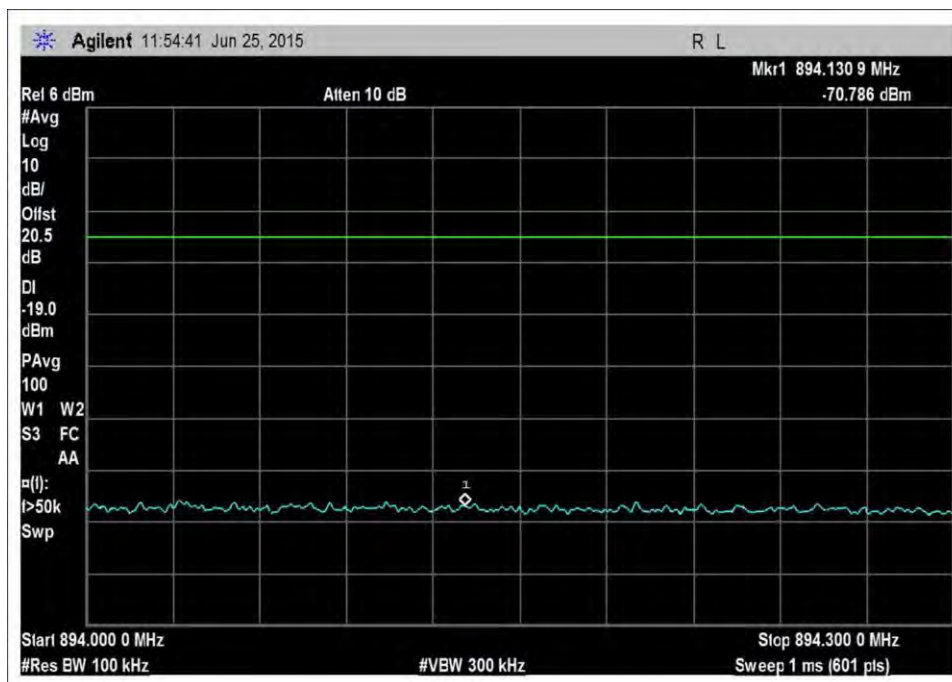


DL_869-894MHz_H_Max

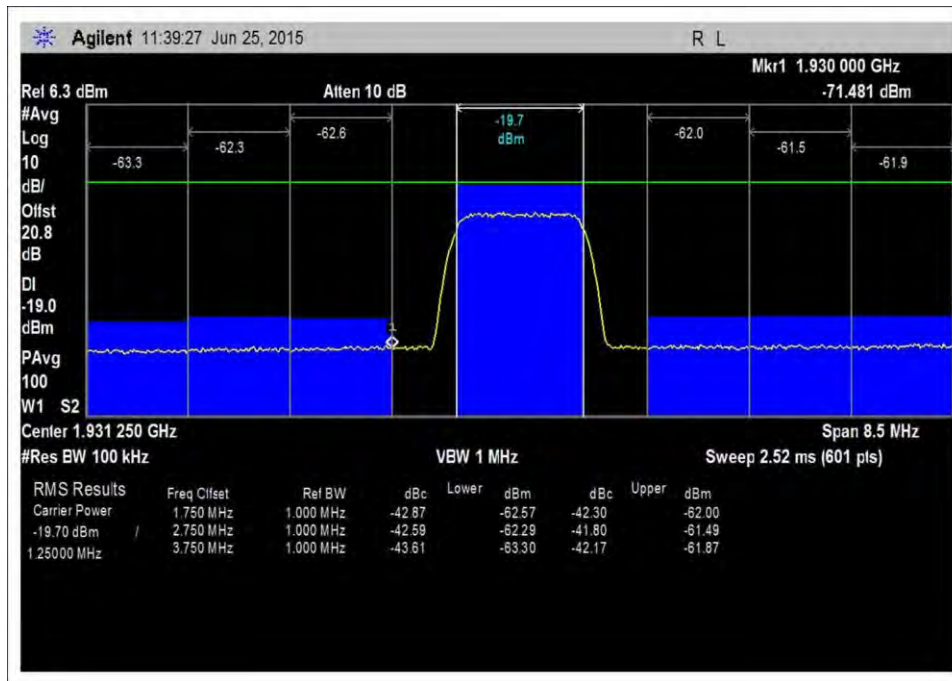


DL_1930-1995MHz_L_PreAGC

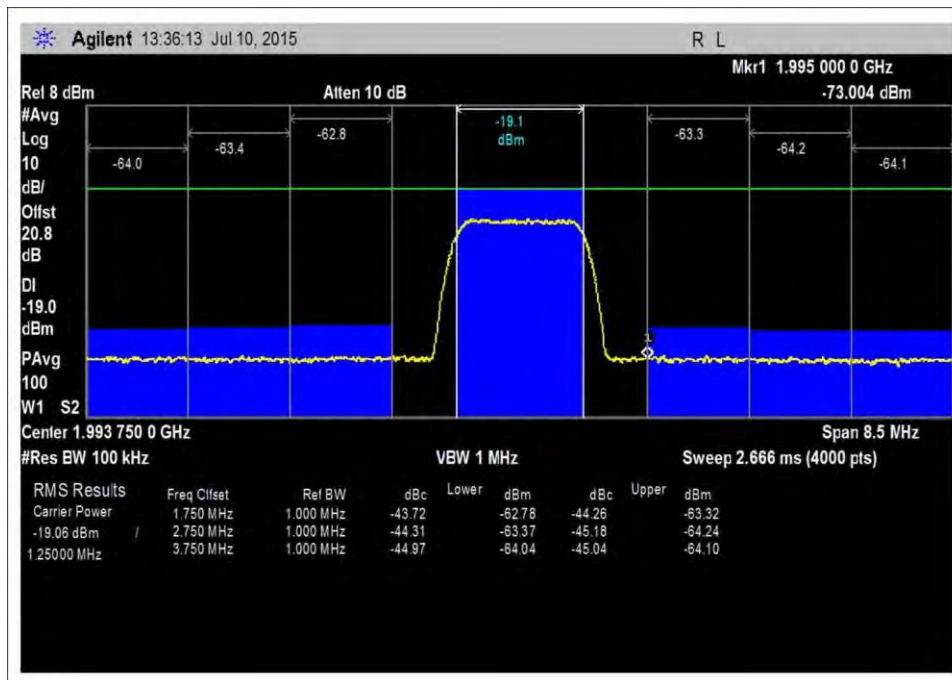


DL_1930-1995MHz_H_PreAGC

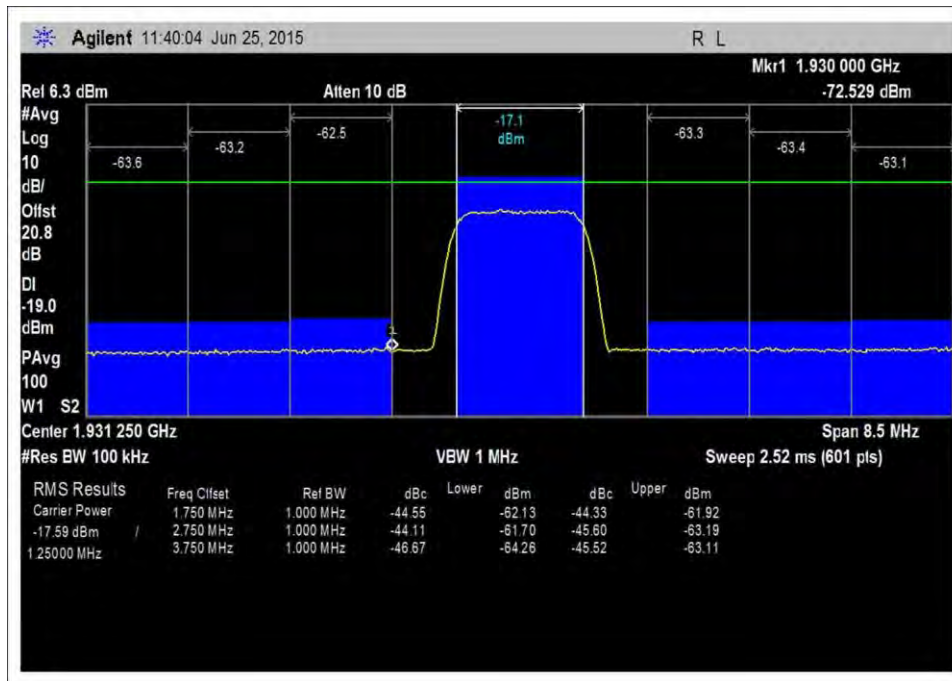


DL_1930-1995MHz_L_Max

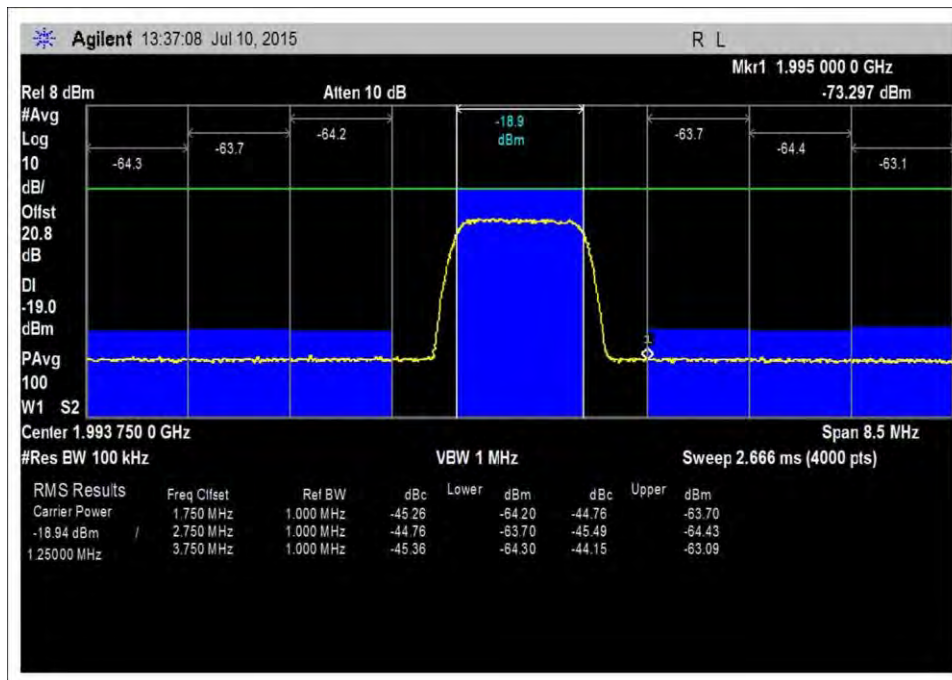


DL_1930-1995MHz_H_Max

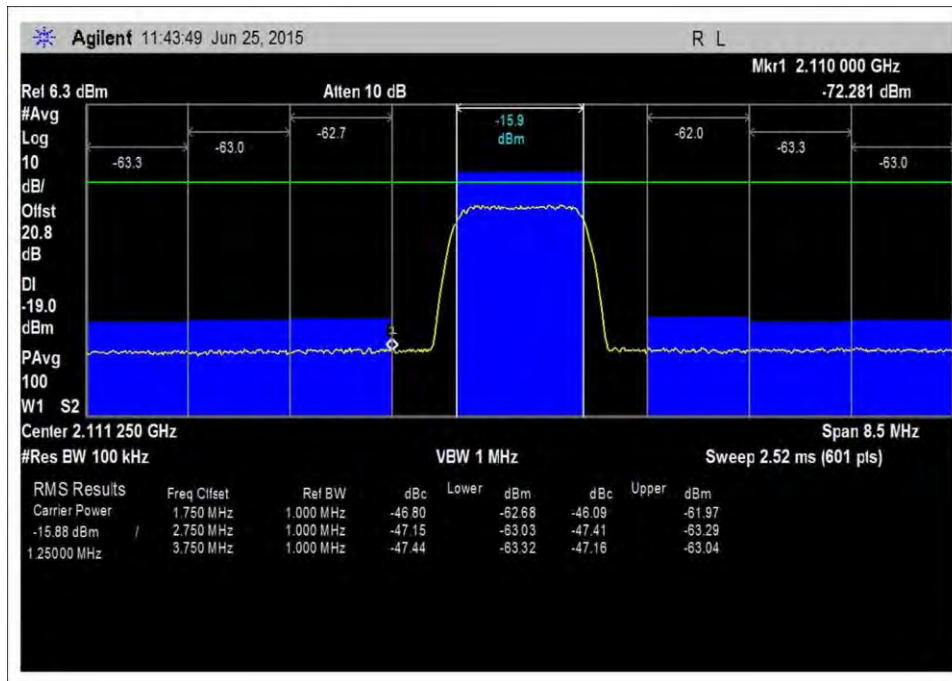


DL_2110-2155MHz_L_PreAGC

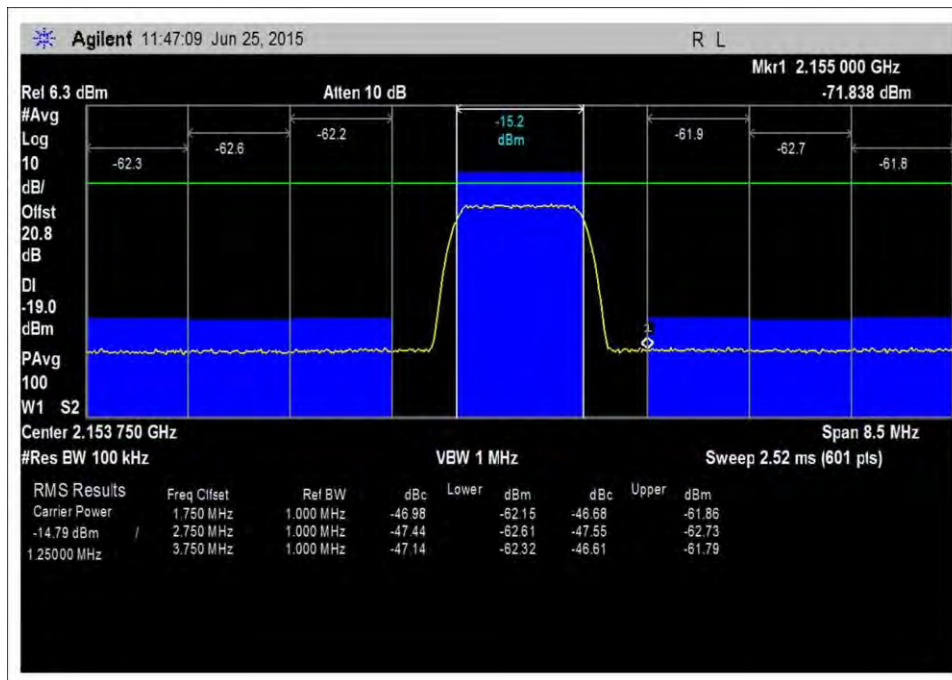

DL_2110-2155MHz_H_PreAGC

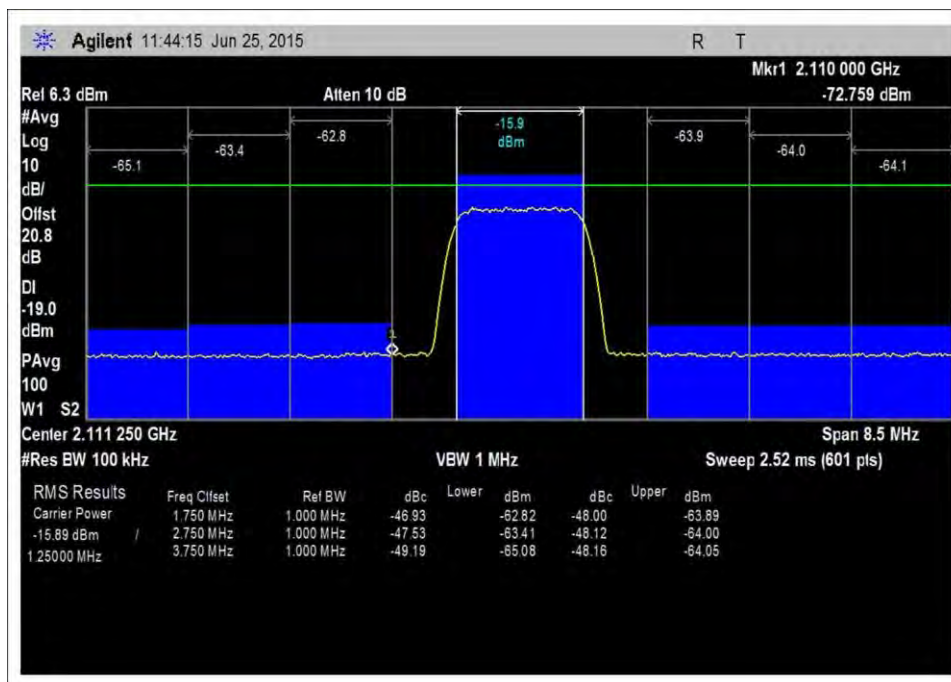


DL_2110-2155MHz_L_Max

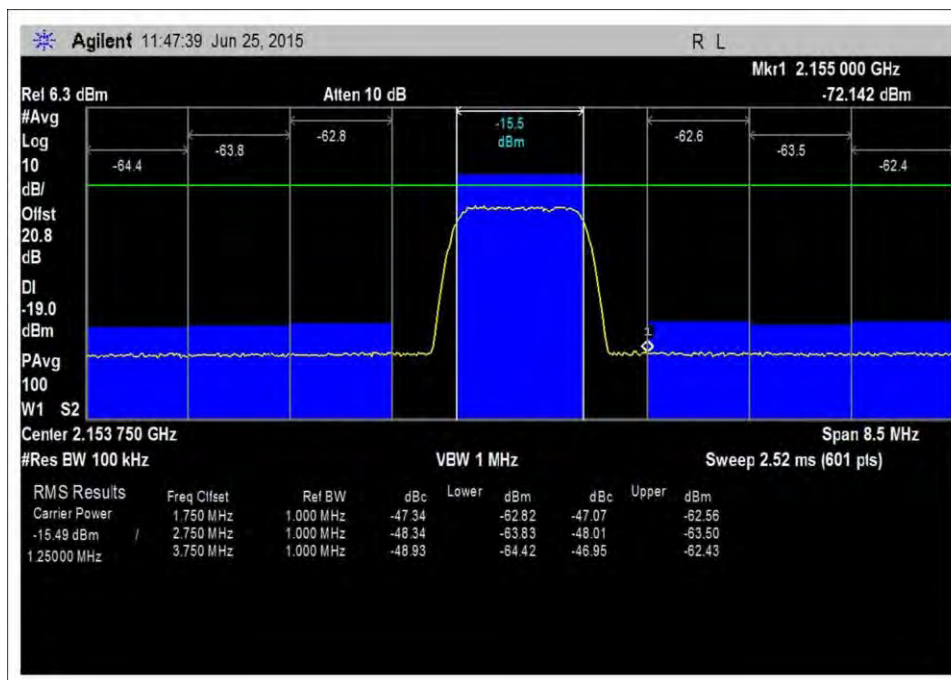


DL_2110-2155MHz_H_Max


UL-LTE

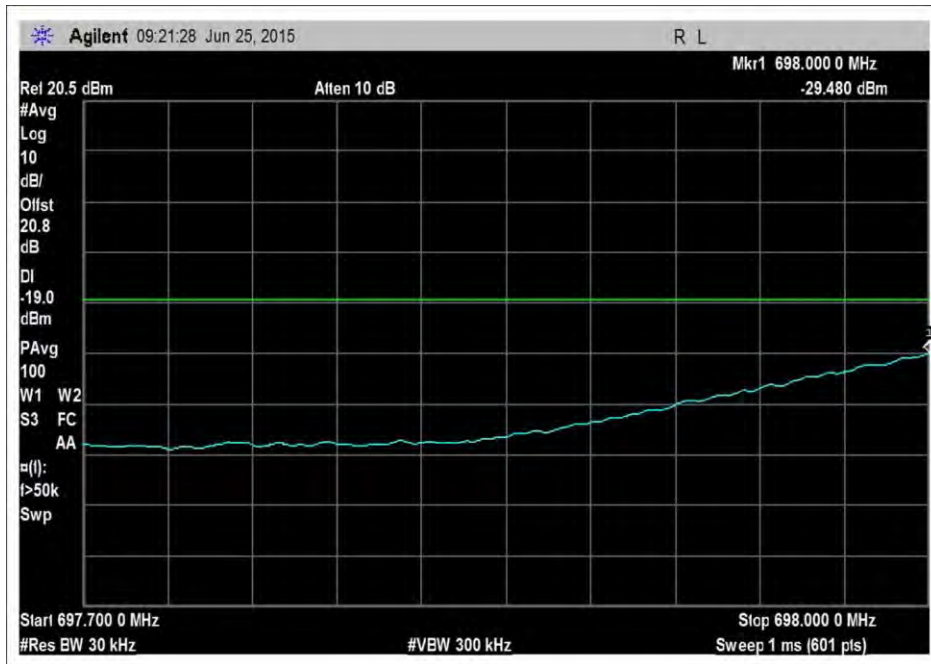


UL_698-716MHz_L_PreAGC

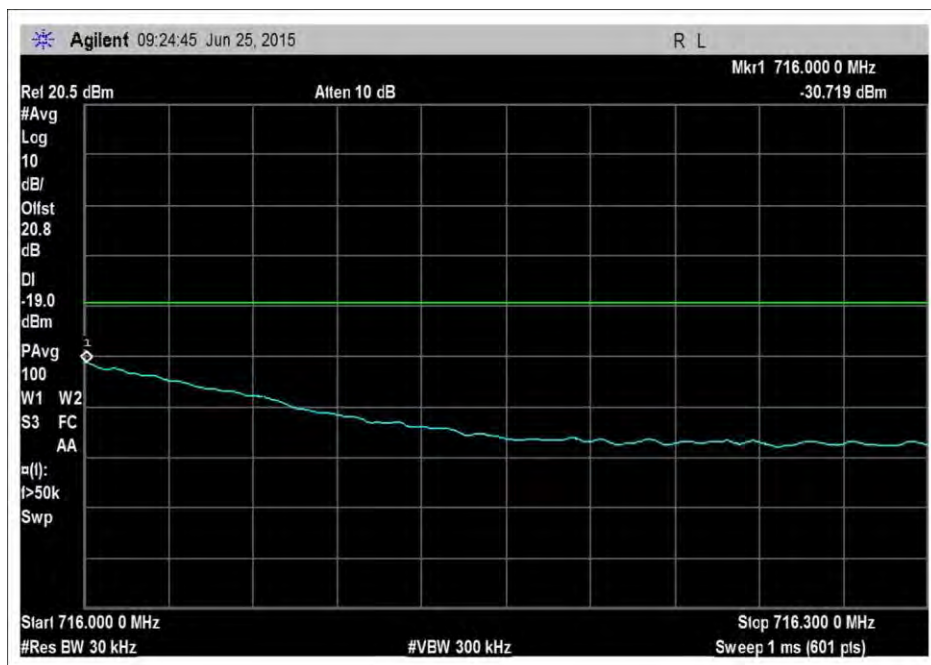


UL_698_H_PreAGC

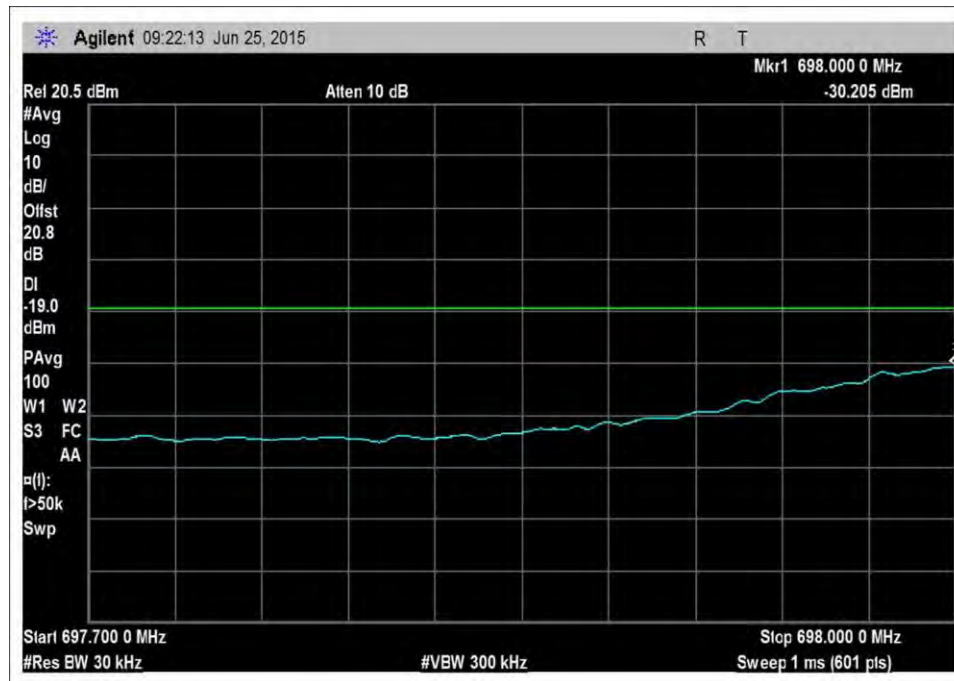


UL_698-716MHz_L_Max

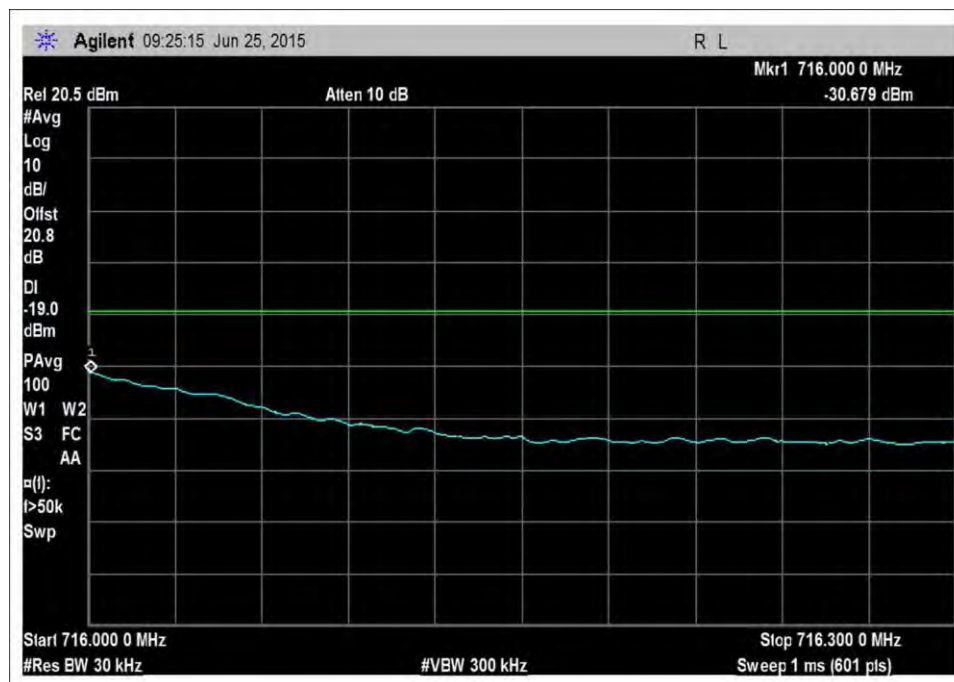

UL_698-716MHz_H_Max

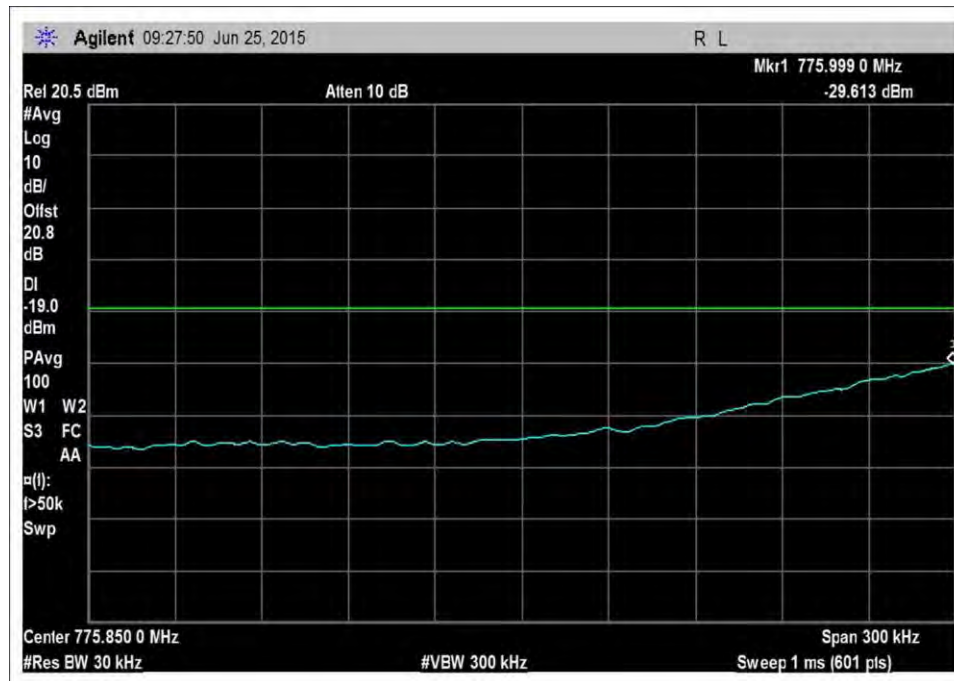

UL_776-787MHz_L_PreAGC

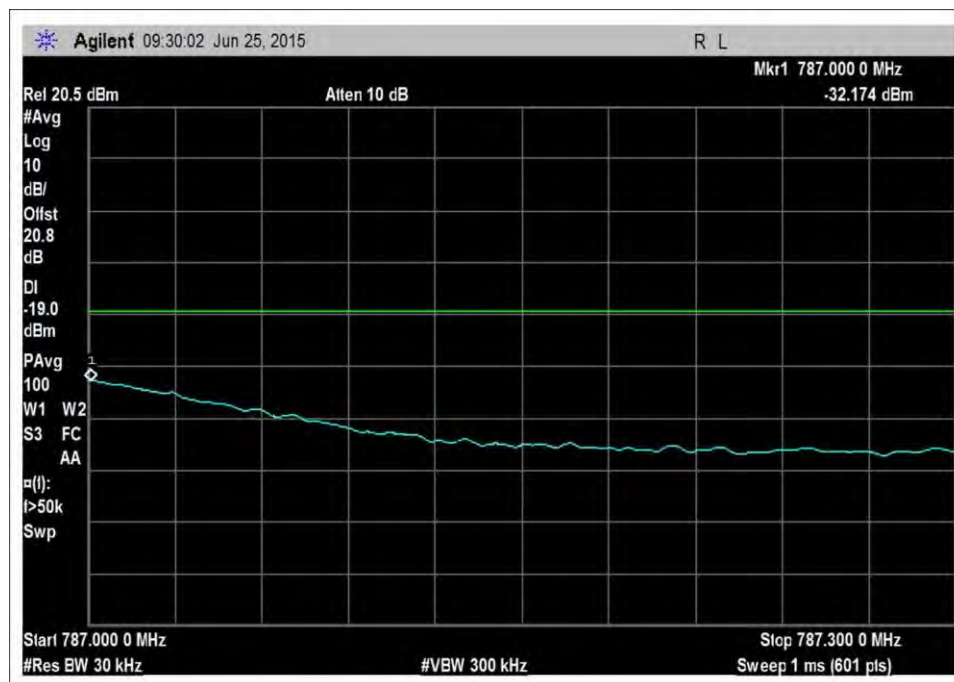

UL_776-787MHz_H_PreAGC