

Recognized by the
Federal Communications Commission and Industry Canada
Anechoic chamber registration No. 90462 (FCC)
Anechoic chamber registration No. 3463 (IC)
TCB ID: DE0001



Accredited by the
German Accreditation Council
DAR–Registration Number
TTI–P–G 081/94–D0



Independent ETSI
compliance test house



Test report No. : 2–3717–01–01/04
Applicant : Publicount GmbH.
Type : USD Sensor
Test standard : FCC Part 15.245

Table of contents

1.	General information	3
1.1.	Notes	3
1.2.	Testing laboratory	4
1.3.	Details of applicant	4
1.4.	Application details	4
1.5.	Test item (EUT)	5
1.6.	Technical data	5
1.6.1.	Operation conditions	6
1.6.2.	Equipment under test	6
1.7.	Test standards:.....	6
1.8.	Code of Federal Regulations (CFR 47).....	6
1.9.	Industry Canada Standards.....	6
2.	Technical test	7
2.1.	Summary of test results.....	7
2.2.	Test environment.....	7
2.3.	Measurement and test set-up.....	7
2.4.	Test equipment utilized and test set-up.....	8
2.5.	Test results	12
3.	Plots, graphs and data sheets	16
4.	Photographs.....	30

1. General information

1.1. Notes

The test results of this test report relate exclusively to the test item specified in 1.5..

CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

Tester :

13.08.2004

Date

Manfred Paschwitz

Name



Signature

Technical responsibility for area of testing :

13.08.2004

Date

Dirk Hausknecht

Name



Signature

1.2. Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimerstraße 6-10

66117 Saarbrücken

Germany

P.O. Box 10 04 45

66004 Saarbrücken

Germany

Telephone : + 49 (0) 681 598-0
Fax : + 49 (0) 681 598-9075
e-mail : info@ict.cetecom.de
Internet : <http://www.cetecom.de>

Accredited testing laboratory

Accredited by : Regulierungsbehörde für Telekommunikation und Post (RegTP)

Listed by : Federal Communications Commission (FCC)
Industry Canada

Authority	Identification/Registration No.
RegTP	TTI-P-G 081/94-D0
FCC	90462
IC	3463

Testing location, if different from CETECOM ICT Services GmbH: (Not applicable)

Name : (Not applicable)

1.3. Details of applicant

Name : Publiccount GmbH.
Street : Bürgerbuschweg 48
Town : 51381 Leverkusen
Country : Germany
Telephone : +49 (0) 21 71 9093 0
Fax : +49 (0) 21 71 9093 100

Contact person

Name : Mr. Harald Franke
Telephone : +49 (0) 21 71 9093 0
Fax : +49 (0) 21 71 9093 100
e mail : harald.franke@publiccount.de

1.4. Application details

Date of receipt of application : 27.07.2004
Date of receipt of test item : 10.08.2004
Date of test : 10./11./12.08.2004

1.5. Test item (EUT)

Description of EUT	:	Field disturbance sensor
System designation	:	Microwave Sensor
Type designation	:	Personal Count System
Name	:	Publicount GmbH.
Street	:	Bürgerbuschweg 48
Town	:	51381 Leverkusen
Country	:	Germany

1.6. Technical data

Frequency range	:	24.075 GHz ... 24.175 GHz
Operational frequency	:	24.112 GHz
Field strength	:	155 mV/m
Type of modulation	:	500KN0N (CW)
Normal AC power supply	:	115.0 V

FCC ID:	SFH-PC0001
Certification No. IC:	5288A-PC0001
Open Area Test Site IC No.:	3436
IC Standards	RSS 210

ATTESTATION:

DECLARATION OF COMPLIANCE: I declare that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

Laboratory Manager :

13.08.2004	RSC 8434	M. Paschwitz
------------	----------	--------------



Date	Section	Name	Signature
------	---------	------	-----------

1.6.1. Operation conditions

Operation: : As soon as the equipment is powered up, TX and RX start operating
Purpose of operation : Microwave Sensor

1.6.2. Equipment under test

Model	Serial No.:
USD Sensor	0405290
HUZ Control Unit	0404704004
AC Adapter	142200083D8

1.7. Test standards:

1.8. Code of Federal Regulations (CFR 47)

FCC Part 15 Section 15.209
Radiation emission limits, general requirements

Section 15.245
Operation within the band 24.075 - 24.175 GHz

Section 15.205
Restricted bands of operation.

1.9. Industry Canada Standards

RSS 210

2. Technical test

2.1. Summary of test results

☒ No deviations from the technical specification (s) were ascertained in the course of the performed tests.

☐ The deviations as specified in clause 2.5 were ascertained during tests

The test report :

☒ describes the first test

☐ describes an additional test

☐ is a verification of documents

☐ is only valid with the test report no.

2.2. Test environment


The environmental conditions are documented especially for each test.

2.3. Measurement and test set-up

The measurement and test set-up is defined in the technical specification .

2.4. Test equipment utilized and test set-up

2.4.1 Field strength and spurious radiation in the frequency range 4 GHz to 33 GHz with broadband amplifier

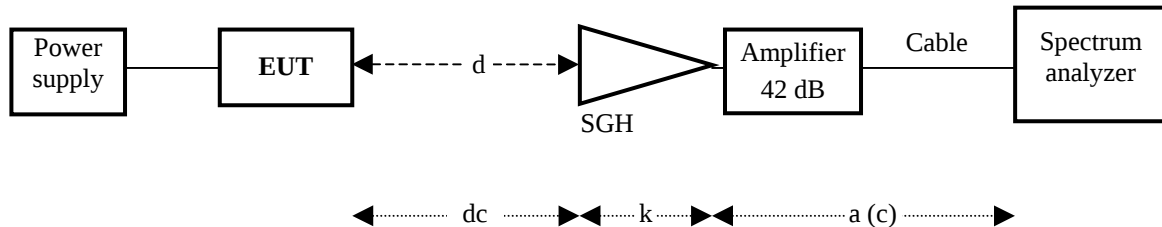

Frequency range [GHz]	Distance d [m]	Standard gain Horn ant. (SGH)	Antenna factor k [dB 1/m]	Amplifier gain g [dB]	Cable loss a [dB]
3.8 ... 6.0	3.0	narda 643	27.31	-42.0	1.5
5.3 ... 8.2	3.0	narda 642	30.06	-42.2	1.8
8.2 ... 12.4	3.0	narda 640	33.70	-42.0	2.0
12.4 ... 18.0	3.0	narda 639	33.97	-42.0	2.5
18 ... 26	1.0	narda 638	40.22	-42.0	3.0
26 ... 40	1.0	narda V637	44.00	-21.58	3.5

Calculation : Field strength = Analyser reading + Cable loss + Antenna factor + Ampl. gain


$e = u + a + k + g$

Test equipment	Manufacturer	Type	CETECOM reference
Spectrum Analyser	HP	HP 8565E	300001665
SGH 3.8 ... 6.0 GHz	narda	643	300002447
SGH 5.3 ... 8.2 GHz	narda	642	300000767
SGH 8.2 ... 12.4 GHz	narda	640	300002213
SGH 12.4 ... 18.0 GHz	narda	639	300000786
SGH 18 ... 27 GHz	narda	638	300002442
SGH 27 ... 40 GHz	narda	V637	300000510
SGH 27 ... 40 GHz	Thomson	COR 27_40	300000797a
Amplifier 0.5 ... 35 GHz	MITEC	U42	300003143
Power supply DC	HP	6032A	300002115
Power supply AC	Grundig	RT 5 A	300001263
RF-cable	HP	5061-5359	300002033
Power Supply	HP	6038A	300001174

Measurement uncertainty

Test parameter	Measurement uncertainty
Power supply	±0.1 V
Temperature	±0.2 °C
Frequency	±0.01 ppm
Field strength	±1.4 dB

2.4.2 Field strength and spurious radiation in the frequency range 4 GHz to 40 GHz

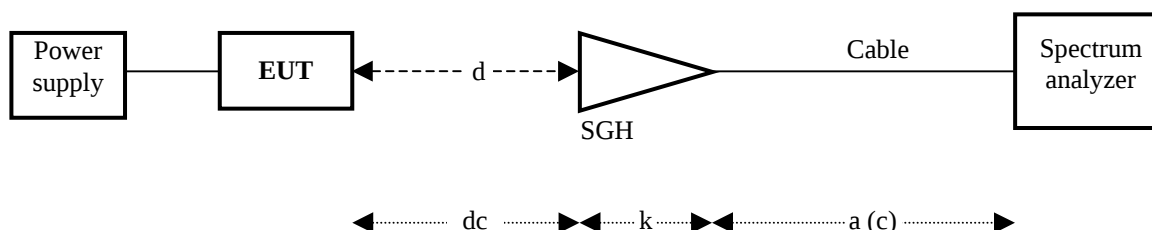

Frequency range [GHz]	Distance d [m]	Standard gain Horn ant. (SGH)	Antenna factor k [dB 1/m]	Distance corr. dc (3m/Xm) [dB]	Cable loss a [dB]
3.8 ... 6.0	1.0	narda 643	27.31	-9.54	1.5
5.3 ... 8.2	0.5	narda 642	30.06	-15.56	1.8
8.2 ... 12.4	0.5	narda 640	33.70	-15.56	2.0
12.4 ... 18.0	3.0	narda 639	33.97	n.a.	2.5
18.0 ... 27.0	3.0	narda 638	40.22	n.a.	3.0
24.125	3.0	narda 638	33.97	n.a.	2.9
27.0 ... 40.0	3.0	narda V637	44.00	n.a.	3.5

Calculation : Field strength = Analyser reading + Cable loss + Antenna factor + distance corr.


$e = u + a + k + dc$

Test equipment	Manufacturer	Type	CETECOM reference
Spectrum Analyser	HP	HP 8565E	300001665
SGH 3.8 ... 6.0 GHz	narda	643	300002447
SGH 5.3 ... 8.2 GHz	narda	642	300000767
SGH 8.2 ... 12.4 GHz	narda	640	300002213
SGH 12.4 ... 18.0 GHz	narda	639	300000786
SGH 18 ... 27 GHz	narda	638	300002442
SGH 27 ... 40 GHz	narda	V637	300000510
SGH 27 ... 40 GHz	Thomson	COR 27_40	300000797a
Power supply DC	HP	6032A	300002115
Power supply AC	Grundig	RT 5 A	300001263
RF-cable	HP	5061-5359	300002033
Power Supply	HP	6038A	300001174

Measurement uncertainty

Test parameter	Measurement uncertainty
Power supply	±0.1 V
Temperature	±0.2 °C
Frequency	±0.01 ppm
Field strength	±1.4 dB

2.4.3 Field strength and spurious radiation in the frequency range 33 GHz to 110 GHz

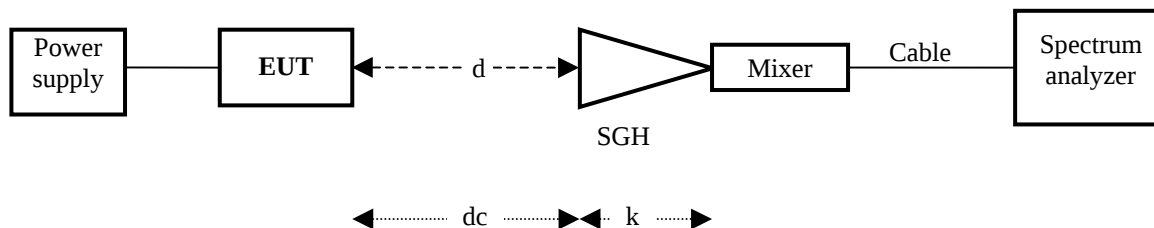

Frequency range [GHz]	Distance d [m]	Distance correction dc (3 m/Xm) [dB]	Antenna factor k [dB 1/m]
33.0 50.0	3.0	n.a.	39.10
50.0 75.0	0.25	-21.58	40.67
75.0 ... 110.0	0.125	-27.60	45.07

Calculation : Field strength = Analyser reading + Cable loss + Antenna factor + Distance correction

$e = u + a + k + dc$


Test equipment	Manufacturer	Type	CETECOM reference
Spectrum Analyser	HP	HP 8565E	300001665
Power supply	HP	6032A	300002115
SGH 33 ... 50 GHz	Thomson	COR 33_50	300000812
Mixer 33 ... 50 GHz	HP	11970Q	300000781j
SGH 50 ... 75 GHz	Thomson	COR 50_75	300000789k
Mixer 50 ... 75 GHz	HP	11970V	300000871o
SGH 75 ... 110 GHz	Thomson	COR 75_110	300000789m
Mixer 75 ... 110 GHz	HP	11970W	300000871v
Power Supply	HP	6038A	300001174

Measurement uncertainty

Test parameter	Measurement uncertainty
Power supply	±0.1 VDC
Temperature	±0.2 °C
Frequency	±0.01 ppm
Field strength <50 GHz	±1.0 dB
Field strength >50 GHz	±3.0 dB

2.4.4 Field strength and spurious radiation in the frequency range 9 kHz to 4 GHz

Set-up for radiated measurements

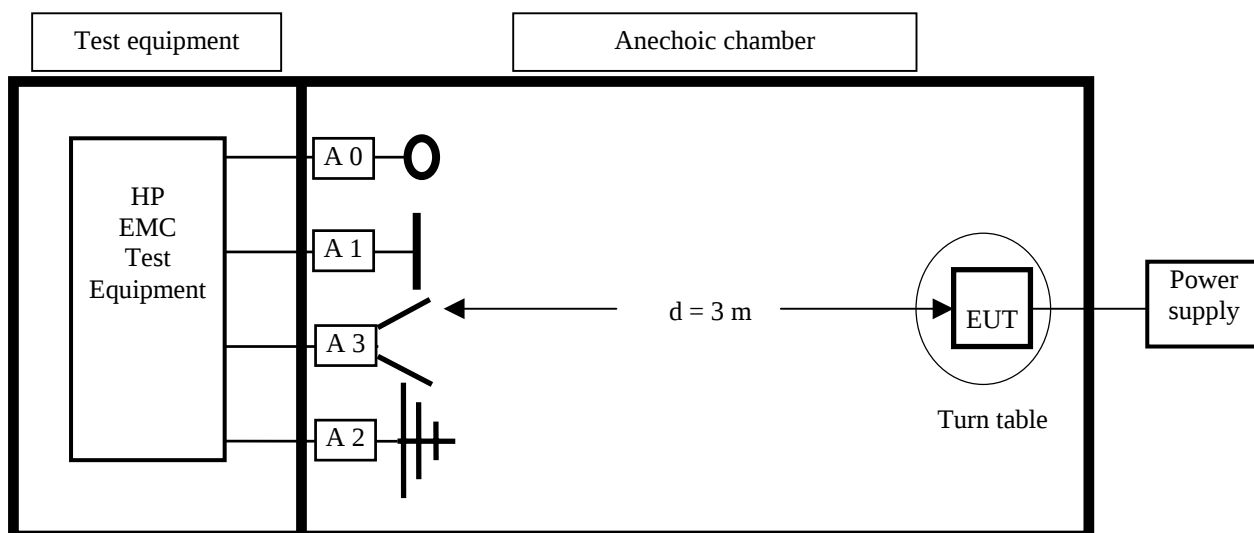

Test equipment	Manufacturer	Type	Serial No.
Spectrum analyser	HP	HP 85660B	2478A05306
Analyser display	HP	HP 85662A	2816A16541
Quasi peak adapter	HP	HP 85650A	2811A01131
RF-preselector	HP	HP 85685A	2833A00768
Loop Antenna A 0	R&S	HFH 2-Z2	881 058/42
Biconical antenna A 1	Emco	3104	3758
Log.-per.-antenna A 2	Emco	3146	2304
Double ridge horn ant. A 3	Emco	3115	3007
Relay switch	R&S	RSU	375 339/002
High pass filter	FSY Microwave	HM 985955	001
Amplifier	Tron-Tech	P42-GA29	B2302
Power supply	HP	HP 6038A	2848A07027
RF-cable	HP	5061-5359	P36303

Measurement uncertainties

Performance	Measurement uncertainty
Input power (DC)	± 0.1 V
Temperature	± 0.2 °C
Frequency	± 0.01 ppm
Field strength	± 1.4 dB

2.5. Test results

2.5.1 Test results overview

This test was performed :

☐ in addition to the test report no.

Verification of EUT :

☒ EUT is in accordance with the technical description

☐ EUT is not in accordance with the technical description

☒ The equipment is compliant to FCC Part 15 and RSS 210 requirement

2.5.2 Summary of test set up

The EUT is positioned in a non-conductive test fixture and can be rotated and tilted in all angles and in all planes.

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 110 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform with specifications ANSI C63.2-1987 clause 15 and ANSI C63.4-2003 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted by EUT. The measurement distances between EUT and receiving antennas are indicated in the test set-ups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received.

The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-2003 clause 4.2.

EUT : USD Sensor
 Ambient temperature : 23 °C
 Relative humidity : 55 %

TRANSMITTER PARAMETERS SPURIOUS FREQUENCIES

SECTION 15.209

TRANSMITTER SPURIOUS FIELD STRENGTH				
Frequency range Frequency [GHz]	Spurious frequencies [GHz]	S A u [dBmV]	E [µV/m]	See plot no.:
0.009 – 30.000 MHz (h + v)	Noise	< limit	< limit	2
0.030 – 4.000 (horizontal.)	Noise	< limit	< limit	3
0.030 – 4.000 (vertical)	Noise	< limit	< limit	4
4.000 – 6.000 (h + v)	Noise	- 32.0	228.1	5
4.000 – 8.000 (h + v)	Noise	- 28.1	12.1	6
8.000 – 12.000 (h + v)	Noise	- 21.6	42.3	7
12.000 – 18.000 (h + v)	Noise	- 21.0	140.7	8
18.000 – 26.000 (h + v)	Noise + TX	- 23.1 (Noise)	79.8	9
26.000 – 40.000 (h + v)	Noise	- 18.5	223.8	10
33.000 - 50.000 (h + v)	Noise	- 19.6	386.3	11
50.000 – 75.000 (h + v)	Noise	- 22.0	357.6	12
75.000 – 110.000 (h + v)	Noise	- 21.0	209.4	13

LIMITS:

SECTION 15.209

Frequency range (MHz)	Measurement distance [m]	Field strength E [µV/m]	Field strength e [dBµV/m] @ 3 m
0.009 – 0.490	300	2400/F(kHz)	88.5 ... 53.8
0.490 – 1.705	30	24000/F(kHz)	53.8 ... 43.0
1.705 – 30.0	30	30	49.5
30.0 – 88.0	3	100	40.0
88.0 – 216.0	3	150	43.5
216.0 – 960.0	3	200	46.0
> 960.0	3	500	54.0
Harmonics	3	2,500	67.9 = 7.9 dB(mV/m)

REFERENCE OF TEST EQUIPMENT USED : see test set-up on pages 8, 9 and 10

Verdict : Spurious limits are kept

EUT : USD Sensor
 Ambient temperature : 23 °C
 Relative humidity : 55 %

AC Conducted Limits

TRANSMITTER SPURIOUS EMISSION				
AC CONDUCTED				
Frequency range Frequency [GHz]	Spurious frequencies [GHz]	S A u [dBmV]	E [µV/m]	See plot no.:
0.150 – 30.000 MHz	Noise	< limit	< limit	14
0.150 – 30.000 MHz	Noise	< limit	< limit	15

REFERENCE

FCC:	CFR Part 15.207
IC:	RSS 210, Issue 4, Section 6.6 , 7.4

LIMITS: SECTION 15.207


Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency

Verdict :	Spurious limits are kept
-----------	--------------------------

3. Plots, graphs and data sheets

Plot 1

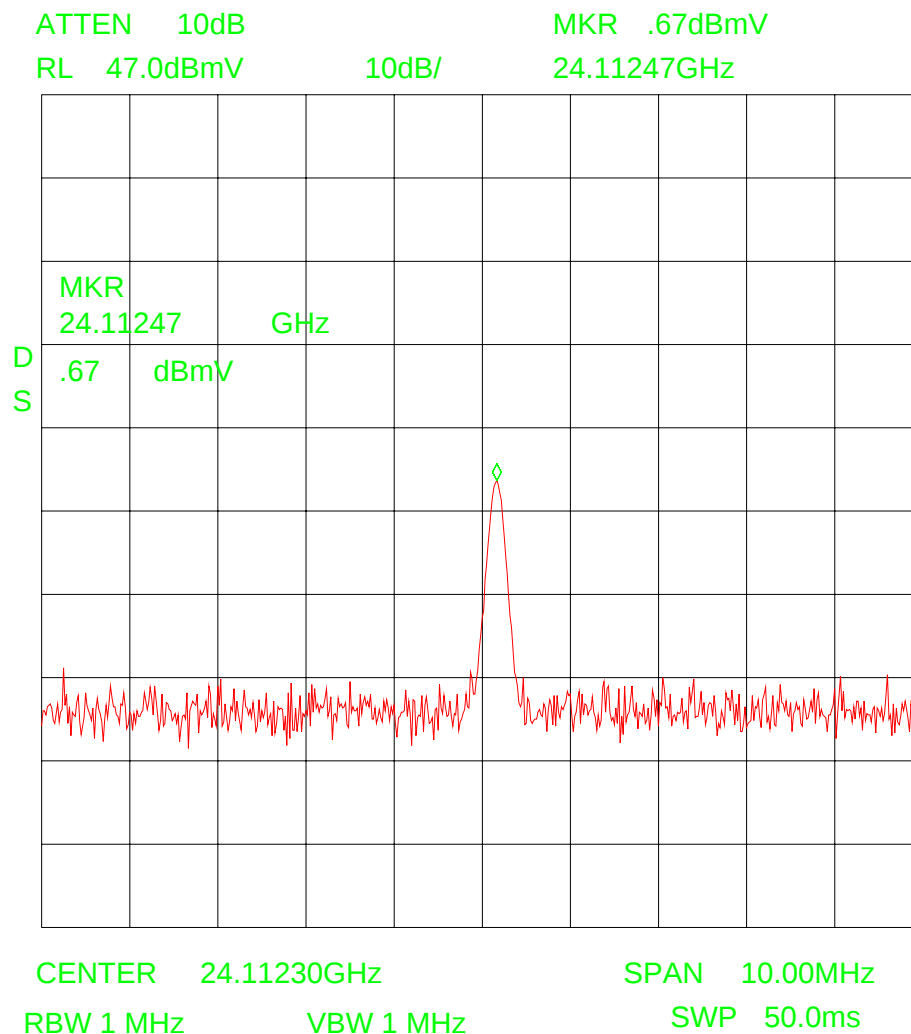

Measurement distance d = 3.0 m

Calculation : Field strength = Analyser reading + Antenna factor + cable loss

e = 0.67 dB(mV) + 40.22 dB(1/m) + 2.9 dB

e = 43.79 dB(mV/m)


E = 154.70 mV/m

Plot 2

FCC Rule 47


Part 15 Magnetics

EUT: 24 GHz Radar
 Manufacturer: Publicount
 Operating Condition: TX on
 Test Site: Cetecom, Room 6
 Operator: Weiden
 Test Specification: 15.209
 Comment: 115 V/ 60Hz
 Start of Test: 13.08.04 / 09:50:33

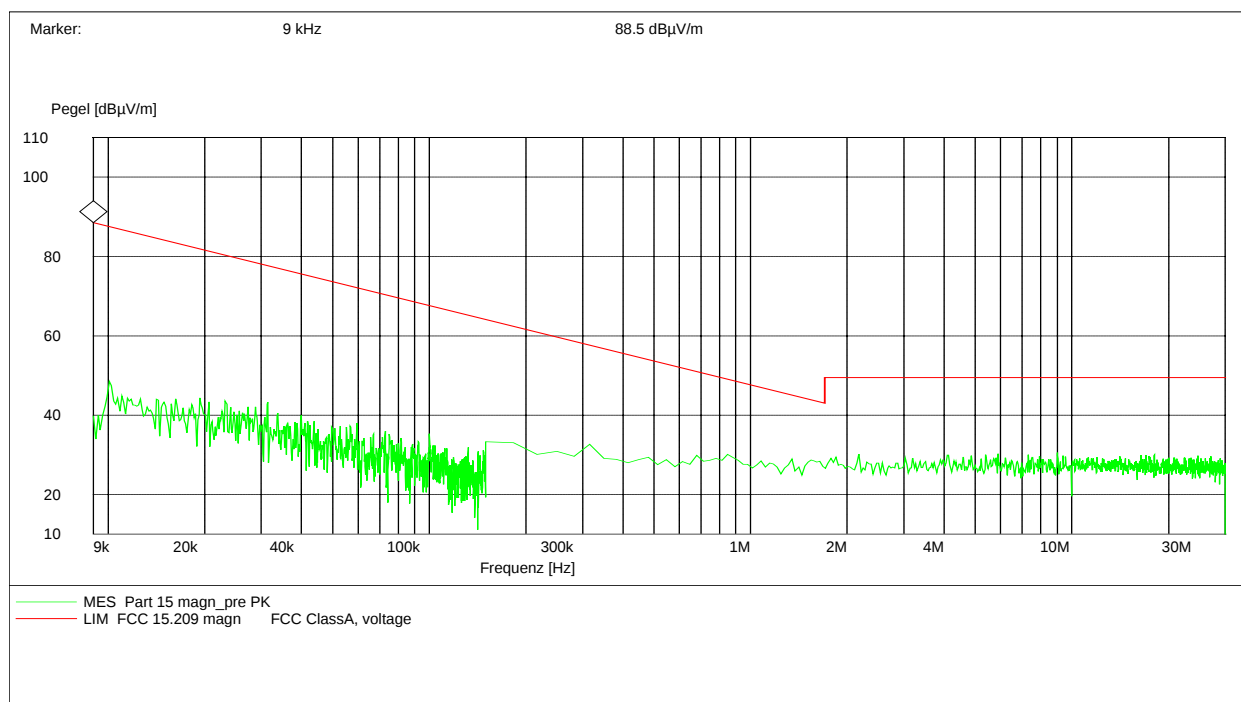


Settings: Peak
 9 kHz – 150 kHz RBW / VBW 100 Hz
 150 kHz – 30 MHz RBW / VBW 9.0 kHz
 QP
 9 kHz – 150 kHz RBW / VBW 200 Hz
 150 kHz – 30 MHz RBW / VBW 9.0 kHz


Plot 3

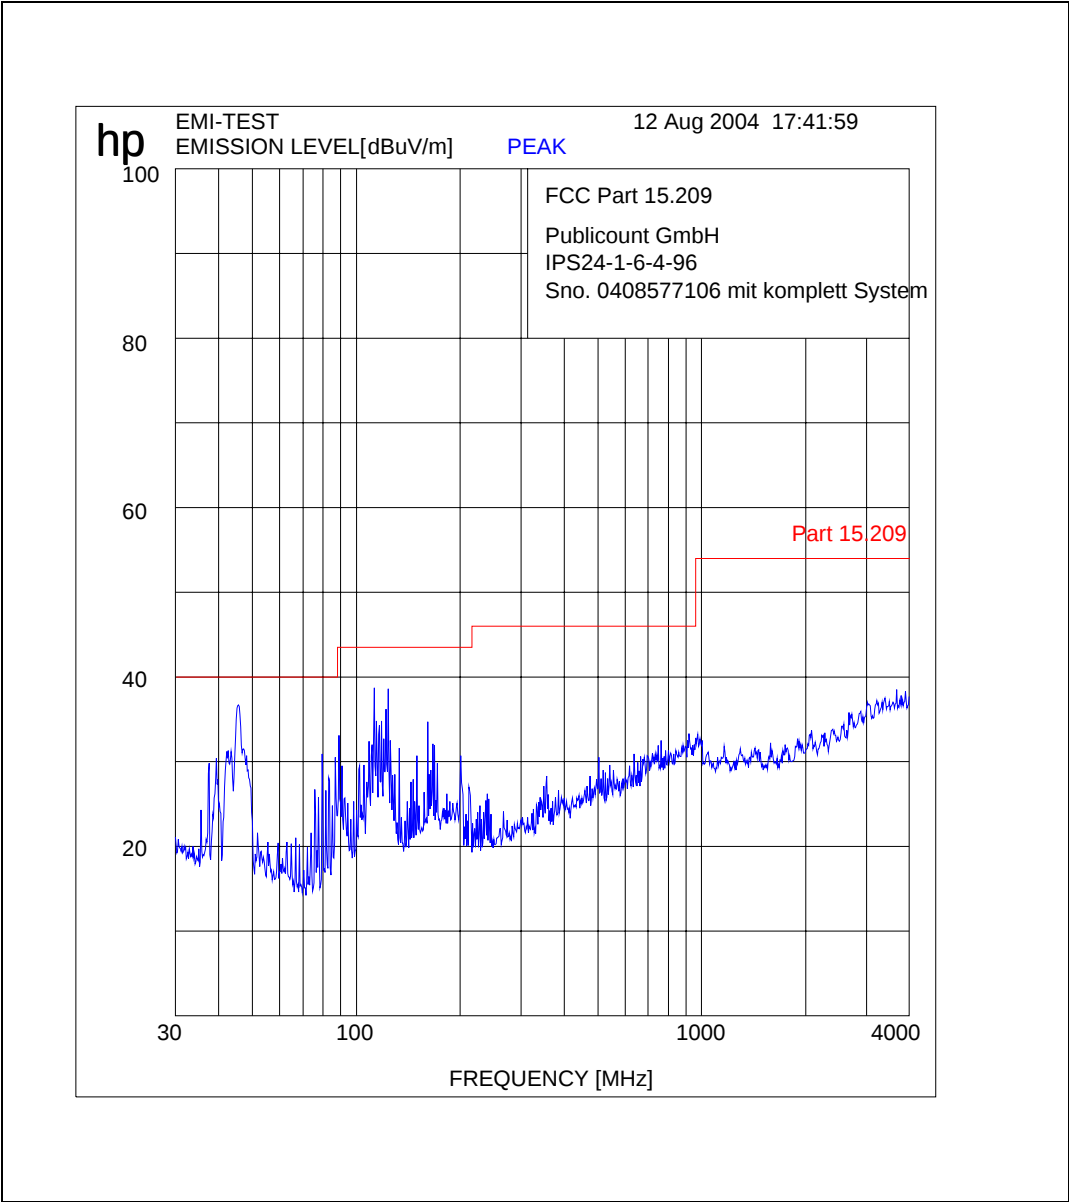

Plot 4

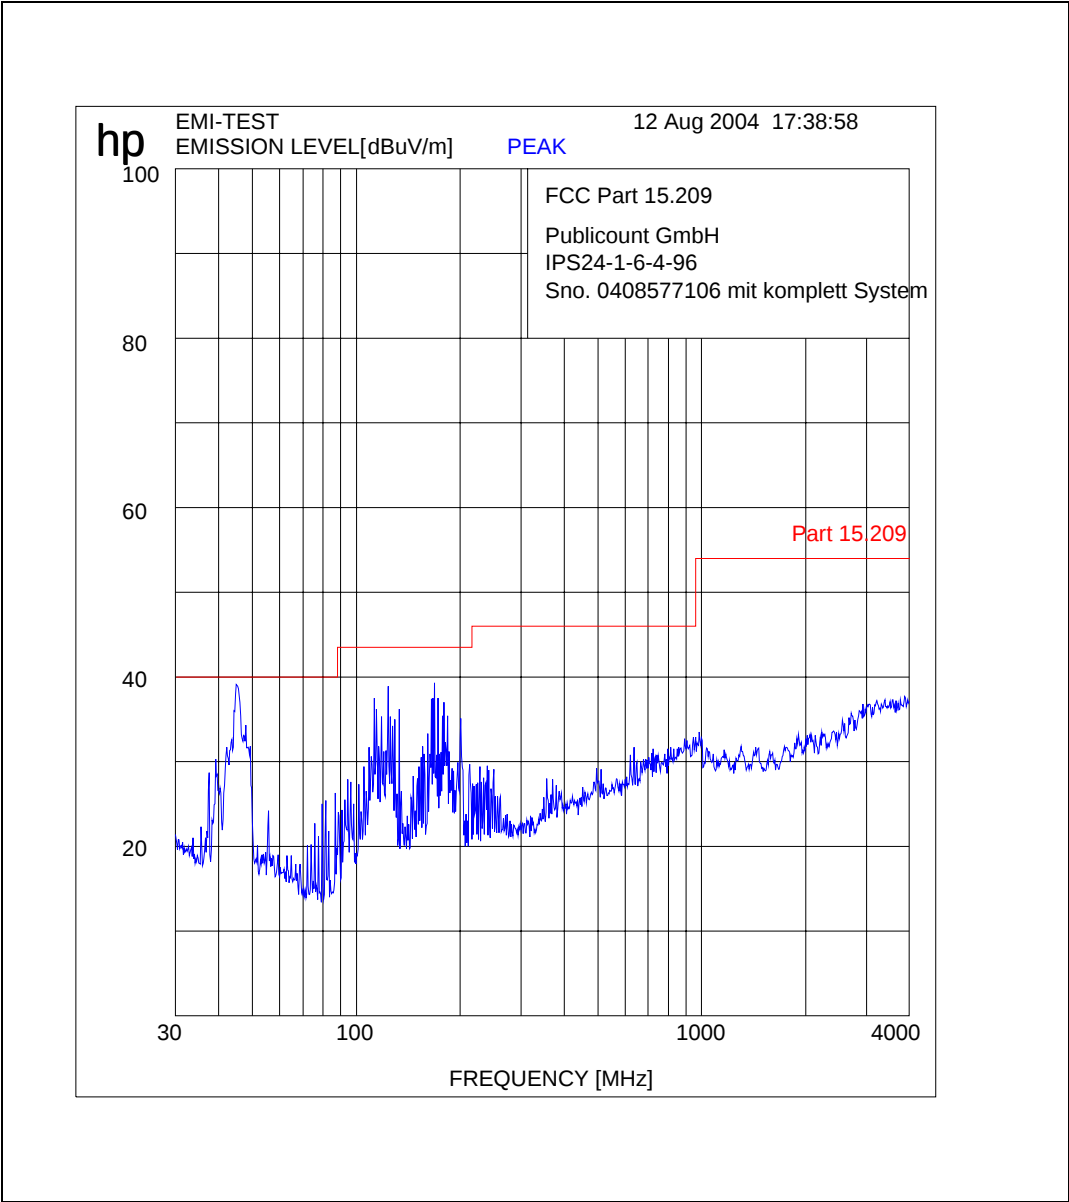

Plot 5

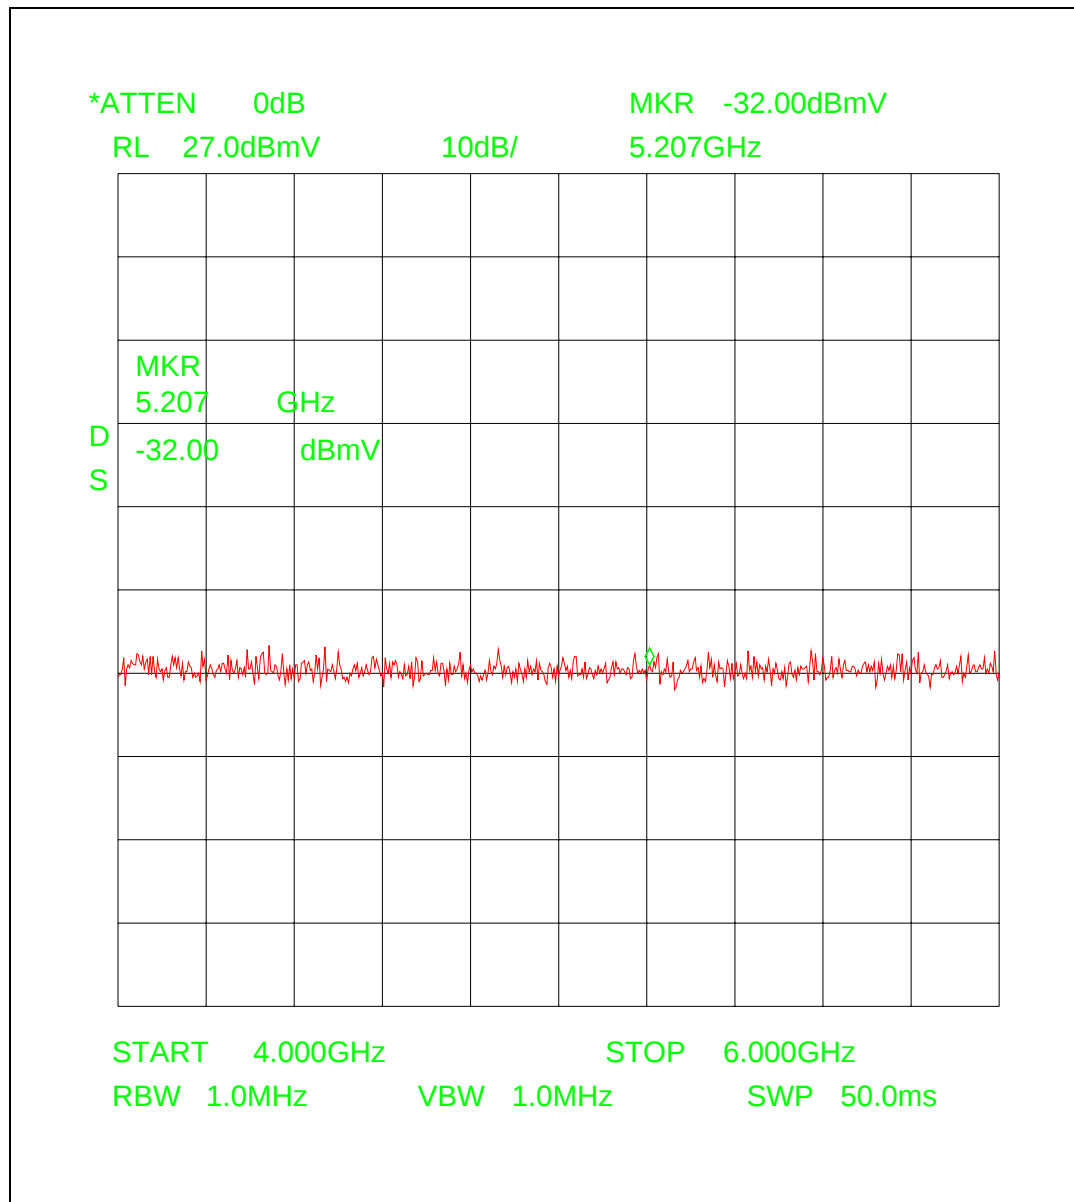

Measurement distance d = 1.0 m

Calculation : Field strength = Analyser reading + Antenna factor + distance corr. + cable loss


e = -32.00 dB(mV) + 27.22 dB(1/m) + (- 9.54 dB) + 1.5 dB

e = -12.82 dB(mV/m)

E = 0.228 mV/m

E = 228.55 µV/m @3m (noise)


Plot 6

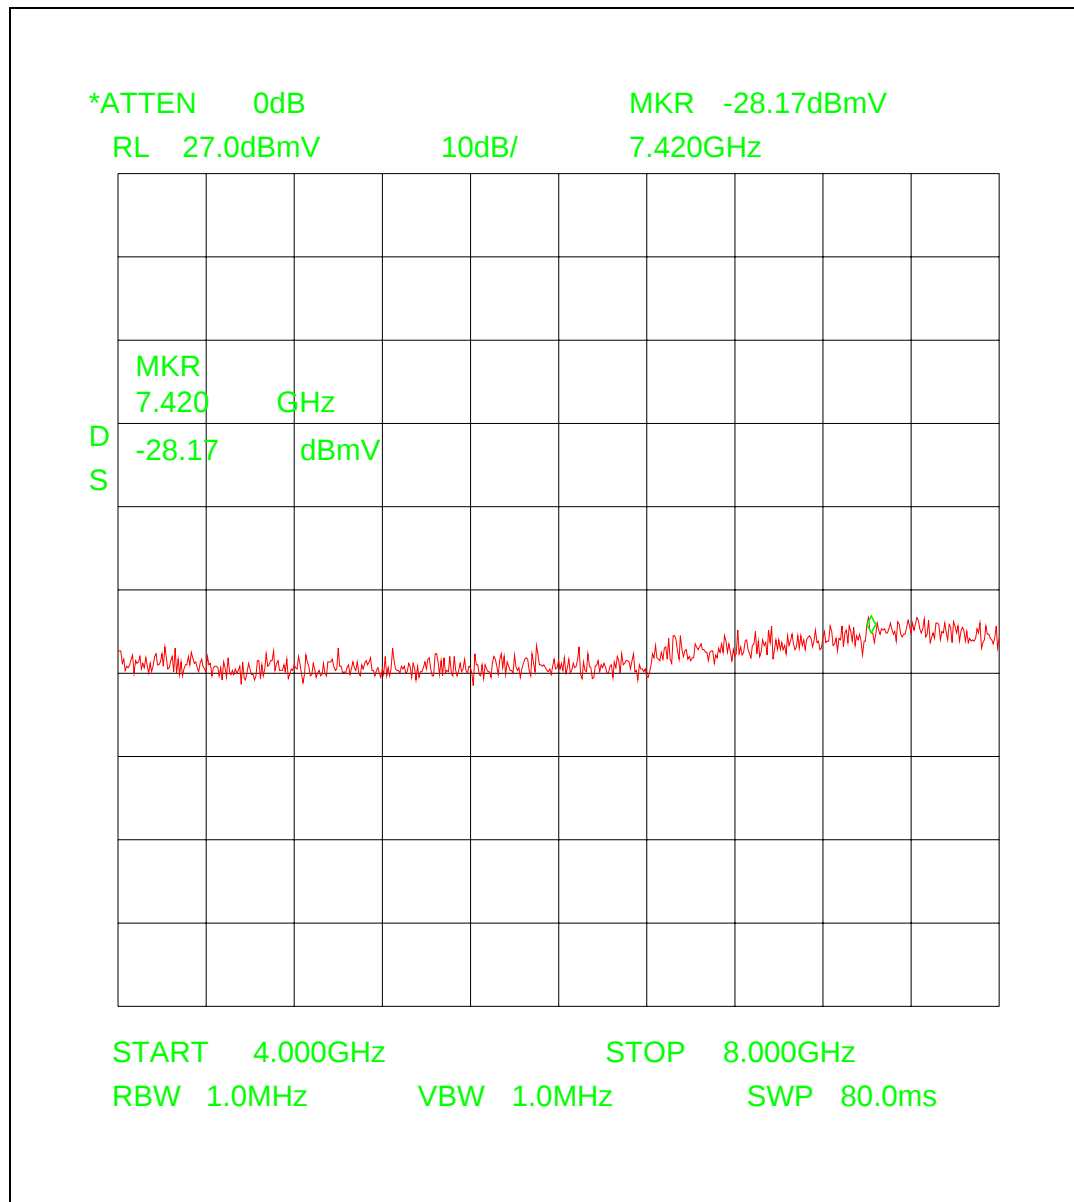

Measurement distance d = 3.0 m

Calculation : Field strength = Analyser reading + Antenna factor + amplifier + cable loss
 e = -28.17 dB(mV) + 30.06 dB(1/m) + (- 42.00 dB) + 1.8 dB
 e = -38.31 dB(mV/m)
 E = 0.012 mV/m
 E = 12.14 μ V/m @3m (noise)


Plot 7

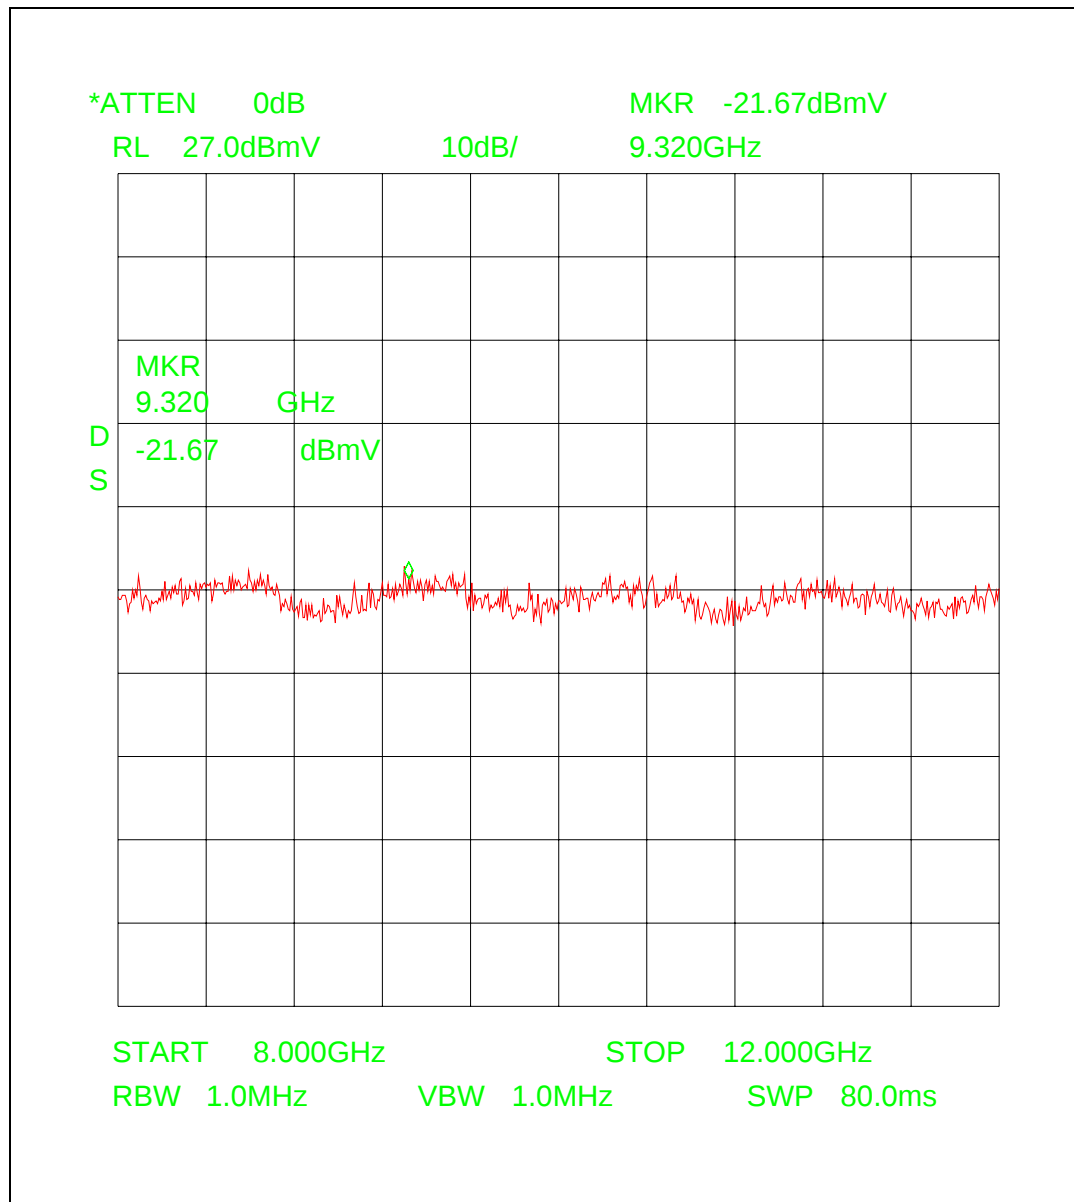

Measurement distance d = 3.0 m

Calculation : Field strength = Analyser reading + Antenna factor + amplifier + cable loss
 e = -21.67 dB(mV) + 33.70 dB(1/m) + (- 42.00 dB) + 2.5 dB
 e = -27.47 dB(mV/m)
 E = 0.042 mV/m
 E = 42.315 μ V/m @3m (noise)

Plot 8

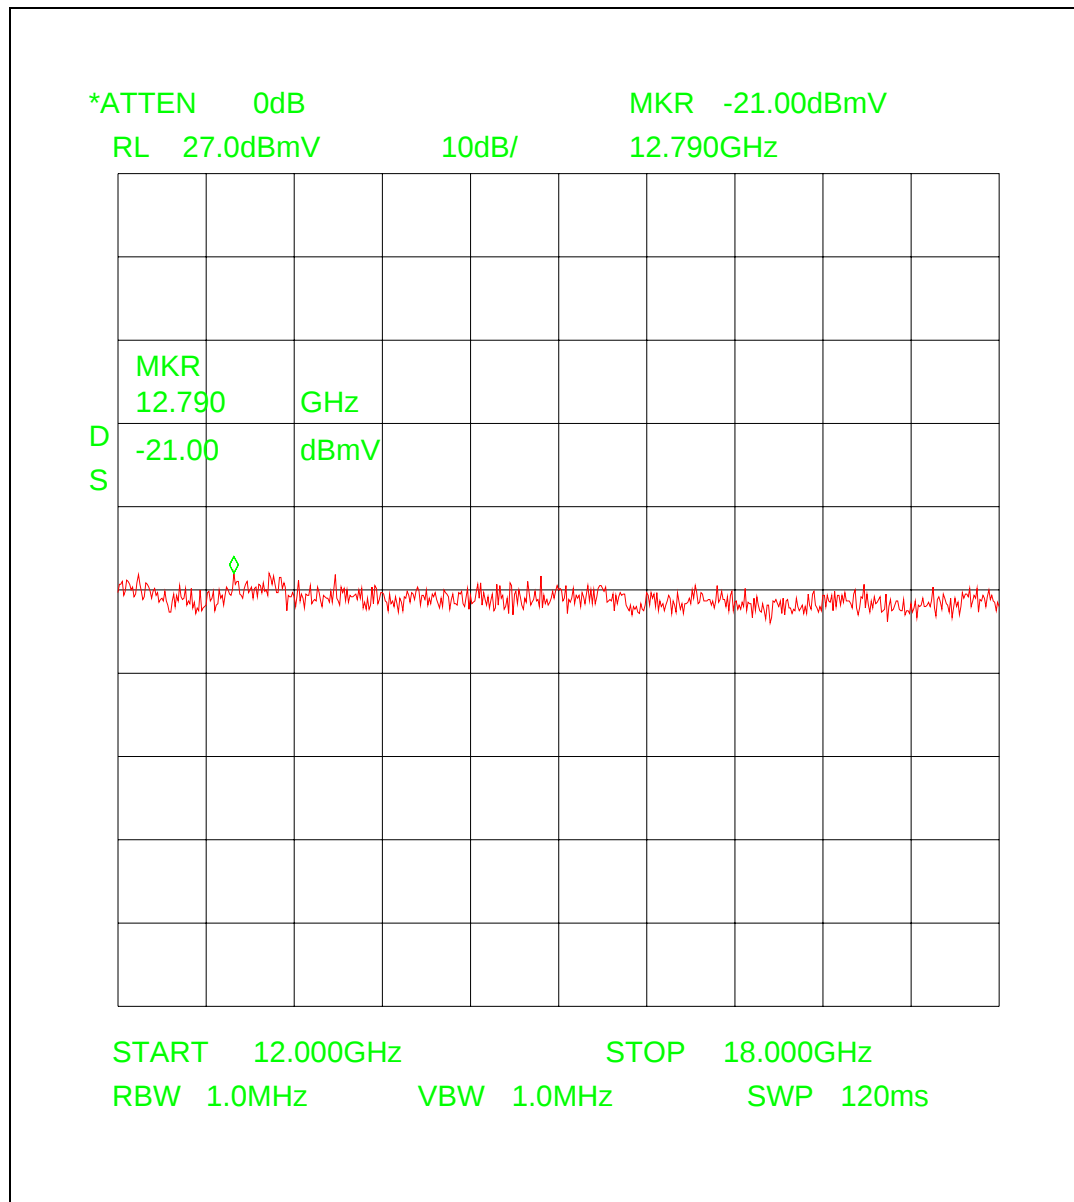

Measurement distance d = 3.0 m

Calculation : Field strength = Analyser reading + Antenna factor + amplifier + cable loss


e = -21.0 dB(mV) + 33.97 dB(1/m) + (-42.0 dB) + 2.0 dB

e = -17.03 dB(mV/m)

E = 0.140 mV/m

E = 140.766 μ V/m (noise)

Plot 9

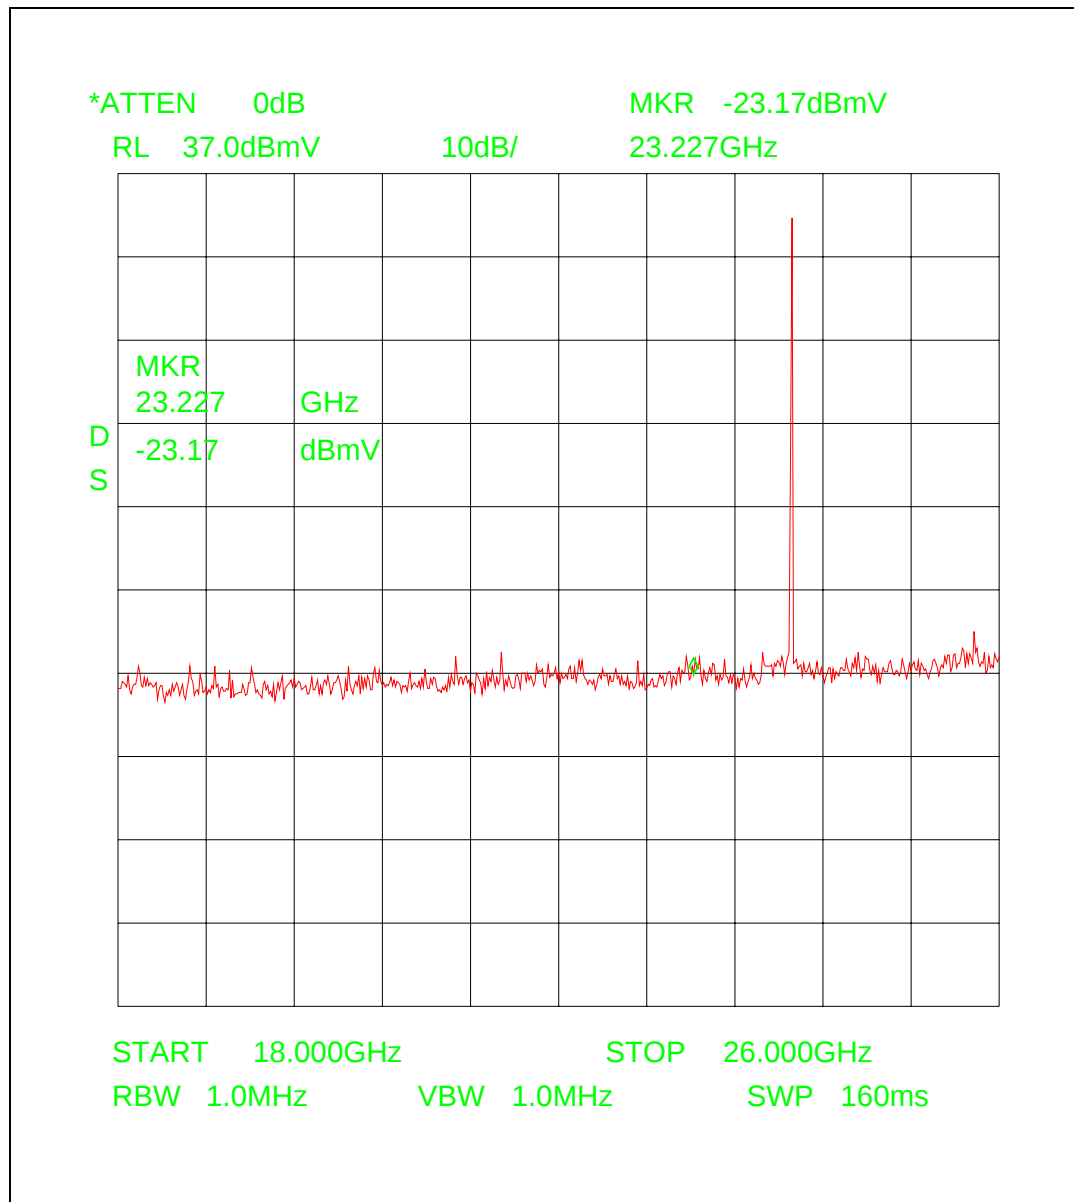

Measurement distance $d = 3.0 \text{ m}$

Calculation : Field strength = Analyser reading + Antenna factor + amplifier + cable loss

$e = -23.17 \text{ dB(mV)} + 40.22 \text{ dB(1/m)} + (-42.00 \text{ dB}) + 3.0 \text{ dB}$


$e = -21.95 \text{ dB(mV/m)}$

$E = 0.079 \text{ mV/m}$

$E = 79.891 \text{ } \mu\text{V/m @3m (noise)}$

Carrier is 10 dB to low because of saturadion effects at the low noise amplifier

Plot 10

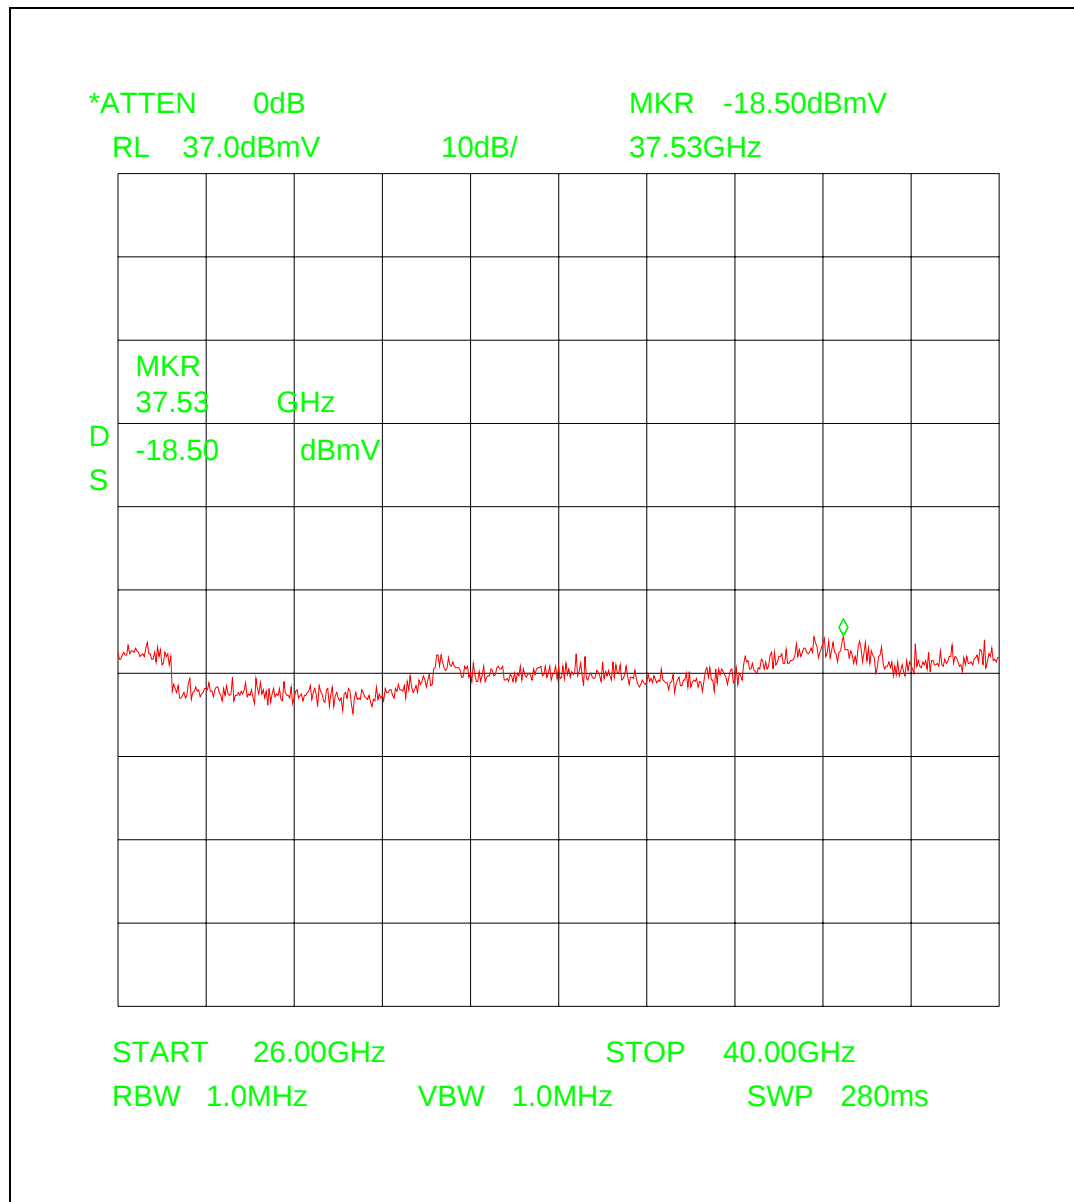

Measurement distance d = 3.0 m

Calculation : Field strength = Analyser reading + Antenna factor + amplifier + cable loss


e = -18.5 dB(mV) + 44.0 dB(1/m) + (-42.0 dB) + 3.5 dB

e = -13.0 dB(mV/m)

E = 0.223 mV/m

E = 223.872 μ V/m @3m (noise)

Plot 11

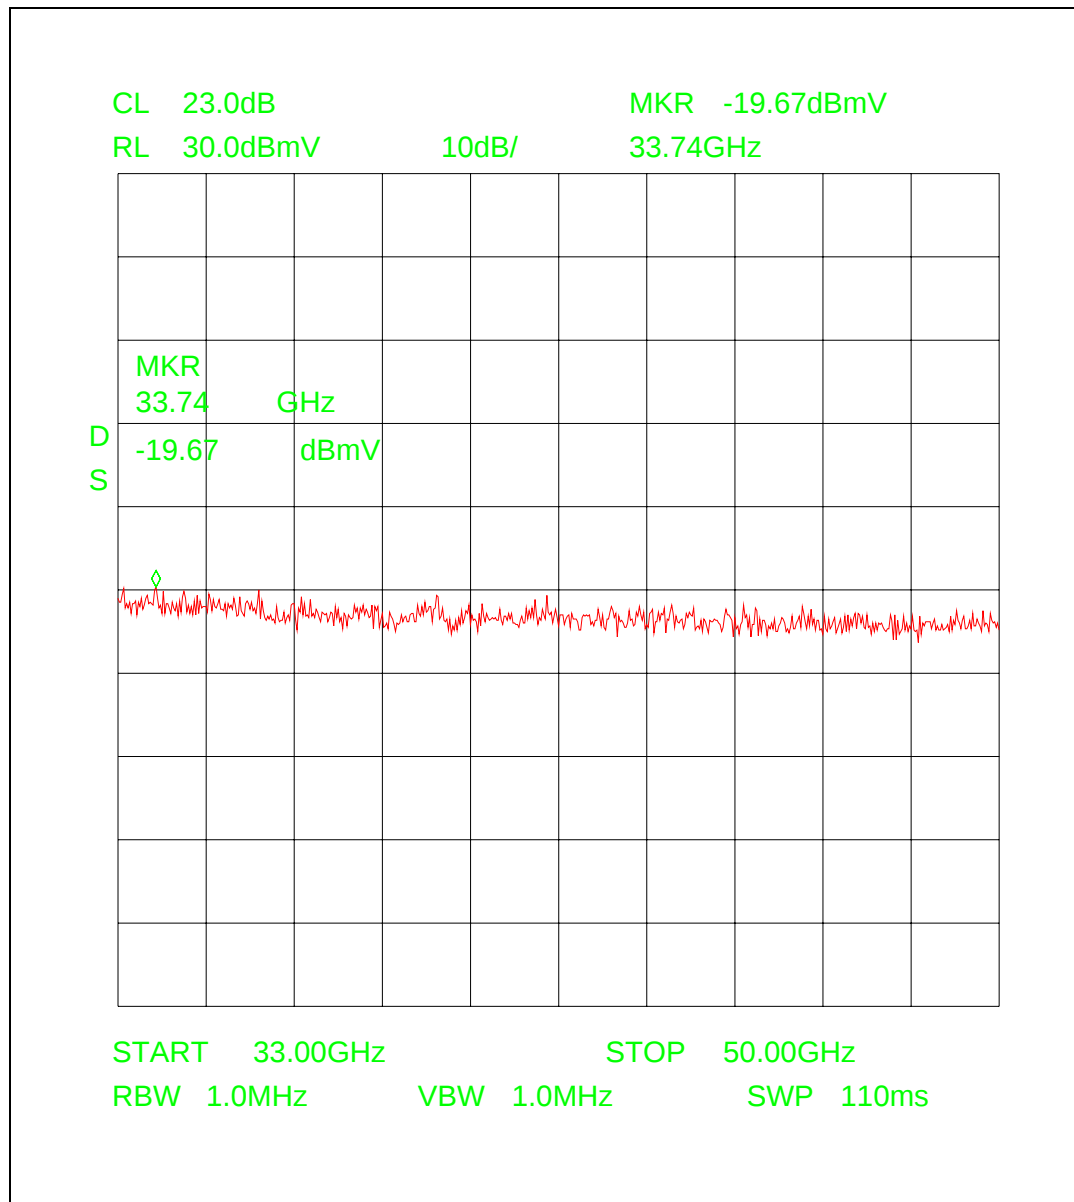

Measurement distance d = 0.125 m

Calculation : Field strength = Analyser reading + Antenna factor + distance corr.


e = -19.67 dB(mV) + 39.01 dB(1/m) + (- 27.6 dB)

e = -8.26 dB(mV/m)

E = 0.386 mV/m

E = 386.366 μ V/m @3m (noise)

Plot 12

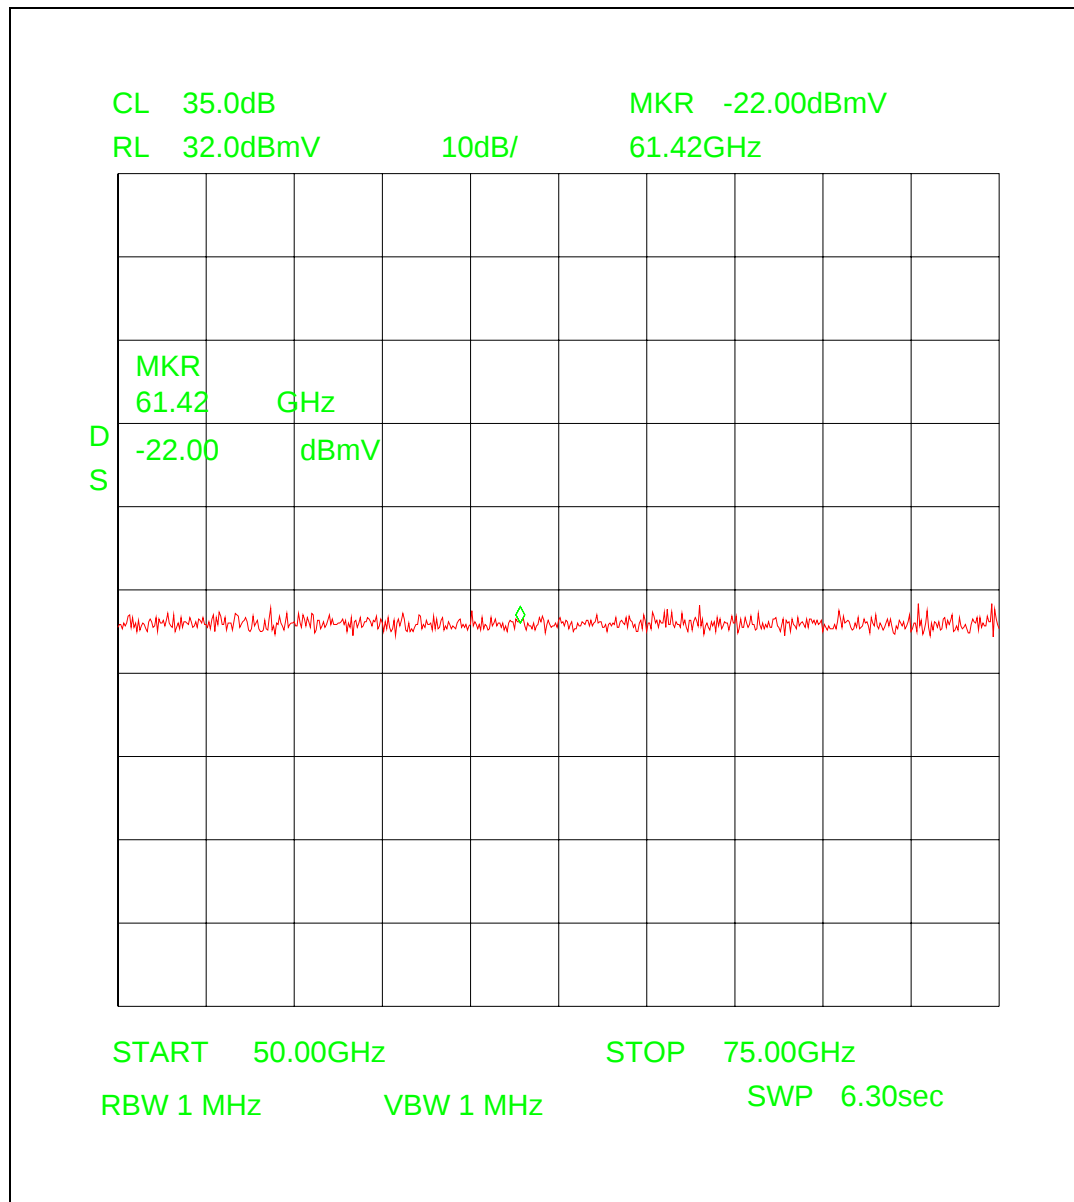

Measurement distance d = 0.125 m

Calculation : Field strength = Analyser reading + Antenna factor + distance corr.


e = -22.0 dB(mV) + 40.67 dB(1/m) + (- 27.60 dB)

e = -8.93 dB(mV/m)

E = 0.357 mV/m

E = 357.684 μ V/m @3m (noise)

Plot 13

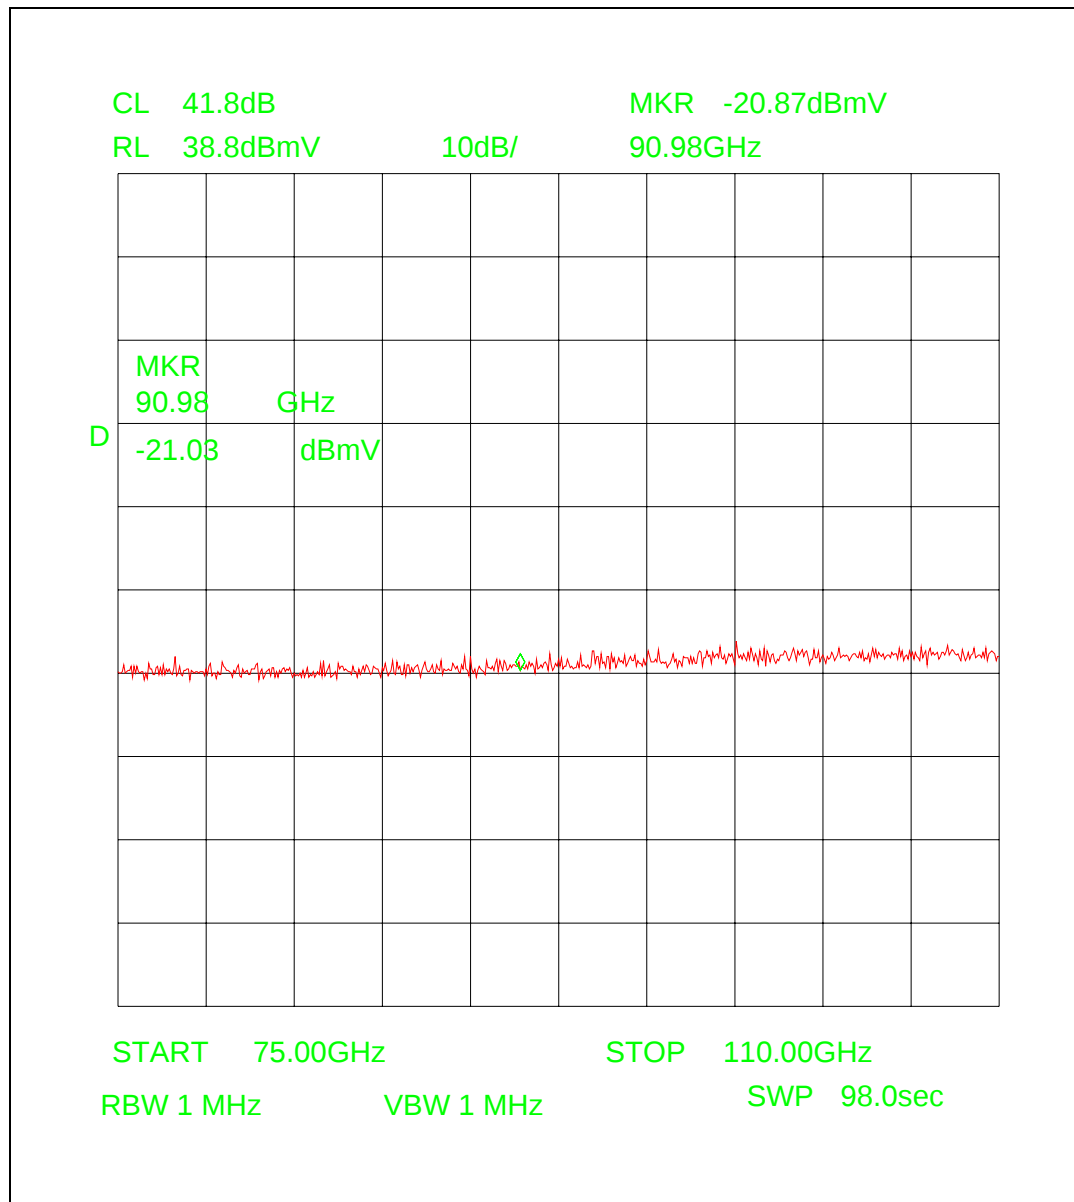

Measurement distance d = 0.125 m

Calculation : Field strength = Analyser reading + Antenna factor + distance corr.

e = -21.03 dB(mV) + 35.05 dB(1/m) + (- 27.6 dB)

e = -13.8 dB(mV/m)

E = 0.209 mV/m

E = 209.411 μ V/m @3m (noise)


Plot 14

CISPR 22

EUT 24 GHz Rada (no brand name)
 Manufacturer: Publicount
 Operating Condition: TX on
 Test Site: CETECOM ICT Services Room 006
 Operator: KRA
 Test Specification: 15.207
 Comment: 115V
 Start of Test: 13.08.04 / 09:36:46

SCAN TABLE: " CISPR 22"

Short Description: Voltage Mains 1.60 Unit dBμV Detector: Mode:

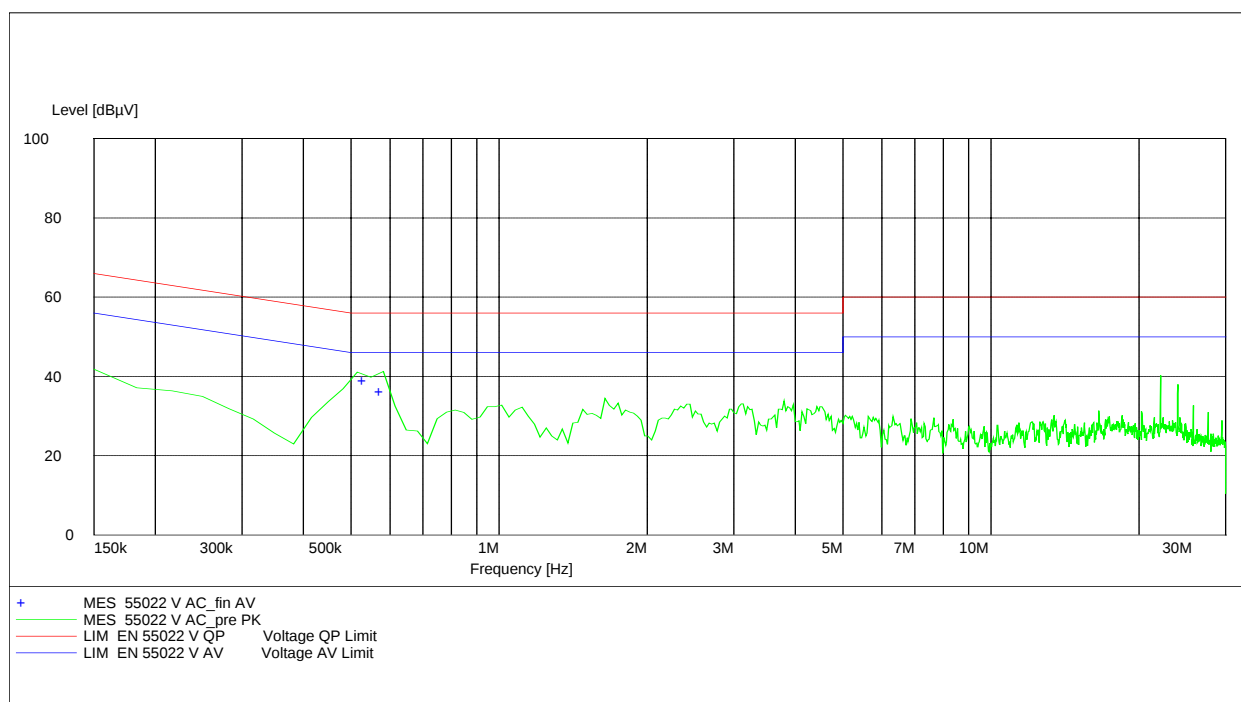

MEASUREMENT RESULT: " CISPR 22 AC_fin AV"

13.08.04 09:39

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line PE and Line N (worst case)
0.540000	39.00	10.6	46	7.0 N	GND
0.585000	36.10	10.5	46	9.9 N	GND

4. Photographs

Photo 1

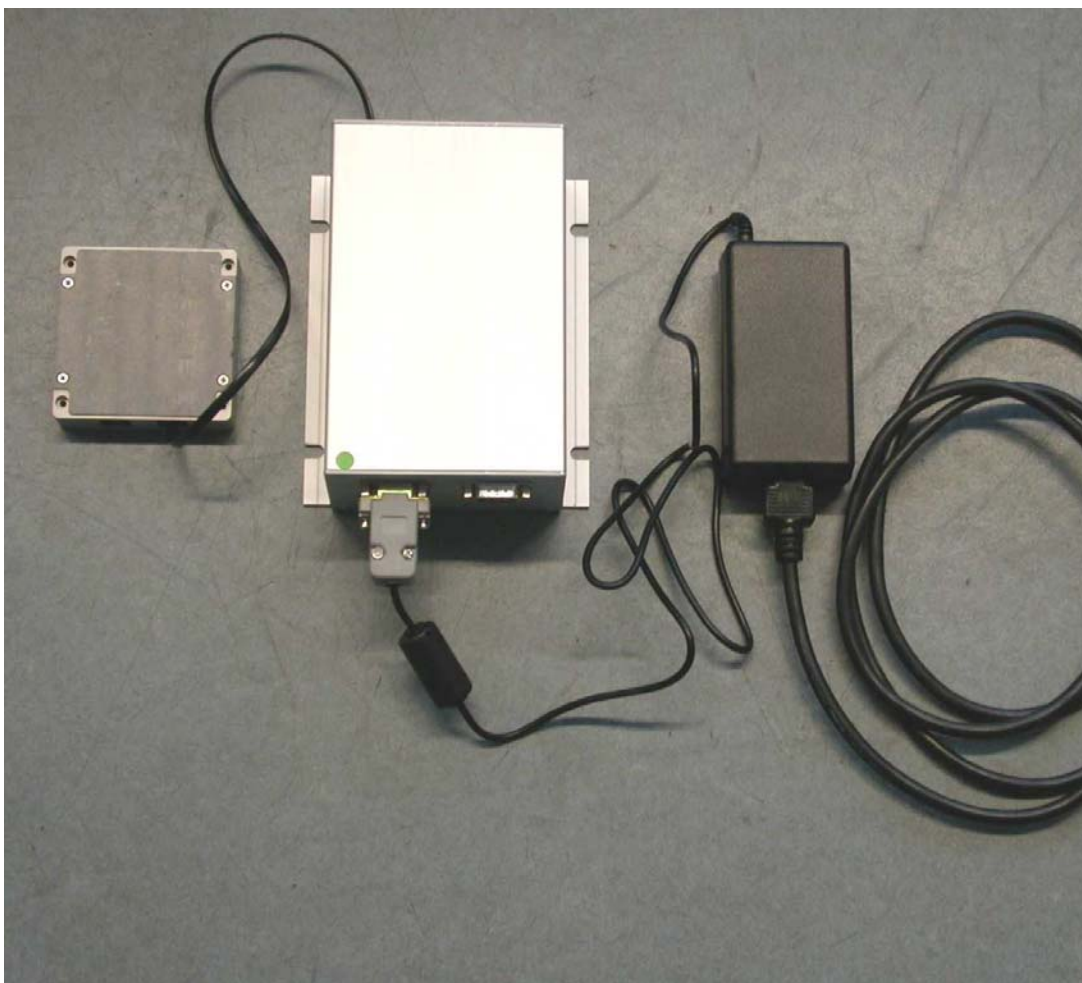


Photo 2

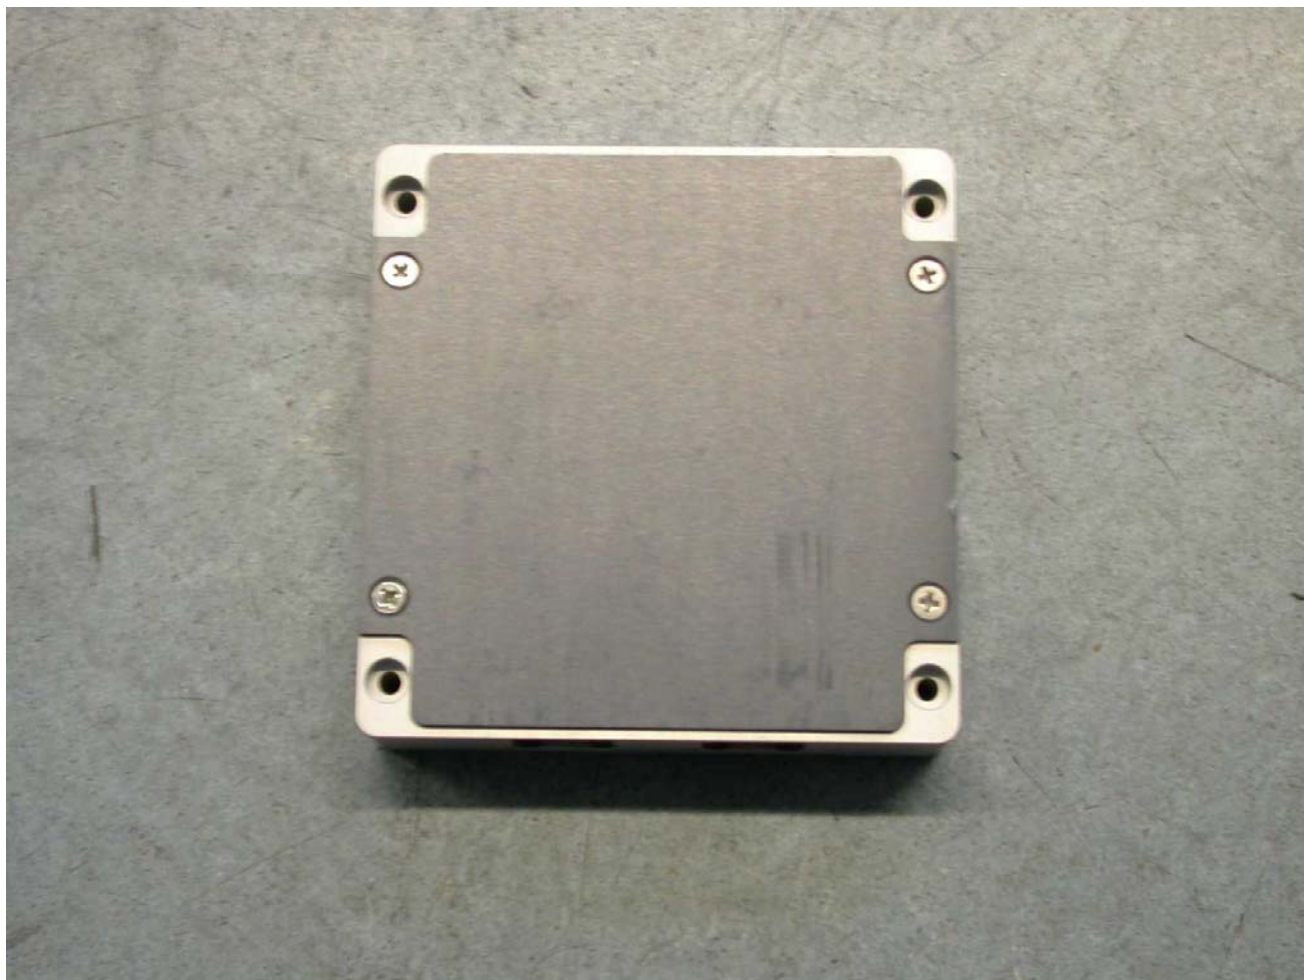


Photo 3



Photo 4



Photo 5

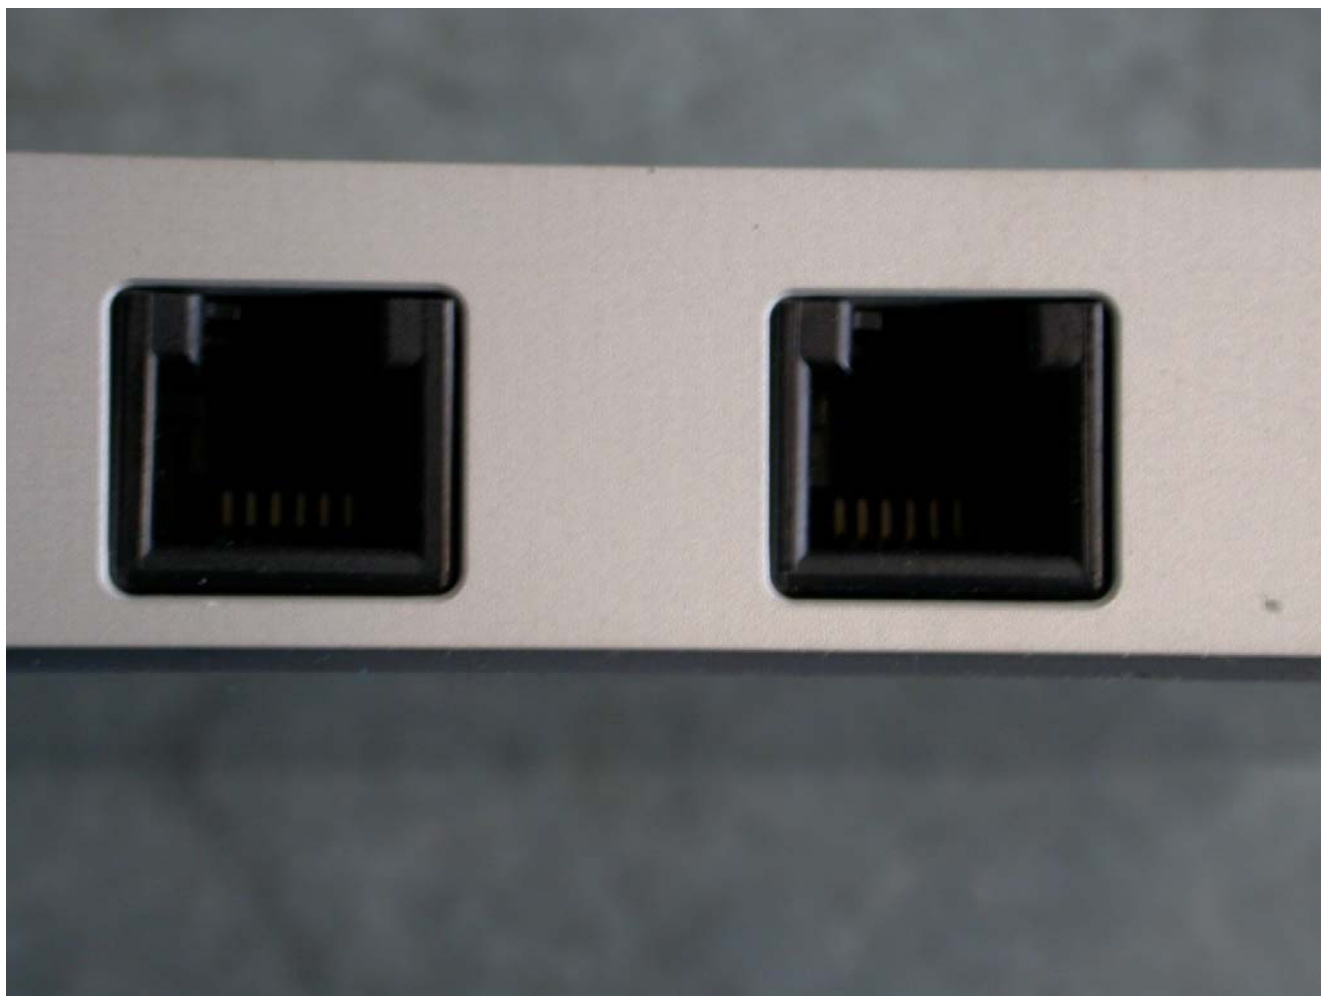


Photo 6

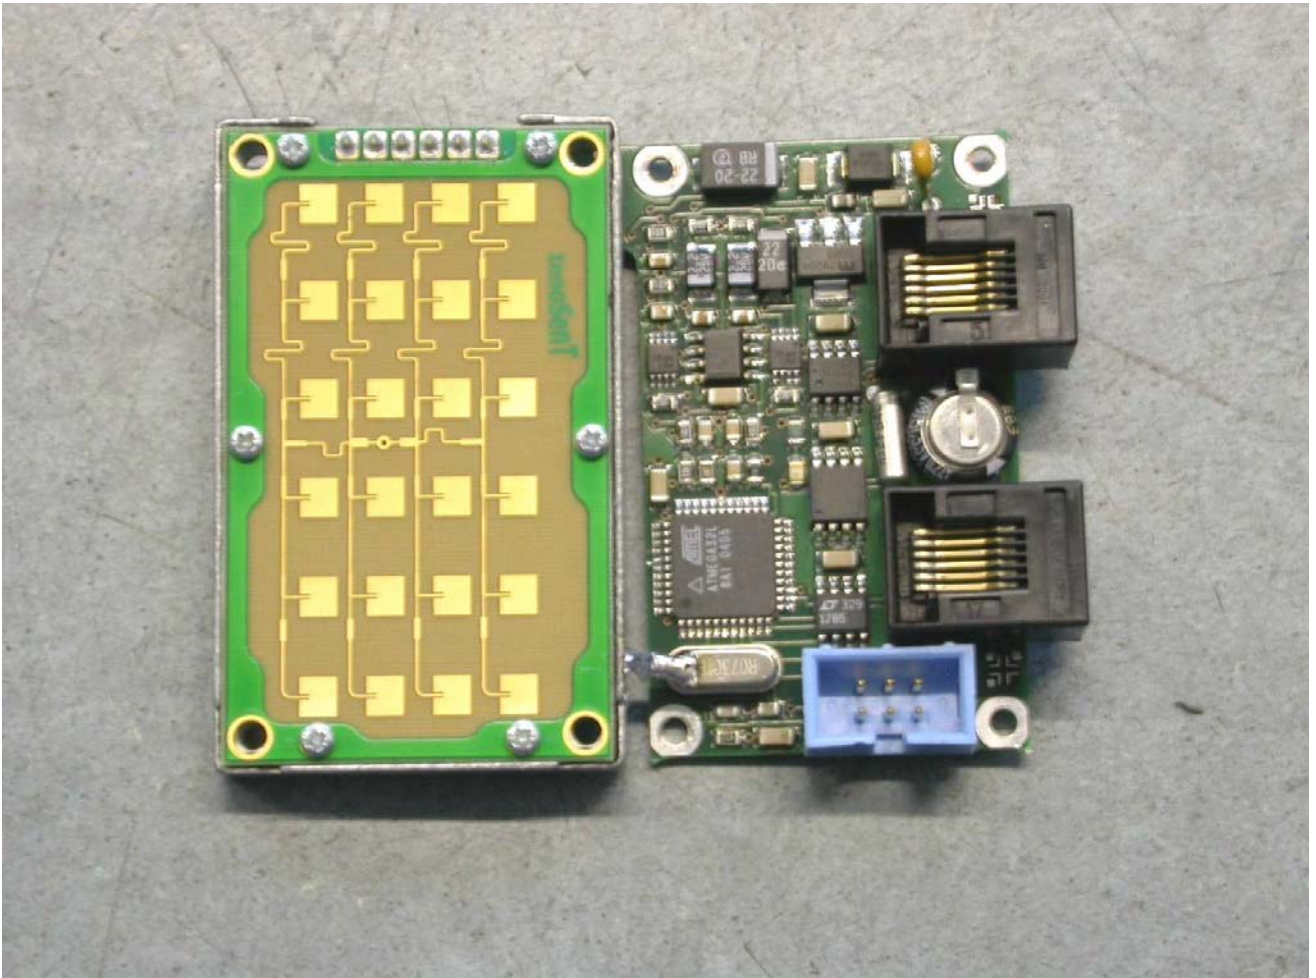


Photo 7

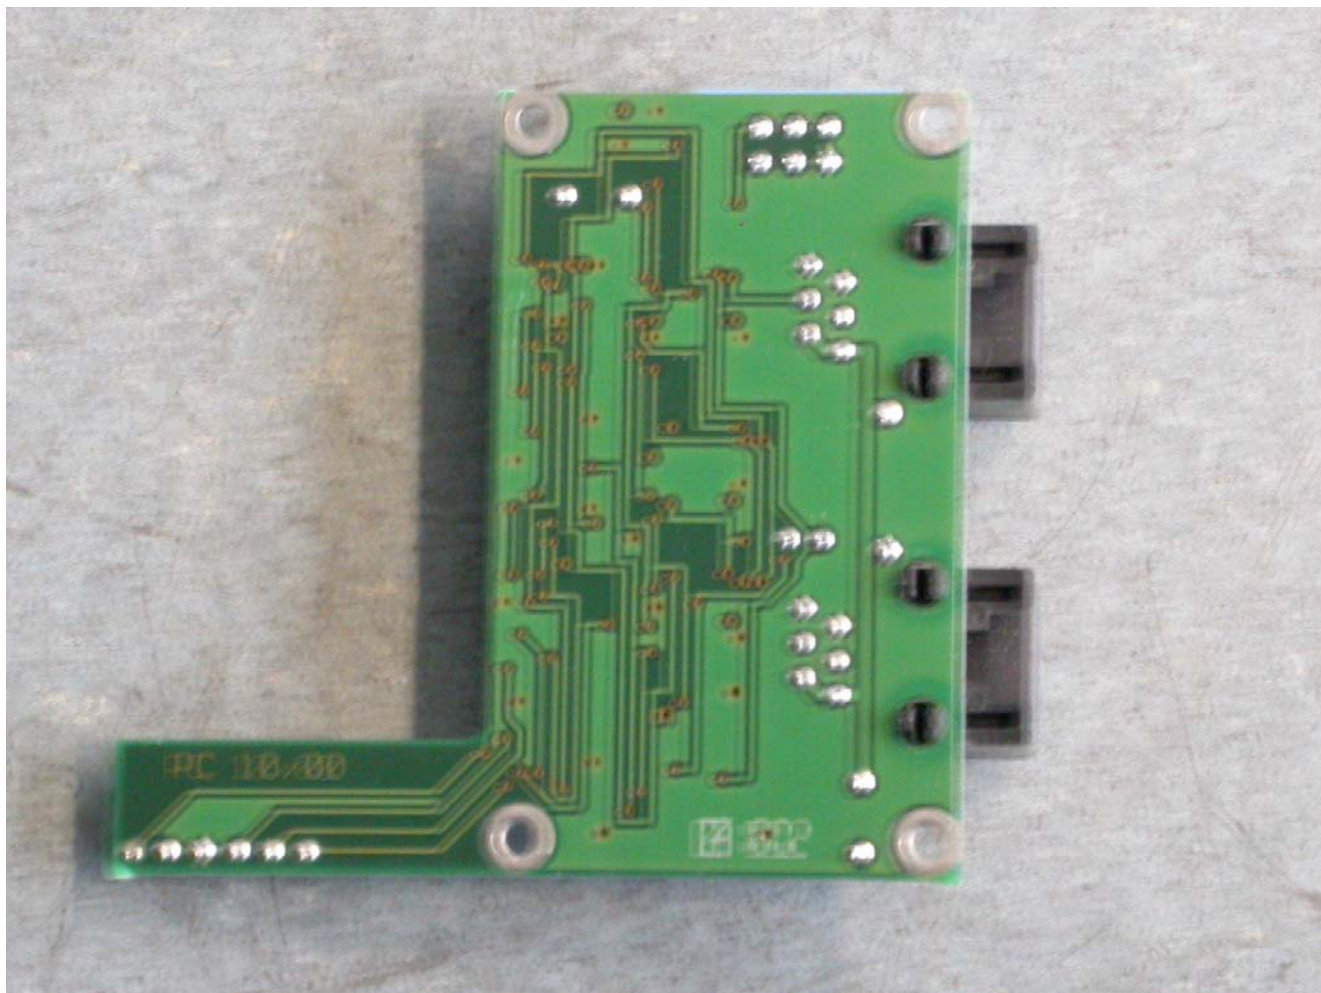


Photo 8



Photo 9



Photo 10

