



# TEST REPORT

No. I15Z40451-GTE02

for

**ZTE CORPORATION**

**WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone**

**Model Name: ZTE Kis II Max/ Kis II Max/ZTE KIS II Max/**

**KIS II Max/ZTE Kis II Max plus/ ZTE Kis II Max plus**

**FCC ID: SRQ-IIMAXPLUS**

with

**Hardware Version: TMBI**

**Software Version: ZTE-CN-FQB25S-P172R10V1.0.0**

**Issued Date: 2015-04-14**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

**Test Laboratory:**

**FCC 2.948 Listed: No. 525429**

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: [cttl\\_terminals@catr.cn](mailto:cttl_terminals@catr.cn), website: [www.chinattl.com](http://www.chinattl.com)

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>4</b>
<b>1.1. TESTING LOCATION .....</b>	<b>4</b>
<b>1.2. TESTING ENVIRONMENT .....</b>	<b>4</b>
<b>1.3. PROJECT DATA .....</b>	<b>4</b>
<b>1.4. SIGNATURE .....</b>	<b>4</b>
<b>2. CLIENT INFORMATION .....</b>	<b>5</b>
<b>2.1. APPLICANT INFORMATION .....</b>	<b>5</b>
<b>2.2. MANUFACTURER INFORMATION .....</b>	<b>5</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>6</b>
<b>3.1. ABOUT EUT .....</b>	<b>6</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>6</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....</b>	<b>6</b>
<b>3.4. NORMAL ACCESSORY SETTING .....</b>	<b>6</b>
<b>3.5. GENERAL DESCRIPTION .....</b>	<b>6</b>
<b>4. REFERENCE DOCUMENTS .....</b>	<b>7</b>
<b>4.1. REFERENCE DOCUMENTS FOR TESTING .....</b>	<b>7</b>
<b>5. LABORATORY ENVIRONMENT .....</b>	<b>8</b>
<b>8. SUMMARY OF TEST RESULTS .....</b>	<b>9</b>
<b>9. TEST EQUIPMENTS UTILIZED .....</b>	<b>10</b>
<b>ANNEX A: MEASUREMENT RESULTS .....</b>	<b>11</b>
<b>A.1 OUTPUT POWER .....</b>	<b>11</b>
<b>A.2 EMISSION LIMIT .....</b>	<b>16</b>
<b>A.3 CONDUCTED EMISSION .....</b>	<b>22</b>
<b>A.4 FREQUENCY STABILITY .....</b>	<b>25</b>
<b>A.5 OCCUPIED BANDWIDTH .....</b>	<b>27</b>
<b>A.6 EMISSION BANDWIDTH .....</b>	<b>31</b>
<b>A.7 BAND EDGE COMPLIANCE .....</b>	<b>35</b>
<b>A.8 CONDUCTED SPURIOUS EMISSION .....</b>	<b>37</b>
<b>A.9 PEAK-TO-AVERAGE POWER RATIO .....</b>	<b>58</b>



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I15Z40451-GTE02	Rev.0	1st edition	2015-04-14

## 1. Test Laboratory

### 1.1. Testing Location

Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China 100191

### 1.2. Testing Environment

Normal Temperature: 15-35℃


Relative Humidity: 20-75%

### 1.3. Project data

Testing Start Date: 2014-06-10

Testing End Date: 2015-03-12

### 1.4. Signature




---

Wang Junqing  
(Prepared this test report)



---

Qu Pengfei  
(Reviewed this test report)



---

Liu Baodian  
Deputy Director of the laboratory  
(Approved this test report)



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: ZTE CORPORATION  
Address /Post: J0411, No. 889 Bibo Road, ZhangjiangHi-TechPark, Shanghai, China  
City: Shanghai  
Postal Code: 201203  
Country: China  
Contact Person: Zhang Min  
Contact Email: /  
Telephone: 0086-21-68897541  
Fax: /

### **2.2. Manufacturer Information**

Company Name: ZTE CORPORATION  
Address /Post: J0411, No. 889 Bibo Road, ZhangjiangHi-TechPark, Shanghai, China  
City: Shanghai  
Postal Code: 201203  
Country: China  
Telephone: 0086-21-68897541

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	WCDMA/GSM(GPRS) Dual-Mode Digital Mobile Phone
Model Name	ZTE Kis II Max/ Kis II Max/ZTE KIS II Max /KIS II Max/ZTE Kis II Max plus/ ZTE Kis II Max plus
FCC ID	SRQ-IIMAXPLUS
Frequency	GSM850; PCS1900; WCDMA Band II; WCDMA Band V
Antenna	Integrated
Output power	25.82dBm maximum EIRP measured for Band II
Extreme vol. Limits	3.4VDC to 4.2VDC (nominal: 3.7VDC)
Extreme temp. Tolerance	-30°C to +50°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

Note: The EUT is a variant model of ZTE V815W. Only RSE/EIRP had been tested. The other result is coming from the initial model.

#### **3.2. Internal Identification of EUT used during the test**

EUT ID*	SN or IMEI	HW Version	SW Version
EUT3	865730029523087	TMBI	ZTE-CN-FQB25S-P172R10V1.0.0

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

AE ID*	Description		
AE1	Battery	/	1540451BA001
AE1	Model	Li3712T42P3h634445	
	Manufacturer	ZTE CORPORATION	
	Capacitance	1200mAh	
	Nominal voltage	3.7V	

\*AE ID: is used to identify the test sample in the lab internally.

#### **3.4. Normal Accessory setting**

Fully charged battery was used during the test

#### **3.5. General Description**

The Equipment Under Test (EUT) is a model of WCDMA/GSM(GPRS) Dual-Mode Digital Mobile Phone with integrated antenna. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the Client.

## 4. Reference Documents

### 4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-14 Edition
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-14 Edition
ANSI/TIA-603-D	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2010
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2009
KDB971168 D01	Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems	2011

## 5. LABORATORY ENVIRONMENT

**Fully-anechoic chamber FAC-3** (9 meters×6.5 meters×4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

**Shielded room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω





## 6. SUMMARY OF TEST RESULTS

Items	List	Clause in FCC rules	Verdict
1	Output Power	22.913(a)/24.232(b)	P
2	Emission Limit	2.1051/22.917/24.238	P
3	Conducted Emission	15.107/15.207	P
4	Frequency Stability	2.1055/24.235	P
5	Occupied Bandwidth	2.1049(h)(i)	P
6	Emission Bandwidth	22.917(b)/24.238(b)	P
7	Band Edge Compliance	22.917(b)/24.238(b)	P
8	Conducted Spurious Emission	2.1057/22.917/24.238	P
9	PEAK-TO-AVERAGE POWER RATIO	KDB971168	P

**7. Test Equipments Utilized**

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CAL PERIOD
1	Test Receiver	ESU26	100376	R&S	2015-10-29	1 year
2	EMI Antenna	VULB 9163	302	Schwarzbeck	2017-1-3	3 year
3	EMI Antenna	3117	00119024	ETS-Lindgren	2016-01-20	3 year
4	LISN	NV216	101200	R&S	2015-07-07	1 year
5	Universal Radio Communication Tester	CMU200	108646	R&S	2015-10-28	1 year
6	Universal Radio Communication Tester	E5515C	MY48361083	Agilent	2016-02-27	1 year
7	Spectrum Analyzer	E4440A	MY48250642	Agilent	2016-03-02	1 year
8	EMI Antenna	9117	167	Schwarzbeck	2016-04-01	3 year
9	EMI Antenna	VULB 9163	9163 175	Schwarzbeck	2015-07-15	3 year
10	EMI Antenna	3117	00119024	ETS-Lindgren	2016-01-20	3 year
11	Signal Generator	N5183A	MY49060052	Agilent	2016-03-02	1 year
12	Climate chamber	SH-241	92007454	ESPEC	2015-12-14	2 year
13	Loop Antenna	HFH2-Z2	829324/007	R&S	2017-12-10	3 year

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 OUTPUT POWER**

#### **A.1.1 Summary**

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure max power transmission and proper modulation.

This result contains peak output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

#### **A.1.2 Conducted**

##### **A.1.2.1 Method of Measurements**

The EUT was set up for the max output power with pseudo random data modulation.

The power was measured with Rhode & Schwarz Spectrum Analyzer FSP (peak)

These measurements were done at 3 frequencies, 1852.4 MHz, 1880.0MHz and 1907.6MHz for WCDMA Band II; 826.4MHz, 836.6MHz and 846.6MHz for WCDMA Band V. (bottom, middle and top of operational frequency range).

##### **Limit**

According to FCC§2.1046.

##### **A.1.2.2 Test Condition**

RBW	VBW	Sweep Time	Span
10MHz	10MHz	800ms	50MHz

#### **WCDMA Band II**

##### **Measurement result**

WCDMA (Band II)	CH	Frequency(MHz)	output power(dBm)
	9262	1852.4	22.69
	9400	1880.0	22.49
	9538	1907.6	22.65

#### **WCDMA Band V**

##### **Measurement result**

WCDMA (Band V)	CH	Frequency(MHz)	output power(dBm)
	4132	826.4	22.95
	4183	836.6	22.84
	4233	846.6	22.63

## HSUPA

### WCDMA Band II

#### Measurement result

	CH	Frequency(MHz)	output power(dBm)
WCDMA (Band II)	9262	1852.4	20.65
	9400	1880.0	20.34
	9538	1907.6	20.35

### WCDMA Band V

#### Measurement result

	CH	Frequency(MHz)	output power(dBm)
WCDMA (Band V)	4132	826.4	20.47
	4183	836.6	20.55
	4233	846.6	20.63

## HSDPA

### WCDMA Band II

#### Measurement result

	CH	Frequency(MHz)	output power(dBm)
WCDMA (Band II)	9262	1852.4	21.95
	9400	1880.0	21.68
	9538	1907.6	21.70

### WCDMA Band V

#### Measurement result

	CH	Frequency(MHz)	output power(dBm)
WCDMA (Band V)	4132	826.4	22.05
	4183	836.6	22.15
	4233	846.6	22.22

### A.1.3 Radiated

#### A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.


Rule Part 24.232(c) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."


#### A.1.3.2 Method of Measurement

The measurements procedures in TIA-603D-2010 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

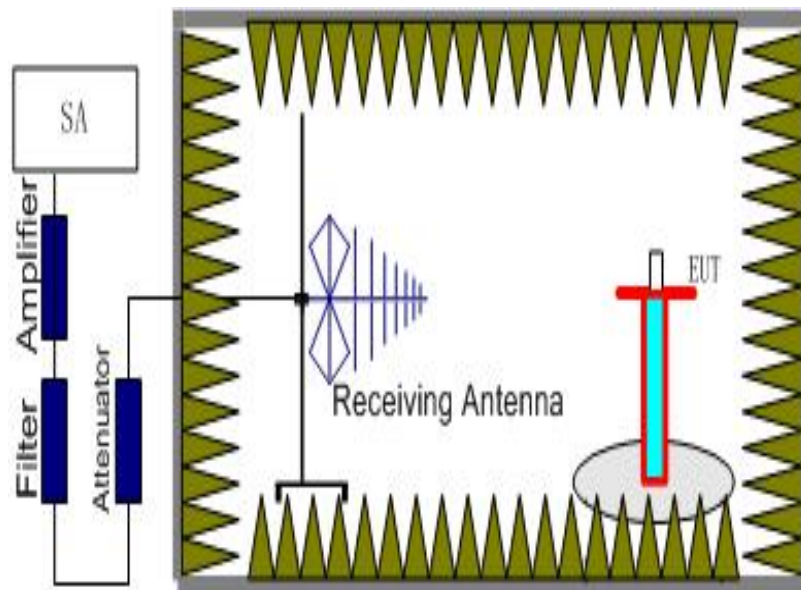

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

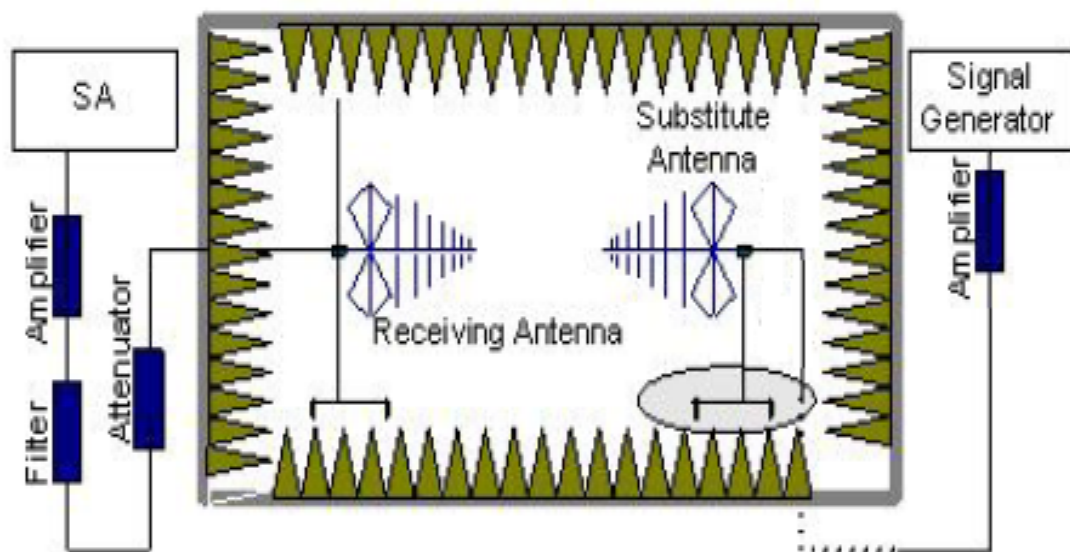

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna.  
The cable loss ( $P_{cl}$ ), the Substitution Antenna Gain ( $G_a$ ) and the Amplifier Gain ( $P_{Ag}$ ) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .

Note: the results contains vertical part and Horizontal part

### WCDMA Band II-EIRP

#### Limits

	Burst Peak EIRP (dBm)
WCDMA Band II	≤33dBm (2W)

#### Measurement result

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1852.40	-23.37	2.84	-43.75	-5.25	22.79	33.00	10.21	H
1880.00	-20.27	2.85	-43.75	-5.19	25.82	33.00	7.18	H
1907.60	-20.38	2.88	-43.77	-5.13	25.64	33.00	7.36	H

Frequency: 1880.00MHz

Peak EIRP(dBm)= P<sub>Mea</sub>(-20.27)- P<sub>cl</sub>(2.85dB)- P<sub>Ag</sub>(-43.75dB)-G<sub>a</sub>(-5.19dB) =25.82dBm

**ANALYZER SETTINGS: RBW = VBW = 5MHz**

### WCDMA Band V-ERP

#### Limits

	Burst Peak ERP (dBm)
WCDMA Band V	≤38.45dBm

#### Measurement result

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
826.40	-22.76	2.25	-45.76	-0.93	2.15	19.53	38.45	18.92	H
836.60	-22.50	2.26	-45.66	-0.82	2.15	19.57	38.45	18.88	H
846.60	-22.25	2.26	-45.56	-0.81	2.15	19.71	38.45	18.74	V

Frequency: 826.40MHz

Peak ERP(dBm)= P<sub>Mea</sub>(-22.25dBm)- P<sub>cl</sub>(2.26dB)- P<sub>Ag</sub>(-45.56dB)-G<sub>a</sub> (-0.81dB)-2.15dB=19.71dBm

**ANALYZER SETTINGS: RBW = VBW = 5MHz**

## **A.2 EMISSION LIMIT**

### **A.2.1 Measurement Method**


The measurements procedures in TIA-603D-2010 are used.

The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set as outlined in Part 24.238 and Part 24.917.

The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band II and WCDMA Band V.


**The procedure of radiated spurious emissions is as follows:**

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

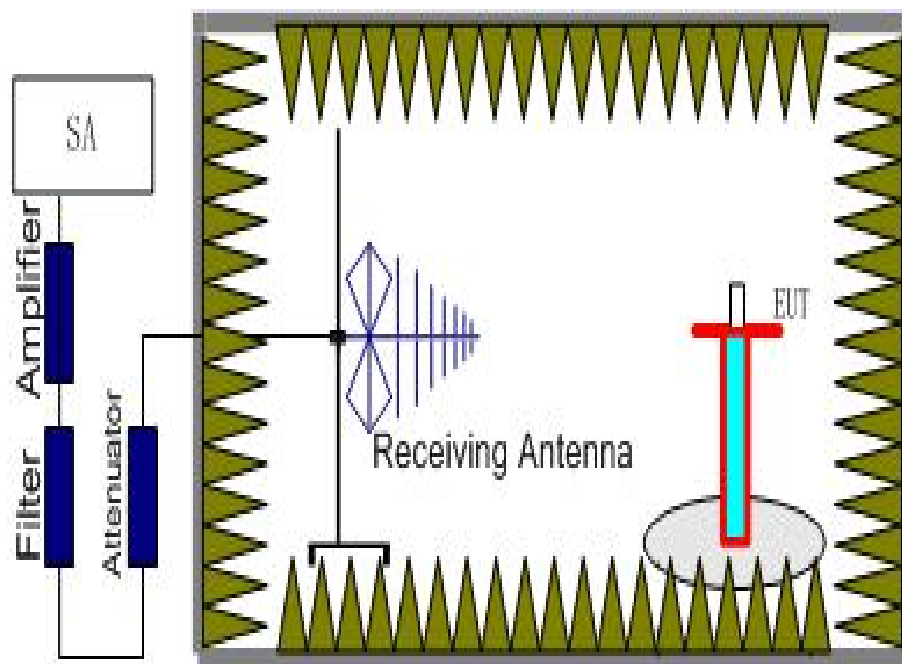

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.



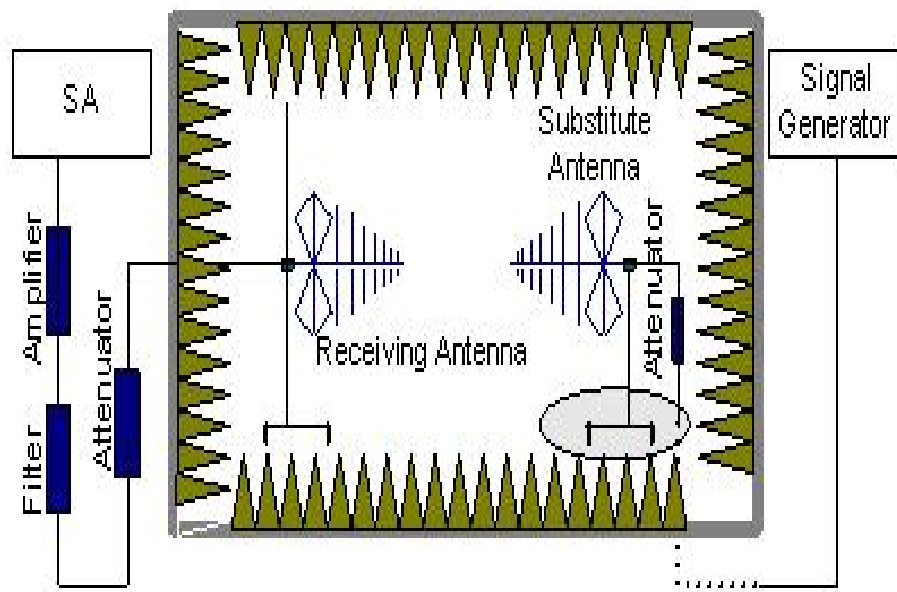

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss ( $P_{pl}$ ) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain ( $G_a$ ) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss ( $P_{pl}$ ) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{pl} - G_a$$

5. Use the power meter to measure the result of power in substitute antenna. Record the result of power meter ( $P_{pm}$ ).

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{pm} - G_a$$

6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .

### **A.2.2 Measurement Limit**

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

### **A.2.3 Measurement Results**

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the WCDMA Band II (1852.4 MHz, 1880.0MHz and 1907.6MHz) and WCDMA Band V (826.4MHz, 836.6MHz and 846.6MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the WCDMA Band II and WCDMA Band V into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

#### A.2.4 Measurement Results Table

Frequency	Channel	Frequency Range	Result
WCDMA Band V	Low	30MHz-10GHz	Pass
	Middle	30MHz-10GHz	Pass
	High	30MHz-10GHz	Pass
WCDMA Band II	Low	30MHz-20GHz	Pass
	Middle	30MHz-20GHz	Pass
	High	30MHz-20GHz	Pass

#### A.2.5 Sweep Table

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
WCDMA Band V	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
WCDMA Band II	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2

Note: the results contains vertical part and Horizontal part

**WCDMA BAND II Mode Channel 9262/1852.4MHz**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3703.12	-57.51	5.35	-7.88	-54.98	-13.00	41.98	V
5580.32	-59.23	6.63	-10.05	-55.81	-13.00	42.81	V
7409.99	-55.88	7.23	-11.16	-51.95	-13.00	38.95	H
9249.23	-56.87	8.19	-12.24	-52.82	-13.00	39.82	V
11125.84	-54.78	8.87	-12.23	-51.42	-13.00	38.42	V
12969.53	-53.17	9.50	-12.69	-49.98	-13.00	36.98	V

**WCDMA BAND II Mode Channel 9400/1880MHz**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3761.61	-52.84	5.13	-7.96	-50.01	-13.00	37.01	V
5636.29	-56.49	6.85	-10.05	-53.29	-13.00	40.29	V
7522.93	-54.88	7.50	-11.25	-51.13	-13.00	38.13	H
9399.75	-56.98	7.99	-12.33	-52.64	-13.00	39.64	H
11274.42	-53.78	9.23	-12.31	-50.70	-13.00	37.70	V
13164.09	-51.91	9.70	-12.98	-48.63	-13.00	35.63	V

**WCDMA BAND II Mode Channel 9538/1907.6MHz**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3812.78	-51.68	5.38	-8.02	-49.04	-13.00	36.04	V
5722.96	-58.22	6.75	-10.06	-54.91	-13.00	41.91	H
7635.25	-52.34	7.54	-11.35	-48.53	-13.00	35.53	H
9543.25	-56.71	8.23	-12.35	-52.59	-13.00	39.59	V
11451.99	-53.73	8.90	-12.41	-50.22	-13.00	37.22	H
13354.64	-49.16	9.76	-13.30	-45.62	-13.00	32.62	V

**WCDMA BAND V Mode Channel 4132/826.4MHz**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3308.94	-56.63	5.29	-7.14	2.15	-56.93	-13.00	43.93	H
4130.63	-57.31	5.78	-8.35	2.15	-56.89	-13.00	43.89	V
4961.58	-57.47	6.32	-9.35	2.15	-56.59	-13.00	43.59	H
5783.85	-57.29	6.79	-10.07	2.15	-56.16	-13.00	43.16	H
6610.75	-55.86	7.14	-10.57	2.15	-54.58	-13.00	41.58	H
7436.70	-57.01	7.14	-11.18	2.15	-55.12	-13.00	42.12	H

**WCDMA BAND V Mode Channel 4183/836.6MHz**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3345.47	-57.23	5.22	-7.23	2.15	-57.37	-13.00	44.37	H
4186.10	-55.66	5.86	-8.39	2.15	-55.28	-13.00	42.28	V
5017.43	-56.80	6.22	-9.43	2.15	-55.74	-13.00	42.74	H
5847.73	-56.98	6.61	-10.07	2.15	-55.67	-13.00	42.67	V
6689.69	-58.07	7.24	-10.62	2.15	-56.84	-13.00	43.84	V
7528.55	-56.59	7.46	-11.26	2.15	-54.94	-13.00	41.94	H

**WCDMA BAND V Mode Channel 4233/846.6MHz**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3381.44	-56.98	5.32	-7.32	2.15	-57.13	-13.00	44.13	H
4227.90	-55.44	6.06	-8.42	2.15	-55.23	-13.00	42.23	H
5074.12	-54.60	6.41	-9.50	2.15	-53.66	-13.00	40.66	V
5925.82	-58.38	6.86	-10.08	2.15	-57.31	-13.00	44.31	H
6776.19	-55.25	7.07	-10.68	2.15	-53.79	-13.00	40.79	V
7619.69	-56.03	7.43	-11.34	2.15	-54.27	-13.00	41.27	H

### **A.3 CONDUCTED EMISSION**

The measurement procedure in ANSI C63.4-2003 is used. Conducted Emission is measured with travel charger.


#### **A.3.1 Limit**

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi -Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50
* Decreases with logarithm of the frequency		

### A.3.2 Measurement result

#### WCDMA Band II

ESH2-Z5 Scan-FCC

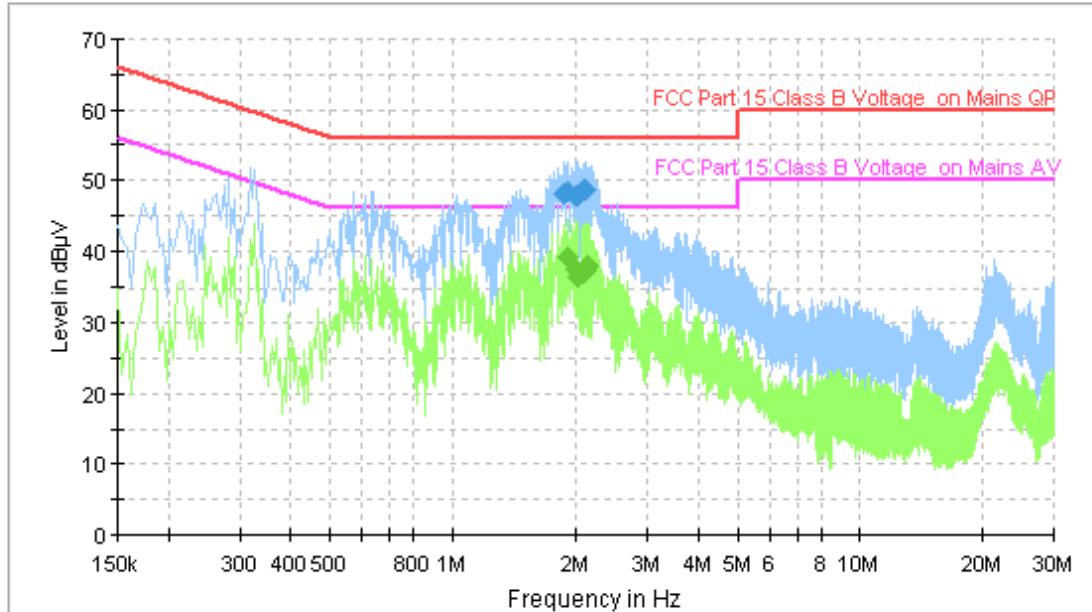

#### Final Measurement Detector 1


Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.854000	48.0	FLO	L1	10.1	8.0	56.0
1.898000	48.2	FLO	L1	10.1	7.8	56.0
1.986000	47.8	FLO	L1	10.1	8.2	56.0
2.026000	47.9	FLO	L1	10.1	8.1	56.0
2.094000	48.5	FLO	L1	10.1	7.5	56.0
2.110000	48.5	FLO	L1	10.1	7.5	56.0

#### Final Measurement Detector 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.898000	39.1	FLO	L1	10.1	6.9	46.0
1.986000	37.4	FLO	L1	10.1	8.6	46.0
2.026000	36.5	FLO	L1	10.1	9.5	46.0
2.082000	37.0	FLO	L1	10.1	9.0	46.0
2.110000	37.3	FLO	L1	10.1	8.7	46.0
2.138000	37.8	FLO	L1	10.1	8.2	46.0

## WCDMA Band V

ESH2-Z5 Scan-FCC

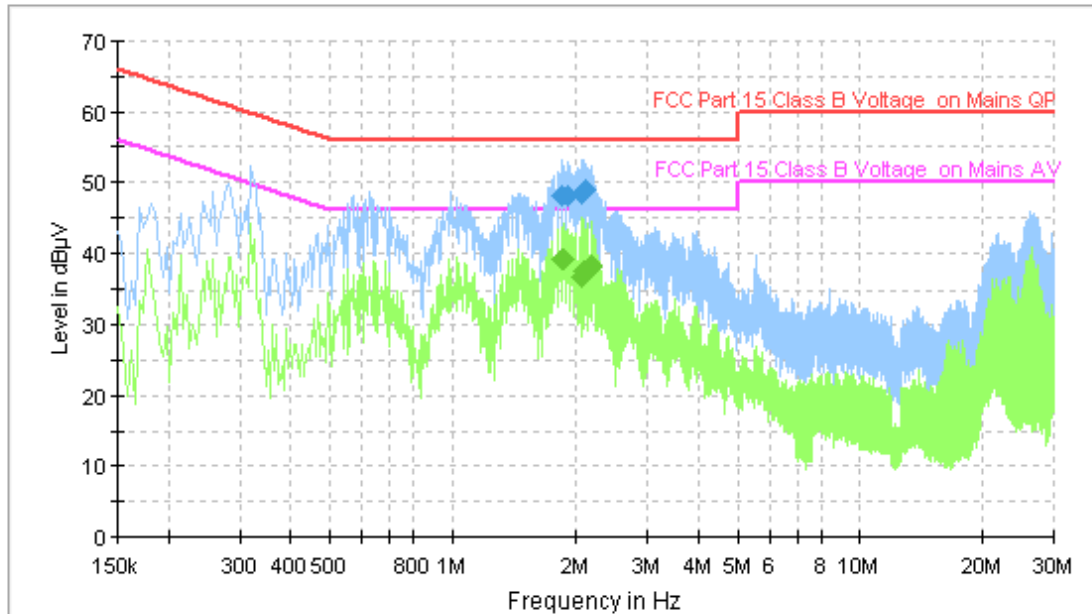

### Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.838000	48.1	FLO	L1	10.1	7.9	56.0
1.898000	48.2	FLO	L1	10.1	7.8	56.0
2.058000	48.5	FLO	L1	10.1	7.5	56.0
2.086000	48.6	FLO	L1	10.1	7.4	56.0
2.098000	48.8	FLO	L1	10.1	7.2	56.0
2.114000	48.8	FLO	L1	10.1	7.2	56.0

### Final Measurement Detector 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.838000	39.0	FLO	L1	10.1	7.0	46.0
1.854000	39.2	FLO	L1	10.1	6.8	46.0
2.058000	36.9	FLO	L1	10.1	9.1	46.0
2.086000	37.4	FLO	L1	10.1	8.6	46.0
2.142000	37.7	FLO	L1	10.1	8.3	46.0
2.170000	38.2	FLO	L1	10.1	7.8	46.0



## **A.4 FREQUENCY STABILITY**

### **A.4.1 Method of Measurement**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of WCDMA Band II and WCDMA Band V, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50°C to -30°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

### **A.4.2 Measurement Limit**

#### **A.4.2.1 For Hand carried battery powered equipment**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.2VDC, with a nominal voltage of 3.9VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

#### **A.4.2.2 For equipment powered by primary supply voltage**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the

fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

#### A.4.3 Measurement results

##### WCDMA Band II

##### Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	36	0.043
3.7	23	0.027
4.2	16	0.019

##### Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	43	0.051
-20	48	0.057
-10	36	0.043
0	27	0.032
10	22	0.026
20	34	0.041
30	41	0.049
40	32	0.038
50	17	0.020

##### WCDMA Band V

##### Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	39	0.021
3.7	31	0.016
4.2	45	0.024

##### Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	56	0.030
-20	47	0.025
-10	45	0.024
0	27	0.014
10	19	0.010
20	22	0.012
30	28	0.015
40	36	0.019
50	9	0.005

## A.5 OCCUPIED BANDWIDTH

### A.5.1 Occupied Bandwidth Results


Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of WCDMA Band II and WCDMA Band V. The table below lists the measured -20dBc BW. Spectrum analyzer plots are included on the following pages.

#### WCDMA Band II(-20dBc)

Frequency(MHz)	Occupied Bandwidth ( MHz)
1852.4	4.17
1880.0	4.18
1907.6	4.18


#### WCDMA Band II

##### Channel 9262-Occupied Bandwidth

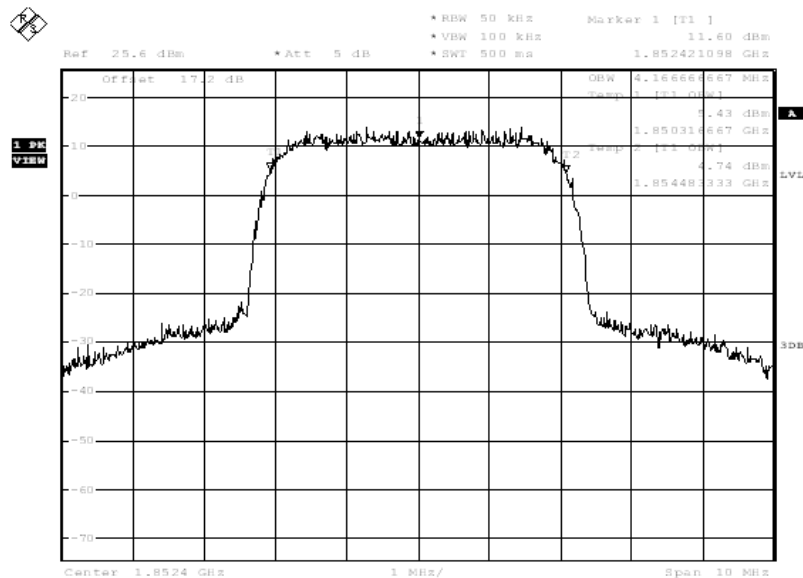


Date: 11 JUN 2014 09:46:54

### Channel 9400-Occupied Bandwidth

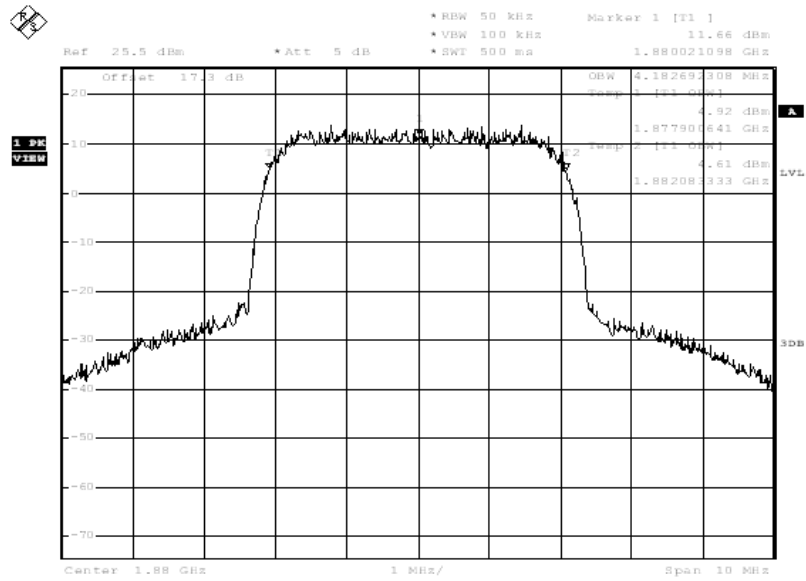

Date: 11. JUN. 2014 09:47:21

### Channel 9538-Occupied Bandwidth

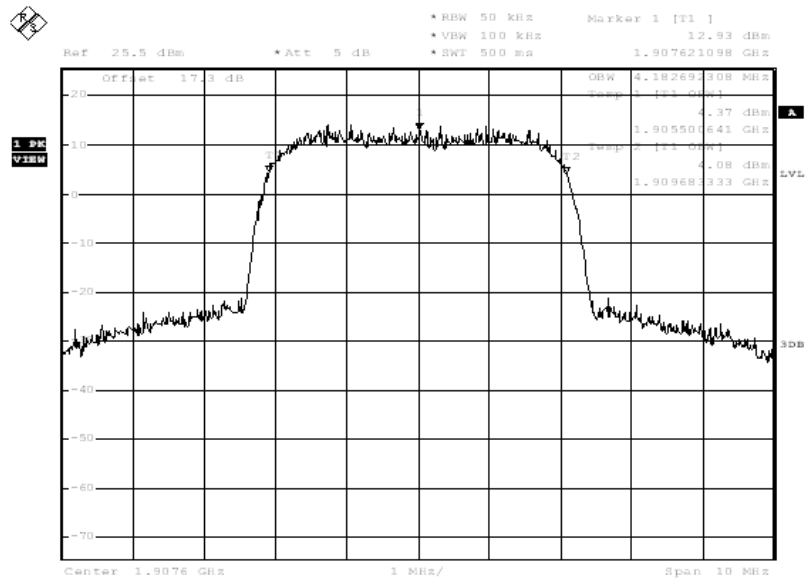


Date: 11. JUN. 2014 09:47:48

### WCDMA Band V(-20dBc)

Frequency(MHz)	Occupied Bandwidth ( MHz)
826.4	4.17
836.6	4.17
846.6	4.18


### WCDMA Band V

#### Channel 4132-Occupied Bandwidth

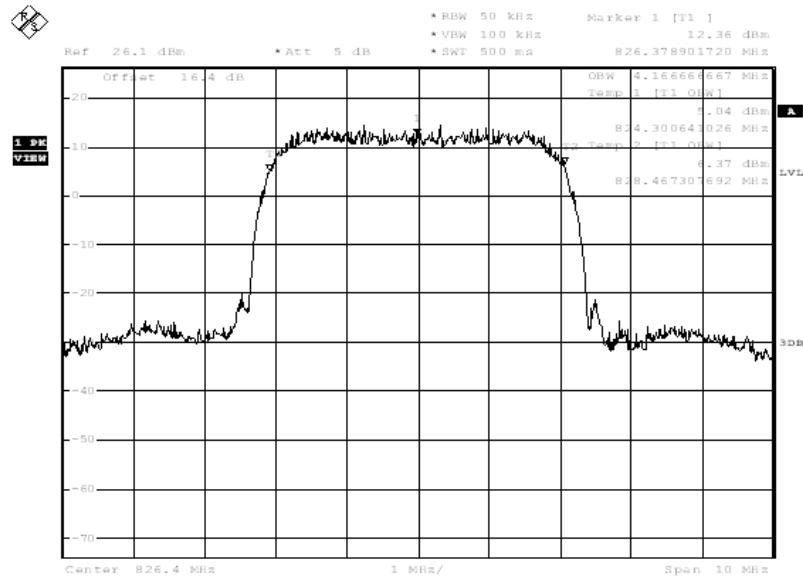


Date: 11 JUN 2014 11:15:40

### Channel 4183-Occupied Bandwidth

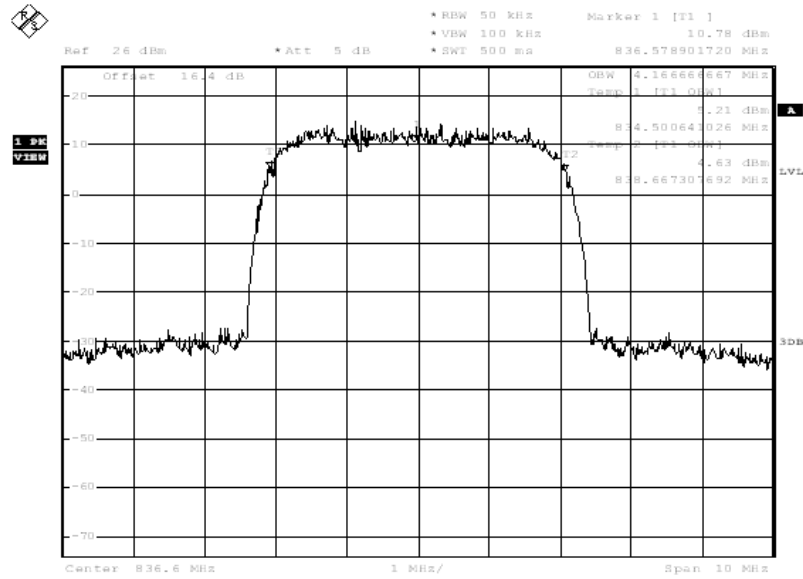

Date: 11 JUN 2014 11:16:08

### Channel 4233-Occupied Bandwidth

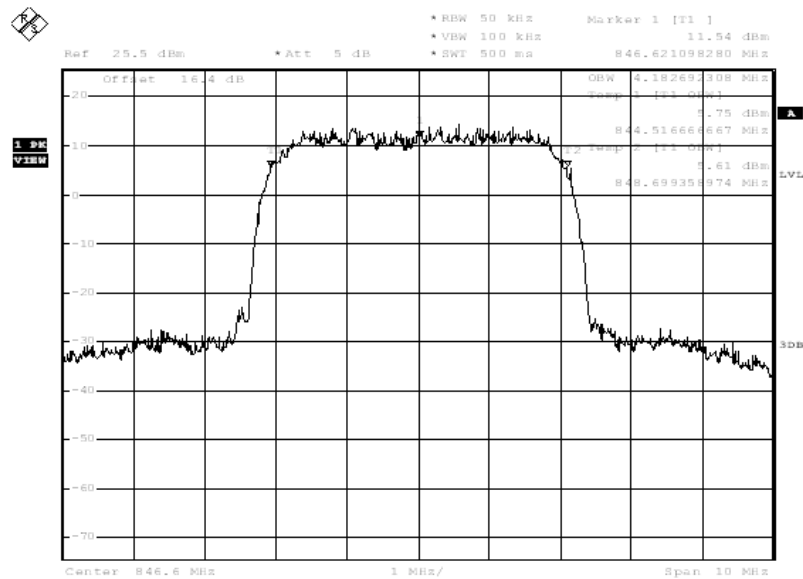

Date: 11 JUN 2014 11:16:35

## A.6 EMISSION BANDWIDTH

### A.6.1 Emission Bandwidth Results


Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of WCDMA Band II and WCDMA Band V. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

#### WCDMA Band II(-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)( MHz)
1852.4	4.68
1880.0	4.65
1907.6	4.70


#### WCDMA Band II

##### Channel 9262-Occupied Bandwidth (-26dBc BW)

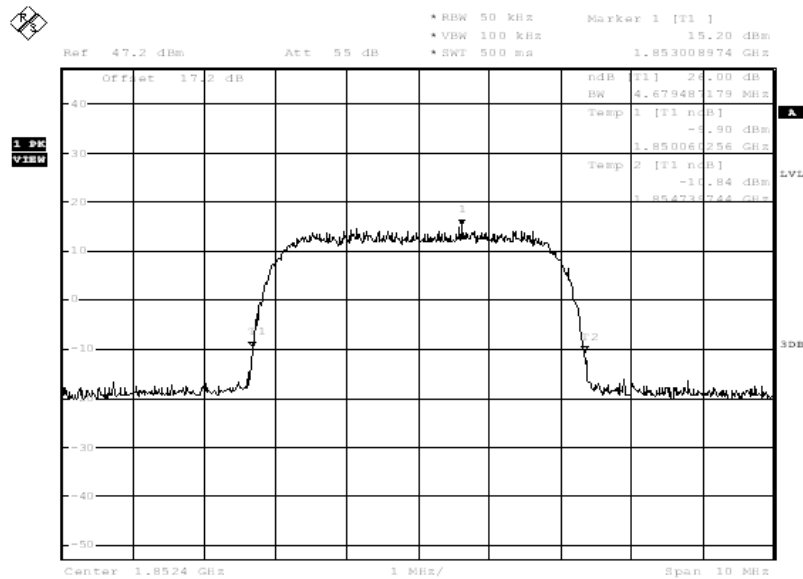


Date: 11 JUN 2014 09:48:48

### Channel 9400-Occupied Bandwidth (-26dBc BW)

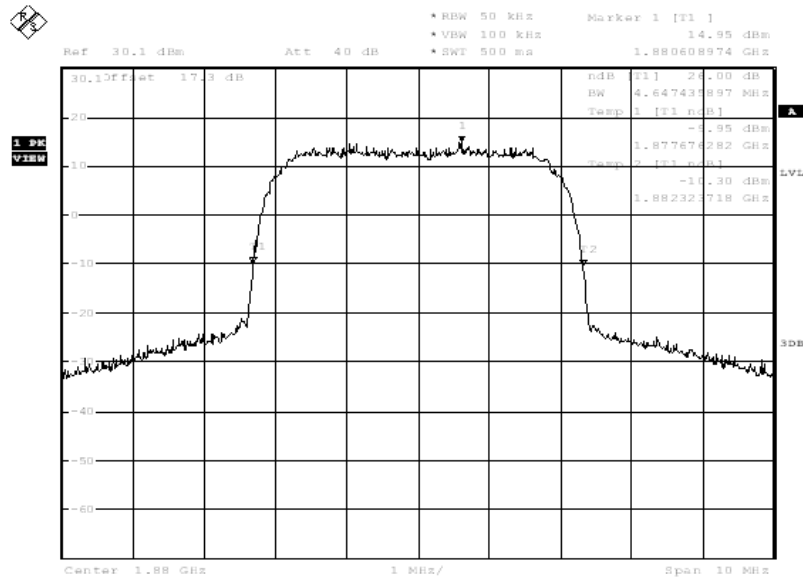

Date: 11. JUN. 2014 09:49:22

### Channel 9538-Occupied Bandwidth (-26dBc BW)

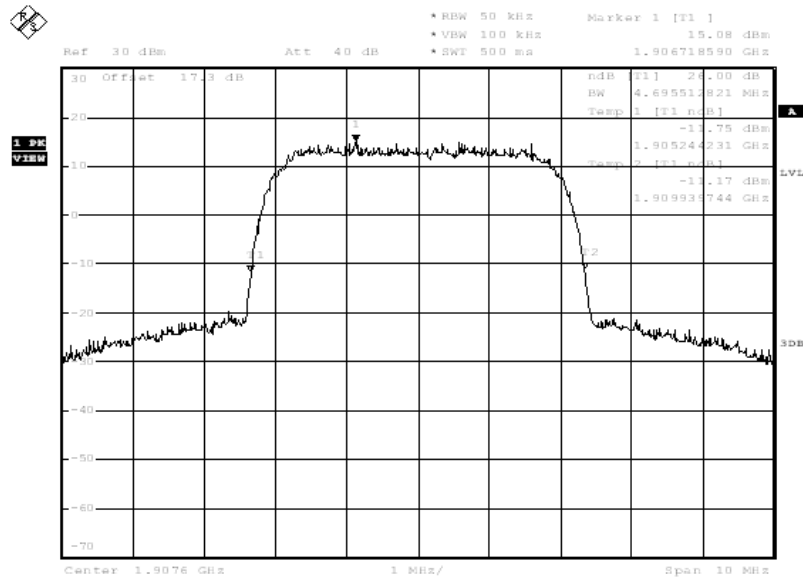

Date: 11. JUN. 2014 09:49:55




### WCDMA Band V(-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)( MHz)
826.40	4.65
836.60	4.66
846.60	4.65

### WCDMA Band V

#### Channel 4132-Occupied Bandwidth (-26dBc BW)

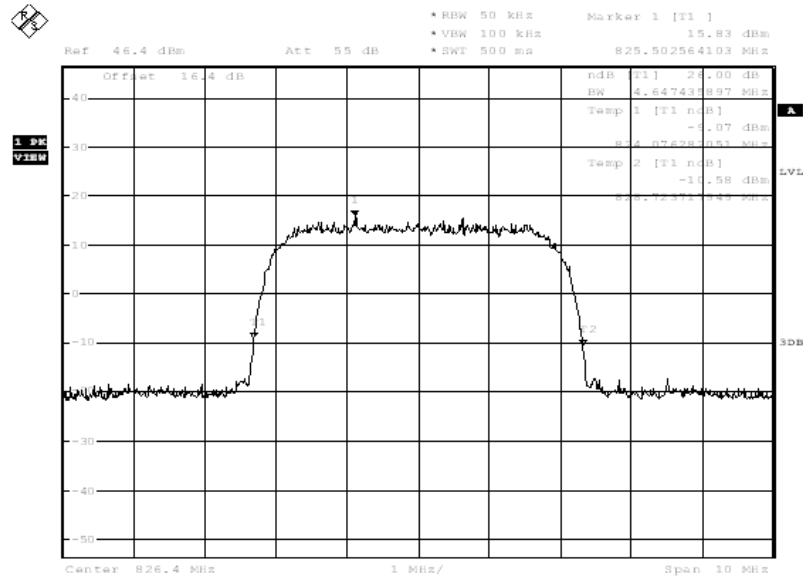

Date: 11 JUN 2014 11:17:31

1.9M 12.1M

A

LVL 30dB

Ref 30 dBm Att 40 dB

\* RBW 50 kHz Marker 1 [T1] 15.50 dBm  
 \* VBW 100 kHz  
 \* SWT 500 ms 835.718589744 MHz

30 Offset 12.4 dB

dBm

Temp 1 [T1] nB1 -11.31 dBm  
 834.260256410 MHz

Temp 2 [T2] nB1 -10.43 dBm  
 838.923717949 MHz

Center 836.6 MHz 1 MHz/ Span 10 MHz

Date: 11. JUN. 2014 11:18:05

Ref 30 dBm Att 40 dB RBW 50 kHz VBW 100 kHz SWT 500 ms Marker 1 [F1]

30 Offset 10.4 dB

1. dBm V21M

30 dBm

20 dBm

10 dBm

0 dBm

-10 dBm

-20 dBm

-30 dBm

-40 dBm

-50 dBm

-60 dBm

-70 dBm

Center 846.6 MHz Span 10 MHz

1 MHz

Marker 1 [F1] 15.32 dBm

847.208974359 MHz

844.276281051 MHz

848.923717949 MHz

Bandwidth 4.647431897 MHz

Level 1 [F1] 15.32 dBm

Level 2 [F2] -3.36 dBm

Level 3 [F3] -3.74 dBm

Level 4 [F4] -3.74 dBm

Level 5 [F5] -3.74 dBm

Level 6 [F6] -3.74 dBm

Level 7 [F7] -3.74 dBm

Level 8 [F8] -3.74 dBm

Level 9 [F9] -3.74 dBm

Level 10 [F10] -3.74 dBm

Level 11 [F11] -3.74 dBm

Level 12 [F12] -3.74 dBm

Level 13 [F13] -3.74 dBm

Level 14 [F14] -3.74 dBm

Level 15 [F15] -3.74 dBm

Level 16 [F16] -3.74 dBm

Level 17 [F17] -3.74 dBm

Level 18 [F18] -3.74 dBm

Level 19 [F19] -3.74 dBm

Level 20 [F20] -3.74 dBm

Level 21 [F21] -3.74 dBm

Level 22 [F22] -3.74 dBm

Level 23 [F23] -3.74 dBm

Level 24 [F24] -3.74 dBm

Level 25 [F25] -3.74 dBm

Level 26 [F26] -3.74 dBm

Level 27 [F27] -3.74 dBm

Level 28 [F28] -3.74 dBm

Level 29 [F29] -3.74 dBm

Level 30 [F30] -3.74 dBm

Level 31 [F31] -3.74 dBm

Level 32 [F32] -3.74 dBm

Level 33 [F33] -3.74 dBm

Level 34 [F34] -3.74 dBm

Level 35 [F35] -3.74 dBm

Level 36 [F36] -3.74 dBm

Level 37 [F37] -3.74 dBm

Level 38 [F38] -3.74 dBm

Level 39 [F39] -3.74 dBm

Level 40 [F40] -3.74 dBm

Level 41 [F41] -3.74 dBm

Level 42 [F42] -3.74 dBm

Level 43 [F43] -3.74 dBm

Level 44 [F44] -3.74 dBm

Level 45 [F45] -3.74 dBm

Level 46 [F46] -3.74 dBm

Level 47 [F47] -3.74 dBm

Level 48 [F48] -3.74 dBm

Level 49 [F49] -3.74 dBm

Level 50 [F50] -3.74 dBm

Level 51 [F51] -3.74 dBm

Level 52 [F52] -3.74 dBm

Level 53 [F53] -3.74 dBm

Level 54 [F54] -3.74 dBm

Level 55 [F55] -3.74 dBm

Level 56 [F56] -3.74 dBm

Level 57 [F57] -3.74 dBm

Level 58 [F58] -3.74 dBm

Level 59 [F59] -3.74 dBm

Level 60 [F60] -3.74 dBm

Level 61 [F61] -3.74 dBm

Level 62 [F62] -3.74 dBm

Level 63 [F63] -3.74 dBm

Level 64 [F64] -3.74 dBm

Level 65 [F65] -3.74 dBm

Level 66 [F66] -3.74 dBm

Level 67 [F67] -3.74 dBm

Level 68 [F68] -3.74 dBm

Level 69 [F69] -3.74 dBm

Level 70 [F70] -3.74 dBm

Level 71 [F71] -3.74 dBm

Level 72 [F72] -3.74 dBm

Level 73 [F73] -3.74 dBm

Level 74 [F74] -3.74 dBm

Level 75 [F75] -3.74 dBm

Level 76 [F76] -3.74 dBm

Level 77 [F77] -3.74 dBm

Level 78 [F78] -3.74 dBm

Level 79 [F79] -3.74 dBm

Level 80 [F80] -3.74 dBm

Level 81 [F81] -3.74 dBm

Level 82 [F82] -3.74 dBm

Level 83 [F83] -3.74 dBm

Level 84 [F84] -3.74 dBm

Level 85 [F85] -3.74 dBm

Level 86 [F86] -3.74 dBm

Level 87 [F87] -3.74 dBm

Level 88 [F88] -3.74 dBm

Level 89 [F89] -3.74 dBm

Level 90 [F90] -3.74 dBm

Level 91 [F91] -3.74 dBm

Level 92 [F92] -3.74 dBm

Level 93 [F93] -3.74 dBm

Level 94 [F94] -3.74 dBm

Level 95 [F95] -3.74 dBm

Level 96 [F96] -3.74 dBm

Level 97 [F97] -3.74 dBm

Level 98 [F98] -3.74 dBm

Level 99 [F99] -3.74 dBm

Level 100 [F100] -3.74 dBm

Level 101 [F101] -3.74 dBm

Level 102 [F102] -3.74 dBm

Level 103 [F103] -3.74 dBm

Level 104 [F104] -3.74 dBm

Level 105 [F105] -3.74 dBm

Level 106 [F106] -3.74 dBm

Level 107 [F107] -3.74 dBm

Level 108 [F108] -3.74 dBm

Level 109 [F109] -3.74 dBm

Level 110 [F110] -3.74 dBm

Level 111 [F111] -3.74 dBm

Level 112 [F112] -3.74 dBm

Level 113 [F113] -3.74 dBm

Level 114 [F114] -3.74 dBm

Level 115 [F115] -3.74 dBm

Level 116 [F116] -3.74 dBm

Level 117 [F117] -3.74 dBm

Level 118 [F118] -3.74 dBm

Level 119 [F119] -3.74 dBm

Level 120 [F120] -3.74 dBm

Level 121 [F121] -3.74 dBm

Level 122 [F122] -3.74 dBm

Level 123 [F123] -3.74 dBm

Level 124 [F124] -3.74 dBm

Level 125 [F125] -3.74 dBm

Level 126 [F126] -3.74 dBm

Level 127 [F127] -3.74 dBm

Level 128 [F128] -3.74 dBm

Level 129 [F129] -3.74 dBm

Level 130 [F130] -3.74 dBm

Level 131 [F131] -3.74 dBm

Level 132 [F132] -3.74 dBm

Level 133 [F133] -3.74 dBm

Level 134 [F134] -3.74 dBm

Level 135 [F135] -3.74 dBm

Level 136 [F136] -3.74 dBm

Level 137 [F137] -3.74 dBm

Level 138 [F138] -3.74 dBm

Level 139 [F139] -3.74 dBm

Level 140 [F140] -3.74 dBm

Level 141 [F141] -3.74 dBm

Level 142 [F142] -3.74 dBm

Level 143 [F143] -3.74 dBm

Level 144 [F144] -3.74 dBm

Level 145 [F145] -3.74 dBm

Level 146 [F146] -3.74 dBm

Level 147 [F147] -3.74 dBm

Level 148 [F148] -3.74 dBm

Level 149 [F149] -3.74 dBm

Level 150 [F150] -3.74 dBm

Level 151 [F151] -3.74 dBm

Level 152 [F152] -3.74 dBm

Level 153 [F153] -3.74 dBm

Level 154 [F154] -3.74 dBm

Level 155 [F155] -3.74 dBm

Level 156 [F156] -3.74 dBm

Level 157 [F157] -3.74 dBm

Level 158 [F158] -3.74 dBm


Level 159 [F1

Date: 11. JUN. 2014 11:18:38

## A.7 BAND EDGE COMPLIANCE


### WCDMA Band II

#### LOW BAND EDGE BLOCK-A (WCDMA Band II)-Channel 9262

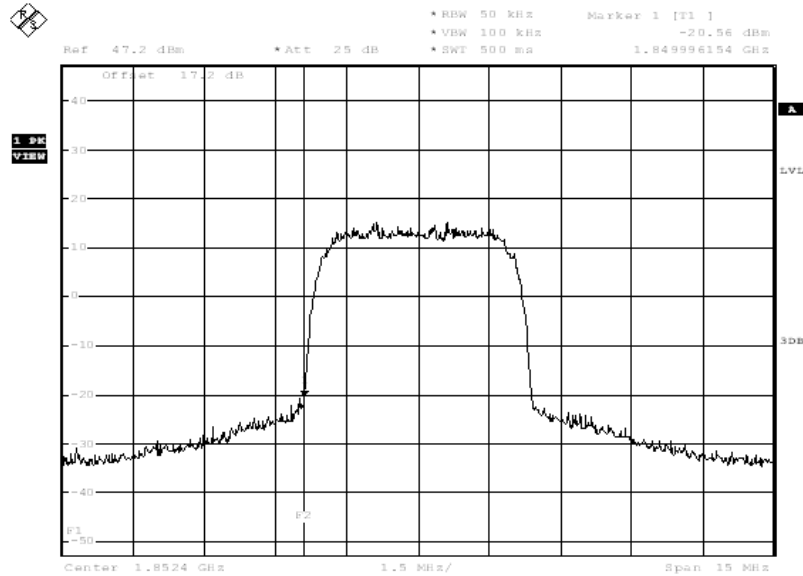

Date: 11. JUN. 2014 09:50:42


#### HIGH BAND EDGE BLOCK-C (WCDMA Band II) -Channel 9538

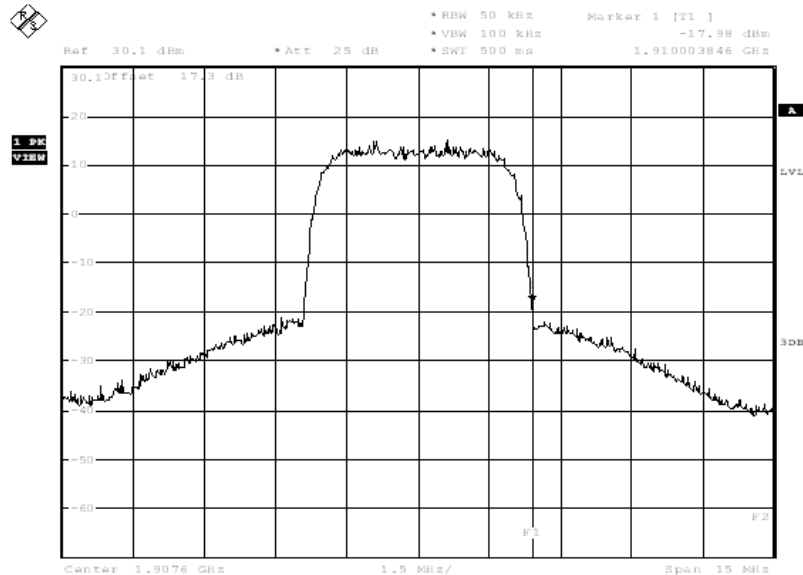

Date: 11. JUN. 2014 09:51:06


## WCDMA Band V

### LOW BAND EDGE BLOCK-A (WCDMA Band V)-Channel 4132

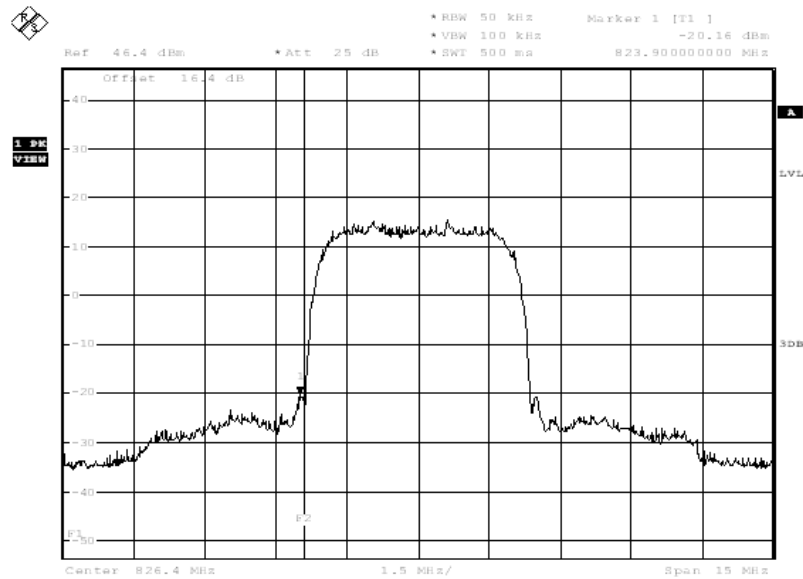

Date: 11. JUN. 2014 11:19:25

### HIGH BAND EDGE BLOCK-C (WCDMA Band V) -Channel 4233

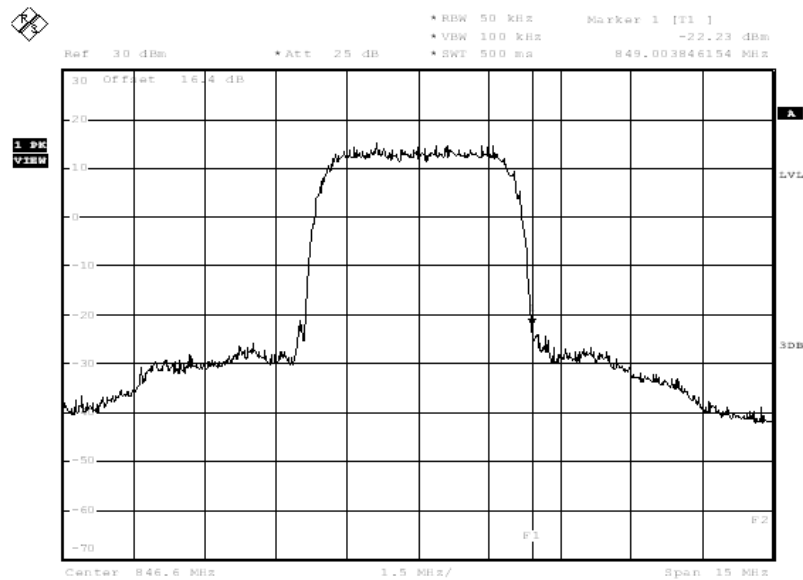

Date: 11. JUN. 2014 11:19:49

## **A.8 CONDUCTED SPURIOUS EMISSION**

### **A.8.1 Measurement Method**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of WCDMA Band II, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For WCDMA Band V, data taken from 30 MHz to 10GHz.
2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; If the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give a optimal sweep time according the selected span and RBW.
3. The procedure to get the conducted spurious emission is as follows:  
The trace mode is set to MaxHold to get the highest signal at each frequency;  
Wait 25 seconds;  
Get the result.
4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

#### **WCDMA Band II Transmitter**

Channel	Frequency (MHz)
9262	1852.40
9400	1880.00
9538	1907.60

#### **WCDMA Band V Transmitter**

Channel	Frequency (MHz)
4132	826.40
4183	836.60
4233	846.60

### **A. 8.2 Measurement Limit**

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.


The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

### A.8.3 Measurement result

#### WCDMA Band II

##### A. 8.3.1 Channel 9262: 30MHz –1GHz

Spurious emission limit –13dBm.

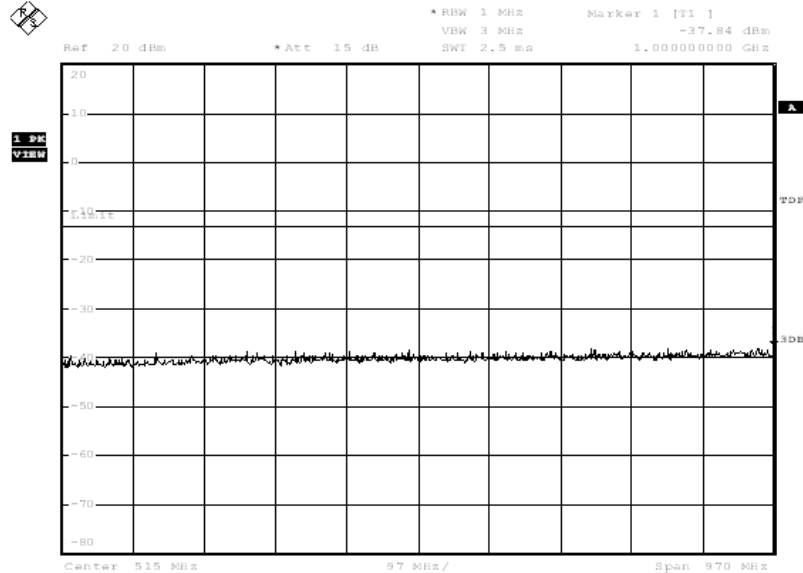


Date: 11. JUN. 2014 09:52:04

##### A.8.3.2 Channel 9262: 1GHz –2.5GHz

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

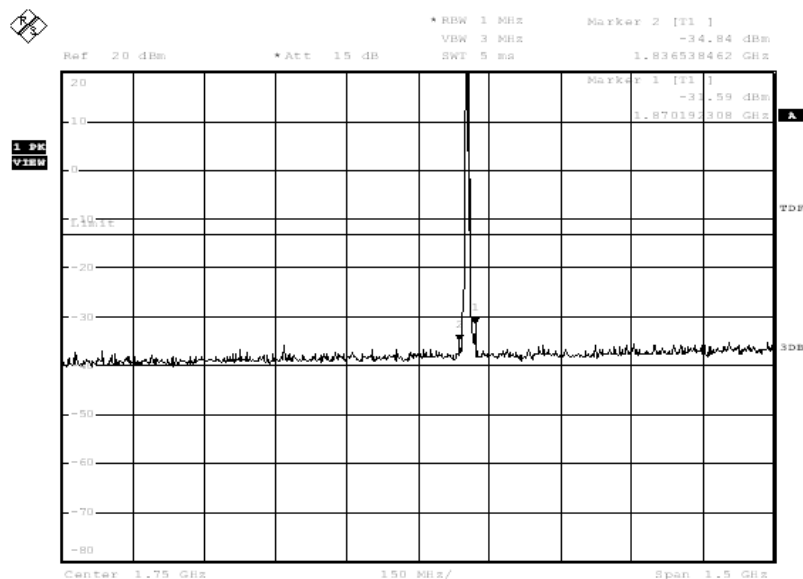

Date: 11. JUN. 2014 09:52:35

### A.8.3.3 Channel 9262: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

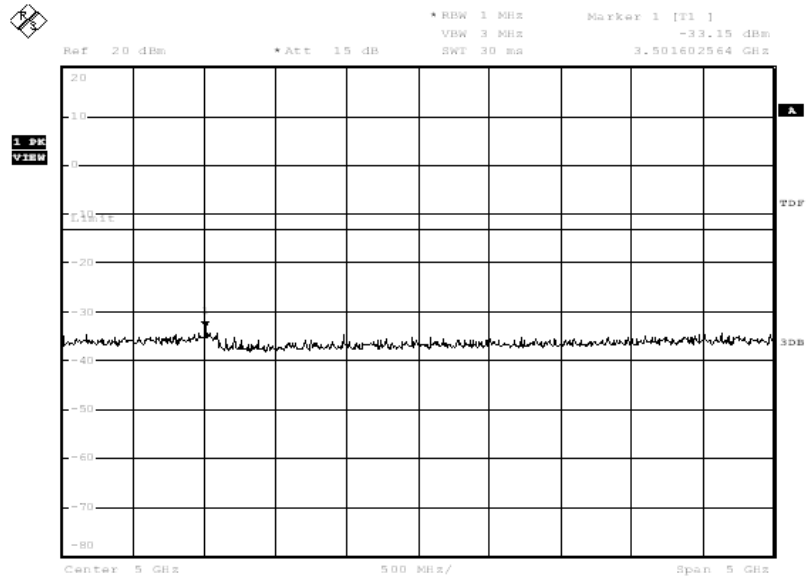

Date: 11. JUN. 2014 09:53:03

### A.8.3.4 Channel 9262: 7.5GHz –10GHz


Spurious emission limit –13dBm.

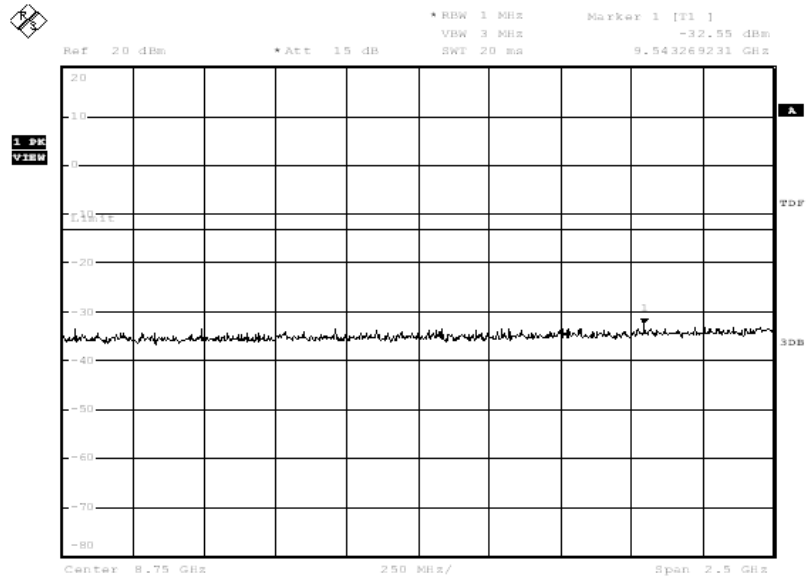

Date: 11. JUN. 2014 09:53:31

### A.8.3.5 Channel 9262: 10GHz –15GHz


Spurious emission limit –13dBm.

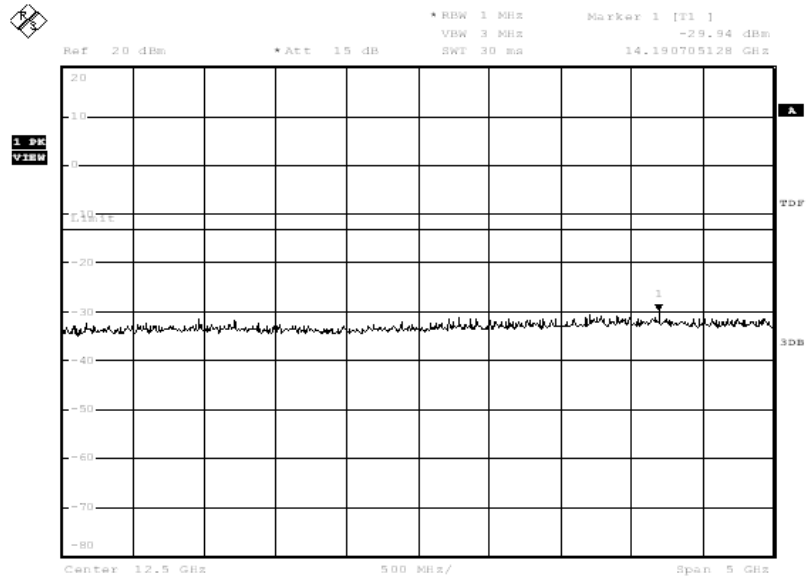

Date: 11. JUN. 2014 09:53:59

### A.8.3.6 Channel 9262: 15GHz –20GHz

Spurious emission limit –13dBm.

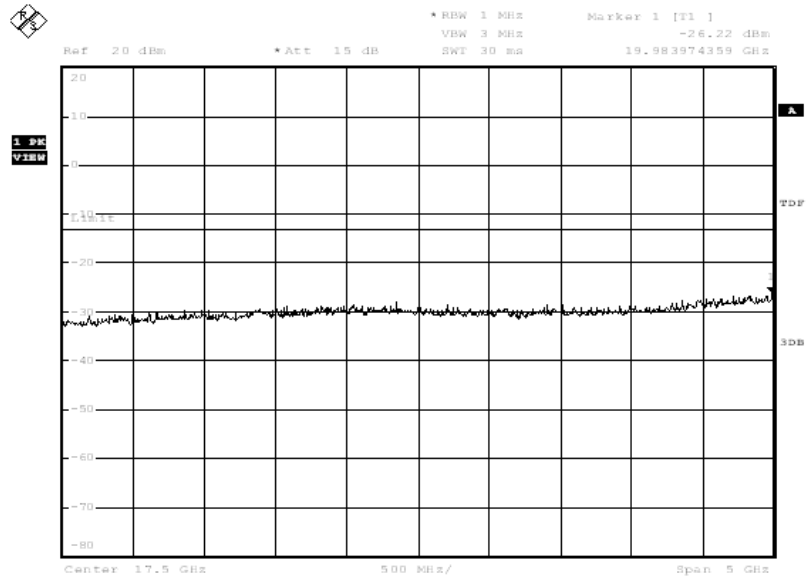


Date: 11. JUN. 2014 09:54:27



### A. 8.3.7 Channel 9400: 30MHz –1GHz

Spurious emission limit –13dBm.

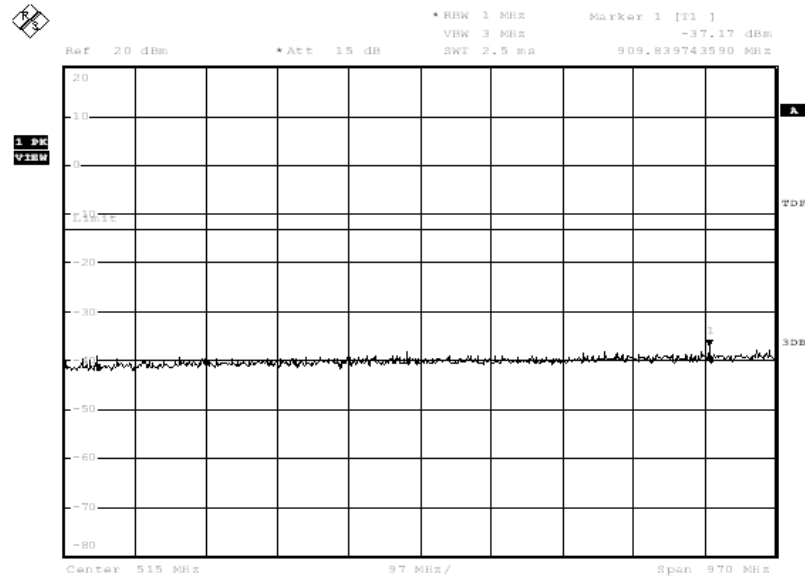


Date: 11. JUN. 2014 09:55:06

### A.8.3.8 Channel 9400: 1GHz –2.5GHz

Spurious emission limit –13dBm.


**NOTE:** peak above the limit line is the carrier frequency.

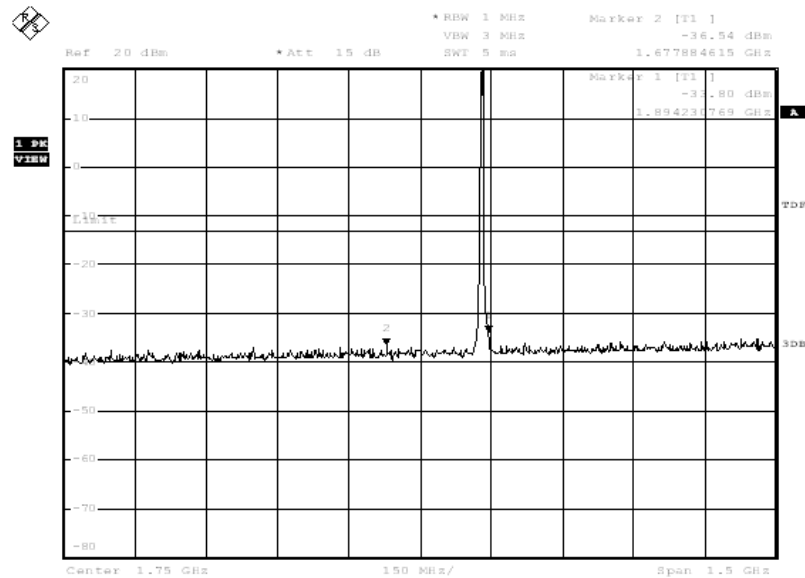

Date: 11. JUN. 2014 09:55:37

### A.8.3.9 Channel 9400: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

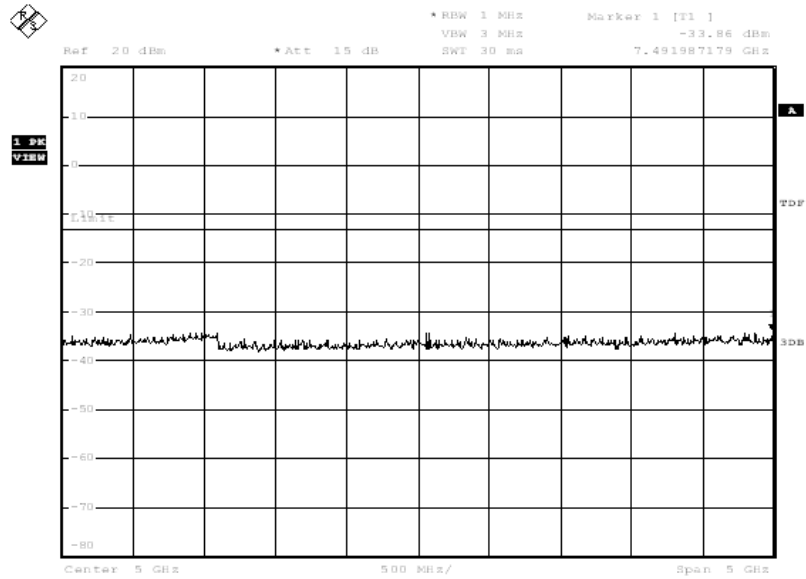

Date: 11. JUN. 2014 09:56:05

### A.8.3.10 Channel 9400: 7.5GHz –10GHz


Spurious emission limit –13dBm.

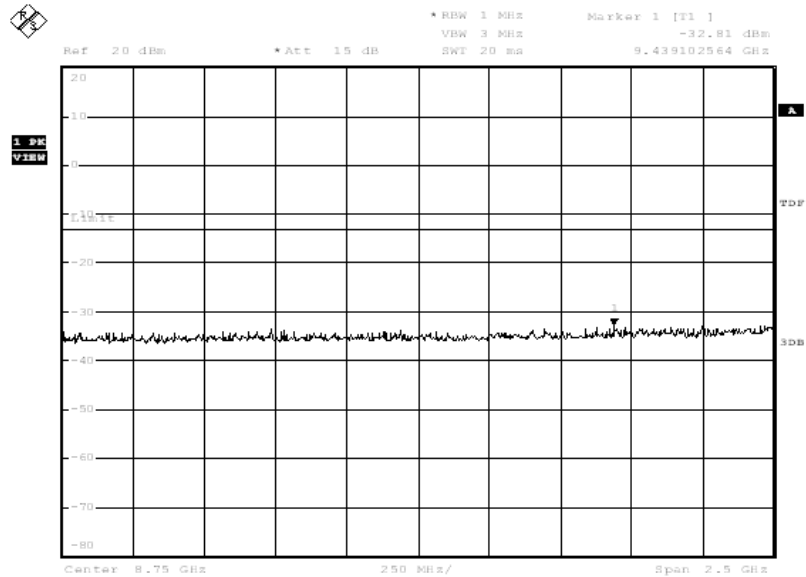

Date: 11. JUN. 2014 09:56:32

### A.8.3.11 Channel 9400: 10GHz –15GHz


Spurious emission limit –13dBm.

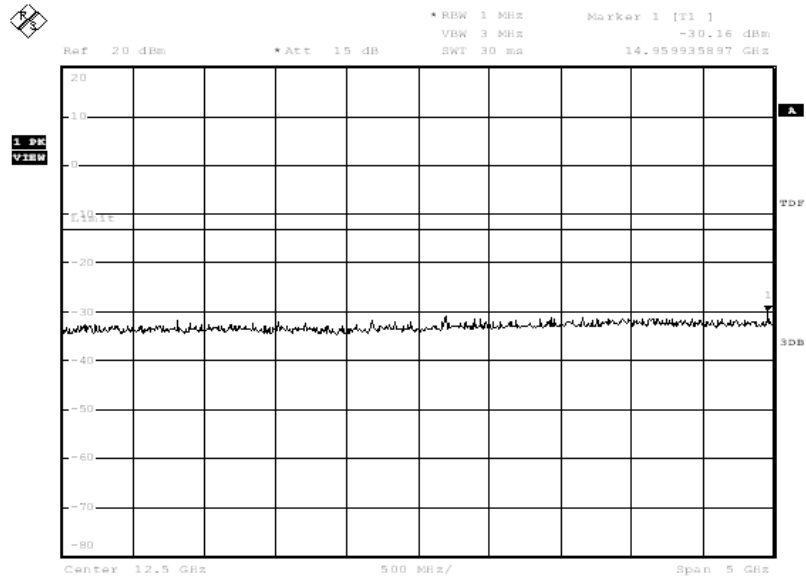

Date: 11. JUN. 2014 09:57:01

### A.8.3.12 Channel 9400: 15GHz –20GHz


Spurious emission limit –13dBm.

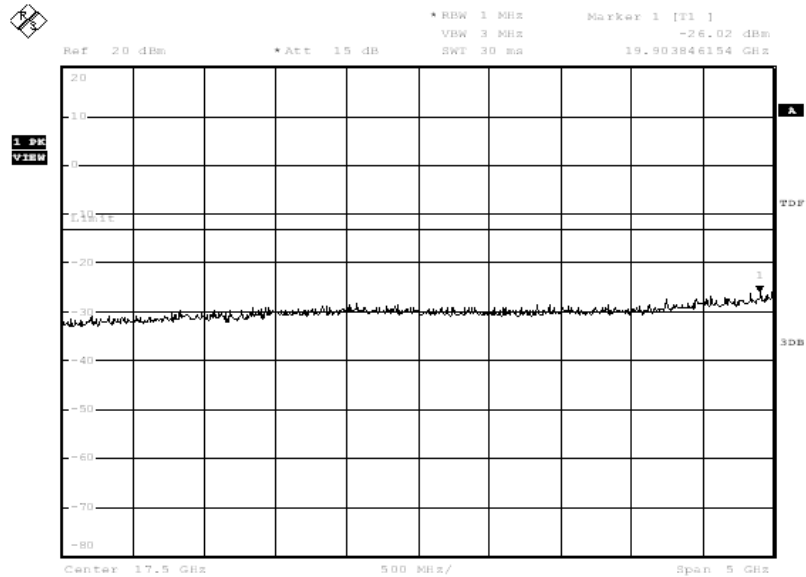

Date: 11. JUN. 2014 09:57:29

### A. 8.3.13 Channel 9538: 30MHz –1GHz

Spurious emission limit –13dBm.

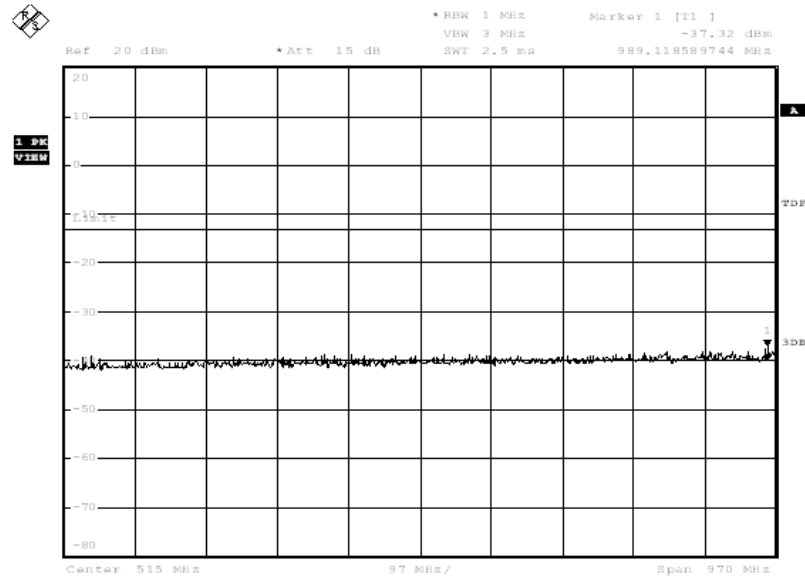


Date: 11. JUN. 2014 09:58:08

### A.8.3.14 Channel 9538: 1GHz –2.5GHz

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

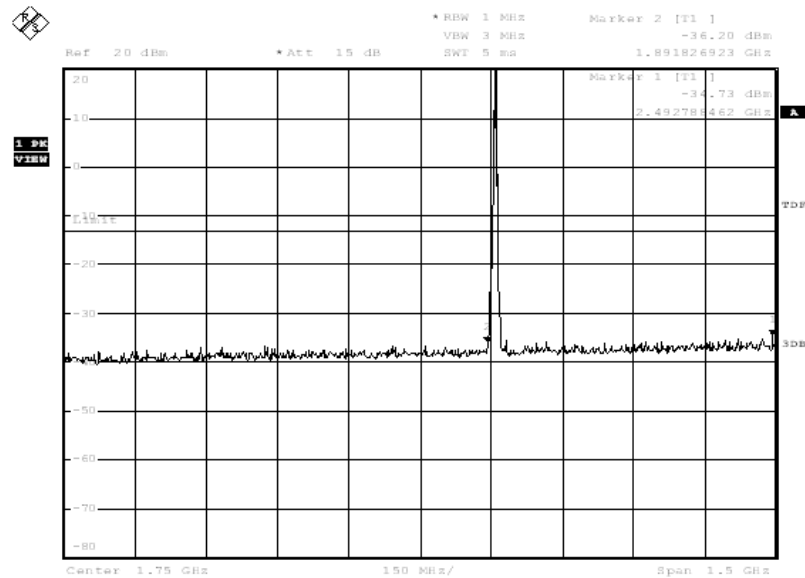

Date: 11. JUN. 2014 09:58:40

### A.8.3.15 Channel 9538: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

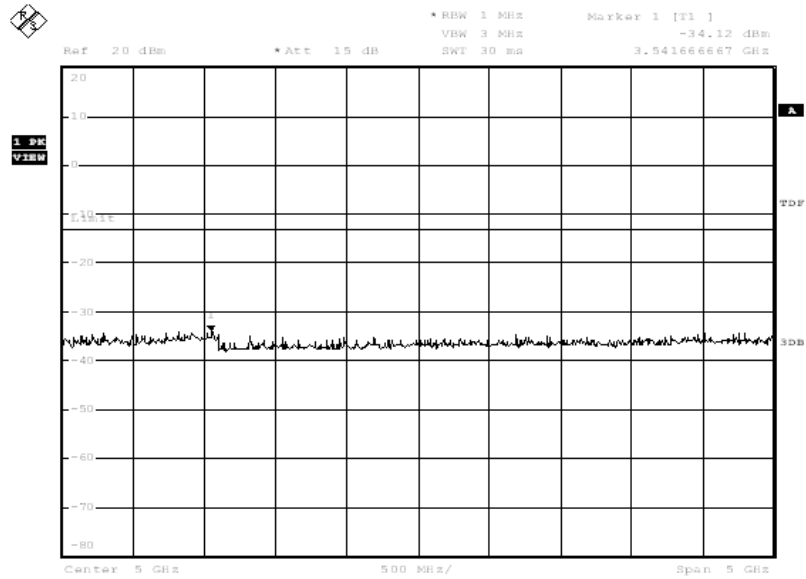

Date: 11. JUN. 2014 09:59:07

### A.8.3.16 Channel 9538: 7.5GHz –10GHz


Spurious emission limit –13dBm.

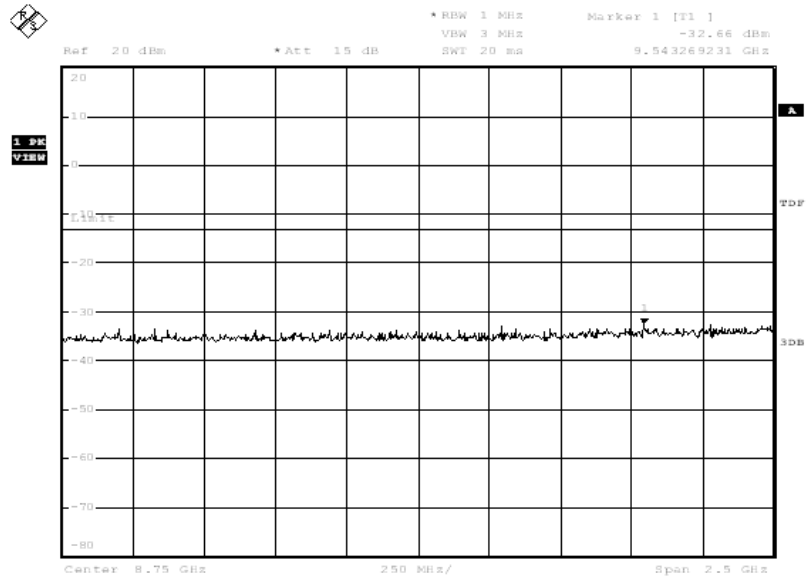

Date: 11. JUN. 2014 09:59:35

### A.8.3.17 Channel 9538: 10GHz –15GHz


Spurious emission limit –13dBm.

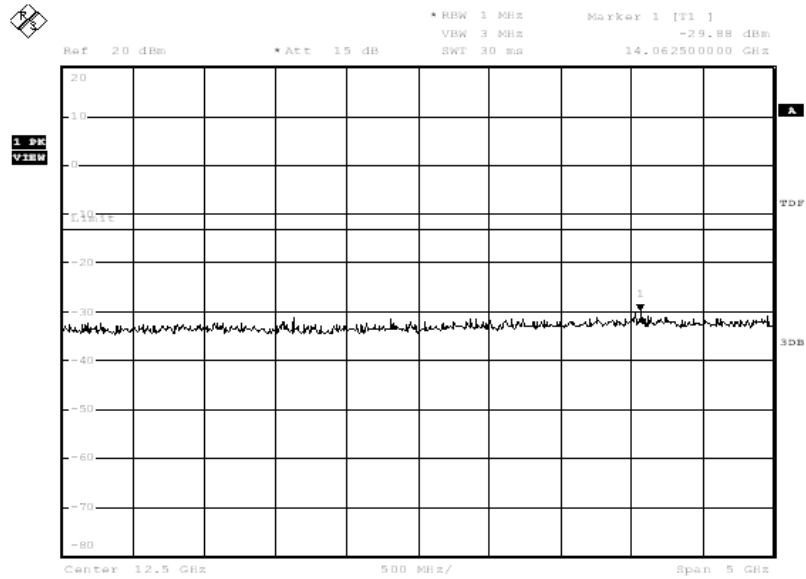

Date: 11. JUN.2014 10:00:03

### A.8.3.18 Channel 9538: 15GHz –20GHz


Spurious emission limit –13dBm.

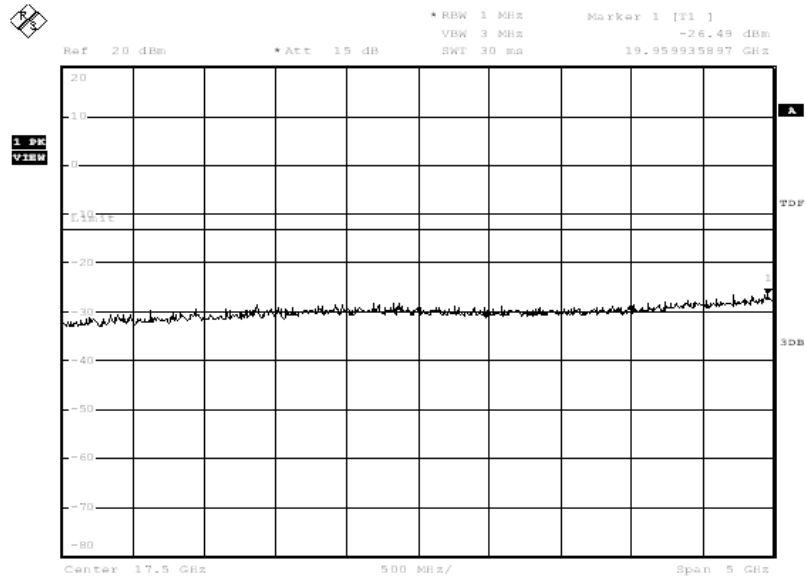

Date: 11. JUN.2014 10:00:31

### A. 8.3.19 Idle mode: 30MHz –1GHz


Spurious emission limit –13dBm.

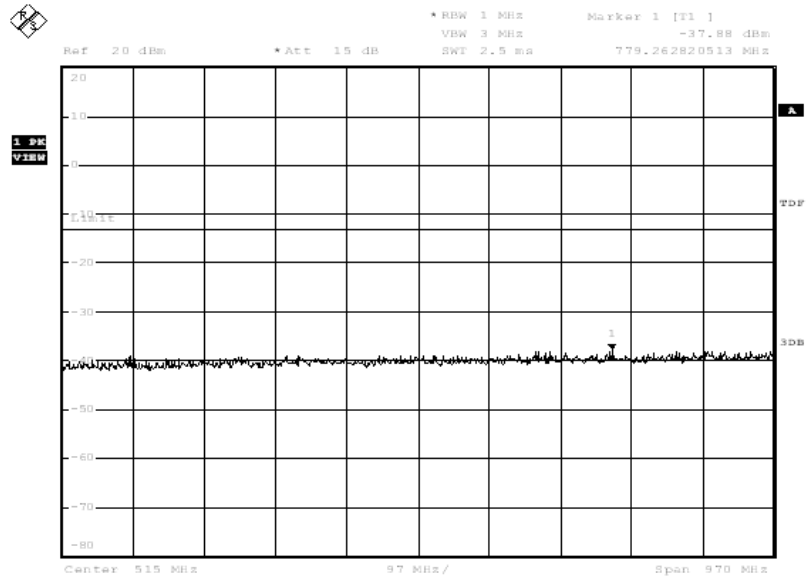

Date: 11. JUN. 2014 10:06:15

### A.8.3.20 Idle mode: 1GHz –2.5GHz


Spurious emission limit –13dBm.

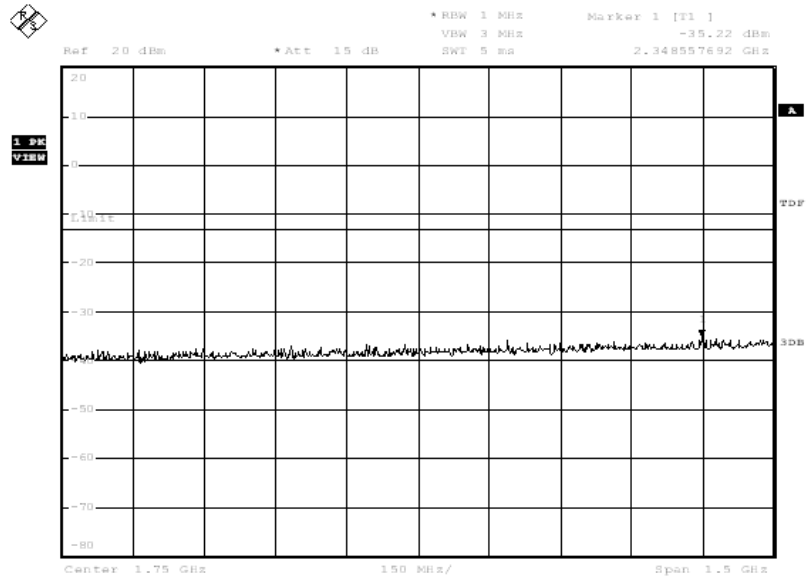

Date: 11. JUN. 2014 10:06:42

### A.8.3.21 Idle mode: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

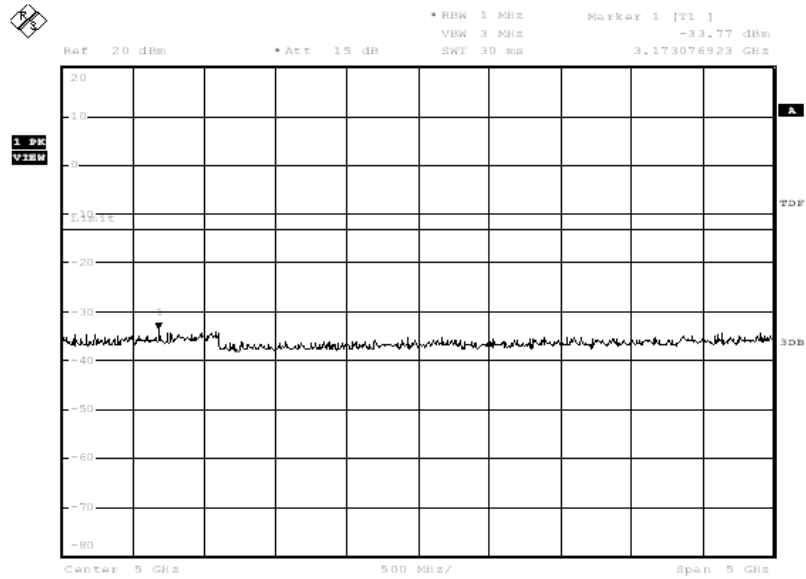

Date: 11. JUN. 2014 10:07:11

### A.8.3.22 Idle mode: 7.5GHz –10GHz

Spurious emission limit –13dBm.

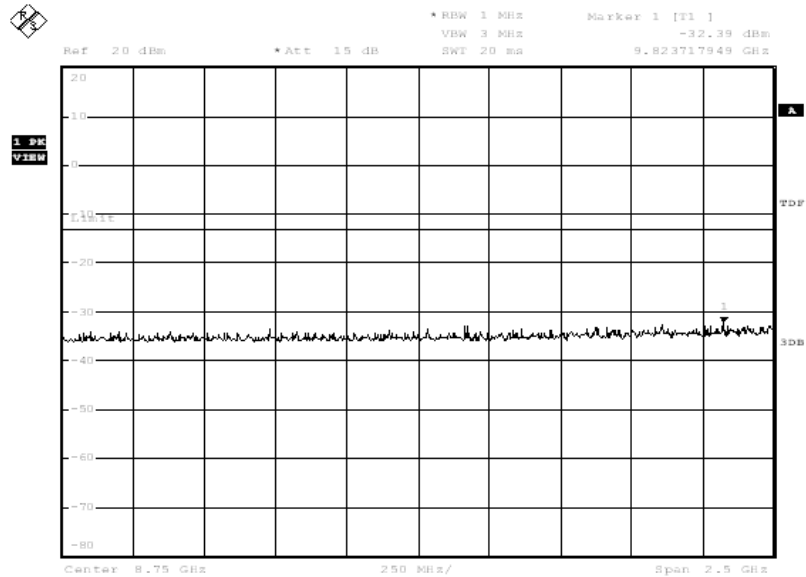


Date: 11. JUN. 2014 10:07:39



### A.8.3.23 Idle mode: 10GHz –15GHz


Spurious emission limit –13dBm.

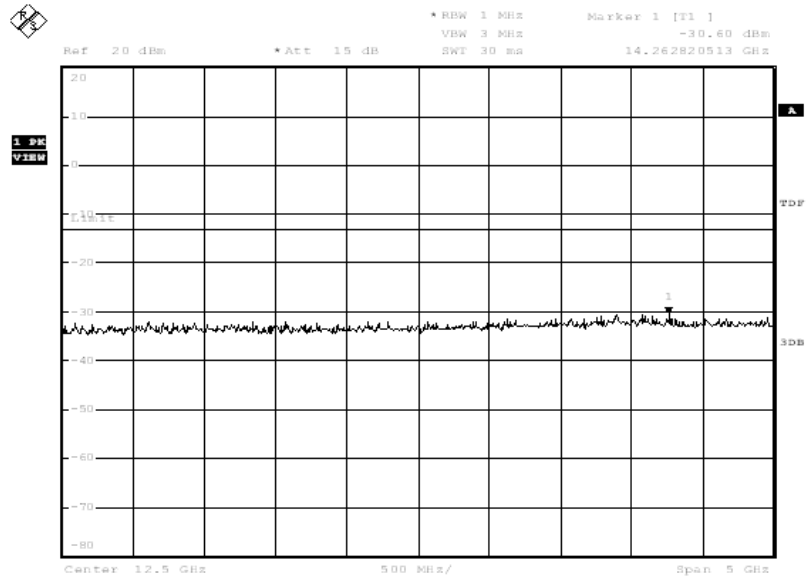

Date: 11. JUN. 2014 10:08:07

### A.8.3.24 Idle mode: 15GHz –20GHz

Spurious emission limit –13dBm.

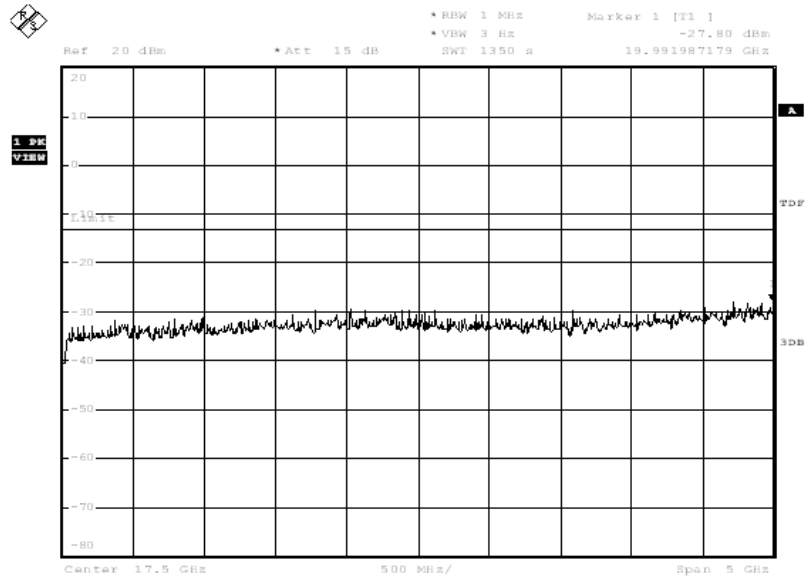


Date: 11. JUN. 2014 10:08:35

## WCDMA Band V

### A. 8.3.25 Channel 4132: 30MHz –1GHz

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

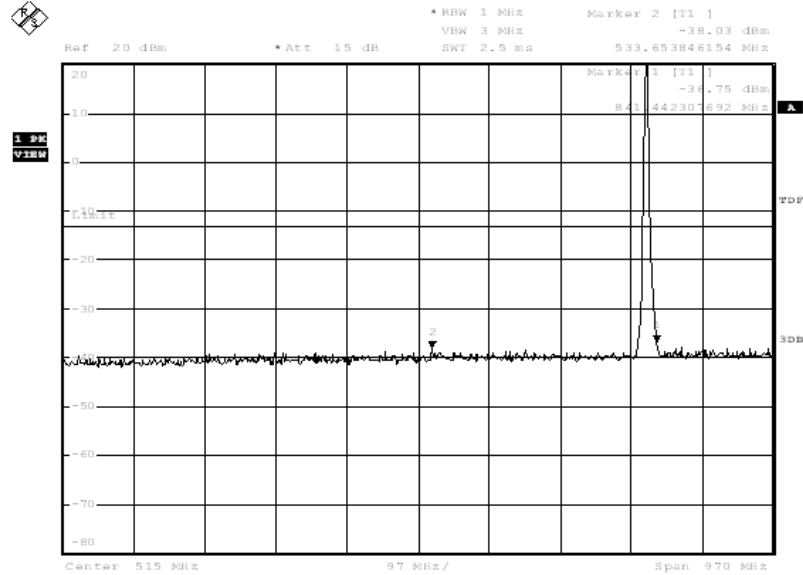

Date: 11. JUN. 2014 11:20:51

### A. 8.3.26 Channel 4132: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

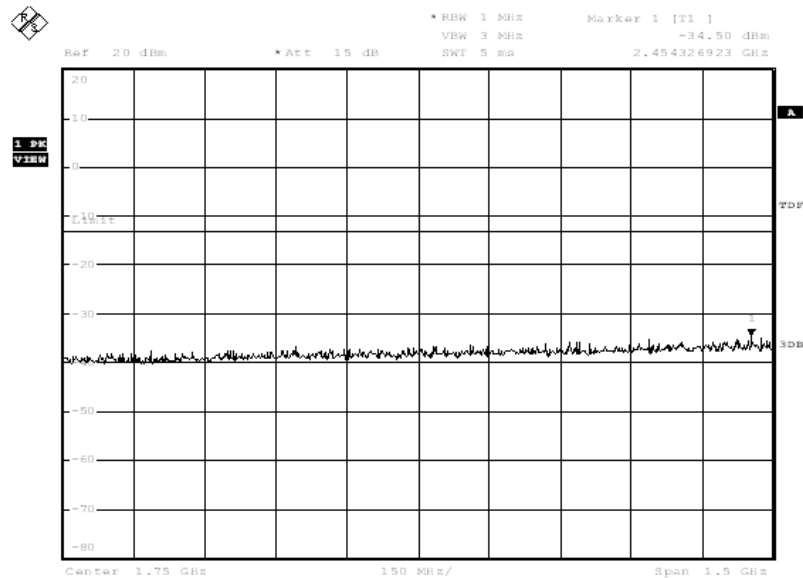

Date: 11. JUN. 2014 11:21:19

### A. 8.3.27 Channel 4132: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

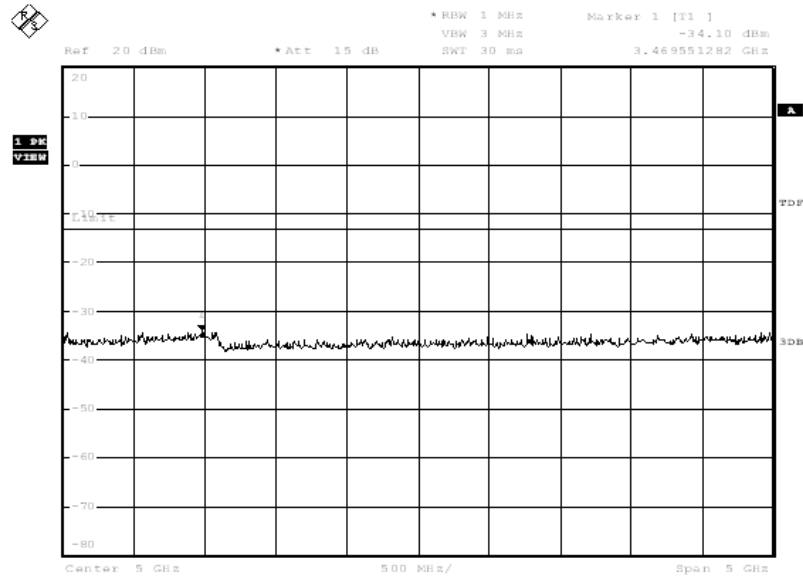

Date: 11. JUN. 2014 11:21:46

### A. 8.3.28 Channel 4132: 7.5GHz – 10GHz

Spurious emission limit –13dBm.

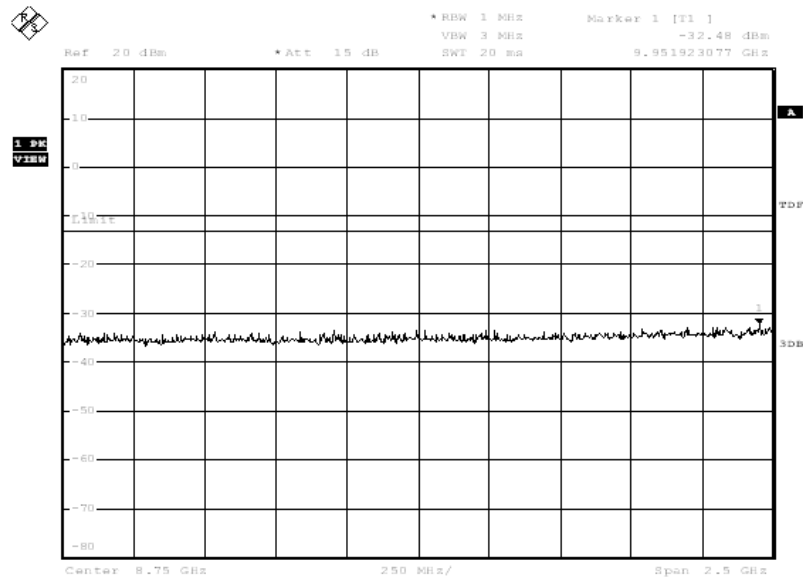


Date: 11. JUN. 2014 11:22:14

### A. 8.3.29 Channel 4183: 30MHz –1GHz

Spurious emission limit –13dBm.


**NOTE:** peak above the limit line is the carrier frequency.

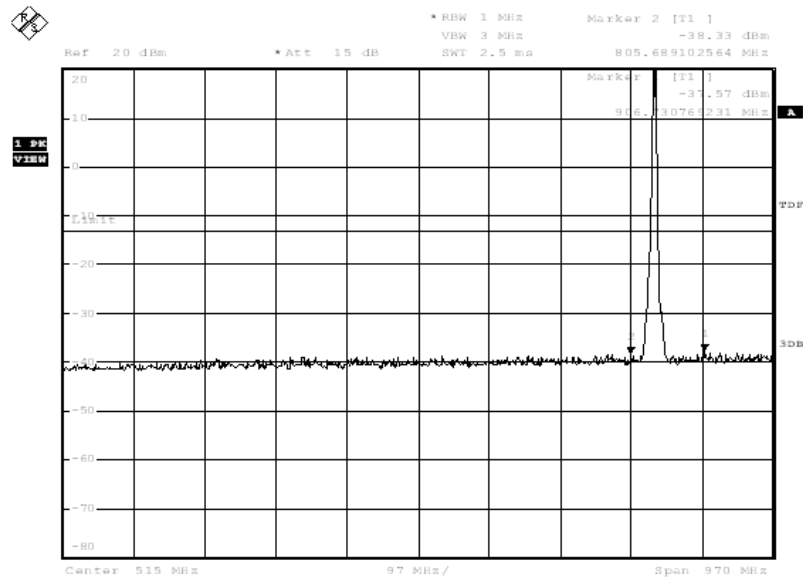

Date: 11. JUN. 2014 11:22:57

### A.8.3.30 Channel 4183: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

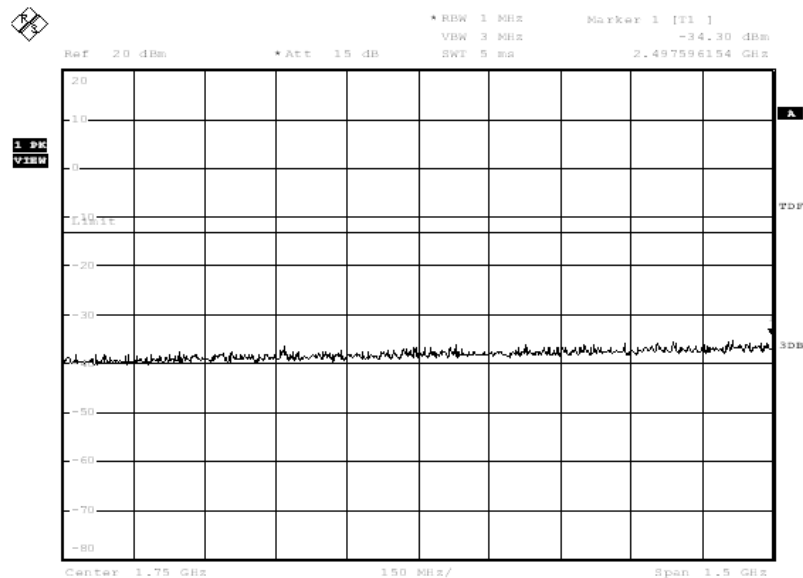

Date: 11. JUN. 2014 11:23:25

### A. 8.3.31 Channel 4183: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

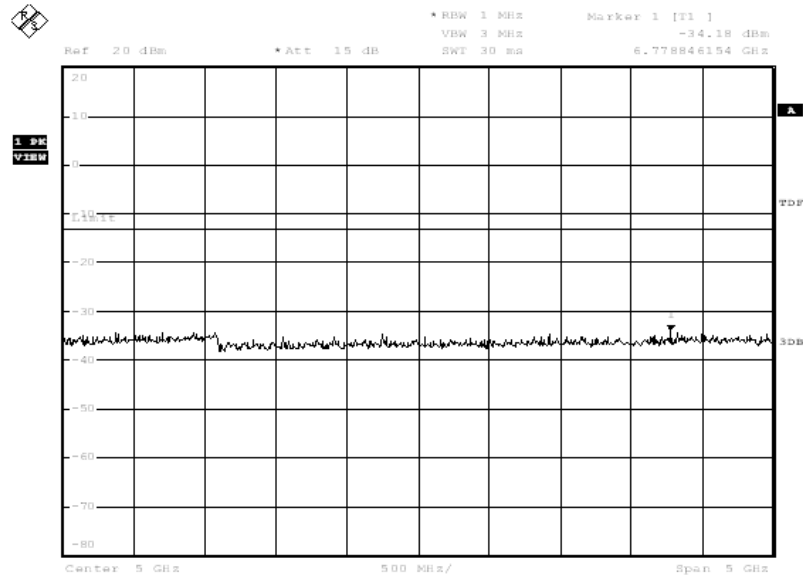

Date: 11. JUN. 2014 11:23:52

### A. 8.3.32 Channel 4183: 7.5GHz – 10GHz

Spurious emission limit –13dBm.

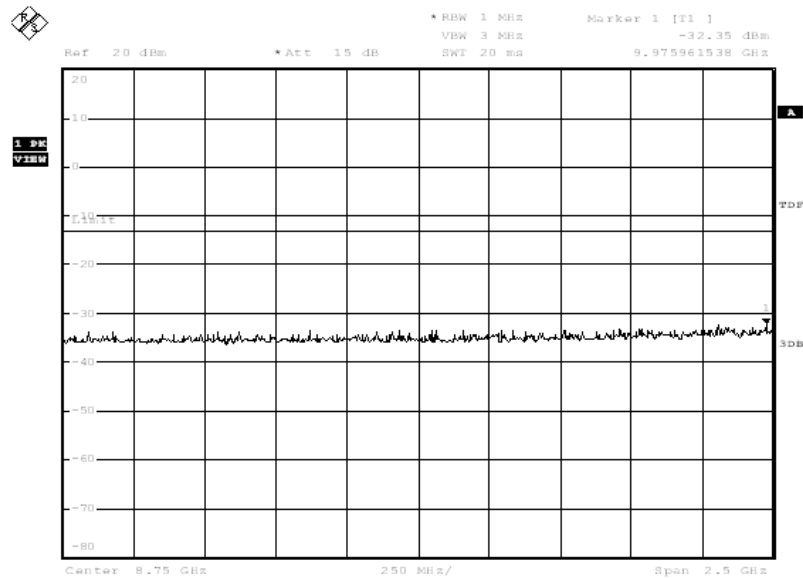


Date: 11. JUN. 2014 11:24:21

### A. 8.3.33 Channel 4233: 30MHz –1GHz

Spurious emission limit –13dBm.


**NOTE:** peak above the limit line is the carrier frequency.

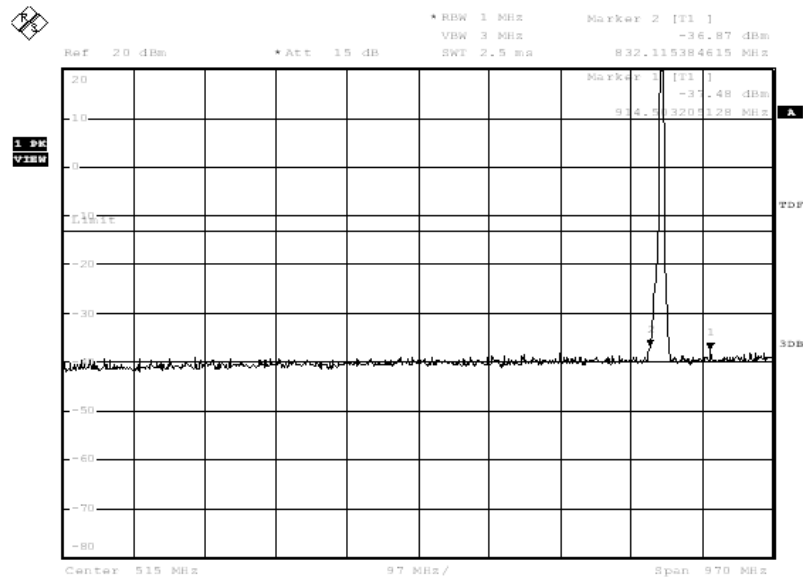

Date: 11. JUN. 2014 11:25:04

### A. 8.3.34 Channel 4233: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

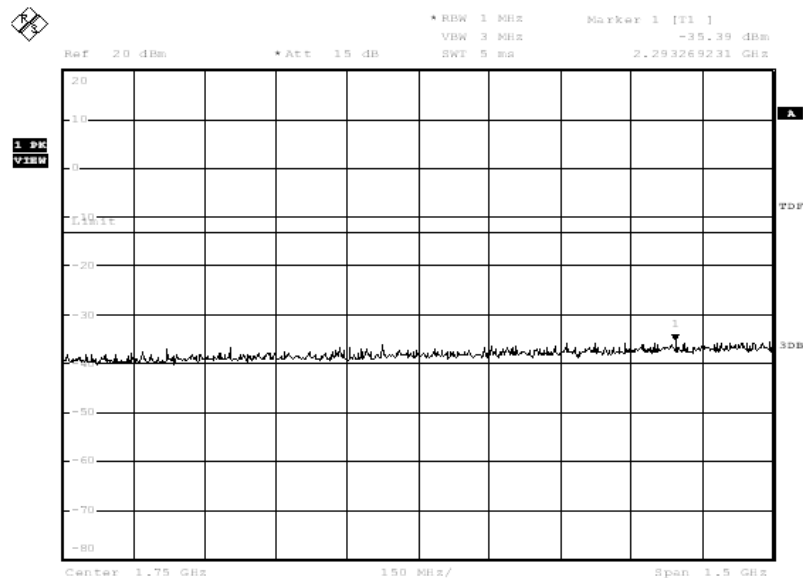

Date: 11. JUN. 2014 11:25:32

### A. 8.3.35 Channel 4233: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

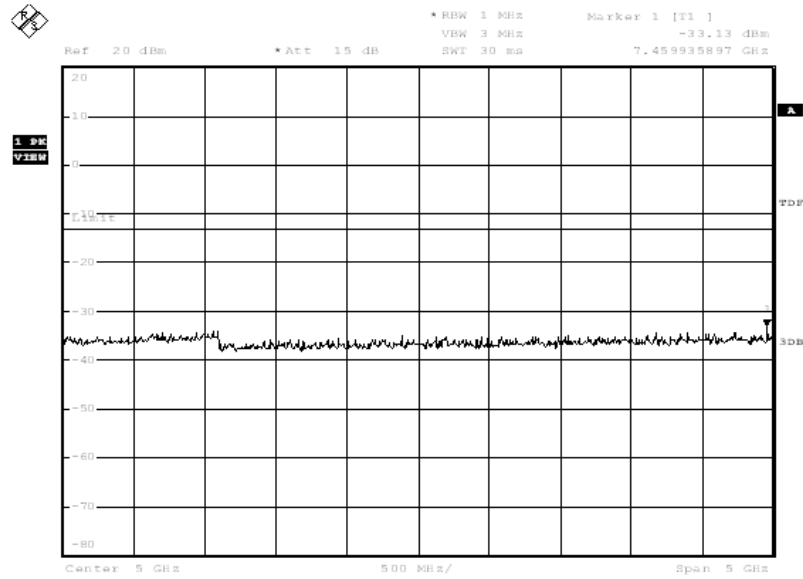

Date: 11. JUN. 2014 11:26:00

### A. 8.3.36 Channel 4233: 7.5GHz – 10GHz


Spurious emission limit –13dBm.

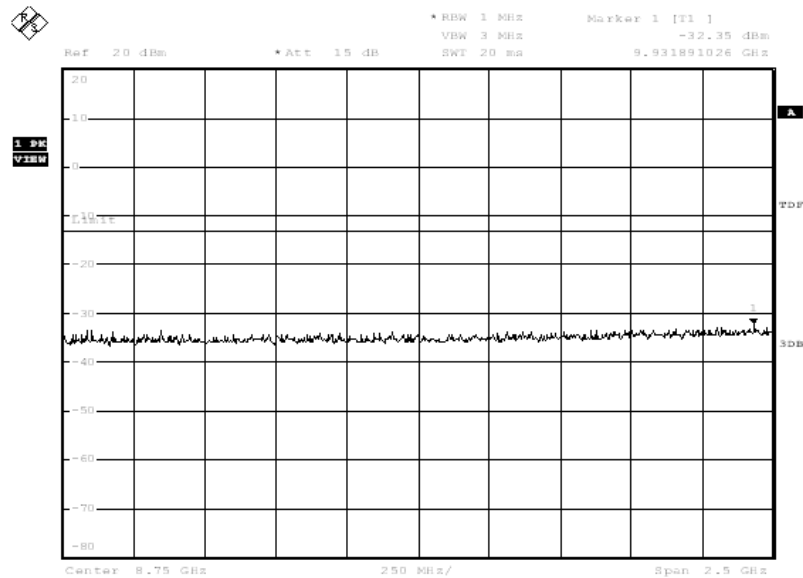

Date: 11. JUN. 2014 11:26:27

### A. 8.3.37 Idle mode: 30MHz – 1GHz


Spurious emission limit -13dBm.

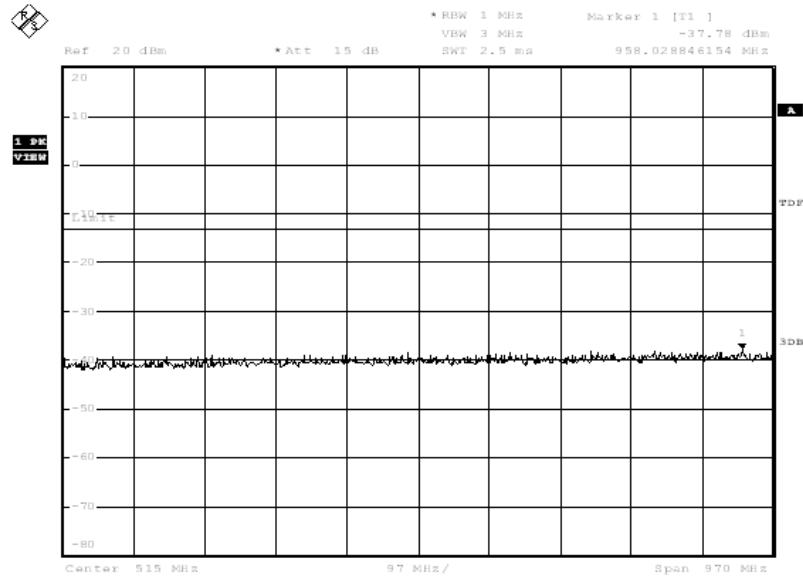

Date: 11. JUN. 2014 12:12:51

### A.8.3.38 Idle mode: 1GHz – 2.5GHz

Spurious emission limit -13dBm.

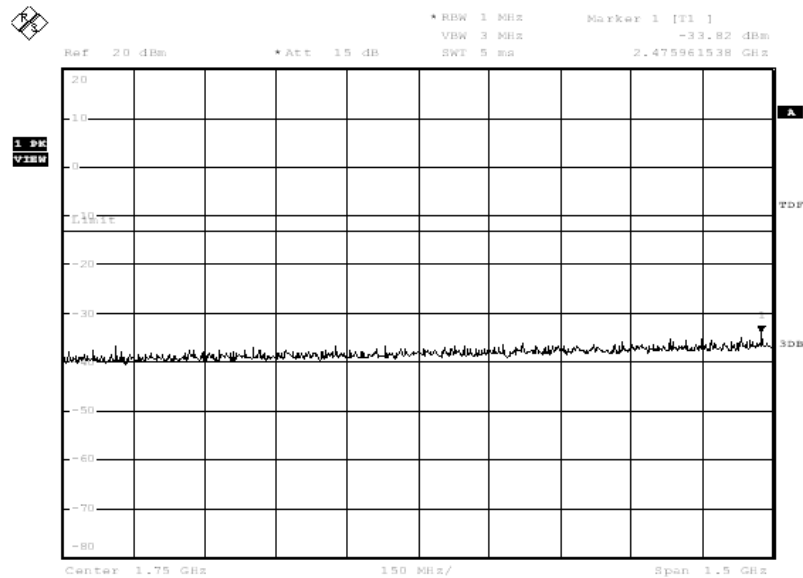


Date: 11. JUN. 2014 12:13:19



### A.8.3.39 Idle mode: 2.5GHz – 7.5GHz


Spurious emission limit -13dBm.

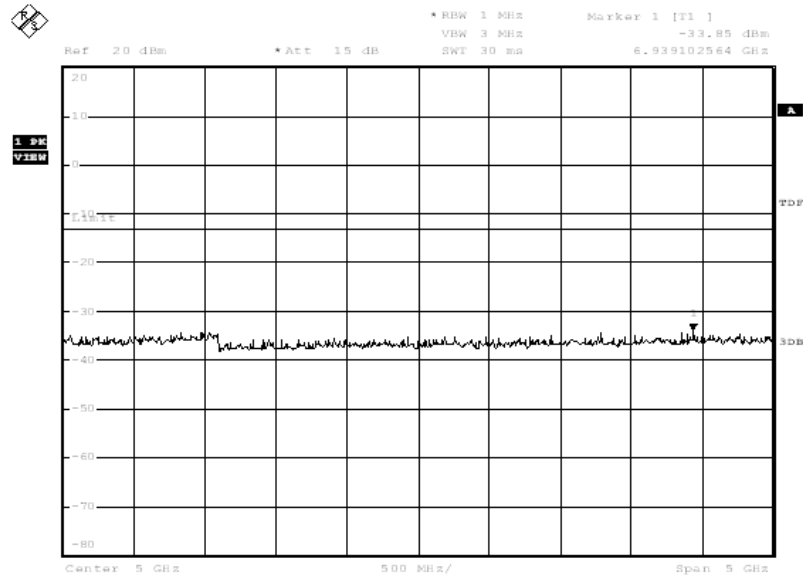

Date: 11. JUN. 2014 12:13:47

### A.8.3.40 Idle mode: 7.5GHz – 10GHz

Spurious emission limit -13dBm.

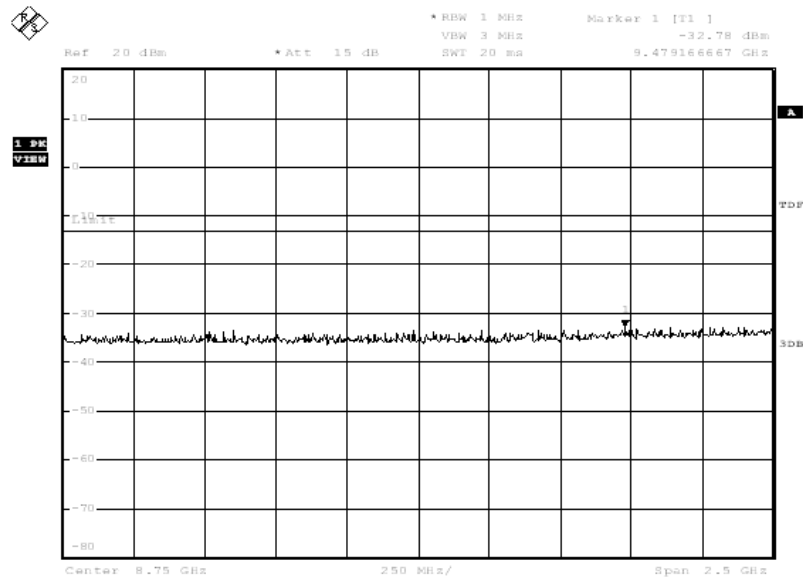

Date: 11. JUN. 2014 12:14:15

## **A.9 PEAK-TO-AVERAGE POWER RATIO**

### **A.9.1 Measurement description**

According to KDB971168, the transmitter's peak-to-average power ratio (PAPR) shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

The parameter of spectrum analyzer: RBW = 10MHz, detector = sample, No. of sample = 500,000

### **A.9.2 Measurement results**

#### **Frequency Error vs Temperature**

	Frequency(MHz)	PAPR(dB)
BAND V	836.60	1.68
BAND II	1880.00	2.55

**\*\*\*END OF REPORT\*\*\***