

# FCC SAR Test Report

APPLICANT : ZTE CORPORATION  
EQUIPMENT : LTE/WCDMA/GSM (GPRS) Multi-Mode Digital  
Mobile Phone  
BRAND NAME : ZTE  
MODEL NAME : Z988  
FCC ID : SRQ-Z988  
STANDARD : FCC 47 CFR Part 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2013

We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Prepared by: Mark Qu / Manager



Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China**



**Table of Contents**

**1. Statement of Compliance ..... 4**

**2. Administration Data ..... 5**

**3. Guidance Standard ..... 5**

**4. Equipment Under Test (EUT) Information ..... 6**

    4.1 General Information ..... 6

    4.2 General LTE SAR Test and Reporting Considerations ..... 7

**5. RF Exposure Limits..... 9**

    5.1 Uncontrolled Environment..... 9

    5.2 Controlled Environment..... 9

**6. Specific Absorption Rate (SAR).....10**

    6.1 Introduction .....10

    6.2 SAR Definition.....10

**7. System Description and Setup .....11**

**8. Measurement Procedures .....12**

    8.1 Spatial Peak SAR Evaluation.....12

    8.2 Power Reference Measurement.....13

    8.3 Area Scan .....13

    8.4 Zoom Scan.....14

    8.5 Volume Scan Procedures.....14

    8.6 Power Drift Monitoring.....14

**9. Test Equipment List .....15**

**10. System Verification .....16**

    10.1 Tissue Verification .....16

    10.2 System Performance Check Results.....17

**11. RF Exposure Positions .....18**

    11.1 Ear and handset reference point .....18

    11.2 Definition of the cheek position.....19

    11.3 Definition of the tilt position.....20

    11.4 Body Worn Accessory .....21

    11.5 Extremity Exposure .....21

    11.6 Wireless Router.....21

**12. Conducted RF Output Power (Unit: dBm).....22**

**13. Bluetooth Exclusions Applied .....39**

**14. Antenna Location .....40**

**15. SAR Test Results .....41**

    15.1 Head SAR .....43

    15.2 Hotspot SAR .....46

    15.3 Body Worn Accessory SAR.....49

    15.4 Extremity SAR.....51

    15.5 Repeated SAR Measurement .....52

**16. Simultaneous Transmission Analysis.....53**

    16.1 Head Exposure Conditions .....54

    16.2 Hotspot Exposure Conditions.....55

    16.3 Body-Worn Accessory Exposure Conditions .....57

**17. Uncertainty Assessment .....58**

**18. References.....61**

**Appendix A. Plots of System Performance Check**

**Appendix B. Plots of High SAR Measurement**

**Appendix C. DASy Calibration Certificate**

**Appendix D. Test Setup Photos**

**Appendix E. Product Equality Declaration**





1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for ZTE CORPORATION, LTE/WCDMA/GSM (GPRS) Multi-Mode Digital Mobile Phone, Z988, are as follows.

Table with 6 columns: Equipment Class, Wireless Operated, Head (Separation 0mm), Body-worn (Separation 10mm), Wireless Router (Separation 10mm), Highest Simultaneous Transmission. Rows include PCE, DTS, NII, and Date of Testing.

Table with 2 columns: Frequency Band, Highest SAR Summary (Extremity 10g SAR (W/kg) (Gap 0mm)). Row includes 5GHz WLAN.

Remark: SAR values for the WWAN (except LTE Band 12) operations are taken from test report FA5O2205 for FCC ID: SRQ-Z962BL. Except that we did perform full testing on FCC ID: SRQ-Z988 for WWAN/WLAN 2.4GHz hotspot mode.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6W/kg as averaged over any 1 gram of tissue; 4.0W/kg as averaged over any 10 gram of tissue for extremity SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications

## 2. Administration Data

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958

Applicant	
Company Name	ZTE CORPORATION
Address	ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P. R. China

Manufacturer	
Company Name	ZTE CORPORATION
Address	ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P. R. China

## 3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r04
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01



**4. Equipment Under Test (EUT) Information**

**4.1 General Information**

Product Feature & Specification	
Equipment Name	LTE/WCDMA/GSM (GPRS) Multi-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	Z988
FCC ID	SRQ-Z988
IMEI Code	868661020002531
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	<ul style="list-style-type: none"> <li>· GSM/GPRS/EGPRS</li> <li>· RMC/AMR 12.2Kbps</li> <li>· HSDPA</li> <li>· HSUPA</li> <li>· HSPA+ (16QAM uplink is not supported)</li> <li>· LTE: QPSK, 16QAM</li> <li>· 802.11a/b/g/n HT20</li> <li>· 802.11ac VHT20/VHT40/VHT80</li> <li>· Bluetooth v2.1+EDR, Bluetooth v4.1 LE</li> </ul>
HW Version	Z988HWV1.0
SW Version	Z988V1.0.0B01
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Production Unit
<b>Remark:</b> <ol style="list-style-type: none"> <li>1. 802.11n-HT40 is not supported in 2.4GHz/5GHz WLAN.</li> <li>2. This device 2.4GHz WLAN supports Hotspot operation.</li> <li>3. This device supported VoIP in GPRS, EGPRS, WCDMA, LTE (e.g. 3rd party VoIP).</li> <li>4. This device supports GRPS/EGPRS mode up to multi-slot class 33.</li> <li>5. This device does not support DTM operation.</li> </ol>	



**4.2 General LTE SAR Test and Reporting Considerations**

Summarized necessary items addressed in KDB 941225 D05 v02r04																																							
FCC ID	SRQ-Z988																																						
Equipment Name	LTE/WCDMA/GSM (GPRS) Multi-Mode Digital Mobile Phone																																						
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz																																						
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz																																						
uplink modulations used	QPSK, and 16QAM																																						
LTE Voice / Data requirements	Data only																																						
LTE MPR permanently built-in by design	<p align="center"><b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</b></p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 2</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																
LTE Release Version	R10, Cat 4																																						
CA Support	NO																																						
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																						



Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				

**5. RF Exposure Limits**

**5.1 Uncontrolled Environment**

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

**5.2 Controlled Environment**

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

**Limits for General Population/Uncontrolled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

## **6. Specific Absorption Rate (SAR)**

### **6.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **6.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

## 7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

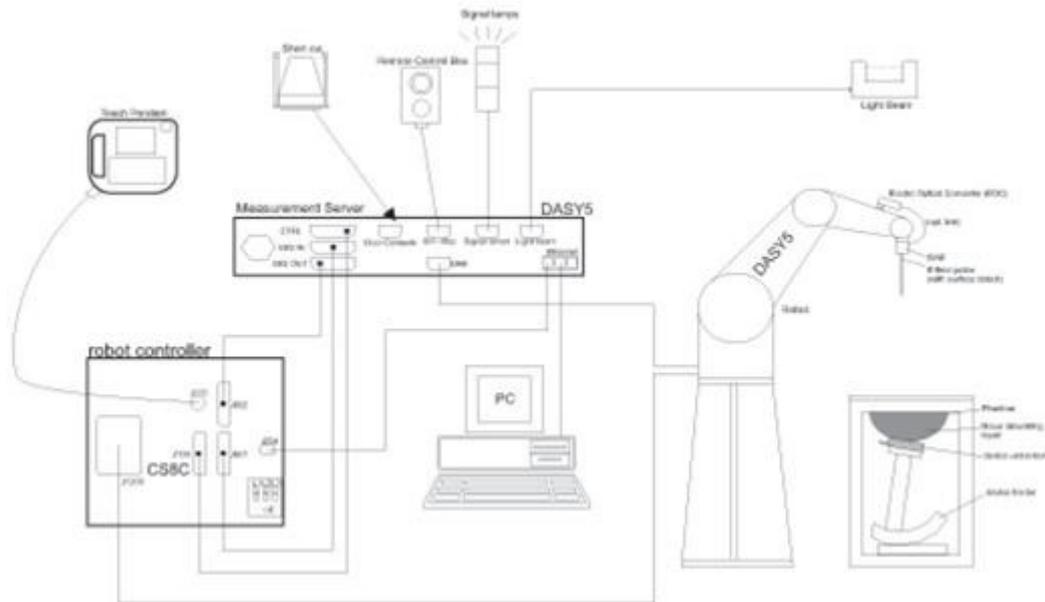

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## **8. Measurement Procedures**

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **8.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

**8.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

**8.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

**8.4 Zoom Scan**

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

**8.5 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

**8.6 Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



**9. Test Equipment List**

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1065	Nov. 19, 2014	Nov. 18, 2015
SPEAG	835MHz System Validation Kit	D835V2	4d091	Nov. 21, 2014	Nov. 20, 2015
SPEAG	1750MHz System Validation Kit	D1750V2	1069	Nov. 21, 2014	Nov. 20, 2015
SPEAG	1900MHz System Validation Kit	D1900V2	5d118	Nov. 21, 2014	Nov. 20, 2015
SPEAG	2450MHz System Validation Kit	D2450V2	840	Nov. 19, 2014	Nov. 18, 2015
SPEAG	5000MHz System Validation Kit	D5GHzV2	1113	Nov. 24, 2014	Nov. 23, 2015
SPEAG	Data Acquisition Electronics	DAE4	1279	Jul. 21, 2015	Jul. 20, 2016
SPEAG	Data Acquisition Electronics	DAE4	1210	May 21, 2015	May 20, 2016
SPEAG	Dosimetric E-Field Probe	EX3DV4	3954	Nov. 21, 2014	Nov. 20, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	May 28, 2015	May 27, 2016
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1644	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1542	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1477	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1479	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio communication analyzer	MT8820C	6201300654	Aug. 10, 2015	Aug. 09, 2016
Agilent	Wireless Communication Test Set	E5515C	MY52102706	May 04, 2015	May 03, 2016
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	May 04, 2015	May 03, 2016
Agilent	Dielectric Probe Kit	85070E	MY44300475	NCR	NCR
R&S	Signal Generator	SMBV100A	258305	Jan. 23, 2015	Jan. 22, 2016
Anritsu	Power Sensor	MA2411B	0917070	Jan. 23, 2015	Jan. 22, 2016
Anritsu	Power Meter	ML2495A	1005002	Jan. 23, 2015	Jan. 22, 2016
Anritsu	Power Sensor	MA2411B	1339163	Jan. 23, 2015	Jan. 22, 2016
Anritsu	Power Meter	ML2495A	1435004	Jan. 23, 2015	Jan. 22, 2016
R&S	Spectrum Analyzer	FSP40	100319	Aug. 10, 2015	Aug. 09, 2016
Agilent	Dual Directional Coupler	778D	50422	Note1	
ARRA	Power Divider	A3200-2	N/A	Note1	
MCL	Attenuation	BW-S10W5	N/A	Note1	
MCL	Attenuation	BW-S10W5	N/A	Note1	
MCL	Attenuation	BW-S10W5	N/A	Note1	
AR	Amplifier	551G4	333096	Note1	
mini-circuits	Amplifier	ZVE-3W-83+	162601250	Note1	

**General Note:**

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.



## 10. System Verification

### 10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

### <Tissue Dielectric Parameter Check Results>


Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
750	Head	22.9	0.901	41.796	0.89	41.90	1.24	-0.25	±5	2015/10/28
835	Head	22.9	0.927	41.904	0.90	41.50	3.00	0.97	±5	2015/10/28
1750	Head	22.6	1.398	39.900	1.37	40.10	2.04	-0.50	±5	2015/11/4
1900	Head	22.7	1.426	40.730	1.40	40.00	1.86	1.82	±5	2015/11/4
2450	Head	22.5	1.815	38.597	1.80	39.20	0.83	-1.54	±5	2015/11/6
5200	Head	22.5	4.793	35.493	4.66	36.00	2.85	-1.41	±5	2015/11/8
5800	Head	22.5	5.395	34.416	5.27	35.30	2.37	-2.50	±5	2015/11/8
750	Body	22.8	0.933	57.590	0.96	55.50	-2.81	3.77	±5	2015/10/27
835	Body	22.8	0.969	55.698	0.97	55.20	-0.10	0.90	±5	2015/10/27
1750	Body	22.7	1.499	53.463	1.49	53.4	0.60	0.12	±5	2015/11/5
1900	Body	22.7	1.55	53.207	1.52	53.3	1.97	-0.17	±5	2015/11/4
2450	Body	22.8	1.988	51.424	1.95	52.70	1.95	-2.42	±5	2015/11/8
5200	Body	22.6	5.420	48.637	5.30	49.00	2.26	-0.74	±5	2015/11/9
5800	Body	22.6	6.289	47.502	6.00	48.20	4.82	-1.45	±5	2015/11/9

**10.2 System Performance Check Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2015/10/28	750	Head	250	1065	3954	1279	1.99	8.14	7.96	-2.21
2015/10/28	835	Head	250	4d091	3954	1279	2.21	9.11	8.84	-2.96
2015/11/4	1750	Head	250	1069	3954	1279	9.29	37.10	37.16	0.16
2015/11/4	1900	Head	250	5d118	3954	1279	9.67	40.10	38.68	-3.54
2015/11/6	2450	Head	250	840	3857	1210	13.20	52.3	52.8	0.96
2015/11/8	5200	Head	100	1113	3954	1279	7.84	80.00	78.4	-2.00
2015/11/8	5800	Head	100	1113	3954	1279	7.56	78.50	75.6	-3.69
2015/10/27	750	Body	250	1065	3954	1279	2.21	8.64	8.84	2.31
2015/10/27	835	Body	250	4d091	3954	1279	2.48	9.6	9.92	3.33
2015/11/5	1750	Body	250	1069	3857	1210	9.16	38.1	36.64	-3.83
2015/11/4	1900	Body	250	5d118	3857	1210	9.36	40	37.44	-6.40
2015/11/8	2450	Body	250	840	3857	1210	11.90	51.00	47.6	-6.67
2015/11/9	5200	Body	100	1113	3954	1279	7.59	74.90	75.9	1.34
2015/11/9	5800	Body	100	1113	3954	1279	7.51	75.40	75.1	-0.40

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2015/11/9	5200	Body	100	1113	3954	1279	2.23	20.90	22.3	6.70
2015/11/9	5800	Body	100	1113	3954	1279	2.15	20.80	21.5	3.37

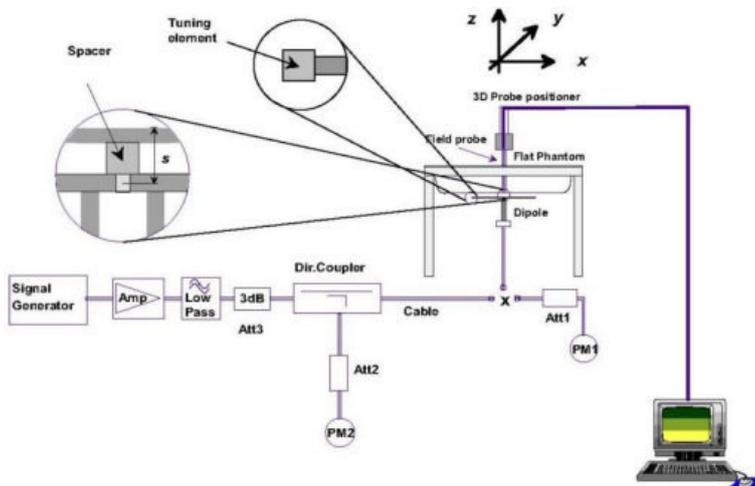

**Fig 8.3.1 System Performance Check Setup**



**Fig 8.3.2 Setup Photo**

## 11. RF Exposure Positions

### 11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

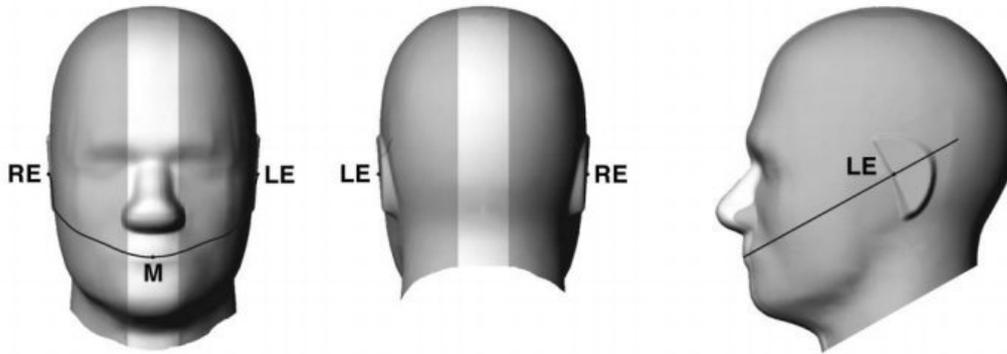


Fig 9.1.1 Front, back, and side views of SAM twin phantom

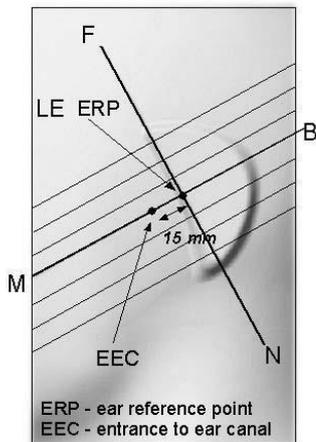


Fig 9.1.2 Close-up side view of phantom showing the ear region.


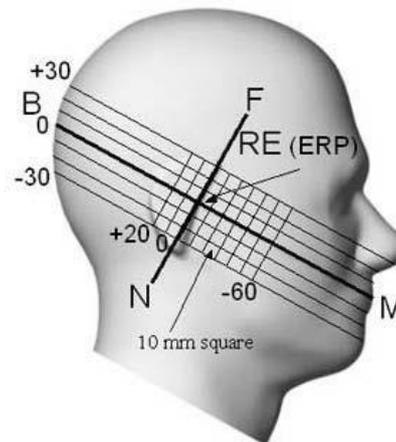



Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

**11.2 Definition of the cheek position**


1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

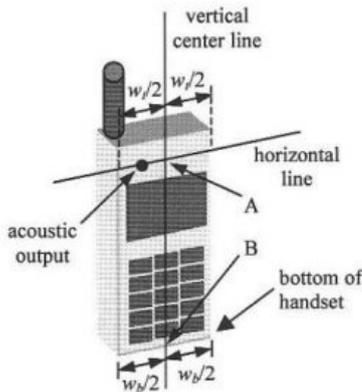

**Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”**

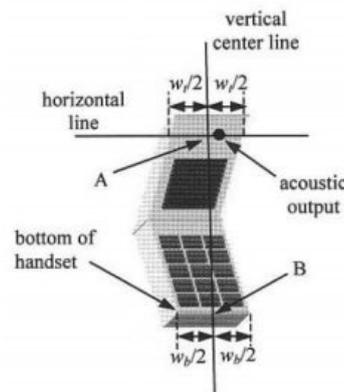


**Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”**

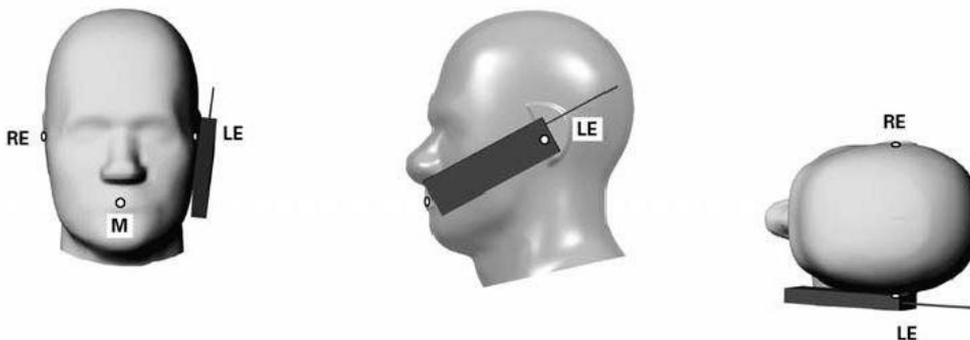

**Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.**

**11.3 Definition of the tilt position**

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

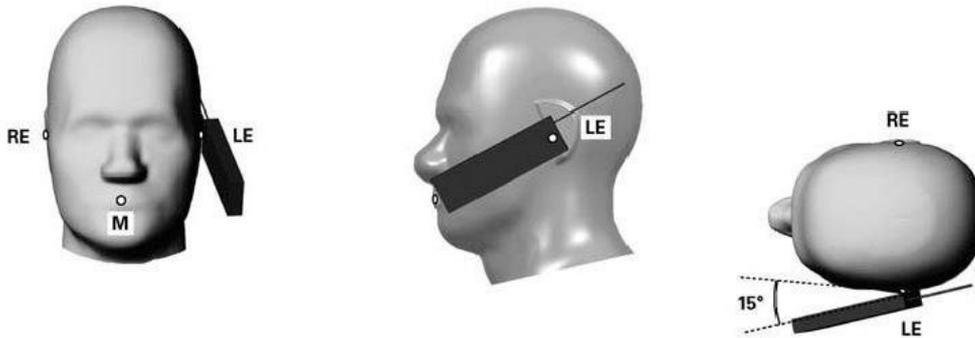


**Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.**

### **11.4 Body Worn Accessory**

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is  $< 1.2 \text{ W/kg}$ , the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

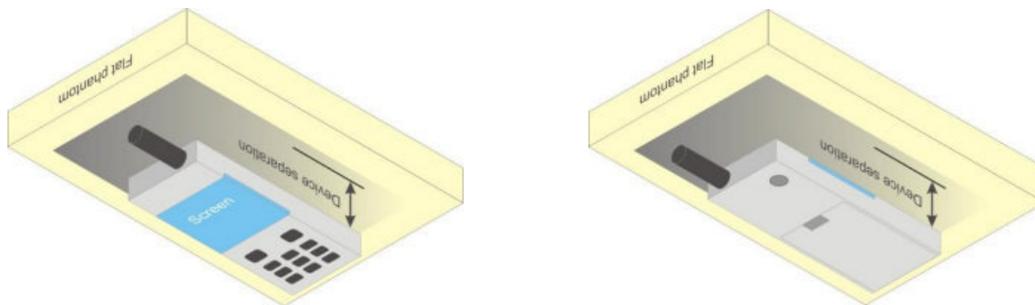

**Fig 9.4 Body Worn Position**

### **11.5 Extremity Exposure**

For smart phones with a display diagonal dimension  $> 15.0 \text{ cm}$  or an overall diagonal dimension  $> 16.0 \text{ cm}$  that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at  $\leq 25 \text{ mm}$  from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR  $> 1.2 \text{ W/kg}$ .

### **11.6 Wireless Router**

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ( $L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$ ) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

## 12. Conducted RF Output Power (Unit: dBm)

### <GSM Conducted Power>

**General Note:**

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, considering the possibility of e.g. 3rd party VoIP operation for Head and body-worn SAR test reduction for GSM and GPRS and EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the EUT was set in GPRS (4Tx slots) for GSM850/GSM1900.
3. Per KDB 941225 D01v03r01, for Hotspot SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance, for modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested, therefore, the EUT was set in GPRS (4Tx slots) for GSM850/GSM1900.

Band GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)	
	TX Channel	128	189		251	128	189		251
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8		
GSM (GMSK, 1 Tx slot)	<b>33.58</b>	33.34	33.26	34.00	24.58	24.34	24.26	25.00	
GPRS (GMSK, 1 Tx slot)	33.55	33.32	33.25	34.00	24.55	24.32	24.25	25.00	
GPRS (GMSK, 2 Tx slots)	32.22	32.30	32.35	32.50	26.22	26.30	26.35	26.50	
GPRS (GMSK, 3 Tx slots)	30.78	30.75	30.79	31.00	26.52	26.49	26.53	26.74	
GPRS (GMSK, 4 Tx slots)	29.56	29.45	29.54	30.50	<b>26.56</b>	26.45	26.54	27.50	
EDGE (8PSK, 1 Tx slot)	26.95	26.89	26.88	27.00	17.95	17.89	17.88	18.00	
EDGE (8PSK, 2 Tx slots)	26.81	26.74	26.74	27.00	20.81	20.74	20.74	21.00	
EDGE (8PSK, 3 Tx slots)	26.16	26.08	26.06	26.50	21.90	21.82	21.80	22.24	
EDGE (8PSK, 4 Tx slots)	25.93	25.87	25.89	26.50	22.93	22.87	22.89	23.50	
Band GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel	512	661	810	512		661	810		
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8		
GSM (GMSK, 1 Tx slot)	30.44	30.48	<b>30.69</b>	31.00	21.44	21.48	21.69	22.00	
GPRS (GMSK, 1 Tx slot)	30.42	30.46	30.65	31.00	21.42	21.46	21.65	22.00	
GPRS (GMSK, 2 Tx slots)	28.50	28.54	28.86	29.00	22.50	22.54	22.86	23.00	
GPRS (GMSK, 3 Tx slots)	26.81	27.04	27.30	27.50	22.55	22.78	23.04	23.24	
GPRS (GMSK, 4 Tx slots)	25.79	25.66	26.04	26.50	22.79	22.66	<b>23.04</b>	23.50	
EDGE (8PSK, 1 Tx slot)	25.97	26.02	26.35	26.50	16.97	17.02	17.35	17.50	
EDGE (8PSK, 2 Tx slots)	25.86	25.90	26.24	26.50	19.86	19.90	20.24	20.50	
EDGE (8PSK, 3 Tx slots)	25.23	25.24	25.58	26.00	20.97	20.98	21.32	21.74	
EDGE (8PSK, 4 Tx slots)	25.02	25.08	25.43	26.00	22.02	22.08	22.43	23.00	

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots. The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
- Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
- Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
- Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

**<WCDMA Conducted Power>**

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.

A summary of these settings are illustrated below:

**HSDPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC 12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{HS} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

**Setup Configuration**

**HSUPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - iii. Set Cell Power = -86 dBm
  - iv. Set Channel Type = 12.2k + HSPA
  - v. Set UE Target Power
  - vi. Power Ctrl Mode= Alternating bits
  - vii. Set and observe the E-TFCl
  - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1)	$\beta_{ec}$	$\beta_{ed}$ (Note 5) (Note 6)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6:  $\beta_{ed}$  can not be set directly, it is set by Absolute Grant Value.

**Setup Configuration**



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, SAR for Head / Hotspot / Body-worn exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA.

Band		WCDMA Band V			Tune-up Limit (dBm)	WCDMA Band II			Tune-up Limit (dBm)
TX Channel		4132	4182	4233		9262	9400	9538	
Rx Channel		4357	4407	4458	9662	9800	9938		
Frequency (MHz)		826.4	836.4	846.6	1852.4	1880	1907.6		
3GPP Rel 99	AMR 12.2Kbps	23.40	23.37	23.38	24.00	22.75	22.85	22.90	23.00
3GPP Rel 99	RMC 12.2Kbps	23.40	23.40	23.46	24.00	22.78	22.86	22.91	23.00
3GPP Rel 6	HSDPA Subtest-1	22.58	22.58	22.48	23.00	21.94	21.79	21.96	22.00
3GPP Rel 6	HSDPA Subtest-2	22.55	22.53	22.47	23.00	21.95	21.11	21.94	22.00
3GPP Rel 6	HSDPA Subtest-3	22.00	21.98	22.08	22.50	21.50	21.31	21.47	22.00
3GPP Rel 6	HSDPA Subtest-4	21.94	22.01	22.01	22.50	21.44	21.29	21.44	22.00
3GPP Rel 6	HSUPA Subtest-1	22.36	22.30	22.33	23.00	21.89	21.87	21.94	22.00
3GPP Rel 6	HSUPA Subtest-2	20.28	20.12	20.21	21.00	19.85	19.82	19.96	20.00
3GPP Rel 6	HSUPA Subtest-3	21.27	21.18	21.25	22.00	20.88	20.80	20.92	21.00
3GPP Rel 6	HSUPA Subtest-4	20.43	20.38	20.28	21.00	19.83	19.90	20.02	21.00
3GPP Rel 6	HSUPA Subtest-5	21.83	21.87	21.81	22.00	21.32	21.31	21.47	22.00

**<LTE Conducted Power>****General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r04, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r04, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r04, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r04, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r04, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r04, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r04, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r04, smaller bandwidth SAR testing is not required.
8. For LTE B12 / B5 / B4 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r04, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.



<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.12	22.10	22.39	23.00	0
20	QPSK	1	49	22.69	22.63	22.44		
20	QPSK	1	99	22.23	22.13	22.25		
20	QPSK	50	0	21.52	21.48	21.50	22.00	1
20	QPSK	50	24	21.39	21.41	21.48		
20	QPSK	50	50	21.39	21.10	21.45		
20	QPSK	100	0	21.47	21.33	21.42	22.00	1
20	16QAM	1	0	21.23	20.34	20.96		
20	16QAM	1	49	21.19	21.00	21.20		
20	16QAM	1	99	20.94	20.94	21.12	21.00	2
20	16QAM	50	0	20.61	20.60	20.37		
20	16QAM	50	24	20.51	20.24	20.45		
20	16QAM	50	50	20.41	20.25	20.57	21.00	2
20	16QAM	100	0	20.47	20.38	20.35		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.08	22.09	22.02	23.00	0
15	QPSK	1	37	22.44	22.38	22.47		
15	QPSK	1	74	22.19	21.98	21.97		
15	QPSK	36	0	21.27	21.31	21.30	22.00	1
15	QPSK	36	20	21.29	21.21	21.29		
15	QPSK	36	39	21.26	21.02	21.28		
15	QPSK	75	0	21.29	21.18	21.39	22.00	1
15	16QAM	1	0	21.06	20.99	20.88		
15	16QAM	1	37	20.96	20.86	21.28		
15	16QAM	1	74	20.85	20.67	20.67	21.00	2
15	16QAM	36	0	20.38	20.33	20.30		
15	16QAM	36	20	20.20	20.16	20.23		
15	16QAM	36	39	20.28	20.04	20.32	21.00	2
15	16QAM	75	0	20.23	20.10	20.40		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.00	22.13	21.99	23.00	0
10	QPSK	1	25	22.48	22.40	22.34		
10	QPSK	1	49	22.09	21.85	22.14		
10	QPSK	25	0	21.27	21.36	21.39	22.00	1
10	QPSK	25	12	21.25	21.20	21.37		
10	QPSK	25	25	21.26	21.12	21.16		
10	QPSK	50	0	21.22	21.17	21.30	22.00	1
10	16QAM	1	0	20.92	21.04	20.95		
10	16QAM	1	25	20.96	20.89	21.12		
10	16QAM	1	49	21.00	20.67	20.76	21.00	2
10	16QAM	25	0	20.24	20.30	20.42		
10	16QAM	25	12	20.28	20.24	20.47		
10	16QAM	25	25	20.51	20.14	20.21	21.00	2
10	16QAM	50	0	20.25	20.20	20.15		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	21.86	22.01	22.26	23.00	0
5	QPSK	1	12	22.32	22.44	22.33		
5	QPSK	1	24	21.77	21.87	21.75		
5	QPSK	12	0	21.25	21.18	21.33	22.00	1
5	QPSK	12	7	21.29	21.20	21.21		
5	QPSK	12	13	21.27	21.12	21.19		
5	QPSK	25	0	21.21	21.18	21.16	22.00	1
5	16QAM	1	0	20.92	21.00	21.04		
5	16QAM	1	12	21.01	21.08	21.10		
5	16QAM	1	24	20.96	20.80	20.65	21.00	2
5	16QAM	12	0	20.19	20.30	20.17		
5	16QAM	12	7	20.21	20.22	20.13		
5	16QAM	12	13	20.30	20.37	20.04	21.00	2
5	16QAM	25	0	20.05	20.29	20.13		



Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.17	21.98	22.13	23.00	0
3	QPSK	1	8	22.01	21.97	22.15		
3	QPSK	1	14	22.12	22.03	21.82		
3	QPSK	8	0	21.28	21.15	21.21	22.00	1
3	QPSK	8	4	21.22	21.19	21.08		
3	QPSK	8	7	21.15	21.14	21.02		
3	QPSK	15	0	21.24	21.04	21.10		
3	16QAM	1	0	21.05	20.95	21.02	22.00	1
3	16QAM	1	8	20.64	20.83	20.99		
3	16QAM	1	14	20.94	20.94	20.81		
3	16QAM	8	0	20.14	20.11	20.24	21.00	2
3	16QAM	8	4	20.36	20.20	20.19		
3	16QAM	8	7	20.19	20.29	20.11		
3	16QAM	15	0	20.18	19.97	20.28		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.27	21.91	21.99	23.00	0
1.4	QPSK	1	3	22.30	21.94	21.92		
1.4	QPSK	1	5	22.22	21.81	21.82		
1.4	QPSK	3	0	22.33	22.11	22.12		
1.4	QPSK	3	1	22.45	22.33	22.18		
1.4	QPSK	3	3	22.22	22.31	22.10	22.00	1
1.4	QPSK	6	0	21.15	21.09	21.10		
1.4	16QAM	1	0	21.02	20.81	20.96	22.00	1
1.4	16QAM	1	3	21.11	20.98	21.10		
1.4	16QAM	1	5	21.36	20.76	20.90		
1.4	16QAM	3	0	21.39	21.03	21.12		
1.4	16QAM	3	1	21.42	21.15	21.13		
1.4	16QAM	3	3	21.43	21.33	21.03		
1.4	16QAM	6	0	20.02	20.18	20.02	21.00	2



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	22.87	23.09	22.90	23.60	0
20	QPSK	1	49	23.17	23.55	23.22		
20	QPSK	1	99	22.97	23.12	22.94		
20	QPSK	50	0	22.12	22.04	22.19	22.60	1
20	QPSK	50	24	22.19	22.27	22.26		
20	QPSK	50	50	22.15	22.11	22.05		
20	QPSK	100	0	22.03	22.17	22.15	22.60	1
20	16QAM	1	0	22.19	22.01	21.74		
20	16QAM	1	49	22.17	22.08	21.75		
20	16QAM	1	99	21.65	21.91	21.81	21.60	2
20	16QAM	50	0	21.16	21.20	21.22		
20	16QAM	50	24	21.19	21.08	21.31		
20	16QAM	50	50	21.10	21.15	21.09	21.60	2
20	16QAM	100	0	21.19	21.07	21.09		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	23.11	23.11	23.02	23.60	0
15	QPSK	1	37	23.52	23.35	23.14		
15	QPSK	1	74	22.77	23.02	22.95		
15	QPSK	36	0	22.25	22.27	22.31	22.60	1
15	QPSK	36	20	22.24	22.10	22.15		
15	QPSK	36	39	22.20	22.14	22.08		
15	QPSK	75	0	22.22	22.24	22.13	22.60	1
15	16QAM	1	0	21.77	22.03	22.01		
15	16QAM	1	37	21.89	22.18	21.87		
15	16QAM	1	74	22.11	21.87	21.76	21.60	2
15	16QAM	36	0	21.27	21.20	21.26		
15	16QAM	36	20	21.19	21.14	21.11		
15	16QAM	36	39	21.12	21.09	21.05	21.60	2
15	16QAM	75	0	21.08	21.28	21.17		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.82	22.84	22.80	23.60	0
10	QPSK	1	25	23.34	23.16	23.28		
10	QPSK	1	49	22.86	22.85	22.90		
10	QPSK	25	0	22.26	22.19	22.18	22.60	1
10	QPSK	25	12	22.23	22.09	22.21		
10	QPSK	25	25	22.12	22.10	22.12		
10	QPSK	50	0	22.15	22.04	22.09		
10	16QAM	1	0	22.10	21.85	21.99	22.60	1
10	16QAM	1	25	22.14	22.18	21.84		
10	16QAM	1	49	22.15	21.96	21.82		
10	16QAM	25	0	21.31	21.24	21.13	21.60	2
10	16QAM	25	12	21.27	21.14	21.23		
10	16QAM	25	25	21.15	21.15	21.28		
10	16QAM	50	0	21.05	21.01	21.05		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	23.03	23.05	22.76	23.60	0
5	QPSK	1	12	23.37	23.51	23.12		
5	QPSK	1	24	22.92	22.88	22.79		
5	QPSK	12	0	22.21	22.16	22.05	22.60	1
5	QPSK	12	7	22.14	22.26	22.17		
5	QPSK	12	13	22.12	22.19	22.17		
5	QPSK	25	0	22.18	22.09	22.12		
5	16QAM	1	0	21.63	21.76	21.88	22.60	1
5	16QAM	1	12	22.03	22.13	22.19		
5	16QAM	1	24	21.65	21.67	22.01		
5	16QAM	12	0	20.85	21.02	20.99	21.60	2
5	16QAM	12	7	21.18	21.02	21.05		
5	16QAM	12	13	21.02	21.15	21.12		
5	16QAM	25	0	21.04	21.04	21.06		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	23.04	23.19	23.10	23.60	0
3	QPSK	1	8	23.11	23.08	23.17		
3	QPSK	1	14	23.06	22.78	23.16		
3	QPSK	8	0	22.10	22.24	22.05	22.60	1
3	QPSK	8	4	22.19	22.23	22.19		
3	QPSK	8	7	22.18	22.18	22.17		
3	QPSK	15	0	22.11	22.15	22.12		
3	16QAM	1	0	21.75	21.99	21.94	22.60	1
3	16QAM	1	8	22.00	22.25	22.39		
3	16QAM	1	14	21.88	22.15	22.37		
3	16QAM	8	0	21.15	21.23	21.23	21.60	2
3	16QAM	8	4	21.18	21.21	21.27		
3	16QAM	8	7	21.20	21.06	21.20		
3	16QAM	15	0	21.16	21.16	21.26		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.81	22.91	23.21	23.60	0
1.4	QPSK	1	3	22.73	22.99	23.25		
1.4	QPSK	1	5	22.91	22.93	23.18		
1.4	QPSK	3	0	23.14	23.17	23.26		
1.4	QPSK	3	1	23.29	23.37	23.39		
1.4	QPSK	3	3	23.26	23.24	23.26		
1.4	QPSK	6	0	22.09	22.08	22.14	22.60	1
1.4	16QAM	1	0	21.92	22.16	22.20	22.60	1
1.4	16QAM	1	3	22.12	22.27	22.52		
1.4	16QAM	1	5	22.04	21.83	22.24		
1.4	16QAM	3	0	21.92	22.06	22.19		
1.4	16QAM	3	1	21.78	21.84	22.46		
1.4	16QAM	3	3	21.84	22.10	22.48		
1.4	16QAM	6	0	20.95	21.09	21.08	21.60	2



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.58	23.47	23.58	24.50	0
10	QPSK	1	25	24.10	24.17	24.15		
10	QPSK	1	49	23.66	23.72	23.71		
10	QPSK	25	0	22.90	22.94	22.90	23.50	1
10	QPSK	25	12	22.89	22.79	22.88		
10	QPSK	25	25	22.88	22.84	22.77		
10	QPSK	50	0	22.74	22.98	22.89	23.50	1
10	16QAM	1	0	22.62	22.49	22.59		
10	16QAM	1	25	22.63	22.69	22.73		
10	16QAM	1	49	22.64	22.66	22.63	22.50	2
10	16QAM	25	0	21.95	22.06	21.97		
10	16QAM	25	12	21.95	22.02	21.94		
10	16QAM	25	25	21.82	21.86	21.89	22.50	2
10	16QAM	50	0	21.95	21.89	21.92		
Channel				20425	20525	20625		
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.44	23.36	23.73	24.50	0
5	QPSK	1	12	23.87	24.13	24.10		
5	QPSK	1	24	23.35	23.51	23.58		
5	QPSK	12	0	22.83	22.80	22.85	23.50	1
5	QPSK	12	7	22.97	22.84	22.85		
5	QPSK	12	13	22.89	22.83	22.85		
5	QPSK	25	0	22.87	22.82	22.82	23.50	1
5	16QAM	1	0	22.77	22.53	22.52		
5	16QAM	1	12	22.39	22.62	22.57		
5	16QAM	1	24	22.42	22.49	22.48	22.50	2
5	16QAM	12	0	21.78	21.72	21.96		
5	16QAM	12	7	21.92	21.98	21.89		
5	16QAM	12	13	21.94	21.82	21.89	22.50	2
5	16QAM	25	0	22.12	21.75	21.98		



Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.72	23.57	23.71	24.50	0
3	QPSK	1	8	23.63	23.48	23.58		
3	QPSK	1	14	23.85	23.57	23.45		
3	QPSK	8	0	22.82	22.98	22.93	23.50	1
3	QPSK	8	4	22.85	22.77	22.83		
3	QPSK	8	7	22.90	22.67	22.86		
3	QPSK	15	0	22.86	22.77	22.83	23.50	1
3	16QAM	1	0	22.64	22.65	22.70		
3	16QAM	1	8	22.55	22.57	22.64		
3	16QAM	1	14	22.71	22.42	22.71	22.50	2
3	16QAM	8	0	21.83	21.67	21.93		
3	16QAM	8	4	21.94	21.84	22.00		
3	16QAM	8	7	21.99	21.54	21.66	21.81	21.63
3	16QAM	15	0	21.81	21.63	21.82		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.68	23.71	23.81	24.50	0
1.4	QPSK	1	3	23.71	23.67	23.85		
1.4	QPSK	1	5	23.75	23.55	23.77		
1.4	QPSK	3	0	23.69	23.80	24.04		
1.4	QPSK	3	1	23.84	23.84	24.01		
1.4	QPSK	3	3	23.91	23.87	23.92	23.50	1
1.4	QPSK	6	0	22.83	22.71	22.84		
1.4	16QAM	1	0	22.65	22.58	22.98	23.50	1
1.4	16QAM	1	3	22.85	22.67	22.96		
1.4	16QAM	1	5	22.66	22.48	22.61		
1.4	16QAM	3	0	22.77	22.67	22.58		
1.4	16QAM	3	1	22.84	22.71	22.75		
1.4	16QAM	3	3	22.81	22.63	22.65	22.50	2
1.4	16QAM	6	0	21.83	21.52	21.66		



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	23.47	23.42	23.41	24.50	0
10	QPSK	1	25	23.77	24.10	23.75		
10	QPSK	1	49	23.48	23.48	23.73		
10	QPSK	25	0	22.68	22.69	22.73	23.50	1
10	QPSK	25	12	22.71	22.76	22.74		
10	QPSK	25	25	22.66	22.67	22.70		
10	QPSK	50	0	22.68	22.76	22.69	23.50	1
10	16QAM	1	0	22.54	22.40	22.32		
10	16QAM	1	25	22.50	22.55	22.20		
10	16QAM	1	49	22.45	22.48	22.64	22.50	2
10	16QAM	25	0	21.91	21.72	21.79		
10	16QAM	25	12	21.93	21.76	21.82		
10	16QAM	25	25	21.77	21.78	21.95	22.50	2
10	16QAM	50	0	21.63	21.65	21.88		
Channel				23035	23095	23155		
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	23.30	23.51	23.38	24.50	0
5	QPSK	1	12	24.07	24.04	24.08		
5	QPSK	1	24	23.66	23.43	23.73		
5	QPSK	12	0	22.81	22.70	22.76	23.50	1
5	QPSK	12	7	22.69	22.64	22.85		
5	QPSK	12	13	22.71	22.62	22.72		
5	QPSK	25	0	22.76	22.67	22.73	23.50	1
5	16QAM	1	0	22.40	22.37	22.27		
5	16QAM	1	12	22.22	22.16	22.36		
5	16QAM	1	24	22.22	22.46	22.59	22.50	2
5	16QAM	12	0	21.84	21.71	21.60		
5	16QAM	12	7	21.91	21.54	21.82		
5	16QAM	12	13	21.93	21.54	21.64	22.50	2
5	16QAM	25	0	21.88	21.62	21.87		



Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	23.48	23.55	23.57	24.50	0
3	QPSK	1	8	23.72	23.46	23.70		
3	QPSK	1	14	23.74	23.53	23.58		
3	QPSK	8	0	22.88	22.78	22.78	23.50	1
3	QPSK	8	4	22.85	22.66	22.78		
3	QPSK	8	7	22.80	22.70	22.72		
3	QPSK	15	0	22.76	22.70	22.67	23.50	1
3	16QAM	1	0	22.24	22.47	22.57		
3	16QAM	1	8	22.25	22.41	22.55		
3	16QAM	1	14	22.32	22.61	22.45	22.50	2
3	16QAM	8	0	21.84	21.96	21.86		
3	16QAM	8	4	21.84	21.74	21.82		
3	16QAM	8	7	21.72	21.66	21.70	21.78	21.69
3	16QAM	15	0	21.78	21.69	21.73		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	23.74	23.59	23.66	24.50	0
1.4	QPSK	1	3	23.83	23.64	23.85		
1.4	QPSK	1	5	23.80	23.50	23.67		
1.4	QPSK	3	0	23.82	23.70	23.76		
1.4	QPSK	3	1	23.82	23.76	23.85		
1.4	QPSK	3	3	23.96	23.77	23.77	23.50	1
1.4	QPSK	6	0	22.73	22.59	22.83		
1.4	16QAM	1	0	22.31	22.57	22.44	23.50	1
1.4	16QAM	1	3	22.48	22.66	22.43		
1.4	16QAM	1	5	22.98	22.38	22.63		
1.4	16QAM	3	0	22.60	22.59	22.62		
1.4	16QAM	3	1	22.62	22.66	22.71		
1.4	16QAM	3	3	22.63	22.56	22.58	22.50	2
1.4	16QAM	6	0	21.56	21.71	21.69		

**<WLAN Conducted Power>****General Note:**

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.



<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b	CH 1	2412	1Mbps	15.55	16.00	97.63
		CH 6	2437		15.87	16.00	
		CH 11	2462		15.65	16.00	
	802.11g	CH 1	2412	6Mbps	13.64	14.00	87.18
		CH 6	2437		13.84	14.00	
		CH 11	2462		13.67	14.00	
	802.11n-HT20	CH 1	2412	MCS0	12.71	13.00	86.50
		CH 6	2437		12.93	13.00	
		CH 11	2462		12.55	13.00	

<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a	CH 36	5180	6Mbps	13.21	13.50	87.04
		CH 40	5200		12.98	13.50	
		CH 44	5220		12.79	13.50	
		CH 48	5240		12.80	13.50	
	802.11n-HT20	CH 36	5180	MCS0	10.35	11.00	86.61
		CH 40	5200		10.04	11.00	
		CH 44	5220		10.08	11.00	
		CH 48	5240		10.05	11.00	
	802.11ac-VHT20	CH 36	5180	MCS0	10.45	11.00	83.11
		CH 40	5200		10.21	11.00	
		CH 44	5220		10.27	11.00	
		CH 48	5240		10.23	11.00	
	802.11ac-VHT40	CH 38	5190	MCS0	9.74	10.00	71.01
		CH 46	5230		9.48	10.00	
	802.11ac-VHT80	CH 42	5210	MCS0	9.84	10.00	55.48

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a	CH 149	5745	MCS0	13.39	13.50	87.04
		CH 157	5785		13.18	13.50	
		CH 165	5825		13.27	13.50	
	802.11n-HT20	CH 149	5745	MCS0	10.22	11.00	86.61
		CH 157	5785		10.17	11.00	
		CH 165	5825		9.85	11.00	
	802.11ac-VHT20	CH 149	5745	MCS0	10.31	11.00	83.11
		CH 157	5785		10.26	11.00	
		CH 165	5825		10.20	11.00	
	802.11ac-VHT40	CH 151	5755	MCS0	9.77	10.00	71.01
		CH 159	5795		9.50	10.00	
	802.11ac-VHT80	CH 155	5775	MCS0	9.91	10.00	55.48

### 13. Bluetooth Exclusions Applied

Mode Band	Average power(dBm)	
	Bluetooth v2.1+EDR	Bluetooth v4.1 LE
2.4GHz Bluetooth	8.5	8.5

**Note:**

- Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:  


$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
  - f(GHz) is the RF channel transmit frequency in GHz
  - Power and distance are rounded to the nearest mW and mm before calculation
  - The result is rounded to one decimal place for comparison

Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
8.5	10	2.48	1.1

**Note:**

Per KDB 447498 D01v06, a distance of 10 mm is applied to determine SAR test exclusion. The test exclusion threshold is 1.1 which is ≤ 3, SAR testing is not required.

### 14. Antenna Location

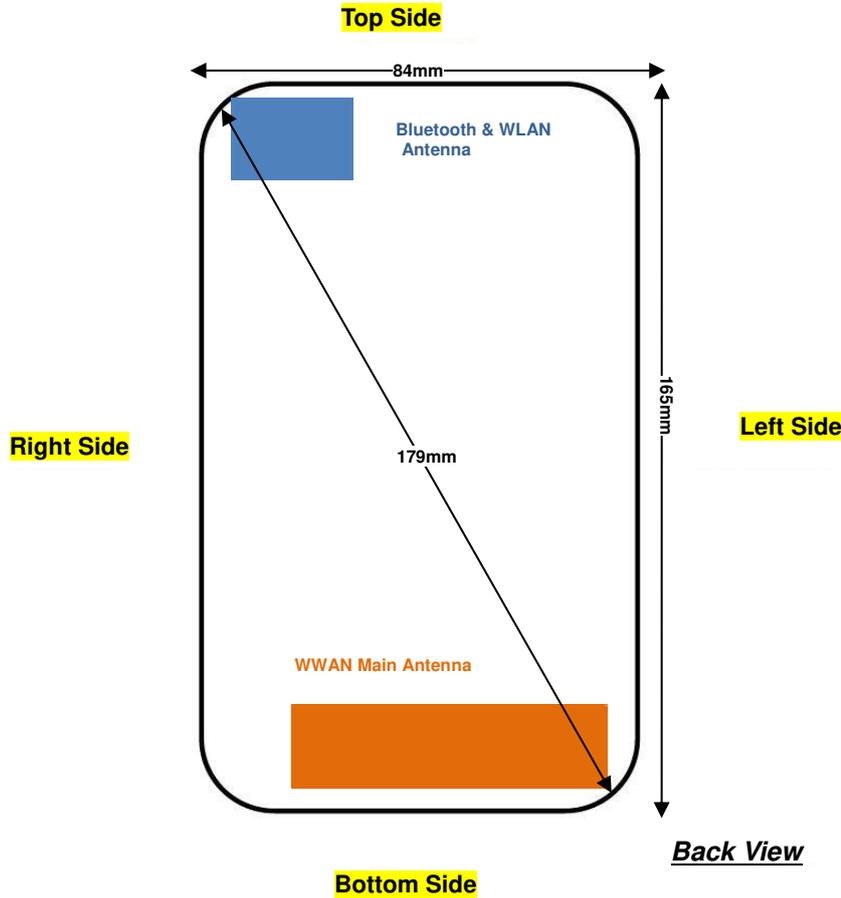

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	148mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN	≤ 25mm	≤ 25mm	≤ 25mm	148mm	≤ 25mm	63mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN	Yes	Yes	Yes	No	Yes	No

**General Note:**

Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm\*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge



## 15. SAR Test Results

### General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
  - d. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is  $\leq 1.2$  W/kg, SAR testing with a headset connected to the handset is not required.
4. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension  $> 15.0$  cm or an overall diagonal dimension  $> 16.0$  cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR  $> 1.2$  W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

### GSM Note:

1. Per KDB 941225 D01v03r01, considering the possibility of e.g. 3rd party VoIP operation for Head and body-worn SAR test reduction for GSM and GPRS and EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the EUT was set in GPRS (4Tx slots) for GSM850/GSM1900.
2. Per KDB 941225 D01v03r01, for Hotspot SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance, for modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested, therefore, the EUT was set in GPRS (4Tx slots) for GSM850/GSM1900.

### UMTS Note:

1. Per KDB 941225 D01v03r01, SAR for Head / Hotspot / Body-worn exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA.

**LTE Note:**

1. Per KDB 941225 D05v02r04, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r04, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r04, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r04, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r04, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r04, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r04, smaller bandwidth SAR testing is not required.
6. For LTE B12 / B5 / B4 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r04, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

**WLAN Note:**

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
2. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
3. For all positions / configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
4. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



**15.1 Head SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
<b>01</b>	<b>GSM850</b>	<b>GPRS(4 Tx slots)</b>	<b>Right Cheek</b>	<b>128</b>	<b>824.2</b>	<b>29.56</b>	<b>30.50</b>	<b>1.242</b>	<b>-0.04</b>	<b>0.371</b>	<b>0.461</b>
	GSM850	GPRS(4 Tx slots)	Right Tilted	128	824.2	29.56	30.50	1.242	-0.12	0.267	0.332
	GSM850	GPRS(4 Tx slots)	Left Cheek	128	824.2	29.56	30.50	1.242	-0.06	0.349	0.433
	GSM850	GPRS(4 Tx slots)	Left Tilted	128	824.2	29.56	30.50	1.242	-0.09	0.185	0.230
<b>02</b>	<b>GSM1900</b>	<b>GPRS(4 Tx slots)</b>	<b>Right Cheek</b>	<b>810</b>	<b>1909.8</b>	<b>26.04</b>	<b>26.50</b>	<b>1.112</b>	<b>0.04</b>	<b>0.141</b>	<b>0.157</b>
	GSM1900	GPRS(4 Tx slots)	Right Tilted	810	1909.8	26.04	26.50	1.112	-0.05	0.073	0.081
	GSM1900	GPRS(4 Tx slots)	Left Cheek	810	1909.8	26.04	26.50	1.112	0.12	0.087	0.097
	GSM1900	GPRS(4 Tx slots)	Left Tilted	810	1909.8	26.04	26.50	1.112	-0.03	0.058	0.064

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
<b>03</b>	<b>WCDMA Band V</b>	<b>RMC 12.2Kbps</b>	<b>Right Cheek</b>	<b>4233</b>	<b>846.6</b>	<b>23.46</b>	<b>24.00</b>	<b>1.132</b>	<b>0</b>	<b>0.220</b>	<b>0.249</b>
	WCDMA Band V	RMC 12.2Kbps	Right Tilted	4233	846.6	23.46	24.00	1.132	0.16	0.216	0.245
	WCDMA Band V	RMC 12.2Kbps	Left Cheek	4233	846.6	23.46	24.00	1.132	-0.03	0.211	0.239
	WCDMA Band V	RMC 12.2Kbps	Left Tilted	4233	846.6	23.46	24.00	1.132	0.04	0.181	0.205
<b>04</b>	<b>WCDMA Band II</b>	<b>RMC 12.2Kbps</b>	<b>Right Cheek</b>	<b>9538</b>	<b>1907.6</b>	<b>22.91</b>	<b>23.00</b>	<b>1.021</b>	<b>0.1</b>	<b>0.158</b>	<b>0.161</b>
	WCDMA Band II	RMC 12.2Kbps	Right Tilted	9538	1907.6	22.91	23.00	1.021	-0.11	0.082	0.084
	WCDMA Band II	RMC 12.2Kbps	Left Cheek	9538	1907.6	22.91	23.00	1.021	0.05	0.086	0.088
	WCDMA Band II	RMC 12.2Kbps	Left Tilted	9538	1907.6	22.91	23.00	1.021	-0.19	0.062	0.063



<LTE SAR>

Plot No.	Band	BW (MHz)	RB Size	RB offset	Modulation	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	1	25	QPSK	Right Cheek	23095	707.5	24.10	24.50	1.096	-0.09	0.183	0.201
	LTE Band 12	10M	25	12	QPSK	Right Cheek	23095	707.5	22.76	23.50	1.186	-0.09	0.144	0.171
	LTE Band 12	10M	1	25	QPSK	Right Tilted	23095	707.5	24.10	24.50	1.096	-0.04	0.172	0.189
	LTE Band 12	10M	25	12	QPSK	Right Tilted	23095	707.5	22.76	23.50	1.186	-0.13	0.134	0.159
<b>05</b>	<b>LTE Band 12</b>	<b>10M</b>	<b>1</b>	<b>25</b>	<b>QPSK</b>	<b>Left Cheek</b>	<b>23095</b>	<b>707.5</b>	<b>24.10</b>	<b>24.50</b>	<b>1.096</b>	<b>0.17</b>	<b>0.225</b>	<b>0.247</b>
	LTE Band 12	10M	25	12	QPSK	Left Cheek	23095	707.5	22.76	23.50	1.186	0.12	0.175	0.208
	LTE Band 12	10M	1	25	QPSK	Left Tilted	23095	707.5	24.10	24.50	1.096	0.12	0.196	0.215
	LTE Band 12	10M	25	12	QPSK	Left Tilted	23095	707.5	22.76	23.50	1.186	0.07	0.156	0.185
<b>06</b>	<b>LTE Band 5</b>	<b>10M</b>	<b>1</b>	<b>25</b>	<b>QPSK</b>	<b>Right Cheek</b>	<b>20525</b>	<b>836.5</b>	<b>24.17</b>	<b>24.50</b>	<b>1.079</b>	<b>-0.17</b>	<b>0.280</b>	<b>0.302</b>
	LTE Band 5	10M	25	0	QPSK	Right Cheek	20525	836.5	22.94	23.50	1.138	0.02	0.215	0.245
	LTE Band 5	10M	1	25	QPSK	Right Tilted	20525	836.5	24.17	24.50	1.079	0.04	0.219	0.236
	LTE Band 5	10M	25	0	QPSK	Right Tilted	20525	836.5	22.94	23.50	1.138	-0.05	0.167	0.190
	LTE Band 5	10M	1	25	QPSK	Left Cheek	20525	836.5	24.17	24.50	1.079	0.03	0.279	0.301
	LTE Band 5	10M	25	0	QPSK	Left Cheek	20525	836.5	22.94	23.50	1.138	-0.18	0.212	0.241
	LTE Band 5	10M	1	25	QPSK	Left Tilted	20525	836.5	24.17	24.50	1.079	-0.03	0.255	0.275
	LTE Band 5	10M	25	0	QPSK	Left Tilted	20525	836.5	22.94	23.50	1.138	0.06	0.195	0.222
<b>07</b>	<b>LTE Band 4</b>	<b>20M</b>	<b>1</b>	<b>49</b>	<b>QPSK</b>	<b>Right Cheek</b>	<b>20175</b>	<b>1732.5</b>	<b>23.55</b>	<b>23.60</b>	<b>1.012</b>	<b>0.07</b>	<b>0.178</b>	<b>0.180</b>
	LTE Band 4	20M	50	24	QPSK	Right Cheek	20175	1732.5	22.27	22.60	1.079	-0.17	0.143	0.154
	LTE Band 4	20M	1	49	QPSK	Right Tilted	20175	1732.5	23.55	23.60	1.012	-0.07	0.072	0.073
	LTE Band 4	20M	50	24	QPSK	Right Tilted	20175	1732.5	22.27	22.60	1.079	0	0.057	0.061
	LTE Band 4	20M	1	49	QPSK	Left Cheek	20175	1732.5	23.55	23.60	1.012	0.15	0.098	0.099
	LTE Band 4	20M	50	24	QPSK	Left Cheek	20175	1732.5	22.27	22.60	1.079	0.16	0.077	0.083
	LTE Band 4	20M	1	49	QPSK	Left Tilted	20175	1732.5	23.55	23.60	1.012	-0.09	0.054	0.055
	LTE Band 4	20M	50	24	QPSK	Left Tilted	20175	1732.5	22.27	22.60	1.079	0.08	0.043	0.046
<b>08</b>	<b>LTE Band 2</b>	<b>20M</b>	<b>1</b>	<b>49</b>	<b>QPSK</b>	<b>Right Cheek</b>	<b>18700</b>	<b>1860</b>	<b>22.69</b>	<b>23.00</b>	<b>1.074</b>	<b>0.09</b>	<b>0.144</b>	<b>0.155</b>
	LTE Band 2	20M	50	0	QPSK	Right Cheek	18700	1860	21.52	22.00	1.117	0.07	0.110	0.123
	LTE Band 2	20M	1	49	QPSK	Right Tilted	18700	1860	22.69	23.00	1.074	0.05	0.050	0.054
	LTE Band 2	20M	50	0	QPSK	Right Tilted	18700	1860	21.52	22.00	1.117	-0.08	0.038	0.042
	LTE Band 2	20M	1	49	QPSK	Left Cheek	18700	1860	22.69	23.00	1.074	0.07	0.076	0.082
	LTE Band 2	20M	50	0	QPSK	Left Cheek	18700	1860	21.52	22.00	1.117	-0.03	0.059	0.066
	LTE Band 2	20M	1	49	QPSK	Left Tilted	18700	1860	22.69	23.00	1.074	-0.09	0.060	0.064
	LTE Band 2	20M	50	0	QPSK	Left Tilted	18700	1860	21.52	22.00	1.117	-0.18	0.046	0.051

<WLAN2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Area Scan Max. SAR (W/kg)	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 2.4GHz	802.11b 1Mbps	Right Cheek	6	2437	15.87	16.00	1.030	97.63	1.024	0.074			
	WLAN 2.4GHz	802.11b 1Mbps	Right Tilted	6	2437	15.87	16.00	1.030	97.63	1.024	0.096			
	WLAN 2.4GHz	802.11b 1Mbps	Left Cheek	6	2437	15.87	16.00	1.030	97.63	1.024	0.193			
<b>09</b>	<b>WLAN 2.4GHz</b>	<b>802.11b 1Mbps</b>	<b>Left Tilted</b>	<b>6</b>	<b>2437</b>	<b>15.87</b>	<b>16.00</b>	<b>1.030</b>	<b>97.63</b>	<b>1.024</b>	<b>0.247</b>	<b>0.05</b>	<b>0.172</b>	<b>0.181</b>



**<WLAN 5GHz SAR>**

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Area Scan Max. SAR (W/kg)	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 5.2GHz	802.11a 6Mbps	Right Cheek	36	5180	13.21	13.50	1.069	87.04	1.149	0.575			
	WLAN 5.2GHz	802.11a 6Mbps	Right Tilted	36	5180	13.21	13.50	1.069	87.04	1.149	0.639			
	WLAN 5.2GHz	802.11a 6Mbps	Left Cheek	36	5180	13.21	13.50	1.069	87.04	1.149	0.643	-0.07	0.243	0.298
<b>10</b>	<b>WLAN 5.2GHz</b>	<b>802.11a 6Mbps</b>	<b>Left Tilted</b>	<b>36</b>	<b>5180</b>	<b>13.21</b>	<b>13.50</b>	<b>1.069</b>	<b>87.04</b>	<b>1.149</b>	<b>0.722</b>	<b>-0.11</b>	<b>0.271</b>	<b>0.333</b>
<b>11</b>	<b>WLAN 5.8GHz</b>	<b>802.11a 6Mbps</b>	<b>Right Cheek</b>	<b>149</b>	<b>5745</b>	<b>13.39</b>	<b>13.50</b>	<b>1.026</b>	<b>87.04</b>	<b>1.149</b>	<b>1.01</b>	<b>-0.08</b>	<b>0.189</b>	<b>0.223</b>
	WLAN 5.8GHz	802.11a 6Mbps	Right Tilted	149	5745	13.39	13.50	1.026	87.04	1.149	0.65			
	WLAN 5.8GHz	802.11a 6Mbps	Left Cheek	149	5745	13.39	13.50	1.026	87.04	1.149	0.789	0.05	0.154	0.181
	WLAN 5.8GHz	802.11a 6Mbps	Left Tilted	149	5745	13.39	13.50	1.026	87.04	1.149	0.763			



**15.2 Hotspot SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS(4 Tx slots)	Front	10	128	824.2	29.56	30.50	1.242	-0.03	0.412	0.512
<b>12</b>	<b>GSM850</b>	<b>GPRS(4 Tx slots)</b>	<b>Back</b>	<b>10</b>	<b>128</b>	<b>824.2</b>	<b>29.56</b>	<b>30.50</b>	<b>1.242</b>	<b>-0.06</b>	<b>0.560</b>	<b>0.695</b>
	GSM850	GPRS(4 Tx slots)	Left Side	10	128	824.2	29.56	30.50	1.242	-0.04	0.377	0.468
	GSM850	GPRS(4 Tx slots)	Right Side	10	128	824.2	29.56	30.50	1.242	-0.02	0.382	0.474
	GSM850	GPRS(4 Tx slots)	Bottom Side	10	128	824.2	29.56	30.50	1.242	-0.12	0.153	0.190
	GSM1900	GPRS(4 Tx slots)	Front	10	810	1909.8	26.04	26.50	1.112	-0.05	0.666	0.740
<b>13</b>	<b>GSM1900</b>	<b>GPRS(4 Tx slots)</b>	<b>Back</b>	<b>10</b>	<b>810</b>	<b>1909.8</b>	<b>26.04</b>	<b>26.50</b>	<b>1.112</b>	<b>-0.01</b>	<b>1.060</b>	<b>1.178</b>
	GSM1900	GPRS(4 Tx slots)	Back	10	512	1850.2	25.79	26.50	1.178	0.05	0.932	1.098
	GSM1900	GPRS(4 Tx slots)	Back	10	661	1880	25.66	26.50	1.213	0.08	0.952	1.155
	GSM1900	GPRS(4 Tx slots)	Left Side	10	810	1909.8	26.04	26.50	1.112	-0.03	0.136	0.151
	GSM1900	GPRS(4 Tx slots)	Right Side	10	810	1909.8	26.04	26.50	1.112	0.03	0.232	0.258
	GSM1900	GPRS(4 Tx slots)	Bottom Side	10	810	1909.8	26.04	26.50	1.112	-0.01	0.941	1.046
	GSM1900	GPRS(4 Tx slots)	Bottom Side	10	512	1850.2	25.79	26.50	1.178	-0.03	0.900	1.060
	GSM1900	GPRS(4 Tx slots)	Bottom Side	10	661	1880	25.66	26.50	1.213	0	0.937	1.137

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC12.2Kbps	Front	10	4233	846.6	23.46	24.00	1.132	-0.02	0.288	0.326
<b>14</b>	<b>WCDMA Band V</b>	<b>RMC12.2Kbps</b>	<b>Back</b>	<b>10</b>	<b>4233</b>	<b>846.6</b>	<b>23.46</b>	<b>24.00</b>	<b>1.132</b>	<b>0.01</b>	<b>0.352</b>	<b>0.399</b>
	WCDMA Band V	RMC12.2Kbps	Left Side	10	4233	846.6	23.46	24.00	1.132	-0.06	0.115	0.130
	WCDMA Band V	RMC12.2Kbps	Right Side	10	4233	846.6	23.46	24.00	1.132	0.02	0.230	0.260
	WCDMA Band V	RMC12.2Kbps	Bottom Side	10	4233	846.6	23.46	24.00	1.132	-0.12	0.117	0.132
	WCDMA Band II	RMC12.2Kbps	Front	10	1513	1752.6	22.91	23.00	1.021	-0.08	0.741	0.757
<b>15</b>	<b>WCDMA Band II</b>	<b>RMC12.2Kbps</b>	<b>Back</b>	<b>10</b>	<b>9538</b>	<b>1907.6</b>	<b>22.91</b>	<b>23.00</b>	<b>1.021</b>	<b>-0.02</b>	<b>1.130</b>	<b>1.154</b>
	WCDMA Band II	RMC12.2Kbps	Back	10	9262	1852.4	22.78	23.00	1.052	0.08	1.000	1.052
	WCDMA Band II	RMC12.2Kbps	Back	10	9400	1880	22.86	23.00	1.033	-0.1	1.000	1.033
	WCDMA Band II	RMC12.2Kbps	Left Side	10	9538	1907.6	22.91	23.00	1.021	-0.1	0.158	0.161
	WCDMA Band II	RMC12.2Kbps	Right Side	10	9538	1907.6	22.91	23.00	1.021	-0.04	0.279	0.285
	WCDMA Band II	RMC12.2Kbps	Bottom Side	10	9538	1907.6	22.91	23.00	1.021	0.04	1.040	1.062
	WCDMA Band II	RMC12.2Kbps	Bottom Side	10	9262	1852.4	22.78	23.00	1.052	-0.02	0.968	1.018
	WCDMA Band II	RMC12.2Kbps	Bottom Side	10	9400	1880	22.86	23.00	1.033	-0.01	0.978	1.010



<LTE SAR>

Plot No.	Band	BW (MHz)	RB Size	RB offset	Modulation	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	1	25	QPSK	Front	10	23095	707.5	24.10	24.50	1.096	-0.05	0.211	0.231
	LTE Band 12	10M	25	12	QPSK	Front	10	23095	707.5	22.76	23.50	1.186	-0.13	0.163	0.193
	LTE Band 12	10M	1	25	QPSK	Back	10	23095	707.5	24.10	24.50	1.096	-0.06	0.299	0.328
	LTE Band 12	10M	25	12	QPSK	Back	10	23095	707.5	22.76	23.50	1.186	-0.07	0.230	0.273
	LTE Band 12	10M	1	25	QPSK	Left Side	10	23095	707.5	24.10	24.50	1.096	-0.03	0.179	0.196
	LTE Band 12	10M	25	12	QPSK	Left Side	10	23095	707.5	22.76	23.50	1.186	0.15	0.228	0.270
<b>16</b>	<b>LTE Band 12</b>	<b>10M</b>	<b>1</b>	<b>25</b>	<b>QPSK</b>	<b>Right Side</b>	<b>10</b>	<b>23095</b>	<b>707.5</b>	<b>24.10</b>	<b>24.50</b>	<b>1.096</b>	<b>0.13</b>	<b>0.310</b>	<b>0.340</b>
	LTE Band 12	10M	25	12	QPSK	Right Side	10	23095	707.5	22.76	23.50	1.186	0.09	0.246	0.292
	LTE Band 12	10M	1	25	QPSK	Bottom Side	10	23095	707.5	24.10	24.50	1.096	-0.14	0.033	0.036
	LTE Band 12	10M	25	12	QPSK	Bottom Side	10	23095	707.5	22.76	23.50	1.186	-0.14	0.025	0.030
	LTE Band 5	10M	1	25	QPSK	Front	10	20525	836.5	24.17	24.50	1.079	0.09	0.284	0.306
	LTE Band 5	10M	25	0	QPSK	Front	10	20525	836.5	22.94	23.50	1.138	-0.02	0.231	0.263
<b>17</b>	<b>LTE Band 5</b>	<b>10M</b>	<b>1</b>	<b>25</b>	<b>QPSK</b>	<b>Back</b>	<b>10</b>	<b>20525</b>	<b>836.5</b>	<b>24.17</b>	<b>24.50</b>	<b>1.079</b>	<b>-0.12</b>	<b>0.423</b>	<b>0.456</b>
	LTE Band 5	10M	25	0	QPSK	Back	10	20525	836.5	22.94	23.50	1.138	-0.04	0.333	0.379
	LTE Band 5	10M	1	25	QPSK	Left Side	10	20525	836.5	24.17	24.50	1.079	-0.03	0.313	0.338
	LTE Band 5	10M	25	0	QPSK	Left Side	10	20525	836.5	22.94	23.50	1.138	-0.02	0.236	0.268
	LTE Band 5	10M	1	25	QPSK	Right Side	10	20525	836.5	24.17	24.50	1.079	-0.02	0.327	0.353
	LTE Band 5	10M	25	0	QPSK	Right Side	10	20525	836.5	22.94	23.50	1.138	-0.03	0.248	0.282
	LTE Band 5	10M	1	25	QPSK	Bottom Side	10	20525	836.5	24.17	24.50	1.079	0.05	0.131	0.141
	LTE Band 5	10M	25	0	QPSK	Bottom Side	10	20525	836.5	22.94	23.50	1.138	-0.12	0.099	0.113
	LTE Band 4	20M	1	49	QPSK	Front	10	20175	1732.5	23.55	23.60	1.012	-0.05	0.790	0.799
	LTE Band 4	20M	50	24	QPSK	Front	10	20175	1732.5	22.27	22.60	1.079	-0.01	0.606	0.654
<b>18</b>	<b>LTE Band 4</b>	<b>20M</b>	<b>1</b>	<b>49</b>	<b>QPSK</b>	<b>Back</b>	<b>10</b>	<b>20175</b>	<b>1732.5</b>	<b>23.55</b>	<b>23.60</b>	<b>1.012</b>	<b>0.15</b>	<b>1.180</b>	<b>1.194</b>
	LTE Band 4	20M	50	24	QPSK	Back	10	20175	1732.5	22.27	22.60	1.079	0.07	0.953	1.028
	LTE Band 4	20M	100	0	QPSK	Back	10	20175	1732.5	22.17	22.60	1.104	0.12	0.953	1.052
	LTE Band 4	20M	1	49	QPSK	Left Side	10	20175	1732.5	23.55	23.60	1.012	0.032	0.211	0.213
	LTE Band 4	20M	50	24	QPSK	Left Side	10	20175	1732.5	22.27	22.60	1.079	-0.026	0.163	0.176
	LTE Band 4	20M	1	49	QPSK	Right Side	10	20175	1732.5	23.55	23.60	1.012	0.01	0.213	0.215
	LTE Band 4	20M	50	24	QPSK	Right Side	10	20175	1732.5	22.27	22.60	1.079	-0.03	0.163	0.176
	LTE Band 4	20M	1	49	QPSK	Bottom Side	10	20175	1732.5	23.55	23.60	1.012	-0.01	0.990	1.001
	LTE Band 4	20M	50	24	QPSK	Bottom Side	10	20175	1732.5	22.27	22.60	1.079	0.09	0.762	0.822
	LTE Band 4	20M	100	0	QPSK	Bottom Side	10	20175	1732.5	22.17	22.60	1.104	0.07	0.748	0.826



Plot No.	Band	BW (MHz)	RB Size	RB offset	Modulation	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	1	49	QPSK	Front	10	18700	1860	22.69	23.00	1.074	-0.07	0.605	0.650
	LTE Band 2	20M	50	0	QPSK	Front	10	18700	1860	21.52	22.00	1.117	-0.05	0.498	0.556
	LTE Band 2	20M	1	49	QPSK	Back	10	18700	1860	22.69	23.00	1.074	0.05	1.010	1.085
	LTE Band 2	20M	50	0	QPSK	Back	10	18700	1860	21.52	22.00	1.117	-0.03	0.794	0.887
	LTE Band 2	20M	100	0	QPSK	Back	10	18700	1860	21.47	22.00	1.130	-0.1	0.793	0.896
	LTE Band 2	20M	1	49	QPSK	Back	10	18900	1880	22.63	23.00	1.089	-0.1	0.979	1.066
<b>19</b>	<b>LTE Band 2</b>	<b>20M</b>	<b>1</b>	<b>49</b>	<b>QPSK</b>	<b>Back</b>	<b>10</b>	<b>19100</b>	<b>1900</b>	<b>22.44</b>	<b>23.00</b>	<b>1.138</b>	<b>0.06</b>	<b>1.040</b>	<b>1.183</b>
	LTE Band 2	20M	50	0	QPSK	Back	10	18900	1880	21.48	22.00	1.127	0.02	0.775	0.874
	LTE Band 2	20M	50	0	QPSK	Back	10	19100	1900	21.50	22.00	1.122	0.01	0.845	0.948
	LTE Band 2	20M	1	49	QPSK	Left Side	10	18700	1860	22.69	23.00	1.074	0.08	0.132	0.142
	LTE Band 2	20M	50	0	QPSK	Left Side	10	18700	1860	21.52	22.00	1.117	-0.11	0.105	0.117
	LTE Band 2	20M	1	49	QPSK	Right Side	10	18700	1860	22.69	23.00	1.074	-0.01	0.219	0.235
	LTE Band 2	20M	50	0	QPSK	Right Side	10	18700	1860	21.52	22.00	1.117	0.06	0.172	0.192
	LTE Band 2	20M	1	49	QPSK	Bottom Side	10	18700	1860	22.69	23.00	1.074	0.01	0.902	0.969
	LTE Band 2	20M	1	49	QPSK	Bottom Side	10	18900	1880	22.63	23.00	1.089	-0.07	0.881	0.959
	LTE Band 2	20M	1	49	QPSK	Bottom Side	10	19100	1900	22.44	23.00	1.138	-0.01	0.957	1.089
	LTE Band 2	20M	50	0	QPSK	Bottom Side	10	18700	1860	21.52	22.00	1.117	-0.07	0.710	0.793
	LTE Band 2	20M	100	0	QPSK	Bottom Side	10	18700	1860	21.47	22.00	1.130	0	0.700	0.791

<WLAN2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Area Scan Max. SAR (W/kg)	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 2.4GHz	802.11b 1Mbps	Front	10	6	2437	15.87	16.00	1.030	97.63	1.024	0.038			
<b>20</b>	<b>WLAN 2.4GHz</b>	<b>802.11b 1Mbps</b>	<b>Back</b>	<b>10</b>	<b>6</b>	<b>2437</b>	<b>15.87</b>	<b>16.00</b>	<b>1.030</b>	<b>97.63</b>	<b>1.024</b>	<b>0.371</b>	<b>0.07</b>	<b>0.244</b>	<b>0.257</b>
	WLAN 2.4GHz	802.11b 1Mbps	Right Side	10	6	2437	15.87	16.00	1.030	97.63	1.024	0.021			
	WLAN 2.4GHz	802.11b 1Mbps	Top Side	10	6	2437	15.87	16.00	1.030	97.63	1.024	0.112			



**15.3 Body Worn Accessory SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS(4 Tx slots)	Front	10	128	824.2	29.56	30.50	1.242	-0.03	0.412	0.512
<b>12</b>	<b>GSM850</b>	<b>GPRS(4 Tx slots)</b>	<b>Back</b>	<b>10</b>	<b>128</b>	<b>824.2</b>	<b>29.56</b>	<b>30.50</b>	<b>1.242</b>	<b>-0.06</b>	<b>0.56</b>	<b>0.695</b>
	GSM1900	GPRS(4 Tx slots)	Front	10	810	1909.8	26.04	26.50	1.112	-0.05	0.666	0.740
<b>13</b>	<b>GSM1900</b>	<b>GPRS(4 Tx slots)</b>	<b>Back</b>	<b>10</b>	<b>810</b>	<b>1909.8</b>	<b>26.04</b>	<b>26.50</b>	<b>1.112</b>	<b>-0.01</b>	<b>1.060</b>	<b>1.178</b>
	GSM1900	GPRS(4 Tx slots)	Back	10	512	1850.2	25.79	26.50	1.178	0.05	0.932	1.098
	GSM1900	GPRS(4 Tx slots)	Back	10	661	1880	25.66	26.50	1.213	0.08	0.952	1.155

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC12.2Kbps	Front	10	4233	846.6	23.46	24.00	1.132	-0.02	0.288	0.326
<b>14</b>	<b>WCDMA Band V</b>	<b>RMC12.2Kbps</b>	<b>Back</b>	<b>10</b>	<b>4233</b>	<b>846.6</b>	<b>23.46</b>	<b>24.00</b>	<b>1.132</b>	<b>0.01</b>	<b>0.352</b>	<b>0.399</b>
	WCDMA Band II	RMC12.2Kbps	Front	10	1513	1752.6	22.91	23.00	1.021	-0.08	0.741	0.757
<b>15</b>	<b>WCDMA Band II</b>	<b>RMC12.2Kbps</b>	<b>Back</b>	<b>10</b>	<b>9538</b>	<b>1907.6</b>	<b>22.91</b>	<b>23.00</b>	<b>1.021</b>	<b>-0.02</b>	<b>1.130</b>	<b>1.154</b>
	WCDMA Band II	RMC12.2Kbps	Back	10	9262	1852.4	22.78	23.00	1.052	0.08	1.000	1.052
	WCDMA Band II	RMC12.2Kbps	Back	10	9400	1880	22.86	23.00	1.033	-0.1	1.000	1.033

**<LTE SAR>**

Plot No.	Band	BW (MHz)	RB Size	RB offset	Modulation	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	1	25	QPSK	Front	10	23095	707.5	24.10	24.50	1.096	-0.05	0.211	0.231
	LTE Band 12	10M	25	12	QPSK	Front	10	23095	707.5	22.76	23.50	1.186	-0.13	0.163	0.193
<b>16</b>	<b>LTE Band 12</b>	<b>10M</b>	<b>1</b>	<b>25</b>	<b>QPSK</b>	<b>Back</b>	<b>10</b>	<b>23095</b>	<b>707.5</b>	<b>24.10</b>	<b>24.50</b>	<b>1.096</b>	<b>-0.06</b>	<b>0.299</b>	<b>0.328</b>
	LTE Band 12	10M	25	12	QPSK	Back	10	23095	707.5	22.76	23.50	1.186	-0.07	0.230	0.273
	LTE Band 5	10M	1	25	QPSK	Front	10	20525	836.5	24.17	24.50	1.079	0.09	0.284	0.306
	LTE Band 5	10M	25	0	QPSK	Front	10	20525	836.5	22.94	23.50	1.138	-0.02	0.231	0.263
<b>17</b>	<b>LTE Band 5</b>	<b>10M</b>	<b>1</b>	<b>25</b>	<b>QPSK</b>	<b>Back</b>	<b>10</b>	<b>20525</b>	<b>836.5</b>	<b>24.17</b>	<b>24.50</b>	<b>1.079</b>	<b>-0.12</b>	<b>0.423</b>	<b>0.456</b>
	LTE Band 5	10M	25	0	QPSK	Back	10	20525	836.5	22.94	23.50	1.138	-0.04	0.333	0.379
	LTE Band 4	20M	1	49	QPSK	Front	10	20175	1732.5	23.55	23.60	1.012	-0.05	0.790	0.799
	LTE Band 4	20M	50	24	QPSK	Front	10	20175	1732.5	22.27	22.60	1.079	-0.01	0.606	0.654
<b>18</b>	<b>LTE Band 4</b>	<b>20M</b>	<b>1</b>	<b>49</b>	<b>QPSK</b>	<b>Back</b>	<b>10</b>	<b>20175</b>	<b>1732.5</b>	<b>23.55</b>	<b>23.60</b>	<b>1.012</b>	<b>0.15</b>	<b>1.180</b>	<b>1.194</b>
	LTE Band 4	20M	50	24	QPSK	Back	10	20175	1732.5	22.27	22.60	1.079	0.07	0.953	1.028
	LTE Band 4	20M	100	0	QPSK	Back	10	20175	1732.5	22.17	22.60	1.104	0.12	0.953	1.052

Plot No.	Band	BW (MHz)	RB Size	RB offset	Modulation	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	1	49	QPSK	Front	10	18700	1860	22.69	23.00	1.074	-0.07	0.605	0.650
	LTE Band 2	20M	50	0	QPSK	Front	10	18700	1860	21.52	22.00	1.117	-0.05	0.498	0.556
	LTE Band 2	20M	1	49	QPSK	Back	10	18700	1860	22.69	23.00	1.074	0.05	1.010	1.085
	LTE Band 2	20M	50	0	QPSK	Back	10	18700	1860	21.52	22.00	1.117	-0.03	0.794	0.887
	LTE Band 2	20M	100	0	QPSK	Back	10	18700	1860	21.47	22.00	1.130	-0.1	0.793	0.896
	LTE Band 2	20M	1	49	QPSK	Back	10	18900	1880	22.63	23.00	1.089	-0.1	0.979	1.066
<b>19</b>	<b>LTE Band 2</b>	<b>20M</b>	<b>1</b>	<b>49</b>	<b>QPSK</b>	<b>Back</b>	<b>10</b>	<b>19100</b>	<b>1900</b>	<b>22.44</b>	<b>23.00</b>	<b>1.138</b>	<b>0.06</b>	<b>1.040</b>	<b>1.183</b>
	LTE Band 2	20M	50	0	QPSK	Back	10	18900	1880	21.48	22.00	1.127	0.02	0.775	0.874
	LTE Band 2	20M	50	0	QPSK	Back	10	19100	1900	21.50	22.00	1.122	0.01	0.845	0.948



**<WLAN2.4GHz SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Area Scan Max. SAR (W/kg)	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 2.4GHz	802.11b 1Mbps	Front	10	6	2437	15.87	16.00	1.030	97.63	1.024	0.038			
20	WLAN 2.4GHz	802.11b 1Mbps	Back	10	6	2437	15.87	16.00	1.030	97.63	1.024	0.371	0.07	0.244	0.257

**<WLAN5GHz SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Area Scan Max. SAR (W/kg)	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 5.2GHz	802.11a 6Mbps	Front	10	36	5180	13.21	13.50	1.069	87.04	1.149	0.145			
21	WLAN 5.2GHz	802.11a 6Mbps	Back	10	36	5180	13.21	13.50	1.069	87.04	1.149	0.199	-0.1	0.088	0.108
	WLAN 5.8GHz	802.11a 6Mbps	Front	10	149	5745	13.39	13.50	1.026	87.04	1.149	0.156			
22	WLAN 5.8GHz	802.11a 6Mbps	Back	10	149	5745	13.39	13.50	1.026	87.04	1.149	0.271	-0.05	0.103	0.121



15.4 Extremity SAR

<WLAN5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN 5.2GHz	802.11a 6Mbps	Front	0	36	5180	13.21	13.50	1.069	87.04	1.149	0.05	0.112	0.138
<b>23</b>	<b>WLAN 5.2GHz</b>	<b>802.11a 6Mbps</b>	<b>Back</b>	<b>0</b>	<b>36</b>	<b>5180</b>	<b>13.21</b>	<b>13.50</b>	<b>1.069</b>	<b>87.04</b>	<b>1.149</b>	<b>0.07</b>	<b>0.247</b>	<b>0.303</b>
	WLAN 5.2GHz	802.11a 6Mbps	Left Side	0	36	5180	13.21	13.50	1.069	87.04	1.149	-0.12	0.00445	0.005
	WLAN 5.2GHz	802.11a 6Mbps	Right Side	0	36	5180	13.21	13.50	1.069	87.04	1.149	0.02	0.024	0.029
	WLAN 5.2GHz	802.11a 6Mbps	Top Side	0	36	5180	13.21	13.50	1.069	87.04	1.149	0.19	0.145	0.178
	WLAN 5.2GHz	802.11a 6Mbps	Bottom Side	0	36	5180	13.21	13.50	1.069	87.04	1.149	0.15	0.00631	0.008
	WLAN 5.8GHz	802.11a 6Mbps	Front	0	149	5745	13.39	13.50	1.026	87.04	1.149	0.09	0.079	0.093
<b>24</b>	<b>WLAN 5.8GHz</b>	<b>802.11a 6Mbps</b>	<b>Back</b>	<b>0</b>	<b>149</b>	<b>5745</b>	<b>13.39</b>	<b>13.50</b>	<b>1.026</b>	<b>87.04</b>	<b>1.149</b>	<b>0.01</b>	<b>0.290</b>	<b>0.342</b>
	WLAN 5.8GHz	802.11a 6Mbps	Left Side	0	149	5745	13.39	13.50	1.026	87.04	1.149	0.15	0.00181	0.002
	WLAN 5.8GHz	802.11a 6Mbps	Right Side	0	149	5745	13.39	13.50	1.026	87.04	1.149	-0.08	0.054	0.064
	WLAN 5.8GHz	802.11a 6Mbps	Top Side	0	149	5745	13.39	13.50	1.026	87.04	1.149	0.05	0.126	0.148
	WLAN 5.8GHz	802.11a 6Mbps	Bottom Side	0	149	5745	13.39	13.50	1.026	87.04	1.149	0.18	1.50E-05	<0.001



**15.5 Repeated SAR Measurement**

No.	Band	BW (MHz)	RB Size	RB offset	Modulation	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA Band II	-	-	-	RMC12.2 Kbps	Back	10	9538	1907.6	22.91	23.00	1.021	-0.02	1.130	1	1.154
2nd	WCDMA Band II	-	-	-	RMC12.2 Kbps	Back	10	9538	1907.6	22.91	23.00	1.021	-0.01	0.942	1.166	0.962
1st	LTE Band 4	20M	1	49	QPSK	Back	10	20175	1732.5	23.55	23.60	1.012	0.15	1.180	1	1.194
2nd	LTE Band 4	20M	1	49	QPSK	Back	10	20175	1732.5	23.55	23.60	1.012	0.14	1.020	1.136	1.032

**General Note:**

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45$ W/kg, only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated *measured SAR*.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

**16. Simultaneous Transmission Analysis**

NO.	Simultaneous Transmission Configurations	Portable Handset			Note
		Head	Body-worn	Hotspot	
1.	GSM Voice + WLAN2.4GHz	Yes	Yes		
2.	GPRS/EDGE + WLAN2.4GHz	Yes	Yes	Yes	Hotspot
3.	WCDMA + WLAN2.4GHz	Yes	Yes	Yes	Hotspot
4.	LTE + WLAN2.4GHz	Yes	Yes	Yes	Hotspot
5.	GSM Voice + Bluetooth		Yes		
6.	GPRS/EDGE + Bluetooth		Yes		WWAN VoIP
7.	WCDMA+ Bluetooth		Yes		WWAN VoIP
8.	LTE + Bluetooth		Yes		WWAN VoIP
9.	GSM Voice + WLAN5GHz	Yes	Yes		
10.	GPRS/EDGE + WLAN5GHz	Yes	Yes		WWAN VoIP
11.	WCDMA + WLAN5GHz	Yes	Yes		WWAN VoIP
12.	LTE + WLAN5GHz	Yes	Yes		WWAN VoIP

**General Note:**

1. This device supported VoIP in GPRS/EGPRS, WCDMA, LTE (e.g. 3rd party VoIP).
2. This device 2.4GHz WLAN supports Hotspot operation, and 5.2GHz / 5.8GHz WLAN supports WiFi Direct.
3. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
4. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
5. For head/body SAR, WLAN 2.4GHz and 5GHz, chose the worse zoom scan SAR for other exclusion position for co-located with WWAN.
6. The Scaled SAR summation is calculated based on the same configuration and test position.
7. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation < 1.6W/kg.
  - ii)  $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
8. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v06 based on the formula below.
  - i)  $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})}] / x$  W/kg for test separation distances  $\leq 50$  mm; where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.
  - ii) When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
  - iii) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Bluetooth Max Power	Exposure Position	Body worn
	Test separation	10 mm
8.5 dBm	Estimated SAR (W/kg)	0.147 W/kg



**16.1 Head Exposure Conditions**

WWAN Band	Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	SPLSR	Case No	
		WWAN	2.4GHz WLAN	5GHz WLAN					
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)					
GSM	GSM850	Right Cheek	0.461	0.181	0.333	0.64	0.79		
		Right Tilted	0.332	0.181	0.333	0.51	0.67		
		Left Cheek	0.433	0.181	0.333	0.61	0.77		
		Left Tilted	0.230	0.181	0.333	0.41	0.56		
	GSM1900	Right Cheek	0.157	0.181	0.333	0.34	0.49		
		Right Tilted	0.081	0.181	0.333	0.26	0.41		
		Left Cheek	0.097	0.181	0.333	0.28	0.43		
		Left Tilted	0.064	0.181	0.333	0.25	0.40		
WCDMA	WCDMA V	Right Cheek	0.249	0.181	0.333	0.43	0.58		
		Right Tilted	0.245	0.181	0.333	0.43	0.58		
		Left Cheek	0.239	0.181	0.333	0.42	0.57		
		Left Tilted	0.205	0.181	0.333	0.39	0.54		
	WCDMA II	Right Cheek	0.161	0.181	0.333	0.34	0.49		
		Right Tilted	0.084	0.181	0.333	0.27	0.42		
		Left Cheek	0.088	0.181	0.333	0.27	0.42		
		Left Tilted	0.063	0.181	0.333	0.24	0.40		
LTE	LTE Band 12	Right Cheek	0.201	0.181	0.333	0.38	0.53		
		Right Tilted	0.189	0.181	0.333	0.37	0.52		
		Left Cheek	0.247	0.181	0.333	0.43	0.58		
		Left Tilted	0.215	0.181	0.333	0.40	0.55		
	LTE Band 5	Right Cheek	0.302	0.181	0.333	0.48	0.64		
		Right Tilted	0.236	0.181	0.333	0.42	0.57		
		Left Cheek	0.301	0.181	0.333	0.48	0.63		
		Left Tilted	0.275	0.181	0.333	0.46	0.61		
	LTE Band 4	Right Cheek	0.180	0.181	0.333	0.36	0.51		
		Right Tilted	0.073	0.181	0.333	0.25	0.41		
		Left Cheek	0.099	0.181	0.333	0.28	0.43		
		Left Tilted	0.055	0.181	0.333	0.24	0.39		
	LTE Band 2	Right Cheek	0.155	0.181	0.333	0.34	0.49		
		Right Tilted	0.054	0.181	0.333	0.24	0.39		
		Left Cheek	0.082	0.181	0.333	0.26	0.42		
		Left Tilted	0.064	0.181	0.333	0.25	0.40		



**16.2 Hotspot Exposure Conditions**

WWAN Band		Exposure Position	1	2	1+2 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	2.4GHz WLAN			
			1g SAR (W/kg)	1g SAR (W/kg)			
GSM	GSM850	Front	0.512	0.257	0.77		
		Back	0.695	0.257	0.95		
		Left side	0.468		0.47		
		Right side	0.474	0.257	0.73		
		Top side		0.257	0.26		
		Bottom side	0.190		0.19		
	GSM1900	Front	0.740	0.257	1.00		
		Back	1.178	0.257	1.44		
		Left side	0.151		0.15		
		Right side	0.258	0.257	0.52		
		Top side		0.257	0.26		
		Bottom side	1.137		1.14		
WCDMA	WCDMA V	Front	0.326	0.257	0.58		
		Back	0.399	0.257	0.66		
		Left side	0.130		0.13		
		Right side	0.260	0.257	0.52		
		Top side		0.257	0.26		
		Bottom side	0.132		0.13		
	WCDMA II	Front	0.757	0.257	1.01		
		Back	1.154	0.257	1.41		
		Left side	0.161		0.16		
		Right side	0.285	0.257	0.54		
		Top side		0.257	0.26		
		Bottom side	1.062		1.06		
LTE	LTE Band 12	Front	0.231	0.257	0.49		
		Back	0.328	0.257	0.59		
		Left side	0.270		0.27		
		Right side	0.340	0.257	0.60		
		Top side		0.257	0.26		
		Bottom side	0.036		0.04		



WWAN Band		Exposure Position	1	2	1+2 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	2.4GHz WLAN			
			1g SAR (W/kg)	1g SAR (W/kg)			
LTE	LTE Band 5	Front	0.306	0.257	0.56		
		Back	0.456	0.257	0.71		
		Left side	0.338		0.34		
		Right side	0.353	0.257	0.61		
		Top side		0.257	0.26		
		Bottom side	0.141		0.14		
	LTE Band 4	Front	0.799	0.257	1.06		
		Back	1.194	0.257	1.45		
		Left side	0.213		0.21		
		Right side	0.215	0.257	0.47		
		Top side		0.257	0.26		
		Bottom side	1.001		1.00		
	LTE Band 2	Front	0.650	0.257	0.91		
		Back	1.183	0.257	1.44		
		Left side	0.142		0.14		
		Right side	0.235	0.257	0.49		
		Top side		0.257	0.26		
		Bottom side	1.089		1.09		



**16.3 Body-Worn Accessory Exposure Conditions**

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	SPLSR	Case No	
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth						
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)						
GSM	GSM850	Front	0.512	0.257	0.121	0.147	0.77	0.63	0.66		
		Back	0.695	0.257	0.121	0.147	0.95	0.82	0.84		
	GSM1900	Front	0.740	0.257	0.121	0.147	1.00	0.86	0.89		
		Back	1.178	0.257	0.121	0.147	1.44	1.30	1.33		
WCDMA	WCDMA V	Front	0.326	0.257	0.121	0.147	0.58	0.45	0.47		
		Back	0.399	0.257	0.121	0.147	0.66	0.52	0.55		
	WCDMA II	Front	0.757	0.257	0.121	0.147	1.01	0.88	0.90		
		Back	1.154	0.257	0.121	0.147	1.41	1.28	1.30		
LTE	LTE Band 12	Front	0.231	0.257	0.121	0.147	0.49	0.35	0.38		
		Back	0.328	0.257	0.121	0.147	0.59	0.45	0.48		
	LTE Band 5	Front	0.306	0.257	0.121	0.147	0.56	0.43	0.45		
		Back	0.456	0.257	0.121	0.147	0.71	0.58	0.60		
	LTE Band 4	Front	0.799	0.257	0.121	0.147	1.06	0.92	0.95		
		Back	1.194	0.257	0.121	0.147	1.45	1.32	1.34		
	LTE Band 2	Front	0.650	0.257	0.121	0.147	0.91	0.77	0.80		
		Back	1.183	0.257	0.121	0.147	1.44	1.30	1.33		

Test Engineer : Fulu Hu

## **17. Uncertainty Assessment**

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

<b>Uncertainty Distributions</b>	<b>Normal</b>	<b>Rectangular</b>	<b>Triangular</b>	<b>U-Shape</b>
Multi-plying Factor <sup>(a)</sup>	1/ $\kappa$ <sup>(b)</sup>	1/ $\sqrt{3}$	1/ $\sqrt{6}$	1/ $\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b)  $\kappa$  is the coverage factor

**Table 17.1. Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
<b>Measurement System</b>							
Probe Calibration	6.0	N	1	1	1	6.0	6.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	1.0	R	1.732	1	1	0.6	0.6
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	2.9	R	1.732	1	1	1.7	1.7
Max. SAR Eval.	2.0	R	1.732	1	1	1.2	1.2
<b>Test Sample Related</b>							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	3.6	3.6
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
<b>Phantom and Setup</b>							
Phantom Uncertainty	6.1	R	1.732	1	1	3.5	3.5
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
<b>Combined Std. Uncertainty</b>						<b>11.4%</b>	<b>11.4%</b>
<b>Coverage Factor for 95 %</b>						<b>K=2</b>	<b>K=2</b>
<b>Expanded STD Uncertainty</b>						<b>22.9%</b>	<b>22.7%</b>

**Table 17.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz**

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
<b>Measurement System</b>							
Probe Calibration	6.55	N	1	1	1	6.6	6.6
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	2.0	R	1.732	1	1	1.2	1.2
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	6.7	R	1.732	1	1	3.9	3.9
Max. SAR Eval.	4.0	R	1.732	1	1	2.3	2.3
<b>Test Sample Related</b>							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	3.6	3.6
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
<b>Phantom and Setup</b>							
Phantom Uncertainty	6.6	R	1.732	1	1	3.8	3.8
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
<b>Combined Std. Uncertainty</b>						12.5%	12.5%
<b>Coverage Factor for 95 %</b>						K=2	K=2
<b>Expanded STD Uncertainty</b>						25.0%	24.9%

**Table 17.3. Uncertainty Budget for frequency range 3 GHz to 6 GHz**



## **18. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r04, "SAR Evaluation Considerations for LTE Devices", Oct 2015
- [10] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [11] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [12] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.



## **Appendix A. Plots of System Performance Check**

The plots are shown as follows.

### System Check\_Head\_750MHz\_151028

**DUT: D750V2 - SN:1065**


Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_151028 Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.901$  S/m;  $\epsilon_r = 41.796$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.9 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.93, 10.93, 10.93); Calibrated: 2014.11.21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 2.56 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 48.16 V/m; Power Drift = -0.18 dB  
Peak SAR (extrapolated) = 2.96 W/kg  
**SAR(1 g) = 1.99 W/kg; SAR(10 g) = 1.32 W/kg**  
Maximum value of SAR (measured) = 2.52 W/kg

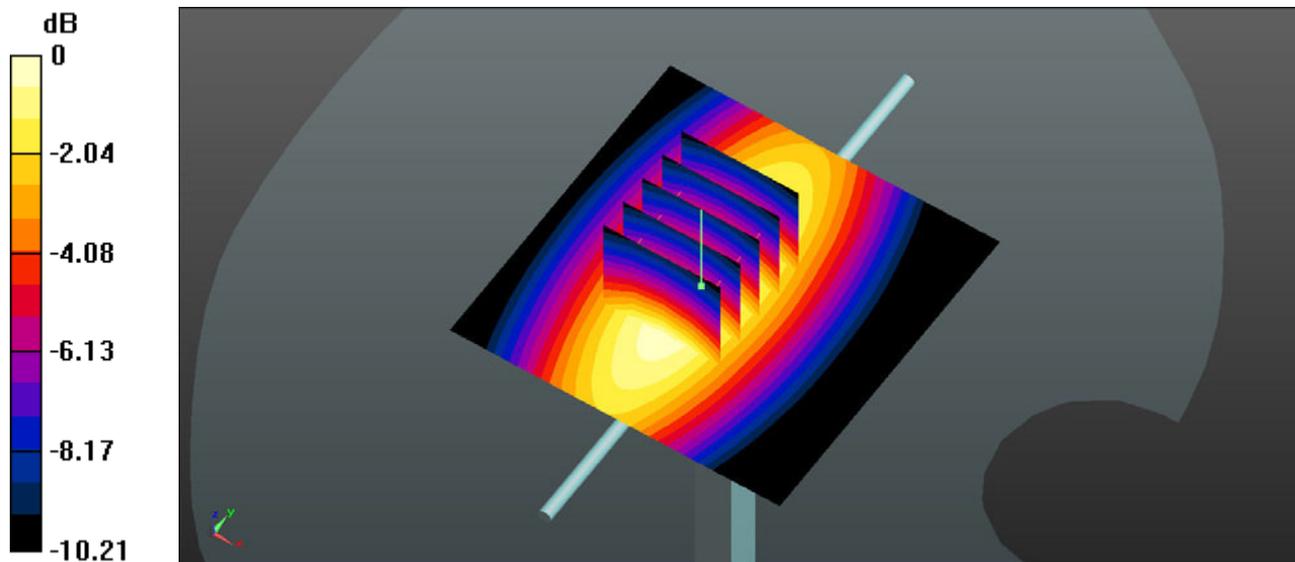

0 dB = 2.52 W/kg = 4.01 dBW/kg

### System Check\_Head\_835MHz\_151028

**DUT: D835V2 - SN:4d091**


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1  
Medium: HSL\_850\_151028 Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.927$  S/m;  $\epsilon_r = 41.904$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.33, 10.33, 10.33); Calibrated: 2014.11.21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 3.19 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 52.72 V/m; Power Drift = -0.01 dB  
Peak SAR (extrapolated) = 3.82 W/kg  
**SAR(1 g) = 2.21 W/kg; SAR(10 g) = 1.25 W/kg**  
Maximum value of SAR (measured) = 3.21 W/kg

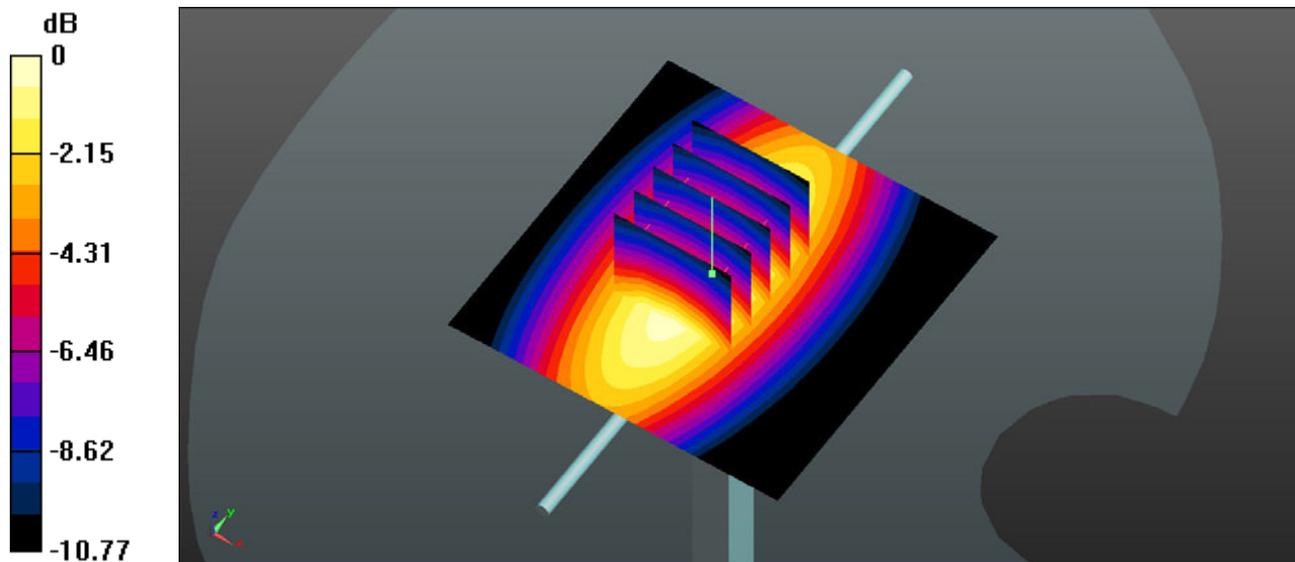

0 dB = 3.21 W/kg = 5.07 dBW/kg

### System Check\_Head\_1750MHz\_151104

**DUT: D1750V2 - SN:1069**


Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_151104 Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.398$  S/m;  $\epsilon_r = 39.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(8.35, 8.35, 8.35); Calibrated: 2014.11.21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 13.2 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 78.78 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 16.1 W/kg  
**SAR(1 g) = 9.29 W/kg; SAR(10 g) = 5.08 W/kg**  
Maximum value of SAR (measured) = 12.9 W/kg

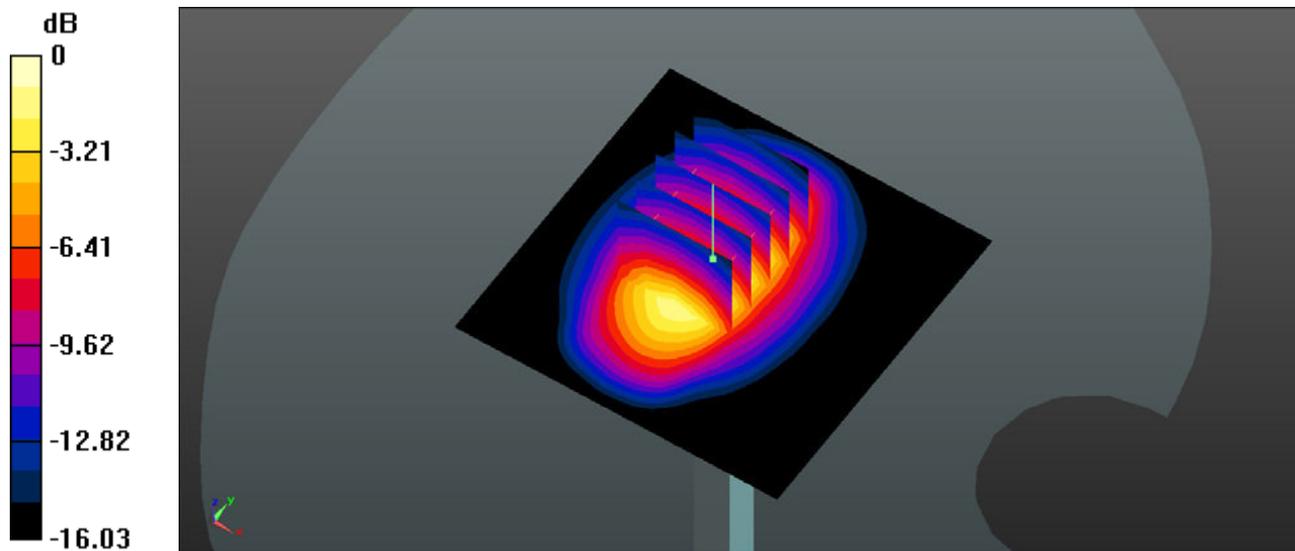

0 dB = 12.9 W/kg = 11.11 dBW/kg

### System Check\_Head\_1900MHz\_151104

#### DUT: D1900V2 - SN:5d118


Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_151104 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.426$  S/m;  $\epsilon_r = 40.73$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(8.1, 8.1, 8.1); Calibrated: 2014.11.21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 13.9 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 86.76 V/m; Power Drift = -0.16 dB  
Peak SAR (extrapolated) = 17.5 W/kg  
**SAR(1 g) = 9.67 W/kg; SAR(10 g) = 5.1 W/kg**  
Maximum value of SAR (measured) = 13.8 W/kg

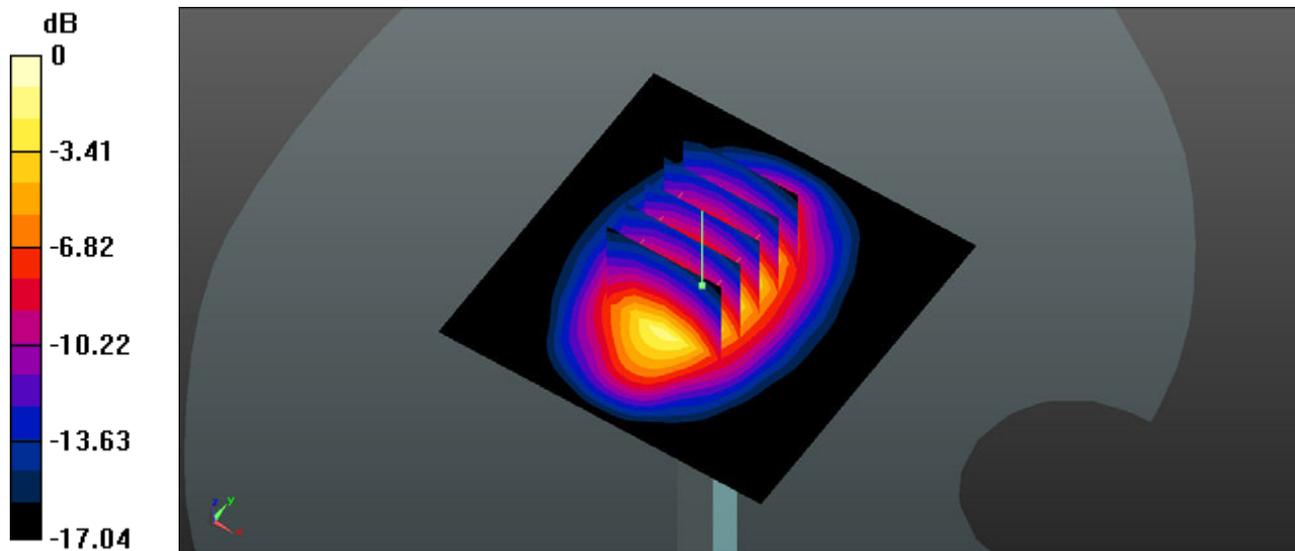

0 dB = 13.8 W/kg = 11.40 dBW/kg

### System Check\_Head\_2450MHz\_151106

**DUT: D2450V2 - SN:840**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL\_2450\_151106 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.815$  S/m;  $\epsilon_r = 38.597$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.08, 7.08, 7.08); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (71x71x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 20.4 W/kg


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 85.23 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 28.3 W/kg

**SAR(1 g) = 13.2 W/kg; SAR(10 g) = 5.95 W/kg**

Maximum value of SAR (measured) = 20.8 W/kg

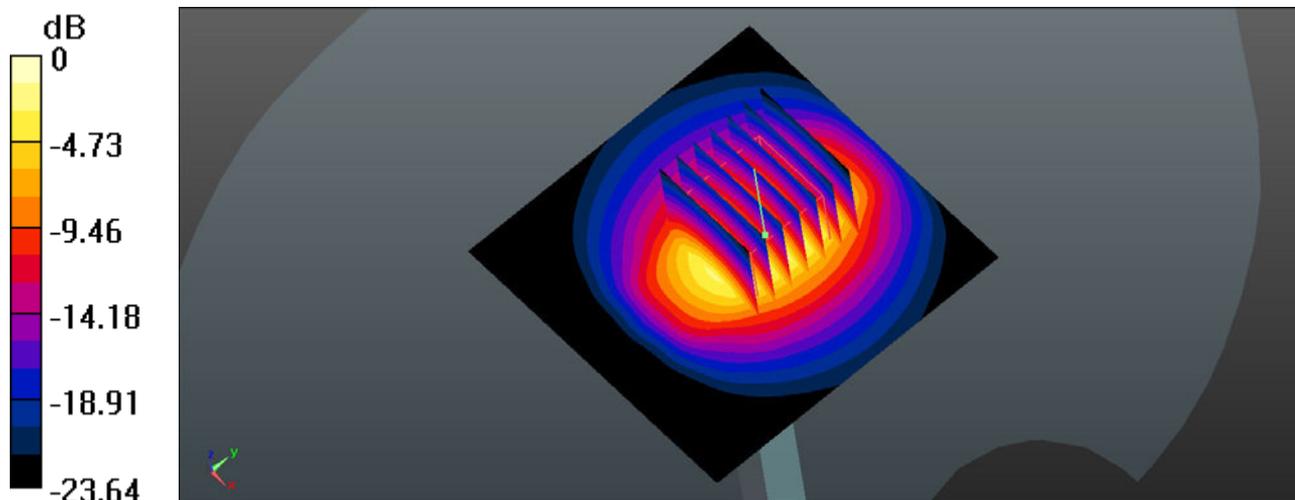

0 dB = 20.8 W/kg

### System Check\_Head\_5200MHz\_151108

#### DUT: Dipole D5GHzV2 -1113


Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle: 1:1  
Medium: HSL\_5000\_151108 Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.793$  S/m;  $\epsilon_r = 35.493$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(5.17, 5.17, 5.17); Calibrated: 2014.11.21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=100mW/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 15.5 W/kg

**Pin=100mW/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 39.53 V/m; Power Drift = -0.06 dB  
Peak SAR (extrapolated) = 30.5 W/kg  
**SAR(1 g) = 7.84 W/kg; SAR(10 g) = 2.31 W/kg**  
Maximum value of SAR (measured) = 18.9 W/kg

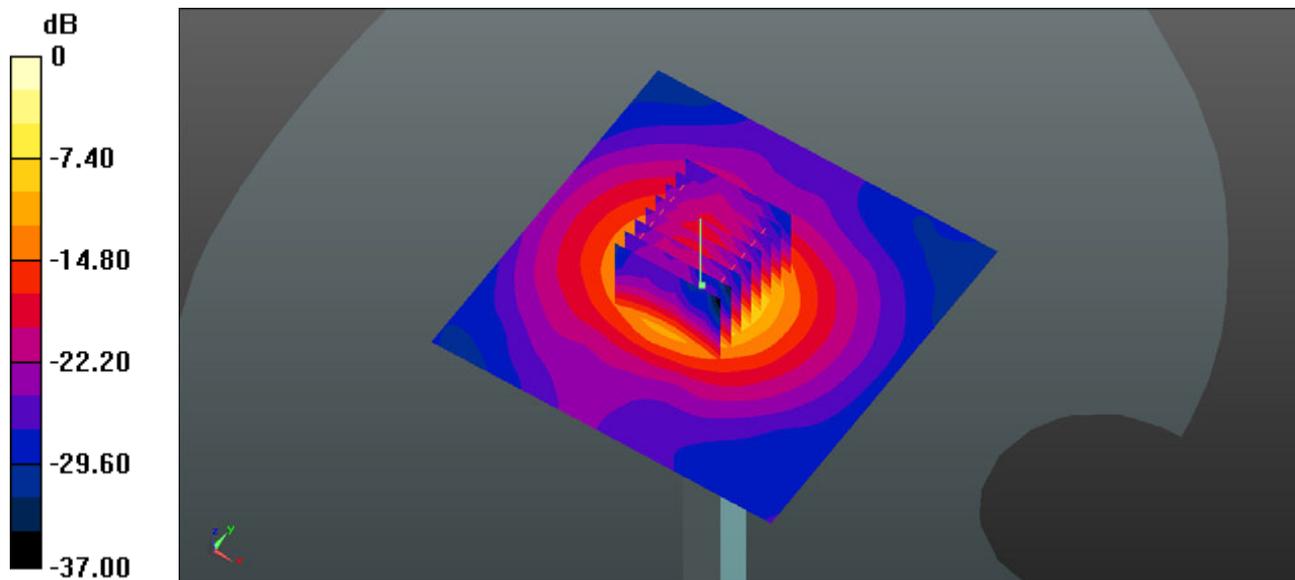

0 dB = 18.9 W/kg = 12.76 dBW/kg

### System Check\_Head\_5800MHz\_151108

#### DUT: Dipole D5GHzV2-1113


Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1  
Medium: HSL\_5000\_151108 Medium parameters used:  $f = 5800$  MHz;  $\sigma = 5.395$  S/m;  $\epsilon_r = 34.416$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(4.64, 4.64, 4.64); Calibrated: 2014.11.21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=100mW/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 15.1 W/kg

**Pin=100mW/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 36.83 V/m; Power Drift = -0.18 dB  
Peak SAR (extrapolated) = 32.5 W/kg  
**SAR(1 g) = 7.56 W/kg; SAR(10 g) = 2.22 W/kg**  
Maximum value of SAR (measured) = 18.6 W/kg

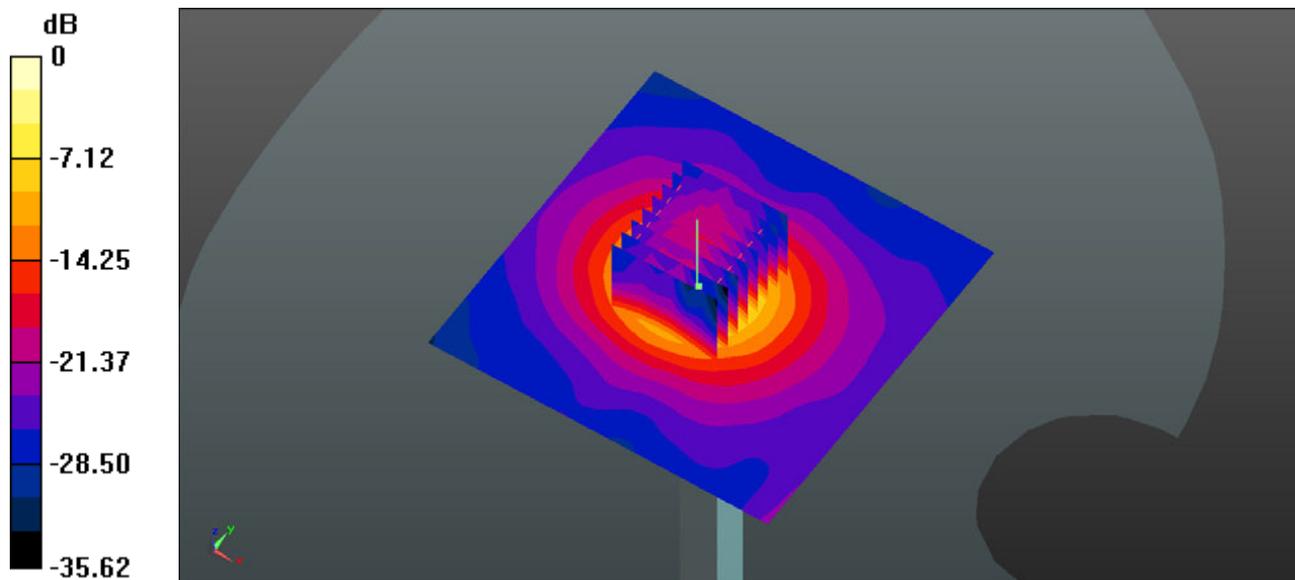

0 dB = 18.6 W/kg = 12.70 dBW/kg

### System Check\_Body\_750MHz\_151027

**DUT: D750V2 - SN:1065**

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium: MSL\_750\_151027 Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.933$  S/m;  $\epsilon_r = 57.59$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.07, 10.07, 10.07); Calibrated: 2014.11.21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.80 W/kg


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 49.95 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 3.16 W/kg

**SAR(1 g) = 2.21 W/kg; SAR(10 g) = 1.5 W/kg**

Maximum value of SAR (measured) = 2.74 W/kg

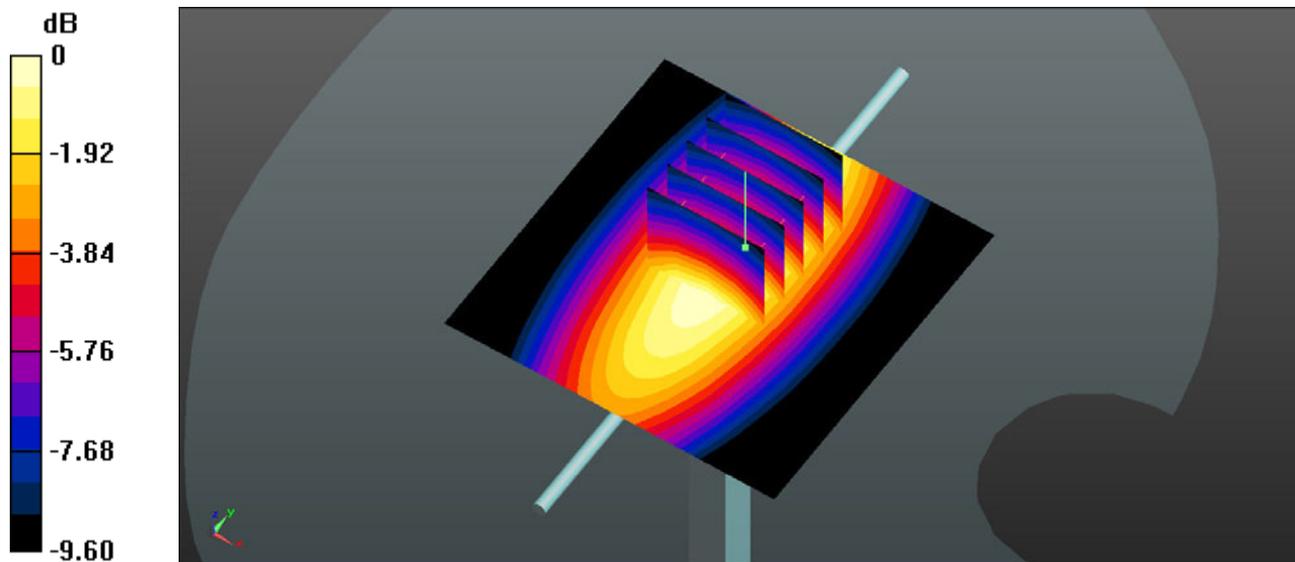

0 dB = 2.74 W/kg = 4.38 dBW/kg

### System Check\_Body\_835MHz\_151027

**DUT: D835V2 - SN:4d091**

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL\_835\_151027 Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.969$  S/m;  $\epsilon_r = 55.698$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.01, 10.01, 10.01); Calibrated: 2014.11.21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.11 W/kg


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 51.85 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 3.62 W/kg

**SAR(1 g) = 2.48 W/kg; SAR(10 g) = 1.63 W/kg**

Maximum value of SAR (measured) = 3.13 W/kg

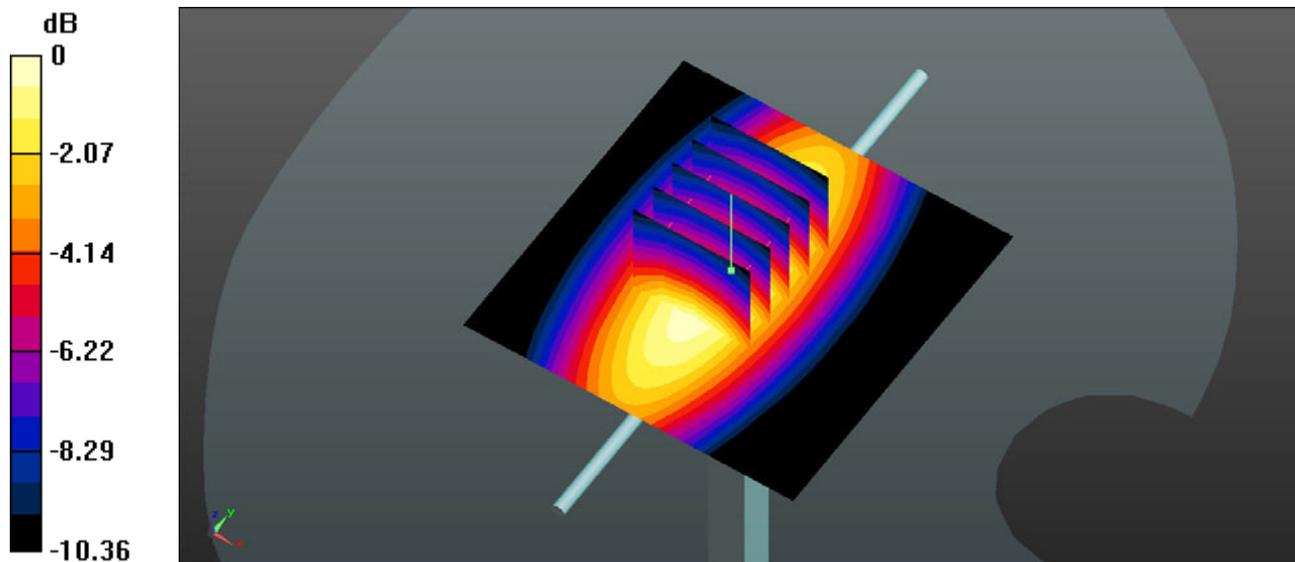

0 dB = 3.13 W/kg = 4.96 dBW/kg

### System Check\_Body\_1750MHz\_151105

**DUT: D1750V2 - SN:1069**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: MSL\_1750\_151105 Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.499$  S/m;  $\epsilon_r = 53.463$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.77, 7.77, 7.77); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012.5.21
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 12.9 W/kg


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 83.63 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 15.6 W/kg

**SAR(1 g) = 9.16 W/kg; SAR(10 g) = 4.93 W/kg**

Maximum value of SAR (measured) = 12.8 W/kg

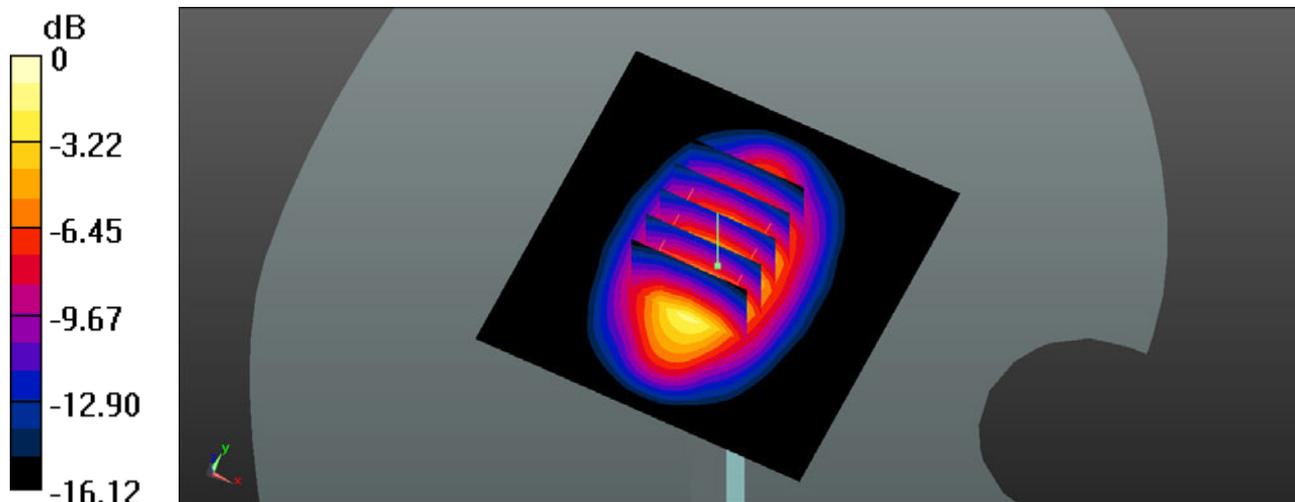

0 dB = 12.8 W/kg = 11.07 dBW/kg

### System Check\_Body\_1900MHz\_151104

#### DUT: D1900V2 - SN:5d118

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_151104 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.55$  S/m;  $\epsilon_r = 53.207$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.54, 7.54, 7.54); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 13.2 W/kg


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 81.28 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 16.6 W/kg

**SAR(1 g) = 9.36 W/kg; SAR(10 g) = 4.9 W/kg**

Maximum value of SAR (measured) = 13.3 W/kg

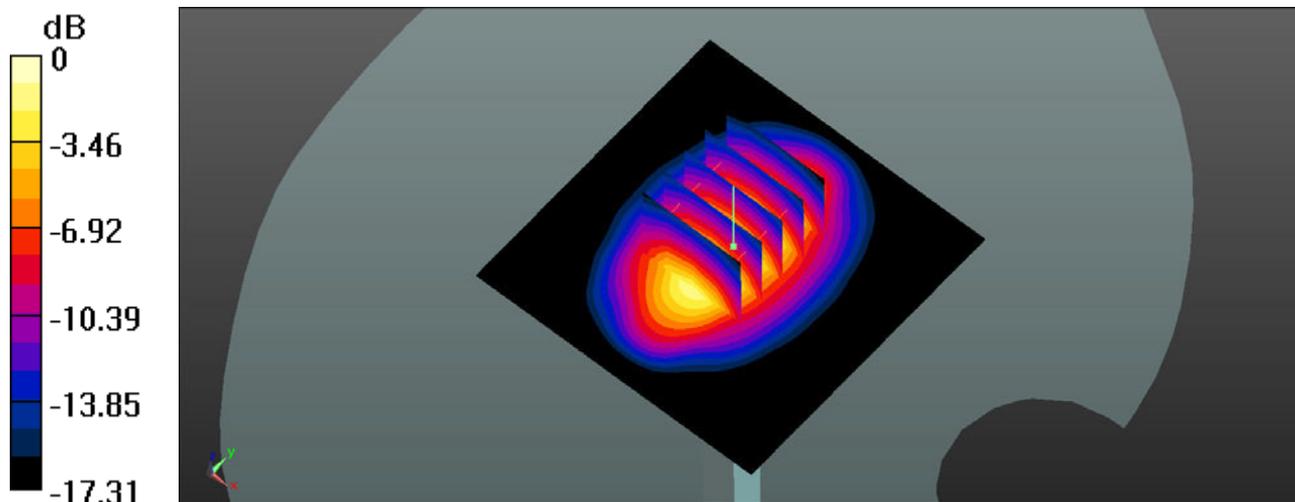

0 dB = 13.3 W/kg = 11.24 dBW/kg

### System Check\_Body\_2450MHz\_151108

**DUT: D2450V2 - SN:840**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL\_2450\_151108 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.988$  S/m;  $\epsilon_r = 51.424$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.29, 7.29, 7.29); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (71x71x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 18.0 W/kg


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.43 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 23.0 W/kg

**SAR(1 g) = 11.9 W/kg; SAR(10 g) = 5.45 W/kg**

Maximum value of SAR (measured) = 17.4 W/kg

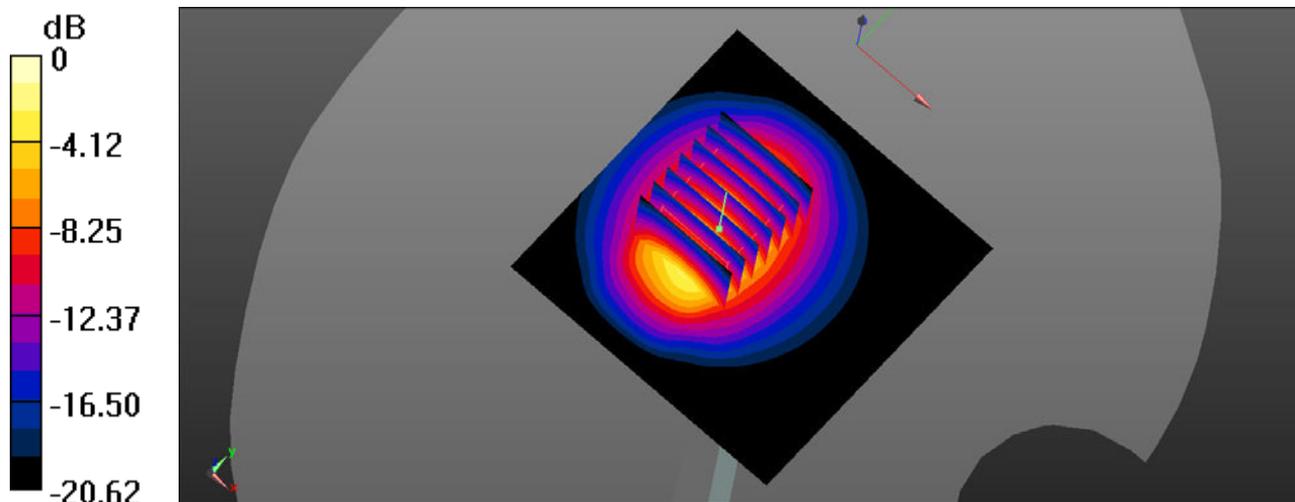

### System Check\_Body\_5200MHz\_151109

#### DUT: D5GHzV2 - SN:1113


Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle: 1:1  
Medium: MSL\_5000\_151109 Medium parameters used:  $f = 5200$  MHz;  $\sigma = 5.42$  S/m;  $\epsilon_r = 48.637$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(4.32, 4.32, 4.32); Calibrated: 2014.11.21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=100mW/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 15.9 W/kg

**Pin=100mW/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 32.39 V/m; Power Drift = -0.14 dB  
Peak SAR (extrapolated) = 28.7 W/kg  
**SAR(1 g) = 7.59 W/kg; SAR(10 g) = 2.23 W/kg**  
Maximum value of SAR (measured) = 18.2 W/kg

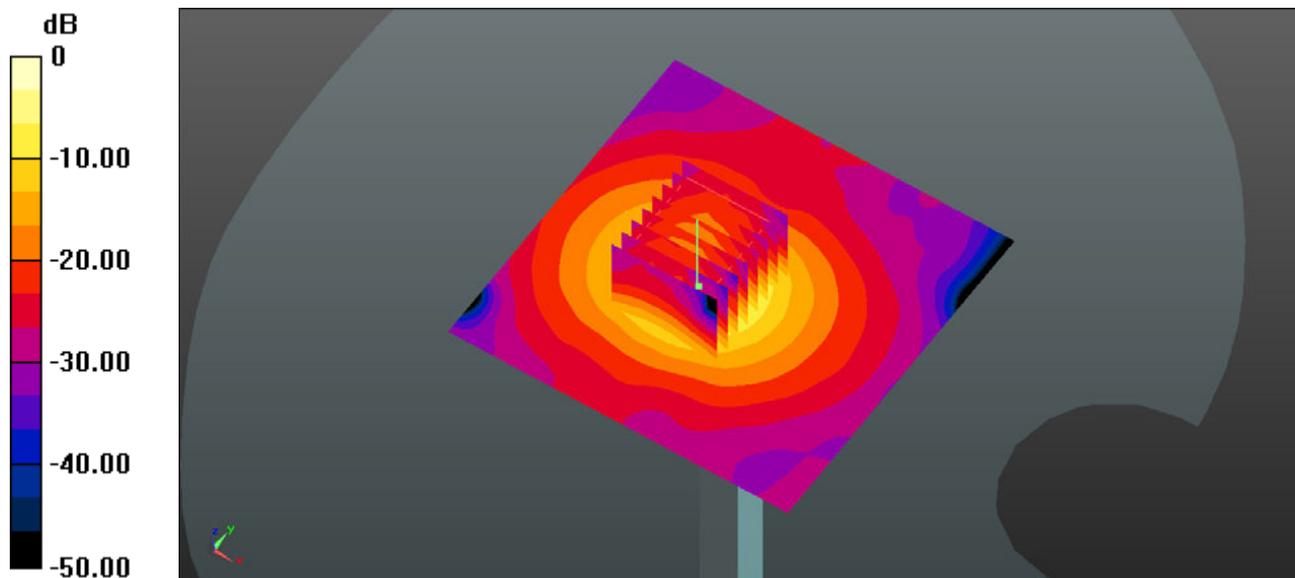

0 dB = 18.2 W/kg = 12.60 dBW/kg

### System Check\_Body\_5800MHz\_151109

#### DUT: D5GHzV2 - SN:1113


Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1  
Medium: MSL\_5000\_151109 Medium parameters used:  $f = 5800$  MHz;  $\sigma = 6.289$  S/m;  $\epsilon_r = 47.502$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(3.96, 3.96, 3.96); Calibrated: 2014.11.21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=100mW/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 15.9 W/kg

**Pin=100mW/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 29.86 V/m; Power Drift = -0.12 dB  
Peak SAR (extrapolated) = 32.9 W/kg  
**SAR(1 g) = 7.51 W/kg; SAR(10 g) = 2.15 W/kg**  
Maximum value of SAR (measured) = 19.6 W/kg

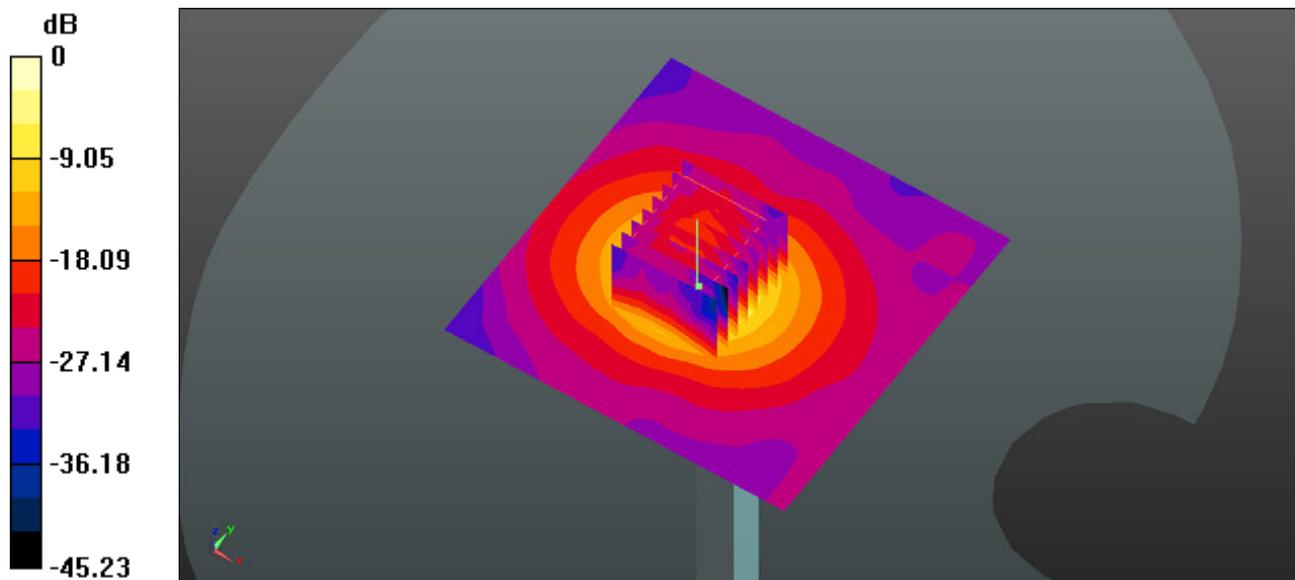

0 dB = 19.6 W/kg = 12.92 dBW/kg



**Appendix B. Plots of High SAR Measurement**

The plots are shown as follows.

### 01\_GSM850\_GPRS (GMSK 4 Tx slots)\_Right Cheek\_Ch128

Communication System: UID 0, GPRS/EDGE (4 Tx slots) (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.08

Medium: HSL\_850\_151028 Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.917$  S/m;  $\epsilon_r = 42.025$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.9 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.33, 10.33, 10.33); Calibrated: 2014.11.21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch128/Area Scan (81x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.435 W/kg


**Ch128/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.078 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.469 W/kg

**SAR(1 g) = 0.371 W/kg; SAR(10 g) = 0.286 W/kg**

Maximum value of SAR (measured) = 0.425 W/kg

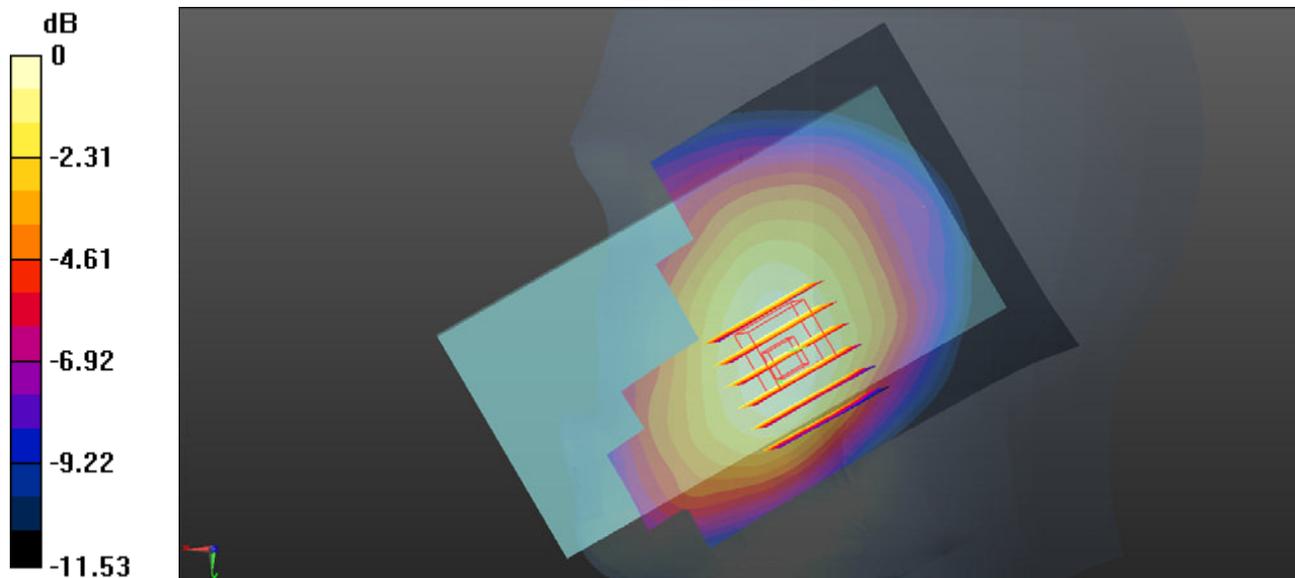

0 dB = 0.425 W/kg

### 02\_GSM1900\_GPRS (GMSK 4 Tx slots)\_Right Cheek\_Ch810

Communication System: UID 0, GPRS/EDGE (4 Tx slots) (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.08

Medium: HSL\_1900\_151104 Medium parameters used:  $f = 1909.8$  MHz;  $\sigma = 1.436$  S/m;  $\epsilon_r = 40.688$ ;

$\rho$   
 $= 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(8.1, 8.1, 8.1); Calibrated: 2014.11.21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch810/Area Scan (81x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.187 W/kg


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.807 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.223 W/kg

**SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.086 W/kg**

Maximum value of SAR (measured) = 0.183 W/kg

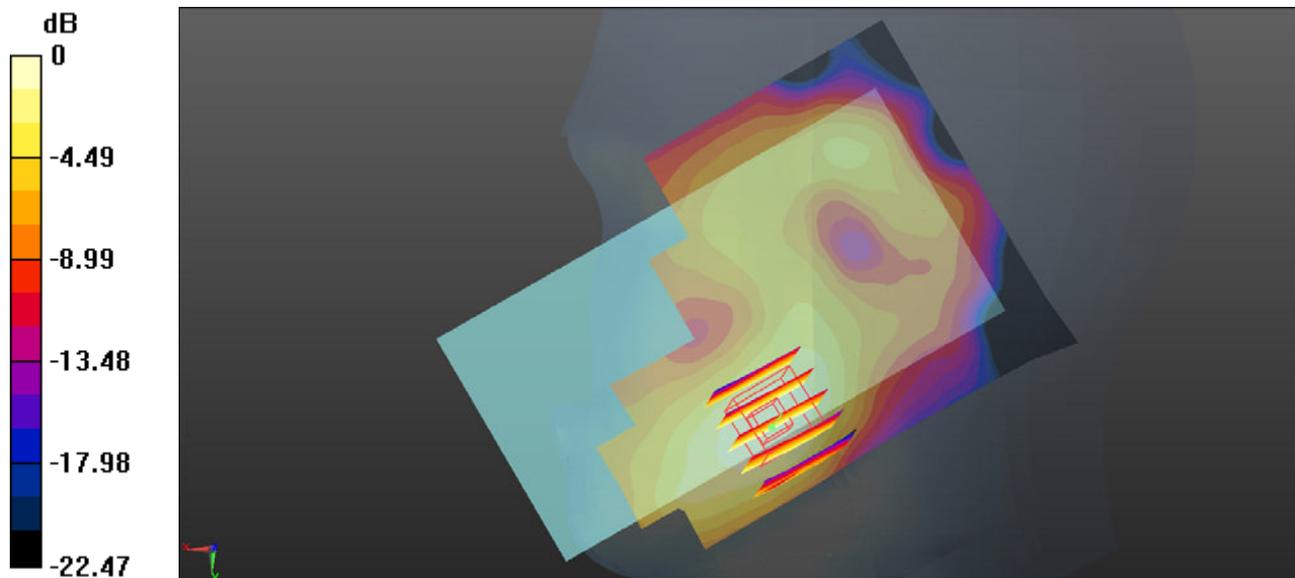

0 dB = 0.183 W/kg

### 03\_WCDMA V\_RMC12.2Kbps\_Right Cheek\_Ch4233


Communication System: UID 0, UMTS (0); Frequency: 846.6 MHz; Duty Cycle: 1:1  
Medium: HSL\_850\_151028 Medium parameters used:  $f = 846.6$  MHz;  $\sigma = 0.938$  S/m;  $\epsilon_r = 41.766$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.9 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.33, 10.33, 10.33); Calibrated: 2014.11.21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch4233/Area Scan (81x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.261 W/kg

**Ch4233/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 9.442 V/m; Power Drift = 0.00 dB  
Peak SAR (extrapolated) = 0.281 W/kg  
**SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.168 W/kg**  
Maximum value of SAR (measured) = 0.251 W/kg

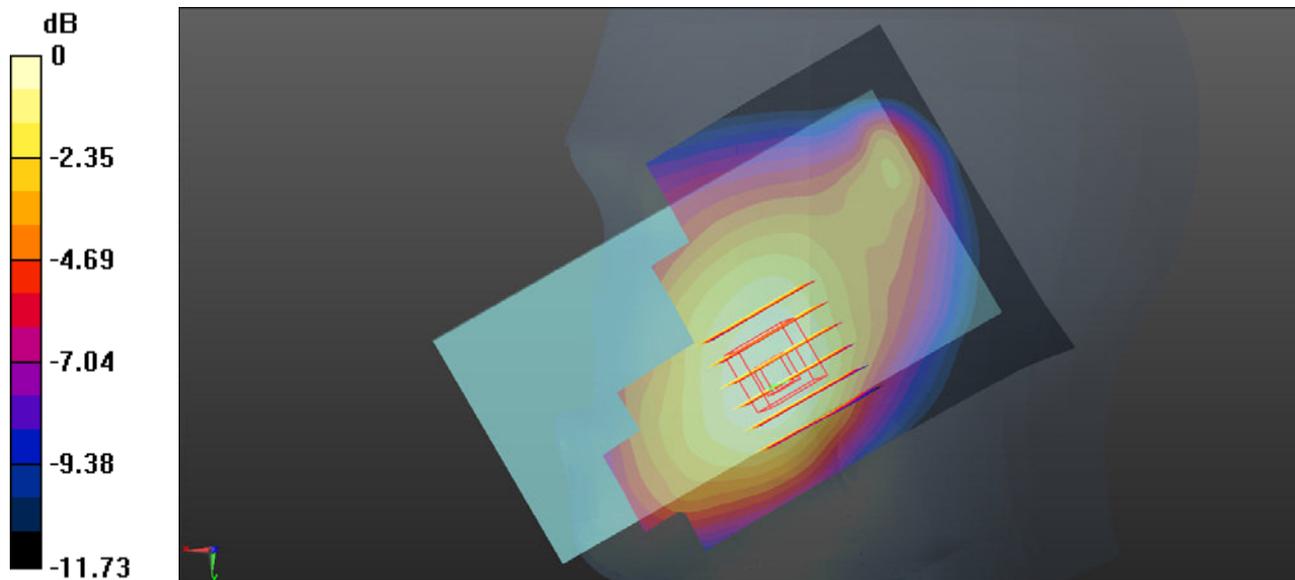

0 dB = 0.251 W/kg

### 04\_WCDMA II\_RMC12.2Kbps\_Right Cheek\_Ch9538

Communication System: UID 0, UMTS (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_151104 Medium parameters used:  $f = 1907.6$  MHz;  $\sigma = 1.434$  S/m;  $\epsilon_r = 40.696$ ;


$\rho$   
=  $1000 \text{ kg/m}^3$   
Ambient Temperature :  $23.2 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.7 \text{ }^\circ\text{C}$

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(8.1, 8.1, 8.1); Calibrated: 2014.11.21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch9538/Area Scan (81x121x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) =  $0.208 \text{ W/kg}$

**Ch9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value =  $5.665 \text{ V/m}$ ; Power Drift =  $0.10 \text{ dB}$   
Peak SAR (extrapolated) =  $0.247 \text{ W/kg}$   
**SAR(1 g) =  $0.158 \text{ W/kg}$ ; SAR(10 g) =  $0.095 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $0.208 \text{ W/kg}$

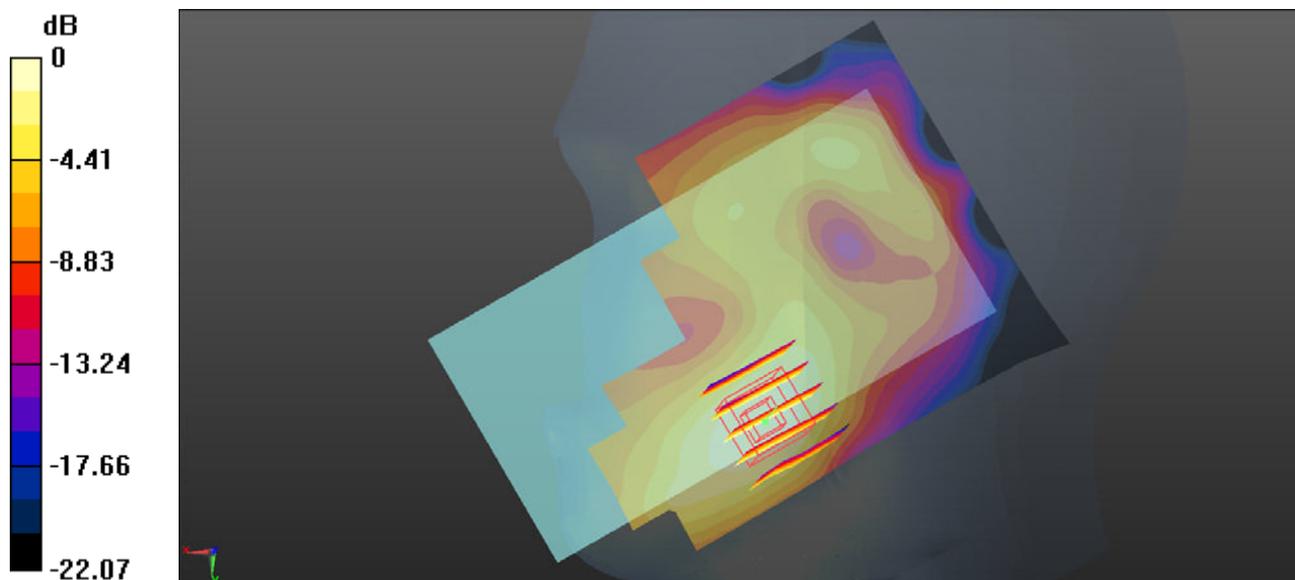

0 dB =  $0.208 \text{ W/kg}$

### 05\_LTE Band12\_10M\_QPSK\_1RB\_25Offset\_Left Cheek\_Ch23095


Communication System: UID 0, FDD\_LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_151028 Medium parameters used (interpolated):  $f = 707.5$  MHz;  $\sigma = 0.866$  S/m;  
 $\epsilon_r = 42.369$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.9 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.93, 10.93, 10.93); Calibrated: 2014.11.21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch23095/Area Scan (81x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.248 W/kg

**Ch23095/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 7.351 V/m; Power Drift = 0.17 dB  
Peak SAR (extrapolated) = 0.267 W/kg  
**SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.183 W/kg**  
Maximum value of SAR (measured) = 0.252 W/kg

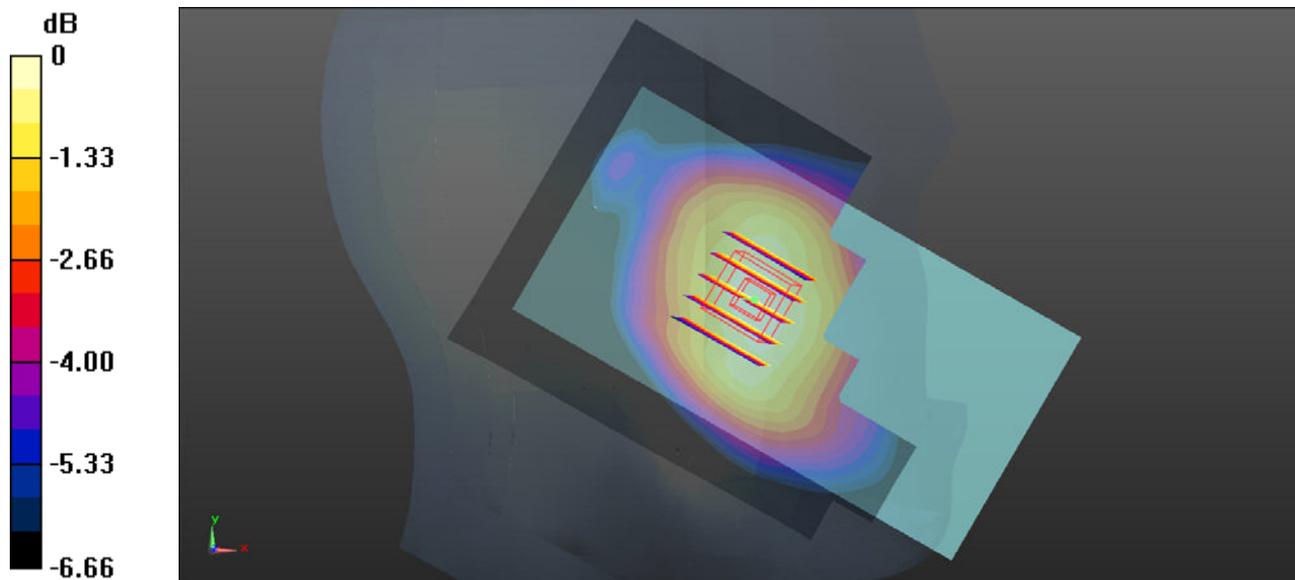

0 dB = 0.252 W/kg

### 06\_LTE Band5\_10M\_QPSK\_1RB\_25Offset\_Right Cheek\_Ch20525


Communication System: UID 0, FDD\_LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_850\_151028 Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.929$  S/m;  
 $\epsilon_r = 41.887$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.9 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.33, 10.33, 10.33); Calibrated: 2014.11.21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch20525/Area Scan (81x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.318 W/kg

**Ch20525/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 7.581 V/m; Power Drift = -0.17 dB  
Peak SAR (extrapolated) = 0.357 W/kg  
**SAR(1 g) = 0.280 W/kg; SAR(10 g) = 0.218 W/kg**  
Maximum value of SAR (measured) = 0.321 W/kg

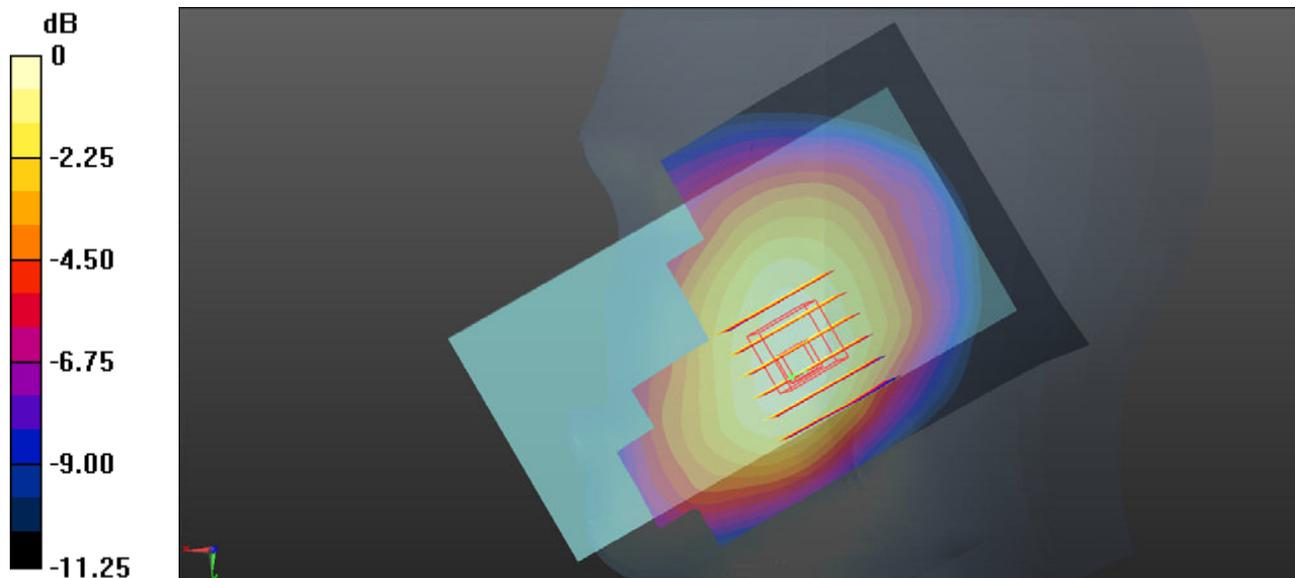

0 dB = 0.321 W/kg

### 07\_LTE Band4\_20M\_QPSK\_1RB\_49Offset\_Right Cheek\_Ch20175

Communication System: UID 0, FDD\_LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_151104 Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.382$  S/m;  $\epsilon_r = 39.933$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(8.35, 8.35, 8.35); Calibrated: 2014.11.21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch20175/Area Scan (81x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.228 W/kg


**Configuration/Ch20175/Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.906 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.260 W/kg

**SAR(1 g) = 0.178 W/kg; SAR(10 g) = 0.117 W/kg**

Maximum value of SAR (measured) = 0.217 W/kg

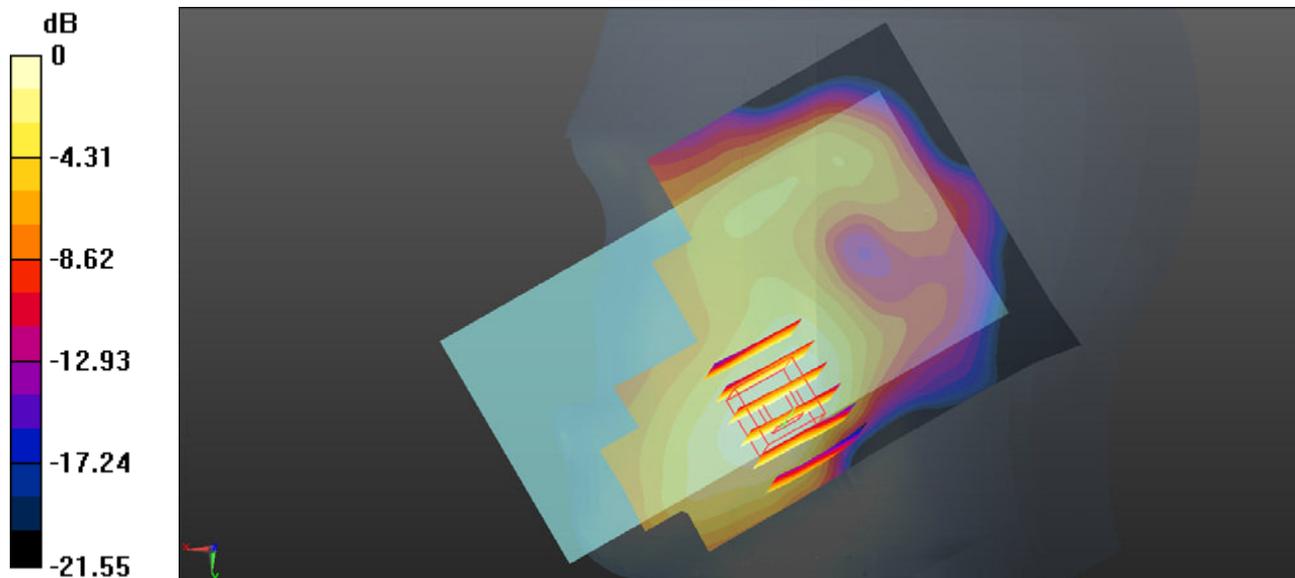

0 dB = 0.217 W/kg

### 08\_LTE Band2\_20M\_QPSK\_1RB\_49Offset\_Right Cheek\_Ch18700


Communication System: UID 0, FDD\_LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_151104 Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.392$  S/m;  $\epsilon_r = 40.859$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(8.1, 8.1, 8.1); Calibrated: 2014.11.21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch18700/Area Scan (81x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.180 W/kg

**Ch18700/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 3.803 V/m; Power Drift = 0.09 dB  
Peak SAR (extrapolated) = 0.220 W/kg  
**SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.089 W/kg**  
Maximum value of SAR (measured) = 0.186 W/kg

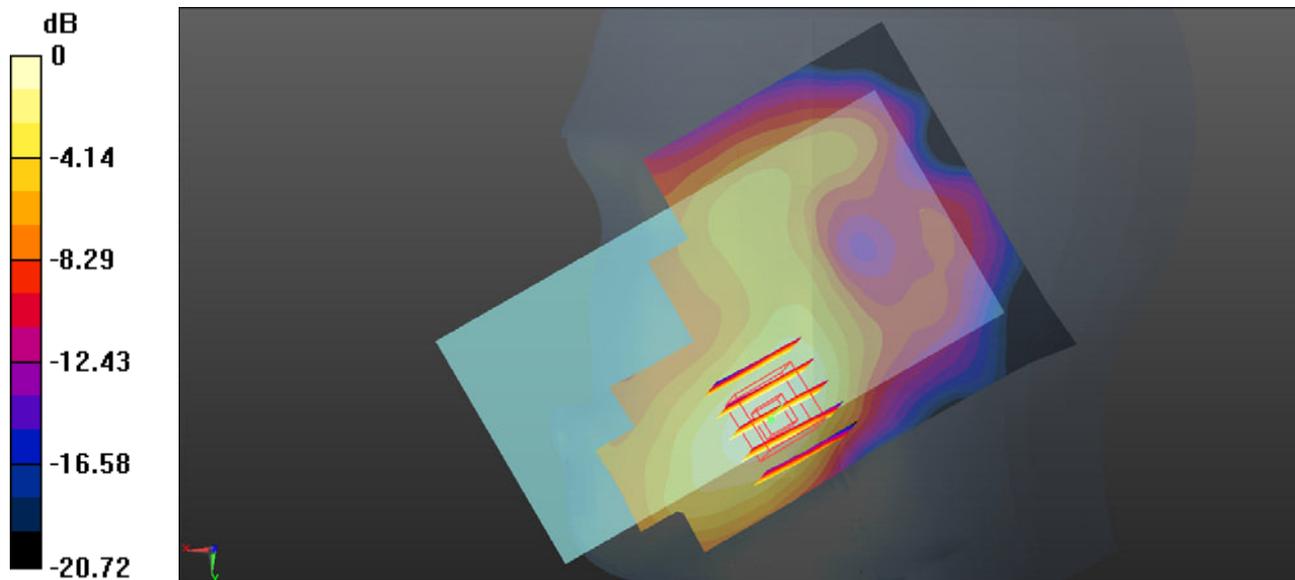

0 dB = 0.186 W/kg

### 09\_WLAN2.4GHz\_802.11b 1M\_Left Tilted\_0mm\_Ch6


Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1.024  
Medium: HSL\_2450\_151106 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.798$  S/m;  $\epsilon_r = 38.626$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.08, 7.08, 7.08); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch6/Area Scan (91x161x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.247 W/kg

**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 3.033 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 0.358 W/kg  
**SAR(1 g) = 0.172 W/kg; SAR(10 g) = 0.076 W/kg**  
Maximum value of SAR (measured) = 0.264 W/kg

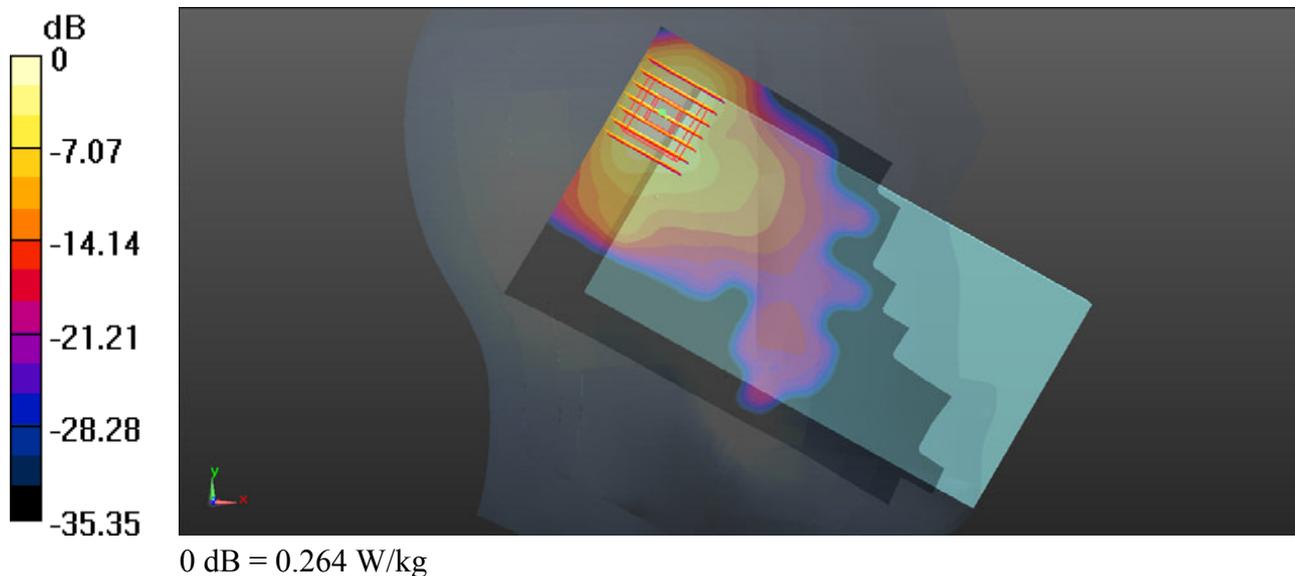

### 10\_WLAN5G Band1\_802.11a 6M\_Left Tilted\_Ch36


Communication System: UID 0, WIFI (0); Frequency: 5180 MHz; Duty Cycle: 1:1.149  
Medium: HSL\_5000\_151108 Medium parameters used:  $f = 5180$  MHz;  $\sigma = 4.771$  S/m;  $\epsilon_r = 35.537$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(5.17, 5.17, 5.17); Calibrated: 2014.11.21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch36/Area Scan (111x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.722 W/kg

**Ch36/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 8.389 V/m; Power Drift = -0.11 dB  
Peak SAR (extrapolated) = 1.14 W/kg  
**SAR(1 g) = 0.271 W/kg; SAR(10 g) = 0.073 W/kg**  
Maximum value of SAR (measured) = 0.650 W/kg

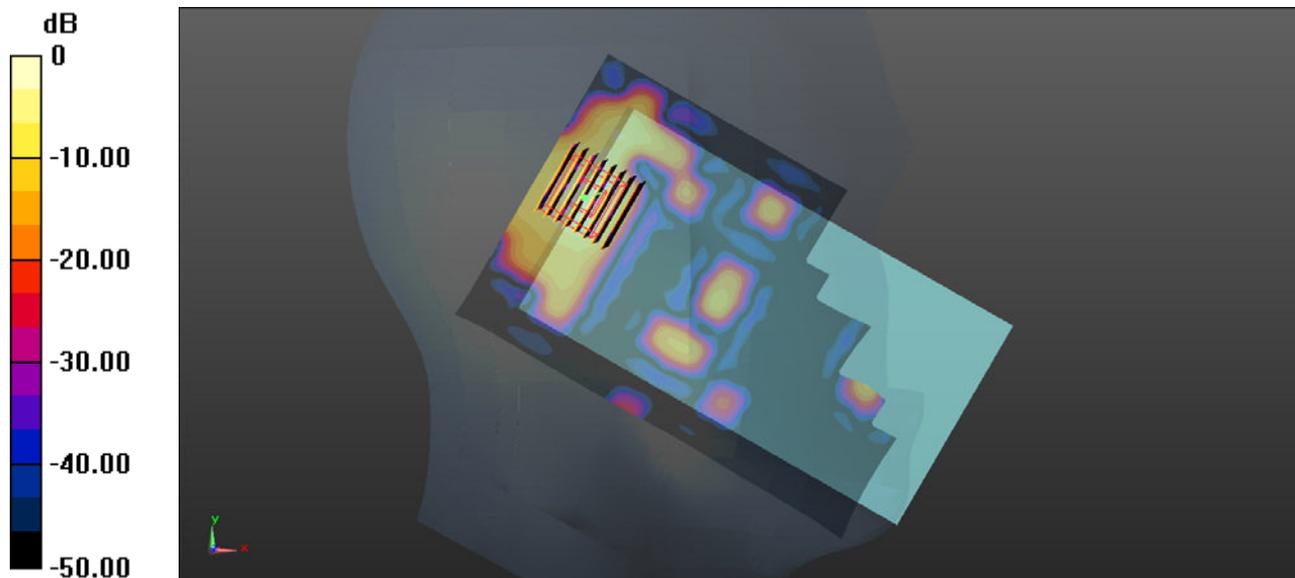

0 dB = 0.650 W/kg = -1.87 dBW/kg

### 11\_WLAN5G Band4\_802.11a 6M\_Right Cheek\_Ch149


Communication System: UID 0, WIFI (0); Frequency: 5745 MHz; Duty Cycle: 1:1.149  
Medium: HSL\_5000\_151108 Medium parameters used:  $f = 5745$  MHz;  $\sigma = 5.36$  S/m;  $\epsilon_r = 34.556$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(4.64, 4.64, 4.64); Calibrated: 2014.11.21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch149/Area Scan (111x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 1.01 W/kg

**Ch149/Zoom Scan (9x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 6.722 V/m; Power Drift = -0.08 dB  
Peak SAR (extrapolated) = 0.808 W/kg  
**SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.049 W/kg**  
Maximum value of SAR (measured) = 0.512 W/kg

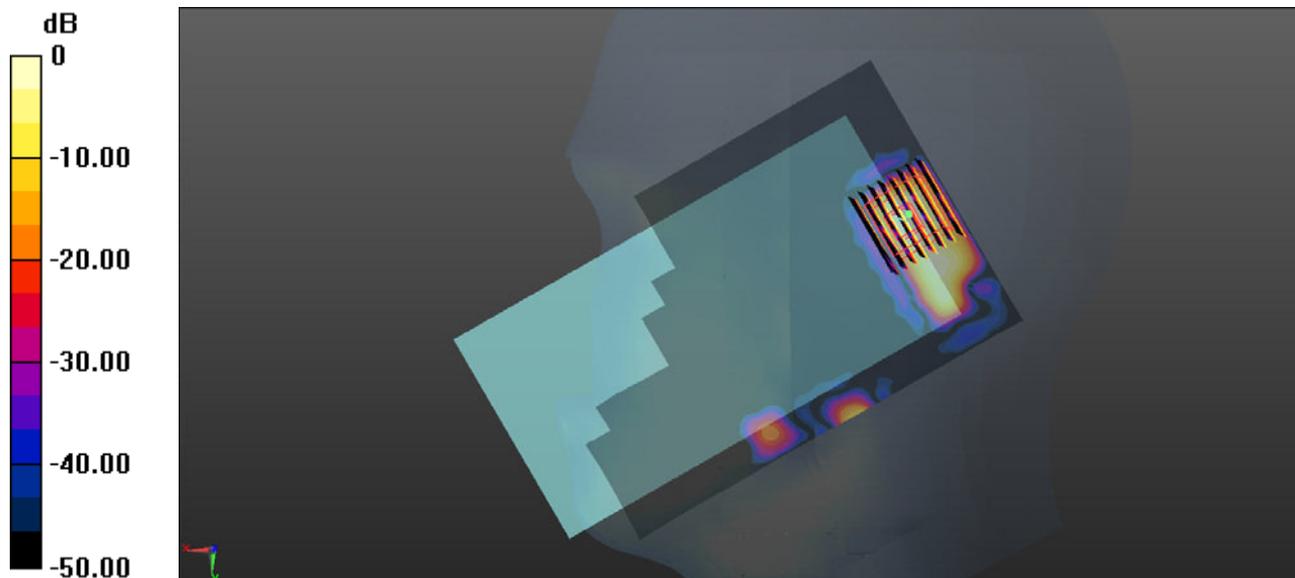

### 12\_GSM850\_GPRS 4 Tx slots\_Back\_10mm\_Ch128

Communication System: UID 0, GPRS/EDGE (4 Tx slots) (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.08

Medium: MSL\_835\_151027 Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.96$  S/m;  $\epsilon_r = 55.794$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.01, 10.01, 10.01); Calibrated: 2014.11.21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch128/Area Scan (71x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.660 W/kg


**Ch128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.27 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.701 W/kg

**SAR(1 g) = 0.560 W/kg; SAR(10 g) = 0.428 W/kg**

Maximum value of SAR (measured) = 0.641 W/kg

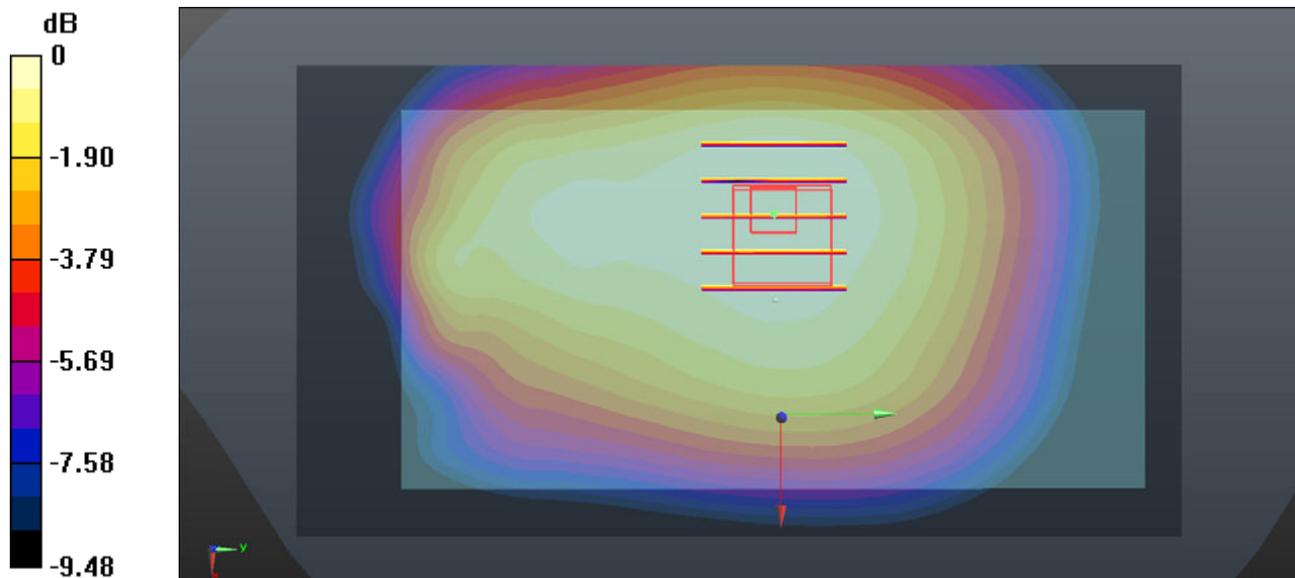

0 dB = 0.641 W/kg

### 13\_GSM1900\_GPRS (4 Tx slots)\_Back\_10mm\_Ch810

Communication System: UID 0, GPRS/EDGE (4 Tx slots) (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.08

Medium: MSL\_1900\_151104 Medium parameters used:  $f = 1909.8$  MHz;  $\sigma = 1.561$  S/m;  $\epsilon_r = 53.176$ ;

$\rho$   
 $= 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.54, 7.54, 7.54); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch810/Area Scan (81x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.50 W/kg


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.77 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.85 W/kg

**SAR(1 g) = 1.060 W/kg; SAR(10 g) = 0.547 W/kg**

Maximum value of SAR (measured) = 1.44 W/kg

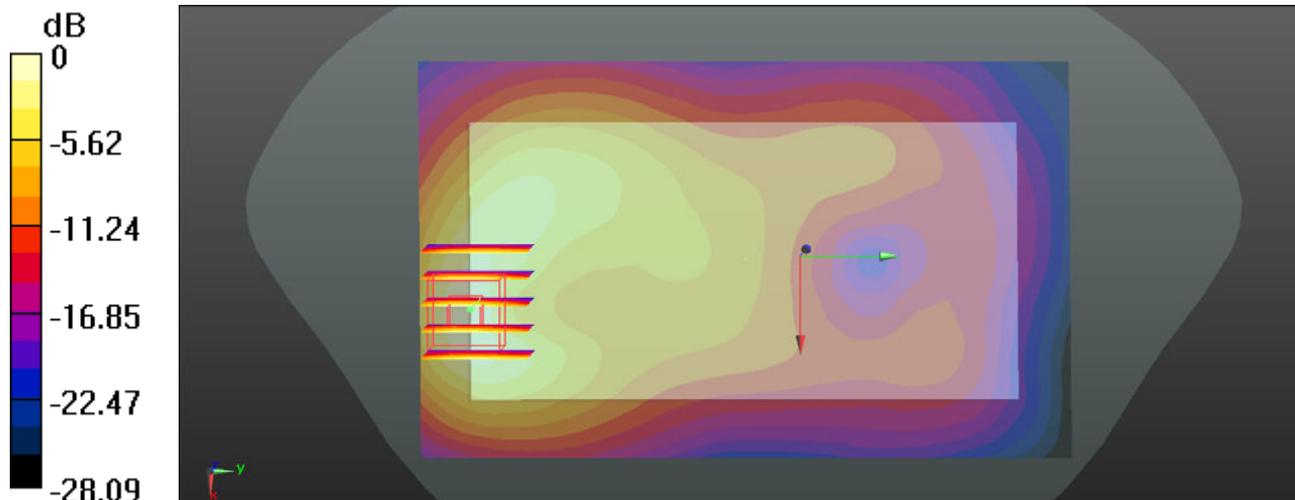

0 dB = 1.50 W/kg

### 14\_WCDMA V\_RMC12.2Kbps\_Back\_10mm\_Ch4233


Communication System: UID 0, UMTS (0); Frequency: 846.6 MHz; Duty Cycle: 1:1  
Medium: MSL\_835\_151027 Medium parameters used:  $f = 846.6$  MHz;  $\sigma = 0.98$  S/m;  $\epsilon_r = 55.591$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.01, 10.01, 10.01); Calibrated: 2014.11.21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch4233/Area Scan (71x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.540 W/kg

**Ch4233/Zoom Scan (6x8x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 14.64 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 0.604 W/kg  
**SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.255 W/kg**  
Maximum value of SAR (measured) = 0.483 W/kg

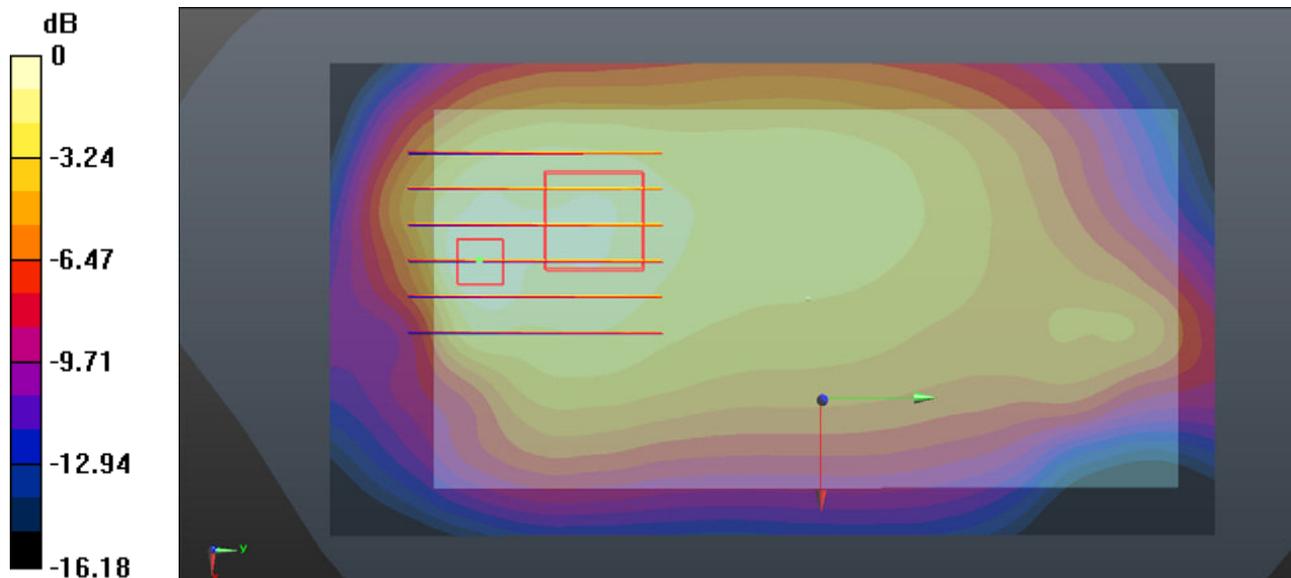

0 dB = 0.483 W/kg

**15\_WCMA II\_RMC 12.2Kbps\_Back\_10mm\_Ch9538**

Communication System: UID 0, UMTS (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1  
 Medium: MSL\_1900\_151104 Medium parameters used:  $f = 1907.6$  MHz;  $\sigma = 1.559$  S/m;  $\epsilon_r = 53.183$ ;


$\rho$   
 =  $1000 \text{ kg/m}^3$   
 Ambient Temperature :  $23.4 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.7 \text{ }^\circ\text{C}$

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(7.54, 7.54, 7.54); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch9538/Area Scan (71x131x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
 Maximum value of SAR (interpolated) =  $1.41 \text{ W/kg}$

**Ch9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
 Reference Value =  $12.09 \text{ V/m}$ ; Power Drift =  $-0.02 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.97 \text{ W/kg}$   
**SAR(1 g) =  $1.130 \text{ W/kg}$ ; SAR(10 g) =  $0.592 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $1.45 \text{ W/kg}$

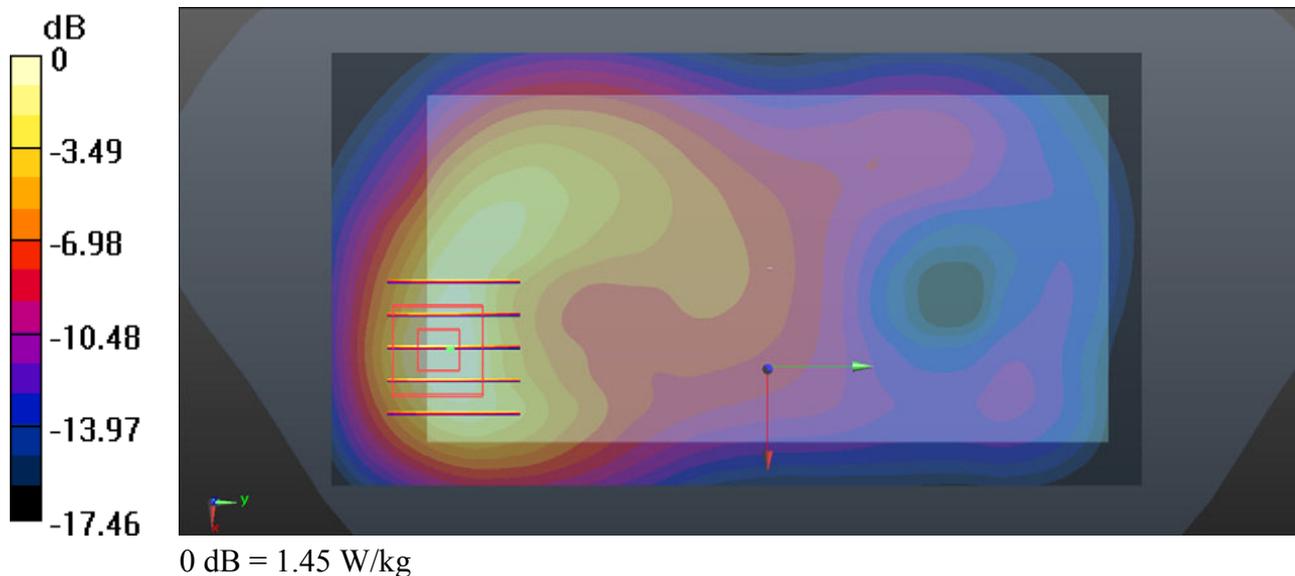

### 16\_LTE Band12\_10M\_QPSK\_1RB\_25Offset\_Right Side\_10mm\_Ch23095


Communication System: UID 0, FDD\_LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium: MSL\_750 151027 Medium parameters used (extrapolated):  $f = 707.5$  MHz;  $\sigma = 0.892$  S/m;  
 $\epsilon_r = 57.982$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.07, 10.07, 10.07); Calibrated: 2014.11.21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch23095/Area Scan (41x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.375 W/kg

**Ch23095/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 18.20 V/m; Power Drift = 0.13 dB  
Peak SAR (extrapolated) = 0.425 W/kg  
**SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.224 W/kg**  
Maximum value of SAR (measured) = 0.373 W/kg

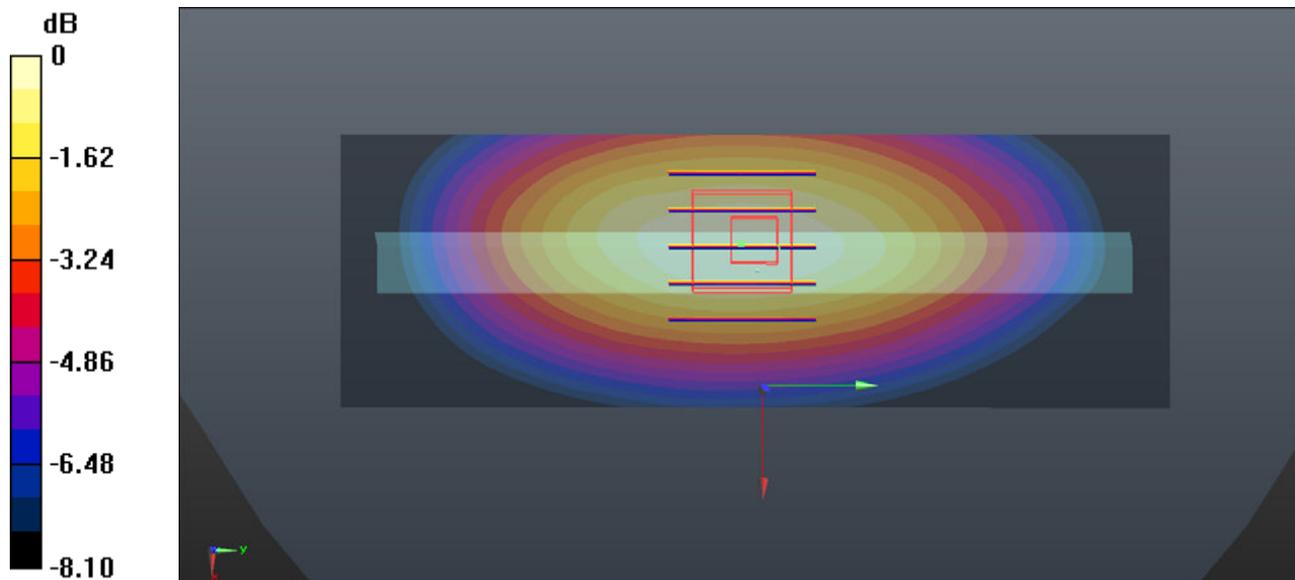

0 dB = 0.373 W/kg

### 17\_LTE Band5\_10M\_QPSK\_1RB\_25Offset\_Back\_10mm\_Ch20525


Communication System: UID 0, FDD\_LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium: MSL\_835\_151027 Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.971$  S/m;  
 $\epsilon_r = 55.684$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.01, 10.01, 10.01); Calibrated: 2014.11.21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch20525/Area Scan (71x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.496 W/kg

**Ch20525/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 20.26 V/m; Power Drift = -0.12 dB  
Peak SAR (extrapolated) = 0.532 W/kg  
**SAR(1 g) = 0.423 W/kg; SAR(10 g) = 0.325 W/kg**  
Maximum value of SAR (measured) = 0.487 W/kg

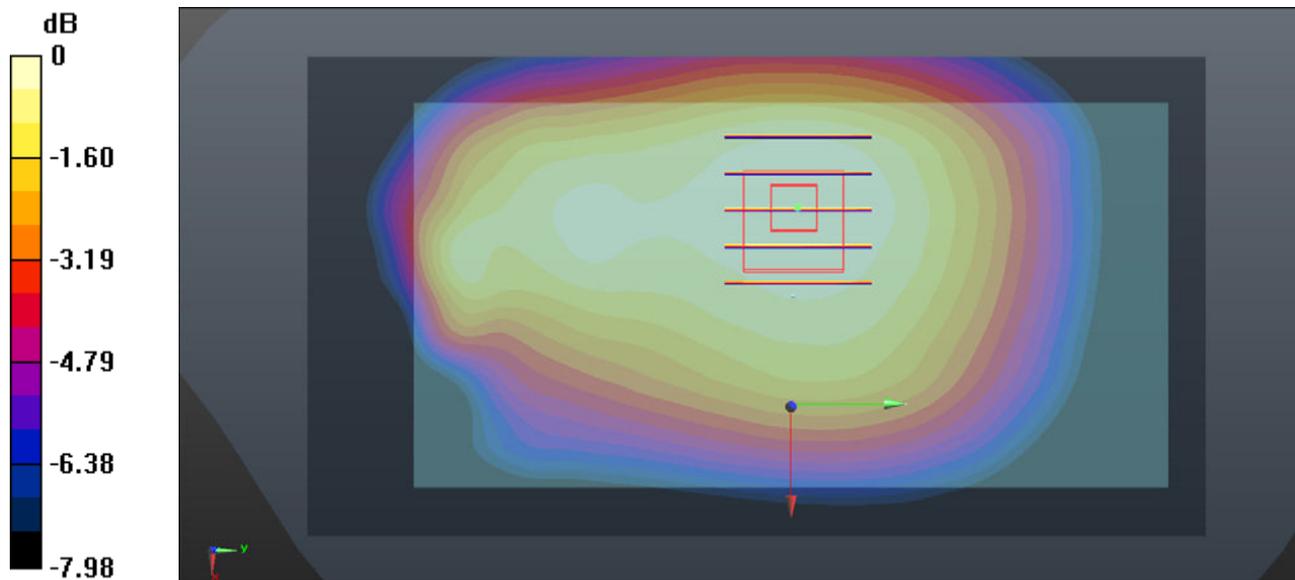

0 dB = 0.487 W/kg

### 18\_LTE Band4\_20M\_QPSK\_1RB\_49Offset\_Back\_10mm\_Ch20175

Communication System: UID 0, FDD\_LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium: MSL\_1750\_151105 Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.48$  S/m;  $\epsilon_r = 53.491$ ;

$\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.77, 7.77, 7.77); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch20175/Area Scan (71x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.48 W/kg

**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 9.176 V/m; Power Drift = 0.15 dB  
Peak SAR (extrapolated) = 2.07 W/kg  
**SAR(1 g) = 1.180 W/kg; SAR(10 g) = 0.614 W/kg**  
Maximum value of SAR (measured) = 1.56 W/kg

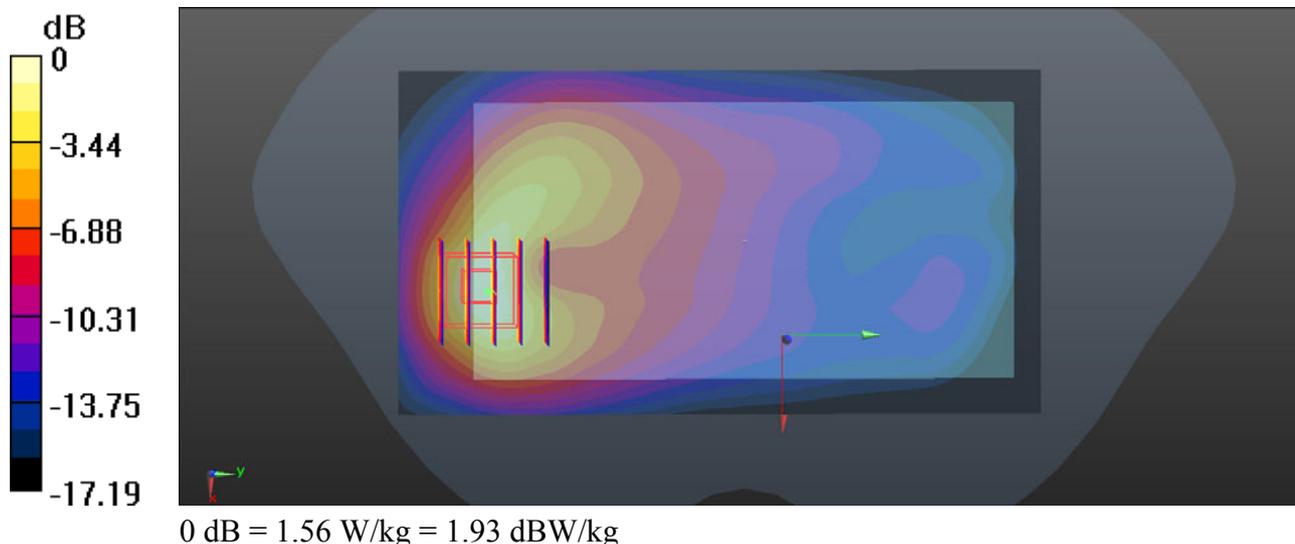

### 19\_LTE Band2\_20M\_QPSK\_1RB\_49Offset\_Back\_10mm\_Ch19100


Communication System: UID 0, FDD\_LTE (0); Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium: MSL\_1900\_151104 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.55$  S/m;  $\epsilon_r = 53.207$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.54, 7.54, 7.54); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch19100/Area Scan (71x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.22 W/kg

**Ch19100/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 10.06 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 1.84 W/kg  
**SAR(1 g) = 1.040 W/kg; SAR(10 g) = 0.545 W/kg**  
Maximum value of SAR (measured) = 1.51 W/kg

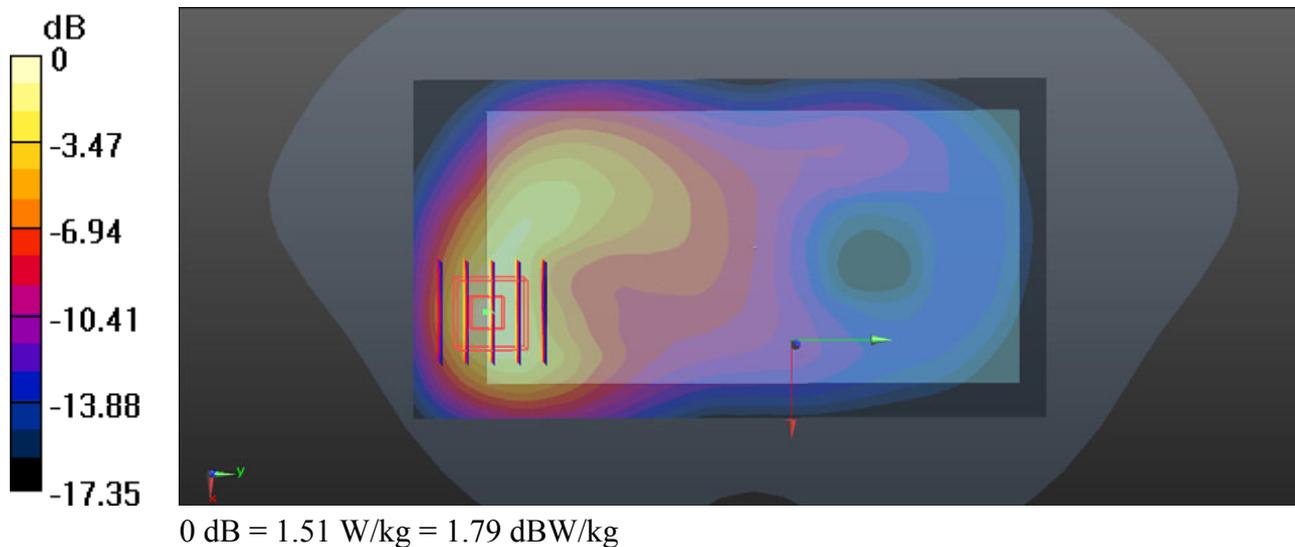

### 20\_WLAN2.4GHz\_802.11b 1M\_Back\_10mm\_Ch6


Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1.024  
Medium: MSL\_2450\_151108 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.969$  S/m;  $\epsilon_r = 51.462$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.29, 7.29, 7.29); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch6/Area Scan (91x161x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.371 W/kg

**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 0.5020 V/m; Power Drift = 0.07 dB  
Peak SAR (extrapolated) = 0.511 W/kg  
**SAR(1 g) = 0.244 W/kg; SAR(10 g) = 0.102 W/kg**  
Maximum value of SAR (measured) = 0.382 W/kg

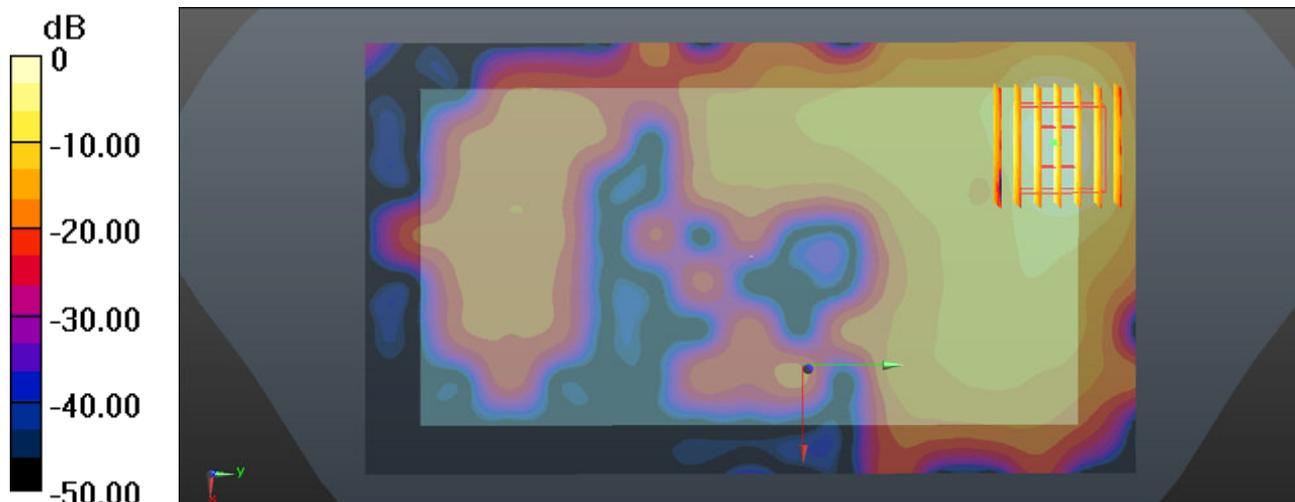

0 dB = 0.382 W/kg = -4.18 dBW/kg

### 21\_WLAN5G Band1\_802.11a 6M\_Back\_10mm\_Ch36


Communication System: UID 0, WIFI (0); Frequency: 5180 MHz; Duty Cycle: 1:1.149  
Medium: MSL\_5000\_151109 Medium parameters used:  $f = 5180$  MHz;  $\sigma = 5.386$  S/m;  $\epsilon_r = 48.679$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(4.32, 4.32, 4.32); Calibrated: 2014.11.21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch36/Area Scan (111x191x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.199 W/kg

**Ch36/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 0.8810 V/m; Power Drift = -0.10 dB  
Peak SAR (extrapolated) = 0.333 W/kg  
**SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.028 W/kg**  
Maximum value of SAR (measured) = 0.211 W/kg

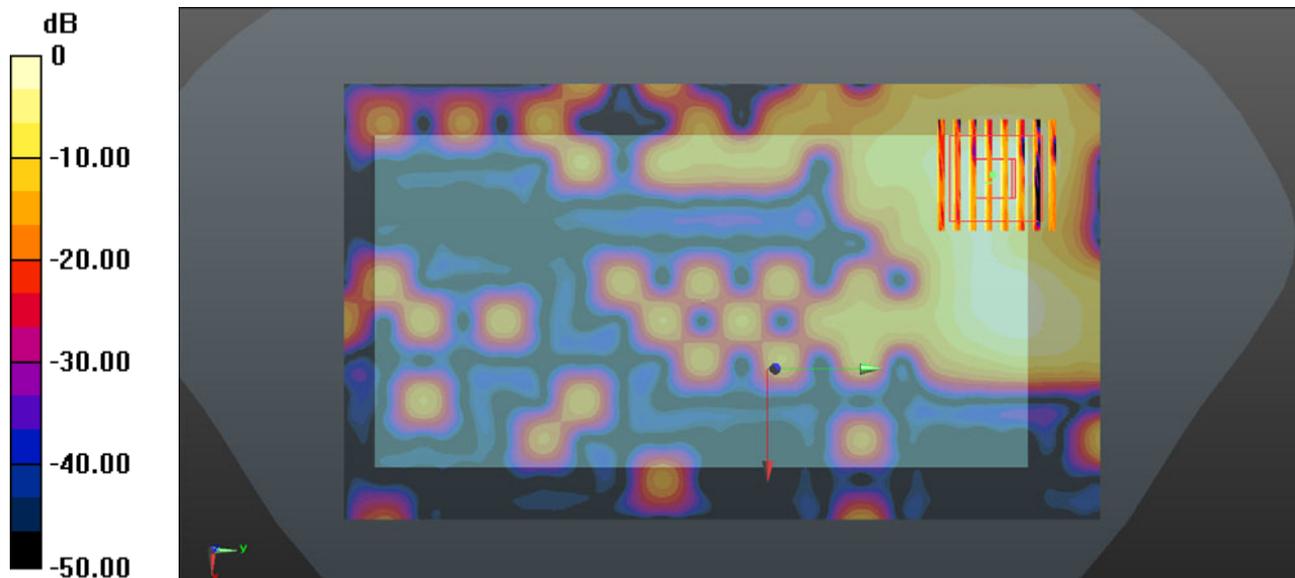

0 dB = 0.211 W/kg = -6.76 dBW/kg

### 22\_WLAN5G Band4\_802.11a 6M\_Back\_10mm\_Ch149


Communication System: UID 0, WIFI (0); Frequency: 5745 MHz; Duty Cycle: 1:1.149  
Medium: MSL\_5000\_151109 Medium parameters used (interpolated):  $f = 5745$  MHz;  $\sigma = 6.207$  S/m;  
 $\epsilon_r = 47.584$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(3.96, 3.96, 3.96); Calibrated: 2014.11.21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch149/Area Scan (111x191x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.271 W/kg

**Ch149/Zoom Scan (10x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 0.4720 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 0.412 W/kg  
**SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.036 W/kg**  
Maximum value of SAR (measured) = 0.263 W/kg

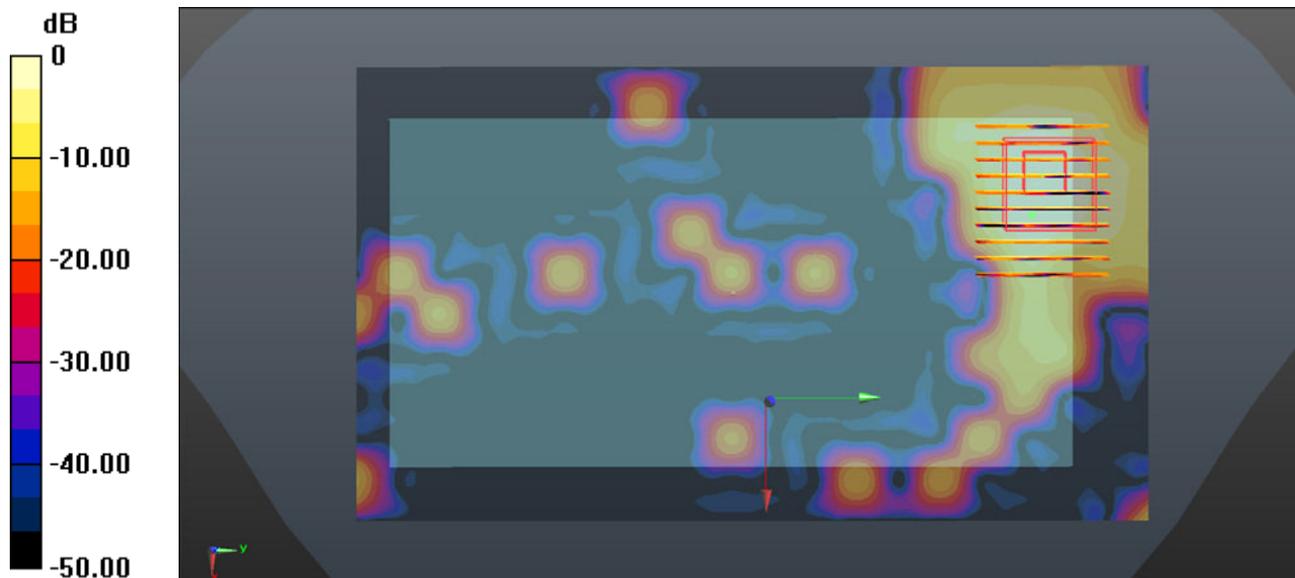

0 dB = 0.263 W/kg

### 23\_WLAN5G Band1\_802.11a 6M\_Back\_0mm\_Ch36


Communication System: UID 0, WIFI (0); Frequency: 5180 MHz; Duty Cycle: 1:1.149  
Medium: MSL\_5000\_151109 Medium parameters used:  $f = 5180$  MHz;  $\sigma = 5.386$  S/m;  $\epsilon_r = 48.679$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(4.32, 4.32, 4.32); Calibrated: 2014.11.21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch36/Area Scan (111x191x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 2.98 W/kg

**Ch36/Zoom Scan (10x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 0.2860 V/m; Power Drift = 0.07 dB  
Peak SAR (extrapolated) = 6.63 W/kg  
**SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.247 W/kg**  
Maximum value of SAR (measured) = 3.47 W/kg

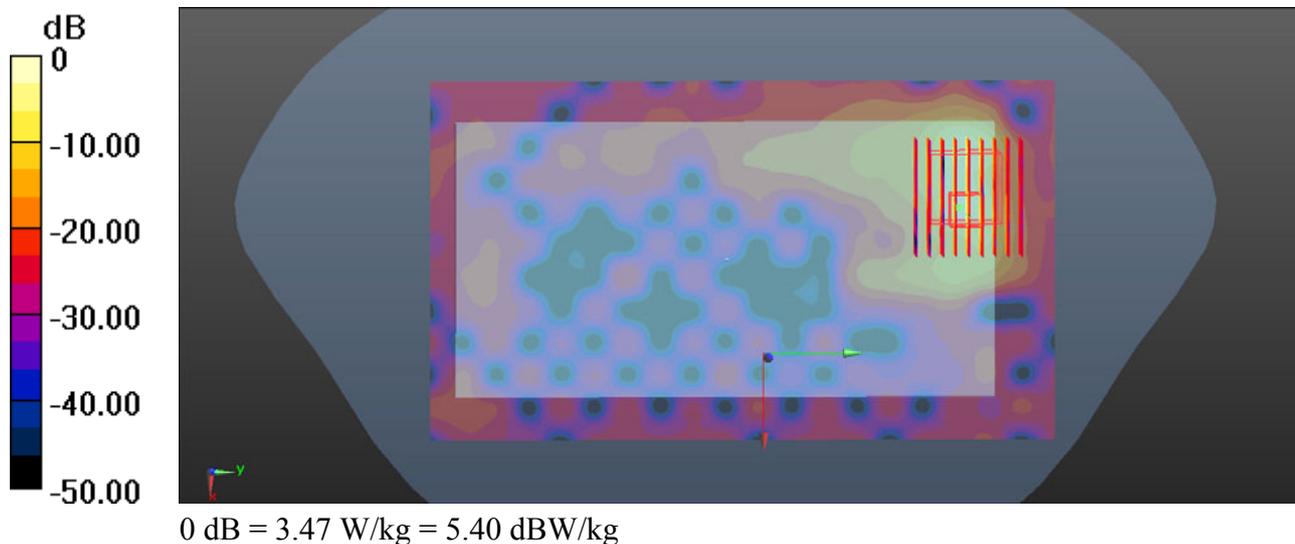

### 24\_WLAN5G Band4\_802.11a 6M\_Back\_0mm\_Ch149

Communication System: UID 0, WIFI (0); Frequency: 5745 MHz; Duty Cycle: 1:1.149  
Medium: MSL\_5000\_151109 Medium parameters used:  $f = 5745$  MHz;  $\sigma = 6.207$  S/m;  $\epsilon_r = 47.584$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(3.96, 3.96, 3.96); Calibrated: 2014.11.21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2015.7.21
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch149/Area Scan (111x191x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 3.95 W/kg

**Ch149/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 0 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 9.29 W/kg  
**SAR(1 g) = 1.4 W/kg; SAR(10 g) = 0.290 W/kg**  
Maximum value of SAR (measured) = 4.38 W/kg

**Ch149/Zoom Scan (8x8x7)/Cube 1:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 0 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 9.01 W/kg  
**SAR(1 g) = 0.857 W/kg; SAR(10 g) = 0.220 W/kg**  
Maximum value of SAR (measured) = 4.04 W/kg

