

Test Plot 1#: SDR 2.4G_1.4M_Handheld Left_Middle**DUT: GL900A; Type: Cendence S; Serial: 1811301020**

Communication System: SDR 2.4G_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1.14

Medium parameters used: $f = 2441.5$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 54.255$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.47, 7.47, 7.47); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (151x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0495 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.015 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0590 W/kg

SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0488 W/kg

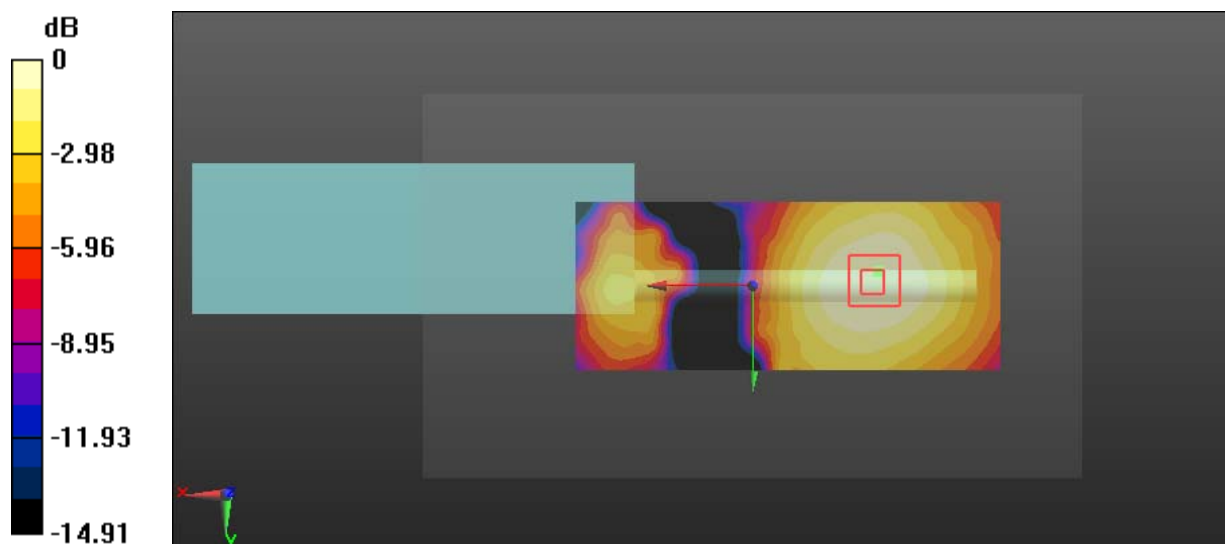

0 dB = 0.0488 W/kg = -13.12 dBW/kg

Test Plot 2#: SDR 2.4G_1.4M_Handheld Back_Middle**DUT: GL900A; Type: Cendence S; Serial: 1811301020**

Communication System: SDR 2.4G_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1.14

Medium parameters used: $f = 2441.5$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 54.255$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.47, 7.47, 7.47); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (151x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0638 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.483 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0760 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0631 W/kg

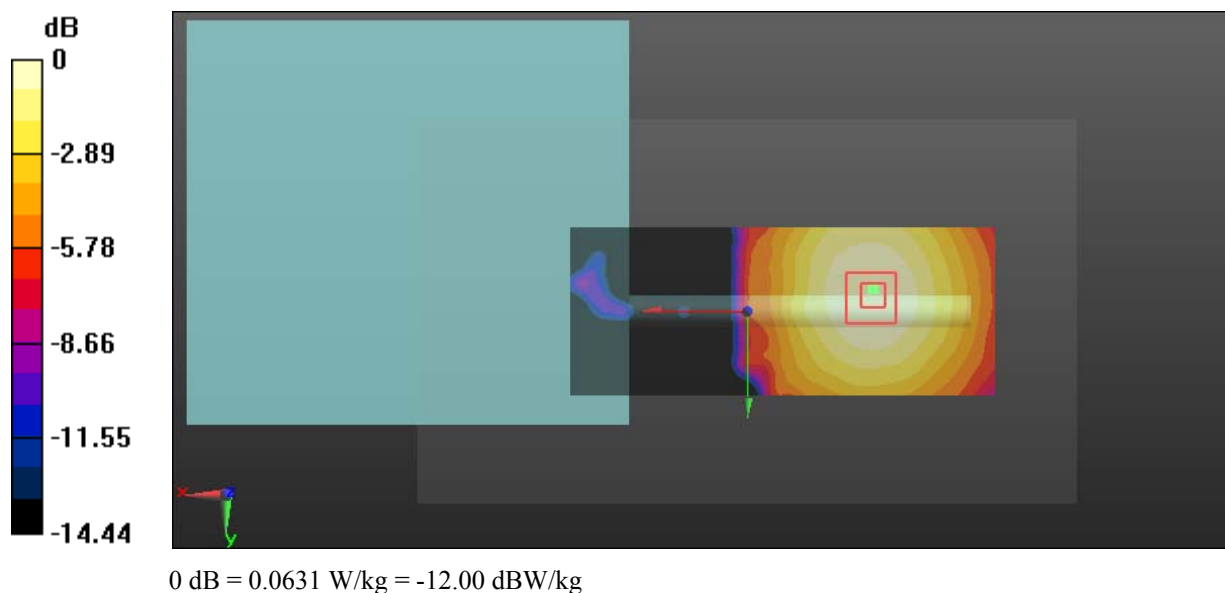

Test Plot 3#: SDR 2.4G_1.4M_Handheld Front_Middle**DUT: GL900A; Type: Cendence S; Serial: 18111301020**

Communication System: SDR 2.4G_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1.14

Medium parameters used: $f = 2441.5$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 54.255$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.47, 7.47, 7.47); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (151x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.185 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.343 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.215 W/kg

SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.179 W/kg

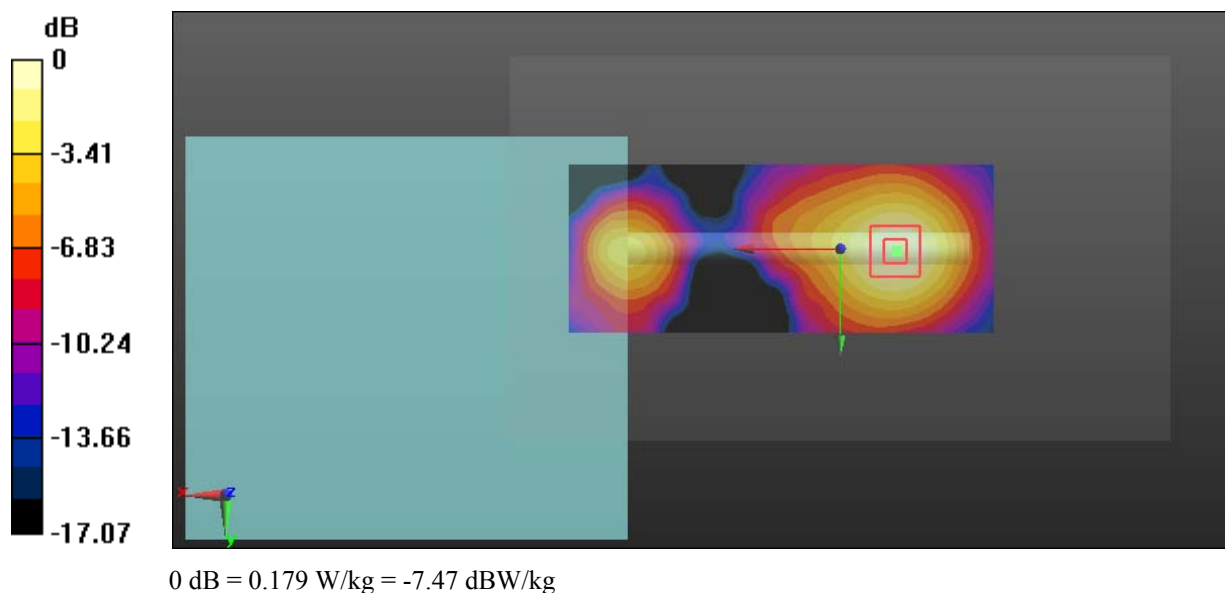

Test Plot 4#: SDR 2.4G_1.4M_Handheld Top_Low**DUT: GL900A; Type: Cendence S; Serial: 18111301020**

Communication System: SDR 2.4G_1.4M; Frequency: 2403.5 MHz; Duty Cycle: 1:1.14

Medium parameters used: $f = 2403.5$ MHz; $\sigma = 1.911$ S/m; $\epsilon_r = 54.451$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.47, 7.47, 7.47); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (131x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.08 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.71 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 4.63 W/kg

SAR(1 g) = 2.32 W/kg; SAR(10 g) = 1.03 W/kg

Maximum value of SAR (measured) = 3.74 W/kg

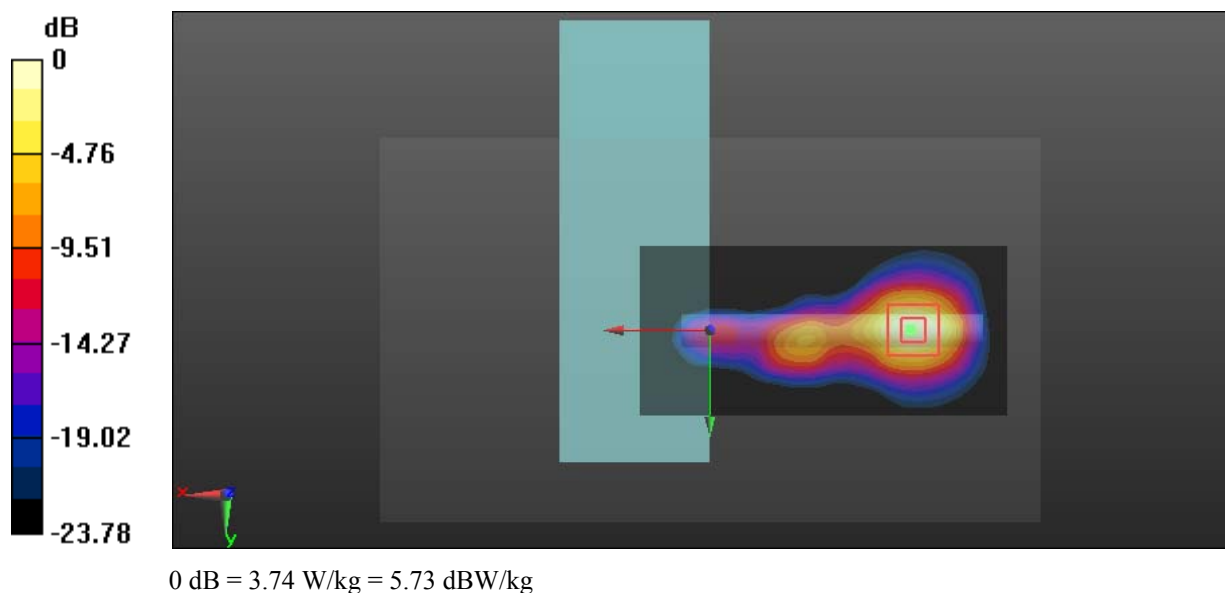

Test Plot 5#: SDR 2.4G_1.4M_Handheld Top_Middle**DUT: GL900A; Type: Cendence S; Serial: 18111301020**

Communication System: SDR 2.4G_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1.14

Medium parameters used: $f = 2441.5$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 54.255$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.47, 7.47, 7.47); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (131x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 3.26 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.84 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 3.91 W/kg

SAR(1 g) = 1.95 W/kg; SAR(10 g) = 0.882 W/kg

Maximum value of SAR (measured) = 3.03 W/kg

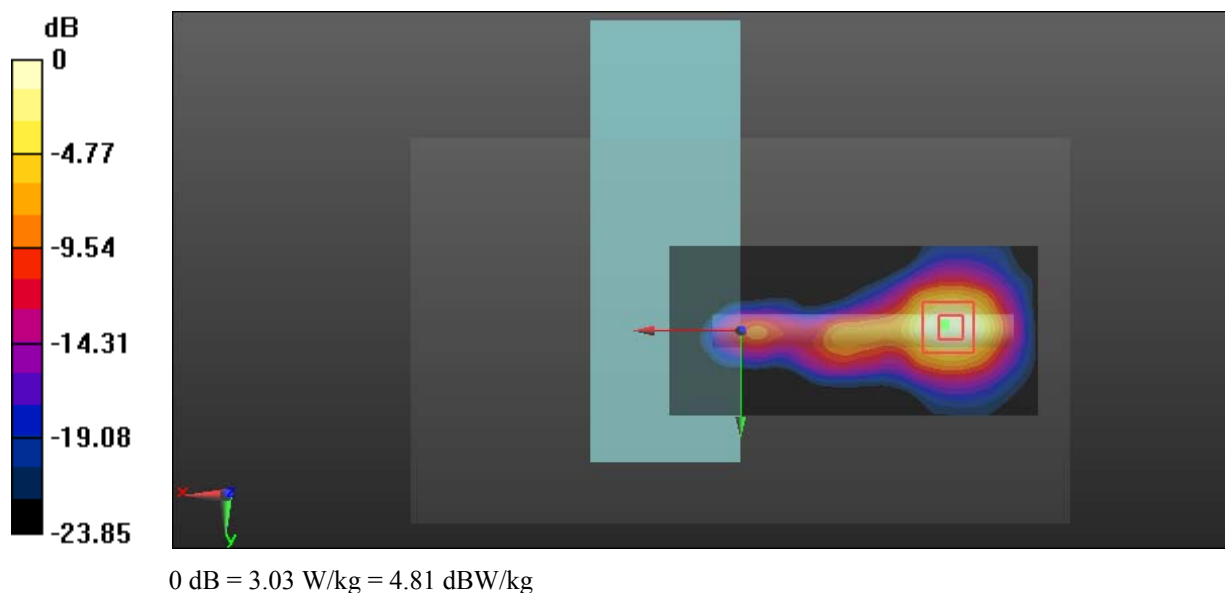

Test Plot 6#: SDR 2.4G_1.4M_Handheld Top_High**DUT: GL900A; Type: Cendence S; Serial: 18111301020**

Communication System: SDR 2.4G_1.4M; Frequency: 2477.5 MHz; Duty Cycle: 1:1.14

Medium parameters used: $f = 2477.5$ MHz; $\sigma = 1.983$ S/m; $\epsilon_r = 53.873$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.47, 7.47, 7.47); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (131x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 3.38 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.80 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 3.81 W/kg

SAR(1 g) = 1.88 W/kg; SAR(10 g) = 0.836 W/kg

Maximum value of SAR (measured) = 3.01 W/kg

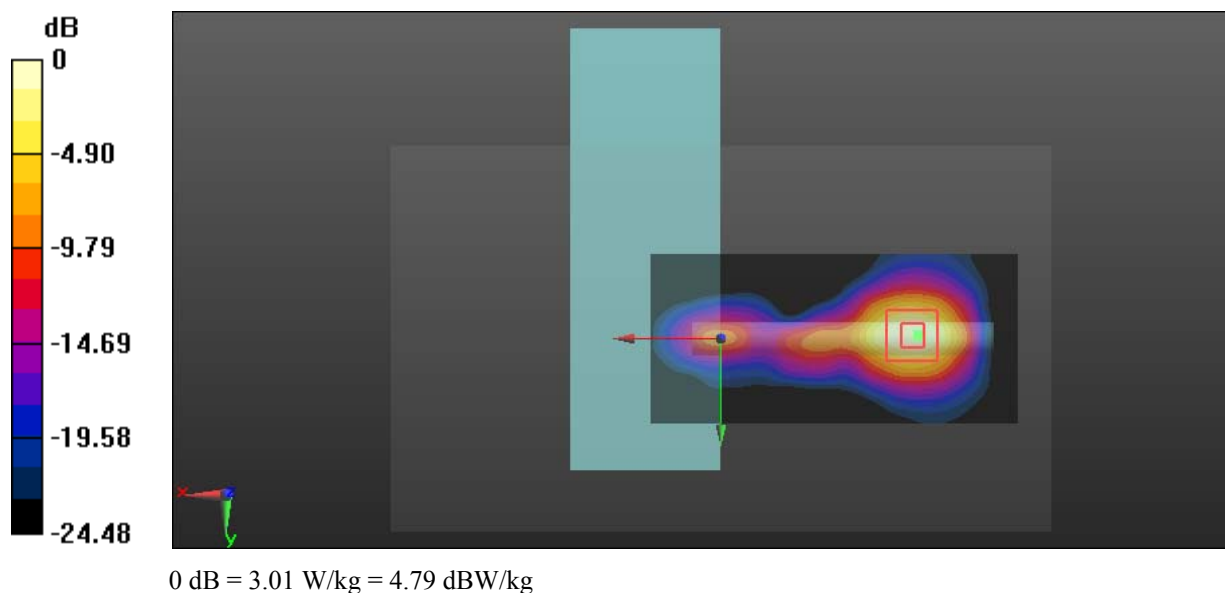

Test Plot 7#: SDR 2.4G_10M_Handheld Top_Middle**DUT: GL900A; Type: Cendence S; Serial: 18111301020**

Communication System: SDR 2.4G_10M; Frequency: 2441.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2441.5$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 54.255$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.47, 7.47, 7.47); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (131x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.633 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.588 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.666 W/kg

SAR(1 g) = 0.314 W/kg; SAR(10 g) = 0.133 W/kg

Maximum value of SAR (measured) = 0.521 W/kg

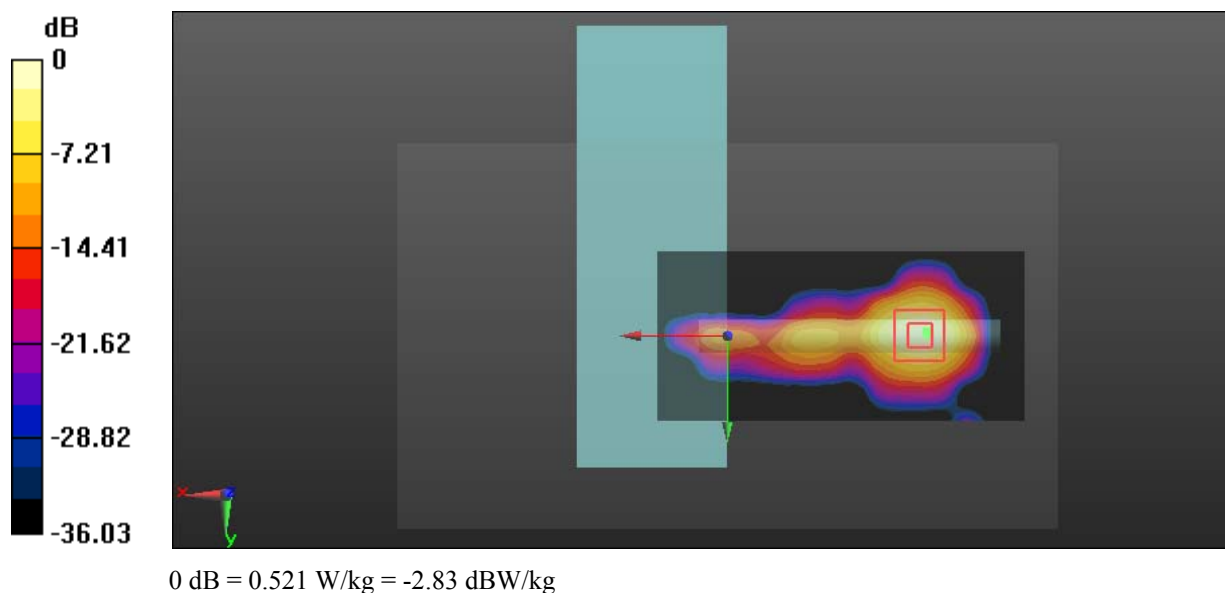

Test Plot 8#: SDR 2.4G_20M_Handheld Top_Middle**DUT: GL900A; Type: Cendence S; Serial: 18111301020**

Communication System: SDR 2.4G_20M; Frequency: 2441.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2441.5$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 54.255$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.47, 7.47, 7.47); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (131x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.693 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.135 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.731 W/kg

SAR(1 g) = 0.340 W/kg; SAR(10 g) = 0.142 W/kg

Maximum value of SAR (measured) = 0.581 W/kg

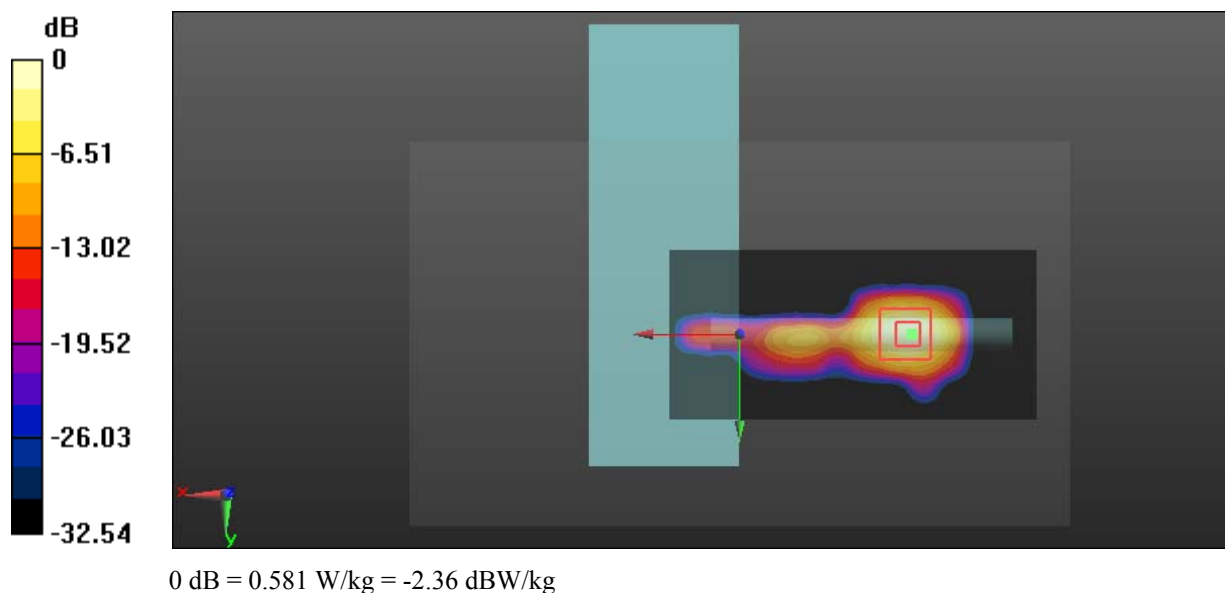

Test Plot 9#: SDR 2.4G_1.4M_Close To Body Left_Middle**DUT: GL900A; Type: Cendence S; Serial: 18111301020**

Communication System: SDR 2.4G_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1.14

Medium parameters used: $f = 2441.5$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 54.255$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.47, 7.47, 7.47); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (151x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0474 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.978 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0580 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0479 W/kg

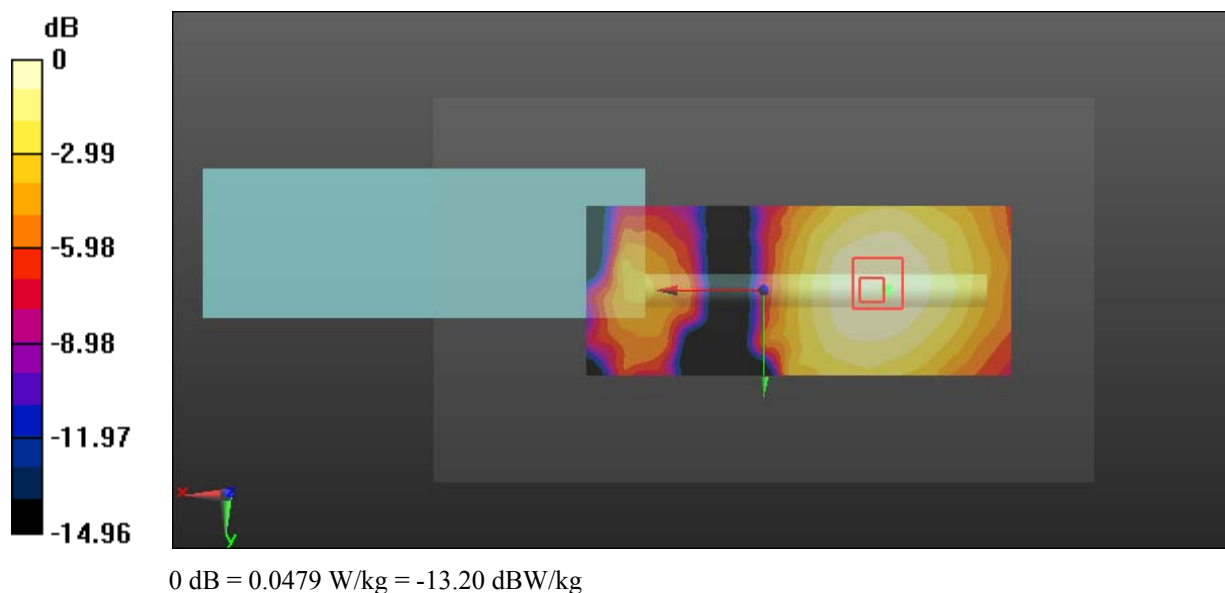

Test Plot 10#: SDR 2.4G_1.4M_Close to Body Back_Middle**DUT: GL900A; Type: Cendence S; Serial: 18111301020**

Communication System: SDR 2.4G_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1.14

Medium parameters used: $f = 2441.5$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 54.255$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.47, 7.47, 7.47); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (151x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0569 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.621 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0650 W/kg

SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.0550 W/kg

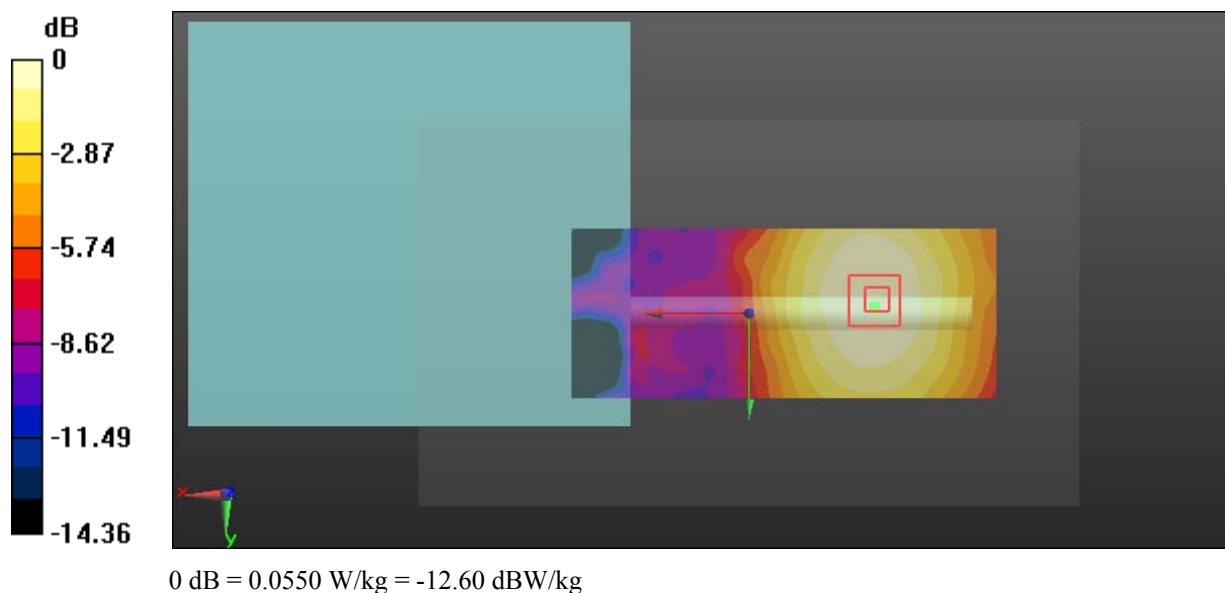

Test Plot 11#: SDR 2.4G_1.4M_Close To Body Front_Middle**DUT: GL900A; Type: Cendence S; Serial: 1811301020**

Communication System: SDR 2.4G_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1.14

Medium parameters used: $f = 2441.5$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 54.255$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.47, 7.47, 7.47); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (151x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.113 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.322 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.131 W/kg

SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.043 W/kg

Maximum value of SAR (measured) = 0.109 W/kg

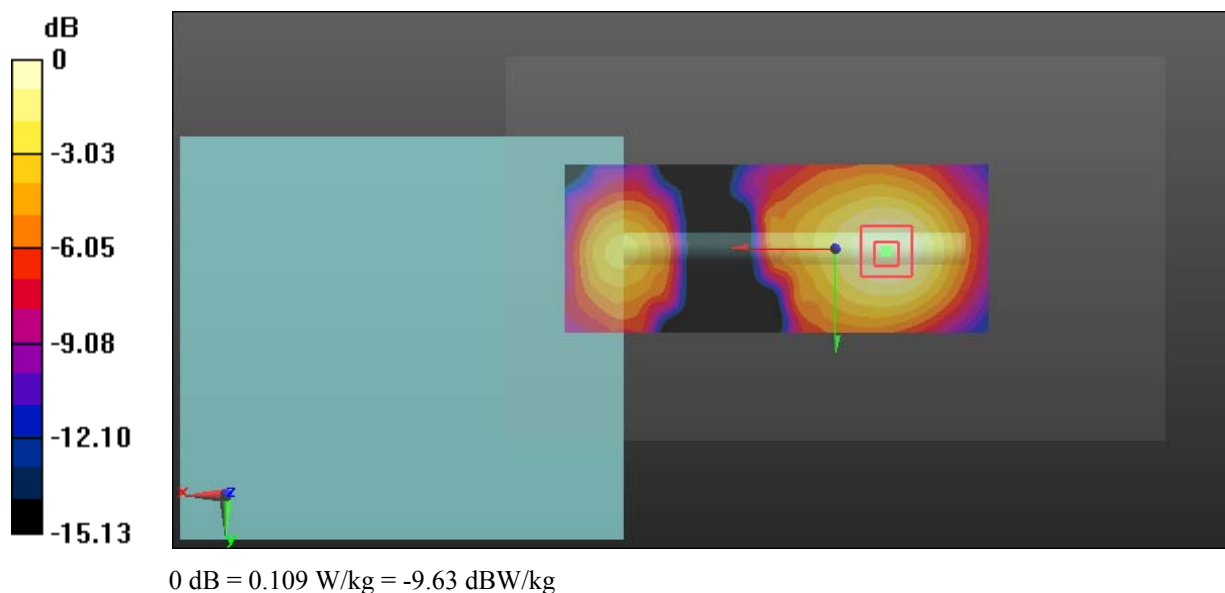

Test Plot 12#: SDR 2.4G_1.4M_Close to Body Top_Low**DUT: GL900A; Type: Cendence S; Serial: 18111301020**

Communication System: SDR 2.4G_1.4M; Frequency: 2403.5 MHz; Duty Cycle: 1:1.14

Medium parameters used: $f = 2403.5$ MHz; $\sigma = 1.911$ S/m; $\epsilon_r = 54.451$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.47, 7.47, 7.47); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (131x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.998 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.144 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.621 W/kg; SAR(10 g) = 0.317 W/kg

Maximum value of SAR (measured) = 0.958 W/kg

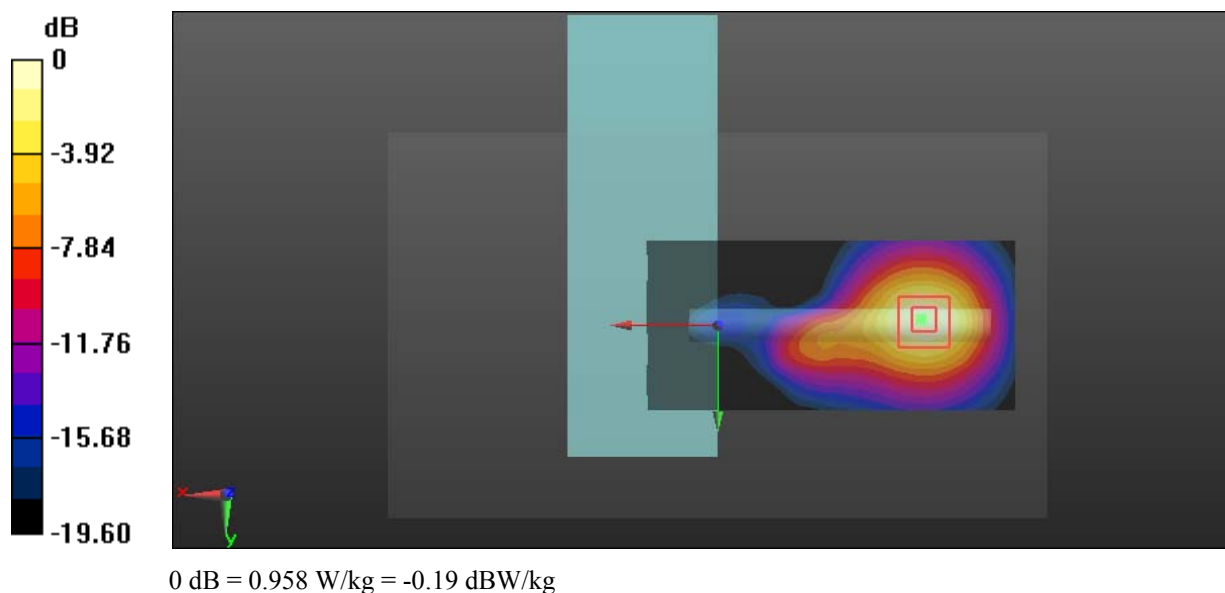

Test Plot 13#: SDR 2.4G_1.4M_Close to Body Top_Middle**DUT: GL900A; Type: Cendence S; Serial: 18111301020**

Communication System: SDR 2.4G_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1.14

Medium parameters used: $f = 2441.5$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 54.255$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.47, 7.47, 7.47); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (131x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.820 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.560 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.997 W/kg

SAR(1 g) = 0.536 W/kg; SAR(10 g) = 0.278 W/kg

Maximum value of SAR (measured) = 0.831 W/kg

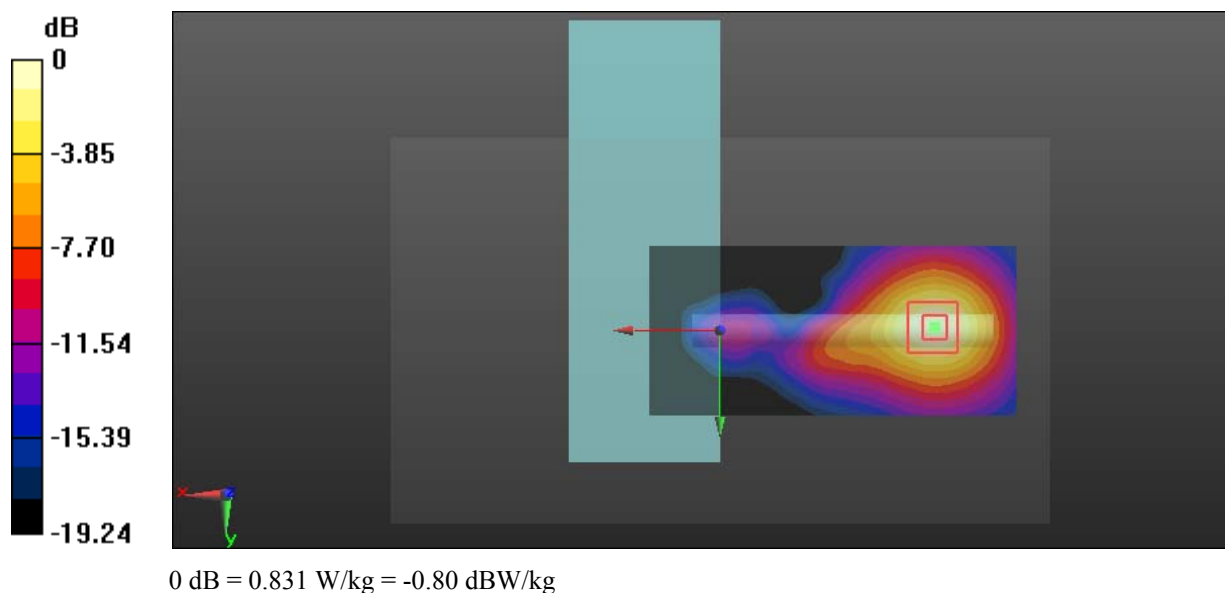

Test Plot 14#: SDR 2.4G_1.4M_Close to Body Top_High**DUT: GL900A; Type: Cendence S; Serial: 18111301020**

Communication System: SDR 2.4G_1.4M; Frequency: 2477.5 MHz; Duty Cycle: 1:1.14

Medium parameters used: $f = 2477.5$ MHz; $\sigma = 1.983$ S/m; $\epsilon_r = 53.873$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.47, 7.47, 7.47); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (131x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.744 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.515 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.885 W/kg

SAR(1 g) = 0.480 W/kg; SAR(10 g) = 0.256 W/kg

Maximum value of SAR (measured) = 0.733 W/kg

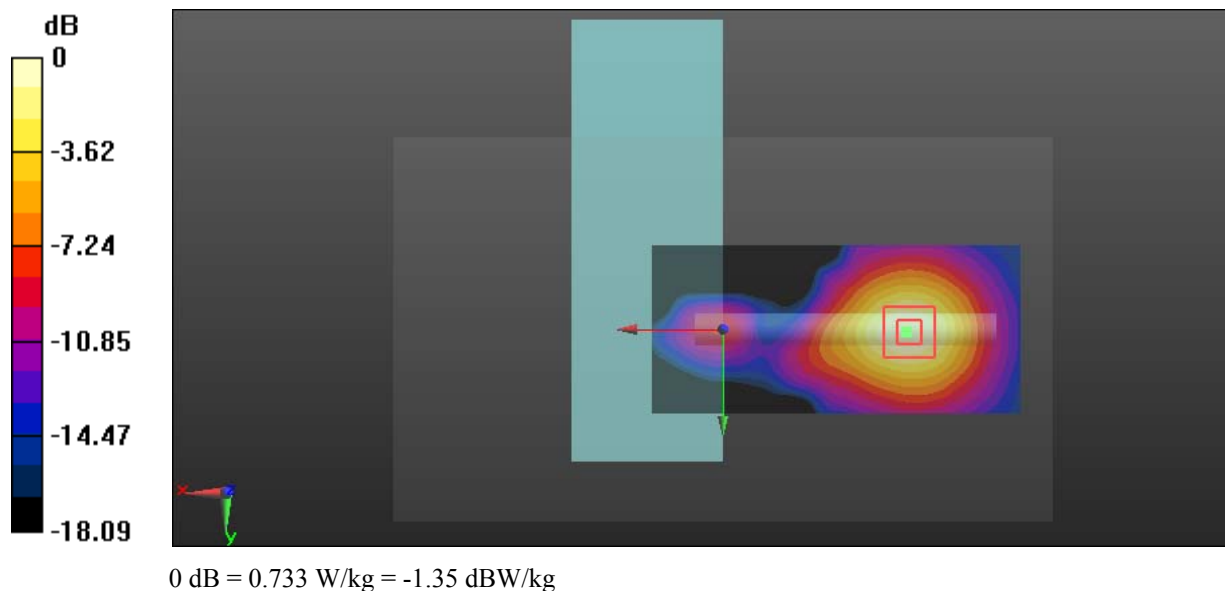

Test Plot 15#: SDR 2.4G_10M_Close to Body Top_Middle**DUT: GL900A; Type: Cendence S; Serial: 1811301020**

Communication System: SDR 2.4G_10M; Frequency: 2441.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2441.5$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 54.255$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.47, 7.47, 7.47); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (131x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.116 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.348 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.136 W/kg

SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.037 W/kg

Maximum value of SAR (measured) = 0.111 W/kg

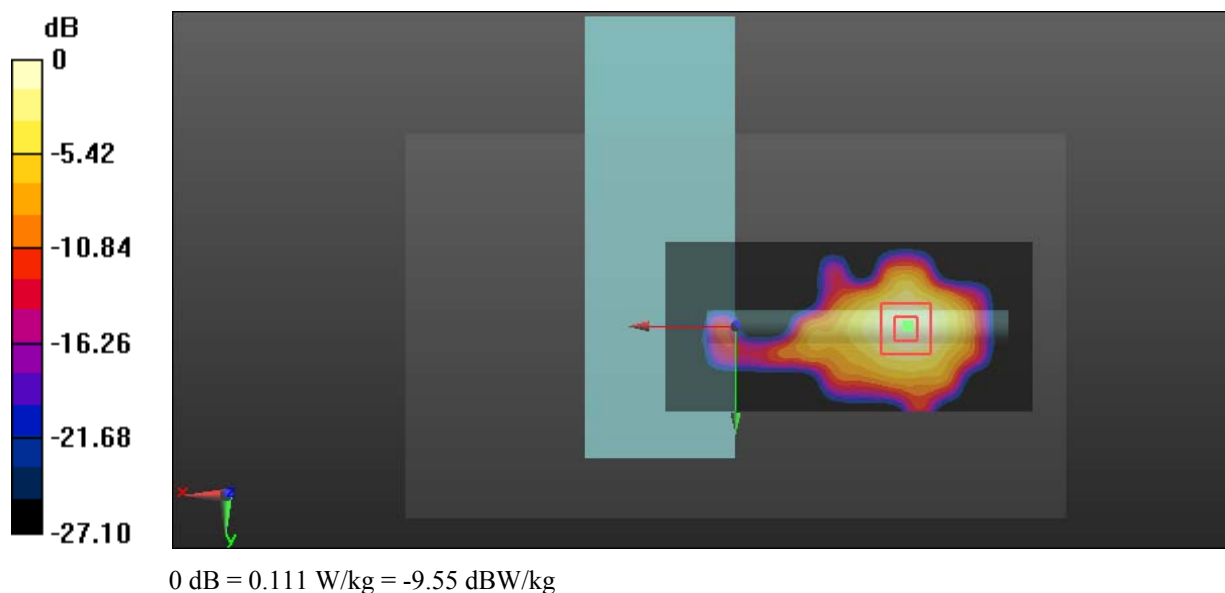

Test Plot 16#: SDR 2.4G_20M_Close to Body Top_Middle**DUT: GL900A; Type: Cendence S; Serial: 1811301020**

Communication System: SDR 2.4G_20M; Frequency: 2441.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2441.5$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 54.255$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.47, 7.47, 7.47); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (131x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.131 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.662 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.156 W/kg

SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.128 W/kg

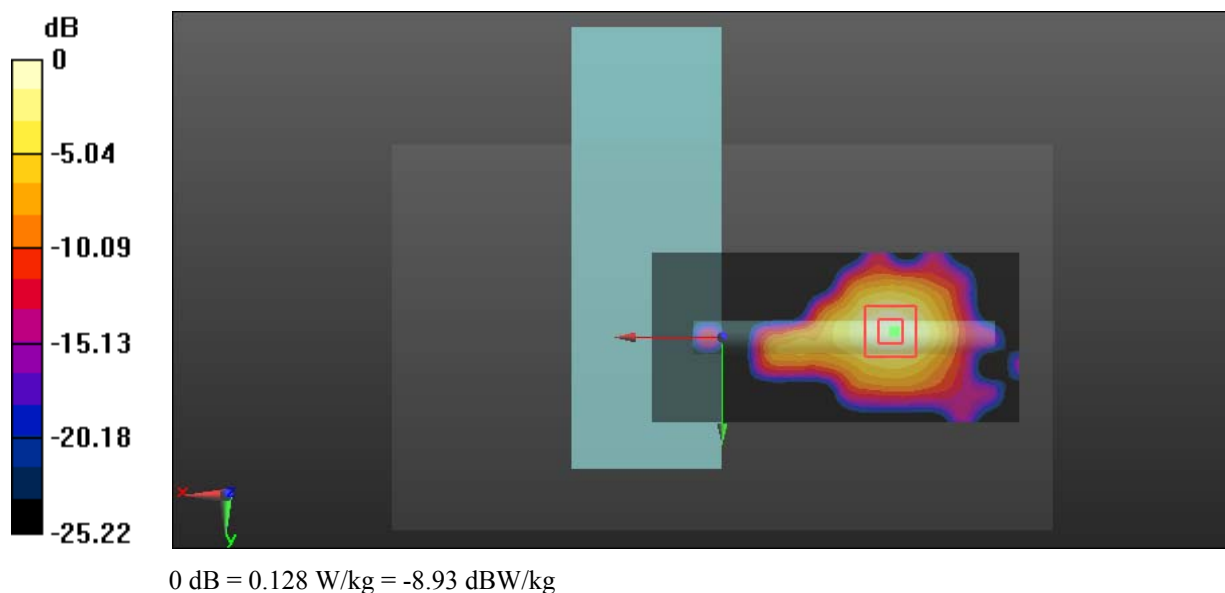

Test Plot 17#: SDR 5.8G_1.4M_Handheld Left_Middle**DUT: GL900A; Type: Cendence S; Serial: 18111301020**

Communication System: SDR 5.8G_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1.14

Medium parameters used: $f = 5786.5$ MHz; $\sigma = 5.845$ S/m; $\epsilon_r = 49.823$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (181x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.174 W/kg


Zoom Scan (7x9x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 5.992 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.291 W/kg

SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.032 W/kg

Maximum value of SAR (measured) = 0.175 W/kg

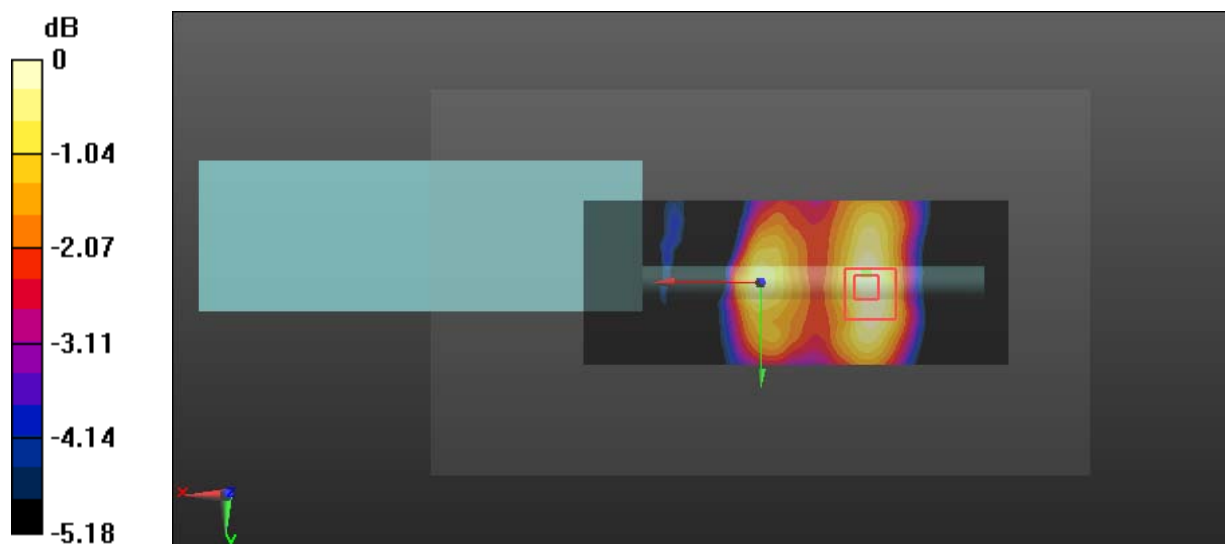

0 dB = 0.175 W/kg = -7.57 dBW/kg

Test Plot 18#: SDR 5.8G_1.4M_Handheld Back_Middle**DUT: GL900A; Type: Cendence S; Serial: 18111301020**

Communication System: SDR 5.8G_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1.14

Medium parameters used: $f = 5786.5$ MHz; $\sigma = 5.845$ S/m; $\epsilon_r = 49.823$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (181x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.280 W/kg


Zoom Scan (7x8x4)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.461 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.425 W/kg

SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.289 W/kg

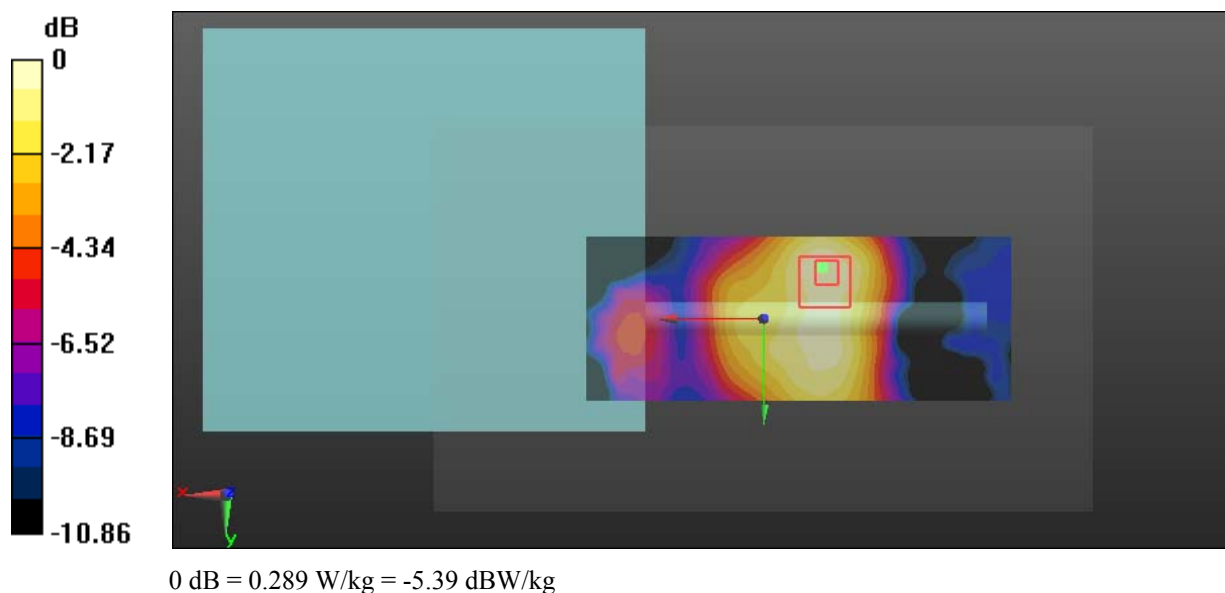

Test Plot 19#: SDR 5.8G_1.4M_Handheld Front_Middle**DUT: GL900A; Type: Cendence S; Serial: 18111301020**

Communication System: SDR 5.8G_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1.14

Medium parameters used: $f = 5786.5$ MHz; $\sigma = 5.845$ S/m; $\epsilon_r = 49.823$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (181x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.80 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.499 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 3.16 W/kg

SAR(1 g) = 0.733 W/kg; SAR(10 g) = 0.262 W/kg

Maximum value of SAR (measured) = 1.78 W/kg

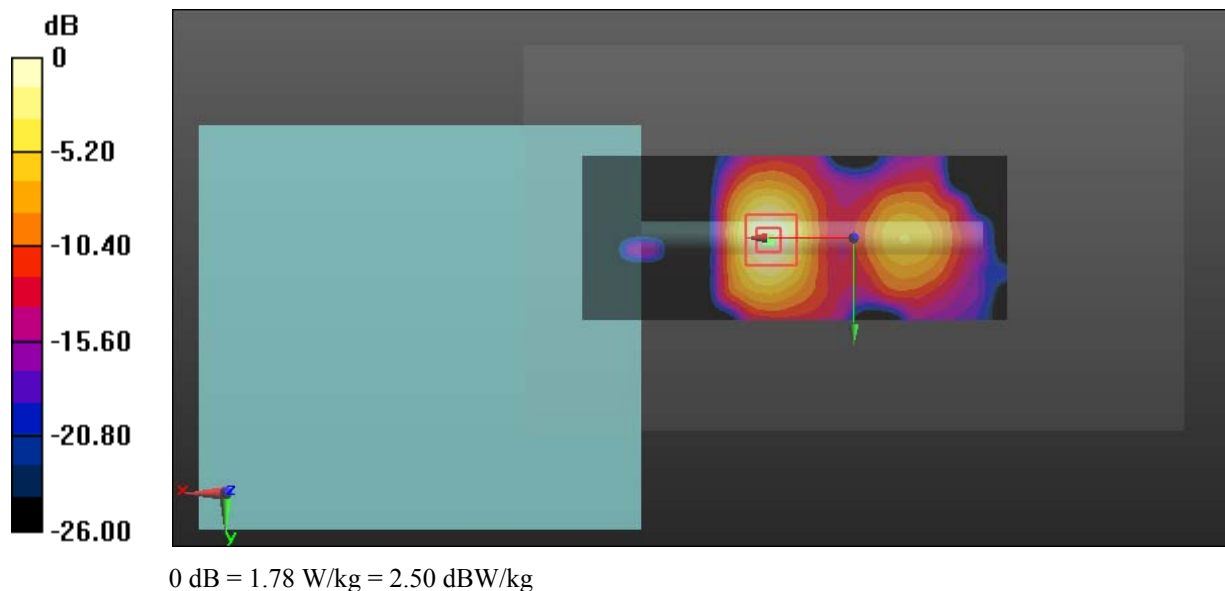

Test Plot 20#: SDR 5.8G_1.4M_Handheld Top_Low**DUT: GL900A; Type: Cendence S; Serial: 1811301020**

Communication System: SDR 5.8G_1.4M; Frequency: 5728.5 MHz; Duty Cycle: 1:1.14

Medium parameters used: $f = 5728.5$ MHz; $\sigma = 5.719$ S/m; $\epsilon_r = 50.062$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (161x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 3.53 W/kg


Zoom Scan (7x8x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 8.221 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 6.63 W/kg

SAR(1 g) = 1.22 W/kg; SAR(10 g) = 0.410 W/kg

Maximum value of SAR (measured) = 3.63 W/kg

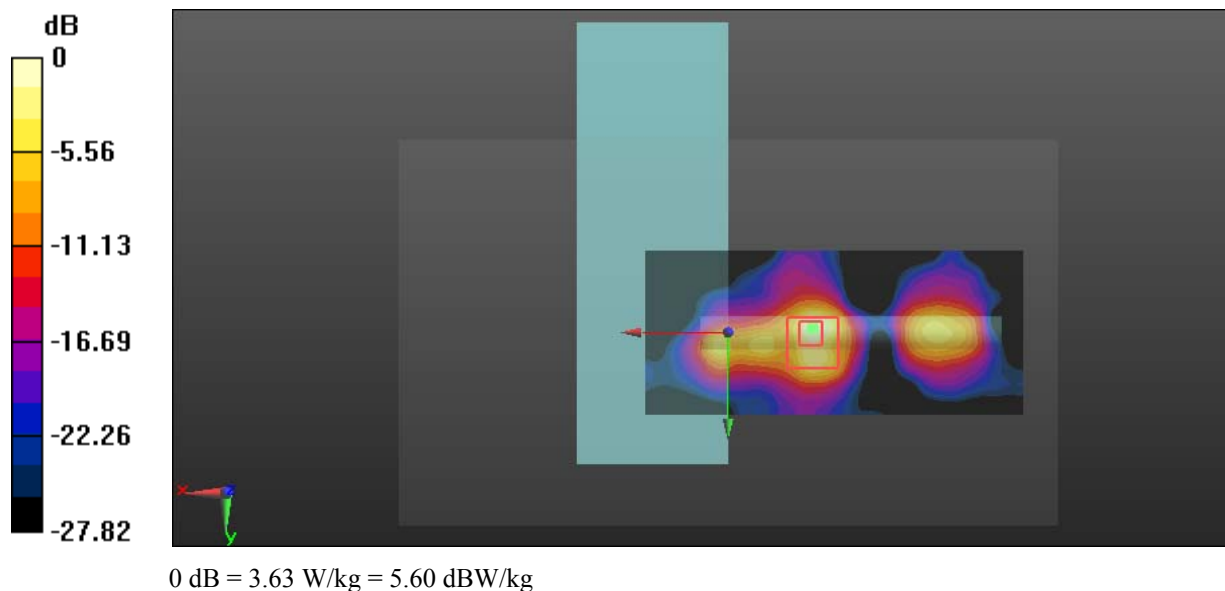

Test Plot 21#: SDR 5.8G_1.4M_Handheld Top_Middle**DUT: GL900A; Type: Cendence S; Serial: 18111301020**

Communication System: SDR 5.8G_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1.14

Medium parameters used: $f = 5786.5$ MHz; $\sigma = 5.845$ S/m; $\epsilon_r = 49.823$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (161x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 3.67 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 10.53 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 4.94 W/kg

SAR(1 g) = 0.927 W/kg; SAR(10 g) = 0.328 W/kg

Maximum value of SAR (measured) = 2.41 W/kg

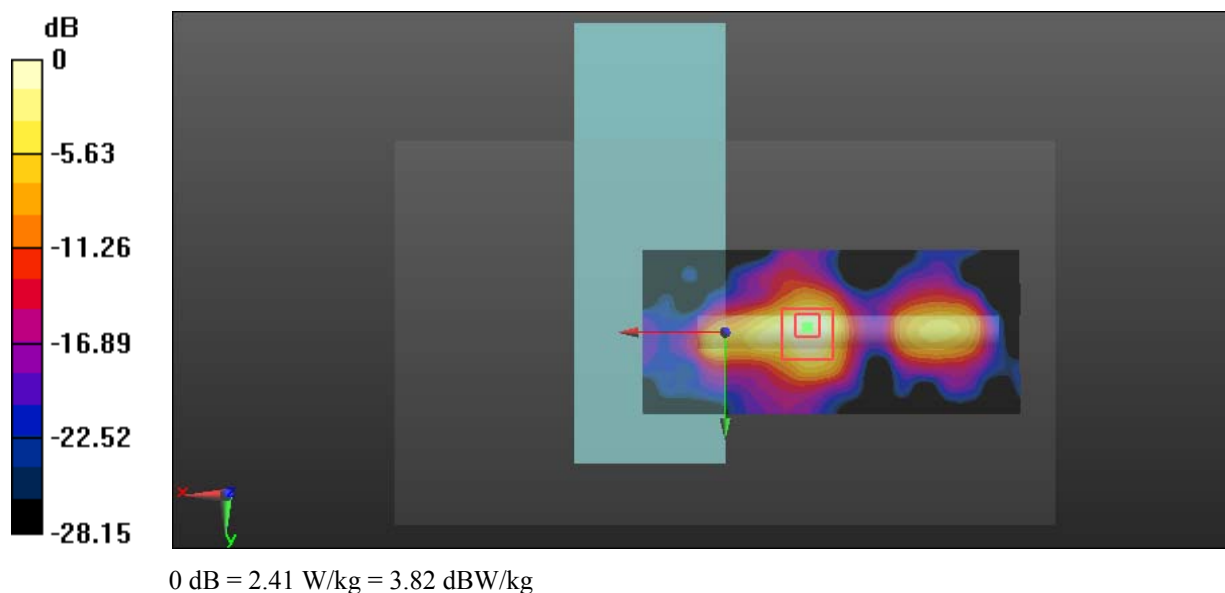

Test Plot 22#: SDR 5.8G_1.4M_Handheld Top_High**DUT: GL900A; Type: Cendence S; Serial: 18111301020**

Communication System: SDR 5.8G_1.4M; Frequency: 5846.5 MHz; Duty Cycle: 1:1.14

Medium parameters used: $f = 5846.5$ MHz; $\sigma = 5.908$ S/m; $\epsilon_r = 49.643$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (161x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.40 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 10.38 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 8.06 W/kg

SAR(1 g) = 1.6 W/kg; SAR(10 g) = 0.595 W/kg

Maximum value of SAR (measured) = 4.16 W/kg

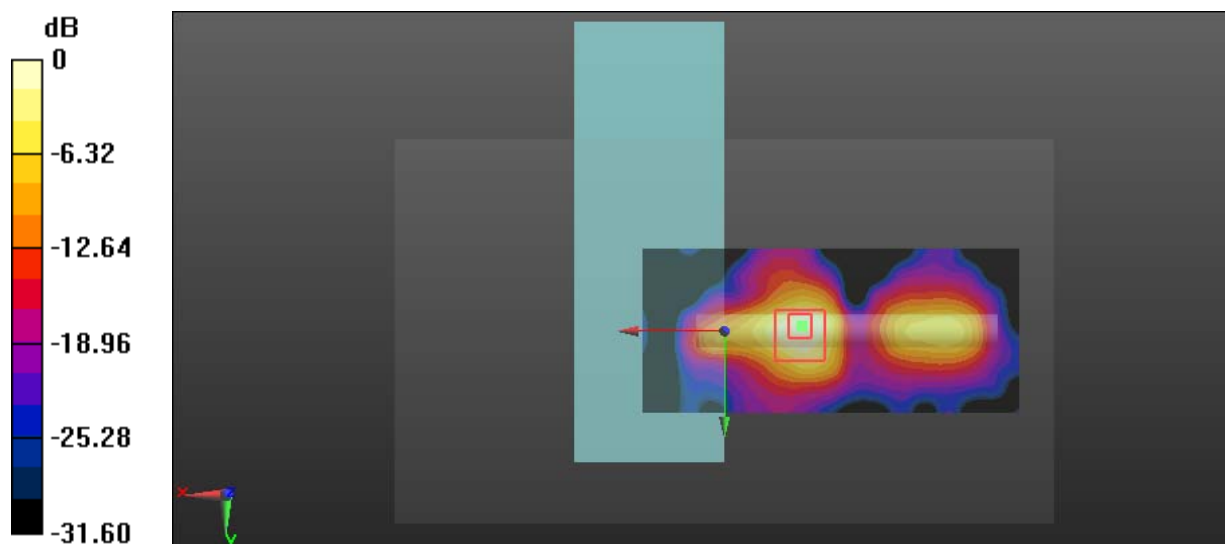

0 dB = 4.16 W/kg = 6.19 dBW/kg

Test Plot 23#: SDR 5.8G_10M_Handheld Top_Middle**DUT: GL900A; Type: Cendence S; Serial: 18111301020**

Communication System: SDR 5.8G_10M; Frequency: 5787.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5787.5$ MHz; $\sigma = 5.853$ S/m; $\epsilon_r = 49.818$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (161x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.417 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.965 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.458 W/kg

SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.290 W/kg

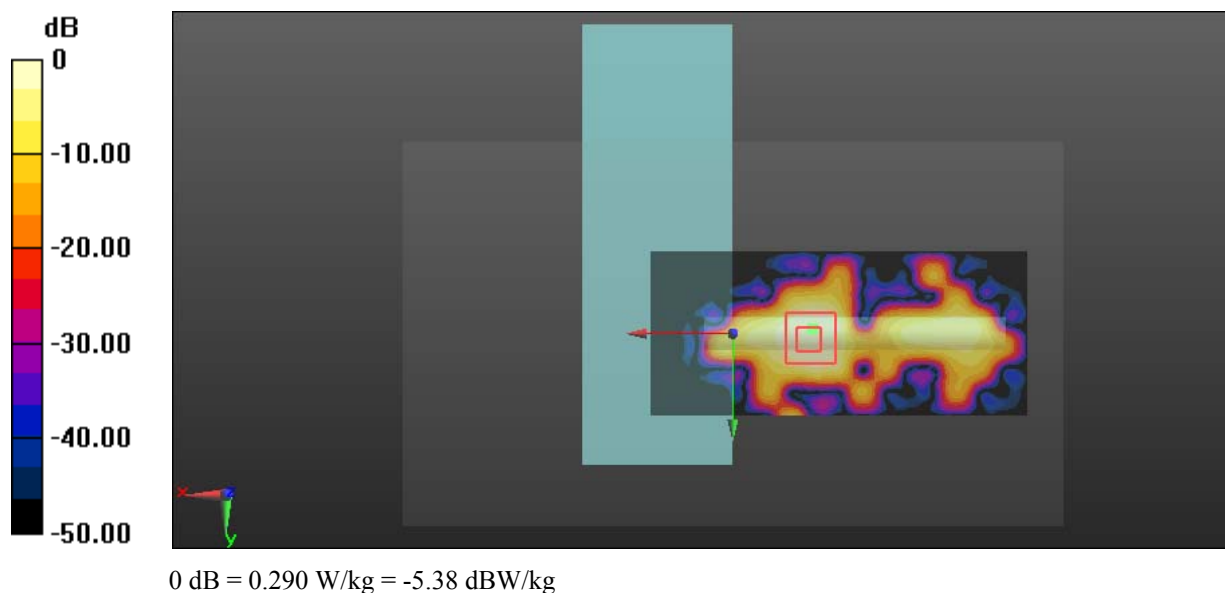

Test Plot 24#: SDR 5.8G_20M_Handheld Top_Middle**DUT: GL900A; Type: Cendence S; Serial: 1811301020**

Communication System: SDR 5.8G_20M; Frequency: 5787.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5787.5$ MHz; $\sigma = 5.853$ S/m; $\epsilon_r = 49.818$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (161x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.698 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 5.171 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.926 W/kg

SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.490 W/kg

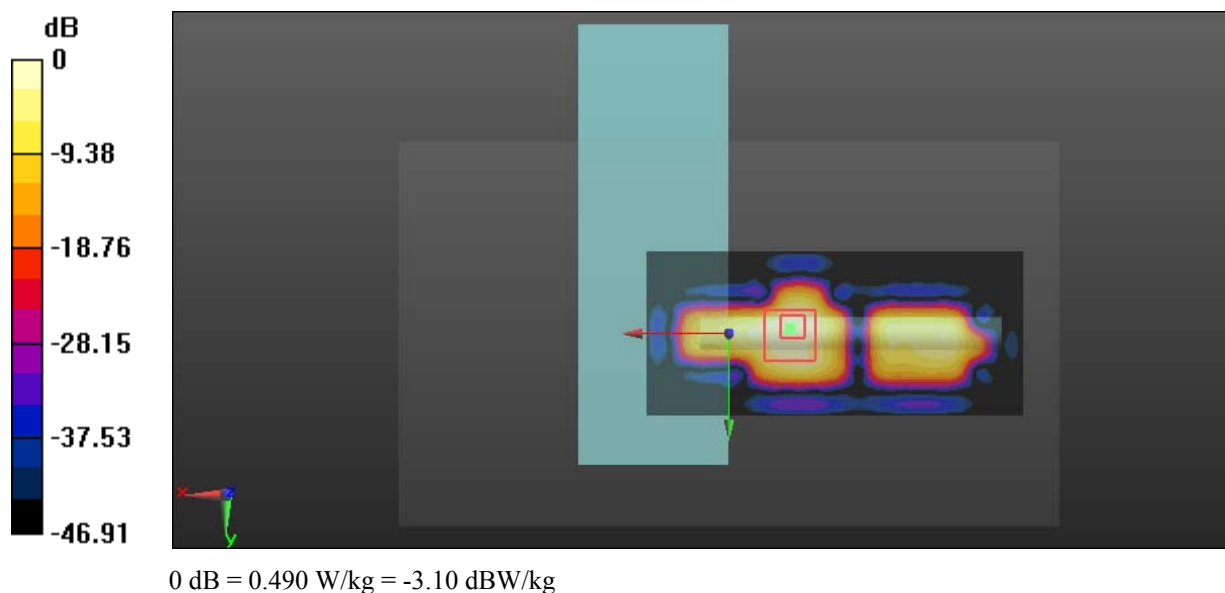

Test Plot 25#: SDR 5.8G_1.4M_Close To Body Left_Middle**DUT: GL900A; Type: Cendence S; Serial: 18111301020**

Communication System: SDR 5.8G_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1.14

Medium parameters used: $f = 5786.5$ MHz; $\sigma = 5.845$ S/m; $\epsilon_r = 49.823$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (181x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.156 W/kg


Zoom Scan (7x8x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 5.534 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.210 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.135 W/kg

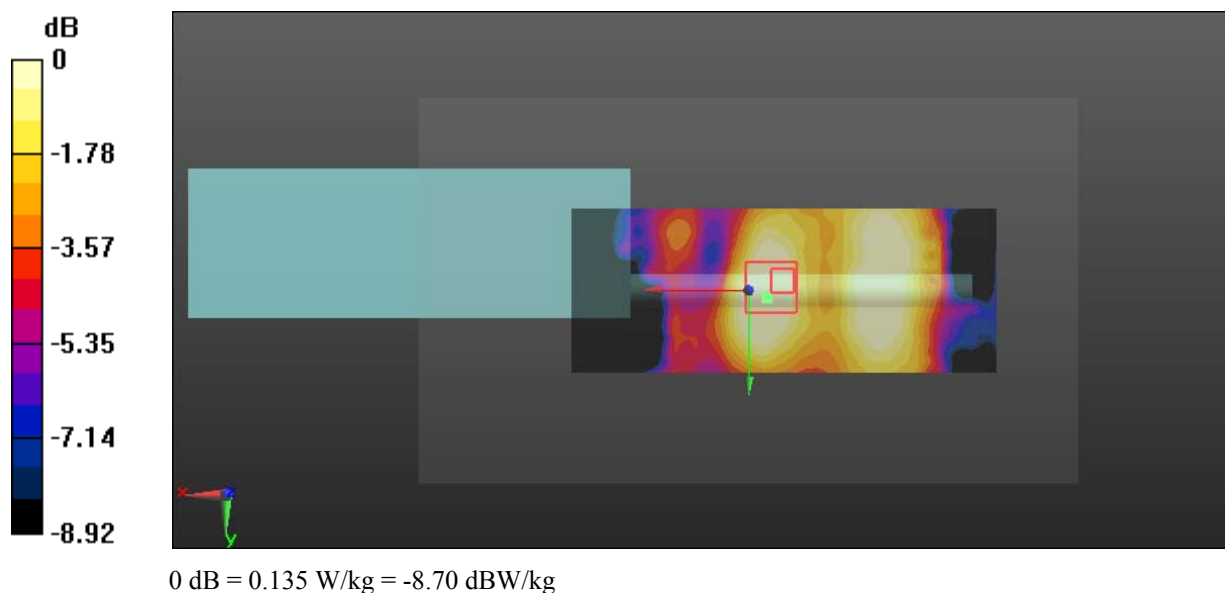

Test Plot 26#: SDR 5.8G_1.4M_Close to Body Back_Middle**DUT: GL900A; Type: Cendence S; Serial: 1811301020**

Communication System: SDR 5.8G_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1.14

Medium parameters used: $f = 5786.5$ MHz; $\sigma = 5.845$ S/m; $\epsilon_r = 49.823$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (181x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.257 W/kg


Zoom Scan (7x7x4)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.666 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.837 W/kg

SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.253 W/kg

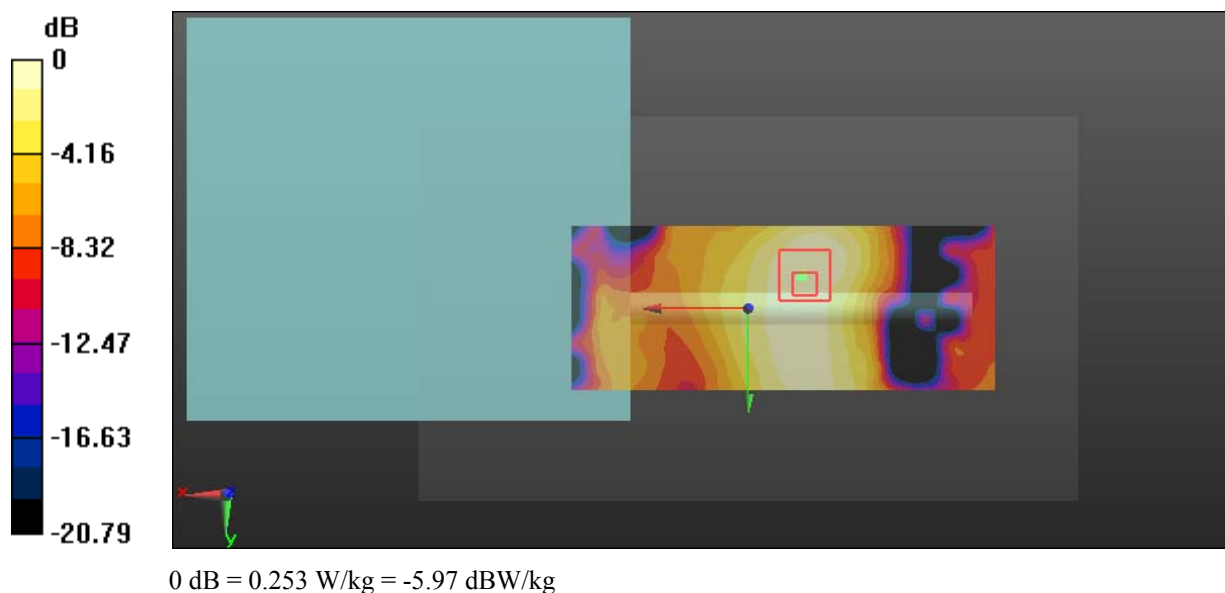

Test Plot 27#: SDR 5.8G_1.4M_Close To Body Front_Middle**DUT: GL900A; Type: Cendence S; Serial: 1811301020**

Communication System: SDR 5.8G_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1.14

Medium parameters used: $f = 5786.5$ MHz; $\sigma = 5.845$ S/m; $\epsilon_r = 49.823$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (181x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.19 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 7.212 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 2.12 W/kg

SAR(1 g) = 0.501 W/kg; SAR(10 g) = 0.199 W/kg

Maximum value of SAR (measured) = 1.19 W/kg

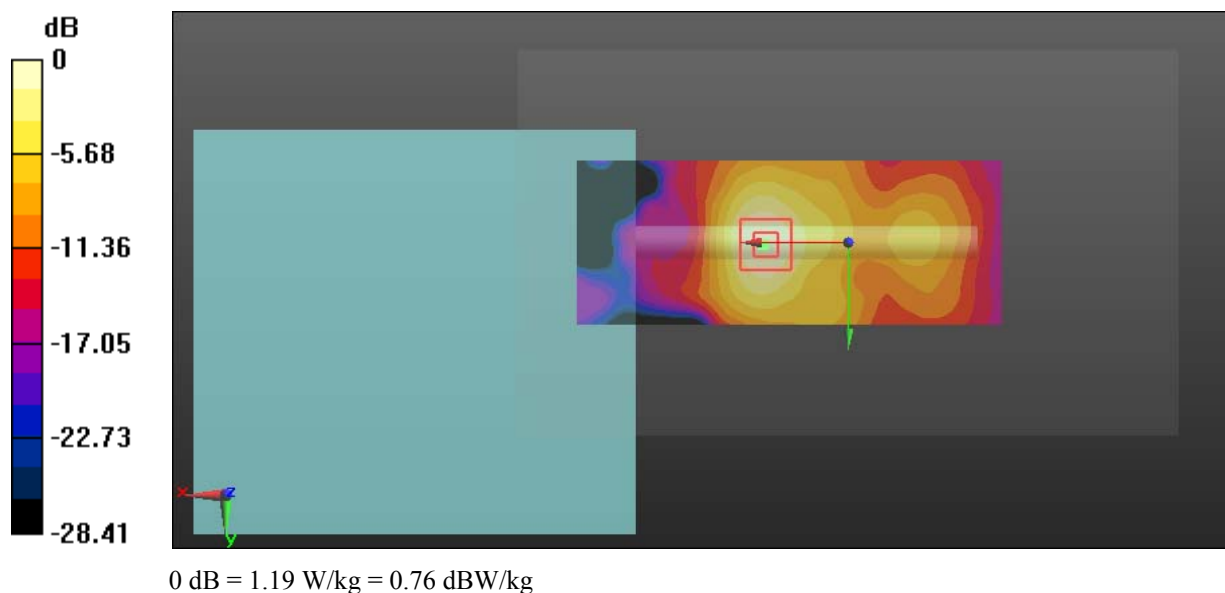

Test Plot 28#: SDR 5.8G_1.4M_Close To Body Top_Low**DUT: GL900A; Type: Cendence S; Serial: 18111301020**

Communication System: SDR 5.8G_1.4M; Frequency: 5728.5 MHz; Duty Cycle: 1:1.14

Medium parameters used: $f = 5728.8$ MHz; $\sigma = 5.719$ S/m; $\epsilon_r = 50.065$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (161x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.979 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.306 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.393 W/kg; SAR(10 g) = 0.148 W/kg

Maximum value of SAR (measured) = 0.904 W/kg

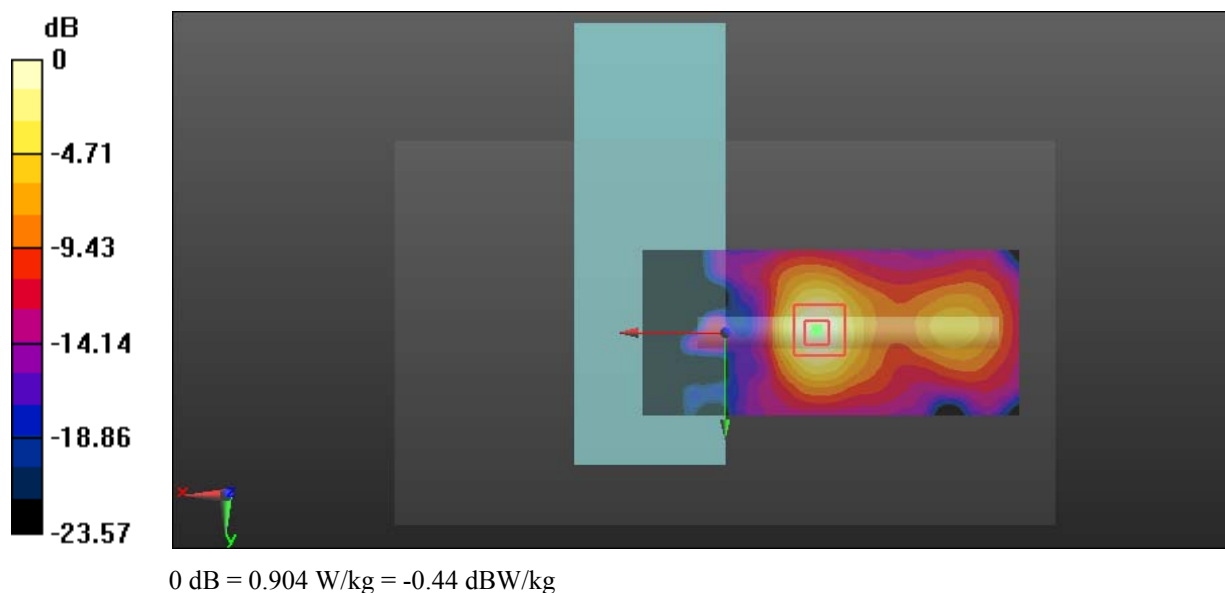

Test Plot 29#: SDR 5.8G_1.4M_Close To Body Top_Middle**DUT: GL900A; Type: Cendence S; Serial: 1811301020**

Communication System: SDR 5.8G_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1.14

Medium parameters used: $f = 5786.5$ MHz; $\sigma = 5.845$ S/m; $\epsilon_r = 49.823$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (161x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.27 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.137 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 g) = 0.511 W/kg; SAR(10 g) = 0.191 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

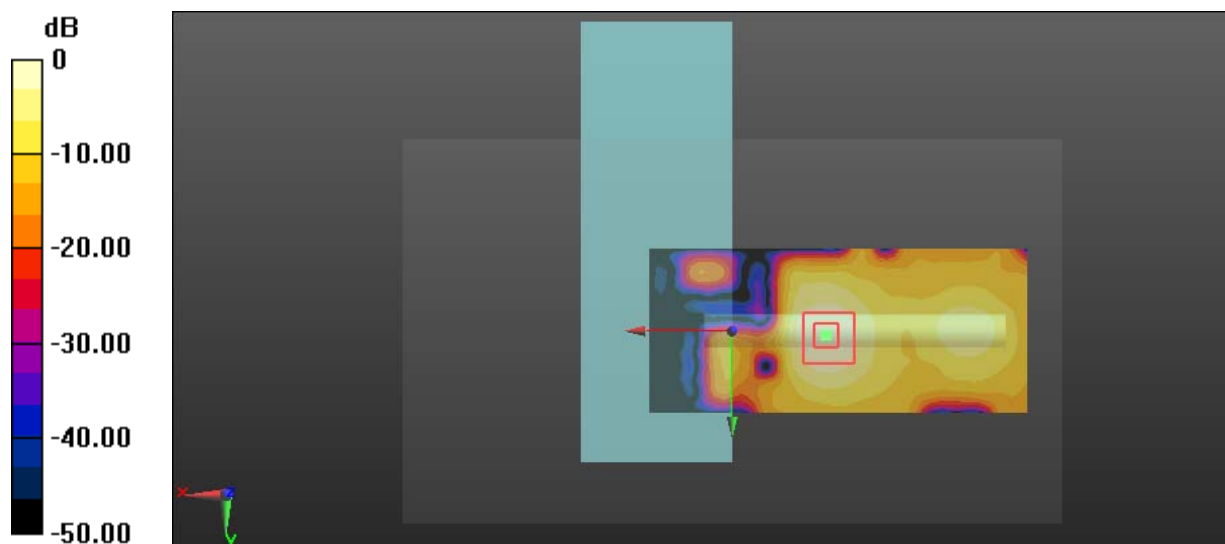

0 dB = 1.21 W/kg = 0.83 dBW/kg

Test Plot 30#: SDR 5.8G_1.4M_Close To Body Top_High**DUT: GL900A; Type: Cendence S; Serial: 18111301020**

Communication System: SDR 5.8G_1.4M; Frequency: 5846.5 MHz; Duty Cycle: 1:1.14

Medium parameters used: $f = 5846.5$ MHz; $\sigma = 5.908$ S/m; $\epsilon_r = 49.643$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (161x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.29 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 1.535 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.23 W/kg

SAR(1 g) = 0.527 W/kg; SAR(10 g) = 0.200 W/kg

Maximum value of SAR (measured) = 1.28 W/kg

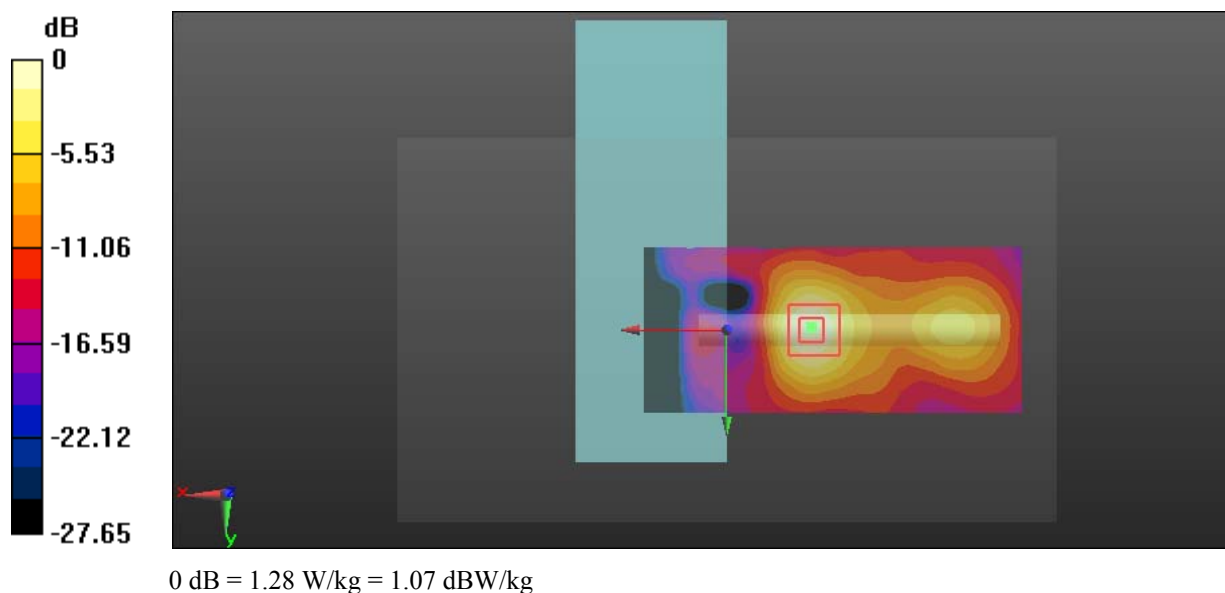

Test Plot 31#: SDR 5.8G_10M_Close To Body Top_Middle**DUT: GL900A; Type: Cendence S; Serial: 1811301020**

Communication System: SDR 5.8G_10M; Frequency: 5787.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5787.5$ MHz; $\sigma = 5.853$ S/m; $\epsilon_r = 49.818$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (161x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.192 W/kg


Zoom Scan (7x9x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0926 W/kg

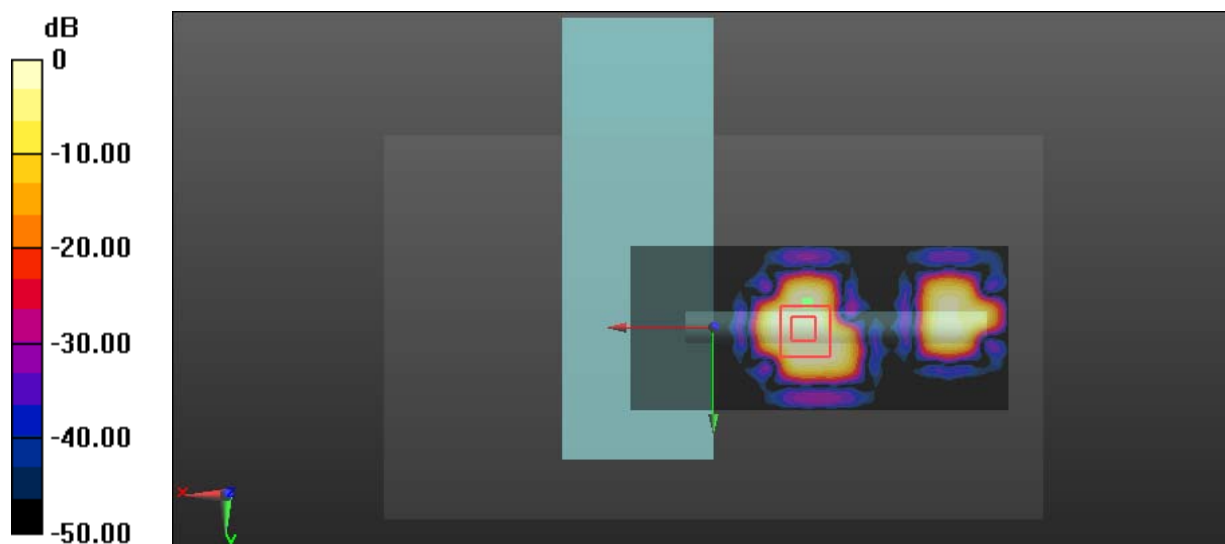

0 dB = 0.0926 W/kg = -10.33 dBW/kg

Test Plot 32#: SDR 5.8G_20M_Close To Body Top_Middle**DUT: GL900A; Type: Cendence S; Serial: 18111301020**

Communication System: SDR 5.8G_20M; Frequency: 5787.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5787.5$ MHz; $\sigma = 5.853$ S/m; $\epsilon_r = 49.818$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (161x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.221 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 0.6290 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.405 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.136 W/kg

