




Test Mode : 2TX 11ac20 CH64 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

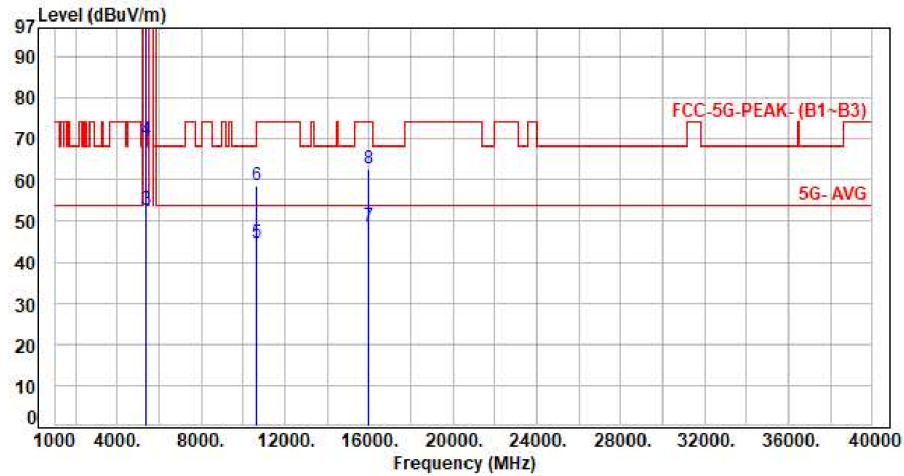

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.19	97.70	104.89	200.00	-95.11	Average	100	135	P
2	5320.00	7.19	107.89	115.08	200.00	-84.92	Peak	100	135	P
3	5350.00	7.22	45.49	52.71	54.00	-1.29	Average	100	135	P
4	5350.00	7.22	62.59	69.81	74.00	-4.19	Peak	100	135	P
5	10640.00	15.10	29.64	44.74	54.00	-9.26	Average	100	115	P
6	10640.00	15.10	43.71	58.81	74.00	-15.19	Peak	100	115	P
7	15960.00	17.56	31.12	48.68	54.00	-5.32	Average	100	115	P
8	15960.00	17.56	45.22	62.78	74.00	-11.22	Peak	100	115	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH54 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

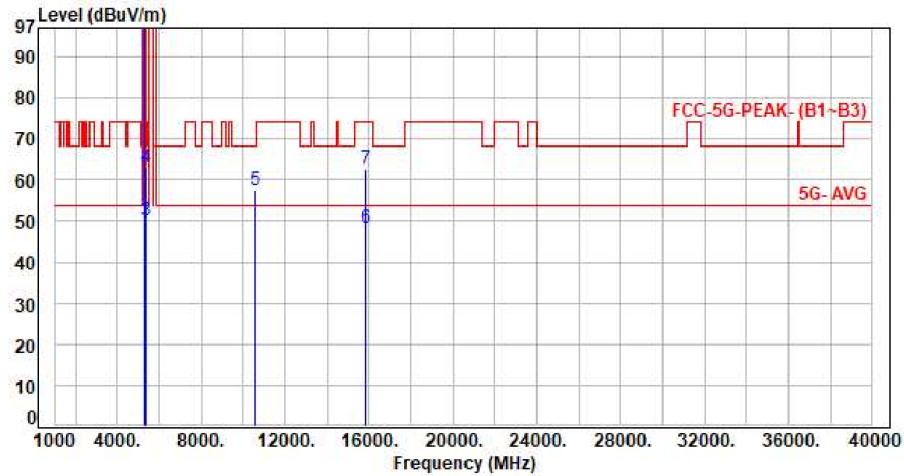


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5270.00	7.07	88.96	96.03	200.00	-103.97	Average	100	131	P
2	5270.00	7.07	99.19	106.26	200.00	-93.74	Peak	100	131	P
3	5350.00	7.22	43.10	50.32	54.00	-3.68	Average	100	131	P
4	5350.00	7.22	56.00	63.22	74.00	-10.78	Peak	100	131	P
5	10540.00	14.90	42.75	57.65	68.20	-10.55	Peak	100	115	P
6	15810.00	17.37	30.96	48.33	54.00	-5.67	Average	100	114	P
7	15810.00	17.37	45.45	62.82	74.00	-11.18	Peak	100	114	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH54 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

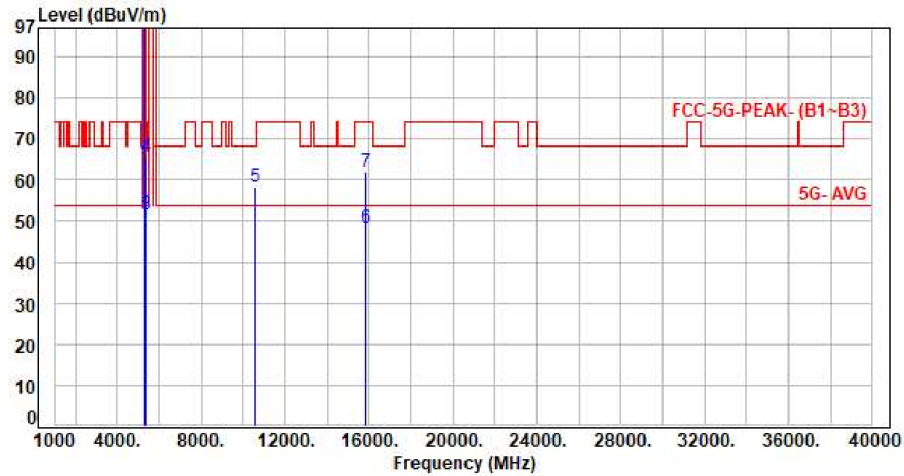


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5270.00	7.07	95.90	102.97	200.00	-97.03	Average	112	133	P
2	5270.00	7.07	106.06	113.13	200.00	-86.87	Peak	112	133	P
3	5350.00	7.22	44.48	51.70	54.00	-2.30	Average	112	133	P
4	5350.00	7.22	58.29	65.51	74.00	-8.49	Peak	112	133	P
5	10540.00	14.90	43.48	58.38	68.20	-9.82	Peak	100	115	P
6	15810.00	17.37	31.08	48.45	54.00	-5.55	Average	100	174	P
7	15810.00	17.37	44.63	62.00	74.00	-12.00	Peak	100	174	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH62 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

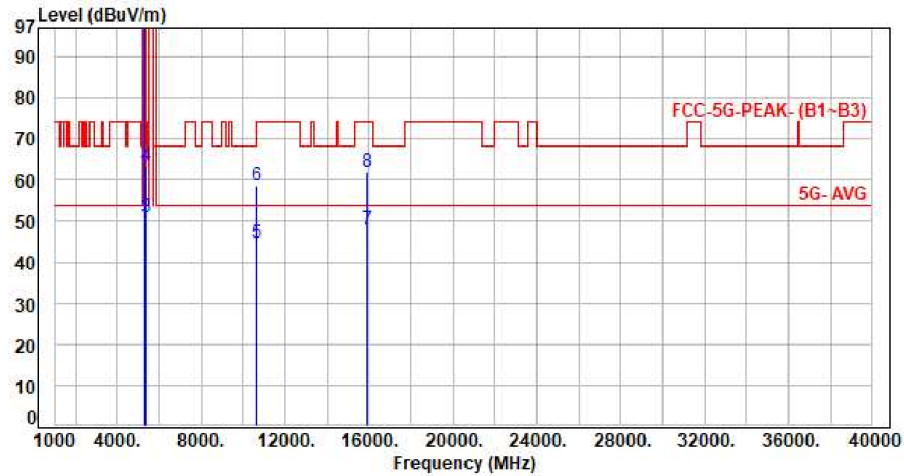

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5310.00	7.18	88.26	95.44	200.00	-104.56	Average	231	278	P
2	5310.00	7.18	97.00	104.18	200.00	-95.82	Peak	231	278	P
3	5350.00	7.22	43.77	50.99	54.00	-3.01	Average	231	278	P
4	5350.00	7.22	56.26	63.48	74.00	-10.52	Peak	231	278	P
5	10620.00	15.05	29.75	44.80	54.00	-9.20	Average	100	175	P
6	10620.00	15.05	43.52	58.57	74.00	-15.43	Peak	100	175	P
7	15930.00	17.52	30.43	47.95	54.00	-6.05	Average	100	331	P
8	15930.00	17.52	44.30	61.82	74.00	-12.18	Peak	100	331	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH62 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

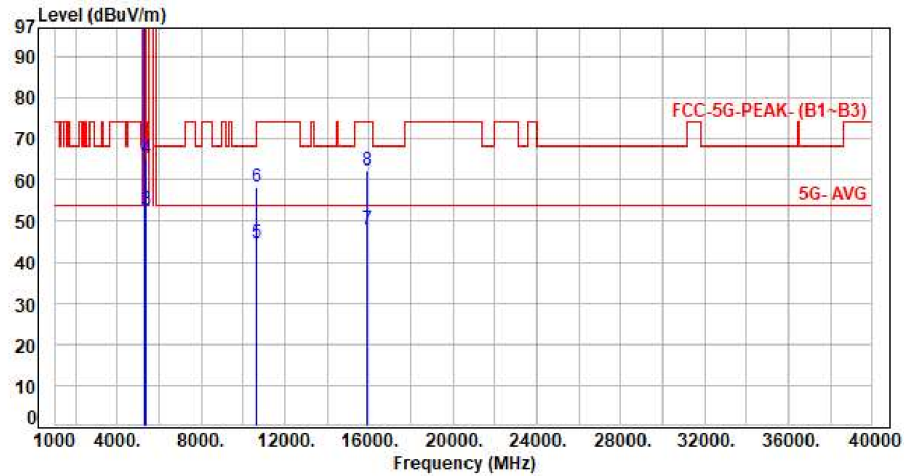

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5310.00	7.18	94.97	102.15	200.00	-97.85	Average	113	133	P
2	5310.00	7.18	104.35	111.53	200.00	-88.47	Peak	113	133	P
3	5350.00	7.22	45.64	52.86	54.00	-1.14	Average	113	133	P
4	5350.00	7.22	58.11	65.33	74.00	-8.67	Peak	113	133	P
5	10620.00	15.05	29.69	44.74	54.00	-9.26	Average	100	174	P
6	10620.00	15.05	43.28	58.33	74.00	-15.67	Peak	100	174	P
7	15930.00	17.52	30.45	47.97	54.00	-6.03	Average	100	214	P
8	15930.00	17.52	44.67	62.19	74.00	-11.81	Peak	100	214	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH58 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

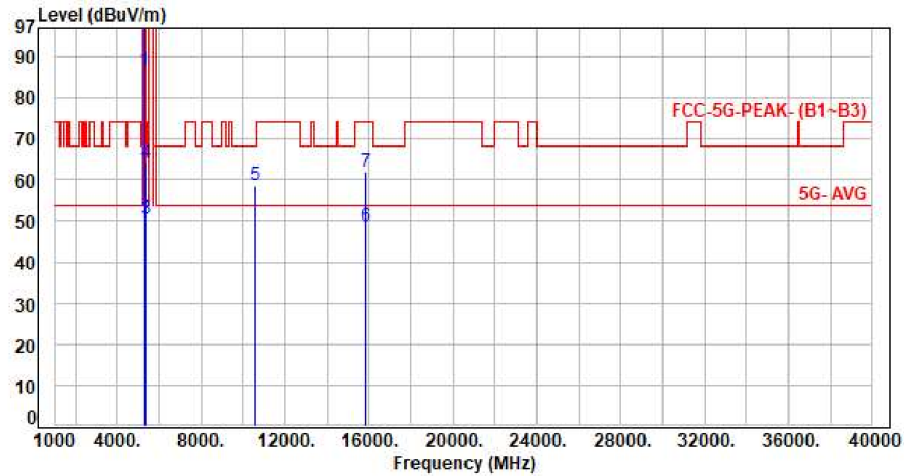


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5290.00	7.13	79.51	86.64	200.00	-113.36	Average	100	278	P
2	5290.00	7.13	90.32	97.45	200.00	-102.55	Peak	100	278	P
3	5350.00	7.22	43.22	50.44	54.00	-3.56	Average	100	278	P
4	5350.00	7.22	57.11	64.33	74.00	-9.67	Peak	100	278	P
5	10580.00	14.95	43.53	58.48	68.20	-9.72	Peak	100	199	P
6	15870.00	17.48	31.22	48.70	54.00	-5.30	Average	100	155	P
7	15870.00	17.48	44.58	62.06	74.00	-11.94	Peak	100	155	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH58 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Horizontal

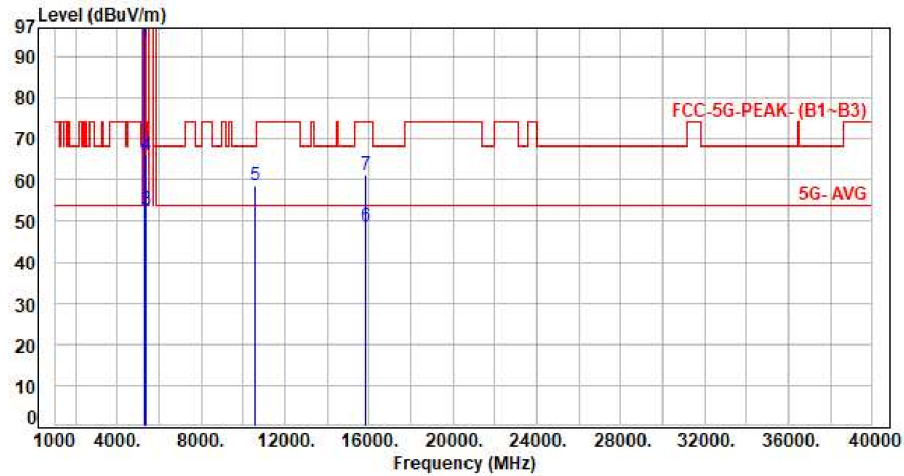


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5290.00	7.13	86.72	93.85	200.00	-106.15	Average	100	134	P
2	5290.00	7.13	96.39	103.52	200.00	-96.48	Peak	100	134	P
3	5350.00	7.22	45.43	52.65	54.00	-1.35	Average	100	134	P
4	5350.00	7.22	58.79	66.01	74.00	-7.99	Peak	100	134	P
5	10580.00	14.95	43.76	58.71	68.20	-9.49	Peak	100	156	P
6	15870.00	17.48	31.14	48.62	54.00	-5.38	Average	100	116	P
7	15870.00	17.48	43.80	61.28	74.00	-12.72	Peak	100	116	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH100 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

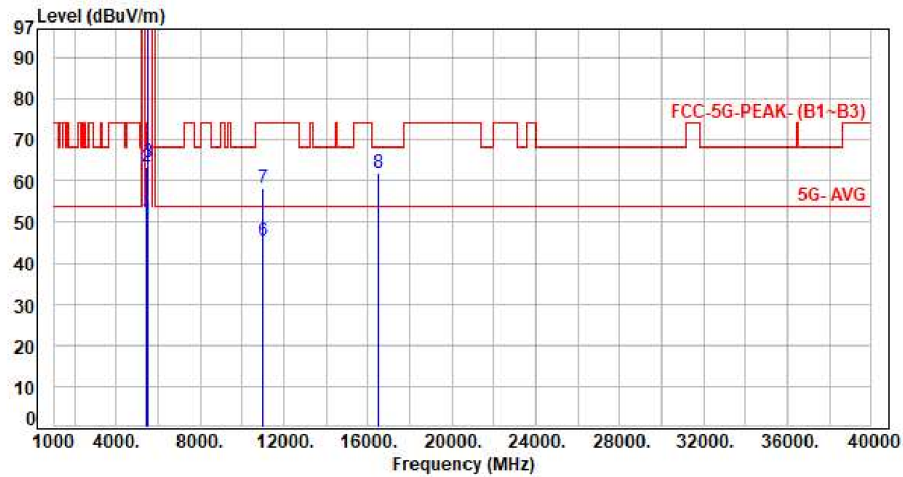


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	43.17	50.62	54.00	-3.38	Average	100	243	P
2	5460.00	7.45	55.92	63.37	74.00	-10.63	Peak	100	243	P
3	5470.00	7.46	57.08	64.54	68.20	-3.66	Peak	100	243	P
4	5500.00	7.49	92.99	100.48	200.00	-99.52	Average	100	243	P
5	5500.00	7.49	102.23	109.72	200.00	-90.28	Peak	100	243	P
6	11000.00	15.68	29.64	45.32	54.00	-8.68	Average	100	132	P
7	11000.00	15.68	42.47	58.15	74.00	-15.85	Peak	100	132	P
8	16500.00	18.65	43.42	62.07	68.20	-6.13	Peak	100	132	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH100 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

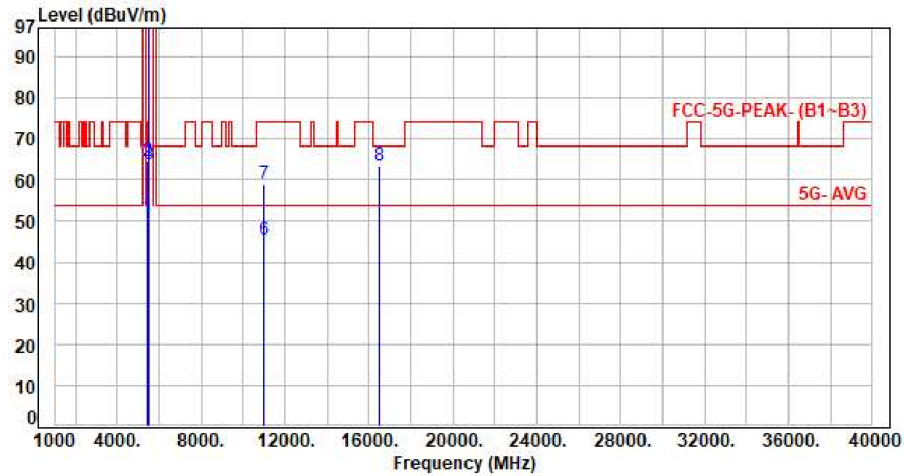

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	43.61	51.06	54.00	-2.94	Average	100	360	P
2	5460.00	7.45	57.24	64.69	74.00	-9.31	Peak	100	360	P
3	5470.00	7.46	56.37	63.83	68.20	-4.37	Peak	100	360	P
4	5500.00	7.49	94.80	102.29	200.00	-97.71	Average	100	360	P
5	5500.00	7.49	104.24	111.73	200.00	-88.27	Peak	100	360	P
6	11000.00	15.68	29.84	45.52	54.00	-8.48	Average	100	159	P
7	11000.00	15.68	43.44	59.12	74.00	-14.88	Peak	100	159	P
8	16500.00	18.65	44.62	63.27	68.20	-4.93	Peak	100	138	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH120 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

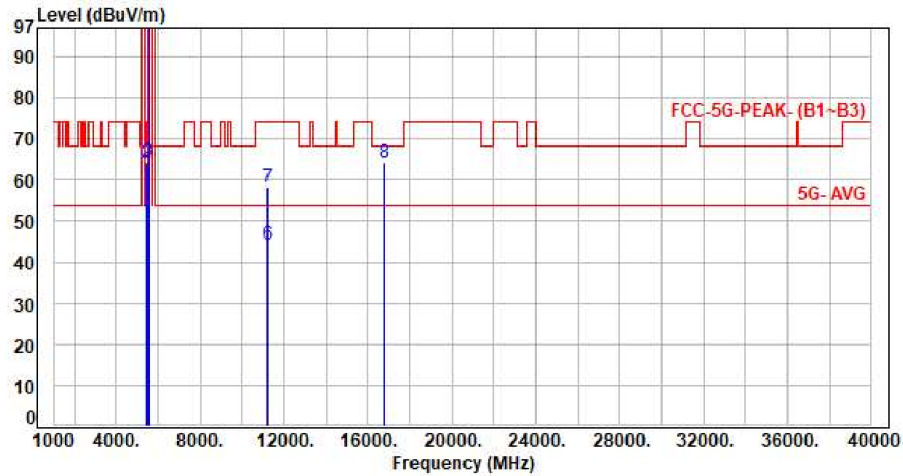

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	42.81	50.26	54.00	-3.74	Average	105	290	P
2	5460.00	7.45	56.69	64.14	74.00	-9.86	Peak	105	290	P
3	5470.00	7.46	56.97	64.43	68.20	-3.77	Peak	105	290	P
4	5600.00	7.43	90.96	98.39	200.00	-101.61	Average	105	290	P
5	5600.00	7.43	99.44	106.87	200.00	-93.13	Peak	105	290	P
6	11200.00	15.91	28.46	44.37	54.00	-9.63	Average	100	147	P
7	11200.00	15.91	42.36	58.27	74.00	-15.73	Peak	100	147	P
8	16800.00	20.49	43.71	64.20	68.20	-4.00	Peak	100	305	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH120 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

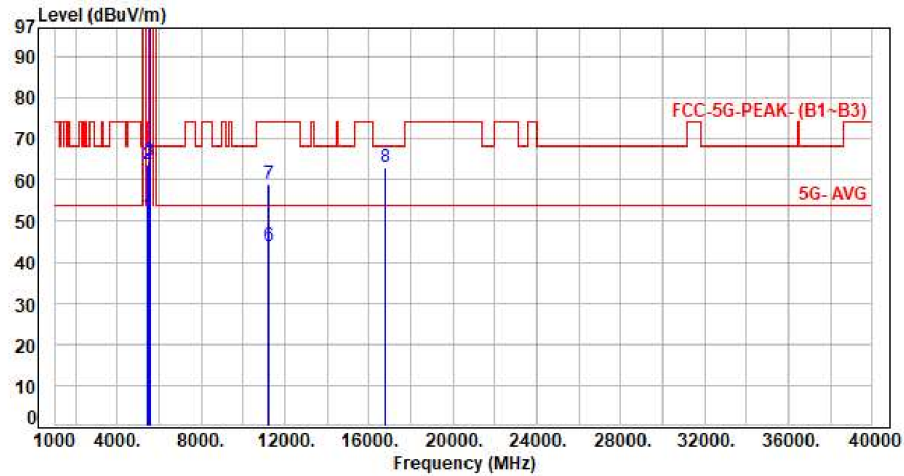


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	43.88	51.33	54.00	-2.67	Average	100	164	P
2	5460.00	7.45	56.40	63.85	74.00	-10.15	Peak	100	164	P
3	5470.00	7.46	57.07	64.53	68.20	-3.67	Peak	100	164	P
4	5600.00	7.43	93.40	100.83	200.00	-99.17	Average	100	164	P
5	5600.00	7.43	102.02	109.45	200.00	-90.55	Peak	100	164	P
6	11200.00	15.91	27.94	43.85	54.00	-10.15	Average	100	241	P
7	11200.00	15.91	43.28	59.19	74.00	-14.81	Peak	100	241	P
8	16800.00	20.49	42.70	63.19	68.20	-5.01	Peak	100	130	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH140 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

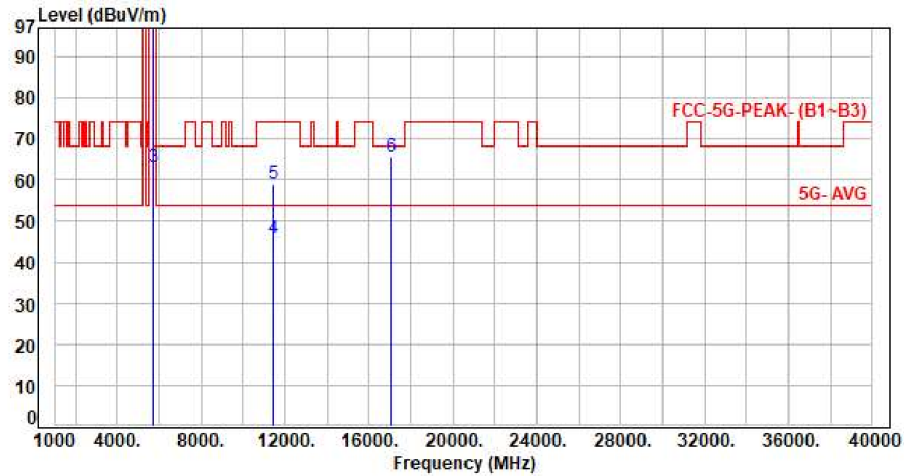


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.37	94.58	101.95	200.00	-98.05	Average	393	271	P
2	5700.00	7.37	104.14	111.51	200.00	-88.49	Peak	393	271	P
3	5725.00	7.33	55.61	62.94	68.20	-5.26	Peak	393	271	P
4	11400.00	16.14	29.48	45.62	54.00	-8.38	Average	100	130	P
5	11400.00	16.14	42.80	58.94	74.00	-15.06	Peak	100	130	P
6	17100.00	21.98	43.65	65.63	68.20	-2.57	Peak	100	195	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH140 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

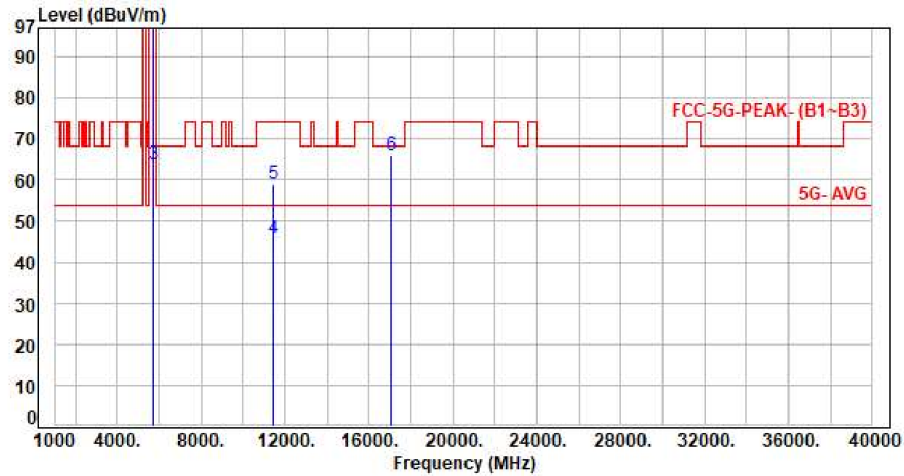


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.37	94.99	102.36	200.00	-97.64	Average	100	360	P
2	5700.00	7.37	104.39	111.76	200.00	-88.24	Peak	100	360	P
3	5725.00	7.33	56.46	63.79	68.20	-4.41	Peak	100	360	P
4	11400.00	16.14	29.62	45.76	54.00	-8.24	Average	100	100	P
5	11400.00	16.14	42.82	58.96	74.00	-15.04	Peak	100	100	P
6	17100.00	21.98	43.88	65.86	68.20	-2.34	Peak	100	263	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH100 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

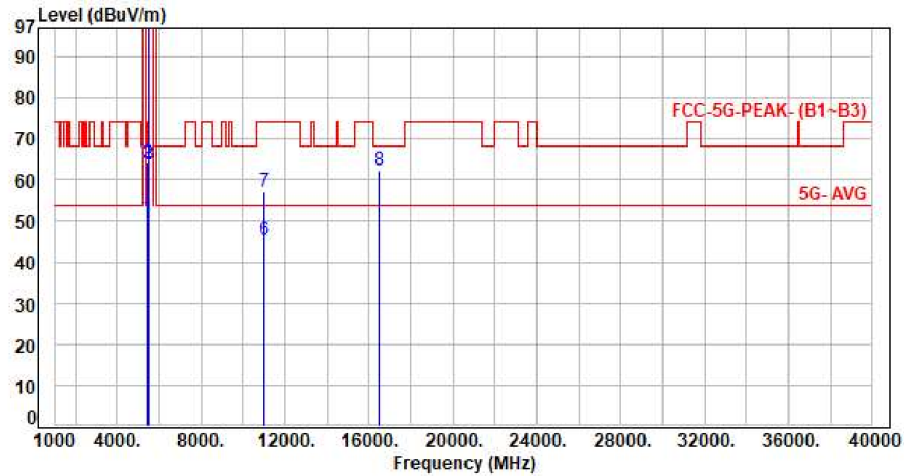


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	43.44	50.89	54.00	-3.11	Average	100	244	P
2	5460.00	7.45	56.66	64.11	74.00	-9.89	Peak	100	244	P
3	5470.00	7.46	56.27	63.73	68.20	-4.47	Peak	100	244	P
4	5500.00	7.49	91.65	99.14	200.00	-100.86	Average	100	244	P
5	5500.00	7.49	101.35	108.84	200.00	-91.16	Peak	100	244	P
6	11000.00	15.68	29.64	45.32	54.00	-8.68	Average	100	241	P
7	11000.00	15.68	41.62	57.30	74.00	-16.70	Peak	100	241	P
8	16500.00	18.65	43.64	62.29	68.20	-5.91	Peak	100	162	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH100 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

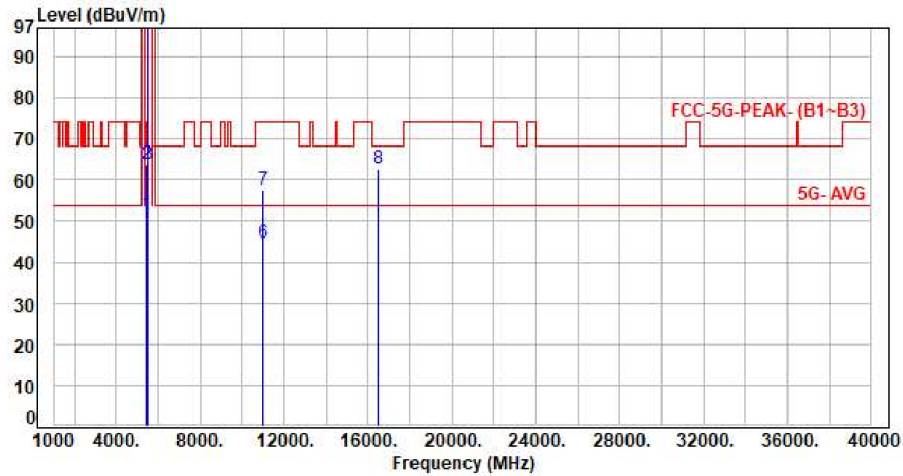

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	44.06	51.51	54.00	-2.49	Average	100	360	P
2	5460.00	7.45	56.23	63.68	74.00	-10.32	Peak	100	360	P
3	5470.00	7.46	56.29	63.75	68.20	-4.45	Peak	100	360	P
4	5500.00	7.49	93.93	101.42	200.00	-98.58	Average	100	360	P
5	5500.00	7.49	103.59	111.08	200.00	-88.92	Peak	100	360	P
6	11000.00	15.68	29.11	44.79	54.00	-9.21	Average	100	135	P
7	11000.00	15.68	41.82	57.50	74.00	-16.50	Peak	100	135	P
8	16500.00	18.65	44.11	62.76	68.20	-5.44	Peak	100	224	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH120 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

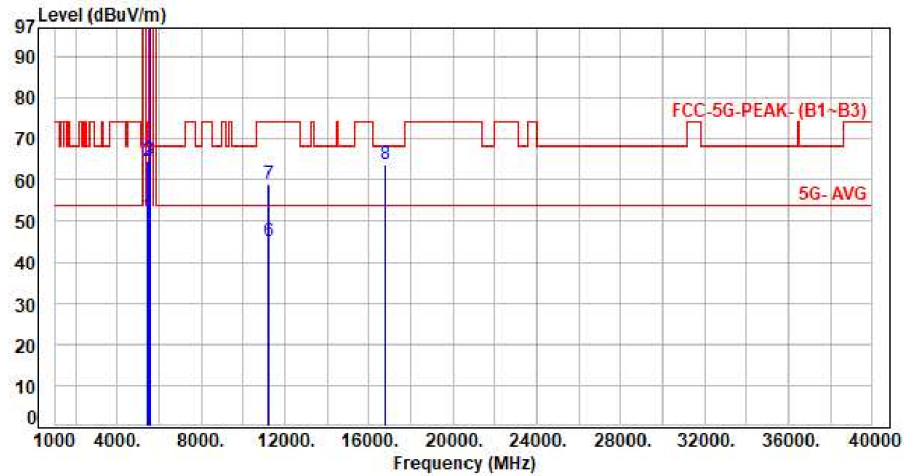

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	43.88	51.33	54.00	-2.67	Average	100	298	P
2	5460.00	7.45	57.00	64.45	74.00	-9.55	Peak	100	298	P
3	5470.00	7.46	57.33	64.79	68.20	-3.41	Peak	100	298	P
4	5600.00	7.43	89.21	96.64	200.00	-103.36	Average	100	298	P
5	5600.00	7.43	101.56	108.99	200.00	-91.01	Peak	100	298	P
6	11200.00	15.91	28.96	44.87	54.00	-9.13	Average	100	144	P
7	11200.00	15.91	42.97	58.88	74.00	-15.12	Peak	100	144	P
8	16800.00	20.49	43.17	63.66	68.20	-4.54	Peak	100	305	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor