




Test Mode : 2TX 11ac20 CH120 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

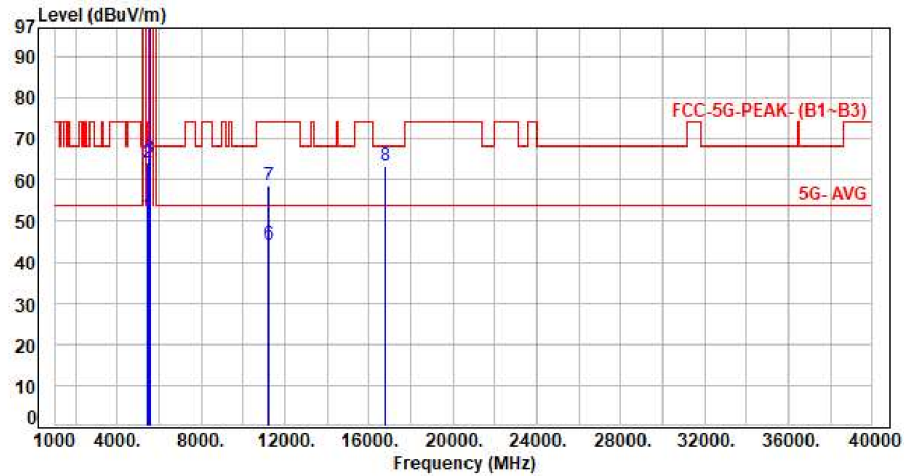

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.45        | 43.97          | 51.42          | 54.00          | -2.58       | Average  | 100         | 165           | P   |
| 2   | 5460.00         | 7.45        | 56.77          | 64.22          | 74.00          | -9.78       | Peak     | 100         | 165           | P   |
| 3   | 5470.00         | 7.46        | 57.73          | 65.19          | 68.20          | -3.01       | Peak     | 100         | 165           | P   |
| 4   | 5600.00         | 7.43        | 92.20          | 99.63          | 200.00         | -100.37     | Average  | 100         | 165           | P   |
| 5   | 5600.00         | 7.43        | 104.50         | 111.93         | 200.00         | -88.07      | Peak     | 100         | 165           | P   |
| 6   | 11200.00        | 15.91       | 28.47          | 44.38          | 54.00          | -9.62       | Average  | 100         | 244           | P   |
| 7   | 11200.00        | 15.91       | 42.68          | 58.59          | 74.00          | -15.41      | Peak     | 100         | 244           | P   |
| 8   | 16800.00        | 20.49       | 43.05          | 63.54          | 68.20          | -4.66       | Peak     | 100         | 130           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH140 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

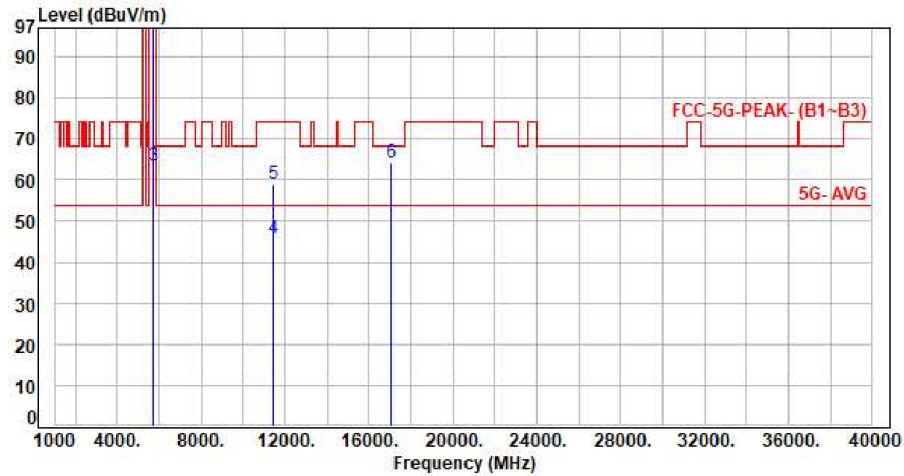


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5700.00         | 7.37        | 91.51          | 98.88          | 200.00         | -101.12     | Average  | 100         | 241           | P   |
| 2   | 5700.00         | 7.37        | 101.10         | 108.47         | 200.00         | -91.53      | Peak     | 100         | 241           | P   |
| 3   | 5725.00         | 7.33        | 55.97          | 63.30          | 68.20          | -4.90       | Peak     | 100         | 241           | P   |
| 4   | 11400.00        | 16.14       | 29.56          | 45.70          | 54.00          | -8.30       | Average  | 100         | 109           | P   |
| 5   | 11400.00        | 16.14       | 42.96          | 59.10          | 74.00          | -14.90      | Peak     | 100         | 109           | P   |
| 6   | 17100.00        | 21.98       | 42.18          | 64.16          | 68.20          | -4.04       | Peak     | 100         | 177           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH140 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

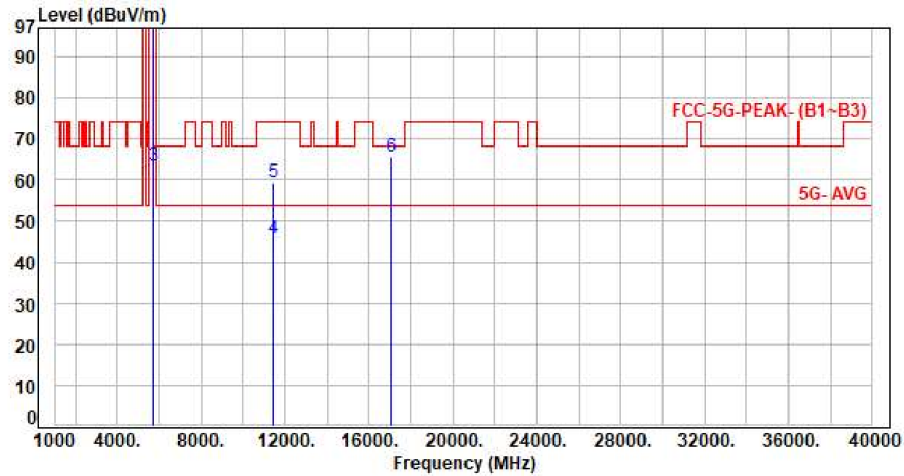


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 5700.00            | 7.37           | 93.75             | 101.12            | 200.00            | -98.88         | Average  | 100            | 360              | P   |
| 2   | 5700.00            | 7.37           | 103.45            | 110.82            | 200.00            | -89.18         | Peak     | 100            | 360              | P   |
| 3   | 5725.00            | 7.33           | 56.08             | 63.41             | 68.20             | -4.79          | Peak     | 100            | 360              | P   |
| 4   | 11400.00           | 16.14          | 29.61             | 45.75             | 54.00             | -8.25          | Average  | 100            | 155              | P   |
| 5   | 11400.00           | 16.14          | 43.14             | 59.28             | 74.00             | -14.72         | Peak     | 100            | 155              | P   |
| 6   | 17100.00           | 21.98          | 43.51             | 65.49             | 68.20             | -2.71          | Peak     | 100            | 162              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH102 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

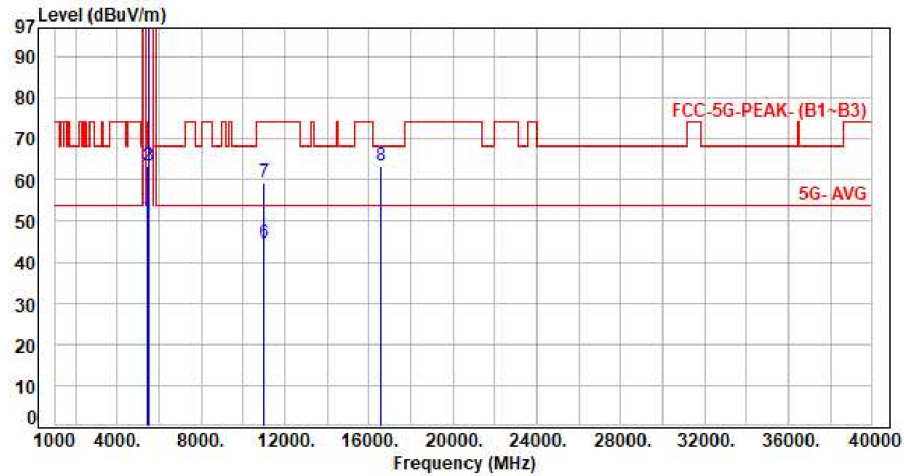

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.45        | 43.35          | 50.80          | 54.00          | -3.20       | Average  | 100         | 243           | P   |
| 2   | 5460.00         | 7.45        | 56.08          | 63.53          | 74.00          | -10.47      | Peak     | 100         | 243           | P   |
| 3   | 5470.00         | 7.46        | 56.12          | 63.58          | 68.20          | -4.62       | Peak     | 100         | 243           | P   |
| 4   | 5510.00         | 7.47        | 90.07          | 97.54          | 200.00         | -102.46     | Average  | 100         | 243           | P   |
| 5   | 5510.00         | 7.47        | 99.27          | 106.74         | 200.00         | -93.26      | Peak     | 100         | 243           | P   |
| 6   | 11020.00        | 15.65       | 29.12          | 44.77          | 54.00          | -9.23       | Average  | 100         | 288           | P   |
| 7   | 11020.00        | 15.65       | 43.61          | 59.26          | 74.00          | -14.74      | Peak     | 100         | 288           | P   |
| 8   | 16530.00        | 18.77       | 44.51          | 63.28          | 68.20          | -4.92       | Peak     | 100         | 240           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH102 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

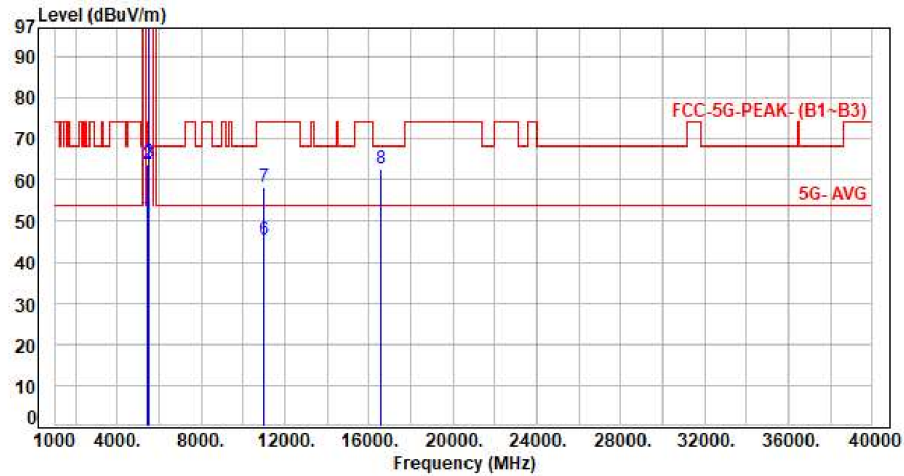

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.45        | 43.52          | 50.97          | 54.00          | -3.03       | Average  | 100         | 360           | P   |
| 2   | 5460.00         | 7.45        | 56.25          | 63.70          | 74.00          | -10.30      | Peak     | 100         | 360           | P   |
| 3   | 5470.00         | 7.46        | 56.55          | 64.01          | 68.20          | -4.19       | Peak     | 100         | 360           | P   |
| 4   | 5510.00         | 7.47        | 91.36          | 98.83          | 200.00         | -101.17     | Average  | 100         | 360           | P   |
| 5   | 5510.00         | 7.47        | 100.56         | 108.03         | 200.00         | -91.97      | Peak     | 100         | 360           | P   |
| 6   | 11020.00        | 15.65       | 29.61          | 45.26          | 54.00          | -8.74       | Average  | 100         | 165           | P   |
| 7   | 11020.00        | 15.65       | 42.64          | 58.29          | 74.00          | -15.71      | Peak     | 100         | 165           | P   |
| 8   | 16530.00        | 18.77       | 44.04          | 62.81          | 68.20          | -5.39       | Peak     | 100         | 170           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH118 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

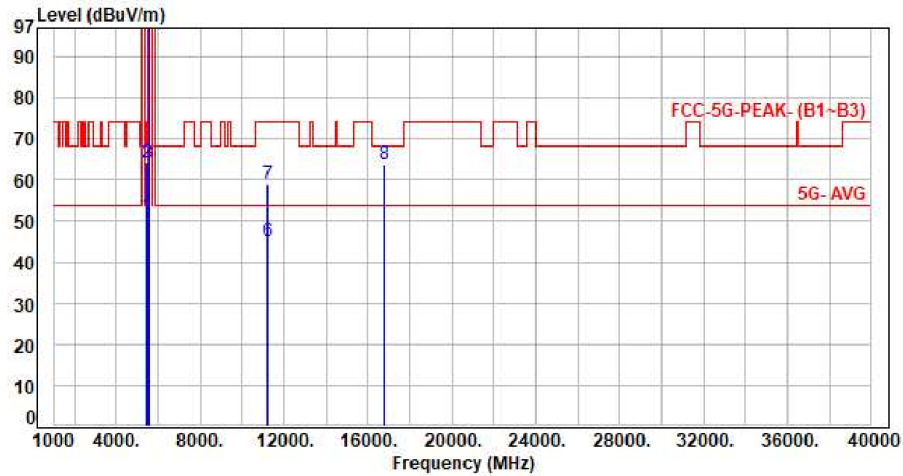

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.45        | 43.83          | 51.28          | 54.00          | -2.72       | Average  | 100         | 291           | P   |
| 2   | 5460.00         | 7.45        | 56.58          | 64.03          | 74.00          | -9.97       | Peak     | 100         | 291           | P   |
| 3   | 5470.00         | 7.46        | 56.70          | 64.16          | 68.20          | -4.04       | Peak     | 100         | 291           | P   |
| 4   | 5590.00         | 7.43        | 88.05          | 95.48          | 200.00         | -104.52     | Average  | 100         | 291           | P   |
| 5   | 5590.00         | 7.43        | 97.65          | 105.08         | 200.00         | -94.92      | Peak     | 100         | 291           | P   |
| 6   | 11180.00        | 15.90       | 29.15          | 45.05          | 54.00          | -8.95       | Average  | 100         | 142           | P   |
| 7   | 11180.00        | 15.90       | 43.22          | 59.12          | 74.00          | -14.88      | Peak     | 100         | 142           | P   |
| 8   | 16770.00        | 20.44       | 43.39          | 63.83          | 68.20          | -4.37       | Peak     | 100         | 310           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor





Test Mode : 2TX 11ac40 CH118 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

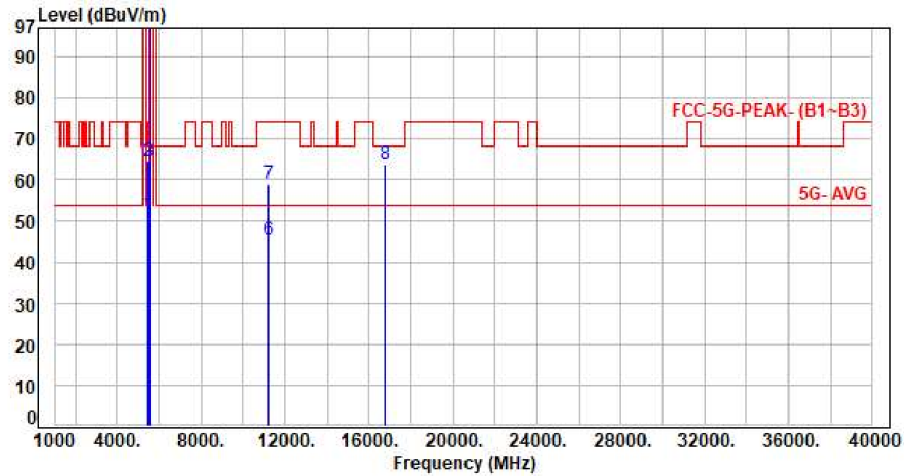

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.45        | 44.18          | 51.63          | 54.00          | -2.37       | Average  | 100         | 164           | P   |
| 2   | 5460.00         | 7.45        | 57.09          | 64.54          | 74.00          | -9.46       | Peak     | 100         | 164           | P   |
| 3   | 5470.00         | 7.46        | 57.12          | 64.58          | 68.20          | -3.62       | Peak     | 100         | 164           | P   |
| 4   | 5590.00         | 7.43        | 91.21          | 98.64          | 200.00         | -101.36     | Average  | 100         | 164           | P   |
| 5   | 5590.00         | 7.43        | 100.29         | 107.72         | 200.00         | -92.28      | Peak     | 100         | 164           | P   |
| 6   | 11180.00        | 15.90       | 29.32          | 45.22          | 54.00          | -8.78       | Average  | 100         | 238           | P   |
| 7   | 11180.00        | 15.90       | 42.94          | 58.84          | 74.00          | -15.16      | Peak     | 100         | 238           | P   |
| 8   | 16770.00        | 20.44       | 43.21          | 63.65          | 68.20          | -4.55       | Peak     | 100         | 124           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH134 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

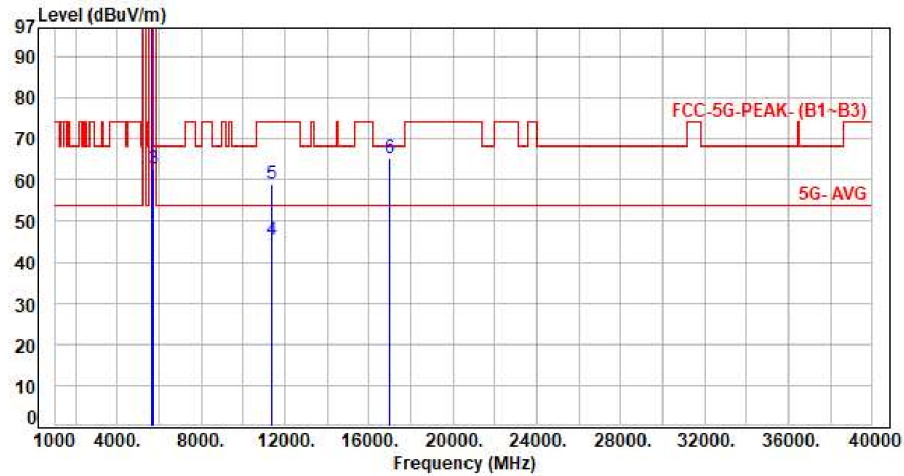


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5670.00         | 7.36        | 89.36          | 96.72          | 200.00         | -103.28     | Average  | 100         | 243           | P   |
| 2   | 5670.00         | 7.36        | 99.20          | 106.56         | 200.00         | -93.44      | Peak     | 100         | 243           | P   |
| 3   | 5725.00         | 7.33        | 55.38          | 62.71          | 68.20          | -5.49       | Peak     | 100         | 243           | P   |
| 4   | 11340.00        | 16.00       | 29.37          | 45.37          | 54.00          | -8.63       | Average  | 100         | 195           | P   |
| 5   | 11340.00        | 16.00       | 42.95          | 58.95          | 74.00          | -15.05      | Peak     | 100         | 195           | P   |
| 6   | 17010.00        | 21.87       | 43.52          | 65.39          | 68.20          | -2.81       | Peak     | 100         | 256           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor





Test Mode : 2TX 11ac40 CH134 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

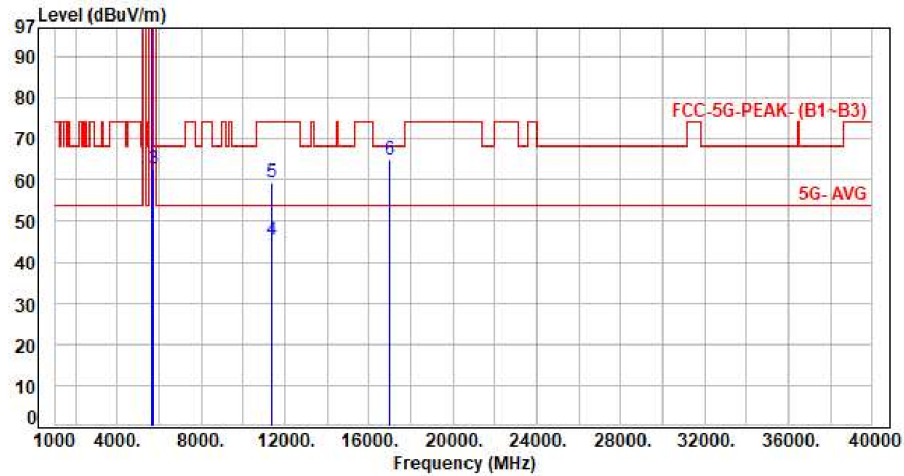


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 5670.00            | 7.36           | 91.97             | 99.33             | 200.00            | -100.67        | Average  | 100            | 360              | P   |
| 2   | 5670.00            | 7.36           | 101.70            | 109.06            | 200.00            | -90.94         | Peak     | 100            | 360              | P   |
| 3   | 5725.00            | 7.33           | 55.49             | 62.82             | 68.20             | -5.38          | Peak     | 100            | 360              | P   |
| 4   | 11340.00           | 16.00          | 29.48             | 45.48             | 54.00             | -8.52          | Average  | 100            | 207              | P   |
| 5   | 11340.00           | 16.00          | 43.28             | 59.28             | 74.00             | -14.72         | Peak     | 100            | 207              | P   |
| 6   | 17010.00           | 21.87          | 43.00             | 64.87             | 68.20             | -3.33          | Peak     | 100            | 224              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH106 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

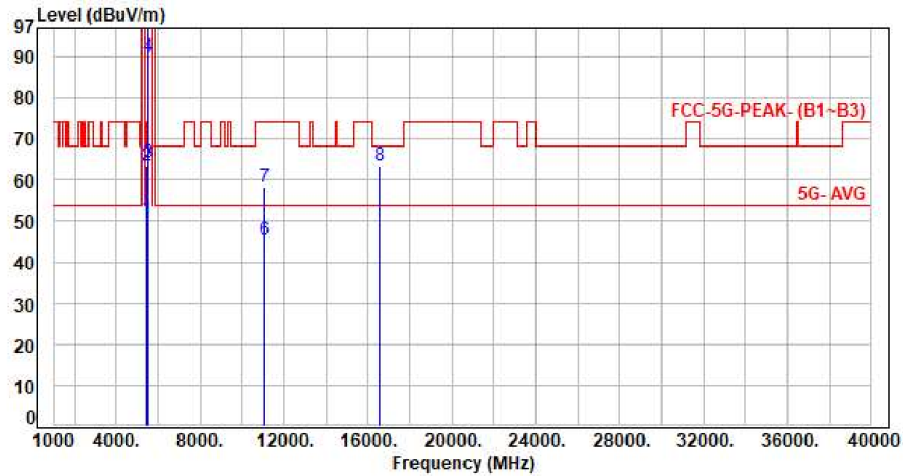

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.45        | 42.91          | 50.36          | 54.00          | -3.64       | Average  | 227         | 270           | P   |
| 2   | 5460.00         | 7.45        | 55.85          | 63.30          | 74.00          | -10.70      | Peak     | 227         | 270           | P   |
| 3   | 5470.00         | 7.46        | 56.64          | 64.10          | 68.20          | -4.10       | Peak     | 227         | 270           | P   |
| 4   | 5530.00         | 7.44        | 82.48          | 89.92          | 200.00         | -110.08     | Average  | 227         | 270           | P   |
| 5   | 5530.00         | 7.44        | 91.74          | 99.18          | 200.00         | -100.82     | Peak     | 227         | 270           | P   |
| 6   | 11060.00        | 15.66       | 29.77          | 45.43          | 54.00          | -8.57       | Average  | 100         | 147           | P   |
| 7   | 11060.00        | 15.66       | 42.62          | 58.28          | 74.00          | -15.72      | Peak     | 100         | 147           | P   |
| 8   | 16590.00        | 19.23       | 44.25          | 63.48          | 68.20          | -4.72       | Peak     | 100         | 335           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH106 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

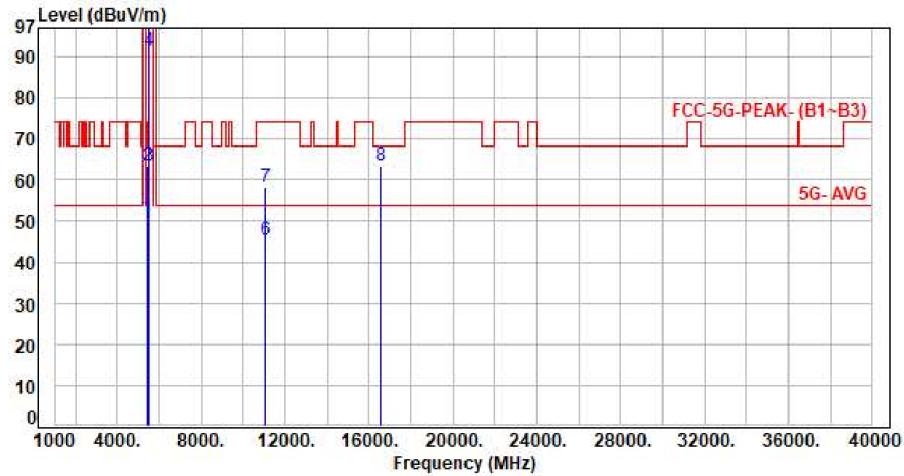

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.45        | 43.48          | 50.93          | 54.00          | -3.07       | Average  | 339         | 360           | P   |
| 2   | 5460.00         | 7.45        | 56.07          | 63.52          | 74.00          | -10.48      | Peak     | 339         | 360           | P   |
| 3   | 5470.00         | 7.46        | 56.03          | 63.49          | 68.20          | -4.71       | Peak     | 339         | 360           | P   |
| 4   | 5530.00         | 7.44        | 84.17          | 91.61          | 200.00         | -108.39     | Average  | 339         | 360           | P   |
| 5   | 5530.00         | 7.44        | 94.21          | 101.65         | 200.00         | -98.35      | Peak     | 339         | 360           | P   |
| 6   | 11060.00        | 15.66       | 29.83          | 45.49          | 54.00          | -8.51       | Average  | 100         | 256           | P   |
| 7   | 11060.00        | 15.66       | 42.73          | 58.39          | 74.00          | -15.61      | Peak     | 100         | 256           | P   |
| 8   | 16590.00        | 19.23       | 44.18          | 63.41          | 68.20          | -4.79       | Peak     | 100         | 241           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH122 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

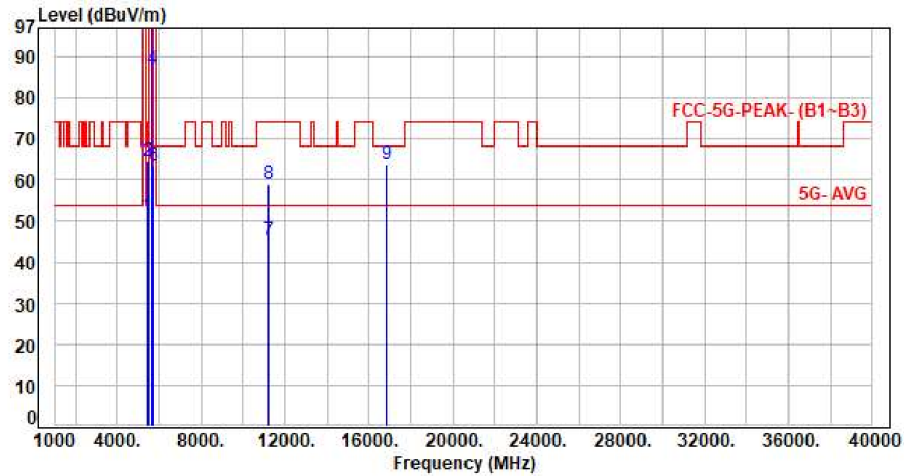

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.45        | 43.74          | 51.19          | 54.00          | -2.81       | Average  | 331         | 70            | P   |
| 2   | 5460.00         | 7.45        | 57.08          | 64.53          | 74.00          | -9.47       | Peak     | 331         | 70            | P   |
| 3   | 5470.00         | 7.46        | 57.12          | 64.58          | 68.20          | -3.62       | Peak     | 331         | 70            | P   |
| 4   | 5610.00         | 7.42        | 79.62          | 87.04          | 200.00         | -112.96     | Average  | 331         | 70            | P   |
| 5   | 5610.00         | 7.42        | 94.87          | 102.29         | 200.00         | -97.71      | Peak     | 331         | 70            | P   |
| 6   | 5725.00         | 7.33        | 56.11          | 63.44          | 68.20          | -4.76       | Peak     | 331         | 70            | P   |
| 7   | 11220.00        | 15.93       | 29.41          | 45.34          | 54.00          | -8.66       | Average  | 100         | 128           | P   |
| 8   | 11220.00        | 15.93       | 43.08          | 59.01          | 74.00          | -14.99      | Peak     | 100         | 128           | P   |
| 9   | 16830.00        | 20.55       | 43.28          | 63.83          | 68.20          | -4.37       | Peak     | 100         | 294           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH122 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

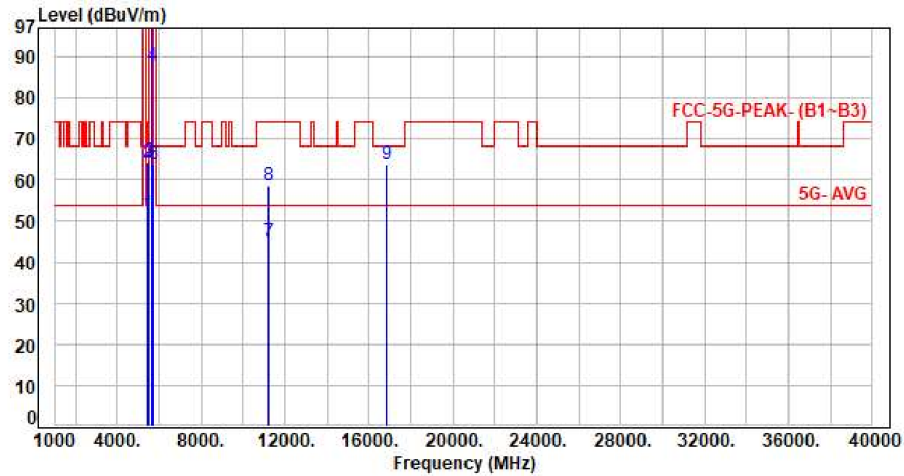


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.45        | 44.12          | 51.57          | 54.00          | -2.43       | Average  | 103         | 104           | P   |
| 2   | 5460.00         | 7.45        | 56.78          | 64.23          | 74.00          | -9.77       | Peak     | 103         | 104           | P   |
| 3   | 5470.00         | 7.46        | 56.92          | 64.38          | 68.20          | -3.82       | Peak     | 103         | 104           | P   |
| 4   | 5610.00         | 7.42        | 80.26          | 87.68          | 200.00         | -112.32     | Average  | 103         | 104           | P   |
| 5   | 5610.00         | 7.42        | 95.51          | 102.93         | 200.00         | -97.07      | Peak     | 103         | 104           | P   |
| 6   | 5725.00         | 7.33        | 56.57          | 63.90          | 68.20          | -4.30       | Peak     | 100         | 104           | P   |
| 7   | 11220.00        | 15.93       | 29.17          | 45.10          | 54.00          | -8.90       | Average  | 100         | 241           | P   |
| 8   | 11220.00        | 15.93       | 42.85          | 58.78          | 74.00          | -15.22      | Peak     | 100         | 126           | P   |
| 9   | 16830.00        | 20.55       | 43.28          | 63.83          | 68.20          | -4.37       | Peak     | 100         | 126           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor





Test Mode : 2TX 11a CH144 6Mbps  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

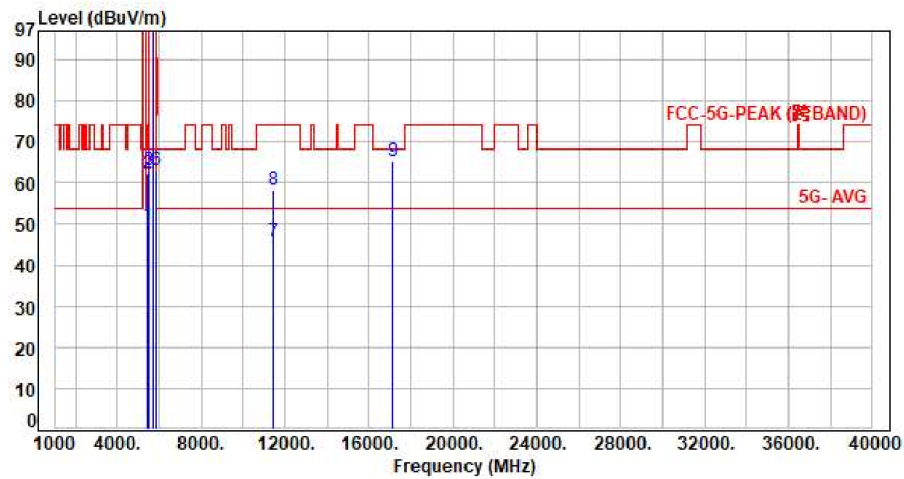


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.45        | 42.30          | 49.75          | 54.00          | -4.25       | Average  | 390         | 271           | P   |
| 2   | 5460.00         | 7.45        | 54.81          | 62.26          | 74.00          | -11.74      | Peak     | 390         | 271           | P   |
| 3   | 5470.00         | 7.46        | 55.61          | 63.07          | 68.20          | -5.13       | Peak     | 390         | 271           | P   |
| 4   | 5720.00         | 7.34        | 93.89          | 101.23         | 200.00         | -98.77      | Average  | 390         | 271           | P   |
| 5   | 5720.00         | 7.34        | 103.52         | 110.86         | 200.00         | -89.14      | Peak     | 390         | 271           | P   |
| 6   | 5850.00         | 7.43        | 55.75          | 63.18          | 68.20          | -5.02       | Peak     | 390         | 271           | P   |
| 7   | 11440.00        | 16.25       | 29.62          | 45.87          | 54.00          | -8.13       | Average  | 100         | 193           | P   |
| 8   | 11440.00        | 16.25       | 42.18          | 58.43          | 74.00          | -15.57      | Peak     | 100         | 193           | P   |
| 9   | 17160.00        | 22.12       | 43.15          | 65.27          | 68.20          | -2.93       | Peak     | 100         | 127           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor





Test Mode : 2TX 11a CH144 6Mbps  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

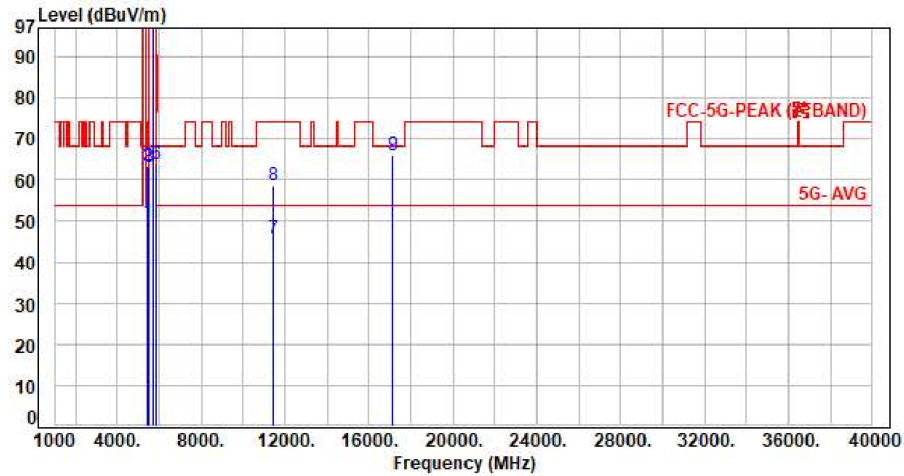


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.45        | 42.33          | 49.78          | 54.00          | -4.22       | Average  | 100         | 360           | P   |
| 2   | 5460.00         | 7.45        | 56.00          | 63.45          | 74.00          | -10.55      | Peak     | 100         | 360           | P   |
| 3   | 5470.00         | 7.46        | 55.43          | 62.89          | 68.20          | -5.31       | Peak     | 100         | 360           | P   |
| 4   | 5720.00         | 7.34        | 95.01          | 102.35         | 200.00         | -97.65      | Average  | 100         | 360           | P   |
| 5   | 5720.00         | 7.34        | 104.36         | 111.70         | 200.00         | -88.30      | Peak     | 100         | 360           | P   |
| 6   | 5850.00         | 7.43        | 56.31          | 63.74          | 68.20          | -4.46       | Peak     | 100         | 360           | P   |
| 7   | 11440.00        | 16.25       | 29.36          | 45.61          | 54.00          | -8.39       | Average  | 100         | 152           | P   |
| 8   | 11440.00        | 16.25       | 42.32          | 58.57          | 74.00          | -15.43      | Peak     | 100         | 152           | P   |
| 9   | 17160.00        | 22.12       | 43.74          | 65.86          | 68.20          | -2.34       | Peak     | 100         | 147           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH144 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

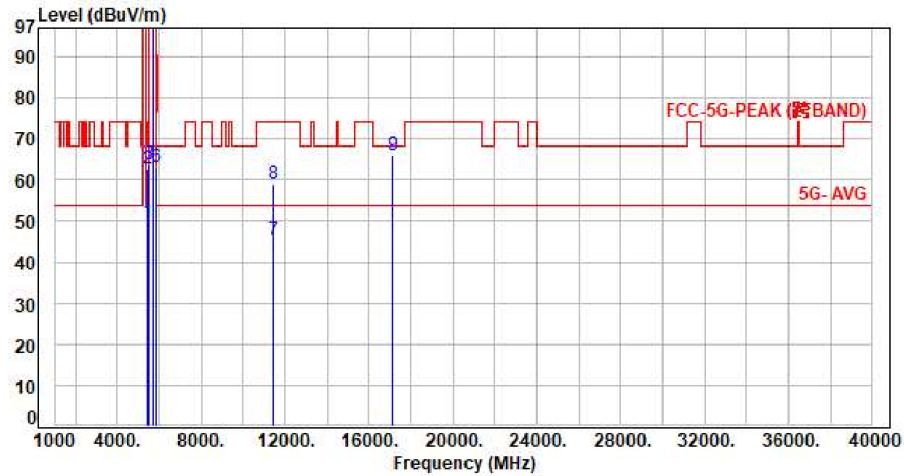

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.45        | 42.33          | 49.78          | 54.00          | -4.22       | Average  | 391         | 267           | P   |
| 2   | 5460.00         | 7.45        | 55.22          | 62.67          | 74.00          | -11.33      | Peak     | 391         | 267           | P   |
| 3   | 5470.00         | 7.46        | 56.50          | 63.96          | 68.20          | -4.24       | Peak     | 391         | 267           | P   |
| 4   | 5720.00         | 7.34        | 93.19          | 100.53         | 200.00         | -99.47      | Average  | 391         | 267           | P   |
| 5   | 5720.00         | 7.34        | 103.15         | 110.49         | 200.00         | -89.51      | Peak     | 391         | 267           | P   |
| 6   | 5850.00         | 7.43        | 55.51          | 62.94          | 68.20          | -5.26       | Peak     | 391         | 267           | P   |
| 7   | 11440.00        | 16.25       | 29.19          | 45.44          | 54.00          | -8.56       | Average  | 100         | 142           | P   |
| 8   | 11440.00        | 16.25       | 42.62          | 58.87          | 74.00          | -15.13      | Peak     | 100         | 142           | P   |
| 9   | 17160.00        | 22.12       | 43.85          | 65.97          | 68.20          | -2.23       | Peak     | 100         | 115           | P   |

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor