




Test Mode : 2TX 11ac20 CH144 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

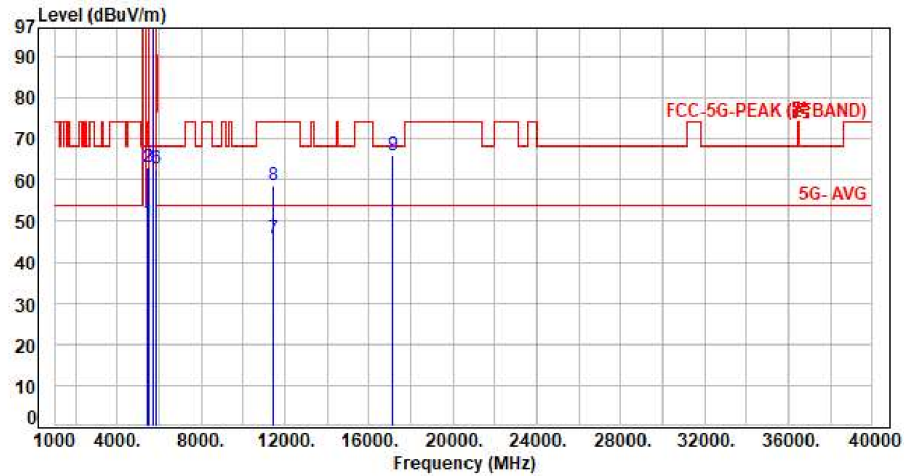


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	42.37	49.82	54.00	-4.18	Average	100	360	P
2	5460.00	7.45	55.63	63.08	74.00	-10.92	Peak	100	360	P
3	5470.00	7.46	55.55	63.01	68.20	-5.19	Peak	100	360	P
4	5720.00	7.34	93.94	101.28	200.00	-98.72	Average	100	360	P
5	5720.00	7.34	103.19	110.53	200.00	-89.47	Peak	100	360	P
6	5850.00	7.43	55.24	62.67	68.20	-5.53	Peak	100	360	P
7	11440.00	16.25	29.41	45.66	54.00	-8.34	Average	100	358	P
8	11440.00	16.25	42.35	58.60	74.00	-15.40	Peak	100	358	P
9	17160.00	22.12	43.84	65.96	68.20	-2.24	Peak	100	301	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH142 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

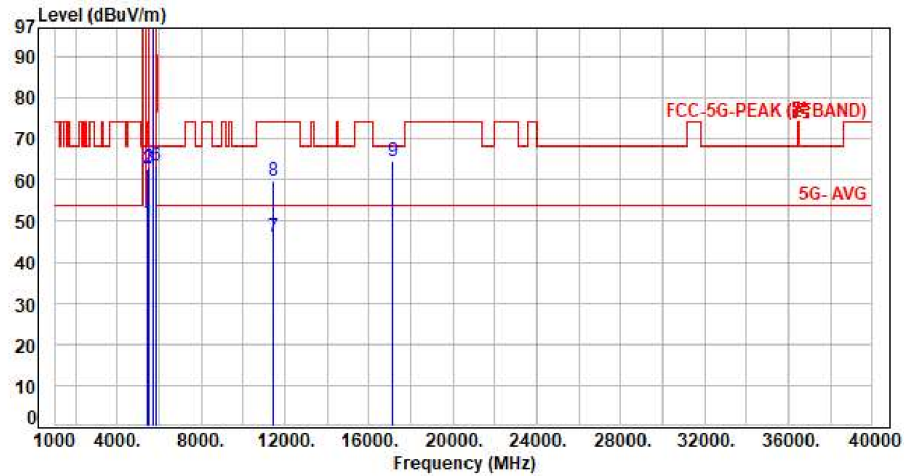


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	42.33	49.78	54.00	-4.22	Average	396	243	P
2	5460.00	7.45	55.16	62.61	74.00	-11.39	Peak	396	243	P
3	5470.00	7.46	55.43	62.89	68.20	-5.31	Peak	396	243	P
4	5710.00	7.36	89.55	96.91	200.00	-103.09	Average	396	243	P
5	5710.00	7.36	99.65	107.01	200.00	-92.99	Peak	396	243	P
6	5850.00	7.43	56.14	63.57	68.20	-4.63	Peak	396	243	P
7	11420.00	16.20	29.84	46.04	54.00	-7.96	Average	100	194	P
8	11420.00	16.20	43.48	59.68	74.00	-14.32	Peak	100	194	P
9	17130.00	22.05	42.66	64.71	68.20	-3.49	Peak	100	116	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH142 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

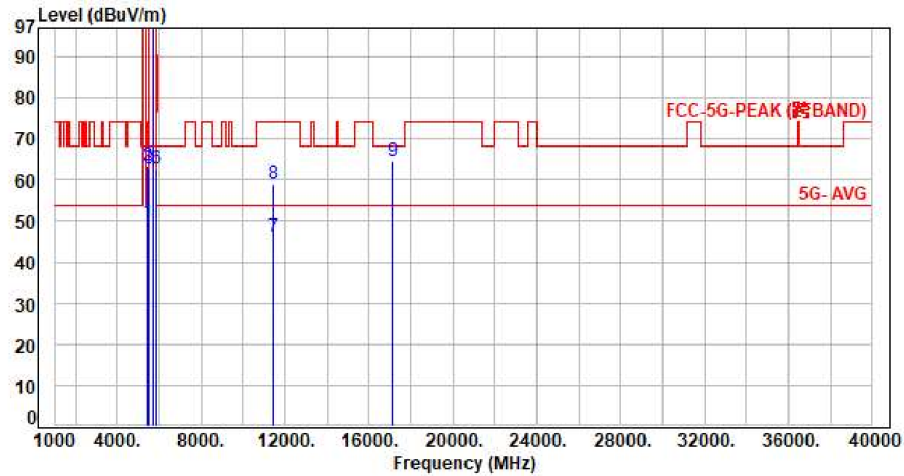


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	42.40	49.85	54.00	-4.15	Average	100	360	P
2	5460.00	7.45	55.89	63.34	74.00	-10.66	Peak	100	360	P
3	5470.00	7.46	55.26	62.72	68.20	-5.48	Peak	100	360	P
4	5710.00	7.36	91.65	99.01	200.00	-100.99	Average	100	360	P
5	5710.00	7.36	101.05	108.41	200.00	-91.59	Peak	100	360	P
6	5850.00	7.43	55.30	62.73	68.20	-5.47	Peak	100	360	P
7	11420.00	16.20	29.87	46.07	54.00	-7.93	Average	100	128	P
8	11420.00	16.20	42.75	58.95	74.00	-15.05	Peak	100	128	P
9	17130.00	22.05	42.63	64.68	68.20	-3.52	Peak	100	153	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH138 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

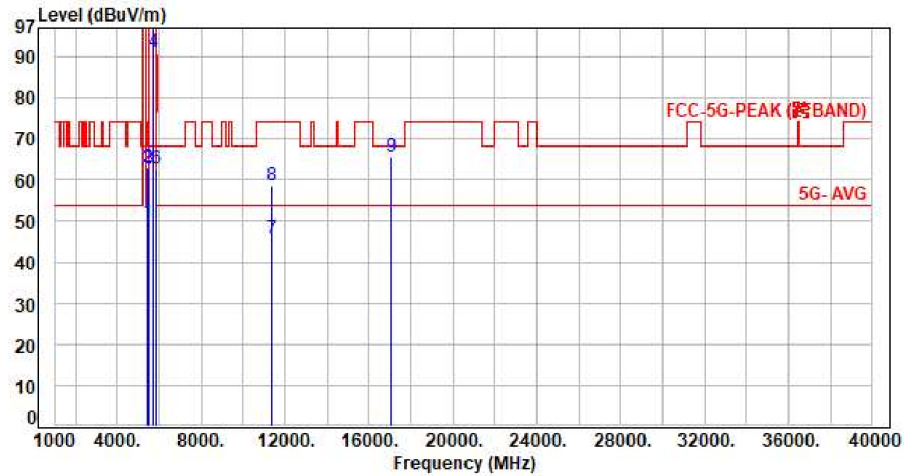

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	42.39	49.84	54.00	-4.16	Average	377	267	P
2	5460.00	7.45	55.76	63.21	74.00	-10.79	Peak	377	267	P
3	5470.00	7.46	55.36	62.82	68.20	-5.38	Peak	377	267	P
4	5690.00	7.37	83.69	91.06	200.00	-108.94	Average	377	267	P
5	5690.00	7.37	93.43	100.80	200.00	-99.20	Peak	377	267	P
6	5850.00	7.43	55.35	62.78	68.20	-5.42	Peak	377	267	P
7	11380.00	16.09	29.67	45.76	54.00	-8.24	Average	100	145	P
8	11380.00	16.09	42.68	58.77	74.00	-15.23	Peak	100	145	P
9	17070.00	21.97	43.78	65.75	68.20	-2.45	Peak	100	114	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH138 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

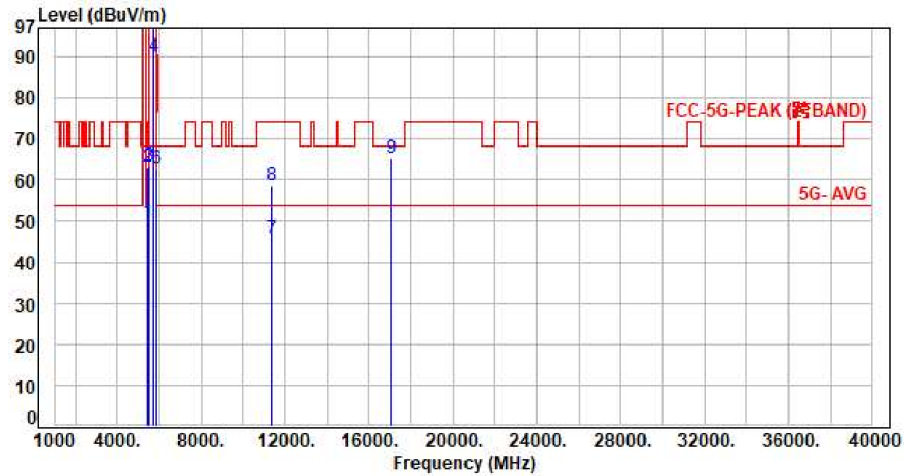


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.45	42.31	49.76	54.00	-4.24	Average	100	295	P
2	5460.00	7.45	55.65	63.10	74.00	-10.90	Peak	100	295	P
3	5470.00	7.46	55.90	63.36	68.20	-4.84	Peak	100	295	P
4	5690.00	7.37	82.69	90.06	200.00	-109.94	Average	100	295	P
5	5690.00	7.37	93.42	100.79	200.00	-99.21	Peak	100	295	P
6	5850.00	7.43	55.31	62.74	68.20	-5.46	Peak	100	295	P
7	11380.00	16.09	29.73	45.82	54.00	-8.18	Average	100	253	P
8	11380.00	16.09	42.44	58.53	74.00	-15.47	Peak	100	253	P
9	17070.00	21.97	43.48	65.45	68.20	-2.75	Peak	100	175	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH149 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

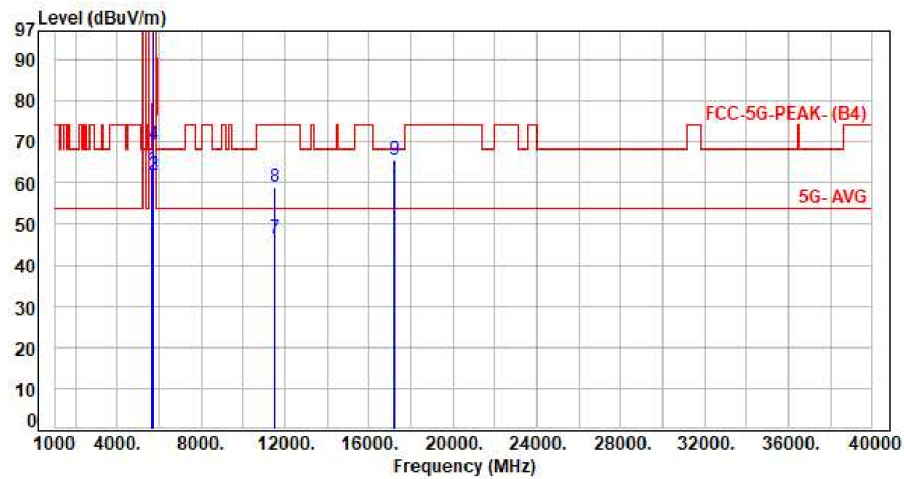


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	56.12	63.47	68.20	-4.73	Peak	366	268	P
2	5700.00	7.37	54.60	61.97	105.20	-43.23	Peak	366	268	P
3	5720.00	7.34	54.69	62.03	110.80	-48.77	Peak	366	268	P
4	5725.00	7.33	62.15	69.48	122.20	-52.72	Peak	366	268	P
5	5745.00	7.30	92.91	100.21	200.00	-99.79	Average	366	268	P
6	5745.00	7.30	102.48	109.78	200.00	-90.22	Peak	366	268	P
7	11490.00	16.46	29.89	46.35	54.00	-7.65	Average	100	304	P
8	11490.00	16.46	42.63	59.09	74.00	-14.91	Peak	100	304	P
9	17235.00	22.37	43.10	65.47	68.20	-2.73	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH149 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

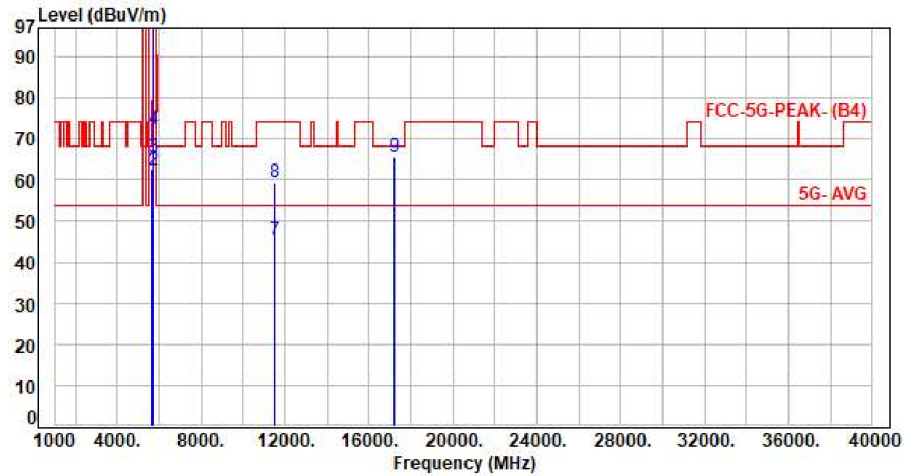


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	55.17	62.52	68.20	-5.68	Peak	100	360	P
2	5700.00	7.37	54.86	62.23	105.20	-42.97	Peak	100	360	P
3	5720.00	7.34	58.47	65.81	110.80	-44.99	Peak	100	360	P
4	5725.00	7.33	65.00	72.33	122.20	-49.87	Peak	100	360	P
5	5745.00	7.30	94.71	102.01	200.00	-97.99	Average	100	360	P
6	5745.00	7.30	104.47	111.77	200.00	-88.23	Peak	100	360	P
7	11490.00	16.46	29.03	45.49	54.00	-8.51	Average	100	225	P
8	11490.00	16.46	43.08	59.54	74.00	-14.46	Peak	100	225	P
9	17235.00	22.37	43.21	65.58	68.20	-2.62	Peak	100	192	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH157 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

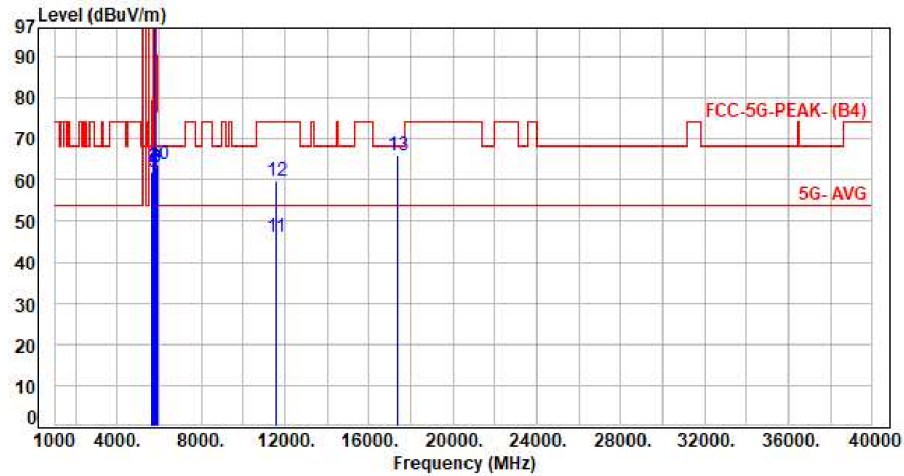


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	54.65	62.00	68.20	-6.20	Peak	100	261	P
2	5700.00	7.37	56.02	63.39	105.20	-41.81	Peak	100	261	P
3	5720.00	7.34	54.80	62.14	110.80	-48.66	Peak	100	261	P
4	5725.00	7.33	55.10	62.43	122.20	-59.77	Peak	100	261	P
5	5785.00	7.37	92.20	99.57	200.00	-100.43	Average	100	261	P
6	5785.00	7.37	102.32	109.69	200.00	-90.31	Peak	100	261	P
7	5850.00	7.43	55.33	62.76	122.20	-59.44	Peak	100	261	P
8	5855.00	7.45	55.49	62.94	110.80	-47.86	Peak	100	261	P
9	5875.00	7.54	55.62	63.16	105.20	-42.04	Peak	100	261	P
10	5925.00	7.66	56.16	63.82	68.20	-4.38	Peak	100	261	P
11	11570.00	16.67	29.49	46.16	54.00	-7.84	Average	100	251	P
12	11570.00	16.67	42.93	59.60	74.00	-14.40	Peak	100	251	P
13	17355.00	23.18	43.00	66.18	68.20	-2.02	Peak	100	117	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH157 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

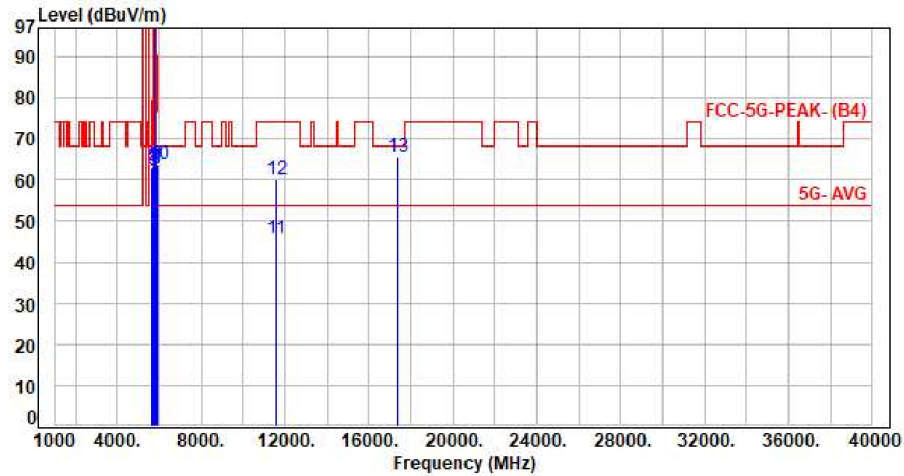


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	55.72	63.07	68.20	-5.13	Peak	100	360	P
2	5700.00	7.37	55.93	63.30	105.20	-41.90	Peak	100	360	P
3	5720.00	7.34	54.81	62.15	110.80	-48.65	Peak	100	360	P
4	5725.00	7.33	55.24	62.57	122.20	-59.63	Peak	100	360	P
5	5785.00	7.37	94.13	101.50	200.00	-98.50	Average	100	360	P
6	5785.00	7.37	103.47	110.84	200.00	-89.16	Peak	100	360	P
7	5850.00	7.43	55.53	62.96	122.20	-59.24	Peak	100	360	P
8	5855.00	7.45	55.36	62.81	110.80	-47.99	Peak	100	360	P
9	5875.00	7.54	56.23	63.77	105.20	-41.43	Peak	100	360	P
10	5925.00	7.66	56.16	63.82	68.20	-4.38	Peak	100	360	P
11	11570.00	16.67	28.90	45.57	54.00	-8.43	Average	100	261	P
12	11570.00	16.67	43.50	60.17	74.00	-13.83	Peak	100	261	P
13	17355.00	23.18	42.60	65.78	68.20	-2.42	Peak	100	312	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH165 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

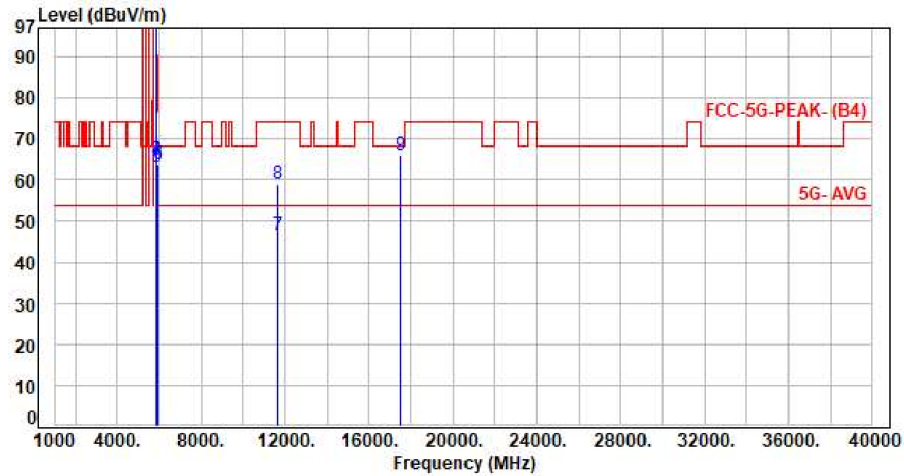


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.42	92.43	99.85	200.00	-100.15	Average	100	243	P
2	5825.00	7.42	101.51	108.93	200.00	-91.07	Peak	100	243	P
3	5850.00	7.43	57.39	64.82	122.20	-57.38	Peak	100	243	P
4	5855.00	7.45	57.36	64.81	110.80	-45.99	Peak	100	243	P
5	5875.00	7.54	55.70	63.24	105.20	-41.96	Peak	100	243	P
6	5925.00	7.66	56.27	63.93	68.20	-4.27	Peak	100	243	P
7	11650.00	16.84	29.64	46.48	54.00	-7.52	Average	100	194	P
8	11650.00	16.84	42.02	58.86	74.00	-15.14	Peak	100	194	P
9	17475.00	23.76	42.31	66.07	68.20	-2.13	Peak	100	185	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH165 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

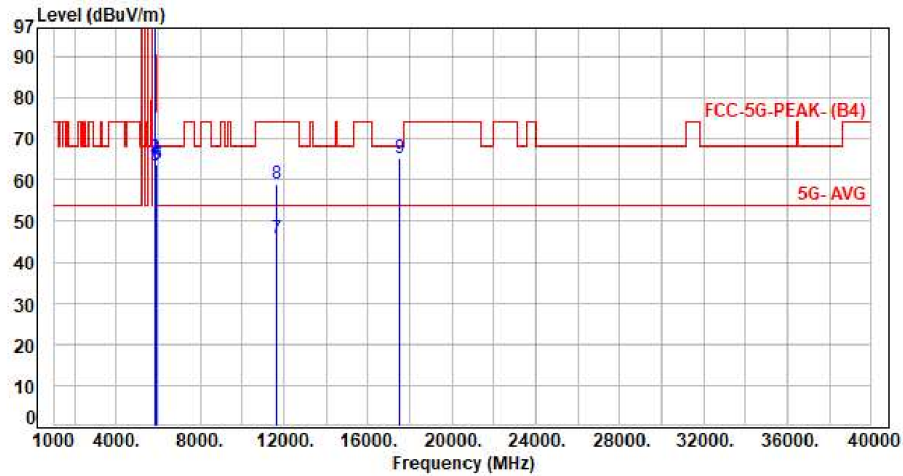


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.42	94.83	102.25	200.00	-97.75	Average	100	360	P
2	5825.00	7.42	104.55	111.97	200.00	-88.03	Peak	100	360	P
3	5850.00	7.43	57.68	65.11	122.20	-57.09	Peak	100	360	P
4	5855.00	7.45	57.42	64.87	110.80	-45.93	Peak	100	360	P
5	5875.00	7.54	56.06	63.60	105.20	-41.60	Peak	100	360	P
6	5925.00	7.66	56.03	63.69	68.20	-4.51	Peak	100	360	P
7	11650.00	16.84	28.76	45.60	54.00	-8.40	Average	100	196	P
8	11650.00	16.84	42.01	58.85	74.00	-15.15	Peak	100	196	P
9	17475.00	23.76	41.52	65.28	68.20	-2.92	Peak	100	119	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH149 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

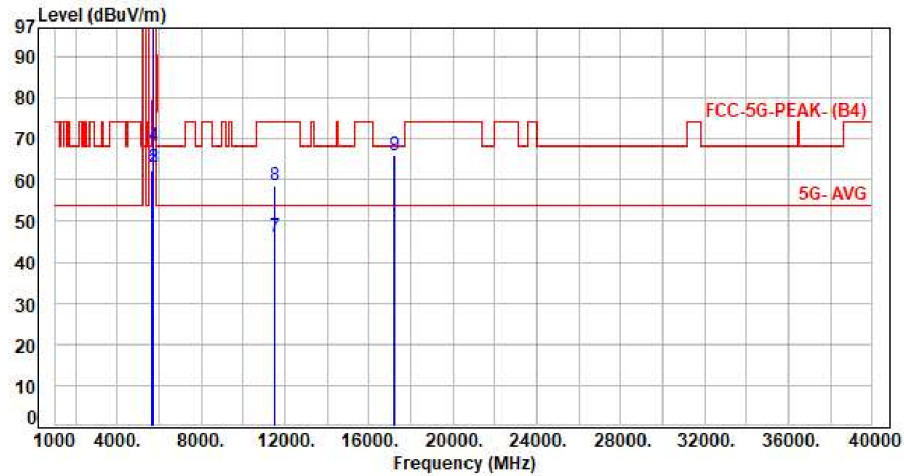


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	54.92	62.27	68.20	-5.93	Peak	388	267	P
2	5700.00	7.37	55.83	63.20	105.20	-42.00	Peak	388	267	P
3	5720.00	7.34	55.76	63.10	110.80	-47.70	Peak	388	267	P
4	5725.00	7.33	60.72	68.05	122.20	-54.15	Peak	388	267	P
5	5745.00	7.30	92.30	99.60	200.00	-100.40	Average	388	267	P
6	5745.00	7.30	102.34	109.64	200.00	-90.36	Peak	388	267	P
7	11490.00	16.46	29.52	45.98	54.00	-8.02	Average	100	145	P
8	11490.00	16.46	42.31	58.77	74.00	-15.23	Peak	100	145	P
9	17235.00	22.37	43.62	65.99	68.20	-2.21	Peak	100	266	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH149 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

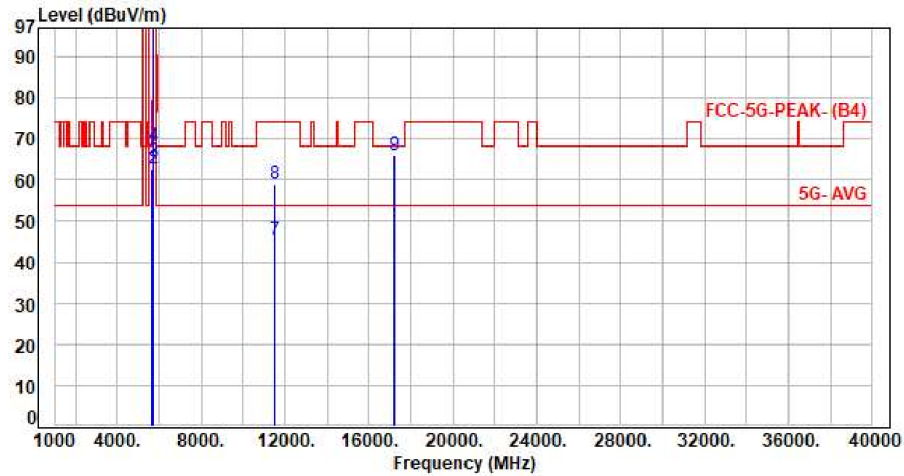


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	55.26	62.61	68.20	-5.59	Peak	100	360	P
2	5700.00	7.37	55.43	62.80	105.20	-42.40	Peak	100	360	P
3	5720.00	7.34	57.24	64.58	110.80	-46.22	Peak	100	360	P
4	5725.00	7.33	60.96	68.29	122.20	-53.91	Peak	100	360	P
5	5745.00	7.30	93.67	100.97	200.00	-99.03	Average	100	360	P
6	5745.00	7.30	103.28	110.58	200.00	-89.42	Peak	100	360	P
7	11490.00	16.46	29.03	45.49	54.00	-8.51	Average	100	117	P
8	11490.00	16.46	42.53	58.99	74.00	-15.01	Peak	100	117	P
9	17235.00	22.37	43.69	66.06	68.20	-2.14	Peak	100	254	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH157 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

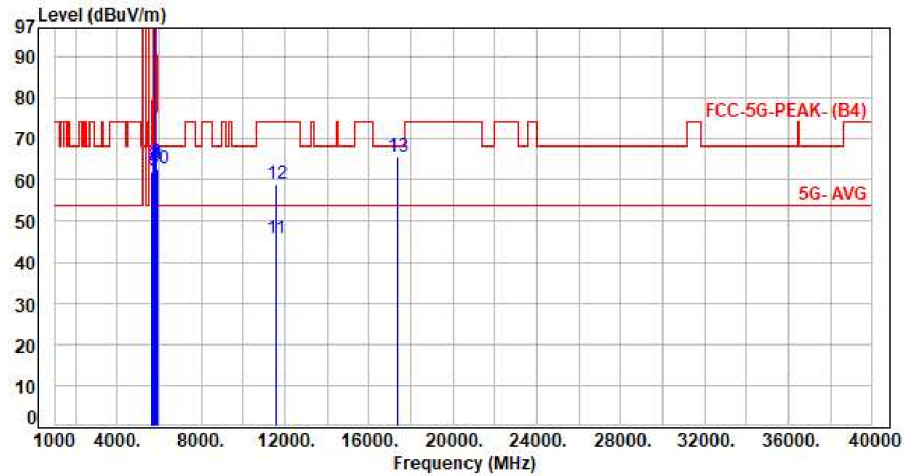


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	54.76	62.11	68.20	-6.09	Peak	400	265	P
2	5700.00	7.37	55.95	63.32	105.20	-41.88	Peak	400	265	P
3	5720.00	7.34	55.06	62.40	110.80	-48.40	Peak	400	265	P
4	5725.00	7.33	55.24	62.57	122.20	-59.63	Peak	400	265	P
5	5785.00	7.37	91.91	99.28	200.00	-100.72	Average	400	265	P
6	5785.00	7.37	101.95	109.32	200.00	-90.68	Peak	400	265	P
7	5850.00	7.43	55.58	63.01	122.20	-59.19	Peak	400	265	P
8	5855.00	7.45	56.70	64.15	110.80	-46.65	Peak	400	265	P
9	5875.00	7.54	56.08	63.62	105.20	-41.58	Peak	400	265	P
10	5925.00	7.66	55.00	62.66	68.20	-5.54	Peak	400	265	P
11	11570.00	16.67	28.92	45.59	54.00	-8.41	Average	100	299	P
12	11570.00	16.67	42.20	58.87	74.00	-15.13	Peak	100	299	P
13	17355.00	23.18	42.56	65.74	68.20	-2.46	Peak	100	225	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH157 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

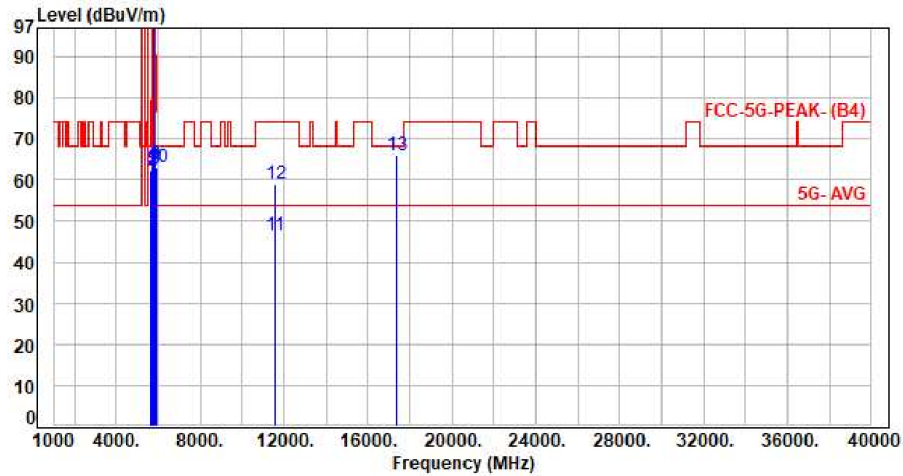

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	55.14	62.49	68.20	-5.71	Peak	100	360	P
2	5700.00	7.37	54.93	62.30	105.20	-42.90	Peak	100	360	P
3	5720.00	7.34	55.42	62.76	110.80	-48.04	Peak	100	360	P
4	5725.00	7.33	56.14	63.47	122.20	-58.73	Peak	100	360	P
5	5785.00	7.37	93.50	100.87	200.00	-99.13	Average	100	360	P
6	5785.00	7.37	102.87	110.24	200.00	-89.76	Peak	100	360	P
7	5850.00	7.43	55.81	63.24	122.20	-58.96	Peak	100	360	P
8	5855.00	7.45	55.31	62.76	110.80	-48.04	Peak	100	360	P
9	5875.00	7.54	56.21	63.75	105.20	-41.45	Peak	100	360	P
10	5925.00	7.66	55.44	63.10	68.20	-5.10	Peak	100	360	P
11	11570.00	16.67	29.62	46.29	54.00	-7.71	Average	100	143	P
12	11570.00	16.67	42.47	59.14	74.00	-14.86	Peak	100	143	P
13	17355.00	23.18	42.81	65.99	68.20	-2.21	Peak	100	231	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor