



**MET Laboratories, Inc.** *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

April 17, 2006

Bentley Kinetics  
60 Rogers Street  
Manchester, NH 03103

Dear Bill Nawn,

Enclosed is the EMC test report for compliance testing of the Bentley Kinetics, KSensor IMU400 as tested to the requirements of Title 47 of the CFR, Part 15 Subpart B for a Class B Digital Device and Subpart C, §15.247 for Intentional Radiators.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,  
MET LABORATORIES, INC.

Molly Sunderland  
Documentation Department

Reference: (\Bentley Kinetics\ KSensor IMU400 \ EMC19336A-FCC247)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc. While use of the National Voluntary Laboratory Accreditation Program (NVLAP) letters or the NVLAP Logo, the Standards Council of Canada Logo, A2LA, or the Nationally Recognized Testing Laboratory (NRTL) Letters in this report reflects MET Accreditation under these programs, these letters, logo, or statements do not claim product endorsement by these organizations or any Agency of the U.S. Government. This letter of transmittal is not a part of the attached report.

DOC-EMC702 2/26/2004



*The Nation's First Licensed Nationally Recognized Testing Laboratory*





**MET Laboratories, Inc.** *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

## **Electromagnetic Compatibility Test Report**

For the

**Bentley Kinetics  
KSensor IMU400**

**Tested in Accordance with  
Title 47 of the CFR  
FCC Part 15 Subpart B and C**

**MET Report: EMC19336A-FCC247**

April 17, 2006

**Prepared For:**

**Bentley Kinetics  
60 Rogers Street  
Manchester, NH 03103**

**Prepared By:**  
**MET Laboratories, Inc.**  
914 West Patapsco Avenue  
Baltimore, MD 21230



Bentley Kinetics  
KSensor IMU400

CFR Title 47, Part 15 Subpart B and C

---

## Electromagnetic Compatibility Test Report

For the

**Bentley Kinetics  
KSensor IMU400**

**Tested in Accordance with  
Title 47 of the CFR  
FCC Part 15 Subpart B and C**

Dusmantha Tennakoon  
Test Engineer, Electromagnetic Compatibility Lab

Molly Sunderland  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 15, §15.247 of the FCC Rules under normal use and maintenance.

Kevin Mehaffey  
Manager, Electromagnetic Compatibility Lab



Bentley Kinetics  
KSensor IMU400

CFR Title 47, Part 15 Subpart B and C

---

## Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	April 17, 2006	Initial Issue.



## List of Terms and Abbreviations

<b>AC</b>	<b>Alternating Current</b>
<b>ACF</b>	<b>Antenna Correction Factor</b>
<b>Cal</b>	<b>Calibration</b>
<b>d</b>	<b>Measurement Distance</b>
<b>dB</b>	<b>Deci Bels</b>
<b>dB<math>\mu</math>V</b>	<b>Deci-Bels above one <b>micro</b> Volt</b>
<b>dB<math>\mu</math>V/m</b>	<b>Deci-Bels above one <b>micro</b> Volt <b>per</b> meter</b>
<b>DC</b>	<b>Direct Current</b>
<b>DCF</b>	<b>Distance Correction Factor</b>
<b>E</b>	<b>Electric Field</b>
<b>EUT</b>	<b>Equipment Under Test</b>
<b>f</b>	<b>Frequency</b>
<b>FCC</b>	<b>Federal Communications Commission</b>
<b>H</b>	<b>Magnetic Field</b>
<b>GHz</b>	<b>Giga Hertz</b>
<b>Hz</b>	<b>Hertz</b>
<b>ICES</b>	<b>Interference-Causing Equipment Standard</b>
<b>kHz</b>	<b>kilohertz</b>
<b>kPa</b>	<b>kilopascal</b>
<b>kV</b>	<b>kilo Volt</b>
<b>LISN</b>	<b>Line Impedance Stabilization Network</b>
<b>MHz</b>	<b>MegaHertz</b>
<b><math>\mu</math>H</b>	<b><b>micro</b> Henry</b>
<b><math>\mu</math>F</b>	<b><b>micro</b> Farad</b>
<b><math>\mu</math>s</b>	<b><b>micro</b> seconds</b>
<b>RF</b>	<b>Radio Frequency</b>
<b>RMS</b>	<b>Root-Mean-Square</b>



## Table of Contents

<b>1</b>	<b>Introduction.....</b>	<b>1</b>
1.1	Overview .....	1
1.2	Test Site .....	1
1.3	Testing Summary .....	2
<b>2</b>	<b>Equipment Configuration.....</b>	<b>3</b>
2.1	Description of EUT .....	3
2.2	Equipment Configuration .....	3
2.3	Support Equipment .....	4
2.4	Ports and Cabling Information .....	4
2.5	Mode Of Operation .....	5
2.6	Modifications to EUT .....	5
2.7	Disposition of EUT .....	5
<b>3</b>	<b>Electromagnetic Compatibility Test Data.....</b>	<b>7</b>
3.1	Conducted Emission Limits .....	7
3.2	Radiated Emission Limits .....	13
3.3	Spurious Radiated Emissions.....	24
3.4	Conducted Emission Limits .....	28
3.5	Bandwidth Requirements .....	35
3.6	Peak Output Power.....	39
3.7	RF Exposure.....	43
3.8	Band Edge Emissions.....	45
3.9	Spectral Power Density .....	48
3.10	Antenna Requirements .....	52
3.11	Spurious Conducted Emissions.....	53
<b>4</b>	<b>Additional Photographs.....</b>	<b>66</b>
<b>5</b>	<b>Test Equipment .....</b>	<b>71</b>
<b>6</b>	<b>Compliance Information.....</b>	<b>72</b>
6.1	Certification Information .....	72
6.2	Label and User's Manual Information .....	76



## List of Tables

Table 1. Testing Summary .....	2
Table 2. Equipment Configuration .....	3
Table 3. Support Equipment, Normal Operation.....	4
Table 4. Support Equipment, Charging Mode.....	4
Table 5. Ports and Cabling, Normal Mode.....	4
Table 6. Ports and Cabling, Charging Mode .....	4
Table 7. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Section 15.107(a) (b) .....	7
Table 8. 15.107, Subpart B Conducted Emissions Test Results, Phase Line .....	8
Table 9. 15.107, Subpart B Conducted Emissions Test Results, Neutral Line.....	10
Table 10. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b) .....	13
Table 11. 15.109, Subpart B Radiated Emissions Test Results, Normal Operation.....	14
Table 12. 15.109, Subpart B Radiated Emissions Test Results, Charging Mode.....	15
Table 13. Restricted Bands of Operation from FCC Part 15, § 15.205 .....	24
Table 14. Radiated Emissions Limits from § 15.209 (a).....	25
Table 15. 5.209 Subpart C Spurious Radiated Emissions Test Results – Channel 0.....	26
Table 16. 5.209 Subpart C Spurious Radiated Emissions Test Results – Channel 7.....	26
Table 17. 5.209 Subpart C Spurious Radiated Emissions Test Results – Channel 15.....	26
Table 18. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Section 15.107(a) (b).....	28
Table 19. 5.207 Subpart C Conducted Emissions Test Results, Phase Line .....	30
Table 20. 5.207 Subpart C Conducted Emissions Test Results, Neutral Line.....	32
Table 21. Limits for Maximum Permissible Exposure.....	43
Table 22. Restricted Bands of Operation from FCC Part 15, § 15.205 .....	45

## List of Figures

Figure 1. Block Diagram of Normal Mode .....	6
Figure 2. Block Diagram of Charging Mode.....	6

## List of Photographs

Photograph 1. 15.107, Subpart B Conducted Emissions Test Setup .....	12
Photograph 2. 15.109, Subpart B Radiated Emissions Test Setup, Normal Operation .....	22
Photograph 3. 15.109, Subpart B Radiated Emissions Test Setup, Charging Mode .....	23
Photograph 4. 5.209 Subpart C Spurious Radiated Emissions Test Setup .....	27
Photograph 5. 5.207 Subpart C Conducted Emissions Test Setup .....	34



## List of Plots

Plot 1. 15.107, Subpart B Conducted Emissions, Phase Line, 0.15 MHz to 30 MHz .....	9
Plot 2. 15.107, Subpart B Conducted Emissions Test Results, Neutral Line, 0.15 MHz to 30 MHz .....	11
Plot 3. 5.207 Subpart C Conducted Emissions, Phase Line, 0.15 MHz to 30 MHz .....	31
Plot 4. 5.207 Subpart C Conducted Emissions, Neutral Line, 0.15 MHz to 30 MHz .....	33
Plot 5. Occupied Bandwidth Test Results – Channel 0 .....	36
Plot 6. Occupied Bandwidth Test Results – Channel 7 .....	37
Plot 7. Occupied Bandwidth Test Results – Channel 15 .....	38
Plot 8. Output Power Test Results – Channel 0 .....	40
Plot 9. Output Power Test Results – Channel 7 .....	41
Plot 10. Output Power Test Results – Channel 15 .....	42
Plot 11. Band Edge Emissions Test Results, 1 .....	46
Plot 12. Band Edge Emissions Test Results, 2 .....	47
Plot 13. Spectral Power Density Test Results – Channel 0 .....	49
Plot 14. Spectral Power Density Test Results – Channel 7 .....	50
Plot 15. Spectral Power Density Test Results – Channel 15 .....	51
Plot 16. Spurious Conducted Emission Test Results– Channel 0 – 30 MHz to 100 MHz* .....	54
Plot 17. Spurious Conducted Emission Test Results – Channel 0 – 100 MHz to 500 MHz* .....	54
Plot 18. Spurious Conducted Emission Test Results – Channel 0 – 500 MHz to 1 GHz* .....	55
Plot 19. Spurious Conducted Emission – Channel 0 – 1 GHz to 3 GHz* .....	55
Plot 20. Spurious Conducted Emission – Channel 0 – 3 GHz to 5 GHz* .....	56
Plot 21. Spurious Conducted Emission Test Results – Channel 0 – 5 GHz to 10 GHz* .....	56
Plot 22. Spurious Conducted Emission Test Results – Channel 0 – 10 GHz to 20 GHz* .....	57
Plot 23. Spurious Conducted Emission Test Results – Channel 0 – 20 GHz to 26 GHz* .....	57
Plot 24. Spurious Conducted Emission Test Results – Channel 7 – 30 MHz to 100 MHz* .....	58
Plot 25. Spurious Conducted Emission Test Results– Channel 7 – 100 MHz to 500 MHz* .....	58
Plot 26. Spurious Conducted Emission Test Results – Channel 7 – 500 MHz to 1 GHz* .....	59
Plot 27. Spurious Conducted Emission Test Results – Channel 7 – 1 GHz to 3 GHz* .....	59
Plot 28. Spurious Conducted Emission Test Results – Channel 7 – 3 GHz to 5 GHz* .....	60
Plot 29. Spurious Conducted Emission Test Results – Channel 7 – 5 GHz to 10 GHz* .....	60
Plot 30. Spurious Conducted Emission Test Results – Channel 7 – 10 GHz to 20 GHz* .....	61
Plot 31. Spurious Conducted Emission Test Results – Channel 7 – 20 GHz to 26 GHz* .....	61
Plot 32. Spurious Conducted Emission Test Results – Channel 15 – 30 MHz to 100 MHz* .....	62
Plot 33. Spurious Conducted Emission Test Results – Channel 15 – 100 MHz to 500 MHz* .....	62
Plot 34. Spurious Conducted Emission Test Results – Channel 15 – 500 MHz to 1 GHz* .....	63
Plot 35. Spurious Conducted Emission Test Results – Channel 15 – 1 GHz to 3 GHz* .....	63
Plot 36. Spurious Conducted Emission Test Results – Channel 15 – 3 GHz to 5 GHz* .....	64
Plot 37. Spurious Conducted Emission Test Results – Channel 15 – 5 GHz to 10 GHz* .....	64
Plot 38. Spurious Conducted Emission Test Results – Channel 15 – 10 GHz to 20 GHz* .....	65
Plot 39. Spurious Conducted Emission Test Results – Channel 0 – 20 GHz to 26 GHz* .....	65





## 1.0 Introduction

### 1.1 Overview

MET Laboratories, Inc. was contracted by Bentley Kinetics to perform testing on the KSensor IMU400, under Bentley Kinetics purchase order number 035.

This document describes the test setups, test methods, required test equipment, and the test limits used to perform compliance testing of KSensor IMU400. All applicable tests were performed in accordance with Title 47 of the CFR, FCC Part 15 Subpart B and C.

<b>Type of Submission/Rule:</b>	Part 15.247 Original Filing		
<b>Model(s) Tested:</b>	KSensor IMU400		
	<b>Primary Power:</b>	Rechargeable Lithium Polymer Battery (~3.7V) (120 VAC/DC adapter when charging)	
<b>EUT Specifications:</b>	<b>FCC ID:</b>	T4E-KSENS401	
	<b>Equipment Code:</b>	DTS	
	<b>RF Power Output:</b>	-5.276 dBm (0.297 mW)	
	<b>Equipment Frequency Range:</b>	2.404 - 2.480 GHz	
<b>Analysis:</b>	The results obtained relate only to the item(s) tested.		
<b>Evaluated by:</b>	Dusmantha Tennakoon		
<b>Report Date:</b>	April 17, 2006		

### 1.2 Test Site

All testing was performed at MET Laboratories, Inc., 914 West Patapsco Avenue, Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a semi-anechoic chamber. In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories. In accordance with §2.948(d), MET Laboratories has been accredited by the National Voluntary Laboratory Accreditation Program (Lab Code: 100273-0).



### 1.3 Testing Summary

Paragraph	Name of Test	Compliance
Part 15, Subpart B, §15.107	Conducted Emissions	Compliant
Part 15, Subpart B, §15.109	Radiated Emissions	Compliant
Part 15, Subpart C, §15.207	Conducted Emissions Voltage	Compliant
Part 15, Subpart C, §15.247 (a)	Occupied Bandwidth	Compliant
Part 15, Subpart C, §15.247(b)	Output Power	Compliant
Part 15, Subpart C, §15.247(i)	RF Exposure	Compliant
Part 15, Subpart C, §15.247(d)	Spectral Power Density	Compliant
Part 15, Subpart C, §15.203	Antenna Requirements	Compliant
Part 15, Subpart C, §15.247	Spurious Conducted Emissions	Compliant
Part 15, Subpart C, §15.247	Spurious Radiated Emissions	Compliant

**Table 1. Testing Summary**



## 2.0 Equipment Configuration

### 2.1 Description of EUT

The EUTs are Inertial Measurement Units(IMUs). They contain sensors that measure rotation, acceleration and magnetic fields to compute the orientation (yaw, pitch and roll) of the KSensor IMU400. They are used in many different applications including simulation and training, virtual reality systems and for system control feedback.

The base station (Wireless IC3 Receiver) can be connected to a PC through either a serial port or a USB connection. In the serial case, the power must be supplied through a separate power supply. In the USB case power is provided through the USB connection. The USB base station can support 1 to 4 wireless KSensors, but the serial base station can only support 1 wireless KSensor. The KSensors only connection is a battery charger input.

The wireless link is based on Chipcon 2420 reference design with a PCB antenna. They support the low level communication protocol for the Zigbee standard. It uses DSS in the 2.4 to 2.48 GHz range. 16 channels can be selected at 5 MHz spacing. No frequency hopping is implemented. The upper level stack of the Zigbee standard is not supported.

### 2.2 Equipment Configuration

Name / Description	Model Number	Serial Number	Rev #
KSensor IMU400	100-KSENS-0401	KSN-0601467-A	A

**Table 2. Equipment Configuration**



## 2.3 Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number	Serial Number
A	Laptop	Hewlett Packard	Pavilion zd 7000	2CB4291R9K
B	Laptop Power Supply	Hewlett Packard	PPP017L	4401848702
C	Wireless IC3 Receiver – USB	Intersense	100-IC3UW-RX16	RUW-0511295-B

Table 3. Support Equipment, Normal Operation

Ref. ID	Name / Description	Manufacturer	Model Number	Serial Number
A	5 VDC Power Supply	CUI Inc	EPA-121DA-05	DTS050250SUDC-P5-SZ

Table 4. Support Equipment, Charging Mode

## 2.4 Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description	Qty.	Length (m)	Shielded?
1	USB connection for Base Station	4 conductor USB	1	3.0	yes
2	AC Power for Laptop Power Supply	2 conductor 18 ga.	1	1.8	no
1	USB connection for Base Station	4 conductor USB	1	3.0	yes

Table 5. Ports and Cabling, Normal Mode

Ref. ID	Port name on EUT	Cable Description	Qty.	Length (m)	Shielded?
1	AC Power for KSensor Power Supply	2 conductor 18 ga.	1	1.8	no
2	5 VDC Output	2 conductor 18 ga.	1	1.8	no

Table 6. Ports and Cabling, Charging Mode



## 2.5 Mode Of Operation

The Wireless IC3 Receiver was connected to a test laptop. The KSensor IMU400 has its own internal rechargeable battery. Both devices were close enough in physical proximity to allow wireless communication.

A test program called **FCC\_Wireless\_IC3.exe** was supplied to initiate communication between the KSensor IMU400 and the Wireless IC3 Receiver. When initiated, the program instructs the Wireless IC3 Receiver to find up to 4 devices and then collect data in the normal operating mode and display it for use during testing.

A test program called **Device Tool** was also supplied. This program allows the user to pair remote KSensor IMU400's with base receivers and change the channel on which the devices operate.

A third program called **FCC\_Direct.exe** was supplied which allowed the KSensor IMU400 to be put into a continuous transmit mode independent of the Wireless IC3 Receiver. The program also allows the user to change transmit channels.

For the purposes of testing, only one KSensor IMU400 communicated with one Wireless IC3 Receiver at any given time.

## 2.6 Modifications to EUT

No modifications were made to the EUT.

## 2.7 Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Bentley Kinetics upon completion of testing.

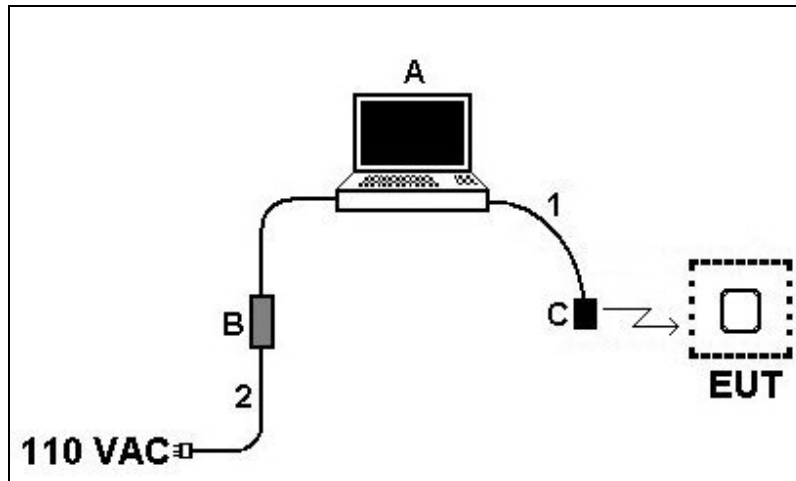


Figure 1. Block Diagram of Normal Mode

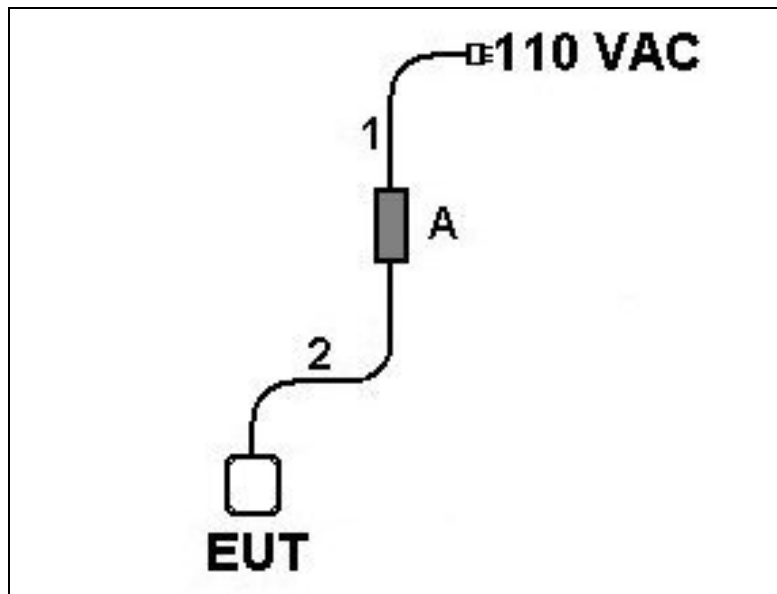


Figure 2. Block Diagram of Charging Mode



### 3.0 Electromagnetic Compatibility Test Data

#### 3.1 Conducted Emission Limits

**Test Requirement(s):** **15.107 (a)** “Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 18. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.”

**15.107 (b)** “For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 18. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.”

Frequency range (MHz)	15.107(b), Class A Limits (dB $\mu$ V)		15.107(a), Class B Limits (dB $\mu$ V)	
	Quasi-Peak	Average	Quasi-Peak	Average
0.15- 0.5	79	66	66 - 56	56 - 46
0.5 – 5.0	73	60	56	46
5.0 - 30	73	60	60	50

Note 1 — The lower limit shall apply at the transition frequencies.  
Note 2 — The limit decreases linearly with the logarithm if the frequency in the range 0.15 MHz to 0.5 MHz.

**Table 7. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Section 15.107(a) (b)**

**Test Procedures:** The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. The method of testing, test conditions, and test procedures of ANSI C63.4 were used. The EUT was powered through a 50 $\Omega$ /50 $\mu$ H LISN. An EMI receiver, connected to the measurement port of the LISN, scanned the frequency range from 150 kHz to 30 MHz in order to find the peak conducted emissions. All peak emissions within 6 dB of the limit were remeasured using a quasi-peak and/or average detector as appropriate.

**Test Results:** The EUT was **compliant** with the Class B requirement(s) of this section. Emissions were within applicable limits

**Test Engineer(s):** Dusmantha Tennakoon

**Test Date(s):** March 3, 2006



Line Under Test	FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
Phase	0.167683	29.3	65.07	-35.77	12	55.07	-43.07
Phase	0.260459	40.5	61.42	-20.92	35.3	51.42	-16.12
Phase	0.260524	40.5	61.41	-20.91	35.5	51.41	-15.91
Phase	0.264141	39.7	61.3	-21.6	35	51.3	-16.3
Phase	0.284954	33	60.67	-27.67	10.1	50.67	-40.57
Phase	0.537145	27.8	56	-28.2	18.4	46	-27.6


**Table 8. 15.107, Subpart B Conducted Emissions Test Results, Phase Line**





Bentley Kinetics  
KSensor IMU400

Electromagnetic Compatibility  
Emission Criteria  
CFR Title 47, Part 15 Subpart B and C

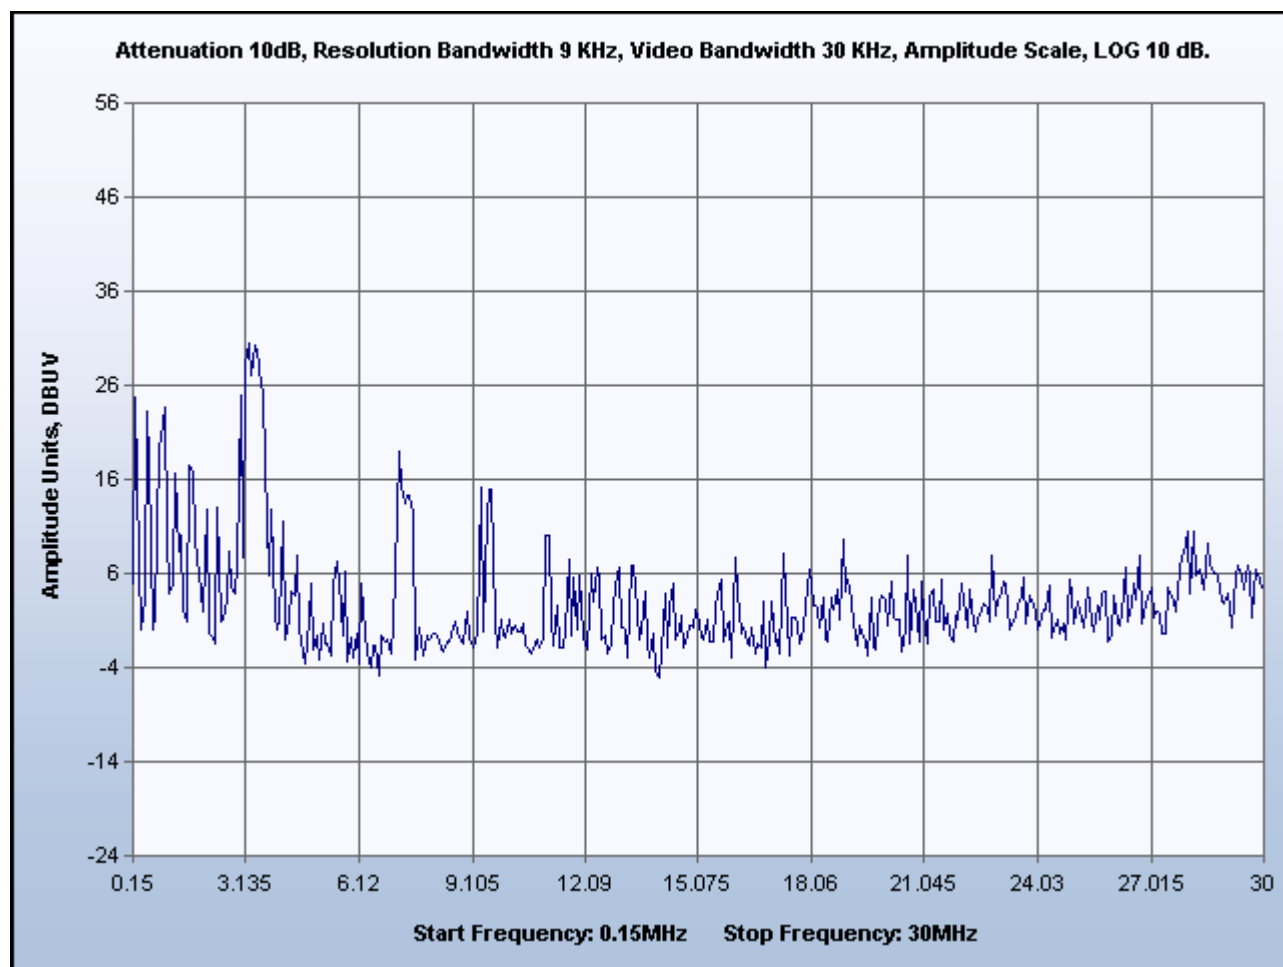


**Plot 1. 15.107, Subpart B Conducted Emissions, Phase Line, 0.15 MHz to 30 MHz**



Line Under Test	FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
Neutral	0.17374	28.9	64.78	-35.88	10.2	54.78	-44.58
Neutral	0.181276	27.4	64.43	-37.03	10.6	54.43	-43.83
Neutral	0.264401	34	61.29	-27.29	28.1	51.29	-23.19
Neutral	0.272946	33	61.03	-28.03	25.3	51.03	-25.73
Neutral	0.284205	26.8	60.69	-33.89	12.4	50.69	-38.29
Neutral	0.528708	26.8	56	-29.2	17.6	46	-28.4

Table 9. 15.107, Subpart B Conducted Emissions Test Results, Neutral Line

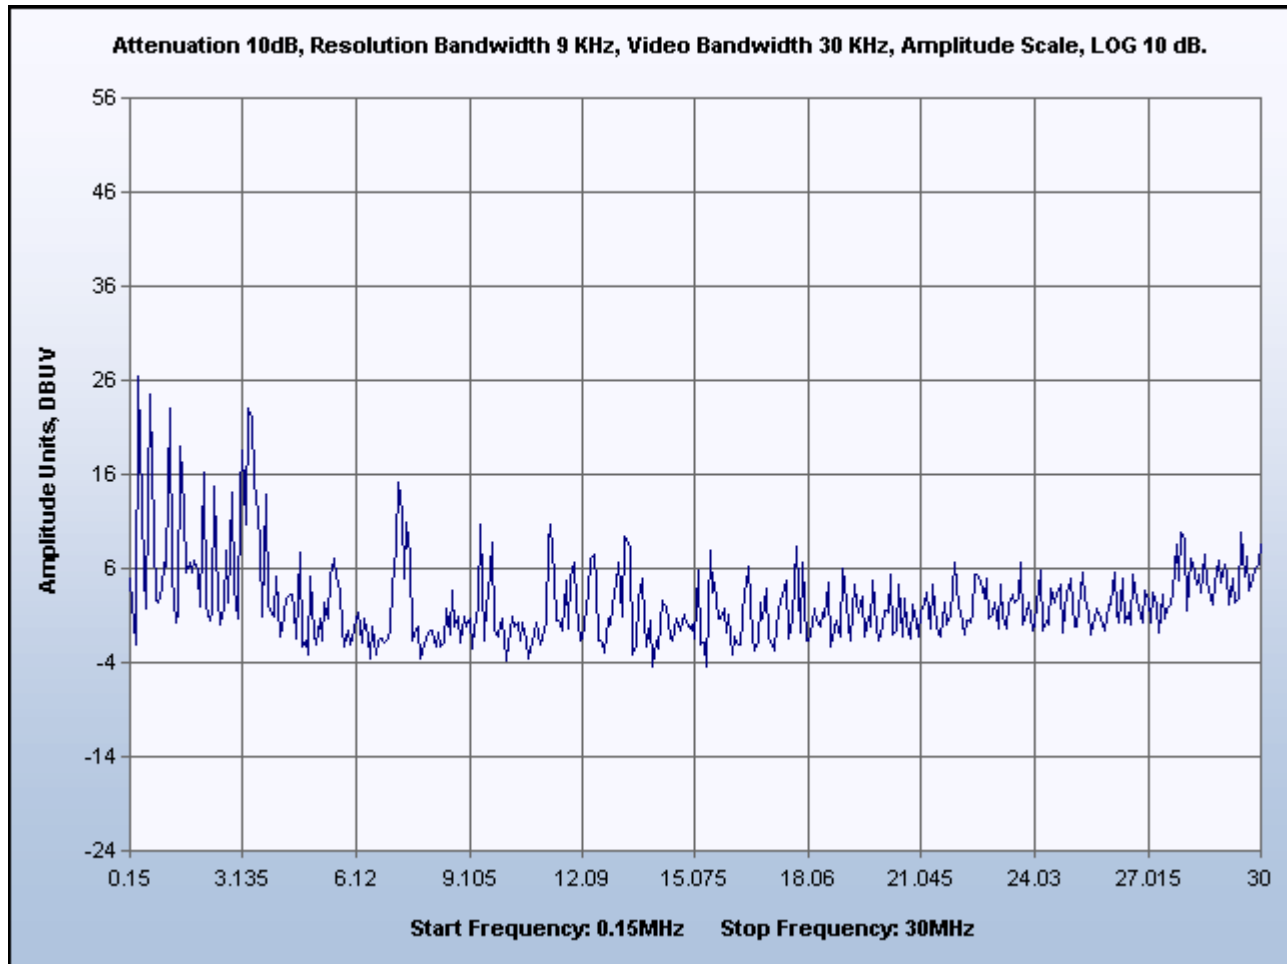

**Plot 2. 15.107, Subpart B Conducted Emissions Test Results, Neutral Line, 0.15 MHz to 30 MHz**



Bentley Kinetics  
KSensor IMU400

Electromagnetic Compatibility  
Emission Criteria  
CFR Title 47, Part 15 Subpart B and C



**Photograph 1. 15.107, Subpart B Conducted Emissions Test Setup**



## 3.2 Radiated Emission Limits

**Test Requirement(s):** **15.109 (a)** Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class B limits expressed in Table 10.

**15.109 (b)** The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 10.

Frequency (MHz)	Field Strength (dB $\mu$ V/m)	
	§15.109 (b), Class A Limit (dB $\mu$ V) @ 10m	§15.109 (a), Class B Limit (dB $\mu$ V) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

**Table 10. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)**

**Test Procedures:** The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4 were used. An antenna was located 3 m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

**Test Results:** The EUT was **compliant** with the Class B requirement(s) of this section. Emissions were within applicable limits.

**Test Engineer(s):** Len Knight

**Test Date(s):** March 10, 2006



Bentley Kinetics  
KSensor IMU400

Electromagnetic Compatibility  
Emission Criteria  
CFR Title 47, Part 15 Subpart B and C

Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected Amplitude (dBuv)	Antenna Correction Factor (dB) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuv)	Limit (dBuv)	Margin (dB)
30.000	0	H	1.50	5.26	5.40	0.50	0.00	11.16	40.00	-28.84
30.000	0	V	1.00	5.34	4.90	0.50	0.00	10.74	40.00	-29.26
40.000	0	H	1.50	5.42	9.00	0.67	0.00	15.09	40.00	-24.91
40.000	0	V	1.00	5.42	8.40	0.67	0.00	14.49	40.00	-25.51
100.000	0	H	1.50	5.87	7.90	1.00	0.00	14.77	43.50	-28.73
100.000	0	V	1.00	5.87	8.00	1.00	0.00	14.87	43.50	-28.63
250.000	0	H	1.50	4.69	12.70	1.33	0.00	18.72	46.00	-27.28
250.000	0	V	1.00	4.78	13.10	1.33	0.00	19.21	46.00	-26.79
500.000	0	H	1.50	5.18	17.40	2.00	0.00	24.58	46.00	-21.42
500.000	0	V	1.00	5.18	17.00	2.00	0.00	24.18	46.00	-21.82
900.000	0	H	1.49	5.95	22.40	2.33	0.00	30.68	46.00	-15.32
900.000	0	V	1.00	5.95	22.00	2.33	0.00	30.28	46.00	-15.72

**Table 11. 15.109, Subpart B Radiated Emissions Test Results, Normal Operation**

Note: Measurements were made at 3m.



Bentley Kinetics  
KSensor IMU400

Electromagnetic Compatibility  
Emission Criteria  
CFR Title 47, Part 15 Subpart B and C

Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected Amplitude (dBuv)	Antenna Correction Factor (dB) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuv)	Limit (dBuv)	Margin (dB)
31.623	87	H	1.42	7.54	6.21	0.53	0.00	14.28	40.00	-25.72
31.623	234	V	1.00	13.47	5.74	0.53	0.00	19.74	40.00	-20.26
34.248	182	H	1.00	7.91	7.52	0.57	0.00	16.01	40.00	-23.99
34.248	182	V	1.20	8.02	7.11	0.57	0.00	15.70	40.00	-24.30
55.912	174	H	1.05	6.37	10.79	0.83	0.00	17.99	40.00	-22.01
55.912	84	V	1.00	14.75	10.12	0.83	0.00	25.70	40.00	-14.30
60.000	-1	H	1.50	5.65	10.30	0.83	0.00	16.78	40.00	-23.22
60.000	-1	V	1.00	7.11	10.20	0.83	0.00	18.14	40.00	-21.86
100.000	0	H	1.50	5.95	7.90	1.00	0.00	14.85	43.50	-28.65
100.000	0	V	1.00	5.87	8.00	1.00	0.00	14.87	43.50	-28.63
400.000	0	H	1.50	0.00	15.30	1.67	0.00	16.97	46.00	-29.03
400.000	0	V	1.00	0.00	15.30	1.67	0.00	16.97	46.00	-29.03


**Table 12. 15.109, Subpart B Radiated Emissions Test Results, Charging Mode**

Note: Measurements were made at 3m.



Bentley Kinetics  
KSensor IMU400

Electromagnetic Compatibility  
Emission Criteria  
CFR Title 47, Part 15 Subpart B and C

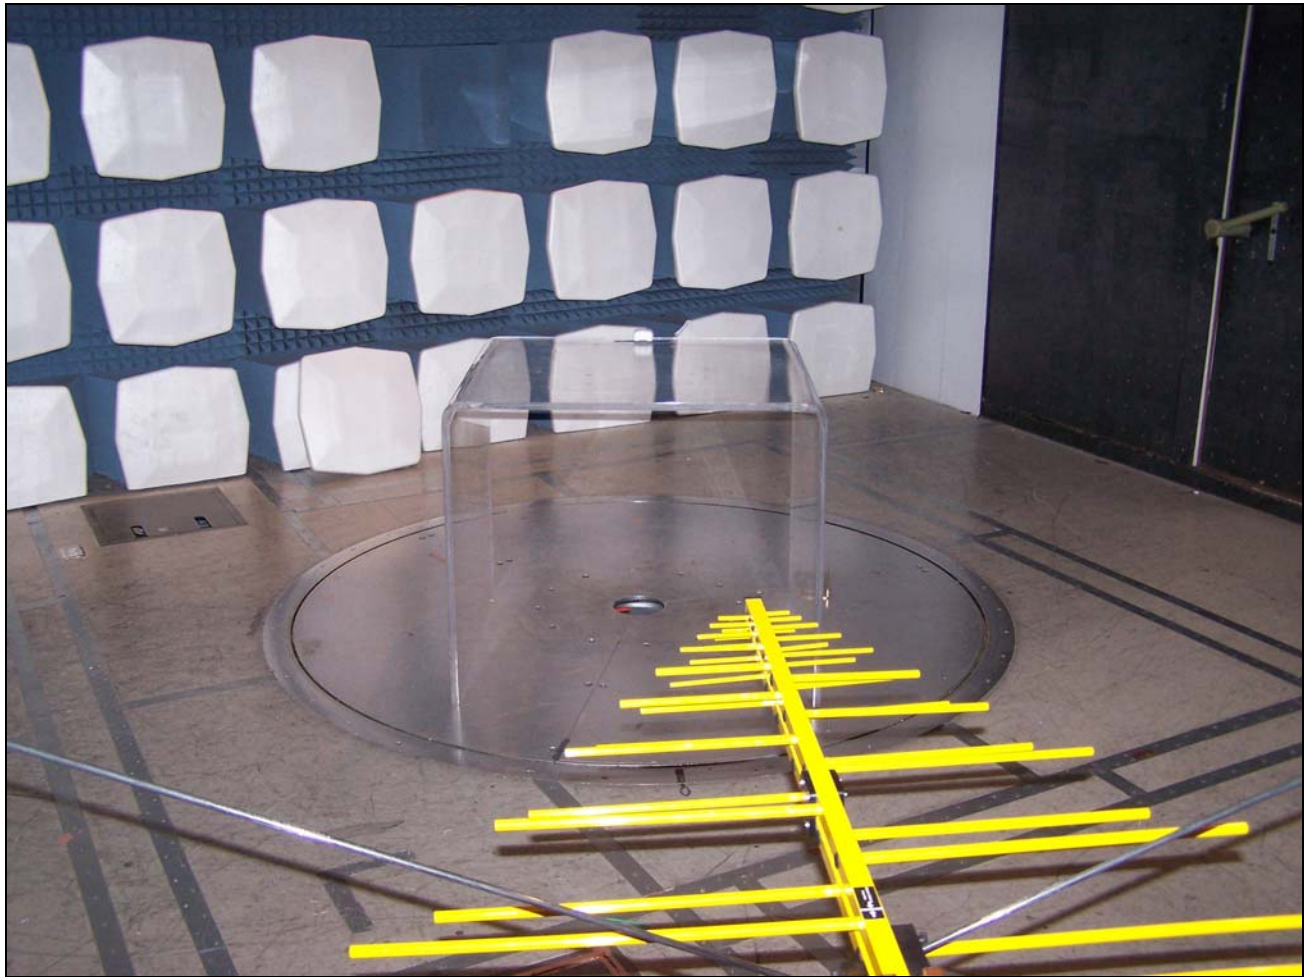


**Photograph 2. 15.109, Subpart B Radiated Emissions Test Setup, Normal Operation**





Bentley Kinetics  
KSensor IMU400

Electromagnetic Compatibility  
Emission Criteria  
CFR Title 47, Part 15 Subpart B and C

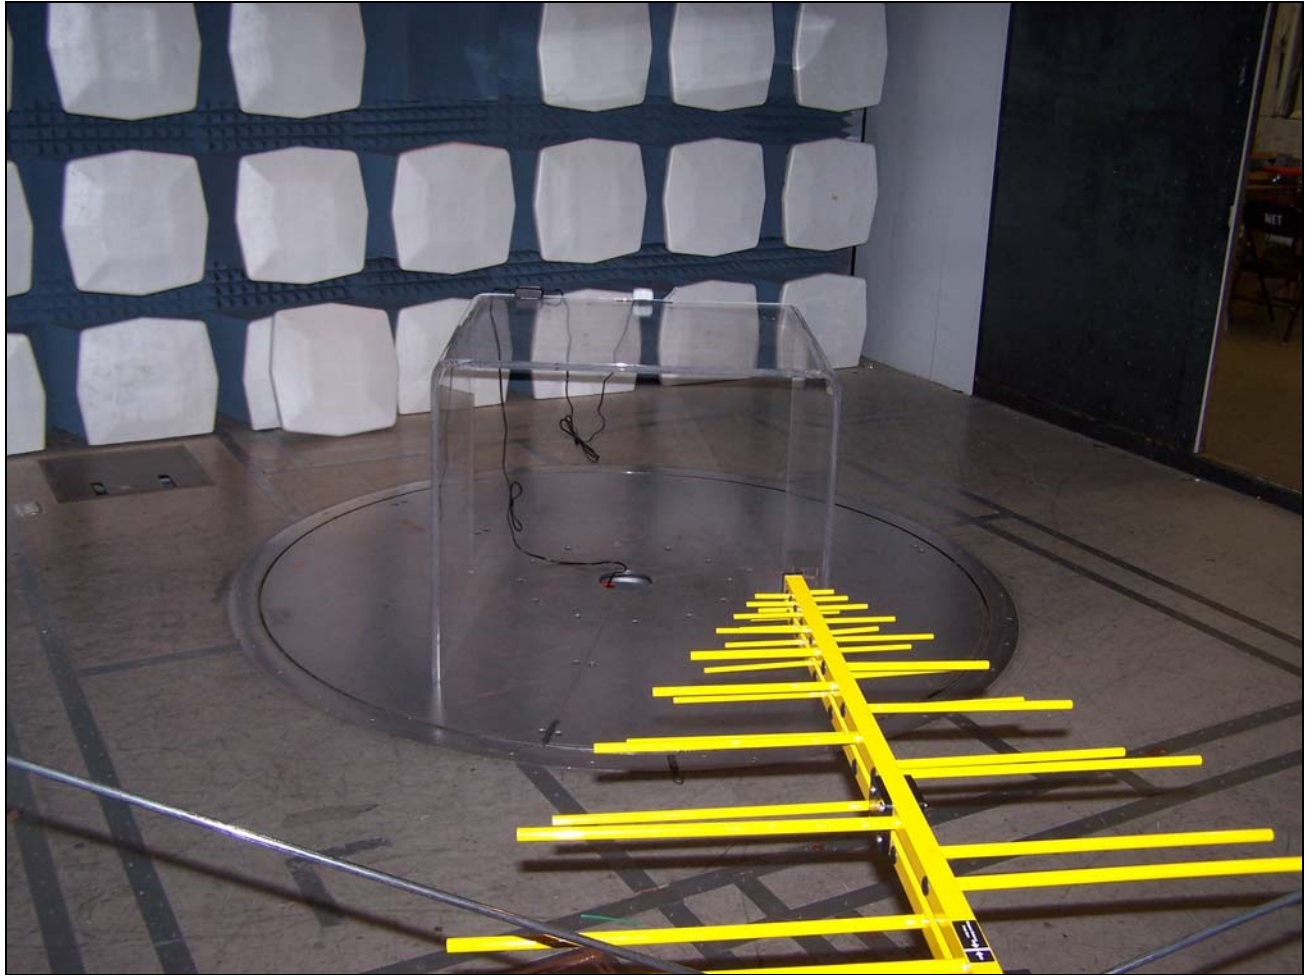

**Photograph 3. 15.109, Subpart B Radiated Emissions Test Setup, Charging Mode**



### 3.3 Spurious Radiated Emissions

**Test Requirement(s):** § 15.205 (a): Except as shown in paragraph (d) of 15.205 Restricted bands of operation, only spurious emissions are permitted in any of the frequency bands specified in Table 13:

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Note
13.36–13.41.			
Note: Above 38.6			

**Table 13. Restricted Bands of Operation from FCC Part 15, § 15.205**

**§ 15.205 (b):** (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

**§ 15.35 (b):** ...When average radiated emission measurements are specified in this part, including emission measurements below 1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules...



Frequency (MHz)	Field Strength (Microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F (kHz)	300
0.490 – 1.705	24000/F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.		

**Table 14. Radiated Emissions Limits from § 15.209 (a)**

**Test Procedure:** The EUT was configured with the control software to communicate in a normal mode of operation. Measurements were made with a ridge guide horn antenna at a distance of 1 meter. The frequency range of interest was that indicative to spurious emissions associated with the intentional radiator section of the EUT.

**Test Results:** The EUT was found **compliant** with the requirements of this section.

**Test Engineer(s):** Dusmantha Tennakoon

**Test Date(s):** March 29, 2006



Frequency (GHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna Height (m)	Spectrum Analyzer Measurement (dBuV) @ 1m		Antenna Correction Factor (dB)	Cable Loss/Pre-amp System Gain Correction Factor (dB)	Measurement Distance Correction Factor (dB) @ 1m	Corrected Measurement (dBuV/m)		Emissions Limit @ 3m (dBuV/m)		Margin (dB)	
				Peak	Average				Peak	Average	Peak	Average	Peak	Average
4.80973	0	H	1	49.53	32.87	33.58	24.5	-9.54	49.07	32.41	74	54	-24.93	-21.59
4.81048	0	V	1	52.7	32.03	33.48	24.5	-9.54	52.14	31.47	74	54	-21.86	-22.53
4.80588	0	H	1	48.03	34.87	33.57	24.5	-9.54	47.56	34.4	74	54	-26.44	-19.6
4.80582	0	V	1	46.53	32.53	33.47	24.5	-9.54	45.96	31.96	74	54	-28.04	-22.04

Table 15. 5.209 Subpart C Spurious Radiated Emissions Test Results – Channel 0

Frequency (GHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna Height (m)	Spectrum Analyzer Measurement (dBuV) @ 1m		Antenna Correction Factor (dB)	Cable Loss/Pre-amp System Gain Correction Factor (dB)	Measurement Distance Correction Factor (dB) @ 1m	Corrected Measurement (dBuV/m)		Emissions Limit @ 3m (dBuV/m)		Margin (dB)	
				Peak	Average				Peak	Average	Peak	Average	Peak	Average
4.88023	0	H	1	50.37	33.54	33.8	24.5	-9.54	50.13	33.3	74	54	-23.87	-20.7
4.879	0	V	1	53.87	32.7	33.69	24.5	-9.54	52.14	32.35	74	54	-21.86	-21.65
4.87595	0	H	1	48.03	35.03	33.78	24.5	-9.54	47.77	34.77	74	54	-26.23	-19.23
4.88063	0	V	1	53.53	32.53	33.7	24.5	-9.54	53.19	32.19	74	54	-20.81	-21.81
4.87582	0	V	1	46.87	33.03	33.68	24.5	-9.54	46.51	32.67	74	54	-27.49	-21.33

Table 16. 5.209 Subpart C Spurious Radiated Emissions Test Results – Channel 7

Frequency (GHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna Height (m)	Spectrum Analyzer Measurement (dBuV) @ 1m		Antenna Correction Factor (dB)	Cable Loss/Pre-amp System Gain Correction Factor (dB)	Measurement Distance Correction Factor (dB) @ 1m	Corrected Measurement (dBuV/m)		Emissions Limit @ 3m (dBuV/m)		Margin (dB)	
				Peak	Average				Peak	Average	Peak	Average	Peak	Average
4.96077	0	H	1	51.53	32.53	34.01	24.5	-9.54	51.5	32.5	74	54	-22.5	-21.5
4.9589	0	V	1	54.87	34.32	33.91	24.5	-9.54	54.74	34.19	74	54	-19.26	-19.81
4.95595	0	H	1	47.7	34.7	34	24.5	-9.54	47.66	34.66	74	54	-26.34	-19.34
4.96083	0	V	1	54.7	34.37	33.91	24.5	-9.54	54.57	34.24	74	54	-19.43	-19.76
4.95593	0	V	1	48.03	35.87	33.9	24.5	-9.54	47.89	35.73	74	54	-26.11	-18.27

Table 17. 5.209 Subpart C Spurious Radiated Emissions Test Results – Channel 15



Bentley Kinetics  
KSensor IMU400

Electromagnetic Compatibility  
Emission Criteria  
CFR Title 47, Part 15 Subpart B and C



**Photograph 4. 5.209 Subpart C Spurious Radiated Emissions Test Setup**



### 3.4 Conducted Emission Limits

**Test Requirement(s):** **15.207 (a)** “Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/ 50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.”

Frequency range (MHz)	15.107(b), Class A Limits (dB $\mu$ V)	
	Quasi-Peak	Average
0.15- 0.5	66 to 56	56 to 46
0.5 – 5.0	56	46
5.0 - 30	60	50
Note 1 — The lower limit shall apply at the transition frequencies.		
Note 2 — The limit decreases linearly with the logarithm if the frequency in the range 0.15 MHz to 0.5 MHz.		

**Table 18. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Section 15.107(a) (b)**



**Test Procedures:** The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a shield room. The method of testing, test conditions, and test procedures of ANSI C63.4 were used. The EUT was powered through a 50Ω/50μH LISN. An EMI receiver, connected to the measurement port of the LISN, scanned the frequency range from 150 kHz to 30 MHz in order to find the peak conducted emissions. All peak emissions within 6 dB of the limit were remeasured using a quasi-peak and/or average detector as appropriate.

**Test Results:** The EUT was found **compliant** with this section. Emissions were within applicable limits.

**Test Engineer(s):** Dusmantha Tennakoon


**Test Date(s):** March 3, 2006



Line Under Test	FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
Phase A	0.167683	29.3	65.07	-35.77	12	55.07	-43.07
Phase A	0.260459	40.5	61.42	-20.92	35.3	51.42	-16.12
Phase A	0.260524	40.5	61.41	-20.91	35.5	51.41	-15.91
Phase A	0.264141	39.7	61.3	-21.6	35	51.3	-16.3
Phase A	0.284954	33	60.67	-27.67	10.1	50.67	-40.57
Phase A	0.537145	27.8	56	-28.2	18.4	46	-27.6

Table 19. 5.207 Subpart C Conducted Emissions Test Results, Phase Line



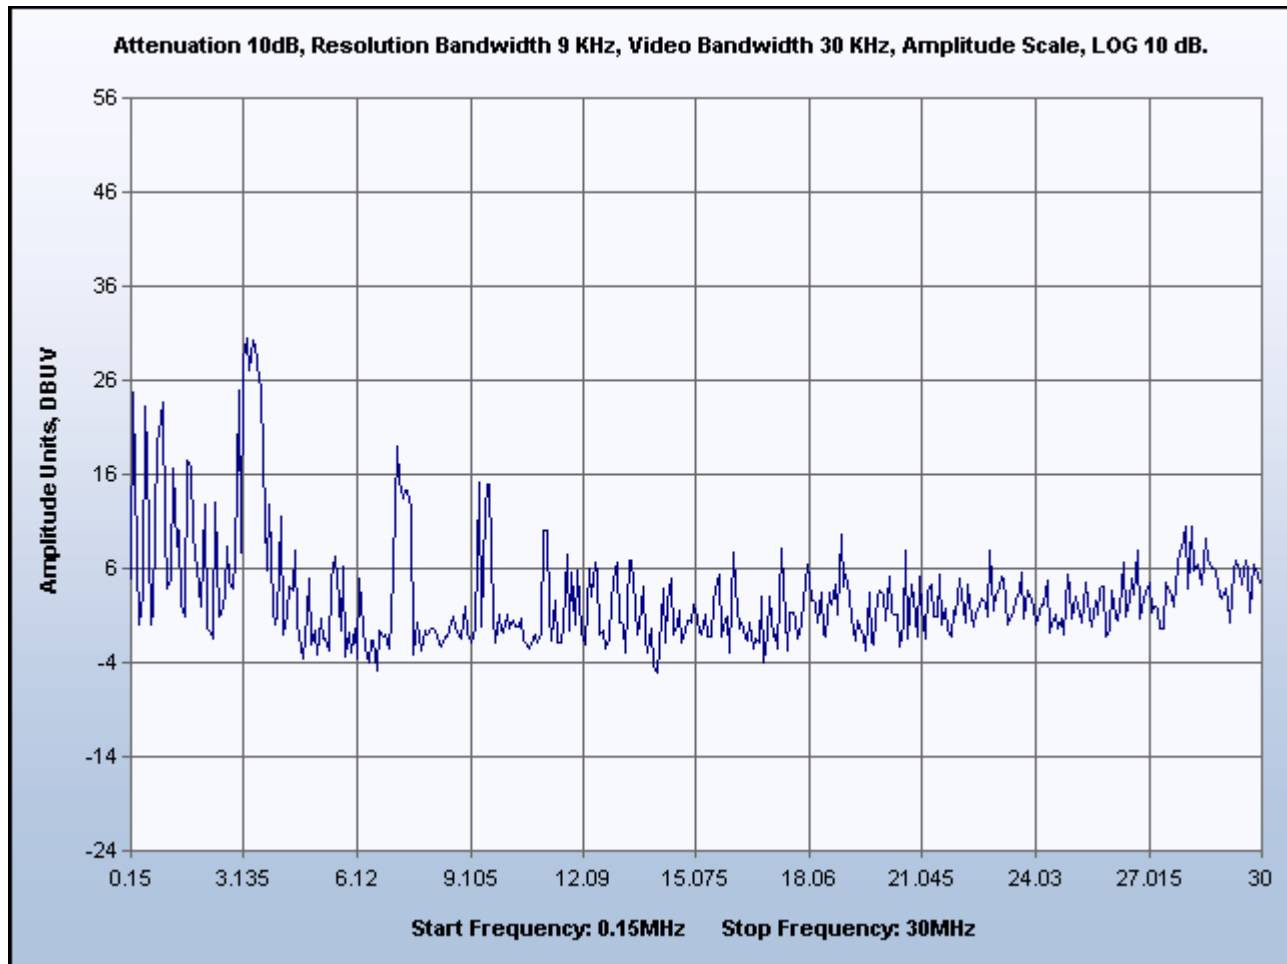


**Plot 3. 5.207 Subpart C Conducted Emissions, Phase Line, 0.15 MHz to 30 MHz**



Line Under Test	FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
Neutral	0.17374	28.9	64.78	-35.88	10.2	54.78	-44.58
Neutral	0.181276	27.4	64.43	-37.03	10.6	54.43	-43.83
Neutral	0.264401	34	61.29	-27.29	28.1	51.29	-23.19
Neutral	0.272946	33	61.03	-28.03	25.3	51.03	-25.73
Neutral	0.284205	26.8	60.69	-33.89	12.4	50.69	-38.29
Neutral	0.528708	26.8	56	-29.2	17.6	46	-28.4

**Table 20. 5.207 Subpart C Conducted Emissions Test Results, Neutral Line**

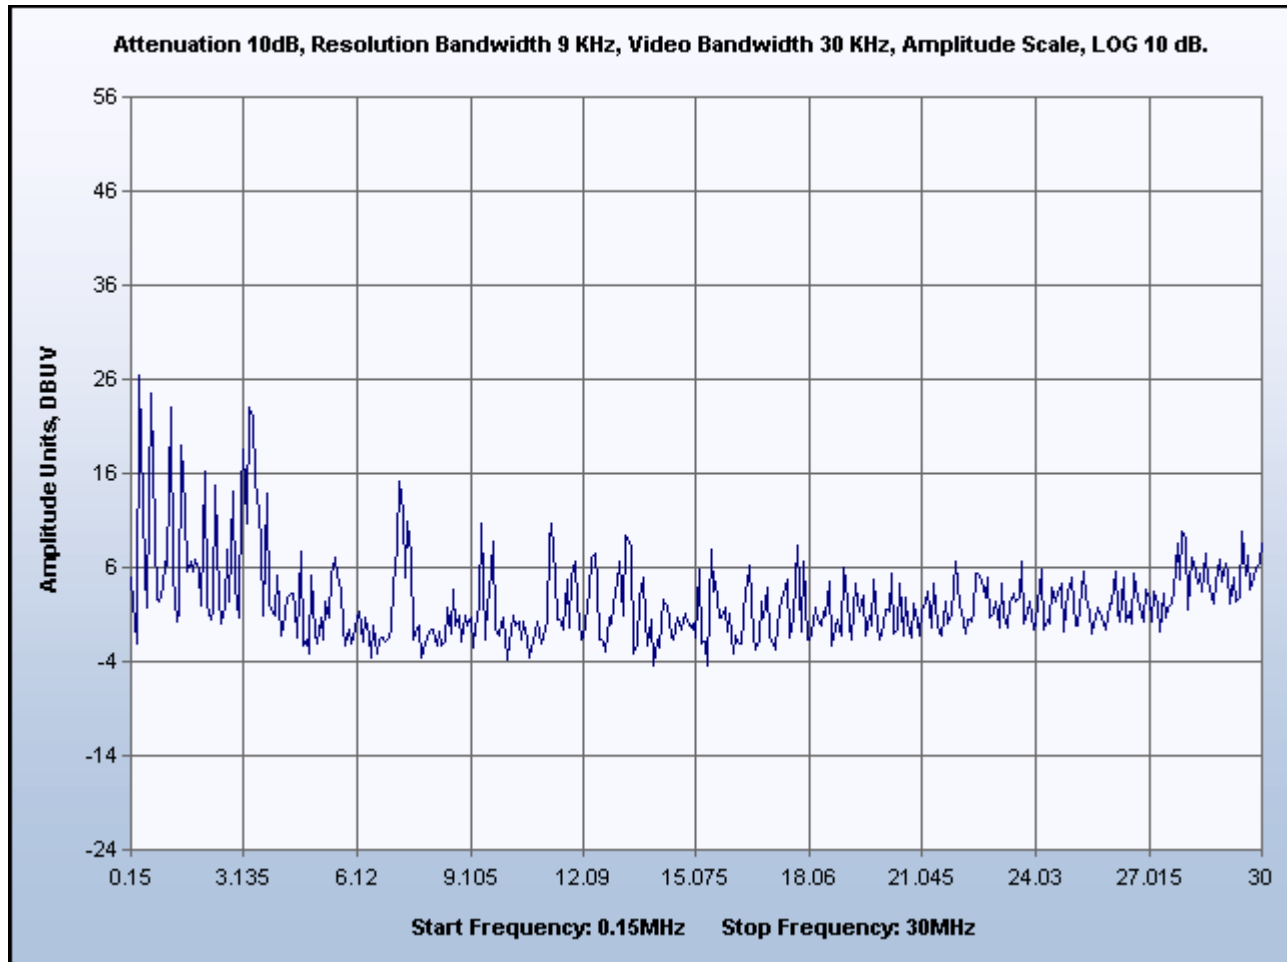

**Plot 4. 5.207 Subpart C Conducted Emissions, Neutral Line, 0.15 MHz to 30 MHz**



Bentley Kinetics  
KSensor IMU400

Electromagnetic Compatibility  
Emission Criteria  
CFR Title 47, Part 15 Subpart B and C



**Photograph 5.5.207 Subpart C Conducted Emissions Test Setup**



### 3.5 Bandwidth Requirements

**Test Requirements:** § 15.247(a): Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

§ 15.247(a) (2): Systems using digital modulation techniques may operate in the 902 - -928 MHz, 2400 – 2483.5 MHz, and 5725 – 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

**Test Procedure:** The EUT's transmitter output was connected directly to the spectrum analyzer. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW of 100 kHz and a VBW> RBW. The 6 dB bandwidth was measured and recorded.

**Test Results:** The EUT was found **compliant** with the requirements of this section.

Channel	Occupied 6dB bandwidth (kHz)
0	1700
7	1667
15	1675


**Test Engineer(s):** Len Knight

**Test Date(s):** April 10, 2006



Bentley Kinetics  
KSensor IMU400

Electromagnetic Compatibility  
Emission Criteria  
CFR Title 47, Part 15 Subpart B and C

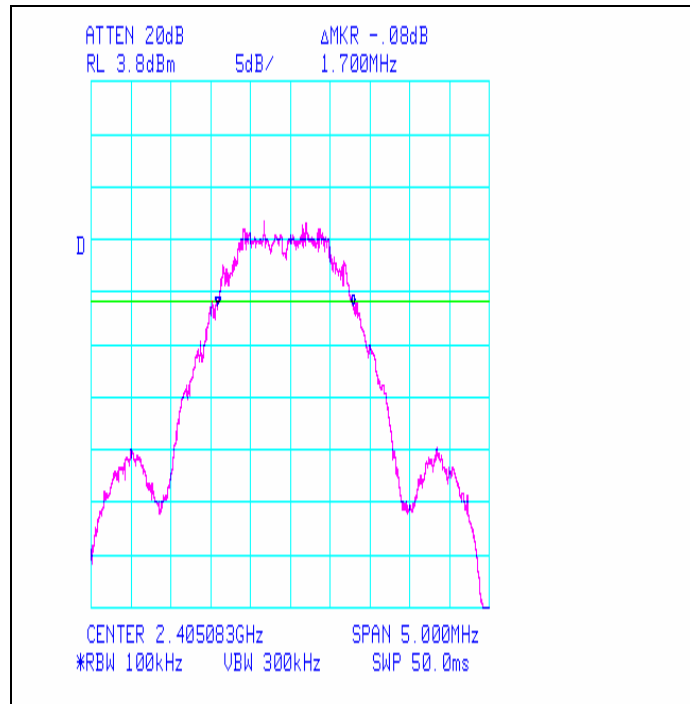


**Plot 5. Occupied Bandwidth Test Results – Channel 0**



Bentley Kinetics  
KSensor IMU400

Electromagnetic Compatibility  
Emission Criteria  
CFR Title 47, Part 15 Subpart B and C

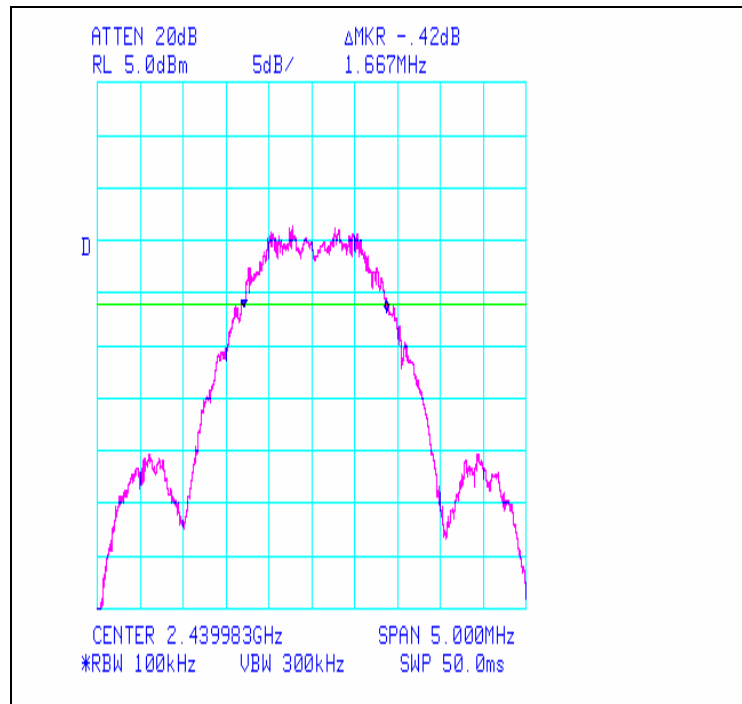


**Plot 6. Occupied Bandwidth Test Results – Channel 7**



Bentley Kinetics  
KSensor IMU400

Electromagnetic Compatibility  
Emission Criteria  
CFR Title 47, Part 15 Subpart B and C

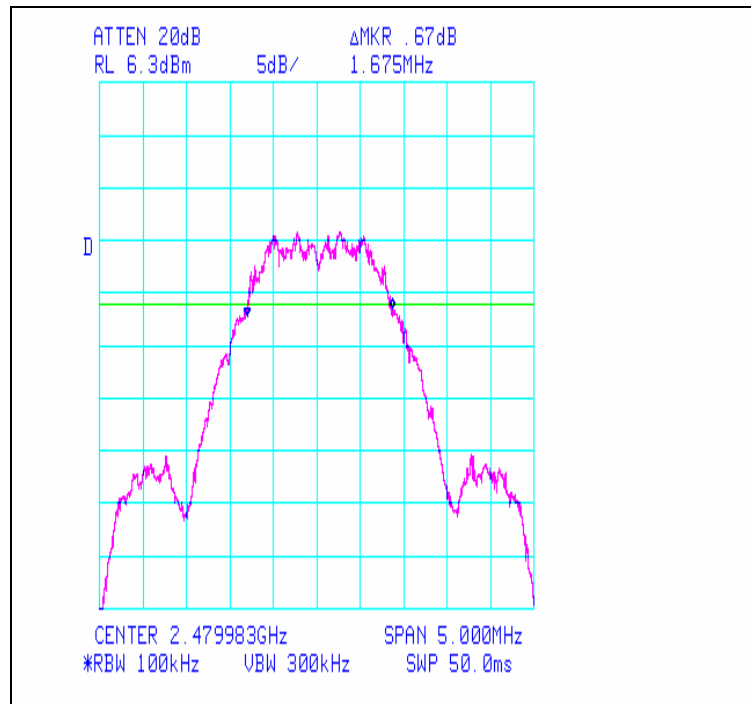

**Plot 7. Occupied Bandwidth Test Results – Channel 15**





### 3.4 Peak Output Power

**Test Requirements:** §15.247(b): The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247(b) (3): For systems using digital modulation in the 902 – 928 MHz, 2400 – 2483.5 MHz, and 5725 – 5850 MHz bands: 1 Watt.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

**Test Procedure:** The transmitter output of the EUT was connected to the spectrum analyzer through an attenuator. The power was set to the maximum output; low, mid, and high channels were measured.


Peak Output Power = 0.297 mW

The peak output power was determined from the plots on the following page(s).

**Test Results** The EUT was found **compliant** with the requirements of this section.

**Test Engineer:** Len Knight


**Test Date:** April 10, 2006

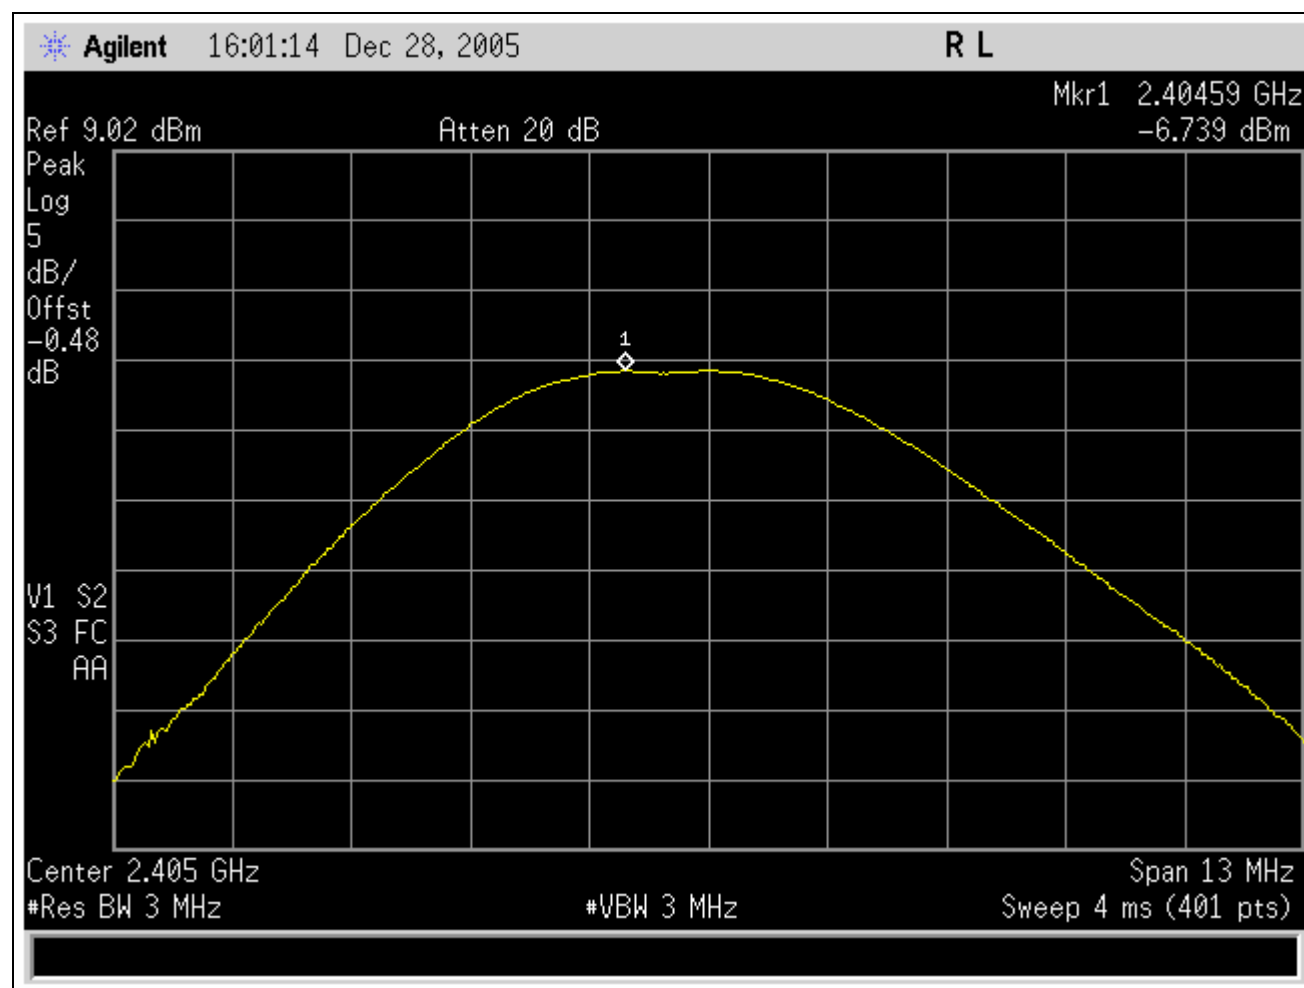

Plot 8. Output Power Test Results – Channel 0

Output Power = Measured + Cable Loss


Cable Loss was factored into Spectrum Analyzer

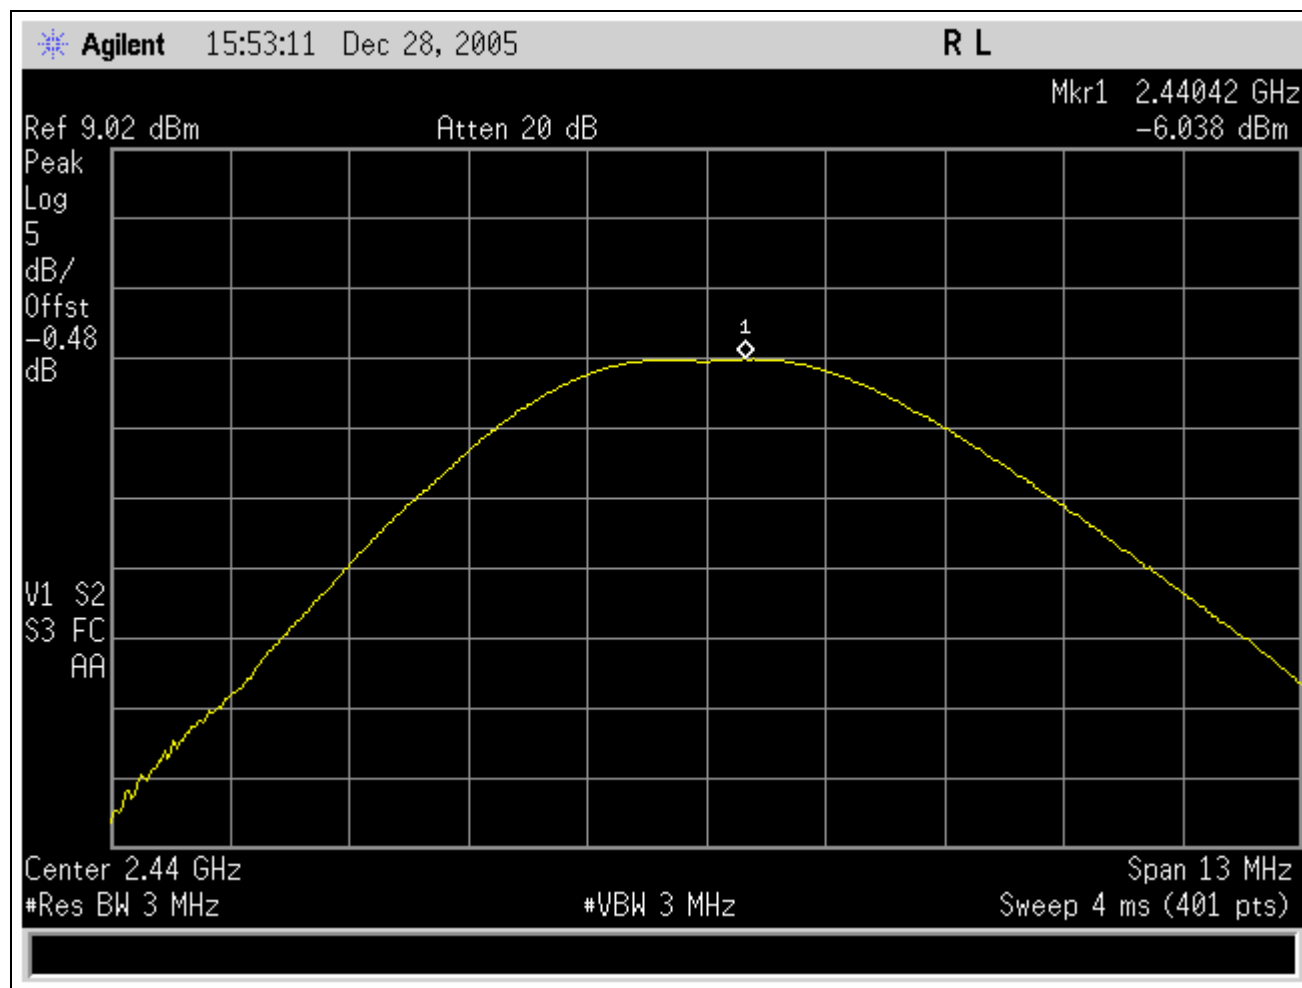

**Plot 9. Output Power Test Results – Channel 7**

$$\text{Output Power} = \text{Measured} + \text{Cable Loss}$$

Cable Loss was factored into Spectrum Analyzer

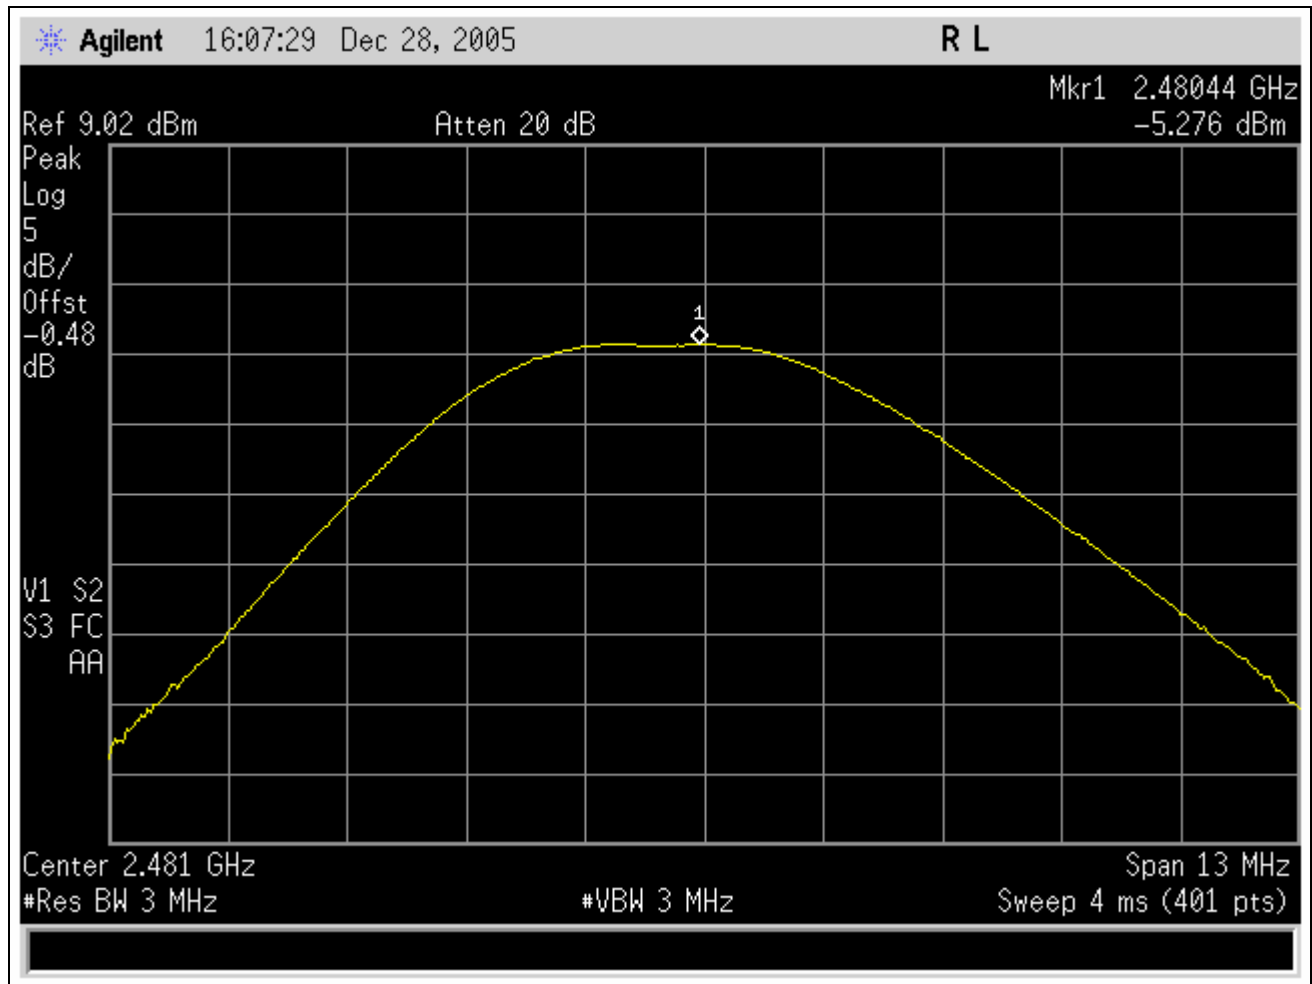

Plot 10. Output Power Test Results – Channel 15

$$\text{Output Power} = \text{Measured} + \text{Cable Loss}$$

Cable Loss was factored into Spectrum Analyzer



### 3.5 RF Exposure

**RF Exposure Requirements - § 15.247 (b) (5):** Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

**RF Radiation Limits:** §1.1310: As specified in this section, the Maximum Permissible Exposure (MPE Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Section 1.1307 (b), except in the case of portable devices which shall be evaluated according to the provisions of Section 2.1903 of this chapter.

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time (minutes)
<b>(A) Limits for Occupational/Control Exposures</b>				
30-300	61.4	0.163	1.0	6
300-1,500	--	--	F/300	6
1,500-100,000	--	--	5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
30-300	27.5	0.073	0.2	30
300-1,500	--	--	F/1,500	30
1,500-100,000	--	--	1.0	30

**Table 21. Limits for Maximum Permissible Exposure**

Note: F=Frequency in MHz



**Test Results:**

MPE Limit Calculation:

EUT's lowest frequency channel @ 2400 MHz;  
**Limit for Uncontrolled exposure:** 1 mW/cm<sup>2</sup>

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2$$

where, S = Power Density mW/m<sup>2</sup>

P = Power Input to antenna mili Watts

G = Numeric Antenna Gain

R = Distance to the center of radiation of the antenna (20 cm for Mobile minimum distance)

$$\text{Antenna Numeric Gain} = 10^{\text{dBi}/10}$$

Power at antenna port = 0.297 mW

Antenna Gain = 5 dBi

$$\text{Numeric antenna gain} = 10^{5/10} = 3.16$$

$$S = (0.297)(3.16) / 4(3.1416)(20)^2$$

$$S = 0.000187 \text{ mW/cm}^2$$

Therefore EUT meets the Uncontrolled Exposure limit.

**Test Engineer:**

Len Knight

**Test Date:**

April 10, 2006



### 3.6 Band Edge Emissions


**Test Requirement(s):** § 15.205 (a): Except as shown in paragraph (d) of 15.205 Restricted bands of operation, only spurious emissions are permitted in any of the frequency bands specified in Table 22:

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Note
13.36–13.41.			
Note : Above 38.6			

**Table 22. Restricted Bands of Operation from FCC Part 15, § 15.205**

**Test Procedure:** The EUT was set up at maximum power, first on Channel 1, then on Channel 15. It was verified that the first channel and the last channel were within the band 2400-2480 MHz and not infringing upon the restricted bands.

**Test Results:** The EUT was **compliant** with the requirements of this section.

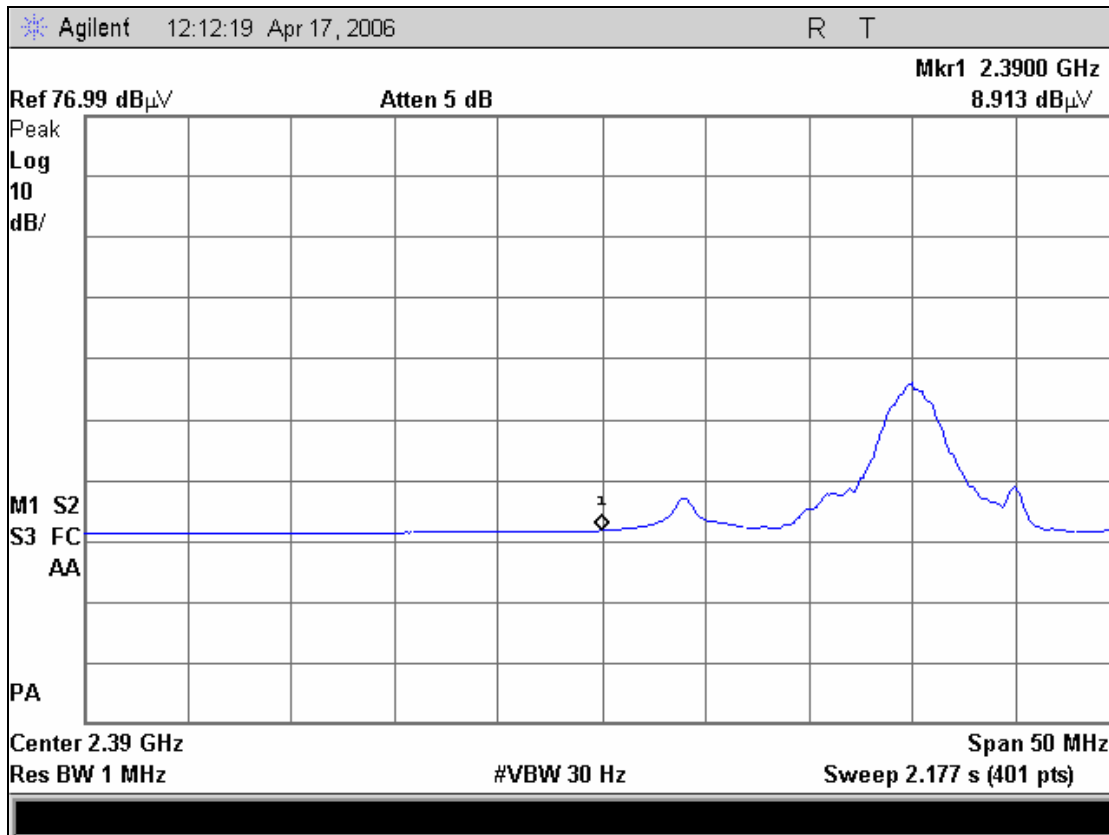

Plot 11. Band Edge Emissions Test Results, 1

The measured value of 8.913 dBuV is at 1m


The average power @ 2.39 GHz adjusted for 3m = measured + ACF + cable loss - 9.54 dB = 8.913 + 28.89 + 2.4 - 9.54 = 30.7 dBuV





Bentley Kinetics  
KSensor IMU400

Electromagnetic Compatibility  
Emission Criteria  
CFR Title 47, Part 15 Subpart B and C

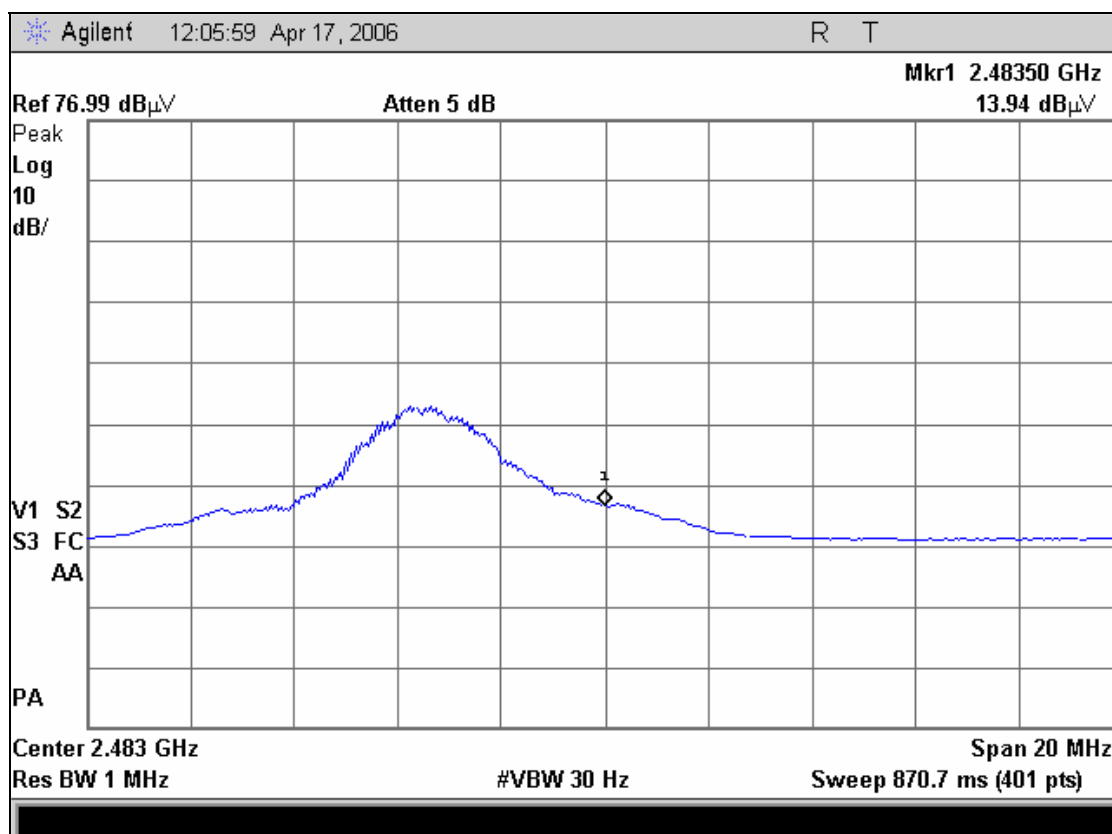

Plot 12. Band Edge Emissions Test Results, 2

The measured value of 13.94 dBuV is at 1m

The average power @ 2.4835 GHz adjusted for 3m = measured + ACF + cable loss - 9.54 dB = 13.94 + 28.89 + 2.4 - 9.54 = 35.7 dBuV



### 3.7 Spectral Power Density

**Test Requirements:** §15.247(d): For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

**Test Procedure:** The transmitter output was connected to the spectrum analyzer through an attenuator.

$$\text{RBW} = 3\text{kHz}, \text{VBW} > \text{RBW}$$

$$\text{Sweep} = \text{Span}/3\text{kHz}$$

**Test Results:** The EUT was found **compliant** with the requirements of this section.


**Test Engineer:** Len Knight

**Test Date:** April 10, 2006



Bentley Kinetics  
KSensor IMU400

Electromagnetic Compatibility  
Emission Criteria  
CFR Title 47, Part 15 Subpart B and C

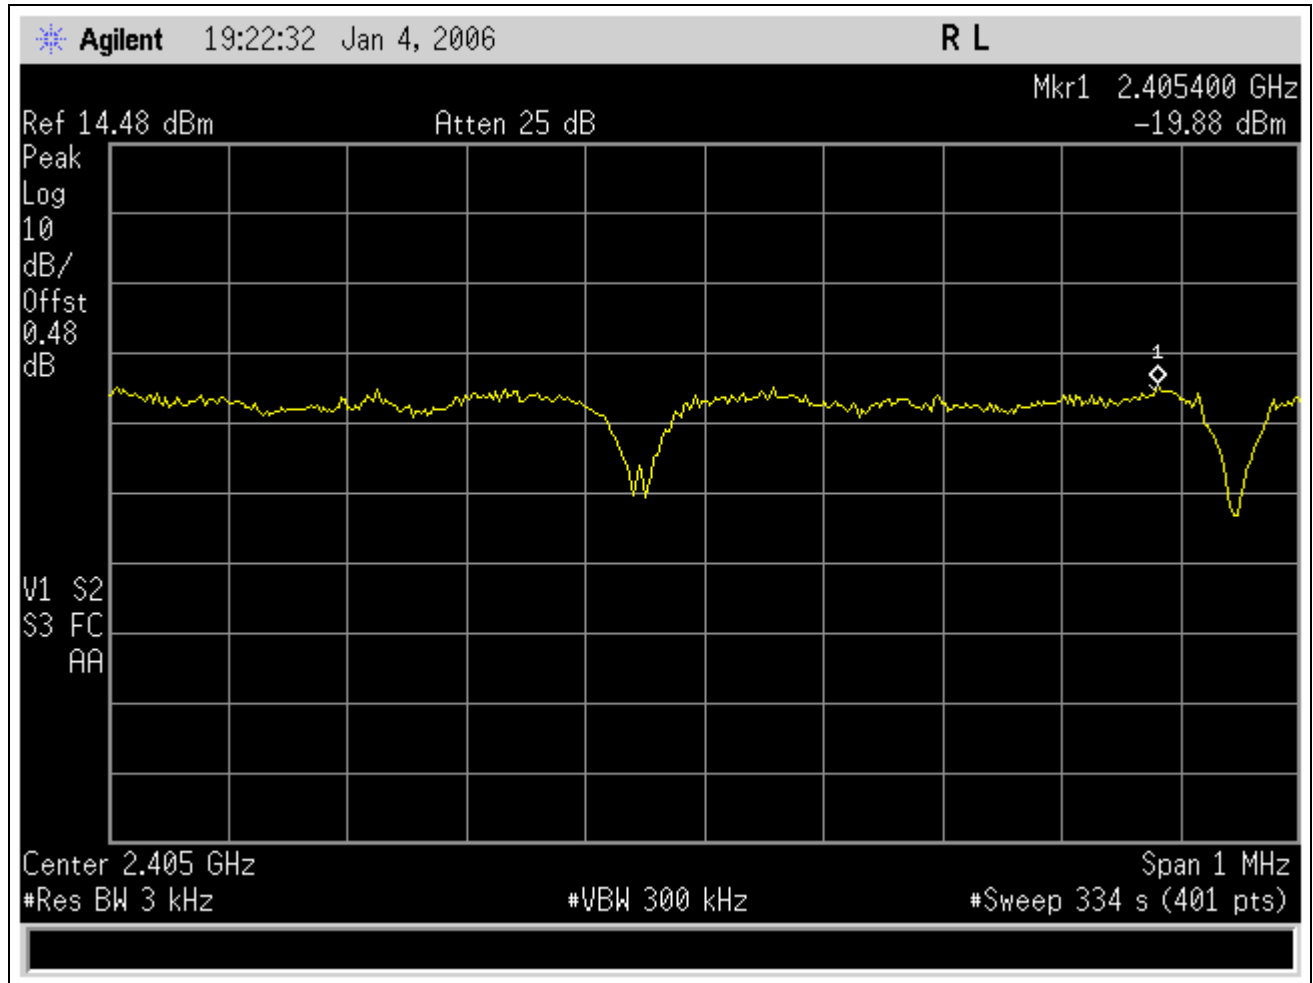


Plot 13. Spectral Power Density Test Results – Channel 0



Bentley Kinetics  
KSensor IMU400

Electromagnetic Compatibility  
Emission Criteria  
CFR Title 47, Part 15 Subpart B and C

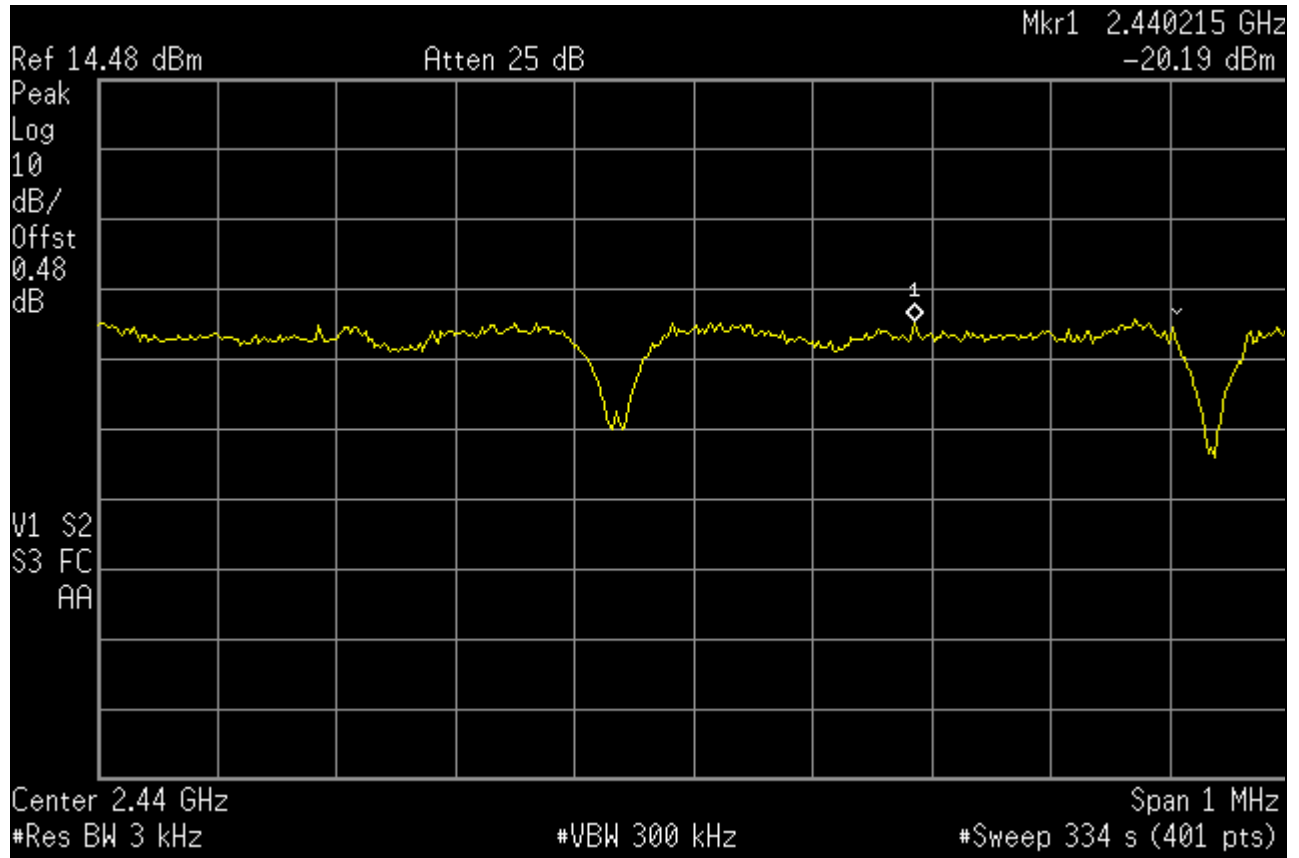


Plot 14. Spectral Power Density Test Results – Channel 7



Bentley Kinetics  
KSensor IMU400

Electromagnetic Compatibility  
Emission Criteria  
CFR Title 47, Part 15 Subpart B and C

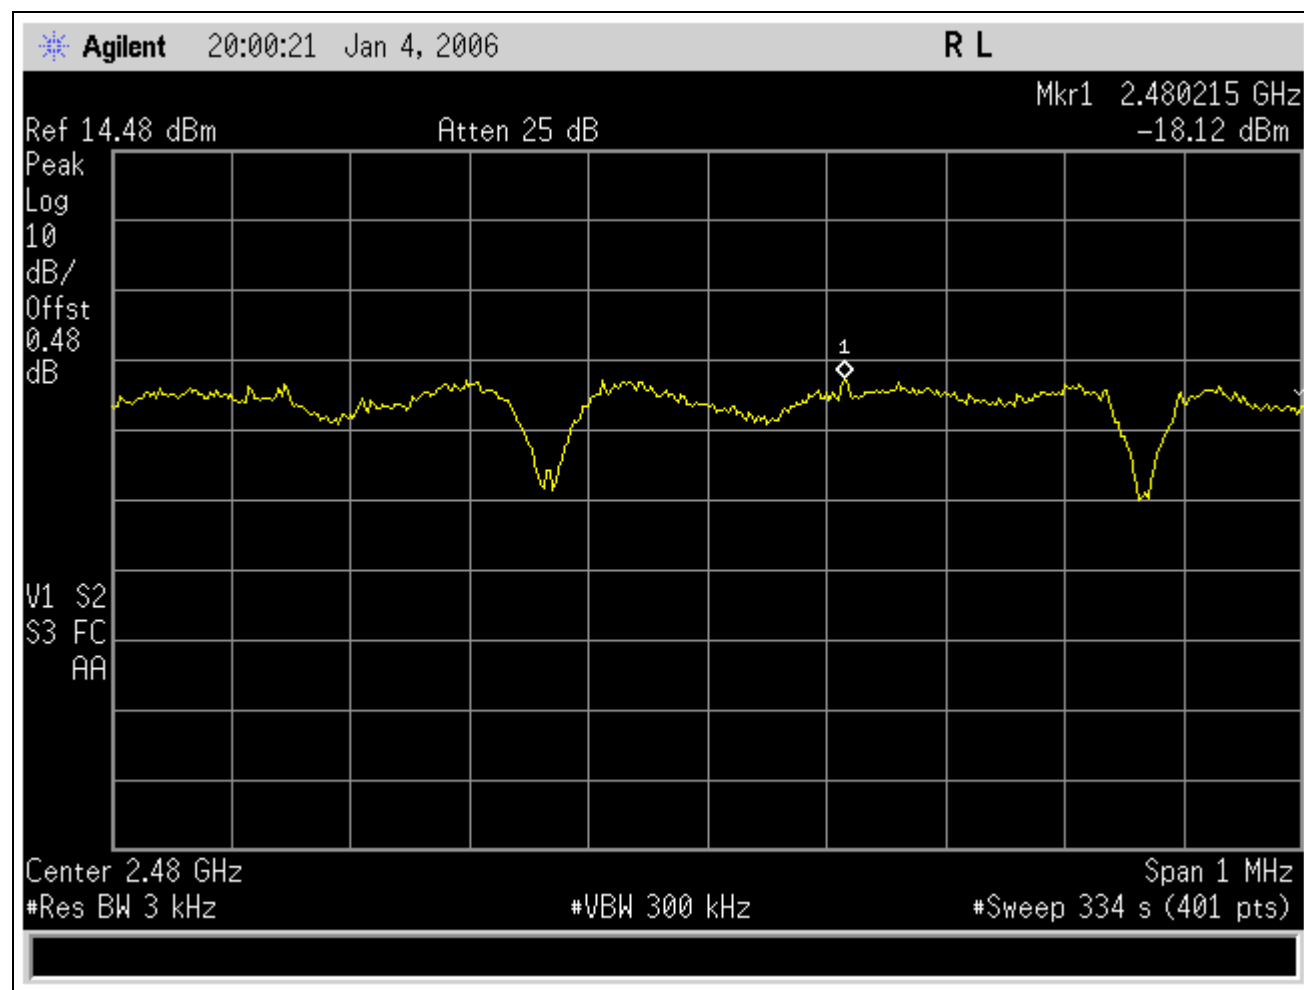

Plot 15. Spectral Power Density Test Results – Channel 15



### 3.8 Antenna Requirements

**Test Requirement:** § 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Test Results:** The EUT was **compliant** to the requirements of this section. The antenna is permanently attached.

Type of antenna: PCB etched Inverted F-Type. See Photographs 10 and 13 of the EUT.  
Max Gain: 5 dBi



### 3.9 Spurious Conducted Emissions


**Test Requirements:** §15.247(c): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

**Test Procedure:** The EUT was configured with the control software to transmit at maximum power. The transmit output was connected to the analyzer through an attenuator. RBW = 100 kHz, VBW  $\geq$  RBW.


**Test Results:** The EUT was found **compliant** with the requirements of this section.

**Test Engineer:** Len Knight

**Test Date:** 12/29/2005

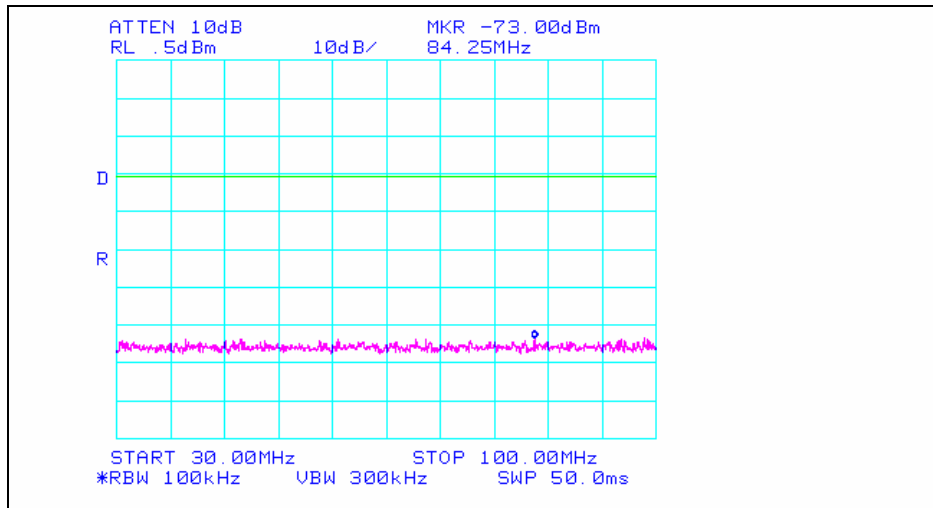


Plot 16. Spurious Conducted Emission Test Results– Channel 0 – 30 MHz to 100 MHz\*

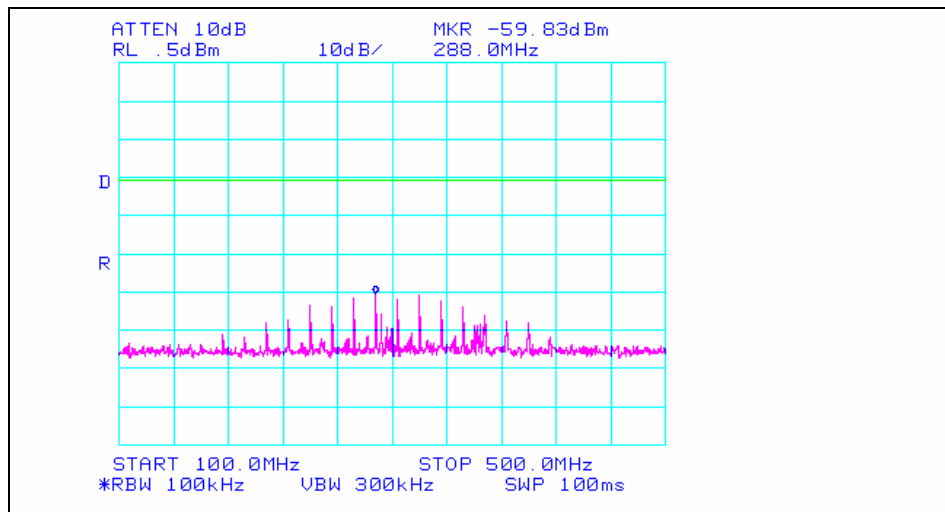


Plot 17. Spurious Conducted Emission Test Results – Channel 0 – 100 MHz to 500 MHz\*




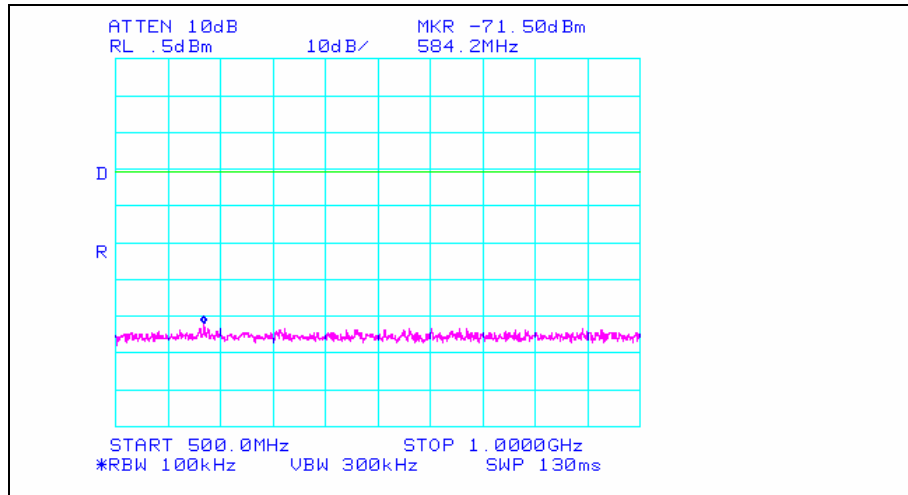


**Plot 18. Spurious Conducted Emission Test Results – Channel 0 – 500 MHz to 1 GHz\***

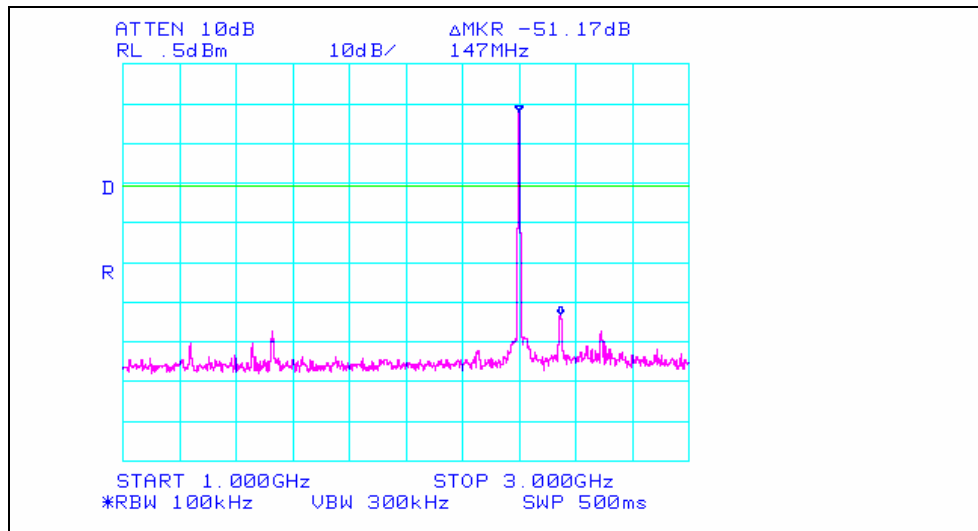


**Plot 19. Spurious Conducted Emission – Channel 0 – 1 GHz to 3 GHz\***

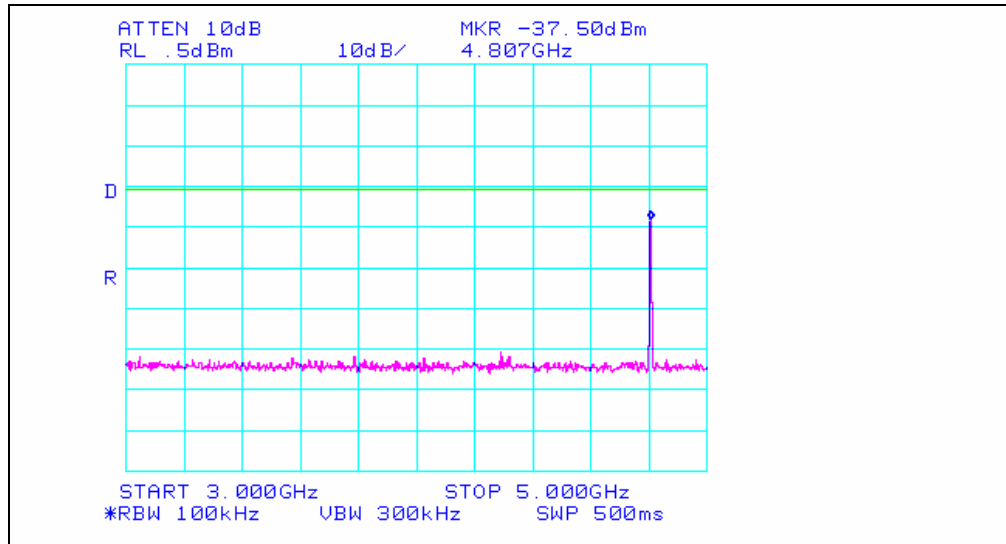


Plot 20. Spurious Conducted Emission – Channel 0 – 3 GHz to 5 GHz\*

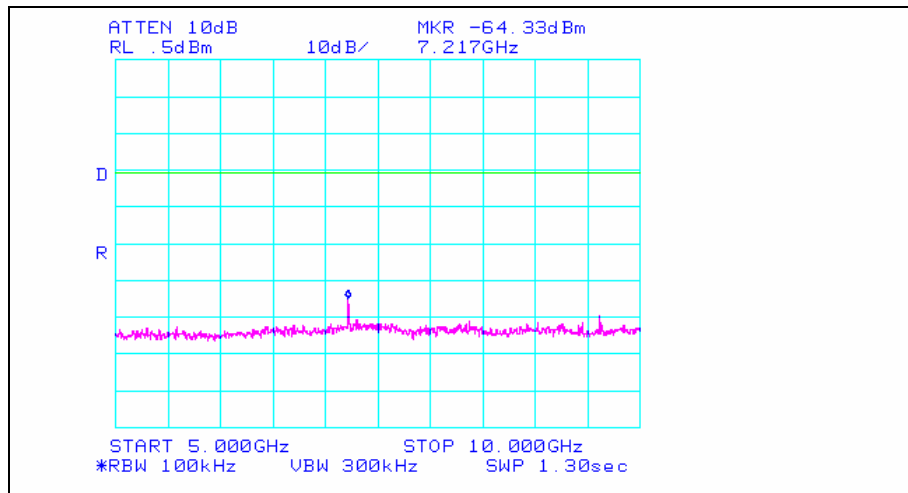


Plot 21. Spurious Conducted Emission Test Results – Channel 0 – 5 GHz to 10 GHz\*

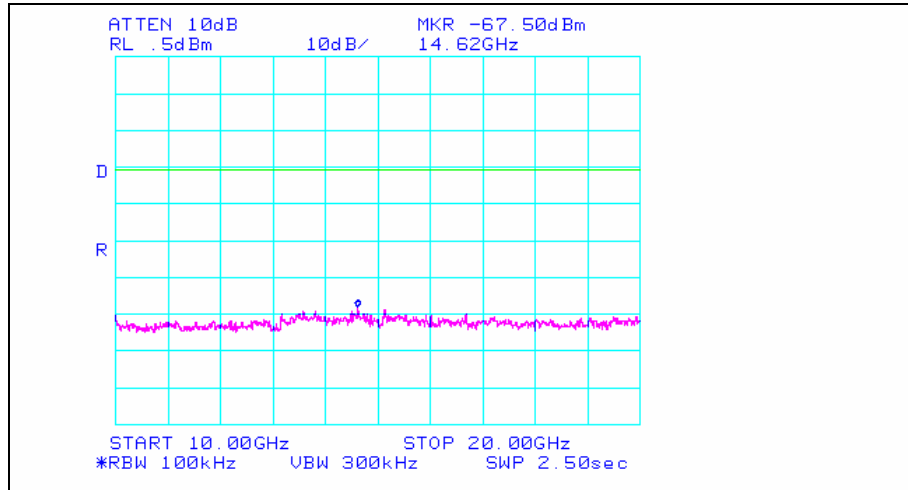


Plot 22. Spurious Conducted Emission Test Results – Channel 0 – 10 GHz to 20 GHz\*

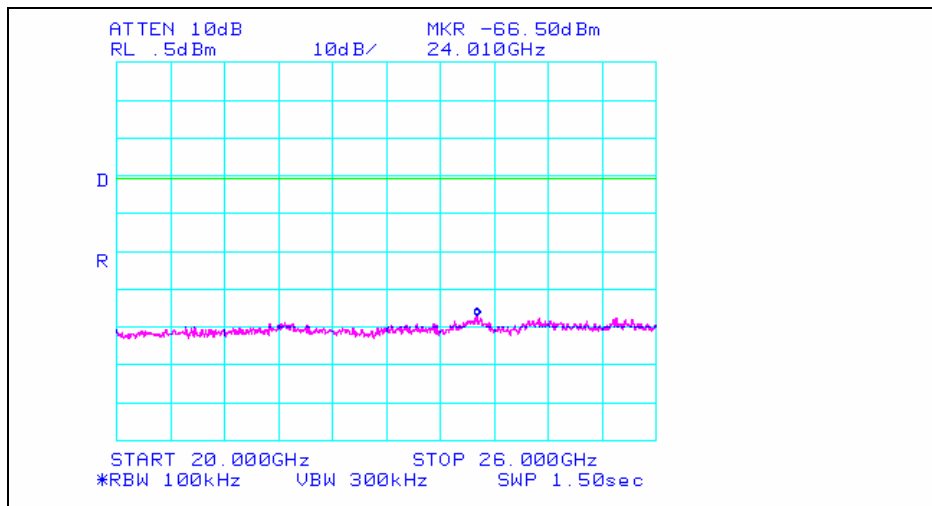


Plot 23. Spurious Conducted Emission Test Results – Channel 0 – 20 GHz to 26 GHz\*

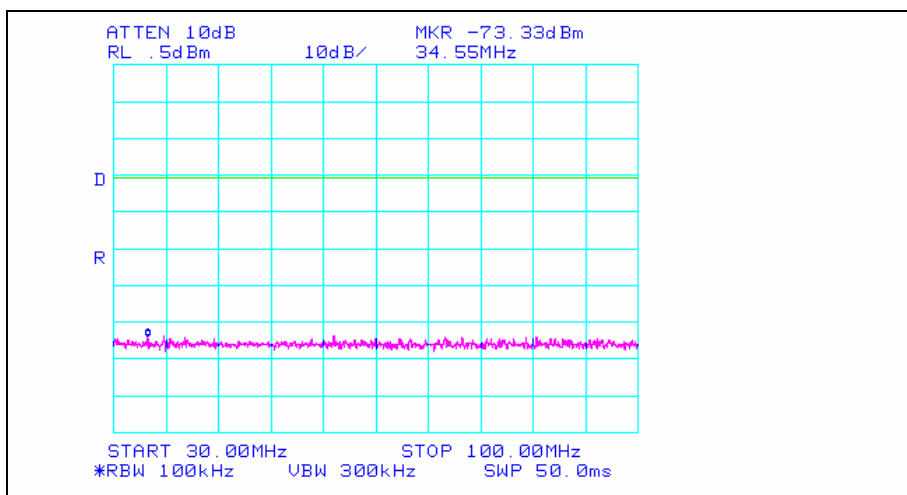


**Plot 24. Spurious Conducted Emission Test Results – Channel 7 – 30 MHz to 100 MHz\***

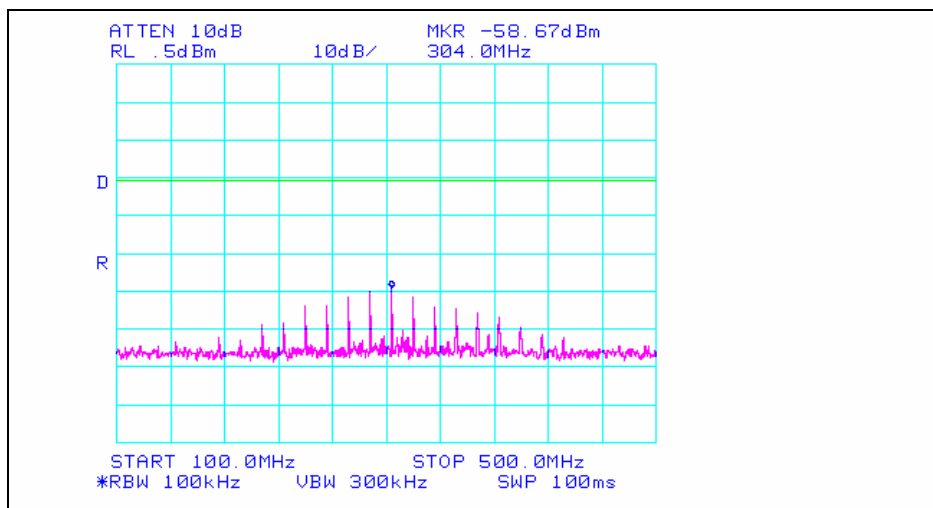


**Plot 25. Spurious Conducted Emission Test Results– Channel 7 – 100 MHz to 500 MHz\***

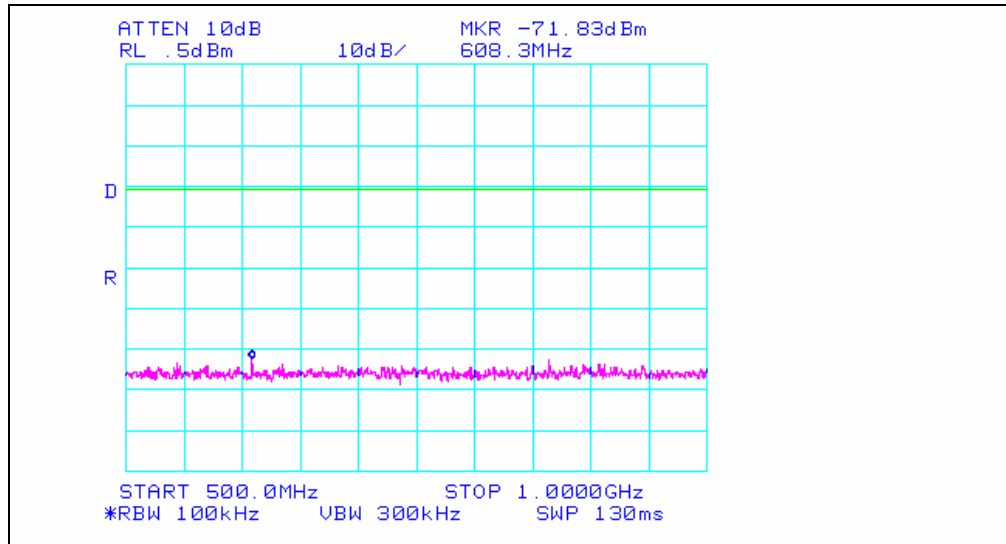


**Plot 26. Spurious Conducted Emission Test Results – Channel 7 – 500 MHz to 1 GHz\***

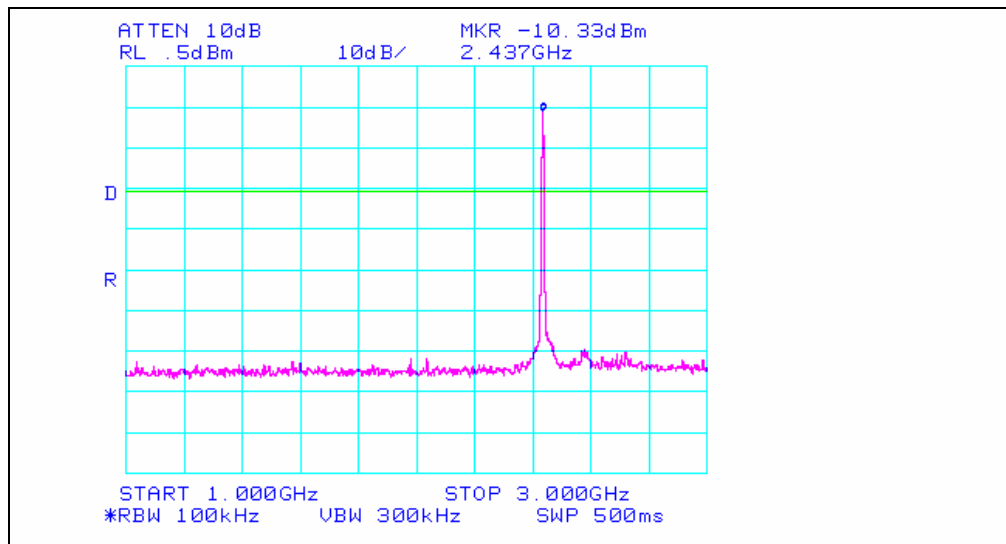


**Plot 27. Spurious Conducted Emission Test Results – Channel 7 – 1 GHz to 3 GHz\***

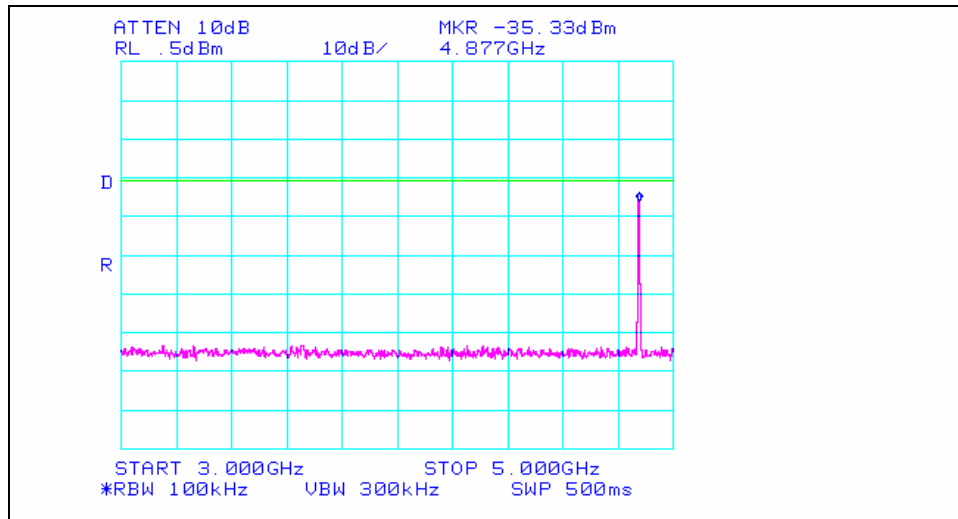


Plot 28. Spurious Conducted Emission Test Results – Channel 7 – 3 GHz to 5 GHz\*

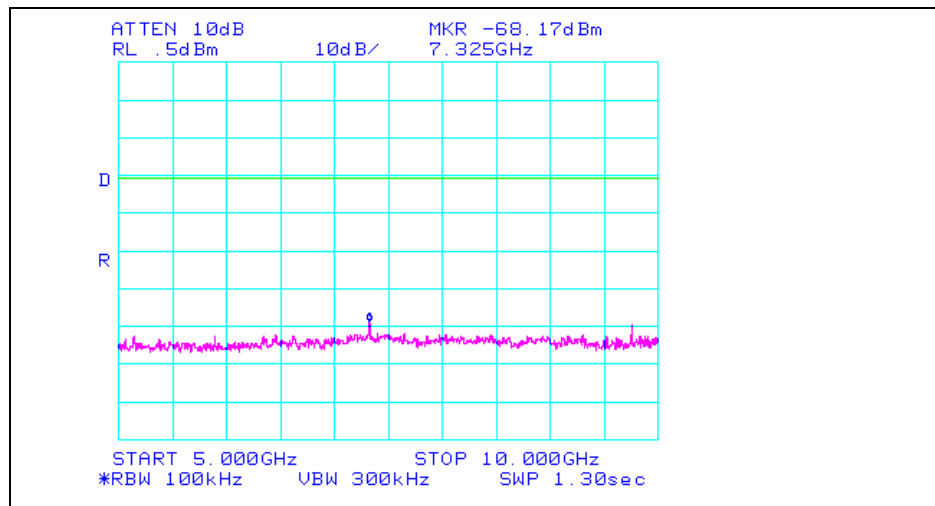


Plot 29. Spurious Conducted Emission Test Results – Channel 7 – 5 GHz to 10 GHz\*

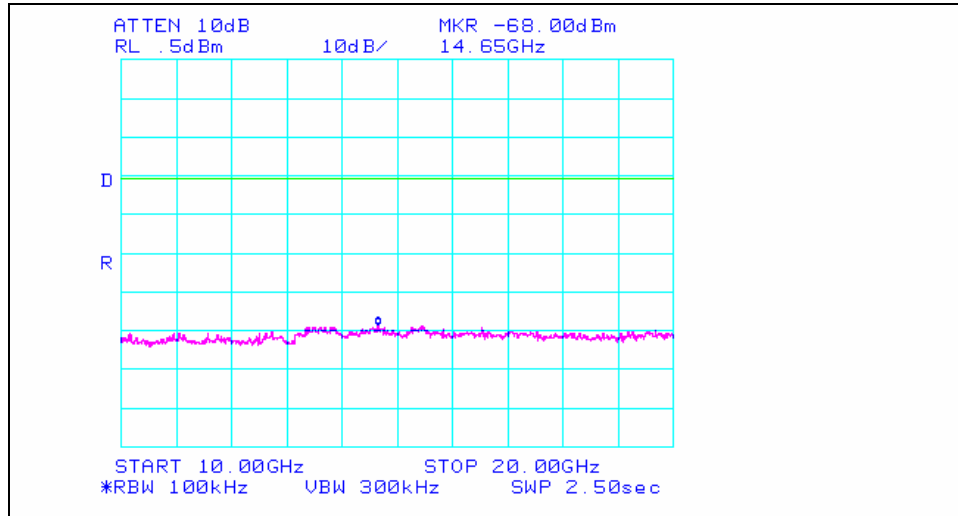


Plot 30. Spurious Conducted Emission Test Results – Channel 7 – 10 GHz to 20 GHz\*

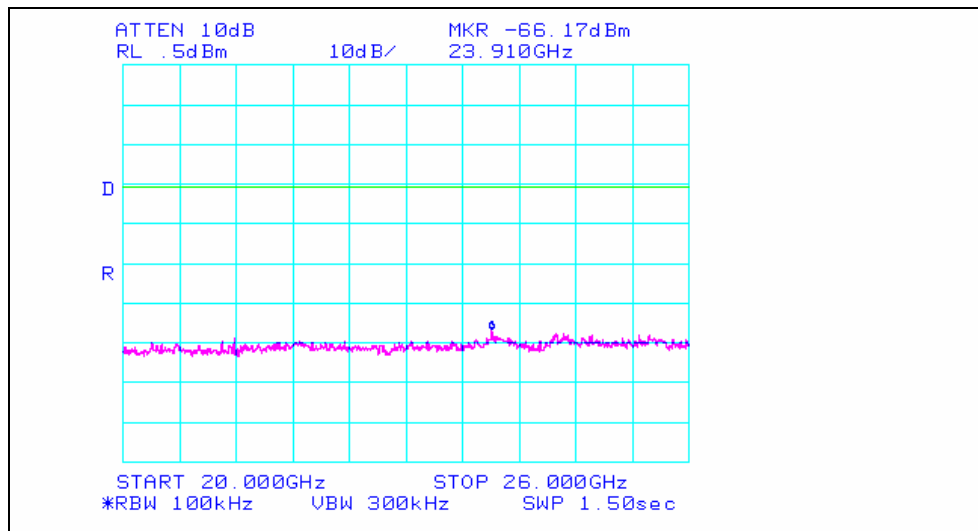

Plot 31. Spurious Conducted Emission Test Results – Channel 7 – 20 GHz to 26 GHz\*

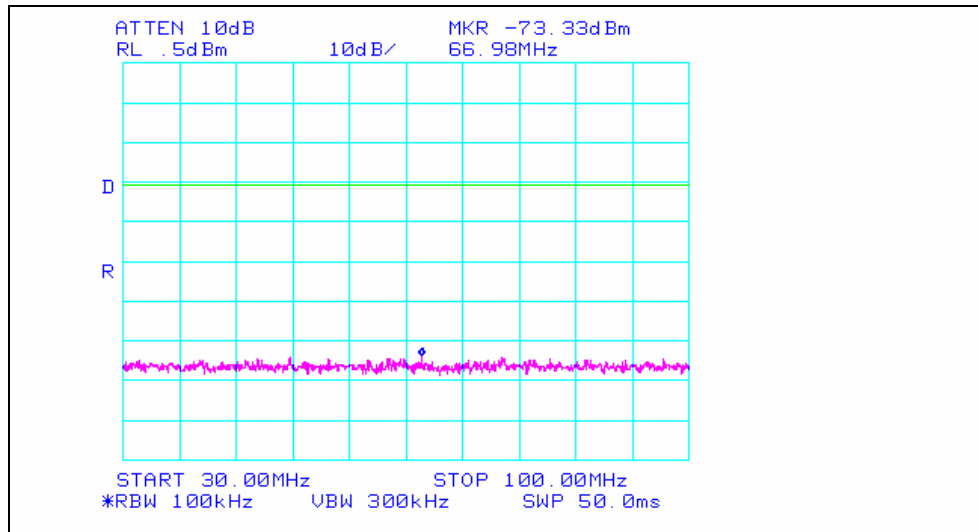


Plot 32. Spurious Conducted Emission Test Results – Channel 15 – 30 MHz to 100 MHz\*

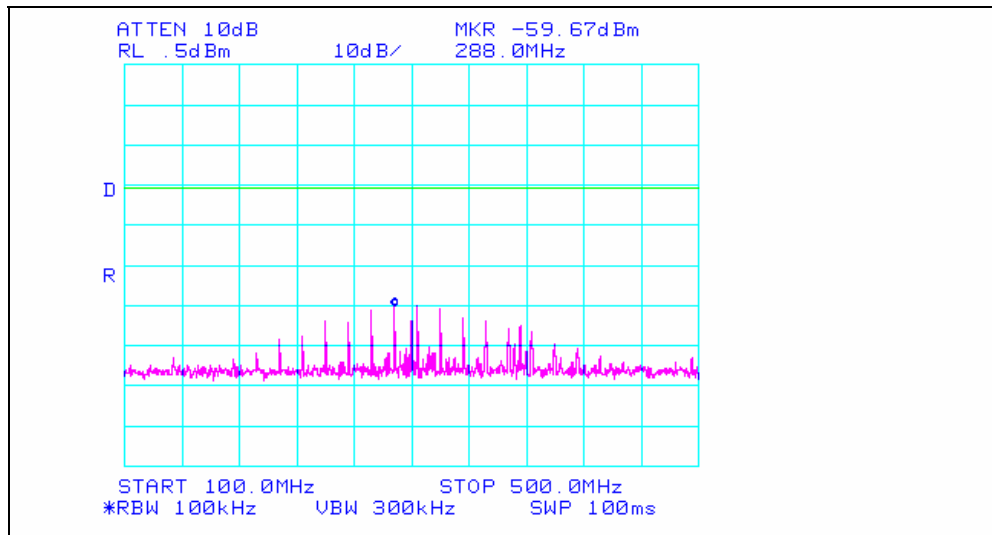


Plot 33. Spurious Conducted Emission Test Results – Channel 15 – 100 MHz to 500 MHz\*




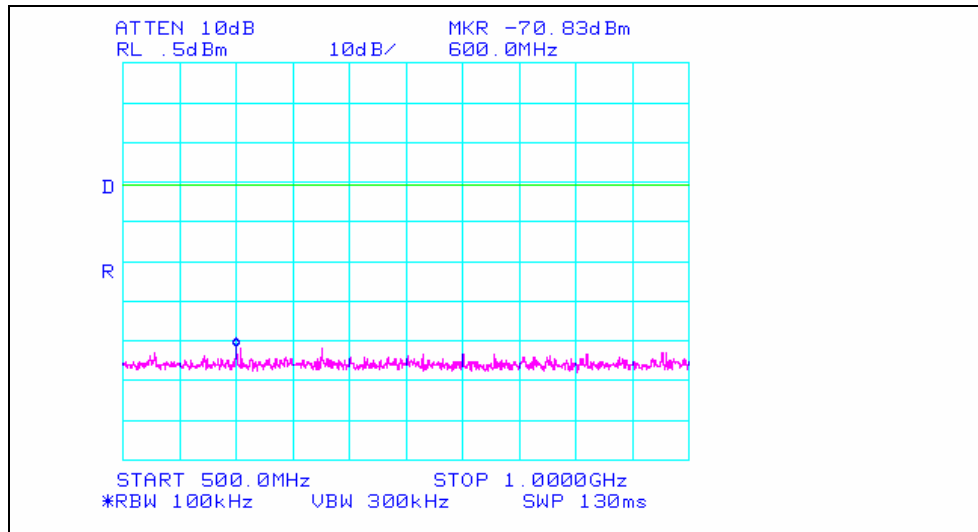


**Plot 34. Spurious Conducted Emission Test Results – Channel 15 – 500 MHz to 1 GHz\***

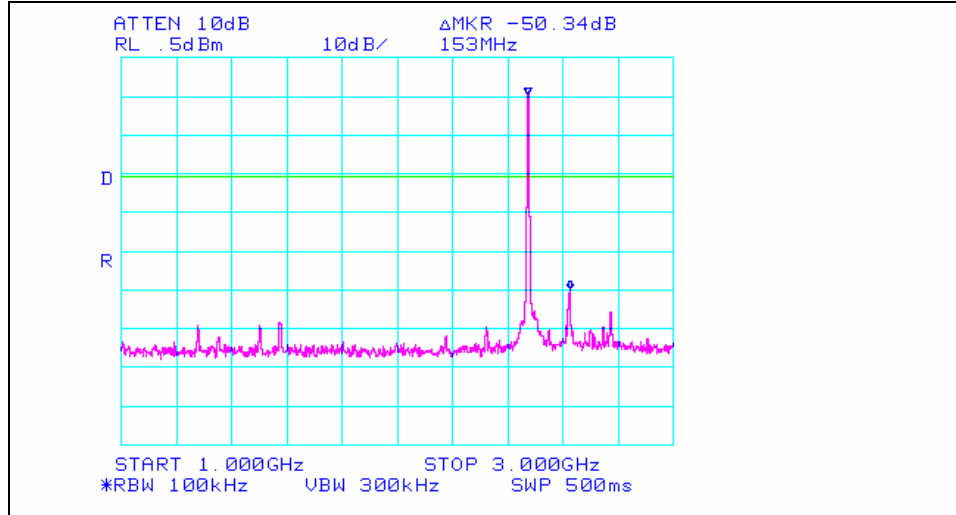


**Plot 35. Spurious Conducted Emission Test Results – Channel 15 – 1 GHz to 3 GHz\***

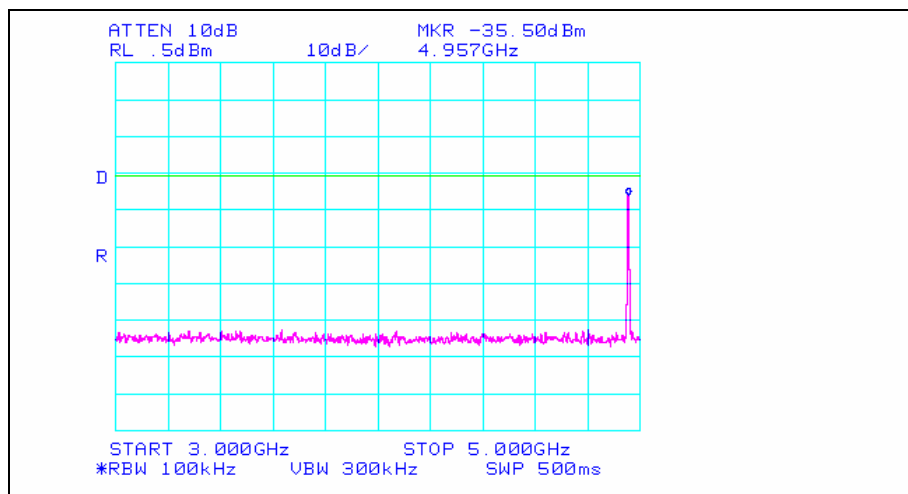


**Plot 36. Spurrious Conducted Emission Test Results – Channel 15 – 3 GHz to 5 GHz\***

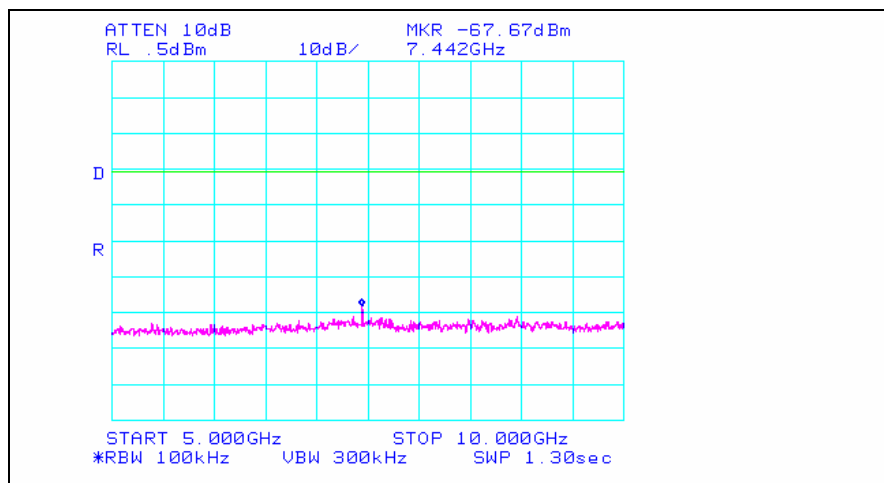

**Plot 37. Spurrious Conducted Emission Test Results – Channel 15 – 5 GHz to 10 GHz\***

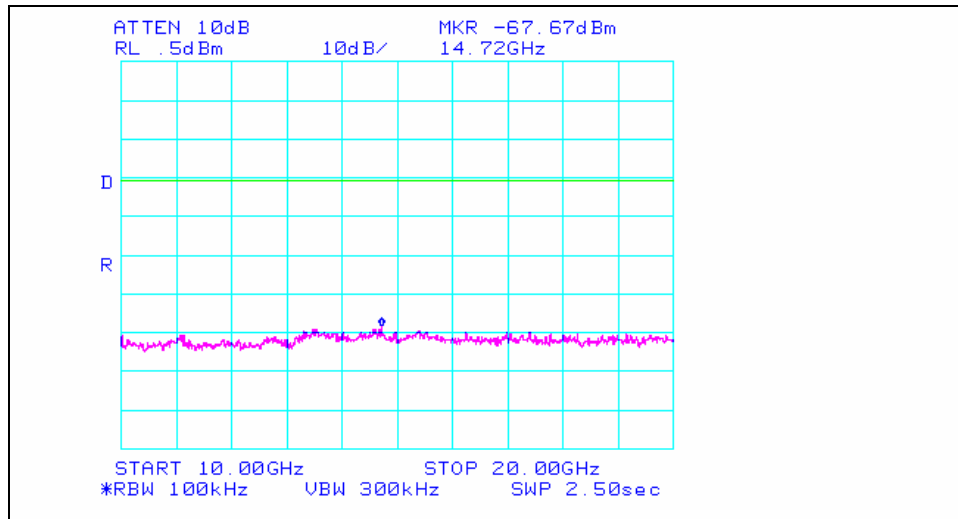

Plot 38. Spurious Conducted Emission Test Results – Channel 15 – 10 GHz to 20 GHz\*

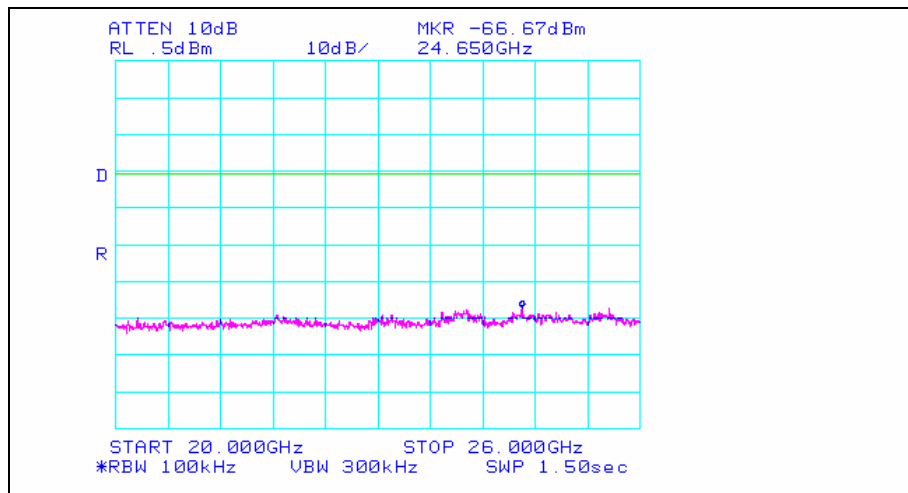

Plot 39. Spurious Conducted Emission Test Results – Channel 0 – 20 GHz to 26 GHz\*

\* Emissions were peak conducted.



## 4.0 Additional Photographs




Internal View of EUT - 1



Internal View of EUT - 2



Internal View of EUT - 3

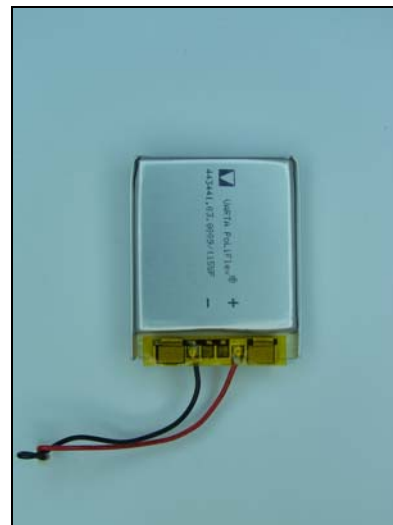

Internal View of EUT - 4




**Internal View of EUT – 5**



**Internal View of EUT – 6**



**Internal View of EUT – 7**

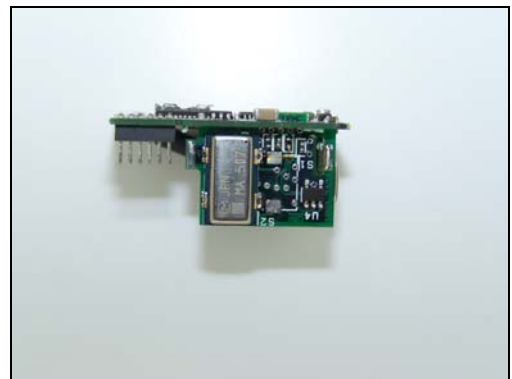

**Internal View of EUT – 8**



Bentley Kinetics  
KSensor IMU400

Electromagnetic Compatibility  
Additional Photographs  
CFR Title 47, Part 15 Subpart B and C



Internal View of EUT - 9



Internal View of EUT - 10




Internal View of EUT - 11



Internal View of EUT - 12



**Internal View of EUT – 13**

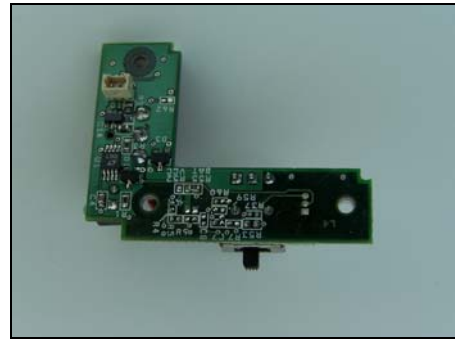

**Internal View of EUT – 14**



**Internal View of EUT – 15**



Bentley Kinetics  
KSensor IMU400

Electromagnetic Compatibility  
Test Equipment  
CFR Title 47, Part 15 Subpart B and C



External View of EUT – 1



External View of EUT – 2



External View of EUT – 3



External View of EUT – 4





## 5.0 Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ANSI/NCSL Z540-1-1994 and ANSI/ISO/IEC 17025:2000.

Test Name: Conducted Emissions Voltage				Test Date(s): March 29, 2006	
MET Asset #	Nomenclature	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4503	SHIELDED ROOM	UNIVERSAL SHIELDING CORP	N/A	4/30/2005	4/30/2006
1T4302	EMI RECEIVER	HEWLETT PACKARD	85462A	10/20/2005	10/20/2006
1T4295	TRANSIENT LIMITER	HEWLETT PACKARD	11947A	SEE NOTE	
1T4212	LISN; SWITCH	SOLAR ELECTRONICS CO	9252-R-24-BNC	12/6/2005	12/6/2006
Test Name: Radiated Emissions				Test Date(s): March 29, 2006	
MET Asset #	Nomenclature	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4459	THERMO-HYGROMETER	FISHER SCIENTIFIC	11-661-71D	11/8/2004	11/8/2006
1T4409	EMI RECEIVER	ROHDE & SCHWARTZ	ESIB7	4/14/2005	4/14/2006
1T4303	ANTENNA; BILOG	SCHAFNER – CHASE EMC	CBL6140A	5/13/2005	5/13/2006
1T4300	SEMI-ANECHOIC CHAMBER # 1	EMC TEST SYSTEMS	NONE	2/17/2006	1/17/2009
Test Name: Conducted Measurements				Test Date(s): March 3, 2006	
MET Asset #	Nomenclature	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4351	SPECTRUM ANALYZER	AGILENT	E7405A	10/4/2005	10/4/2006
1T4503	SHIELDED ROOM	UNIVERSAL SHIELDING CORP.	N/A	4/30/2005	4/30/2006
Test Name: Spurious Radiated Emissions				Test Date(s): March 29, 2006	
MET Asset #	Nomenclature	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4288	SPECTRUM ANALYZER	HEWLETT PACKARD	8563A	1/12/2006	1/12/2007
1T4442	PRE-AMPLIFIER, MICROWAVE	MITEQ	AFS42-01001800-30-10P	SEE NOTE	
1T2511	ANTENNA; HORN	EMCO	3115	6/28/2005	6/28/2006

Note: Functionally verified test equipment is verified using calibrated instrumentation at the time of testing.



## 6.0 Compliance Information

### 6.1 Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

#### § 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

#### § 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
  - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
  - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.



- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing;*
  - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
  - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
  - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
  - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.



**The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:**

**§ 2.901 Basis and Purpose**

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.<sup>1</sup> *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer*, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

**§ 2.907 Certification.**

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

---

<sup>1</sup> In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart C (of Part 15), which deals with intentional radiators.



**§ 2.948 Description of measurement facilities.**

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
  - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
    - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
    - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
  - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.



## 6.2 Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

### § 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

*This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.
- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

### § 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



## **§ 15.27 Special Accessories.**

(a) Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in §2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

## **§ 15.105 Information to the user.**

- (a) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.