



FCC Test Report

Equipment : AC1300 Whole Home Wi-Fi System
Brand Name : TP-Link
Model No. : Deco M5
FCC ID : TE7M5
Standard : 47 CFR FCC Part 15.407
Operating Band : 5150 MHz – 5250 MHz
5725 MHz – 5850 MHz
Applicant : TP-Link Technologies Co., Ltd.
Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central
Science and Technology Park,Shennan Rd, Nanshan,
Shenzhen,China
Manufacturer : TP-Link Technologies Co., Ltd.
Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central
Science and Technology Park,Shennan Rd, Nanshan,
Shenzhen,China
Function : Outdoor; Indoor; Fixed P2P
 Client

The product sample received on Jun. 29, 2016 and completely tested on Jan. 13, 2017. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.


Cliff Chang
SPORTON INTERNATIONAL INC.





Table of Contents

- 1 GENERAL DESCRIPTION5**
- 1.1 Information.....5
- 1.2 Testing Applied Standards8
- 1.3 Testing Location Information8
- 1.4 Measurement Uncertainty9
- 2 TEST CONFIGURATION OF EUT10**
- 2.1 Test Channel Mode10
- 2.2 The Worst Case Measurement Configuration.....11
- 2.3 EUT Operation during Test12
- 2.4 Accessories13
- 2.5 Support Equipment.....13
- 2.6 Test Setup Diagram15
- 3 TRANSMITTER TEST RESULT19**
- 3.1 AC Power-line Conducted Emissions19
- 3.2 Emission Bandwidth21
- 3.3 Maximum Conducted Output Power22
- 3.4 Peak Power Spectral Density.....24
- 3.5 Unwanted Emissions.....27
- 3.6 Frequency Stability.....32
- 4 TEST EQUIPMENT AND CALIBRATION DATA34**

APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS

APPENDIX B. TEST RESULTS OF EMISSION BANDWIDTH

APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER

APPENDIX D. TEST RESULTS OF PEAK POWER SPECTRAL DENSITY

APPENDIX E. TEST RESULTS OF UNWANTED EMISSIONS

APPENDIX F. TEST RESULTS OF FREQUENCY STABILITY

APPENDIX G. TEST RESULTS OF RADIATED EMISSION CO-LOCATION

APPENDIX H. TEST PHOTOS

PHOTOGRAPHS OF EUT V01



Summary of Test Result

Conformance Test Specifications			
Report Clause	Ref. Std. Clause	Description	Result
1.1.2	15.203	Antenna Requirement	Complied
3.1	15.207	AC Power-line Conducted Emissions	Complied
3.2	15.407(a)	Emission Bandwidth	Complied
3.3	15.407(a)	Maximum Conducted Output Power	Complied
3.4	15.407(a)	Peak Power Spectral Density	Complied
3.5	15.407(b)	Unwanted Emissions	Complied
3.6	15.407(g)	Frequency Stability	Complied



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5150-5250	a, n (HT20), ac (VHT20)	5180-5240	36-48 [4]
5725-5850		5745-5825	149-165 [5]
5150-5250	n (HT40), ac (VHT40)	5190-5230	38-46 [2]
5725-5850		5755-5795	151-159 [2]
5150-5250	ac (VHT80)	5210	42 [1]
5725-5850		5775	155 [1]

Band	Mode	BWch (MHz)	Nant
5.2G	11a	20	2
5.2G	HT20	20	2
5.2G	HT20,BF	20	2
5.2G	VHT20	20	2
5.2G	VHT20,BF	20	2
5.2G	HT40	40	2
5.2G	HT40,BF	40	2
5.2G	VHT40	40	2
5.2G	VHT40,BF	40	2
5.2G	VHT80	80	2
5.2G	VHT80,BF	80	2
5.8G	11a	20	2
5.8G	HT20	20	2
5.8G	HT20,BF	20	2
5.8G	VHT20	20	2
5.8G	VHT20,BF	20	2
5.8G	HT40	40	2
5.8G	HT40,BF	40	2
5.8G	VHT40	40	2
5.8G	VHT40,BF	40	2
5.8G	VHT80	80	2
5.8G	VHT80,BF	80	2



Note:

- ◆ 5.2G/5.2G-I(IC) is the 5.2GHz Band (5.15-5.25GHz).
- ◆ 5.8G/5.8G-I(IC) is the 5.8GHz Band (5.725-5.850GHz).
- ◆ 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ◆ VHT20, VHT40, VHT80 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
- ◆ BWch is the nominal channel bandwidth.
- ◆ Nss-Min is the minimum number of spatial streams.
- ◆ Nant is the number of outputs. e.g., 2(2,3) means have 2 outputs for port 2 and port 3. 2 means have 2 outputs for port 1 and port 2.



1.1.2 Antenna Information

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)			
					WLAN 2.4G	WLAN 5G B1	WLAN 5G B4	Bluetooth
1	TP-LINK	3101501201	Omni-Directional Antenna	I-PEX	1.30	-	-	-
2	TP-LINK	3101501201	Omni-Directional Antenna	I-PEX	1.30	-	-	-
3	TP-LINK	5G2-M5	Omni-Directional Antenna	N/A	-	0.64	0.88	-
4	TP-LINK	5G2-M5	Omni-Directional Antenna	N/A	-	0.64	0.88	-
5	TP-LINK	Bluetooth-M5	Omni-Directional Antenna	N/A	-	-	-	1.40

Note:

Ant. 1~Ant. 2 connect to port1~port 2 for 2.4GHz.

Ant. 3~Ant. 4 connect to port1~port 2 for 5GHz.

Ant. 5 connect to port1 for bluetooth.

For 2.4GHz IEEE 802.11b/g/n/ac mode (2TX/2RX):

Ant. 1 and Ant. 2 could transmit/receive simultaneously.

For 5GHz IEEE 802.11n/a/ac mode (2TX/2RX):

Ant. 3 and Ant. 4 could transmit/receive simultaneously.

For bluetooth mode (1TX/1RX):

Only Ant. 5 could transmit/receive.

1.1.3 Mode Test Duty Cycle

Mode	DC
11a	0.949
VHT20	0.985
VHT20,BF	0.894
VHT40	0.969
VHT40,BF	0.898
VHT80	0.814
VHT80,BF	0.922

1.1.4 EUT Operational Condition

EUT Power Type	From Power Adapter		
Beamforming Function	<input checked="" type="checkbox"/>	With beamforming for 802.11n/ac	<input type="checkbox"/> Without beamforming



1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013
- ◆ FCC KDB 789033 D02 v01r03
- ◆ FCC KDB 644545 D03 v01
- ◆ FCC KDB 662911 D01 v02r01

1.3 Testing Location Information

Testing Location		
<input type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
<input checked="" type="checkbox"/>	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-CB	Gino Huang & Gary Chu	22°C / 55%	Nov. 19, 2016 ~ Jan. 13, 2017
Radiated	03CH01-CB	Poul Chen & Mason Chen & Welson Chen & Steven Liang & Zero Chen	22°C / 54%	Nov. 15, 2016 ~ Dec. 13, 2016
AC Conduction	CO01-CB	GN Hou & Ryo Fan	23°C / 60%	Dec. 01, 2016

Test site Designation No. TW0006 with FCC
Test site registered number IC 4086D with Industry Canada.



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%
Output Power Measurement	1.33 dB	Confidence levels of 95%
Power Density Measurement	1.27 dB	Confidence levels of 95%
Bandwidth Measurement	9.74×10^{-8}	Confidence levels of 95%
Frequency Stability	6.06×10^{-8}	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Band	Mode	BWch (MHz)	Nss-Min	Nant	Ch. (MHz)	Range	Power Setting
5.2G	11a	20	1	2	5180	L	20
5.2G	11a	20	1	2	5200	M	23
5.2G	11a	20	1	2	5240	H	23
5.8G	11a	20	1	2	5745	L	23
5.8G	11a	20	1	2	5785	M	23
5.8G	11a	20	1	2	5825	H	23
5.2G	VHT20	20	1,(M0)	2	5180	L	20.5
5.2G	VHT20	20	1,(M0)	2	5200	M	23
5.2G	VHT20	20	1,(M0)	2	5240	H	23
5.8G	VHT20	20	1,(M0)	2	5745	L	23
5.8G	VHT20	20	1,(M0)	2	5785	M	23
5.8G	VHT20	20	1,(M0)	2	5825	H	23
5.2G	VHT40	40	1,(M0)	2	5190	L	18
5.2G	VHT40	40	1,(M0)	2	5230	H	22
5.8G	VHT40	40	1,(M0)	2	5755	L	23
5.8G	VHT40	40	1,(M0)	2	5795	H	23
5.2G	VHT80	80	1,(M0)	2	5210	S	18.5
5.8G	VHT80	80	1,(M0)	2	5775	S	21
5.2G	VHT20,BF	20	1,(M0)	2	5180	L	22
5.2G	VHT20,BF	20	1,(M0)	2	5200	M	25
5.2G	VHT20,BF	20	1,(M0)	2	5240	H	25
5.8G	VHT20,BF	20	1,(M0)	2	5745	L	26
5.8G	VHT20,BF	20	1,(M0)	2	5785	M	26
5.8G	VHT20,BF	20	1,(M0)	2	5825	H	25
5.2G	VHT40,BF	40	1,(M0)	2	5190	L	21
5.2G	VHT40,BF	40	1,(M0)	2	5230	H	25
5.8G	VHT40,BF	40	1,(M0)	2	5755	L	25
5.8G	VHT40,BF	40	1,(M0)	2	5795	H	26
5.2G	VHT80,BF	80	1,(M0)	2	5210	S	21
5.8G	VHT80,BF	80	1,(M0)	2	5775	S	23

Note:

- Test range channel consist of L (Low Ch.), M (Middle Ch.), H (High Ch.), S (Single Ch.) and C (Straddle Band Ch.).
- VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.



2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	Normal Link
1	Repeater Mode with AP_2.4GHz
2	Repeater Mode with AP_5GHz
For operating mode 1 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Conducted Output Power Peak Power Spectral Density Frequency Stability
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link
1	Repeater Mode with AP_2.4GHz
2	Repeater Mode with AP_5GHz
For operating mode 2 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX
1	EUT in Z axis_Repeater Mode with AP



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis
Test Condition	Radiated measurement
Operating Mode	Normal Link
1	WLAN 2.4GHz + Bluetooth
2	WLAN 5GHz + Bluetooth
For operating mode 2 is the worst case and it was record in this test report. Refer to Sporton Test Report No.: FA672842 for Co-location RF Exposure Evaluation and Appendix G for Radiated Emission Co-location.	

Note1: The EUT only uses in Z axis.

Note2: The EUT supports both AP and Repeater mode. Repeater mode selected as representative mode because it is equipped with the most complicated functions.

2.3 EUT Operation during Test

For CTX Mode:

non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

beamforming mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN XP were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under LanTest20.
3. Executed "Lantest.exe" to link with the remote workstation to transmit and receive packet by Wireless AP and transmit duty cycle no less 98%.

For Normal Link:

During the test, the EUT operation to normal function.



2.4 Accessories

Accessories			
Equipment Name	Brand Holder	Model Name	Rating
Adapter	TP-Link Technologies Co., Ltd.	T120120-2B4	INPUT: 100-240V~50/60Hz 0.4A OUTPUT: 5V-1.2A, 12V-1.2A

2.5 Support Equipment

For Test Site No: CO01-CB

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB*5	DELL	E6430	DoC
2	Device	TP-Link	Deco M5	TE7M5
3	iPad	Apple	A1430	DoC

For Test Site No: 03CH01-CB (below 1GHz)

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB*5	DELL	E4300	DoC
2	AP Router	Planex	GW-AP54SGX	N/A
3	iPad	Apple	A1430	N/A

For Test Site No: 03CH01-CB (above 1GHz)
non-beamforming mode

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB	DELL	E4300	DoC
2	Test Fixture	TP-Link	ZLR113590	N/A

beamforming mode


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB*2	DELL	E4300	DoC
2	Test Fixture	TP-Link	ZLR113590	N/A
3	RX Device	TP-Link	Deco M5	TE7M5




For Test Site No: TH01-CB


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB	DELL	E4300	DoC
2	Test Fixture	TP-Link	ZLR113590	N/A

2.6 Test Setup Diagram

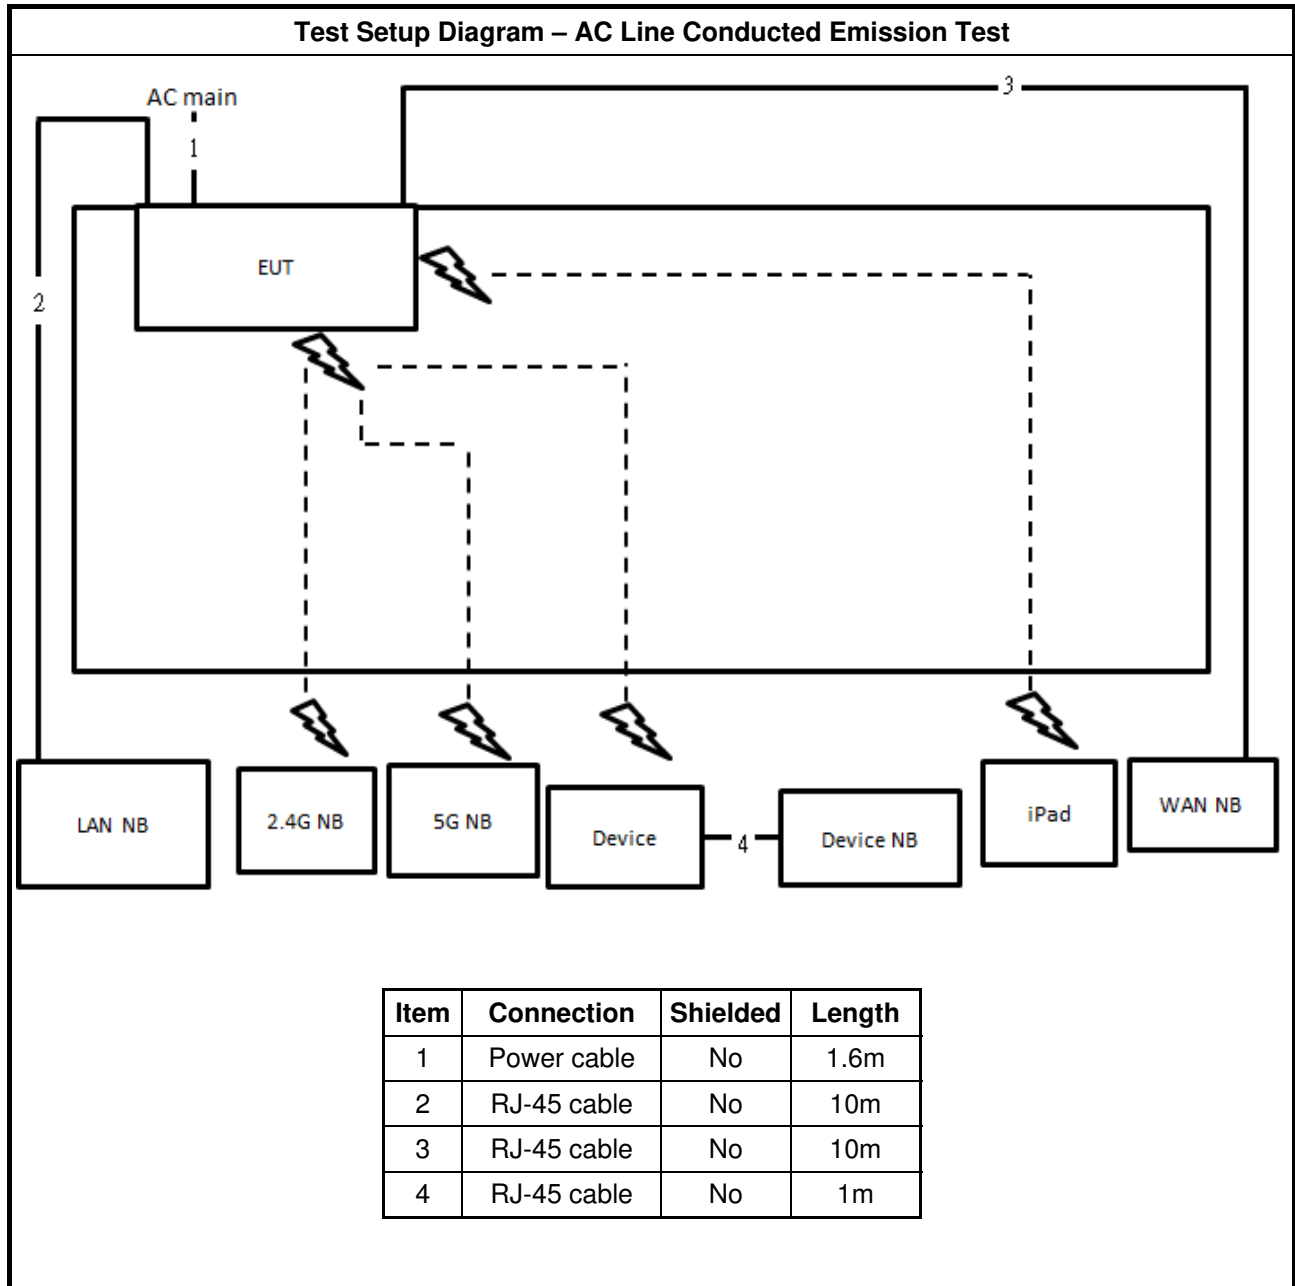

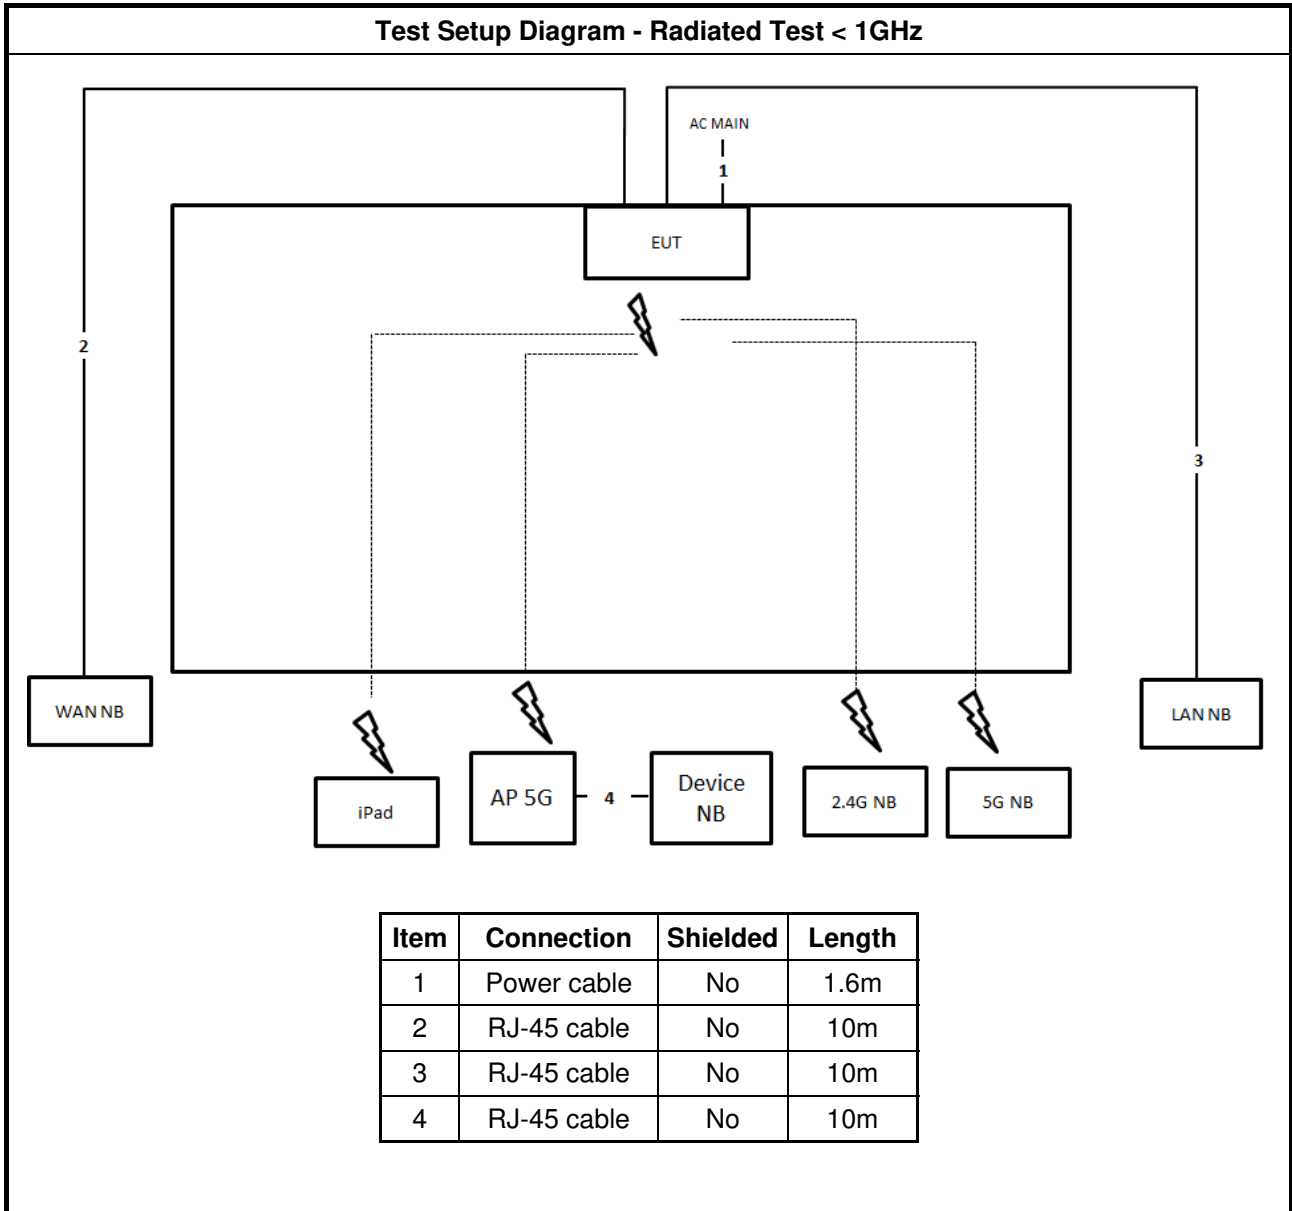


Test Setup Diagram - Radiated Test > 1GHz / non-beamforming mode

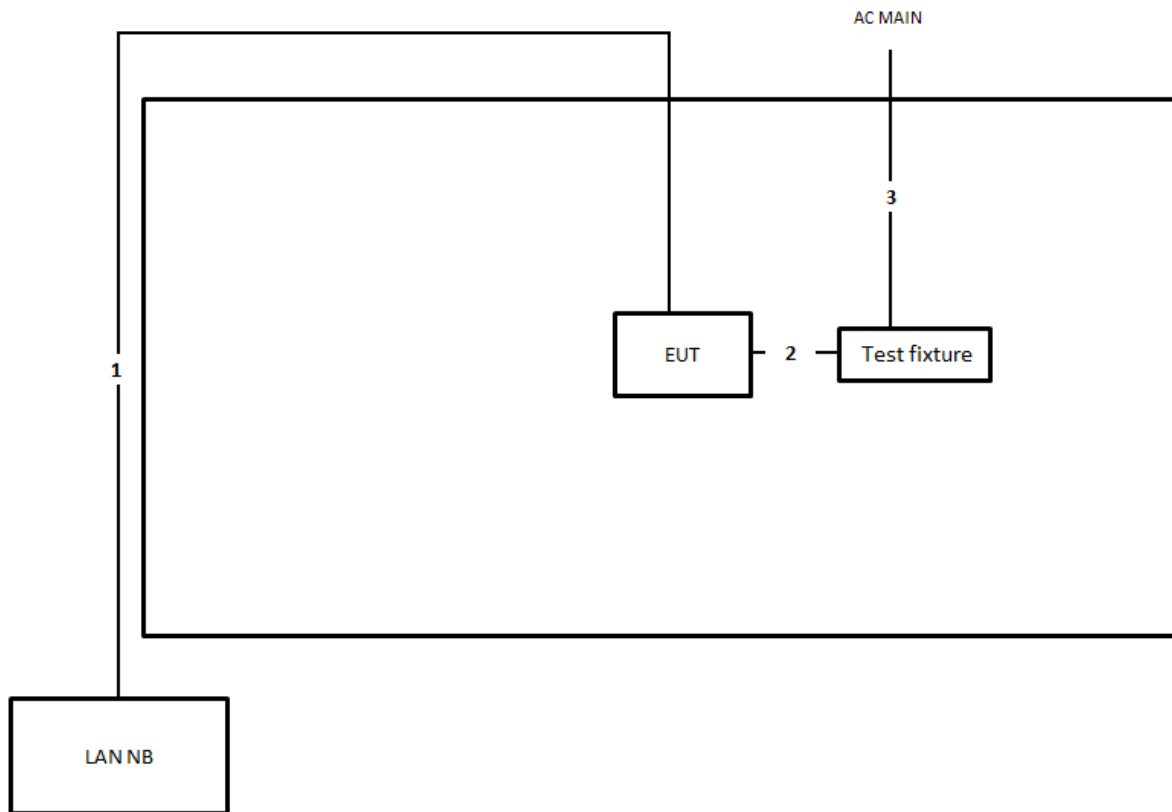

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	USB cable	Yes	0.15m
3	Power cable	No	1.6m

Test Setup Diagram - Radiated Test > 1GHz / beamforming mode

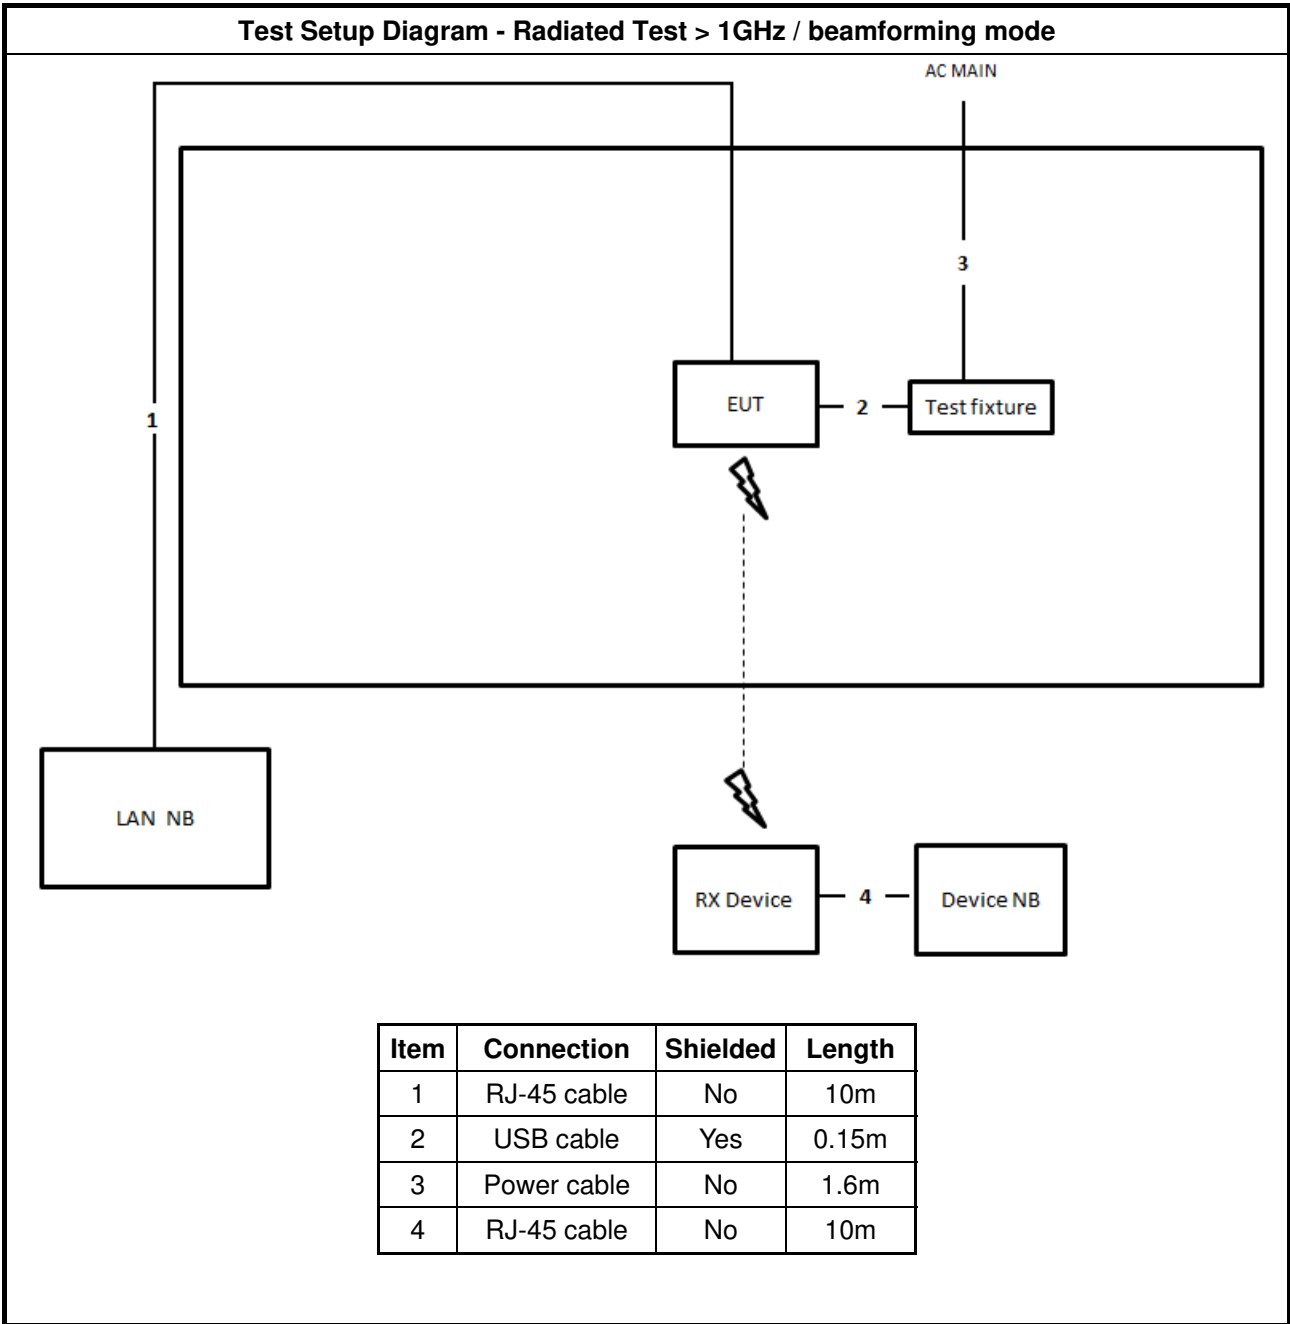

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

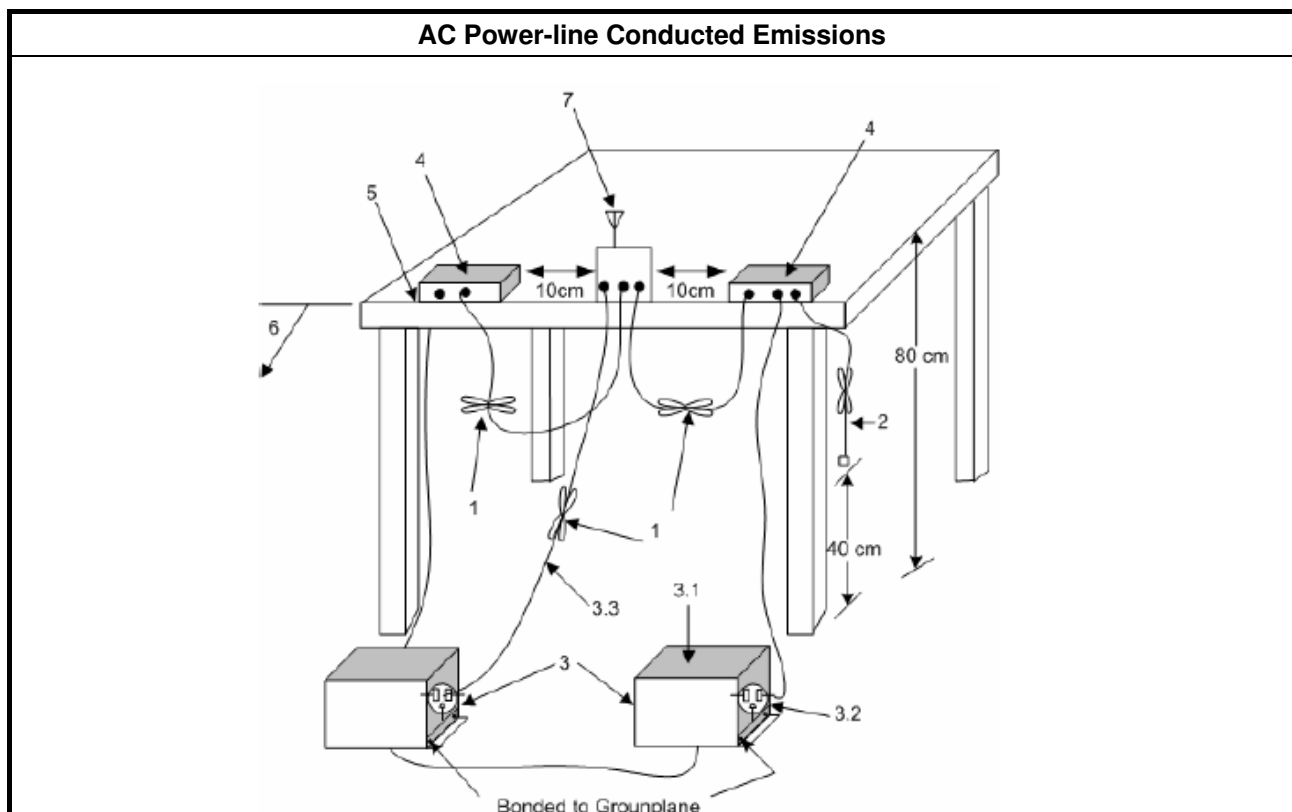



3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
<input checked="" type="checkbox"/>	For the 5.15-5.25 GHz band, N/A
<input type="checkbox"/>	For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
<input type="checkbox"/>	For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
<input checked="" type="checkbox"/>	For the 5.725-5.85 GHz band, 6 dB emission bandwidth \geq 500kHz.
LE-LAN Devices	
<input type="checkbox"/>	For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
<input type="checkbox"/>	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
<input type="checkbox"/>	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
<input type="checkbox"/>	For the 5.725-5.85 GHz band, 6 dB emission bandwidth \geq 500kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> ▪ For the emission bandwidth shall be measured using one of the options below: 	
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause C for EBW and clause D for OBW measurement.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input type="checkbox"/>	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.2.4 Test Setup

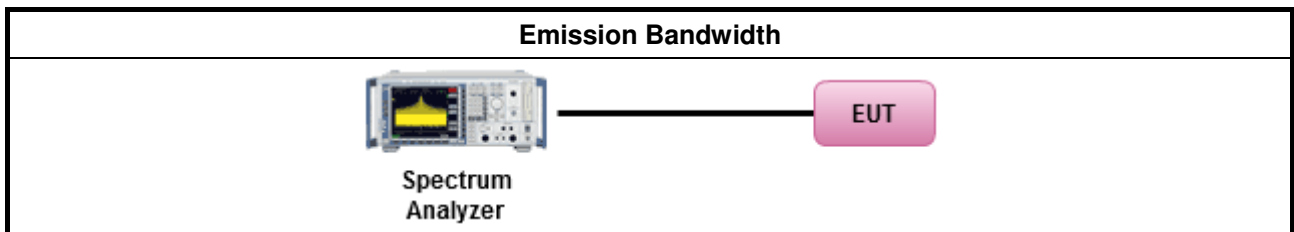

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
UNII Devices	
<input checked="" type="checkbox"/> For the 5.15-5.25 GHz band:	
	<ul style="list-style-type: none"> ▪ Outdoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. e.i.r.p. at any elevation angle above 30 degrees ≤ 125mW [21dBm] ▪ Indoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ ▪ Point-to-point AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$. ▪ Mobile or Portable Client: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
<input type="checkbox"/> For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
<input type="checkbox"/> For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
<input checked="" type="checkbox"/> For the 5.725-5.85 GHz band:	
	<ul style="list-style-type: none"> ▪ Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. ▪ Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
LE-LAN Devices	
<input type="checkbox"/> For the 5.15-5.25 GHz band, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.	
<input type="checkbox"/> For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz	
<input type="checkbox"/> For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz	
<input type="checkbox"/> For the 5.725-5.85 GHz band:	
	<ul style="list-style-type: none"> ▪ Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. ▪ Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> Maximum Conducted Output Power 	
Average over on/off periods with duty factor	
<input type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
Wideband RF power meter and average over on/off periods with duty factor	
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause E Method PM-G (using an RF average power meter).
<ul style="list-style-type: none"> For conducted measurement. 	
<ul style="list-style-type: none"> If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. 	
<ul style="list-style-type: none"> If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$ 	

3.3.4 Test Setup

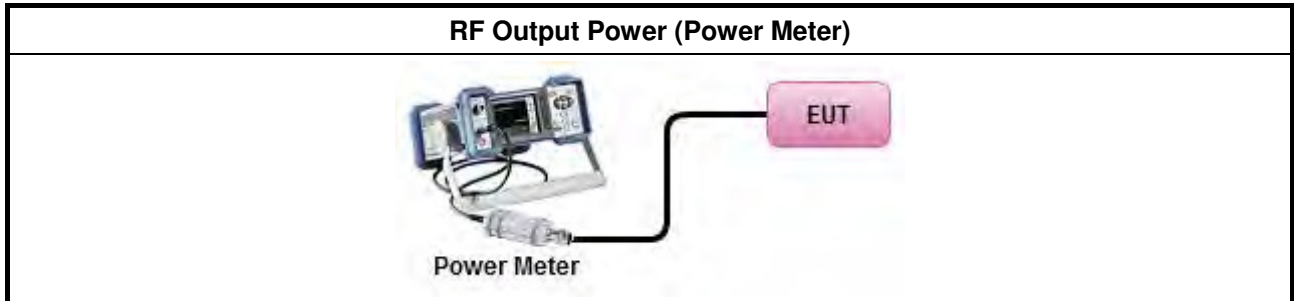

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

3.4 Peak Power Spectral Density

3.4.1 Peak Power Spectral Density Limit

Peak Power Spectral Density Limit	
UNII Devices	
<input checked="" type="checkbox"/> For the 5.15-5.25 GHz band:	
	<ul style="list-style-type: none"> ▪ Outdoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$. ▪ Indoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$. ▪ Point-to-point AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 23$ dBi, then $P_{Out} = 17 - (G_{TX} - 23)$. ▪ Mobile or Portable Client: the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
<input type="checkbox"/> For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
<input type="checkbox"/> For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
<input checked="" type="checkbox"/> For the 5.725-5.85 GHz band:	
	<ul style="list-style-type: none"> ▪ Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$. ▪ Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
LE-LAN Devices	
<input type="checkbox"/> For the 5.15-5.25 GHz band, the peak power spectral density (PPSD) ≤ 4 dBm/MHz and the e.i.r.p. peak power spectral density (PPSD) ≤ 10 dBm/MHz.	
<input type="checkbox"/> For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz and the e.i.r.p. peak power spectral density (PPSD) ≤ 17 dBm/MHz.	
	<ul style="list-style-type: none"> ▪ e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. at different elevations, where θ is the angle above the local horizontal plane (of the Earth) as shown below: -13 dBW/MHz for $0^\circ \leq \theta < 8^\circ$; -13 - 0.716 ($\theta-8$) dBW/MHz for $8^\circ \leq \theta < 40^\circ$ -35.9 - 1.22 ($\theta-40$) dBW/MHz for $40^\circ \leq \theta \leq 45^\circ$; -42 dBW/MHz for $\theta > 45^\circ$
<input type="checkbox"/> For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz and the e.i.r.p. peak power spectral density (PPSD) ≤ 17 dBm/MHz.	
<input type="checkbox"/> For the 5.725-5.85 GHz band:	
	<ul style="list-style-type: none"> ▪ Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$. ▪ Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
<p>PPSD = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz</p> <p>G_{TX} = the maximum transmitting antenna directional gain in dBi.</p>	


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> ▪ Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options: 	
	<input type="checkbox"/> Refer as FCC KDB 789033, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
[duty cycle ≥ 98% or external video / power trigger]	
	<input checked="" type="checkbox"/> Refer as FCC KDB 789033, clause E Method SA-1 (spectral trace averaging).
	<input type="checkbox"/> Refer as FCC KDB 789033, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
	<input checked="" type="checkbox"/> Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).
	<input type="checkbox"/> Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
<ul style="list-style-type: none"> ▪ For conducted measurement. 	
<ul style="list-style-type: none"> ▪ If the EUT supports multiple transmit chains using options given below: 	
	<input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
	<input type="checkbox"/> Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
	<input type="checkbox"/> Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
<ul style="list-style-type: none"> ▪ If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$ 	

3.4.4 Test Setup

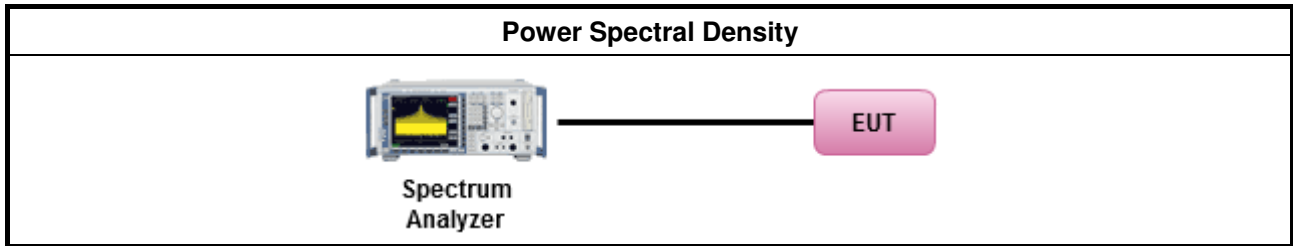

3.4.5 Test Result of Peak Power Spectral Density

Refer as Appendix D



3.5 Unwanted Emissions

3.5.1 Transmitter Radiated Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.85 GHz	all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).




3.5.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method																	
	<ul style="list-style-type: none"> ▪ Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements). 																
	<ul style="list-style-type: none"> ▪ The average emission levels shall be measured in [duty cycle \geq 98 or duty factor]. 																
	<ul style="list-style-type: none"> ▪ For the transmitter unwanted emissions shall be measured using following options below: <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 5%;"></td> <td> <ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033, clause H)2) for unwanted emissions into non-restricted bands. </td> </tr> <tr> <td></td> <td> <ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033, clause H)1) for unwanted emissions into restricted bands. <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 5%;"></td> <td> <input type="checkbox"/> Refer as FCC KDB 789033, H)6) Method AD (Trace Averaging). </td> </tr> <tr> <td></td> <td> <input checked="" type="checkbox"/> Refer as FCC KDB 789033, H)6) Method VB (Reduced VBW). </td> </tr> <tr> <td></td> <td> <input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW \geq 1/T, where T is pulse time. </td> </tr> <tr> <td></td> <td> <input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions. </td> </tr> <tr> <td></td> <td> <input checked="" type="checkbox"/> Refer as FCC KDB 789033, clause H)5) measurement procedure peak limit. </td> </tr> <tr> <td></td> <td> <input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit. </td> </tr> </table> </td></tr></table> 		<ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033, clause H)2) for unwanted emissions into non-restricted bands. 		<ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033, clause H)1) for unwanted emissions into restricted bands. <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 5%;"></td> <td> <input type="checkbox"/> Refer as FCC KDB 789033, H)6) Method AD (Trace Averaging). </td> </tr> <tr> <td></td> <td> <input checked="" type="checkbox"/> Refer as FCC KDB 789033, H)6) Method VB (Reduced VBW). </td> </tr> <tr> <td></td> <td> <input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW \geq 1/T, where T is pulse time. </td> </tr> <tr> <td></td> <td> <input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions. </td> </tr> <tr> <td></td> <td> <input checked="" type="checkbox"/> Refer as FCC KDB 789033, clause H)5) measurement procedure peak limit. </td> </tr> <tr> <td></td> <td> <input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit. </td> </tr> </table> 		<input type="checkbox"/> Refer as FCC KDB 789033, H)6) Method AD (Trace Averaging).		<input checked="" type="checkbox"/> Refer as FCC KDB 789033, H)6) Method VB (Reduced VBW).		<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW \geq 1/T, where T is pulse time.		<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.		<input checked="" type="checkbox"/> Refer as FCC KDB 789033, clause H)5) measurement procedure peak limit.		<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033, clause H)2) for unwanted emissions into non-restricted bands. 																
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033, clause H)1) for unwanted emissions into restricted bands. <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 5%;"></td> <td> <input type="checkbox"/> Refer as FCC KDB 789033, H)6) Method AD (Trace Averaging). </td> </tr> <tr> <td></td> <td> <input checked="" type="checkbox"/> Refer as FCC KDB 789033, H)6) Method VB (Reduced VBW). </td> </tr> <tr> <td></td> <td> <input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW \geq 1/T, where T is pulse time. </td> </tr> <tr> <td></td> <td> <input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions. </td> </tr> <tr> <td></td> <td> <input checked="" type="checkbox"/> Refer as FCC KDB 789033, clause H)5) measurement procedure peak limit. </td> </tr> <tr> <td></td> <td> <input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit. </td> </tr> </table> 		<input type="checkbox"/> Refer as FCC KDB 789033, H)6) Method AD (Trace Averaging).		<input checked="" type="checkbox"/> Refer as FCC KDB 789033, H)6) Method VB (Reduced VBW).		<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW \geq 1/T, where T is pulse time.		<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.		<input checked="" type="checkbox"/> Refer as FCC KDB 789033, clause H)5) measurement procedure peak limit.		<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.				
	<input type="checkbox"/> Refer as FCC KDB 789033, H)6) Method AD (Trace Averaging).																
	<input checked="" type="checkbox"/> Refer as FCC KDB 789033, H)6) Method VB (Reduced VBW).																
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW \geq 1/T, where T is pulse time.																
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.																
	<input checked="" type="checkbox"/> Refer as FCC KDB 789033, clause H)5) measurement procedure peak limit.																
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.																
	<ul style="list-style-type: none"> ▪ For radiated measurement. <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 5%;"></td> <td> <ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m. </td> </tr> <tr> <td></td> <td> <ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m. </td> </tr> <tr> <td></td> <td> <ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. </td> </tr> </table> 		<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m. 		<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m. 		<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. 										
	<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m. 																
	<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m. 																
	<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. 																
	<ul style="list-style-type: none"> ▪ The any unwanted emissions level shall not exceed the fundamental emission level. 																
	<ul style="list-style-type: none"> ▪ All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported. 																

3.5.4 Test Setup

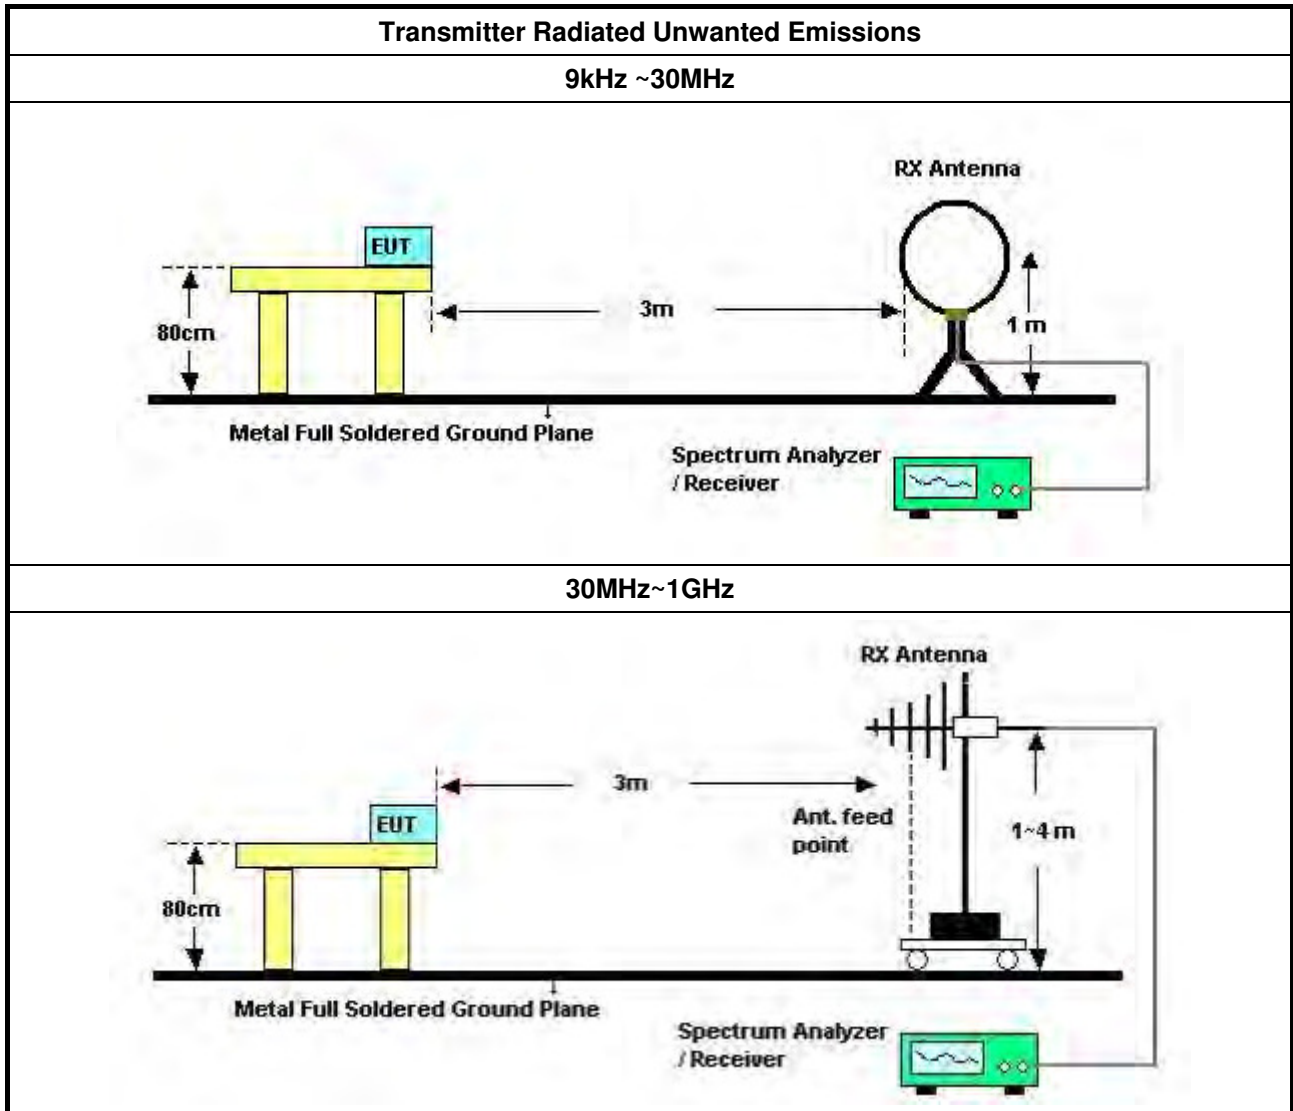

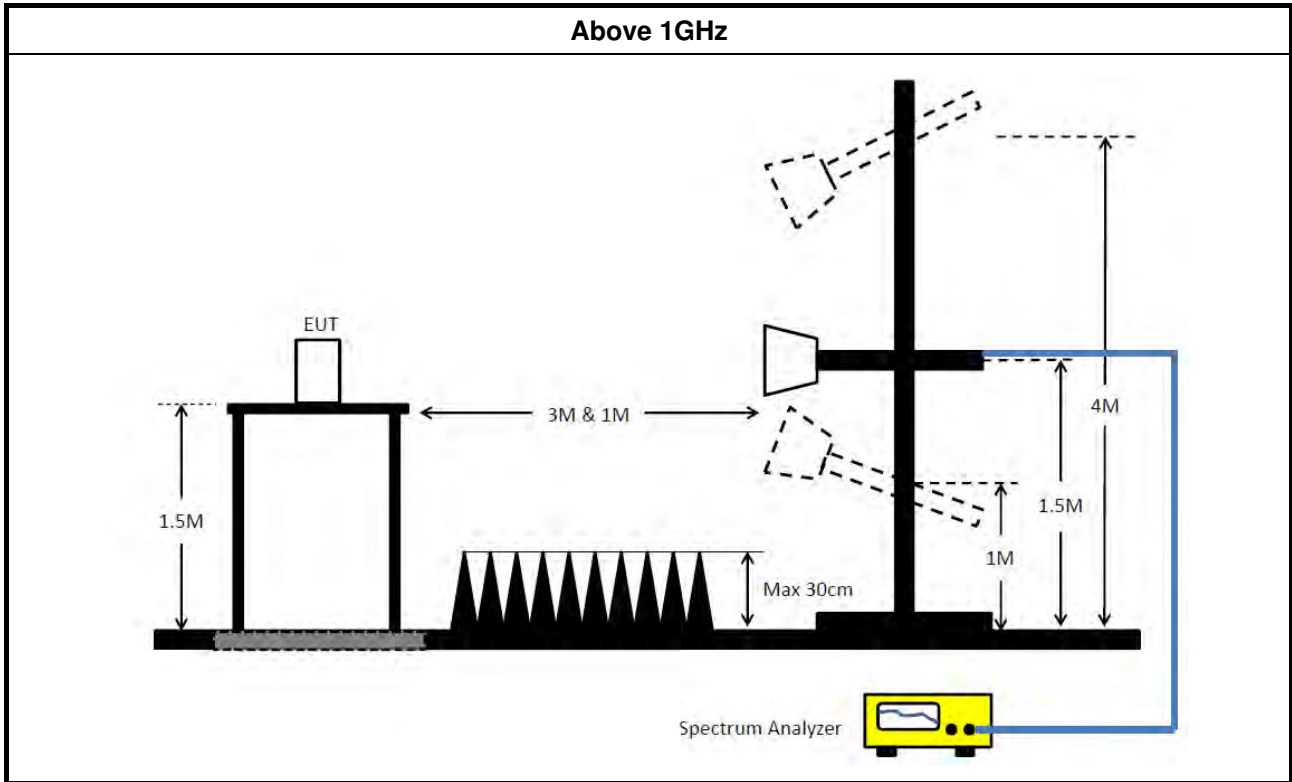



3.5.5 Transmitter Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.5.6 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E

3.6 Frequency Stability

3.6.1 Frequency Stability Limit

Frequency Stability Limit
UNII Devices
<ul style="list-style-type: none"> In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
LE-LAN Devices
<ul style="list-style-type: none"> N/A
IEEE Std. 802.11
<ul style="list-style-type: none"> The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band and ± 25 ppm maximum for the 2.4 GHz band.


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method
<ul style="list-style-type: none"> Refer as ANSI C63.10, clause 6.8 for frequency stability tests
<ul style="list-style-type: none"> Frequency stability with respect to ambient temperature
<ul style="list-style-type: none"> Frequency stability when varying supply voltage
<ul style="list-style-type: none"> Extreme temperature is 0°C~40°C.

3.6.4 Test Setup

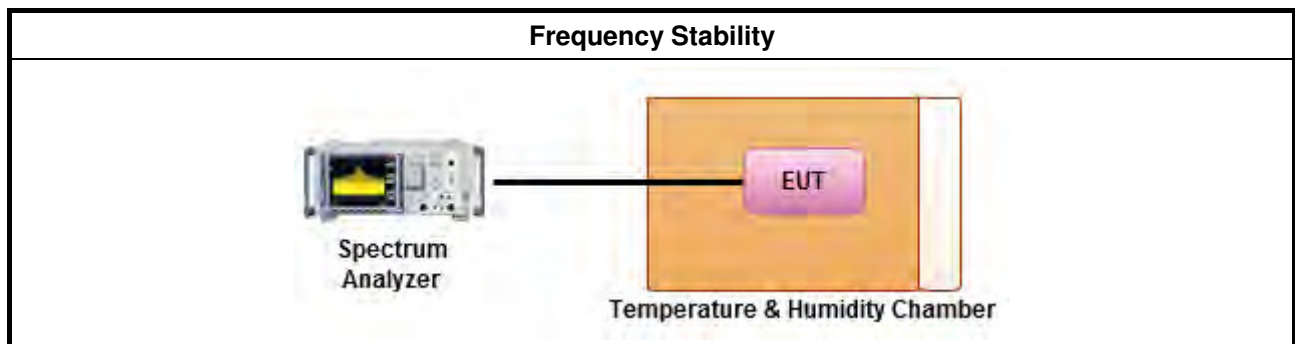



3.6.5 Test Result of Frequency Stability

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 27, 2016	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 08, 2015	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 23, 2015	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 24, 2016	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA with 6dB Attenuator	TESEQ & EMC	CBL6112D & N-6-06	37880 & AT-N0609	20MHz ~ 2GHz	Aug. 30, 2016	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2016*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Nov. 10, 2016	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 25, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Mar. 15, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 18, 2016	Radiation (03CH01-CB)
Pre-Amplifier	MITEQ	TTA1840-35-HG	1864479	18GHz ~ 40GHz	Jun. 28, 2016	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP-40	100019	9kHz ~ 40GHz	Apr. 21, 2016	Radiation (03CH01-CB)
EMI Test	R&S	ESCS	100355	9kHz ~ 2.75GHz	May 16, 2016	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-16+17	N/A	30 MHz ~ 1 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16+17	N/A	1 GHz ~ 18 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#1	N/A	18GHz ~ 40 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#2	N/A	18GHz ~ 40 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-10-7	N/A	N/A	Radiation (03CH01-CB)





Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum analyzer	R&S	FSV40	101027	9kHz~40GHz	Jul. 26, 2016	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 03, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz –26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz –26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz –26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz –26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	1126203	300MHz~40GHz	Sep. 09, 2016	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

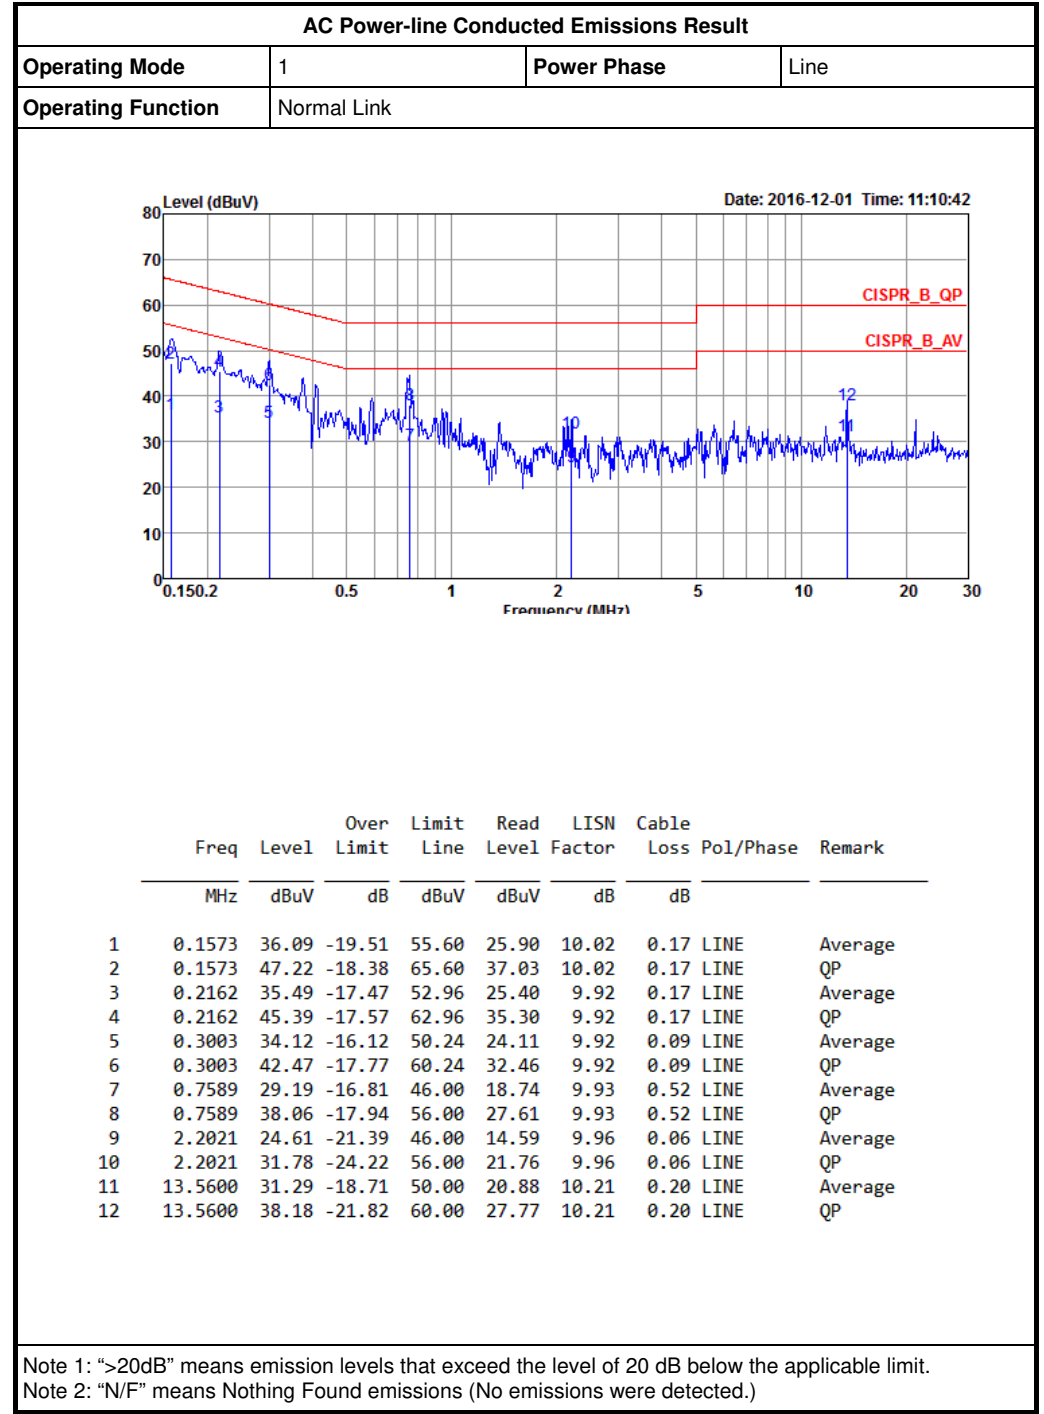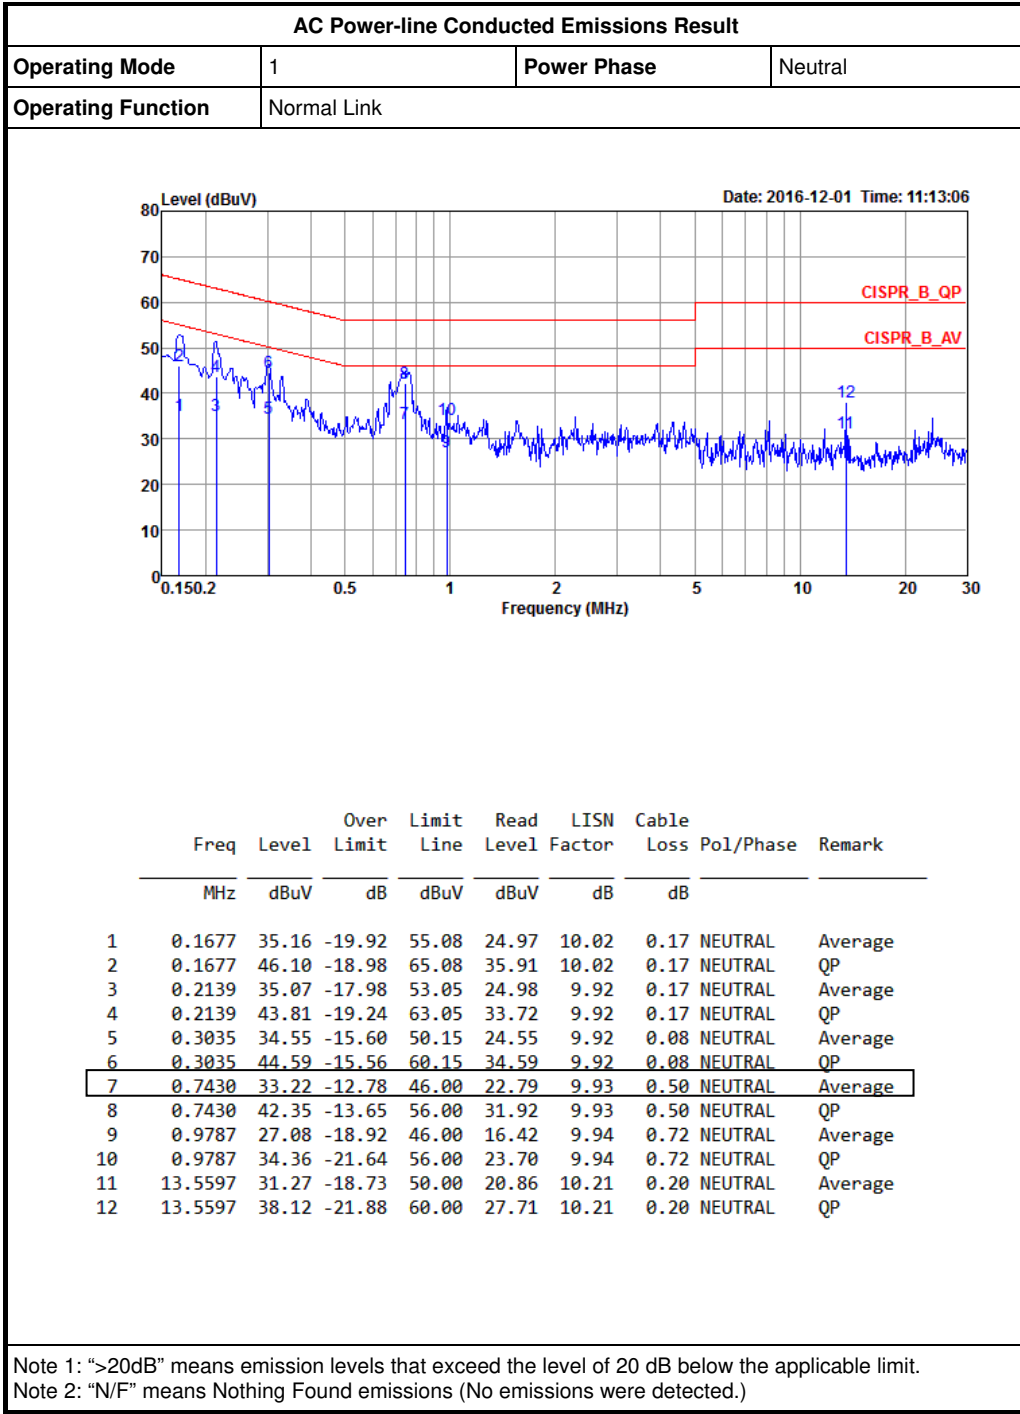















Summary













Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.2G;11a;Nss1;Ntx2	28.525M	16.6M	16M6D1D	19M	16.45M
5.8G;11a;Nss1;Ntx2	16.35M	16.575M	16M6D1D	16.3M	16.5M
5.2G;VHT20;Nss1,(M0);Ntx2	29.75M	17.775M	17M8D1D	20.35M	17.65M
5.8G;VHT20;Nss1,(M0);Ntx2	17.625M	17.75M	17M7D1D	17.55M	17.675M
5.2G;VHT40;Nss1,(M0);Ntx2	41.2M	36.45M	36M4D1D	40.6M	36.25M
5.8G;VHT40;Nss1,(M0);Ntx2	36.35M	36.55M	36M5D1D	32.3M	36.3M
5.2G;VHT80;Nss1,(M0);Ntx2	86.3M	75.9M	75M9D1D	83.9M	75.9M
5.8G;VHT80;Nss1,(M0);Ntx2	76.4M	76M	76M0D1D	76M	75.7M
5.2G;VHT20,BF;Nss1,(M0);Ntx2	20.65M	17.725M	17M7D1D	20.2M	17.7M
5.8G;VHT20,BF;Nss1,(M0);Ntx2	17.6M	17.725M	17M7D1D	17.55M	17.675M
5.2G;VHT40,BF;Nss1,(M0);Ntx2	48.55M	36.35M	36M3D1D	40.25M	36.15M
5.8G;VHT40,BF;Nss1,(M0);Ntx2	35.1M	36.45M	36M4D1D	34.3M	36.25M
5.2G;VHT80,BF;Nss1,(M0);Ntx2	83.2M	75.9M	75M9D1D	82.8M	75.6M
5.8G;VHT80,BF;Nss1,(M0);Ntx2	76.3M	75.7M	75M7D1D	75.7M	75.7M



Result







Mode	Result	Limit (Hz)	P1-N dB (Hz)	P1-OBW (Hz)	P2-N dB (Hz)	P2-OBW (Hz)
5.2G;11a;Nss1;Ntx2;5180	Pass	Inf	19.325M	16.475M	19M	16.45M
5.2G;11a;Nss1;Ntx2;5200	Pass	Inf	20.75M	16.5M	21.525M	16.55M
5.2G;11a;Nss1;Ntx2;5240	Pass	Inf	24.55M	16.525M	28.525M	16.6M
5.8G;11a;Nss1;Ntx2;5745	Pass	500k	16.35M	16.55M	16.35M	16.525M
5.8G;11a;Nss1;Ntx2;5785	Pass	500k	16.3M	16.525M	16.325M	16.575M
5.8G;11a;Nss1;Ntx2;5825	Pass	500k	16.35M	16.5M	16.325M	16.5M
5.2G;VHT20;Nss1,(M0);Ntx2;5180	Pass	Inf	20.425M	17.65M	20.35M	17.65M
5.2G;VHT20;Nss1,(M0);Ntx2;5200	Pass	Inf	24.05M	17.75M	29.75M	17.775M
5.2G;VHT20;Nss1,(M0);Ntx2;5240	Pass	Inf	27.125M	17.725M	29.325M	17.775M
5.8G;VHT20;Nss1,(M0);Ntx2;5745	Pass	500k	17.575M	17.675M	17.625M	17.7M
5.8G;VHT20;Nss1,(M0);Ntx2;5785	Pass	500k	17.55M	17.725M	17.6M	17.725M
5.8G;VHT20;Nss1,(M0);Ntx2;5825	Pass	500k	17.55M	17.725M	17.6M	17.75M
5.2G;VHT40;Nss1,(M0);Ntx2;5190	Pass	Inf	40.6M	36.25M	40.7M	36.3M
5.2G;VHT40;Nss1,(M0);Ntx2;5230	Pass	Inf	40.85M	36.45M	41.2M	36.4M
5.8G;VHT40;Nss1,(M0);Ntx2;5755	Pass	500k	36.35M	36.3M	33.2M	36.35M
5.8G;VHT40;Nss1,(M0);Ntx2;5795	Pass	500k	32.3M	36.35M	35.5M	36.55M
5.2G;VHT80;Nss1,(M0);Ntx2;5210	Pass	Inf	86.3M	75.9M	83.9M	75.9M
5.8G;VHT80;Nss1,(M0);Ntx2;5775	Pass	500k	76M	75.7M	76.4M	76M
5.2G;VHT20,BF;Nss1,(M0);Ntx2;5180	Pass	Inf	20.275M	17.7M	20.2M	17.7M
5.2G;VHT20,BF;Nss1,(M0);Ntx2;5200	Pass	Inf	20.65M	17.725M	20.4M	17.725M
5.2G;VHT20,BF;Nss1,(M0);Ntx2;5240	Pass	Inf	20.55M	17.7M	20.35M	17.725M
5.8G;VHT20,BF;Nss1,(M0);Ntx2;5745	Pass	500k	17.575M	17.675M	17.575M	17.675M
5.8G;VHT20,BF;Nss1,(M0);Ntx2;5785	Pass	500k	17.575M	17.725M	17.55M	17.725M
5.8G;VHT20,BF;Nss1,(M0);Ntx2;5825	Pass	500k	17.55M	17.7M	17.6M	17.675M
5.2G;VHT40,BF;Nss1,(M0);Ntx2;5190	Pass	Inf	40.8M	36.2M	40.25M	36.15M
5.2G;VHT40,BF;Nss1,(M0);Ntx2;5230	Pass	Inf	48.55M	36.35M	41.95M	36.3M
5.8G;VHT40,BF;Nss1,(M0);Ntx2;5755	Pass	500k	35.05M	36.3M	35.1M	36.3M
5.8G;VHT40,BF;Nss1,(M0);Ntx2;5795	Pass	500k	34.3M	36.25M	35M	36.45M
5.2G;VHT80,BF;Nss1,(M0);Ntx2;5210	Pass	Inf	83.2M	75.9M	82.8M	75.6M
5.8G;VHT80,BF;Nss1,(M0);Ntx2;5775	Pass	500k	75.7M	75.7M	76.3M	75.7M

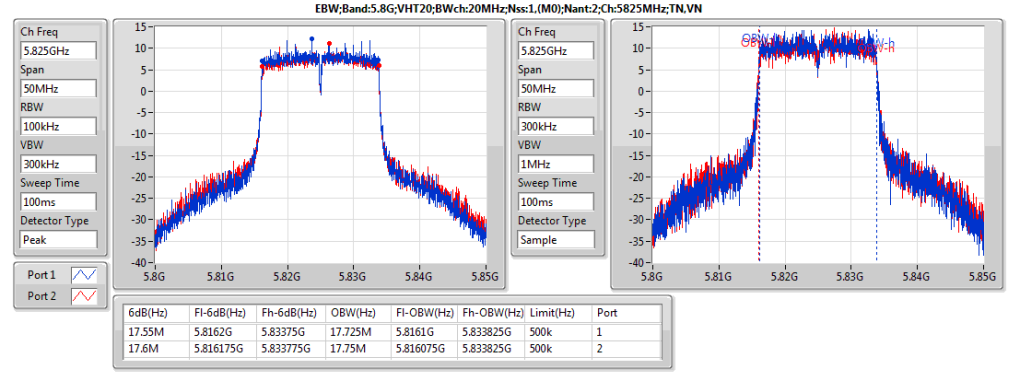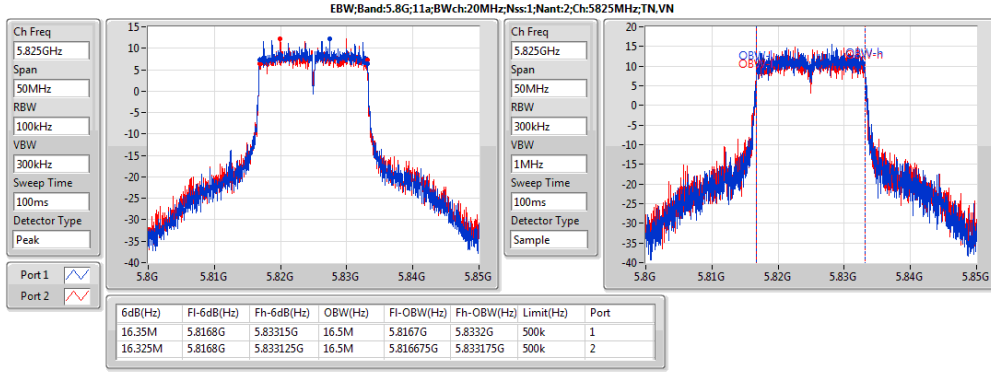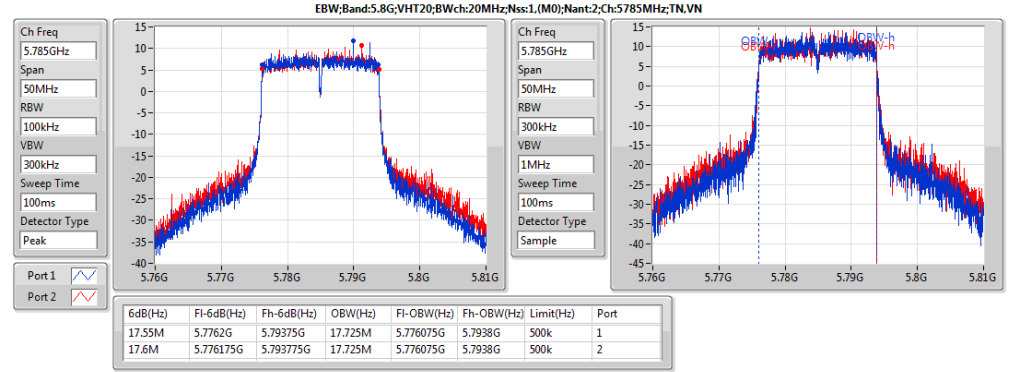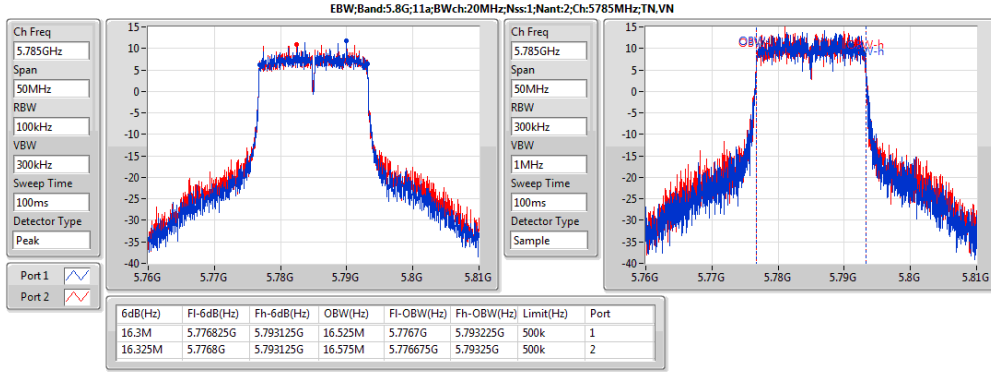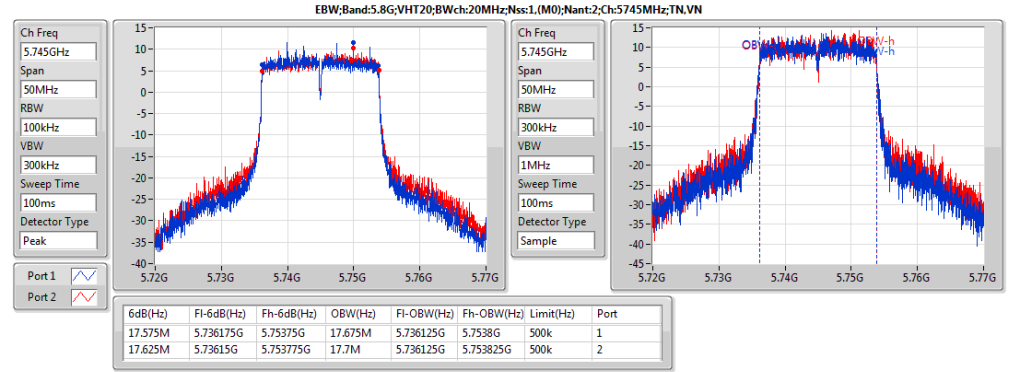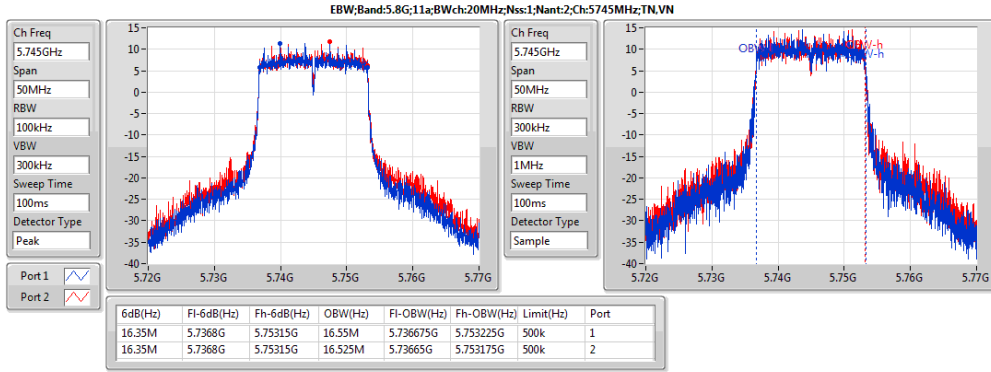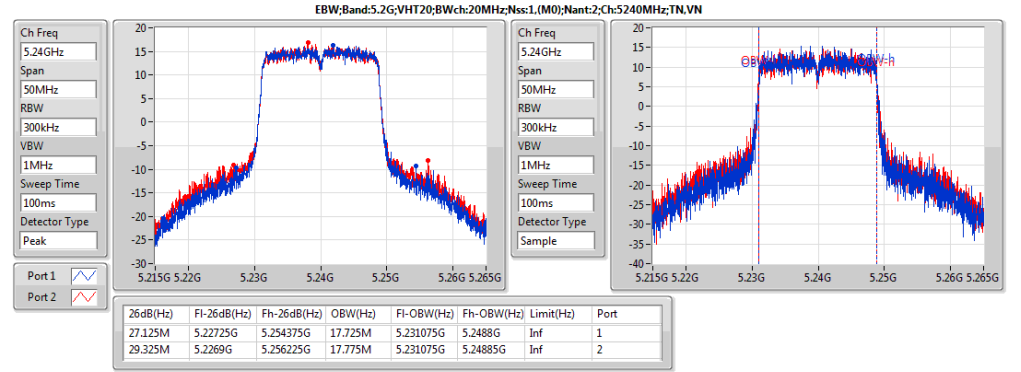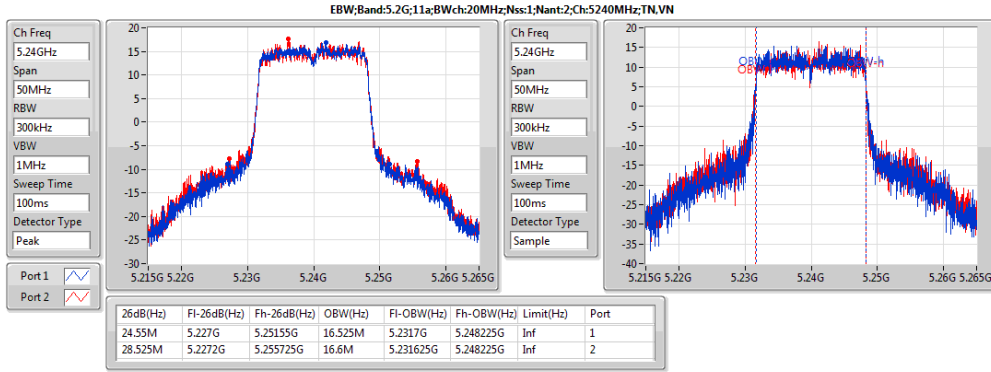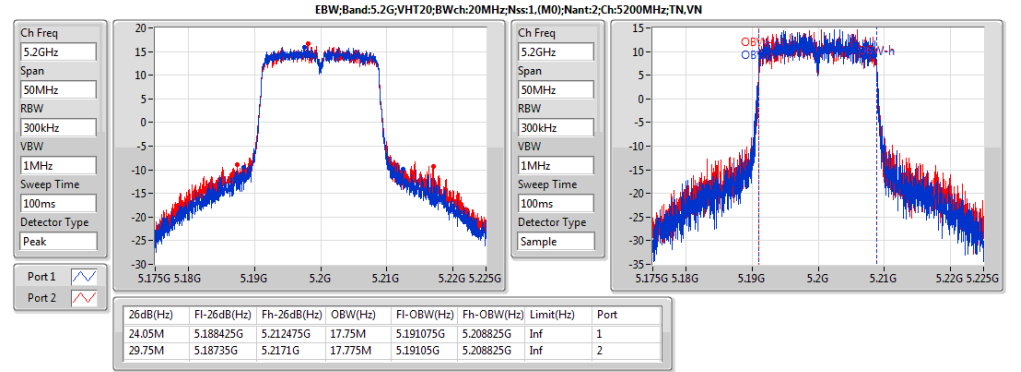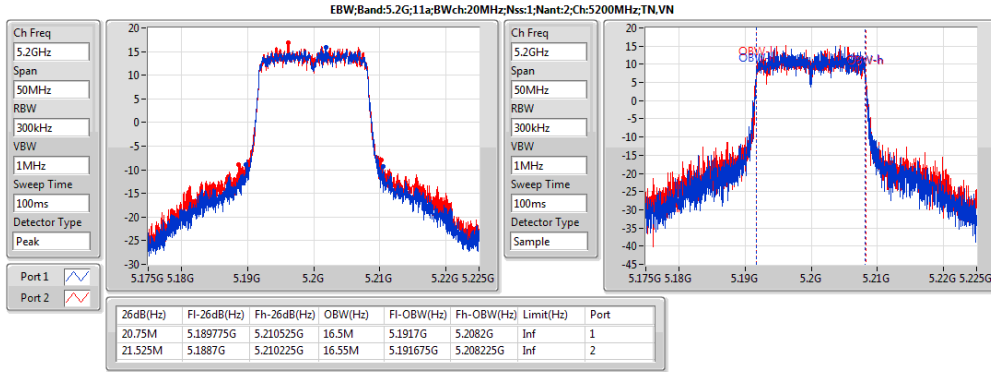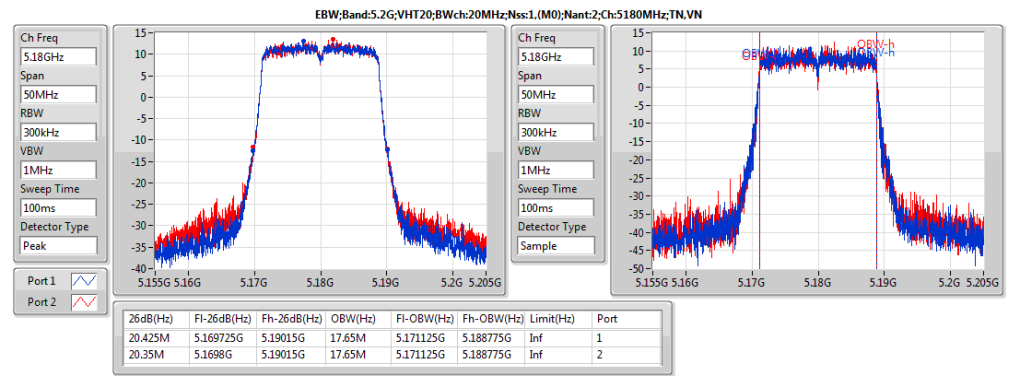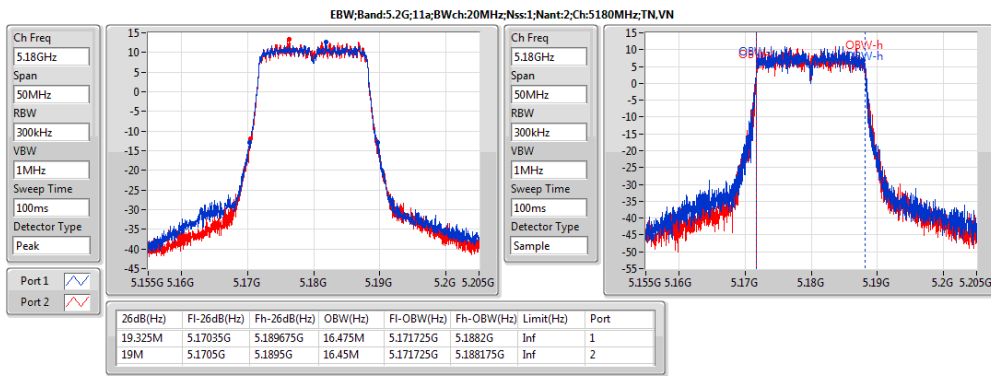

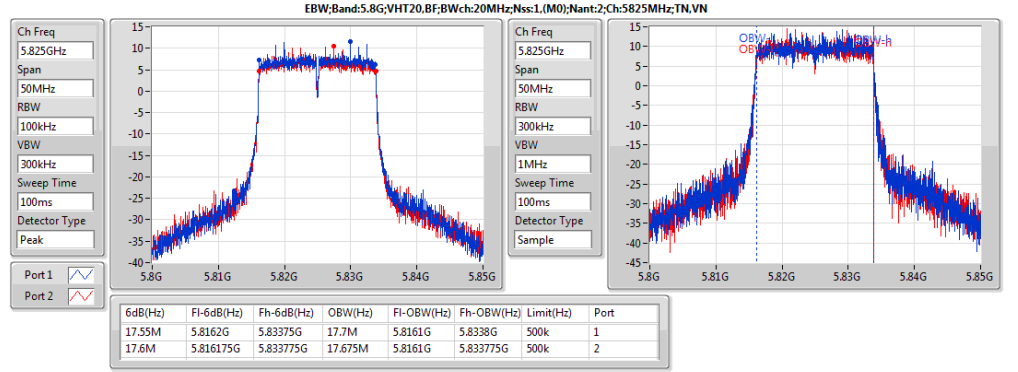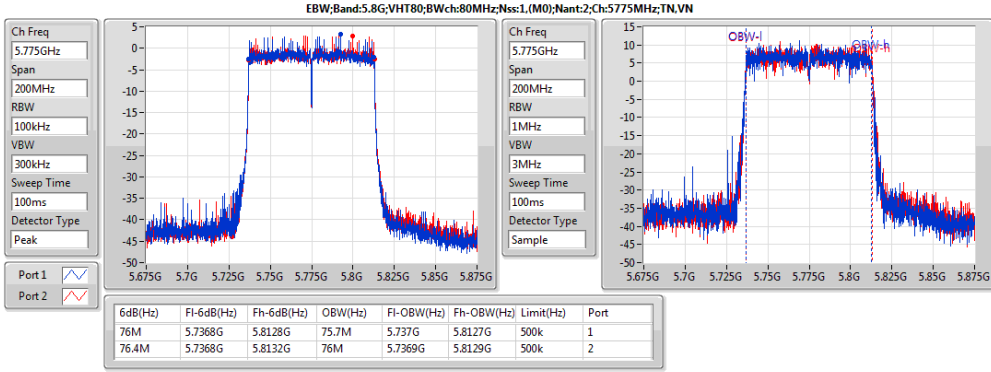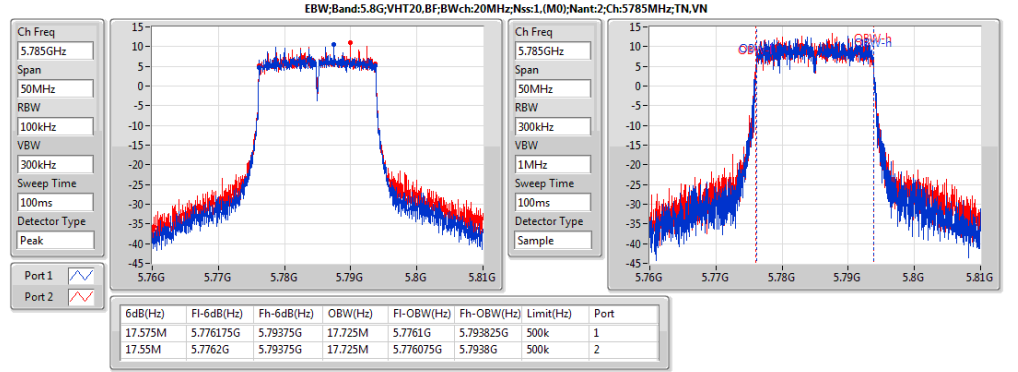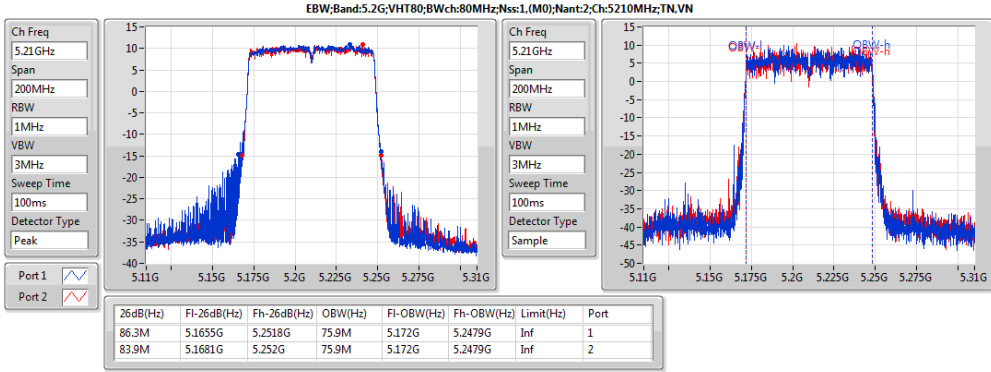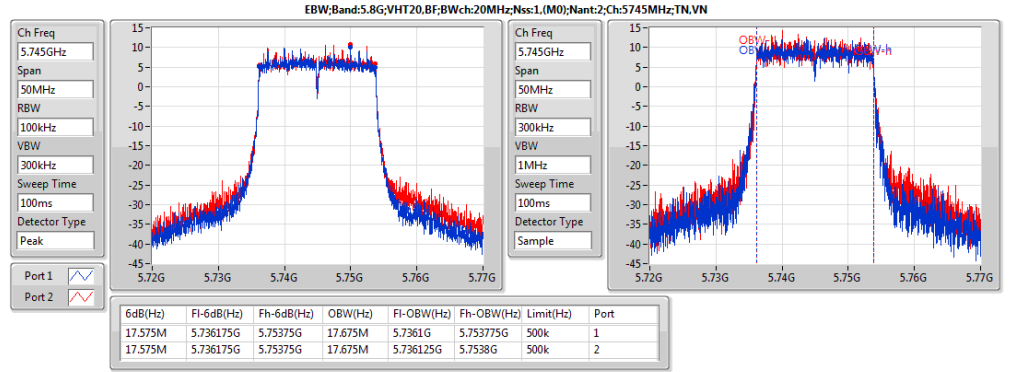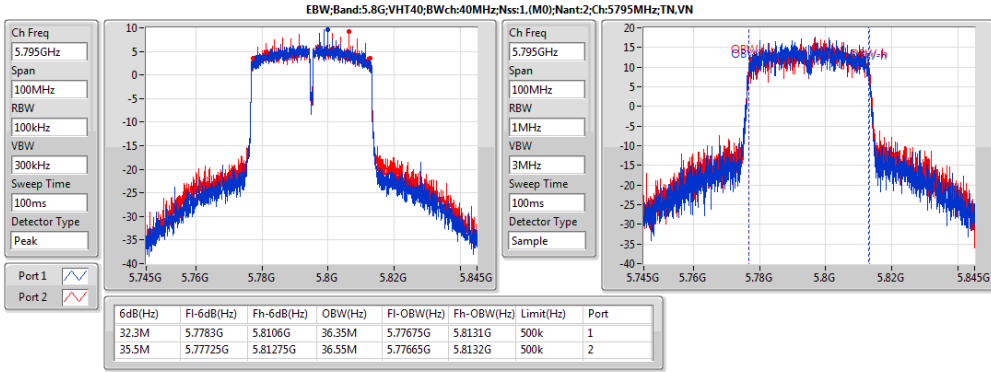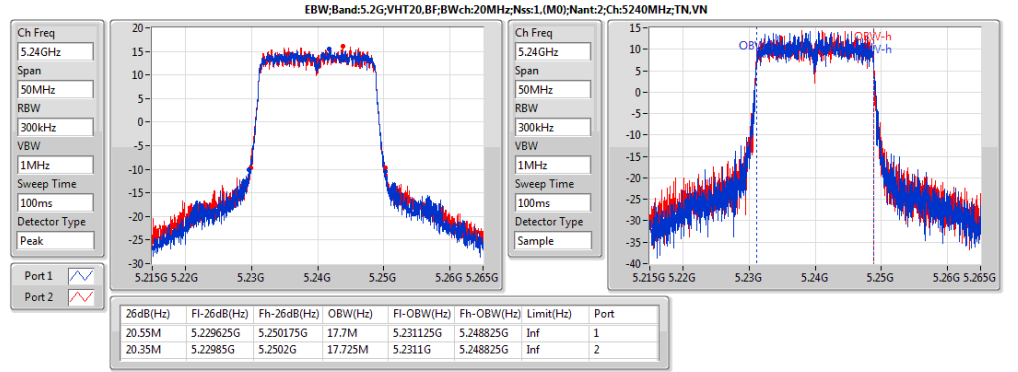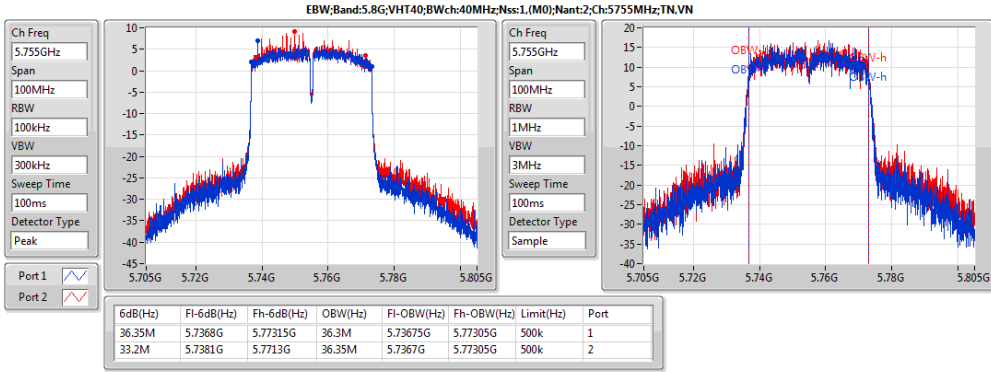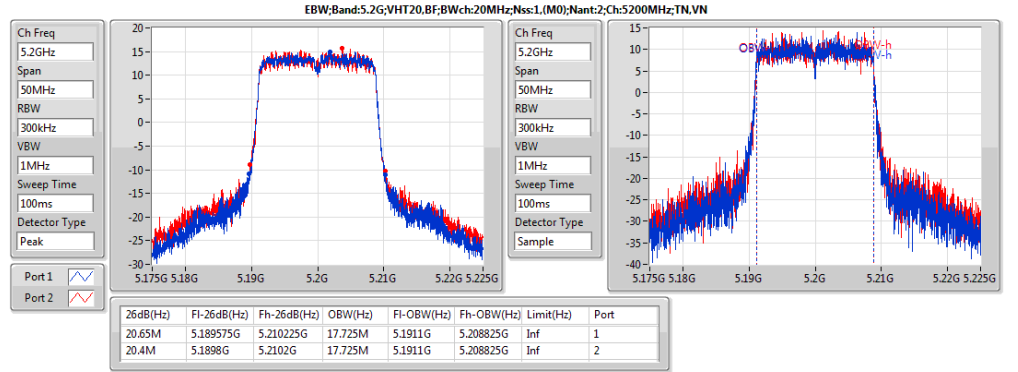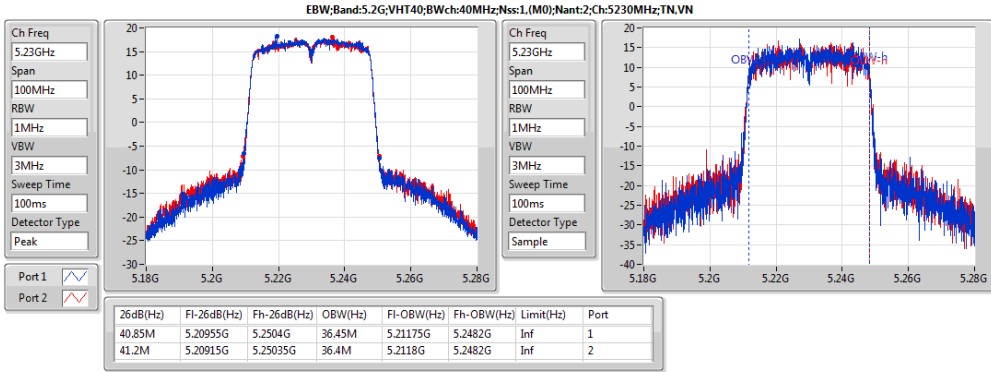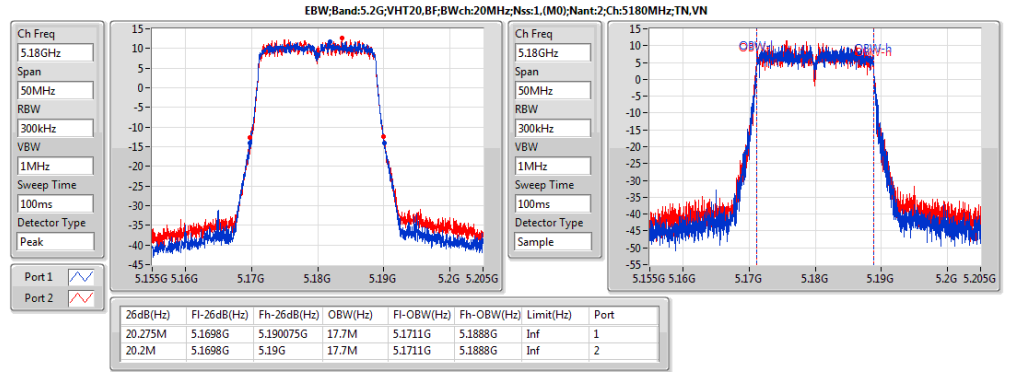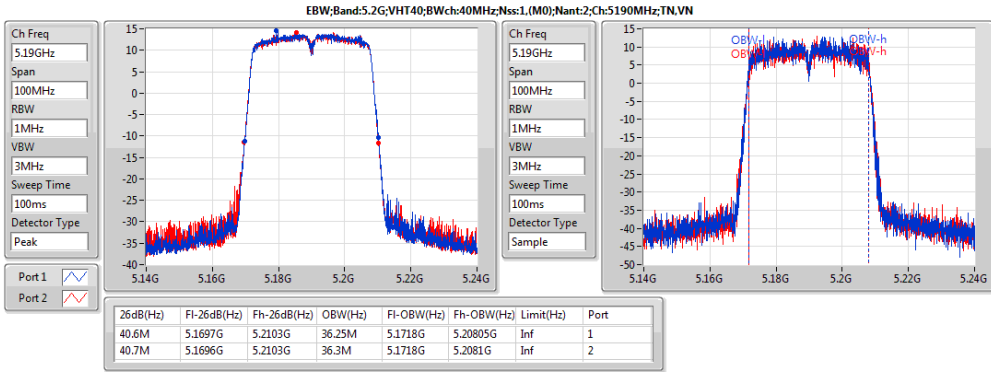



EBW Result

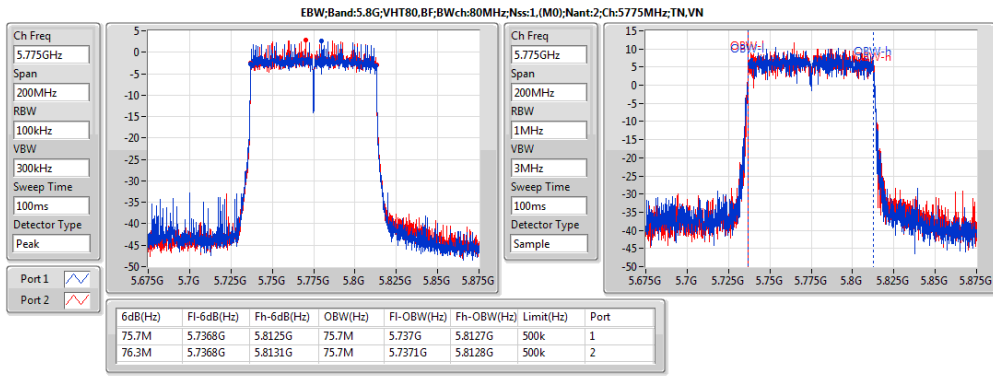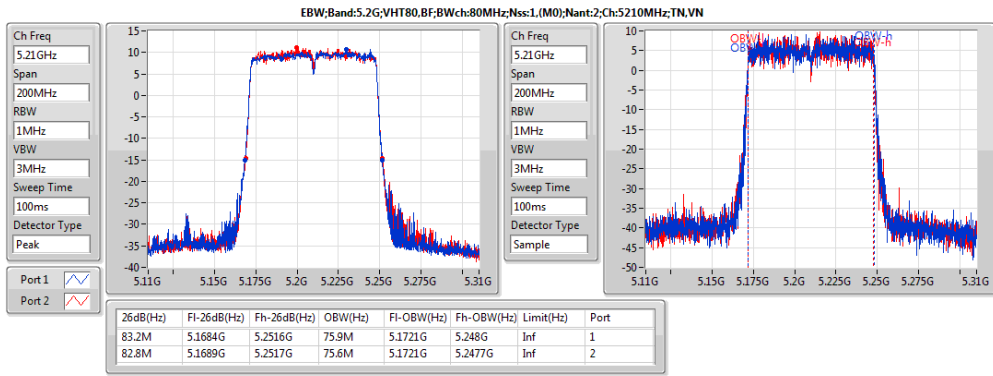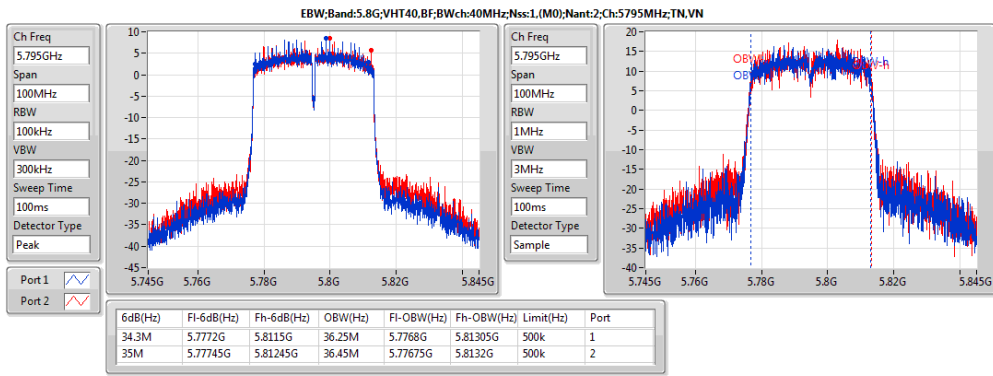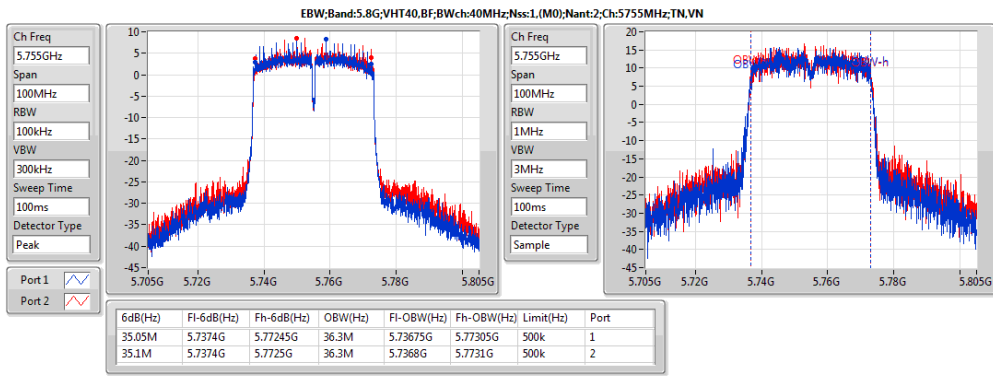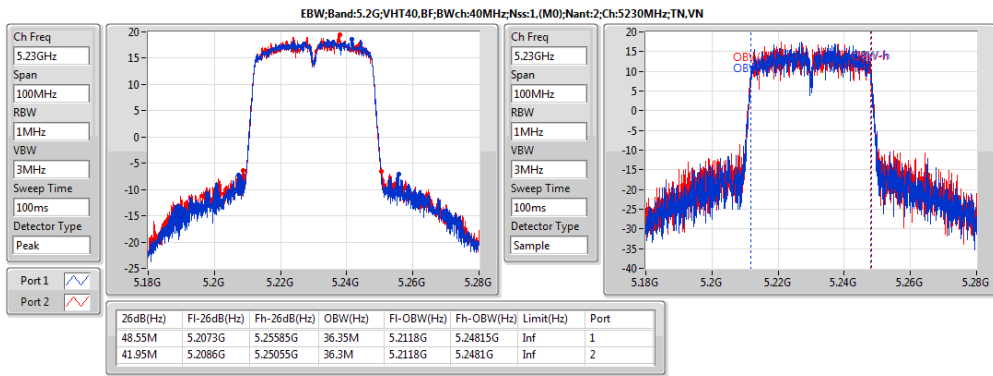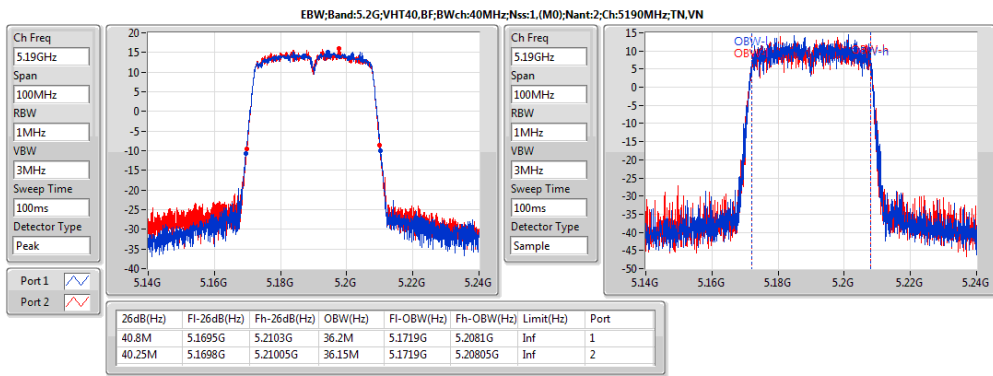



Summary

Mode	Sum (dBm)	Sum (W)	EIRP (dBm)	EIRP (W)
5.2G;11a;Nss1;Ntx2	25.88	0.38726	26.52	0.44875
5.8G;11a;Nss1;Ntx2	25.89	0.38815	26.77	0.47534
5.2G;VHT20;Nss1,(M0);Ntx2	25.98	0.39628	26.62	0.4592
5.8G;VHT20;Nss1,(M0);Ntx2	25.83	0.38282	26.71	0.46881
5.2G;VHT40;Nss1,(M0);Ntx2	24.98	0.31477	25.62	0.36475
5.8G;VHT40;Nss1,(M0);Ntx2	25.97	0.39537	26.85	0.48417
5.2G;VHT80;Nss1,(M0);Ntx2	21.38	0.1374	22.02	0.15922
5.8G;VHT80;Nss1,(M0);Ntx2	23.82	0.24099	24.70	0.29512
5.2G;VHT20,BF;Nss1,(M0);Ntx2	25.56	0.35975	29.21	0.83368
5.8G;VHT20,BF;Nss1,(M0);Ntx2	25.82	0.38194	29.71	0.93541
5.2G;VHT40,BF;Nss1,(M0);Ntx2	24.83	0.30409	28.48	0.70469
5.8G;VHT40,BF;Nss1,(M0);Ntx2	26.00	0.39811	29.89	0.97499
5.2G;VHT80,BF;Nss1,(M0);Ntx2	20.72	0.11803	24.37	0.27353
5.8G;VHT80,BF;Nss1,(M0);Ntx2	22.64	0.18365	26.53	0.44978



Result

Mode	Result	DG (dBi)	Sum (dBm)	Sum Lim. (dBm)	EIRP (dBm)	EIRP Lim. (dBm)	P1 (dBm)	P2 (dBm)
5.2G;11a;Nss1;Ntx2;5180	Pass	0.64	22.95	30.00	23.59	36.00	20.00	19.87
5.2G;11a;Nss1;Ntx2;5200	Pass	0.64	25.88	30.00	26.52	36.00	22.75	22.98
5.2G;11a;Nss1;Ntx2;5240	Pass	0.64	25.86	30.00	26.50	36.00	22.79	22.91
5.8G;11a;Nss1;Ntx2;5745	Pass	0.88	25.82	30.00	26.70	36.00	22.72	22.89
5.8G;11a;Nss1;Ntx2;5785	Pass	0.88	25.83	30.00	26.71	36.00	22.66	22.97
5.8G;11a;Nss1;Ntx2;5825	Pass	0.88	25.89	30.00	26.77	36.00	22.86	22.89
5.2G;VHT20;Nss1,(M0);Ntx2;5180	Pass	0.64	23.58	30.00	24.22	36.00	20.51	20.63
5.2G;VHT20;Nss1,(M0);Ntx2;5200	Pass	0.64	25.85	30.00	26.49	36.00	22.71	22.96
5.2G;VHT20;Nss1,(M0);Ntx2;5240	Pass	0.64	25.98	30.00	26.62	36.00	22.95	22.98
5.8G;VHT20;Nss1,(M0);Ntx2;5745	Pass	0.88	25.75	30.00	26.63	36.00	22.61	22.87
5.8G;VHT20;Nss1,(M0);Ntx2;5785	Pass	0.88	25.80	30.00	26.68	36.00	22.63	22.94
5.8G;VHT20;Nss1,(M0);Ntx2;5825	Pass	0.88	25.83	30.00	26.71	36.00	22.79	22.85
5.2G;VHT40;Nss1,(M0);Ntx2;5190	Pass	0.64	21.12	30.00	21.76	36.00	18.03	18.18
5.2G;VHT40;Nss1,(M0);Ntx2;5230	Pass	0.64	24.98	30.00	25.62	36.00	21.96	21.98
5.8G;VHT40;Nss1,(M0);Ntx2;5755	Pass	0.88	25.94	30.00	26.82	36.00	22.89	22.97
5.8G;VHT40;Nss1,(M0);Ntx2;5795	Pass	0.88	25.97	30.00	26.85	36.00	22.94	22.98
5.2G;VHT80;Nss1,(M0);Ntx2;5210	Pass	0.64	21.38	30.00	22.02	36.00	18.24	18.49
5.8G;VHT80;Nss1,(M0);Ntx2;5775	Pass	0.88	23.82	30.00	24.70	36.00	20.64	20.97
5.2G;VHT20,BF;Nss1,(M0);Ntx2;5180	Pass	3.65	22.53	30.00	26.18	36.00	19.51	19.53
5.2G;VHT20,BF;Nss1,(M0);Ntx2;5200	Pass	3.65	25.56	30.00	29.21	36.00	22.52	22.57
5.2G;VHT20,BF;Nss1,(M0);Ntx2;5240	Pass	3.65	25.54	30.00	29.19	36.00	22.51	22.54
5.8G;VHT20,BF;Nss1,(M0);Ntx2;5745	Pass	3.89	25.67	30.00	29.56	36.00	22.54	22.78
5.8G;VHT20,BF;Nss1,(M0);Ntx2;5785	Pass	3.89	25.82	30.00	29.71	36.00	22.56	23.04
5.8G;VHT20,BF;Nss1,(M0);Ntx2;5825	Pass	3.89	25.56	30.00	29.45	36.00	22.52	22.58
5.2G;VHT40,BF;Nss1,(M0);Ntx2;5190	Pass	3.65	21.05	30.00	24.70	36.00	18.02	18.05
5.2G;VHT40,BF;Nss1,(M0);Ntx2;5230	Pass	3.65	24.83	30.00	28.48	36.00	21.76	21.87
5.8G;VHT40,BF;Nss1,(M0);Ntx2;5755	Pass	3.89	25.54	30.00	29.43	36.00	22.51	22.55
5.8G;VHT40,BF;Nss1,(M0);Ntx2;5795	Pass	3.89	26.00	30.00	29.89	36.00	22.93	23.05
5.2G;VHT80,BF;Nss1,(M0);Ntx2;5210	Pass	3.65	20.72	30.00	24.37	36.00	17.63	17.78
5.8G;VHT80,BF;Nss1,(M0);Ntx2;5775	Pass	3.89	22.64	30.00	26.53	36.00	19.59	19.67















Summary













Mode	PD (dBm/RBW)	EIRP.PD (dBm/RBW)
5.2G;11a;Nss1;Ntx2	12.86	16.51
5.8G;11a;Nss1;Ntx2	9.91	13.80
5.2G;VHT20;Nss1,(M0);Ntx2	12.67	16.32
5.8G;VHT20;Nss1,(M0);Ntx2	9.57	13.46
5.2G;VHT40;Nss1,(M0);Ntx2	9.32	12.97
5.8G;VHT40;Nss1,(M0);Ntx2	7.16	11.05
5.2G;VHT80;Nss1,(M0);Ntx2	1.97	5.62
5.8G;VHT80;Nss1,(M0);Ntx2	0.52	4.41
5.2G;VHT20,BF;Nss1,(M0);Ntx2	12.25	15.90
5.8G;VHT20,BF;Nss1,(M0);Ntx2	8.73	12.62
5.2G;VHT40,BF;Nss1,(M0);Ntx2	8.84	12.49
5.8G;VHT40,BF;Nss1,(M0);Ntx2	6.30	10.19
5.2G;VHT80,BF;Nss1,(M0);Ntx2	1.53	5.18
5.8G;VHT80,BF;Nss1,(M0);Ntx2	0.10	3.99











Result

Mode	Result	DG (dBi)	PD (dBm/RBW)	PD.Limit (dBm/RBW)	P1 (dBm/RBW)	P2 (dBm/RBW)
5.2G;11a;Nss1;Ntx2;5180	Pass	3.65	9.51	17.00	6.78	6.55
5.2G;11a;Nss1;Ntx2;5200	Pass	3.65	12.79	17.00	9.63	10.04
5.2G;11a;Nss1;Ntx2;5240	Pass	3.65	12.86	17.00	9.80	10.09
5.8G;11a;Nss1;Ntx2;5745	Pass	3.89	9.69	30.00	6.34	7.05
5.8G;11a;Nss1;Ntx2;5785	Pass	3.89	9.91	30.00	6.57	7.35
5.8G;11a;Nss1;Ntx2;5825	Pass	3.89	9.73	30.00	6.56	6.98
5.2G;VHT20;Nss1,(M0);Ntx2;5180	Pass	3.65	10.09	17.00	6.83	7.34
5.2G;VHT20;Nss1,(M0);Ntx2;5200	Pass	3.65	12.66	17.00	9.51	9.87
5.2G;VHT20;Nss1,(M0);Ntx2;5240	Pass	3.65	12.67	17.00	9.53	9.88
5.8G;VHT20;Nss1,(M0);Ntx2;5745	Pass	3.89	9.36	30.00	6.09	6.73
5.8G;VHT20;Nss1,(M0);Ntx2;5785	Pass	3.89	9.57	30.00	6.27	7.01
5.8G;VHT20;Nss1,(M0);Ntx2;5825	Pass	3.89	9.49	30.00	6.34	6.74
5.2G;VHT40;Nss1,(M0);Ntx2;5190	Pass	3.65	5.20	17.00	1.96	2.49
5.2G;VHT40;Nss1,(M0);Ntx2;5230	Pass	3.65	9.32	17.00	6.21	6.45
5.8G;VHT40;Nss1,(M0);Ntx2;5755	Pass	3.89	6.34	30.00	3.05	3.67
5.8G;VHT40;Nss1,(M0);Ntx2;5795	Pass	3.89	7.16	30.00	3.88	4.57
5.2G;VHT80;Nss1,(M0);Ntx2;5210	Pass	3.65	1.97	17.00	-1.15	-0.71
5.8G;VHT80;Nss1,(M0);Ntx2;5775	Pass	3.89	0.52	30.00	-2.75	-2.01
5.2G;VHT20,BF;Nss1,(M0);Ntx2;5180	Pass	3.65	9.26	17.00	6.11	6.56
5.2G;VHT20,BF;Nss1,(M0);Ntx2;5200	Pass	3.65	12.20	17.00	9.07	9.43
5.2G;VHT20,BF;Nss1,(M0);Ntx2;5240	Pass	3.65	12.25	17.00	9.06	9.44
5.8G;VHT20,BF;Nss1,(M0);Ntx2;5745	Pass	3.89	8.73	30.00	5.48	6.16
5.8G;VHT20,BF;Nss1,(M0);Ntx2;5785	Pass	3.89	8.67	30.00	5.65	5.94
5.8G;VHT20,BF;Nss1,(M0);Ntx2;5825	Pass	3.89	8.61	30.00	5.40	5.82
5.2G;VHT40,BF;Nss1,(M0);Ntx2;5190	Pass	3.65	5.20	17.00	1.85	2.52
5.2G;VHT40,BF;Nss1,(M0);Ntx2;5230	Pass	3.65	8.84	17.00	5.60	6.07
5.8G;VHT40,BF;Nss1,(M0);Ntx2;5755	Pass	3.89	5.86	30.00	2.60	3.23
5.8G;VHT40,BF;Nss1,(M0);Ntx2;5795	Pass	3.89	6.30	30.00	3.34	3.56
5.2G;VHT80,BF;Nss1,(M0);Ntx2;5210	Pass	3.65	1.53	17.00	-1.66	-1.21
5.8G;VHT80,BF;Nss1,(M0);Ntx2;5775	Pass	3.89	0.10	30.00	-3.08	-2.59

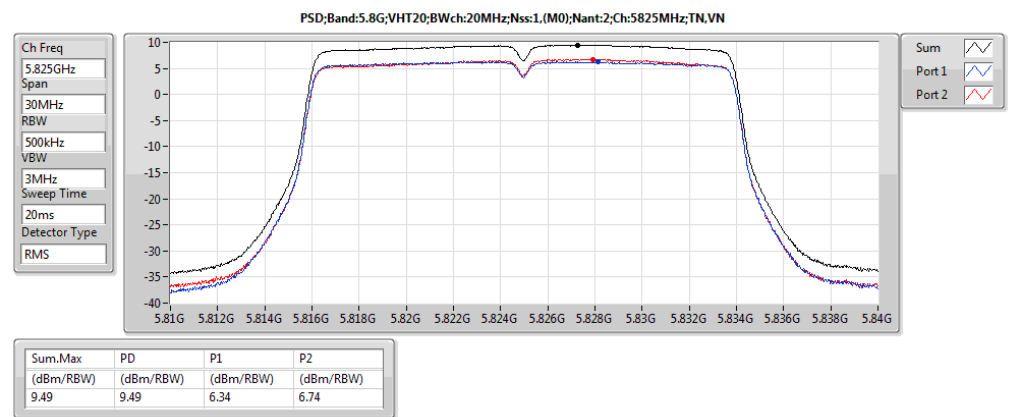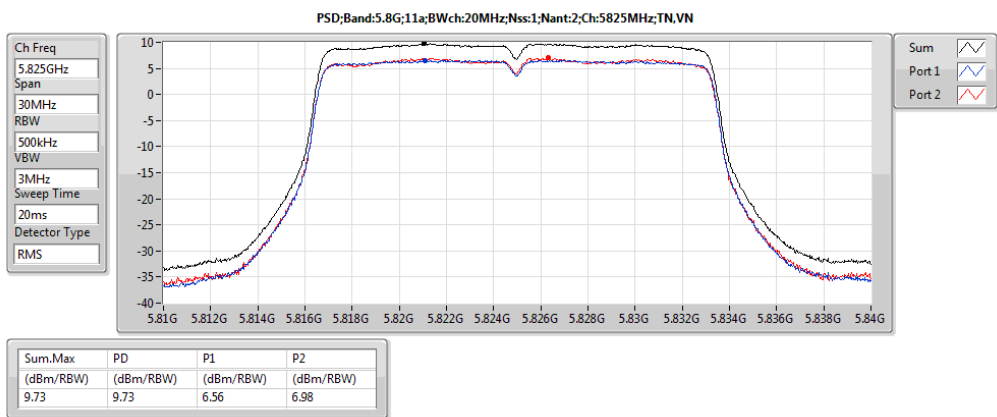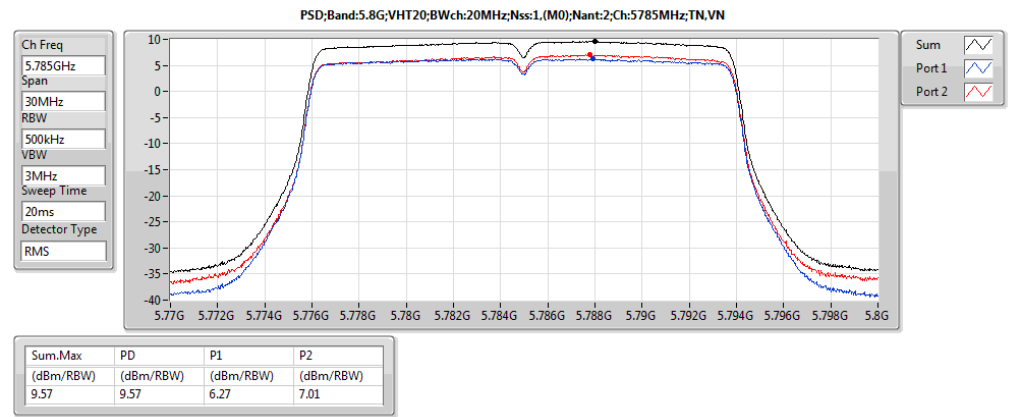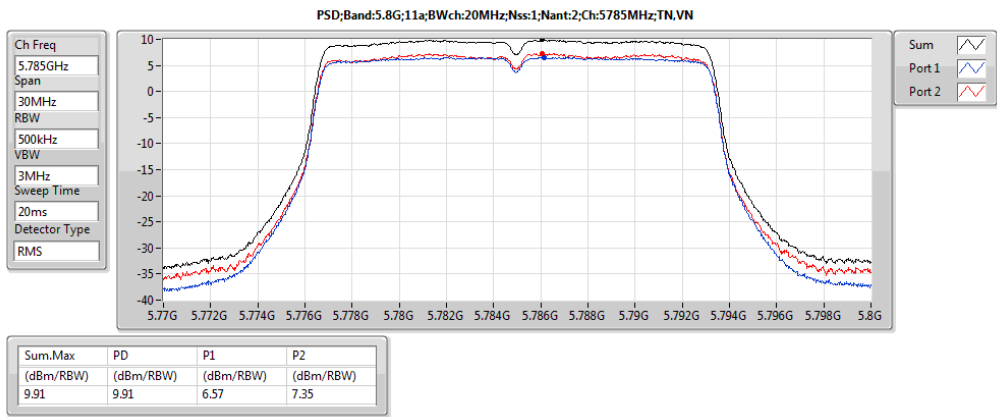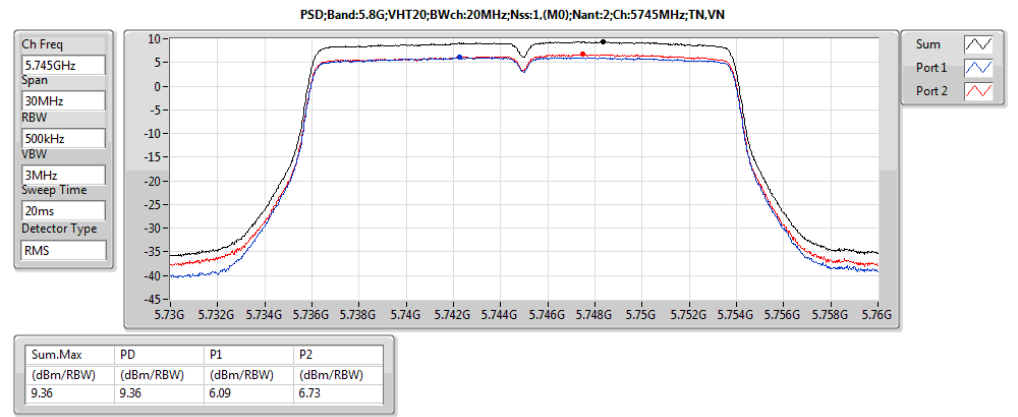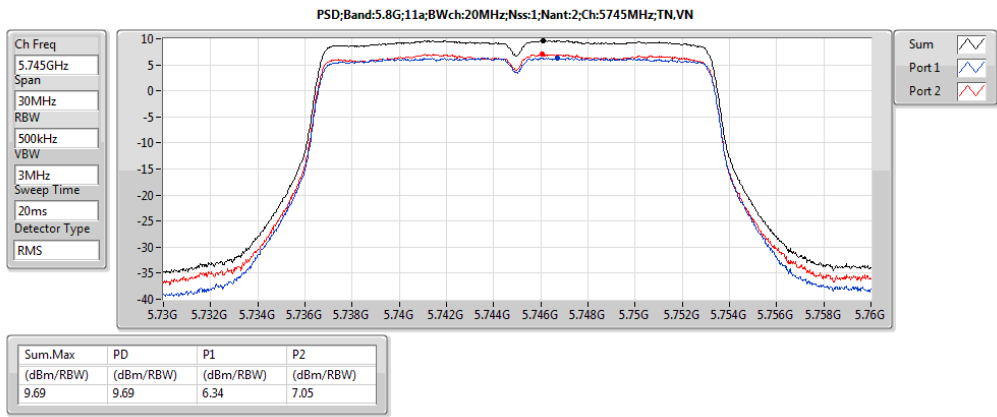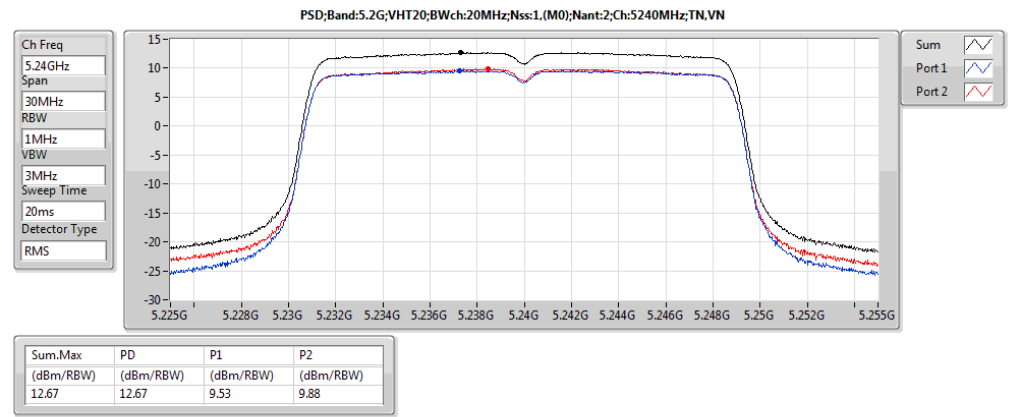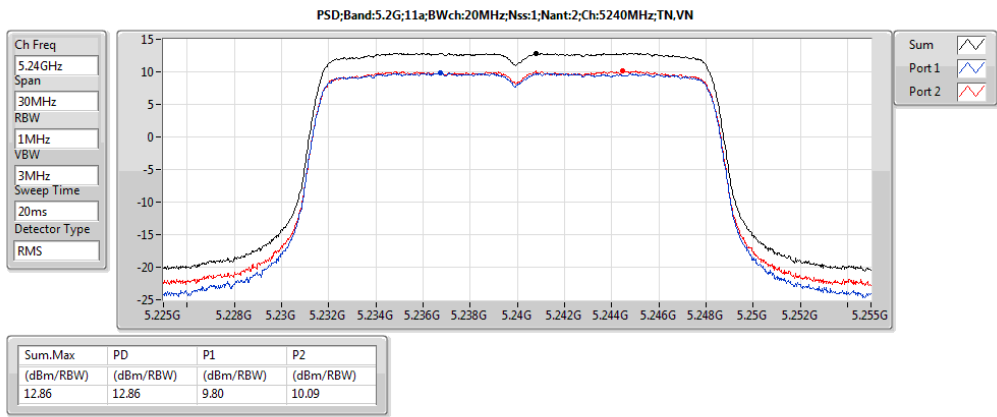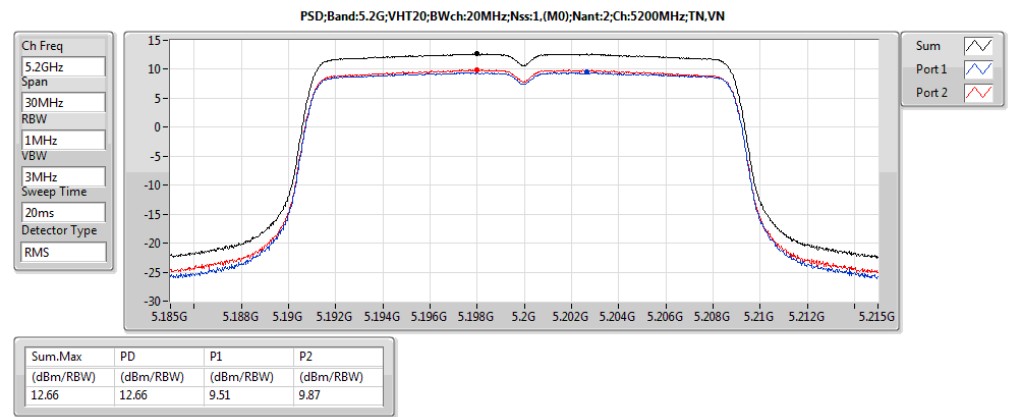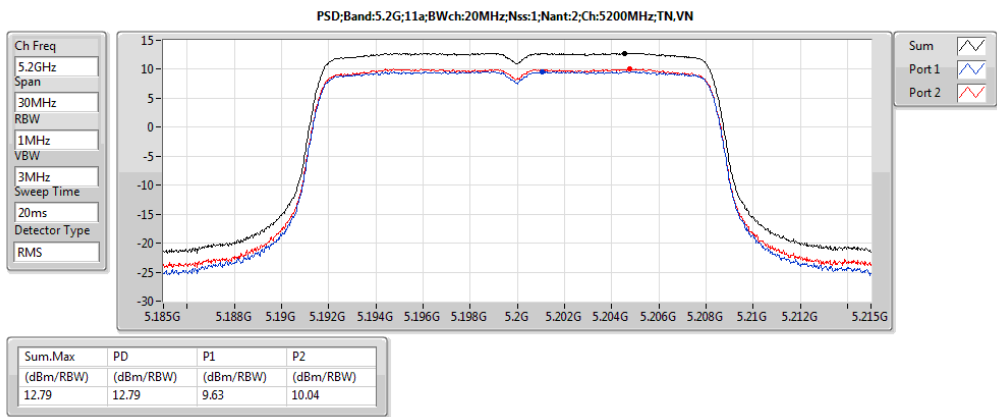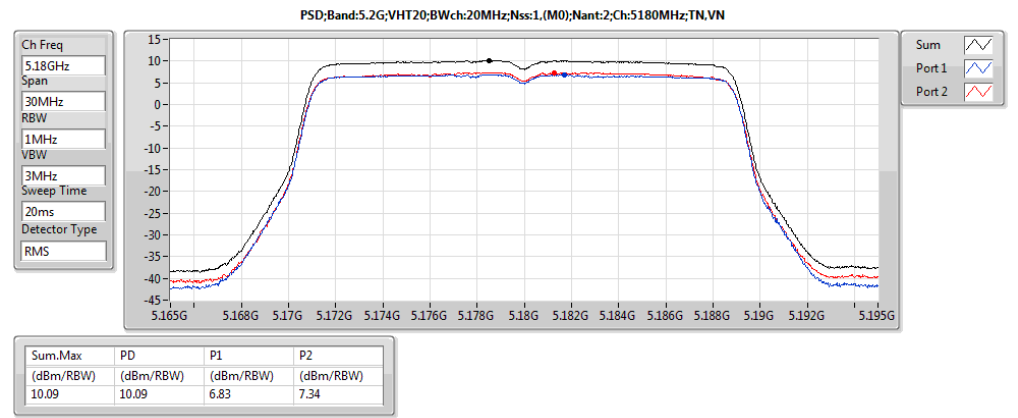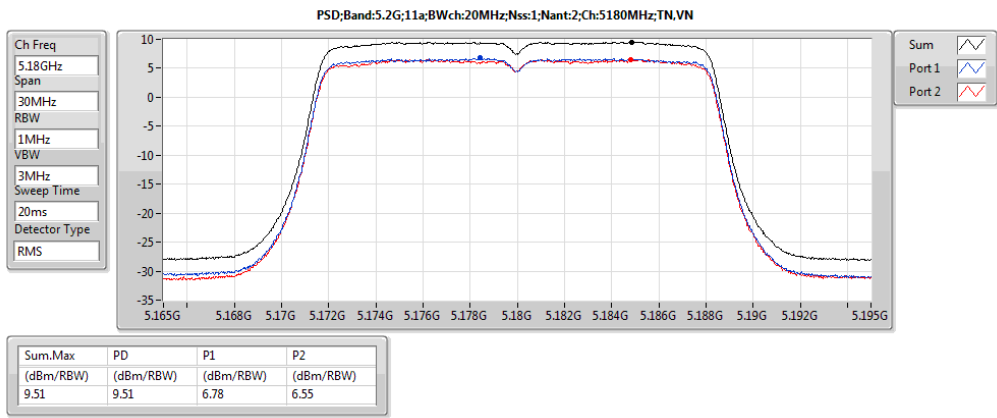

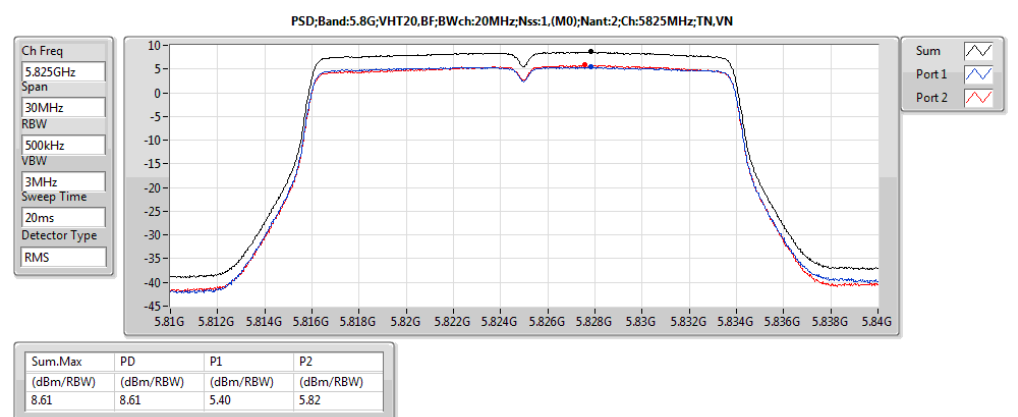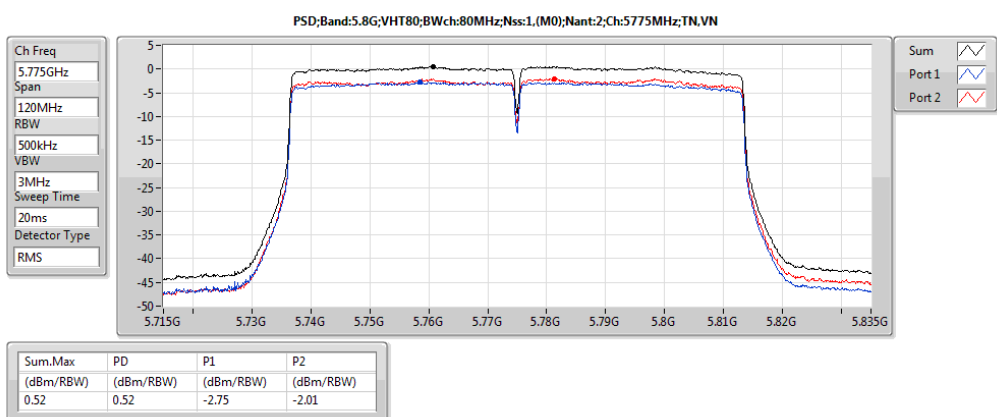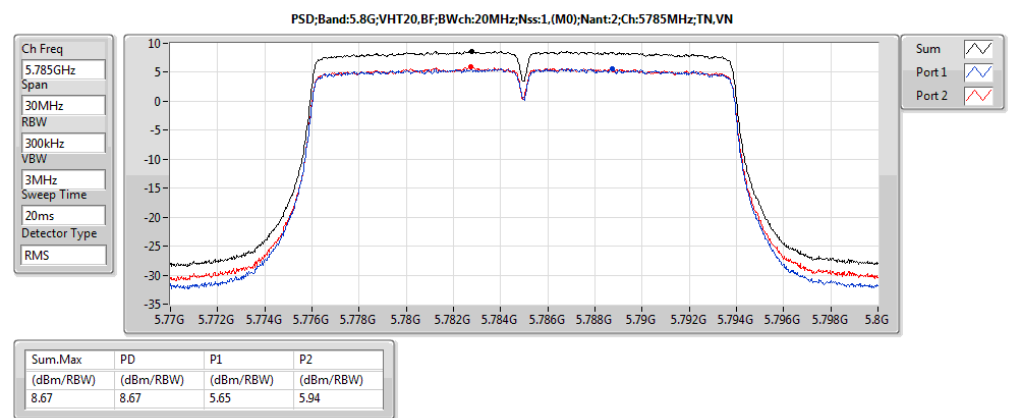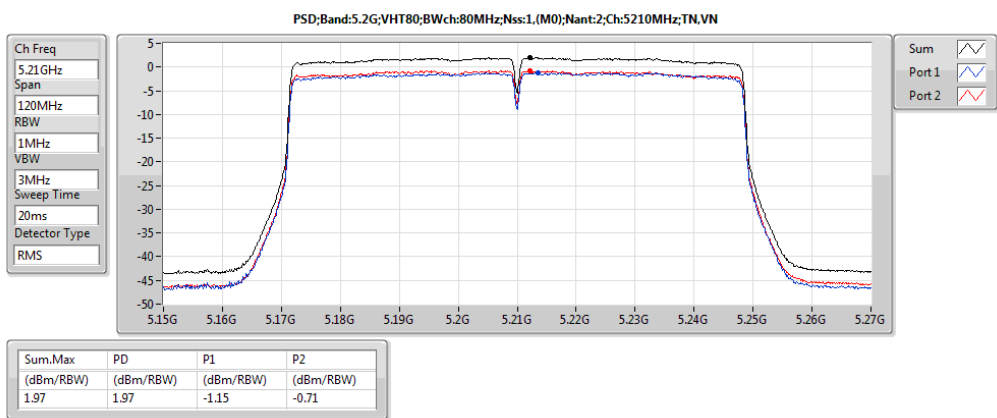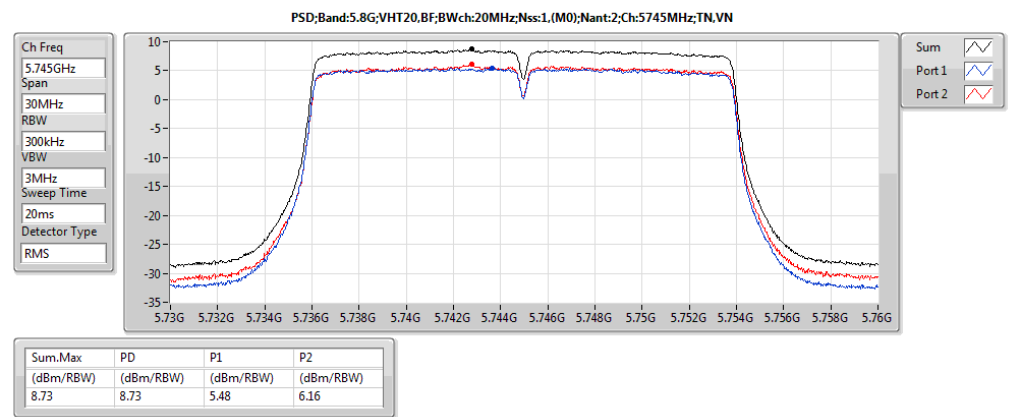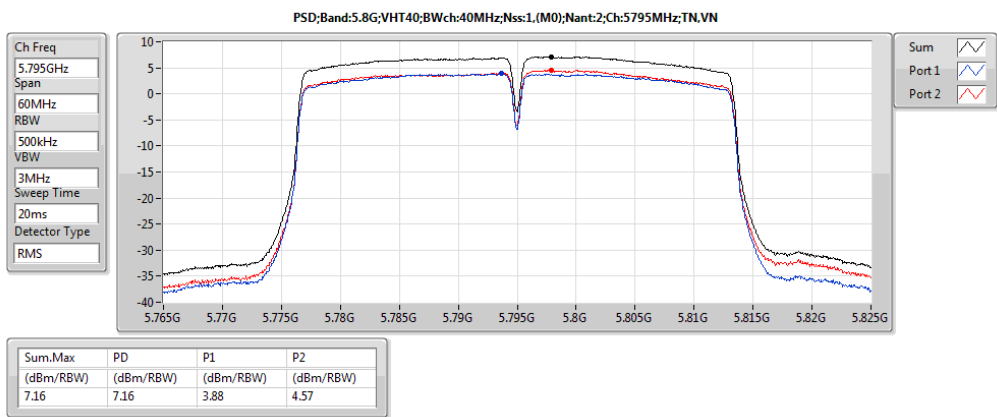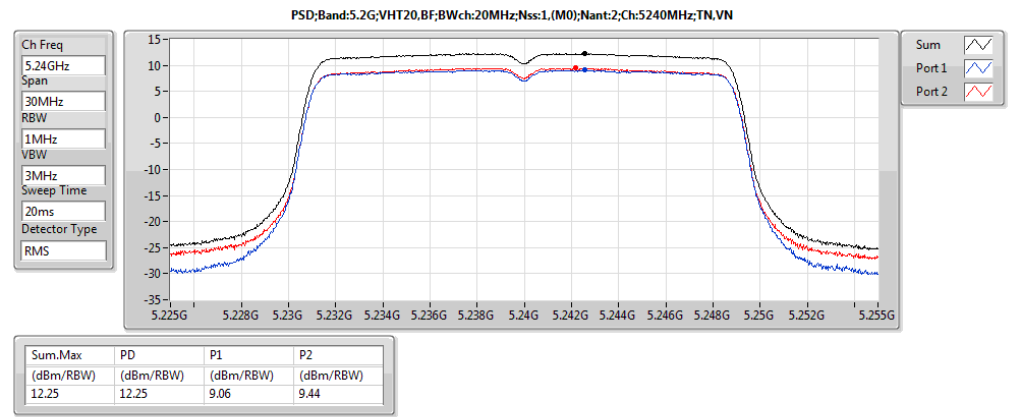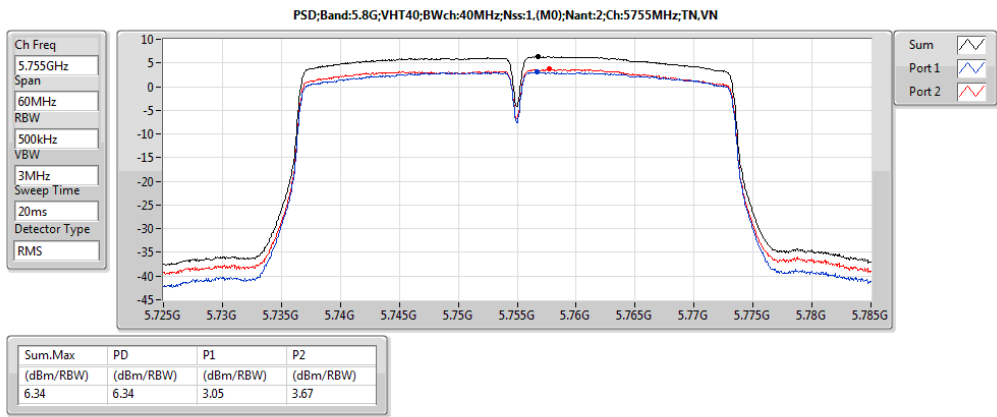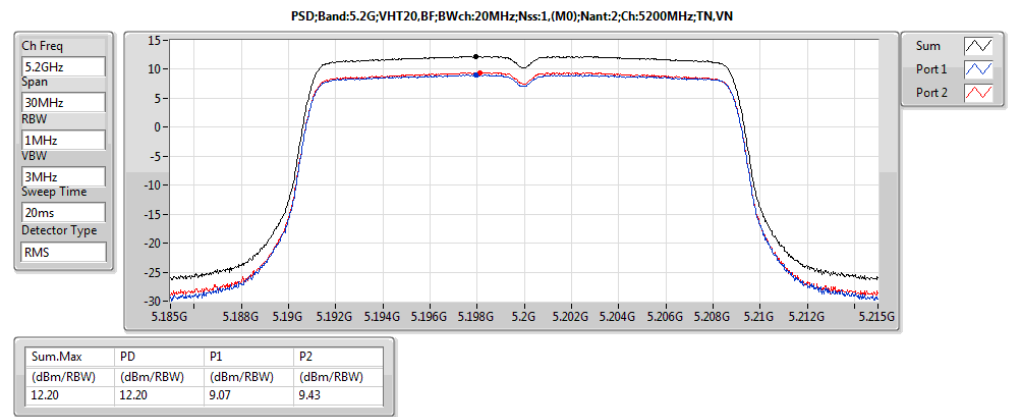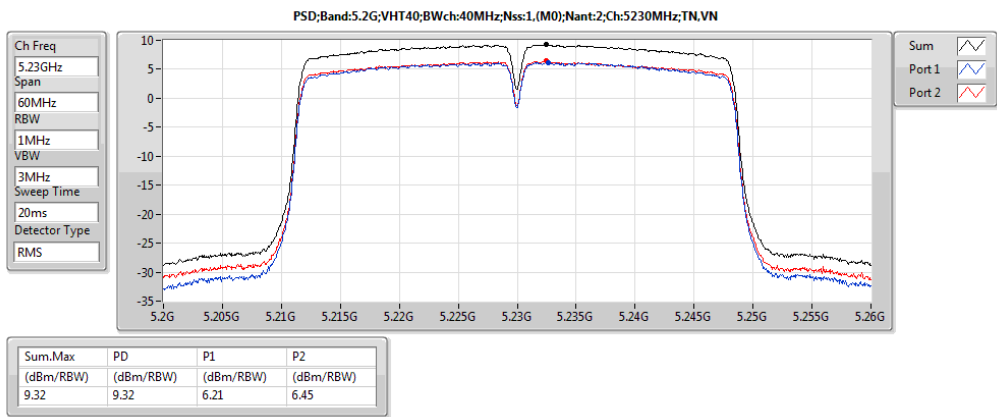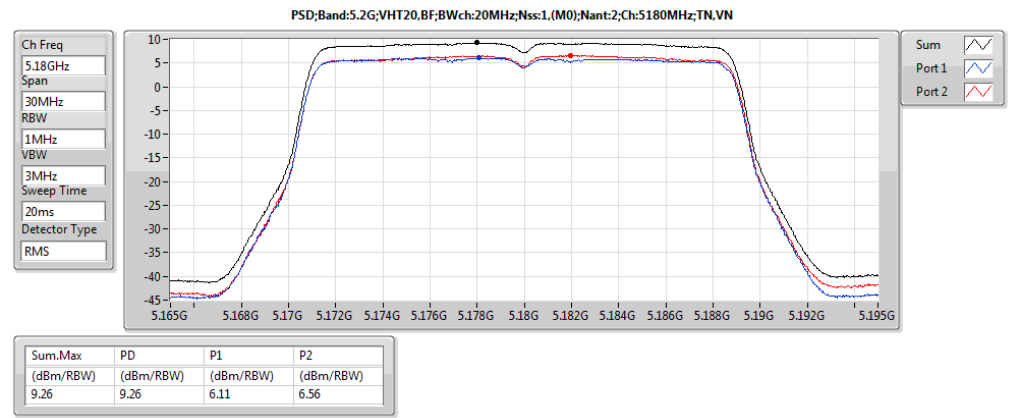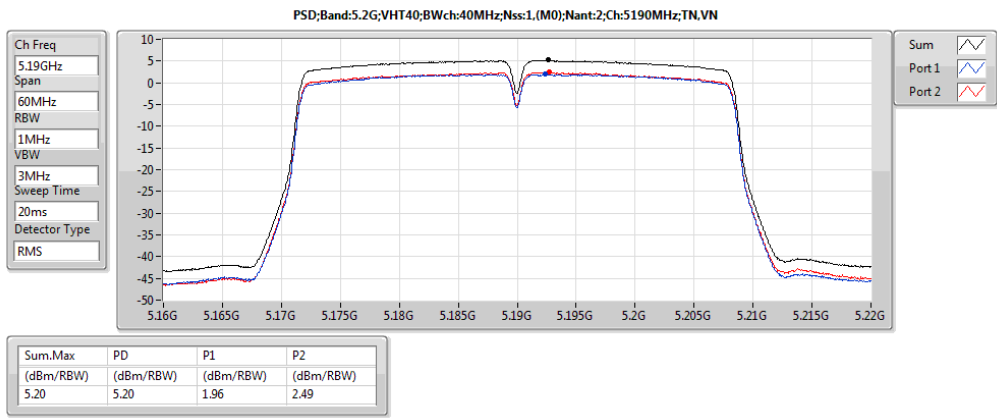

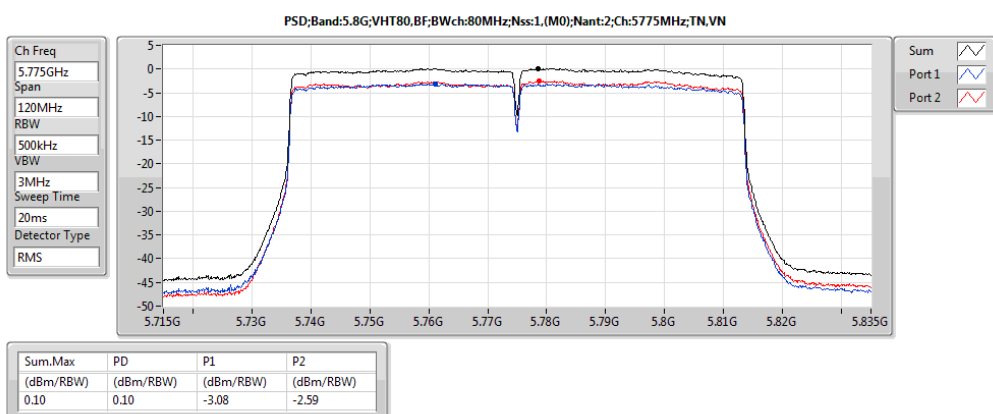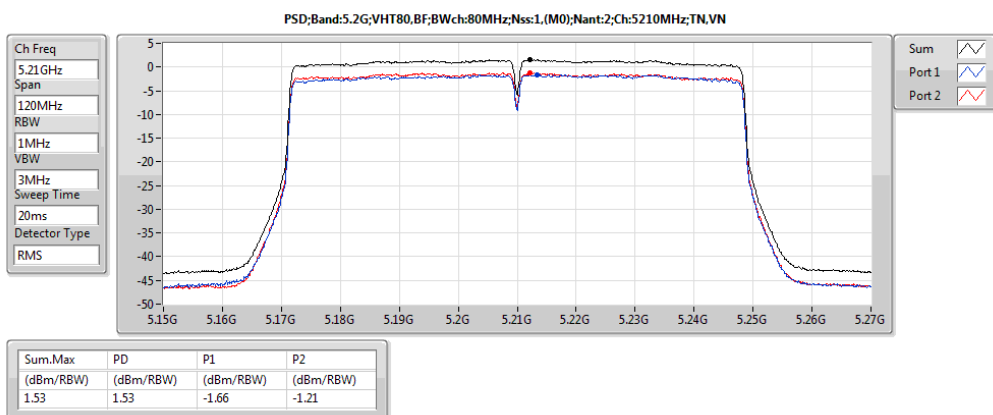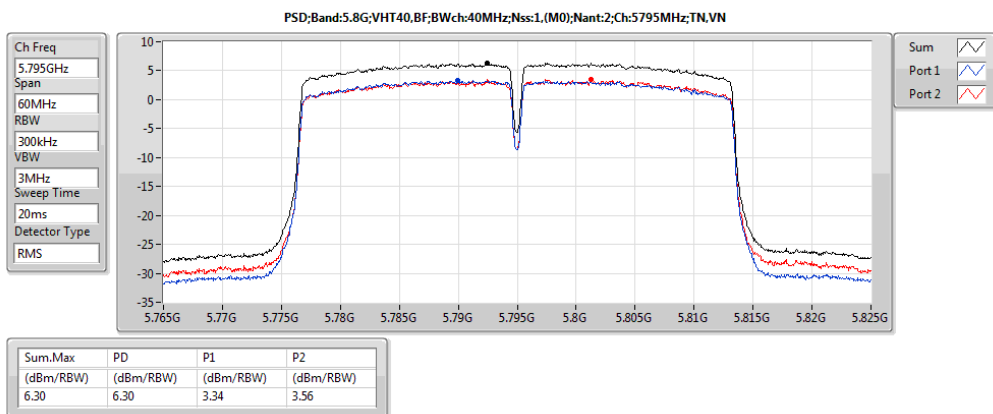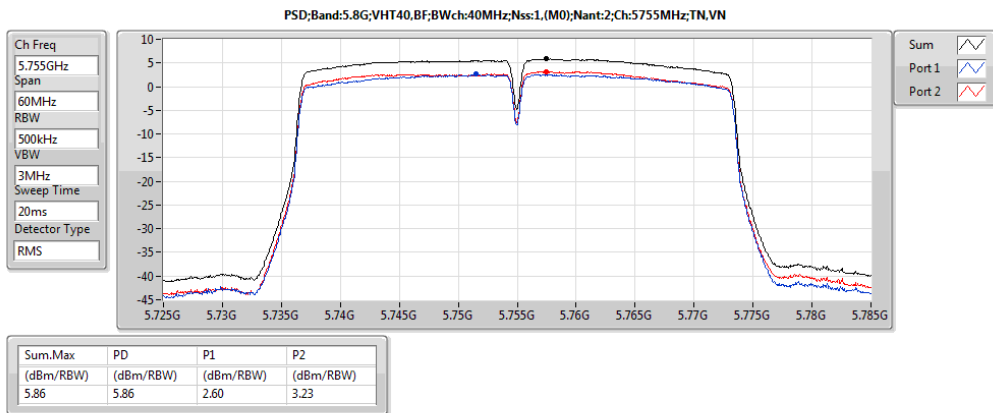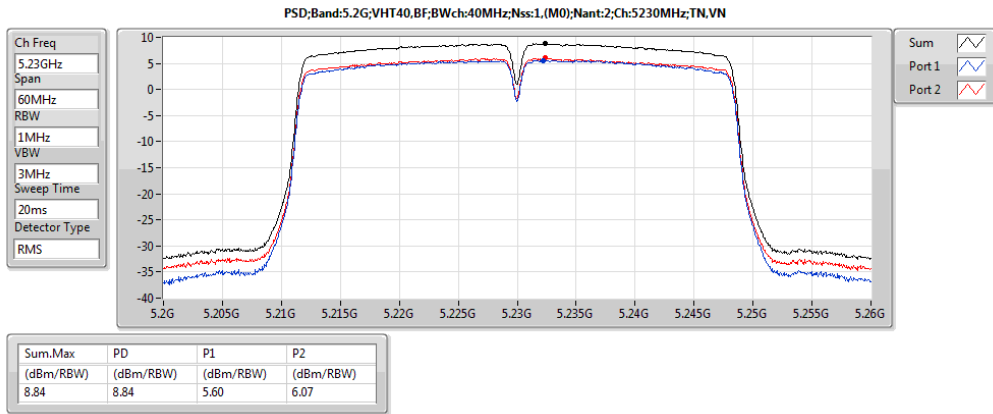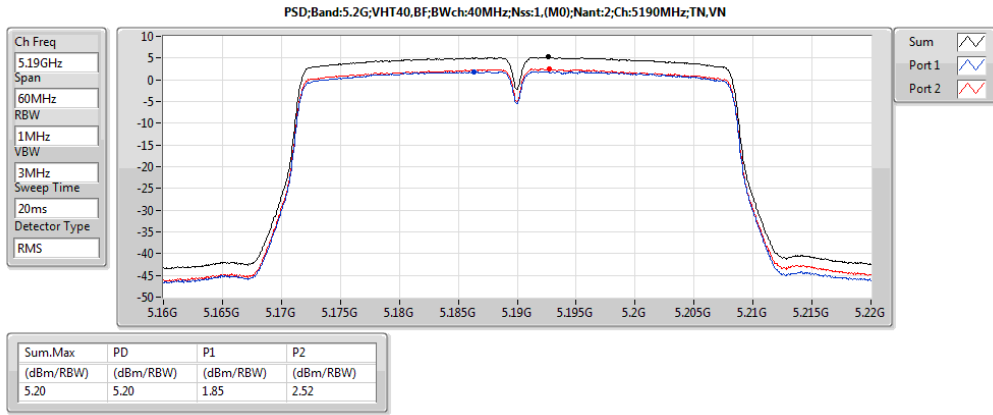


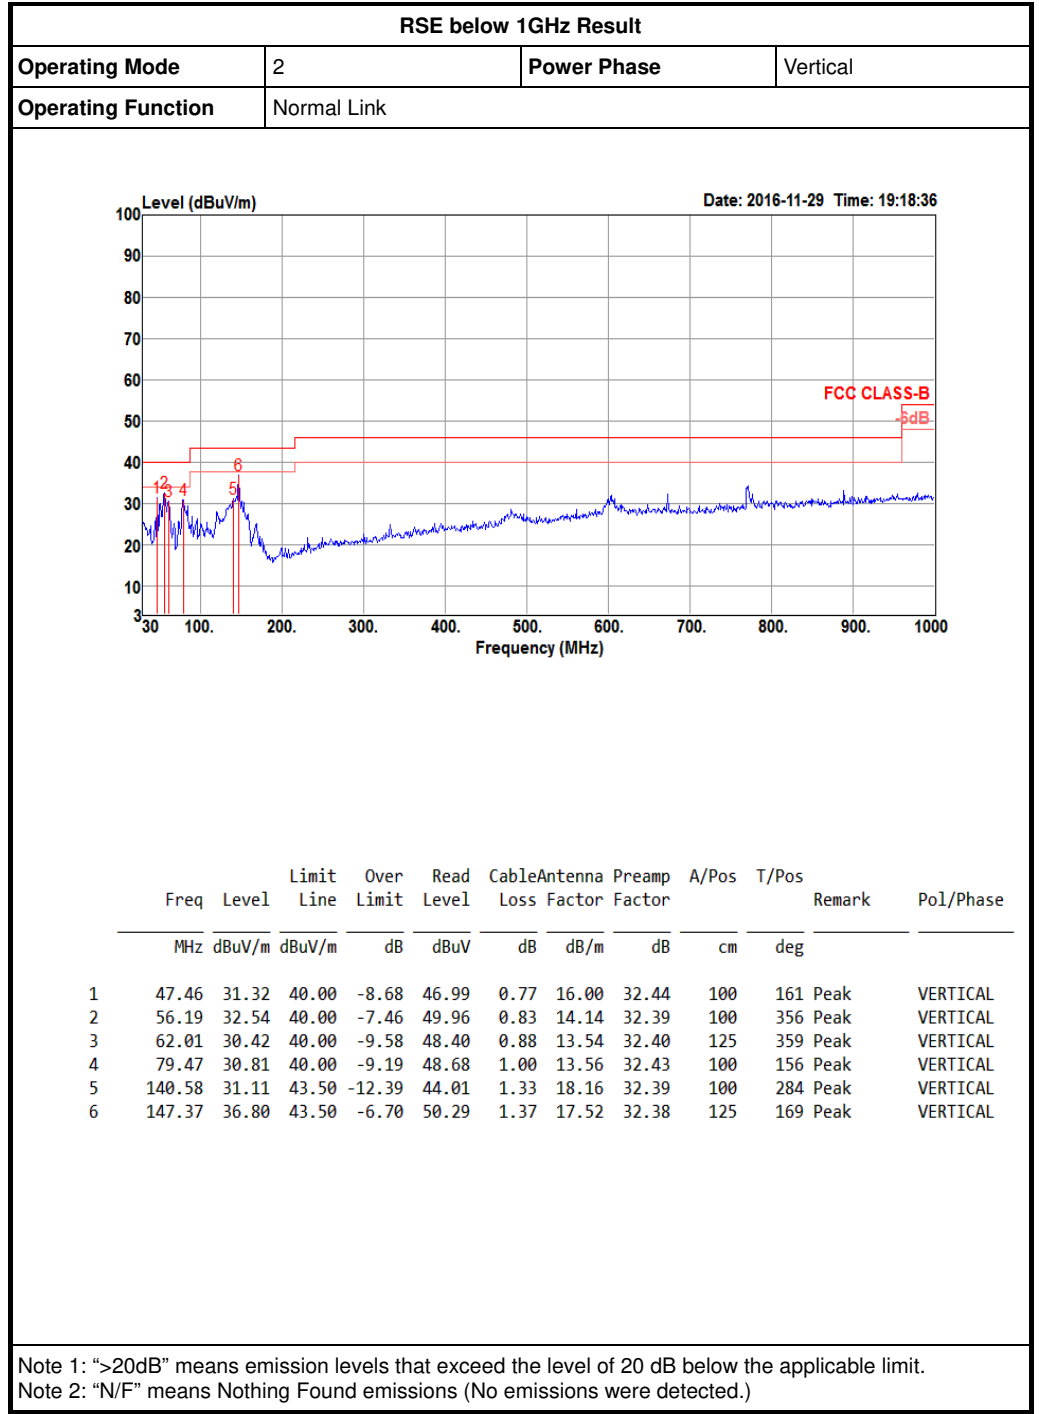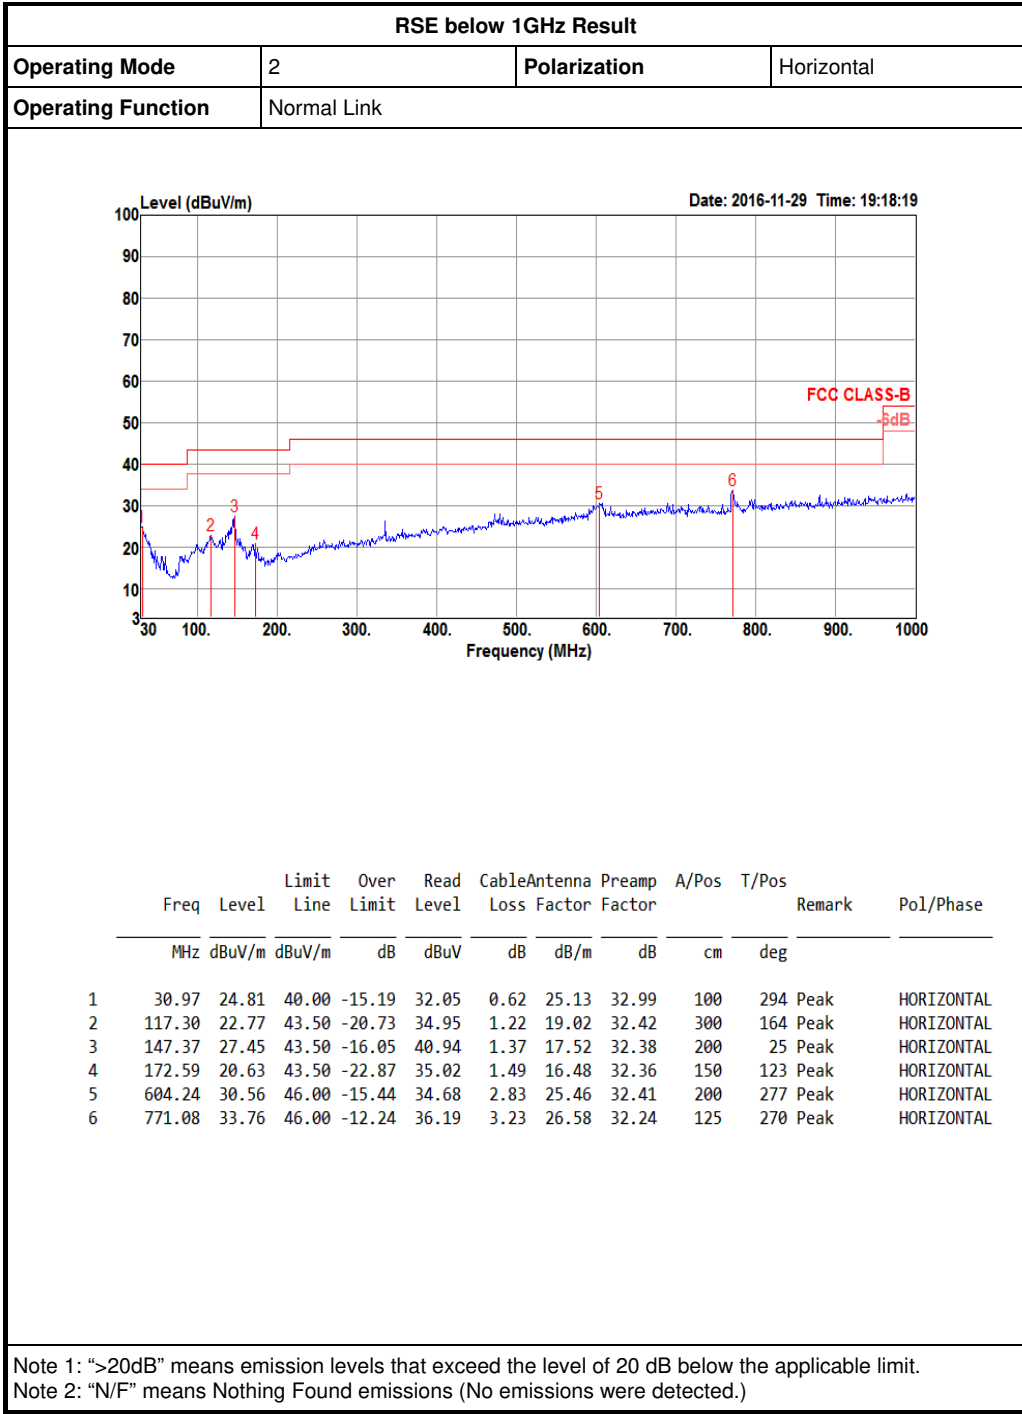




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Pol. (H/V)	Azimuth (°)	Height (m)	Comments
5.2G;VHT40;Nss1,(M0);Ntx2:5190	Pass	AV	5.1496G	53.87	54.00	-0.13	7.24	3	V	312	1.08	-

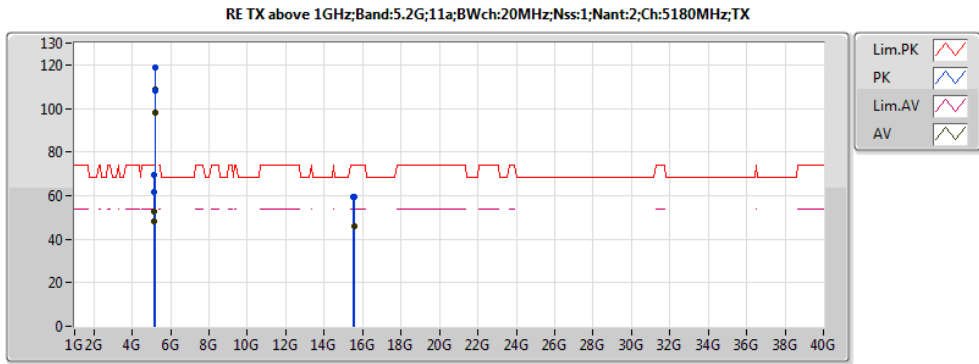


20161117
EUT Z 2TX
Setting 20
02-M-01
02-W-3

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	5.1496G	48.08	54.00	-5.92	7.24	3	H	47	1.03	-
AV	5.1748G	97.96	Inf	-Inf	7.31	3	H	47	1.03	-
PK	5.1496G	61.55	74.00	-12.45	7.24	3	H	47	1.03	-
PK	5.1744G	108.40	Inf	-Inf	7.31	3	H	47	1.03	-
AV	5.1496G	52.92	54.00	-1.08	7.24	3	V	311	1.09	-
AV	5.1856G	108.85	Inf	-Inf	7.33	3	V	311	1.09	-
PK	5.1496G	69.23	74.00	-4.77	7.24	3	V	311	1.09	-
PK	5.1756G	118.98	Inf	-Inf	7.31	3	V	311	1.09	-
AV	15.53786G	45.91	54.00	-8.09	16.17	3	H	293	1.97	-
PK	15.54444G	59.34	74.00	-14.66	16.15	3	H	293	1.97	-
AV	15.5437G	45.71	54.00	-8.29	16.16	3	V	109	1.17	-
PK	15.53708G	59.40	74.00	-14.60	16.18	3	V	109	1.17	-

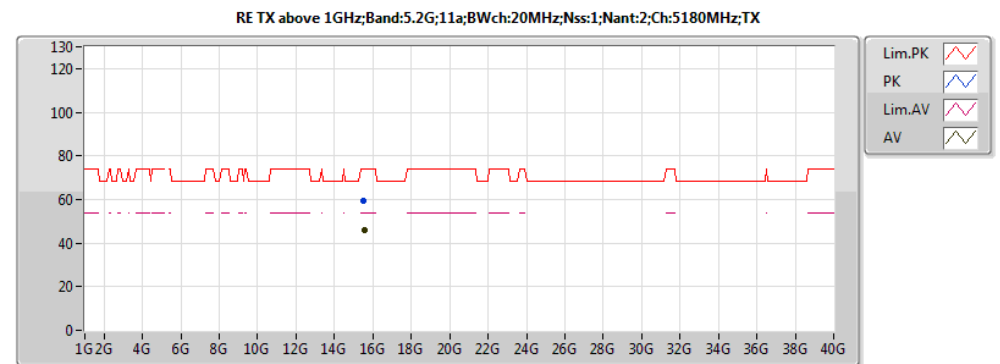


20161117
EUT Z 2TX
Setting 20
02-W-3

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	15.5437G	45.71	54.00	-8.29	16.16	3	V	109	1.17	-
PK	15.53708G	59.40	74.00	-14.60	16.18	3	V	109	1.17	-

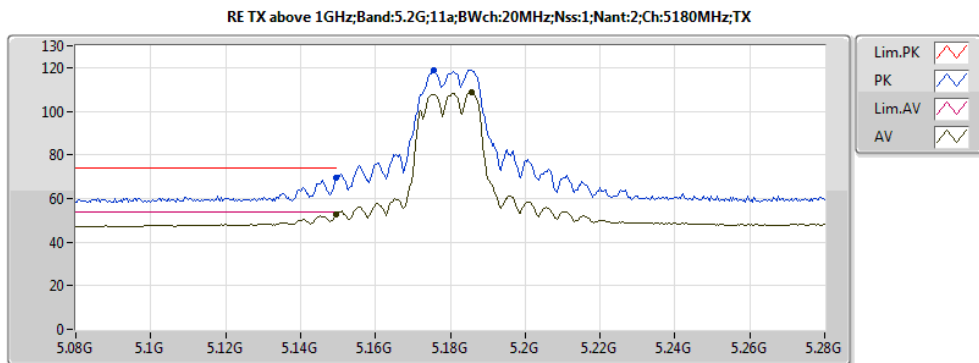


20161117
EUT Z 2TX
Setting 20
02-M-01

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	5.1496G	52.92	54.00	-1.08	7.24	3	V	311	1.09	-
AV	5.1856G	108.85	Inf	-Inf	7.33	3	V	311	1.09	-
PK	5.1496G	69.23	74.00	-4.77	7.24	3	V	311	1.09	-
PK	5.1756G	118.98	Inf	-Inf	7.31	3	V	311	1.09	-

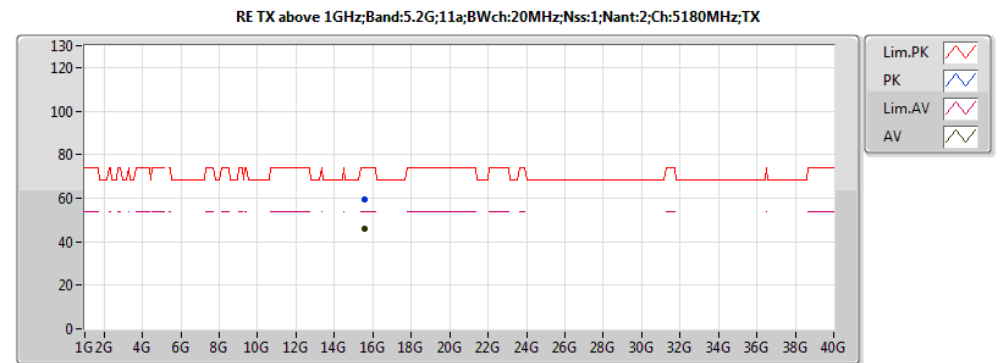


20161117
EUT Z 2TX
Setting 20
02-W-3

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	15.53786G	45.91	54.00	-8.09	16.17	3	H	293	1.97	-
PK	15.54444G	59.34	74.00	-14.66	16.15	3	H	293	1.97	-

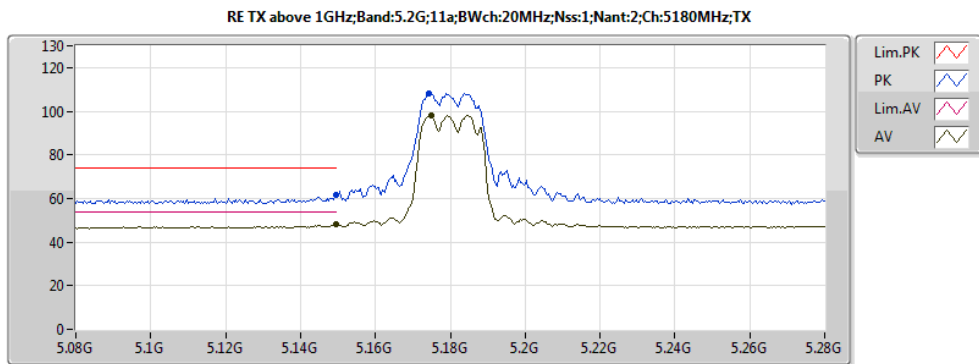







20161117
EUT Z 2TX
Setting 20
02-M-01


Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	5.1496G	48.08	54.00	-5.92	7.24	3	H	47	1.03	-
AV	5.1748G	97.96	Inf	-Inf	7.31	3	H	47	1.03	-
PK	5.1496G	61.55	74.00	-12.45	7.24	3	H	47	1.03	-
PK	5.1744G	108.40	Inf	-Inf	7.31	3	H	47	1.03	-

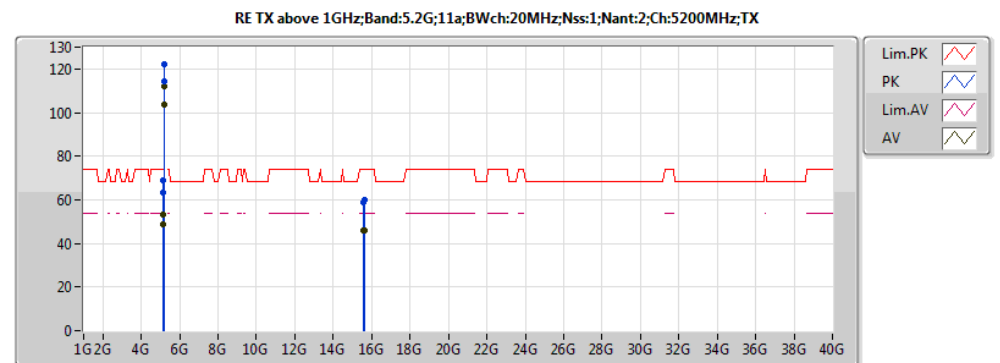

20161117
EUT Z 2TX
Setting 23.5
02-M-01
02-W-3


Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	5.1464G	48.52	54.00	-5.48	7.24	3	H	313	1.10	-
AV	5.2016G	103.74	Inf	-Inf	7.37	3	H	313	1.10	-
PK	5.142G	63.58	74.00	-10.42	7.23	3	H	313	1.10	-
PK	5.202G	114.22	Inf	-Inf	7.38	3	H	313	1.10	-
AV	5.1496G	53.10	54.00	-0.90	7.24	3	V	312	1.05	-
AV	5.2008G	112.00	Inf	-Inf	7.37	3	V	312	1.05	-
PK	5.1496G	68.93	74.00	-5.07	7.24	3	V	312	1.05	-
PK	5.1956G	122.02	Inf	-Inf	7.36	3	V	312	1.05	-
AV	15.60092G	46.21	54.00	-7.79	15.98	3	H	187	1.22	-
PK	15.60188G	59.86	74.00	-14.14	15.98	3	H	187	1.22	-
AV	15.6047G	45.79	54.00	-8.21	15.97	3	V	288	2.00	-
PK	15.60096G	59.06	74.00	-14.94	15.98	3	V	288	2.00	-

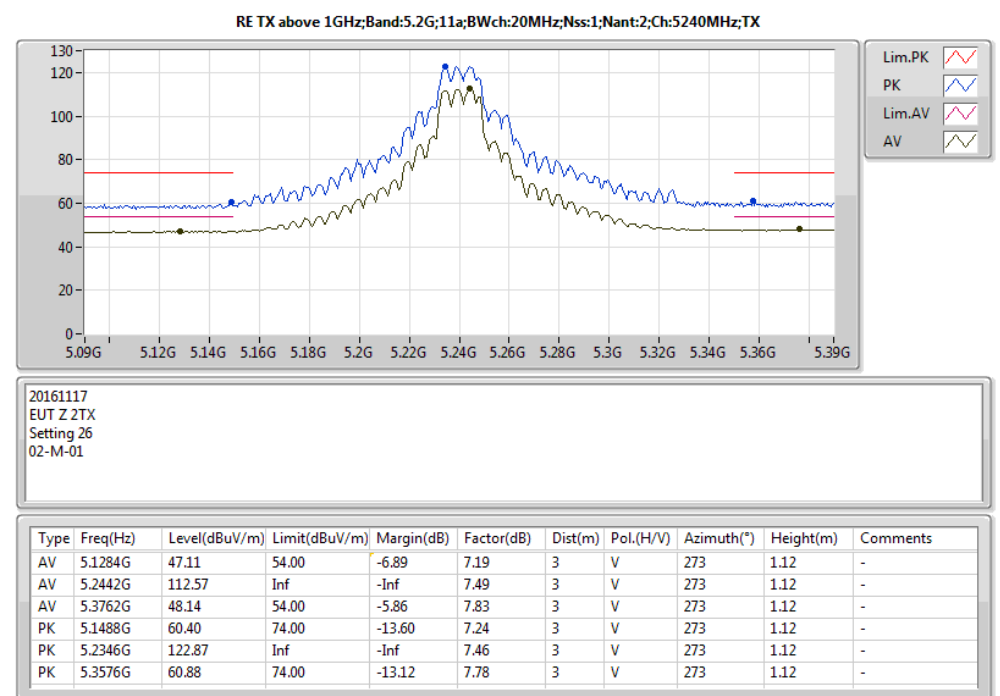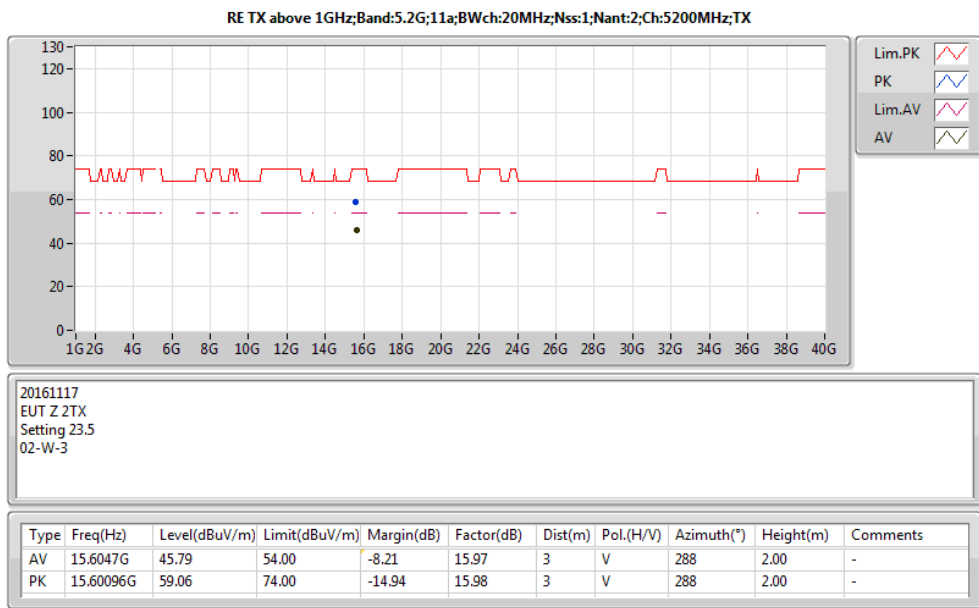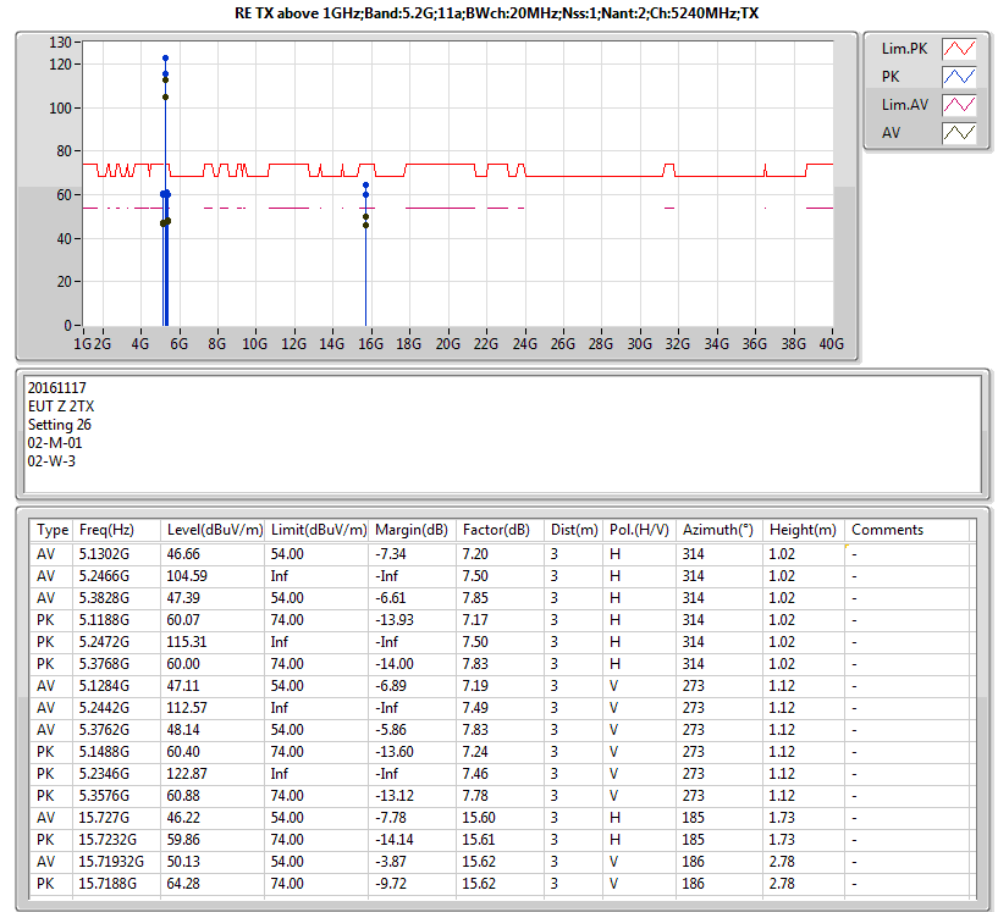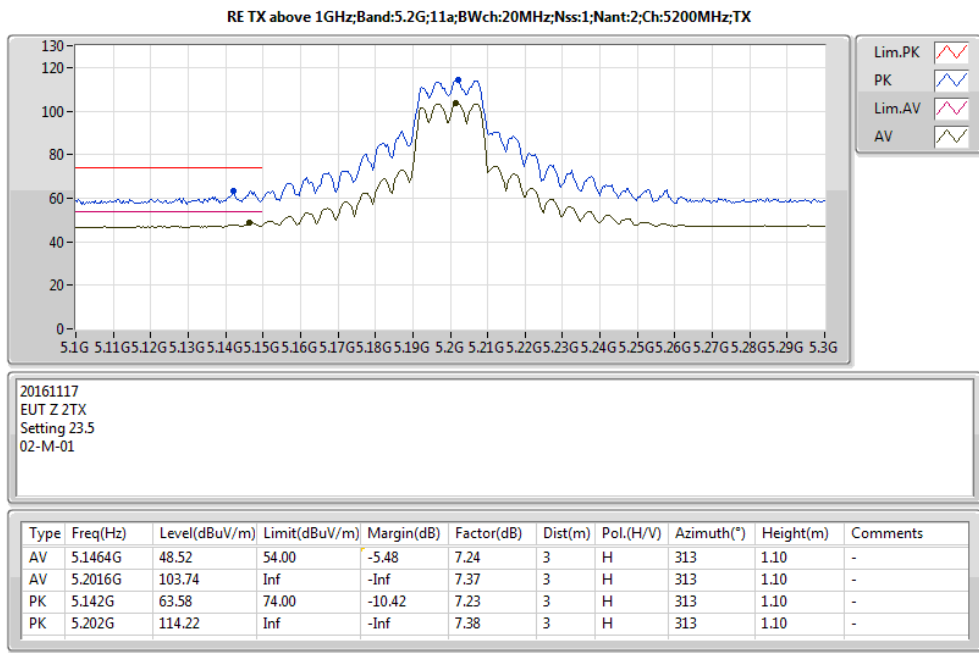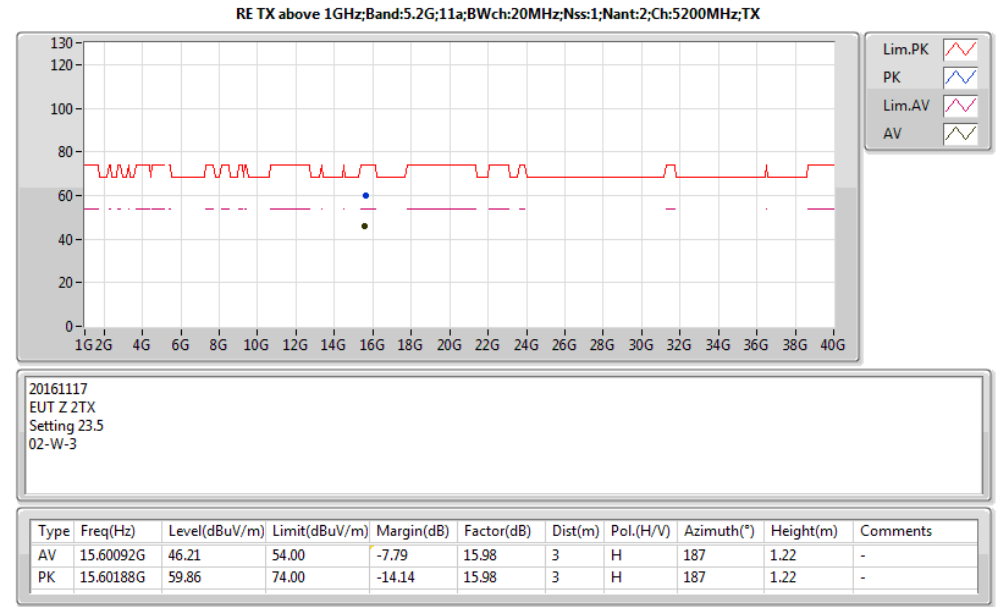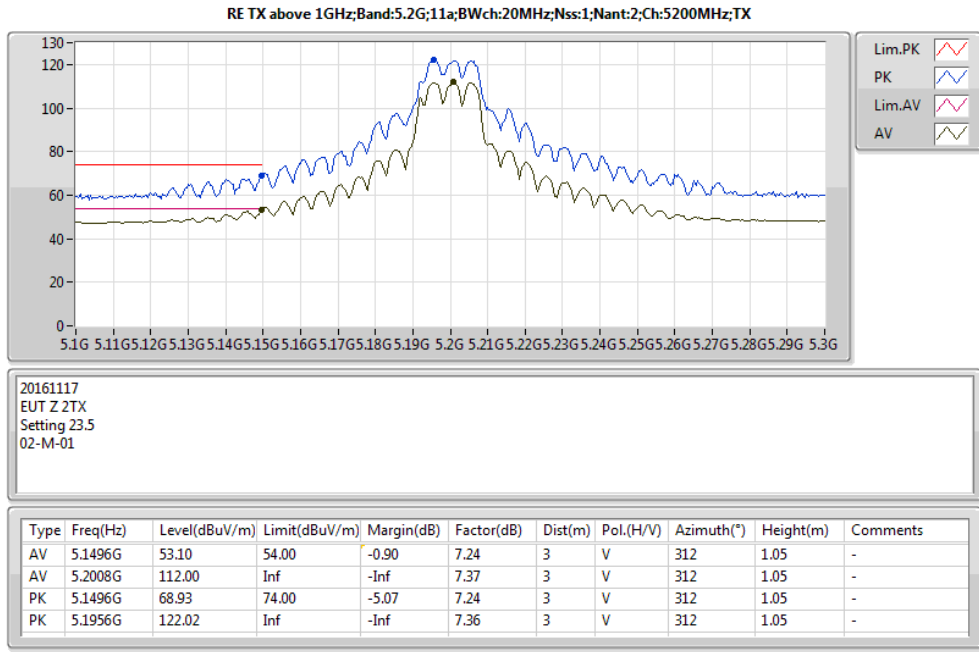

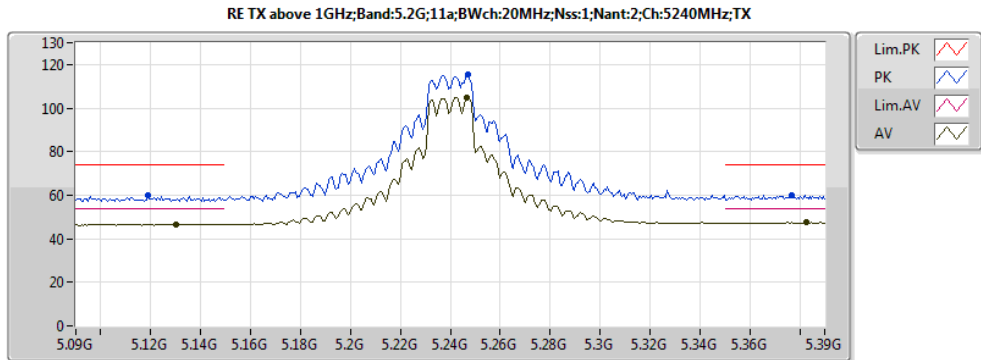


20161117
EUT Z 2TX
Setting 26
02-M-01

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.1302G	46.66	54.00	-7.34	7.20	3	H	314	1.02	-
AV	5.2466G	104.59	Inf	-Inf	7.50	3	H	314	1.02	-
AV	5.3828G	47.39	54.00	-6.61	7.85	3	H	314	1.02	-
PK	5.1188G	60.07	74.00	-13.93	7.17	3	H	314	1.02	-
PK	5.2472G	115.31	Inf	-Inf	7.50	3	H	314	1.02	-
PK	5.3768G	60.00	74.00	-14.00	7.83	3	H	314	1.02	-

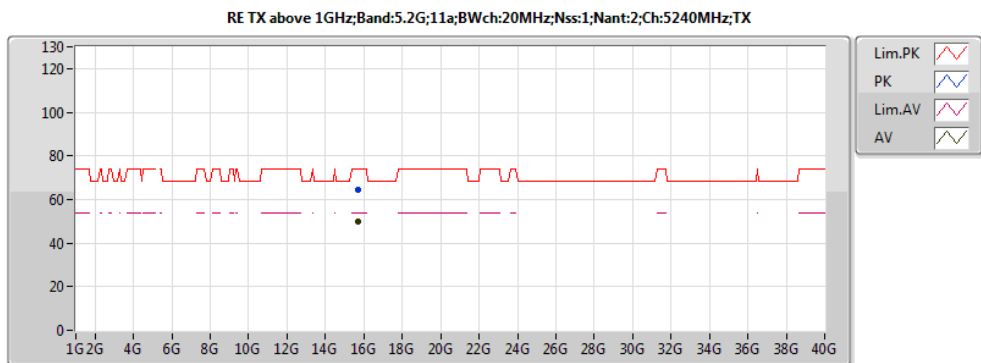


20161117
EUT Z 2TX
Setting 26
02-W-3

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.71932G	50.13	54.00	-3.87	15.62	3	V	186	2.78	-
PK	15.7188G	64.28	74.00	-9.72	15.62	3	V	186	2.78	-

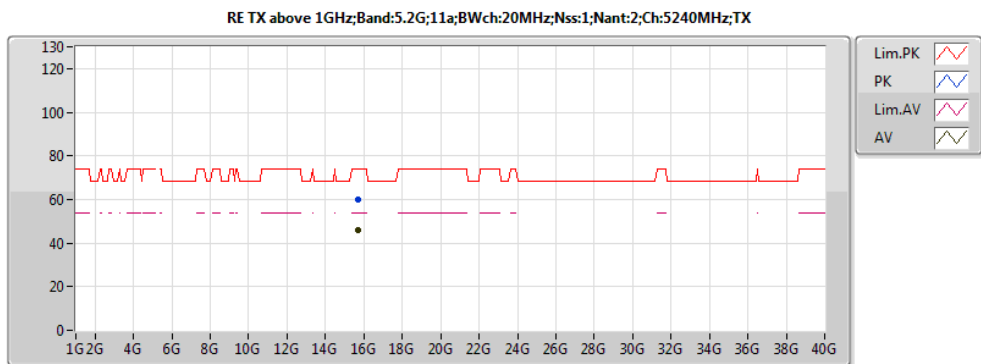


20161117
EUT Z 2TX
Setting 26
02-W-3

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.727G	46.22	54.00	-7.78	15.60	3	H	185	1.73	-
PK	15.7232G	59.86	74.00	-14.14	15.61	3	H	185	1.73	-

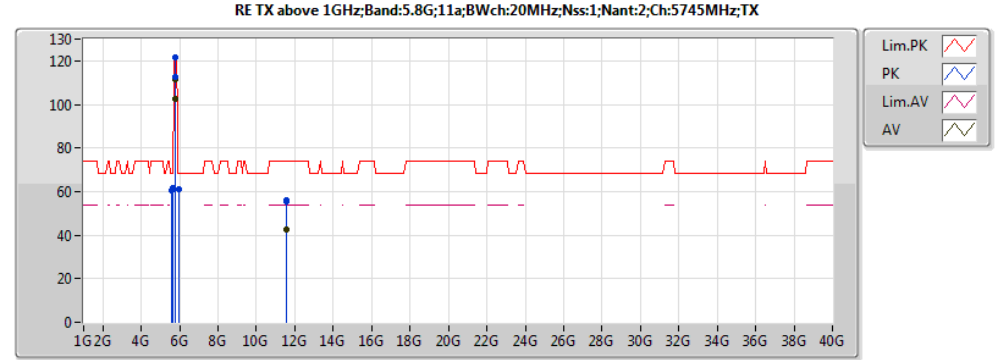


20161117
EUT Z 2TX
Setting 26
02-M-01

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.741G	102.47	Inf	-Inf	8.44	3	H	360	1.05	-
PK	5.598G	60.36	68.20	-7.84	8.23	3	H	360	1.05	-
PK	5.746G	112.68	Inf	-Inf	8.45	3	H	360	1.05	-
PK	5.956G	61.21	68.20	-6.99	8.65	3	H	360	1.05	-
AV	5.744G	111.52	Inf	-Inf	8.45	3	V	291	1.29	-
PK	5.651G	61.48	68.94	-7.46	8.31	3	V	291	1.29	-
PK	5.744G	121.65	Inf	-Inf	8.45	3	V	291	1.29	-
PK	5.968G	61.12	68.20	-7.08	8.66	3	V	291	1.29	-
AV	11.5678G	42.39	54.00	-11.61	14.41	3	H	53	1.09	-
PK	11.56634G	56.21	74.00	-17.79	14.41	3	H	53	1.09	-
AV	11.56914G	42.38	54.00	-11.62	14.41	3	V	334	1.50	-
PK	11.5734G	55.67	74.00	-18.33	14.42	3	V	334	1.50	-

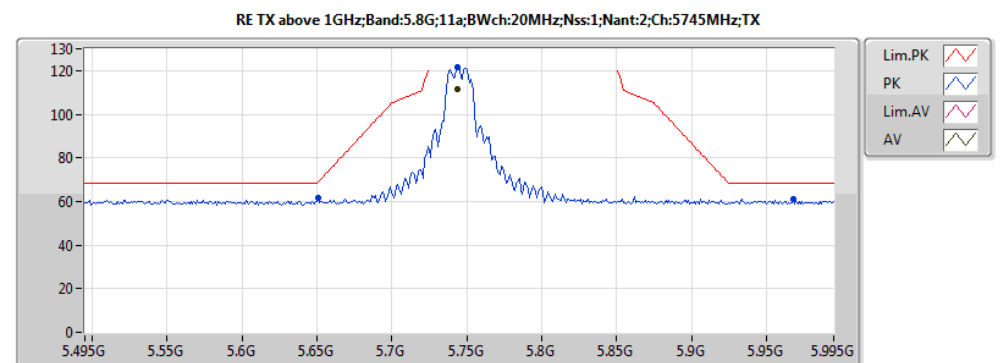







20161117
EUT Z 2TX
Setting 26
02-M-01







Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.744G	111.52	Inf	-Inf	8.45	3	V	291	1.29	-
PK	5.651G	61.48	68.94	-7.46	8.31	3	V	291	1.29	-
PK	5.744G	121.65	Inf	-Inf	8.45	3	V	291	1.29	-
PK	5.968G	61.12	68.20	-7.08	8.66	3	V	291	1.29	-

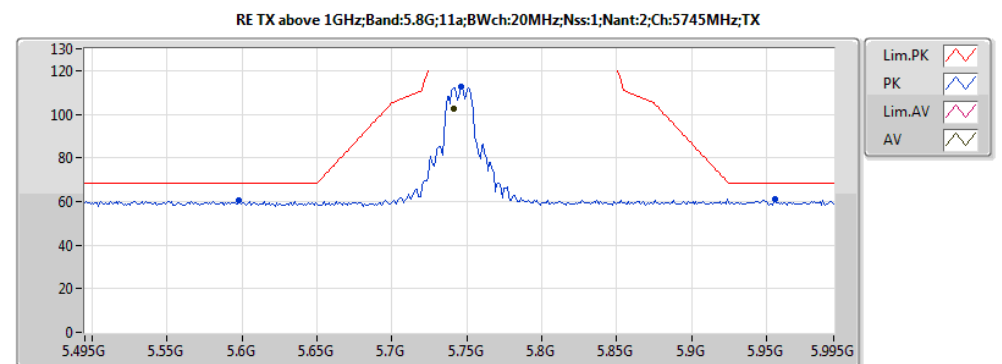


20161117
EUT Z 2TX
Setting 26
02-M-01

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.741G	102.47	Inf	-Inf	8.44	3	H	360	1.05	-
PK	5.598G	60.36	68.20	-7.84	8.23	3	H	360	1.05	-
PK	5.746G	112.68	Inf	-Inf	8.45	3	H	360	1.05	-
PK	5.956G	61.21	68.20	-6.99	8.65	3	H	360	1.05	-

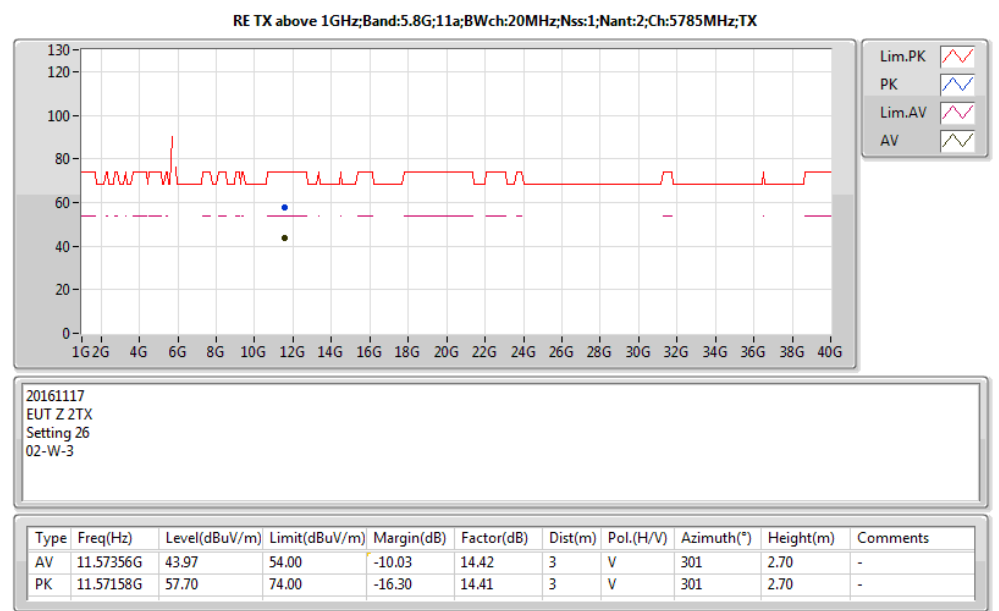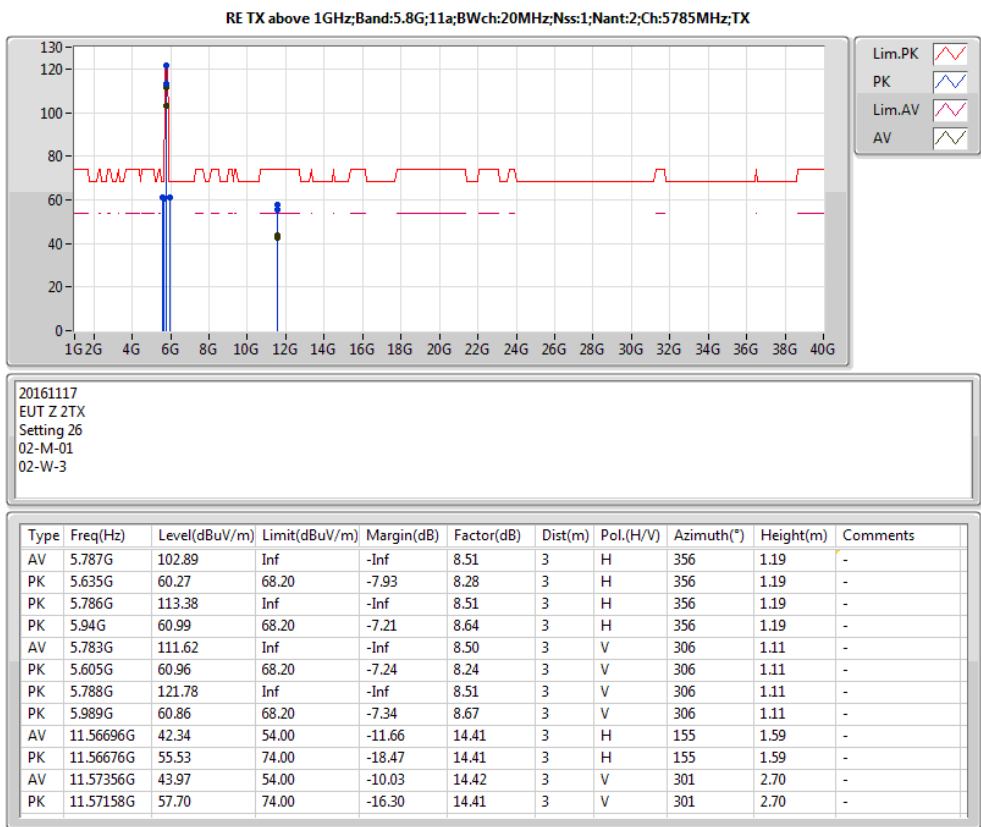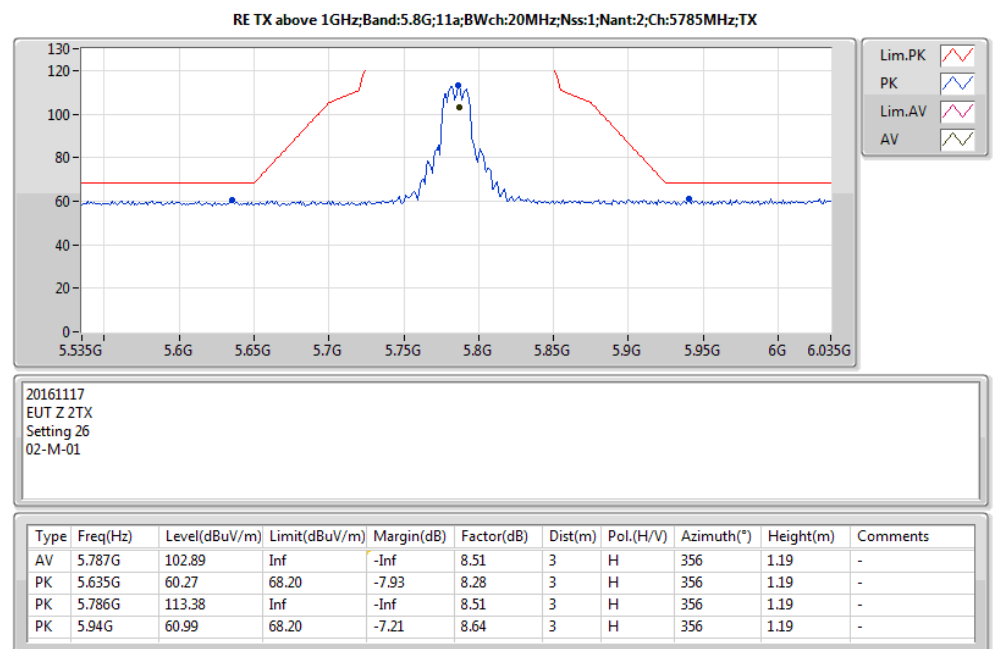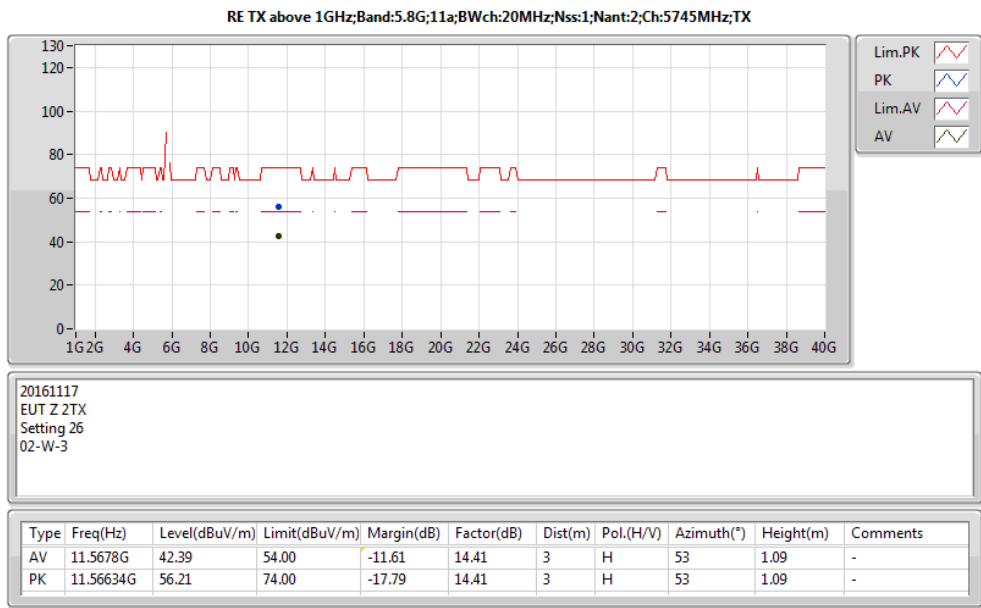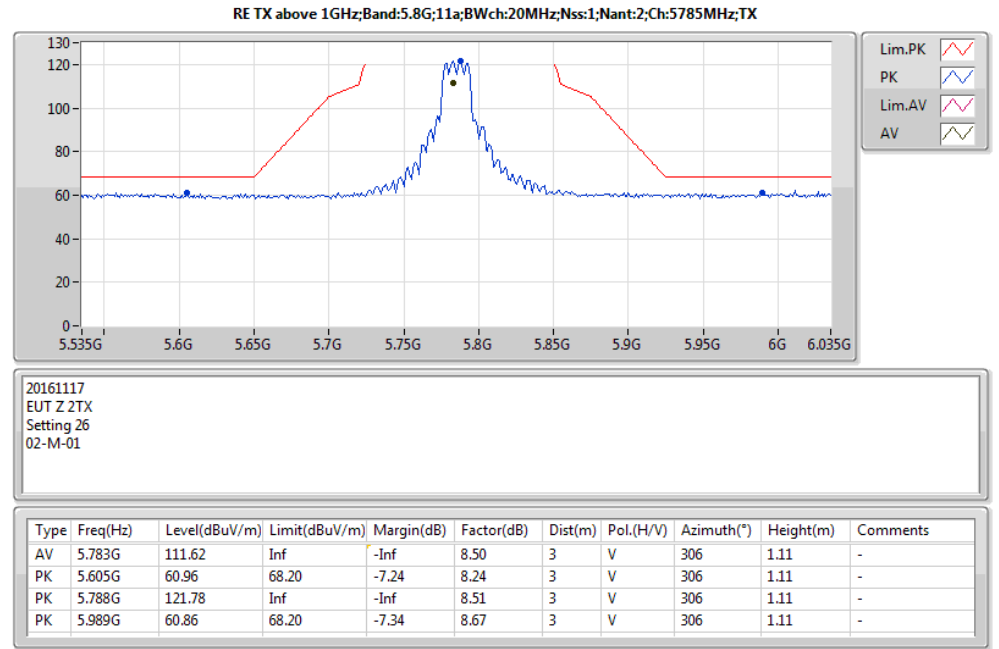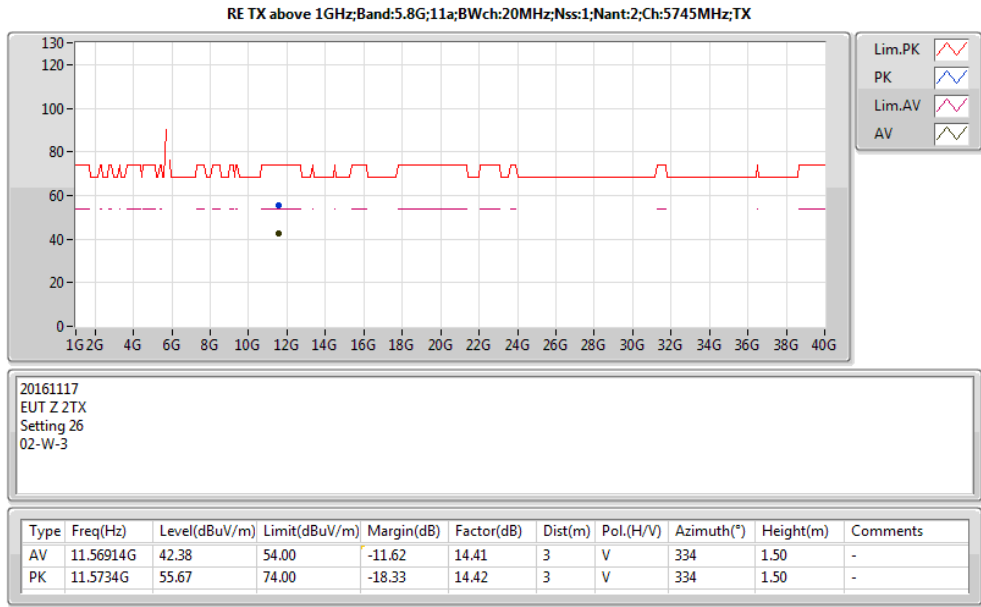


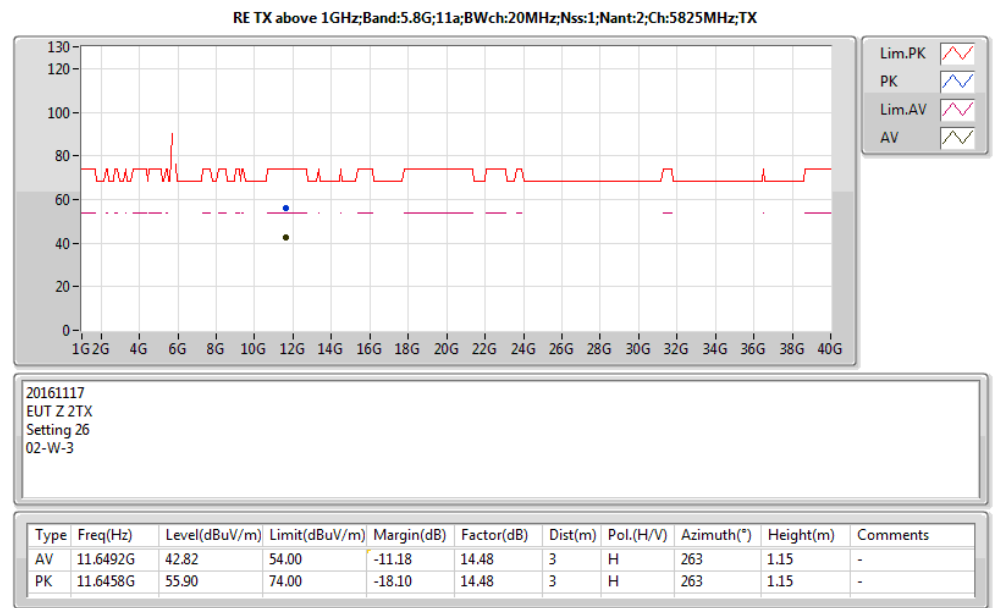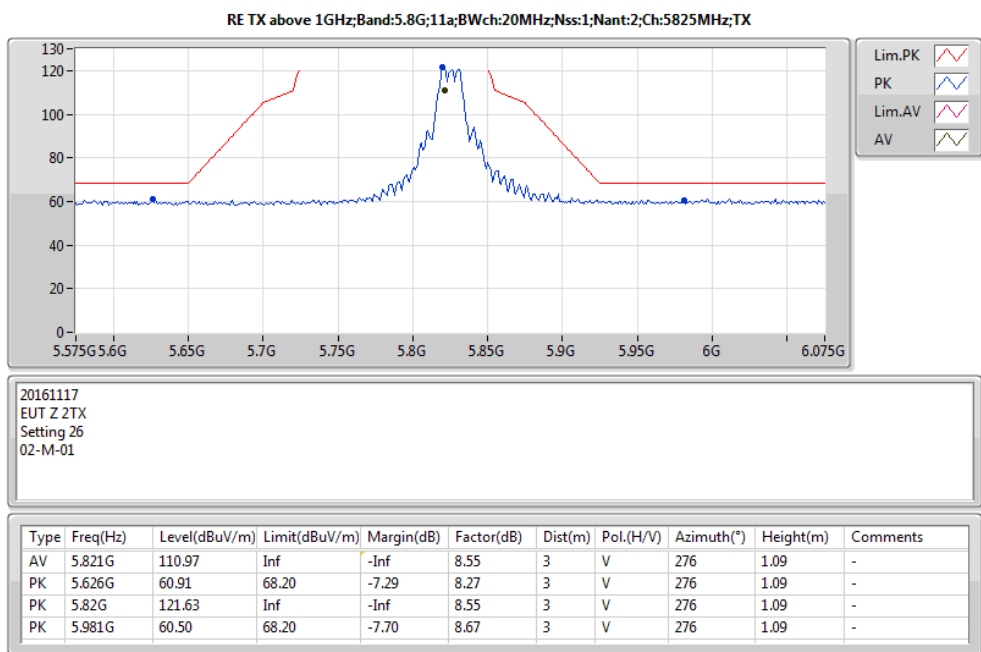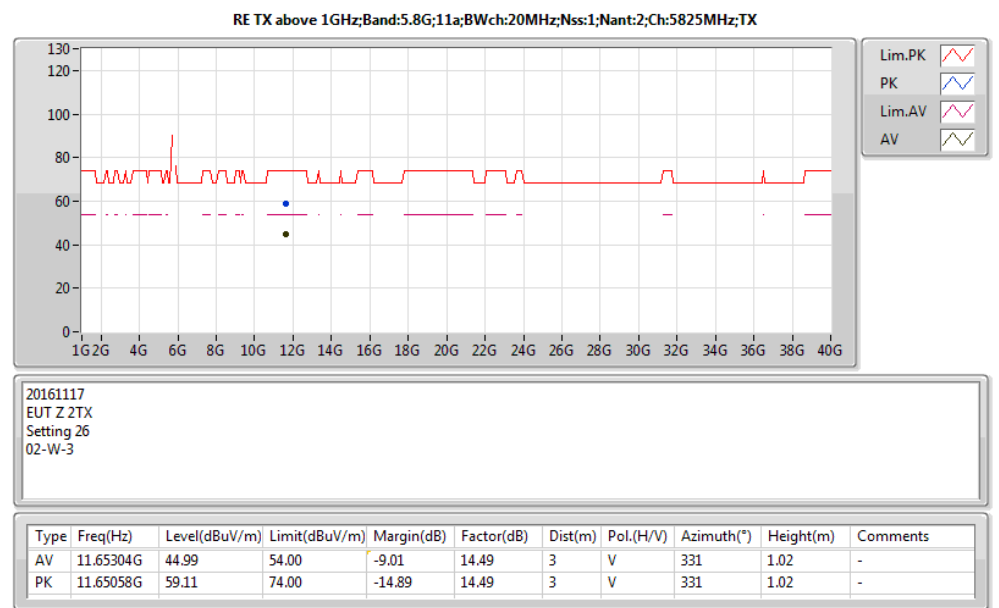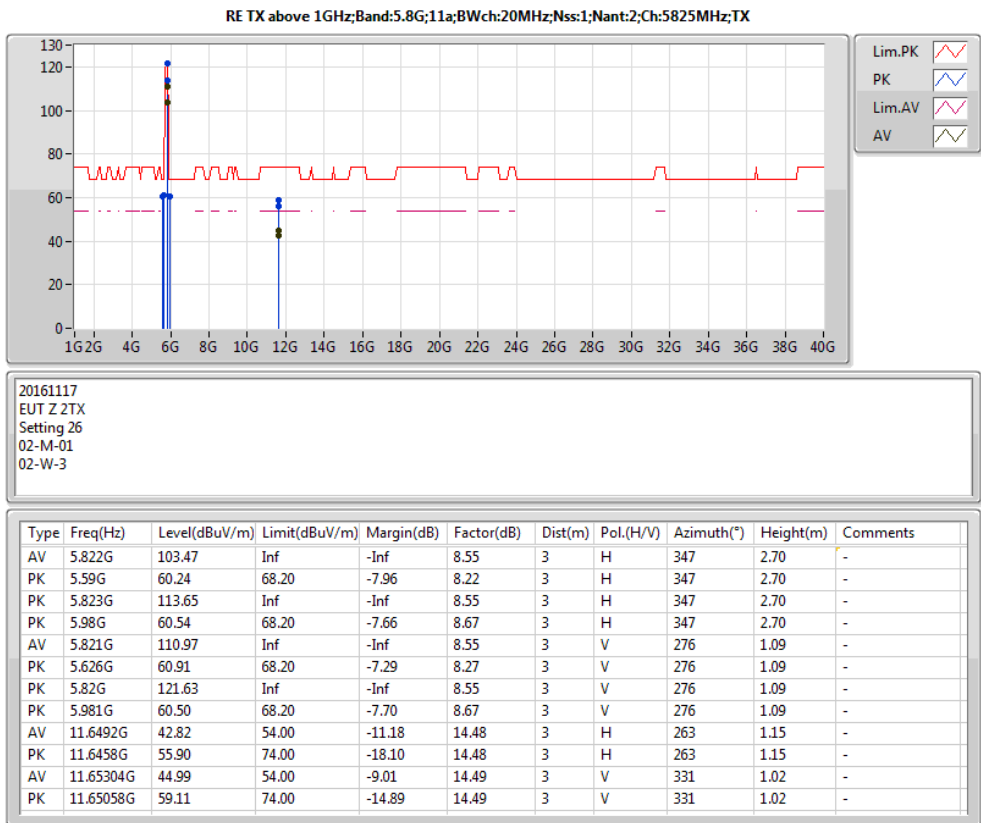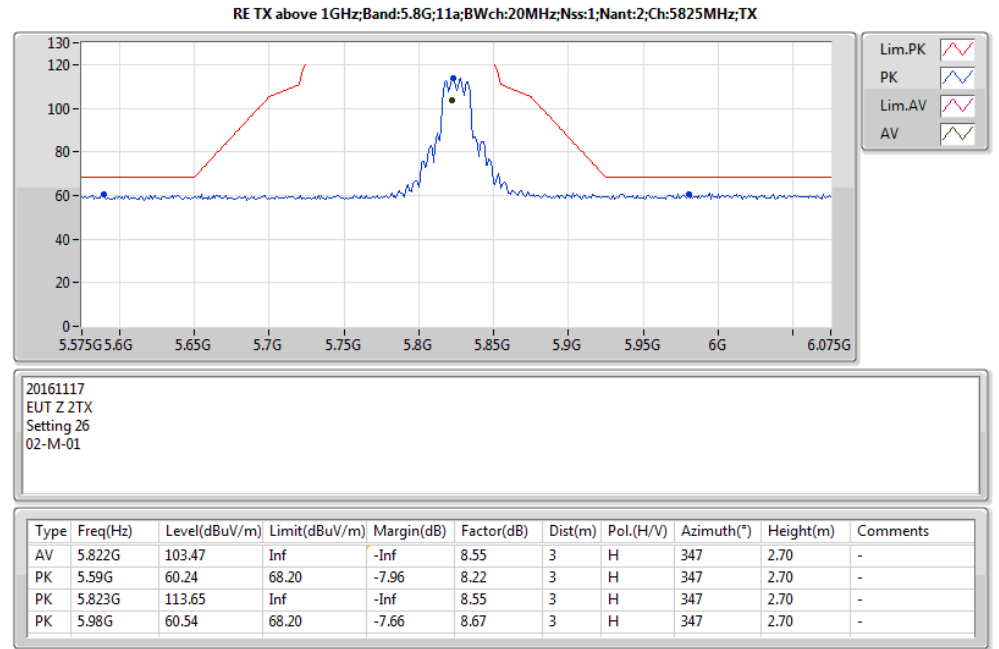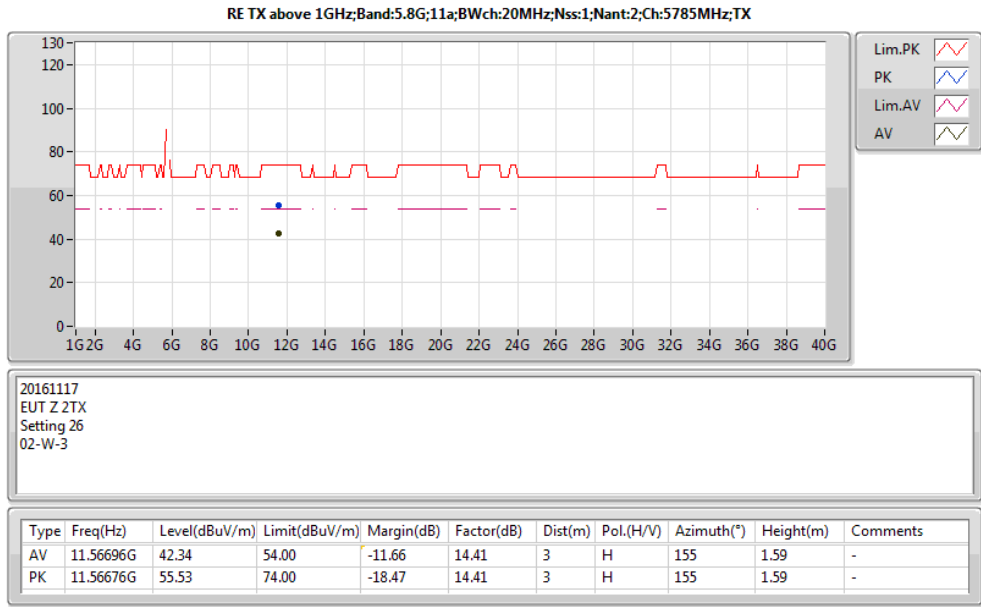

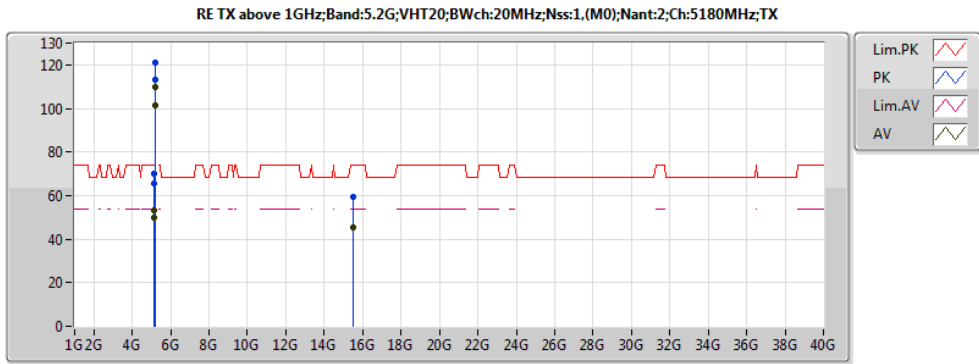


20161117
EUT Z 2TX non-TXBF
Setting 21
02-M-01
02-W-3

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	5.1488G	49.66	54.00	-4.34	4.27	3	H	323	1.03	-
AV	5.1852G	101.45	Inf	-Inf	4.35	3	H	323	1.03	-
PK	5.1484G	65.33	74.00	-8.67	4.27	3	H	323	1.03	-
PK	5.1488G	113.15	Inf	-Inf	4.35	3	H	323	1.03	-
AV	5.1456G	53.44	54.00	-0.56	4.26	3	V	318	1.03	-
AV	5.1836G	109.59	Inf	-Inf	4.34	3	V	318	1.03	-
PK	5.1456G	70.28	74.00	-3.72	4.26	3	V	318	1.03	-
PK	5.1848G	120.92	Inf	-Inf	4.35	3	V	318	1.03	-
AV	15.5358G	45.15	54.00	-8.85	16.18	3	H	158	2.55	-
PK	15.53662G	59.51	74.00	-14.49	16.18	3	H	158	2.55	-
AV	15.535G	45.57	54.00	-8.43	16.18	3	V	252	1.86	-
PK	15.53598G	59.16	74.00	-14.84	16.18	3	V	252	1.86	-

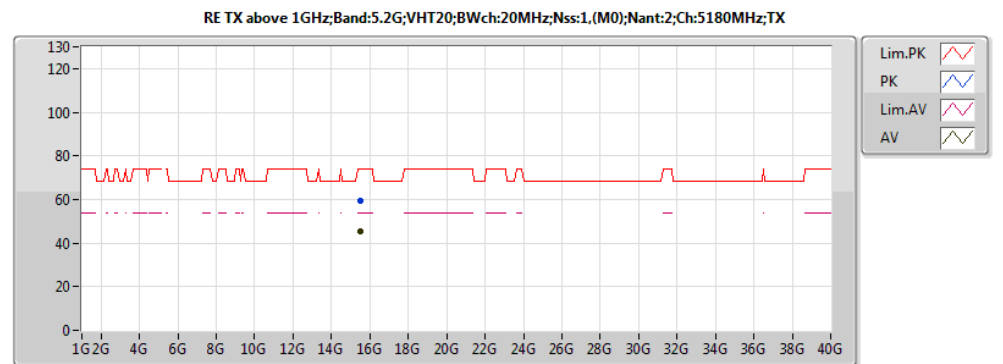


20161117
EUT Z 2TX non-TXBF
Setting 21
02-W-3

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	15.535G	45.57	54.00	-8.43	16.18	3	V	252	1.86	-
PK	15.53598G	59.16	74.00	-14.84	16.18	3	V	252	1.86	-

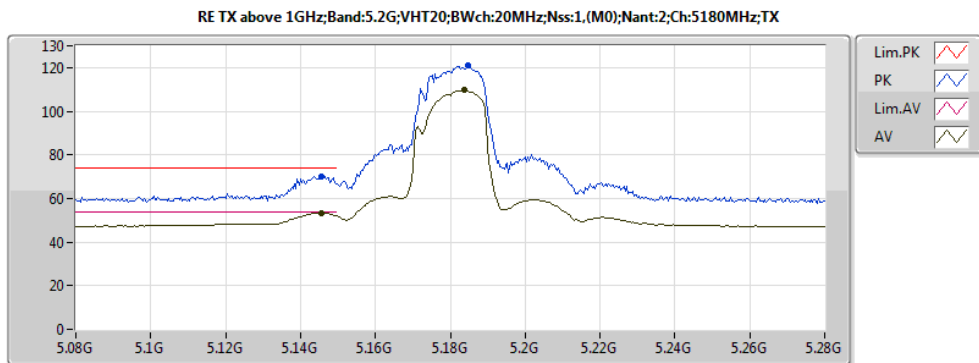


20161117
EUT Z 2TX non-TXBF
Setting 21
02-M-01-13

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	5.1456G	53.44	54.00	-0.56	4.26	3	V	318	1.03	-
AV	5.1836G	109.59	Inf	-Inf	4.34	3	V	318	1.03	-
PK	5.1456G	70.28	74.00	-3.72	4.26	3	V	318	1.03	-
PK	5.1848G	120.92	Inf	-Inf	4.35	3	V	318	1.03	-

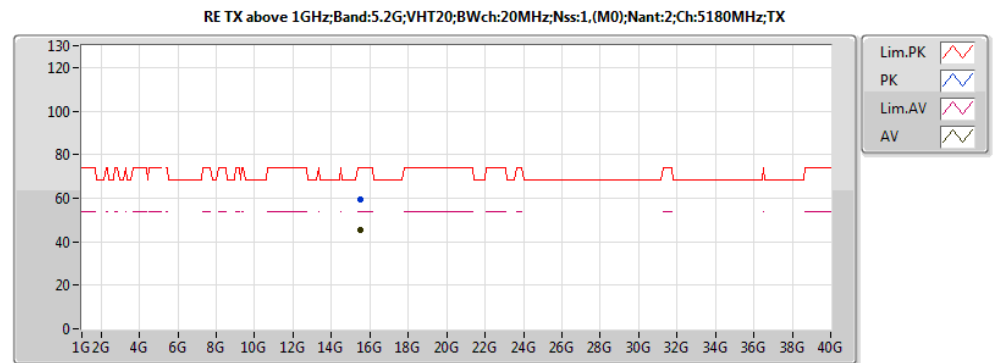


20161117
EUT Z 2TX non-TXBF
Setting 21
02-W-3

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	15.5358G	45.15	54.00	-8.85	16.18	3	H	158	2.55	-
PK	15.53662G	59.51	74.00	-14.49	16.18	3	H	158	2.55	-

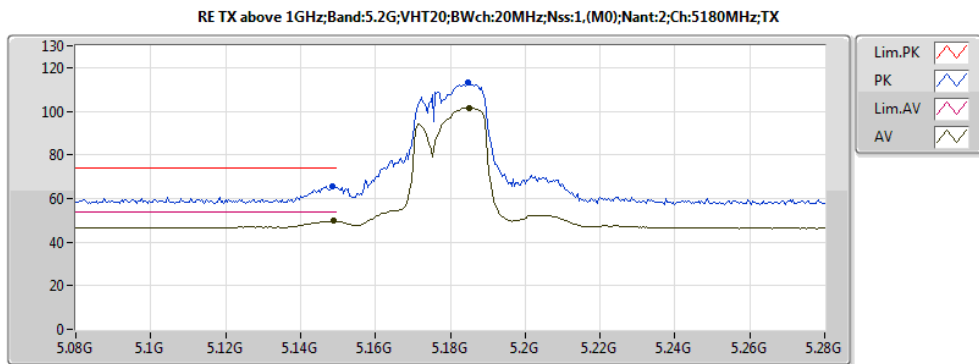







20161117
EUT Z 2TX non-TXBF
Setting 21
02-M-01-13


Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	5.1488G	49.66	54.00	-4.34	4.27	3	H	323	1.03	-
AV	5.1852G	101.45	Inf	-Inf	4.35	3	H	323	1.03	-
PK	5.1484G	65.33	74.00	-8.67	4.27	3	H	323	1.03	-
PK	5.1488G	113.15	Inf	-Inf	4.35	3	H	323	1.03	-

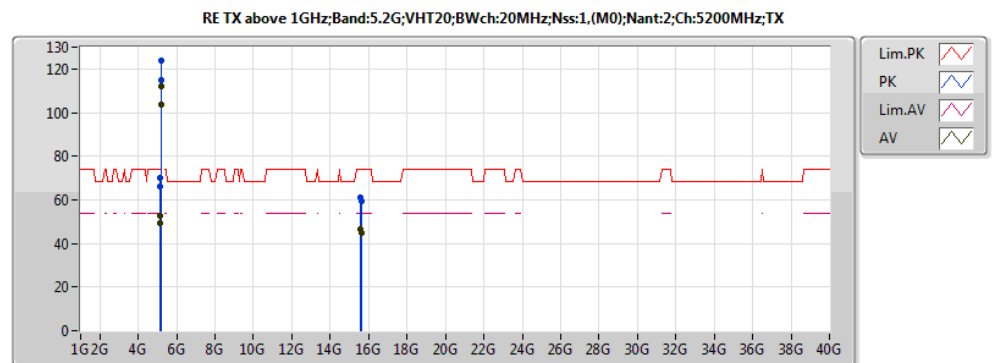

20161117
EUT Z 2TX
Setting 26
02-M-01
02-W-3


Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	5.1468G	49.44	54.00	-4.56	7.24	3	H	317	1.09	-
AV	5.2036G	103.39	Inf	-Inf	7.38	3	H	317	1.09	-
PK	5.1456G	65.95	74.00	-8.05	7.23	3	H	317	1.09	-
PK	5.2048G	114.86	Inf	-Inf	7.38	3	H	317	1.09	-
AV	5.1416G	52.79	54.00	-1.21	7.22	3	V	315	1.06	-
AV	5.202G	112.03	Inf	-Inf	7.38	3	V	315	1.06	-
PK	5.1396G	70.15	74.00	-3.85	7.22	3	V	315	1.06	-
PK	5.2024G	123.56	Inf	-Inf	7.38	3	V	315	1.06	-
AV	15.60284G	45.09	54.00	-8.91	15.98	3	H	146	1.85	-
PK	15.60368G	59.44	74.00	-14.56	15.97	3	H	146	1.85	-
AV	15.59964G	46.32	54.00	-7.68	15.99	3	V	252	1.04	-
PK	15.6002G	61.03	74.00	-12.97	15.99	3	V	252	1.04	-

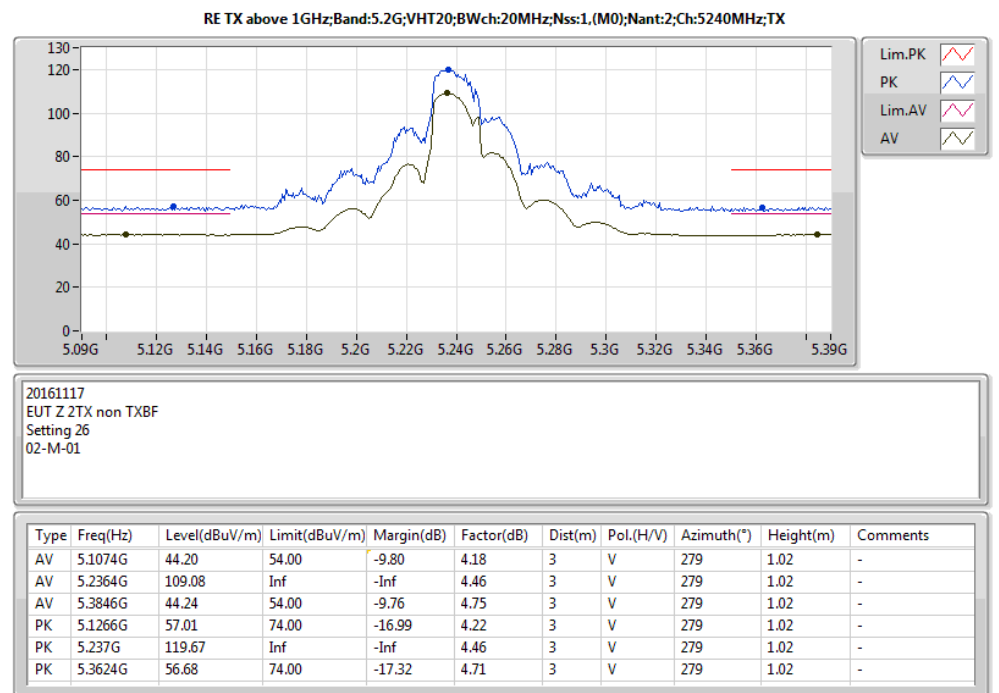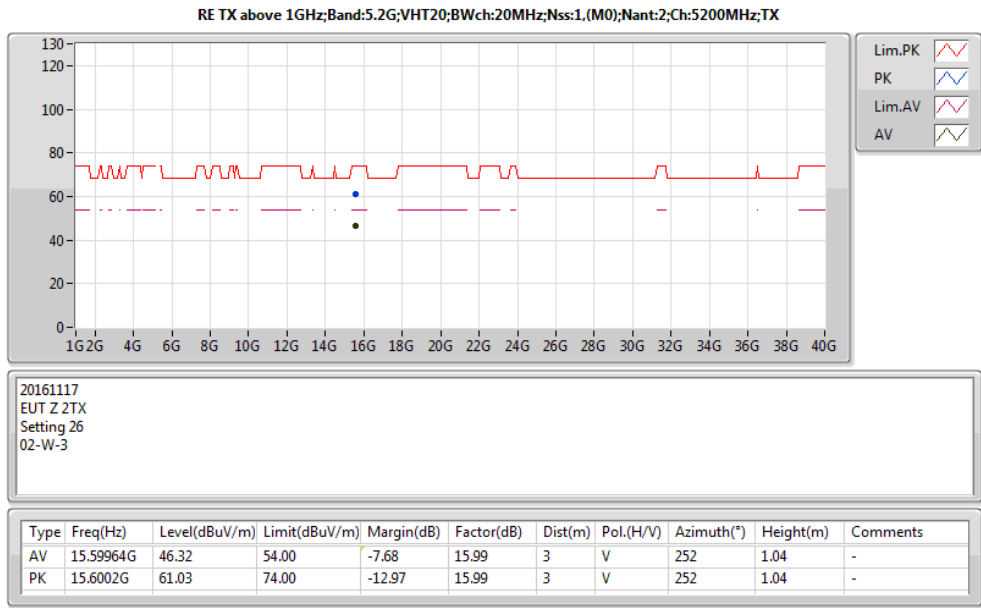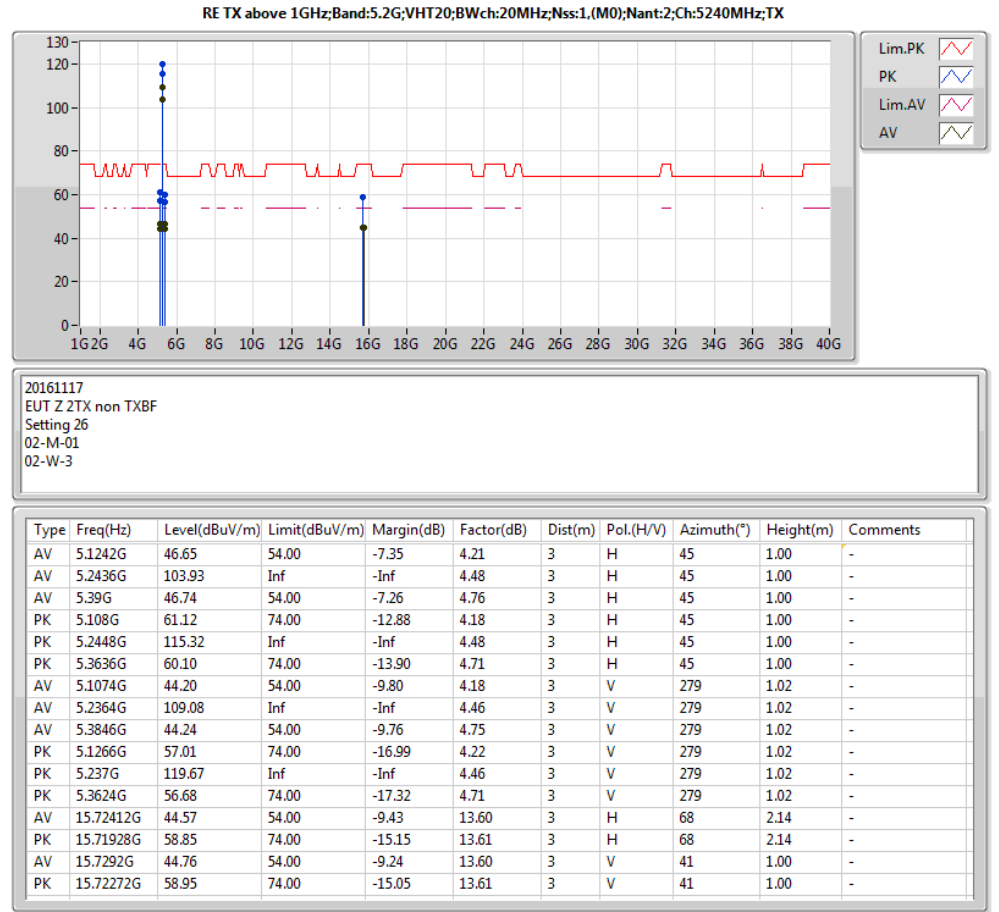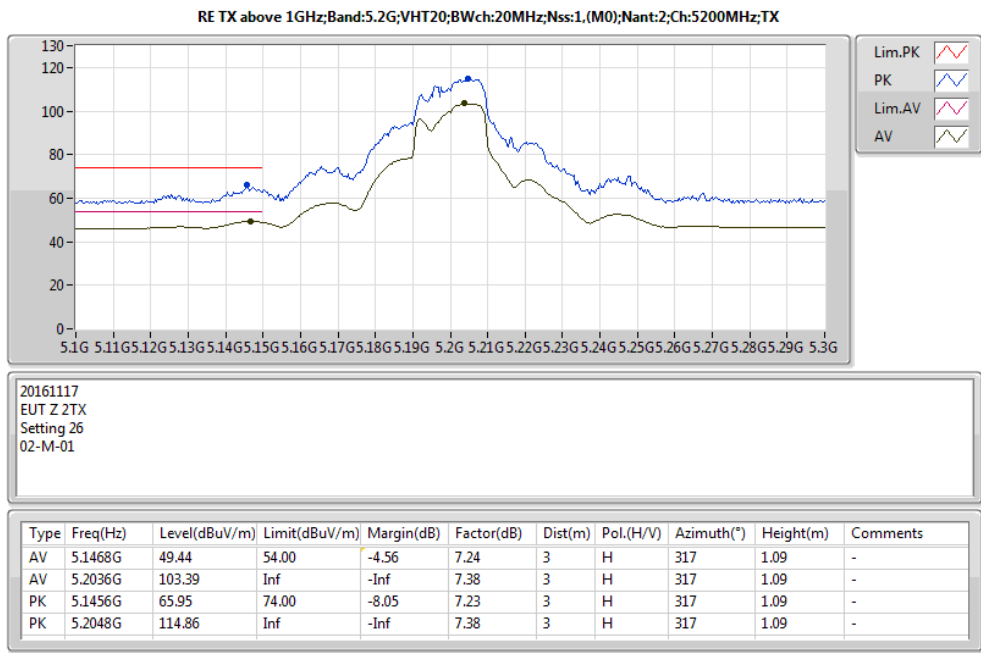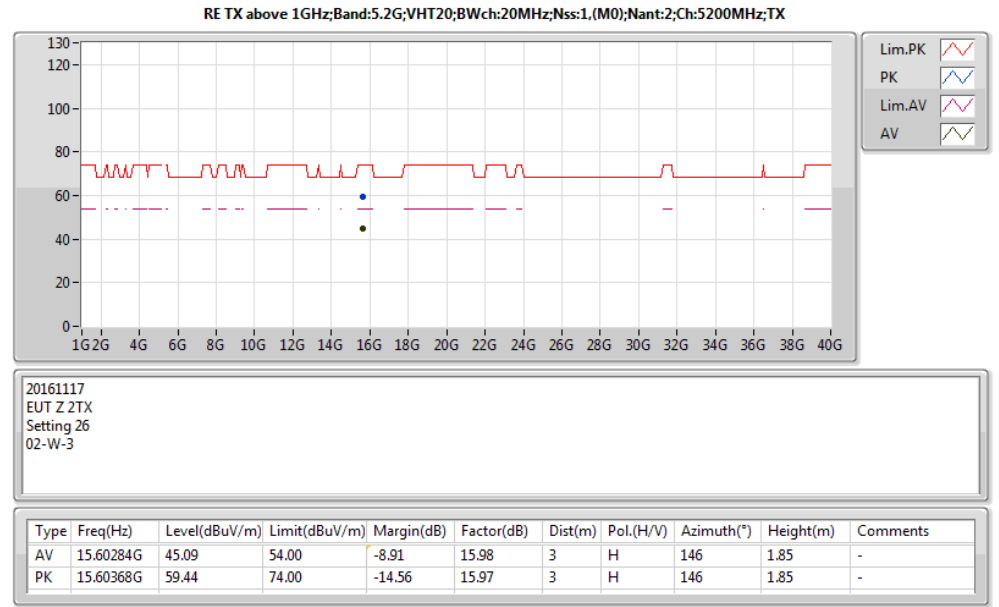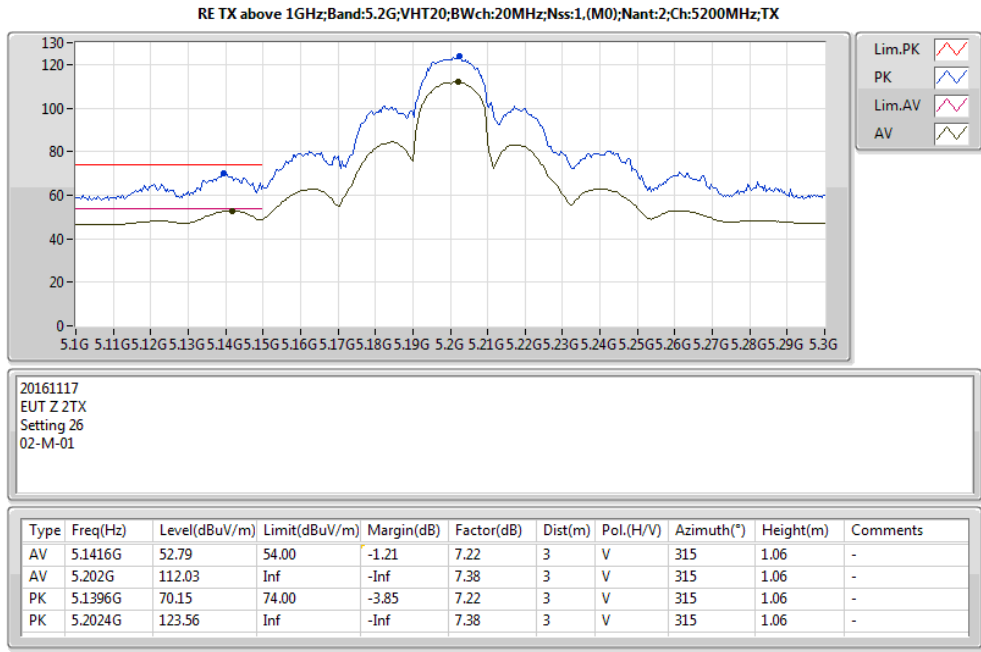

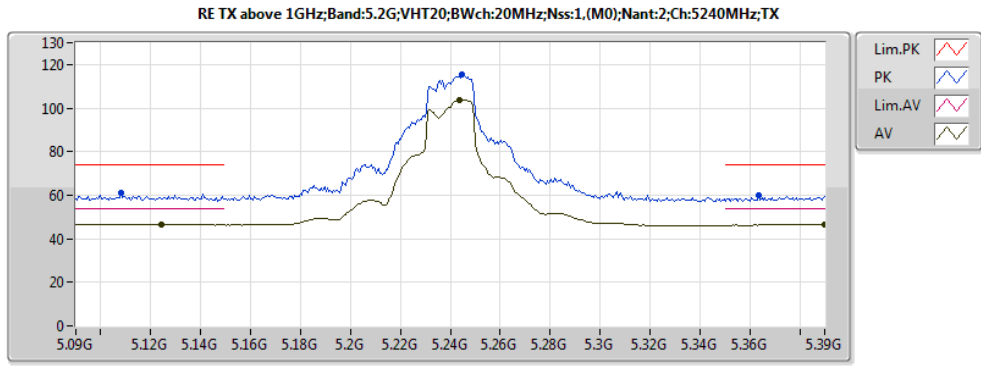


20161117
EUT Z 2TX non TXBF
Setting 26
02-M-01

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.1242G	46.65	54.00	-7.35	4.21	3	H	45	1.00	-
AV	5.2436G	103.93	Inf	-Inf	4.48	3	H	45	1.00	-
AV	5.39G	46.74	54.00	-7.26	4.76	3	H	45	1.00	-
PK	5.108G	61.12	74.00	-12.88	4.18	3	H	45	1.00	-
PK	5.2448G	115.32	Inf	-Inf	4.48	3	H	45	1.00	-
PK	5.3636G	60.10	74.00	-13.90	4.71	3	H	45	1.00	-

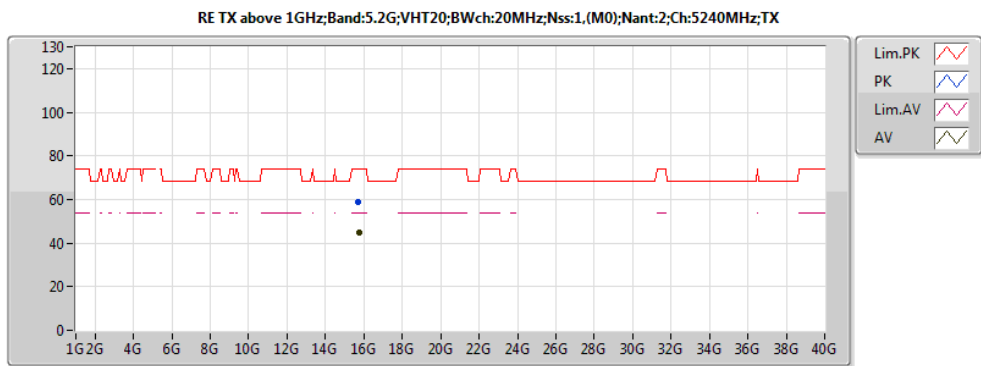


20161117
EUT Z 2TX non TXBF
Setting 26
02-W-3

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.7292G	44.76	54.00	-9.24	13.60	3	V	41	1.00	-
PK	15.72272G	58.95	74.00	-15.05	13.61	3	V	41	1.00	-

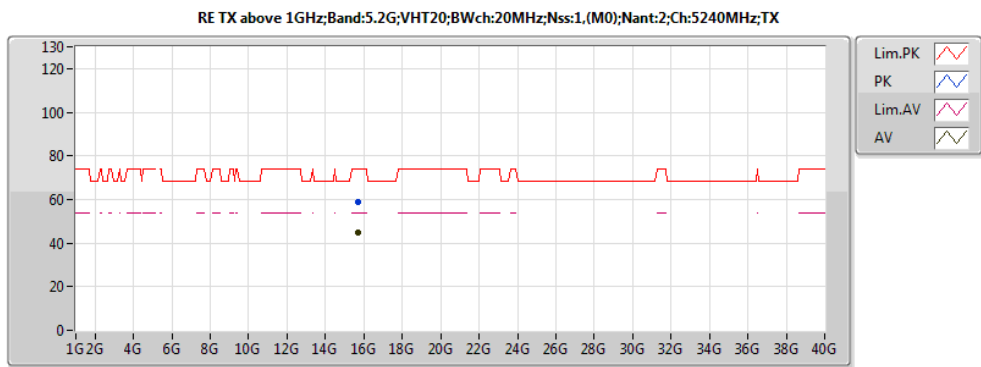


20161117
EUT Z 2TX non TXBF
Setting 26
02-W-3

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.72412G	44.57	54.00	-9.43	13.60	3	H	68	2.14	-
PK	15.71928G	58.85	74.00	-15.15	13.61	3	H	68	2.14	-

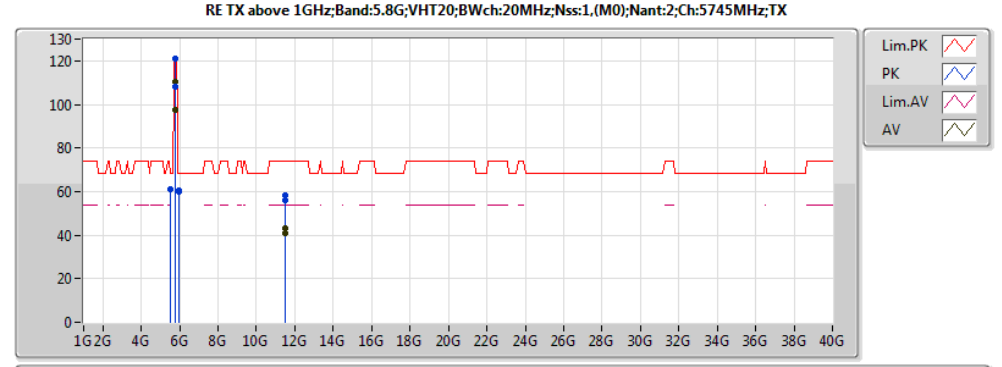


20161117
EUT Z 2TX
Setting 26
02-M-01
02-W-3

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.741G	97.50	Inf	-Inf	8.44	3	H	378	1.11	-
PK	5.514G	60.80	68.20	-7.40	8.14	3	H	378	1.11	-
PK	5.744G	108.18	Inf	-Inf	8.45	3	H	378	1.11	-
PK	5.975G	60.22	68.20	-7.98	8.66	3	H	378	1.11	-
AV	5.743G	110.32	Inf	-Inf	8.44	3	V	287	1.50	-
PK	5.499G	60.97	68.20	-7.23	8.13	3	V	287	1.50	-
PK	5.742G	121.06	Inf	-Inf	8.44	3	V	287	1.50	-
PK	5.958G	60.74	68.20	-7.46	8.65	3	V	287	1.50	-
AV	11.4904G	40.99	54.00	-13.01	14.34	3	H	320	2.24	-
PK	11.48604G	55.79	74.00	-18.21	14.34	3	H	320	2.24	-
AV	11.49034G	43.35	54.00	-10.65	14.34	3	V	300	2.45	-
PK	11.49214G	58.28	74.00	-15.72	14.34	3	V	300	2.45	-

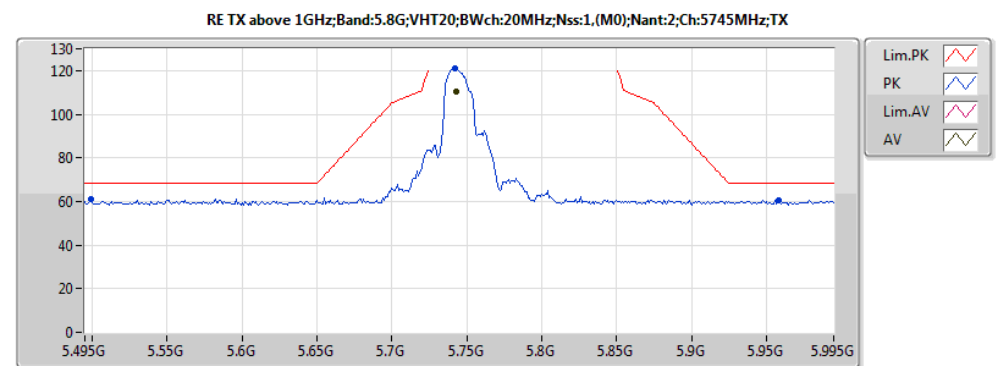







20161117
EUT Z 2TX
Setting 26
02-M-01







Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.743G	110.32	Inf	-Inf	8.44	3	V	287	1.50	-
PK	5.499G	60.97	68.20	-7.23	8.13	3	V	287	1.50	-
PK	5.742G	121.06	Inf	-Inf	8.44	3	V	287	1.50	-
PK	5.958G	60.74	68.20	-7.46	8.65	3	V	287	1.50	-

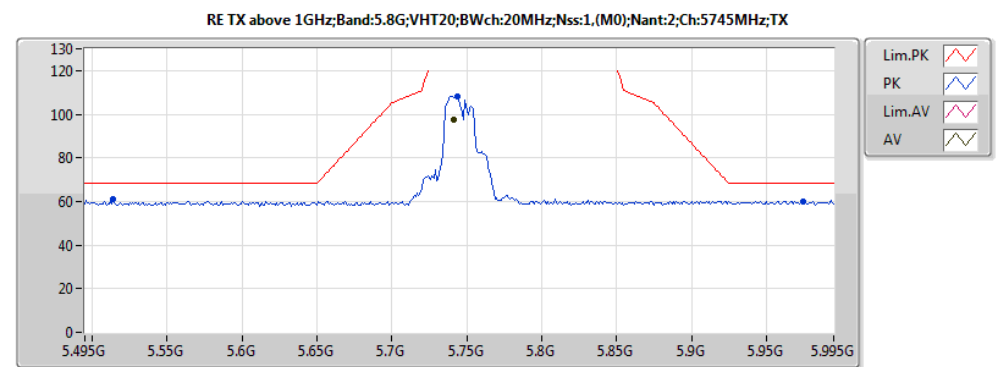


20161117
EUT Z 2TX
Setting 26
02-M-01

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.741G	97.50	Inf	-Inf	8.44	3	H	378	1.11	-
PK	5.514G	60.80	68.20	-7.40	8.14	3	H	378	1.11	-
PK	5.744G	108.18	Inf	-Inf	8.45	3	H	378	1.11	-
PK	5.975G	60.22	68.20	-7.98	8.66	3	H	378	1.11	-

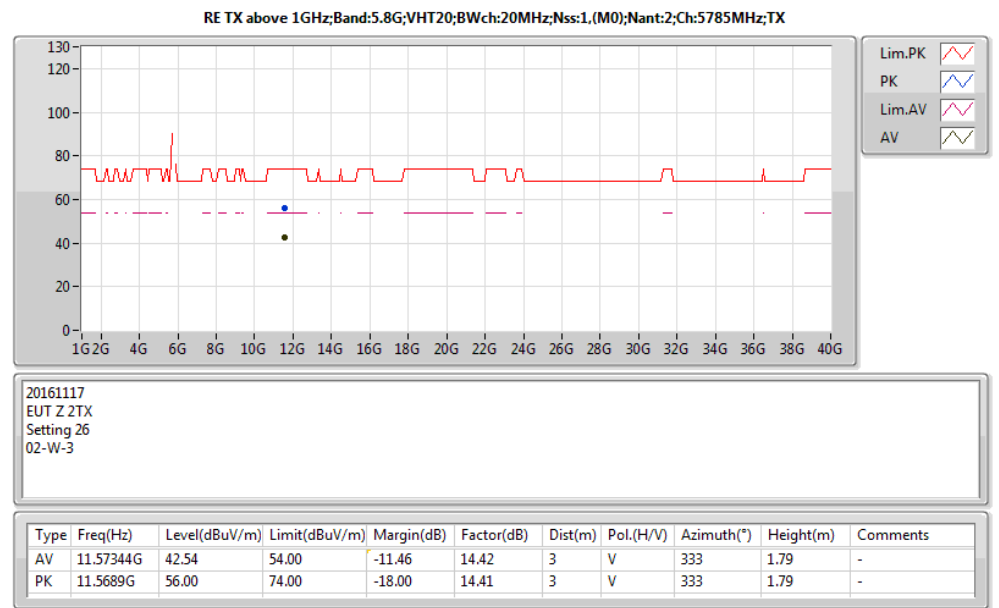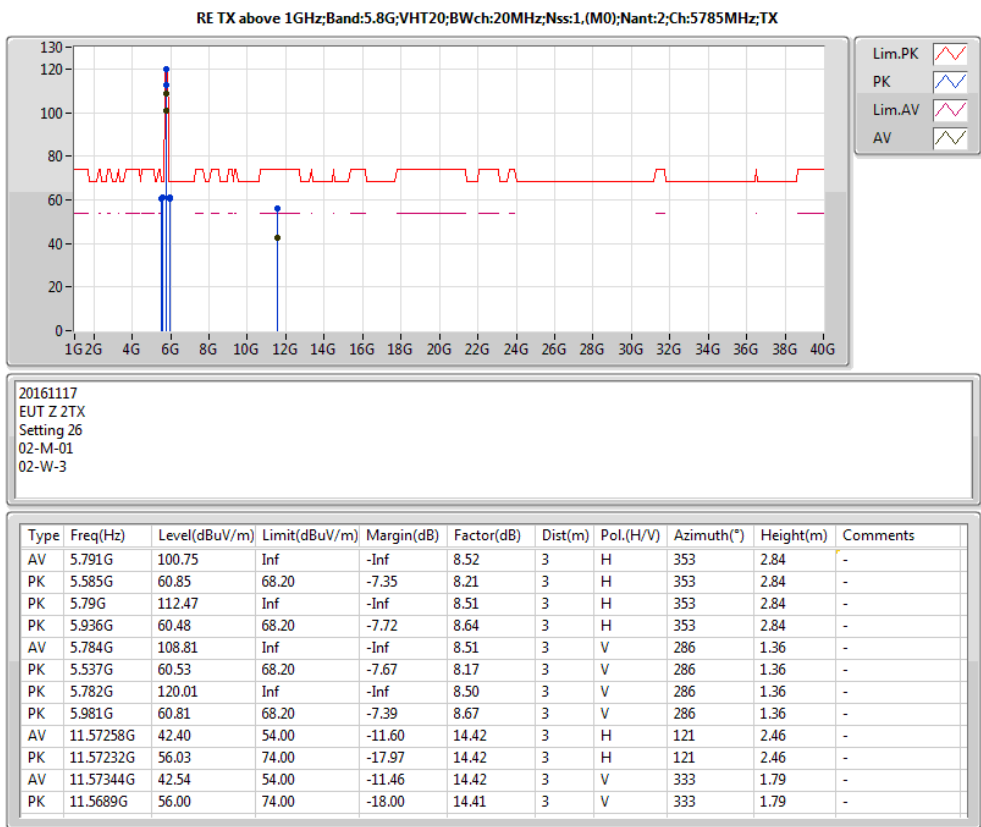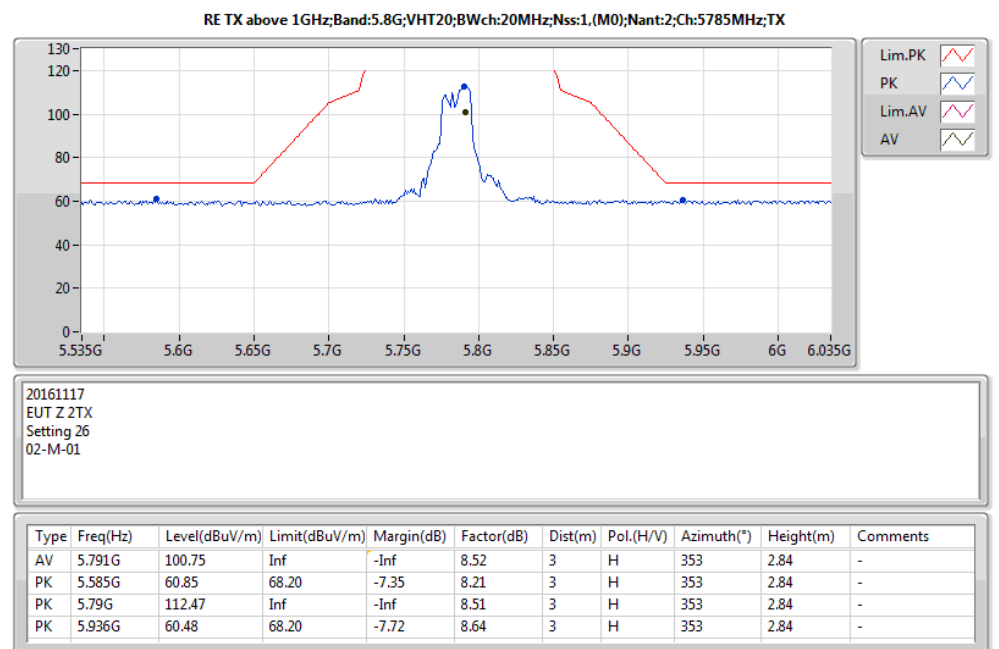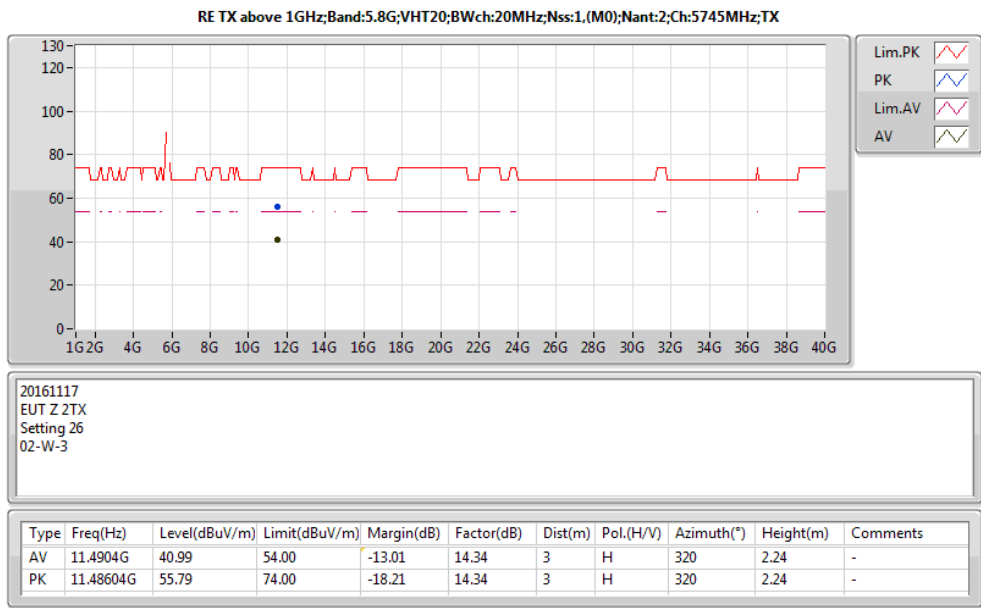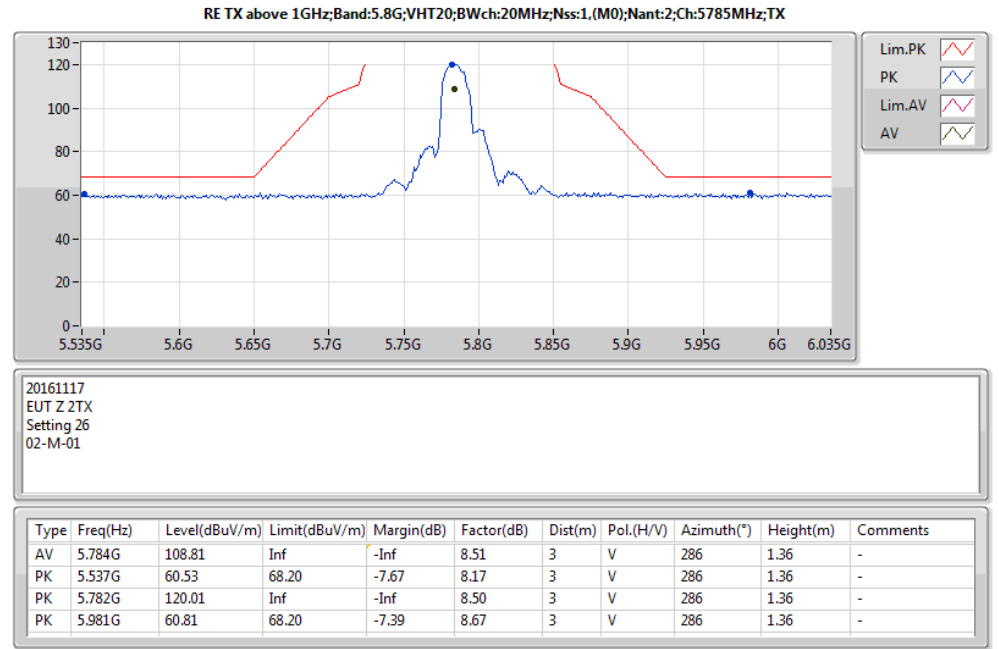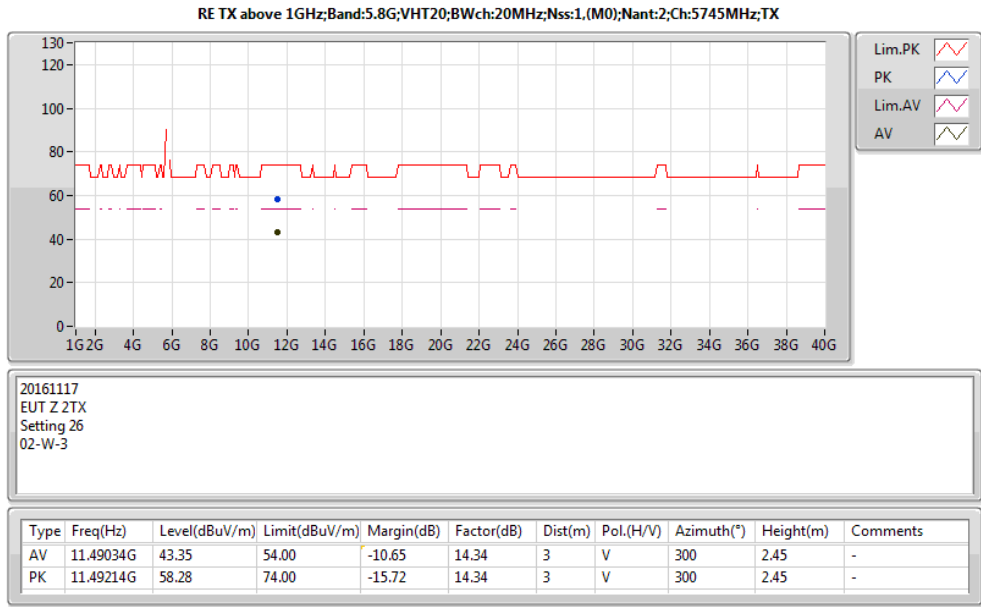


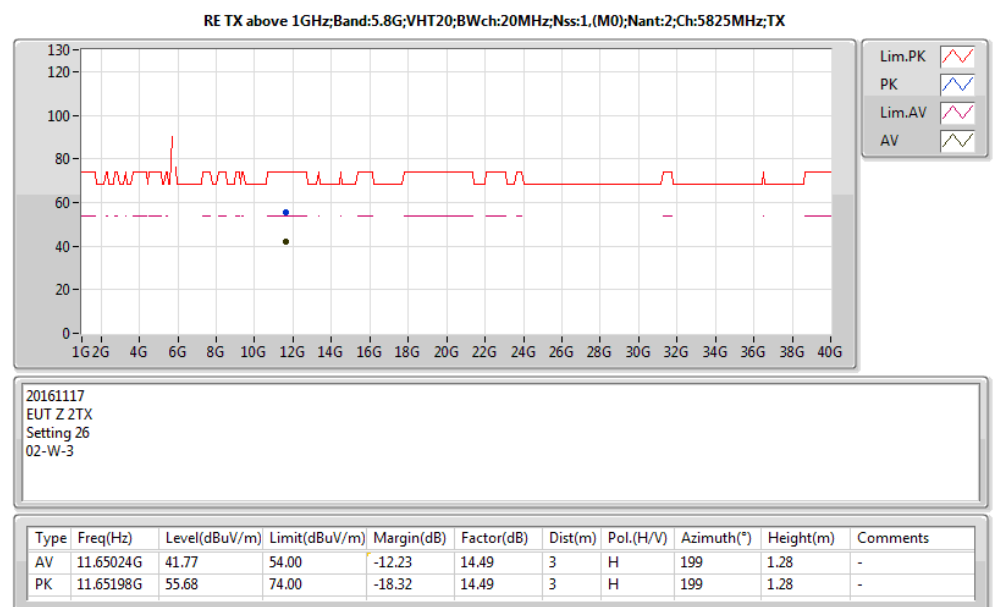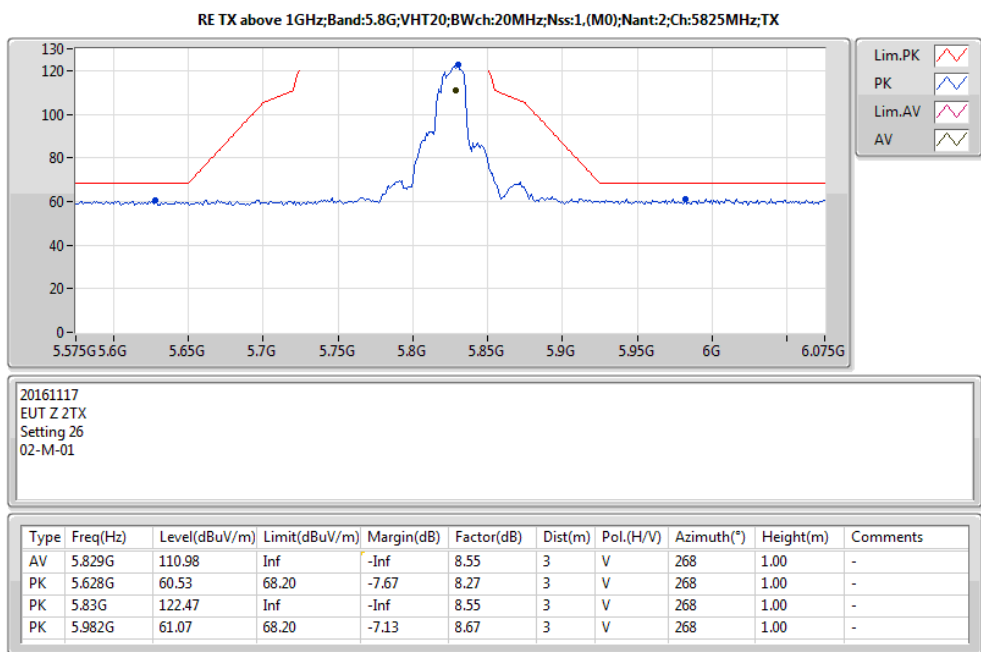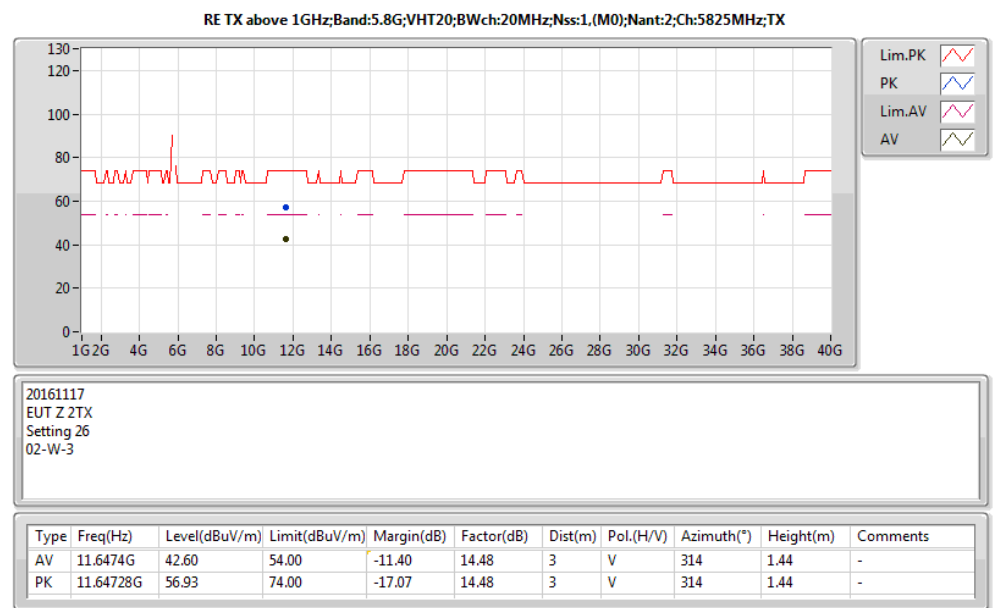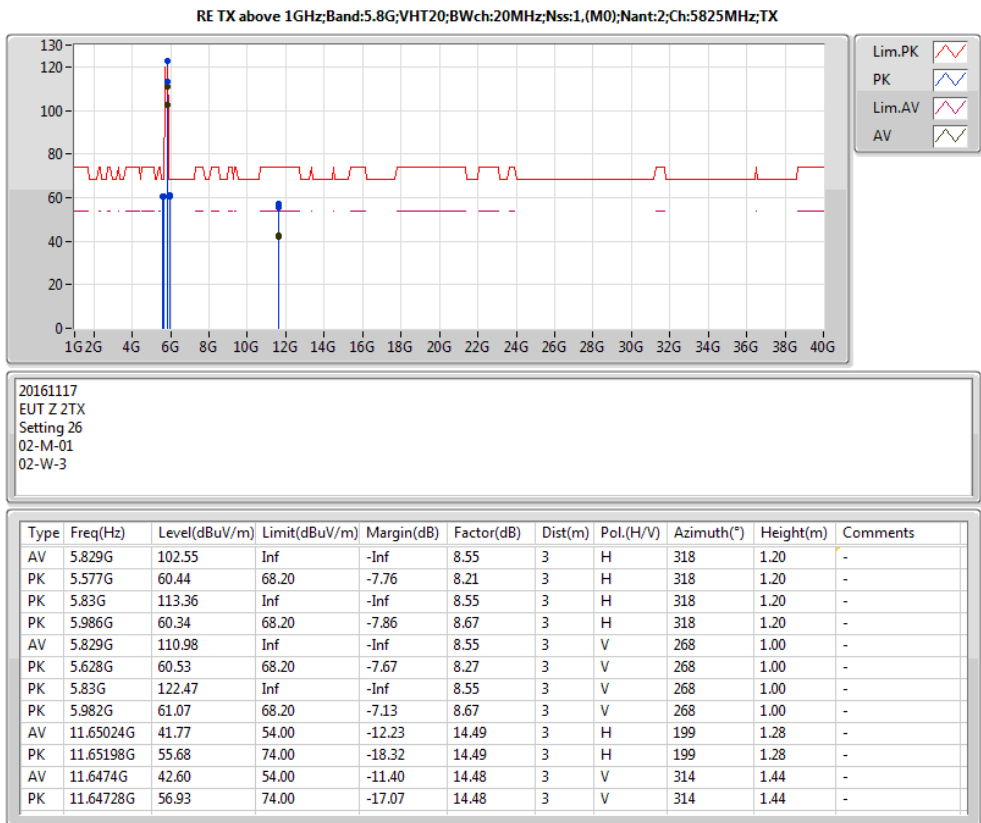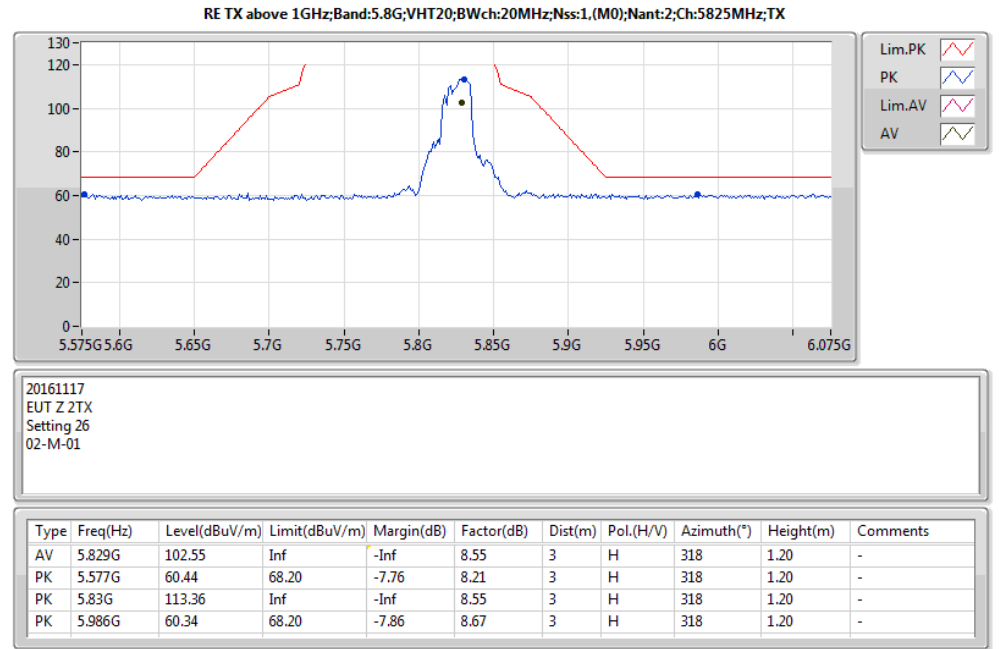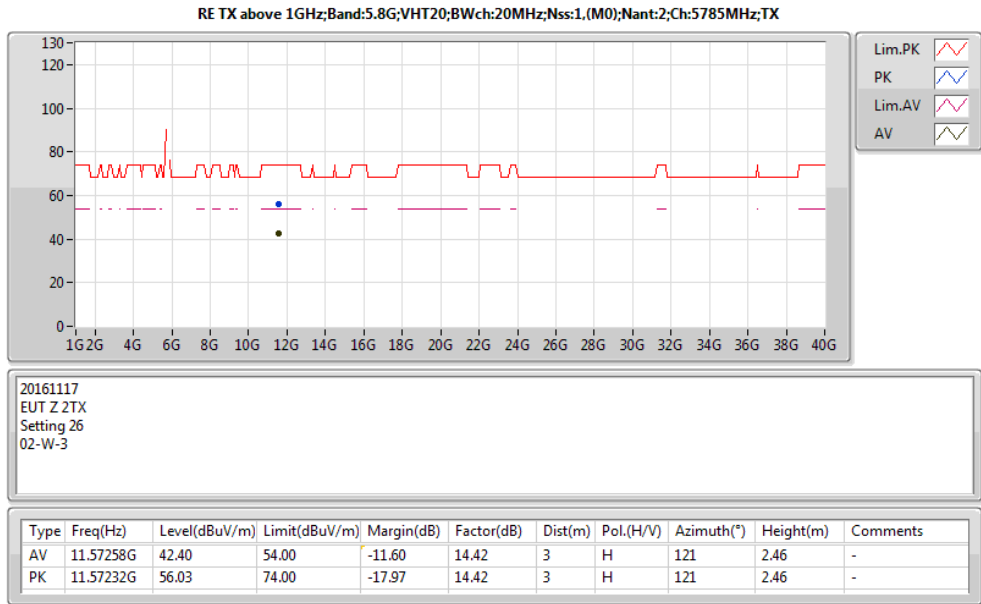

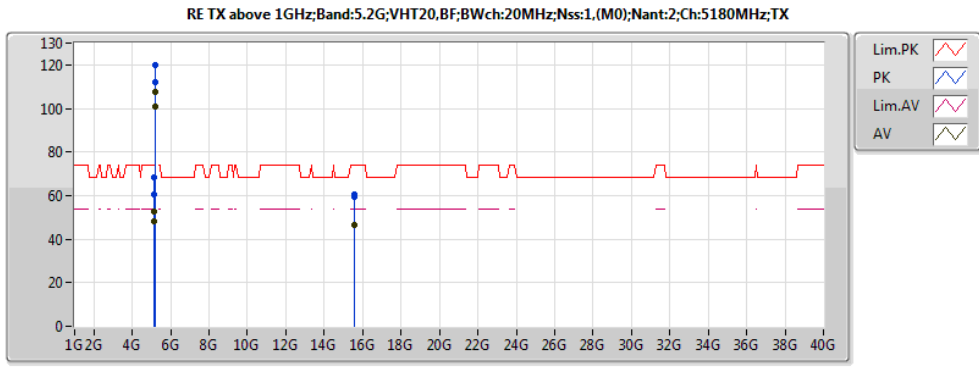


20161213
EUT Z 2TX _ TXBF
Setting 23
01-J-5-FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	5.1492G	48.23	54.00	-5.77	4.95	3	H	288	1.26	-
AV	5.1876G	100.88	Inf	-Inf	5.07	3	H	288	1.26	-
PK	5.1036G	60.64	74.00	-13.36	4.80	3	H	288	1.26	-
PK	5.184G	111.88	Inf	-Inf	5.06	3	H	288	1.26	-
AV	5.1496G	52.50	54.00	-1.50	3.90	3	V	271	1.11	-
AV	5.1828G	107.84	Inf	-Inf	3.97	3	V	271	1.11	-
PK	5.1484G	68.13	74.00	-5.87	3.90	3	V	271	1.11	-
PK	5.1776G	119.94	Inf	-Inf	3.96	3	V	271	1.11	-
AV	15.53868G	46.33	54.00	-7.67	13.82	3	H	17	1.07	-
PK	15.54094G	59.52	74.00	-14.48	13.81	3	H	17	1.07	-
AV	15.53889G	46.30	54.00	-7.70	13.82	3	V	170	1.80	-
PK	15.54064G	60.27	74.00	-13.73	13.81	3	V	170	1.80	-

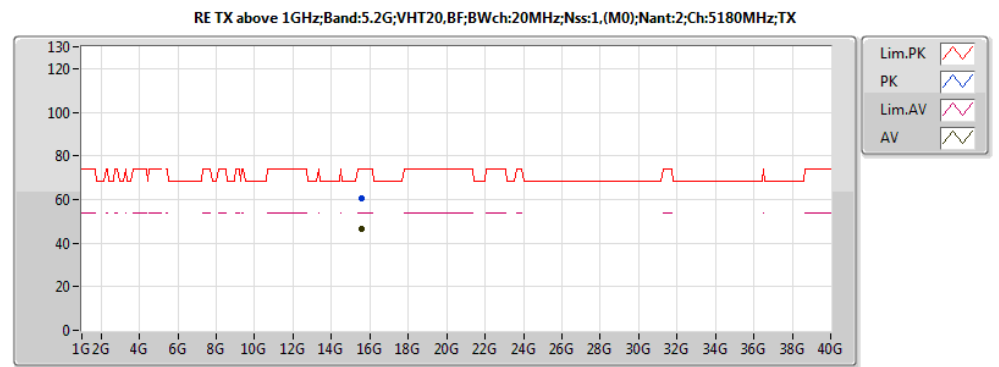


20161213
EUT Z 2TX _ TXBF
Setting 23
01-J-5-FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	15.53889G	46.30	54.00	-7.70	13.82	3	V	170	1.80	-
PK	15.54064G	60.27	74.00	-13.73	13.81	3	V	170	1.80	-

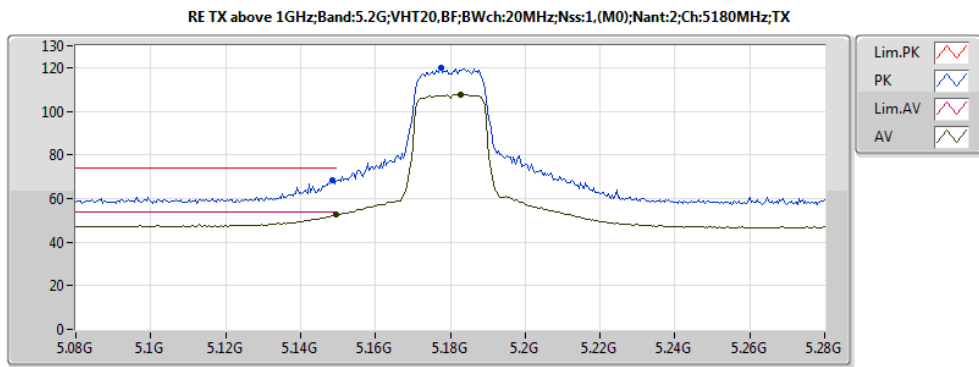


20161213
EUT Z 2TX _ TXBF
Setting 23
01-J-5-13-FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	5.1496G	52.50	54.00	-1.50	3.90	3	V	271	1.11	-
AV	5.1828G	107.84	Inf	-Inf	3.97	3	V	271	1.11	-
PK	5.1484G	68.13	74.00	-5.87	3.90	3	V	271	1.11	-
PK	5.1776G	119.94	Inf	-Inf	3.96	3	V	271	1.11	-

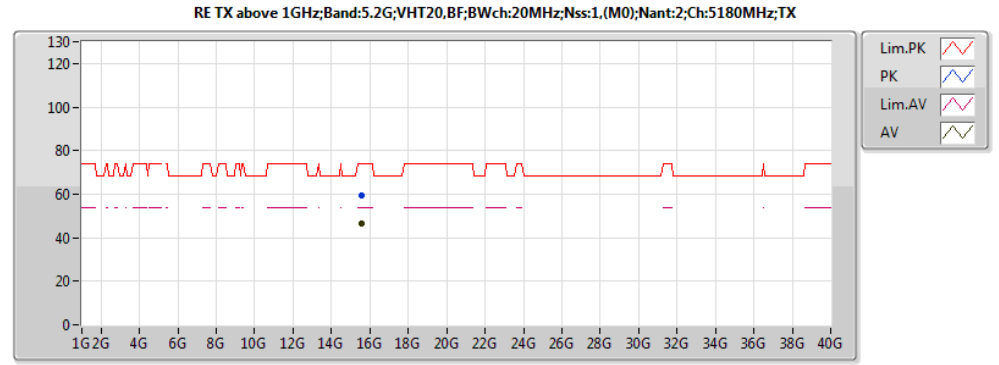


20161213
EUT Z 2TX _ TXBF
Setting 23
01-J-5-FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	15.53868G	46.33	54.00	-7.67	13.82	3	H	17	1.07	-
PK	15.54094G	59.52	74.00	-14.48	13.81	3	H	17	1.07	-

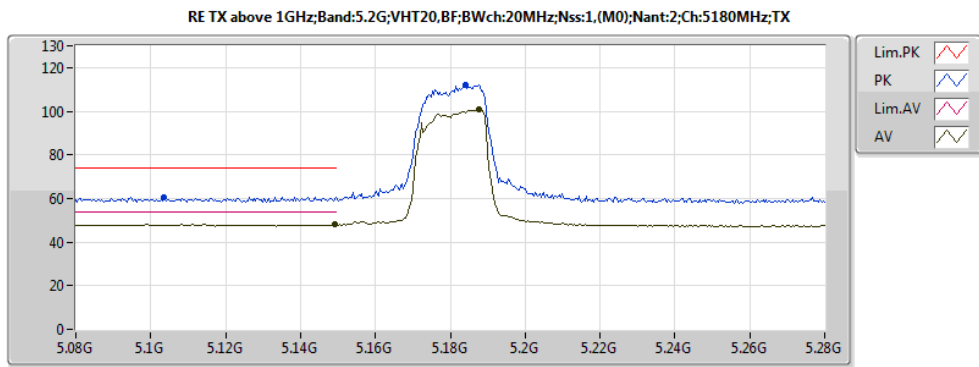







20161213
EUT Z 2TX _ TXBF
Setting 23
01-J-5-13-FSP


Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	5.1492G	48.23	54.00	-5.77	4.95	3	H	288	1.26	-
AV	5.1876G	100.88	Inf	-Inf	5.07	3	H	288	1.26	-
PK	5.1036G	60.64	74.00	-13.36	4.80	3	H	288	1.26	-
PK	5.184G	111.88	Inf	-Inf	5.06	3	H	288	1.26	-

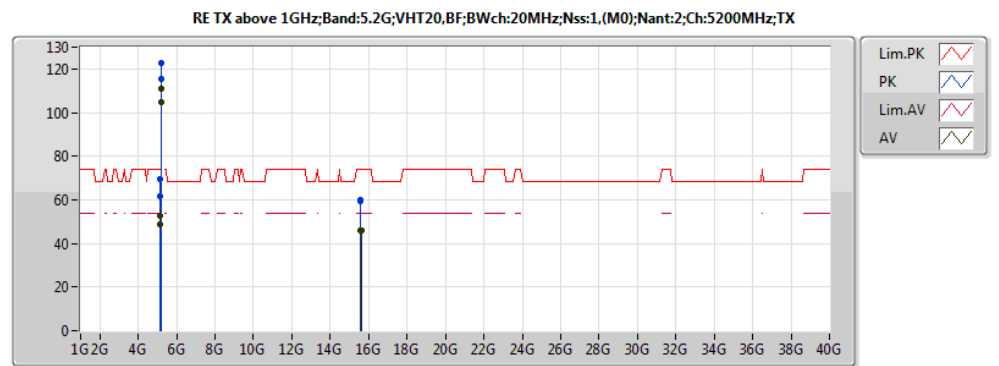

20161213
EUT Z 2TX _ TXBF
Setting 26
01-J-5-FSP


Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	5.1484G	48.51	54.00	-5.49	4.27	3	H	279	1.00	-
AV	5.192G	104.88	Inf	-Inf	4.36	3	H	279	1.00	-
PK	5.1488G	61.88	74.00	-12.12	4.27	3	H	279	1.00	-
PK	5.1924G	115.56	Inf	-Inf	4.36	3	H	279	1.00	-
AV	5.1496G	52.64	54.00	-1.36	4.27	3	V	278	1.03	-
AV	5.2028G	111.09	Inf	-Inf	4.39	3	V	278	1.03	-
PK	5.1468G	69.52	74.00	-4.48	4.26	3	V	278	1.03	-
PK	5.2048G	122.69	Inf	-Inf	4.39	3	V	278	1.03	-
AV	15.60134G	46.19	54.00	-7.81	13.74	3	H	278	1.30	-
PK	15.59947G	59.77	74.00	-14.23	13.75	3	H	278	1.30	-
AV	15.60064G	46.16	54.00	-7.84	13.75	3	V	181	2.05	-
PK	15.60102G	59.57	74.00	-14.43	13.74	3	V	181	2.05	-

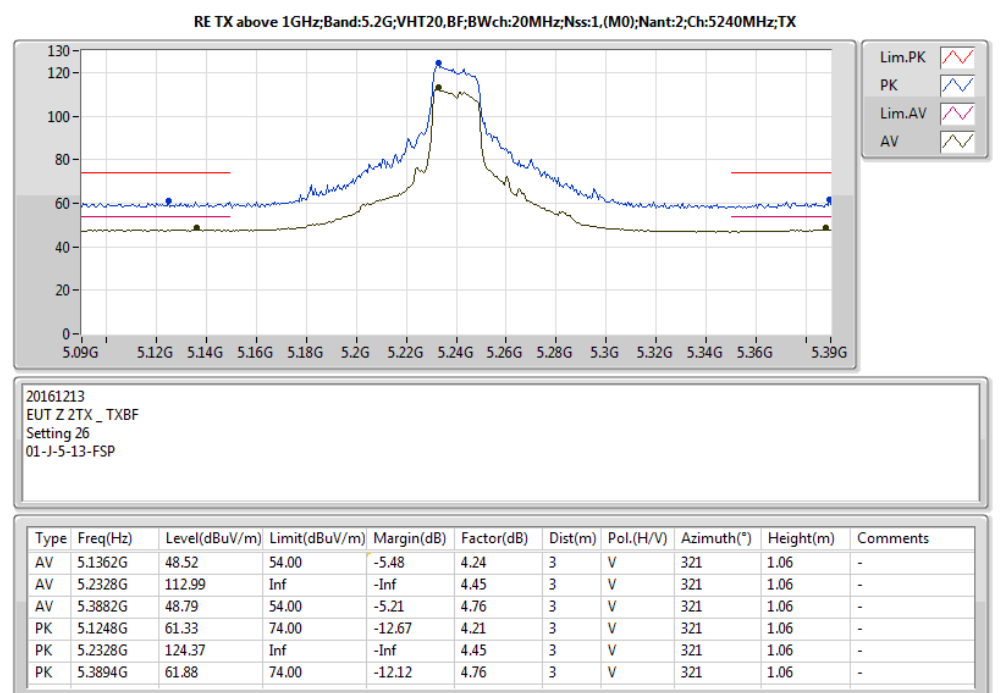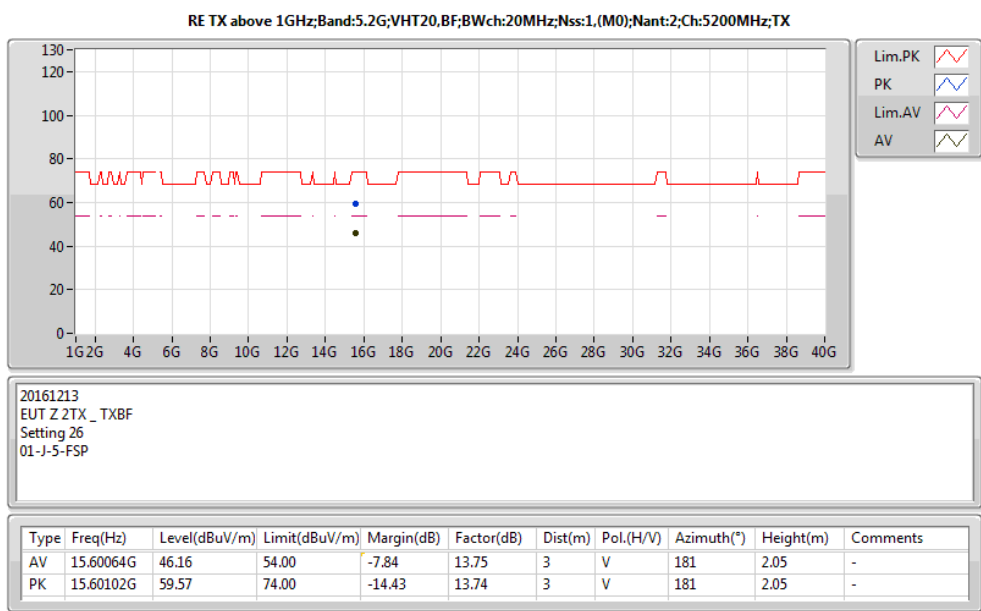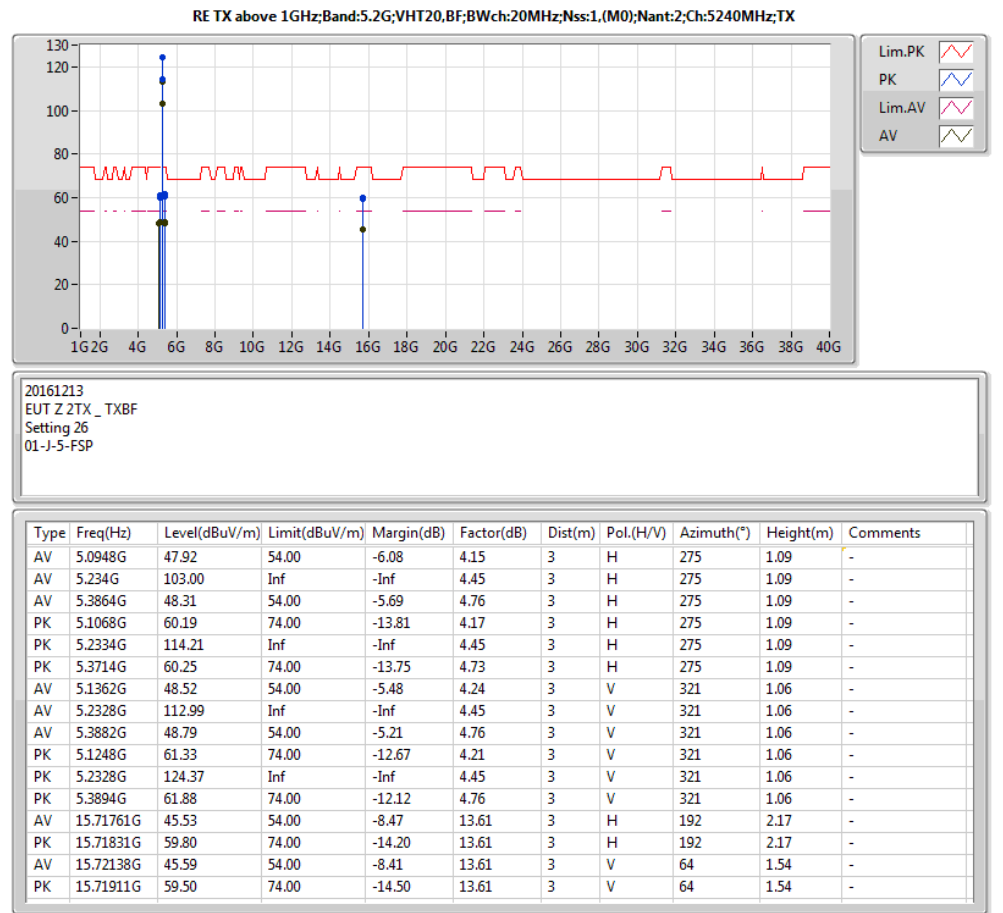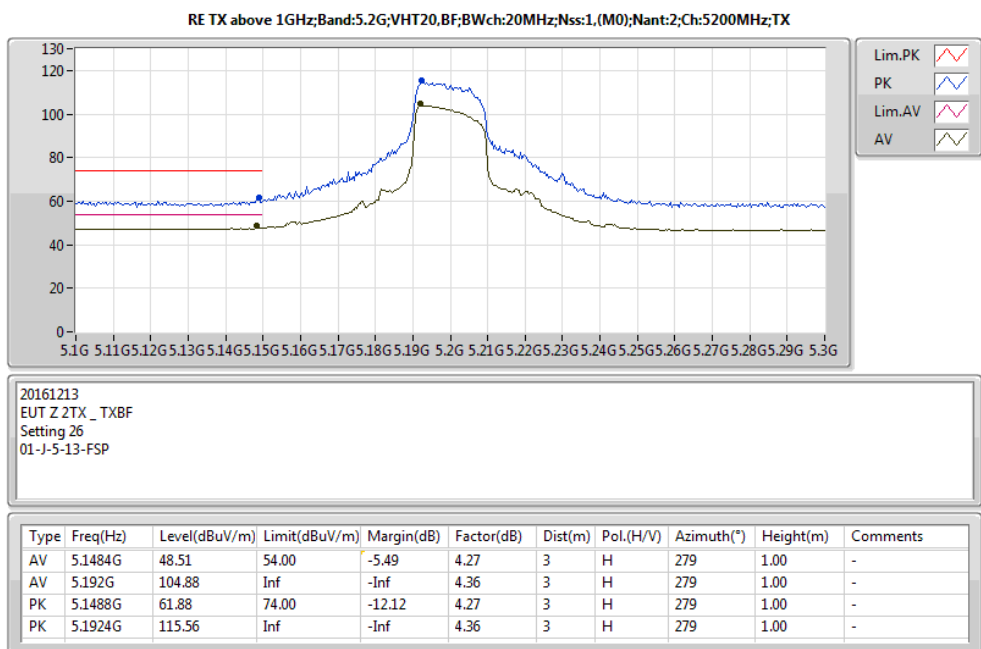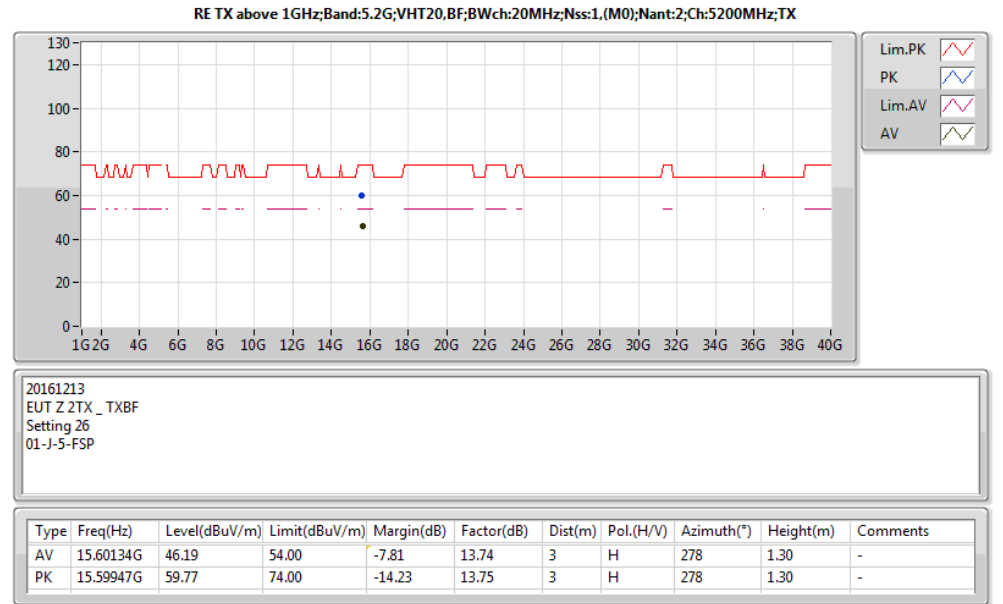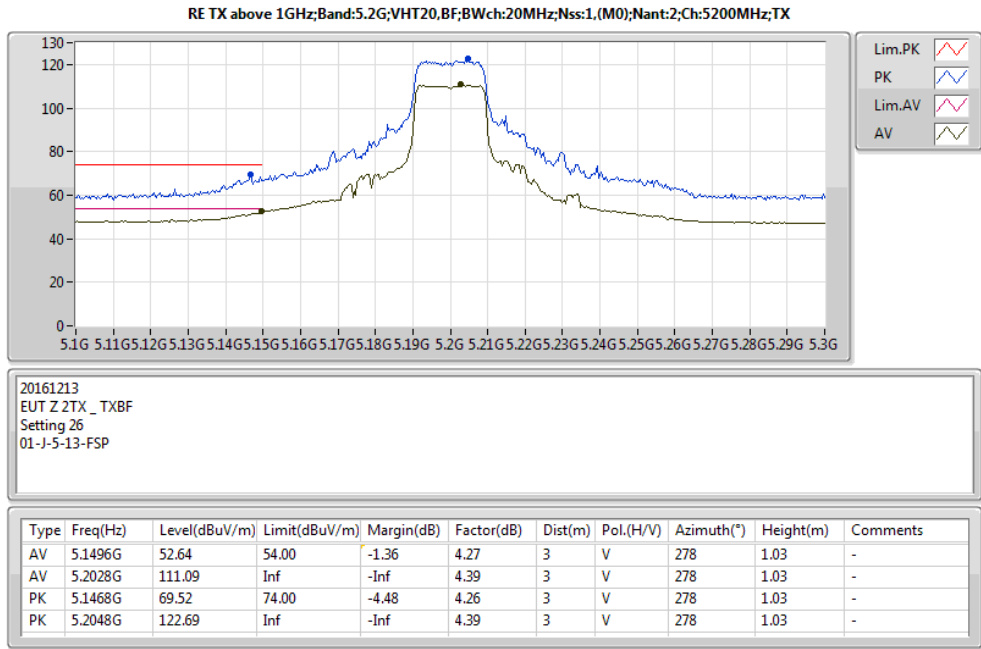

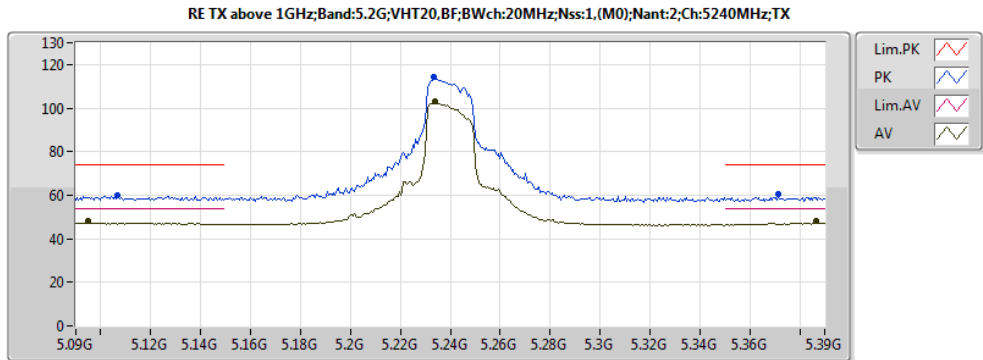


20161213
EUT Z 2TX _ TXBF
Setting 26
01-J-5-FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.0948G	47.92	54.00	-6.08	4.15	3	H	275	1.09	-
AV	5.234G	103.00	Inf	-Inf	4.45	3	H	275	1.09	-
AV	5.3864G	48.31	54.00	-5.69	4.76	3	H	275	1.09	-
PK	5.1068G	60.19	74.00	-13.81	4.17	3	H	275	1.09	-
PK	5.2334G	114.21	Inf	-Inf	4.45	3	H	275	1.09	-
PK	5.3714G	60.25	74.00	-13.75	4.73	3	H	275	1.09	-

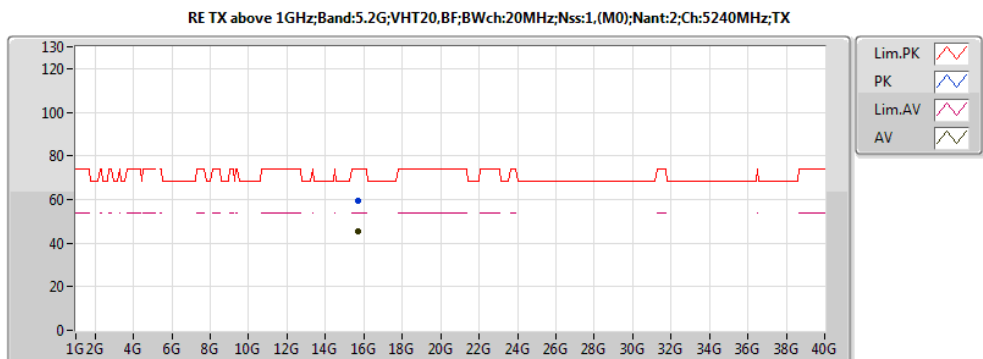


20161213
EUT Z 2TX _ TXBF
Setting 26
01-J-5-FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.72138G	45.59	54.00	-8.41	13.61	3	V	64	1.54	-
PK	15.71911G	59.50	74.00	-14.50	13.61	3	V	64	1.54	-

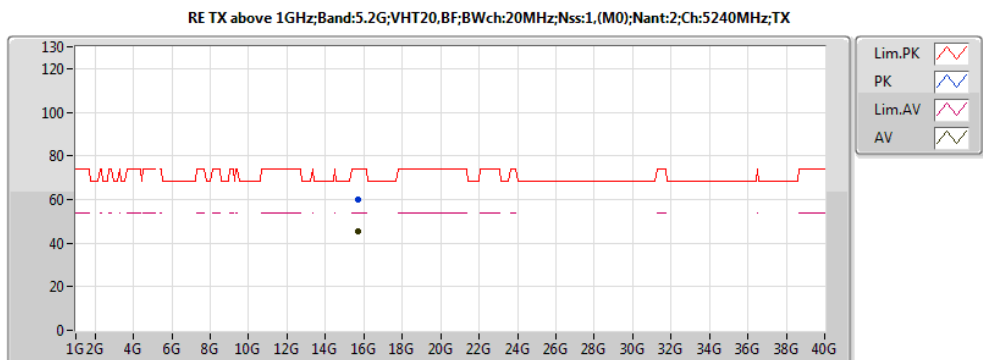


20161213
EUT Z 2TX _ TXBF
Setting 26
01-J-5-FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.71761G	45.53	54.00	-8.47	13.61	3	H	192	2.17	-
PK	15.71831G	59.80	74.00	-14.20	13.61	3	H	192	2.17	-

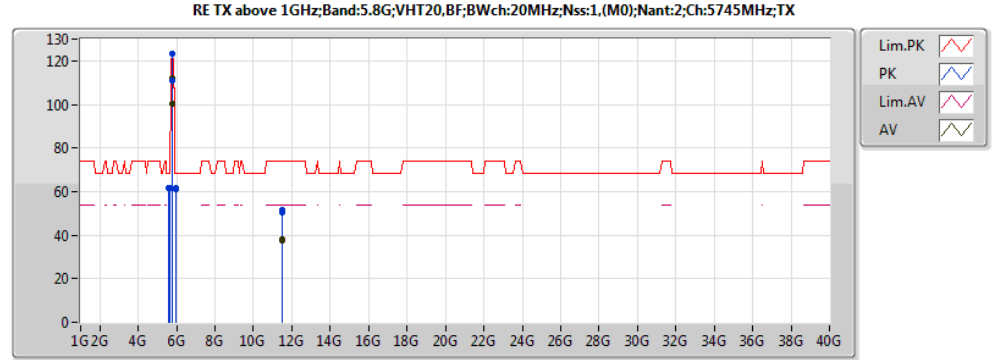


20161213
EUT Z 2TX _ TXBF
Setting 26
01-J-5-FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.7534G	100.15	Inf	-Inf	5.84	3	H	347	1.39	-
PK	5.625G	61.43	68.20	-6.77	5.47	3	H	347	1.39	-
PK	5.7498G	110.85	Inf	-Inf	5.83	3	H	347	1.39	-
PK	5.9622G	61.33	68.20	-6.87	6.58	3	H	347	1.39	-
AV	5.7414G	111.83	Inf	-Inf	5.81	3	V	311	1.09	-
PK	5.5782G	61.70	68.20	-6.50	5.32	3	V	311	1.09	-
PK	5.7462G	123.14	Inf	-Inf	5.82	3	V	311	1.09	-
PK	5.9862G	61.50	68.20	-6.70	6.67	3	V	311	1.09	-
AV	11.49176G	37.71	54.00	-16.29	12.04	3	H	62	2.10	-
PK	11.49042G	50.71	74.00	-23.29	12.04	3	H	62	2.10	-
AV	11.4916G	38.12	54.00	-15.88	12.04	3	V	296	2.27	-
PK	11.48877G	51.62	74.00	-22.38	12.03	3	V	296	2.27	-

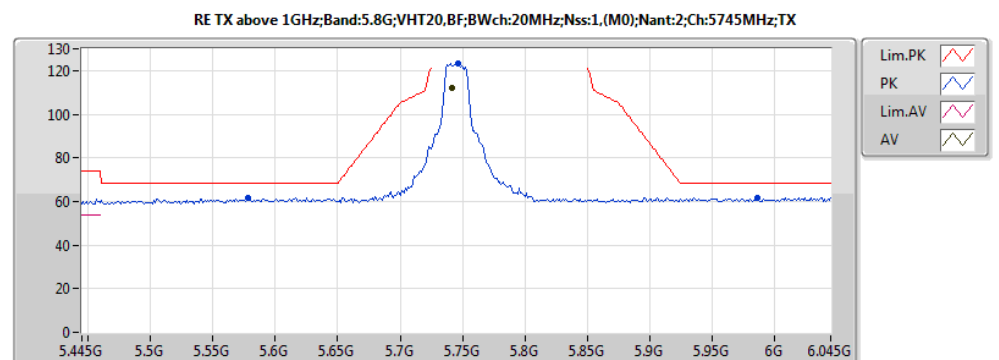







20161213
EUT Z 2TX _ TXBF
Setting 26
01-J-5-FSP







Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.7414G	111.83	Inf	-Inf	5.81	3	V	311	1.09	-
PK	5.5782G	61.70	68.20	-6.50	5.32	3	V	311	1.09	-
PK	5.7462G	123.14	Inf	-Inf	5.82	3	V	311	1.09	-
PK	5.9862G	61.50	68.20	-6.70	6.67	3	V	311	1.09	-

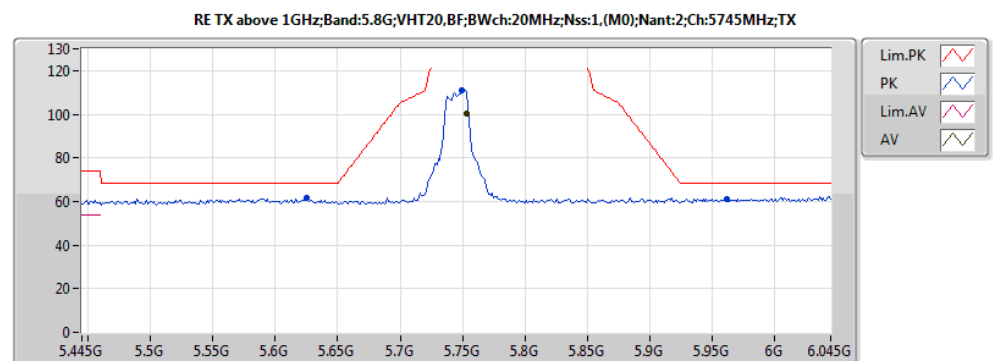


20161213
EUT Z 2TX _ TXBF
Setting 26
01-J-5-FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.7534G	100.15	Inf	-Inf	5.84	3	H	347	1.39	-
PK	5.625G	61.43	68.20	-6.77	5.47	3	H	347	1.39	-
PK	5.7498G	110.85	Inf	-Inf	5.83	3	H	347	1.39	-
PK	5.9622G	61.33	68.20	-6.87	6.58	3	H	347	1.39	-

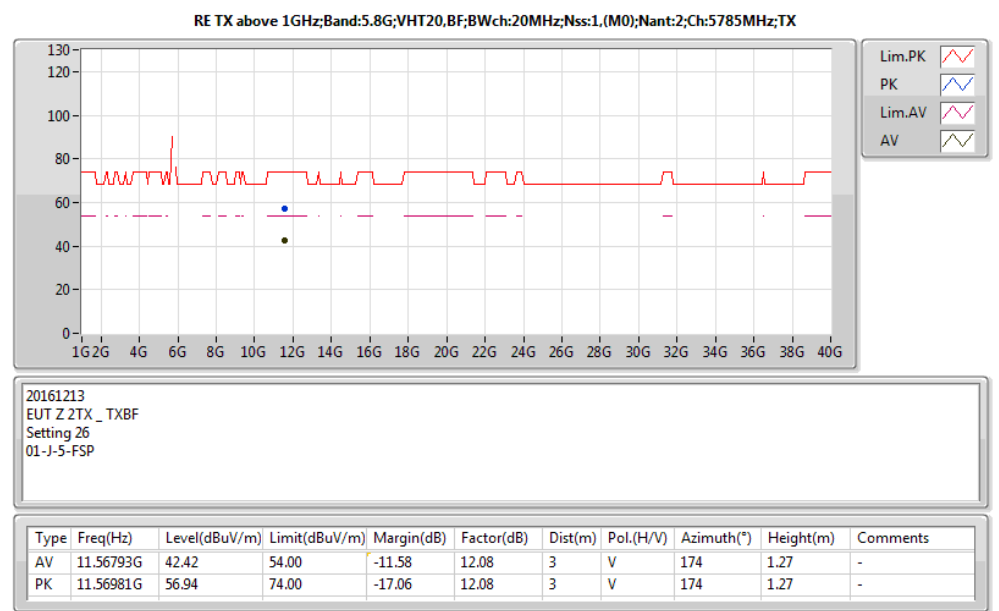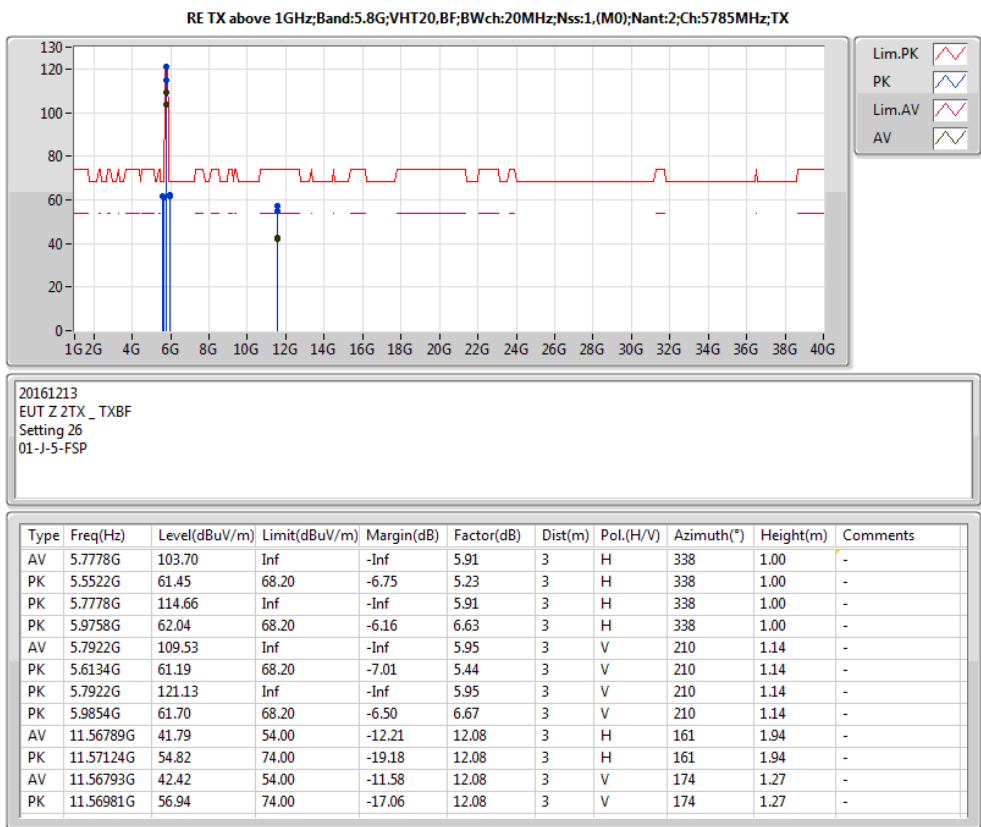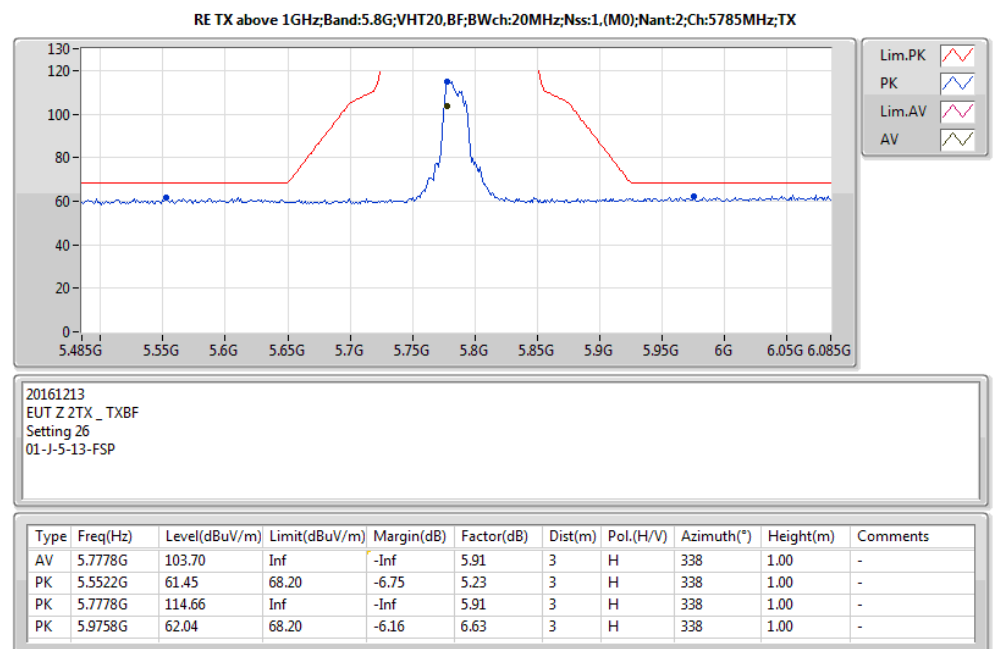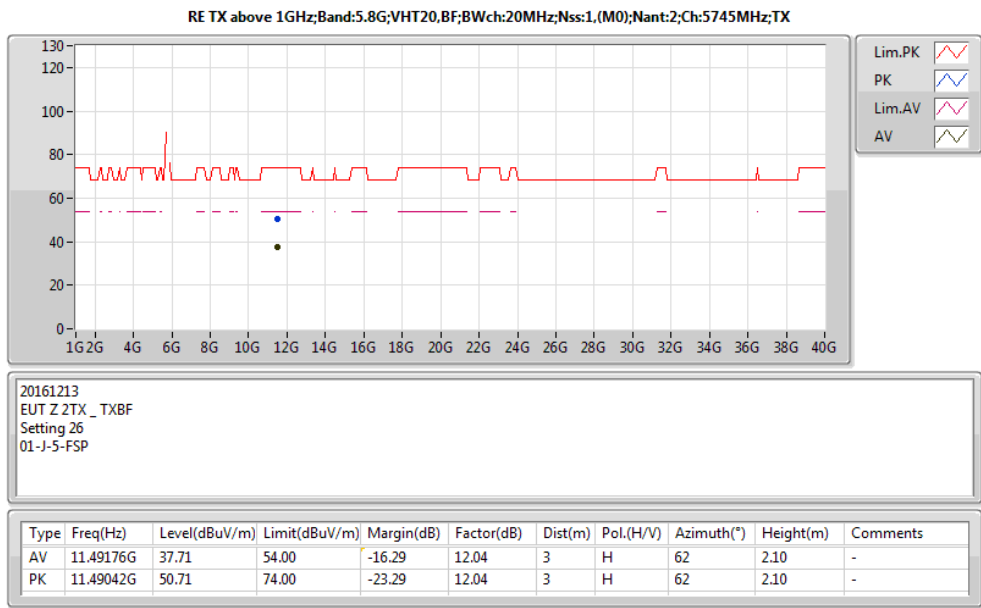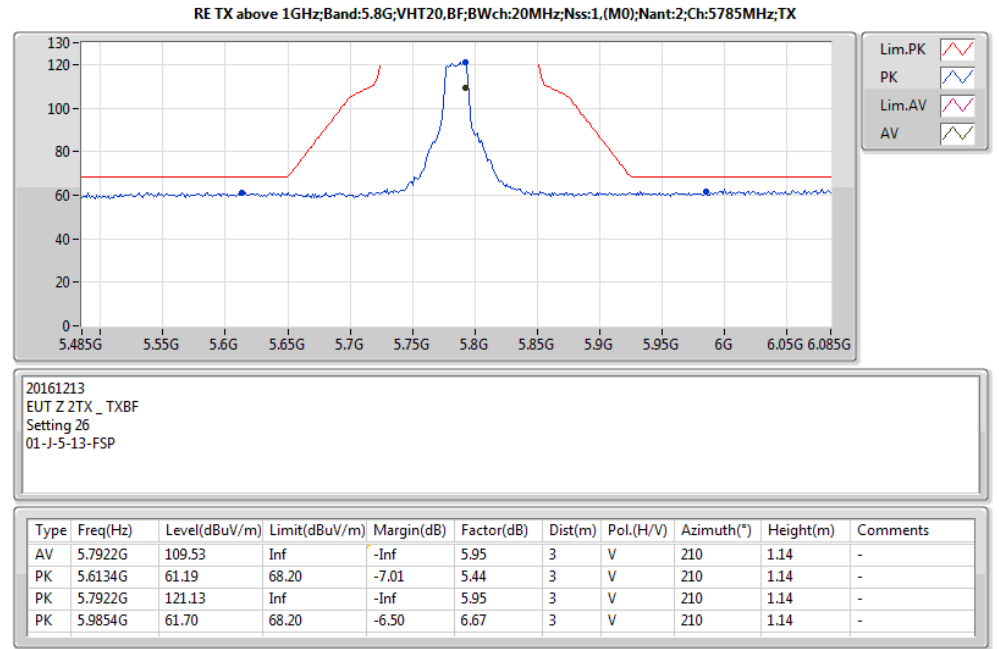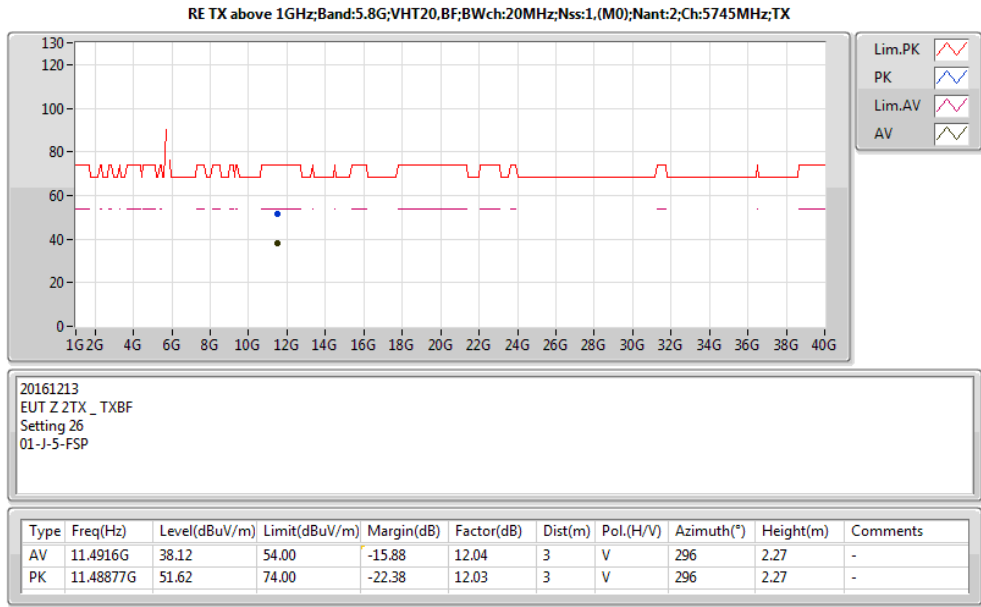


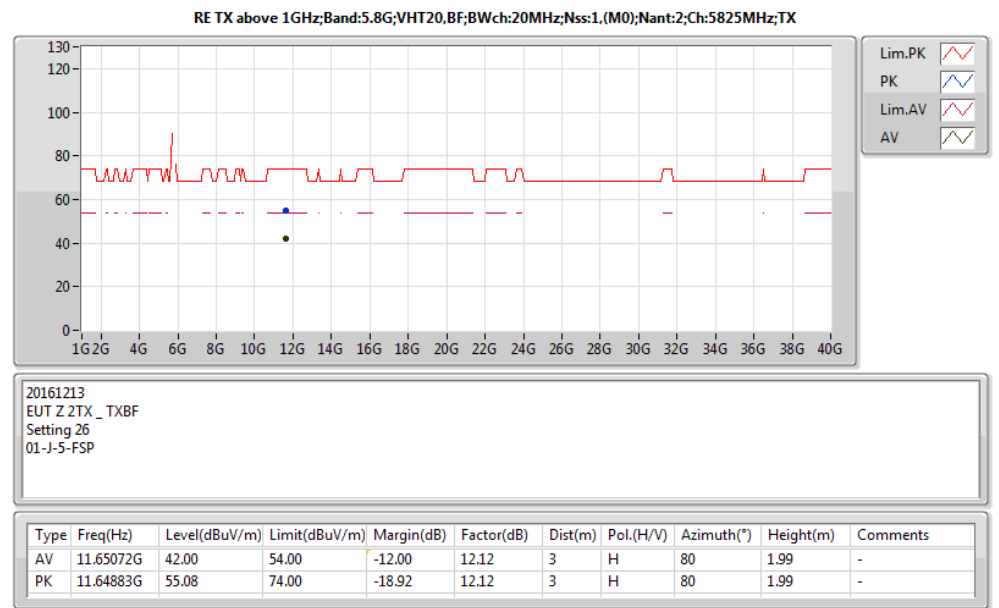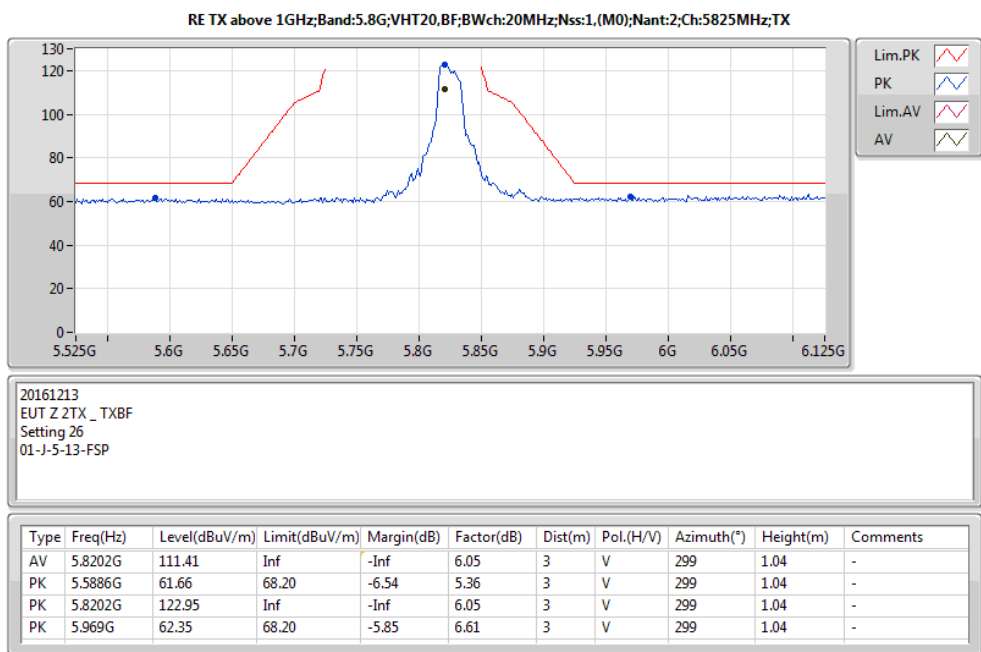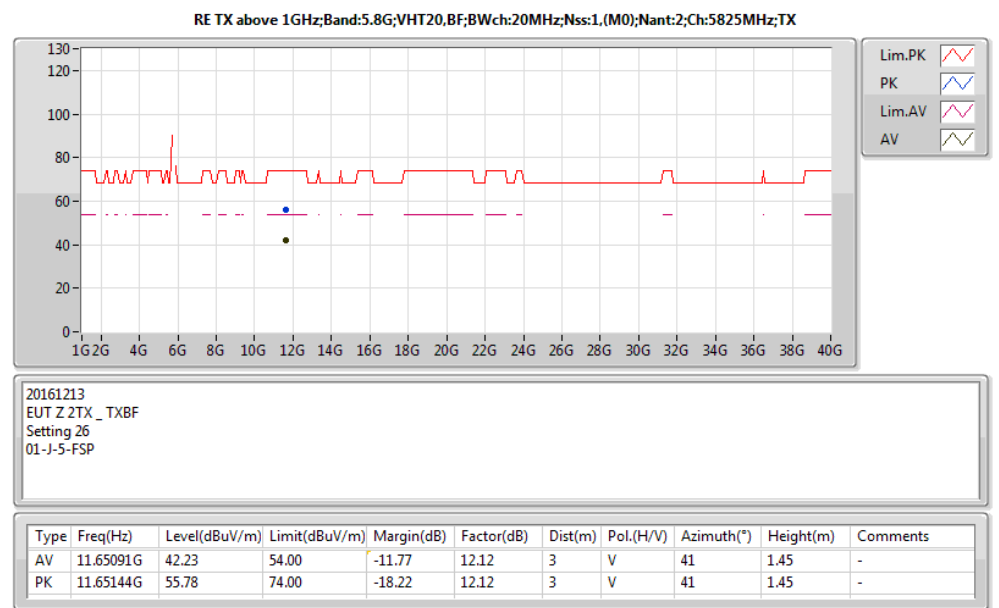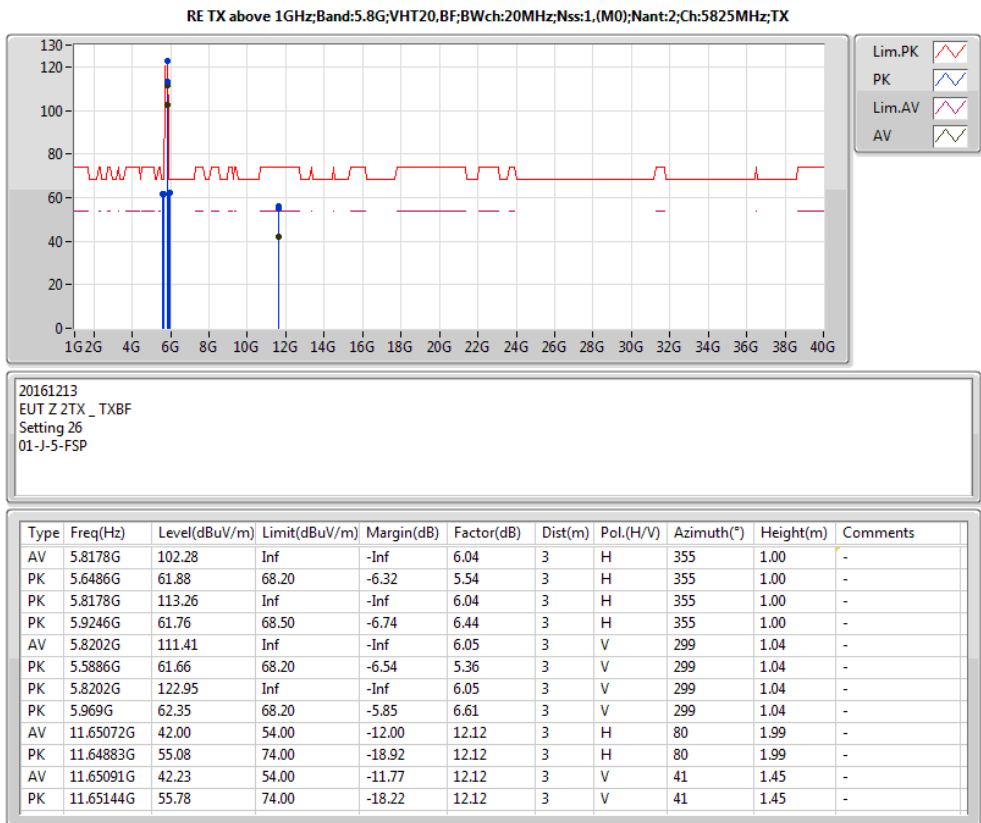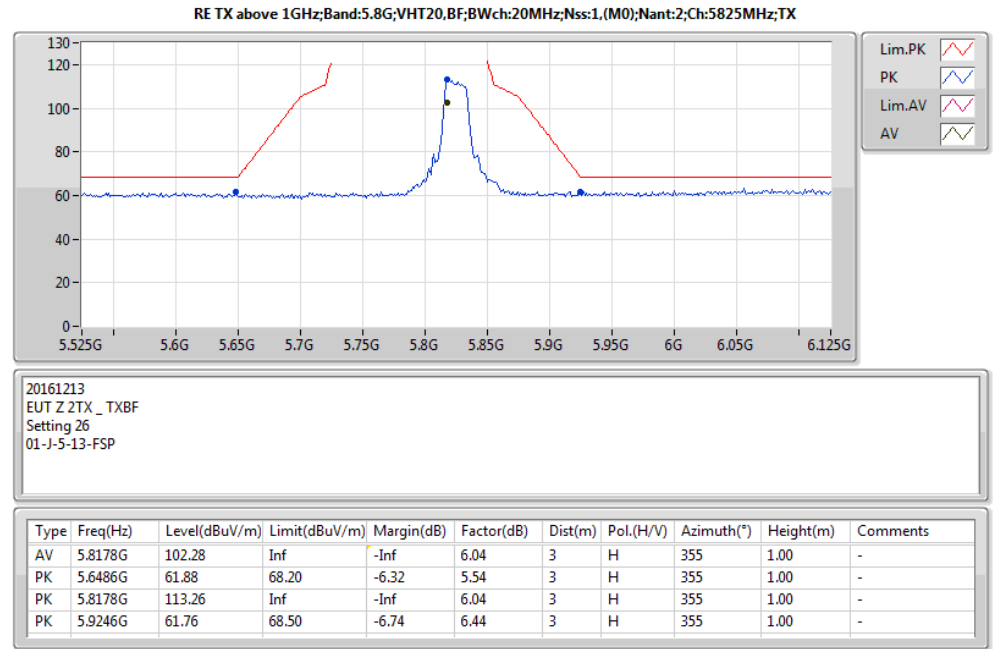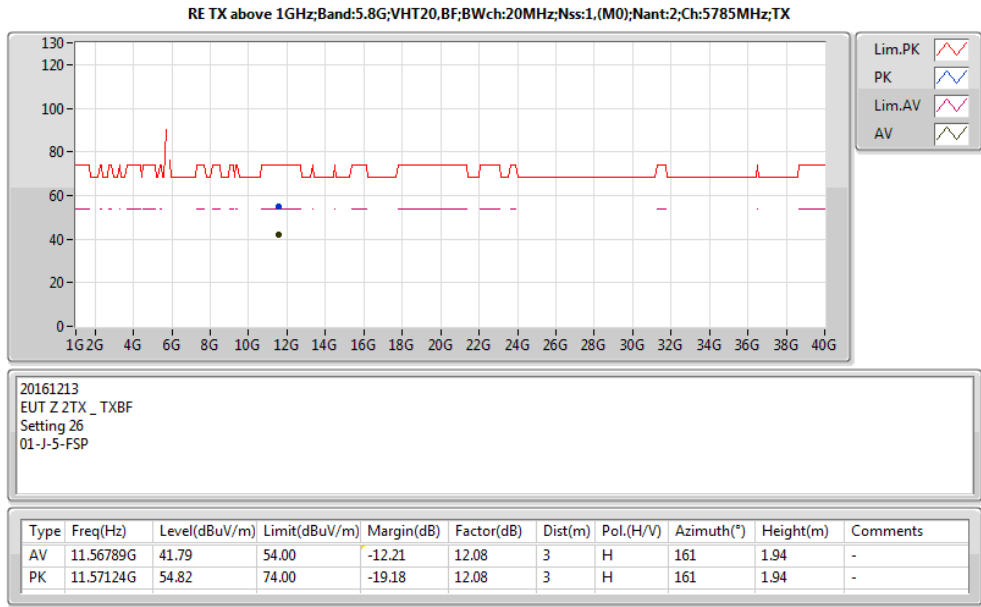

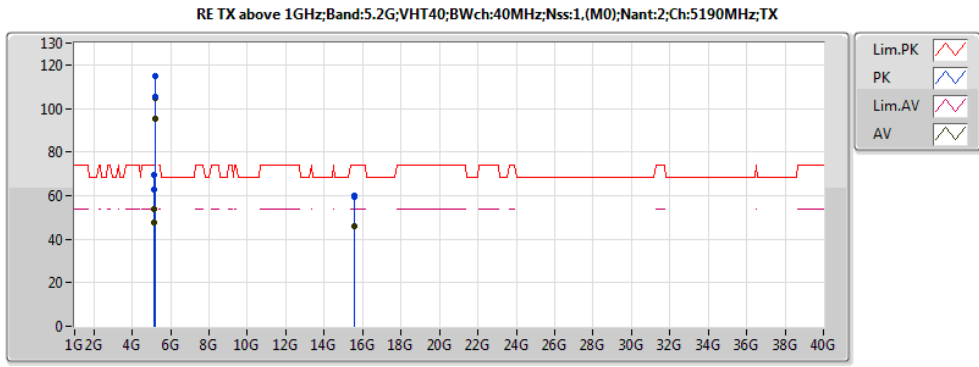


20161117
EUT Z 2TX
Setting 19
02-M-01
02-W-3

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	5.1496G	47.66	54.00	-6.34	7.24	3	H	357	2.99	-
AV	5.1956G	95.47	Inf	-Inf	7.36	3	H	357	2.99	-
PK	5.1496G	62.54	74.00	-11.46	7.24	3	H	357	2.99	-
PK	5.1936G	105.46	Inf	-Inf	7.35	3	H	357	2.99	-
AV	5.1496G	53.87	54.00	-0.13	7.24	3	V	312	1.08	-
AV	5.1936G	104.82	Inf	-Inf	7.35	3	V	312	1.08	-
PK	5.1452G	69.71	74.00	-4.29	7.23	3	V	312	1.08	-
PK	5.1936G	114.77	Inf	-Inf	7.35	3	V	312	1.08	-
AV	15.5682G	45.81	54.00	-8.19	16.08	3	H	241	1.76	-
PK	15.56716G	59.63	74.00	-14.37	16.09	3	H	241	1.76	-
AV	15.57358G	45.81	54.00	-8.19	16.07	3	V	162	2.78	-
PK	15.57244G	60.02	74.00	-13.98	16.07	3	V	162	2.78	-

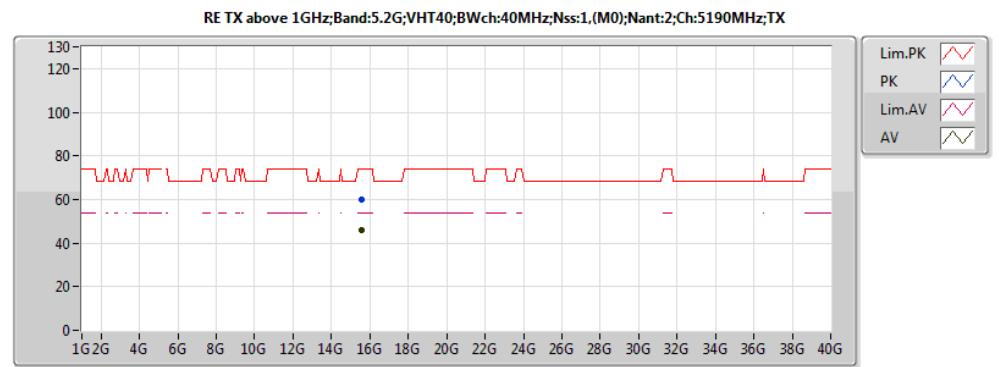


20161117
EUT Z 2TX
Setting 19
02-W-3

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	15.57358G	45.81	54.00	-8.19	16.07	3	V	162	2.78	-
PK	15.57244G	60.02	74.00	-13.98	16.07	3	V	162	2.78	-

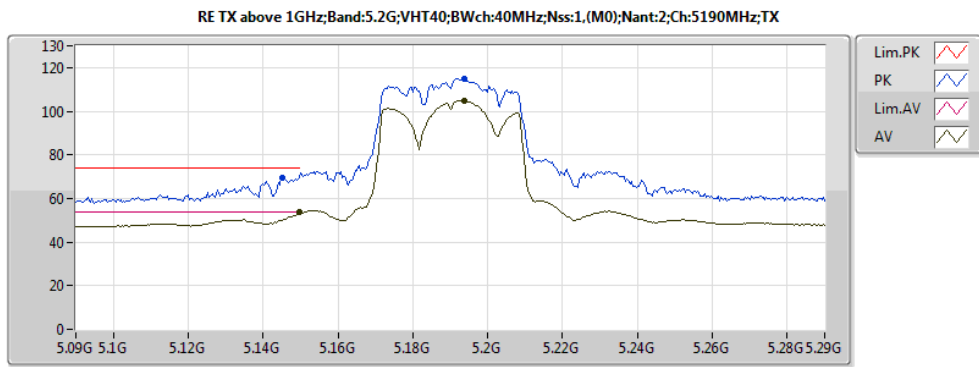


20161117
EUT Z 2TX
Setting 19
02-M-01

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	5.1496G	53.87	54.00	-0.13	7.24	3	V	312	1.08	-
AV	5.1936G	104.82	Inf	-Inf	7.35	3	V	312	1.08	-
PK	5.1452G	69.71	74.00	-4.29	7.23	3	V	312	1.08	-
PK	5.1936G	114.77	Inf	-Inf	7.35	3	V	312	1.08	-

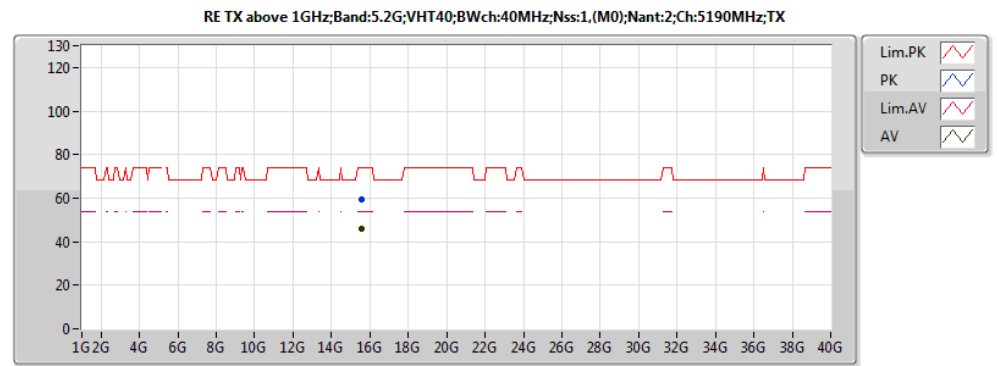


20161117
EUT Z 2TX
Setting 19
02-W-3

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	15.5682G	45.81	54.00	-8.19	16.08	3	H	241	1.76	-
PK	15.56716G	59.63	74.00	-14.37	16.09	3	H	241	1.76	-

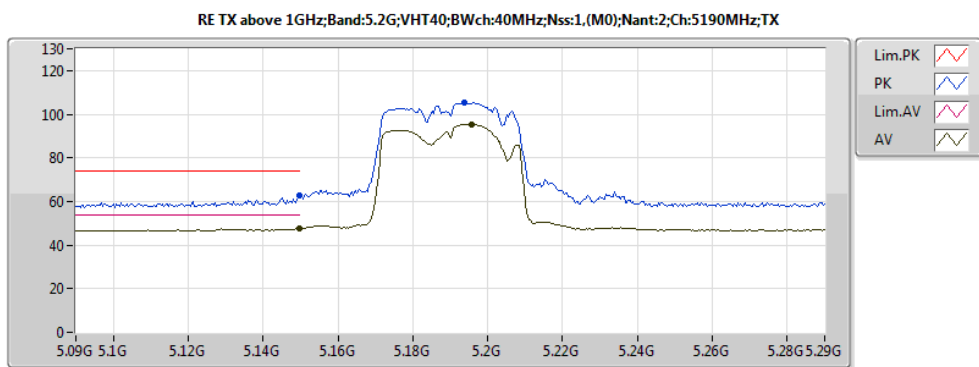







20161117
EUT Z 2TX
Setting 19
02-M-01







Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	5.1496G	47.66	54.00	-6.34	7.24	3	H	357	2.99	-
AV	5.1956G	95.47	Inf	-Inf	7.36	3	H	357	2.99	-
PK	5.1496G	62.54	74.00	-11.46	7.24	3	H	357	2.99	-
PK	5.1936G	105.46	Inf	-Inf	7.35	3	H	357	2.99	-






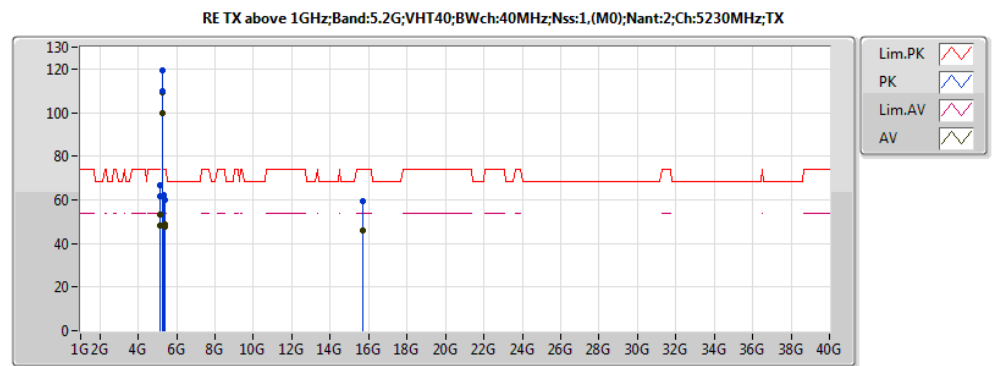








20161117
EUT Z 2TX
Setting 22.5
02-M-01
02-W-3


Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	5.1376G	47.97	54.00	-6.03	7.21	3	H	315	1.14	-
AV	5.2378G	99.93	Inf	-Inf	7.47	3	H	315	1.14	-
AV	5.3656G	47.43	54.00	-6.57	7.80	3	H	315	1.14	-
PK	5.1382G	61.50	74.00	-12.50	7.22	3	H	315	1.14	-
PK	5.2366G	109.58	Inf	-Inf	7.47	3	H	315	1.14	-
PK	5.3668G	59.69	74.00	-14.31	7.81	3	H	315	1.14	-
AV	5.1496G	53.23	54.00	-0.77	7.24	3	V	308	1.13	-
AV	5.2336G	109.15	Inf	-Inf	7.46	3	V	308	1.13	-
AV	5.3764G	48.75	54.00	-5.25	7.83	3	V	308	1.13	-
PK	5.1496G	66.81	74.00	-7.19	7.24	3	V	308	1.13	-
PK	5.2336G	119.16	Inf	-Inf	7.46	3	V	308	1.13	-
PK	5.3542G	62.35	74.00	-11.65	7.78	3	V	308	1.13	-
AV	15.68608G	45.81	54.00	-8.19	15.72	3	H	78	2.09	-
PK	15.6856G	59.34	74.00	-14.66	15.72	3	H	78	2.09	-
AV	15.68568G	45.70	54.00	-8.30	15.73	3	V	160	1.52	-
PK	15.68974G	59.26	74.00	-14.74	15.71	3	V	160	1.52	-

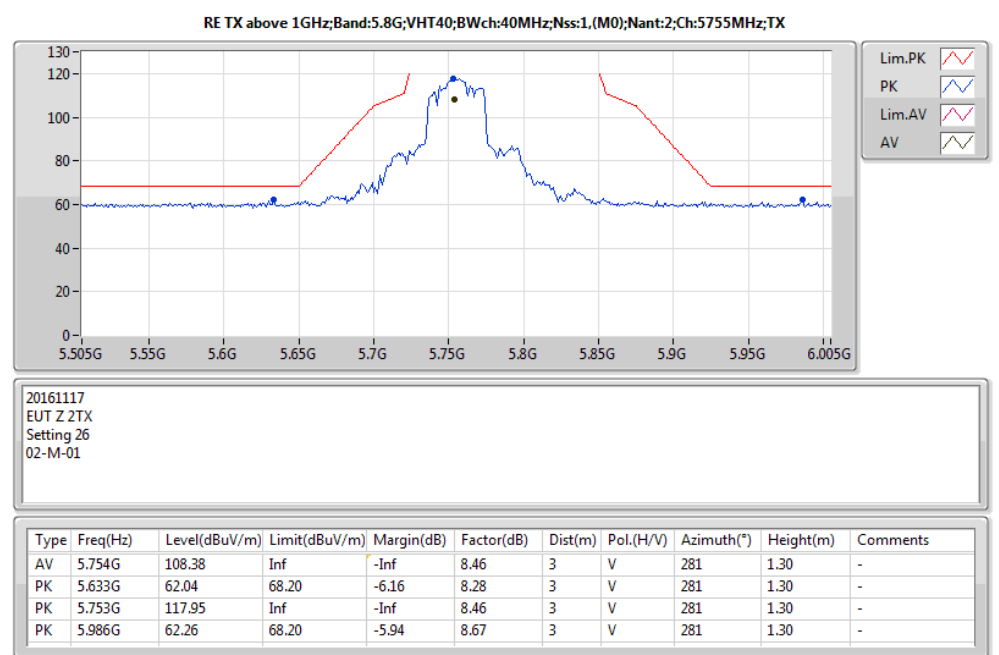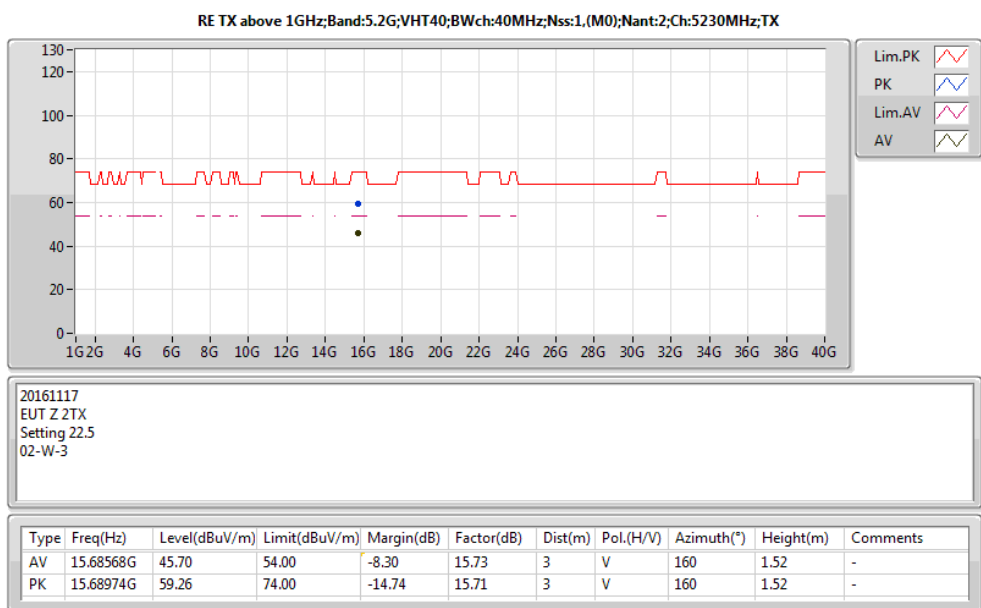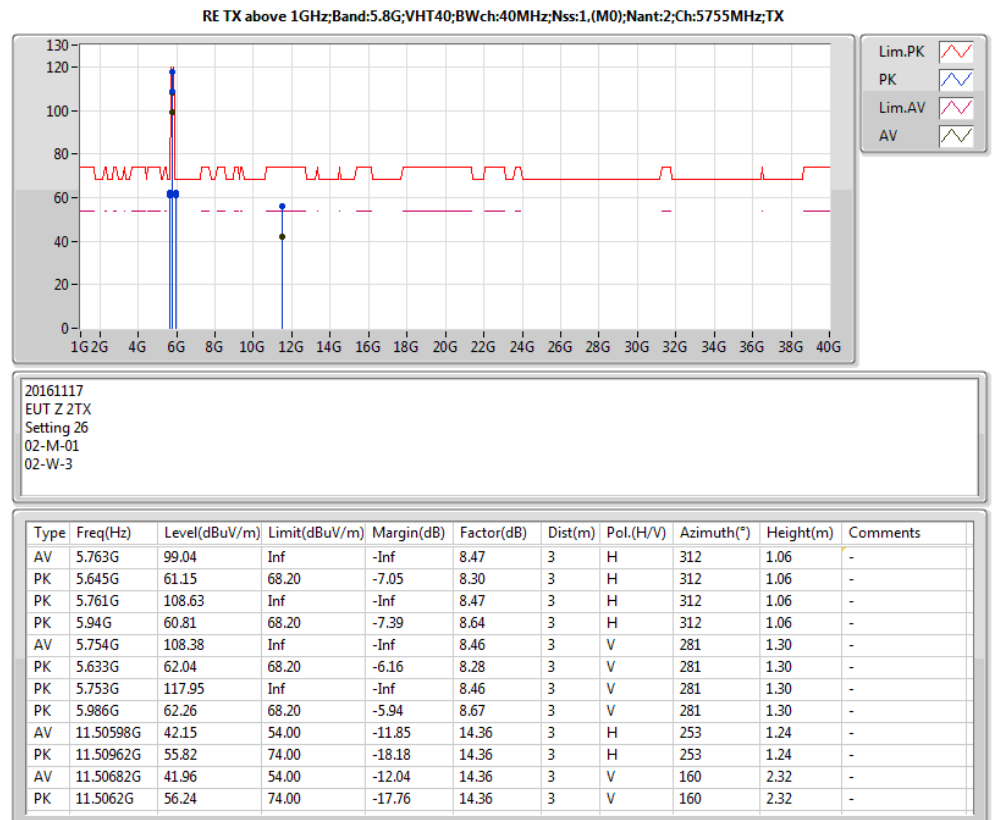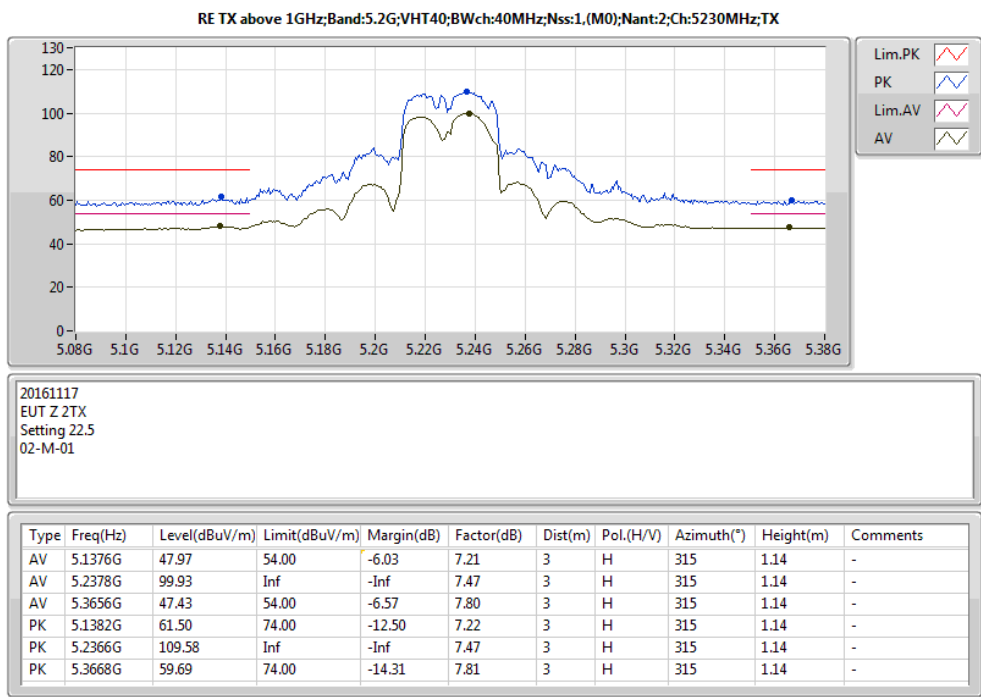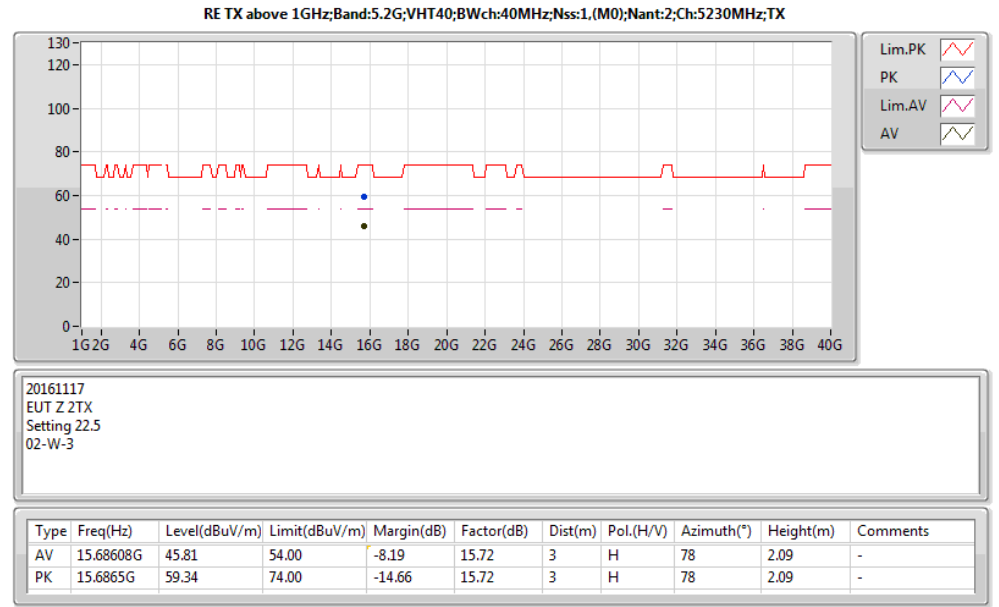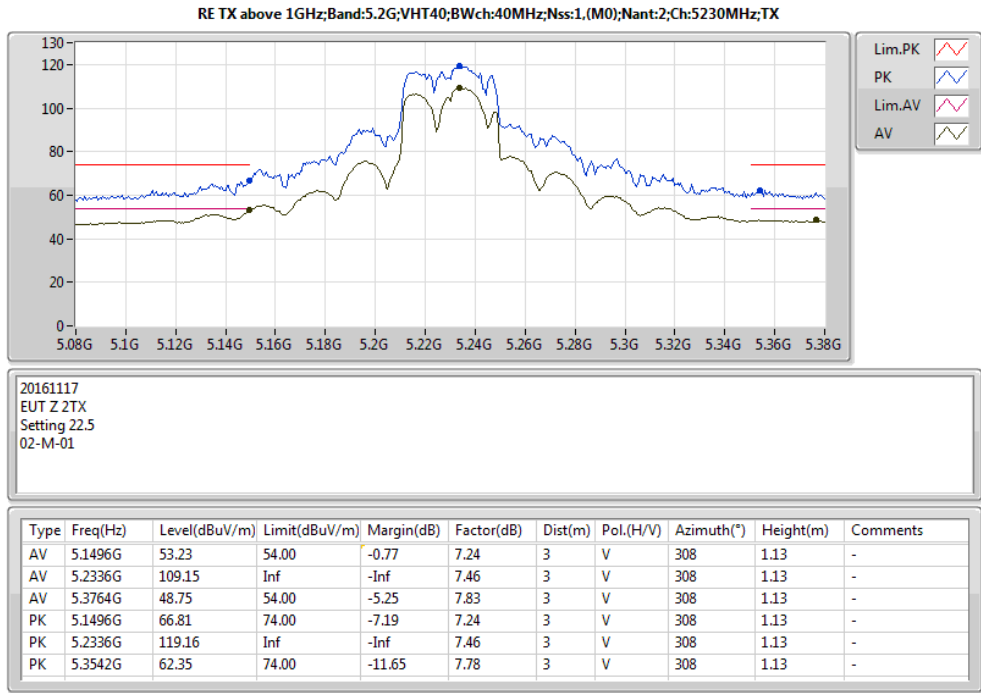

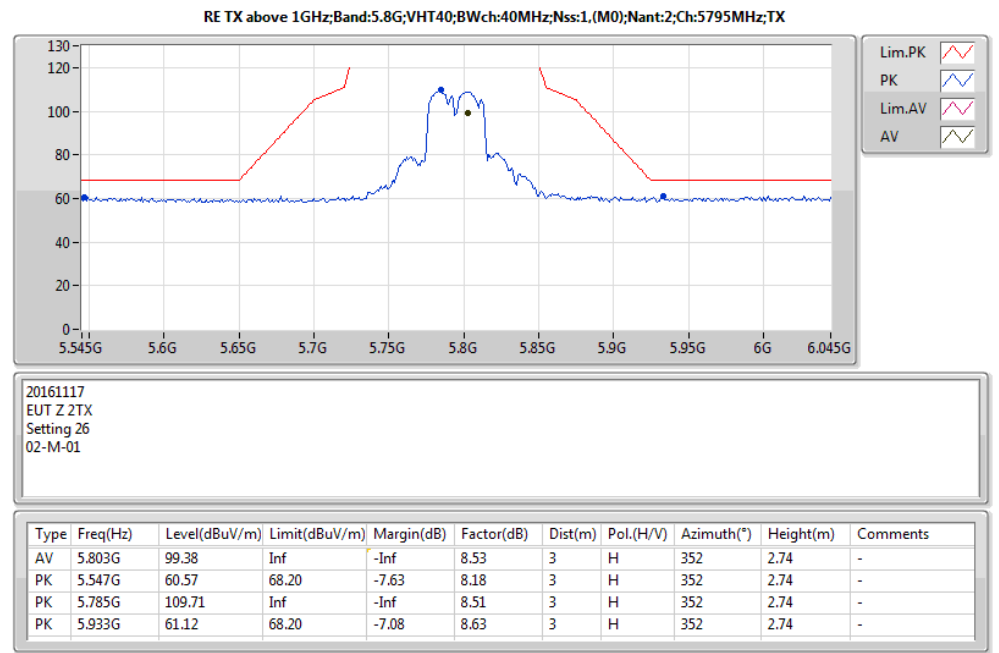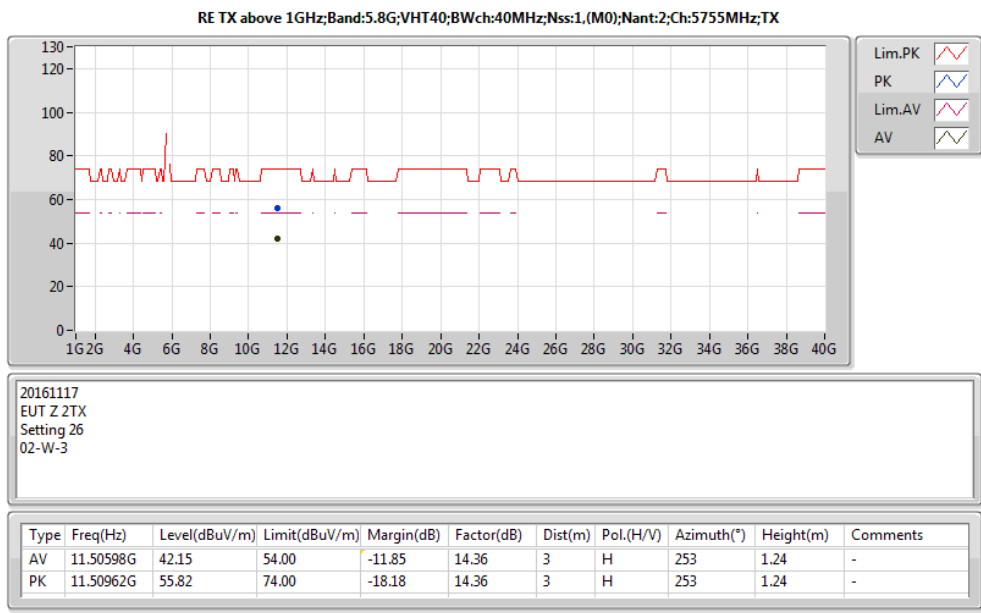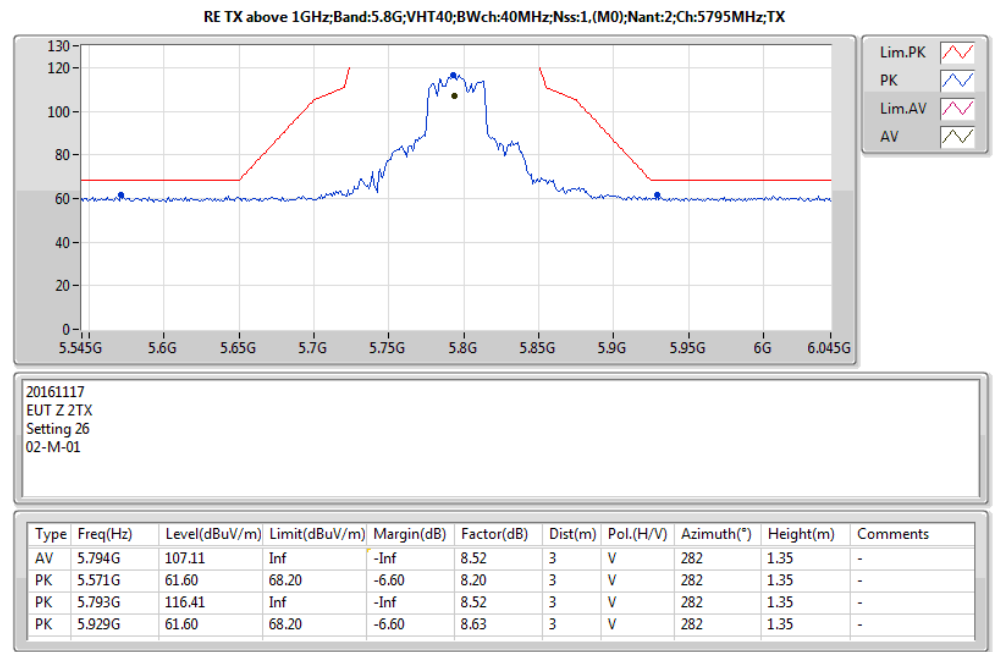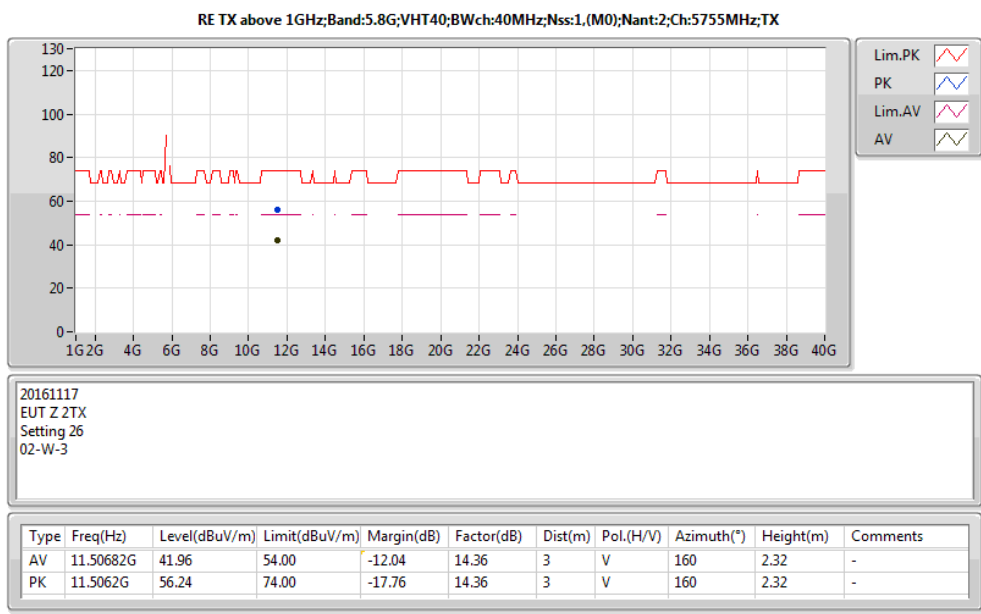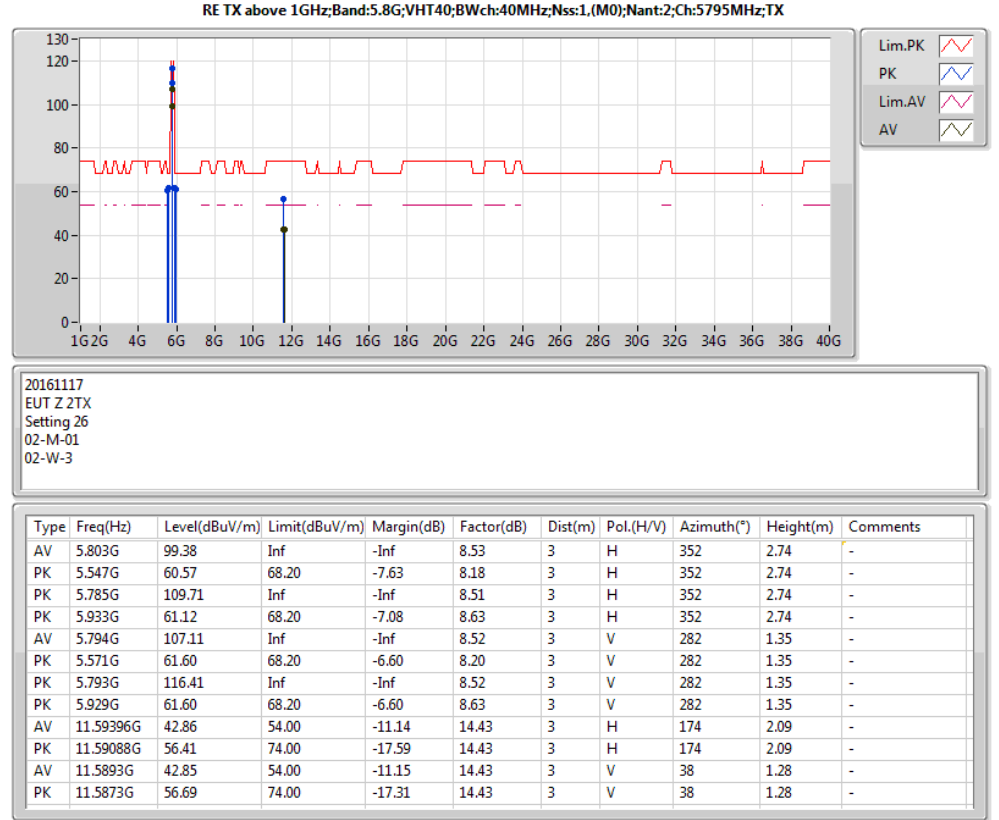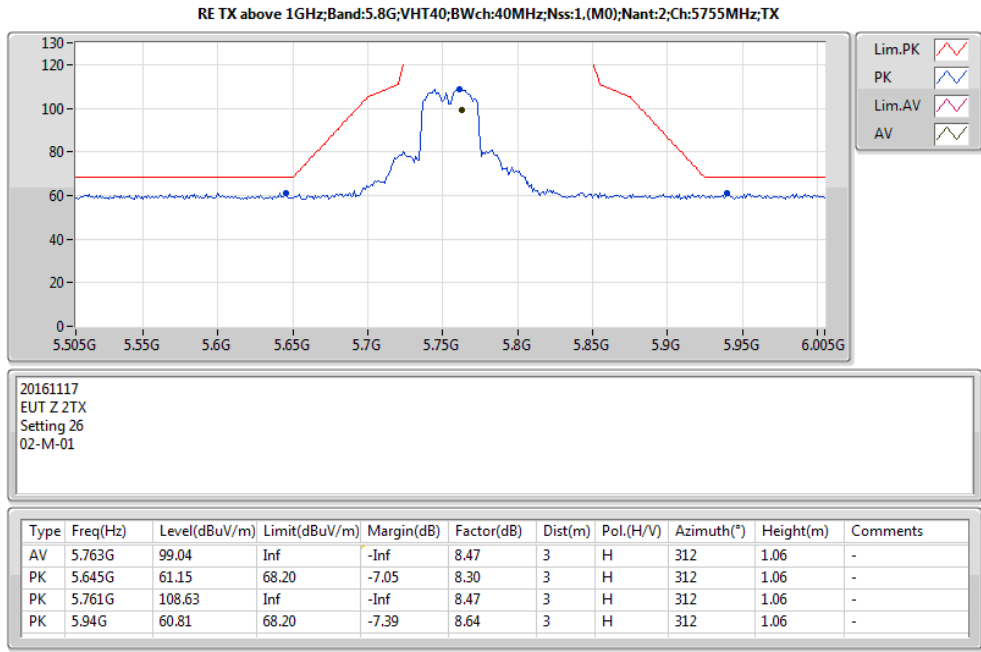

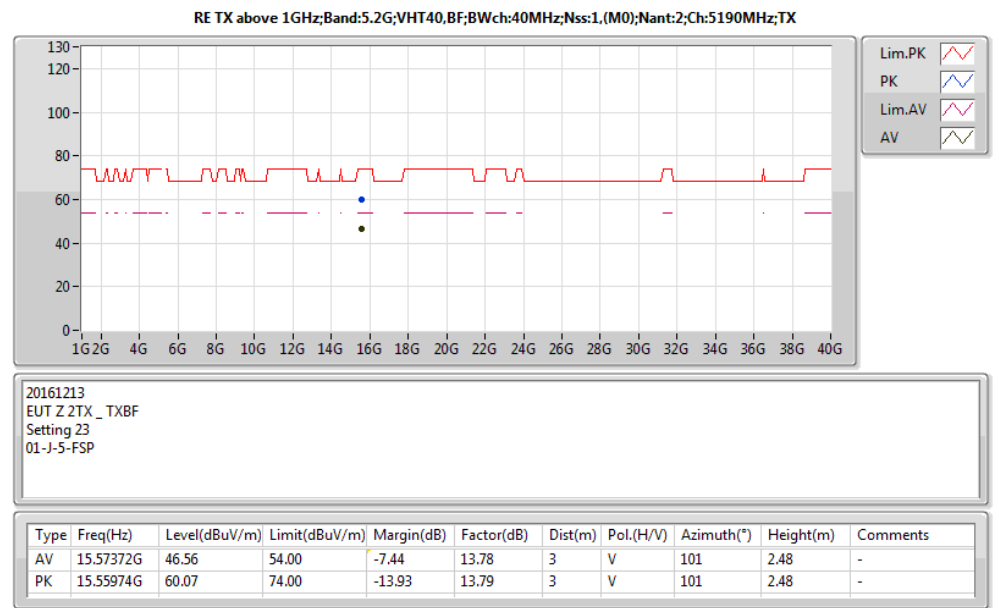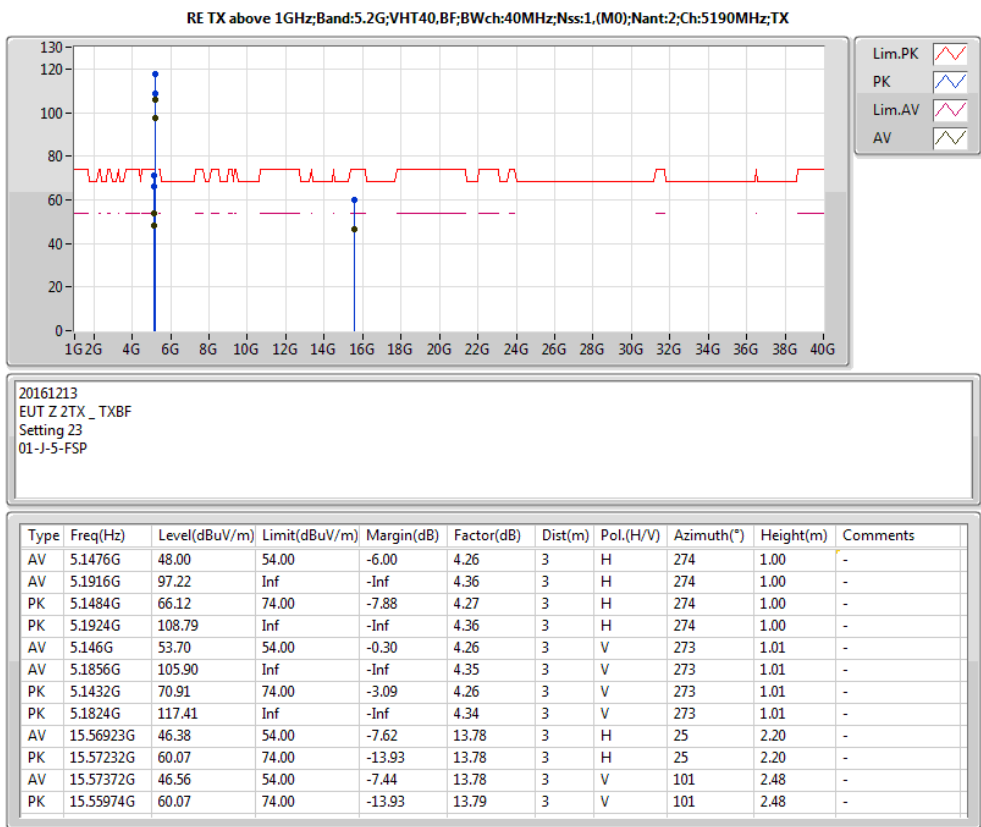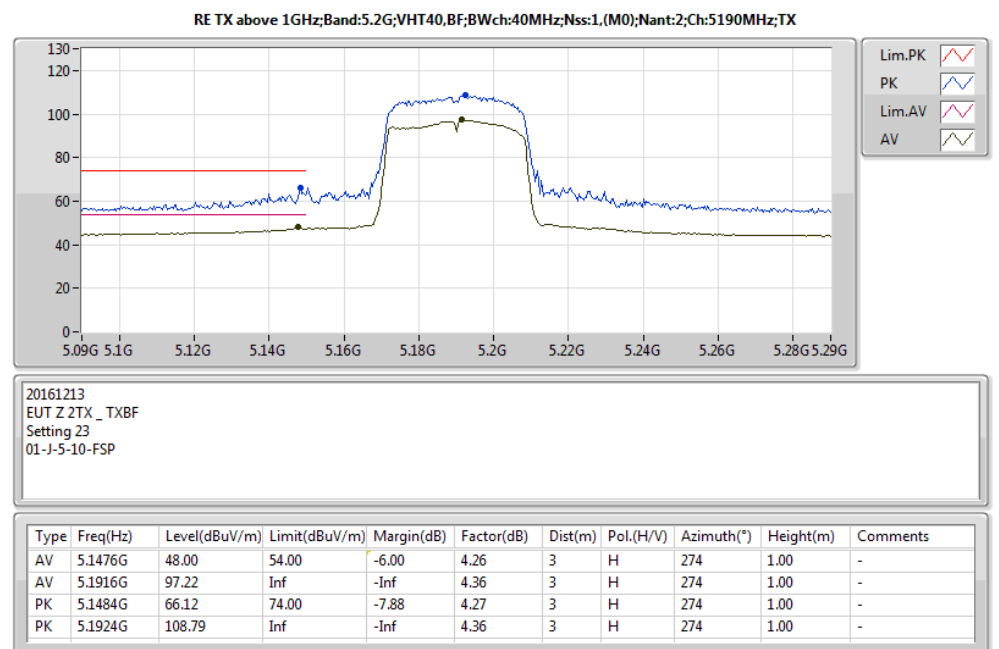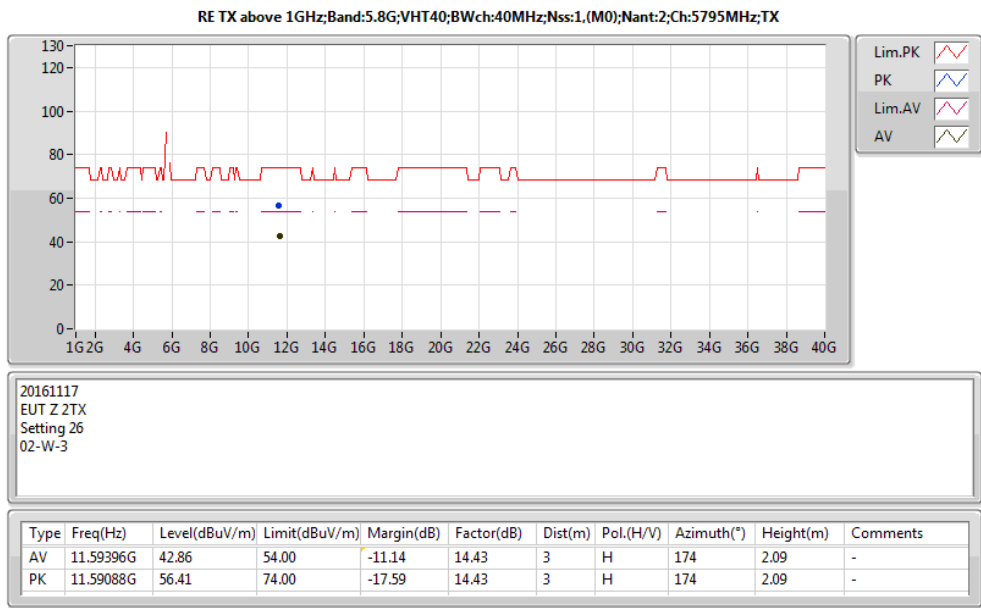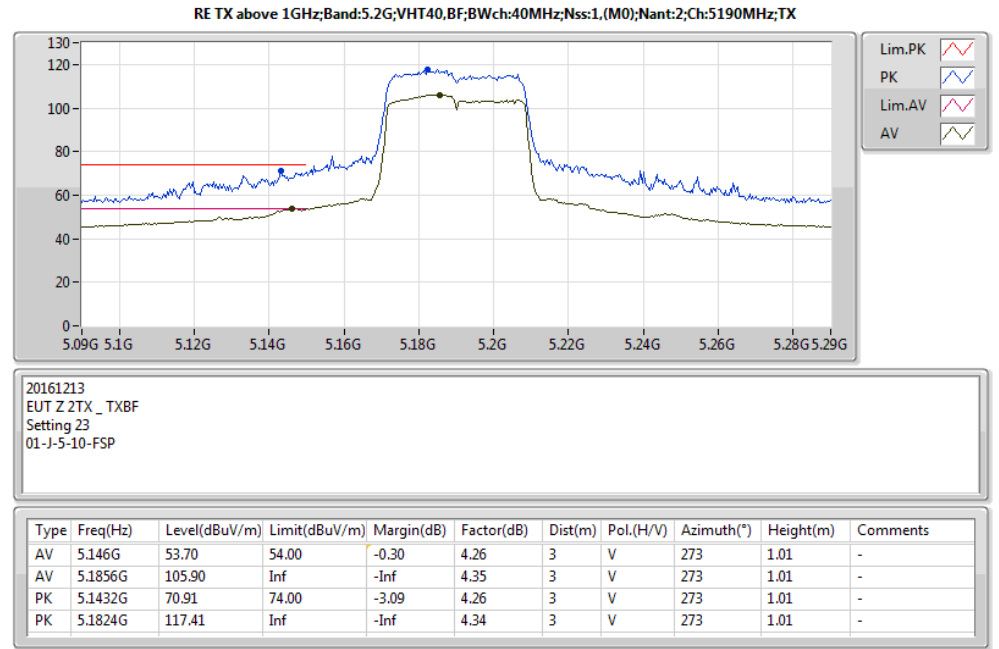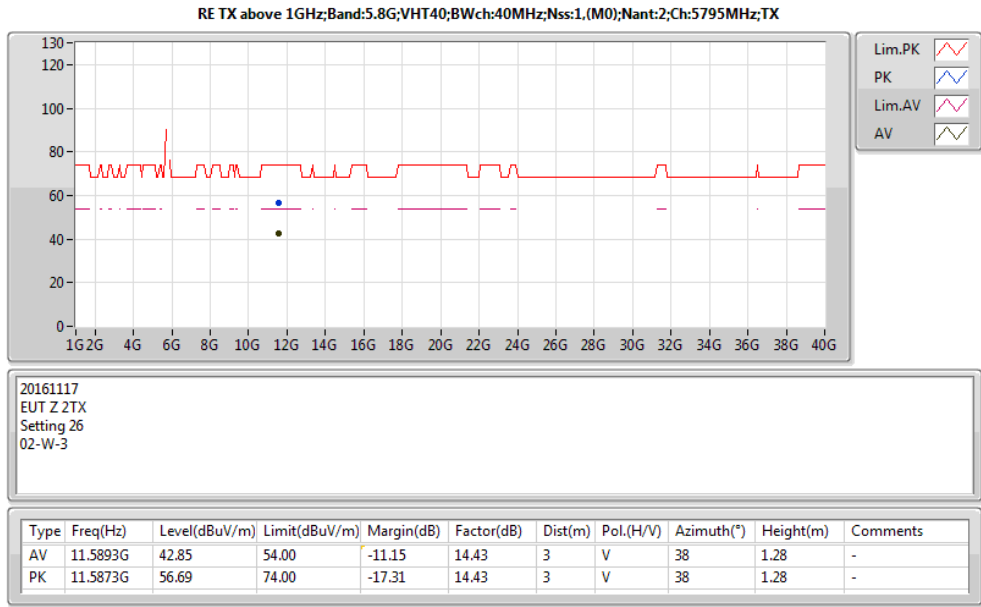


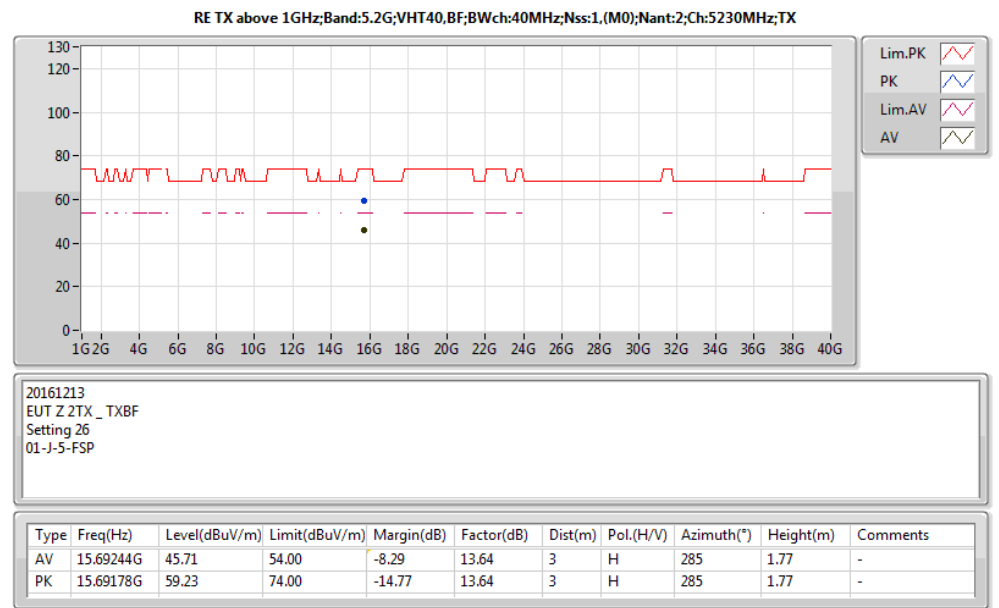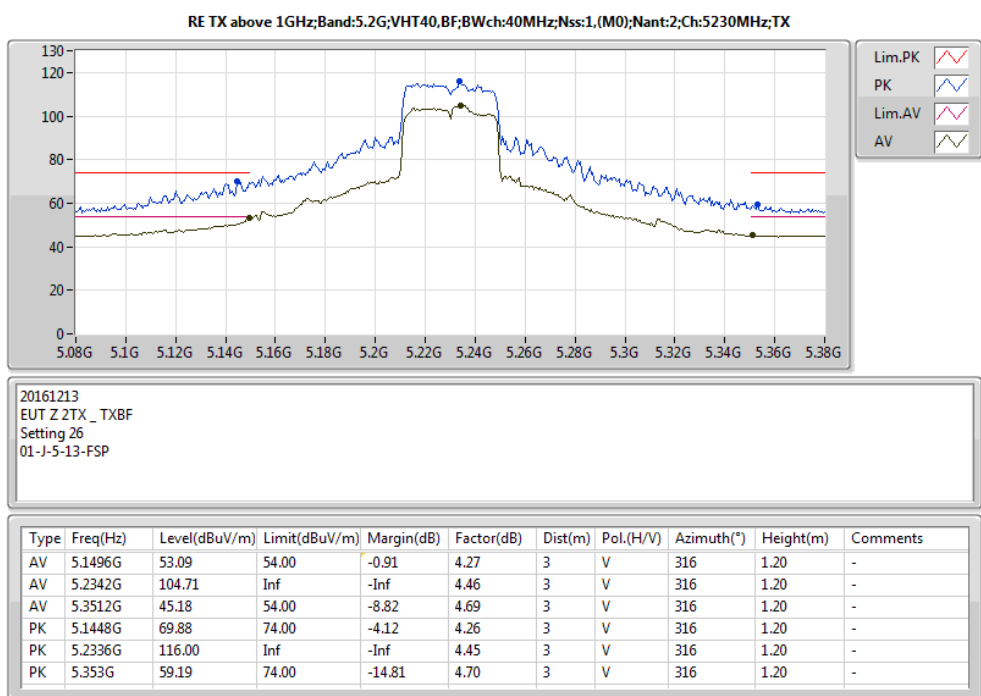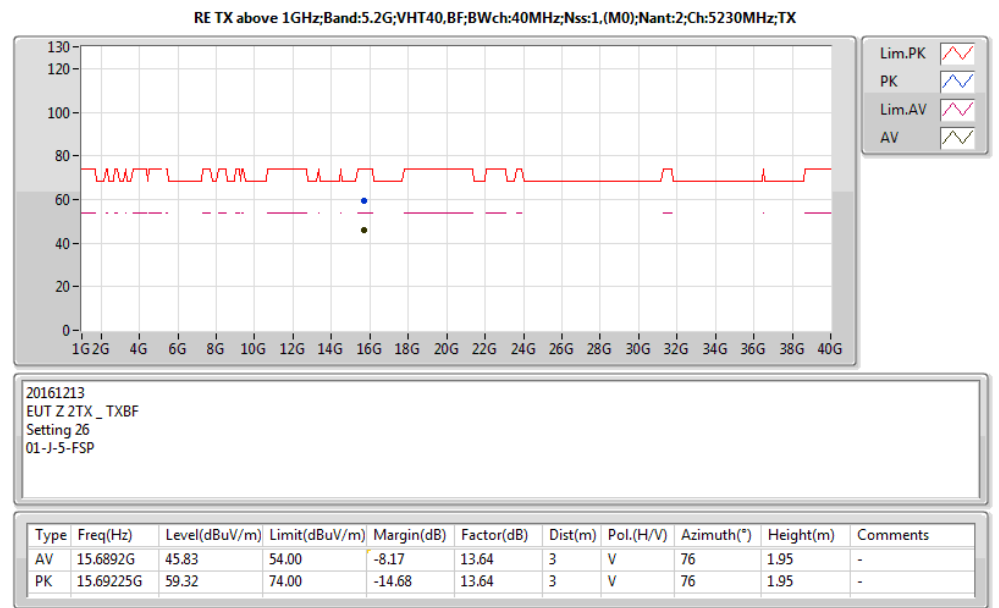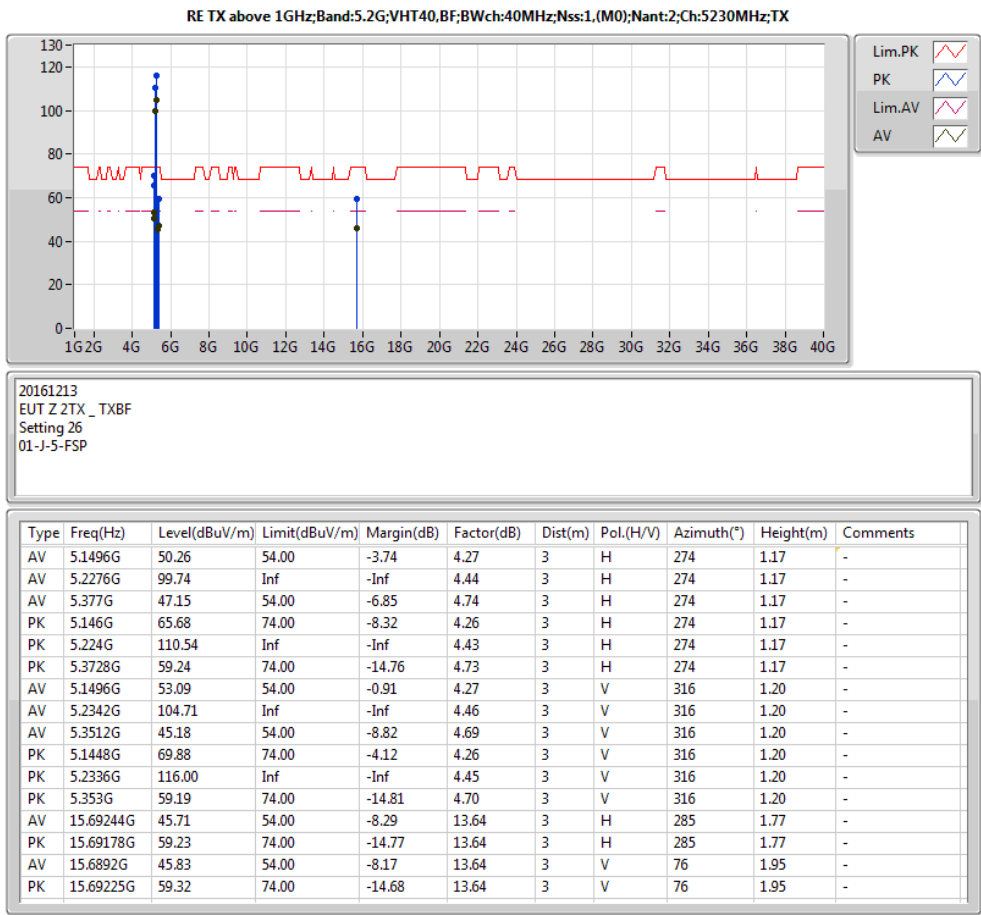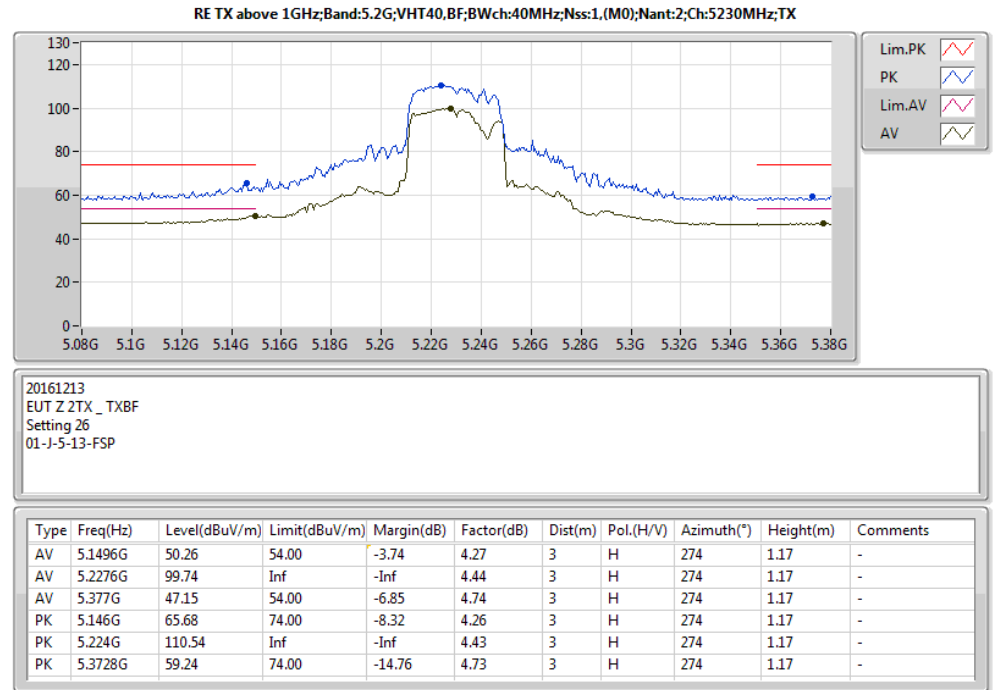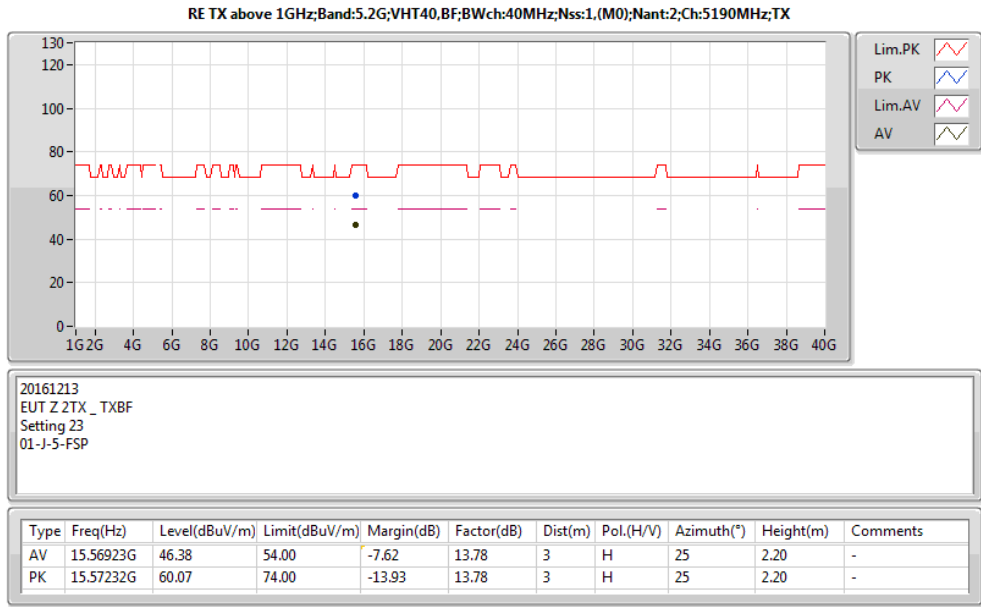

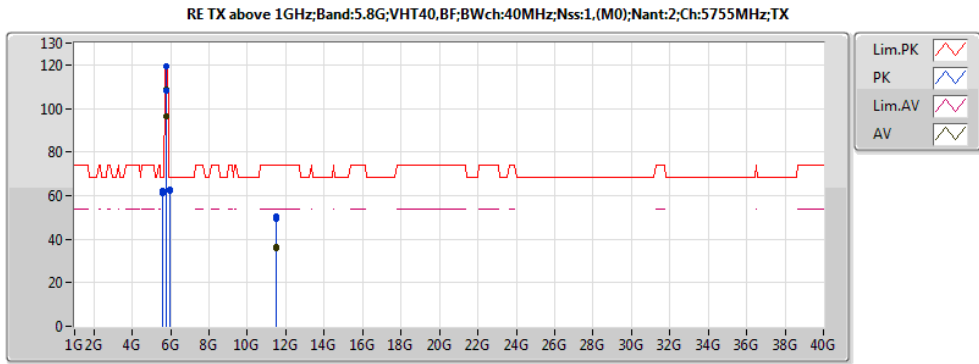


20161213
EUT Z 2TX _ TXBF
Setting 26
01-J-5-FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	5.749G	96.56	Inf	-Inf	5.83	3	H	299	2.96	-
PK	5.5702G	61.16	68.20	-7.04	5.30	3	H	299	2.96	-
PK	5.7526G	108.03	Inf	-Inf	5.84	3	H	299	2.96	-
PK	5.9494G	62.51	68.20	-5.69	6.53	3	H	299	2.96	-
AV	5.7526G	108.53	Inf	-Inf	5.84	3	V	348	1.04	-
PK	5.5906G	62.26	68.20	-5.94	5.37	3	V	348	1.04	-
PK	5.7514G	119.17	Inf	-Inf	5.83	3	V	348	1.04	-
PK	5.953G	62.01	68.20	-6.19	6.55	3	V	348	1.04	-
AV	11.50829G	36.11	54.00	-17.89	12.04	3	H	304	1.64	-
PK	11.51239G	50.40	74.00	-23.60	12.05	3	H	304	1.64	-
AV	11.50944G	36.29	54.00	-17.71	12.04	3	V	174	1.71	-
PK	11.51042G	49.43	74.00	-24.57	12.05	3	V	174	1.71	-

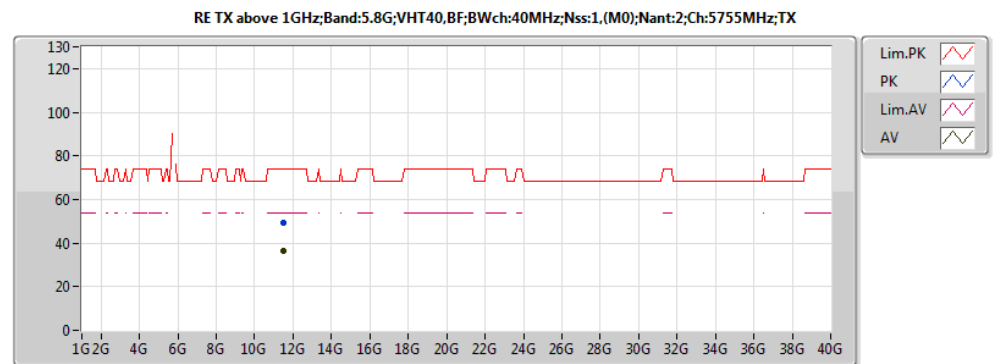


20161213
EUT Z 2TX _ TXBF
Setting 26
01-J-5-FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	11.50944G	36.29	54.00	-17.71	12.04	3	V	174	1.71	-
PK	11.51042G	49.43	74.00	-24.57	12.05	3	V	174	1.71	-

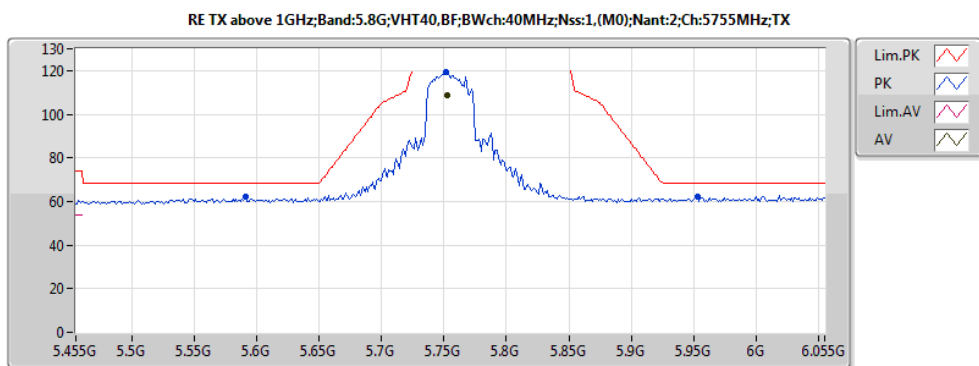


20161213
EUT Z 2TX _ TXBF
Setting 26
01-J-5-13-FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	5.7526G	108.53	Inf	-Inf	5.84	3	V	348	1.04	-
PK	5.5906G	62.26	68.20	-5.94	5.37	3	V	348	1.04	-
PK	5.7514G	119.17	Inf	-Inf	5.83	3	V	348	1.04	-
PK	5.953G	62.01	68.20	-6.19	6.55	3	V	348	1.04	-

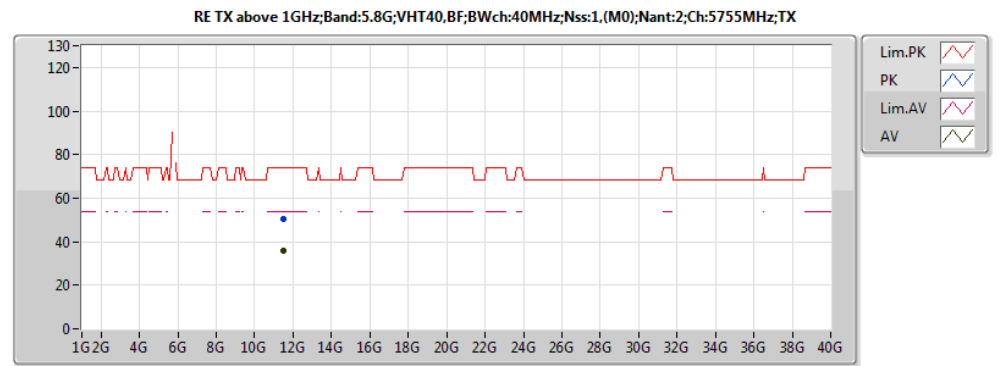


20161213
EUT Z 2TX _ TXBF
Setting 26
01-J-5-FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	11.50829G	36.11	54.00	-17.89	12.04	3	H	304	1.64	-
PK	11.51239G	50.40	74.00	-23.60	12.05	3	H	304	1.64	-

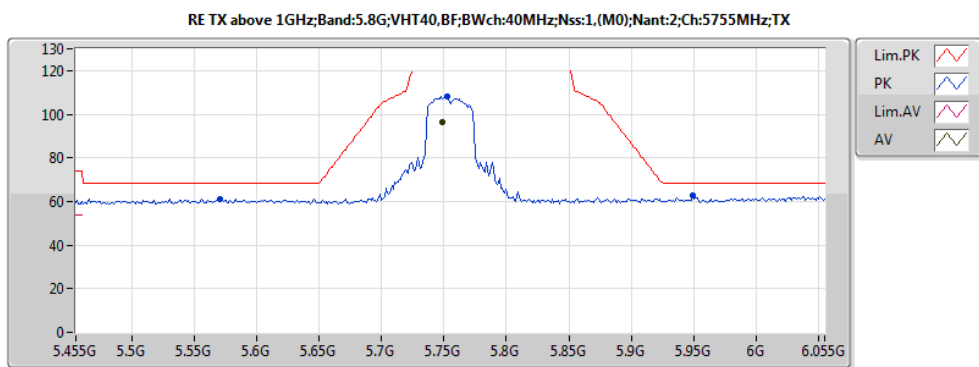







20161213
EUT Z 2TX _ TXBF
Setting 26
01-J-5-13-FSP


Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	5.749G	96.56	Inf	-Inf	5.83	3	H	299	2.96	-
PK	5.5702G	61.16	68.20	-7.04	5.30	3	H	299	2.96	-
PK	5.7526G	108.03	Inf	-Inf	5.84	3	H	299	2.96	-
PK	5.9494G	62.51	68.20	-5.69	6.53	3	H	299	2.96	-

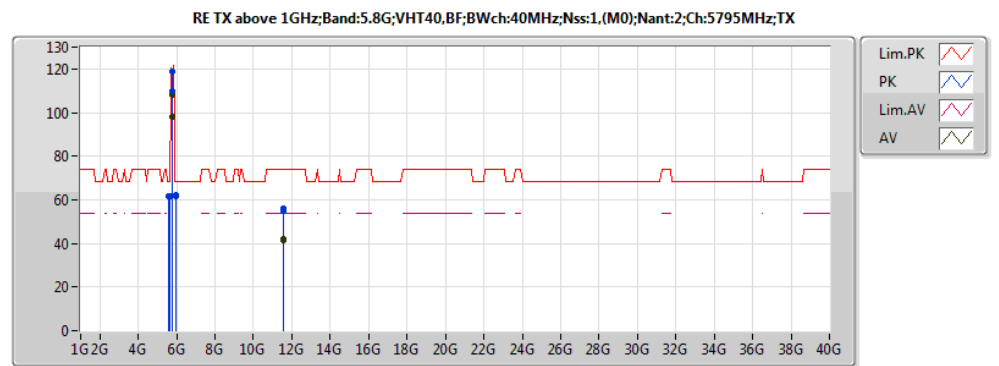

20161213
EUT Z 2TX _ TXBF
Setting 26
01-J-5-FSP


Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(*)	Height(m)	Comments
AV	5.7902G	98.23	Inf	-Inf	5.94	3	H	345	1.15	-
PK	5.5742G	61.66	68.20	-6.54	5.31	3	H	345	1.15	-
PK	5.783G	109.80	Inf	-Inf	5.92	3	H	345	1.15	-
PK	5.9702G	61.40	68.20	-6.80	6.61	3	H	345	1.15	-
AV	5.7938G	108.08	Inf	-Inf	5.95	3	V	208	1.09	-
PK	5.615G	61.86	68.20	-6.34	5.44	3	V	208	1.09	-
PK	5.7926G	118.99	Inf	-Inf	5.95	3	V	208	1.09	-
PK	5.981G	62.23	68.20	-5.97	6.65	3	V	208	1.09	-
AV	11.58753G	41.58	54.00	-12.42	12.09	3	H	11	1.27	-
PK	11.58778G	55.04	74.00	-18.96	12.09	3	H	11	1.27	-
AV	11.58791G	41.77	54.00	-12.23	12.09	3	V	167	1.92	-
PK	11.59184G	56.02	74.00	-17.98	12.09	3	V	167	1.92	-

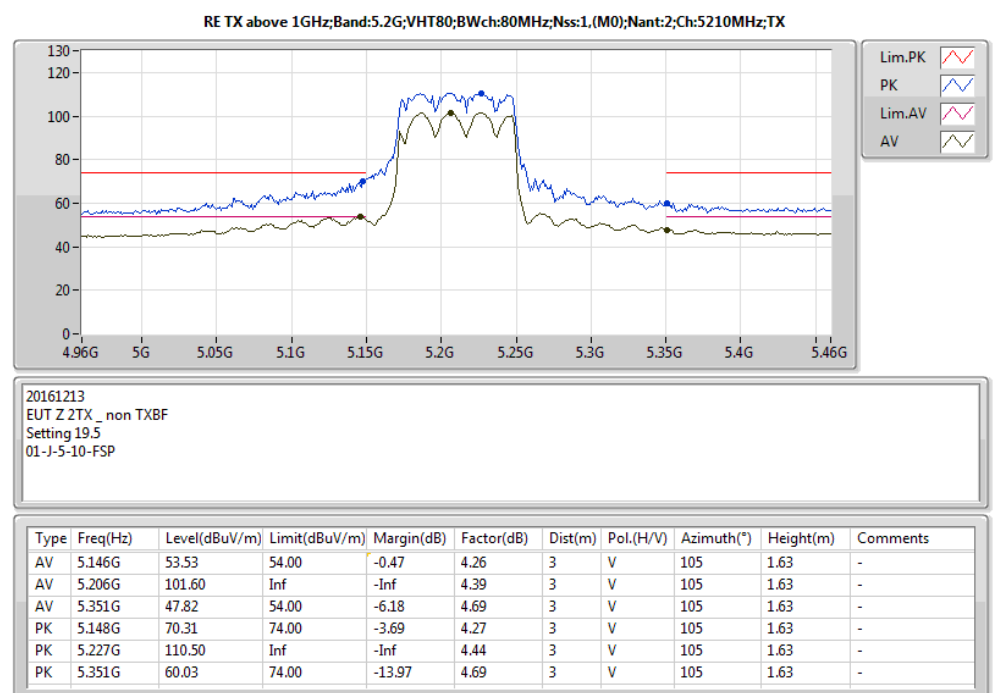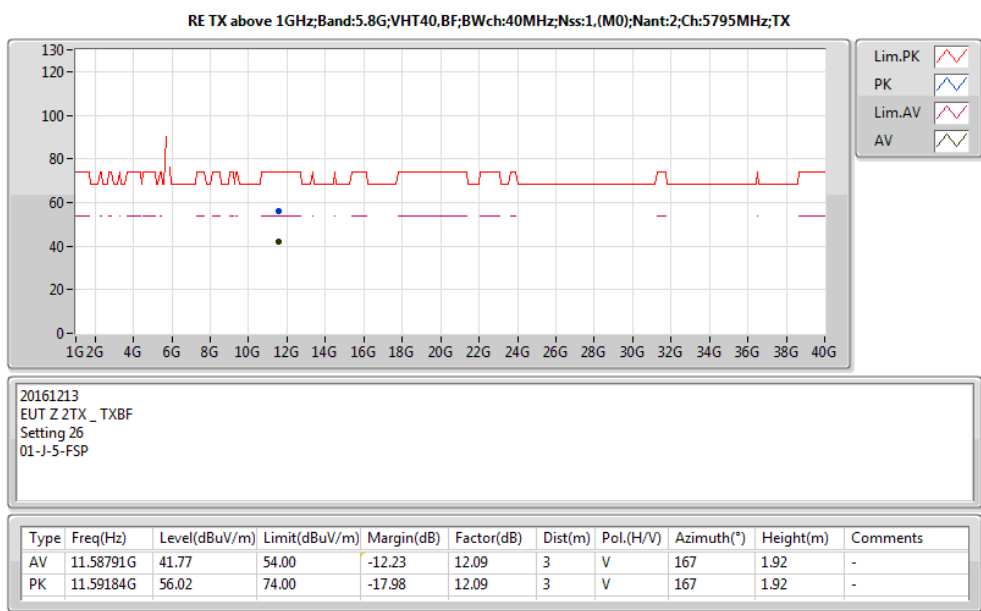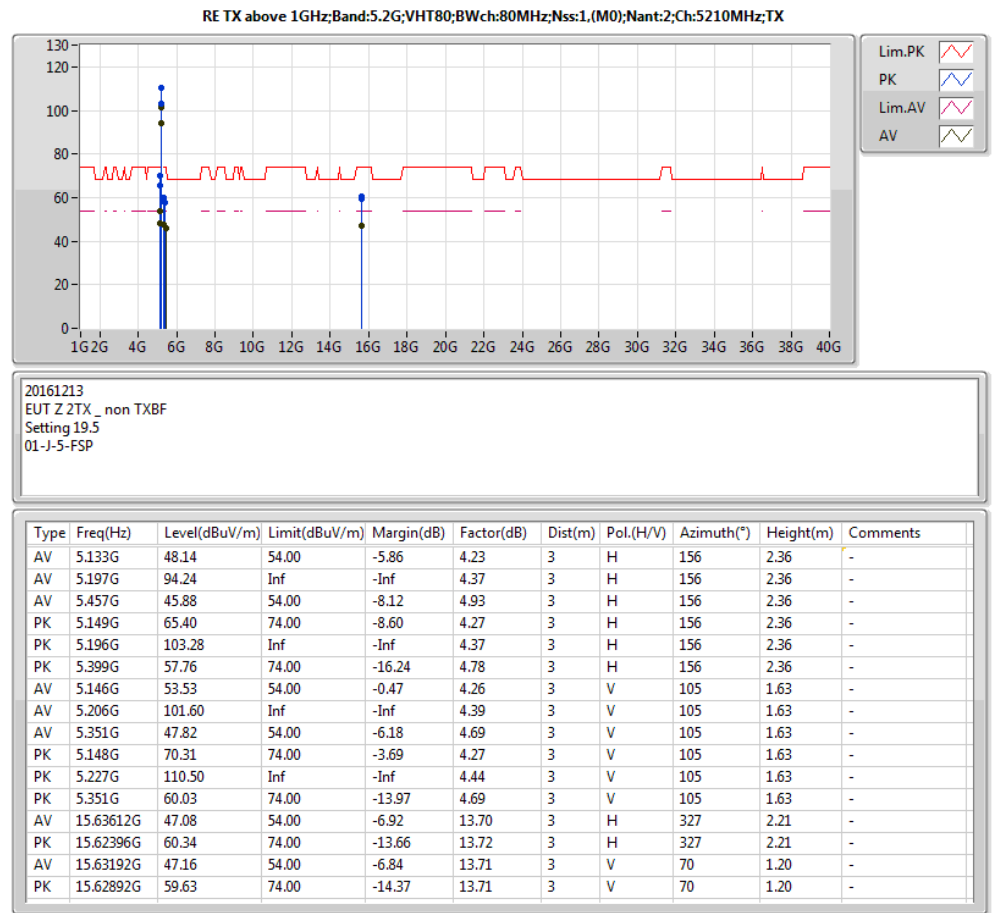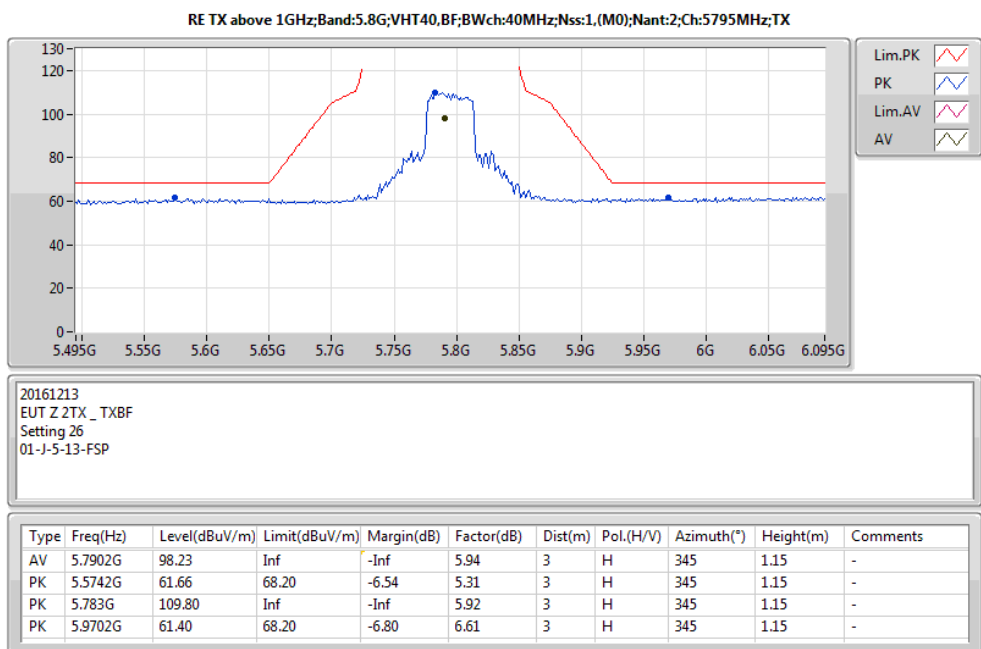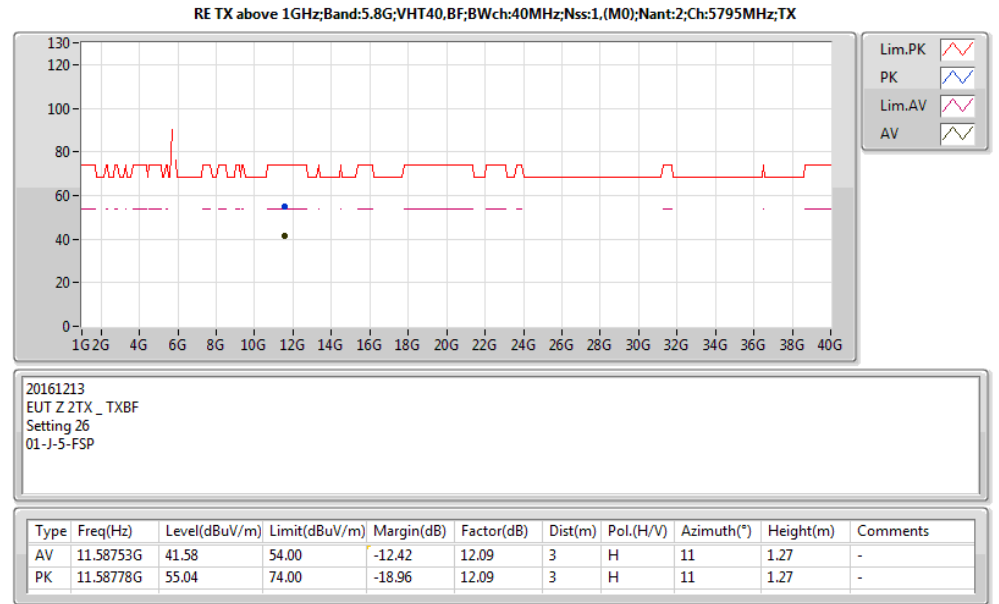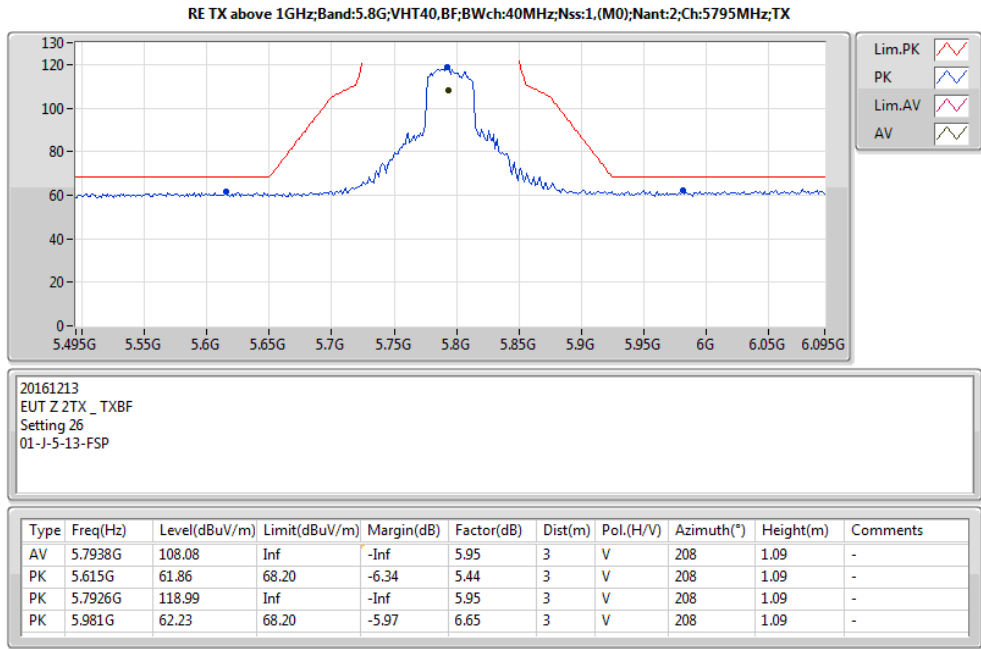

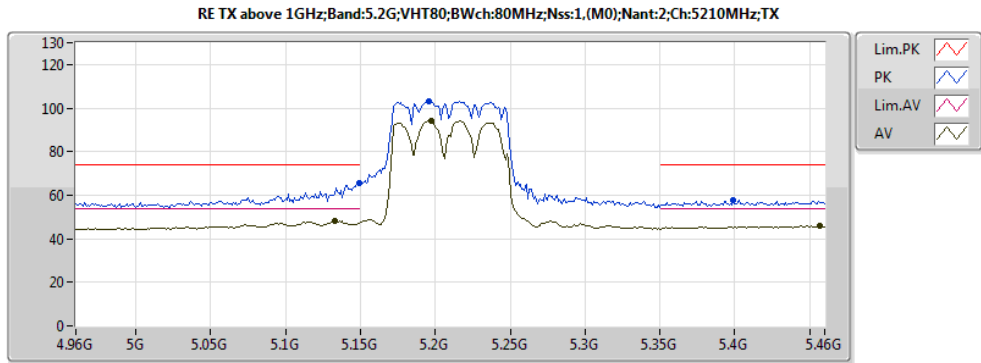


20161213
EUT Z 2TX_non TXBF
Setting 19.5
01-J-5-10-FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.133G	48.14	54.00	-5.86	4.23	3	H	156	2.36	-
AV	5.197G	94.24	Inf	-Inf	4.37	3	H	156	2.36	-
AV	5.457G	45.88	54.00	-8.12	4.93	3	H	156	2.36	-
PK	5.149G	65.40	74.00	-8.60	4.27	3	H	156	2.36	-
PK	5.196G	103.28	Inf	-Inf	4.37	3	H	156	2.36	-
PK	5.399G	57.76	74.00	-16.24	4.78	3	H	156	2.36	-

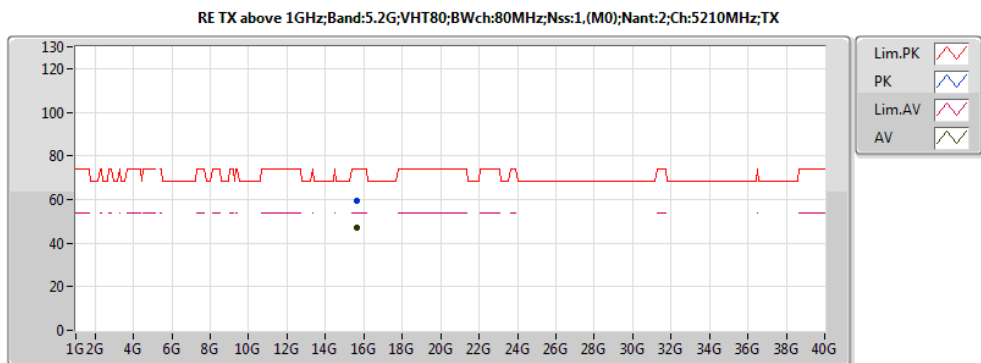


20161213
EUT Z 2TX_non TXBF
Setting 19.5
01-J-5-FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.63192G	47.16	54.00	-6.84	13.71	3	V	70	1.20	-
PK	15.62892G	59.63	74.00	-14.37	13.71	3	V	70	1.20	-

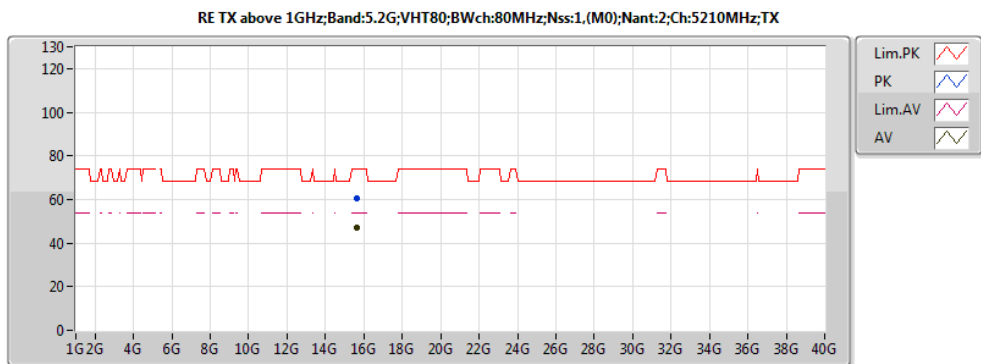


20161213
EUT Z 2TX_non TXBF
Setting 19.5
01-J-5-FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.63612G	47.08	54.00	-6.92	13.70	3	H	327	2.21	-
PK	15.62396G	60.34	74.00	-13.66	13.72	3	H	327	2.21	-

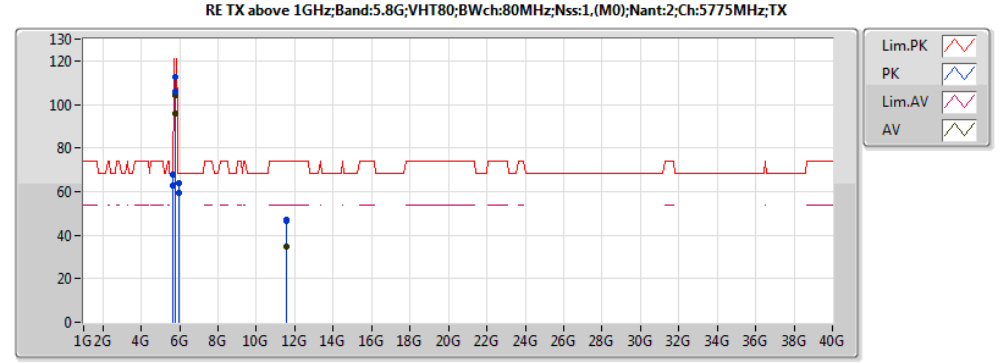


20161213
EUT Z 2TX_non TXBF
Setting 21.5
01-J-5-FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.7846G	96.06	Inf	-Inf	5.93	3	H	358	1.04	-
PK	5.6406G	62.82	68.20	-5.38	5.52	3	H	358	1.04	-
PK	5.745G	105.70	Inf	-Inf	5.82	3	H	358	1.04	-
PK	5.9478G	59.25	68.20	-8.95	6.53	3	H	358	1.04	-
AV	5.7606G	103.98	Inf	-Inf	5.86	3	V	212	1.16	-
PK	5.6394G	67.79	68.20	-0.41	5.51	3	V	212	1.16	-
PK	5.7582G	112.57	Inf	-Inf	5.85	3	V	212	1.16	-
PK	5.943G	63.88	68.20	-4.32	6.51	3	V	212	1.16	-
AV	11.55976G	34.84	54.00	-19.16	12.07	3	H	3	1.25	-
PK	11.55896G	46.71	74.00	-27.29	12.07	3	H	3	1.25	-
AV	11.55992G	34.64	54.00	-19.36	12.07	3	V	240	1.82	-
PK	11.55416G	47.29	74.00	-26.71	12.07	3	V	240	1.82	-

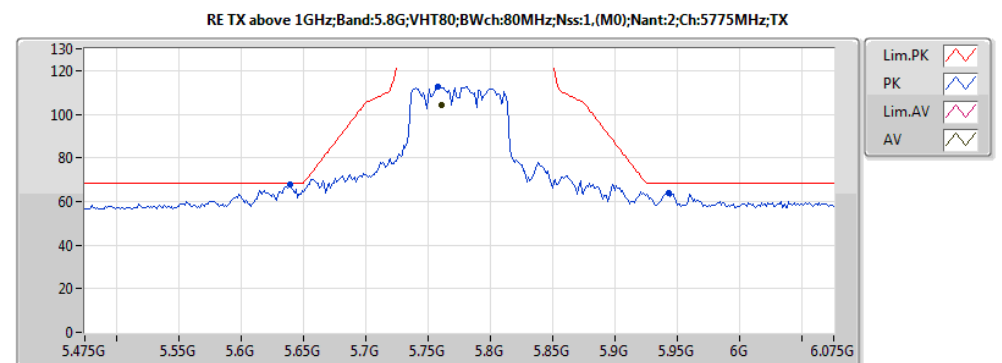







20161213
EUT Z 2TX_non-TXBF
Setting 21.5
01-J-5-10-FSP







Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.7606G	103.98	Inf	-Inf	5.86	3	V	212	1.16	-
PK	5.6394G	67.79	68.20	-0.41	5.51	3	V	212	1.16	-
PK	5.7582G	112.57	Inf	-Inf	5.85	3	V	212	1.16	-
PK	5.943G	63.88	68.20	-4.32	6.51	3	V	212	1.16	-

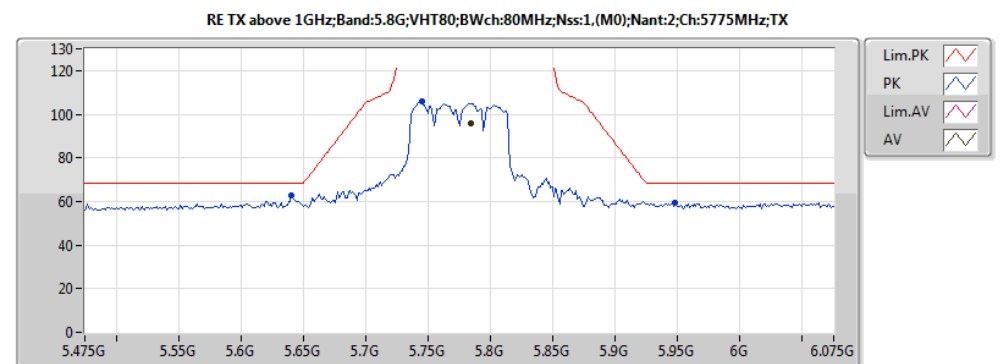

20161213
EUT Z 2TX_non-TXBF
Setting 21.5
01-J-5-10-FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.7846G	96.06	Inf	-Inf	5.93	3	H	358	1.04	-
PK	5.6406G	62.82	68.20	-5.38	5.52	3	H	358	1.04	-
PK	5.745G	105.70	Inf	-Inf	5.82	3	H	358	1.04	-
PK	5.9478G	59.25	68.20	-8.95	6.53	3	H	358	1.04	-

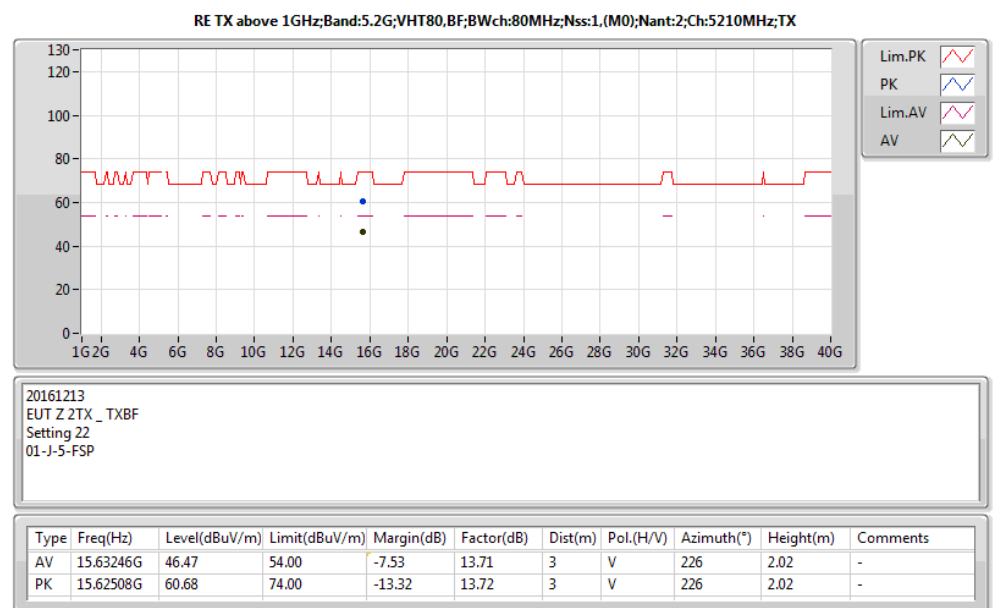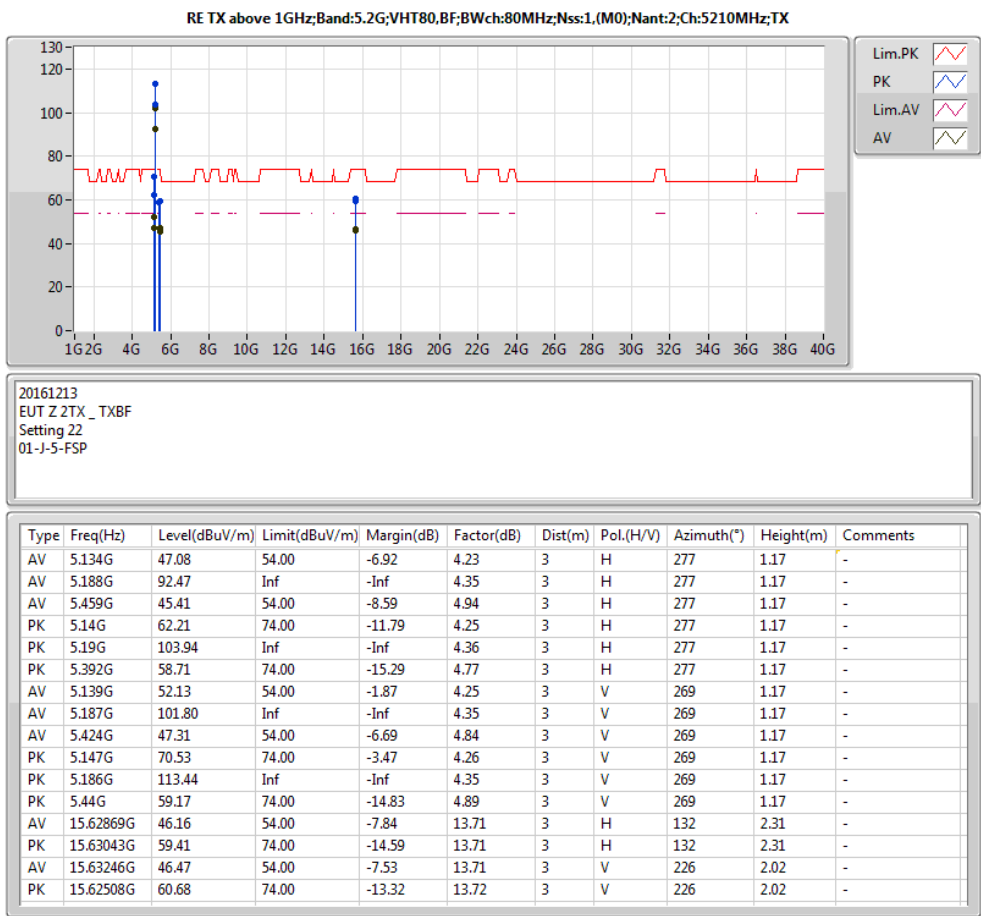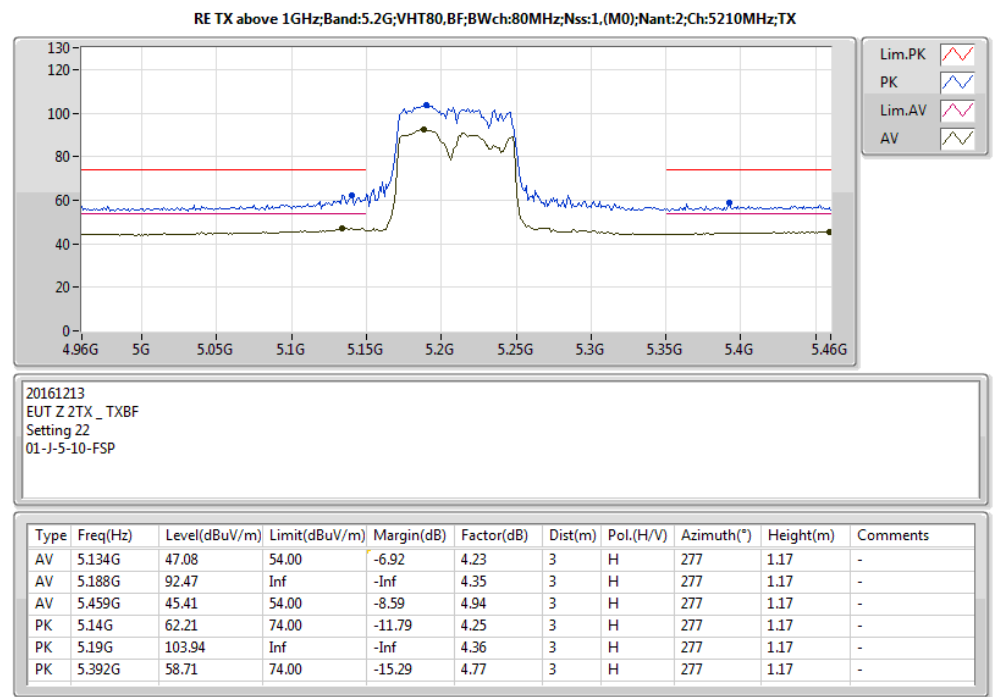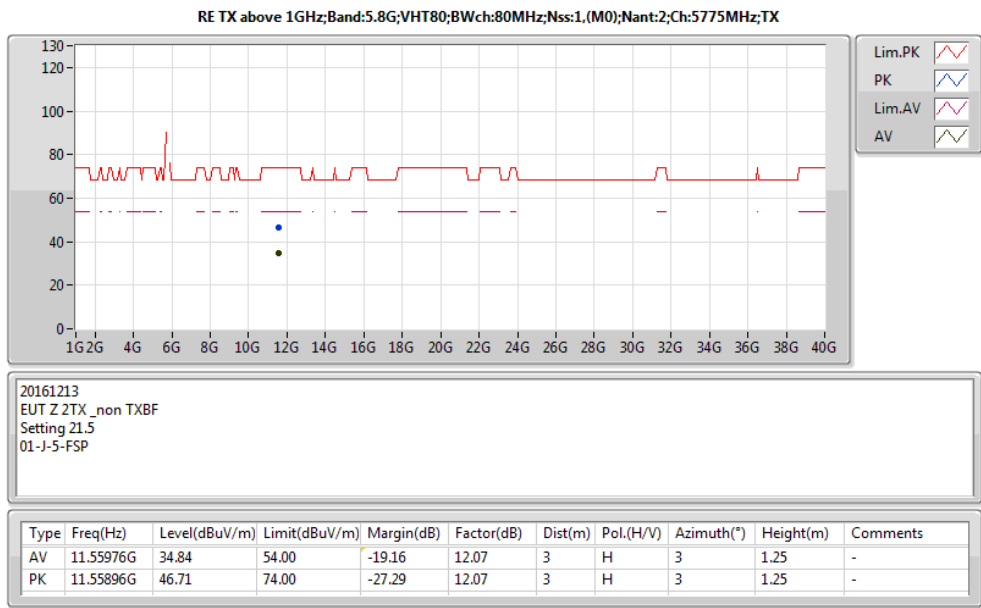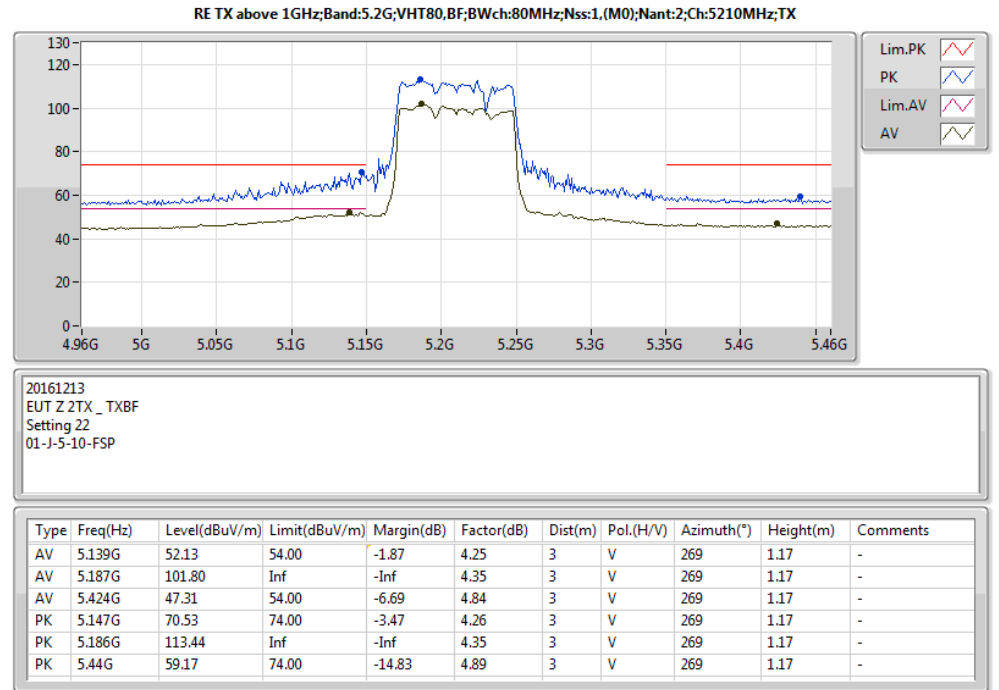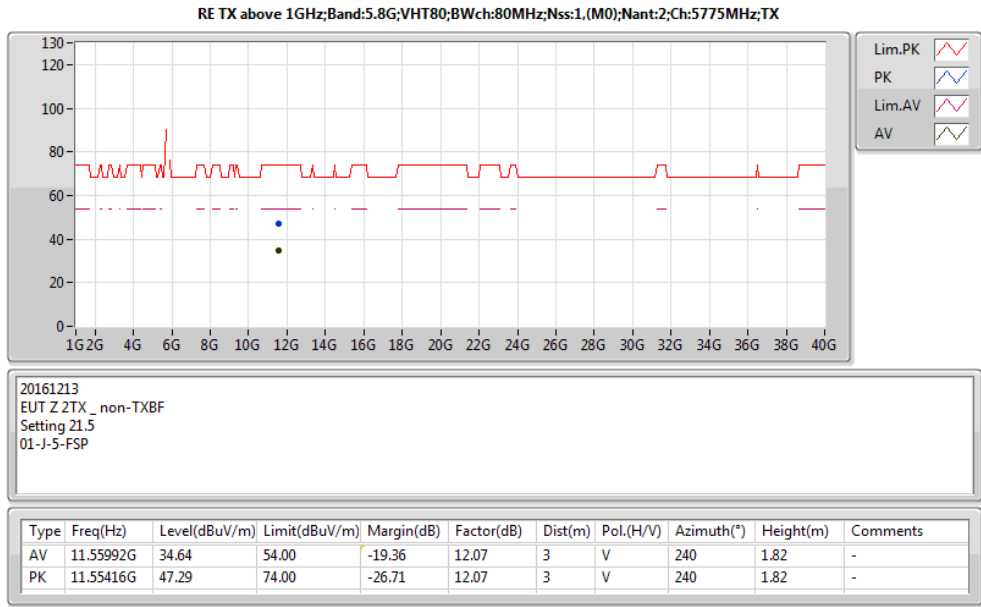

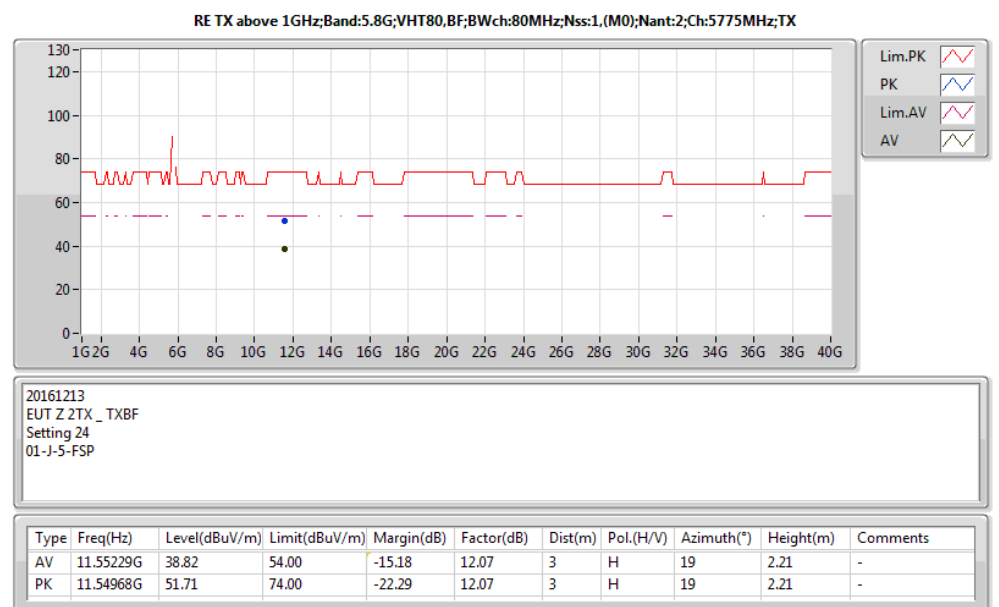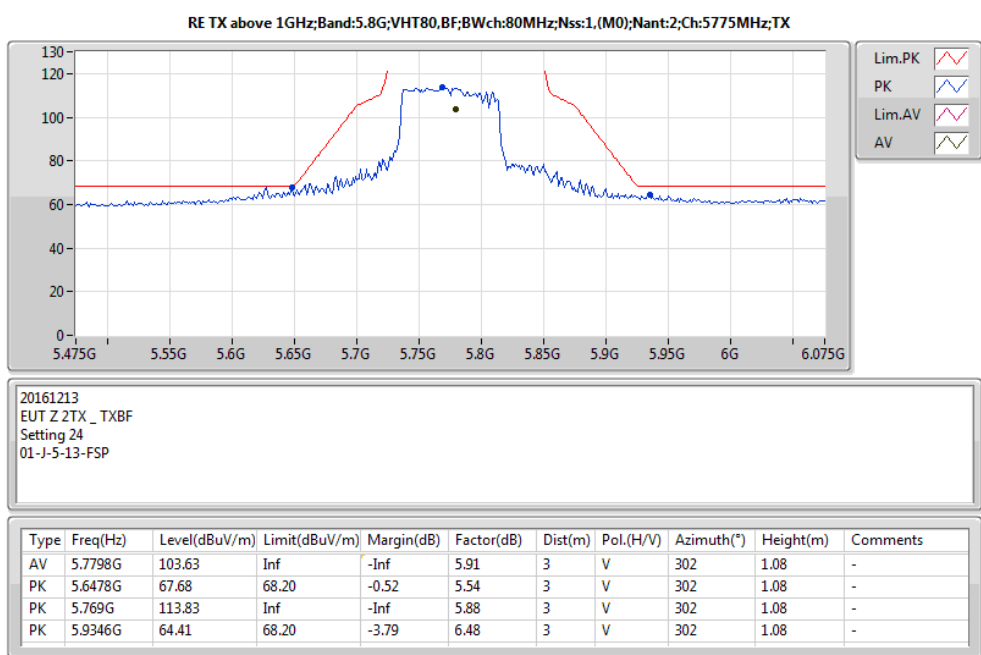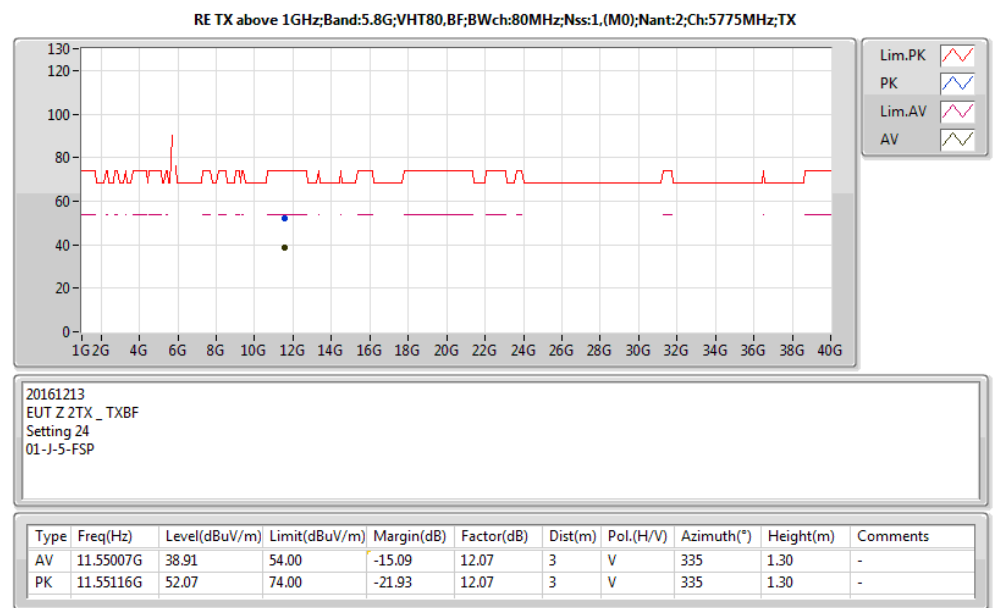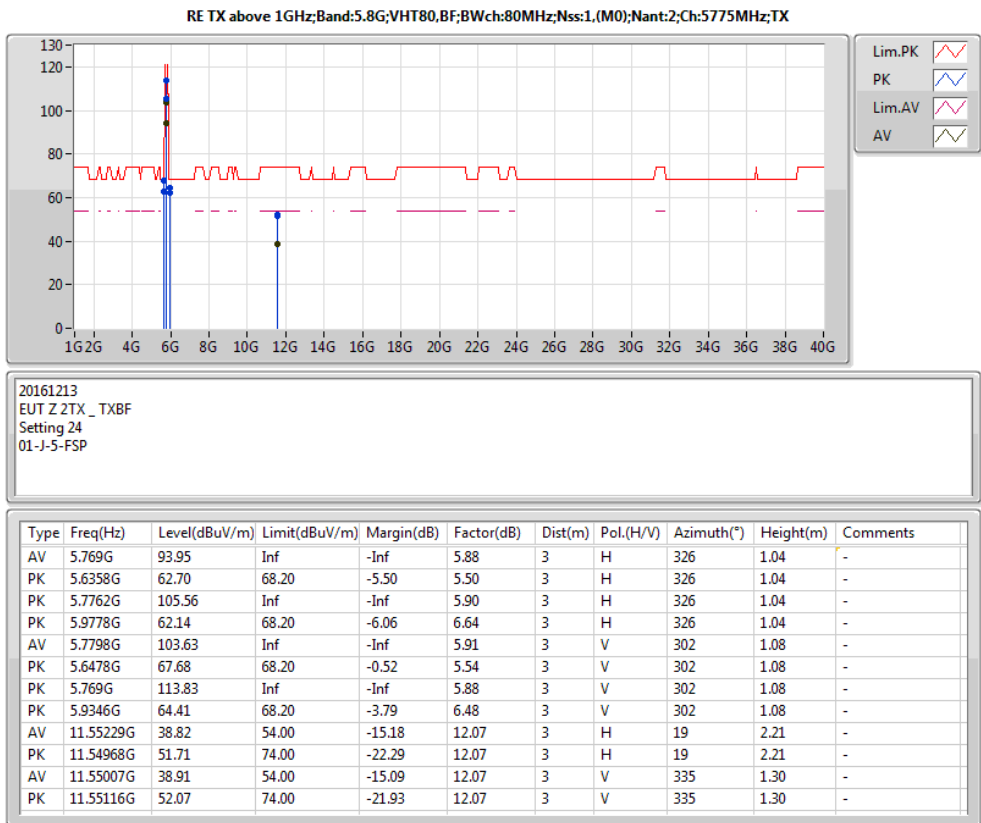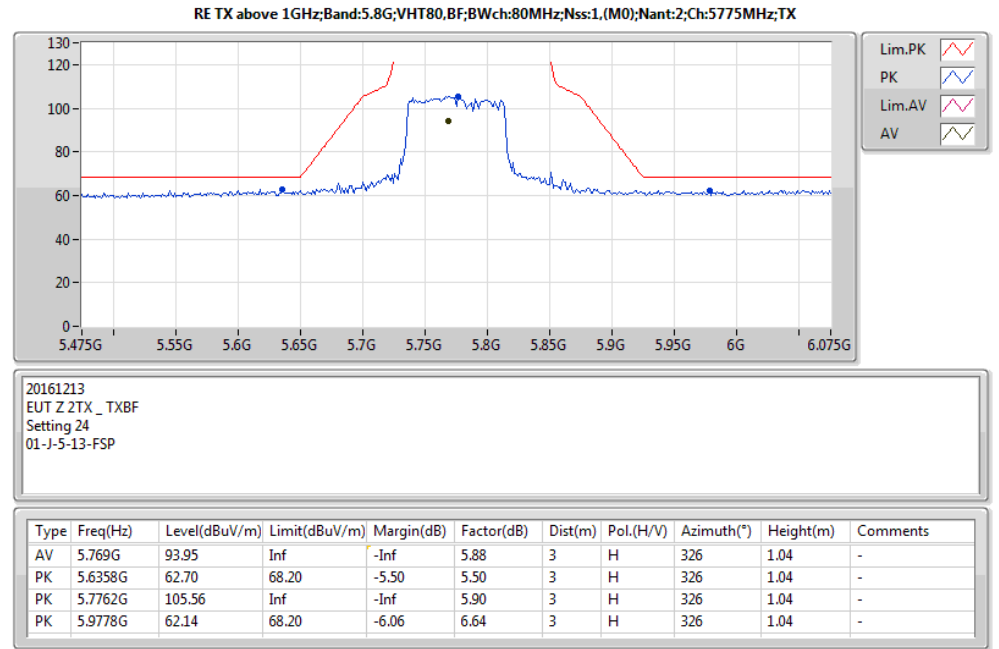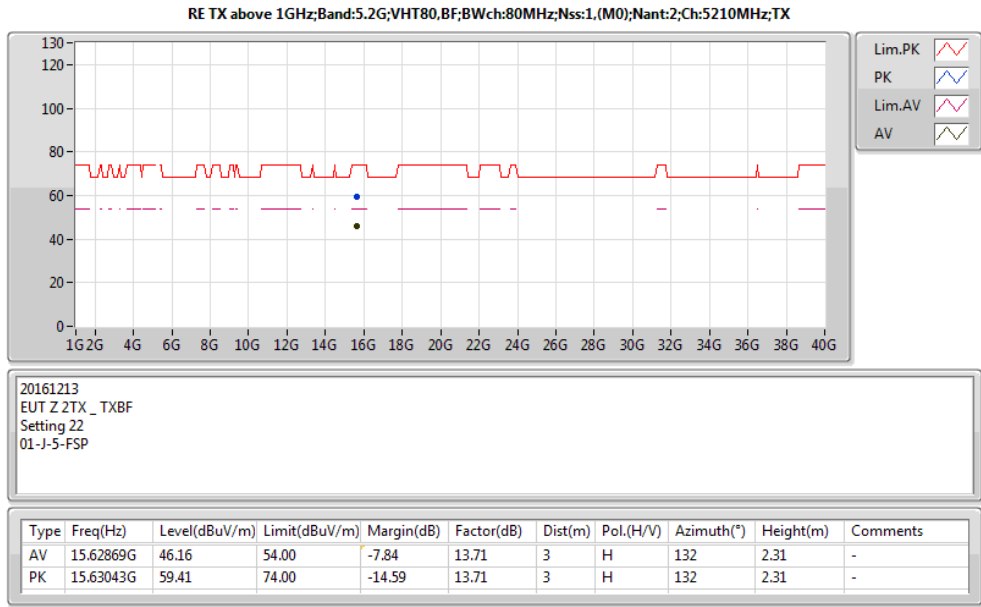

Mode: 20 MHz / Ant. 4

Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)			
	5200 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5199.9642	5199.9635	5199.9626	5199.9622
110.00	5199.9635	5199.9627	5199.9619	5199.9611
93.50	5199.9631	5199.9628	5199.9624	5199.9619
Max. Deviation (MHz)	0.0369	0.0373	0.0381	0.0389
Max. Deviation (ppm)	7.10	7.17	7.33	7.48
Result	Pass			

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)			
	5200 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5199.9624	5199.9620	5199.9611	5199.9604
10	5199.9630	5199.9626	5199.9619	5199.9614
20	5199.9635	5199.9627	5199.9621	5199.9618
30	5199.9958	5199.9949	5199.9942	5199.9938
40	5199.9962	5199.9954	5199.9947	5199.9942
Max. Deviation (MHz)	0.0376	0.0380	0.0389	0.0396
Max. Deviation (ppm)	7.23	7.31	7.48	7.62
Result	Pass			

Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)			
	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5784.9640	5784.9635	5784.9630	5784.9620
110.00	5784.9635	5784.9628	5784.9618	5784.9616
93.50	5784.9633	5784.9631	5784.9629	5784.9628
Max. Deviation (MHz)	0.0367	0.0372	0.0382	0.0384
Max. Deviation (ppm)	6.34	6.43	6.60	6.64
Result	Pass			

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)			
	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5784.9623	5784.9613	5784.9610	5784.9607
10	5784.9627	5784.9622	5784.9617	5784.9609
20	5784.9635	5784.9630	5784.9624	5784.9615
30	5784.9958	5784.9948	5784.9944	5784.9943
40	5784.9965	5784.9958	5784.9956	5784.9949
Max. Deviation (MHz)	0.0377	0.0387	0.0390	0.0393
Max. Deviation (ppm)	6.52	6.69	6.74	6.79
Result	Pass			

Mode: 40 MHz / Ant. 4

Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)			
	5190 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5189.9639	5189.9633	5189.9626	5189.9624
110.00	5189.9635	5189.9627	5189.9621	5189.9619
93.50	5189.9634	5189.9629	5189.9625	5189.9617
Max. Deviation (MHz)	0.0366	0.0373	0.0379	0.0383
Max. Deviation (ppm)	7.05	7.19	7.30	7.38
Result	Pass			

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)			
	5190 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5189.9622	5189.9614	5189.9613	5189.9603
10	5189.9625	5189.9620	5189.9611	5189.9607
20	5189.9635	5189.9627	5189.9619	5189.9618
30	5189.9958	5189.9950	5189.9944	5189.9937
40	5189.9976	5189.9967	5189.9961	5189.9958
Max. Deviation (MHz)	0.0378	0.0386	0.0389	0.0397
Max. Deviation (ppm)	7.28	7.44	7.50	7.65
Result	Pass			

Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)			
	5755 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5754.9644	5754.9635	5754.9625	5754.9615
110.00	5754.9635	5754.9634	5754.9625	5754.9617
93.50	5754.9625	5754.9620	5754.9614	5754.9606
Max. Deviation (MHz)	0.0375	0.0380	0.0386	0.0394
Max. Deviation (ppm)	6.52	6.60	6.71	6.85
Result	Pass			

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)			
	5755 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5754.9621	5754.9611	5754.9607	5754.9604
10	5754.9627	5754.9623	5754.9618	5754.9608
20	5754.9635	5754.9629	5754.9627	5754.9621
30	5754.9958	5754.9948	5754.9947	5754.9938
40	5754.9966	5754.9959	5754.9955	5754.9951
Max. Deviation (MHz)	0.0379	0.0389	0.0393	0.0396
Max. Deviation (ppm)	6.59	6.76	6.83	6.88
Result	Pass			

Mode: 80 MHz / Ant. 4

Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)			
	5210 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5209.9638	5209.9633	5209.9629	5209.9624
110.00	5209.9635	5209.9631	5209.9625	5209.9623
93.50	5209.9627	5209.9625	5209.9616	5209.9611
Max. Deviation (MHz)	0.0373	0.0375	0.0384	0.0389
Max. Deviation (ppm)	7.16	7.20	7.37	7.47
Result	Pass			

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)			
	5210 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5209.9627	5209.9624	5209.9616	5209.9608
10	5209.9632	5209.9630	5209.9621	5209.9614
20	5209.9635	5209.9629	5209.9622	5209.9614
30	5209.9958	5209.9952	5209.9950	5209.9947
40	5209.9960	5209.9954	5209.9945	5209.9940
Max. Deviation (MHz)	0.0373	0.0376	0.0384	0.0392
Max. Deviation (ppm)	7.16	7.22	7.37	7.52
Result	Pass			

Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)			
	5775 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5774.9636	5774.9626	5774.9620	5774.9619
110.00	5774.9635	5774.9626	5774.9622	5774.9620
93.50	5774.9629	5774.9621	5774.9612	5774.9611
Max. Deviation (MHz)	0.0371	0.0379	0.0388	0.0389
Max. Deviation (ppm)	6.42	6.56	6.72	6.74
Result	Pass			

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)			
	5775 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5774.9622	5774.9612	5774.9603	5774.9594
10	5774.9634	5774.9632	5774.9622	5774.9619
20	5774.9635	5774.9627	5774.9620	5774.9612
30	5774.9958	5774.9949	5774.9943	5774.9940
40	5774.9966	5774.9964	5774.9961	5774.9954
Max. Deviation (MHz)	0.0378	0.0388	0.0397	0.0406
Max. Deviation (ppm)	6.55	6.72	6.87	7.03
Result	Pass			

