



CTK Co., Ltd.
The Prime Leader of Global Regulatory Corporation

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

TEST REPORT For FCC

FCC Standards : FCC 47CFR part 15 subpart C Industry Canada Standards :RSS-210 Issue 8 & RSS-GEN Issue 3

Test Report No. : CTK-2014-00385
Date of Issue : 2014-04-01
FCC ID : U5MNANO20BT
IC ID : 7962A-NANO20BT
Basic Model/Type No. : SPP-R210, ZQ110
Kind of Product : Mobile Printer
Applicant : BIXOLON Co., Ltd.
Applicant Address : 7TH-8TH FL, MiraeAsset Venture Tower, 20, Pangyoyeok-ro
241beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, Korea
Manufacturer : BIXOLON Co., Ltd.
Manufacturer Address : 7TH-8TH FL, MiraeAsset Venture Tower, 20, Pangyoyeok-ro
241beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, Korea
Contact Person : Shin Ji Sung / Assistant Manager
Telephone : +82-31-218-5582
Received Date : 2014-01-09
Test period : Start : 2014-01-22 End : 2014-03-24
Test Results : ☒ In Compliance ☐ Not in Compliance

The test results presented in this report relate only to the object tested.

Tested by

Y. T. Lee

Young-taek Lee
Test Engineer
Date: 2014-04-01

Reviewed by

Y. J. Park

Young-Joon, Park
Technical Manager
Date: 2014-04-01



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

REPORT REVISION HISTORY

Date	Revision	Page No
2014-04-01	Issued (CTK-2014-00385)	All

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
1.0 General Product Description	4
1.1 Tested Frequency	4
1.2 Tested Mode	4
1.3 Model Differences	5
1.4 Device Modifications	5
1.5 Peripheral Devices	5
1.6 Calibration Details of Equipment Used for Measurement	5
1.7 Test Facility	5
1.8 Laboratory Accreditations and Listings	6
2.0 Summary of tests	7
2.1 Transmitter Requirements	8
2.1.1 Carrier Frequency Separation	8
2.1.2 Number of Hopping Frequencies	10
2.1.4 Time of Occupancy (Dwell Time)	19
2.1.5 Maximum peak Conducted Output Power	25
2.1.6 RF Conducted Emissions	30
2.1.7 Field Strength of Emissions (TX mode)	41
2.1.8 Field Strength of Emissions (RX Mode)	59
2.1.9 AC Conducted Emissions	62
APPENDIX A – Test Equipment Used For Tests	67



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

1.0 General Product Description

Equipment model name	SPP-R210
Serial number	Prototype
EUT condition	Pre-production, not damaged
Antenna type	Chip antenna Gain 0.55 dBi
Frequency Range	2402 MHz - 2480 MHz
RF power	5.934 dBm Peak Conducted (GFSK) 2.710 dBm Peak Conducted (8-DPSK)
Type of Modulation	Frequency Hopping Spread Spectrum
Number of channels	79
Channel Spacing	1 MHz
Channel Access Protocol	Frequency Hopping
Type of Modulation	GFSK(1Mbps), DQPSK(2Mbps), 8-DPSK(3Mbps)
Power Source	Lithium-ion Battery Pack(Rechargeable battery) 7.4 Vdc/1200 mAh

1.1 Tested Frequency

	LOW	MID	HIGH
Frequency (MHz)	2402	2441	2480

1.2 Tested Mode

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Tested Ch	Modulation Technology	Modulation Type	Packet Type
Low, Mid, High	FHSS	GFSK	DH5
Low, Mid, High	FHSS	8-DPSK	3-DH5



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Mode	Description
Mode 1	SPP-R210, MSR
Mode 2	ZQ110, MSR
Mode 3	SPP-R210, SCR
Mode 4	ZQ110, SCR

Note : MSR type - Magnetic Stripe Reader, SCR type - Smart Card Reader

1.3 Model Differences

- SPP-R210 is basic model.
- SPP-R210 and ZQ110 are no technical difference from except for model name and product type.

1.4 Device Modifications

The following modifications were necessary for compliance:

Not applicable

1.5 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
Notebook Computer	SP20	G86791BW400177	Samsung Electronics Co., Ltd.
AC/DC ADAPTER	FSP GROUP INC.	FSP090-DMAB1	6LL0660303GP MM1

1.6 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

1.7 Test Facility

The measurement facility is located at (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

1.8 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 m & 10 m SAC and Conducted Test Site to perform FCC Part 15/18 measurements	 805871
JAPAN	VCCI	3 m & 10 m SAC and Conducted Test Site	 C-986, T-1843, R-3627, G-387
KOREA	KCC	EMI (3 m & 10 m SAC and Conducted Test Site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and Interruptions)	 No. 51, KR0025
International	KOLAS	EMC	



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

2.0 Summary of tests

FCC Part Section(s)	IC RSS Section	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	RSS-210 A8.1 (b)	Carrier Frequency Separation	> 25 kHz	Conducted	C
15.247(a)	RSS-210 A8.1 (d)	Number of Hopping Frequencies	> 15 hops		C
15.247(a)	RSS-210 A8.1 (b)	20 dB Bandwidth	NA		C
15.247	RSS-210 A8.1 (d)	Dwell Time	< 0.4 seconds		C
15.247(b)	RSS-210 A8.1 (b)	Transmitter Output Power	< 0.125 Watts		C
15.247(d)	RSS-210 A8.5	Conducted Spurious emission	> 20 dBc		C
15.247(d)	RSS-210 A8.5	Band Edge	> 20 dBc		C
15.209	RSS-Gen 7.2.5	Field Strength of Harmonics	15.209(a)	Radiated	C
15.207	RSS-Gen 7.2.4	AC Conducted Emissions	15.207(a)	Line Conducted	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:

- FCC Part 15.247, ANSI C63.4-2003
- RSS-210, Issue No.:8 Date: 2010

The tests were performed according to the method of measurements prescribed in DA 00-705.

2.1 Transmitter Requirements

2.1.1 Carrier Frequency Separation

Test Location

RF Test Room

Test Procedures

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

Span = 5 MHz (wide enough to capture the peaks of two adjacent channels)

RBW = 30 kHz ($\geq 1\%$ of the span) Sweep = auto

VBW = 30 kHz ($\geq$ RBW) Detector function = peak

Trace = max hold




Figure 1 : Measurement setup for the carrier frequency separation

Limit

§15.247(a)(1) Frequency hopping system operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-third of 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Results

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Channel	Adjacent Hopping Channel Separation (kHz)	Two-third of 20dB bandwidth (kHz)	Minimum Bandwidth (kHz)	Result
2441MHz	1015	563.8	25	Complies

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Channel	Adjacent Hopping Channel Separation (kHz)	Two-third of 20dB bandwidth (kHz)	Minimum Bandwidth (kHz)	Result
2441MHz	1000	837.3	25	Complies

See next pages for actual measured spectrum plots.




CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Carrier Frequency Separation

Data Rate : GFSK

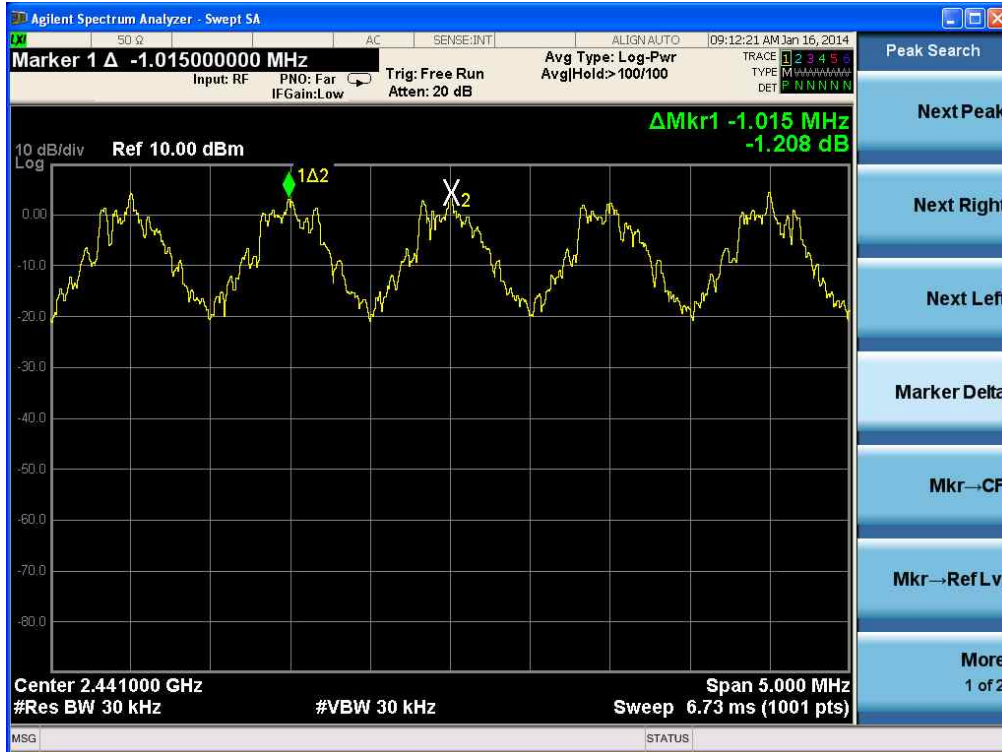

Data Rate : 8-DPSK



2.1.2 Number of Hopping Frequencies

Test Location

RF Test Room

Test Procedures


The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to:

Frequency range 1: Start = 2389.5 MHz, Stop = 2439.5 MHz
 2: Start = 2439.5 MHz, Stop = 2489.5 MHz

RBW = 300 kHz ($\geq 1\%$ of the span)
VBW = 300 kHz ($\geq$ RBW)
Trace = max hold

Sweep = auto
Detector function = peak



Limit

§15.247(a)(1)(iii) For frequency hopping system operating in the 2400-2483.5 MHz band shall use at least 15 hopping frequencies.

Test Results

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Total number of Hopping Channels	Result
79	Complies

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Total number of Hopping Channels	Result
79	Complies

See next pages for actual measured spectrum plots.




CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Number of Hopping Frequencies(GFSK)

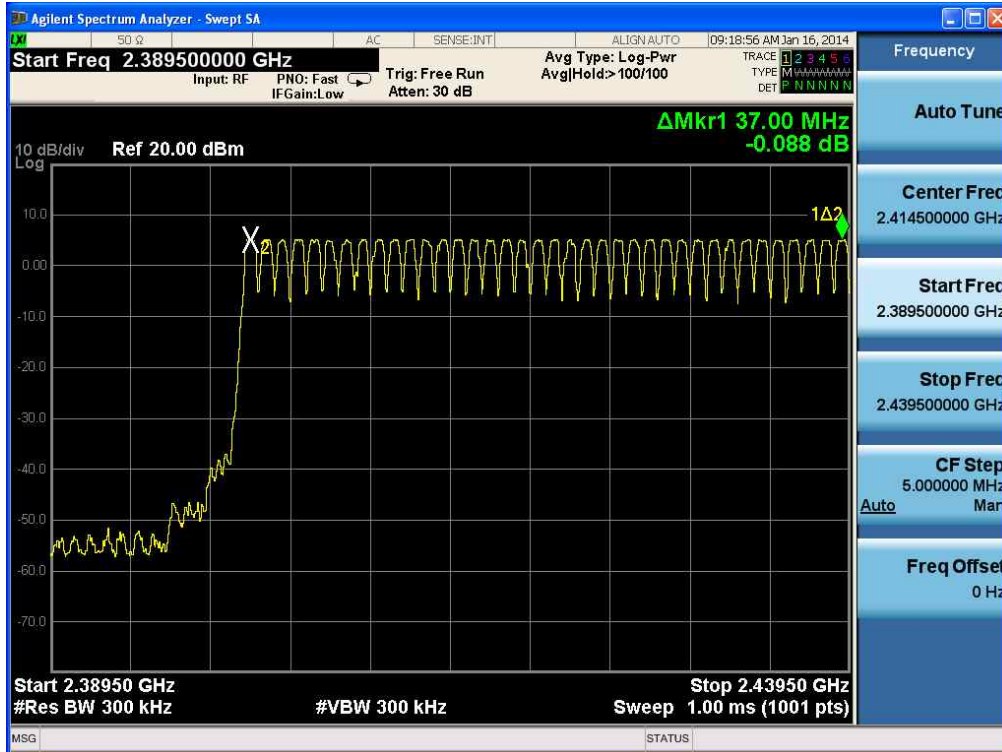



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Number of Hopping Frequencies(8-DPSK)



2.1.3 20 dB bandwidth

Test Location

RF Test Room

Test Procedures

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels. After the trace being stable, Use the marker-to peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 2 MHz (approximately 2 or 3 times of the 20 dB bandwidth)


RBW = 30 kHz ($\geq 1\%$ of the span)

Sweep = auto

VBW = 30 kHz ($\geq$ RBW)

Detector function = peak

Trace = max hold



Limit

Limit : N/A



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Test Results

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency (MHz)	Channel Number.	Measured Bandwidth (MHz)	Result
2402	0	0.840	Complies
2441	39	0.846	Complies
2480	78	0.847	Complies

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency (MHz)	Channel Number.	Measured Bandwidth (MHz)	Result
2402	0	1.254	Complies
2441	39	1.256	Complies
2480	78	1.253	Complies

See next pages for actual measured spectrum plots.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

20 dB Bandwidth - GFSK





CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com







CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

20 dB Bandwidth - 8-DPSK

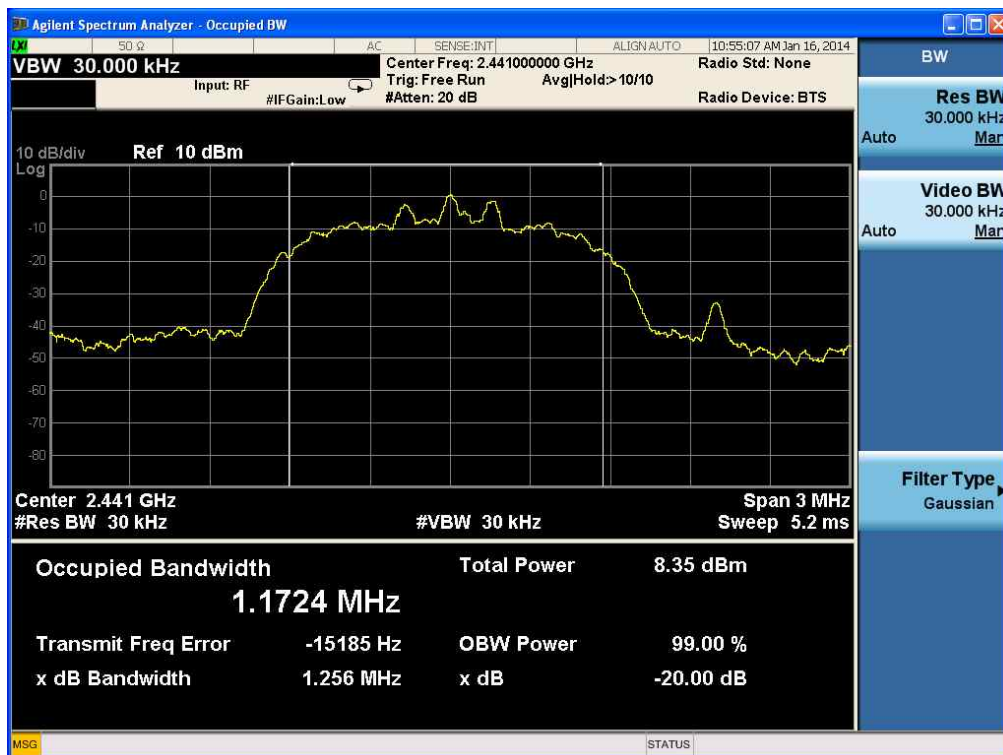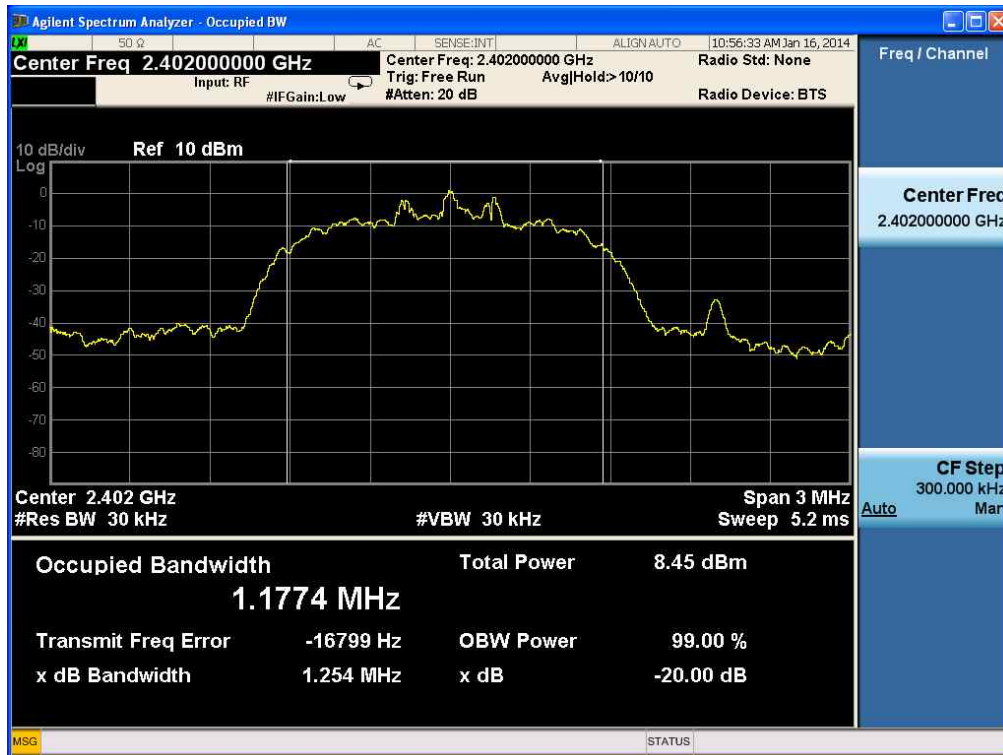




CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

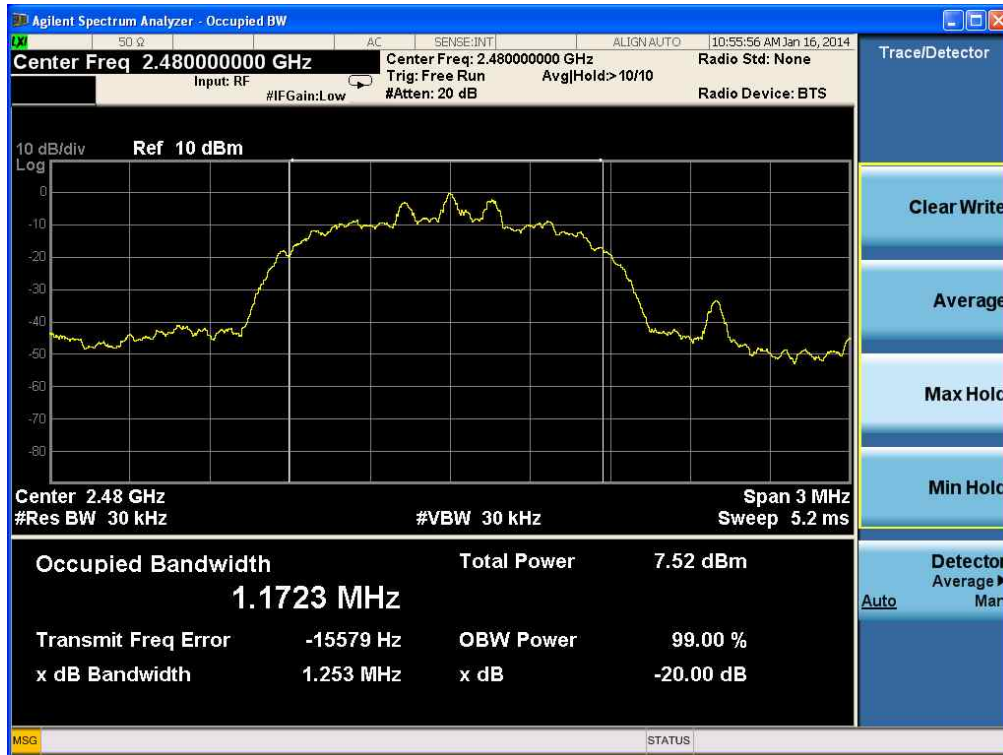

2.1.4 Time of Occupancy (Dwell Time)

Test Location

RF Test Room

Test Procedures

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of spectrum analyzer on any frequency be measured and set spectrum analyzer to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.
6. The SPP-R210 has 3 type of payload, DH1, DH3, DH5. The hopping rate is 1600 per second.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

Span = zero


RBW = 1 MHz

Trace = max hold

VBW = 1 MHz ($\geq$ RBW)

Detector function = peak

Sweep = as necessary to capture the entire dwell time per hopping channel



Limit

§15.247(a)(1)(iii) For frequency hopping system operating in 2400-2483.5 MHz band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Results

Time of occupancy on the TX channel in 31.6 sec = time domain slot length × hop rate ÷
number of hop per channel × 31.6

Test mode : GFSK

Channel Frequency (MHz)	Packet Type	Dwell Time (ms)	Test Results	
			Time of occupancy on the TX channel in 31.6sec (ms)	Result
2441	DH 1	0.395	126.40	Complies
	DH 3	1.645	263.20	Complies
	DH 5	2.895	308.80	Complies

DH1 Dwell time = $0.395 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 126.40 \text{ ms}$

DH3 Dwell time = $1.645 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 263.20 \text{ ms}$

DH5 Dwell time = $2.895 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 308.80 \text{ ms}$

Test mode : 8-DPSK

Channel Frequency (MHz)	Packet Type	Dwell Time (ms)	Test Results	
			Time of occupancy on the TX channel in 31.6sec (ms)	Result
2441	3DH 1	0.405	129.60	Complies
	3DH 3	1.640	262.40	Complies
	3DH 5	2.910	310.40	Complies

DH1 Dwell time = $0.405 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 129.60 \text{ ms}$

DH3 Dwell time = $1.640 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 262.40 \text{ ms}$

DH5 Dwell time = $2.910 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 310.40 \text{ ms}$

See next pages for actual measured spectrum plots.




CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Time of Occupancy for PACKET Type DH1(GFSK)

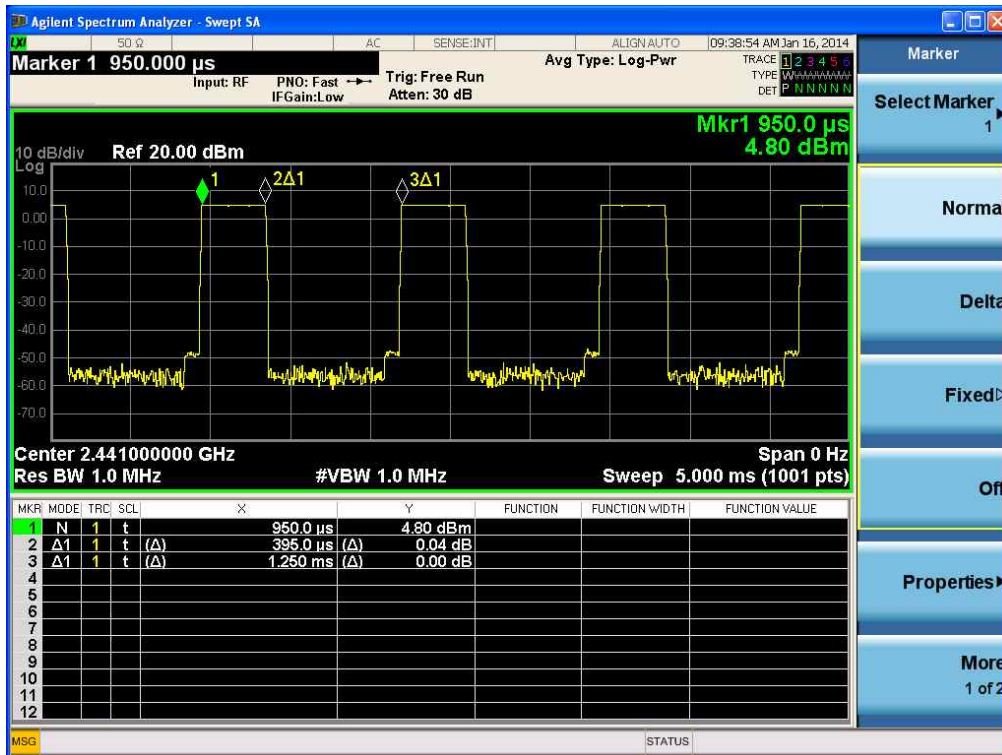

Time of Occupancy for PACKET Type DH3(GFSK)

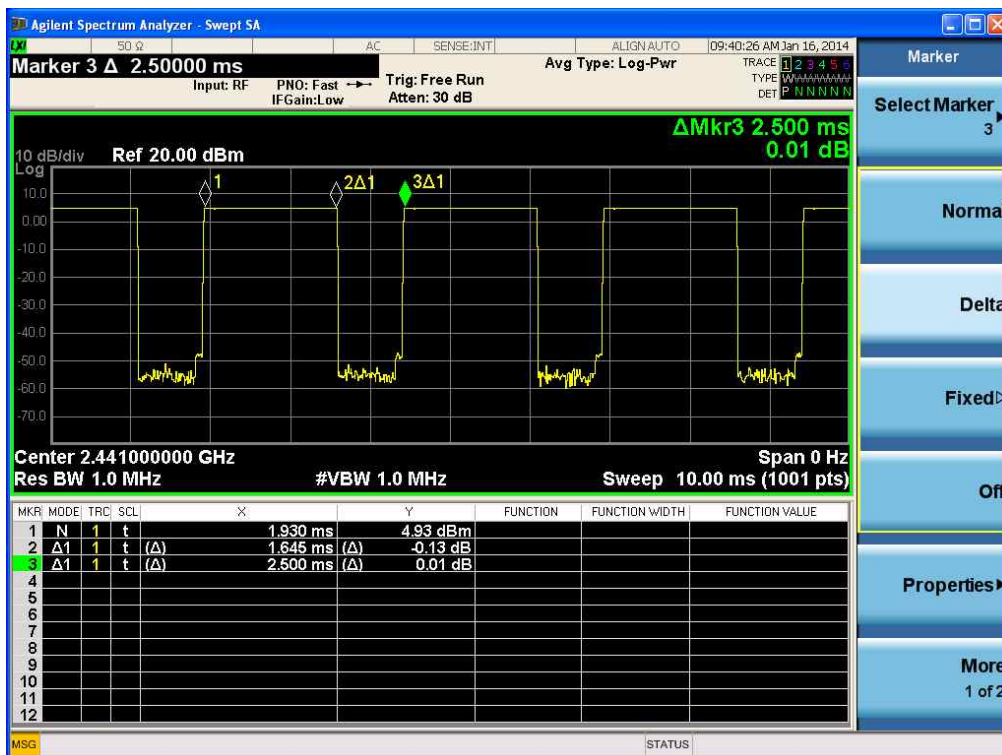




CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Time of Occupancy for PACKET Type DH5(GFSK)

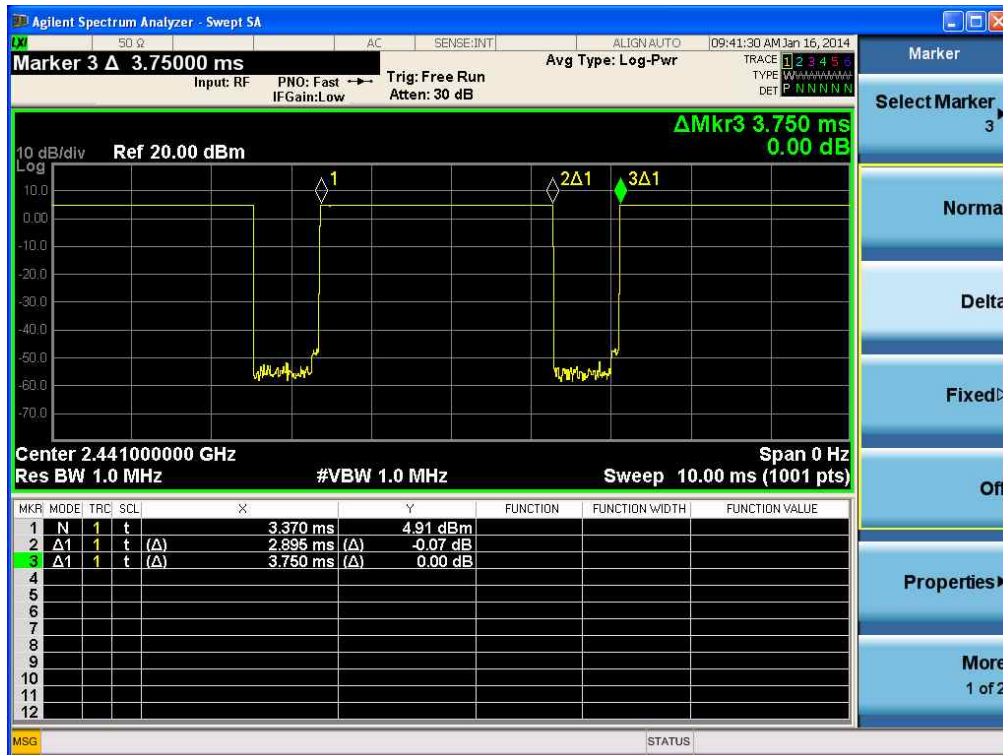



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea


Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Time of Occupancy for PACKET Type 3DH1(8-DPSK)

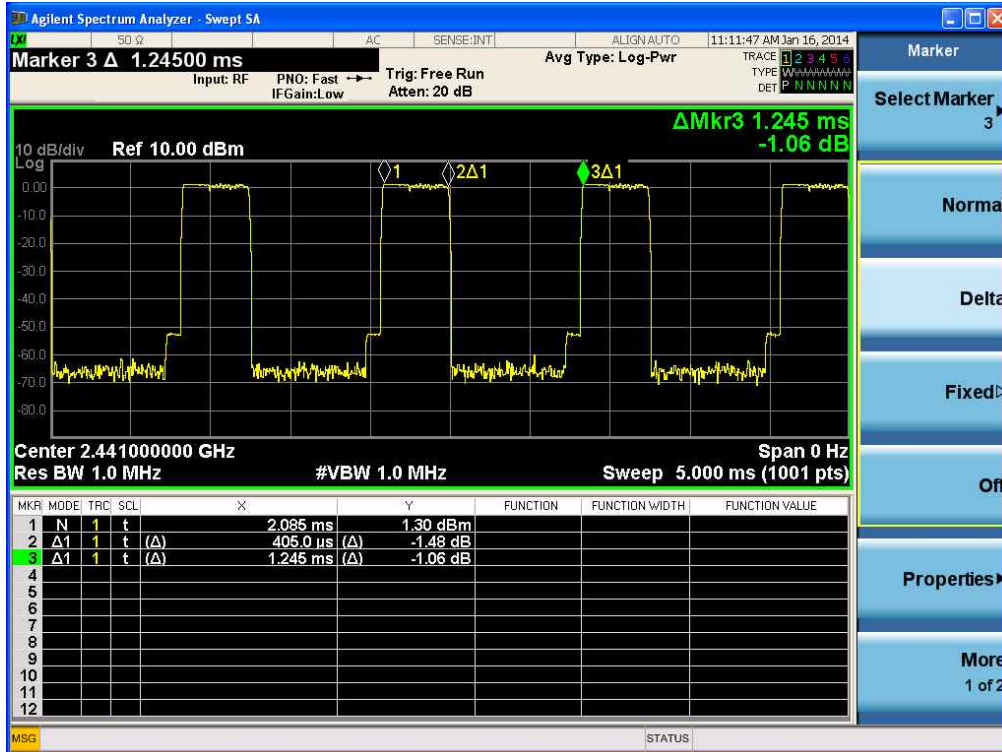

Time of Occupancy for PACKET Type 3DH3(8-DPSK)

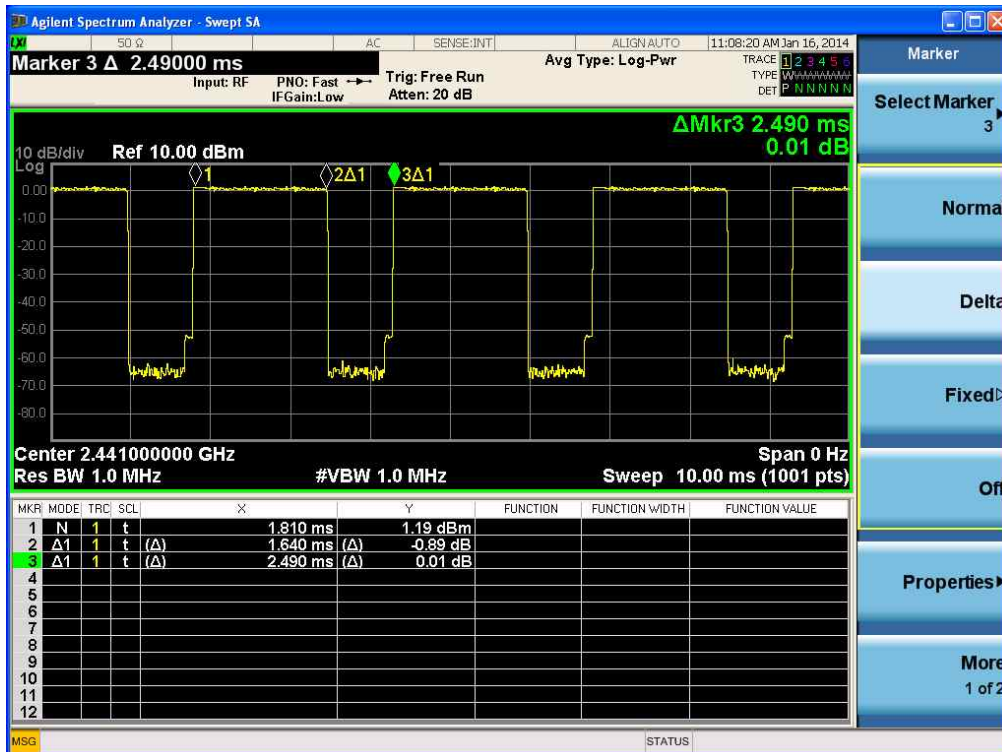




CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Time of Occupancy for PACKET Type 3DH5(8-DPSK)

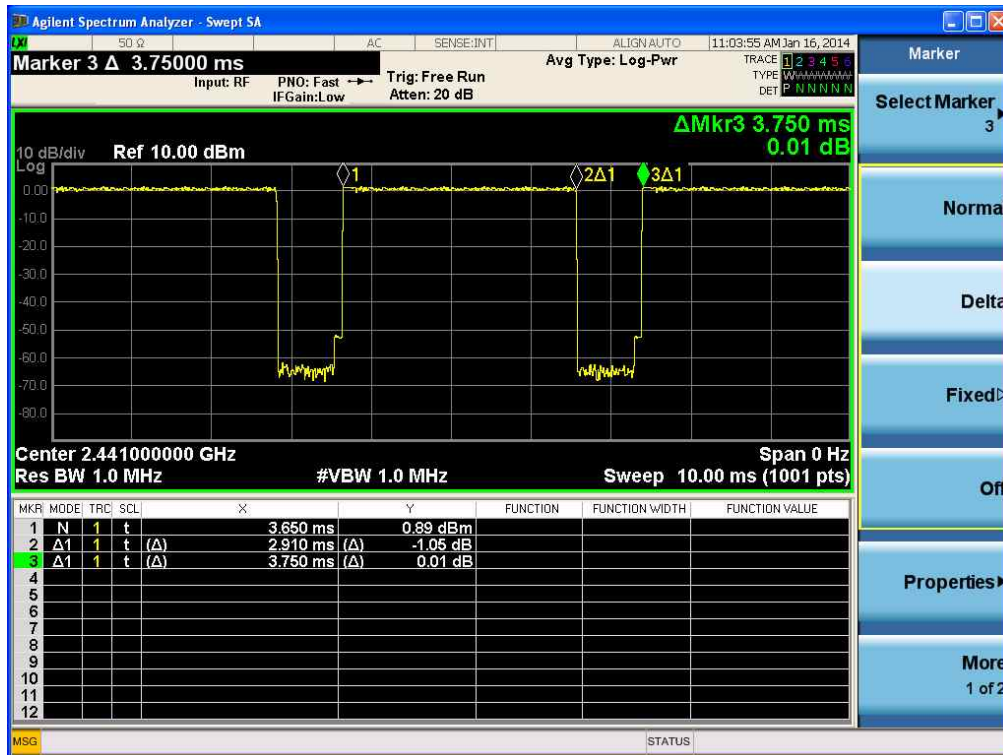

2.1.5 Maximum peak Conducted Output Power

Test Location

RF Test Room

Test Procedures

The maximum peak conducted output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function disabled at the highest, middle and the lowest available channels.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

Span = 5 MHz (approximately 5 times of the 20 dB bandwidth)


RBW = 1 MHz (greater than the 20 dB bandwidth of the emission being measured)

VBW = 1 MHz ($\geq$ RBW)

Detector function = peak

Trace = max hold

Sweep = auto



Note:

The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.

The RF output of EUT was connected to the spectrum analyzer by low loss cable.

Limit

§5.247(b)(1) The Maximum Peak Output Power Measurement is 0.125 Watts for frequency hopping system operating in 2400-2483.5 MHz employing at least 15 Hopping channels.

Test Results

Test mode : GPSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency (MHz)	Channel No.	Peak output power(dBm)	Peak output power(mW)	Result
2402	0	5.934	3.921	Complies
2441	39	5.758	3.765	Complies
2480	78	5.079	3.220	Complies

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency (MHz)	Channel No.	Peak output power(dBm)	Peak output power(mW)	Result
2402	0	2.710	1.866	Complies
2441	39	2.387	1.733	Complies
2480	78	1.579	1.438	Complies

See next pages for actual measured spectrum plots.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Maximum peak Conducted Output Power - GFSK





CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com





CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Maximum peak Conducted Output Power - 8-DPSK





CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com



2.1.6 RF Conducted Emissions

Test Location

RF Test Room

Test Procedures

The bandwidth at 20 dB down from the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function disabled at the highest, middle and the lowest available channels.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

RBW = 100 kHz


VBW = 100 kHz ($\geq$ RBW)

Span = 10 MHz

Trace = max hold

Detector function = peak

Sweep = auto



Limit

> 20 dBc

Test Results

All conducted emission in any 100 kHz bandwidth outside of the spectrum band was at least 20 dB lower than the highest level of the inband spectral density. Therefore the applying equipment meets the requirement.

See next pages for actual measured spectrum plots.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Band – edge (with Hopping) - GFSK





CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Band - edge (with Hopping) - 8-DPSK





CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970

Fax: +82-31-624-9501

www.e-ctk.com

Band – edge (without Hopping) - GFSK





CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Band – edge (without Hopping) - 8-DPSK





CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Spurious (at 20 dB blow) – Low channel
Frequency Range = 30 MHz ~ 10th harmonic
(Test mode : GFSK)

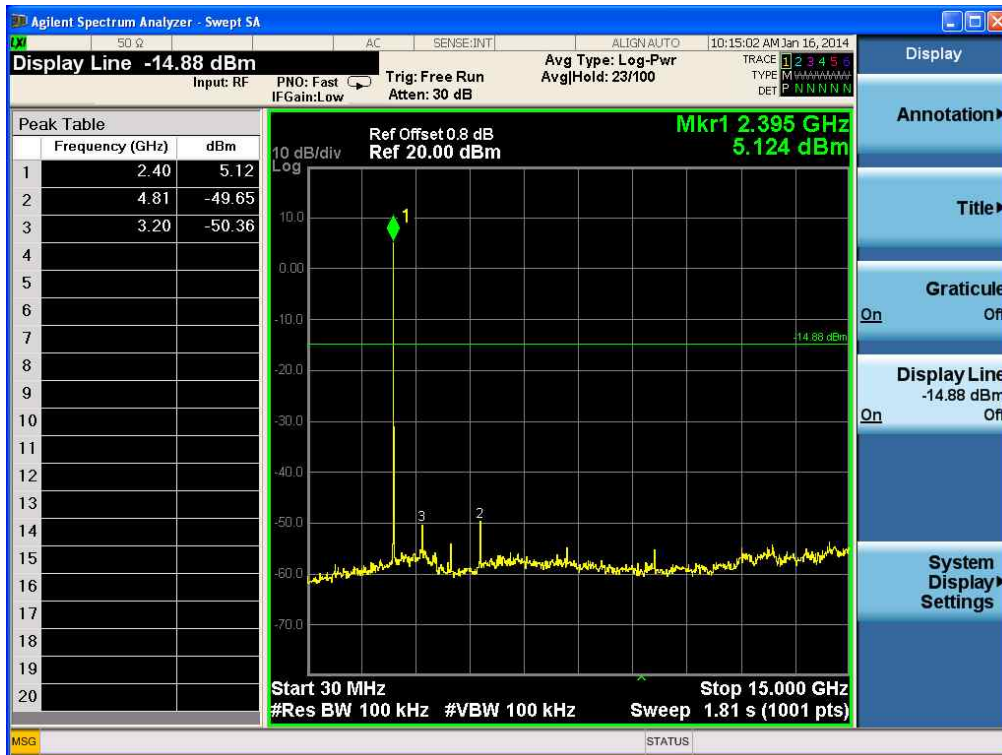




CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Spurious (at 20 dB blow) – Mid channel Frequency Range = 30 MHz ~ 10th harmonic (Test mode : GFSK)

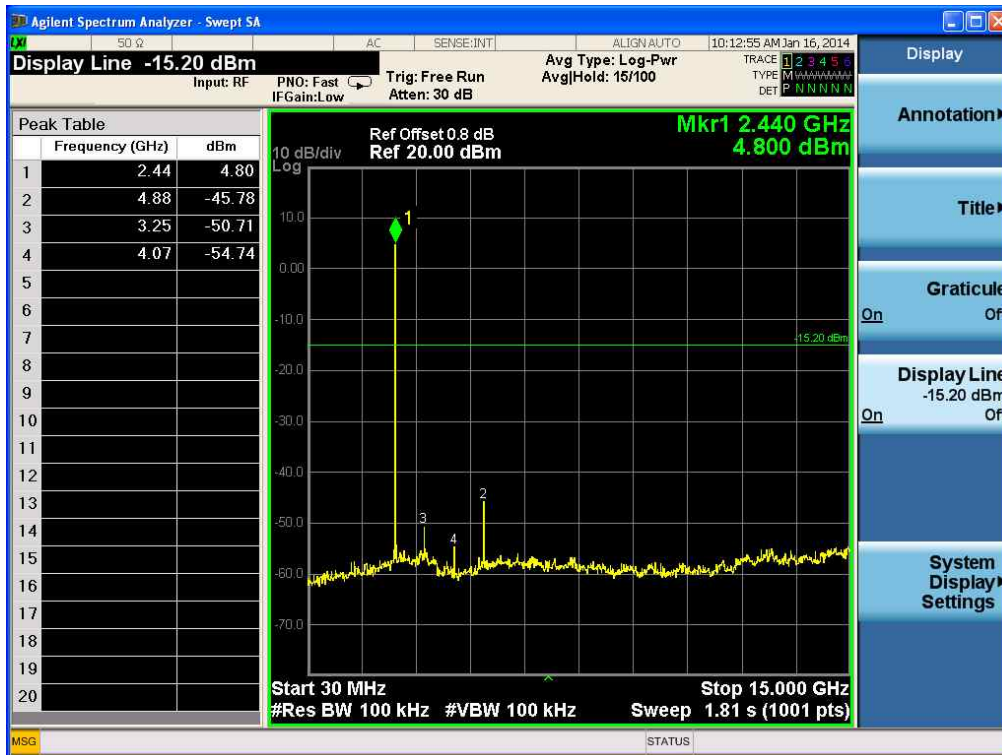



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Spurious (at 20 dB blow) – High channel Frequency Range = 30 MHz ~ 10th harmonic (Test mode : GFSK)





www.e-ctk.com




CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Spurious (at 20 dB blow) – Mid channel Frequency Range = 30 MHz ~ 10th harmonic (Test mode : 8-DPSK)

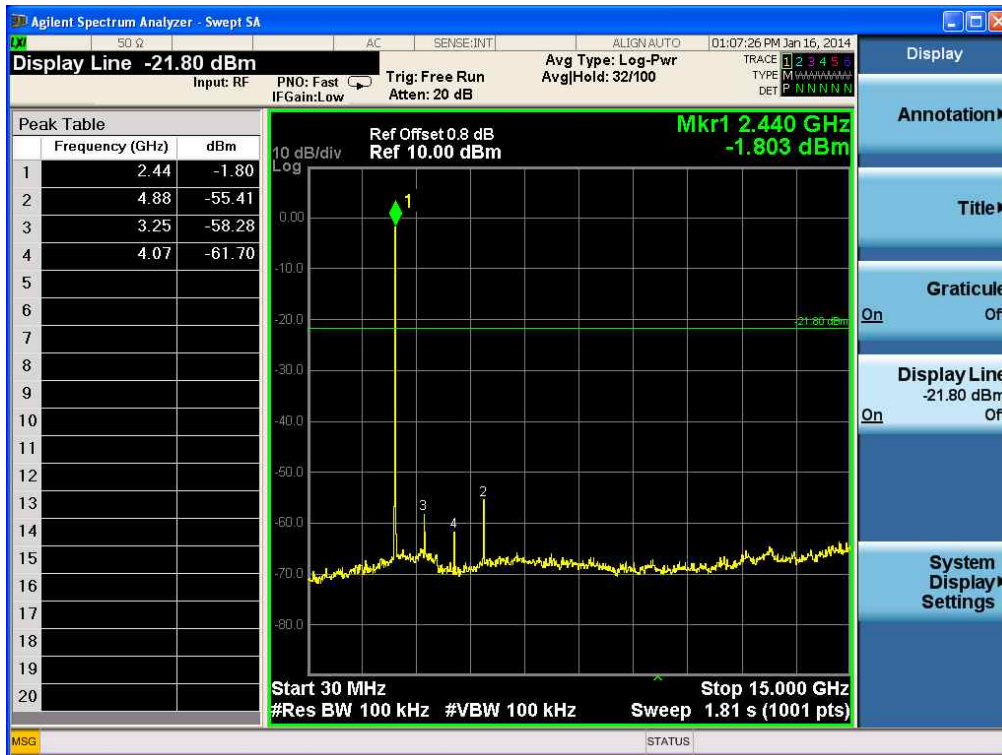



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Spurious (at 20 dB blow) – High channel
Frequency Range = 30 MHz ~ 10th harmonic
(Test mode : 8-DPSK)





CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

2.1.7 Field Strength of Emissions (TX mode)

Test Location

- ☒ 10 m SAC (test distance : ☐ 10 m, ☒ 3 m)
☒ 3 m SAC (test distance : 3 m)

Test Procedures

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

The spectrum analyzer is set to:

Frequency Range = 9 kHz ~ 25 GHz (2.4 GHz 10th harmonic)

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz, 9 kHz for $f < 30$ MHz

VBW $\geq$ RBW

Sweep = auto



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Limit

§ 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	MHz	GHz
0.09-0.11	8.37626-8.38675	73-74.6	399.9-410	2690-2900	10.6-12.7
¹ 0.495-0.505	8.41425-8.41475	74.8-75.2	608-614	3260-3267	13.25-13.4
2.1735-2.1905	12.29-12.293	108-121.94	960-1240	3332-3339	14.47-14.5
4.125-4.128	12.51975-12.52025	123-138	1300-1427	3345.8-3358	15.35-16.2
4.17725-4.17775	12.57675-12.57725	149.9-150.05	1435-1626.5	3600-4400	17.7-21.4
4.20725-4.20775	13.36-13.41	156.52475-156.52525	1645.5-1646.5	4500-5150	22.01-23.12
6.215-6.218	16.42-16.423	156.7-156.9	1660-1710	5350-5460	23.6-24
6.26775-6.26825	16.69475-16.69525	162.0125-167.17	1718.8-1722.2	7250-7750	31.2-31.8
6.31175-6.31225	16.80425-16.80475	167.72-173.2	2200-2300	8025-8500	36.43-36.5
8.291-8.294	25.5-25.67	240-285	2310-2390	9000-9200	² Above 38.6
8.362-8.366	37.5-38.25	322-335.4	2483.5-2500	9300-9500	

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

§ 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m	Deasurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705-30	30	-	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3


** Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Note :


- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3m (AV) and 74 dBuV/m@3m (PK)

Test Setup:


1) For field strength of emissions from 9 kHz to 30 MHz

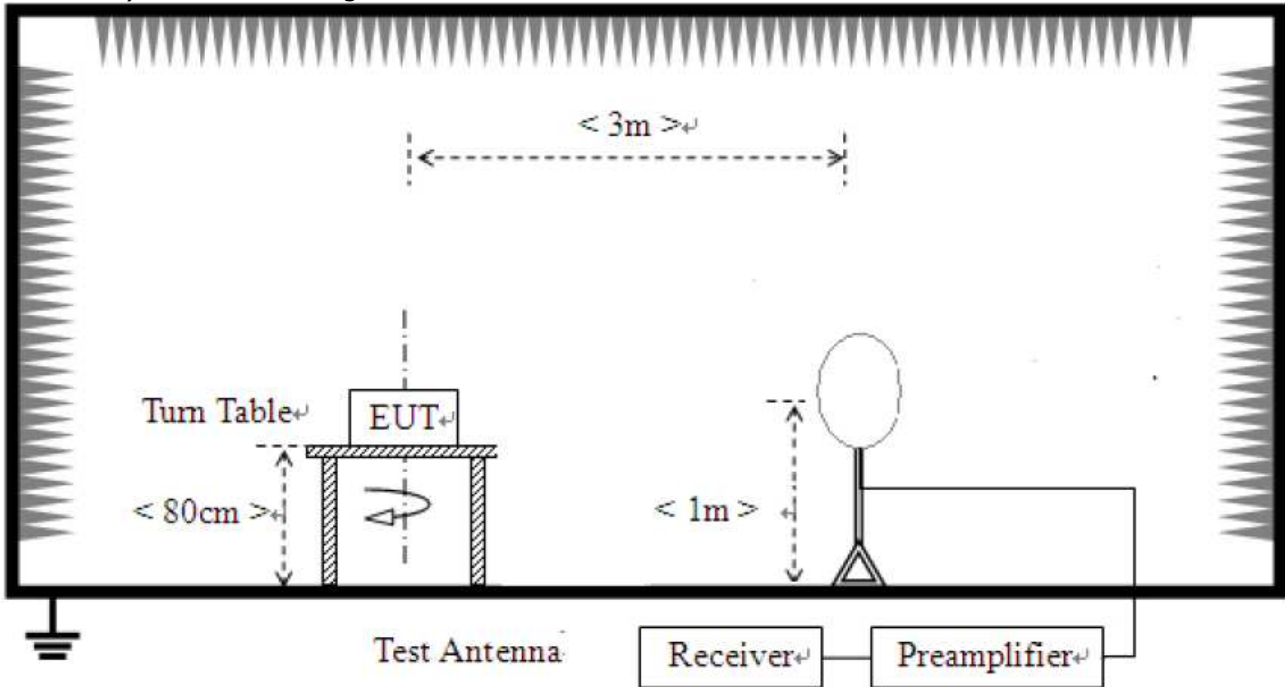

2) For field strength of emissions from 30 MHz to 1 GHz

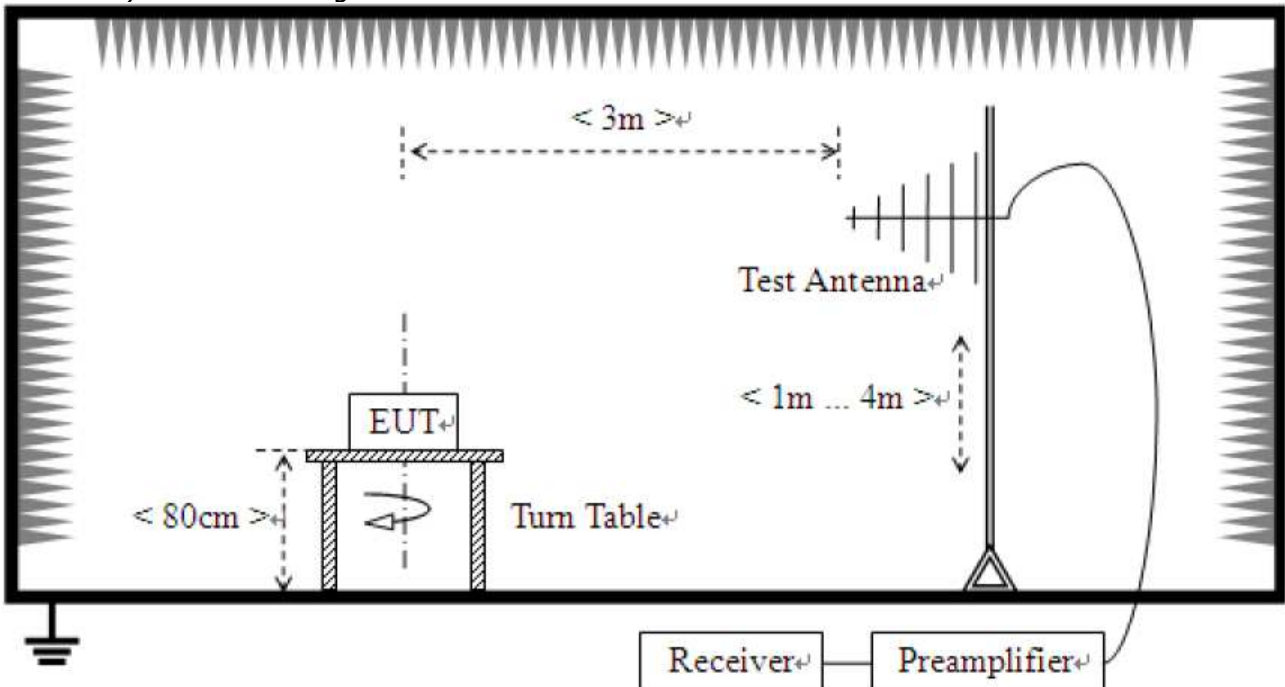

3) For field strength of emissions above 1 GHz

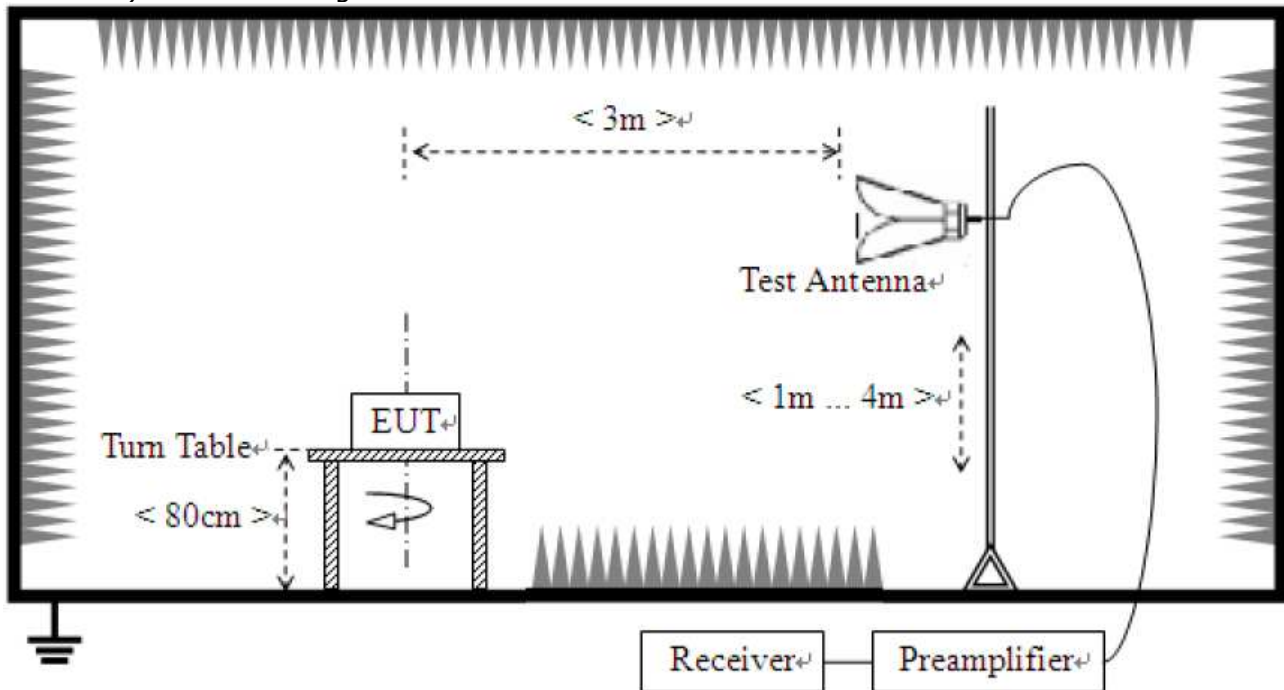

Test Results

1) 9 kHz to 30 MHz

EUT	Mobile Printer	Measurement Detail	
Frequency Range		9 kHz – 30 MHz	
Test mode	1, 2, 3, 4	Detector function	Quasi-Peak

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	See note

Note :

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

2) 30 MHz to 1 GHz

Test mode : Hopping(GFSK), CFG PKT Packet Type : 15 Packet Size : 339(DH5)


EUT	Mobile Printer	Measurement Detail	
Frequency Range		Below 1000MHz	
Test mode	Mode 2 (Worst Case)	Detector function	Quasi-Peak

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
768.049	37.9	8.1	Quasi-Peak

Test Data

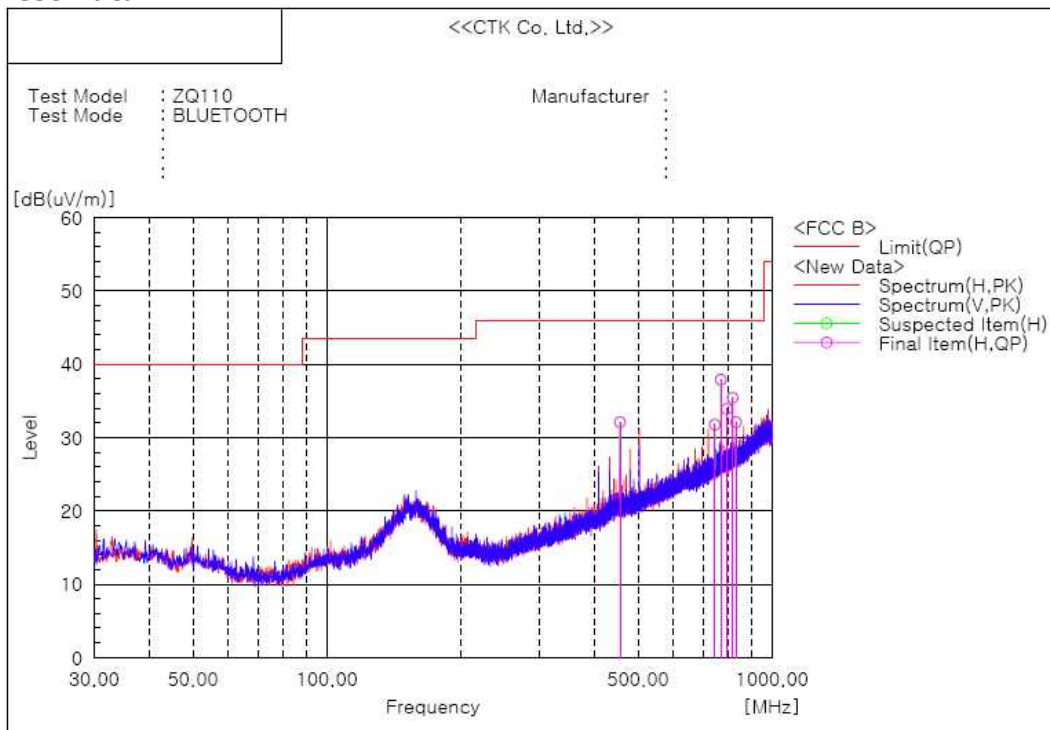

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	455.951	H	37.3	-5.2	32.1	46.0	13.9	206.0	66.0
2	744.041	H	31.7	0.1	31.8	46.0	14.2	206.0	29.0
3	768.049	H	37.4	0.5	37.9	46.0	8.1	100.0	103.0
4	792.056	H	33.0	0.9	33.9	46.0	12.1	100.0	103.0
5	816.064	H	34.1	1.3	35.4	46.0	10.6	100.0	140.0
6	830.735	H	30.6	1.5	32.1	46.0	13.9	206.0	290.0

Remark :

1. The field strength of spurious emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + Correction factor
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

3) above 1 GHz_Mode 1

EUT	Mobile Printer	Measurement Detail	
Mode	Mode 1	Frequency Range	1-25GHz
Channel	Channel 0	Detector function	Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (Z axis) for final test.

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
4804	47.0	7.0	Average

Test Data

Test mode : GPSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak		Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak		Result [dBuV/m] AV / Peak		Margin [dB] AV / Peak	
	Antenna + Amp. Gain + Cable										
4804.00	34.3	45.8	V	1.0	12.7	54.0	74.0	47.0	58.5	7.0	15.5

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak		Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak		Result [dBuV/m] AV / Peak		Margin [dB] AV / Peak	
	Antenna + Amp. Gain + Cable										
4804.00	27.5	38.6	V	1.0	12.7	54.0	74.0	40.2	51.3	13.8	22.7

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Test mode : GPSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Amp. Gain	Cable			
No emissions were detected at a level greater than 20dB below limit.									

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Amp. Gain	Cable			
No emissions were detected at a level greater than 20dB below limit.									



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

EUT	Mobile Printer	Measurement Detail	
Model	Mode 1	Frequency Range	1-25GHz
Channel	Channel 39	Detector function	Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (Z axis) for final test.

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
4882	45.2	8.8	Average

Test Data

Test mode : GPSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak		Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak		Result [dBuV/m] AV / Peak		Margin [dB] AV / Peak	
	Antenna + Amp. Gain + Cable										
4882.00	32.3	44.9	V	1.0	12.9	54.0	74.0	45.2	57.8	8.8	16.2

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak		Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak		Result [dBuV/m] AV / Peak		Margin [dB] AV / Peak	
	Antenna + Amp. Gain + Cable										
4882.00	25.4	37.7	V	1.0	12.9	54.0	74.0	38.3	50.6	15.7	23.4

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Test mode : GPSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Amp. Gain	Cable			
No emissions were detected at a level greater than 20dB below limit.									

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Amp. Gain	Cable			
No emissions were detected at a level greater than 20dB below limit.									



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970 Fax: +82-31-624-9501
 www.e-ctk.com

CTK Co., Ltd.
 The Prime Leader of Global Regulatory Compliance

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

EUT	Mobile Printer	Measurement Detail	
Model	Mode 1	Frequency Range	1-25GHz
Channel	Channel 78	Detector function	Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (Z axis) for final test.

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
4960	44.1	9.9	Average / Peak

Test Data

Test mode : GPSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
4960.00	31.0 : 44.7	V	1.0	13.1	54.0 : 74.0	44.1 : 57.8	9.9 : 16.2

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
4960.00	24.5 : 37.1	V	1.0	13.1	54.0 : 74.0	37.6 : 50.2	16.4 : 23.8

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Test mode : GPSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
2483.50	31.4 : 45.1	H	1.0	5.4	54.0 : 74.0	36.8 : 50.5	17.2 : 23.5

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
2483.50	31.4 : 45.9	H	1.0	5.4	54.0 : 74.0	36.8 : 51.3	17.2 : 22.7



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

4) above 1 GHz_Mode 2

EUT	Mobile Printer	Measurement Detail	
Mode	Mode 2	Frequency Range	1-25GHz
Channel	Channel 0	Detector function	Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (Z axis) for final test.

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
4804	51.9	2.1	Average

Test Data

Test mode : GPSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak		Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak		Result [dBuV/m] AV / Peak		Margin [dB] AV / Peak	
					Antenna + Amp. Gain + Cable						
4804.00	39.2	50.5	V	1.0	12.7	54.0	74.0	51.9	63.2	2.1	10.8

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak		Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak		Result [dBuV/m] AV / Peak		Margin [dB] AV / Peak	
	Antenna + Amp. Gain + Cable										
4804.00	32.5	43.7	V	1.0	12.7	54.0	74.0	45.2	56.4	8.8	17.6

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Test mode : GPSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Amp. Gain	Cable			
No emissions were detected at a level greater than 20dB below limit.									

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Amp. Gain	Cable			
No emissions were detected at a level greater than 20dB below limit.									



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

EUT	Mobile Printer	Measurement Detail	
Model	Mode 2	Frequency Range	1-25GHz
Channel	Channel 39	Detector function	Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (Z axis) for final test.

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
4882	47.5	6.5	Average

Test Data

Test mode : GPSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak		Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak		Result [dBuV/m] AV / Peak		Margin [dB] AV / Peak	
	Antenna + Amp. Gain + Cable										
4882.00	34.6	49.2	V	1.0	12.9	54.0	74.0	47.5	62.1	6.5	11.9

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak		Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak		Result [dBuV/m] AV / Peak		Margin [dB] AV / Peak	
	Antenna + Amp. Gain + Cable										
4882.00	27.7	42.0	V	1.0	12.9	54.0	74.0	40.6	54.9	13.4	19.1

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Test mode : GPSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Amp. Gain	Cable			

No emissions were detected at a level greater than 20dB below limit.

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Amp. Gain	Cable			

No emissions were detected at a level greater than 20dB below limit.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

EUT	Mobile Printer	Measurement Detail	
Model	Mode 2	Frequency Range	1-25GHz
Channel	Channel 78	Detector function	Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (Z axis) for final test.

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
4960	46.5	7.5	Average / Peak

Test Data

Test mode : GPSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
4960.00	33.4 : 48.2	V	1.0	13.1	54.0 : 74.0	46.5 : 61.3	7.5 : 12.7

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
4960.00	26.8 : 41.4	V	1.0	13.1	54.0 : 74.0	39.9 : 54.5	14.1 : 19.5

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Test mode : GPSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
2483.50	35.2 : 45.7	H	1.0	5.4	54.0 : 74.0	40.6 : 51.1	13.4 : 22.9

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
2483.50	36.5 : 48.6	H	1.0	5.4	54.0 : 74.0	41.9 : 54.0	12.1 : 20.0



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

5) above 1 GHz_Mode 3

EUT	Mobile Printer	Measurement Detail	
Mode	Mode 3	Frequency Range	1-25GHz
Channel	Channel 0	Detector function	Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (Z axis) for final test.

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
4804	44.9	9.1	Average

Test Data

Test mode : GPSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak		Pol.	Height [m]	Correction Factor Antenna + Amp. Gain + Cable			Limits [dBuV/m] AV / Peak		Result [dBuV/m] AV / Peak		Margin [dB] AV / Peak	
4804.00	32.2	45.3	V	1.0	12.7			54.0	74.0	44.9	58.0	9.1	16.0

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak		Pol.	Height [m]	Correction Factor Antenna + Amp. Gain + Cable			Limits [dBuV/m] AV / Peak		Result [dBuV/m] AV / Peak		Margin [dB] AV / Peak	
4804.00	13.1	26.0	V	1.0	12.7			54.0	74.0	25.8	38.7	28.2	35.3

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Test mode : GPSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Amp. Gain	Cable			
No emissions were detected at a level greater than 20dB below limit.									

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Amp. Gain	Cable			
No emissions were detected at a level greater than 20dB below limit.									



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

EUT	Mobile Printer	Measurement Detail	
Model	Mode 3	Frequency Range	1-25GHz
Channel	Channel 39	Detector function	Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (Z axis) for final test.

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
4882	45.6	8.4	Average

Test Data

Test mode : GPSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak		Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak		Result [dBuV/m] AV / Peak		Margin [dB] AV / Peak	
	Antenna + Amp. Gain + Cable										
4882.00	32.7	45.7	V	1.0	12.9	54.0	74.0	45.6	58.6	8.4	15.4

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak		Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak		Result [dBuV/m] AV / Peak		Margin [dB] AV / Peak	
					Antenna + Amp. Gain + Cable						
4882.00	25.9	38.9	V	1.0	12.9	54.0	74.0	38.8	51.8	15.2	22.2

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Test mode : GPSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Amp. Gain	Cable			

No emissions were detected at a level greater than 20dB below limit.

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Amp. Gain	Cable			

No emissions were detected at a level greater than 20dB below limit.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

EUT	Mobile Printer	Measurement Detail	
Model	Mode 3	Frequency Range	1-25GHz
Channel	Channel 78	Detector function	Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (Z axis) for final test.

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
4960	46.8	7.2	Average / Peak

Test Data

Test mode : GPSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
4960.00	33.7 : 46.6	V	1.0	13.1	54.0 : 74.0	46.8 : 59.7	7.2 : 14.3

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
4960.00	27.0 : 39.3	V	1.0	13.1	54.0 : 74.0	40.1 : 52.4	13.9 : 21.6

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Test mode : GPSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
2483.50	30.2 : 44.4	H	1.0	5.4	54.0 : 74.0	35.6 : 49.8	18.4 : 24.2

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
2483.50	30.7 : 45.4	H	1.0	5.4	54.0 : 74.0	36.1 : 50.8	17.9 : 23.2



CTK Co., Ltd.
The First Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

6) above 1 GHz_Mode 4

EUT	Mobile Printer	Measurement Detail	
Mode	Mode 4	Frequency Range	1-25GHz
Channel	Channel 0	Detector function	Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (Z axis) for final test.

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
4804	51.2	2.8	Average

Test Data

Test mode : GPSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak		Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak		Result [dBuV/m] AV / Peak		Margin [dB] AV / Peak	
	Antenna + Amp. Gain + Cable										
4804.00	38.5	46.4	V	1.0	12.7	54.0	74.0	51.2	59.1	2.8	14.9

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak		Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak		Result [dBuV/m] AV / Peak		Margin [dB] AV / Peak	
	Antenna + Amp. Gain + Cable										
4804.00	31.8	39.4	V	1.0	12.7	54.0	74.0	44.5	52.1	9.5	21.9

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Test mode : GPSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Amp. Gain	Cable			
No emissions were detected at a level greater than 20dB below limit.									

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Amp. Gain	Cable			
No emissions were detected at a level greater than 20dB below limit.									



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

EUT	Mobile Printer	Measurement Detail	
Model	Mode 4	Frequency Range	1-25GHz
Channel	Channel 39	Detector function	Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (Z axis) for final test.

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
4882	49.5	4.5	Average

Test Data

Test mode : GPSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak		Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak		Result [dBuV/m] AV / Peak		Margin [dB] AV / Peak	
	Antenna + Amp. Gain + Cable										
4882.00	36.6	46.6	V	1.0	12.9	54.0	74.0	49.5	59.5	4.5	14.5

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak		Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak		Result [dBuV/m] AV / Peak		Margin [dB] AV / Peak	
	Antenna + Amp. Gain + Cable										
4882.00	29.8	39.5	V	1.0	12.9	54.0	74.0	42.7	52.4	11.3	21.6

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Test mode : GPSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Amp. Gain	Cable			

No emissions were detected at a level greater than 20dB below limit.

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Amp. Gain	Cable			

No emissions were detected at a level greater than 20dB below limit.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

EUT	Mobile Printer	Measurement Detail	
Model	Mode 4	Frequency Range	1-25GHz
Channel	Channel 78	Detector function	Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (Z axis) for final test.

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
4960	47.2	6.8	Average / Peak

Test Data

Test mode : GPSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
4960.00	34.1 : 47.0	V	1.0	13.1	54.0 : 74.0	47.2 : 60.1	6.8 : 13.9

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
4960.00	27.0 : 46.7	V	1.0	13.1	54.0 : 74.0	40.1 : 59.8	13.9 : 14.2

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Test mode : GPSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
2483.50	34.7 : 45.4	H	1.0	5.4	54.0 : 74.0	40.1 : 50.8	13.9 : 23.2

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
2483.50	36.0 : 48.0	H	1.0	5.4	54.0 : 74.0	41.4 : 53.4	12.6 : 20.6

2.1.8 Field Strength of Emissions (RX Mode)

Test Location

☒ Testing was performed at a test distance of 3 meter SAC

Test Procedures

The height of the measuring antenna was varied between 1 to 4 m and the table was rotated a full revolution in order to obtain maximum values of the electric field intensity. The measurement was made in both the vertical and horizontal polarization, and the maximum value is presented in the report.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 30 MHz ~ 10th harmonic


RBW = 120 kHz (30 MHz ~ 1 GHz) VBW ≥ RBW

= 1 MHz (1 GHz ~ 10th harmonic)

Span = 100 MHz

Detector function = Quasi-peak

Trace = Max hold

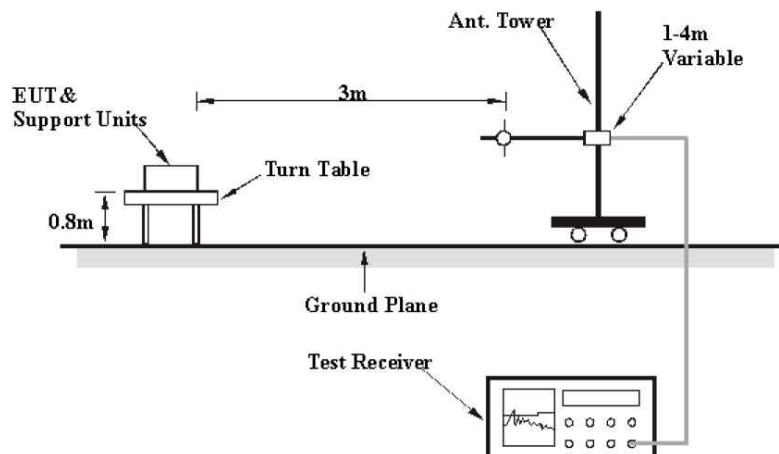

Limit

- 15.209(a)

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m
30-88	100**	40
88-216	150**	43.5
216-960	200**	46
Above 960	500	54

** Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Test Results

1) 30 MHz to 1 GHz

Test mode : Hopping(GFSK), CFG PKT Packet Type : 15 Packet Size : 339(DH5)


EUT	Mobile Printer	
Frequency Range		Below 1000MHz
Test mode	Mode 2 (Worst Case)	Detector function Quasi-Peak

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
864.079	37.7	8.3	Quasi-Peak

Test Data

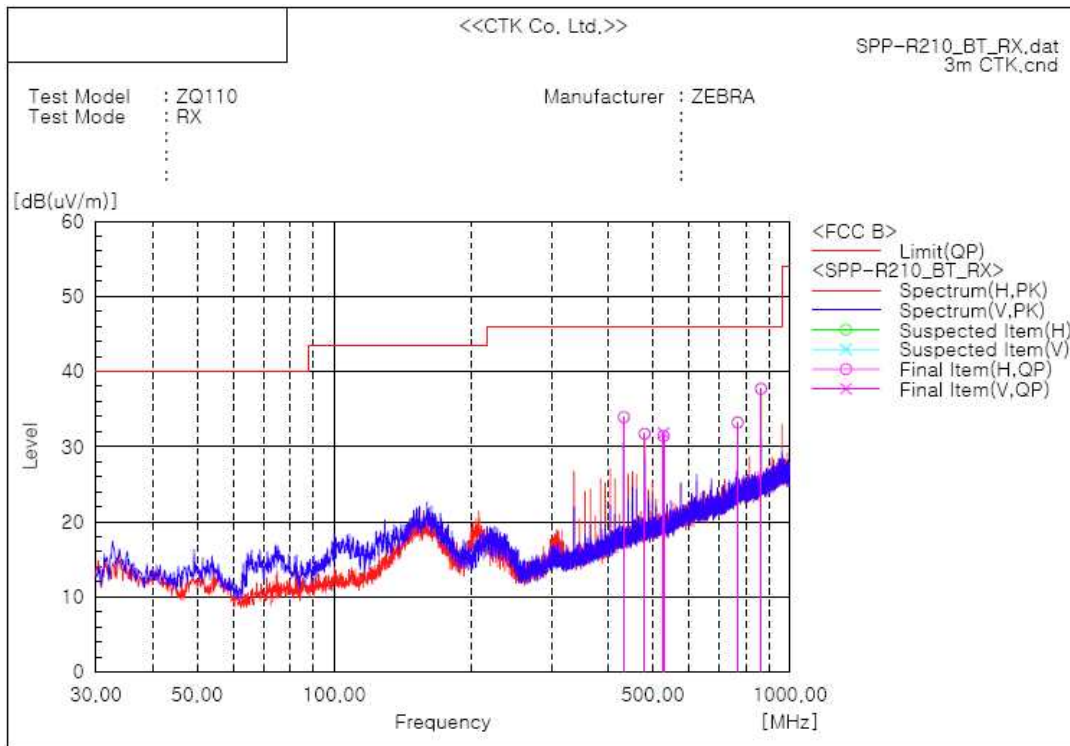

Final Result

No.	Frequency (P)	Reading	c.f	Result	Limit	Margin	Height	Angle	Remark
	[MHz]	[dB(uV)]	[dB(1/m)]	[dB(uV/m)]	[dB(uV/m)]	[dB]	[cm]	[deg]	
1	432.065	H 39.8	-5.9	33.9	46.0	12.1	100.0	119.0	
2	480.080	H 36.6	-4.9	31.7	46.0	14.3	205.0	145.0	
3	527.974	V 35.8	-4.0	31.8	46.0	14.2	100.0	0.0	
4	528.095	H 35.4	-4.0	31.4	46.0	14.6	205.0	145.0	
5	768.049	H 32.7	0.5	33.2	46.0	12.8	100.0	45.0	
6	864.079	H 35.7	2.0	37.7	46.0	8.3	100.0	8.0	

Remark :

1. The field strength of spurious emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + Correction factor
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Test Results

EUT	Mobile Printer		
Frequency Range		1-25GHz	
Test mode	Receive mode	Detector function	Peak

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
No emissions were detected at a level greater than 20dB below limit.			



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

2.1.9 AC Conducted Emissions

Test Location

Shielded Room

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit

- 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency.

Test Results

The requirements are:

☒ Complies

Test mode : Mode 1(Worst Case)

Hopping(GFSK), CFG PKT Packet Type : 15,
Packet Size : 339(DH5), Hopping mode

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
7.521	46.2	3.8	Average

Test mode : Mode 1(Worst Case)

RX operating

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
7.62	46.5	3.5	Average



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.


(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Test Data (TX operating)

[HOT]

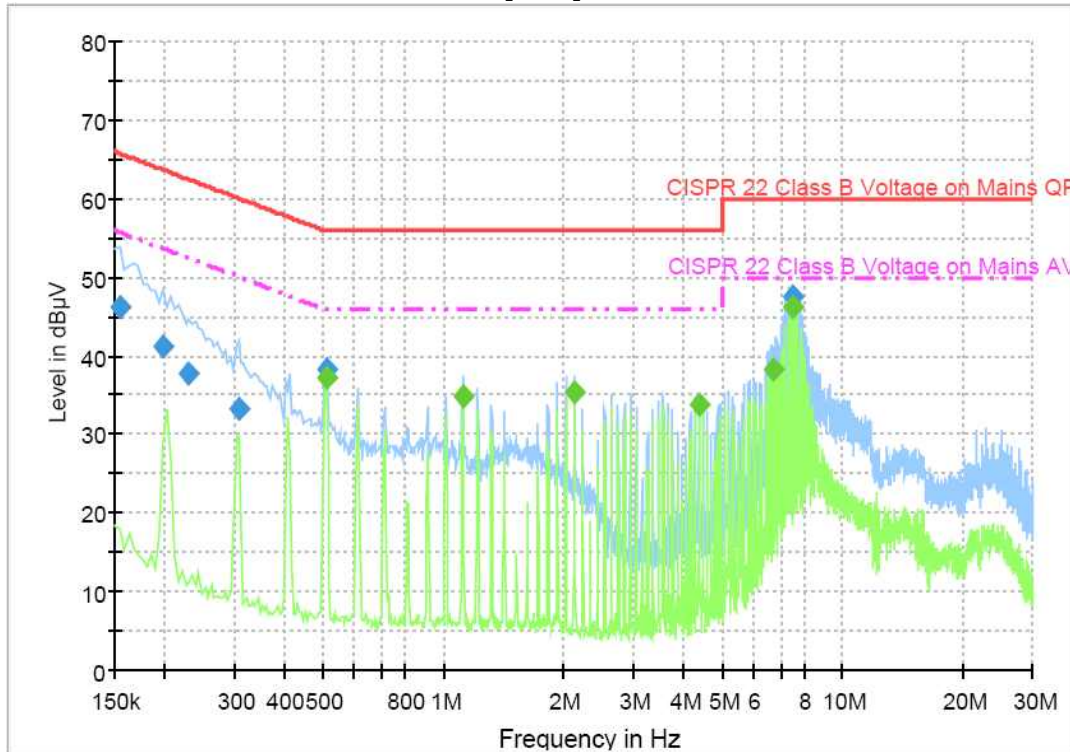

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.154500	46.3	1000.0	9.000	On	L1	10.0	19.4	65.8
0.199500	41.1	1000.0	9.000	On	L1	10.0	22.6	63.6
0.231000	37.8	1000.0	9.000	On	L1	9.9	24.7	62.4
0.307500	33.2	1000.0	9.000	On	L1	10.0	26.9	60.0
0.510000	38.3	1000.0	9.000	On	L1	10.2	17.7	56.0
7.521000	47.5	1000.0	9.000	On	L1	9.6	12.5	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.510000	37.3	1000.0	9.000	On	L1	10.2	8.7	46.0
1.117500	34.9	1000.0	9.000	On	L1	9.9	11.1	46.0
2.134500	35.3	1000.0	9.000	On	L1	9.8	10.7	46.0
4.371000	33.9	1000.0	9.000	On	L1	9.7	12.1	46.0
6.706500	38.4	1000.0	9.000	On	L1	9.6	11.6	50.0
7.521000	46.2	1000.0	9.000	On	L1	9.6	3.8	50.0



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

[NEUTRAL]

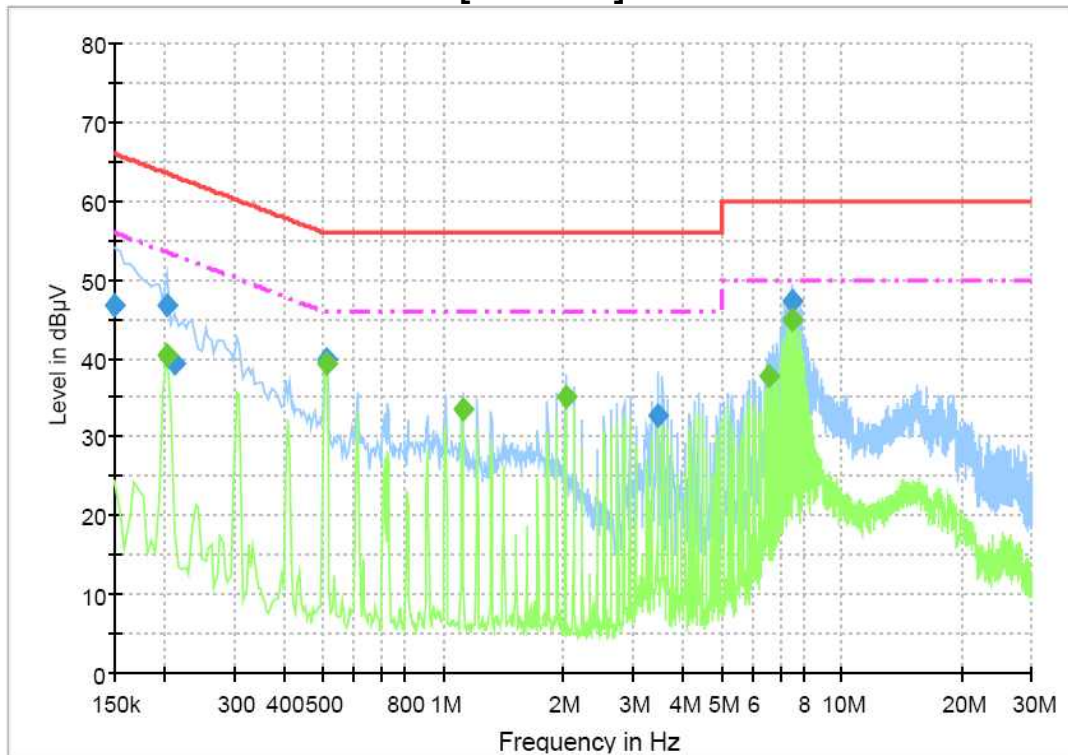

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	46.8	1000.0	9.000	On	N	10.0	19.2	66.0
0.204000	46.8	1000.0	9.000	On	N	10.0	16.6	63.4
0.213000	39.3	1000.0	9.000	On	N	10.0	23.8	63.1
0.510000	39.9	1000.0	9.000	On	N	10.2	16.1	56.0
3.453000	32.7	1000.0	9.000	On	N	9.8	23.3	56.0
7.521000	47.4	1000.0	9.000	On	N	9.6	12.6	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.204000	40.4	1000.0	9.000	On	N	10.0	13.1	53.4
0.510000	39.5	1000.0	9.000	On	N	10.2	6.5	46.0
1.117500	33.4	1000.0	9.000	On	N	9.9	12.6	46.0
2.031000	35.1	1000.0	9.000	On	N	9.8	10.9	46.0
6.603000	37.9	1000.0	9.000	On	N	9.6	12.1	50.0
7.516500	44.8	1000.0	9.000	On	N	9.6	5.2	50.0




CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Test Data (RX operating)

[HOT]

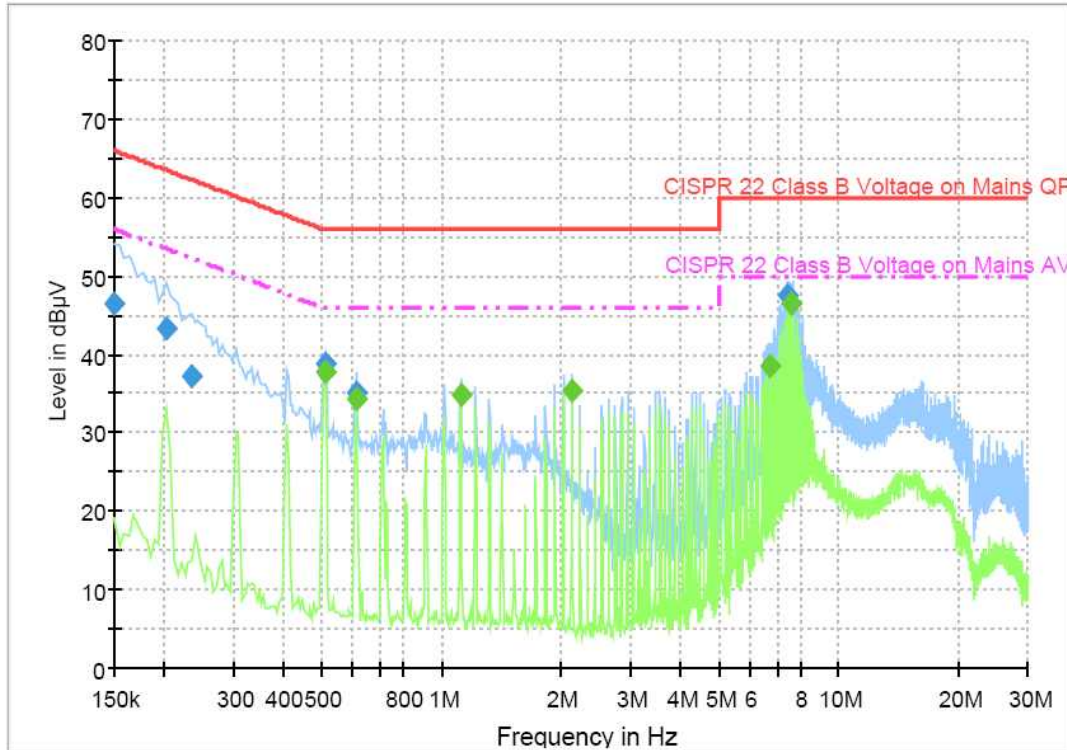

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	46.4	1000.0	9.000	On	L1	10.0	19.6	66.0
0.204000	43.3	1000.0	9.000	On	L1	10.0	20.1	63.4
0.235500	37.1	1000.0	9.000	On	L1	9.9	25.1	62.3
0.510000	38.7	1000.0	9.000	On	L1	10.2	17.3	56.0
0.609000	35.2	1000.0	9.000	On	L1	10.2	20.8	56.0
7.417500	47.4	1000.0	9.000	On	L1	9.6	12.6	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.510000	37.7	1000.0	9.000	On	L1	10.2	8.3	46.0
0.609000	34.3	1000.0	9.000	On	L1	10.2	11.7	46.0
1.117500	34.8	1000.0	9.000	On	L1	9.9	11.2	46.0
2.134500	35.4	1000.0	9.000	On	L1	9.8	10.6	46.0
6.706500	38.5	1000.0	9.000	On	L1	9.6	11.5	50.0
7.620000	46.5	1000.0	9.000	On	L1	9.6	3.5	50.0



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

[NEUTRAL]

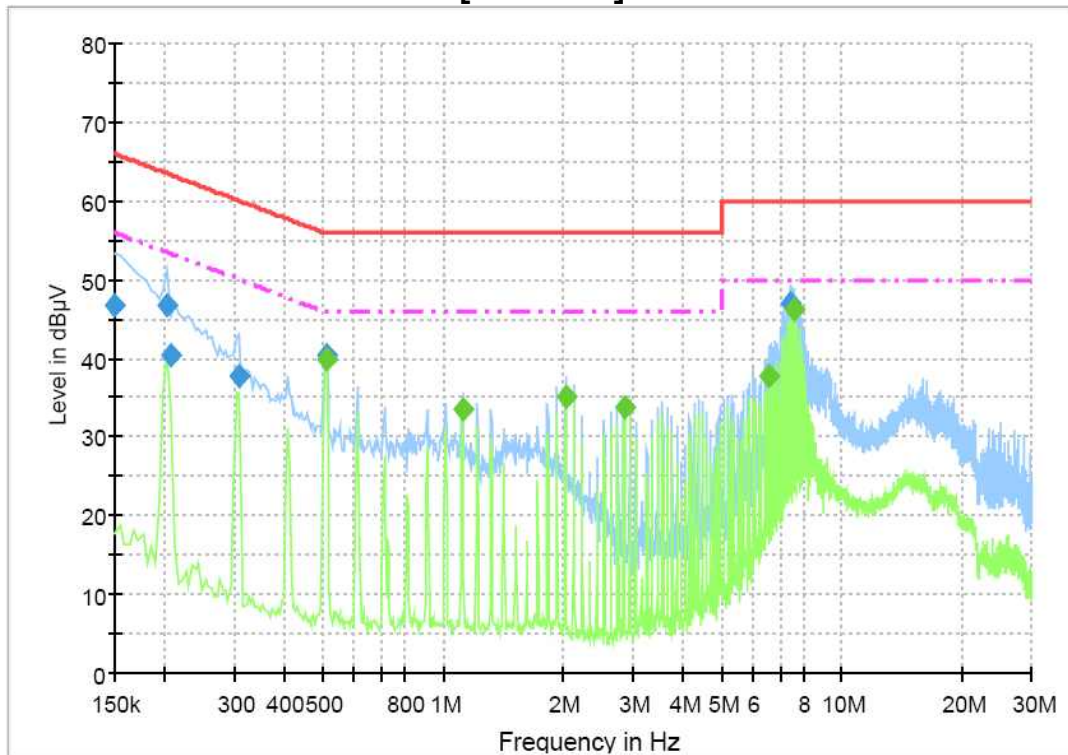

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	46.7	1000.0	9.000	On	N	10.0	19.3	66.0
0.204000	46.7	1000.0	9.000	On	N	10.0	16.7	63.4
0.208500	40.5	1000.0	9.000	On	N	10.0	22.8	63.3
0.307500	37.6	1000.0	9.000	On	N	10.0	22.4	60.0
0.510000	40.3	1000.0	9.000	On	N	10.2	15.7	56.0
7.417500	47.1	1000.0	9.000	On	N	9.6	12.9	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.510000	39.9	1000.0	9.000	On	N	10.2	6.1	46.0
1.117500	33.4	1000.0	9.000	On	N	9.9	12.6	46.0
2.031000	35.1	1000.0	9.000	On	N	9.8	10.9	46.0
2.845500	33.8	1000.0	9.000	On	N	9.8	12.2	46.0
6.603000	37.9	1000.0	9.000	On	N	9.6	12.1	50.0
7.620000	46.3	1000.0	9.000	On	N	9.6	3.7	50.0



CTK Co., Ltd.

The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date
1	Signal Analyzer	Agilent	N9020A	MY48011598	2013-11-08	2014-11-08
2	EMI Test Receiver	Rohde & Schwarz	ESCI7	100814	2012-12-14	2014-12-06
3	EMI Test Receiver	Rohde & Schwarz	ESCI7	100816	2012-12-14	2014-12-06
4	EMI Test Receiver	Rohde & Schwarz	ESU40	100336	2013-06-27	2014-06-27
5	Trilog Broadband Antenna	SCHWARZBECK	VULB 9161 SE	9161-4133	2012-06-11	2014-06-11
6	Horn Antenna	ETS-Lindgren	3115	00078895	2013-02-28	2015-02-28
7	DOUBLE RIDGE HORN ANTENNA	ETS-Lindgren	3116	00062916	2013-03-20	2015-03-20
8	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-125	2012-06-06	2014-06-06
9	Attenuator	Rohde & Schwarz	DNF	272.4110.50	2013-11-12	2014-11-12
10	PREAMPLIFIER	Agilent	8449B	3008A02307	2013-11-08	2014-11-08
11	AMPLIFIER	Sonoma Instrument Co.	310	291721	2013-03-21	2015-02-06
12	LISN	Rohde & Schwarz	ENV216	101235	2013-08-02	2014-08-02
13	LISN	Rohde & Schwarz	ENV216	101236	2013-08-02	2014-08-02
14	Band Reject Filter	Wainwright Instruments GmbH	WRCGV 2400/2483-2375/2505-50/10EE	2	2013-09-09	2014-09-09
15	Signal Generator	Agilent	E4432B	US40054094	2013-11-08	2014-11-08
16	Signal Generator	HP	8341B	2819A01563	2013-11-08	2014-11-08