



FCC RF Test Report

FCC ID : UZ7ET45BA
EQUIPMENT : Tablet
BRAND NAME : Zebra
MODEL NAME : ET45BA
APPLICANT : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
MANUFACTURER : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
STANDARD : FCC Part 15 Subpart C §15.225
CLASSIFICATION : (DXX) Low Power Communication Device Transmitter
TEST DATE(S) : Jun. 08, 2022 ~ Jul. 19, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sportun International Inc. (Kunshan)
No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

TABLE OF CONTENTS	2
REVISION HISTORY	3
SUMMARY OF THE TEST RESULT	4
1. GENERAL DESCRIPTION	5
1.1 Product Feature of Equipment Under Test	5
1.2 Product Specification of Equipment Under Test	5
1.3 Modification of EUT	6
1.4 Testing Location	6
1.5 Test Software	6
1.6 Applicable Standards.....	6
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Descriptions of Test Mode.....	7
2.2 Connection Diagram of Test System.....	8
2.3 EUT Operation Test Setup	8
3. TEST RESULTS.....	9
3.1 AC Power Line Conducted Emissions Measurement	9
3.2 20dB and 99% OBW Spectrum Bandwidth Measurement.....	11
3.3 Frequency Stability Measurement	12
3.4 Field Strength of Fundamental Emissions and Mask Measurement.....	13
3.5 Radiated Emissions Measurement.....	15
3.6 Antenna Requirements.....	18
4. LIST OF MEASURING EQUIPMENT	19
5. UNCERTAINTY OF EVALUATION	20

APPENDIX A. TEST RESULTS OF CONDUCTED EMISSION TEST

APPENDIX B. TEST RESULTS OF CONDUCTED TEST ITEMS

- B1. Test Result of 20dB Spectrum Bandwidth
- B2. Test Result of Frequency Stability

APPENDIX C. TEST RESULTS OF RADIATED TEST ITEMS

- C1. Test Result of Field Strength of Fundamental Emissions
- C2. Results of Radiated Emissions (9 kHz~30MHz)
- C3. Results of Radiated Emissions (30MHz~1GHz)

APPENDIX D. SETUP PHOTOGRAPHS



REVISION HISTORY



SUMMARY OF THE TEST RESULT

Report Section	FCC Rule	Description of Test	Result	Remark
3.1	15.207	AC Power Line Conducted Emissions	Complies	Under limit 15.16 dB at 0.199MHz
3.2	15.215(c)	20dB Spectrum Bandwidth	Complies	-
	-	99% OBW Spectrum Bandwidth	Complies	-
3.3	15.225(e)	Frequency Stability	Complies	-
3.4	15.225(a)(b)(c)	Field Strength of Fundamental Emissions	Complies	Max level 68.47 dB μ V/m at 13.560 MHz
3.5	15.225(d) & 15.209	Radiated Spurious Emissions	Complies	Under limit 5.02 dB at 45.520MHz for Quasi-Peak
3.6	15.203	Antenna Requirements	Complies	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1. General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Tablet
Brand Name	Zebra
Model Name	ET45BA
FCC ID	UZ7ET45BA
HW Version	EV2-2
SW Version	ET45USERDEBUG 11 11-10-12.00-RG-U00-PRD-GSE MXJ release-keys
MFD	12MAY22
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Specification of Accessory				
Battery	Brand Name	Zebra	Model Number	BT-000455

Supported Unit used in test configuration and system				
AC Adapter	Brand Name	Zebra	Part Number	PWR-WUA5V12W0US
Earphone 1	Brand Name	Zebra	Part Number	HDST-35MM-PTV-01
Earphone 2	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
USB Cable (Type C to Type A)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01

1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	13.553 ~ 13.567MHz
Channel Number	1
20dBW	2.475 kHz
99%OBW	2.098 kHz
Antenna Type	Coil Antenna
Type of Modulation	ASK

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Location

Sportun International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Site	Sportun International Inc. (Kunshan)			
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958			
Test Site No.	Sportun Site No.			FCC Designation No.
	TH01-KS	03CH02-KS	CO01-KS	CN1257
Test Engineer	Jacob Zhang	Feng	Amos Zhang	
Temperature	22~24	21~22	25.3~26.2	
Relative Humidity	53~55	41~42	38~40	

1.5 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH02-KS	AUDIX	E3	6.2009-8-24a
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.225
- ♦ ANSI C63.10-2013



2. Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

Investigation has been done on all the possible configurations.

The following table is a list of the test modes shown in this test report.

Test Items	
AC Power Line Conducted Emissions	Field Strength of Fundamental Emissions
20dB Spectrum Bandwidth	Frequency Stability
Radiated Emissions 9kHz~30MHz	Radiated Emissions 30MHz~1GHz

The EUT was tested under non-signaling mode.

Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (Z plane as worst plane) from all possible combinations.

Test Cases	
AC Conducted Emission	Mode 1: NFC Tx + Battery(BT-000455) + USB Cable(CBL-TC5X-USBC2A-01) + Charging from AC Adapter (PWR-WUA5V12W0US)
Remark: The AC Conduction and RSE are tested with accessories from the worst case of Part 15B report.	



2.2 Connection Diagram of Test System

For Conducted Emission/ Radiated Emission:



This example is connection diagram of EUT test configurations.

For detail, please refer to test mode configuration and setup photographs for each test item.

2.3 EUT Operation Test Setup

The EUT was programmed to be in continuously transmitting mode.

The ancillary equipment, NFC card, is used to make the EUT (NFC) continuously transmit at 13.56MHz and is placed around 3 cm gap to the EUT.



3. Test Results

3.1 AC Power Line Conducted Emissions Measurement

3.1.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4 Test setup

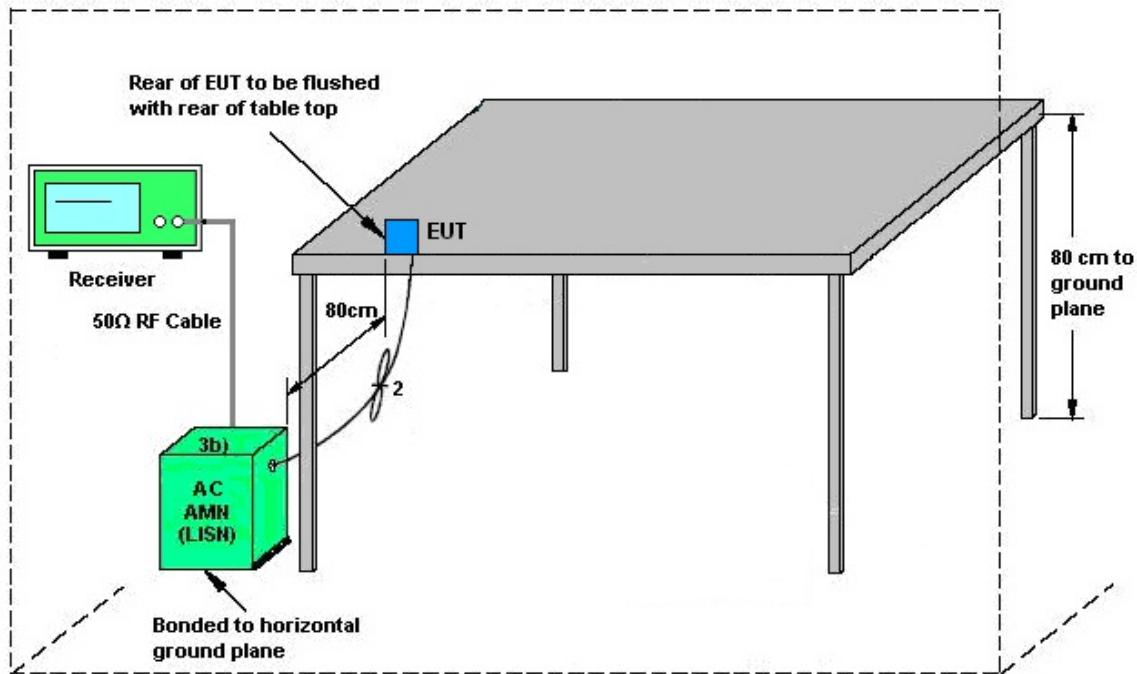

AMN = Artificial mains network (LISH)
AE = Associated equipment
EUT = Equipment under test
ISH = Impedance stabilization network

3.1.5 Test Result of AC Conducted Emission

Please refer to Appendix A.

3.2 20dB and 99% OBW Spectrum Bandwidth Measurement

3.2.1 Limit

Intentional radiators must be designed to ensure that the 20dB and 99% emission bandwidth in the specific band 13.553~13.567MHz.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.
4. Measured the 99% OBW.

3.2.4 Test Setup

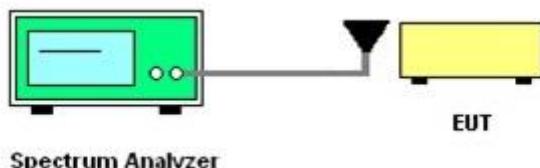

3.2.5 Test Result of Conducted Test Items

Please refer to Appendix B.

3.3 Frequency Stability Measurement

3.3.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT.
2. EUT have transmitted signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 3 kHz with peak detector and maxhold settings.
5. The fc is declaring of channel frequency. Then the frequency error formula is $(fc-f)/fc \times 10^6$ ppm and the limit is less than ± 100 ppm.
6. Extreme temperature rule is -20°C~50°C.

3.3.4 Test Setup

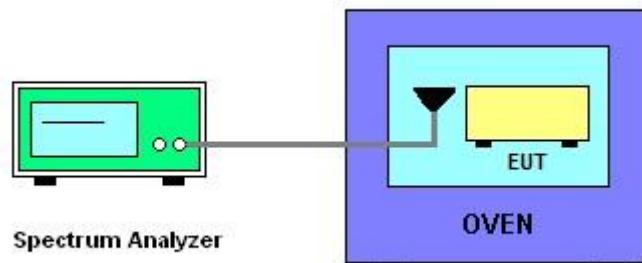

3.3.5 Test Result of Conducted Test Items

Please refer to Appendix B.



3.4 Field Strength of Fundamental Emissions and Mask Measurement

3.4.1 Limit

Rules and specifications	FCC CFR 47 Part 15 section 15.225			
Description	Compliance with the spectrum mask is tested with RBW set to 9kHz.			
Freq. of Emission (MHz)	Field Strength (μ V/m) at 30m	Field Strength (dB μ V/m) at 30m	Field Strength (dB μ V/m) at 10m	Field Strength (dB μ V/m) at 3m
1.705~13.110	30	29.5	48.58	69.5
13.110~13.410	106	40.5	59.58	80.5
13.410~13.553	334	50.5	69.58	90.5
13.553~13.567	15848	84.0	103.08	124.0
13.567~13.710	334	50.5	69.58	90.5
13.710~14.010	106	40.5	59.58	80.5
14.010~30.000	30	29.5	48.58	69.5

3.4.2 Measuring Instruments

See list of measuring instruments of this test report.


3.4.3 Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested with RBW set to 9kHz.

Note: Emission level (dB μ V/m) = 20 log Emission level (μ V/m).

3.4.4 Test Setup

For radiated emissions below 30MHz

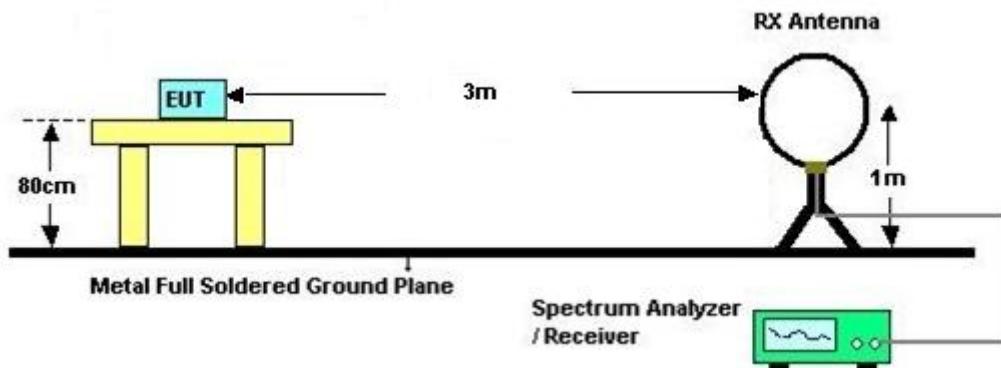

3.4.5 Test Result of Field Strength of Fundamental Emissions and Mask

Please refer to Appendix C.



3.5 Radiated Emissions Measurement

3.5.1 Limit

The field strength of any emissions which appear outside of 13.110 ~14.010MHz band shall not exceed the general radiated emissions limits.

Frequencies (MHz)	Field Strength (μ V/m)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Measuring Instrument Setting

The following table is the setting of receiver.

Receiver Parameter	Setting
Attenuation	Auto
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak

Note: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.




3.5.4 Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. Antenna Requirements

3.5.5 Test Setup

For radiated emissions below 30MHz

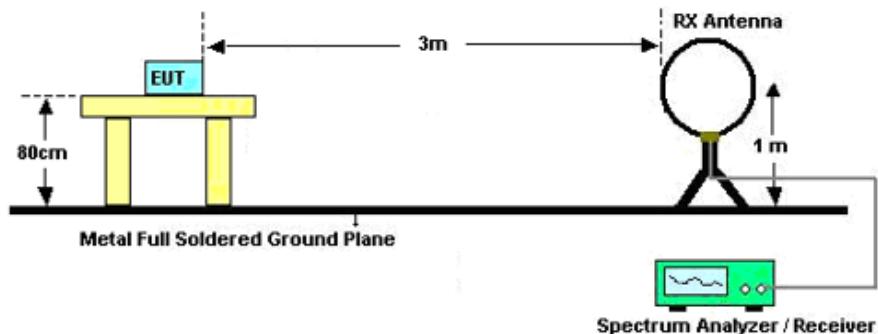

For radiated emissions above 30MHz

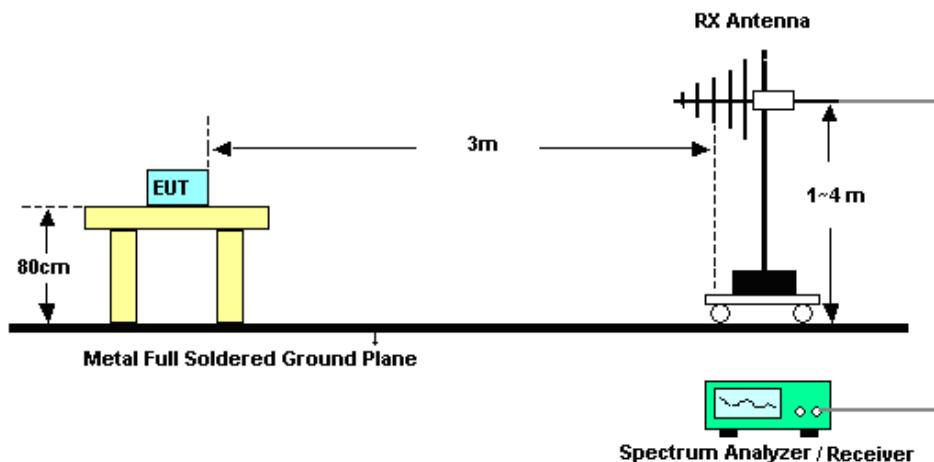

3.5.6 Test Result of Radiated Emissions Measurement

Please refer to Appendix C.

Remark:

1. There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.
2. According to C63.10 radiated Test, the EUT pre-scanned horizontal, vertical, and ground-parallel three polarization's, the worst case is horizontal & vertical polarization, test data of two mode was reported.



3.6 Antenna Requirements

3.6.1 Standard Applicable

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Jul. 19, 2022	Oct. 13, 2022	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011 440	-40~+150°C 20%~95%RH	Jul. 11, 2022	Jul. 19, 2022	Jul. 10, 2023	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Oct. 16, 2021	Jun. 08, 2022	Oct. 15, 2022	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Jun. 08, 2022	Oct. 29, 2022	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Dec. 22, 2021	Jun. 08, 2022	Dec. 21, 2022	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	413741	9KHz-1GHz	Jan. 05, 2022	Jun. 08, 2022	Jan. 04, 2023	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002 473	N/A	NCR	Jun. 08, 2022	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jun. 08, 2022	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jun. 08, 2022	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 24, 2022	Jul. 24, 2022	May 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2021	Jul. 24, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC LISN	R&S	ENV216	100334	9kHz~30MHz	Oct. 14, 2021	Jul. 24, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2021	Jul. 24, 2022	Oct. 13, 2022	Conduction (CO01-KS)

NCR: No Calibration Required



5. Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Occupied Channel Bandwidth	±0.03 %

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U _c (y))	2.94dB
-------------------------------------------------------------------------------------	--------

Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U _c (y))	4.9dB
-------------------------------------------------------------------------------------	-------


Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U _c (y))	4.9dB
-------------------------------------------------------------------------------------	-------

----- THE END -----




Appendix A. Test Results of Conducted Emission Test

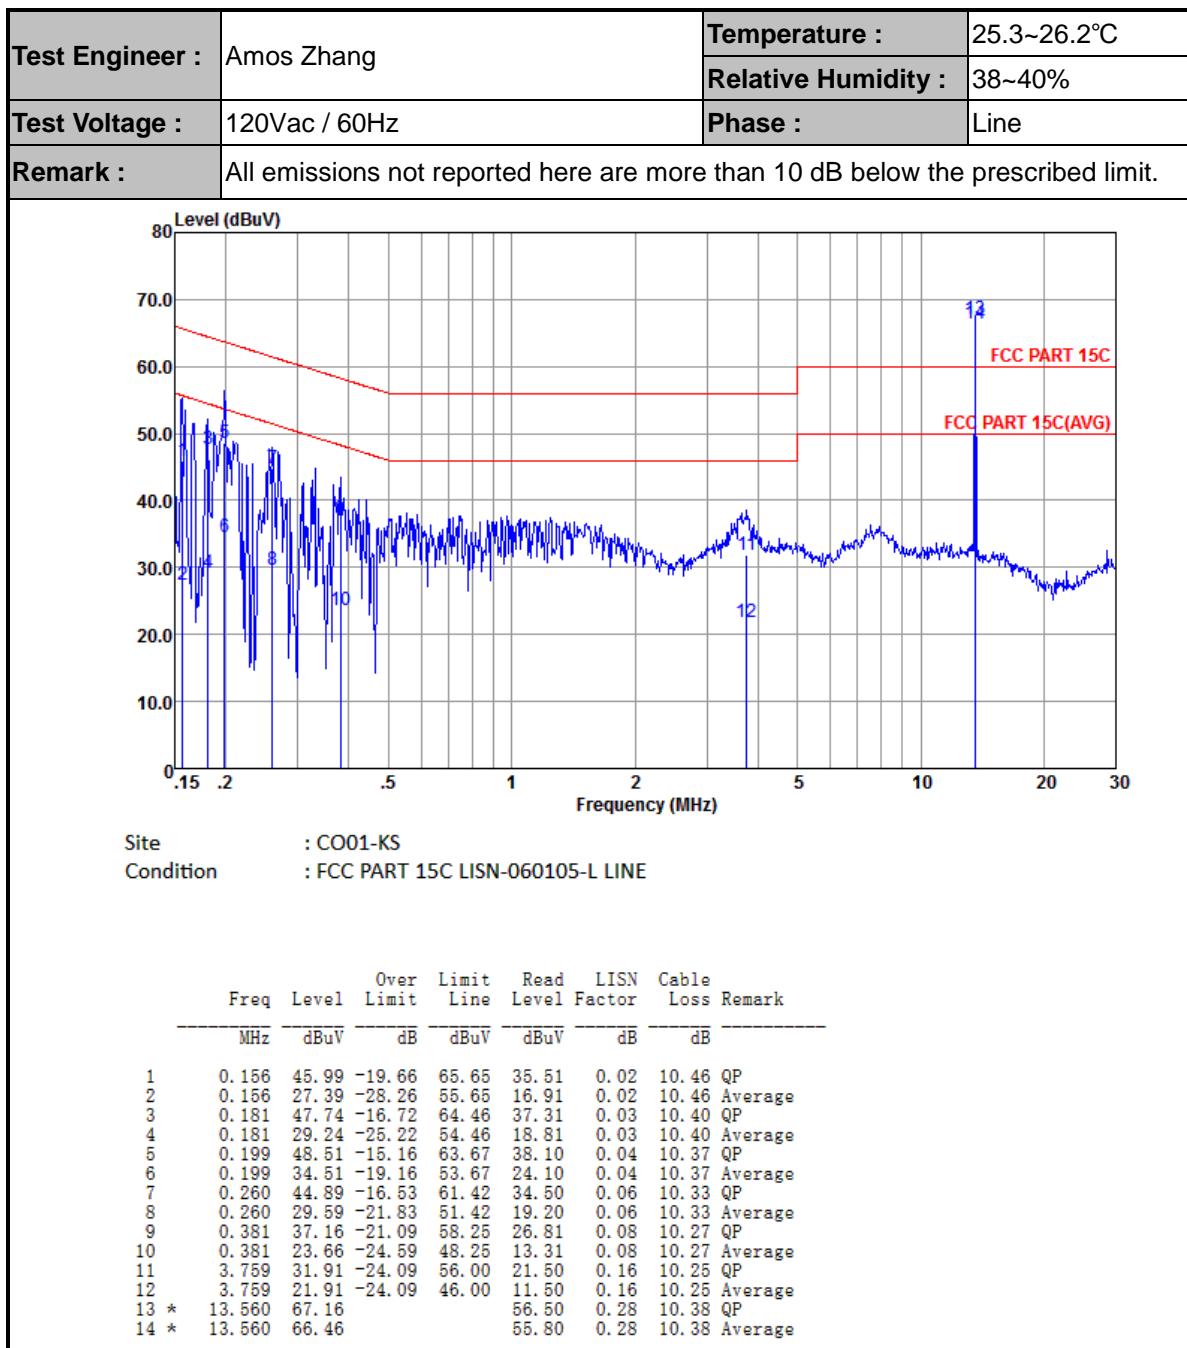


(1) with antenna

Remark: 13.560MHz is the NFC RF fundamental signal.

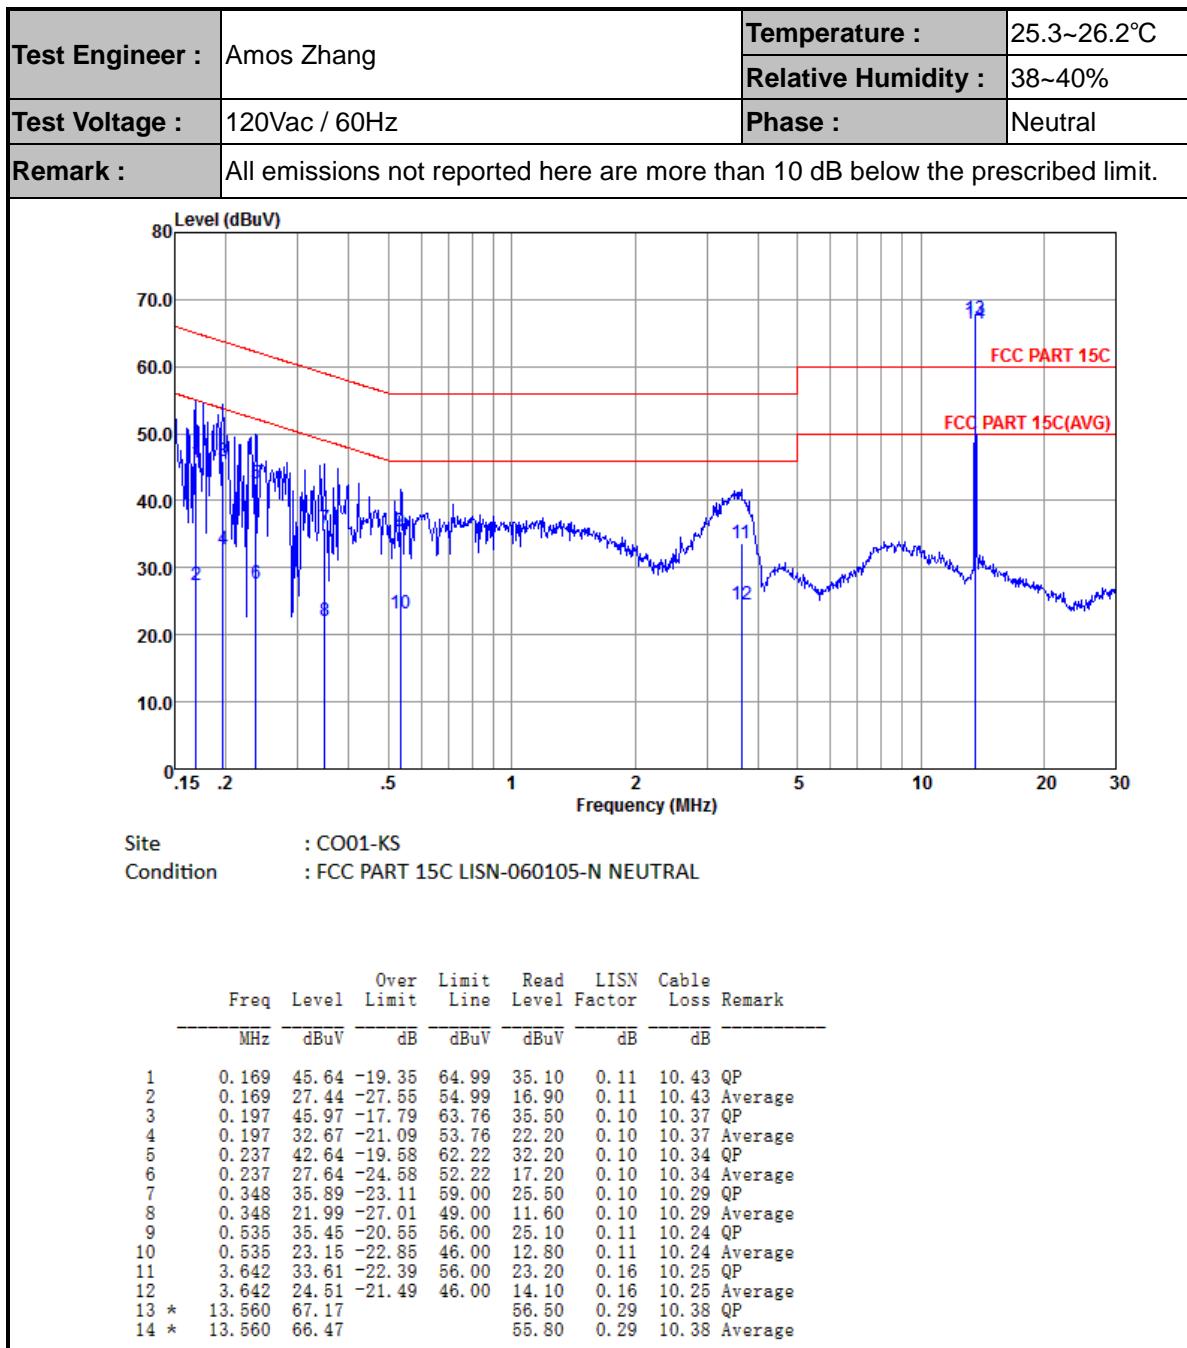


(1) with antenna

Remark: 13.560MHz is the NFC RF fundamental signal.

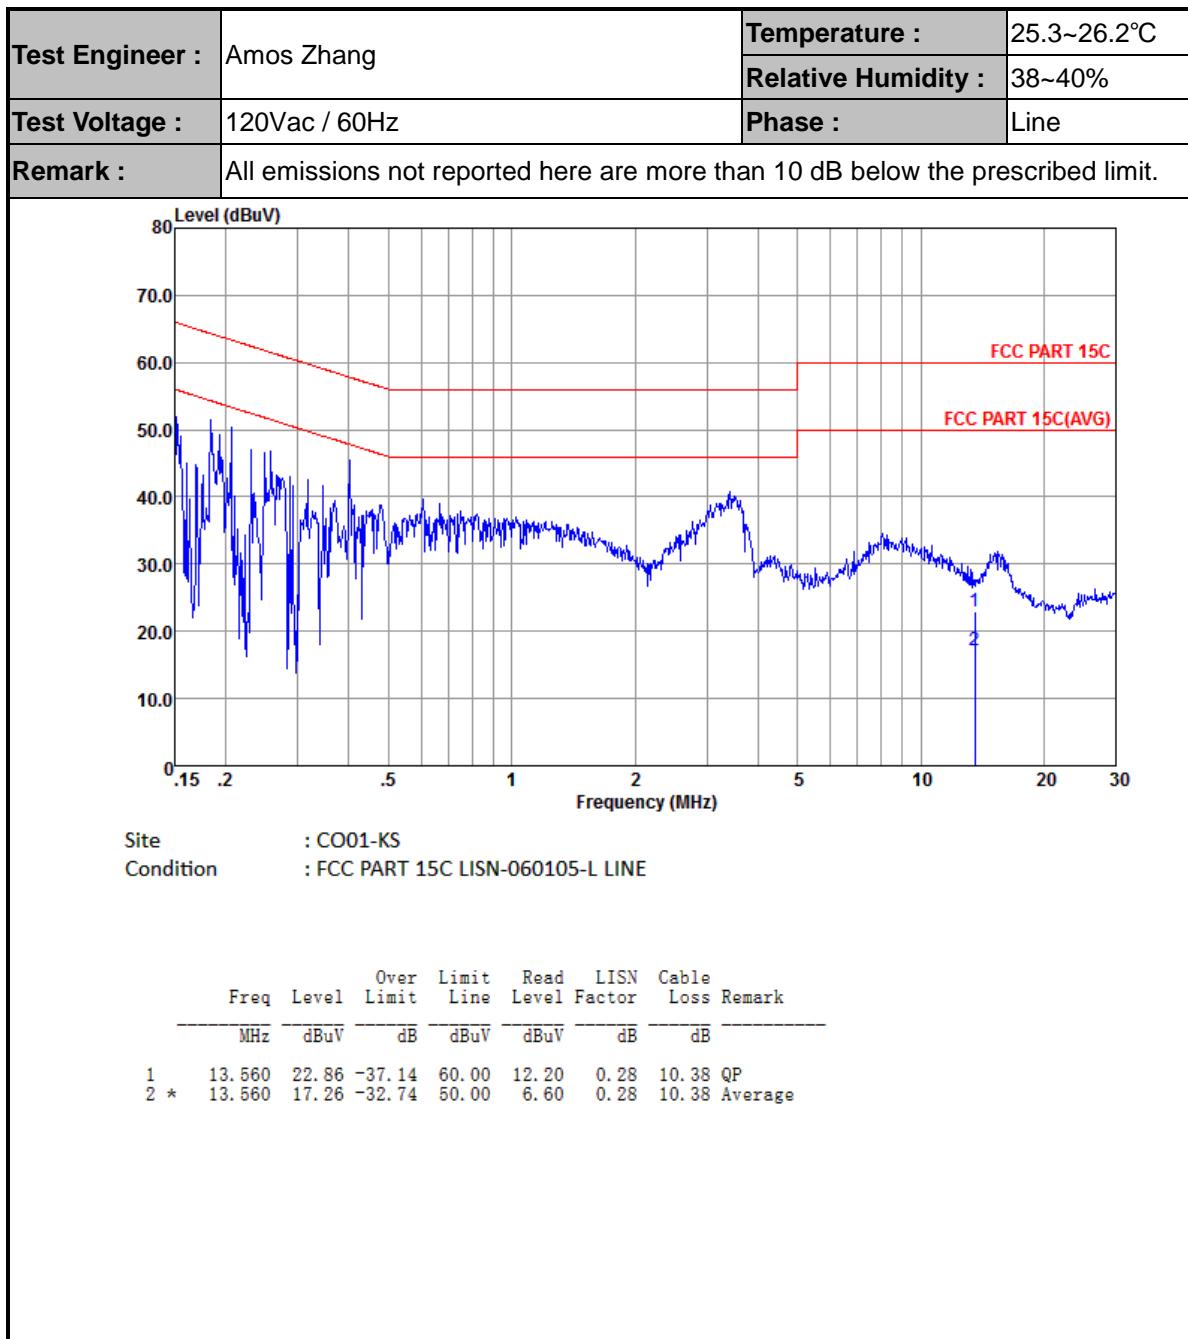

(2) With dummy load

Remark: Only the fundamental NFC signal needs to be retested per KDB 174176.

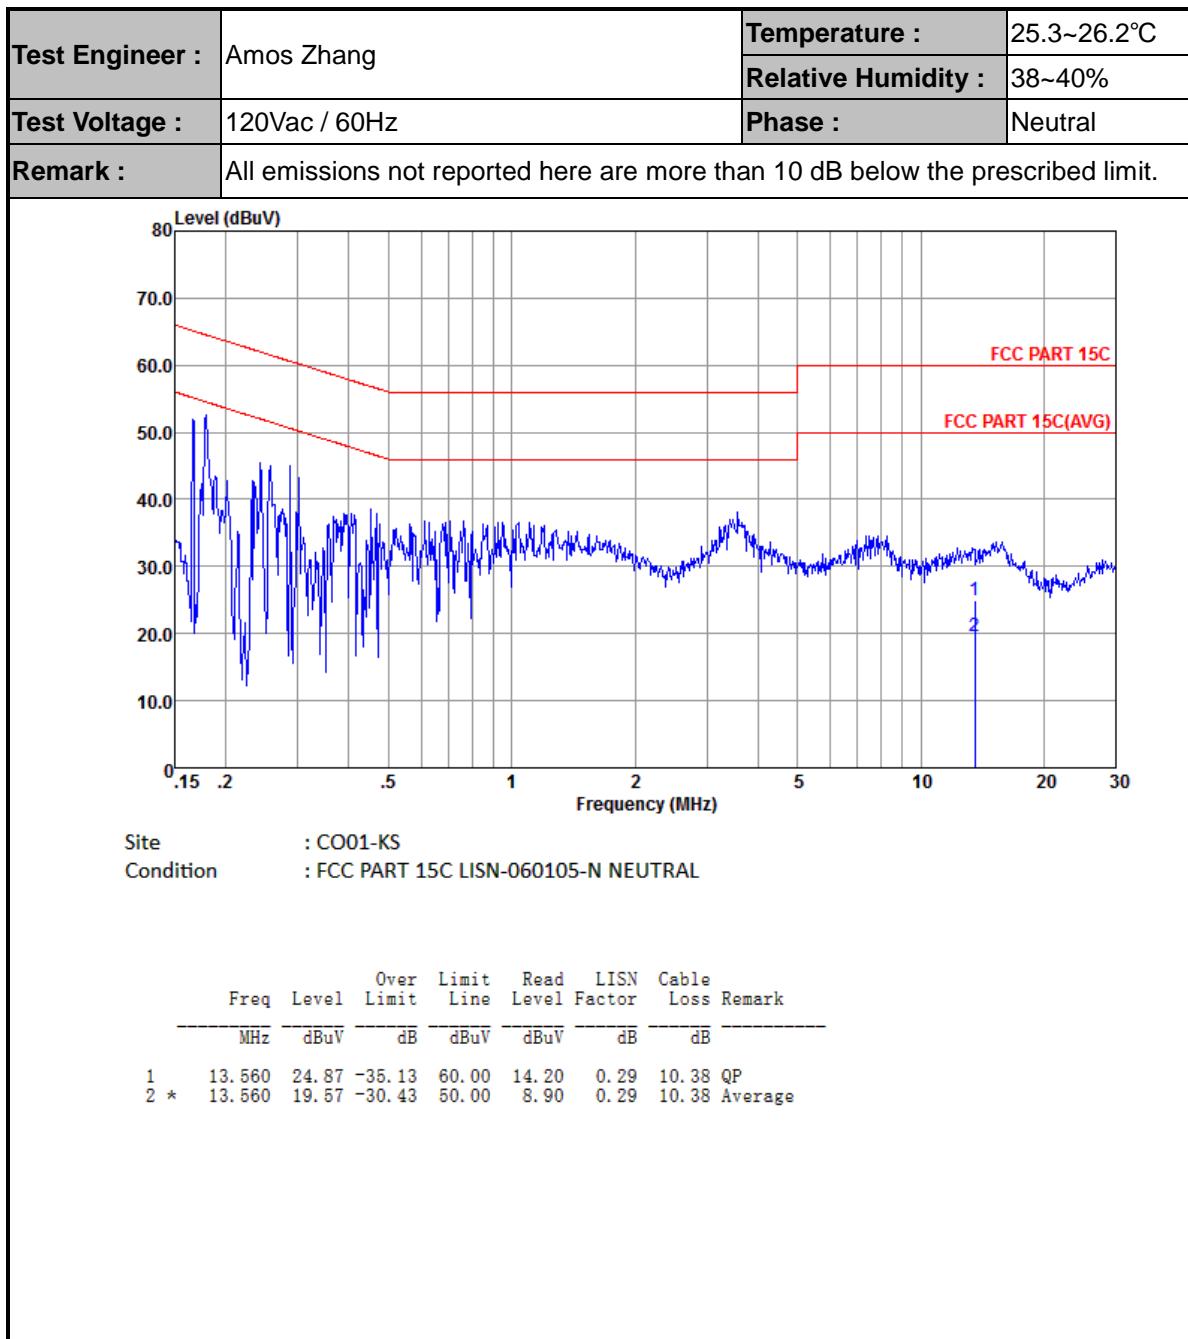

(2) With dummy load

Remark: Only the fundamental NFC signal needs to be retested per KDB 174176.

Note:

1. Level(dB μ V) = Read Level(dB μ V) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dB μ V) – Limit Line(dB μ V)



Appendix B. Test Results of Conducted Test Items

B1. Test Result of 20dB Spectrum Bandwidth

Test mode	NFC Tx	Test Frequency (MHz)	13.56																																																								
	<p>Spectrum Ref Level 0.00 dBm RBW 1 kHz Att 20 dB SWT 20 ms VBW 3 kHz Mode Auto FFT</p> <table border="1"> <thead> <tr> <th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr> </thead> <tbody> <tr> <td>M1</td><td>1</td><td></td><td>13.5597110 MHz</td><td>-13.00 dBm</td><td>ndB down</td><td>2.475 kHz</td></tr> <tr> <td>T1</td><td>1</td><td></td><td>13.558466 MHz</td><td>-32.79 dBm</td><td>ndB</td><td>20.00 dB</td></tr> <tr> <td>T2</td><td>1</td><td></td><td>13.560941 MHz</td><td>-32.91 dBm</td><td>Q factor</td><td>5479.4</td></tr> </tbody> </table> <p>CF 13.56 MHz 691 pts Span 10.0 kHz</p> <p>Marker</p> <p>Date: 19.JUL.2022 19:14:06</p>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		13.5597110 MHz	-13.00 dBm	ndB down	2.475 kHz	T1	1		13.558466 MHz	-32.79 dBm	ndB	20.00 dB	T2	1		13.560941 MHz	-32.91 dBm	Q factor	5479.4	<p>Spectrum Ref Level 0.00 dBm RBW 1 kHz Att 20 dB SWT 20 ms VBW 3 kHz Mode Auto FFT</p> <table border="1"> <thead> <tr> <th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr> </thead> <tbody> <tr> <td>M1</td><td>1</td><td></td><td>13.5596960 MHz</td><td>-13.34 dBm</td><td>ndB down</td><td>2.098408104 kHz</td></tr> <tr> <td>T1</td><td>1</td><td></td><td>13.5586541 MHz</td><td>-27.13 dBm</td><td>ndB</td><td>20.098408104 kHz</td></tr> <tr> <td>T2</td><td>1</td><td></td><td>13.5607525 MHz</td><td>-27.22 dBm</td><td>Q factor</td><td>5479.4</td></tr> </tbody> </table> <p>CF 13.56 MHz 691 pts Span 10.0 kHz</p> <p>Marker</p> <p>Date: 19.JUL.2022 19:19:17</p>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		13.5596960 MHz	-13.34 dBm	ndB down	2.098408104 kHz	T1	1		13.5586541 MHz	-27.13 dBm	ndB	20.098408104 kHz	T2	1		13.5607525 MHz	-27.22 dBm	Q factor	5479.4	
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																																					
M1	1		13.5597110 MHz	-13.00 dBm	ndB down	2.475 kHz																																																					
T1	1		13.558466 MHz	-32.79 dBm	ndB	20.00 dB																																																					
T2	1		13.560941 MHz	-32.91 dBm	Q factor	5479.4																																																					
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																																					
M1	1		13.5596960 MHz	-13.34 dBm	ndB down	2.098408104 kHz																																																					
T1	1		13.5586541 MHz	-27.13 dBm	ndB	20.098408104 kHz																																																					
T2	1		13.5607525 MHz	-27.22 dBm	Q factor	5479.4																																																					
20dB Bandwidth (kHz)	2.475	99% OccupiedBW(kHz)	2.098																																																								
Frequency range (MHz)	$f_L > 13.553$	13.558466	Test Result																																																								
	$f_H < 13.567$	13.560941	Complies																																																								

Remark: Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.

**B2. Test Result of Frequency Stability**

For startup

Voltage vs. Frequency Stability		Temperature vs. Frequency Stability	
Voltage (Vac)	Measurement Frequency (MHz)	Temperature (°C)	Measurement Frequency (MHz)
3.87	13.559704	-20	13.559704
3.55	13.559704	-10	13.559704
4.45	13.559704	0	13.559704
-	-	10	13.559704
-	-	20	13.559704
-	-	30	13.559704
-	-	40	13.559704
-	-	50	13.559704
Max.Deviation (MHz)	-0.000297	Max.Deviation (MHz)	-0.000297
Max.Deviation (ppm)	-21.8658	Max.Deviation (ppm)	-21.8658
Limit	FS < ±100 ppm	Limit	FS < ±100 ppm
Test Result	PASS	Test Result	PASS

For 2MIN

Voltage vs. Frequency Stability		Temperature vs. Frequency Stability	
Voltage (Vac)	Measurement Frequency (MHz)	Temperature (°C)	Measurement Frequency (MHz)
3.87	13.559711	-20	13.559711
3.55	13.559711	-10	13.559711
4.45	13.559718	0	13.559711
-	-	10	13.559711
-	-	20	13.559718
-	-	30	13.559711
-	-	40	13.559711
-	-	50	13.559711
Max.Deviation (MHz)	-0.000290	Max.Deviation (MHz)	-0.000290
Max.Deviation (ppm)	-21.3496	Max.Deviation (ppm)	-21.3496
Limit	FS < ±100 ppm	Limit	FS < ±100 ppm
Test Result	PASS	Test Result	PASS



For 5MIN

Voltage vs. Frequency Stability		Temperature vs. Frequency Stability	
Voltage (Vac)	Measurement Frequency (MHz)	Temperature (°C)	Measurement Frequency (MHz)
3.87	13.559704	-20	13.559704
3.55	13.559697	-10	13.559704
4.45	13.559704	0	13.559704
-	-	10	13.559704
-	-	20	13.559704
-	-	30	13.559704
-	-	40	13.559704
-	-	50	13.559704
Max.Deviation (MHz)	-0.000303	Max.Deviation (MHz)	-0.000297
Max.Deviation (ppm)	-22.3820	Max.Deviation (ppm)	-21.8658
Limit	FS < ±100 ppm	Limit	FS < ±100 ppm
Test Result	PASS	Test Result	PASS


For 10MIN

Voltage vs. Frequency Stability		Temperature vs. Frequency Stability	
Voltage (Vac)	Measurement Frequency (MHz)	Temperature (°C)	Measurement Frequency (MHz)
3.87	13.559704	-20	13.559704
3.55	13.559704	-10	13.559704
4.45	13.559704	0	13.559704
-	-	10	13.559704
-	-	20	13.559704
-	-	30	13.559704
-	-	40	13.559704
-	-	50	13.559704
Max.Deviation (MHz)	-0.000297	Max.Deviation (MHz)	-0.000297
Max.Deviation (ppm)	-21.8658	Max.Deviation (ppm)	-21.8658
Limit	FS < ±100 ppm	Limit	FS < ±100 ppm
Test Result	PASS	Test Result	PASS



Appendix C. Test Results of Radiated Test Items

C1. Test Result of Field Strength of Fundamental Emissions

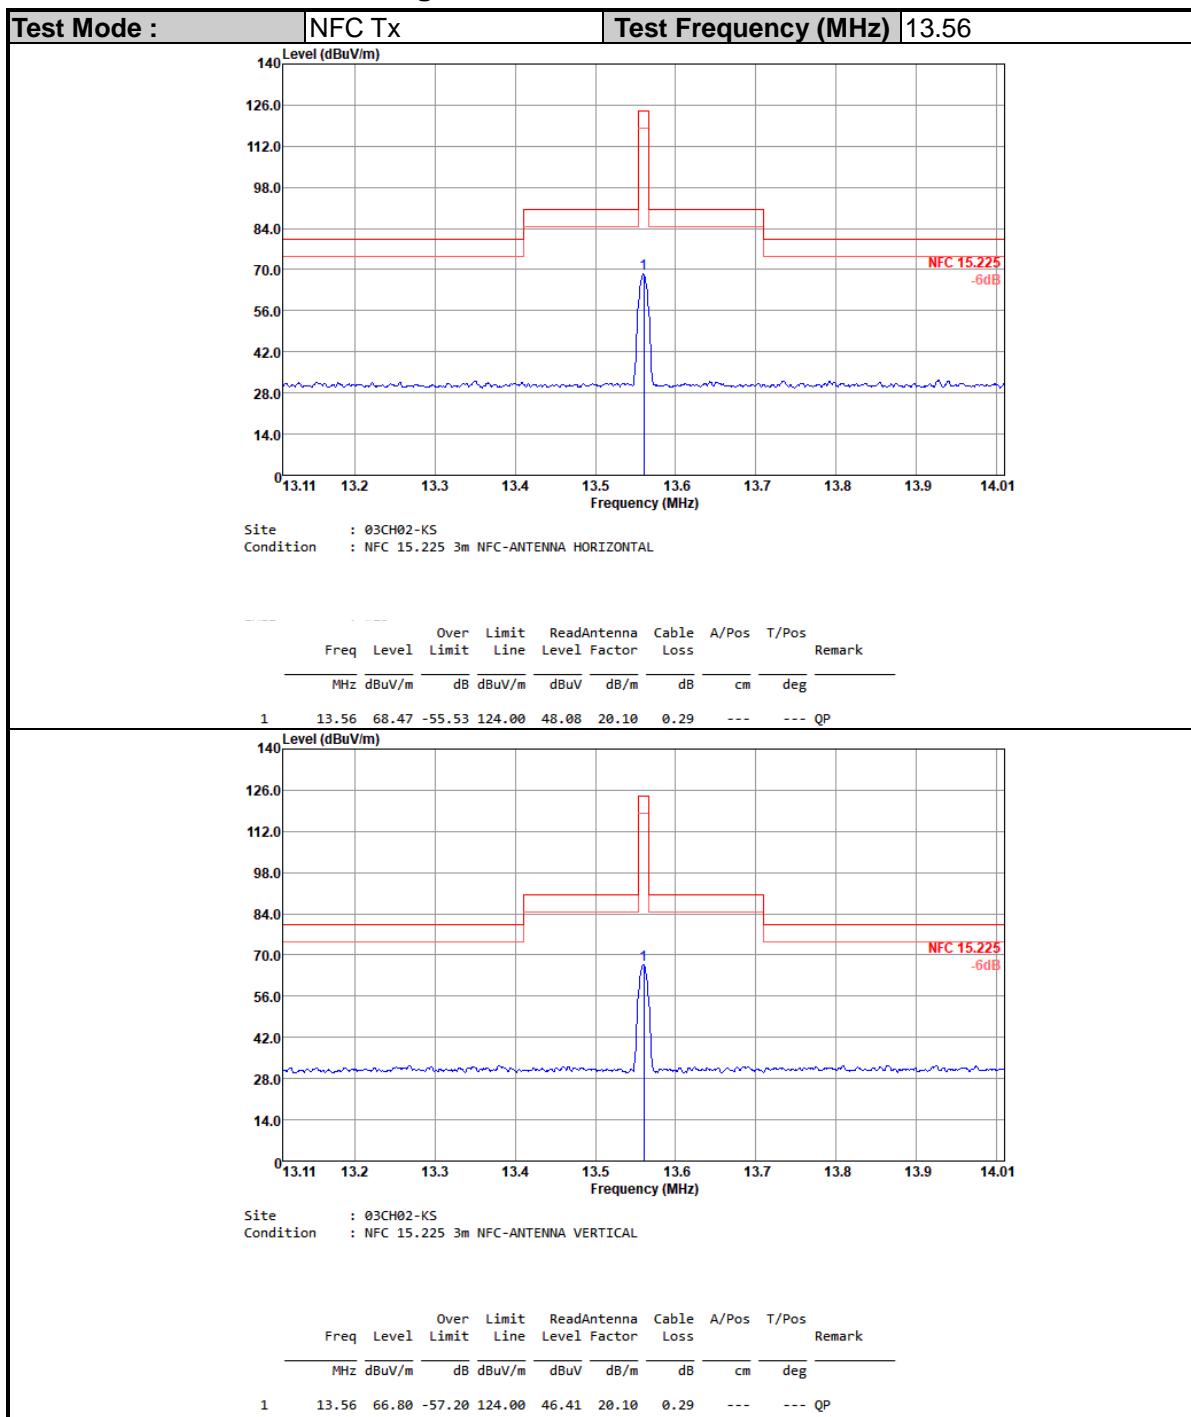

Note:

1. Level(dB μ V/m) = Read Level(dB μ V) + Antenna Factor(dB/m) + Cable Loss(dB)
2. Over Limit(dB) = Level(dB μ V/m) – Limit Line(dB μ V/m)

**C2. Results of Radiated Spurious Emissions (9 kHz~30MHz)**

Test Mode :		NFC Tx		Polarization :		Horizontal			
Frequency (MHz)	Level (dB μ V/m)	Over Limit (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
0.05835	58.46	-53.81	112.27	37.77	20.6	0.09	-	-	Average
0.11785	50.69	-55.47	106.16	30.33	20.27	0.09	-	-	Average
1.119	55.3	-11.31	66.61	34.39	20.81	0.1	-	-	QP
2.354	41.62	-27.92	69.54	20.7	20.81	0.11	-	-	QP
17.367	32.56	-36.98	69.54	12.71	19.51	0.34	-	-	QP
27.81	31.45	-38.09	69.54	11.49	19.44	0.52	-	-	QP

Test Mode :		NFC Tx		Polarization :		Vertical			
Frequency (MHz)	Level (dB μ V/m)	Over Limit (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
0.08726	40.18	-68.6	108.78	19.89	20.2	0.09	-	-	Average
0.11757	38.98	-67.21	106.19	18.62	20.27	0.09	-	-	Average
1.123	54.95	-11.63	66.58	34.04	20.81	0.1	-	-	QP
6.914	40.63	-28.91	69.54	20.35	20.1	0.18	-	-	QP
11.213	36.66	-32.88	69.54	16.18	20.23	0.25	-	-	QP
26.545	30.78	-38.76	69.54	10.99	19.29	0.5	-	-	QP

Note:

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
3. Limit line = specific limits (dB μ V) + distance extrapolation factor.

**C3. Results of Radiated Spurious Emissions (30MHz~1GHz)**

Test Mode :		NFC Tx			Polarization :		Horizontal			
Frequency (MHz)	Level (dB μ V/m)	Over Limit (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
45.52	27.85	-12.15	40	43.09	16.2	0.96	32.4	-	-	Peak
85.29	27.52	-12.48	40	44.79	13.8	1.33	32.4	-	-	Peak
176.47	32.57	-10.93	43.5	48.03	15	1.94	32.4	-	-	Peak
230.79	28.74	-17.26	46	42.93	16.12	2.09	32.4	-	-	Peak
325.85	26.71	-19.29	46	37.01	19.44	2.66	32.4	-	-	Peak
650.8	27.18	-18.82	46	29.61	26.24	3.73	32.4	-	-	Peak

Test Mode :		NFC Tx			Polarization :		Vertical			
Frequency (MHz)	Level (dB μ V/m)	Over Limit (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
45.52	34.98	-5.02	40	50.22	16.2	0.96	32.4	100	200	QP
78.5	29.98	-10.02	40	48.11	13	1.27	32.4	-	-	Peak
128.94	29.77	-13.73	43.5	42.99	17.5	1.68	32.4	-	-	Peak
176.47	30.28	-13.22	43.5	45.74	15	1.94	32.4	-	-	Peak
285.11	22.47	-23.53	46	33.55	18.9	2.42	32.4	-	-	Peak
650.8	27.69	-18.31	46	30.12	26.24	3.73	32.4	-	-	Peak

Note:

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dB μ V/m) = 20 log Emission level (μ V/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor= Level.