



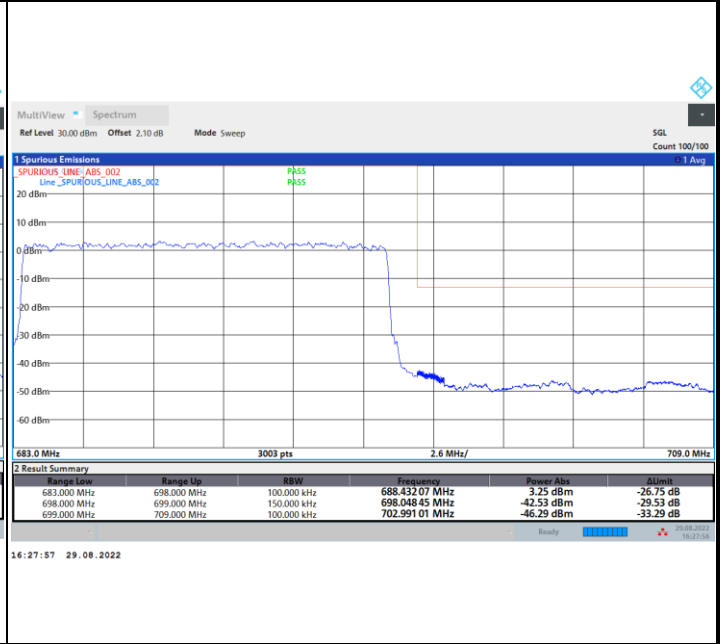

FR1 n71 / 15MHz / DFT-s-OFDM / PI/2 BPSK / Full RB

Lowest Band Edge



Highest Band Edge

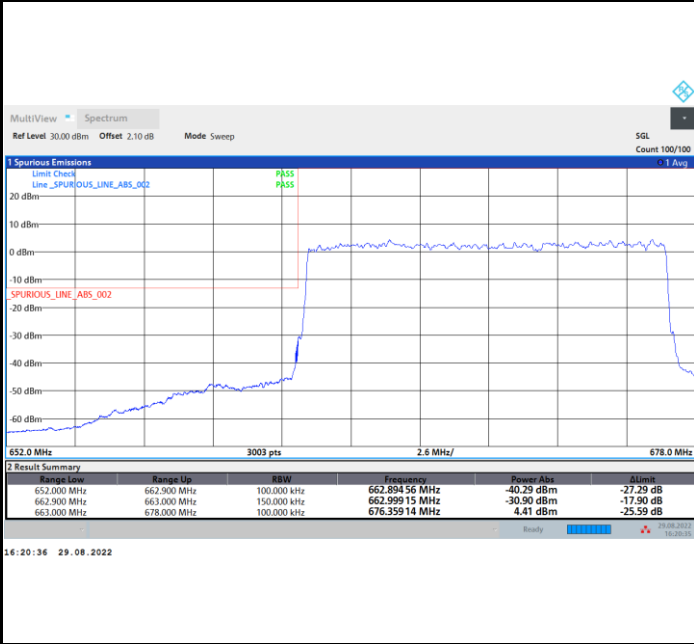

FR1 n71 / 15MHz / DFT-s-OFDM / QPSK / Full RB

Lowest Band Edge

Highest Band Edge

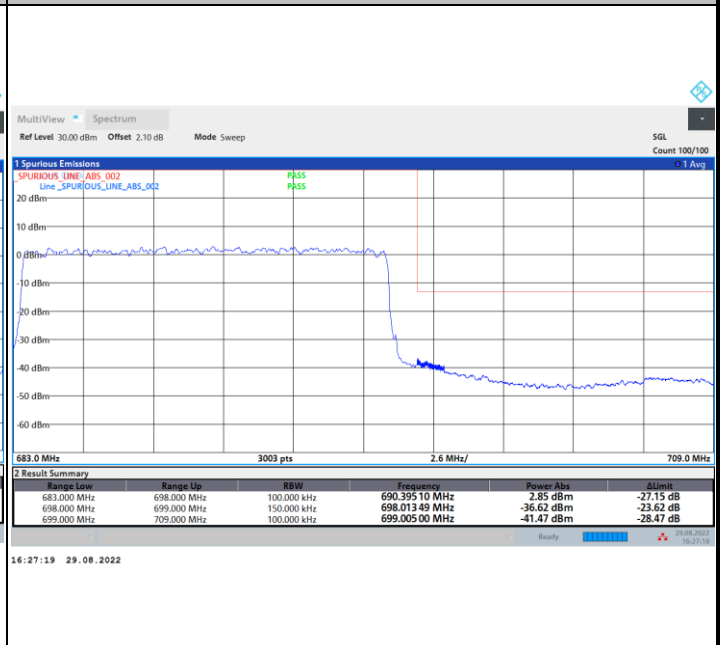
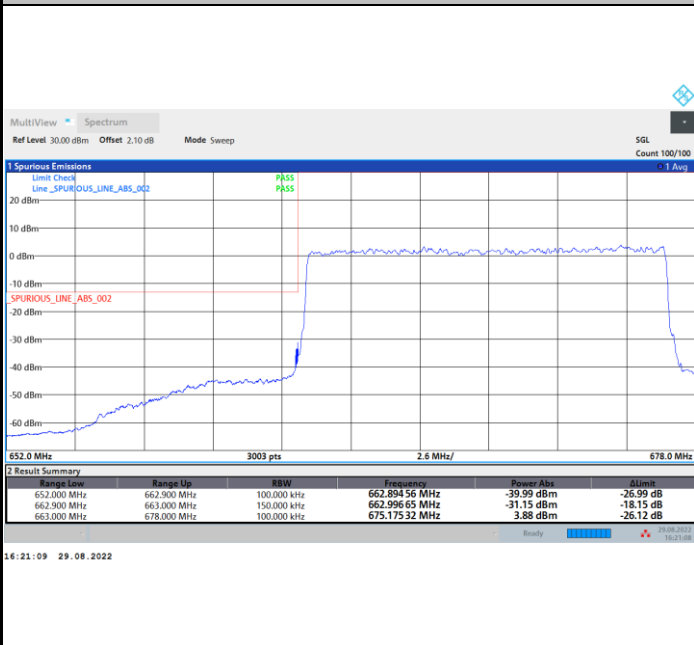




FR1 n71 / 15MHz / DFT-s-OFDM / 16QAM / Full RB

Lowest Band Edge



Highest Band Edge

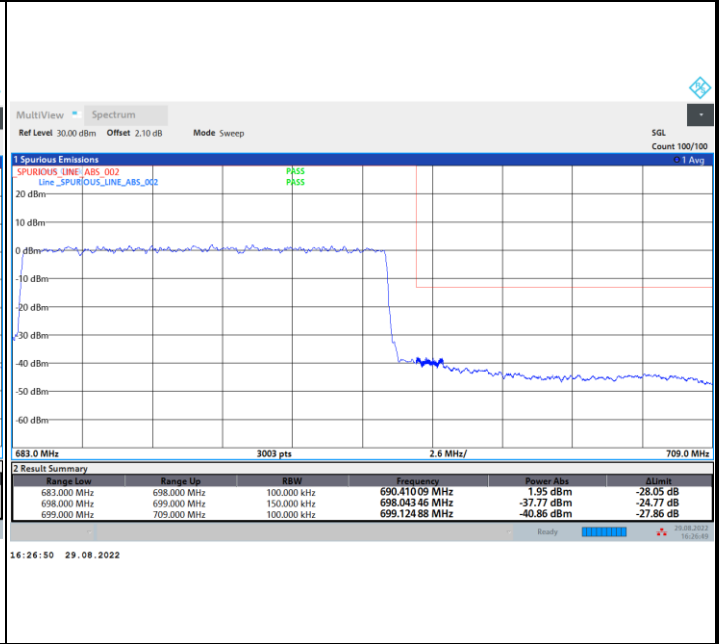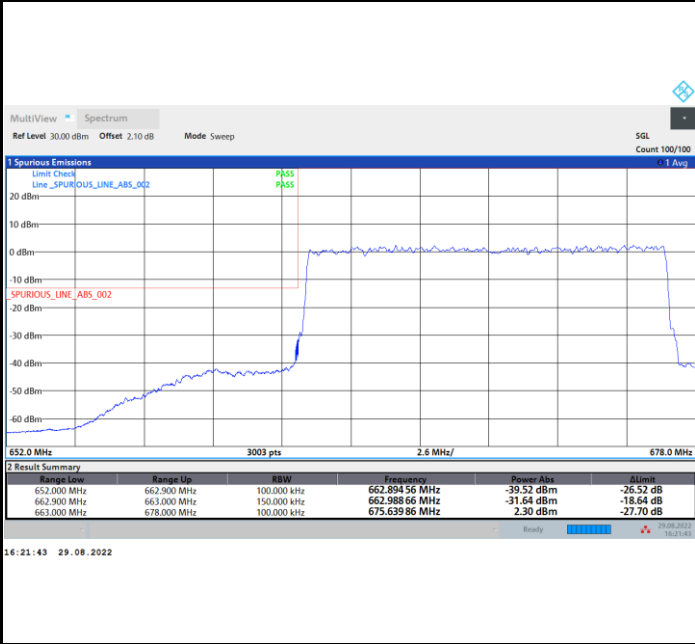

FR1 n71 / 15MHz / DFT-s-OFDM / 64QAM / Full RB

Lowest Band Edge

Highest Band Edge

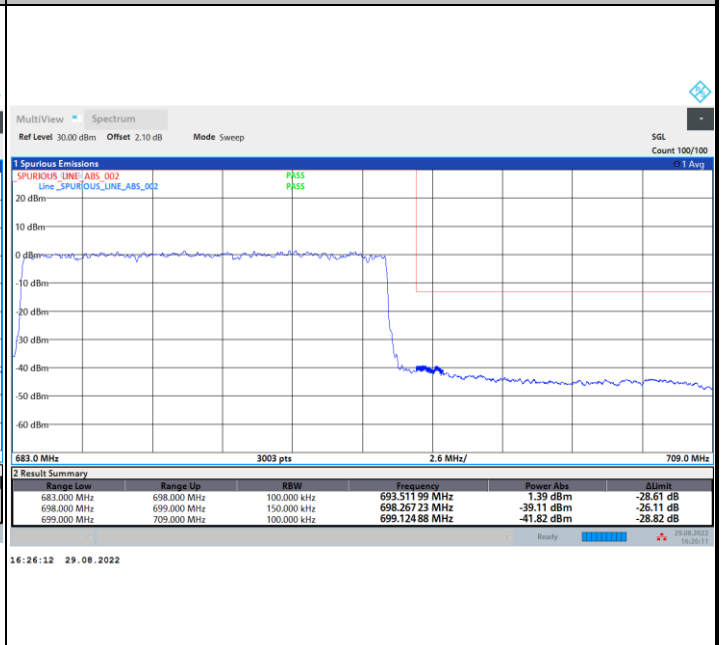
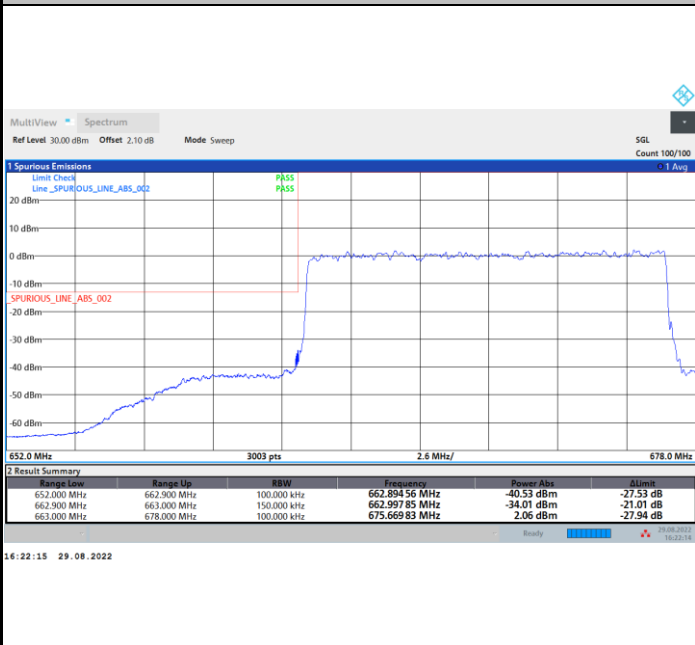




FR1 n71 / 15MHz / DFT-s-OFDM / 256QAM / Full RB

Lowest Band Edge



Highest Band Edge

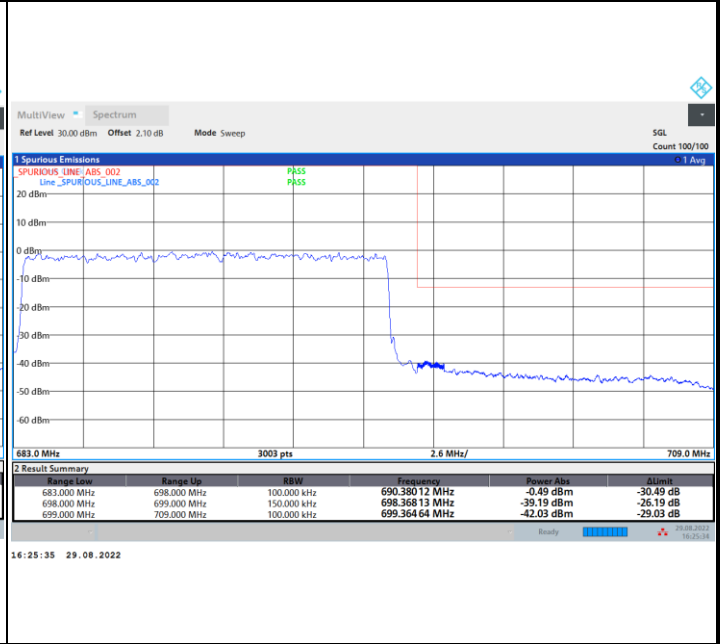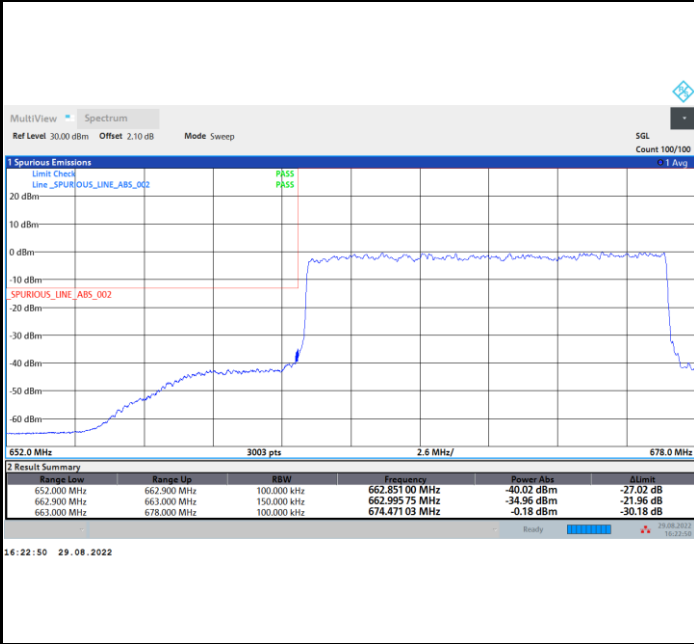

FR1 n71 / 15MHz / CP OFDM / QPSK / Full RB

Lowest Band Edge

Highest Band Edge

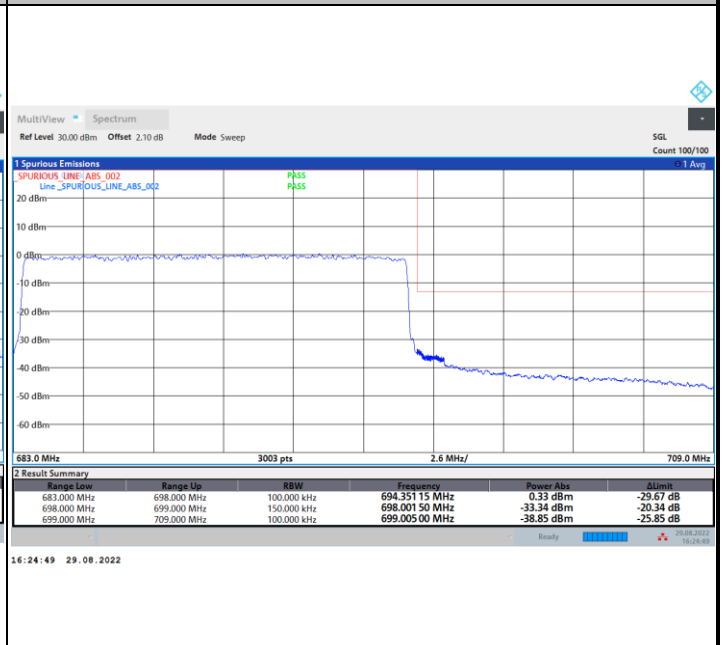
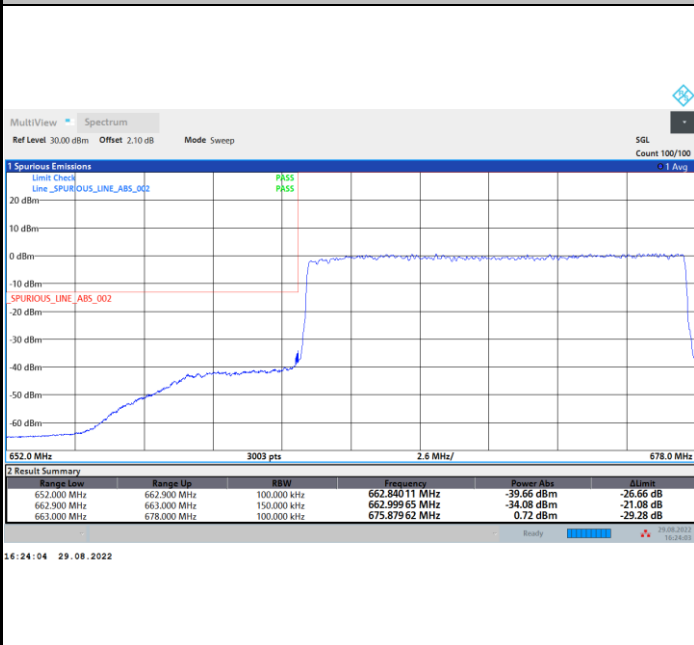




FR1 n71 / 20MHz / DFT-s-OFDM / PI/2 BPSK / Full RB

Lowest Band Edge


Highest Band Edge

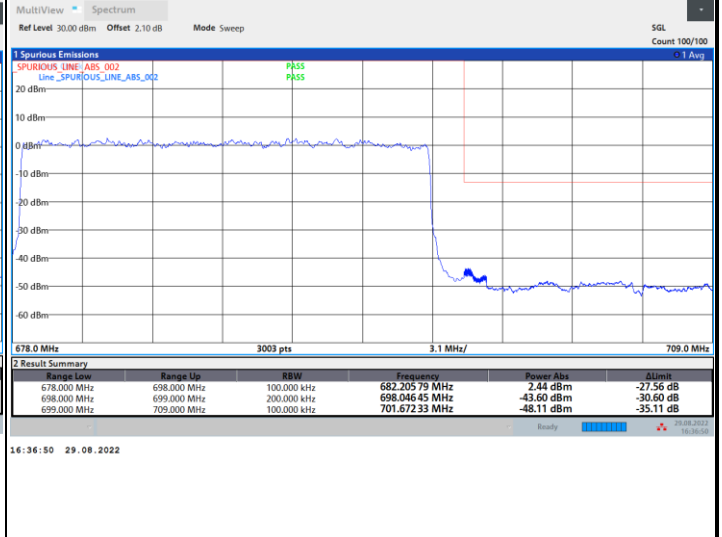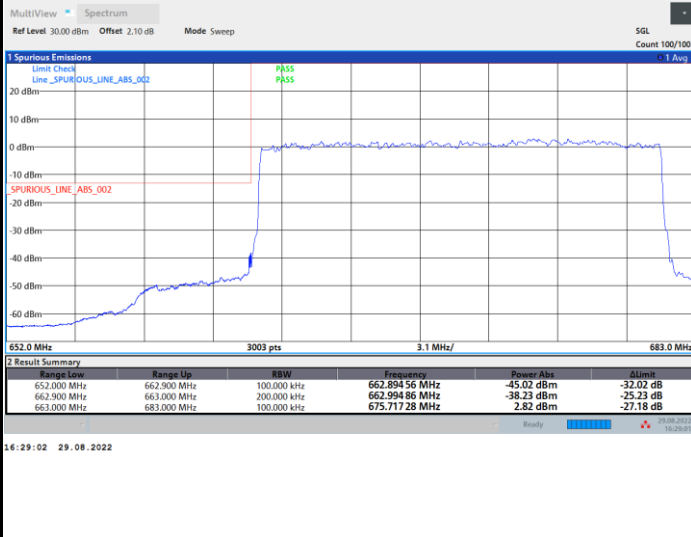

FR1 n71 / 20MHz / DFT-s-OFDM / QPSK / Full RB

Lowest Band Edge

Highest Band Edge


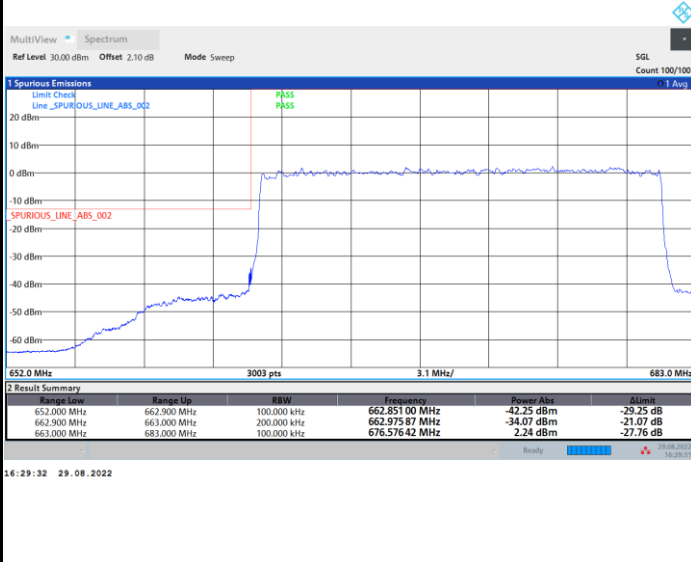




FR1 n71 / 20MHz / DFT-s-OFDM / 16QAM / Full RB

Lowest Band Edge



Highest Band Edge

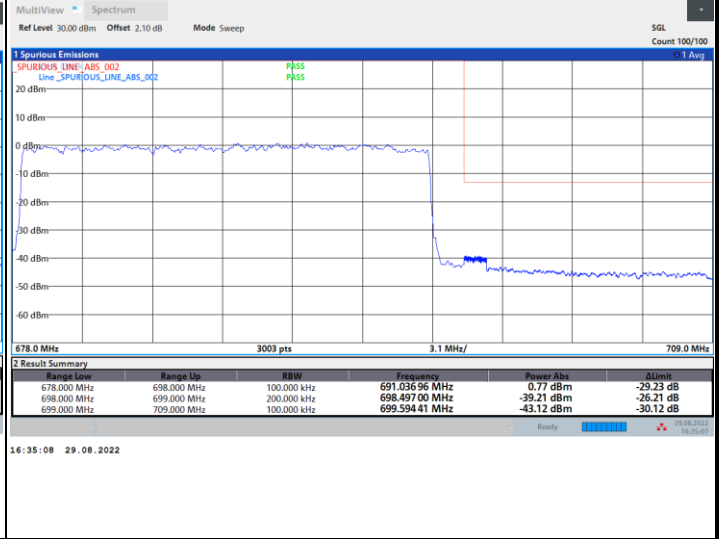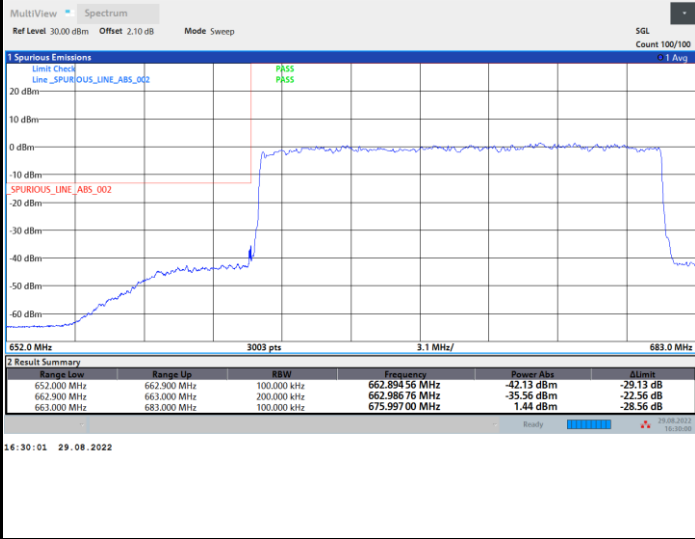

FR1 n71 / 20MHz / DFT-s-OFDM / 64QAM / Full RB

Lowest Band Edge

Highest Band Edge

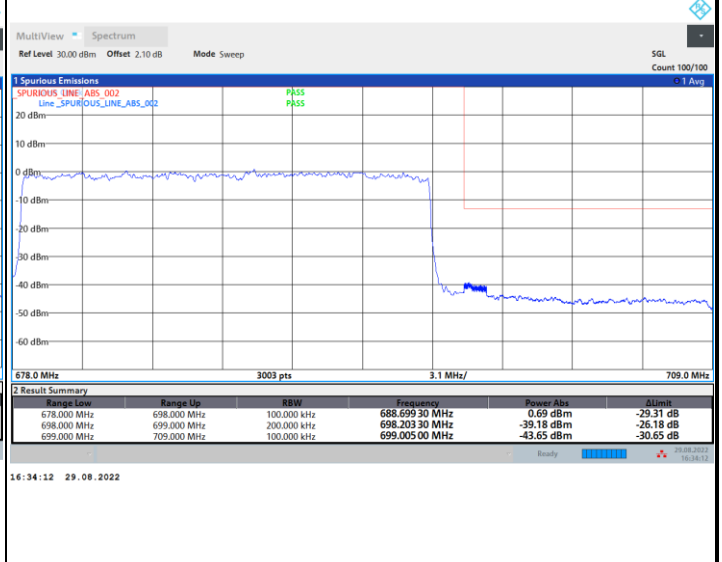
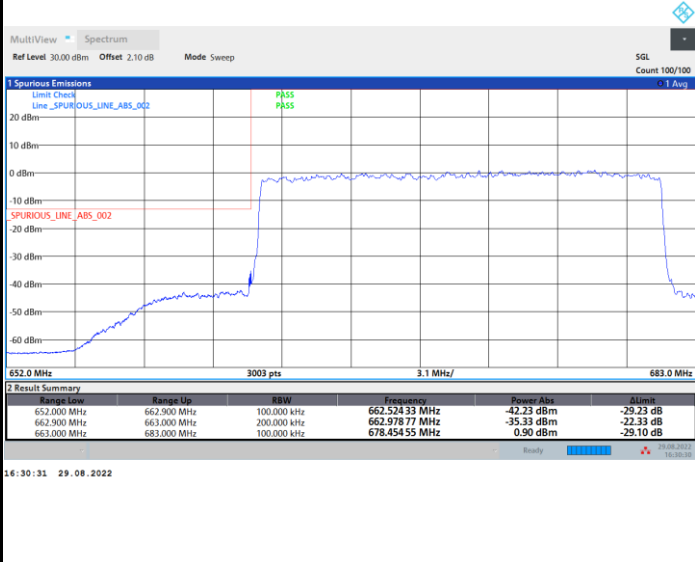




FR1 n71 / 20MHz / DFT-s-OFDM / 256QAM / Full RB

Lowest Band Edge



Highest Band Edge

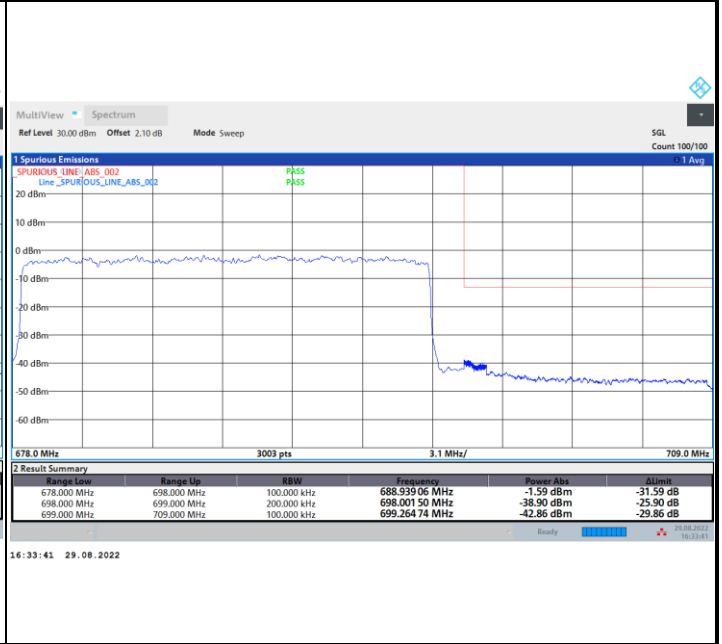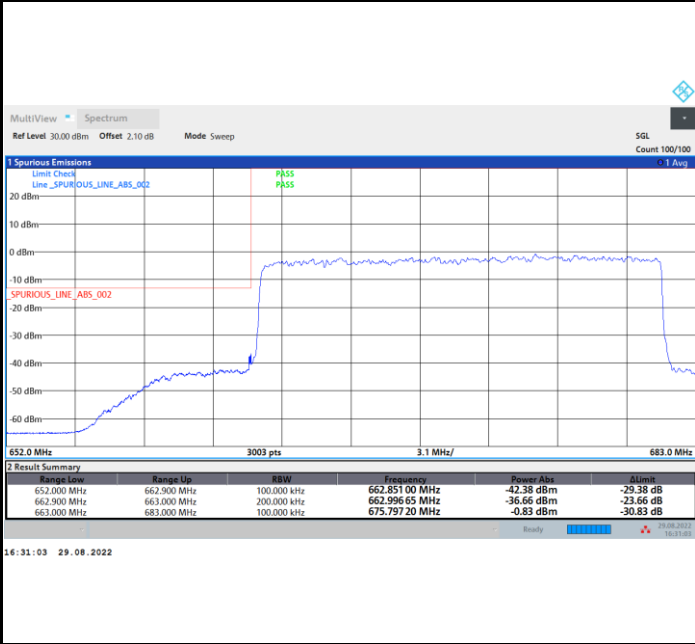

FR1 n71 / 20MHz / CP OFDM / QPSK / Full RB

Lowest Band Edge

Highest Band Edge

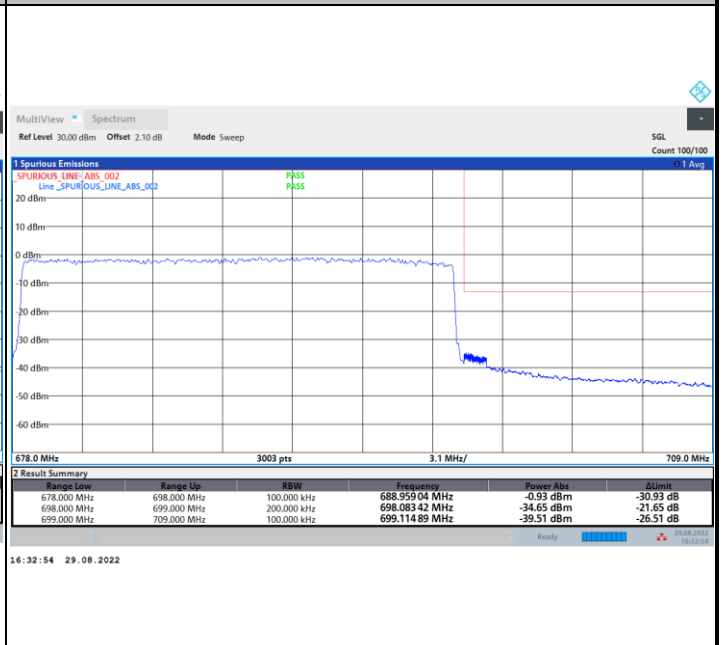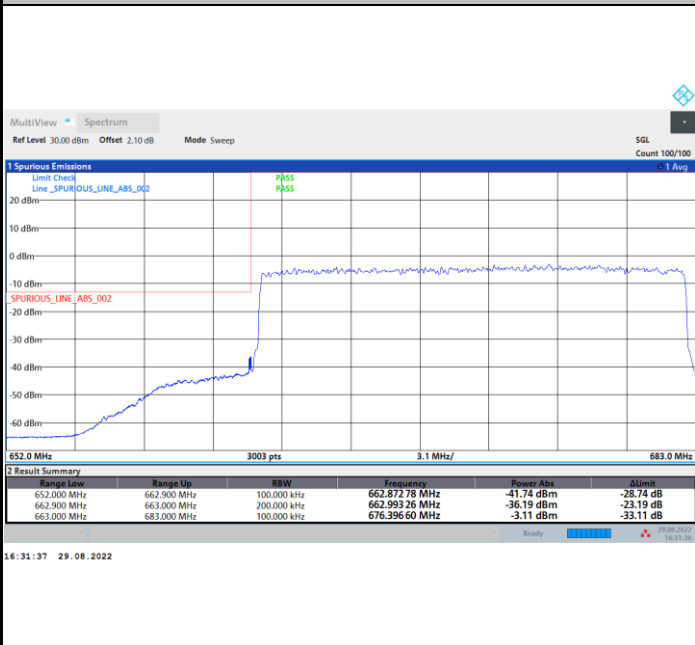





Conducted Spurious Emission


FR1 n71 / 5MHz / DFT-S OFDM / QPSK / 1RB1

Lowest Channel

Middle Channel

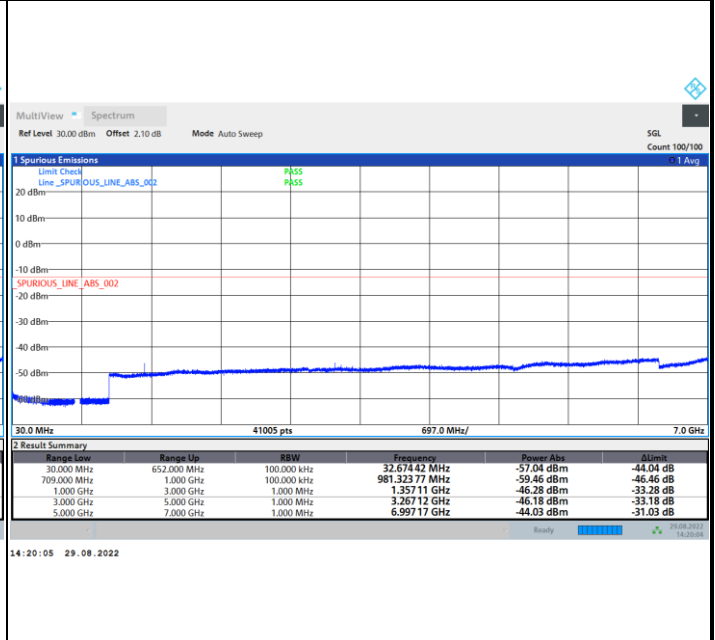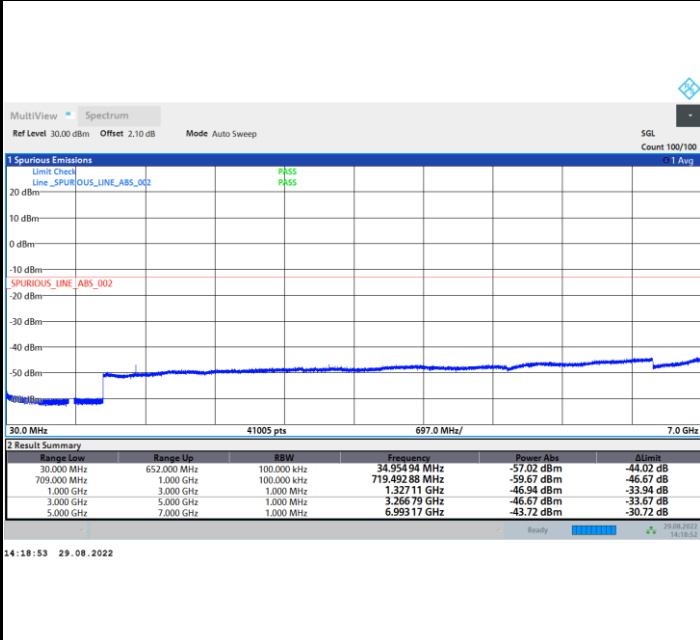

Highest Channel

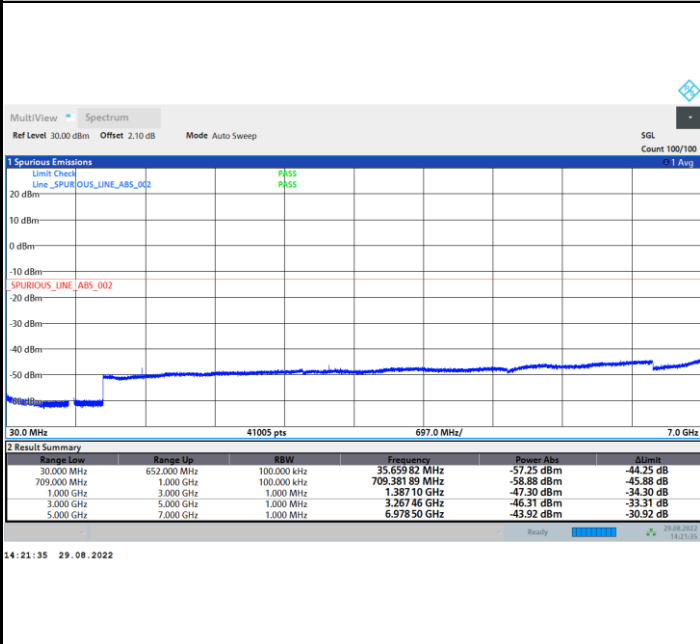



Frequency Stability

Test Conditions		FR1 n71 (BPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 20MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0014	PASS
40	Normal Voltage	0.0032	
30	Normal Voltage	0.0034	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0002	
0	Normal Voltage	0.0041	
-10	Normal Voltage	0.0013	
-20	Normal Voltage	0.0023	
-30	Normal Voltage	0.0029	
20	Maximum Voltage	0.0027	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0000	

Note:

- 1. Normal Voltage = 4.05 V. ; Battery End Point (BEP) = 3.85 V. ; Maximum Voltage = 4.35 V.
- 2. The frequency fundamental emissions stay within the authorized frequency block.



Appendix B. Test Results of Radiated Test

<Ant. 0>

5G NR n71

5G NR n71/ 20MHz / PI/2 BPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1328	-56.76	-13	-43.76	-68.36	-62.95	0.76	6.95	H
	1992	-56.16	-13	-43.16	-69.19	-65.27	0.89	10.00	H
	2657	-54.71	-13	-41.71	-70.39	-64.60	1.08	10.97	H
									H
									H
									H
	1328	-56.57	-13	-43.57	-67.92	-62.76	0.76	6.95	V
	1992	-56.43	-13	-43.43	-69.48	-65.54	0.89	10.00	V
	2657	-54.11	-13	-41.11	-70.01	-64.00	1.08	10.97	V
									V
									V
									V
Middle	1344	-57.02	-13	-44.02	-68.59	-63.26	0.76	7.00	H
	2016	-57.02	-13	-44.02	-70.25	-66.04	0.90	9.92	H
	2687	-55.06	-13	-42.06	-70.83	-64.93	1.09	10.96	H
									H
									H
									H
	1344	-57.56	-13	-44.56	-69	-63.80	0.76	7.00	V
	2016	-56.78	-13	-43.78	-70.09	-65.80	0.90	9.92	V
	2687	-54.77	-13	-41.77	-70.82	-64.64	1.09	10.96	V
									V
									V
									V



Highest	1358	-57.36	-13	-44.36	-68.89	-63.65	0.77	7.05	H
	2037	-56.72	-13	-43.72	-70.15	-65.63	0.90	9.82	H
	2720	-55.59	-13	-42.59	-71.46	-65.43	1.10	10.94	H
									H
									H
									H
	1358	-57.00	-13	-44.00	-68.45	-63.29	0.77	7.05	V
	2037	-56.76	-13	-43.76	-70.35	-65.67	0.90	9.82	V
	2720	-55.57	-13	-42.57	-71.78	-65.41	1.10	10.94	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Ant. 2>

5G NR n2

5G NR n2/ 20MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3687	-51.54	-13	-38.54	-71.25	-62.38	1.24	12.09	H
	5531	-47.60	-13	-34.60	-71.83	-59.13	1.60	13.13	H
	7375	-42.49	-13	-29.49	-72.68	-51.95	1.93	11.39	H
									H
									H
									H
	3687	-51.69	-13	-38.69	-71.64	-62.53	1.24	12.09	V
	5531	-44.79	-13	-31.79	-71.64	-56.32	1.60	13.13	V
	7375	-41.98	-13	-28.98	-72.3	-51.44	1.93	11.39	V
									V
									V
									V
Middle	3744	-51.23	-13	-38.23	-70.9	-62.19	1.18	12.14	H
	5610	-43.89	-13	-30.89	-68.04	-55.59	1.51	13.21	H
	7485	-42.40	-13	-29.40	-72.45	-51.71	1.92	11.23	H
									H
									H
									H
	3744	-49.84	-13	-36.84	-69.79	-60.80	1.18	12.14	V
	5610	-41.65	-13	-28.65	-68.65	-53.35	1.51	13.21	V
	7485	-42.33	-13	-29.33	-72.5	-51.64	1.92	11.23	V
									V
									V
									V



Highest	3797	-51.29	-13	-38.29	-70.91	-62.36	1.12	12.20	H
	5696	-47.67	-13	-34.67	-71.91	-59.55	1.42	13.30	H
	7595	-42.64	-13	-29.64	-72.6	-52.33	1.89	11.58	H
									H
									H
									H
	3797	-51.28	-13	-38.28	-71.22	-62.35	1.12	12.20	V
	5696	-44.95	-13	-31.95	-71.74	-56.83	1.42	13.30	V
	7595	-42.23	-13	-29.23	-72.36	-51.92	1.89	11.58	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



5G NR n66

5G NR n66/ 40MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3424	-50.46	-13	-37.46	-69.55	-61.87	1.14	12.55	H
	5136	-34.39	-13	-21.39	-57.28	-45.76	1.30	12.67	H
	6850	-43.75	-13	-30.75	-72.08	-54.30	1.85	12.40	H
									H
									H
									H
	3424	-50.97	-13	-37.97	-70.18	-62.38	1.14	12.55	V
	5136	-36.12	-13	-23.12	-59.84	-47.49	1.30	12.67	V
	6850	-43.18	-13	-30.18	-72.24	-53.73	1.85	12.40	V
									V
									V
									V
Middle	3454	-50.88	-13	-37.88	-70.42	-62.18	1.19	12.49	H
	5181	-38.60	-13	-25.60	-61.58	-50.00	1.29	12.69	H
	6909	-43.75	-13	-30.75	-72.17	-54.07	1.84	12.16	H
									H
									H
									H
	3454	-49.58	-13	-36.58	-69	-60.88	1.19	12.49	V
	5181	-35.75	-13	-22.75	-59.69	-47.15	1.29	12.69	V
	6909	-43.60	-13	-30.60	-72.49	-53.92	1.84	12.16	V
									V
									V
									V



Highest	3484	-50.86	-13	-37.86	-70.84	-62.05	1.24	12.43	H
	5226	-36.33	-13	-23.33	-59.57	-47.77	1.33	12.78	H
	6969	-43.35	-13	-30.35	-71.86	-53.43	1.84	11.92	H
									H
									H
									H
	3484	-51.35	-13	-38.35	-70.96	-62.54	1.24	12.43	V
	5226	-39.42	-13	-26.42	-63.75	-50.86	1.33	12.78	V
	6969	-42.56	-13	-29.56	-71.29	-52.64	1.84	11.92	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Ant. 4>

5G NR n5

5G NR n5/ 20MHz / PI/2 BPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1651	-59.42	-13	-46.42	-71.13	-65.84	0.81	9.38	H
	2476	-56.15	-13	-43.15	-70.89	-63.30	1.08	10.38	H
	3301	-53.95	-13	-40.95	-71.8	-62.75	1.10	12.06	H
									H
									H
									H
	1651	-59.63	-13	-46.63	-71.27	-66.05	0.81	9.38	V
	2476	-56.23	-13	-43.23	-71.02	-63.38	1.08	10.38	V
	3301	-53.35	-13	-40.35	-71.5	-62.15	1.10	12.06	V
									V
									V
									V
Middle	1656	-59.17	-13	-46.17	-70.89	-65.61	0.81	9.40	H
	2483	-56.37	-13	-43.37	-71.12	-63.54	1.09	10.42	H
	3312	-53.43	-13	-40.43	-71.29	-62.29	1.10	12.12	H
									H
									H
									H
	1656	-59.07	-13	-46.07	-70.72	-65.51	0.81	9.40	V
	2483	-55.83	-13	-42.83	-70.63	-63.00	1.09	10.42	V
	3312	-53.04	-13	-40.04	-71.2	-61.90	1.10	12.12	V
									V
									V
									V



Highest	1661	-59.24	-13	-46.24	-70.96	-65.69	0.81	9.41	H
	2491	-56.13	-13	-43.13	-70.87	-63.33	1.10	10.46	H
	3321	-53.22	-13	-40.22	-71.1	-62.13	1.10	12.17	H
									H
									H
									H
	1661	-59.00	-13	-46.00	-70.66	-65.45	0.81	9.41	V
	2491	-55.83	-13	-42.83	-70.62	-63.03	1.10	10.46	V
	3321	-52.95	-13	-39.95	-71.13	-61.86	1.10	12.17	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Ant. 6>

5G NR n38

5G NR n38/ 40MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5144	-49.23	-25	-24.23	-72.13	-60.60	1.30	12.67	H
	7716	-42.06	-25	-17.06	-72.17	-51.83	1.88	11.66	H
	10289	-36.82	-25	-11.82	-72.21	-45.48	2.27	10.93	H
									H
									H
									H
	5144	-47.84	-25	-22.84	-71.58	-59.21	1.30	12.67	V
	7716	-41.59	-25	-16.59	-71.94	-51.36	1.88	11.66	V
	10289	-36.97	-25	-11.97	-71.46	-45.63	2.27	10.93	V
									V
									V
									V
Middle	5154	-48.67	-25	-23.67	-71.59	-60.05	1.30	12.68	H
	7731	-41.33	-25	-16.33	-71.46	-51.11	1.88	11.67	H
	10309	-36.57	-25	-11.57	-71.99	-45.22	2.27	10.91	H
									H
									H
									H
	5154	-47.80	-25	-22.80	-71.6	-59.18	1.30	12.68	V
	7731	-41.76	-25	-16.76	-72.14	-51.54	1.88	11.67	V
	10309	-37.70	-25	-12.70	-72.25	-46.35	2.27	10.91	V
									V
									V
									V



Highest	5166	-49.04	-25	-24.04	-71.98	-60.43	1.29	12.68	H
	7746	-41.87	-25	-16.87	-72.02	-51.66	1.88	11.67	H
	10332	-36.65	-25	-11.65	-72.09	-45.29	2.26	10.90	H
									H
									H
									H
	5166	-48.12	-25	-23.12	-71.96	-59.51	1.29	12.68	V
	7746	-41.44	-25	-16.44	-71.85	-51.23	1.88	11.67	V
	10332	-37.42	-25	-12.42	-72.04	-46.06	2.26	10.90	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



5G NR n41

5G NR n41/ 100MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4995	-48.78	-25	-23.78	-71.37	-60.03	1.35	12.60	H
	7492	-42.52	-25	-17.52	-72.55	-51.81	1.92	11.22	H
	9989	-36.59	-25	-11.59	-71.61	-45.39	2.29	11.09	H
									H
									H
									H
	4995	-48.60	-25	-23.60	-71.66	-59.85	1.35	12.60	V
	7492	-42.21	-25	-17.21	-72.36	-51.50	1.92	11.22	V
	9989	-38.26	-25	-13.26	-71.94	-47.06	2.29	11.09	V
									V
									V
									V
Middle	5088	-48.98	-25	-23.98	-71.76	-60.30	1.32	12.64	H
	7632	-42.31	-25	-17.31	-72.31	-52.04	1.89	11.62	H
	10177	-36.40	-25	-11.40	-71.66	-45.12	2.28	10.99	H
									H
									H
									H
	5088	-47.88	-25	-22.88	-71.37	-59.20	1.32	12.64	V
	7632	-41.92	-25	-16.92	-72.11	-51.65	1.89	11.62	V
	10177	-37.59	-25	-12.59	-71.77	-46.31	2.28	10.99	V
									V
									V
									V



Highest	5183	-48.32	-25	-23.32	-71.31	-59.73	1.29	12.69	H
	7774	-41.74	-25	-16.74	-71.94	-51.55	1.88	11.69	H
	10365	-36.13	-25	-11.13	-71.62	-44.75	2.26	10.88	H
									H
									H
									H
	5183	-48.05	-25	-23.05	-71.99	-59.46	1.29	12.69	V
	7774	-41.53	-25	-16.53	-72.01	-51.34	1.88	11.69	V
	10365	-37.36	-25	-12.36	-72.08	-45.98	2.26	10.88	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Ant. 12>

5G NR n7

5G NR n7/ 20MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5004	-49.24	-25	-24.24	-71.84	-60.49	1.35	12.60	H
	7500	-42.67	-25	-17.67	-72.68	-51.95	1.92	11.20	H
	10008	-36.47	-25	-11.47	-71.52	-45.28	2.29	11.10	H
									H
									H
									H
	5004	-48.47	-25	-23.47	-71.55	-59.72	1.35	12.60	V
	7500	-42.32	-25	-17.32	-72.46	-51.60	1.92	11.20	V
	10008	-38.50	-25	-13.50	-72.19	-47.31	2.29	11.10	V
									V
									V
									V
Middle	5052	-49.13	-25	-24.13	-71.83	-60.42	1.33	12.63	H
	7578	-42.76	-25	-17.76	-72.73	-52.38	1.90	11.51	H
	10107	-37.14	-25	-12.14	-72.31	-45.89	2.28	11.04	H
									H
									H
									H
	5052	-48.21	-25	-23.21	-71.52	-59.50	1.33	12.63	V
	7578	-42.63	-25	-17.63	-72.76	-52.25	1.90	11.51	V
	10107	-37.53	-25	-12.53	-71.5	-46.28	2.28	11.04	V
									V
									V
									V



Highest	5102	-49.00	-25	-24.00	-71.81	-60.34	1.31	12.65	H
	7653	-42.39	-25	-17.39	-72.42	-52.13	1.89	11.63	H
	10206	-36.65	-25	-11.65	-71.94	-45.35	2.27	10.98	H
									H
									H
									H
	5102	-47.22	-25	-22.22	-70.76	-58.56	1.31	12.65	V
	7653	-41.95	-25	-16.95	-72.19	-51.69	1.89	11.63	V
	10206	-37.86	-25	-12.86	-72.12	-46.56	2.27	10.98	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Ant. 12 + Ant. 2>

EN-DC 7A-n2A

EN-DC 7A-n2A / 20MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3687	-51.44	-13	-38.44	-71.15	-62.28	1.24	12.09	H
	5531	-47.40	-13	-34.40	-71.63	-58.93	1.60	13.13	H
	7375	-42.24	-13	-29.24	-72.43	-51.70	1.93	11.39	H
									H
									H
									H
	3687	-51.88	-13	-38.88	-71.83	-62.72	1.24	12.09	V
	5531	-44.88	-13	-31.88	-71.73	-56.41	1.60	13.13	V
	7375	-42.31	-13	-29.31	-72.63	-51.77	1.93	11.39	V
									V
									V
									V
Middle	3744	-51.60	-13	-38.60	-71.27	-62.56	1.18	12.14	H
	5610	-43.50	-13	-30.50	-67.65	-55.20	1.51	13.21	H
	7485	-42.02	-13	-29.02	-72.07	-51.33	1.92	11.23	H
									H
									H
									H
	3744	-50.78	-13	-37.78	-70.73	-61.74	1.18	12.14	V
	5610	-40.27	-13	-27.27	-67.27	-51.97	1.51	13.21	V
	7485	-42.06	-13	-29.06	-72.23	-51.37	1.92	11.23	V
									V
									V
									V



Highest	3797	-51.48	-13	-38.48	-71.1	-62.55	1.12	12.20	H
	5696	-47.47	-13	-34.47	-71.71	-59.35	1.42	13.30	H
	7595	-42.55	-13	-29.55	-72.51	-52.24	1.89	11.58	H
									H
									H
									H
	3797	-51.18	-13	-38.18	-71.12	-62.25	1.12	12.20	V
	5696	-45.18	-13	-32.18	-71.97	-57.06	1.42	13.30	V
	7595	-42.09	-13	-29.09	-72.22	-51.78	1.89	11.58	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Ant. 4 + Ant. 2>

EN-DC 5A-n66A

EN-DC 5A-n66A / 10+40MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3425	-52.00	-13	-39.00	-71.09	-63.41	1.14	12.55	H
	5137	-48.69	-13	-35.69	-71.58	-60.06	1.30	12.67	H
	6849	-44.18	-13	-31.18	-72.51	-54.74	1.85	12.40	H
									H
									H
									H
	3425	-52.41	-13	-39.41	-71.62	-63.82	1.14	12.55	V
	5137	-48.12	-13	-35.12	-71.84	-59.49	1.30	12.67	V
	6849	-43.40	-13	-30.40	-72.46	-53.96	1.85	12.40	V
									V
									V
									V
Middle	3455	-51.97	-13	-38.97	-71.51	-63.27	1.19	12.49	H
	5182	-47.94	-13	-34.94	-70.92	-59.34	1.29	12.69	H
	6909	-44.30	-13	-31.30	-72.72	-54.62	1.84	12.16	H
									H
									H
									H
	3455	-52.04	-13	-39.04	-71.46	-63.34	1.19	12.49	V
	5182	-47.60	-13	-34.60	-71.54	-59.00	1.29	12.69	V
	6909	-43.36	-13	-30.36	-72.25	-53.68	1.84	12.16	V
									V
									V
									V



Highest	3484	-51.70	-13	-38.70	-71.68	-62.89	1.24	12.43	H
	5226	-49.02	-13	-36.02	-72.26	-60.46	1.33	12.78	H
	6969	-43.52	-13	-30.52	-72.03	-53.60	1.84	11.92	H
									H
									H
									H
	3484	-51.76	-13	-38.76	-71.37	-62.95	1.24	12.43	V
	5226	-47.96	-13	-34.96	-72.29	-59.40	1.33	12.78	V
	6969	-43.34	-13	-30.34	-72.07	-53.42	1.84	11.92	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Ant. 2 + Ant. 4>

EN-DC 2A-n5A

EN-DC 2A-n5A / 20MHz / PI/2 BPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1650	-39.04	-13	-26.04	-70.76	-45.46	0.81	9.38	H
	2475	-35.95	-13	-22.95	-70.75	-43.09	1.08	10.38	H
	3301	-33.36	-13	-20.36	-71.24	-42.16	1.10	12.06	H
									H
									H
									H
	1650	-39.09	-13	-26.09	-70.74	-45.51	0.81	9.38	V
	2475	-35.06	-13	-22.06	-69.91	-42.20	1.08	10.38	V
	3301	-33.33	-13	-20.33	-71.51	-42.13	1.10	12.06	V
									V
									V
									V
Middle	1656	-39.13	-13	-26.13	-70.86	-45.57	0.81	9.40	H
	2483	-36.06	-13	-23.06	-70.87	-43.23	1.09	10.42	H
	3311	-33.43	-13	-20.43	-71.32	-42.29	1.10	12.11	H
									H
									H
									H
	1655	-38.40	-13	-25.40	-70.06	-44.83	0.81	9.39	V
	2483	-35.96	-13	-22.96	-70.82	-43.13	1.09	10.42	V
	3311	-33.20	-13	-20.20	-71.39	-42.06	1.10	12.11	V
									V
									V
									V



Highest	1661	-39.20	-13	-26.20	-70.93	-45.65	0.81	9.41	H
	2491	-35.98	-13	-22.98	-70.78	-43.18	1.10	10.46	H
	3321	-32.56	-13	-19.56	-70.47	-41.47	1.10	12.17	H
									H
									H
									H
	1661	-39.51	-13	-26.51	-71.18	-45.96	0.81	9.41	V
	2491	-36.14	-13	-23.14	-70.99	-43.34	1.10	10.46	V
	3321	-32.85	-13	-19.85	-71.06	-41.76	1.10	12.17	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Ant. 4 + Ant. 6>

EN-DC 5A-n7A

EN-DC 5A-n7A / 20MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5002	-49.05	-25	-24.05	-71.64	-60.30	1.35	12.60	H
	7503	-41.61	-25	-16.61	-71.62	-50.90	1.92	11.21	H
	10004	-36.55	-25	-11.55	-71.59	-45.36	2.29	11.10	H
									H
									H
									H
	5002	-48.37	-25	-23.37	-71.44	-59.62	1.35	12.60	V
	7503	-41.89	-25	-16.89	-72.03	-51.18	1.92	11.21	V
	10004	-37.42	-25	-12.42	-71.1	-46.23	2.29	11.10	V
									V
									V
									V
Middle	5052	-48.56	-25	-23.56	-71.26	-59.85	1.33	12.63	H
	7578	-42.00	-25	-17.00	-71.97	-51.62	1.90	11.51	H
	10107	-36.84	-25	-11.84	-72	-45.59	2.28	11.04	H
									H
									H
									H
	5052	-48.04	-25	-23.04	-71.35	-59.33	1.33	12.63	V
	7578	-42.25	-25	-17.25	-72.38	-51.87	1.90	11.51	V
	10107	-37.62	-25	-12.62	-71.58	-46.37	2.28	11.04	V
									V
									V
									V



Highest	5102	-48.70	-25	-23.70	-71.51	-60.04	1.31	12.65	H
	7653	-42.04	-25	-17.04	-72.07	-51.78	1.89	11.63	H
	10204	-36.54	-25	-11.54	-71.83	-45.24	2.27	10.98	H
									H
									H
									H
	5102	-46.88	-25	-21.88	-70.43	-58.22	1.31	12.65	V
	7653	-41.87	-25	-16.87	-72.11	-51.61	1.89	11.63	V
	10204	-37.61	-25	-12.61	-71.86	-46.31	2.27	10.98	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.