



# MEASUREMENT REPORT

## FCC PART 2 & 22 & 24 & 27

---

**FCC ID:** XMR2020RM502QAE  
**Application:** Quectel Wireless Solutions Company Limited  
**Application Type:** Certification  
**Product:** 5G Sub-6 GHz M.2 Module  
**Model No.:** RM502Q-AE  
**Brand Name:** Quectel  
**FCC Rule Part(s):** Part 2, 22 (H), 24 (E), 27  
**Test Procedure(s):** ANSI C63.26: 2015  
**Test Date:** October 08 ~ November 11, 2020

Reviewed By:   
( Sunny Sun )  
Approved By:   
( Robin Wu )



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.26-2015. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

---

## Revision History

Report No.	Version	Description	Issue Date	Note
2010RSU005-U7	Rev. 01	Initial Report	11-16-2020	Valid

---

## CONTENTS

Description	Page
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1. Applicant .....	5
1.2. Manufacturer .....	5
1.3. Testing Facility.....	5
<b>2. PRODUCT INFORMATION .....</b>	<b>6</b>
2.1. Equipment Description .....	6
2.2. Product Specification Subjective to this Report .....	7
2.3. Description of Available Antennas.....	7
2.4. Test Methodology .....	7
2.5. EMI Suppression Device(s)/Modifications.....	7
2.6. Maximum Power, Frequency Tolerance, and Emission Designator .....	8
2.7. Configuration of Tested System .....	8
2.8. Test Environment Condition.....	8
<b>3. TEST EQUIPMENT CALIBRATION DATE.....</b>	<b>9</b>
<b>4. MEASUREMENT UNCERTAINTY .....</b>	<b>11</b>
<b>5. TEST RESULT .....</b>	<b>12</b>
5.1. Summary.....	12
5.2. Occupied Bandwidth .....	13
5.2.1. Test Limit .....	13
5.2.2. Test Procedure .....	13
5.2.3. Test Setting.....	13
5.2.4. Test Setup .....	13
5.2.5. Test Result.....	14
5.3. Frequency Stability Measurement .....	17
5.3.1. Test Limit .....	17
5.3.2. Test Procedures Used .....	17
5.3.3. Test Setting.....	17
5.3.4. Test Setup .....	18
5.3.5. Test Result.....	19
5.4. Equivalent Isotropically Radiated Power Measurement .....	22
5.4.1. Test Limit .....	22
5.4.2. Test Procedures Used .....	22
5.4.3. Test Setting.....	22
5.4.4. Test Setup .....	23

---

5.4.5.	Test Result.....	24
5.5.	Band Edge Measurement.....	27
5.5.1.	Test Limit .....	27
5.5.2.	Test Procedure Used .....	27
5.5.3.	Test Setting.....	27
5.5.4.	Test Setup .....	28
5.5.5.	Test Result.....	29
5.6.	Peak to Average Ratio.....	30
5.6.1.	Test Limit .....	30
5.6.2.	Test Procedure Used .....	30
5.6.3.	Test Setting.....	30
5.6.4.	Test Setup .....	30
5.6.5.	Test Result.....	31
5.7.	Conducted Spurious Emissions.....	34
5.7.1.	Test Limit .....	34
5.7.2.	Test Procedure Used .....	34
5.7.3.	Test Setting.....	34
5.7.4.	Test Setup .....	35
5.7.5.	Test Result.....	36
5.8.	Radiated Spurious Emissions Measurements .....	40
5.8.1.	Test Limit .....	40
5.8.2.	Test Procedure Used .....	40
5.8.3.	Test Setting.....	40
5.8.4.	Test Setup .....	40
5.8.5.	Test Result.....	42
<b>6.</b>	<b>CONCLUSION .....</b>	<b>45</b>
	<b>Appendix A - Test Setup Photograph.....</b>	<b>46</b>
	<b>Appendix B - EUT Photograph.....</b>	<b>47</b>

## 1. GENERAL INFORMATION

### 1.1. Applicant

Quectel Wireless Solutions Company Limited  
 Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District,  
 Shanghai, China 200233

### 1.2. Manufacturer

Quectel Wireless Solutions Company Limited  
 Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District,  
 Shanghai, China 200233

### 1.3. Testing Facility

<input checked="" type="checkbox"/>	<b>Test Site - MRT Suzhou Laboratory</b>
	<b>Laboratory Location (Suzhou - Wuzhong)</b> D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
	<b>Laboratory Location (Suzhou - SIP)</b> 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China
	<b>Laboratory Accreditations</b>
	A2LA: 3628.01 <span style="float: right;">CNAS: L10551</span>
	FCC: CN1166 <span style="float: right;">ISED: CN0001</span>
	VCCI: R-20025, G-20034, C-20020, T-20020
<input type="checkbox"/>	<b>Test Site - MRT Shenzhen Laboratory</b>
	<b>Laboratory Location (Shenzhen)</b> 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China
	<b>Laboratory Accreditations</b>
	A2LA: 3628.02 <span style="float: right;">CNAS: L10551</span>
	FCC: CN1284 <span style="float: right;">ISED: CN0105</span>
<input type="checkbox"/>	<b>Test Site - MRT Taiwan Laboratory</b>
	<b>Laboratory Location (Taiwan)</b> No. 38, Fuxing 2 <sup>nd</sup> Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
	<b>Laboratory Accreditations</b>
	TAF: L3261-190725
	FCC: 291082, TW3261 <span style="float: right;">ISED: TW3261</span>

## 2. PRODUCT INFORMATION

### 2.1. Equipment Description

Product Name:	5G Sub-6 GHz M.2 Module
Model No.:	RM502Q-AE
Brand Name:	Quectel
IMEI:	Conducted Measurement: 867826050002666 Radiated Measurement: 867826050003060
Operating Temperature:	-20 ~ 60 °C
Power Type:	3.135 ~ 4.4Vdc, typical 3.7Vdc
UMTS Specification	
Single Band:	Band 2, 4, 5
Modulation:	UL up to 16QAM, DL up to 64QAM
Category:	Category 6
E-UTRA Specification	
Single Band:	Band 2, 4, 5, 7, 12, 13, 14, 17, 25, 26, 30, 38, 41, 48, 66, 71
Intra-Band:	CA_2C, CA_5B, CA_7C, CA_38C, CA_41C, CA_66C
Modulation:	UL & DL up to 256QAM
Category:	Category 18
5G NR Specification	
SA Band:	n2, n5, n7, n12, n25, n41, n66, n71, n77
SA UL MIMO Band:	n41
EN-DC Band:	DC_5A_n2A, DC_12A_n2, DC_13A_n2A, DC_2A_n5A DC_30A_n5A, DC_66A_n5A, DC_5A_n7A, DC_12A_n7A DC_2A_n12A, DC_12A_n25A, DC_2A_n41A, DC_25A_n41A DC_26A_n41A, DC_66A_n41A, DC_5A_n66A, DC_12A_n66A DC_13A_n66A, DC_14A_n66A, DC_71A_n66A, DC_2A_n71A DC_7A_n71A, DC_66A_n71A
HPUE Band:	n41, n77 (SA & UL MIMO)
SCS for NR cell:	FDD Band: 15kHz; TDD Band: 30kHz
Modulation:	UL & DL up to 256QAM

## 2.2. Product Specification Subjective to this Report

T <sub>x</sub> Frequency Range:	Band II: 1850 ~ 1910MHz, Band IV: 1710 ~ 1755MHz Band V: 824 ~ 849MHz
R <sub>x</sub> Frequency Range:	Band II: 1930 ~ 1990MHz, Band IV: 2110 ~ 2155MHz Band V: 869 ~ 894MHz

Note 1: For other features of this EUT, test report will be issued separately.

Note 2: The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

## 2.3. Description of Available Antennas

Technology	Frequency Range (MHz)	Antenna Type	Max Peak Gain (dBi)
WCDMA Band II	1850 ~ 1910	Dipole	0.25
WCDMA Band IV	1710 ~ 1755		1.47
WCDMA Band V	824 ~ 849		2.68

Note: All antenna information (Antenna type and Peak Gain) is provided by the manufacturer.

## 2.4. Test Methodology

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.26:2015
- FCC CFR 47 Part 22, Part 24, Part 27
- FCC KDB 971168 D01 v03r01: Power Meas License Digital Systems
- FCC KDB 971168 D02 v02r01: Misc Rev Approv License Devices
- FCC KDB 412172 D01 v01r01: Determining ERP and EIRP


## 2.5. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

## 2.6. Maximum Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Modulation	Maximum Power (W)	Frequency Tolerance (ppm)	Emission Designator
Part 24	WCDMA Band II RMC 12.2Kbps	BPSK	0.1950	0.0068	4M15F9W
Part 27	WCDMA Band IV RMC 12.2Kbps	BPSK	0.1936	0.0074	4M15F9W
Part 22	WCDMA Band V RMC 12.2Kbps	BPSK	0.1820	0.0018	4M15F9W

## 2.7. Configuration of Tested System

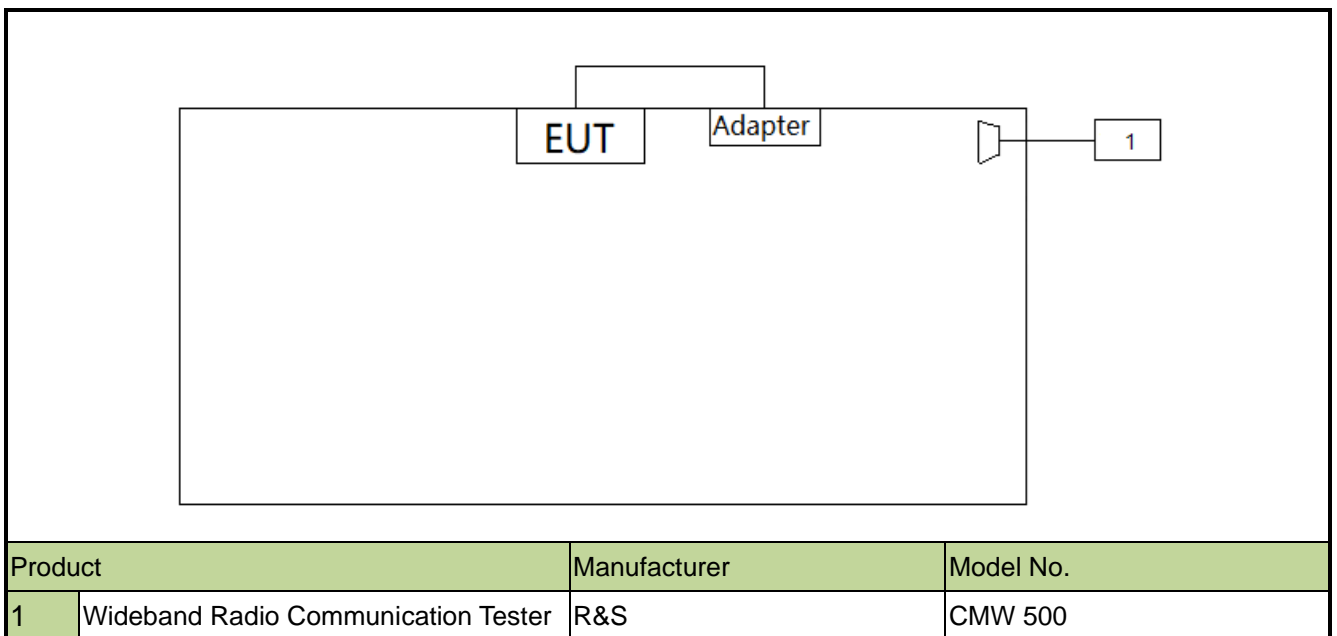

## 2.8. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20% ~ 75%RH



### 3. TEST EQUIPMENT CALIBRATION DATE

#### Radiated Emission (WZ-AC1)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2021/08/01
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2021/11/07
UXM 5G Wireless Test Platform	Keysight	E7515B	MRTSUE06869	1 year	2021/05/25
PXA Signal Analyzer	Keysight	9030B	MRTSUE06395	1 year	2021/09/03
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/10
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2021/03/31
Broad Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2021/10/13
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2021/02/23
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2021/11/15
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2021/06/11
Thermohygrometer	Testo	608-H1	MRTSUE06403	1 year	2021/08/08
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2021/04/30

#### Radiated Emission (WZ-AC2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Keysight	N9038A	MRTSUE06125	1 year	2021/08/01
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2021/11/07
UXM 5G Wireless Test Platform	Keysight	E7515B	MRTSUE06869	1 year	2021/05/25
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/10
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2021/10/13
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06171	1 year	2021/10/27
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2021/02/23
Broad Band Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2021/11/15
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2021/06/11
Temperature/Humidity Meter	Minggao	ETH529	MRTSUE06170	1 year	2020/12/15
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2021/04/30

## Conducted Test Equipment (WZ)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2021/04/15
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06452	1 year	2021/07/11
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2021/04/15
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2021/11/07
UXM 5G Wireless Test Platform	Keysight	E7515B	MRTSUE06869	1 year	2021/05/25
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2020/11/18
DC Power Supply	GWINSTEK	DPS-3303C	MRTSUE06064	N/A	N/A
True RMS Clamp Meter	Fluke	319	MRTSUE06080	1 year	2021/05/06
Directional Coupler	Agilent	87301D	MRTSUE06082	1 year	2021/03/25
Dual Directional Coupler	Agilent	7778D	MRTSUE06083	1 year	2021/03/25
Attenuator	MVE	6dB	MRTSUE06534	1 year	2020/12/12
Attenuator	MVE	10dB	MRTSUE06543	1 year	2020/12/12
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2021/11/07
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2021/08/08

Software	Version	Function
EMI Software	V3	EMI Test Software

#### 4. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

<b>Radiated Spurious Emissions</b>
Measurement Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): Horizontal: 9kHz ~ 300MHz: 5.04dB 300MHz ~ 1GHz: 4.95dB 1GHz ~ 40GHz: 6.40dB Vertical: 9kHz ~ 300MHz: 5.24dB 300MHz ~ 1GHz: 6.03dB 1GHz ~ 40GHz: 6.40dB
<b>Conducted Spurious Emissions</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.78dB
<b>Output Power</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 1.13dB
<b>Occupied Bandwidth</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.28%
<b>Frequency Stability</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 76.2Hz

## 5. TEST RESULT

### 5.1. Summary

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	Conducted	Pass	Section 5.2
2.1055, 22.355 24.235, 27.54	Frequency Stability	< 2.5 ppm		Pass	Section 5.3
22.913(a)(5)	Equivalent Radiated Power	< 7 Watts Max ERP		Pass	Section 5.4
27.50(d)(4)	Equivalent Isotropic Radiated Power	< 1 Watts Max EIRP			
24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts Max EIRP			
2.1051, 22.917(a) 24.238(a), 27.53(h)	Band Edge	< 43 + 10log <sub>10</sub> (P <sub>[Watts]</sub> )			
2.1051, 22.917(a) 24.238(a), 27.53(h)	Spurious Emission	< 43 + 10log <sub>10</sub> (P <sub>[Watts]</sub> )			
24.232(d) 27.50(d)(5)	Peak to Average Ratio	< 13dB	Pass	Section 5.6	
2.1053, 22.917(a) 24.238(a), 27.53(h)	Spurious Emissions	< 43 + 10log <sub>10</sub> (P <sub>[Watts]</sub> )	Radiated	Pass	Section 5.8

#### Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All supported modulation types were evaluated. The worst-case emission of modulation was selected. Therefore, the Frequency Stability, Channel Band Edge, Radiated & Conducted Spurious Emission were presented worst-case in the test report.

## 5.2. Occupied Bandwidth

### 5.2.1. Test Limit

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.


### 5.2.2. Test Procedure

ANSI C63.26-2015 - Section 5.4

### 5.2.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency
2. RBW = The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument and report the measured bandwidth.


### 5.2.4. Test Setup

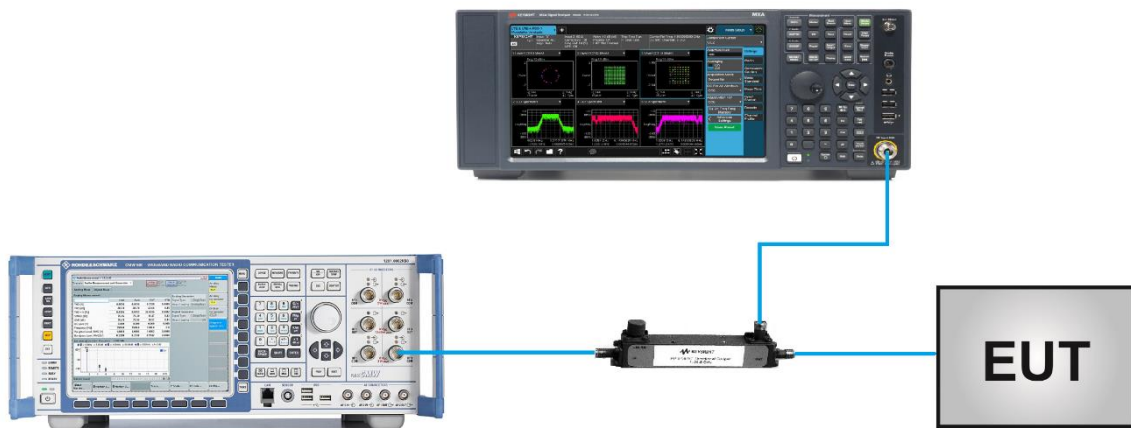

### 5.2.5. Test Result

Product	5G Sub-6 GHz M.2 Module	Test Site	WZ-SR6
Test Engineer	Candy Luo	Test Date	2020/10/11
Test Band	WCDMA Band II		

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	1852.4	4.15
Middle	1880.0	4.15
High	1907.6	4.15

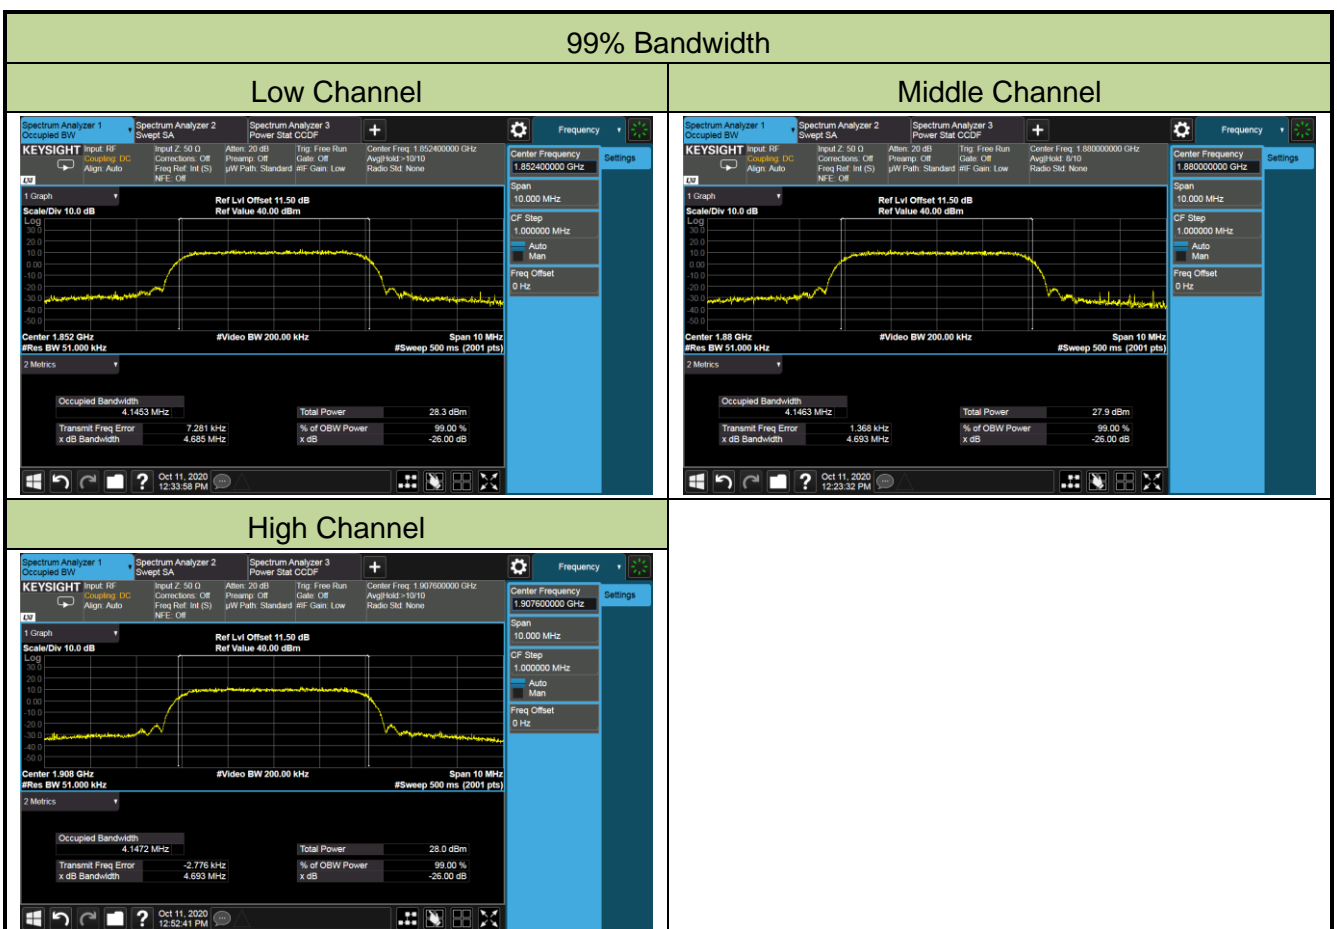


Product	5G Sub-6 GHz M.2 Module	Test Site	WZ-SR6
Test Engineer	Candy Luo	Test Date	2020/10/11
Test Band	WCDMA Band V		

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	1712.4	4.15
Middle	1732.4	4.14
High	1752.6	4.15



Product	5G Sub-6 GHz M.2 Module	Test Site	WZ-SR6
Test Engineer	Candy Luo	Test Date	2020/10/11
Test Band	WCDMA Band V		

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	826.4	4.14
Middle	836.4	4.15
High	846.6	4.13

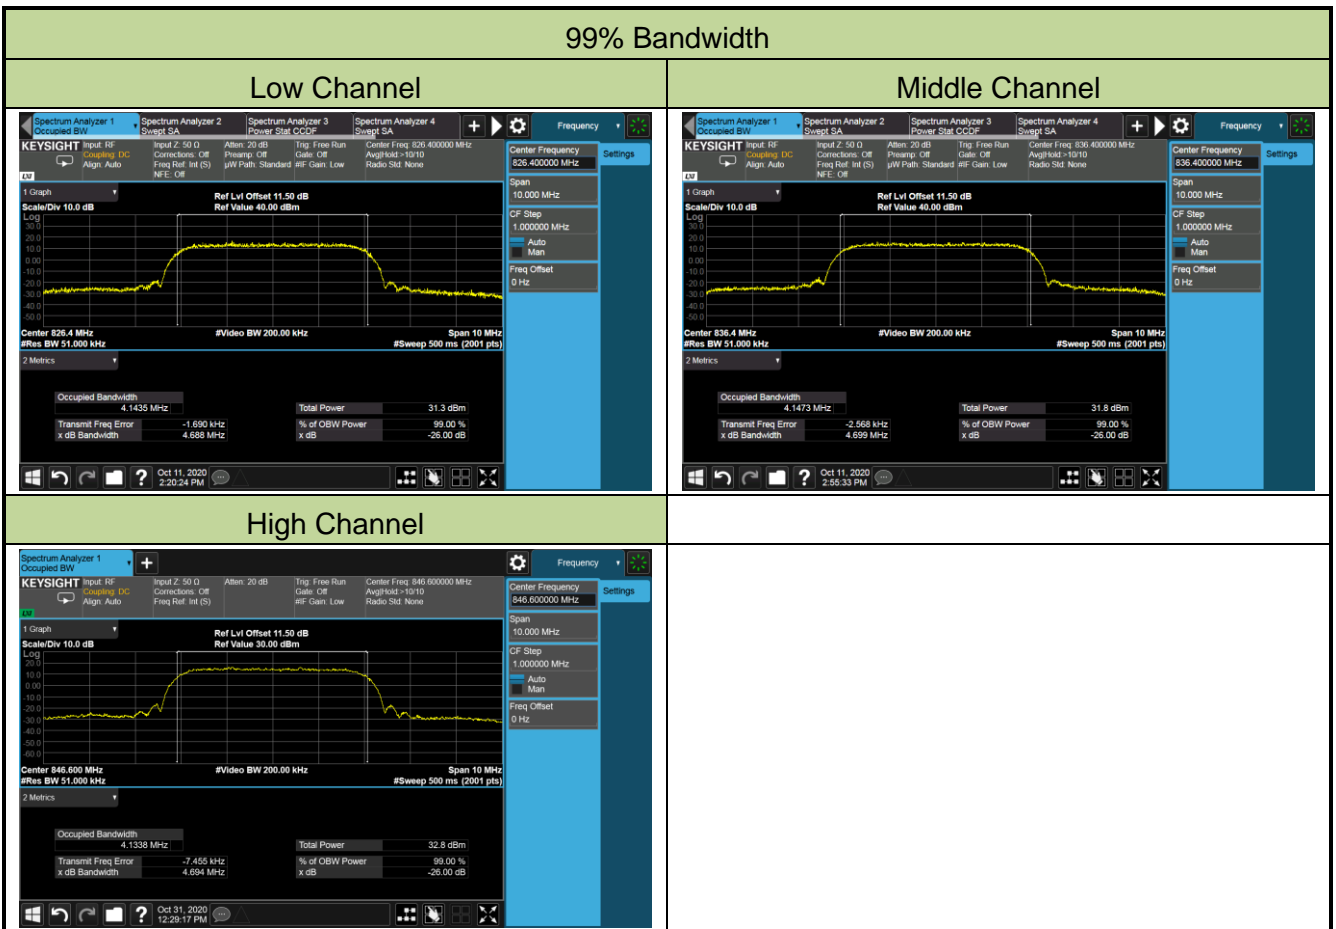



### **5.3. Frequency Stability Measurement**

#### **5.3.1. Test Limit**

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

#### **5.3.2. Test Procedures Used**

ANSI C63.26-2015 - Section 5.6

#### **5.3.3. Test Setting**

##### **Frequency Stability Under Temperature Variations:**


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to High. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the Low temperature reached.

##### **Frequency Stability Under Voltage Variations:**

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ( $\pm 15\%$ ) and endpoint, record the maximum frequency change.

### 5.3.4. Test Setup

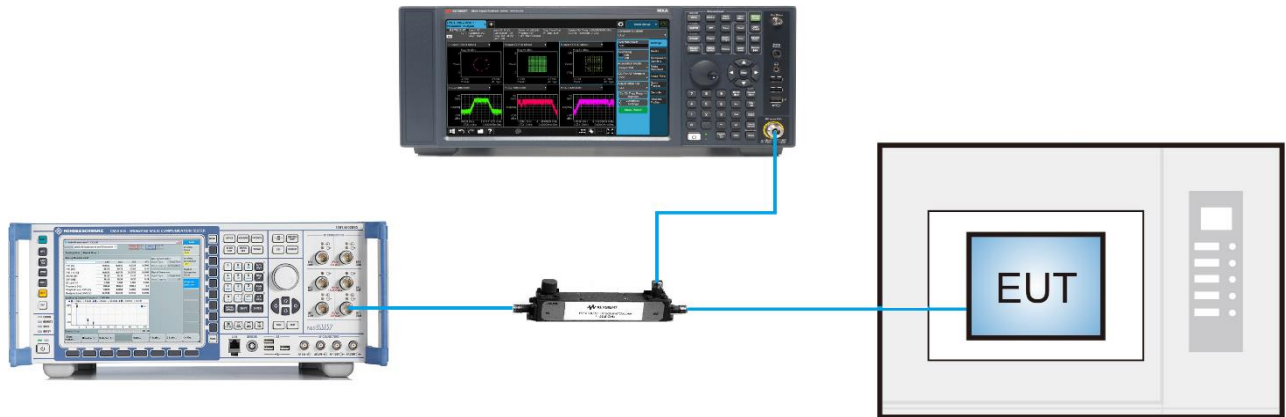

### 5.3.5. Test Result

Product	5G Sub-6 GHz M.2 Module	Test Site	WZ-TR3
Test Engineer	Candy Luo	Test Date	2020/10/14
Test Band	WCDMA Band II		

Power (Vdc)	Temp. (°C)	Frequency Tolerance (ppm)
3.7	- 30	0.0067
	- 20	0.0068
	- 10	0.0067
	0	0.0066
	+ 10	0.0063
	+ 20 (Ref)	0.0051
	+ 30	0.0056
	+ 40	0.0055
	+ 50	0.0053
4.4	+ 20	0.0058
3.135	+ 20	0.0053

Product	5G Sub-6 GHz M.2 Module	Test Site	WZ-TR3
Test Engineer	Candy Luo	Test Date	2020/10/14
Test Band	WCDMA Band IV		

Power (Vdc)	Temp. (°C)	Frequency Tolerance (ppm)
3.7	- 30	0.0073
	- 20	0.0065
	- 10	0.0067
	0	0.0074
	+ 10	0.0046
	+ 20 (Ref)	0.0001
	+ 30	0.0045
	+ 40	0.0006
	+ 50	-0.0008
4.4	+ 20	0.0013
3.135	+ 20	0.0006

Product	5G Sub-6 GHz M.2 Module	Test Site	WZ-TR3
Test Engineer	Candy Luo	Test Date	2020/10/14
Test Band	WCDMA Band V		

Power (Vdc)	Temp. (°C)	Frequency Tolerance (ppm)
3.7	- 30	0.0018
	- 20	0.0002
	- 10	-0.0003
	0	0.0007
	+ 10	-0.0005
	+ 20 (Ref)	0.0002
	+ 30	0.0003
	+ 40	0.0006
	+ 50	-0.0002
4.4	+ 20	0.0002
3.135	+ 20	0.0000

## 5.4. Equivalent Isotropically Radiated Power Measurement

### 5.4.1. Test Limit

#### Band 2:

Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

#### Band 4:

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

#### Band 5:

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

### 5.4.2. Test Procedures Used

ANSI C63.26-2015 - Section 5.2

### 5.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation (1) as follows:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}}$$

where


ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as  $P_{\text{Meas}}$ , e.g., dBm or dBW)

$P_{\text{Meas}}$  measured transmitter output power or PSD, in dBm or dBW

$G_{\text{T}}$  gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

$$\text{ERP} = \text{EIRP} - 2.15$$

### 5.4.4. Test Setup

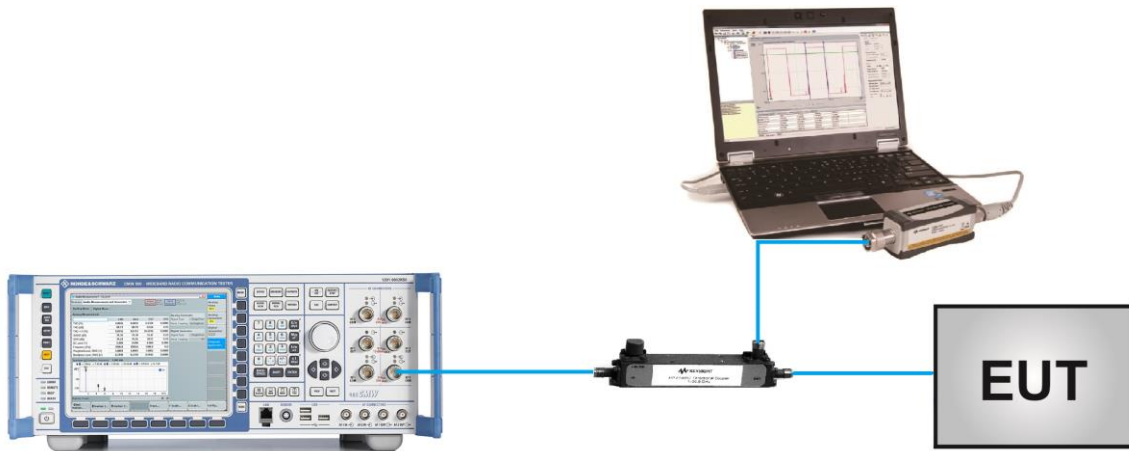

#### 5.4.5. Test Result

Product	5G Sub-6 GHz M.2 Module	Test Site	WZ-SR6
Test Engineer	Candy Luo	Test Date	2020/10/14
Test Band	WCDMA Band II		

Mode	3GPP Subtest	Conducted Power (dBm)			Antenna Gain (dBi)	EIRP (dBm)		
		Band II Channel				Band II Channel		
		9262	9400	9538		9262	9400	9538
WCDMA R99	1	22.90	22.87	22.90	0.25	23.15	23.12	23.15
HSDPA	1	21.94	21.90	21.88	0.25	22.19	22.15	22.13
	2	21.92	21.87	21.89	0.25	22.17	22.12	22.14
	3	21.43	21.20	21.38	0.25	21.68	21.45	21.63
	4	21.45	21.38	21.40	0.25	21.70	21.63	21.65
HSUPA	1	21.84	21.85	21.87	0.25	22.09	22.10	22.12
	2	19.86	19.81	19.83	0.25	20.11	20.06	20.08
	3	22.40	22.37	22.35	0.25	22.65	22.62	22.60
	4	19.87	19.90	19.83	0.25	20.12	20.15	20.08
	5	21.82	21.78	21.85	0.25	22.07	22.03	22.10
Limit	33.01dBm							

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)



Product	5G Sub-6 GHz M.2 Module	Test Site	WZ-SR6
Test Engineer	Candy Luo	Test Date	2020/10/14
Test Band	WCDMA Band IV		

Mode	3GPP Subtest	Conducted Power (dBm)			Antenna Gain (dBi)	EIRP (dBm)		
		Band IV Channel				Band IV Channel		
		1312	1412	1513		1312	1412	1513
WCDMA R99	1	22.72	22.87	22.87	1.47	24.19	24.34	24.34
HSDPA	1	21.74	21.88	21.87	1.47	23.21	23.35	23.34
	2	21.75	21.76	21.88	1.47	23.22	23.23	23.35
	3	21.25	21.40	21.42	1.47	22.72	22.87	22.89
	4	21.26	21.43	21.38	1.47	22.73	22.9	22.85
HSUPA	1	21.78	21.87	21.85	1.47	23.25	23.34	23.32
	2	19.69	19.85	19.82	1.47	21.16	21.32	21.29
	3	22.27	22.18	22.32	1.47	23.74	23.65	23.79
	4	19.74	19.84	19.90	1.47	21.21	21.31	21.37
	5	21.72	21.81	21.85	1.47	23.19	23.28	23.32
Limit	30.00dBm							

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Product	5G Sub-6 GHz M.2 Module	Test Site	WZ-SR6
Test Engineer	Candy Luo	Test Date	2020/10/14
Test Band	WCDMA Band V		

Mode	3GPP Subtest	Conducted Power (dBm)			Antenna Gain (dBi)	ERP (dBm)		
		Band V Channel				Band V Channel		
		4132	4182	4233		4132	4182	4233
WCDMA R99	1	22.60	22.56	22.50	2.68	23.13	23.09	23.03
HSDPA	1	21.66	21.65	21.52	2.68	22.19	22.18	22.05
	2	21.64	21.63	21.58	2.68	22.17	22.16	22.11
	3	21.13	21.13	21.04	2.68	21.66	21.66	21.57
	4	21.14	21.17	21.05	2.68	21.67	21.70	21.58
HSUPA	1	21.59	21.62	21.57	2.68	22.12	22.15	22.10
	2	19.63	19.59	19.56	2.68	20.16	20.12	20.09
	3	20.63	20.65	20.56	2.68	21.16	21.18	21.09
	4	19.62	19.56	19.54	2.68	20.15	20.09	20.07
	5	21.64	21.67	21.56	2.68	22.17	22.20	22.09
Limit	38.45dBm							

Note: The ERP (dBm) = Output Power (dBm) + Antenna Gain (dBi) – 2.15

## **5.5. Band Edge Measurement**

### **5.5.1. Test Limit**

For operations in the 824 ~ 849 MHz, 1850 ~ 1910 MHz, 1930 ~ 1990 MHz, 698 ~ 746 MHz and 1710 ~ 1755 MHz, the FCC limit is  $43 + 10\log_{10}(P_{\text{Watts}})$  dB below the transmitter power P(Watts) in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


### **5.5.2. Test Procedure Used**

ANSI C63.26-2015 - Section 5.7

### **5.5.3. Test Setting**

1. Set the analyzer frequency to low or high channel
2.  $RBW \geq$  The nominal RBW shall be in the range of 1% of the anticipated OBW (in the 1MHz band immediately outside and adjacent to the band edge). For improvement of the accuracy in the measurement of the average power of a noise-like emission, a RBW narrower than the specified reference bandwidth can be used (generally limited to no less than 1% of the OBW), provided that a subsequent integration is performed over the full required measurement bandwidth. This integration should be performed using the spectrum analyzer's band power functions.
3.  $VBW \geq 3*RBW$
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

### 5.5.4. Test Setup

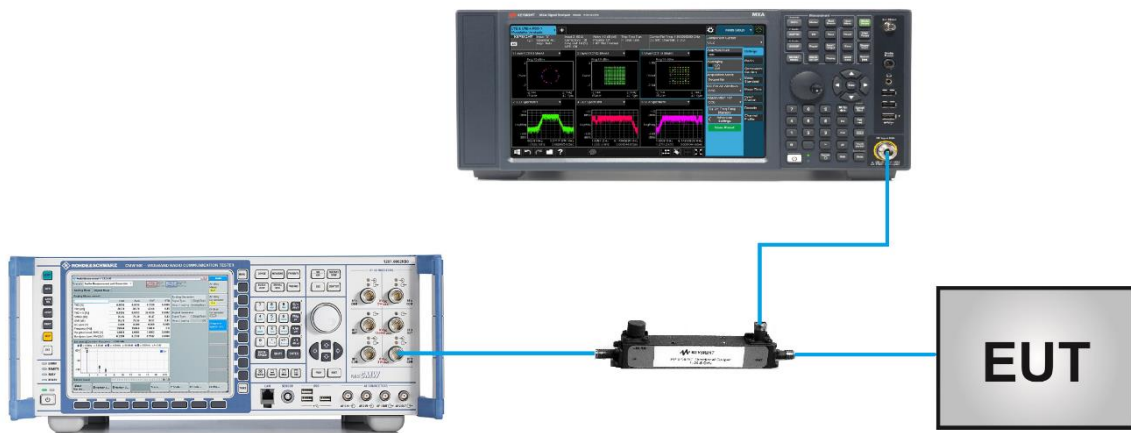

### 5.5.5. Test Result

Product	5G Sub-6 GHz M.2 Module	Test Site	WZ-SR6
Test Engineer	Candy Luo	Test Date	2020/10/11
Test Band	WCDMA Band II, IV, V	Test Result	Pass



## 5.6. Peak to Average Ratio

### 5.6.1. Test Limit

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.


### 5.6.2. Test Procedure Used

ANSI C63.26-2015 - Section 5.2.3.4 (CCDF).

### 5.6.3. Test Setting

1. Set the resolution / measurement bandwidth  $\geq$  signal's occupied bandwidth
2. Set the number of counts to a value that stabilizes the measured CCDF curve
3. Record the maximum PARR level associated with a probability of 0.1%

### 5.6.4. Test Setup

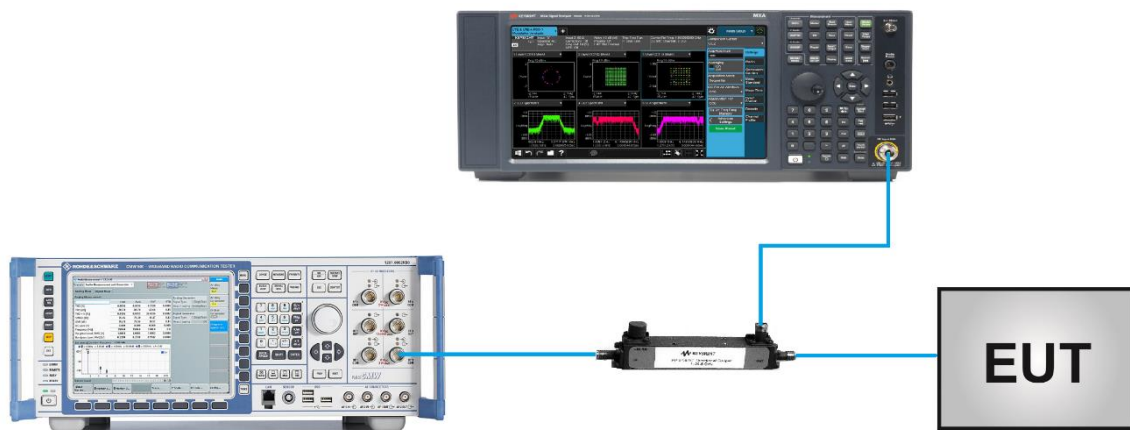


### 5.6.5. Test Result

Product	5G Sub-6 GHz M.2 Module	Test Site	WZ-SR6
Test Engineer	Candy Luo	Test Date	2020/10/11
Test Band	WCDMA Band II, IV, V		


Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
<b>Band II</b>					
9262	1852.5	5	3.87	≤ 13.00	Pass
9400	1880.0	5	3.86	≤ 13.00	Pass
9538	1907.6	5	3.82	≤ 13.00	Pass
<b>Band IV</b>					
1312	1712.4	5	3.91	≤ 13.00	Pass
1412	1732.4	5	3.82	≤ 13.00	Pass
1513	1752.6	5	3.79	≤ 13.00	Pass
<b>Band V (Report Only)</b>					
4132	826.4	5	3.74	≤ 13.00	Pass
4183	836.4	5	3.64	≤ 13.00	Pass
4233	846.6	5	3.75	≤ 13.00	Pass

## WCDMA Band II


## Channel 9262 (1852.4MHz)

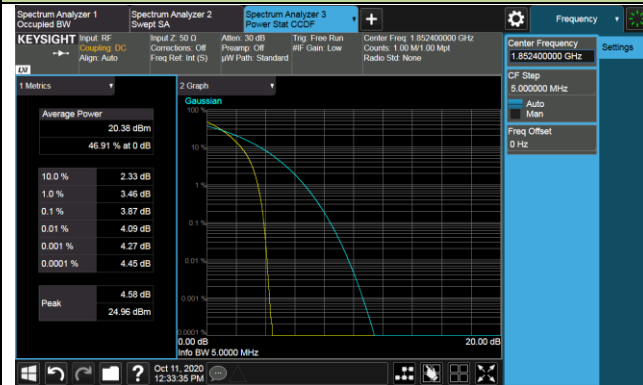

## Channel 9400 (1880.0MHz)

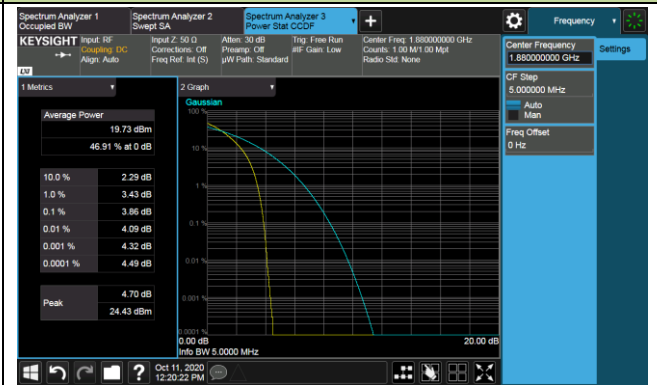


## Channel 9538 (1907.6MHz)

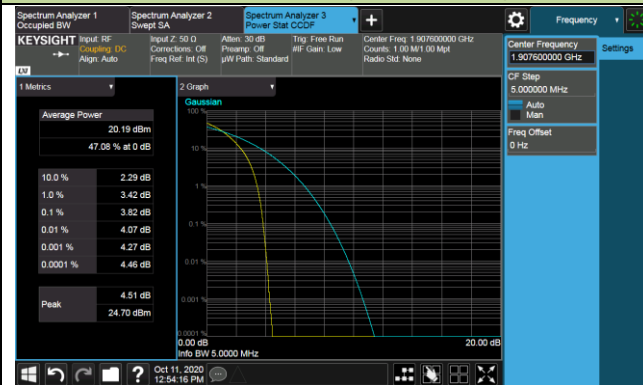

## WCDMA Band IV


## Channel 1312 (1712.4MHz)

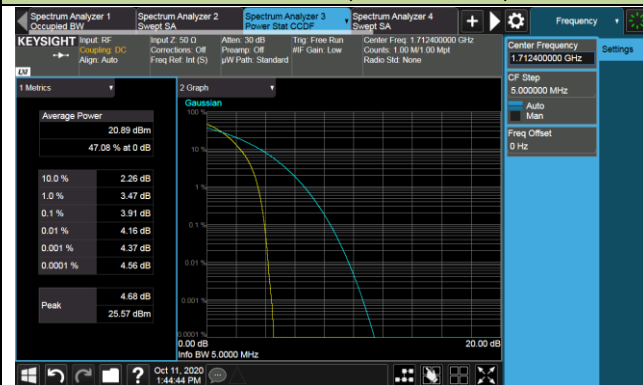

## Channel 1412 (1732.4MHz)




## Channel 1513 (1752.6MHz)

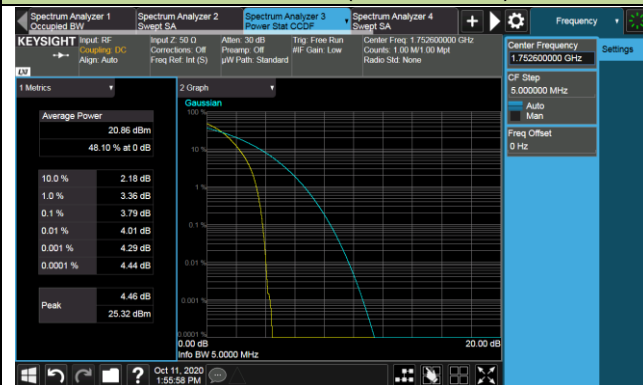




## WCDMA Band V


## Channel 4132 (826.4MHz)

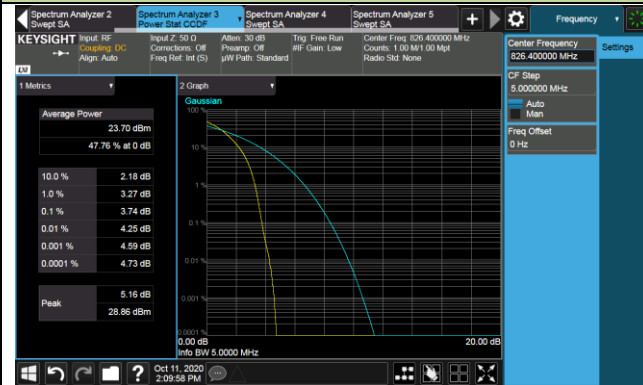

## Channel 4183 (836.4MHz)

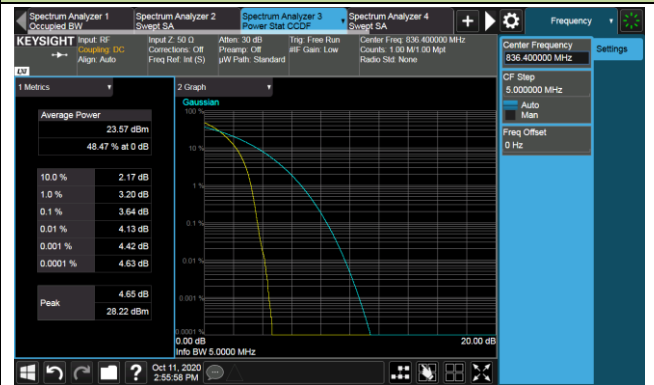

## Channel 4233 (846.6MHz)

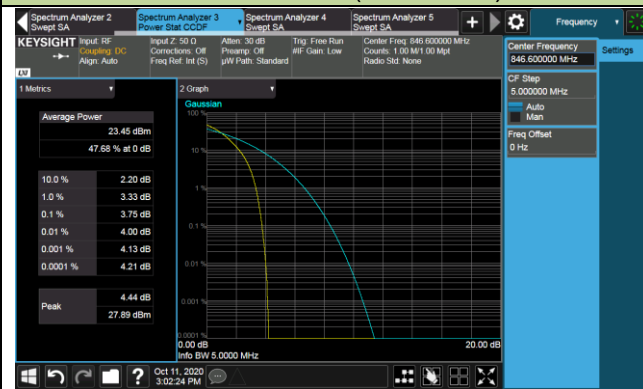

## **5.7. Conducted Spurious Emissions**

### **5.7.1. Test Limit**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the Low frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### **5.7.2. Test Procedure Used**

ANSI C63.26-2015 - Section 5.7

### **5.7.3. Test Setting**

1. Set the analyzer frequency to low, mid, high channel.
2. RBW = 1MHz
3. VBW  $\geq 3 \cdot$ RBW
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power.
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple.

To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

### 5.7.4. Test Setup



**5.7.5.Test Result**

Product	5G Sub-6 GHz M.2 Module	Test Site	WZ-SR6
Test Engineer	Candy Luo	Test Date	2020/10/11
Test Band	WCDMA Band II, IV, V		


Mode	Frequency (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
WCDMA Band II	1852.4	30 ~ 1000	-49.96	≤ -13.00	Pass
		1000 ~ 20000	-31.02	≤ -13.00	Pass
	1880.0	30 ~ 1000	-50.07	≤ -13.00	Pass
		1000 ~ 20000	-32.50	≤ -13.00	Pass
	1907.6	30 ~ 1000	-48.96	≤ -13.00	Pass
		1000 ~ 20000	-32.60	≤ -13.00	Pass
WCDMA Band IV	1712.4	30 ~ 1000	-50.01	≤ -13.00	Pass
		1000 ~ 20000	-33.00	≤ -13.00	Pass
	1732.4	30 ~ 1000	-49.67	≤ -13.00	Pass
		1000 ~ 20000	-31.56	≤ -13.00	Pass
	1752.6	30 ~ 1000	-49.75	≤ -13.00	Pass
		1000 ~ 20000	-32.96	≤ -13.00	Pass
WCDMA Band V	826.4	30 ~ 1000	-50.54	≤ -13.00	Pass
		1000 ~ 10000	-33.28	≤ -13.00	Pass
	836.4	30 ~ 1000	-49.85	≤ -13.00	Pass
		1000 ~ 10000	-34.87	≤ -13.00	Pass
	846.6	30 ~ 1000	-39.81	≤ -13.00	Pass
		1000 ~ 10000	-34.18	≤ -13.00	Pass

### WCDMA Band II


#### Low Channel 30 ~ 1000MHz




#### Low Channel 1000 ~ 20000MHz

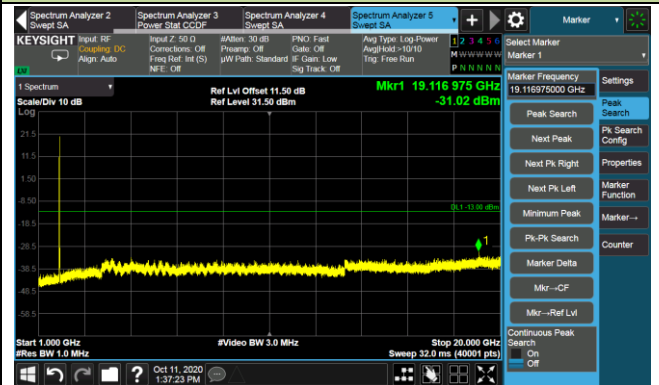


#### Middle Channel 30 ~ 1000MHz

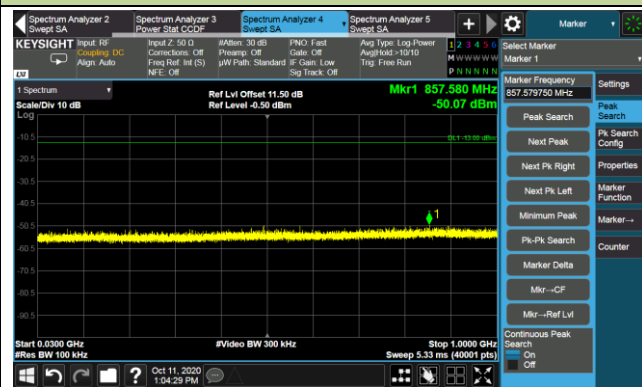


#### Middle Channel 1000 ~ 20000MHz

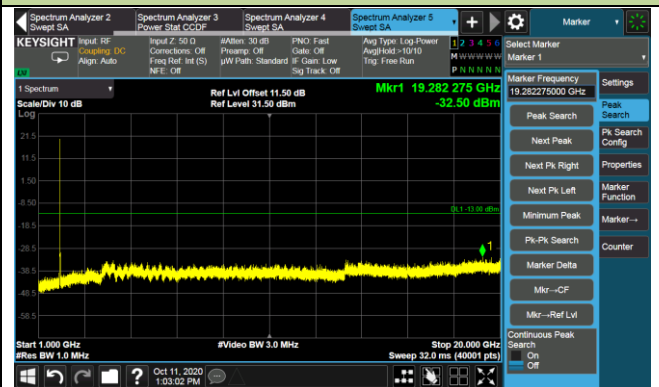

#### High Channel 30 ~ 1000MHz

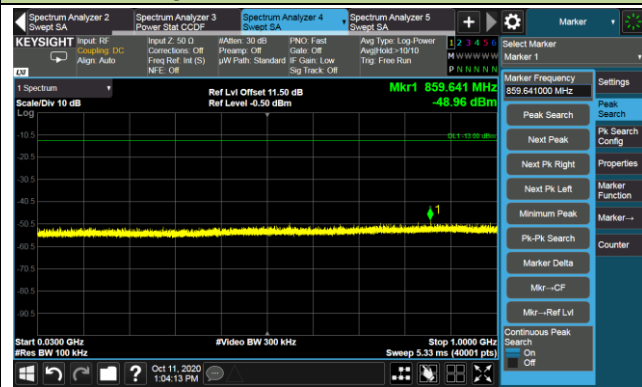


#### High Channel 1000 ~ 20000MHz

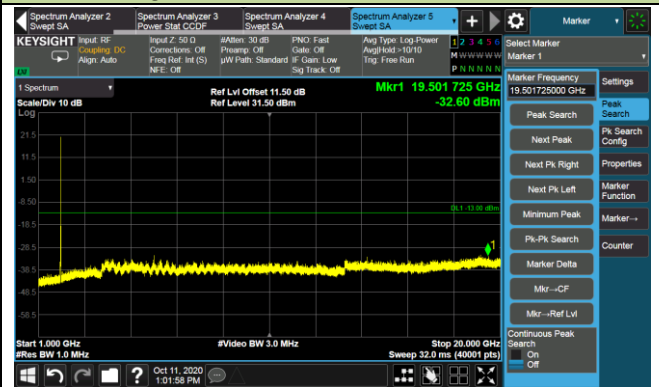


### WCDMA Band IV


#### Low Channel 30 ~ 1000MHz

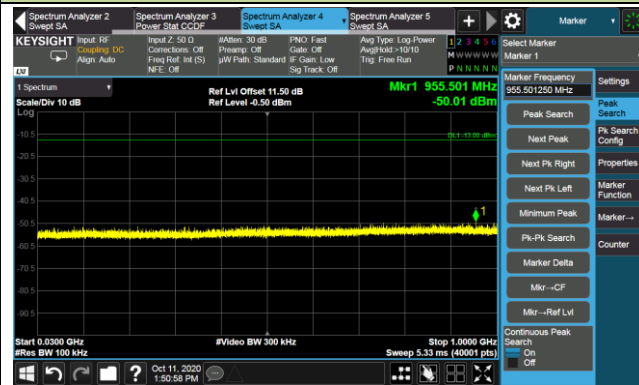


#### Low Channel 1000 ~ 20000MHz

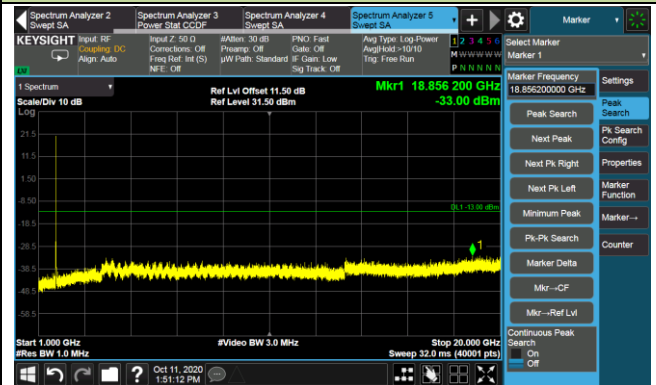


#### Middle Channel 30 ~ 1000MHz

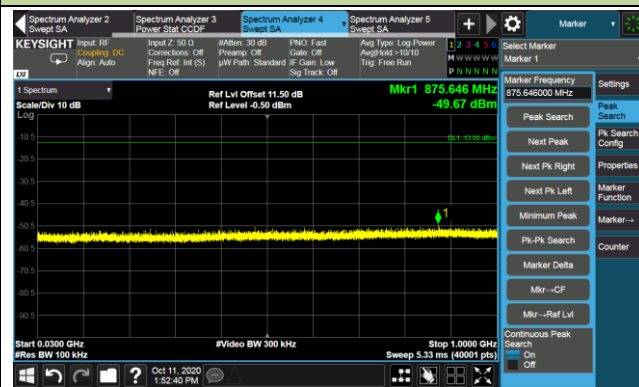


#### Middle Channel 1000 ~ 20000MHz

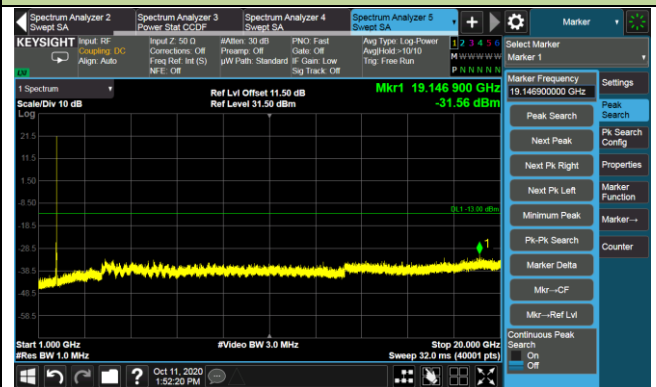

#### High Channel 30 ~ 1000MHz

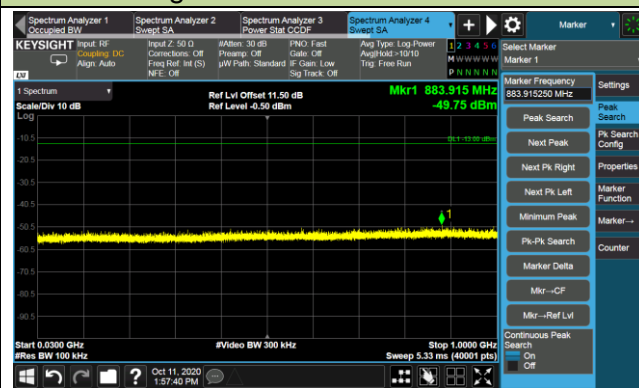


#### High Channel 1000 ~ 20000MHz

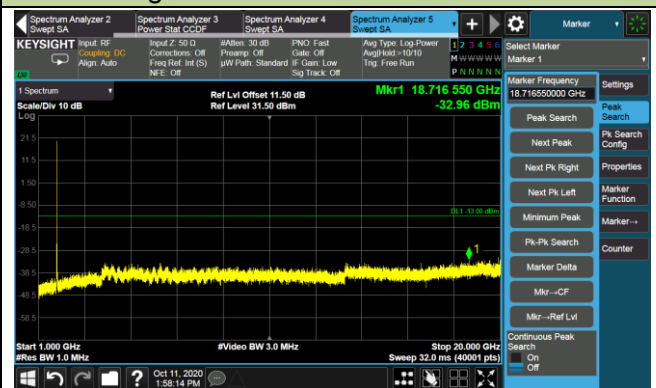


## WCDMA Band V


## Low Channel 30 ~ 1000MHz

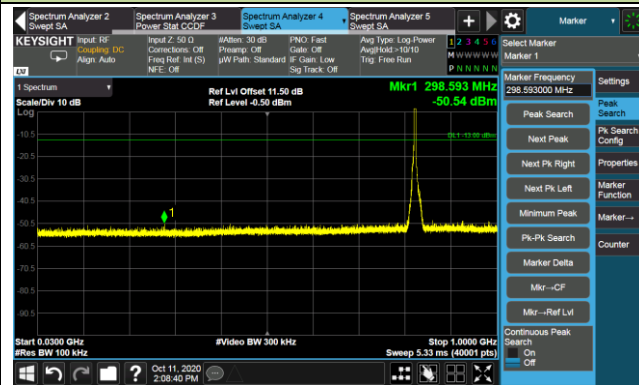

## Low Channel 1000 ~ 10000MHz

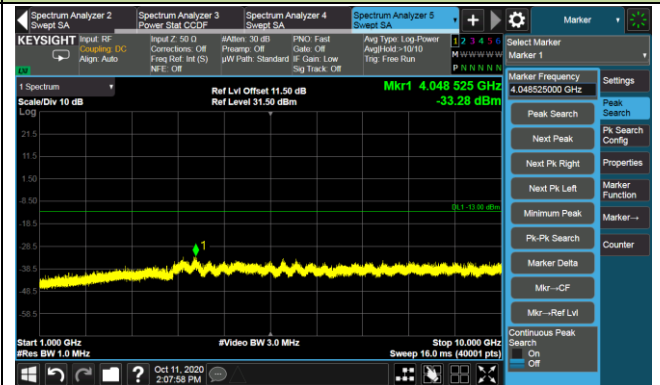

## Middle Channel 30 ~ 1000MHz

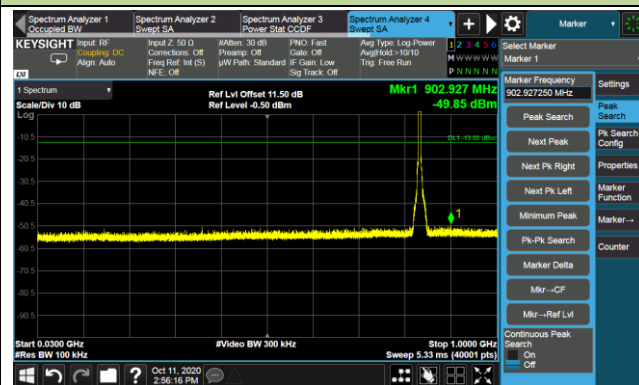

## Middle Channel 1000 ~ 10000MHz



## High Channel 30 ~ 1000MHz



## High Channel 1000 ~ 10000MHz



## 5.8. Radiated Spurious Emissions Measurements

### 5.8.1. Test Limit

Out of band emissions: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to -13dBm.

$E$  (dB $\mu$ V/m) = EIRP (dBm) - 20 log D + 104.8; where D is the measurement distance in meters. The emission limit equal to 82.3dB $\mu$ V/m.

### 5.8.2. Test Procedure Used


ANSI C63.26-2015 - Section 5.2.7 & 5.5

### 5.8.3. Test Setting

1. RBW = 1MHz
2. VBW  $\geq$  3\*RBW
3. Sweep time  $\geq$  10  $\times$  (number of points in sweep)  $\times$  (transmission symbol period)
4. Detector = Peak
5. Trace mode = max hold
6. The trace was allowed to stabilize


### 5.8.4. Test Setup

Below 1GHz Test Setup:

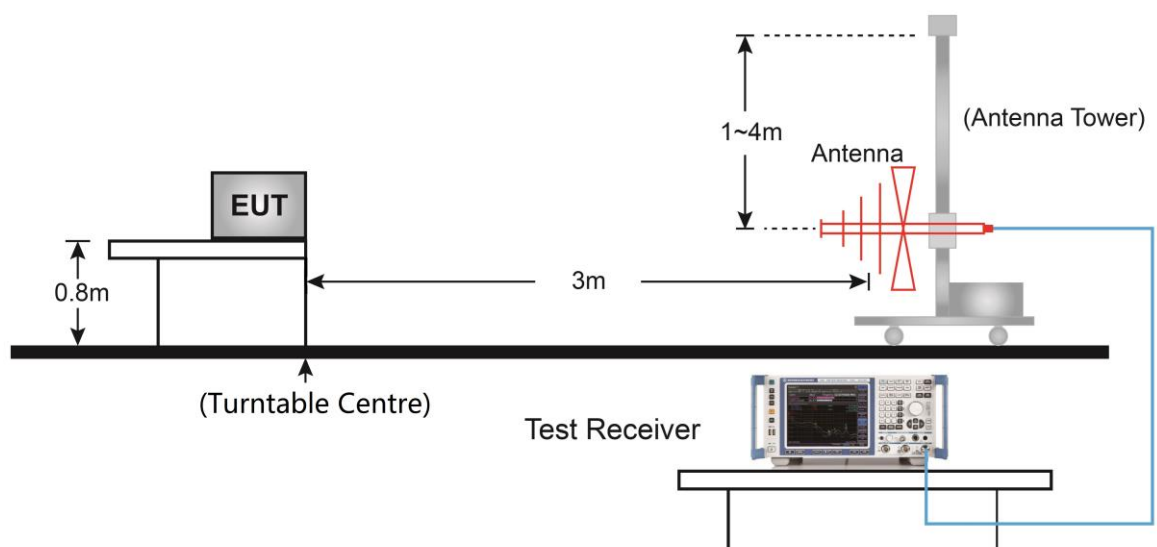



Above 1GHz Test Setup:

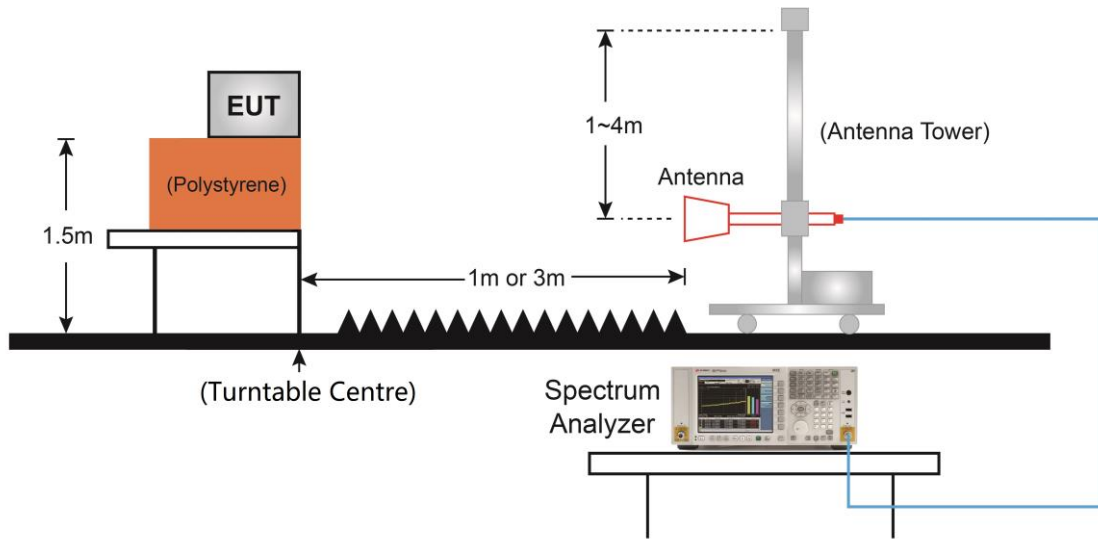

### 5.8.5. Test Result

Product	5G Sub-6 GHz M.2 Module	Test Site	WZ-AC2
Test Engineer	Jason Gao	Test Date	2020/10/15
Test Band	WCDMA Band II		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
<b>Low Channel</b>							
144.9	21.6	18.0	39.6	82.3	-42.7	Peak	Horizontal
335.1	19.3	19.7	39.0	82.3	-43.3	Peak	Horizontal
55.2	19.4	18.0	37.4	82.3	-44.9	Peak	Vertical
138.2	21.0	17.4	38.4	82.3	-43.9	Peak	Vertical
4638.0	39.3	5.4	44.7	82.3	-37.6	Peak	Horizontal
8276.0	38.7	11.1	49.8	82.3	-32.5	Peak	Horizontal
7876.5	39.1	11.1	50.2	82.3	-32.1	Peak	Vertical
14030.5	38.1	17.0	55.1	82.3	-27.2	Peak	Vertical
<b>Middle Channel</b>							
140.1	22.0	17.6	39.6	82.3	-42.7	Peak	Horizontal
334.6	18.1	19.7	37.8	82.3	-44.5	Peak	Horizontal
141.6	20.3	17.7	38.0	82.3	-44.3	Peak	Vertical
341.4	19.2	19.7	38.9	82.3	-43.4	Peak	Vertical
4434.0	38.7	4.7	43.4	82.3	-38.9	Peak	Horizontal
14770.0	38.0	17.8	55.8	82.3	-26.5	Peak	Horizontal
2887.0	41.6	1.0	42.6	82.3	-39.7	Peak	Vertical
4638.0	38.4	5.4	43.8	82.3	-38.5	Peak	Vertical
<b>High Channel</b>							
144.0	22.3	17.9	40.2	82.3	-42.1	Peak	Horizontal
310.3	15.5	19.0	34.5	82.3	-47.8	Peak	Horizontal
138.6	20.8	17.5	38.3	82.3	-44.0	Peak	Vertical
312.3	21.5	19.1	40.6	82.3	-41.7	Peak	Vertical
7256.0	39.2	10.5	49.7	82.3	-32.6	Peak	Horizontal
14676.5	37.7	17.7	55.4	82.3	-26.9	Peak	Horizontal
10979.0	37.6	15.8	53.4	82.3	-28.9	Peak	Vertical
14336.5	37.2	17.6	54.8	82.3	-27.5	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB).

Product	5G Sub-6 GHz M.2 Module	Test Site	WZ-AC2
Test Engineer	Jason Gao	Test Date	2020/10/15
Test Band	WCDMA Band IV		

Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB)	Measure Level(dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
<b>Low Channel</b>							
144.9	21.6	18.0	39.6	82.3	-42.7	Peak	Horizontal
336.0	18.8	19.7	38.5	82.3	-43.8	Peak	Horizontal
141.1	20.5	17.7	38.2	82.3	-44.1	Peak	Vertical
340.4	18.3	19.7	38.0	82.3	-44.3	Peak	Vertical
11506.0	37.3	15.6	52.9	82.3	-29.4	Peak	Horizontal
14770.0	36.9	17.8	54.7	82.3	-27.6	Peak	Horizontal
9500.0	37.8	14.0	51.8	82.3	-30.5	Peak	Vertical
14642.5	37.1	18.0	55.1	82.3	-27.2	Peak	Vertical
<b>Middle Channel</b>							
139.6	22.0	17.6	39.6	82.3	-42.7	Peak	Horizontal
335.6	18.7	19.7	38.4	82.3	-43.9	Peak	Horizontal
55.2	20.9	18.0	38.9	82.3	-43.4	Peak	Vertical
341.4	18.2	19.7	37.9	82.3	-44.4	Peak	Vertical
9228.0	37.1	13.7	50.8	82.3	-31.5	Peak	Horizontal
13826.5	37.7	16.5	54.2	82.3	-28.1	Peak	Horizontal
8097.5	38.0	11.6	49.6	82.3	-32.7	Peak	Vertical
14846.5	38.4	17.6	56.0	82.3	-26.3	Peak	Vertical
<b>High Channel</b>							
103.7	18.7	14.1	32.8	82.3	-49.5	Peak	Horizontal
145.4	22.0	18.1	40.1	82.3	-42.2	Peak	Horizontal
53.8	19.7	18.0	37.7	82.3	-44.6	Peak	Vertical
140.1	20.5	17.6	38.1	82.3	-44.2	Peak	Vertical
9287.5	37.1	13.7	50.8	82.3	-31.5	Peak	Horizontal
14234.5	37.5	17.8	55.3	82.3	-27.0	Peak	Horizontal
12254.0	38.0	15.3	53.3	82.3	-29.0	Peak	Vertical
14421.5	37.5	17.8	55.3	82.3	-27.0	Peak	Vertical

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB).

Product	5G Sub-6 GHz M.2 Module	Test Site	WZ-AC2
Test Engineer	Jason Gao	Test Date	2020/10/15
Test Band	WCDMA Band V		

Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB)	Measure Level(dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
<b>Low Channel</b>							
141.1	22.9	17.7	40.6	82.3	-41.7	Peak	Horizontal
333.1	19.1	19.7	38.8	82.3	-43.5	Peak	Horizontal
55.7	19.7	17.9	37.6	82.3	-44.7	Peak	Vertical
141.1	22.0	17.7	39.7	82.3	-42.6	Peak	Vertical
9279.0	36.8	13.8	50.6	82.3	-31.7	Peak	Horizontal
14294.0	37.0	17.9	54.9	82.3	-27.4	Peak	Horizontal
1654.5	47.3	-4.6	42.7	82.3	-39.6	Peak	Vertical
14523.5	37.1	17.7	54.8	82.3	-27.5	Peak	Vertical
<b>Middle Channel</b>							
54.7	18.1	18.0	36.1	82.3	-46.2	Peak	Horizontal
141.1	21.9	17.7	39.6	82.3	-42.7	Peak	Horizontal
62.5	19.6	17.2	36.8	82.3	-45.5	Peak	Vertical
141.6	19.0	17.7	36.7	82.3	-45.6	Peak	Vertical
1671.5	47.5	-4.7	42.8	82.3	-39.5	Peak	Horizontal
14200.5	37.1	17.5	54.6	82.3	-27.7	Peak	Horizontal
1671.5	51.8	-4.7	47.1	82.3	-35.2	Peak	Vertical
10953.5	37.4	16.1	53.5	82.3	-28.8	Peak	Vertical
<b>High Channel</b>							
57.2	14.9	17.9	32.8	82.3	-49.5	Peak	Horizontal
139.1	22.7	17.5	40.2	82.3	-42.1	Peak	Horizontal
139.1	22.7	17.5	40.2	82.3	-42.1	Peak	Vertical
284.1	24.6	18.3	42.9	82.3	-39.4	Peak	Vertical
1688.5	48.8	-4.7	44.1	82.3	-38.2	Peak	Horizontal
6559.0	38.9	8.5	47.4	82.3	-34.9	Peak	Horizontal
1688.5	52.3	-4.7	47.6	82.3	-34.7	Peak	Vertical
9738.0	36.5	14.5	51.0	82.3	-31.3	Peak	Vertical

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB).

## 6. CONCLUSION

The data collected relate only the item(s) tested and show that unit is compliance with FCC Rules.

————— The End —————

## **Appendix A - Test Setup Photograph**

Refer to "2010RSU005-UT" file.

## **Appendix B - EUT Photograph**

Refer to "2010RSU005-UE" file.