



# FCC RADIO TEST REPORT

**FCC ID** : ZMOL860GL16G  
**Equipment** : LTE Module  
**Brand Name** : Fibocom Wireless Inc.  
**Model Name** : L860-GL-16  
**Applicant** : Fibocom Wireless Inc.  
1101, Tower A, Building 6, Shenzhen  
International, Innovation Valley, Dashi 1st Rd,  
Nanshan, ShenZhen, China  
**Manufacturer** : LCFC (HeFei) Electronics Technology Co., Ltd.  
No. 3188-1, Yungu Road (Hefei Export  
Processing Zone), Hefei Economics &  
Technology Development Area, Anhui, CHINA  
**Standard** : FCC 47 CFR Part 2, 96

Equipment: Fibocom L860-GL-16 tested inside of Lenovo Notebook Computer.

The product was received on Oct. 18, 2021 and testing was started from Oct. 29, 2021 to Nov. 25, 2021. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

**Sporton International Inc. Wensan Laboratory**



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test .....	5
1.2 Product Specification of Equipment Under Test .....	5
1.3 Modification of EUT .....	5
1.4 Testing Location .....	6
1.5 Applied Standards .....	6
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>7</b>
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System .....	7
2.3 Support Unit used in test configuration .....	8
2.4 Frequency List of Low/Middle/High Channels.....	8
<b>3 Conducted Test Items.....</b>	<b>9</b>
3.1 Measuring Instruments.....	9
3.2 Conducted Output Power .....	10
3.3 EIRP .....	11
<b>4 Radiated Test Items .....</b>	<b>12</b>
4.1 Measuring Instruments.....	12
4.2 Test Setup .....	12
4.3 Test Result of Radiated Test.....	13
4.4 Radiated Spurious Emission .....	14
<b>5 List of Measuring Equipment.....</b>	<b>15</b>
<b>6 Uncertainty of Evaluation.....</b>	<b>16</b>
<b>Appendix A. Test Results of Conducted Test</b>	
<b>Appendix B. Test Results of Radiated Test</b>	
<b>Appendix C. Test Setup Photographs</b>	



### History of this test report

Report No.	Version	Description	Issued Date
FG1O1549F	01	Initial issue of report	Jan. 06, 2022



### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
-	§96.41	Peak-to-Average Ratio	-	See Note
3.3	§96.41	Effective Isotropic Radiated Power	Pass	-
-	§2.1049 §96.41	Occupied Bandwidth	-	See Note
-	§2.1051 §96.41	Conducted Band Edge Measurement	-	See Note
-	§2.1051 §96.41	Conducted Spurious Emission	-	See Note
-	§2.1055	Frequency Stability for Temperature & Voltage	-	See Note
4.4	§2.1051 §96.41	Radiated Spurious Emission	Pass	Under limit 6.94 dB at 7100.000 MHz

**Note:**

1. The module (Model: L860-GL-16) makes no difference after verifying output power, this report reuses test data from the module report.
2. Conducted power was verified to be consistent with the original modular approval, so the output power level in the original modular grant is referenced in this report for determining EIRP of this host product

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Sheng Kuo**

**Report Producer: Ruby Zou**

# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	LTE Module
Brand Name	Fibocom Wireless Inc.
Model Name	L860-GL-16
FCC ID	ZMOL860GL16G
Sample 1	EUT with Host 1
Sample 2	EUT with Host 2
EUT supports Radios application	WCDMA/HSPA/LTE/GNSS
EUT Stage	Production Unit

**Remark:**

1. The above EUT's information was declared by manufacturer.
2. Equipment: Fibocom L860-GL-16 tested inside of Lenovo Notebook Computer.

The product was installed into Notebook Computer (Brand Name: Lenovo, Model Name: TP00135A, and the host information was recorded in the following table.

Host Information	
Host 1	Host with Amphenol Antenna
Host 2	Host with Speed Antenna

WWAN Antenna Information				
Main Antenna	Manufacturer	Amphenol	Peak gain (dBi)	LTE Band 48 : -2.14
	Part number	DC33001VU00	Type	PIFA
	Manufacturer	Speed	Peak gain (dBi)	LTE Band 48 : -2.14
	Part number	DC33001VW00	Type	PIFA

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.
2. All the tests were performed with "Speed Antenna" as representative.

## 1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx Frequency	3552.5 MHz ~ 3697.5 MHz
Rx Frequency	3552.5 MHz ~ 3697.5 MHz
Bandwidth	5 MHz / 10 MHz / 15 MHz / 20 MHz
Maximum Output Power to Antenna	20.88 dBm
Type of Modulation	QPSK / 16QAM / 64QAM

## 1.3 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan
Test Site No.	<b>Sporton Site No.</b>
	TH03-HY (TAF Code: 1190)
Test Engineer	Benjamin Lin
Temperature (°C)	23.5~25
Relative Humidity (%)	49.4~52
Remark	The Conducted test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan
Test Site No.	<b>Sporton Site No.</b>
	03CH12-HY
Test Engineer	Jack Cheng, Lance Chiang and Chuan Chu
Temperature (°C)	22.8~26.8
Relative Humidity (%)	56~66

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

### 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 96
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 940660 D01 Part 96 CBRS Eqpt v01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.


## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	48	-	-	v	v	v	v	v	v	v	v			v	v	v
E.I.R.P	48	-	-	v	v	v	v	v	v	v	Max. Power					
Radiated Spurious Emission	48	-	-				v	v			v			v	v	v
Remark	<ol style="list-style-type: none"> <li>The mark "v" means that this configuration is chosen for testing</li> <li>The mark "-" means that this bandwidth is not supported.</li> <li>The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</li> <li>All the radiated test cases were performed with Battery 1.</li> </ol>															

### 2.2 Connection Diagram of Test System

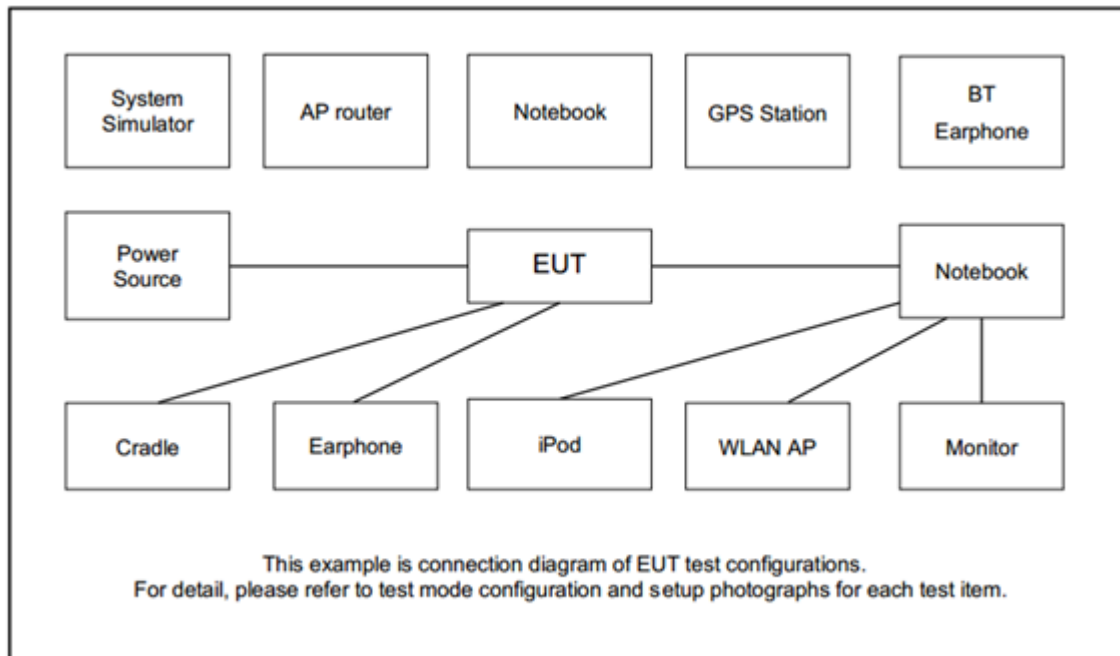



### 2.3 Support Unit used in test configuration

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m

### 2.4 Frequency List of Low/Middle/High Channels

LTE Band 48 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	55340	55990	56640
	Frequency	3560.0	3625.0	3690.0
15	Channel	55315	55990	56665
	Frequency	3557.5	3625.0	3692.5
10	Channel	55290	55990	56690
	Frequency	3555.0	3625.0	3695.0
5	Channel	55265	55990	56715
	Frequency	3552.5	3625.0	3697.5




### 3 Conducted Test Items

#### 3.1 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.1 Test Setup

##### 3.1.2 Conducted Output Power

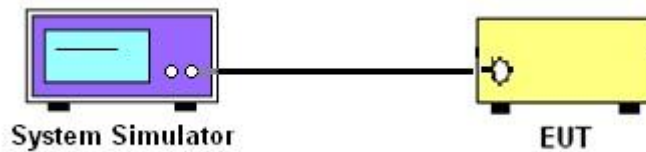

##### 3.1.3 Test Result of Conducted Test

Please refer to Appendix A.



## **3.2 Conducted Output Power**

### **3.2.1 Description of the Conducted Output Power Measurement**

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

### **3.2.2 Test Procedures**

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



### 3.3 EIRP

#### 3.3.1 Description of the EIRP Measurement

The EIRP of mobile transmitters must not exceed 23 dBm /10 megahertz for LTE Band 48.

The testing follows ANSI C63.26-2015 Section 5.2.5.5

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

Device	Maximum EIRP (dBm/10 MHz)	Maximum PSD (dBm/MHz)
End User Device	23	n/a

**Remark:** Total channel power is complied with EIRP limit 23dBm/10MHz.

#### 3.3.1 Test Procedures

The testing follows procedure in Section 5.2 of ANSI C63.26-2015 and KDB 940660 D01 Part 96 CBRS Eqpt v03 Section 3.2(b)(2)

Determine the EIRP by adding the effective antenna gain to the measured average conducted power level.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup


For radiated test below 30MHz

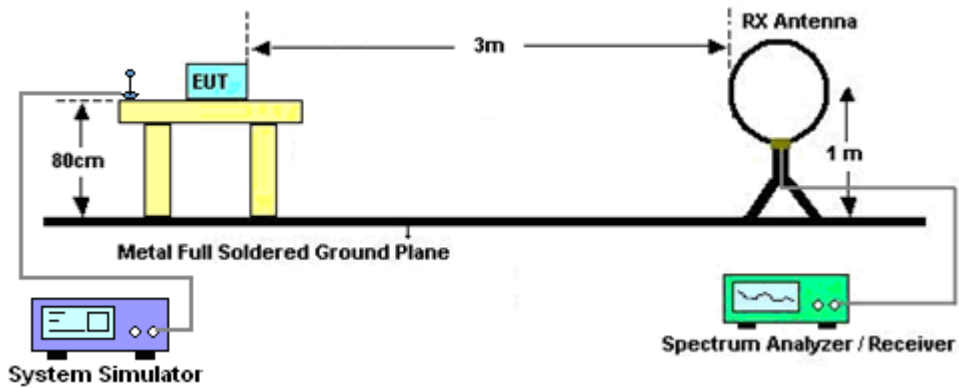


For radiated test from 30MHz to 1GHz

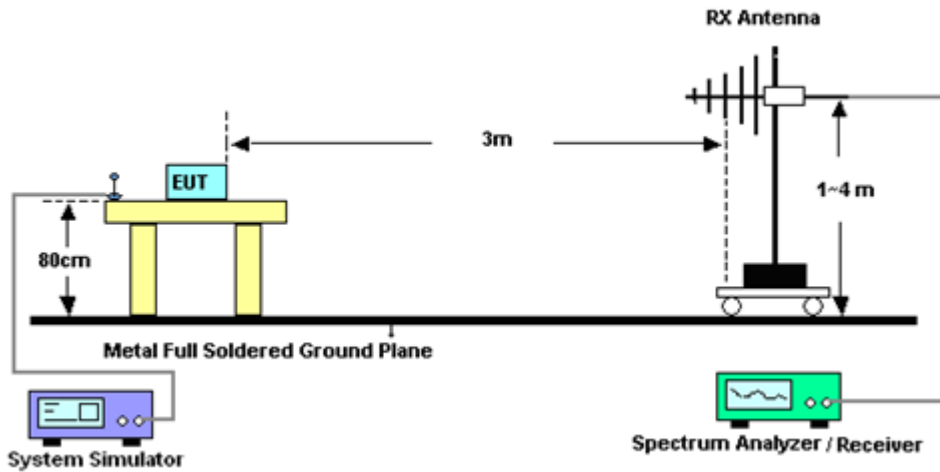

For radiated test from 1GHz to 18GHz

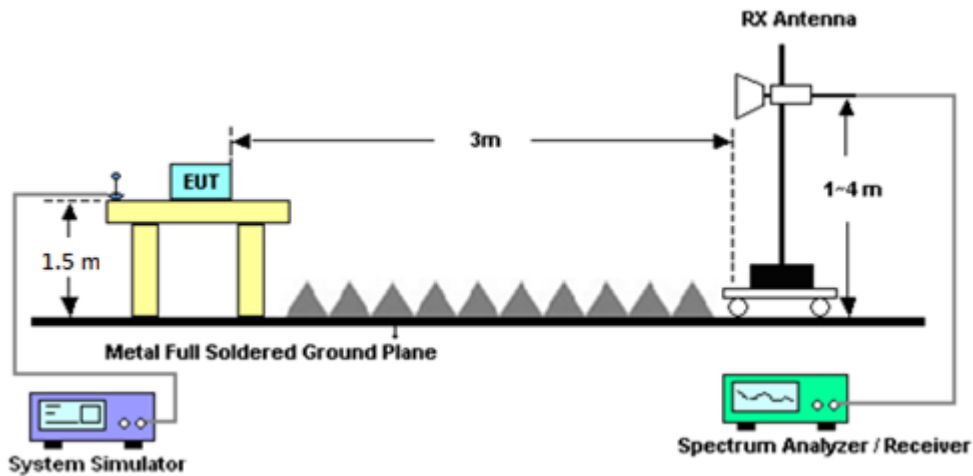

For radiated test above 18GHz

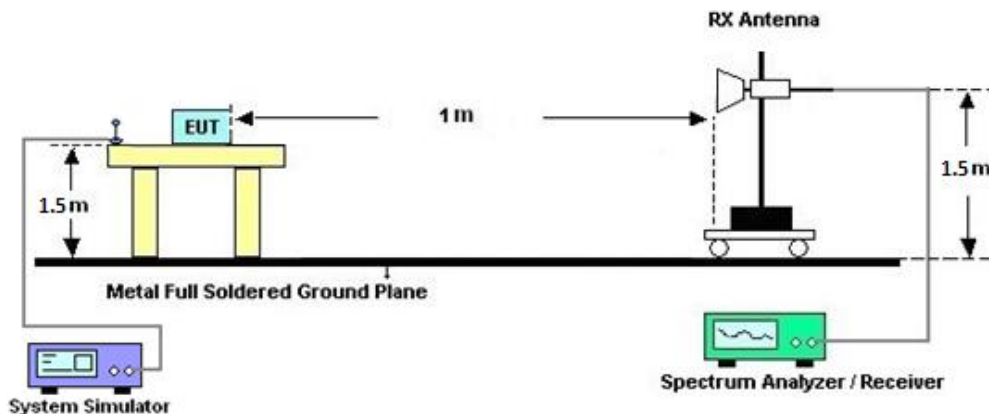

### 4.3 Test Result of Radiated Test

Please refer to Appendix B.

**Note:**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



## 4.4 Radiated Spurious Emission

### 4.4.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.  
EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain  
ERP (dBm) = EIRP - 2.15
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.  
The limit line is -40dBm/MHz



## 5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Base Station (Measure)	Anritsu	MT8821C	6262025341	N/A	Oct. 05, 2021	Oct. 29, 2021	Oct. 04, 2022	Conducted (TH03-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 04, 2021	Nov. 14, 2021~ Nov. 25, 2021	Jan. 03, 2022	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CCBL 6111D & 00800N1D01N-06	41912 & 05	30MHz~1GHz	Feb. 08, 2021	Nov. 14, 2021~ Nov. 25, 2021	Feb. 07, 2022	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CCBL 6111D & 00800N1D01N-06	40103 & 07	30MHz~1GHz	Apr. 28, 2021	Nov. 14, 2021~ Nov. 25, 2021	Apr. 27, 2022	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz~18GHz	Oct. 25, 2021	Nov. 14, 2021~ Nov. 25, 2021	Oct. 24, 2022	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1212	1GHz~18GHz	May 18, 2021	Nov. 14, 2021~ Nov. 25, 2021	May 17, 2022	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz~40GHz	Dec. 11, 2020	Nov. 14, 2021~ Nov. 25, 2021	Dec. 10, 2021	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170576	18GHz~40GHz	May 21, 2021	Nov. 14, 2021~ Nov. 25, 2021	May 20, 2022	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 24, 2021	Nov. 14, 2021~ Nov. 25, 2021	Mar. 23, 2022	Radiation (03CH12-HY)
Preamplifier	Agilent	8449B	3008A02375	1GHz~26.5GHz	May 25, 2021	Nov. 14, 2021~ Nov. 25, 2021	May 24, 2022	Radiation (03CH12-HY)
Preamplifier	JPA0118-55-303K	JPA0118-55-303K	1710001800054002	1GHz~18GHz	Jun. 16, 2021	Nov. 14, 2021~ Nov. 25, 2021	Jun. 15, 2022	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 11, 2020	Nov. 14, 2021~ Nov. 25, 2021	Dec. 10, 2021	Radiation (03CH12-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Jan. 15, 2021	Nov. 14, 2021~ Nov. 25, 2021	Jan. 14, 2022	Radiation (03CH12-HY)
Filter	Wainwright	WLKS1200-12SS	SN2	1.2GHz Low Pass Filter	Mar. 17, 2021	Nov. 14, 2021~ Nov. 25, 2021	Mar. 16, 2022	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60ST	SN2	3GHz High Pass Filter	Jul. 12, 2021	Nov. 14, 2021~ Nov. 25, 2021	Jul. 11, 2022	Radiation (03CH12-HY)
Filter	Wainwright	WHKX8-5872.5-6750-18000-40ST	SN2	6.75GHz High Pass Filter	Mar. 17, 2021	Nov. 14, 2021~ Nov. 25, 2021	Mar. 16, 2022	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz~30MHz	Mar. 11, 2021	Nov. 14, 2021~ Nov. 25, 2021	Mar. 10, 2022	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30MHz~18GHz	Dec. 11, 2020	Nov. 14, 2021~ Nov. 25, 2021	Dec. 10, 2021	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Feb. 22, 2021	Nov. 14, 2021~ Nov. 25, 2021	Feb. 21, 2022	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30MHz~40GHz	Feb. 22, 2021	Nov. 14, 2021~ Nov. 25, 2021	Feb. 21, 2022	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Nov. 14, 2021~ Nov. 25, 2021	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Nov. 14, 2021~ Nov. 25, 2021	N/A	Radiation (03CH12-HY)
Hygrometer	TECPEL	DTM-303B	TP140349	N/A	Sep. 30, 2021	Nov. 14, 2021~ Nov. 25, 2021	Sep. 29, 2022	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	Nov. 14, 2021~ Nov. 25, 2021	N/A	Radiation (03CH12-HY)



## 6 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.10 dB
---	---------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.39 dB
---	---------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.34 dB
---	---------





## Appendix A. Test Results of Conducted Test

### Conducted Output Power(Average power & EIRP)

LTE Band 48 Maximum Average Power [dBm] (GT - LC = -2.14 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
20	1	0	QPSK	20.65	20.77	20.70	18.74	0.0748
20	1	99		20.60	20.88	20.64		
20	100	0		19.50	19.75	19.60		
20	1	0	16-QAM	19.88	19.96	19.85	17.82	0.0605
20	1	0	64-QAM	18.60	18.91	18.85	16.77	0.0475
Limit	EIRP < 23dBm/10MHz			Result			Pass	

LTE Band 48 Maximum Average Power [dBm] (GT - LC = -2.14 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
15	1	0	QPSK	20.63	20.75	20.66	18.61	0.0726
15	1	0	16-QAM	19.76	20.08	19.78	17.94	0.0622
15	1	0	64-QAM	18.52	18.86	18.82	16.72	0.0470
Limit	EIRP < 23dBm/10MHz			Result			Pass	

LTE Band 48 Maximum Average Power [dBm] (GT - LC = -2.14 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
10	1	0	QPSK	20.65	20.80	20.62	18.66	0.0735
10	1	0	16-QAM	19.60	19.73	19.77	17.63	0.0579
10	1	0	64-QAM	18.85	19.14	18.85	17.00	0.0501
Limit	EIRP < 23dBm/10MHz			Result			Pass	

LTE Band 48 Maximum Average Power [dBm] (GT - LC = -2.14 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
5	1	0	QPSK	20.53	20.69	20.59	18.55	0.0716
5	1	0	16-QAM	19.95	19.85	19.82	17.81	0.0604
5	1	0	64-QAM	19.52	19.21	19.06	17.38	0.0547
Limit	EIRP < 23dBm/10MHz			Result			Pass	



### Appendix B. Test Results of Radiated Test

### LTE Band 48

LTE Band 48 / 20MHz / QPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	7100	-50.23	-40	-10.23	-51.09	-60.20	1.77	11.74	H
	10655	-58.77	-40	-18.77	-63.16	-67.20	2.47	10.90	H
	14205	-56.84	-40	-16.84	-67.2	-65.68	2.87	11.71	H
	21307	-55.36	-40	-15.36	-77.17	-72.08	1.98	18.70	H
	24859	-53.01	-40	-13.01	-77.77	-69.02	2.07	18.07	H
	28411	-52.04	-40	-12.04	-77.35	-69.29	2.32	19.56	H
									H
	7100	-46.94	-40	-6.94	-47.41	-56.91	1.77	11.74	V
	10655	-56.25	-40	-16.25	-60.38	-64.68	2.47	10.90	V
	14205	-57.12	-40	-17.12	-67.2	-65.96	2.87	11.71	V
	21307	-55.11	-40	-15.11	-76.79	-71.83	1.98	18.70	V
	24859	-51.41	-40	-11.41	-77.38	-67.42	2.07	18.07	V
	28411	-49.71	-40	-9.71	-76.84	-66.96	2.32	19.56	V
									V



Middle	7230	-56.05	-40	-16.05	-57.33	-65.74	1.84	11.53	H
	10850	-58.45	-40	-18.45	-63.25	-66.78	2.57	10.90	H
	14462	-56.99	-40	-16.99	-67.34	-65.23	2.85	11.09	H
	18077	-54.26	-40	-14.26	-72.2	-70.49	1.76	17.98	H
	21696	-54.41	-40	-14.41	-75.81	-71.20	1.99	18.78	H
	25314	-52.03	-40	-12.03	-77.23	-68.63	2.14	18.74	H
									H
	7230	-53.56	-40	-13.56	-54.58	-63.25	1.84	11.53	V
	10850	-58.67	-40	-18.67	-63.26	-67.00	2.57	10.90	V
	14462	-57.65	-40	-17.65	-67.18	-65.89	2.85	11.09	V
	18077	-55.07	-40	-15.07	-72.08	-71.30	1.76	17.98	V
	21696	-54.73	-40	-14.73	-76.12	-71.52	1.99	18.78	V
	25314	-50.66	-40	-10.66	-77.13	-67.26	2.14	18.74	V
									V
Highest	7360	-51.85	-40	-11.85	-53.23	-61.26	1.91	11.32	H
	11045	-57.29	-40	-17.29	-62.63	-65.61	2.63	10.95	H
	14724	-56.29	-40	-16.29	-67.78	-65.09	2.91	11.72	H
	18399	-55.90	-40	-15.90	-74.17	-71.95	1.87	17.92	H
	22084	-54.83	-40	-14.83	-76.73	-71.62	2.08	18.87	H
	25770	-51.52	-40	-11.52	-77.41	-68.54	2.03	19.05	H
									H
	7360	-49.53	-40	-9.53	-50.72	-58.94	1.91	11.32	V
	11045	-57.82	-40	-17.82	-62.99	-66.14	2.63	10.95	V
	14724	-57.90	-40	-17.90	-67.72	-66.70	2.91	11.72	V
	18399	-56.17	-40	-16.17	-73.56	-72.22	1.87	17.92	V
	22084	-53.81	-40	-13.81	-75.71	-70.60	2.08	18.87	V
	25770	-50.54	-40	-10.54	-77.61	-67.56	2.03	19.05	V
									V

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.