


# FCC SAR Test Report

## FCC ID: ZMOL860GL16G

**Report No.** : BTL-FCC SAR-1-2212T118  
**Equipment** : LTE Module  
**Model Name** : L860-GL-16  
**Brand Name** : Fibocom  
**Applicant** : Fibocom Wireless Inc.  
**Address** : 1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan, ShenZhen, China  
**Manufacturer** : Lenovo PC HK Limited.  
**Address** : 23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, China  
**Radio Function** : WLAN 2.4G, WLAN 5G, WLAN 6E, Bluetooth, WCDMA Band II, IV, V and LTE Band 2, 4, 5, 7, 12, 13, 14, 17, 25, 26, 30, 38, 41, 48, 66, 71  
**Standard(s)** : **KDB447498 D04** Interim General RF Exposure Guidance v01  
**KDB865664 D01** SAR measurement 100 MHz to 6 GHz v01r04  
**KDB865664 D02** SAR Reporting v01r02  
**KDB616217 D04** SAR for laptop and Tablets  
**KDB248227 D01** 802.11 Wi-Fi SAR v02r02  
**KDB941225 D01** 3G SAR Procedures v03r01  
**KDB941225 D05** SAR for LTE Devices v02r05  
**FCC§2.1093** Radiofrequency radiation exposure evaluation: portable devices  
**IEEE C95.1:1992** Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.  
**IEC/IEEE 62209-1528:2020** Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)

**Date of Receipt** : Dec. 30, 2022  
**Date of Test** : Jan. 19, 2023 ~ Feb. 2, 2023  
**Issued Date** : Feb. 16, 2023

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

**Prepared by** :   
Jerry Chuang, Supervisor



**Approved by** :   
Peter Chen, Assistant Manager

**BTL Inc.**  
No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan  
Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com

**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

<b>Table of Contents</b>	<b>Page</b>
<b>1. GENERAL INFORMATION</b>	<b>6</b>
1.1. GENERAL DESCRIPTION OF EUT	6
<b>2. SUMMARY OF SAR MEASUREMENT</b>	<b>9</b>
2.1. TEST FACILITY	9
2.2. MEASUREMENT UNCERTAINTY	9
2.3. ANTENNA INFORMATION:	11
2.4. THE MAXIMUM SAR 1G VALUES	12
2.5. LABORATORY ENVIRONMENT	12
2.6. MAIN TEST INSTRUMENTS	13
<b>3. SAR MEASUREMENTS SYSTEM CONFIGURATION</b>	<b>14</b>
3.1. SAR MEASUREMENT SETUP	14
3.1.1. TEST SETUP LAYOUT	14
3.2. DASY5 E-FIELD PROBE SYSTEM	15
3.2.1. EX3DV4 PROBE SPECIFICATION	15
3.2.2. E-FIELD PROBE CALIBRATION	16
3.2.3. OTHER TEST EQUIPMENT	17
3.2.4. SCANNING PROCEDURE	18
3.2.5. DATA STORAGE AND EVALUATION	19
3.2.6. DATA EVALUATION BY SEMCAD	20
<b>4. TISSUE-EQUIVALENT LIQUID</b>	<b>22</b>
4.1. TISSUE-EQUIVALENT LIQUID INGREDIENTS	22
4.2. TISSUE-EQUIVALENT LIQUID PROPERTIES	23
<b>5. SYSTEM CHECK</b>	<b>24</b>
5.1. DESCRIPTION OF SYSTEM CHECK	24
5.2. DESCRIPTION OF SYSTEM CHECK	25
<b>6. OPERATIONAL CONDITIONS DURING TEST</b>	<b>26</b>
6.1. GENERAL DESCRIPTION OF TEST PROCEDURES	26
6.2. TEST POSITION ANTENNA LOCATION	26
6.3. TEST POSITION OF PORTABLE DEVICES	27
6.4. TEST CONFIGURATION	28
6.5. SAR EXCLUSION CALCULATIONS FOR WWAN ANTENNA	29
<b>7. SAR MEASUREMENT VARIABILITY AND UNCERTAINTY</b>	<b>31</b>
7.1. SAR MEASUREMENT VARIABILITY	31
7.2. WCDMA TEST CONFIGURATION	32
7.3. LTE TEST CONFIGURATION	37
<b>8. POWER REDUCTION BY PROXIMITY SENSING</b>	<b>38</b>
8.1. PROCEDURES FOR DETERMINING PROXIMITY SENSOR TRIGGERING DISTANCES	38
8.2. PROCEDURES FOR DETERMINING ANTENNA AND PROXIMITY SENSOR COVERAGE	39
8.3. PROXIMITY SENSOR STATUS TABLE OF TRIGGER DISTANCE	40
8.4. POWER REDUCTION PER AIR-INTERFACE	41

<b>Table of Contents</b>	<b>Page</b>
<b>9. CONDUCTED POWER RESULTS</b>	<b>59</b>
9.1. UMTS BAND	59
9.2. LTE BAND	62
9.3. CONDUCTED POWER MEASUREMENT RESULTS OF BLUETOOTH	97
9.4. CONDUCTED POWER MEASUREMENTS OF WI-FI 2.4GHZ BAND	98
9.5. CONDUCTED POWER MEASUREMENTS OF 5G UNII_1	99
9.6. CONDUCTED POWER MEASUREMENTS OF 5G UNII_2A	99
9.7. CONDUCTED POWER MEASUREMENTS OF 5G UNII_2C	100
9.8. CONDUCTED POWER MEASUREMENTS OF 5G UNII_3	100
9.9. CONDUCTED POWER MEASUREMENTS OF 6E UNII_5	101
9.10. CONDUCTED POWER MEASUREMENTS OF 6E UNII_6	101
9.11. CONDUCTED POWER MEASUREMENTS OF 6E UNII_7	102
9.12. CONDUCTED POWER MEASUREMENTS OF 6E UNII_8	102
9.13. SAR TEST RESULTS	103
<b>10. SAR TEST RESULTS</b>	<b>104</b>
10.1. BODY SAR TEST RESULT	104
<b>11. TEST LAYOUT</b>	<b>108</b>

**REPORT ISSUED HISTORY**

Report Version	Description	Issued Date
R00	Original Issue.	2023/2/16

## 1. GENERAL INFORMATION

### 1.1. GENERAL DESCRIPTION OF EUT

Equipment	LTE Module
Model Name	L860-GL-16
Brand Name	Fibocom
Host device information	
Equipment	Notebook Computer
Model Name	TP00143B
Brand Name	Lenovo
Power Source	DC voltage supplied from External Power Supply.
Power Rating	Brand : Lenovo M/N : ADL135SLC3A I/P: 100-240V~ 2.5A 50-60Hz O/P: DC20.0V 6.75A 135.0W
	Brand : Lenovo M/N : ADL135SDC3A I/P: 100-240V~ 2.5A 50-60Hz O/P: DC20.0V 6.75A 135.0W
	Brand : Lenovo M/N : ADL135SCC3A I/P: 100-240V~ 2.5A 50-60Hz O/P: DC20.0V 6.75A 135.0W
	Brand : Lenovo M/N : ADL230SLC3A I/P: 100-240V~ 3.5A 50-60Hz O/P: DC20.0V 11.5A 230.0W
	Brand : Lenovo M/N : ADL230SDC3A I/P: 100-240V~ 3.5A 50-60Hz O/P: DC20.0V 11.5A 230.0W
	Brand : Lenovo M/N : ADL230SCC3A I/P: 100-240V~ 3.5A 50-60Hz O/P: DC20.0V 11.5A 230.0W
	Brand : Lenovo M/N : ADL170SLC3A I/P: 100-240V~ 2.5A 50-60Hz O/P: DC20.0V 8.5A 170.0W
	Brand : Lenovo M/N : ADL170SDC3A I/P: 100-240V~ 2.5A 50-60Hz O/P: DC20.0V 8.5A 170.0W

	Brand : Lenovo M/N : ADL170SCC3A I/P: 100-240V~ 2.5A 50-60Hz O/P: DC20.0V 8.5A 170.0W		
Battery Information	Brand: LG ENERGY SOLUTION, LTD. Model: L21L6P70 Rating: 7948mAh / 92Wh  Brand: SIMPLO TECHNOLOGY CO LTD Model: L21M6P70 Rating:7970 mAh / 92Wh		
WLAN Module	Intel® Wi-Fi 6E AX211 / AX211D2W		
WWAN Module	Fibocom / L860-GL-16		
NFC Module	FOXCONN / T77H747		
Operation Frequency	Function	Band	Frequency (MHz)
	WiFi	2.4G	TX : 2412 - 2472
		5G_UNII 1	TX : 5180 - 5240
		5G_UNII 2a	TX : 5250 - 5350
		5G_UNII 2c	TX : 5500 - 5700
		5G_UNII 3	TX : 5745 - 5825
		5G_UNII 5	TX : 5925 - 6425
		5G_UNII 6	TX : 6425 - 6525
		5G_UNII 7	TX : 6525 - 6875
	Bluetooth	5G_UNII 8	TX : 6875 - 7125
		Basic Rate (BR)	TX : 2402 - 2480
		Enhance Data Rate	TX : 2402 - 2480
		Bluetooth Low Energy	TX : 2402 - 2480

Operation Frequency	Function	Band	Frequency (MHz)	
	WCDMA		UMTS Band II	TX : 1850 - 1910
			UMTS Band IV	TX : 1710 - 1755
			UMTS Band V	TX : 824 - 849
	LTE		LTE Band 2	TX : 1850 - 1910
			LTE Band 4	TX : 1710 - 1755
			LTE Band 5	TX : 824 - 849
			LTE Band 7	TX : 2500 - 2570
			LTE Band 12	TX : 699 - 716
			LTE Band 13	TX : 777 - 787
			LTE Band 14	TX : 788 - 798
			LTE Band 17	TX : 704 - 716
			LTE Band 25	TX : 1850 - 1915
			LTE Band 26	TX : 814 - 849
			LTE Band 30	TX : 2305 - 2315
			LTE Band 38	TX : 2570 - 2620
			LTE Band 41	TX : 2496 - 2690
			LTE Band 48	TX : 3550 - 3700
			LTE Band 66	TX : 1710 - 1780
		LTE Band 71	TX : 663 - 698	
Test Model	L860-GL-16			
Sample Status	Engineering Sample			
EUT Modification(s)	N/A			

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCC-SAR-1-2212T118) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).



## 2. SUMMARY OF SAR MEASUREMENT

### 2.1. TEST FACILITY

The test facilities used to collect the test data in this report is **SAR Test room** at the location of No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan.

### 2.2. MEASUREMENT UNCERTAINTY

Uncertainty Budget for Frequency range of 300 MHz to 3 GHz

Error Description	Uncertainty Value ( $\pm$ %)		Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)	Vi V <sub>eff</sub>
<b>Measurement System</b>									
Probe Calibration	6.05		Normal	1	1	1	$\pm 6.05$ %	$\pm 6.05$ %	$\infty$
Axial Isotropy	4.7		Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 1.9$ %	$\pm 1.9$ %	$\infty$
Hemispherical Isotropy	9.6		Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 3.9$ %	$\pm 3.9$ %	$\infty$
Boundary Effects	1		Rectangular	$\sqrt{3}$	1	1	$\pm 0.6$ %	$\pm 0.6$ %	$\infty$
Linearity	4.7		Rectangular	$\sqrt{3}$	1	1	$\pm 2.7$ %	$\pm 2.7$ %	$\infty$
Detection Limits	1		Rectangular	$\sqrt{3}$	1	1	$\pm 0.6$ %	$\pm 0.6$ %	$\infty$
Modulation response	2.4		Rectangular	$\sqrt{3}$	1	1	$\pm 1.4$ %	$\pm 1.4$ %	$\infty$
Readout Electronics	0.3		Normal	1	1	1	$\pm 0.3$ %	$\pm 0.3$ %	$\infty$
Response Time	0.8		Rectangular	$\sqrt{3}$	1	1	$\pm 0.5$ %	$\pm 0.5$ %	$\infty$
Integration Time	2.6		Rectangular	$\sqrt{3}$	1	1	$\pm 1.5$ %	$\pm 1.5$ %	$\infty$
RF Ambient – Noise	3		Rectangular	$\sqrt{3}$	1	1	$\pm 1.7$ %	$\pm 1.7$ %	$\infty$
RF Ambient– Reflections	3		Rectangular	$\sqrt{3}$	1	1	$\pm 1.7$ %	$\pm 1.7$ %	$\infty$
Probe Positioner	0.4		Rectangular	$\sqrt{3}$	1	1	$\pm 0.2$ %	$\pm 0.2$ %	$\infty$
Probe Positioning	2.9		Rectangular	$\sqrt{3}$	1	1	$\pm 1.7$ %	$\pm 1.7$ %	$\infty$
Post-processing	4		Rectangular	$\sqrt{3}$	1	1	$\pm 2.3$ %	$\pm 2.3$ %	$\infty$
Max.SAR Evaluation	2		Rectangular	$\sqrt{3}$	1	1	$\pm 1.15$ %	$\pm 1.15$ %	$\infty$
<b>Test Sample Related</b>									
Device Positioning	1.6	1.8	Normal	1	1	1	$\pm 1.6$ %	$\pm 1.8$ %	145
Device Holder	1.5	1.7	Normal	1	1	1	$\pm 1.5$ %	$\pm 1.7$ %	5
Power Drift	5.0		Rectangular	$\sqrt{3}$	1	1	$\pm 2.9$ %	$\pm 2.9$ %	$\infty$
<b>Phantom and Setup</b>									
Phantom Production Tolerances	6.1		Rectangular	$\sqrt{3}$	1	1	3.52	3.52	$\infty$
SAR correction	1.9		Rectangular	$\sqrt{3}$	1	0.84	1.10	1.10	
Liquid Conductivity (mea.)	2.4		Rectangular	$\sqrt{3}$	0.78	0.71	1.08	1.08	$\infty$
Liquid Permittivity (mea.)	2.4		Rectangular	$\sqrt{3}$	0.26	0.26	0.36	0.36	$\infty$
Temp. unc. - Conductivity	3.4		Rectangular	$\sqrt{3}$	0.78	0.71	1.53	1.53	$\infty$
Temp. unc. - Permittivity	0.4		Rectangular	$\sqrt{3}$	0.23	0.26	0.05	0.05	$\infty$
<b>Combined Standard Uncertainty (K = 1)</b>							$\pm 10.42$ %	$\pm 10.48$ %	361
<b>Expanded Uncertainty (K = 2)</b>							$\pm 20.84$ %	$\pm 20.97$ %	

## Uncertainty Budget for Frequency range of 3 GHz to 6 GHz

Error Description	Uncertainty Value (± %)		Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)	Vi V <sub>eff</sub>
<b>Measurement System</b>									
Probe Calibration	6.65		Normal	1	1	1	± 6.65 %	± 6.65 %	∞
Axial Isotropy	4.7		Rectangular	$\sqrt{3}$	0.7	0.7	± 1.9 %	± 1.9 %	∞
Hemispherical Isotropy	9.6		Rectangular	$\sqrt{3}$	0.7	0.7	± 3.9 %	± 3.9 %	∞
Boundary Effects	2		Rectangular	$\sqrt{3}$	1	1	± 1.2 %	± 1.2 %	∞
Linearity	4.7		Rectangular	$\sqrt{3}$	1	1	± 2.7 %	± 2.7 %	∞
Detection Limits	1		Rectangular	$\sqrt{3}$	1	1	± 0.6 %	± 0.6 %	∞
Modulation response	2.4		Rectangular	$\sqrt{3}$	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	0.3		Normal	1	1	1	± 0.3 %	± 0.3 %	∞
Response Time	0.8		Rectangular	$\sqrt{3}$	1	1	± 0.5%	± 0.5 %	∞
Integration Time	2.6		Rectangular	$\sqrt{3}$	1	1	± 1.5 %	± 1.5 %	∞
RF Ambient – Noise	3		Rectangular	$\sqrt{3}$	1	1	± 1.7 %	± 1.7 %	∞
RF Ambient– Reflections	3		Rectangular	$\sqrt{3}$	1	1	± 1.7 %	± 1.7 %	∞
Probe Positioner	0.4		Rectangular	$\sqrt{3}$	1	1	± 0.2 %	± 0.2 %	∞
Probe Positioning	6.7		Rectangular	$\sqrt{3}$	1	1	± 3.9 %	±3.9 %	∞
Post-processing	4		Rectangular	$\sqrt{3}$	1	1	± 2.3 %	± 2.3 %	∞
Max.SAR Evaluation	4		Rectangular	$\sqrt{3}$	1	1	± 2.3 %	± 2.3 %	∞
<b>Test Sample Related</b>									
Device Positioning	1.6	1.8	Normal	1	1	1	±1.6 %	± 1.8 %	145
Device Holder	1.5	1.7	Normal	1	1	1	± 1.5 %	± 1.7 %	5
Power Drift	5.0		Rectangular	$\sqrt{3}$	1	1	± 2.9 %	± 2.9 %	∞
<b>Phantom and Setup</b>									
Phantom Production Tolerances	6.6		Rectangular	$\sqrt{3}$	1	1	3.81	3.81	∞
SAR correction	1.9		Rectangular	$\sqrt{3}$	1	0.84	1.10	0.92	
Liquid Conductivity (mea.)	2.4		Rectangular	$\sqrt{3}$	0.78	0.71	1.08	0.98	∞
Liquid Permittivity (mea.)	2.4		Rectangular	$\sqrt{3}$	0.26	0.26	0.36	0.36	∞
Temp. unc. - Conductivity	3.4		Rectangular	$\sqrt{3}$	0.78	0.71	1.53	1.39	∞
Temp. unc. - Permittivity	0.4		Rectangular	$\sqrt{3}$	0.23	0.26	0.05	0.06	∞
<b>Combined Standard Uncertainty (K = 1)</b>							± 11.65 %	± 11.66 %	361
<b>Expanded Uncertainty (K = 2)</b>							± 23.29 %	± 23.33 %	

### 2.3. Antenna Information:

#### For WLAN

Antenna	Manufacture	Part Number	Type	Connector	Frequency Range (MHz)	Gain (dBi)
Main	AWAN	DC33001WF20	PIFA	I-PEX	2400-2500	1.75
					5150-5350	2.36
					5470-5725	2.31
					5725-5850	2.27
					5925-6425	2.67
					6425-6525	1.83
					6525-6875	2.38
					6875-7125	2.25
Aux	AWAN	DC33001WF30	PIFA	I-PEX	2400-2500	1.89
					5150-5350	2.10
					5470-5725	2.46
					5725-5850	1.45
					5925-6425	2.65
					6425-6525	1.59
					6525-6875	2.24
					6875-7125	1.18

#### For WWAN

Antenna	Manufacture	P/N	Type	Connector	Gain (dBi)	Note
Main	AWAN	DC33001WF00	PIFA	I-PEX	0.69	UMTS-Band II
					1.68	UMTS-Band IV
					-2.16	UMTS-Band V
					0.69	LTE Band 2
					1.68	LTE Band 4
					-2.16	LTE Band 5
					1.51	LTE Band 7
					-0.91	LTE Band 12
					-3.12	LTE Band 13
					-2.05	LTE Band 14
					-1.10	LTE Band 17
					0.57	LTE Band 25
					-2.05	LTE Band 26
					-1.08	LTE Band 30
					1.51	LTE Band 38
					1.11	LTE Band 41
					0.15	LTE Band 48
1.75	LTE Band 66					
-0.04	LTE Band 71					
Aux	AWAN	DC33001WF10	PIFA	I-PEX	-	RX only

## 2.4. The Maximum SAR 1g Values

Mode	Distance(mm)	Highest Body Reported SAR-1g(W/kg)
UMTS Band II	0	0.918
UMTS Band IV	0	0.945
UMTS Band V	0	0.321
LTE Band 2	0	1.150
LTE Band 4	0	1.139
LTE Band 5	0	0.374
LTE Band 7	0	1.026
LTE Band 12	0	0.475
LTE Band 13	0	0.545
LTE Band 14	0	0.361
LTE Band 17	0	0.590
LTE Band 25	0	1.104
LTE Band 26	0	0.435
LTE Band 30	0	0.123
LTE Band 38	0	0.468
LTE Band 41	0	0.426
LTE Band 48	0	0.210
LTE Band 66	0	0.572
LTE Band 71	0	0.408

Note:

- 1) The device is in compliance with Specific Absorption Rate(SAR)for general population uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI C95.1:2019/IEEE C95.1:2019, the NCRP Report Number 86 for uncontrolled environment and had been tested in accordance with the measurement methods and procedures specified in IEC/IEEE 62209-1528:2020 .

## 2.5. Laboratory Environment

Temperature	Min. = 18°C, Max. = 25°C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

## 2.6. Main Test Instruments

Item	Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Interval
1	Data Acquisition Electronics	Speag	DAE4	1289	May. 31, 2022	1 Year
2	E-field Probe	Speag	EX3DV4	7678	Aug. 30, 2022	1 Year
3	System Validation Dipole	Speag	D750V3	1145	May. 27, 2022	3 Year
4	System Validation Dipole	Speag	D900V2	1d185	May. 23, 2022	3 Year
5	System Validation Dipole	Speag	D1800V2	2d210	May. 30, 2022	3 Year
6	System Validation Dipole	Speag	D1900V2	5d208	May. 23, 2022	3 Year
7	System Validation Dipole	Speag	D2300V2	1054	May. 25, 2022	3 Year
8	System Validation Dipole	Speag	D2600V2	1111	May. 25, 2022	3 Year
9	System Validation Dipole	Speag	D3500V2	1096	Jan. 24, 2020	3 Year
10	System Validation Dipole	Speag	D3700V2	1065	Jan. 24, 2020	3 Year
11	ELI4 Phantom	Speag	ELI4 Phantom V8.0	2149	N/A	N/A
12	ENA Network Analyzer	Agilent	E5071C	MY46524658	Mar. 21, 2022	1 Year
12	Signal Generator	R&S	SMB100A	E-613	Jul. 29, 2022	1 Year
14	Spectrum Analyzer	Keysight	N9020A	MY57120120	Mar. 7, 2022	1 Year
15	Power Meter	Anritsu	ML2495A	1128008	Jun. 1, 2022	1 Year
16	Power Sensor	Anritsu	MA2411B	1126001	Jun. 1, 2022	1 Year
17	Dielectric Probe Kit	Agilent	85070E	2593	N/A	N/A
18	Low pass filter	Mini-Circuits	SLP-2950+	M108294	N/A	N/A
19	Power Amplifier	Mini-Circuits	ZVE-2W-272+	N650001538	N/A	N/A
20	Power Amplifier	Mini-Circuits	ZVE-8G+	N628801631	N/A	N/A
21	Thermometer	kolin	KGM-DVB03	E-1093	Oct. 14, 2022	1 Year

Remark: "N/A" denotes no model name, serial No. or calibration specified.


### 3. SAR MEASUREMENTS SYSTEM CONFIGURATION

#### 3.1. SAR Measurement Setup

The DASY5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
6. The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows.
7. DASY5 software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

##### 3.1.1. TEST SETUP LAYOUT

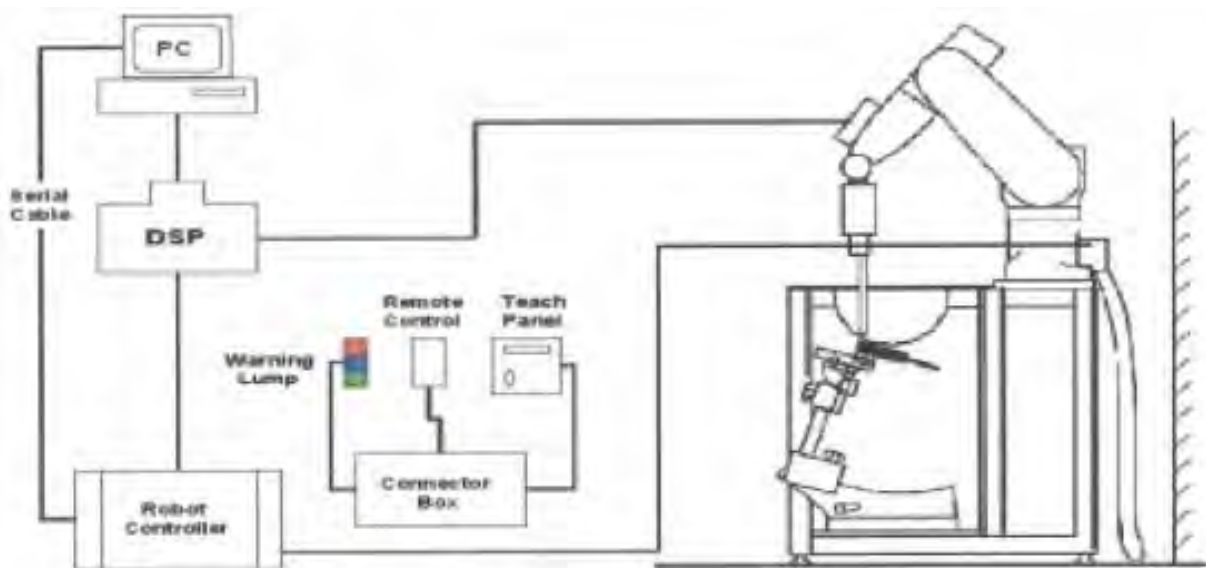


### 3.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

#### 3.2.1. EX3DV4 PROBE SPECIFICATION

<b>Construction</b>	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
<b>Calibration</b>	ISO/IEC 17025 calibration service available
<b>Frequency</b>	10 MHz to 6 GHz Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)
<b>Directivity</b>	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)
<b>Dynamic Range</b>	10 $\mu$ W/g to $> 100$ mW/g Linearity: $\pm 0.2$ dB
<b>Dimensions</b>	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.0 mm

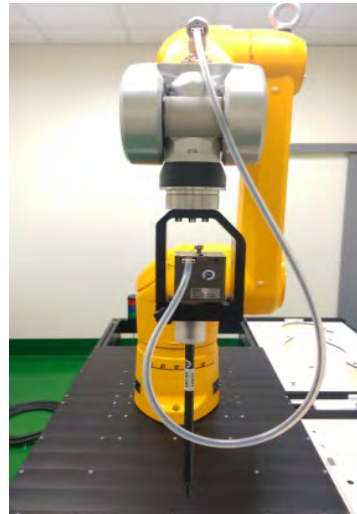

EX3DV4 E-field Probe

### 3.2.2. E-FIELD PROBE CALIBRATION

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy was evaluated and found to be better than  $\pm 0.25\text{dB}$ . The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where:  $\Delta t$  = Exposure time (30 seconds),  
 C = Heat capacity of tissue (brain or muscle),  
 $\Delta T$  = Temperature increase due to RF exposure.

Or 
$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:  $\sigma$  = Simulated tissue conductivity,  
 $\rho$  = Tissue density (kg/m<sup>3</sup>).




### 3.2.3. OTHER TEST EQUIPMENT


#### 3.2.3.1. DEVICE HOLDER FOR TRANSMITTERS

**Construction:** Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.) It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI4 and SAM v6.0 Phantoms.

**Material:** POM, Acrylic glass, Foam


#### 3.2.3.2. PHANTOM

Model	ELI4 Phantom	
<b>Construction</b>	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	
<b>Shell Thickness</b>	2±0.1 mm	
<b>Filling Volume</b>	Approx. 30 liters	
<b>Dimensions</b>	Length: 600 mm ; Width: 190mm Height: adjustable feet	
<b>Available</b>	Special	

Model	Twin SAM	
<b>Construction</b>	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.	
<b>Shell Thickness</b>	2 ± 0.2 mm	
<b>Filling Volume</b>	Approx. 25 liters	
<b>Dimensions</b>	Length:1000mm; Width: 500mm Height: adjustable feet	
<b>Available</b>	Special	

### 3.2.4. SCANNING PROCEDURE

The SAR test against the head and body-worn phantom was carried out as follow:

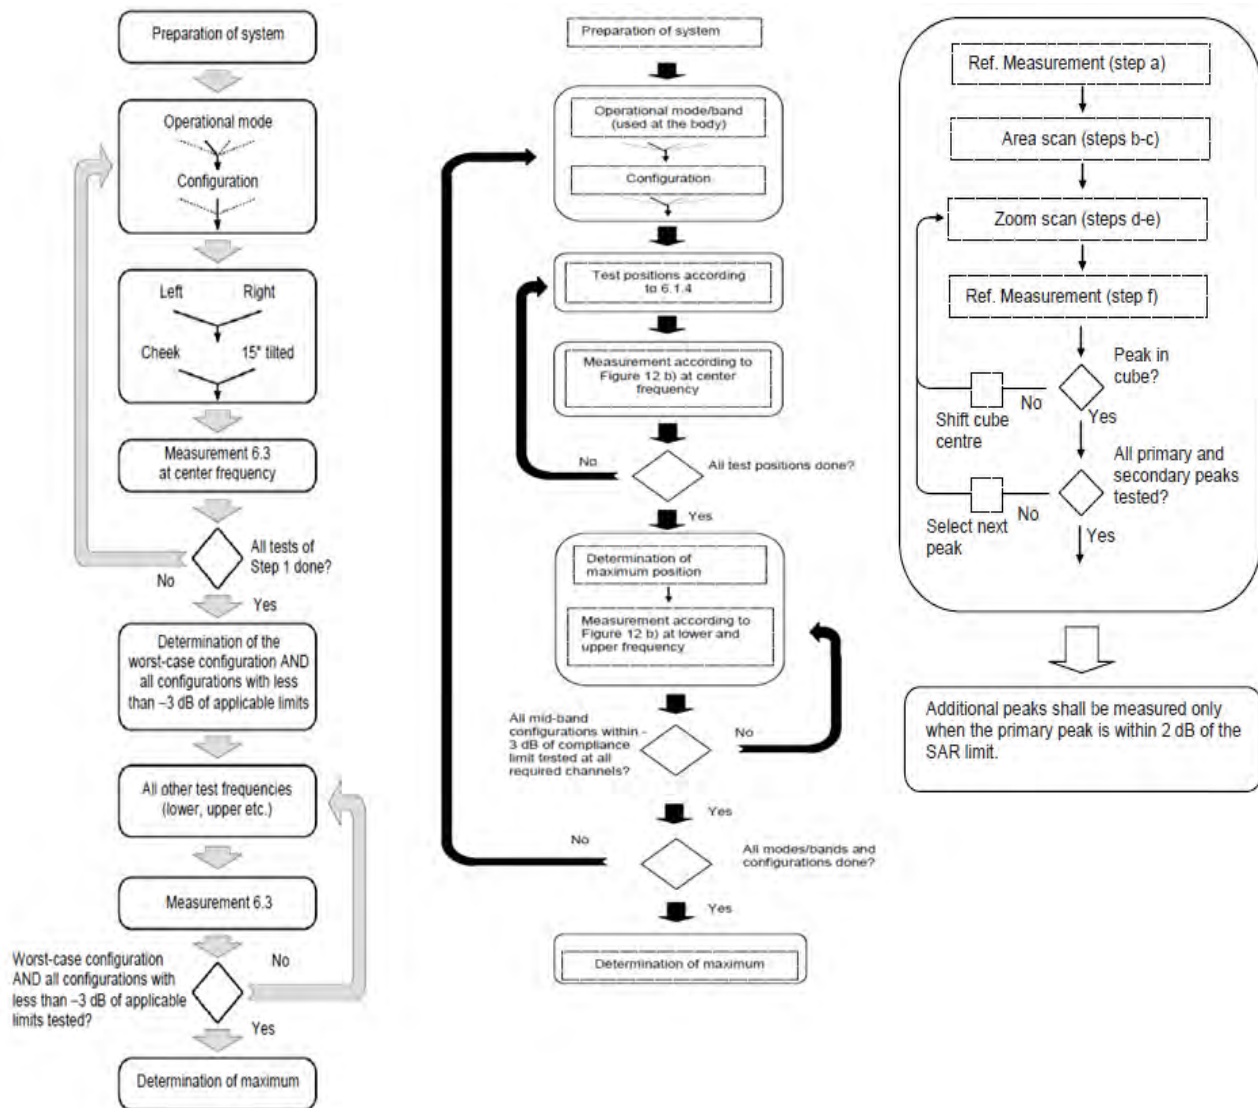

After an area scan has been done at a fixed distance of 1.4mm from the surface of the phantom on the source side, a 3D scan is set up around the location of the maximum spot SAR. First, a point within the scan area is visited by the probe and a SAR reading taken at the start of testing. At the end of testing, the probe is returned to the same point and a second reading is taken. Comparison between these start and end readings enables the power drift during measurement to be assessed.

Above is the scanning procedure flow chart and table from the IEEE1528 standard.

This is the procedure for which all compliant testing should be carried out to ensure that all variations of the device position and transmission behavior are tested.

### **3.2.5. DATA STORAGE AND EVALUATION**

#### **3.2.5.1. DATA STORAGE**

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm<sup>2</sup>], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### 3.2.6. DATA EVALUATION BY SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	Sensitivity	Normi, a <sub>i0</sub> , a <sub>i1</sub> , a <sub>i2</sub>
	Conversion factor	ConvF <sub>i</sub>
	Diode compression point	Dcp <sub>i</sub>
Device parameters:	Frequency	f
	Crest factor	cf
Media parameters:	Conductivity	
	Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcp_i$$

With	V <sub>i</sub> = compensated signal of channel i	( i = x, y, z )
	U <sub>i</sub> = input signal of channel i	( i = x, y, z )
	cf = crest factor of exciting field	(DASY parameter)
	dcp <sub>i</sub> = diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E-field probes: } E_i = ( V_i / \text{Norm}_i \cdot \text{ConvF} )^{1/2}$$

$$\text{H-field probes: } H_i = ( V_i )^{1/2} \cdot ( a_{i0} + a_{i1} f + a_{i2} f^2 ) / f$$

With  $V_i$  = compensated signal of channel i ( i = x, y, z )

$\text{Norm}_i$  = sensor sensitivity of channel i ( i = x, y, z )  
 [mV/(V/m)<sup>2</sup>] for E-field Probes

ConvF = sensitivity enhancement in solution

$a_{ij}$  = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

$E_i$  = electric field strength of channel i in V/m

$H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = (E_X^2 + E_Y^2 + E_Z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = (E_{\text{tot}})^2 \cdot \sigma / (\rho \cdot 1000)$$

With SAR = local specific absorption rate in mW/g

$E_{\text{tot}}$  = total field strength in V/m  
 = conductivity in [mho/m] or [Siemens/m]  
 = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{\text{pwe}} = E_{\text{tot}}^2 / 3770 \text{ or } P_{\text{pwe}} = H_{\text{tot}}^2 \cdot 37.7$$

With  $P_{\text{pwe}}$  = equivalent power density of a plane wave in mW/cm<sup>2</sup>

$E_{\text{tot}}$  = total field strength in V/m

$H_{\text{tot}}$  = total magnetic field strength in A/m

## 4. TISSUE-EQUIVALENT LIQUID

### 4.1. Tissue-equivalent Liquid Ingredients

The liquid is consisted of water, salt and Glycol, Sugar, Preventol and Cellulose. The liquid has previously been proven to be suited for worst-case. The measured conductivity and relative permittivity should be within  $\pm 5\%$  of the target values. The below table shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEC 62209.

#### Composition of the Tissue Equivalent Matter

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
Head 750	0.2	-	0.2	1.5	56.0	-	42.1	-
Head 900	0.2	-	0.2	1.4	58.0	-	40.2	-
Head 1800	-	44.5	-	0.3	-	-	55.2	-
Head 1900	-	44.5	-	0.2	-	-	55.3	-
Head 2300	-	44.9	-	0.1	-	-	55.0	-
Head 2600	-	45.1	-	0.1	-	-	54.8	-
Head 3500	-	8.0	-	0.2	-	20.0	71.8	-
Head 3700	-	8.1	-	0.2	-	20.0	71.7	-

## 4.2. Tissue-equivalent Liquid Properties

### Dielectric Performance of Tissue Simulating Liquid

Tissue Verification									
Date	Tissue Type	Frequency (MHz)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Targeted Conductivity ( $\sigma$ )	Targeted Permittivity ( $\epsilon_r$ )	Deviation Conductivity ( $\sigma$ ) (%)	Deviation Permittivity ( $\epsilon_r$ ) (%)	Limit (%) $\pm 5$
2023/1/30	Head	750	0.89	43.15	0.89	41.94	-0.04	2.89	$\pm 5$
2023/2/1	Head	900	0.96	42.82	0.97	41.50	-1.44	3.18	$\pm 5$
2023/1/31	Head	1800	1.40	41.42	1.40	40.00	0.07	3.55	$\pm 5$
2023/2/2	Head	1900	1.41	41.29	1.40	40.00	1.00	3.23	$\pm 5$
2023/2/1	Head	2300	1.73	39.24	1.67	39.47	3.86	-0.59	$\pm 5$
2023/1/31	Head	2600	2.00	40.15	1.96	39.01	1.99	2.91	$\pm 5$
2023/1/19	Head	3500	2.81	37.88	2.91	37.90	-3.40	-0.07	$\pm 5$
2023/1/19	Head	3700	3.01	37.53	3.12	37.70	-3.56	-0.44	$\pm 5$

**Note:**

- 1) The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.
- 2) KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.
- 3) The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.
- 4) According to FCC TCB workshop April, 2019 RF Exposure Procedures Update (Effective February 19, 2019), FCC has permitted the use of single head-tissue simulating liquid specified in IEEE 62209-1- for all SAR tests.

## 5. SYSTEM CHECK


### 5.1. DESCRIPTION OF SYSTEM CHECK

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyzer. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW (below 3GHz) or 100mW (3-6GHz), which was placed under the flat section of the twin SAM phantom. The system check results (dielectric parameters and SAR values) are given in the 6.2.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ( $\pm 10\%$ ).

System check is performed regularly on all frequency bands where tests are performed with the DASY5 system.

#### System Check Set-up

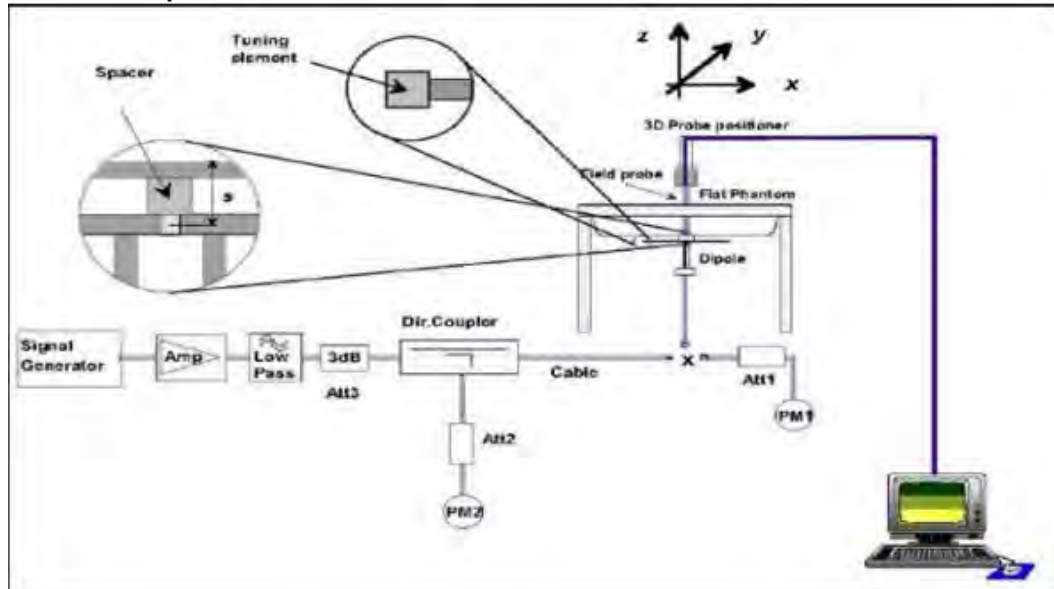



## 5.2. DESCRIPTION OF SYSTEM CHECK

### System Check in Tissue Simulating Liquid

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests.

Date	System Dipole			Parameters	Target [W/kg]	Measured [W/kg]	Deviation [%]	Limited [%]
	Type	Serial No.	Liquid					
2023/1/30	D750V3	1145	Head	1g SAR	8.55	8.12	-5.03	± 10
2023/2/1	D900V2	1d185	Head	1g SAR	11.10	11.16	0.54	± 10
2023/1/31	D1800V2	2d210	Head	1g SAR	38.20	42.00	9.95	± 10
2023/2/2	D1900V2	5d208	Head	1g SAR	40.20	41.20	2.49	± 10
2023/2/1	D2300V2	1054	Head	1g SAR	48.20	50.40	4.56	± 10
2023/1/31	D2600V2	1111	Head	1g SAR	55.80	61.20	9.68	± 10
2023/1/19	D3500V2	1096	Head	1g SAR	67.70	63.80	-5.76	± 10
2023/1/19	D3700V2	1065	Head	1g SAR	66.40	68.70	3.46	± 10


## 6. OPERATIONAL CONDITIONS DURING TEST

### 6.1. General Description of Test Procedures


Connection to the EUT is established via air interface with base station An, and the EUT is Set to maximum output power by base station. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. The antenna connected to the output of the base station simulator shall be placed at least 50cm away from the EUT. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the EUT by at least 30dB.

### 6.2. Test position Antenna Location

#### For WLAN

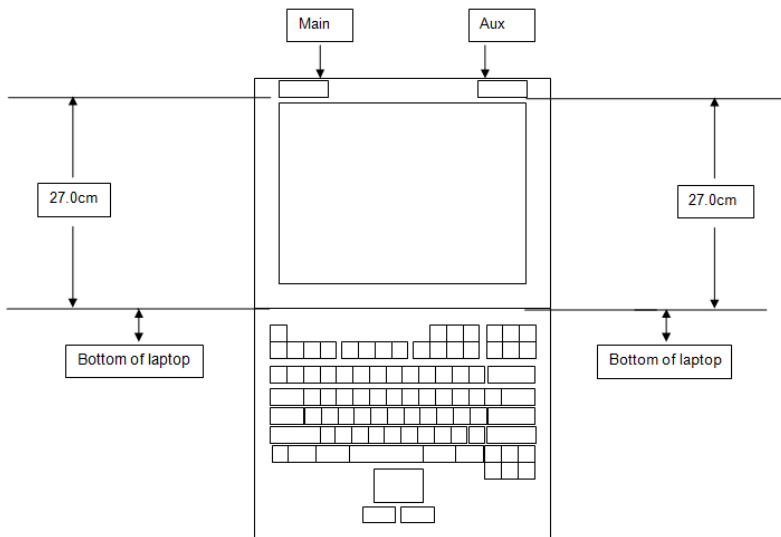

#### For WWAN

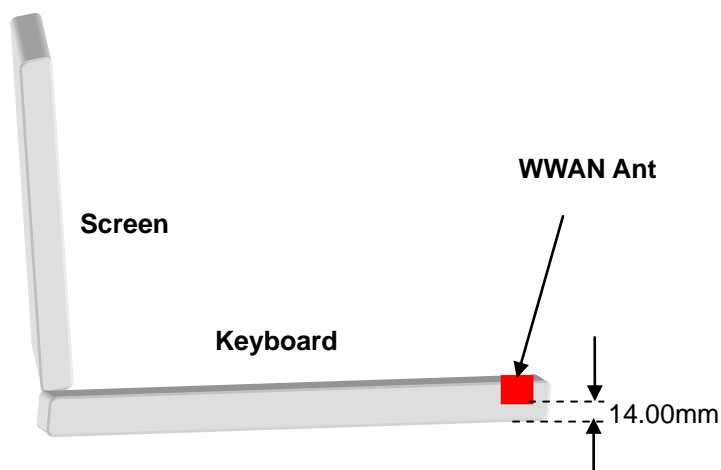

**6.3. Test Position of Portable Devices****For WLAN**

Minimum Separation Distance			
Antenna	Position	Distance (mm)	Evaluation Test
Wlan Main	Bottom	270	No
Wlan Aux	Bottom	270	No

**For WWAN**

Minimum Separation Distance					
P-Sensor	Mode	Antenna	Position	Distance (mm)	Evaluation Test
on	WWAN	Main	Bottom	14.00	Yes
off		Main	Bottom	29.00	Yes

## 6.4. TEST CONFIGURATION

The SAR Exclusion Threshold in KDB 447498 D04 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an EUT edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned adjacent the phantom and the edge containing the antenna positioned perpendicular to the phantom.

### SAR test reduction and exclusion guidance

(1)The SAR exclusion threshold for is defined by the following equation:

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases} \quad (\text{B. 2})$$

where

$$x = -\log_{10} \left( \frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right)$$

and  $f$  is in GHz,  $d$  is the separation distance (cm), and  $ERP_{20 \text{ cm}}$  is per Formula (B.1).

Example values shown in Table B.2 are for illustration only.

Table B.2—Example Power Thresholds (mW)

Frequency (MHz)	Distance (mm)									
	5	10	15	20	25	30	35	40	45	50
300	39	65	88	110	129	148	166	184	201	217
450	22	44	67	89	112	135	158	180	203	226
835	9	25	44	66	90	116	145	175	207	240
1900	3	12	26	44	66	92	122	157	195	236
2450	3	10	22	38	59	83	111	143	179	219
3600	2	8	18	32	49	71	96	125	158	195
5800	1	6	14	25	40	58	80	106	136	169

## 6.5. SAR Exclusion Calculations for WWAN Antenna

P-SENSOR ON

Mode	Ant	Position	Distance (mm)	f (MHz)	Max Power(dBm)	Max Power(mW)	SAR Exclusion threshold(mW)	Test required
UMTS Band II	Main	Bottom	14.00	1880	23.00	199.53	12	Yes
UMTS Band IV	Main	Bottom	14.00	1732.6	23.00	199.53	12	Yes
UMTS Band V	Main	Bottom	14.00	836.4	23.00	199.53	25	Yes

Mode	Ant	Position	Distance (mm)	f (MHz)	Max Power(dBm)	Max Power(mW)	SAR Exclusion threshold(mW)	Test required
LTE Band 2	Main	Bottom	14.00	1880	23.00	199.53	12	Yes
LTE Band 4	Main	Bottom	14.00	1732.5	23.00	199.53	12	Yes
LTE Band 5	Main	Bottom	14.00	836.5	23.00	199.53	25	Yes
LTE Band 7	Main	Bottom	14.00	2535	23.00	199.53	10	Yes
LTE Band 12	Main	Bottom	14.00	707.5	23.00	199.53	25	Yes
LTE Band 13	Main	Bottom	14.00	782	23.00	199.53	25	Yes
LTE Band 14	Main	Bottom	14.00	793	23.00	199.53	25	Yes
LTE Band 17	Main	Bottom	14.00	710	23.00	199.53	25	Yes
LTE Band 25	Main	Bottom	14.00	1882.5	23.00	199.53	12	Yes
LTE Band 26	Main	Bottom	14.00	831	23.00	199.53	25	Yes
LTE Band 30	Main	Bottom	14.00	2310	16.50	44.67	10	Yes
LTE Band 38	Main	Bottom	14.00	2595	23.00	199.53	10	Yes
LTE Band 41	Main	Bottom	14.00	2593	23.00	199.53	10	Yes
LTE Band 48	Main	Bottom	14.00	3646.7	20.00	100.00	8	Yes
LTE Band 66	Main	Bottom	14.00	1745	20.50	112.20	12	Yes
LTE Band 71	Main	Bottom	14.00	680.5	23.00	199.53	25	Yes

## P-SENSOR OFF

Mode	Ant	Position	Distance (mm)	f (MHz)	Max Power(dBm)	Max Power(mW)	SAR Exclusion threshold(mW)	Test required
UMTS Band II	Main	Bottom	29.00	1880	24.50	281.84	66	Yes
UMTS Band IV	Main	Bottom	29.00	1732.6	24.50	281.84	66	Yes
UMTS Band V	Main	Bottom	29.00	836.4	24.50	281.84	90	Yes

Mode	Ant	Position	Distance (mm)	f (MHz)	Max Power(dBm)	Max Power(mW)	SAR Exclusion threshold(mW)	Test required
LTE Band 2	Main	Bottom	29.00	1880	24.00	251.19	66	Yes
LTE Band 4	Main	Bottom	29.00	1732.5	24.00	251.19	66	Yes
LTE Band 5	Main	Bottom	29.00	836.5	24.00	251.19	90	Yes
LTE Band 7	Main	Bottom	29.00	2535	24.00	251.19	59	Yes
LTE Band 12	Main	Bottom	29.00	707.5	24.00	251.19	90	Yes
LTE Band 13	Main	Bottom	29.00	782	24.00	251.19	90	Yes
LTE Band 14	Main	Bottom	29.00	793	24.00	251.19	90	Yes
LTE Band 17	Main	Bottom	29.00	710	24.00	251.19	90	Yes
LTE Band 25	Main	Bottom	29.00	1882.5	24.00	251.19	66	Yes
LTE Band 26	Main	Bottom	29.00	831	24.00	251.19	90	Yes
LTE Band 30	Main	Bottom	29.00	2310	17.50	56.23	59	No
LTE Band 38	Main	Bottom	29.00	2595	24.00	251.19	59	Yes
LTE Band 41	Main	Bottom	29.00	2593	24.00	251.19	59	Yes
LTE Band 41(HPUE)	Main	Bottom	29.00	2593	25.00	316.23	59	Yes
LTE Band 48	Main	Bottom	29.00	3646.7	21.00	125.89	49	Yes
LTE Band 66	Main	Bottom	29.00	1745	21.50	141.25	66	Yes
LTE Band 71	Main	Bottom	29.00	680.5	24.00	251.19	90	Yes

## 7. SAR MEASUREMENT VARIABILITY AND UNCERTAINTY

### 7.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Section 8.2.

## 7.2. WCDMA Test Configuration

### 1. Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the procedures description in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1s" for WCDMA/HSDPA or applying the required inner loop power control procedure to maintain maximum output power while HSUPA is active. Result for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) Should be tabulated in the SAR report. All configuration that are not supported by the DUT or cannot be measured due to technical or equipment limitation should be clearly identified.

### 2. WCDMA

#### (1). Head SAR Measurements

SAR for Head exposure configurations in voice mode is measured using a 12.2 kbps RMC with TPC bits configured to all "1s". SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than ¼ dB higher than that measured in 12.2 kbps RMC. Otherwise SAR is measured on the maximum output channel in 12.2 kbps AMR with 3.4 kbps SRB (signalling radio bearer) using the exposure configuration that results in the highest SAR in 12.2 kbps RMC for that RF channel.

#### (2). Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits configured to all "1s". SAR for other spreading codes and multiple DPDCHn, when supported by the EUT, are not required when the maximum average outputs of each RF channel, for each spreading code and DPDCHn configuration, are less than ¼ dB higher than those measured in 12.2 kbps RMC.

### 3. HSDPA

SAR for body exposure configurations is measured according to the "Body SAR Measurements" procedures of 3G device. In addition, body SAR is also measured for HSDPA when the maximum average outputs of each RF channel with HSDPA active is at ¼ dB higher than that measured without HSDPA using 12.2 kbps RMC or the maximum SAR 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA.

HSDPA should be configured according to UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HAPRQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. The  $\beta_c$  and  $\beta_d$  gain factors for DPCCH and DPDCH were set according to the values in the

below table,  $\beta_{hs}$  for HS-DPCCH is set automatically to the correct value when  $\Delta ACK$ ,  $\Delta NACK$ ,

$\Delta CQI = 8$ . The variation of the  $\beta_c / \beta_d$  ratio causes a power reduction at sub-tests 2 - 4.

Sub-test <sup>o</sup>	$\beta_c$ <sup>o</sup>	$\beta_d$ <sup>o</sup>	$\beta_d$ (SF) <sup>o</sup>	$\beta_c / \beta_d$ <sup>o</sup>	$\beta_{hs}$ (1) <sup>o</sup>	CM(dB)(2) <sup>o</sup>	MPR (dB) <sup>o</sup>
1 <sup>o</sup>	2/15 <sup>o</sup>	15/15 <sup>o</sup>	64 <sup>o</sup>	2/15 <sup>o</sup>	4/15 <sup>o</sup>	0.0 <sup>o</sup>	0 <sup>o</sup>
2 <sup>o</sup>	12/15(3) <sup>o</sup>	15/15(3) <sup>o</sup>	64 <sup>o</sup>	12/15(3) <sup>o</sup>	24/15 <sup>o</sup>	1.0 <sup>o</sup>	0 <sup>o</sup>
3 <sup>o</sup>	15/15 <sup>o</sup>	8/15 <sup>o</sup>	64 <sup>o</sup>	15/8 <sup>o</sup>	30/15 <sup>o</sup>	1.5 <sup>o</sup>	0.5 <sup>o</sup>
4 <sup>o</sup>	15/15 <sup>o</sup>	4/15 <sup>o</sup>	64 <sup>o</sup>	15/4 <sup>o</sup>	30/15 <sup>o</sup>	1.5 <sup>o</sup>	0.5 <sup>o</sup>

Note 1:  $\Delta ACK$ ,  $\Delta NACK$  and  $\Delta CQI = 8$   $A_{hs} = \beta_{hs} / \beta_c = 30/15$   $\beta_{hs} = 30/15 * \beta_c$ <sup>o</sup>

Note 2: CM=1 for  $\beta_c / \beta_d = 12/15$ ,  $\beta_{hs} / \beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.<sup>o</sup>

Note 3: For subtest 2 the  $\beta_c / \beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ <sup>o</sup>



The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Settings of required H-Set 1 QPSK acc. to 3GPP 34.121

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI"s
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

HSDPA UE category

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

#### 4. HSUPA

SAR for Body exposure configurations is measured according to the "Body SAR Measurements" procedures of 3G device. When the maximum output power is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the SAR of the primary mode is scaled by the ratio of specified maximum output power and SAR is  $\leq 75\%$  SAR Limit, SAR measurement is not required for the secondary mode.

The 3G SAR test reduction procedures is applied to HSPA(HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures for the highest reported body exposure SAR configuration in 12.2 kbps RMC.

Due to inner loop power control requirements in HSUPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSDPA should be configured according to the values indicated below as well as other applicable procedures described in the "WCDMA Handset" and „Release 5 HSDPA Data Device" sections of 3G device.

## Subtests for WCDMA Release 6 HSUPA

WCDMA General Settings	Mode	HSPA	HSPA	HSPA	HSPA	HSPA
	Subtest	1	2	3	4	5
	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	$\beta_c$	11/15	6/15	15/15	2/15	15/15
	$\beta_d$	15/15	15/15	9/15	15/15	15/15
	$\beta_{ec}$	209/225	12/15	30/15	2/15	24/15
	$\beta_c/\beta_d$	11/15	6/15	9/15	2/15	15/15
	$\beta_{hs}$	22/15	12/15	30/15	4/15	30/15
	$\beta_{ed}$	1309/225	94/75	47/15	56/75	134/15
	CM (dB)	1	3	2	3	1
	MPR (dB)	0	2	1	2	0

## HSUPA UE category

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF4	11484	5.76
	4	4	2		20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF4	22996	?
	4	4	10		20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM. (TS25.306-7.3.0).

### 5. DC-HSDPA

In DC-HSDPA implementation of this device, the uplink parameters are the same as HSDPA. No additional channels and modulations (16 QAM, and 64 QAM) are supported in uplink. The difference is only in the downlink parameters, where two carriers are supported. HSDPA settings were used on uplink.

For Rel. 8 DC-HSDPA apply the four subtests from HSDPA Release 5 except use fixed reference channel H-Set 12 for DC-HSDPA. And we can apply the same SAR test exclusion criteria used for Rel. 6 HSPA for Rel. 7 HSPA+ and Rel. 8 DC-HSDPA. That is, if the HSPA, HSPA+, or the DC-HSDPA maximum output is not more than 0.25 dB higher than WCDMA, SAR measurement for those modes is not required. The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0 Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13


The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121 annex C for FDD and 3GPP TS 34.122.

The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI"s
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Note:

1. The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.
2. Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.

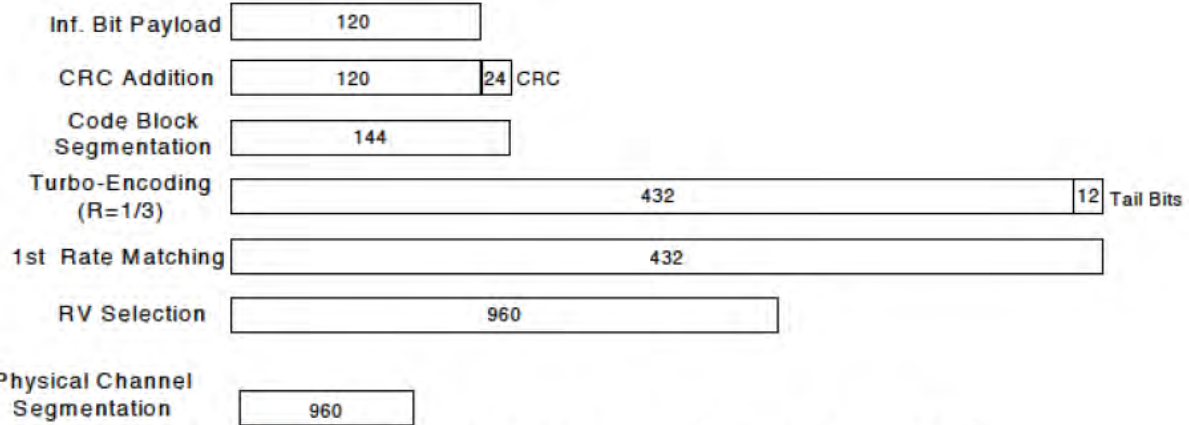

**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test <sup>o</sup>	$\beta_c$ <sup>o</sup>	$\beta_d$ <sup>o</sup>	$\beta_d$ (SF) <sup>o</sup>	$\beta_c/\beta_d$ <sup>o</sup>	$\beta_{hs}(1)$ <sup>o</sup>	CM(dB)(2) <sup>o</sup>	MPR (dB) <sup>o</sup>
1 <sup>o</sup>	2/15 <sup>o</sup>	15/15 <sup>o</sup>	64 <sup>o</sup>	2/15 <sup>o</sup>	4/15 <sup>o</sup>	0.0 <sup>o</sup>	0 <sup>o</sup>
2 <sup>o</sup>	12/15(3) <sup>o</sup>	15/15(3) <sup>o</sup>	64 <sup>o</sup>	12/15(3) <sup>o</sup>	24/15 <sup>o</sup>	1.0 <sup>o</sup>	0 <sup>o</sup>
3 <sup>o</sup>	15/15 <sup>o</sup>	8/15 <sup>o</sup>	64 <sup>o</sup>	15/8 <sup>o</sup>	30/15 <sup>o</sup>	1.5 <sup>o</sup>	0.5 <sup>o</sup>
4 <sup>o</sup>	15/15 <sup>o</sup>	4/15 <sup>o</sup>	64 <sup>o</sup>	15/4 <sup>o</sup>	30/15 <sup>o</sup>	1.5 <sup>o</sup>	0.5 <sup>o</sup>

Note 1:  $\Delta$  ACK,  $\Delta$  NACK and  $\Delta$  CQI=8  $A_{hs} = \beta_{hs}/\beta_c = 30/15$   $\beta_{hs} = 30/15 * \beta_c$

Note 2: CM=1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 3: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$

Up commands are set continuously to set the UE to Max power.

Note:

1. The Dual Carriers transmission only applies to HSDPA physical channels
2. The Dual Carriers belong to the same Node and are on adjacent carriers.
3. The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
4. The Dual Carriers operate in the same frequency band .
5. The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.
6. The device doesn't support carrier aggregation for it just can operate in Release 8.

### 7.3. LTE Test Configuration

Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR. The RS CMW500 was used for LTE output power measurements and SAR testing. Max power control was used so the UE transmits with maximum output power during SAR testing. SAR must be measured with the maximum TTI(transmit time interval) supported by the device in each LTE configuration.

#### 1)Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

#### 2) MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3-6.2.5 under Table 6.2.3-1.

#### 3)A-MPR

A-MPR(Additional MPR) has been disabled for all SAR tests by using Network Signaling Value of "NS=01"on the base station simulator.

#### 4)SAR test requirements

The LTE SAR test is choice the max power mode and start with the max power channel.

##### A) Largest channel bandwidth standalone SAR test requirements

i) QPSK with 1 RB allocation

When the SAR is  $\leq 1$  W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the 10-g SAR of a required test channel is  $> 1.8$  W/kg, SAR is required for all three RB offset configurations for that required test channel.

## 8. POWER REDUCTION BY PROXIMITY SENSING

A proximity sensor for power reduction is implemented in this device to address RF exposure compliance when the cellular antenna is positioned close to the user's body. The sensor's mechanical structure is designed to fit within the enclosure design used in this device and also extended around the edge and top of the antenna element in order to optimize sensitivity in these orientations. This design combines the antenna printed directly on a plastic part and proximity sensor FPC (Flexible Printed Circuit) bonded together into one piece. According to KDB 616217 D04 SAR for laptop and tablets v01r02)

### 8.1. procedures for determining proximity sensor triggering distances

The following procedures should be applied to determine proximity sensor triggering distances for the back surface and individual edges of a tablet. Conducted power is monitored qualitatively to identify the general triggering characteristics and recorded quantitatively, versus spacing, as required by the procedures. Unless there is built-in test software that reports the triggering conditions and enables the power levels to be confirmed separately, monitoring of conducted power during the triggering tests typically requires internal access to the antenna ports inside the tablet, which may interfere with the triggering tests.

1. The relevant transmitter should be set to operate at its normal maximum output power.
2. The entire back surface or edge of the tablet is positioned below a flat phantom filled with the required tissue-equivalent medium, and positioned at least 20 mm further than the distance that triggers power reduction.
3. It should be ensured that the cables required for power measurements are not interfering with the proximity sensor. Cable losses should be properly compensated to report the measured power results.
4. The back surface or edge is moved toward the phantom in 3 mm steps until the sensor triggers.
5. The back surface or edge is then moved back (further away) from the phantom by at least 5 mm or until maximum output power is returned to the normal maximum level.
6. The back surface or edge is again moved toward the phantom, but in 1 mm steps, until it is at least 5 mm past the triggering point or touching the phantom. If 1 mm resolution is not suitable for the sensor triggering sensitivity, a KDB inquiry should be submitted to determine alternative test configurations.
7. If the tablet is not touching the phantom, it is moved in 3 mm steps until it touches the phantom to confirm that the sensor remains triggered and the maximum power stays reduced.
8. The process is then reversed by moving the tablet away from the phantom according to steps 4) to 7), to determine triggering release, until it is at least 10 mm beyond the point that triggers the return of normal maximum power.
9. The measured output power within  $\pm 5$  mm of the triggering points, or until the tablet is touching the phantom, for movements to and from the phantom should be tabulated in the SAR report.
10. If the sensor design and implementation allow additional variations for triggering distance tolerances, multiple samples should be tested to determine the most conservative distance required for SAR evaluation.
11. To ensure all production units are compliant, it is generally necessary to reduce the triggering distance determined from the triggering tests by 1 mm, or more if it is necessary, and use the smallest distance for movements to and from the phantom, minus 1 mm, as the sensor triggering distance for determining the SAR measurement distance.

## 8.2. procedures for determining antenna and proximity sensor coverage

The sensing regions are usually limited to areas near the sensor element. If a sensor is spatially offset from the antenna(s), it is necessary to verify sensor triggering for conditions where the antenna is next to the user but the sensor is laterally further away to ensure sensor coverage is sufficient for reducing the power to maintain compliance. The following are used to determine if additional SAR measurements may be necessary due to sensor and antenna offset. 25 These procedures do not apply and are not required for configurations where the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor.

1. The back surface or edge of the tablet is positioned at a test separation distance less than or equal to the distance required for back surface or edge triggering, with both the antenna and sensor pad located at least 20 mm laterally outside the edge (boundary) of the phantom, along the direction of maximum antenna and sensor offset. For the back surface, if the direction of maximum offset is not aligned with the tablet coordinates (physical edges) the tablet test position would not be aligned with the phantom coordinates (orientations). Each applicable tablet edge should be positioned perpendicularly to the phantom to determine sensor coverage. For antennas and/or sensors located near the corner of a tablet, both adjacent edges must be considered.
2. The similar sequence of steps applied to determine sensor triggering distance in section 6.2 are used to verify back surface and edge sensor coverage by moving the tablet (sensor and antenna) horizontally toward the phantom while maintaining the same vertical separation between the back surface or edge and the phantom.
3. After the exact location where triggering of power reduction is determined, with respect to the sensor and antenna, the tablet movement should be continued, in 3 mm increments, until both the sensor and antenna(s) are fully under the phantom and at least 20 mm inside the phantom edge.
4. The process is then repeated from the opposite direction, starting at the other end of the maximum antenna and sensor offset, by rotating the tablet 180° along the vertical axis.
5. The triggering points should be documented graphically, with the antenna and sensor clearly identified, along with all relevant dimensions.

If the subsequently measured peak SAR location for the antenna is not between the triggering points, established by the sensor coverage tests from opposite ends of the antenna and sensor, additional SAR tests may be required for conditions where only part of the back surface or edge of a tablet corresponding to the antenna is in proximity to the user and the sensor may not be triggering as desired. A KDB inquiry must be submitted by the test lab to determine if additional tests are required and the proper test configurations to use for testing. This may include situations where the sensor coverage region is too small for the antenna, the sensor is located too far away from the antenna, the sensor location is insufficient to cover multiple antennas or the antenna is at the corner of a tablet etc.

### 8.3. proximity sensor status table of trigger distance

As per the KDB 616217 D04 SAR for laptop and tablets v01r02, section 6.2, the following procedure is used to determine the triggering distances.


Proximity Sensor Status Table when DUT is moving towards the phantom


Distance to the DUT (mm)	Proximity Sensor Status – Bottom
30	OFF
27	OFF
25	OFF
24	OFF
23	OFF
22	OFF
21	OFF
20	OFF
19	OFF
18	OFF
17	OFF
16	OFF
15	ON
14	ON
13	ON
12	ON
11	ON
10	ON
9	ON
8	ON
7	ON
6	ON
5	ON
4	ON
3	ON
2	ON
1	ON
0	ON








### 8.4. power reduction per air-interface


The following graphs show the power level and the distance from the DUT to the flat phantom for the Rear,Edge1 and Bottom Mode Surface.

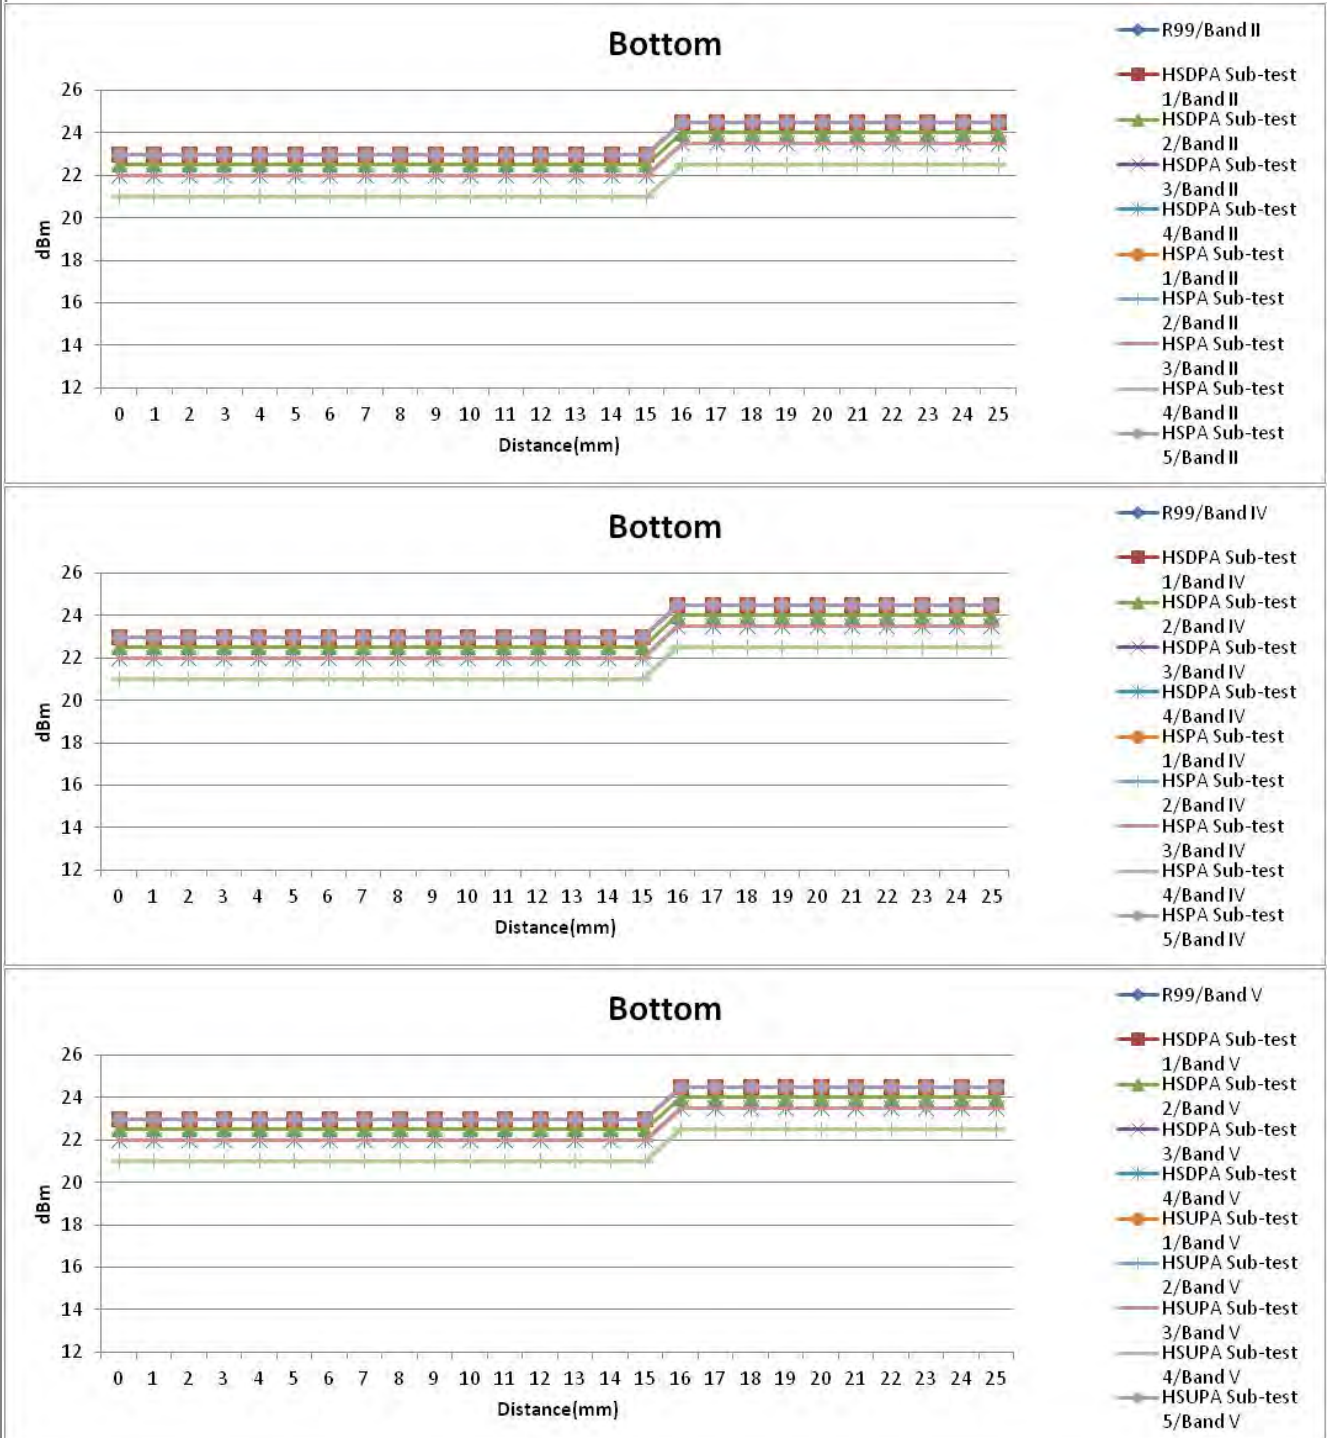

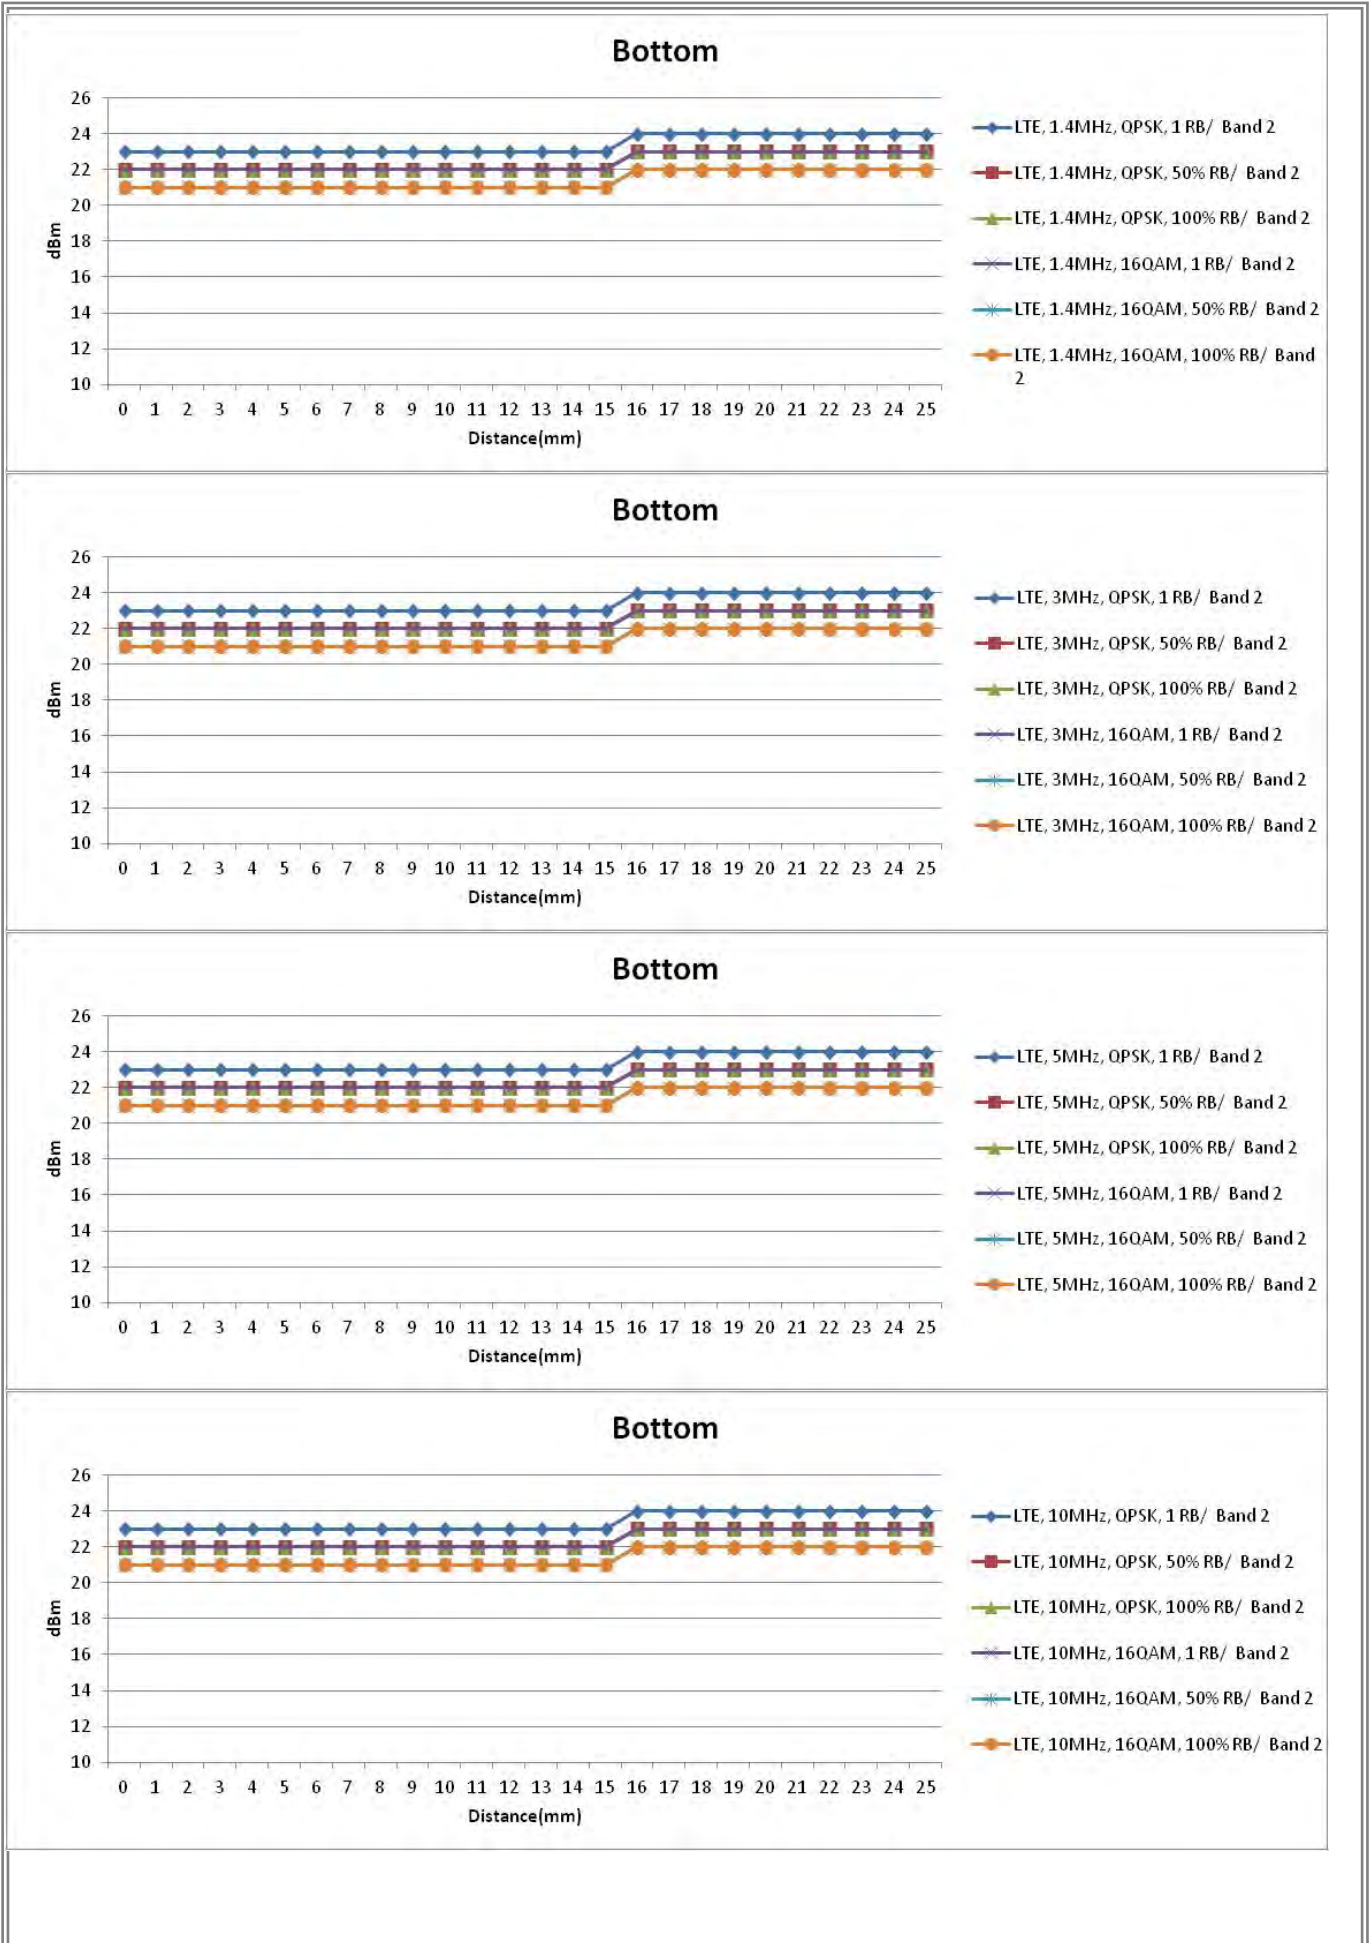





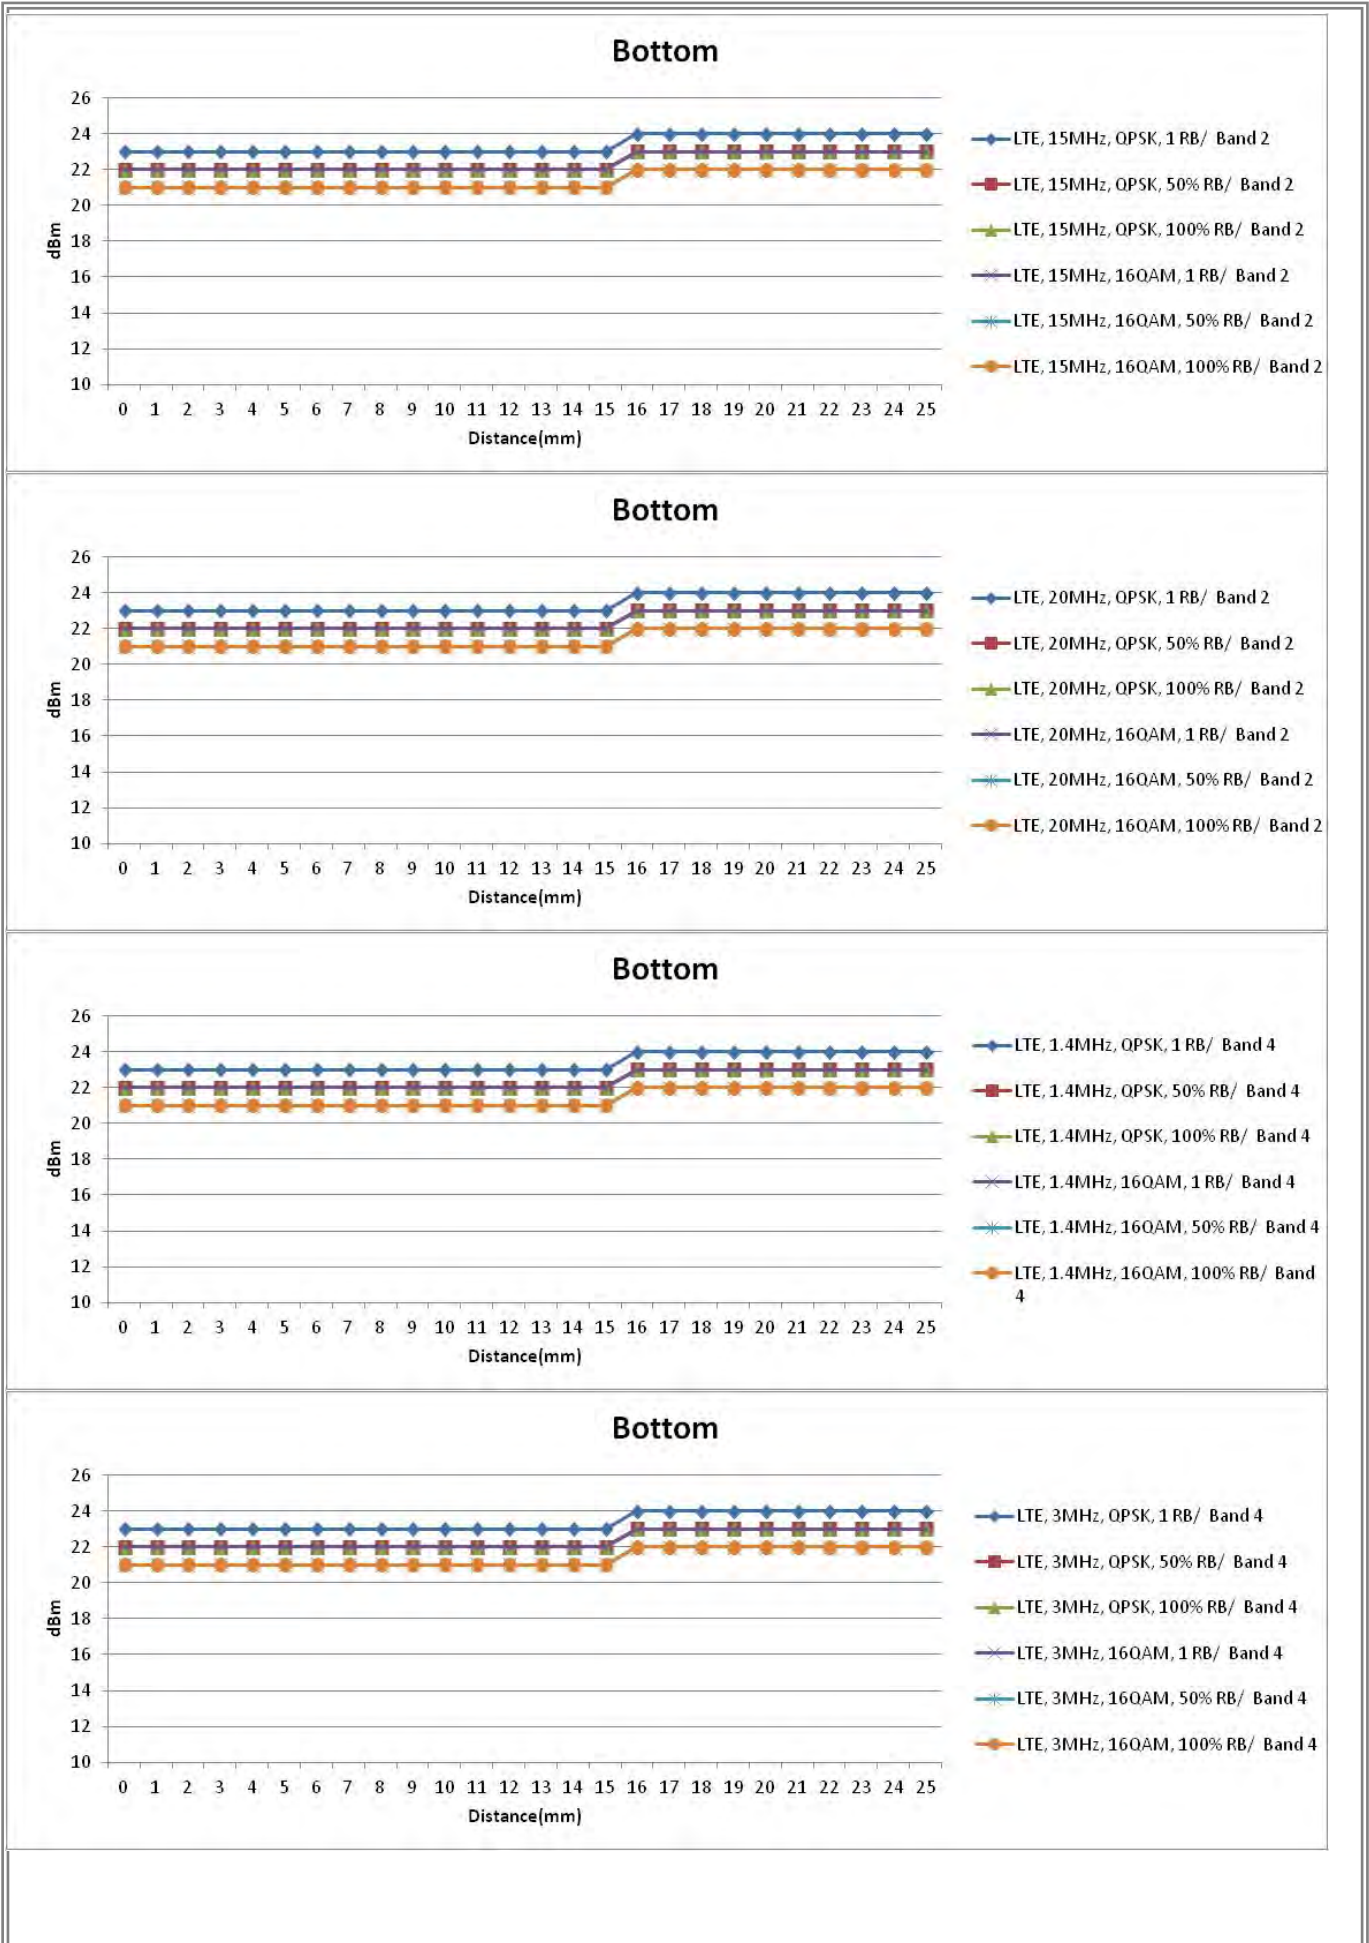


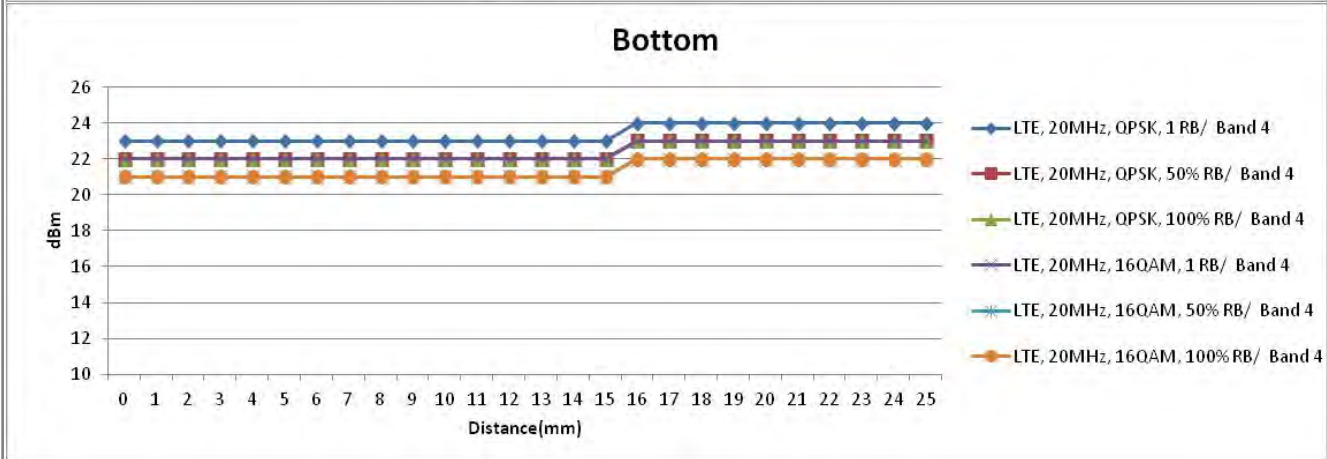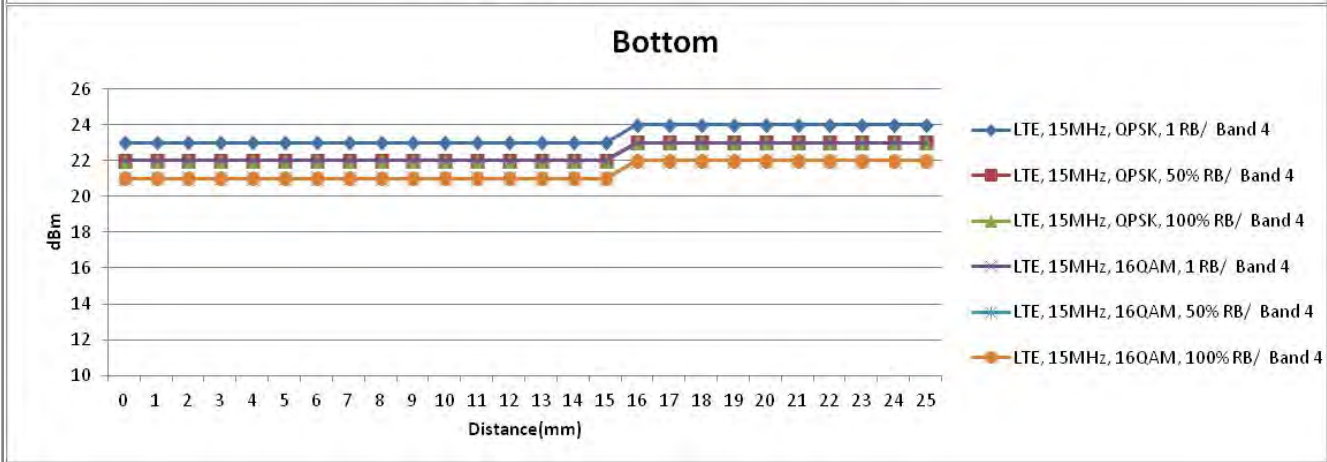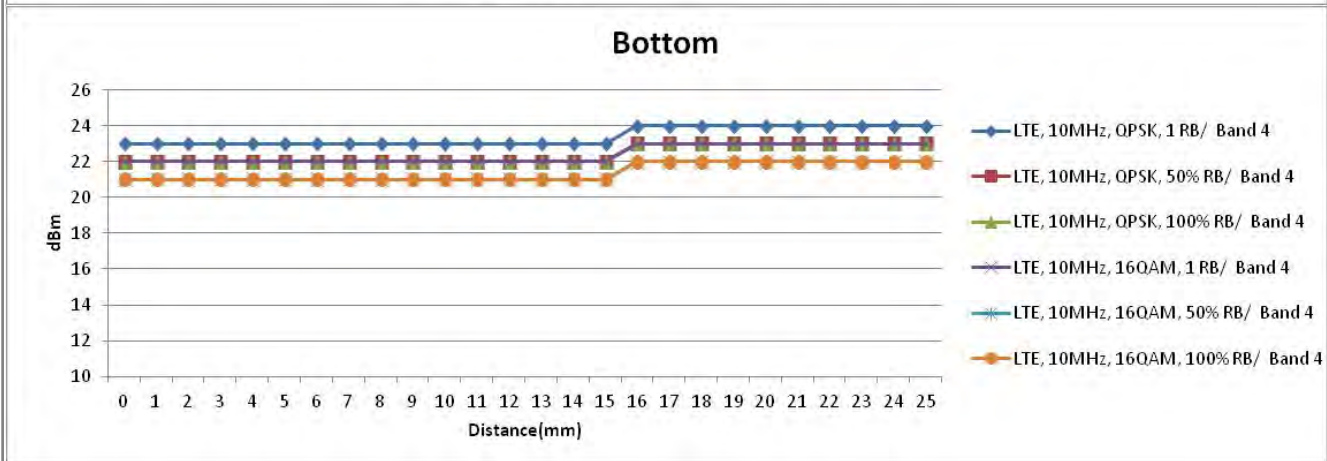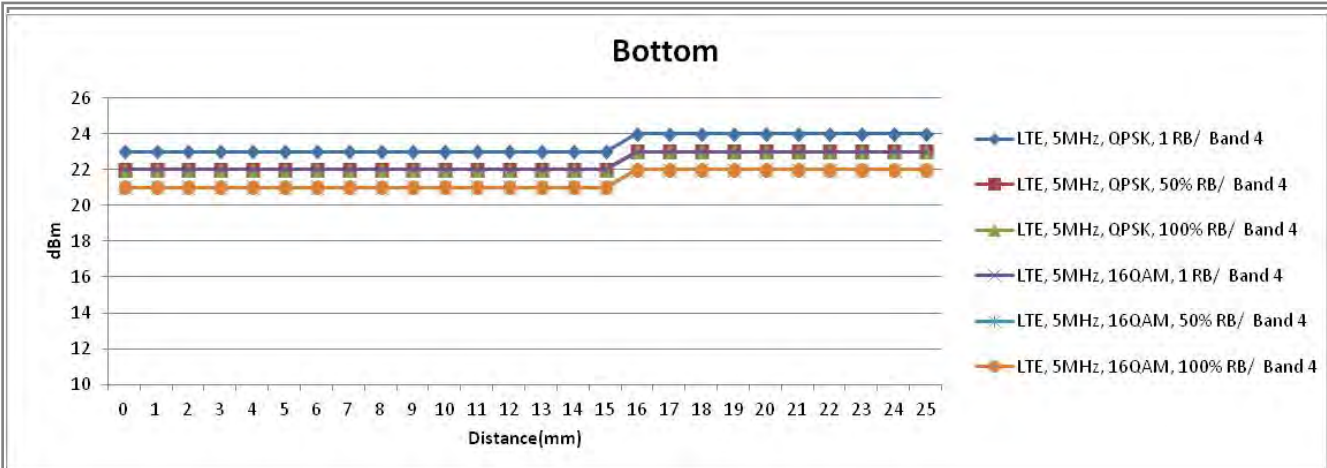

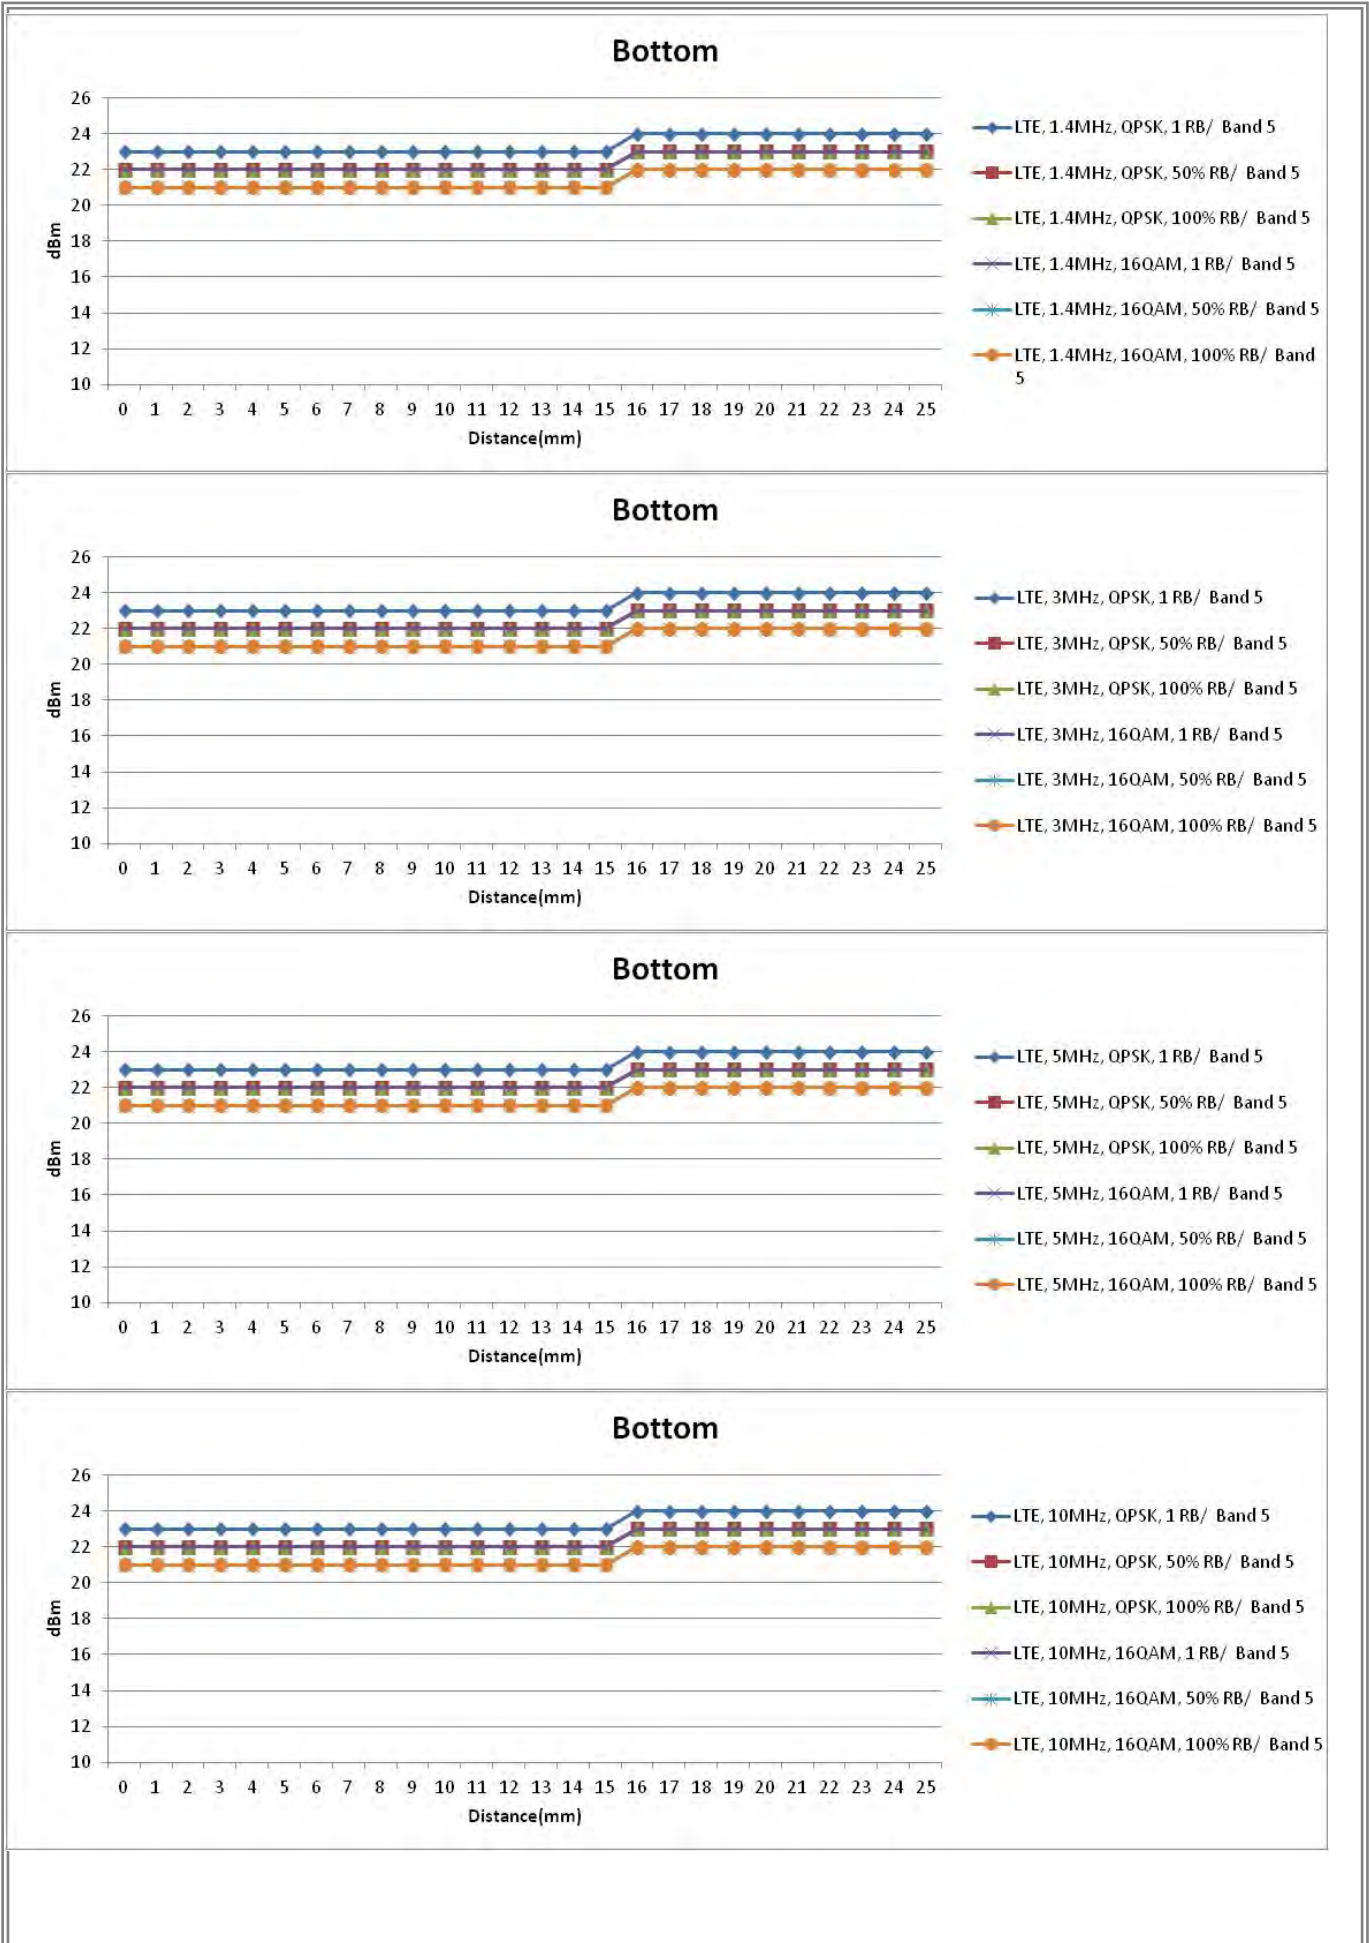








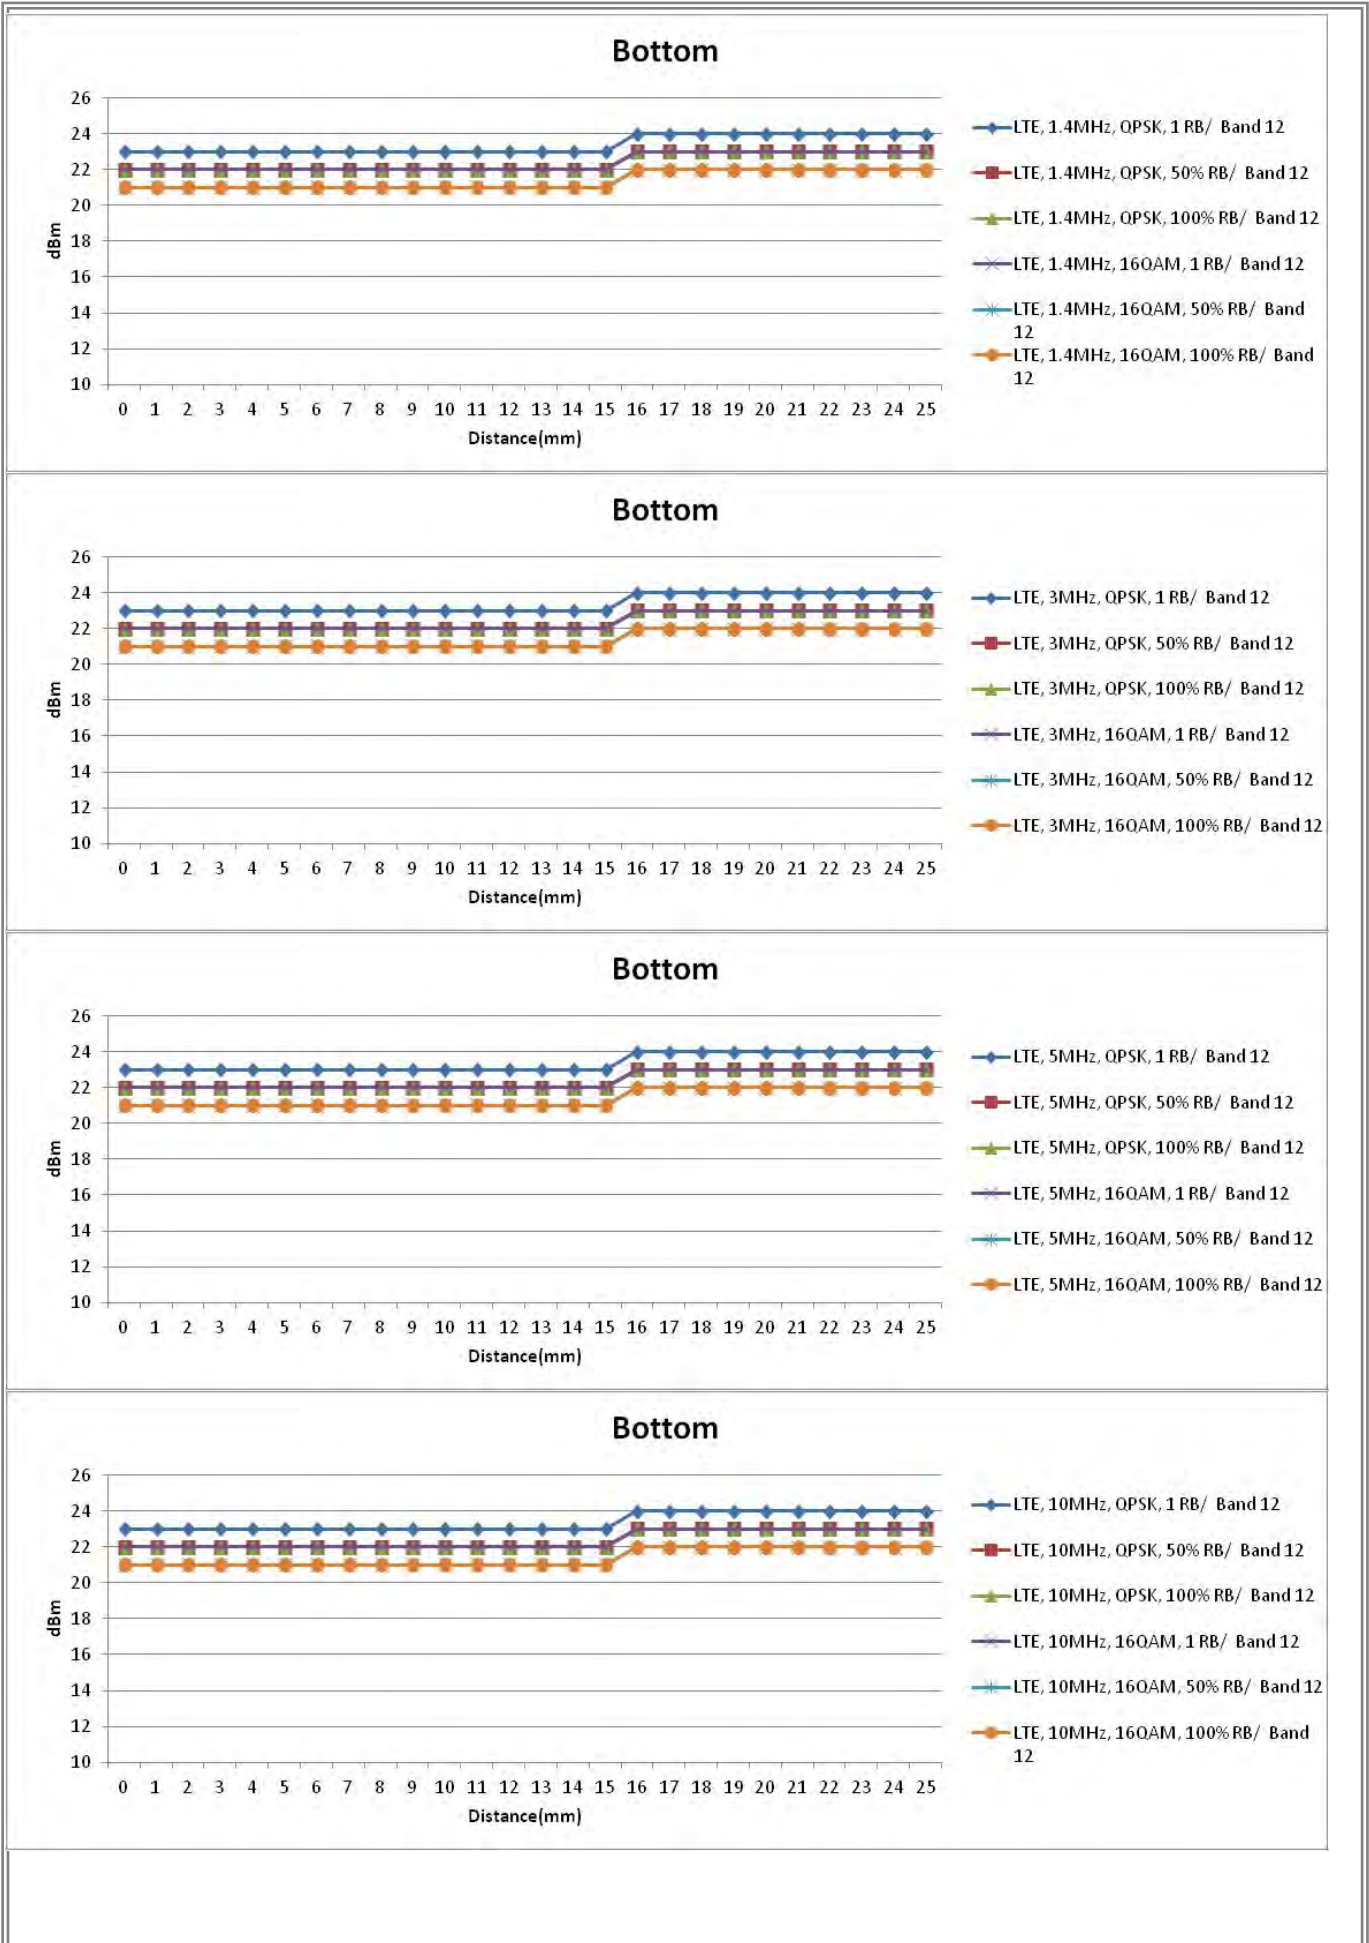


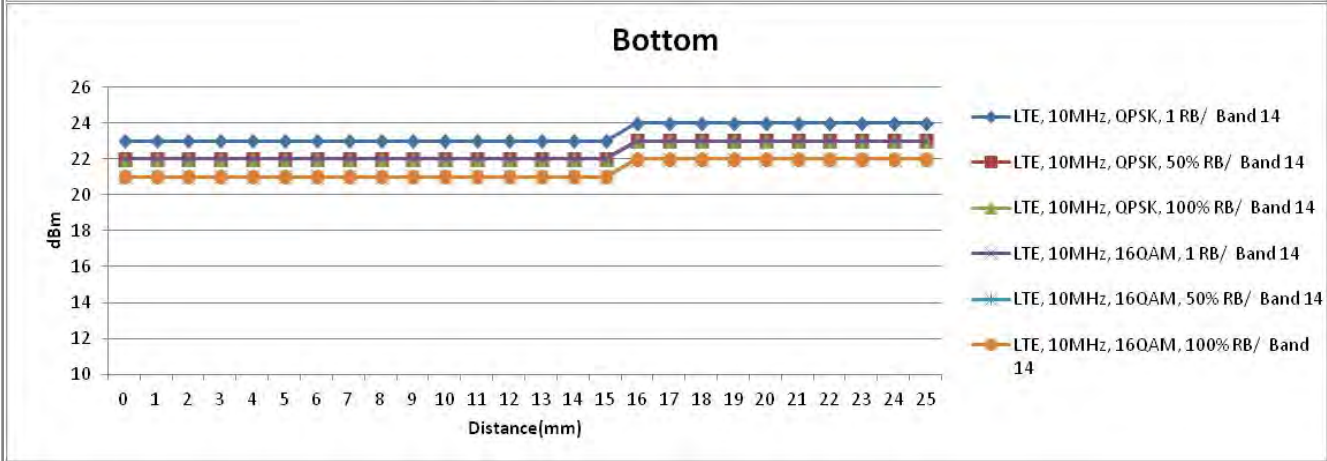
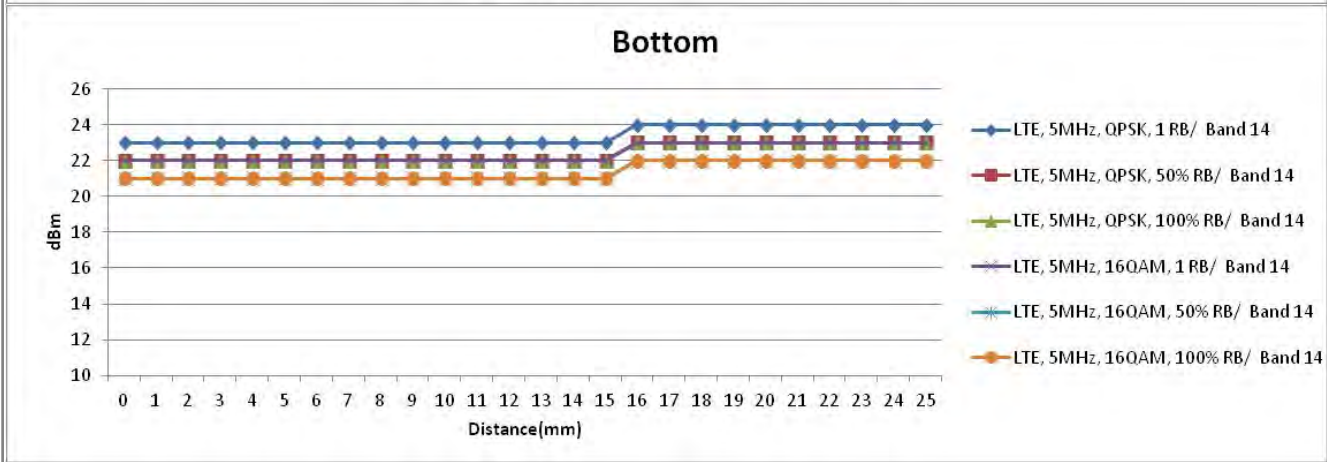
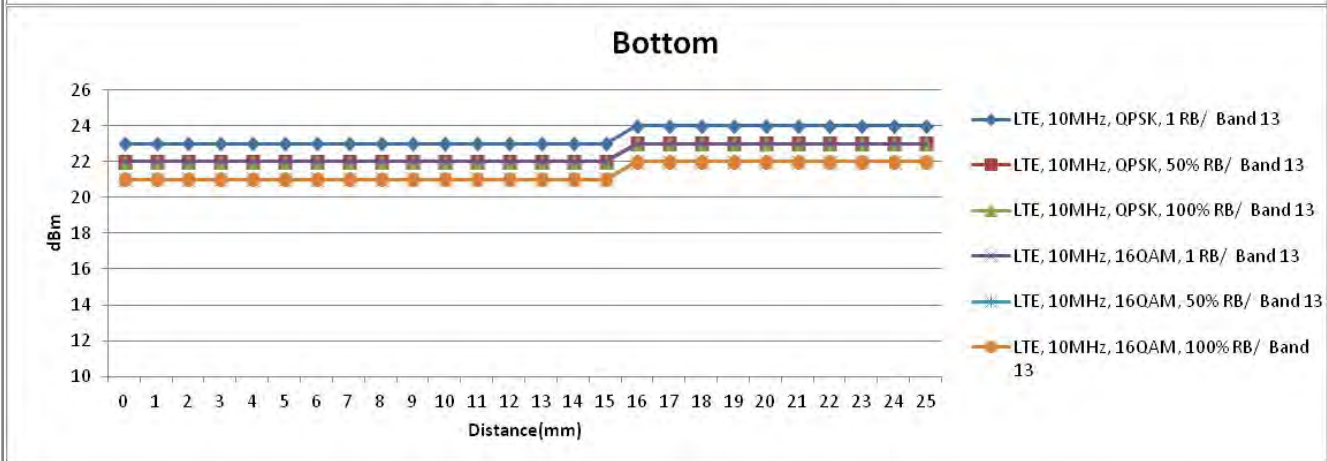
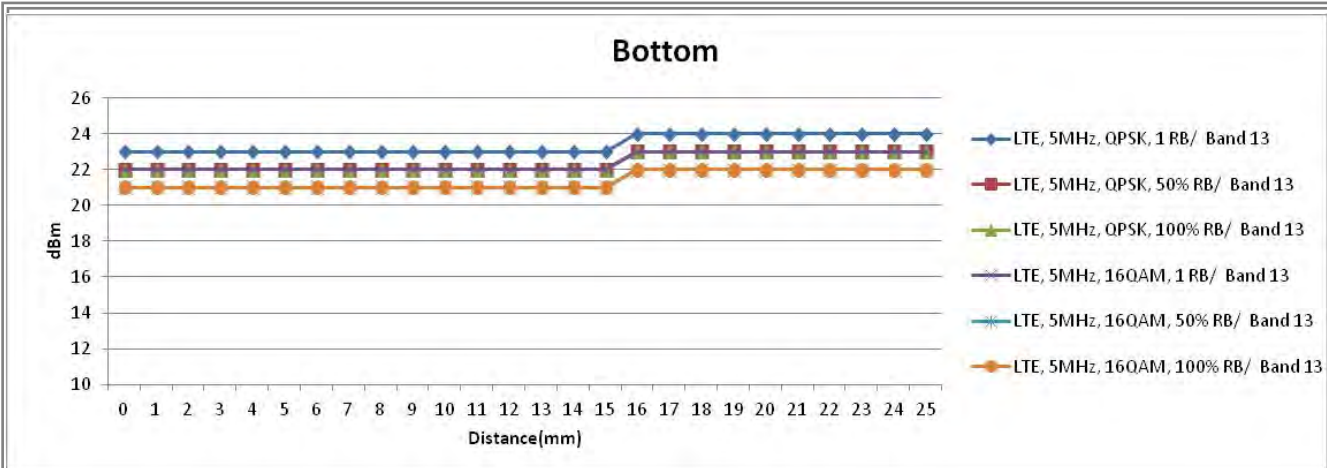






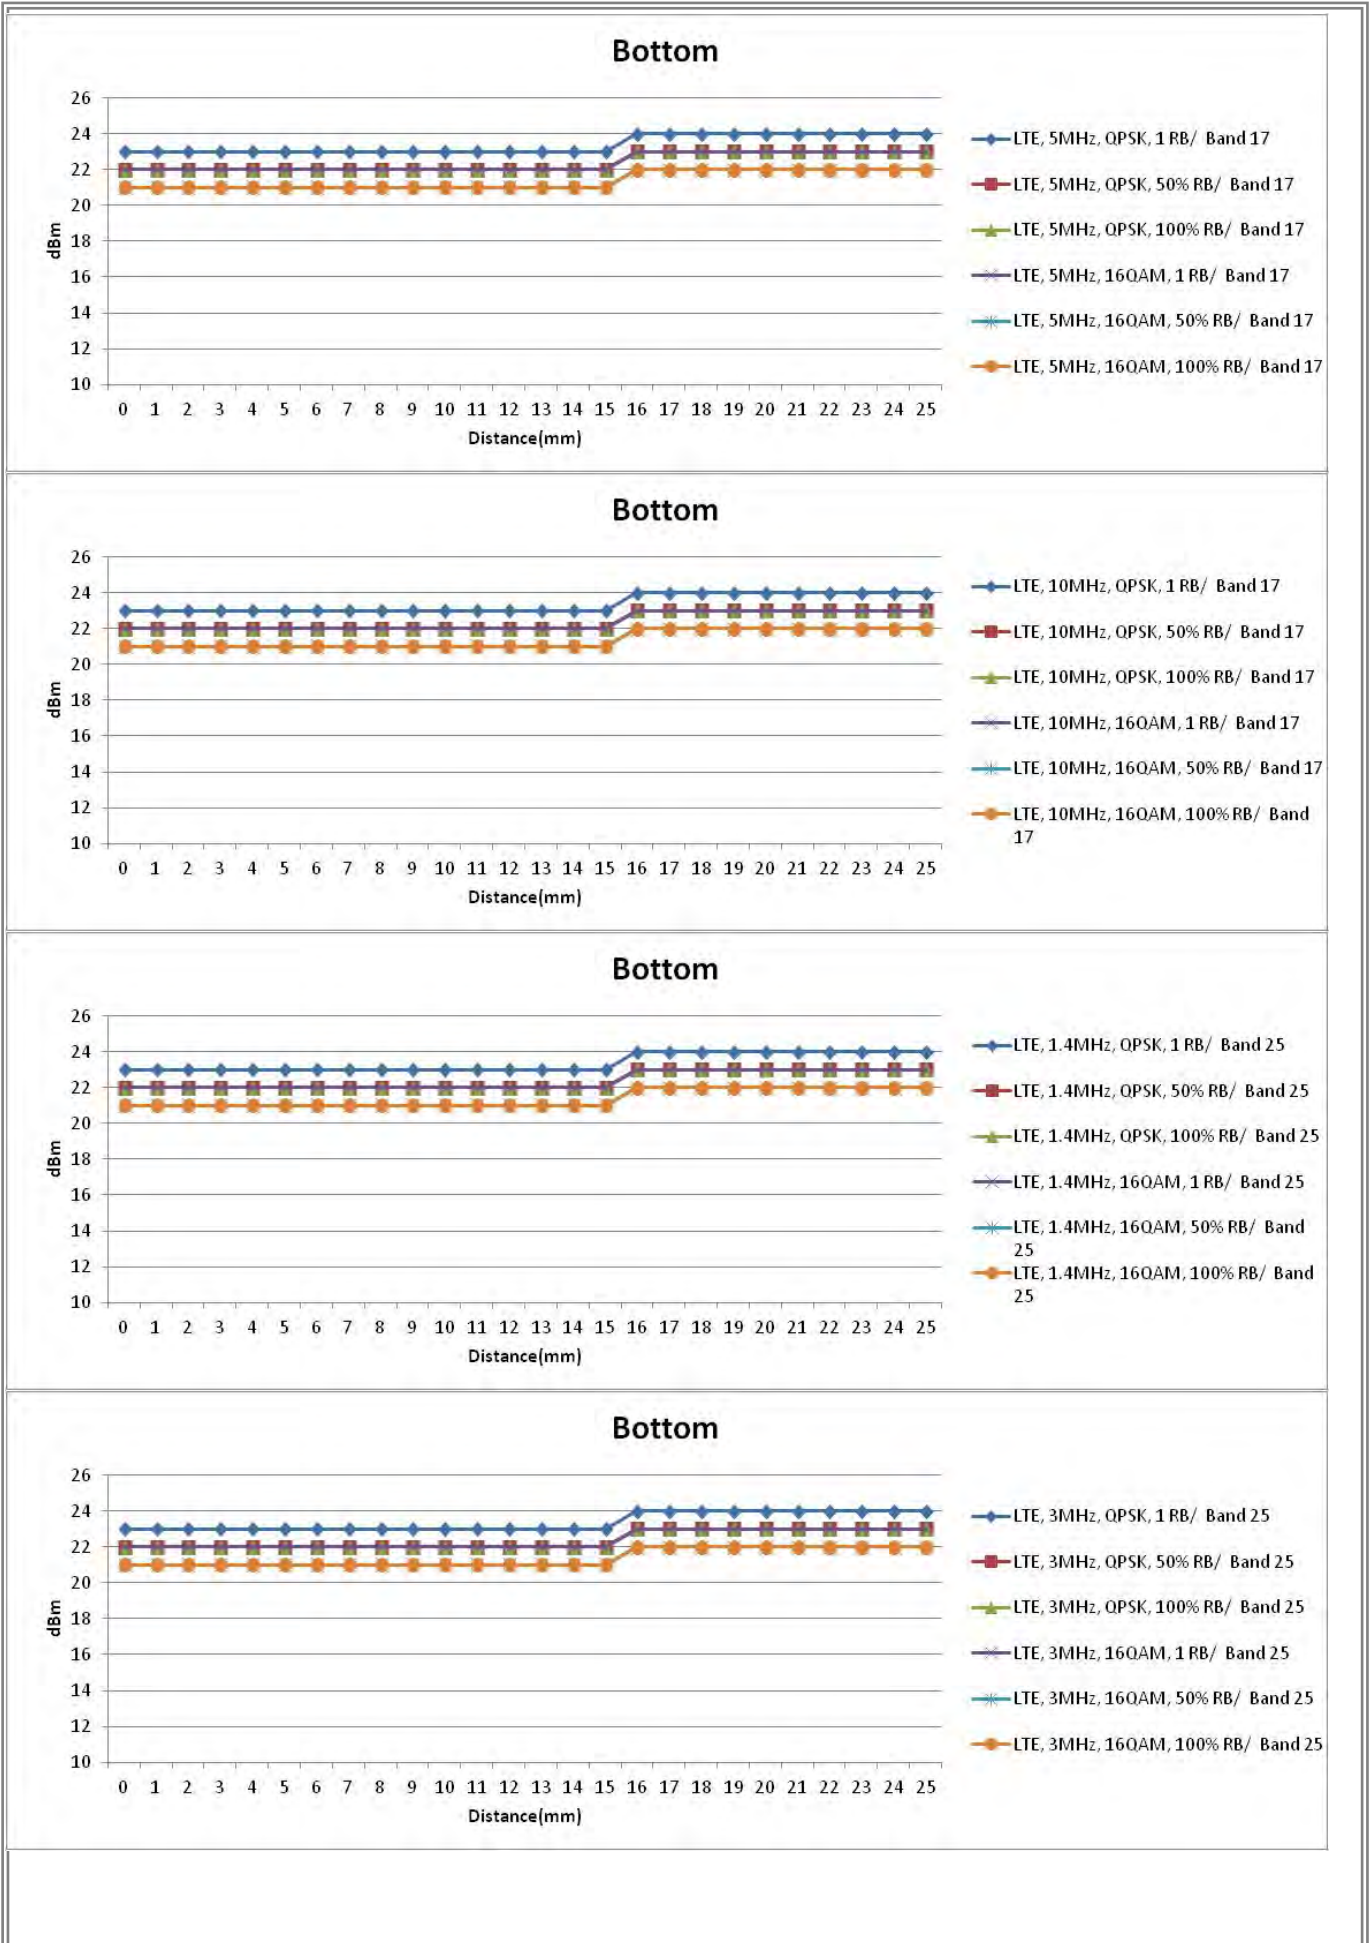





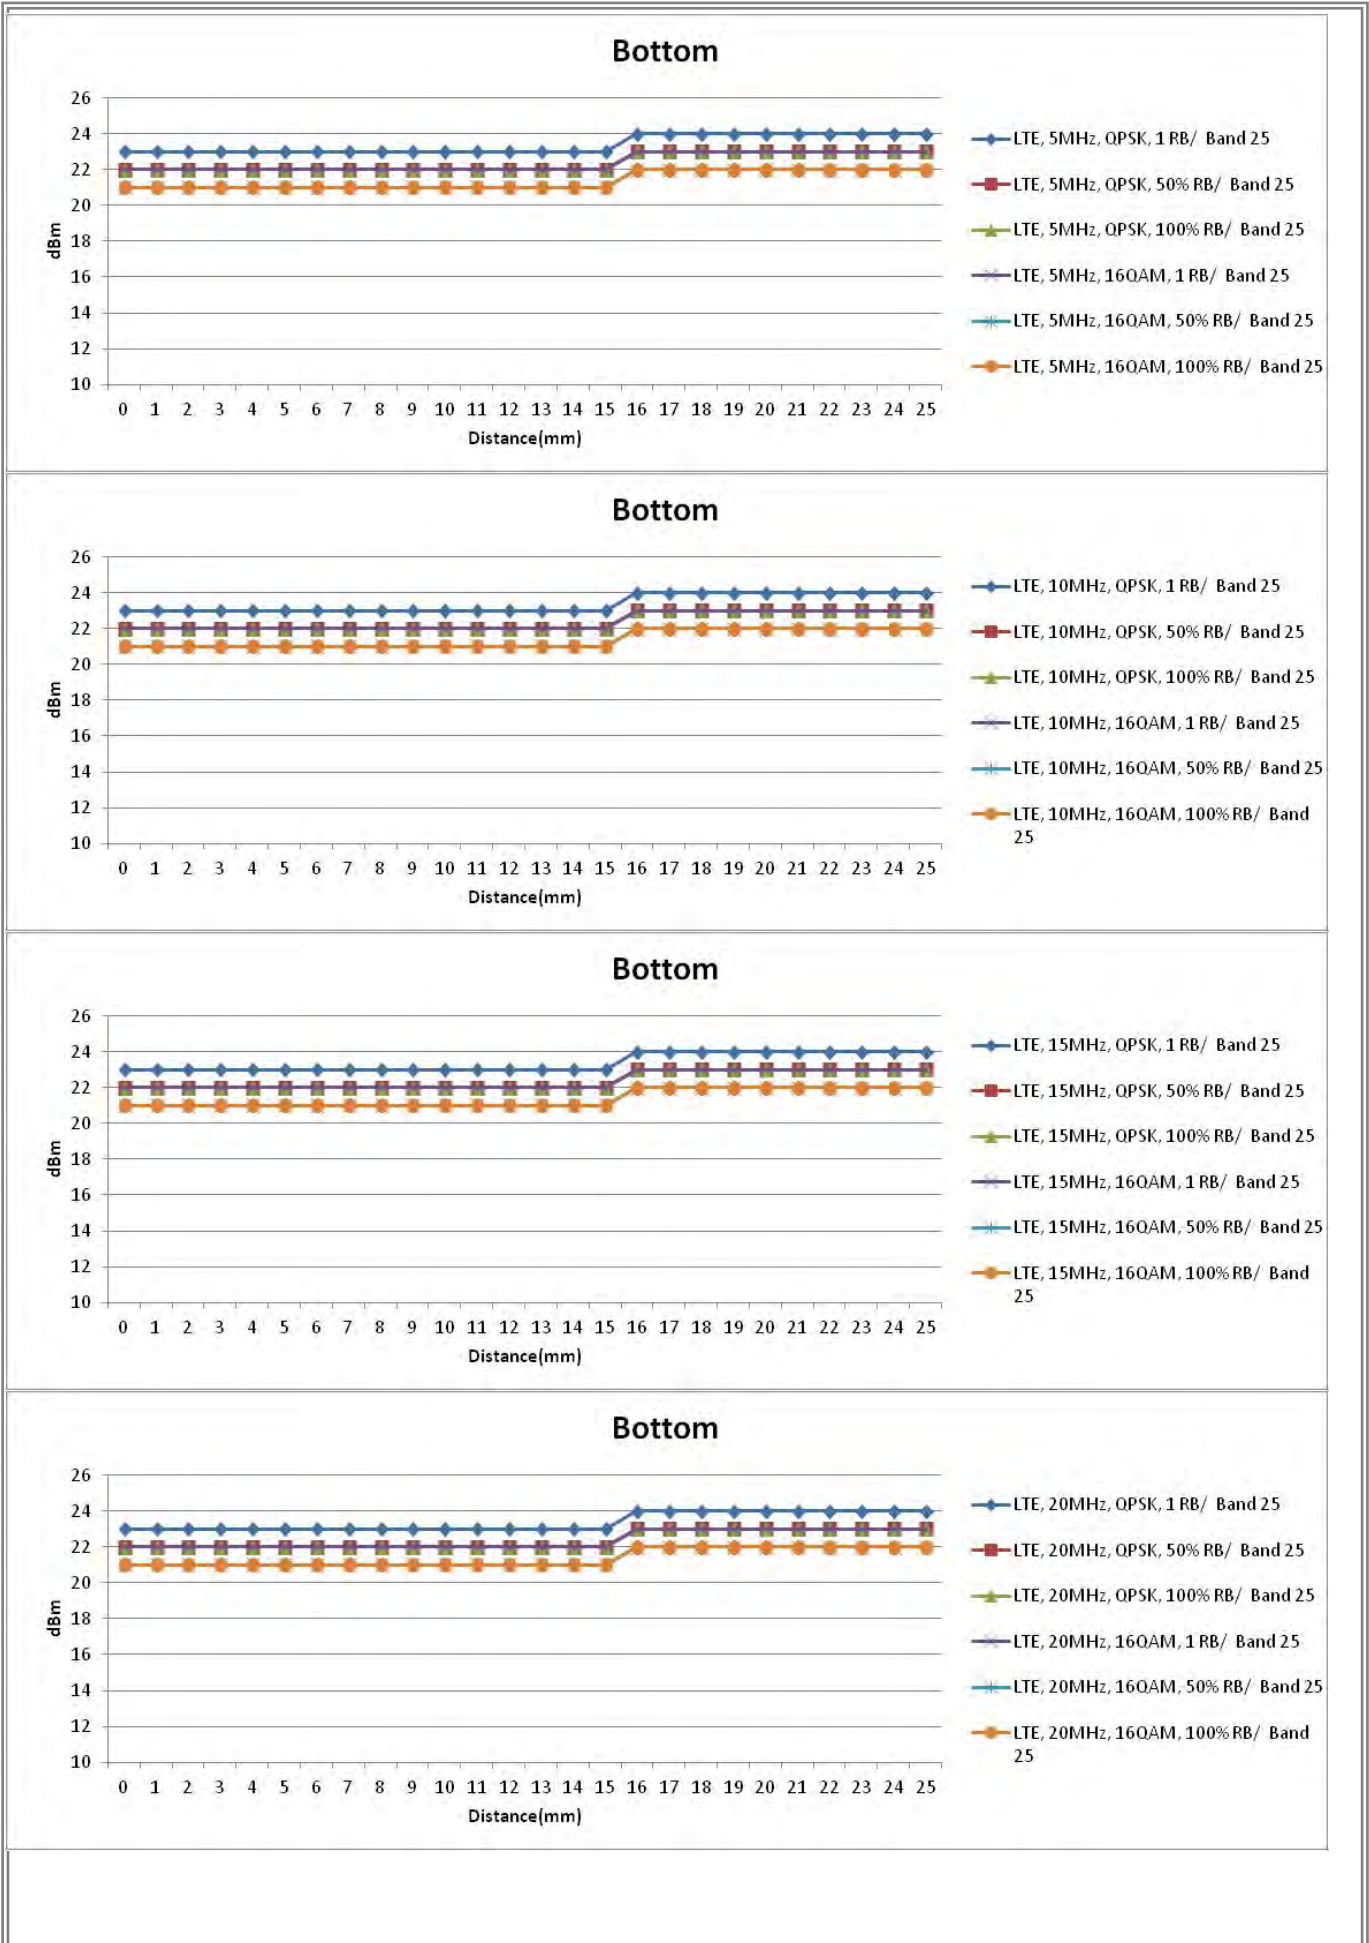


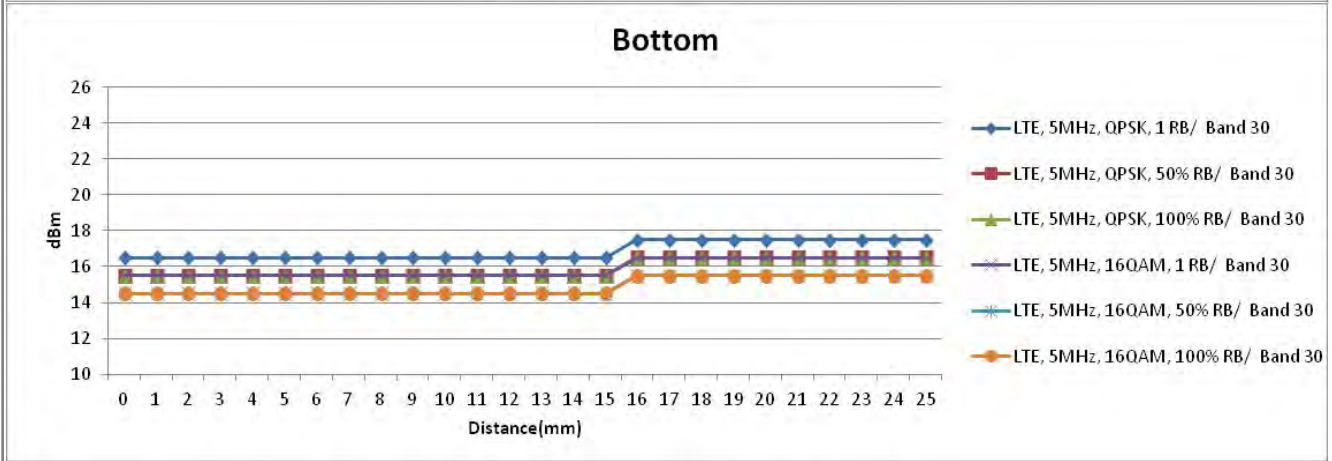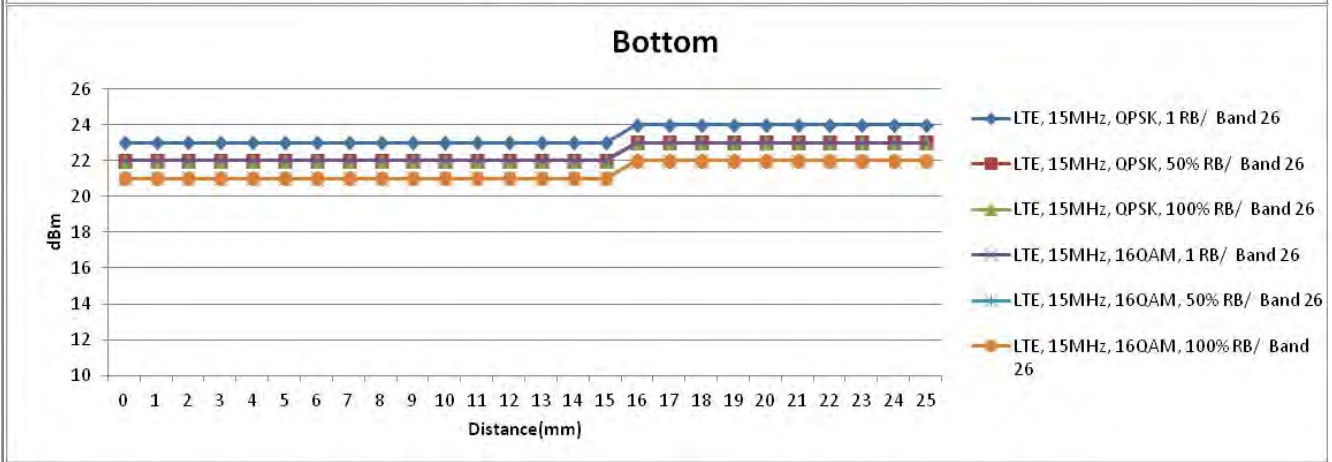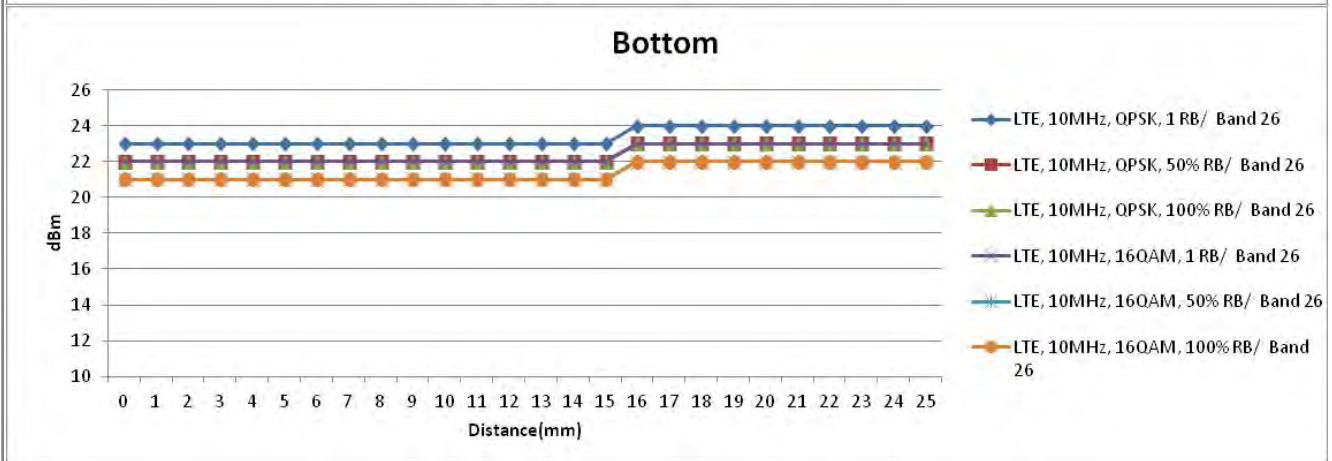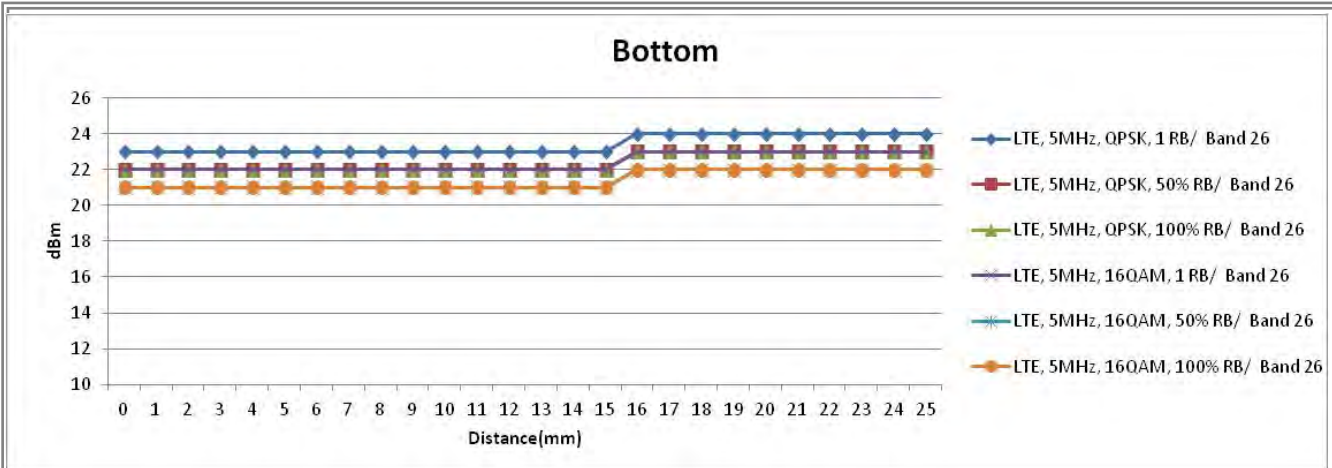


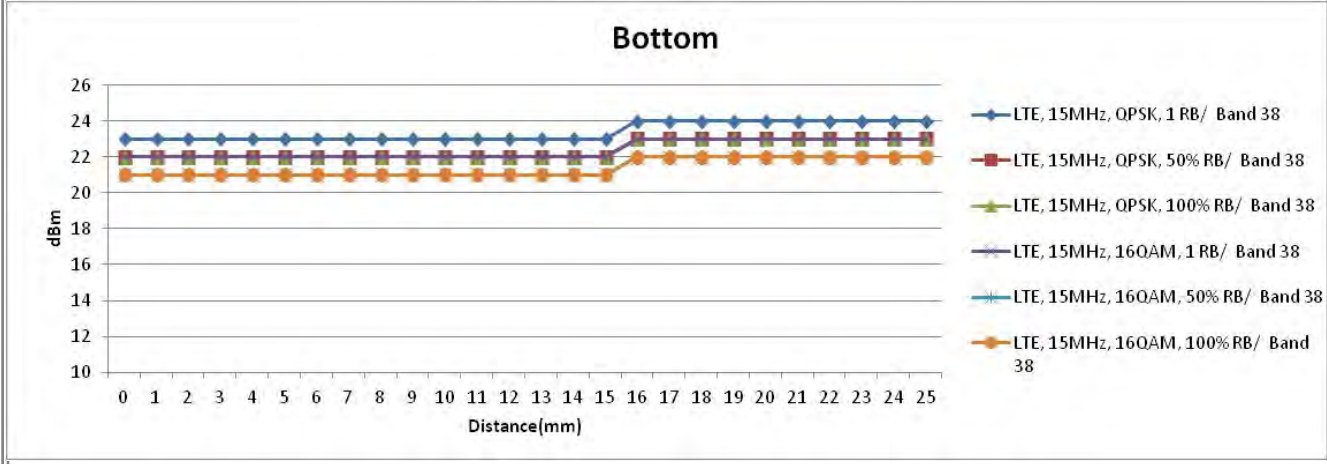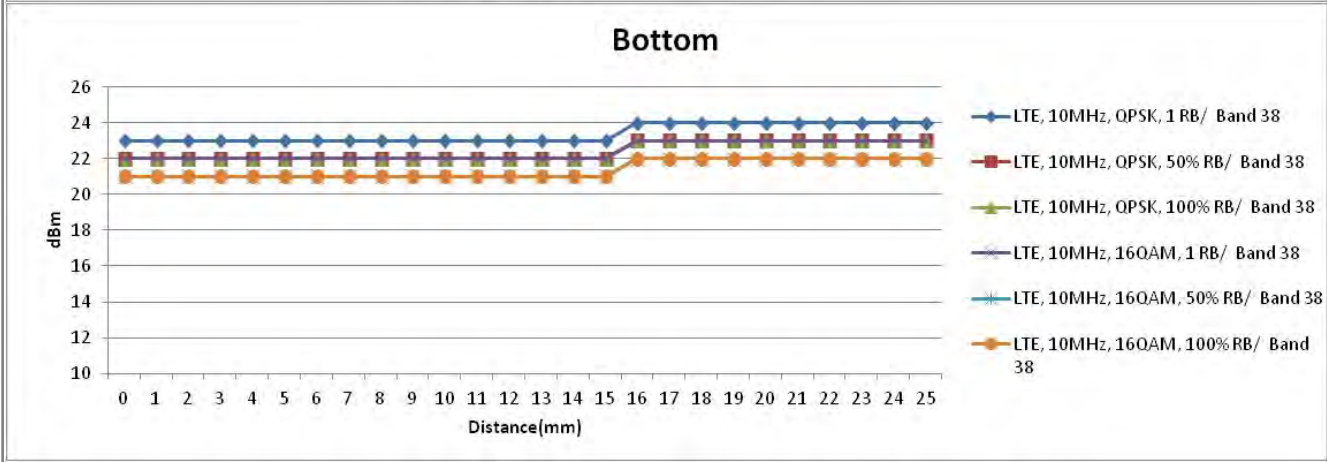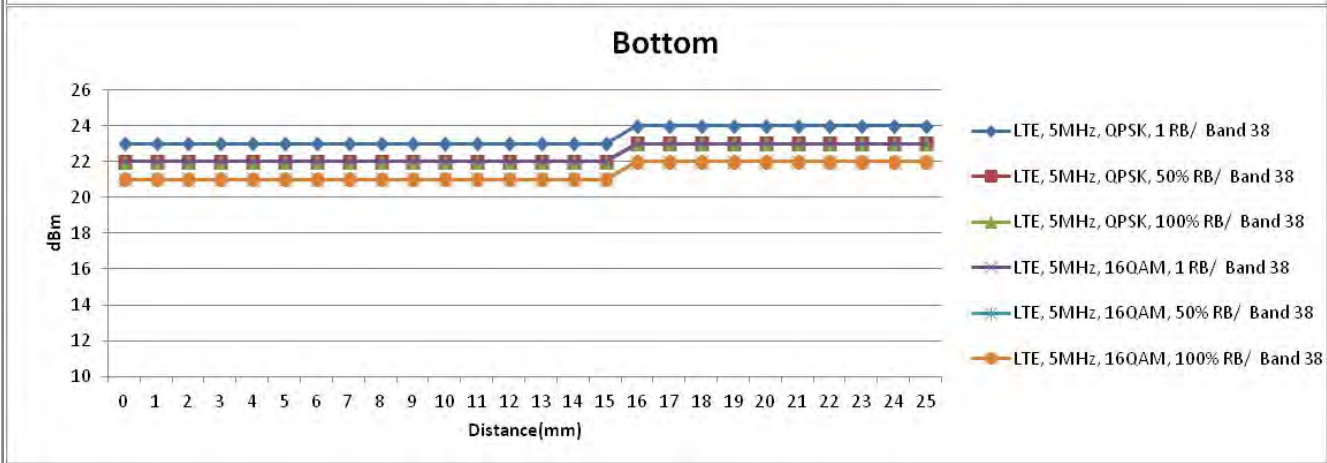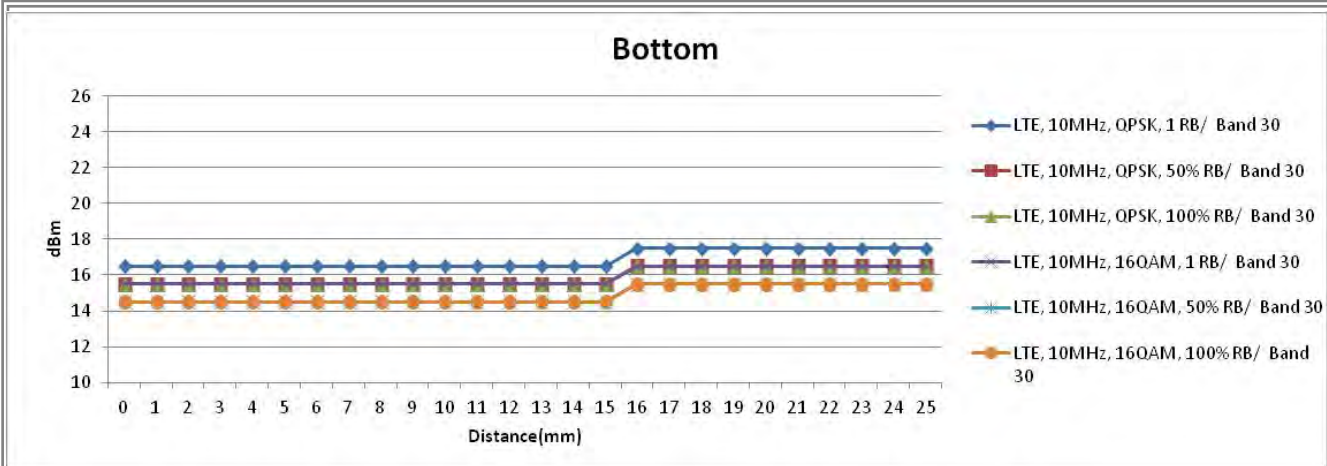







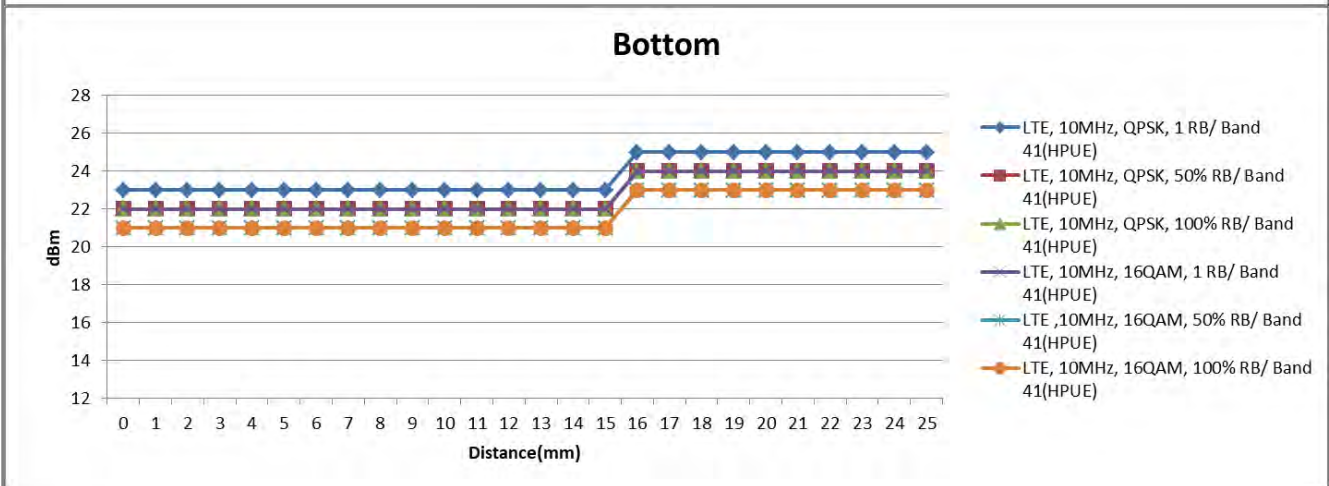
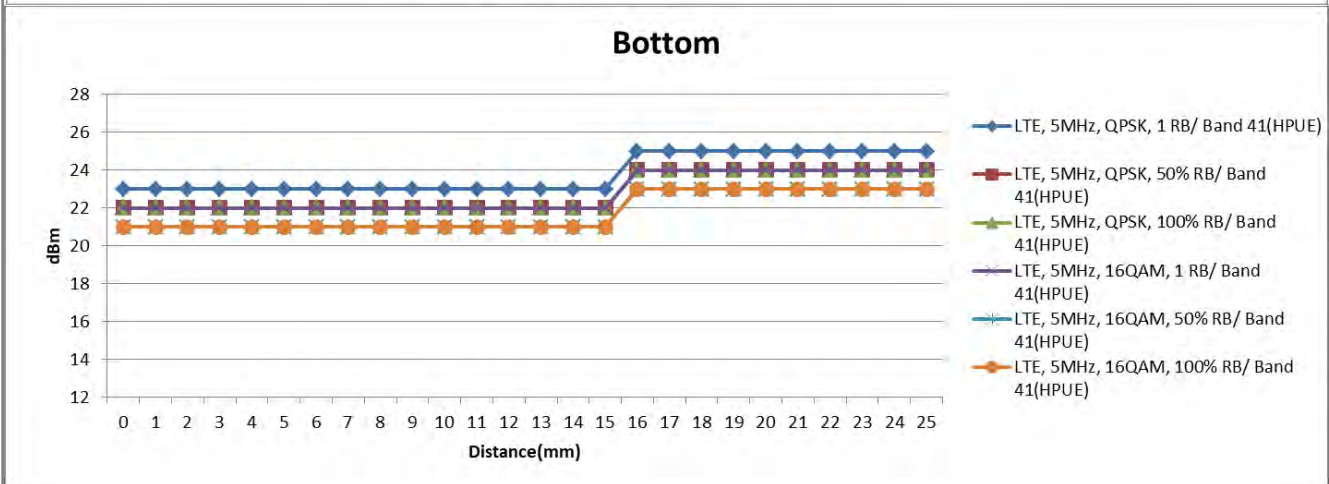
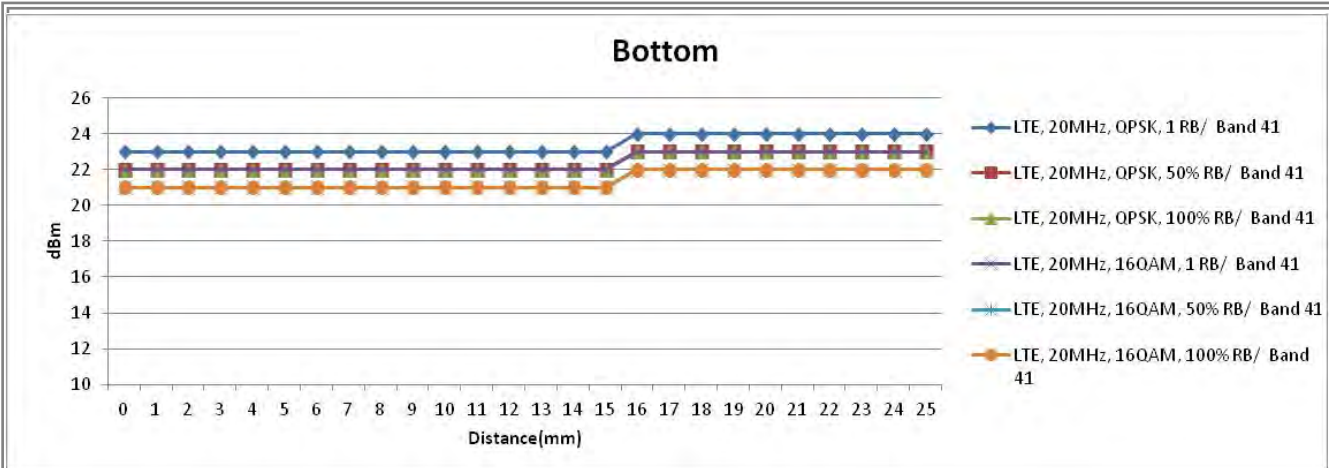


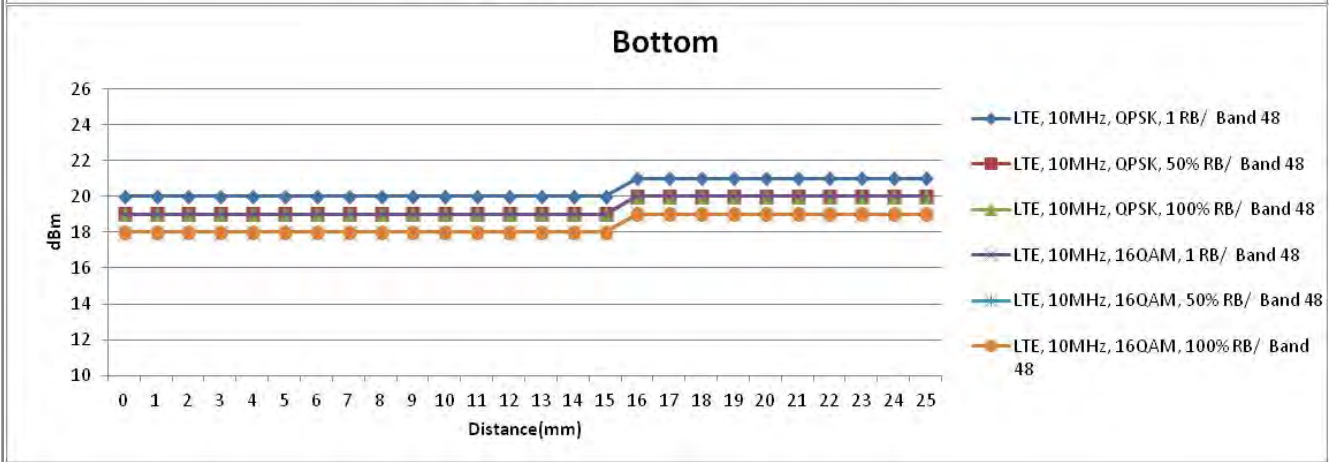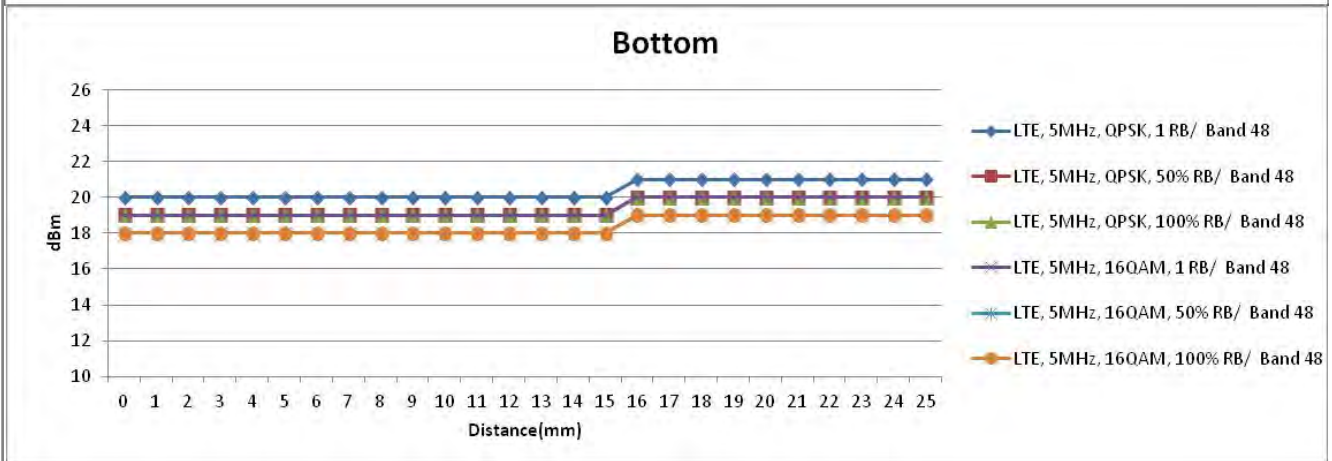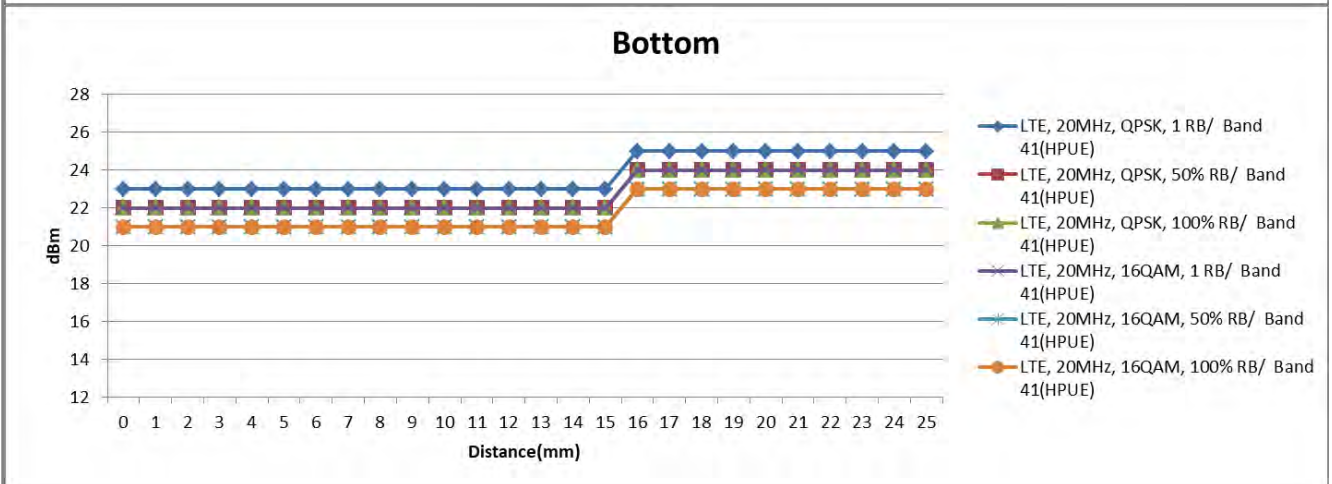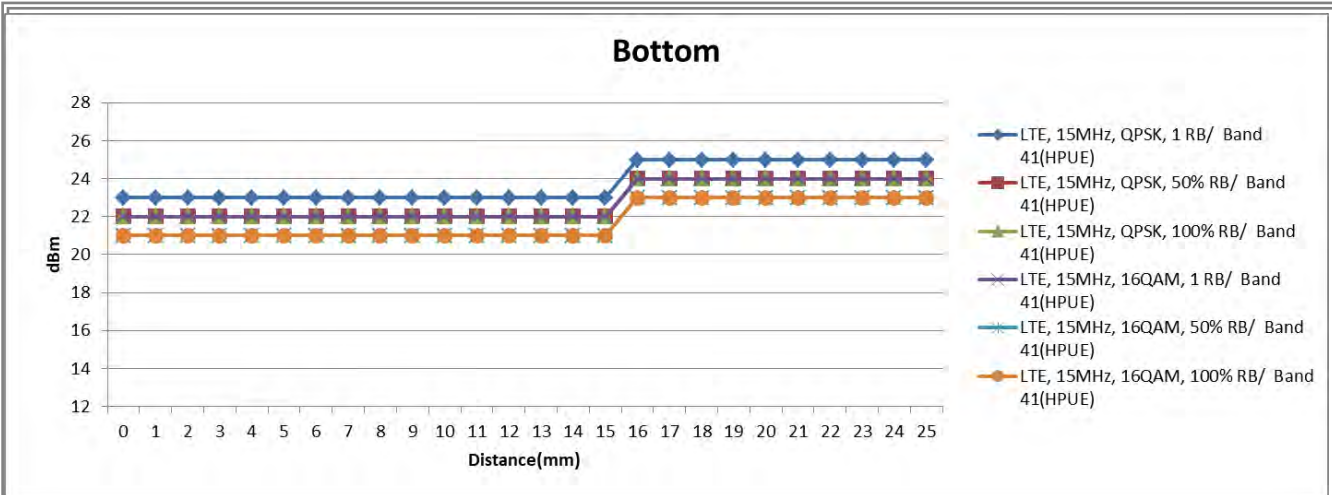

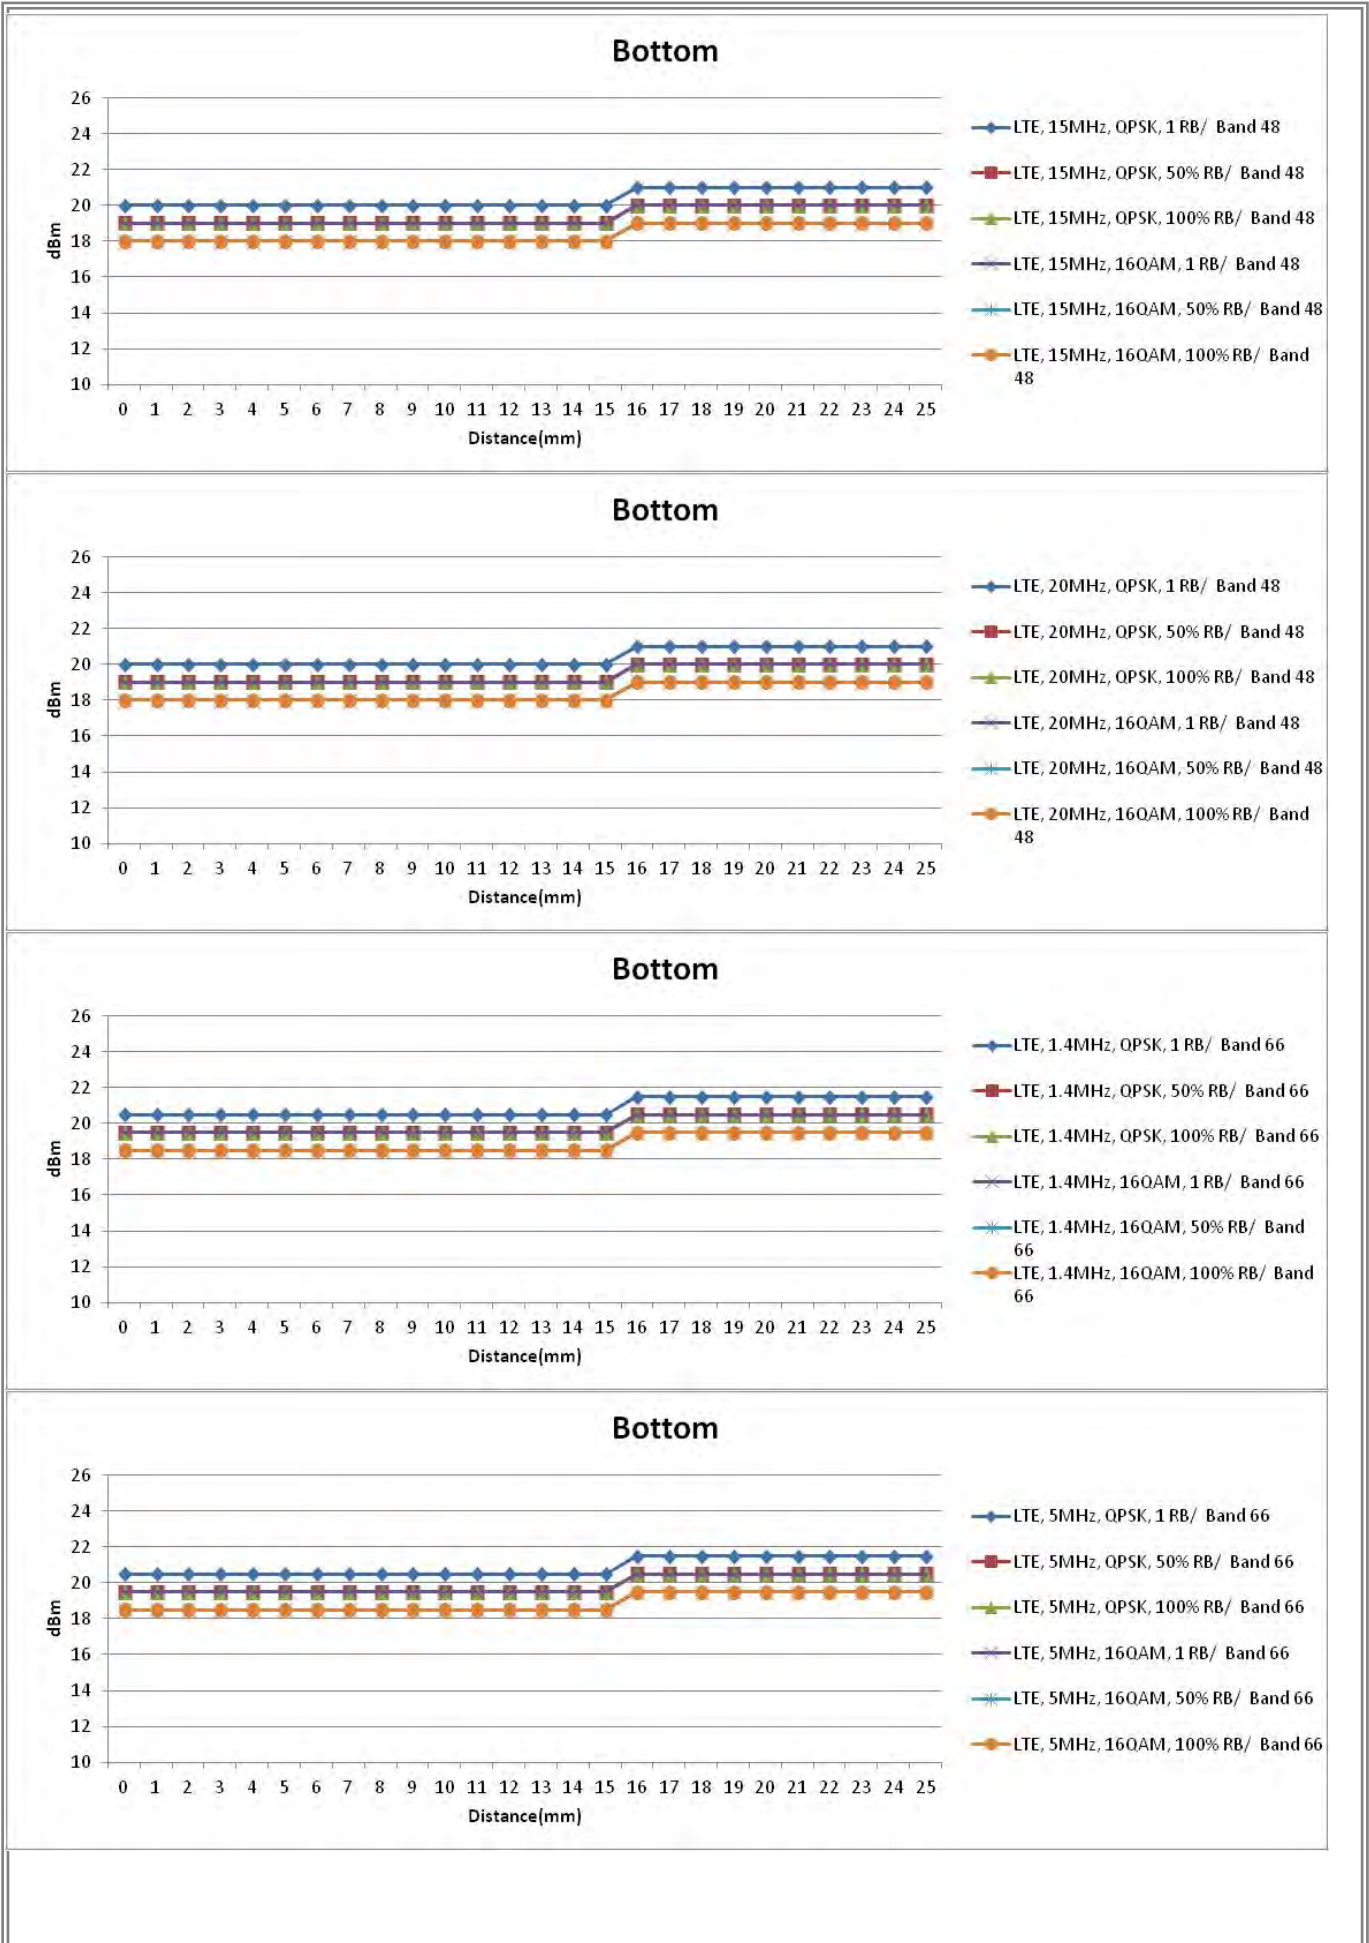



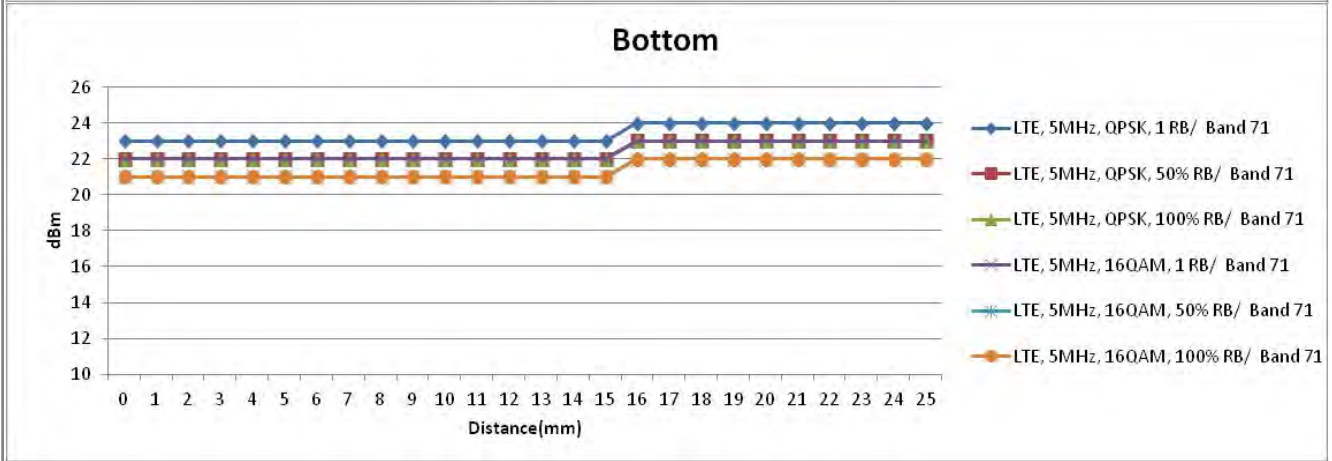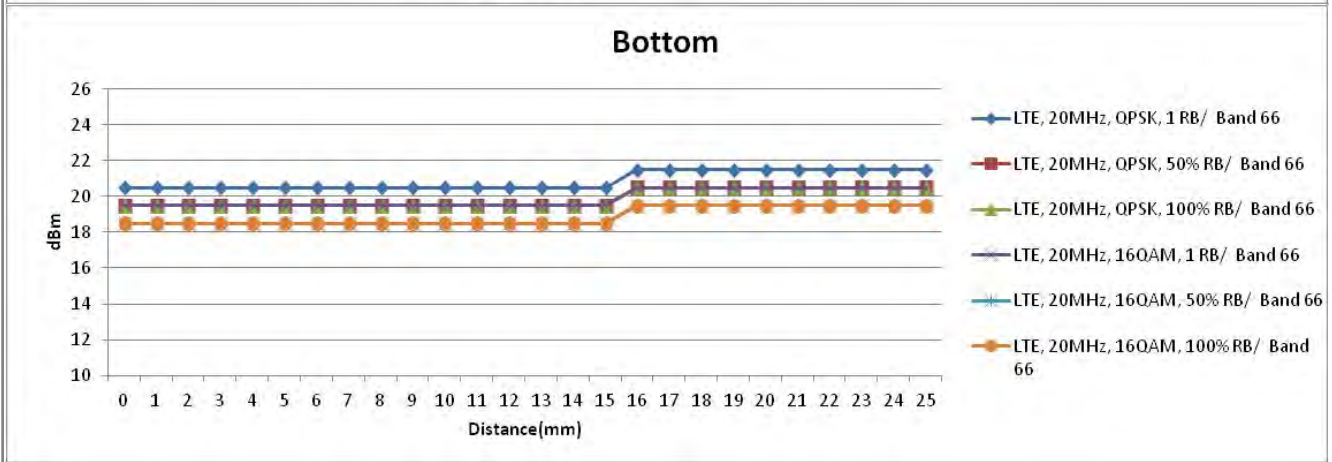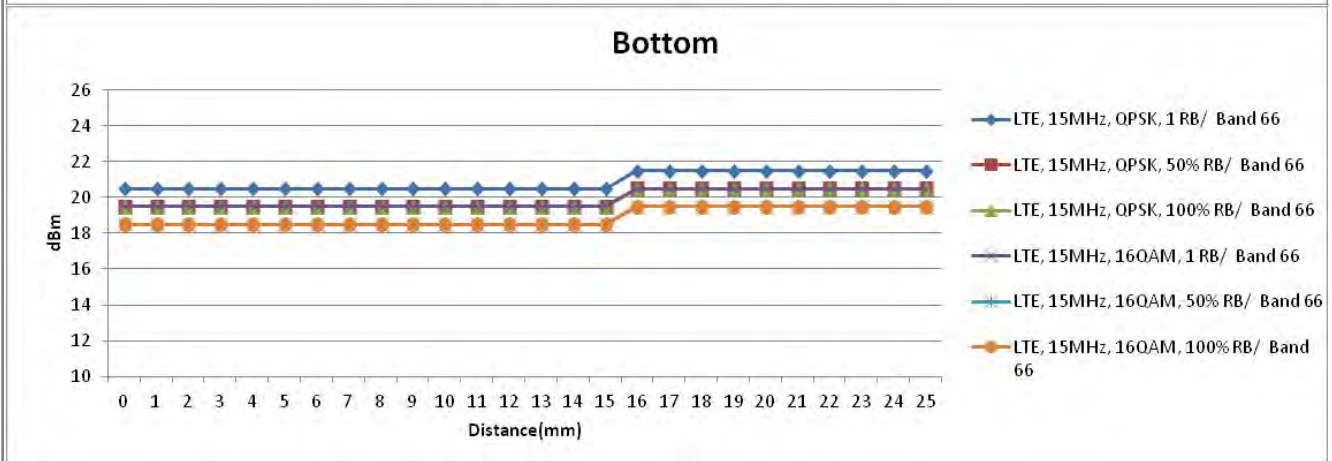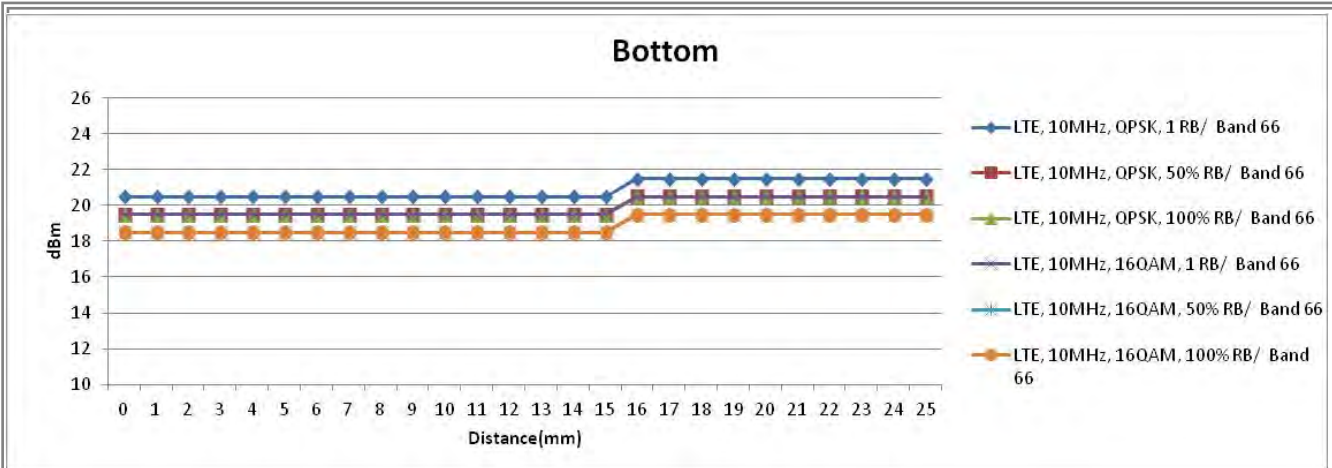

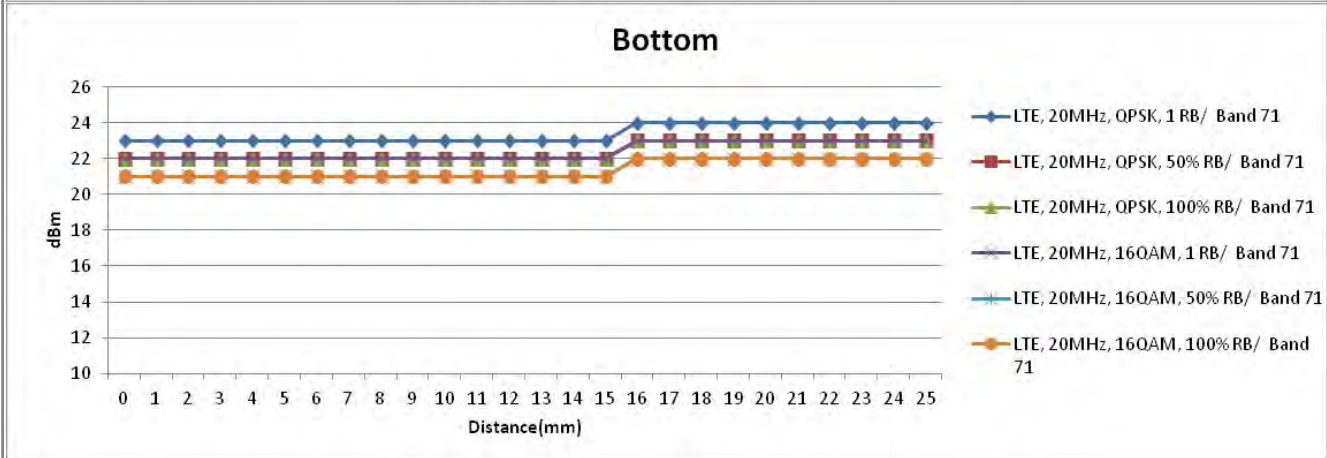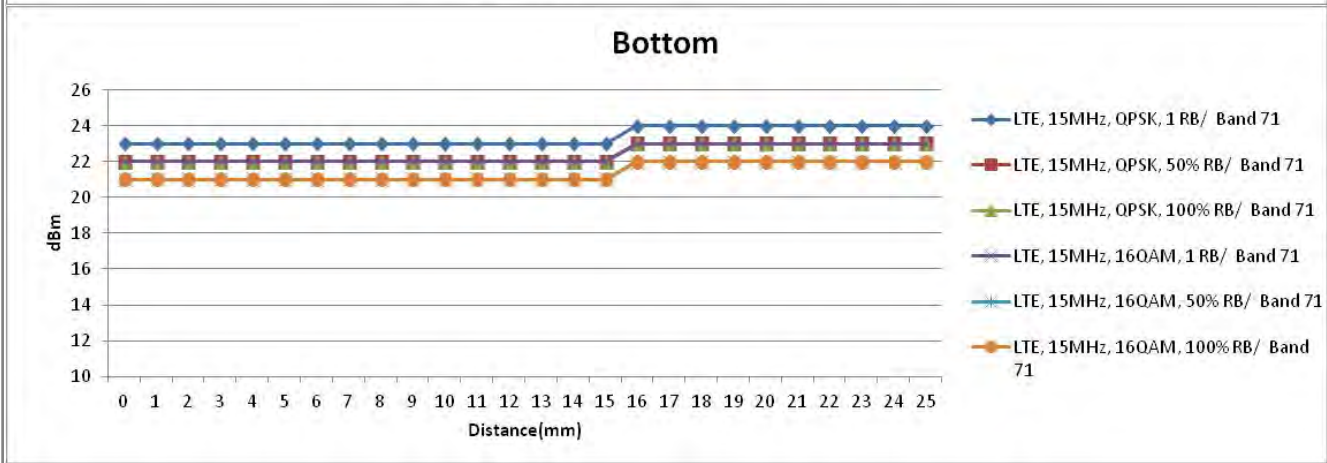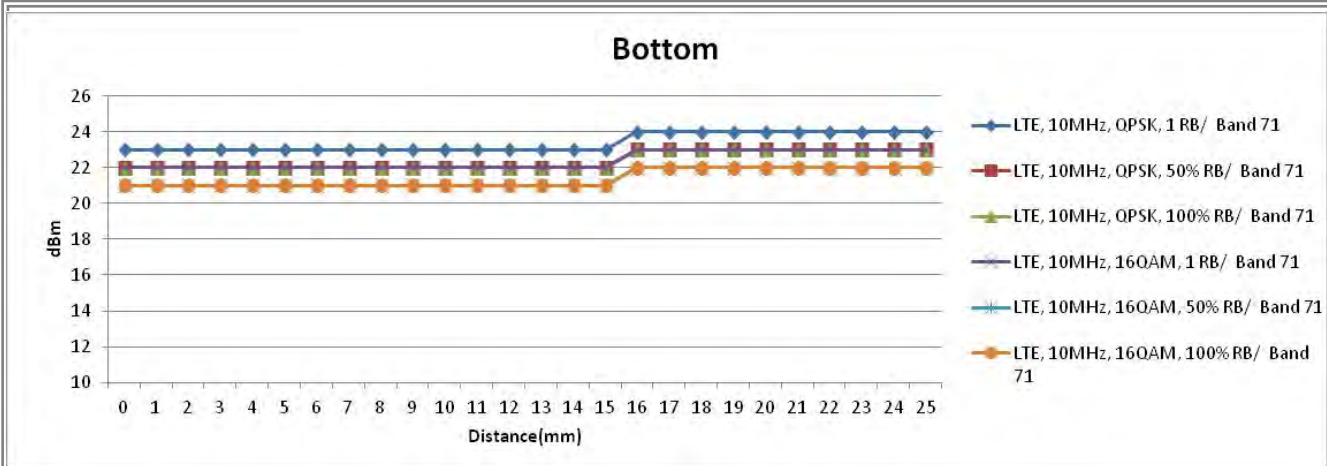

## 9. CONDUCTED POWER RESULTS

### 9.1. UMTS Band

P-sensor off

Band	UMTS Band II Average Conducted Power(dBm)			
Tx Channel	Max. Tune-up power (dBm)	9262	9400	9538
Rx Channel		9662	9800	9938
Frequency		1852.4MHz	1880MHz	1907.6MHz
RMC 12.2K	24.50	22.97	23.27	23.35
HSDPA Subtest-1	24.50	22.86	23.02	22.94
HSDPA Subtest-2	24.00	22.86	22.93	22.86
HSDPA Subtest-3	23.50	22.37	22.44	22.41
HSDPA Subtest-4	23.50	22.41	22.48	22.38
HSUPA Subtest-1	24.50	22.81	23.11	23.21
HSUPA Subtest-2	22.50	21.33	21.38	21.33
HSUPA Subtest-3	23.50	22.36	22.37	22.33
HSUPA Subtest-4	22.50	21.36	21.34	21.35
HSUPA Subtest-5	24.50	22.88	23.26	23.33

P-sensor on

Band	UMTS Band II Average Conducted Power(dBm)			
Tx Channel	Max. Tune-up power (dBm)	9262	9400	9538
Rx Channel		9662	9800	9938
Frequency		1852.4MHz	1880MHz	1907.6MHz
RMC 12.2K	23.00	22.83	22.94	22.89
HSDPA Subtest-1	23.00	22.80	22.85	22.82
HSDPA Subtest-2	22.50	22.33	22.37	22.31
HSDPA Subtest-3	22.00	21.81	21.84	21.87
HSDPA Subtest-4	22.00	21.88	21.93	21.84
HSUPA Subtest-1	23.00	22.72	22.72	22.77
HSUPA Subtest-2	21.00	20.76	20.83	20.80
HSUPA Subtest-3	22.00	21.82	21.86	21.87
HSUPA Subtest-4	21.00	20.81	20.75	20.82
HSUPA Subtest-5	23.00	22.74	22.66	22.71

**P-sensor off**

Band	UMTS Band IV Average Conducted Power(dBm)			
Tx Channel	Max. Tune-up power (dBm)	1312	1413	1513
Rx Channel		1537	1638	1738
Frequency		1712.4MHz	1732.6MHz	1752.6MHz
RMC 12.2K	24.50	23.22	22.88	23.01
HSDPA Subtest-1	24.50	23.08	22.76	22.94
HSDPA Subtest-2	24.00	22.85	22.95	22.90
HSDPA Subtest-3	23.50	22.36	22.46	22.45
HSDPA Subtest-4	23.50	22.40	22.50	22.42
HSUPA Subtest-1	24.50	22.94	22.85	22.82
HSUPA Subtest-2	22.50	21.24	21.40	21.32
HSUPA Subtest-3	23.50	22.27	22.39	22.32
HSUPA Subtest-4	22.50	21.27	21.36	21.34
HSUPA Subtest-5	24.50	23.17	22.82	22.98

**P-sensor on**

Band	UMTS Band IV Average Conducted Power(dBm)			
Tx Channel	Max. Tune-up power (dBm)	1312	1413	1513
Rx Channel		1537	1638	1738
Frequency		1712.4MHz	1732.6MHz	1752.6MHz
RMC 12.2K	23.00	22.81	22.87	22.84
HSDPA Subtest-1	23.00	22.77	22.83	22.82
HSDPA Subtest-2	22.50	22.24	22.36	22.30
HSDPA Subtest-3	22.00	21.72	21.84	21.82
HSDPA Subtest-4	22.00	21.80	21.87	21.79
HSUPA Subtest-1	23.00	22.63	22.75	22.74
HSUPA Subtest-2	21.00	20.65	20.79	20.71
HSUPA Subtest-3	22.00	21.69	21.77	21.72
HSUPA Subtest-4	21.00	20.68	20.76	20.74
HSUPA Subtest-5	23.00	22.52	22.66	22.63

**P-sensor off**

Band	UMTS Band V Average Conducted Power(dBm)			
Tx Channel	Max. Tune-up power (dBm)	4132	4183	4233
Rx Channel		4357	4408	4458
Frequency		826.4MHz	836.4MHz	846.6MHz
RMC 12.2K	24.50	22.94	23.22	23.10
HSDPA Subtest-1	24.50	22.84	23.18	22.98
HSDPA Subtest-2	24.00	22.84	22.93	22.92
HSDPA Subtest-3	23.50	22.35	22.44	22.47
HSDPA Subtest-4	23.50	22.39	22.48	22.44
HSUPA Subtest-1	24.50	22.84	22.94	22.84
HSUPA Subtest-2	22.50	21.23	21.38	21.34
HSUPA Subtest-3	23.50	22.26	22.37	22.34
HSUPA Subtest-4	22.50	21.26	21.34	21.36
HSUPA Subtest-5	24.50	22.85	23.11	23.02

**P-sensor on**

Band	UMTS Band V Average Conducted Power(dBm)			
Tx Channel	Max. Tune-up power (dBm)	4132	4183	4233
Rx Channel		4357	4408	4458
Frequency		826.4MHz	836.4MHz	846.6MHz
RMC 12.2K	23.00	22.84	22.94	22.86
HSDPA Subtest-1	23.00	22.77	22.83	22.80
HSDPA Subtest-2	22.50	22.24	22.36	22.33
HSDPA Subtest-3	22.00	21.74	21.87	21.83
HSDPA Subtest-4	22.00	21.82	21.91	21.85
HSUPA Subtest-1	23.00	22.63	22.79	22.75
HSUPA Subtest-2	21.00	20.68	20.82	20.77
HSUPA Subtest-3	22.00	21.66	21.76	21.70
HSUPA Subtest-4	21.00	20.66	20.78	20.73
HSUPA Subtest-5	23.00	22.59	22.67	22.61

## 9.2. LTE Band

### LTE Band 2

P-sensor off

LTE B2/BW=1.4M		Average Conducted Power(dBm)				LTE B2/BW=3M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			18607/1850.7	18900/1880.0	19193/1909.3				18615/1851.5	18900/1880.0	19185/1908.5
QPSK	1/0	24.00	22.81	22.33	22.67	QPSK	1/0	24.00	22.86	22.38	22.72
	1/2	24.00	22.73	23.04	22.42		1/7	24.00	22.78	23.09	22.47
	1/5	24.00	22.41	22.88	22.97		1/14	24.00	22.46	22.93	23.02
	3/0	23.00	22.82	22.34	22.68		8/0	23.00	21.97	21.49	21.83
	3/1	23.00	22.79	23.10	22.48		8/4	23.00	21.94	22.25	21.63
	3/2	23.00	22.45	22.92	23.01		8/7	23.00	21.60	22.07	22.16
	6/0	23.00	21.92	22.15	21.78		15/0	23.00	21.97	22.20	21.83
16QAM	1/0	23.00	21.90	21.42	21.76	16QAM	1/0	23.00	21.95	21.47	21.81
	1/2	23.00	21.83	22.14	21.52		1/7	23.00	21.88	22.19	21.57
	1/5	23.00	21.52	21.99	22.08		1/14	23.00	21.57	22.04	22.13
	3/0	23.00	21.76	21.49	21.92		8/0	22.00	20.91	20.64	21.07
	3/1	23.00	21.69	22.21	21.43		8/4	22.00	20.89	21.36	20.58
	3/2	22.00	21.37	21.98	21.38		8/7	22.00	20.52	21.13	20.53
	6/0	22.00	20.76	21.18	20.45		15/0	22.00	20.81	21.23	20.50
LTE B2/BW=5M		Average Conducted Power(dBm)				LTE B2/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			18625/1852.5	18900/1880	19175/1907.5				18650/1855	18900/1880	19150/1905
QPSK	1/0	24.00	22.91	22.43	22.77	QPSK	1/0	24.00	22.96	22.48	22.82
	1/12	24.00	22.83	23.14	22.52		1/24	24.00	22.88	23.19	22.57
	1/24	24.00	22.51	22.98	23.07		1/49	24.00	22.56	23.03	23.12
	12/0	23.00	22.02	21.54	21.88		25/0	23.00	22.07	21.59	21.93
	12/6	23.00	21.99	22.30	21.68		25/12	23.00	22.04	22.35	21.73
	12/11	23.00	21.65	22.12	22.21		25/24	23.00	21.70	22.17	22.26
	25/0	23.00	22.02	22.25	21.88		50/0	23.00	22.07	22.30	21.93
16QAM	1/0	23.00	22.00	21.52	21.86	16QAM	1/0	23.00	22.05	21.57	21.91
	1/12	23.00	21.93	22.24	21.62		1/24	23.00	21.98	22.29	21.67
	1/24	23.00	21.62	22.09	22.18		1/49	23.00	21.67	22.14	22.23
	12/0	22.00	20.96	20.69	21.12		25/0	22.00	21.01	20.74	21.17
	12/6	22.00	20.94	21.41	20.63		25/12	22.00	20.99	21.46	20.68
	12/11	22.00	20.57	21.18	20.58		25/24	22.00	20.62	21.23	20.63
	25/0	22.00	20.86	21.28	20.55		50/0	22.00	20.91	21.33	20.60

LTE B2/BW=15M		Average Conducted Power(dBm)				LTE B2/BW=20M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			18675/1857.5	18900/1880	19125/1902.5				18700/1860	18900/1880	19100/1900
QPSK	1/0	24.00	23.01	22.53	22.87	QPSK	1/0	24.00	23.06	22.58	22.92
	1/37	24.00	22.93	23.24	22.62		1/49	24.00	22.98	23.29	22.67
	1/74	24.00	22.61	23.08	23.17		1/99	24.00	22.66	23.13	23.22
	36/0	23.00	22.12	21.64	21.98		50/0	23.00	22.17	21.69	22.03
	36/18	23.00	22.09	22.40	21.78		50/24	23.00	22.14	22.45	21.83
	36/35	23.00	21.75	22.22	22.31		50/49	23.00	21.80	22.27	22.36
	75/0	23.00	22.12	22.35	21.98		100/0	23.00	22.17	22.40	22.03
16QAM	1/0	23.00	22.10	21.62	21.96	16QAM	1/0	23.00	22.15	21.67	22.01
	1/37	23.00	22.03	22.34	21.72		1/49	23.00	22.08	22.39	21.77
	1/74	23.00	21.72	22.19	22.28		1/99	23.00	21.77	22.24	22.33
	36/0	22.00	21.06	20.79	21.22		50/0	22.00	21.11	20.84	21.27
	36/18	22.00	21.04	21.51	20.73		50/24	22.00	21.09	21.56	20.78
	36/35	22.00	20.67	21.28	20.68		50/49	22.00	20.72	21.33	20.73
	75/0	22.00	20.96	21.38	20.65		100/0	22.00	21.01	21.43	20.70

**P-sensor on**

LTE B2/BW=1.4M		Average Conducted Power(dBm)				LTE B2/BW=3M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			18607/1850.7	18900/1880.0	19193/1909.3				18615/1851.5	18900/1880.0	19185/1908.5
QPSK	1/0	23.00	22.11	22.14	22.06	QPSK	1/0	23.00	22.15	22.18	22.10
	1/2	23.00	22.04	22.09	22.01		1/7	23.00	22.08	22.13	22.05
	1/5	23.00	22.00	22.03	21.96		1/14	23.00	22.04	22.07	22.00
	3/0	22.00	21.20	21.23	21.15		8/0	22.00	21.24	21.27	21.19
	3/1	22.00	21.09	21.14	21.06		8/4	22.00	21.13	21.18	21.10
	3/2	22.00	21.07	21.10	21.03		8/7	22.00	21.11	21.14	21.07
	6/0	22.00	21.15	21.18	21.10		15/0	22.00	21.19	21.22	21.14
16QAM	1/0	22.00	21.18	21.21	21.13	16QAM	1/0	22.00	21.22	21.25	21.17
	1/2	22.00	21.12	21.17	21.09		1/7	22.00	21.16	21.21	21.13
	1/5	22.00	21.10	21.13	21.06		1/14	22.00	21.14	21.17	21.10
	3/0	21.00	20.10	20.10	19.99		8/0	21.00	20.14	20.14	20.03
	3/1	21.00	20.01	20.01	19.91		8/4	21.00	20.05	20.05	19.95
	3/2	21.00	19.95	19.93	20.06		8/7	21.00	19.99	19.97	20.10
	6/0	21.00	20.07	20.00	19.94		15/0	21.00	20.11	20.04	19.98

LTE B2/BW=5M		Average Conducted Power(dBm)				LTE B2/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			18625/1852.5	18900/1880	19175/1907.5				18650/1855	18900/1880	19150/1905
QPSK	1/0	23.00	22.23	22.26	22.18	QPSK	1/0	23.00	22.30	22.33	22.25
	1/12	23.00	22.16	22.21	22.13		1/24	23.00	22.23	22.28	22.20
	1/24	23.00	22.12	22.15	22.08		1/49	23.00	22.19	22.22	22.15
	12/0	22.00	21.32	21.35	21.27		25/0	22.00	21.39	21.42	21.34
	12/6	22.00	21.21	21.26	21.18		25/12	22.00	21.28	21.33	21.25
	12/11	22.00	21.19	21.22	21.15		25/24	22.00	21.26	21.29	21.22
	25/0	22.00	21.27	21.30	21.22		50/0	22.00	21.34	21.37	21.29
16QAM	1/0	22.00	21.30	21.33	21.25	16QAM	1/0	22.00	21.37	21.40	21.32
	1/12	22.00	21.24	21.29	21.21		1/24	22.00	21.31	21.36	21.28
	1/24	22.00	21.22	21.25	21.18		1/49	22.00	21.29	21.32	21.25
	12/0	21.00	20.22	20.22	20.11		25/0	21.00	20.29	20.29	20.18
	12/6	21.00	20.13	20.13	20.03		25/12	21.00	20.20	20.20	20.10
	12/11	21.00	20.07	20.05	20.18		25/24	21.00	20.14	20.12	20.25
	25/0	21.00	20.19	20.12	20.06		50/0	21.00	20.26	20.19	20.13
LTE B2/BW=15M		Average Conducted Power(dBm)				LTE B2/BW=20M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			18675/1857.5	18900/1880	19125/1902.5				18700/1860	18900/1880	19100/1900
QPSK	1/0	23.00	22.35	22.38	22.30	QPSK	1/0	23.00	22.48	22.51	22.43
	1/37	23.00	22.28	22.33	22.25		1/49	23.00	22.41	22.46	22.38
	1/74	23.00	22.24	22.27	22.20		1/99	23.00	22.37	22.40	22.33
	36/0	22.00	21.44	21.47	21.39		50/0	22.00	21.57	21.60	21.52
	36/18	22.00	21.33	21.38	21.30		50/24	22.00	21.46	21.51	21.43
	36/35	22.00	21.31	21.34	21.27		50/49	22.00	21.44	21.47	21.40
	75/0	22.00	21.39	21.42	21.34		100/0	22.00	21.52	21.55	21.47
16QAM	1/0	22.00	21.42	21.45	21.37	16QAM	1/0	22.00	21.55	21.58	21.50
	1/37	22.00	21.36	21.41	21.33		1/49	22.00	21.49	21.54	21.46
	1/74	22.00	21.34	21.37	21.30		1/99	22.00	21.47	21.50	21.43
	36/0	21.00	20.34	20.34	20.23		50/0	21.00	20.47	20.47	20.36
	36/18	21.00	20.25	20.25	20.15		50/24	21.00	20.38	20.38	20.28
	36/35	21.00	20.19	20.17	20.30		50/49	21.00	20.32	20.30	20.43
	75/0	21.00	20.31	20.24	20.18		100/0	21.00	20.44	20.37	20.31



**LTE Band 4**
**P-sensor off**

LTE B4/BW=1.4M		Average Conducted Power(dBm)				LTE B4/BW=3M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			19957/1710.7	20175/1732.5	20393/1754.3				19965/1711.5	20175/1732.5	20385/1753.5
QPSK	1/0	24.00	22.27	22.61	22.21	QPSK	1/0	24.00	22.32	22.66	22.26
	1/2	24.00	22.20	22.77	22.73		1/7	24.00	22.25	22.82	22.78
	1/5	24.00	22.16	22.36	22.45		1/14	24.00	22.21	22.41	22.50
	3/0	23.00	22.27	22.61	22.21		8/0	23.00	21.43	21.77	21.37
	3/1	23.00	22.20	22.77	22.73		8/4	23.00	21.41	21.98	21.94
	3/2	23.00	22.16	22.36	22.45		8/7	23.00	21.35	21.55	21.64
	6/0	23.00	21.38	21.72	21.32		15/0	23.00	21.43	21.77	21.37
16QAM	1/0	23.00	21.36	21.70	21.30	16QAM	1/0	23.00	21.41	21.75	21.35
	1/2	23.00	21.30	21.87	21.83		1/7	23.00	21.35	21.92	21.88
	1/5	23.00	21.27	21.47	21.56		1/14	23.00	21.32	21.52	21.61
	3/0	22.00	21.36	21.70	21.30		8/0	22.00	20.26	20.46	20.55
	3/1	22.00	21.30	21.87	21.83		8/4	22.00	20.36	20.93	20.89
	3/2	22.00	21.27	21.47	21.56		8/7	22.00	20.31	20.88	20.84
	6/0	22.00	20.23	20.41	20.50		15/0	22.00	20.28	20.85	20.81
LTE B4/BW=5M		Average Conducted Power(dBm)				LTE B4/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			19975/1712.5	20175/1732.5	20375/1752.5				20000/1715	20175/1732.5	20350/1750
QPSK	1/0	24.00	22.37	22.71	22.31	QPSK	1/0	24.00	22.42	22.76	22.36
	1/12	24.00	22.30	22.87	22.83		1/24	24.00	22.35	22.92	22.88
	1/24	24.00	22.26	22.46	22.55		1/49	24.00	22.31	22.51	22.60
	12/0	23.00	21.48	21.82	21.42		25/0	23.00	21.53	21.87	21.47
	12/6	23.00	21.46	22.03	21.99		25/12	23.00	21.51	22.08	22.04
	12/11	23.00	21.40	21.60	21.69		25/24	23.00	21.45	21.65	21.74
	25/0	23.00	21.48	21.82	21.42		50/0	23.00	21.53	21.87	21.47
16QAM	1/0	23.00	21.46	21.80	21.40	16QAM	1/0	23.00	21.51	21.85	21.45
	1/12	23.00	21.40	21.97	21.93		1/24	23.00	21.45	22.02	21.98
	1/24	23.00	21.37	21.57	21.66		1/49	23.00	21.42	21.62	21.71
	12/0	22.00	20.31	20.51	20.60		25/0	22.00	20.36	20.56	20.65
	12/6	22.00	20.41	20.98	20.94		25/12	22.00	20.46	21.03	20.99
	12/11	22.00	20.36	20.93	20.89		25/24	22.00	20.41	20.98	20.94
	25/0	22.00	20.33	20.90	20.86		50/0	22.00	20.38	20.95	20.91

LTE B4/BW=15M		Average Conducted Power(dBm)				LTE B4/BW=20M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			20025/1717.5	20175/1732.5	20325/1747.5				20050/1720	20175/1732.5	20300/1745
QPSK	1/0	24.00	22.47	22.81	22.41	QPSK	1/0	24.00	22.52	22.86	22.46
	1/37	24.00	22.40	22.97	22.93		1/49	24.00	22.45	23.02	22.98
	1/74	24.00	22.36	22.56	22.65		1/99	24.00	22.41	22.61	22.70
	36/0	23.00	21.58	21.92	21.52		50/0	23.00	21.63	21.97	21.57
	36/18	23.00	21.56	22.13	22.09		50/24	23.00	21.61	22.18	22.14
	36/35	23.00	21.50	21.70	21.79		50/49	23.00	21.55	21.75	21.84
	75/0	23.00	21.58	21.92	21.52		100/0	23.00	21.63	21.97	21.57
16QAM	1/0	23.00	21.56	21.90	21.50	16QAM	1/0	23.00	21.61	21.95	21.55
	1/37	23.00	21.50	22.07	22.03		1/49	23.00	21.55	22.12	22.08
	1/74	23.00	21.47	21.67	21.76		1/99	23.00	21.52	21.72	21.81
	36/0	22.00	20.41	20.61	20.70		50/0	22.00	20.46	20.66	20.75
	36/18	22.00	20.51	21.08	21.04		50/24	22.00	20.56	21.13	21.09
	36/35	22.00	20.46	21.03	20.99		50/49	22.00	20.51	21.08	21.04
	75/0	22.00	20.43	21.00	20.96		100/0	22.00	20.48	21.05	21.01

**P-sensor on**

LTE B4/BW=1.4M		Average Conducted Power(dBm)				LTE B4/BW=3M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			19957/1710.7	20175/1732.5	20393/1754.3				19965/1711.5	20175/1732.5	20385/1753.5
QPSK	1/0	23.00	21.96	22.01	21.98	QPSK	1/0	23.00	22.00	22.05	22.02
	1/12	23.00	21.88	21.92	21.87		1/12	23.00	21.92	21.96	21.91
	1/24	23.00	21.80	21.85	21.78		1/49	23.00	21.84	21.89	21.82
	12/0	22.00	21.05	21.10	21.07		25/0	22.00	21.09	21.14	21.11
	12/6	22.00	20.93	20.97	20.92		25/12	22.00	20.97	21.01	20.96
	12/11	22.00	20.87	20.92	20.85		25/24	22.00	20.91	20.96	20.89
	25/0	22.00	21.00	21.05	21.02		50/0	22.00	21.04	21.09	21.06
16QAM	1/0	22.00	21.03	21.08	21.05	16QAM	1/0	22.00	21.07	21.12	21.09
	1/12	22.00	20.96	21.00	20.95		1/24	22.00	21.00	21.04	20.99
	1/24	22.00	20.90	20.95	20.88		1/49	22.00	20.94	20.99	20.92
	12/0	21.00	19.95	19.97	19.91		25/0	21.00	19.99	20.01	19.95
	12/6	21.00	19.85	19.84	19.77		25/12	21.00	19.89	19.88	19.81
	12/11	21.00	19.75	19.75	19.88		25/24	21.00	19.79	19.79	19.92
	25/0	21.00	19.92	19.87	19.86		50/0	21.00	19.96	19.91	19.90

LTE B4/BW=5M		Average Conducted Power(dBm)				LTE B4/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			19975/1712.5	20175/1732.5	20375/1752.5				20000/1715	20175/1732.5	20350/1750
QPSK	1/0	23.00	22.08	22.13	22.10	QPSK	1/0	23.00	22.15	22.20	22.17
	1/12	23.00	22.00	22.04	21.99		1/12	23.00	22.07	22.11	22.06
	1/24	23.00	21.92	21.97	21.90		1/49	23.00	21.99	22.04	21.97
	12/0	22.00	21.17	21.22	21.19		25/0	22.00	21.24	21.29	21.26
	12/6	22.00	21.05	21.09	21.04		25/12	22.00	21.12	21.16	21.11
	12/11	22.00	20.99	21.04	20.97		25/24	22.00	21.06	21.11	21.04
	25/0	22.00	21.12	21.17	21.14		50/0	22.00	21.19	21.24	21.21
16QAM	1/0	22.00	21.15	21.20	21.17	16QAM	1/0	22.00	21.22	21.27	21.24
	1/12	22.00	21.08	21.12	21.07		1/24	22.00	21.15	21.19	21.14
	1/24	22.00	21.02	21.07	21.00		1/49	22.00	21.09	21.14	21.07
	12/0	21.00	20.07	20.09	20.03		25/0	21.00	20.14	20.16	20.10
	12/6	21.00	19.97	19.96	19.89		25/12	21.00	20.04	20.03	19.96
	12/11	21.00	19.87	19.87	20.00		25/24	21.00	19.94	19.94	20.07
	25/0	21.00	20.04	19.99	19.98		50/0	21.00	20.11	20.06	20.05
LTE B4/BW=15M		Average Conducted Power(dBm)				LTE B4/BW=20M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			20025/1717.5	20175/1732.5	20325/1747.5				20050/1720	20175/1732.5	20300/1745
QPSK	1/0	23.00	22.20	22.25	22.22	QPSK	1/0	23.00	22.33	22.38	22.35
	1/37	23.00	22.12	22.16	22.11		1/49	23.00	22.25	22.29	22.24
	1/74	23.00	22.04	22.09	22.02		1/99	23.00	22.17	22.22	22.15
	36/0	22.00	21.29	21.34	21.31		50/0	22.00	21.42	21.47	21.44
	36/18	22.00	21.17	21.21	21.16		50/24	22.00	21.30	21.34	21.29
	36/35	22.00	21.11	21.16	21.09		50/49	22.00	21.24	21.29	21.22
	75/0	22.00	21.24	21.29	21.26		100/0	22.00	21.37	21.42	21.39
16QAM	1/0	22.00	21.27	21.32	21.29	16QAM	1/0	22.00	21.40	21.45	21.42
	1/37	22.00	21.20	21.24	21.19		1/49	22.00	21.33	21.37	21.32
	1/74	22.00	21.14	21.19	21.12		1/99	22.00	21.27	21.32	21.25
	36/0	21.00	20.19	20.21	20.15		50/0	21.00	20.32	20.34	20.28
	36/18	21.00	20.09	20.08	20.01		50/24	21.00	20.22	20.21	20.14
	36/35	21.00	19.99	19.99	20.12		50/49	21.00	20.12	20.12	20.25
	75/0	21.00	20.16	20.11	20.10		100/0	21.00	20.29	20.24	20.23

**LTE Band 5**
**P-sensor off**

LTE B5/BW=1.4M		Average Conducted Power(dBm)				LTE B5/BW=3M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			20407/824.7	20525/836.5	20643/848.3				20415/825.5	20525/836.5	20635/847.5
QPSK	1/0	24.00	22.59	22.70	22.68	QPSK	1/0	24.00	22.64	22.75	22.73
	1/2	24.00	22.61	22.62	22.45		1/7	24.00	22.66	22.67	22.50
	1/5	24.00	22.45	22.63	22.38		1/14	24.00	22.50	22.68	22.43
	3/0	23.00	22.59	22.70	22.68		8/0	23.00	21.75	21.86	21.84
	3/1	23.00	22.61	22.62	22.45		8/4	23.00	21.82	21.83	21.66
	3/2	23.00	22.45	22.63	22.38		8/7	23.00	21.64	21.82	21.57
	6/0	23.00	21.70	21.81	21.79		15/0	23.00	21.75	21.86	21.84
16QAM	1/0	23.00	21.68	21.79	21.77	16QAM	1/0	23.00	21.73	21.84	21.82
	1/2	23.00	21.71	21.72	21.55		1/7	23.00	21.76	21.77	21.60
	1/5	23.00	21.56	21.74	21.49		1/14	23.00	21.61	21.79	21.54
	3/0	22.00	21.68	21.79	21.77		8/0	22.00	20.55	20.73	20.48
	3/1	22.00	21.71	21.72	21.55		8/4	22.00	20.77	20.78	20.61
	3/2	22.00	21.56	21.74	21.49		8/7	22.00	20.72	20.73	20.56
	6/0	22.00	20.64	20.68	20.43		15/0	22.00	20.69	20.70	20.53
LTE B5/BW=5M		Average Conducted Power(dBm)				LTE B5/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			20425/826.5	20525/836.5	20625/846.5				20450/829	20525/836.5	20600/844
QPSK	1/0	24.00	22.69	22.80	22.78	QPSK	1/0	24.00	22.74	22.85	22.83
	1/12	24.00	22.71	22.72	22.55		1/24	24.00	22.76	22.77	22.60
	1/24	24.00	22.55	22.73	22.48		1/49	24.00	22.60	22.78	22.53
	12/0	23.00	21.80	21.91	21.89		25/0	23.00	21.85	21.96	21.94
	12/6	23.00	21.87	21.88	21.71		25/12	23.00	21.92	21.93	21.76
	12/11	23.00	21.69	21.87	21.62		25/24	23.00	21.74	21.92	21.67
	25/0	23.00	21.80	21.91	21.89		50/0	23.00	21.85	21.96	21.94
16QAM	1/0	23.00	21.78	21.89	21.87	16QAM	1/0	23.00	21.83	21.94	21.92
	1/12	23.00	21.81	21.82	21.65		1/24	23.00	21.86	21.87	21.70
	1/24	23.00	21.66	21.84	21.59		1/49	23.00	21.71	21.89	21.64
	12/0	22.00	20.60	20.78	20.53		25/0	22.00	20.65	20.83	20.58
	12/6	22.00	20.82	20.83	20.66		25/12	22.00	20.87	20.88	20.71
	12/11	22.00	20.77	20.78	20.61		25/24	22.00	20.82	20.83	20.66
	25/0	22.00	20.74	20.75	20.58		50/0	22.00	20.79	20.80	20.63

**P-sensor on**

LTE B5/BW=1.4M		Average Conducted Power(dBm)				LTE B5/BW=3M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			20407/824.7	20525/836.5	20643/848.3				20415/825.5	20525/836.5	20635/847.5
QPSK	1/0	23.00	22.07	22.12	22.08	QPSK	1/0	23.00	22.14	22.19	22.15
	1/12	23.00	21.91	22.00	21.94		1/24	23.00	21.98	22.07	22.01
	1/24	23.00	21.82	21.91	21.87		1/49	23.00	21.89	21.98	21.94
	12/0	22.00	21.16	21.21	21.17		25/0	22.00	21.23	21.28	21.24
	12/6	22.00	20.96	21.05	20.99		25/12	22.00	21.03	21.12	21.06
	12/11	22.00	20.89	20.98	20.94		25/24	22.00	20.96	21.05	21.01
	25/0	22.00	21.11	21.16	21.12		50/0	22.00	21.18	21.23	21.19
16QAM	1/0	22.00	21.14	21.19	21.15	16QAM	1/0	22.00	21.21	21.26	21.22
	1/12	22.00	20.99	21.08	21.02		1/24	22.00	21.06	21.15	21.09
	1/24	22.00	20.92	21.01	20.97		1/49	22.00	20.99	21.08	21.04
	12/0	21.00	20.06	20.08	20.01		25/0	21.00	20.13	20.15	20.08
	12/6	21.00	19.88	19.92	19.84		25/12	21.00	19.95	19.99	19.91
	12/11	21.00	19.77	19.81	19.97		25/24	21.00	19.84	19.88	20.04
	25/0	21.00	20.03	19.98	19.96		50/0	21.00	20.10	20.05	20.03
LTE B5/BW=5M		Average Conducted Power(dBm)				LTE B5/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			20425/826.5	20525/836.5	20625/846.5				20450/829	20525/836.5	20600/844
QPSK	1/0	23.00	22.19	22.24	22.20	QPSK	1/0	23.00	22.32	22.37	22.33
	1/12	23.00	22.03	22.12	22.06		1/24	23.00	22.16	22.25	22.19
	1/24	23.00	21.94	22.03	21.99		1/49	23.00	22.07	22.16	22.12
	12/0	22.00	21.28	21.33	21.29		25/0	22.00	21.41	21.46	21.42
	12/6	22.00	21.08	21.17	21.11		25/12	22.00	21.21	21.30	21.24
	12/11	22.00	21.01	21.10	21.06		25/24	22.00	21.14	21.23	21.19
	25/0	22.00	21.23	21.28	21.24		50/0	22.00	21.36	21.41	21.37
16QAM	1/0	22.00	21.26	21.31	21.27	16QAM	1/0	22.00	21.39	21.44	21.40
	1/12	22.00	21.11	21.20	21.14		1/24	22.00	21.24	21.33	21.27
	1/24	22.00	21.04	21.13	21.09		1/49	22.00	21.17	21.26	21.22
	12/0	21.00	20.18	20.20	20.13		25/0	21.00	20.31	20.33	20.26
	12/6	21.00	20.00	20.04	19.96		25/12	21.00	20.13	20.17	20.09
	12/11	21.00	19.89	19.93	20.09		25/24	21.00	20.02	20.06	20.22
	25/0	21.00	20.15	20.10	20.08		50/0	21.00	20.28	20.23	20.21

**LTE Band 7**
**P-sensor off**

LTE B7/BW=5M		Average Conducted Power(dBm)				LTE B7/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			20775/2502.5	21100/2535	21425/2567.5				20800/2505	21100/2535	21400/2565
QPSK	1/0	24.00	23.62	23.66	23.63	QPSK	1/0	24.00	23.69	23.73	23.70
	1/12	24.00	23.51	23.57	23.50		1/24	24.00	23.58	23.64	23.57
	1/24	24.00	23.46	23.47	23.44		1/49	24.00	23.53	23.54	23.51
	12/0	23.00	22.71	22.75	22.72		25/0	23.00	22.78	22.82	22.79
	12/6	23.00	22.56	22.62	22.55		25/12	23.00	22.63	22.69	22.62
	12/11	23.00	22.53	22.54	22.51		25/24	23.00	22.60	22.61	22.58
	25/0	23.00	22.66	22.70	22.67		50/0	23.00	22.73	22.77	22.74
16QAM	1/0	23.00	22.69	22.73	22.70	16QAM	1/0	23.00	22.76	22.80	22.77
	1/12	23.00	22.59	22.65	22.58		1/24	23.00	22.66	22.72	22.65
	1/24	23.00	22.56	22.57	22.54		1/49	23.00	22.63	22.64	22.61
	12/0	22.00	21.61	21.62	21.56		25/0	22.00	21.68	21.69	21.63
	12/6	22.00	21.48	21.49	21.40		25/12	22.00	21.55	21.56	21.47
	12/11	22.00	21.41	21.37	21.54		25/24	22.00	21.48	21.44	21.61
	25/0	22.00	21.58	21.52	21.51		50/0	22.00	21.65	21.59	21.58
LTE B7/BW=15M		Average Conducted Power(dBm)				LTE B7/BW=20M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			20825/2507.5	21100/2535	21375/2562.5				20850/2510	21100/2535	21350/2560
QPSK	1/0	24.00	23.74	23.78	23.75	QPSK	1/0	24.00	22.66	22.96	22.72
	1/37	24.00	23.63	23.69	23.62		1/49	24.00	22.52	23.07	22.88
	1/74	24.00	23.58	23.59	23.56		1/99	24.00	22.45	22.89	22.81
	36/0	23.00	22.83	22.87	22.84		50/0	23.00	22.96	22.94	22.97
	36/18	23.00	22.68	22.74	22.67		50/24	23.00	22.81	22.87	22.80
	36/35	23.00	22.65	22.66	22.63		50/49	23.00	22.78	22.79	22.76
	75/0	23.00	22.78	22.82	22.79		100/0	23.00	22.91	22.95	22.92
16QAM	1/0	23.00	22.81	22.85	22.82	16QAM	1/0	23.00	22.94	22.98	22.95
	1/37	23.00	22.71	22.77	22.70		1/49	23.00	22.84	22.90	22.83
	1/74	23.00	22.68	22.69	22.66		1/99	23.00	22.81	22.82	22.79
	36/0	22.00	21.73	21.74	21.68		50/0	22.00	21.86	21.87	21.81
	36/18	22.00	21.60	21.61	21.52		50/24	22.00	21.73	21.74	21.65
	36/35	22.00	21.53	21.49	21.66		50/49	22.00	21.66	21.62	21.79
	75/0	22.00	21.70	21.64	21.63		100/0	22.00	21.83	21.77	21.76

**P-sensor on**

LTE B7/BW=5M		Average Conducted Power(dBm)				LTE B7/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			20775/2502.5	21100/2535	21425/2567.5				20800/2505	21100/2535	21400/2565
QPSK	1/0	23.00	22.35	22.60	22.42	QPSK	1/0	23.00	22.39	22.64	22.46
	1/12	23.00	22.22	22.54	22.35		1/24	23.00	22.26	22.58	22.39
	1/24	23.00	22.12	22.48	22.31		1/49	23.00	22.16	22.52	22.35
	12/0	22.00	21.44	21.64	21.51		25/0	22.00	21.48	21.68	21.55
	12/6	22.00	21.27	21.61	21.40		25/12	22.00	21.31	21.65	21.44
	12/11	22.00	21.19	21.55	21.38		25/24	22.00	21.23	21.59	21.42
	25/0	22.00	21.39	21.64	21.46		50/0	22.00	21.43	21.68	21.50
16QAM	1/0	22.00	21.42	21.67	21.49	16QAM	1/0	22.00	21.46	21.71	21.53
	1/12	22.00	21.30	21.62	21.43		1/24	22.00	21.34	21.66	21.47
	1/24	22.00	21.22	21.58	21.41		1/49	22.00	21.26	21.62	21.45
	12/0	21.00	20.32	20.60	20.55		25/0	21.00	20.36	20.64	20.59
	12/6	21.00	20.16	20.52	20.43		25/12	21.00	20.20	20.56	20.47
	12/11	21.00	20.04	20.44	20.41		25/24	21.00	20.08	20.48	20.45
	25/0	21.00	20.25	20.53	20.49		50/0	21.00	20.29	20.57	20.53
LTE B7/BW=15M		Average Conducted Power(dBm)				LTE B7/BW=20M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			20825/2507.5	21100/2535	21375/2562.5				20850/2510	21100/2535	21350/2560
QPSK	1/0	23.00	22.48	22.73	22.55	QPSK	1/0	23.00	22.64	22.84	22.68
	1/37	23.00	22.35	22.67	22.48		1/49	23.00	22.48	22.80	22.61
	1/74	23.00	22.25	22.61	22.44		1/99	23.00	22.38	22.74	22.57
	36/0	22.00	21.57	21.77	21.64		50/0	22.00	21.70	21.93	21.77
	36/18	22.00	21.40	21.74	21.53		50/24	22.00	21.53	21.87	21.66
	36/35	22.00	21.32	21.68	21.51		50/49	22.00	21.45	21.81	21.64
	75/0	22.00	21.52	21.77	21.59		100/0	22.00	21.65	21.90	21.72
16QAM	1/0	22.00	21.55	21.80	21.62	16QAM	1/0	22.00	21.68	21.93	21.75
	1/37	22.00	21.43	21.75	21.56		1/49	22.00	21.56	21.88	21.69
	1/74	22.00	21.35	21.71	21.54		1/99	22.00	21.48	21.84	21.67
	36/0	21.00	20.45	20.73	20.68		50/0	21.00	20.58	20.86	20.81
	36/18	21.00	20.29	20.65	20.56		50/24	21.00	20.42	20.78	20.69
	36/35	21.00	20.17	20.57	20.54		50/49	21.00	20.30	20.70	20.67
	75/0	21.00	20.38	20.66	20.62		100/0	21.00	20.51	20.79	20.75

**LTE Band 12**
**P-sensor off**

LTE B12/BW=1.4M		Average Conducted Power(dBm)				LTE B12/BW=3M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			23017/699.7	23095/707.5	23173/715.3				23025/700.5	23095/707.5	23165/714.5
QPSK	1/0	24.00	22.34	22.93	22.67	QPSK	1/0	24.00	22.39	22.98	22.72
	1/2	24.00	22.67	22.75	22.54		1/7	24.00	22.72	22.80	22.59
	1/5	24.00	22.35	22.49	22.32		1/14	24.00	22.40	22.54	22.37
	3/0	23.00	22.34	22.93	22.67		8/0	23.00	21.50	22.09	21.83
	3/1	23.00	22.67	22.75	22.54		8/4	23.00	21.88	21.96	21.75
	3/2	23.00	22.35	22.49	22.32		8/7	23.00	21.54	21.68	21.51
	6/0	23.00	21.45	22.04	21.78		15/0	23.00	21.50	22.09	21.83
16QAM	1/0	23.00	21.43	22.02	21.76	16QAM	1/0	23.00	21.48	22.07	21.81
	1/2	23.00	21.77	21.85	21.64		1/7	23.00	21.82	21.90	21.69
	1/5	23.00	21.46	21.60	21.43		1/14	23.00	21.51	21.65	21.48
	3/0	22.00	21.43	22.02	21.76		8/0	22.00	20.45	20.59	20.42
	3/1	22.00	21.77	21.85	21.64		8/4	22.00	20.83	20.91	20.70
	3/2	22.00	21.46	21.60	21.43		8/7	22.00	20.78	20.86	20.65
	6/0	22.00	20.70	20.54	20.37		15/0	22.00	20.75	20.83	20.62
LTE B12/BW=5M		Average Conducted Power(dBm)				LTE B12/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			23035/701.5	23095/707.5	23155/713.5				23060/704	23095/707.5	23130/711
QPSK	1/0	24.00	22.44	23.03	22.77	QPSK	1/0	24.00	22.49	23.08	22.82
	1/12	24.00	22.77	22.85	22.64		1/24	24.00	22.82	22.90	22.69
	1/24	24.00	22.45	22.59	22.42		1/49	24.00	22.50	22.64	22.47
	12/0	23.00	21.55	22.14	21.88		25/0	23.00	21.60	22.19	21.93
	12/6	23.00	21.93	22.01	21.80		25/12	23.00	21.98	22.06	21.85
	12/11	23.00	21.59	21.73	21.56		25/24	23.00	21.64	21.78	21.61
	25/0	23.00	21.55	22.14	21.88		50/0	23.00	21.60	22.19	21.93
16QAM	1/0	23.00	21.53	22.12	21.86	16QAM	1/0	23.00	21.58	22.17	21.91
	1/12	23.00	21.87	21.95	21.74		1/24	23.00	21.92	22.00	21.79
	1/24	23.00	21.56	21.70	21.53		1/49	23.00	21.61	21.75	21.58
	12/0	22.00	20.50	20.64	20.47		25/0	22.00	20.55	20.69	20.52
	12/6	22.00	20.88	20.96	20.75		25/12	22.00	20.93	21.01	20.80
	12/11	22.00	20.83	20.91	20.70		25/24	22.00	20.88	20.96	20.75
	25/0	22.00	20.80	20.88	20.67		50/0	22.00	20.85	20.93	20.72



**P-sensor on**

LTE B12/BW=1.4M		Average Conducted Power(dBm)				LTE B12/BW=3M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			23017/699.7	23095/707.5	23173/715.3				23025/700.5	23095/707.5	23165/714.5
QPSK	1/0	23.00	22.50	22.56	22.58	QPSK	1/0	23.00	22.62	22.68	22.69
	1/12	23.00	22.43	22.46	22.44		1/24	23.00	22.55	22.58	22.56
	1/24	23.00	22.31	22.34	22.33		1/49	23.00	22.43	22.46	22.45
	12/0	22.00	21.65	21.71	21.61		25/0	22.00	21.76	21.82	21.73
	12/6	22.00	21.54	21.57	21.55		25/12	22.00	21.65	21.68	21.66
	12/11	22.00	21.44	21.47	21.46		25/24	22.00	21.55	21.58	21.57
	25/0	22.00	21.60	21.66	21.62		50/0	22.00	21.71	21.77	21.73
16QAM	1/0	22.00	21.63	21.69	21.65	16QAM	1/0	22.00	21.74	21.80	21.76
	1/12	22.00	21.57	21.60	21.58		1/24	22.00	21.68	21.71	21.69
	1/24	22.00	21.47	21.50	21.49		1/49	22.00	21.58	21.61	21.60
	12/0	21.00	20.71	20.77	20.73		25/0	21.00	20.82	20.88	20.84
	12/6	21.00	20.57	20.60	20.58		25/12	21.00	20.68	20.71	20.69
	12/11	21.00	20.47	20.50	20.49		25/24	21.00	20.58	20.61	20.60
	25/0	21.00	20.63	20.69	20.65		50/0	21.00	20.74	20.80	20.76
LTE B12/BW=5M		Average Conducted Power(dBm)				LTE B12/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			23035/701.5	23095/707.5	23155/713.5				23060/704	23095/707.5	23130/711
QPSK	1/0	23.00	22.74	22.80	22.76	QPSK	1/0	23.00	22.81	22.88	22.84
	1/37	23.00	22.67	22.70	22.68		1/49	23.00	22.75	22.78	22.76
	1/74	23.00	22.55	22.58	22.57		1/99	23.00	22.62	22.66	22.65
	36/0	22.00	21.83	21.89	21.85		50/0	22.00	21.90	21.95	21.93
	36/18	22.00	21.72	21.75	21.73		50/24	22.00	21.80	21.83	21.81
	36/35	22.00	21.62	21.65	21.64		50/49	22.00	21.70	21.73	21.72
	75/0	22.00	21.78	21.84	21.80		100/0	22.00	21.84	21.92	21.88
16QAM	1/0	22.00	21.81	21.87	21.83	16QAM	1/0	22.00	21.87	21.95	21.91
	1/37	22.00	21.75	21.78	21.76		1/49	22.00	21.83	21.88	21.84
	1/74	22.00	21.65	21.68	21.67		1/99	22.00	21.74	21.76	21.75
	36/0	21.00	20.89	20.95	20.91		50/0	21.00	20.95	20.99	20.97
	36/18	21.00	20.75	20.78	20.76		50/24	21.00	20.83	20.86	20.84
	36/35	21.00	20.65	20.68	20.67		50/49	21.00	20.73	20.76	20.75
	75/0	21.00	20.81	20.87	20.83		100/0	21.00	20.89	20.95	20.91

**LTE Band 13**
**P-sensor off**

LTE B13/BW=5M		Average Conducted Power(dBm)				LTE B13/BW=10M		Average Conducted Power(dBm)	
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)
			23205/779.5	23230/782	23255/784.5				23230/782
QPSK	1/0	24.00	22.55	22.58	22.57	QPSK	1/0	24.00	22.62
	1/12	24.00	22.47	22.50	22.48		1/24	24.00	22.53
	1/24	24.00	22.42	22.46	22.44		1/49	24.00	22.49
	12/0	23.00	21.66	21.70	21.68		25/0	23.00	21.73
	12/6	23.00	21.63	21.66	21.64		25/12	23.00	21.69
	12/11	23.00	21.57	21.60	21.58		25/24	23.00	21.63
	25/0	23.00	21.69	21.70	21.68		50/0	23.00	21.73
16QAM	1/0	23.00	21.65	21.68	21.66	16QAM	1/0	23.00	21.71
	1/12	23.00	21.57	21.60	21.58		1/24	23.00	21.63
	1/24	23.00	21.53	21.57	21.55		1/49	23.00	21.60
	12/0	22.00	20.46	20.51	20.49		25/0	22.00	20.54
	12/6	22.00	20.57	20.61	20.59		25/12	22.00	20.64
	12/11	22.00	20.53	20.56	20.54		25/24	22.00	20.59
	25/0	22.00	20.50	20.53	20.51		50/0	22.00	20.56

**P-sensor on**

LTE B13/BW=5M		Average Conducted Power(dBm)				LTE B13/BW=10M		Average Conducted Power(dBm)	
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)
			23205/779.5	23230/782	23255/784.5				23230/782
QPSK	1/0	23.00	21.85	21.96	21.92	QPSK	1/0	23.00	22.21
	1/12	23.00	21.84	21.94	21.90		1/12	23.00	22.18
	1/24	23.00	21.80	21.90	21.87		1/49	23.00	22.10
	12/0	22.00	20.94	21.05	21.01		25/0	22.00	21.30
	12/6	22.00	20.89	20.99	20.95		25/12	22.00	21.23
	12/11	22.00	20.87	20.97	20.94		25/24	22.00	21.17
	25/0	22.00	20.89	21.00	20.96		50/0	22.00	21.25
16QAM	1/0	22.00	20.92	21.03	20.99	16QAM	1/0	22.00	21.28
	1/12	22.00	20.92	21.02	20.98		1/24	22.00	21.26
	1/24	22.00	20.90	21.00	20.97		1/49	22.00	21.20
	12/0	21.00	19.84	19.92	19.85		25/0	21.00	20.20
	12/6	21.00	19.81	19.86	19.80		25/12	21.00	20.15
	12/11	21.00	19.75	19.80	19.97		25/24	21.00	20.05
	25/0	21.00	19.81	19.82	19.80		50/0	21.00	20.17

**LTE Band 14**
**P-sensor off**

LTE B14/BW=5M		Average Conducted Power(dBm)				LTE B14/BW=10M		Average Conducted Power(dBm)	
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)
			23305/790.5	23330/793	23355/795.5				23330/793
QPSK	1/0	24.00	23.05	23.08	23.07	QPSK	1/0	24.00	23.12
	1/12	24.00	22.93	22.96	22.94		1/12	24.00	22.99
	1/24	24.00	22.90	22.94	22.92		1/49	24.00	22.97
	12/0	23.00	22.16	22.20	22.18		25/0	23.00	22.23
	12/6	23.00	22.09	22.12	22.10		25/12	23.00	22.15
	12/11	23.00	22.05	22.08	22.06		25/24	23.00	22.11
	25/0	23.00	22.19	22.20	22.18		50/0	23.00	22.23
16QAM	1/0	23.00	22.15	22.18	22.16	16QAM	1/0	23.00	22.21
	1/12	23.00	22.03	22.06	22.04		1/24	23.00	22.09
	1/24	23.00	22.01	22.05	22.03		1/49	23.00	22.08
	12/0	22.00	20.94	20.99	20.97		25/0	22.00	21.02
	12/6	22.00	21.03	21.07	21.05		25/12	22.00	21.10
	12/11	22.00	20.99	21.02	21.00		25/24	22.00	21.05
	25/0	22.00	20.96	20.99	20.97		50/0	22.00	21.02

**P-sensor on**

LTE B14/BW=5M		Average Conducted Power(dBm)				LTE B14/BW=10M		Average Conducted Power(dBm)	
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)
			23305/790.5	23330/793	23355/795.5				23330/793
QPSK	1/0	23.00	22.74	22.82	22.79	QPSK	1/0	23.00	22.90
	1/12	23.00	22.61	22.69	22.66		1/12	23.00	22.77
	1/24	23.00	22.58	22.66	22.63		1/49	23.00	22.74
	12/0	22.00	21.75	21.83	21.80		25/0	22.00	21.91
	12/6	22.00	21.60	21.68	21.65		25/12	22.00	21.76
	12/11	22.00	21.54	21.62	21.59		25/24	22.00	21.70
	25/0	22.00	21.69	21.77	21.74		50/0	22.00	21.85
16QAM	1/0	22.00	21.67	21.75	21.72	16QAM	1/0	22.00	21.83
	1/12	22.00	21.51	21.59	21.56		1/24	22.00	21.67
	1/24	22.00	21.46	21.54	21.51		1/49	22.00	21.62
	12/0	21.00	20.74	20.82	20.79		25/0	21.00	20.90
	12/6	21.00	20.61	20.69	20.66		25/12	21.00	20.77
	12/11	21.00	20.58	20.66	20.63		25/24	21.00	20.74
	25/0	21.00	19.75	19.83	19.80		50/0	21.00	19.91

**LTE Band 17**
**P-sensor off**

LTE B17/BW=5M		Average Conducted Power(dBm)				LTE B17/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			23780/706.5	23790/710	23800/713.5				23780/709.0	23790/710	23800/711.0
QPSK	1/0	24.00	22.45	22.65	22.55	QPSK	1/0	24.00	22.50	22.70	22.60
	1/12	24.00	22.30	22.48	22.47		1/12	24.00	22.35	22.53	22.52
	1/24	24.00	22.37	22.45	22.29		1/49	24.00	22.42	22.50	22.34
	12/0	23.00	21.75	21.85	21.75		25/0	23.00	21.80	21.90	21.80
	12/6	23.00	21.35	21.35	21.35		25/12	23.00	21.40	21.40	21.40
	12/11	23.00	21.25	21.55	21.25		25/24	23.00	21.30	21.60	21.30
	25/0	23.00	21.25	21.75	21.25		50/0	23.00	21.30	21.80	21.30
16QAM	1/0	23.00	21.65	22.05	21.65	16QAM	1/0	23.00	21.70	22.10	21.70
	1/12	23.00	21.35	21.45	21.25		1/24	23.00	21.40	21.50	21.30
	1/24	23.00	21.25	21.65	21.35		1/49	23.00	21.30	21.70	21.40
	12/0	22.00	20.75	20.75	20.75		25/0	22.00	20.80	20.80	20.80
	12/6	22.00	20.25	20.45	20.35		25/12	22.00	20.30	20.50	20.40
	12/11	22.00	20.35	20.65	20.25		25/24	22.00	20.40	20.70	20.30
	25/0	22.00	20.25	20.65	20.25		50/0	22.00	20.30	20.70	20.30

**P-sensor on**

LTE B17/BW=5M		Average Conducted Power(dBm)				LTE B17/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			23780/706.5	23790/710	23800/713.5				23780/709.0	23790/710	23800/711.0
QPSK	1/0	23.00	21.21	21.32	21.30	QPSK	1/0	23.00	21.22	21.46	21.23
	1/12	23.00	21.10	21.28	21.22		1/12	23.00	21.18	21.41	21.20
	1/24	23.00	21.08	21.24	21.12		1/49	23.00	21.13	21.38	21.18
	12/0	22.00	20.30	20.41	20.39		25/0	22.00	20.31	20.55	20.32
	12/6	22.00	20.15	20.33	20.27		25/12	22.00	20.23	20.46	20.25
	12/11	22.00	20.15	20.31	20.19		25/24	22.00	20.20	20.45	20.25
	25/0	22.00	20.25	20.36	20.34		50/0	22.00	20.26	20.50	20.27
16QAM	1/0	22.00	20.28	20.39	20.37	16QAM	1/0	22.00	20.29	20.53	20.30
	1/12	22.00	20.18	20.36	20.30		1/24	22.00	20.26	20.49	20.28
	1/24	22.00	20.18	20.34	20.22		1/49	22.00	20.23	20.48	20.28
	12/0	21.00	19.20	19.28	19.23		25/0	21.00	19.21	19.42	19.16
	12/6	21.00	19.07	19.20	19.12		25/12	21.00	19.15	19.33	19.10
	12/11	21.00	19.03	19.14	19.22		25/24	21.00	19.08	19.28	19.28
	25/0	21.00	19.17	19.18	19.18		50/0	21.00	19.18	19.32	19.11

**LTE Band 25**
**P-sensor off**

LTE B25/BW=1.4M		Average Conducted Power(dBm)				LTE B25/BW=3M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			26047/1850.7	26365/1882.5	26683/1914.3				26055/1851.5	26365/1882.5	26675/1913.5
QPSK	1/0	24.00	22.12	22.20	22.31	QPSK	1/0	24.00	22.17	22.25	22.36
	1/2	24.00	22.43	22.52	22.49		1/7	24.00	22.48	22.57	22.54
	1/5	24.00	22.31	22.27	22.05		1/14	24.00	22.36	22.32	22.10
	3/0	23.00	22.12	22.20	22.31		8/0	23.00	21.28	21.36	21.47
	3/1	23.00	22.43	22.52	22.49		8/4	23.00	21.64	21.73	21.70
	3/2	23.00	22.31	22.27	22.05		8/7	23.00	21.50	21.46	21.24
	6/0	23.00	21.23	21.31	21.42		15/0	23.00	21.28	21.36	21.47
16QAM	1/0	23.00	21.21	21.29	21.40	16QAM	1/0	23.00	21.26	21.34	21.45
	1/2	23.00	21.53	21.62	21.59		1/7	23.00	21.58	21.67	21.64
	1/5	23.00	21.42	21.38	21.16		1/14	23.00	21.47	21.43	21.21
	3/0	22.00	21.21	21.29	21.40		8/0	22.00	20.41	20.37	20.15
	3/1	23.00	21.53	21.62	21.59		8/4	22.00	20.59	20.68	20.65
	3/2	22.00	21.42	21.38	21.16		8/7	22.00	20.54	20.63	20.60
	6/0	22.00	20.46	20.32	20.10		15/0	22.00	20.51	20.60	20.57
LTE B25/BW=5M		Average Conducted Power(dBm)				LTE B25/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			26065/1852.5	26365/1882.5	26665/1912.5				26090/1855	26365/1882.5	26640/1910
QPSK	1/0	24.00	22.22	22.30	22.41	QPSK	1/0	24.00	22.27	22.35	22.46
	1/12	24.00	22.53	22.62	22.59		1/24	24.00	22.58	22.67	22.64
	1/24	24.00	22.41	22.37	22.15		1/49	24.00	22.46	22.42	22.20
	12/0	23.00	21.33	21.41	21.52		25/0	23.00	21.38	21.46	21.57
	12/6	23.00	21.69	21.78	21.75		25/12	23.00	21.74	21.83	21.80
	12/11	23.00	21.55	21.51	21.29		25/24	23.00	21.60	21.56	21.34
	25/0	23.00	21.33	21.41	21.52		50/0	23.00	21.38	21.46	21.57
16QAM	1/0	23.00	21.31	21.39	21.50	16QAM	1/0	23.00	21.36	21.44	21.55
	1/12	23.00	21.63	21.72	21.69		1/24	23.00	21.68	21.77	21.74
	1/24	23.00	21.52	21.48	21.26		1/49	23.00	21.57	21.53	21.31
	12/0	22.00	20.46	20.42	20.20		25/0	22.00	20.51	20.47	20.25
	12/6	22.00	20.64	20.73	20.70		25/12	22.00	20.69	20.78	20.75
	12/11	22.00	20.59	20.68	20.65		25/24	22.00	20.64	20.73	20.70
	25/0	22.00	20.56	20.65	20.62		50/0	22.00	20.61	20.70	20.67

LTE B25/BW=15M		Average Conducted Power(dBm)				LTE B25/BW=20M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			26115/1857.5	26365/1882.5	26615/1907.5				26140/1860	26365/1882.5	26590/1905
QPSK	1/0	24.00	22.32	22.40	22.51	QPSK	1/0	24.00	22.37	22.45	22.56
	1/37	24.00	22.63	22.72	22.69		1/49	24.00	22.68	22.77	22.74
	1/74	24.00	22.51	22.47	22.25		1/99	24.00	22.56	22.52	22.30
	36/0	23.00	21.43	21.51	21.62		50/0	23.00	21.48	21.56	21.67
	36/18	23.00	21.79	21.88	21.85		50/24	23.00	21.84	21.93	21.90
	36/35	23.00	21.65	21.61	21.39		50/49	23.00	21.70	21.66	21.44
	75/0	23.00	21.43	21.51	21.62		100/0	23.00	21.48	21.56	21.67
16QAM	1/0	23.00	21.41	21.49	21.60	16QAM	1/0	23.00	21.46	21.54	21.65
	1/37	23.00	21.73	21.82	21.79		1/49	23.00	21.78	21.87	21.84
	1/74	23.00	21.62	21.58	21.36		1/99	23.00	21.67	21.63	21.41
	36/0	22.00	20.56	20.52	20.30		50/0	22.00	20.61	20.57	20.35
	36/18	22.00	20.74	20.83	20.80		50/24	22.00	20.79	20.88	20.85
	36/35	22.00	20.69	20.78	20.75		50/49	22.00	20.74	20.83	20.80
	75/0	22.00	20.66	20.75	20.72		100/0	22.00	20.71	20.80	20.77

**P-sensor on**

LTE B25/BW=1.4M		Average Conducted Power(dBm)				LTE B25/BW=3M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			26047/1850.7	26365/1882.5	26683/1914.3				26055/1851.5	26365/1882.5	26675/1913.5
QPSK	1/0	23.00	22.46	22.48	22.42	QPSK	1/0	23.00	22.54	22.56	22.50
	1/2	23.00	22.38	22.35	22.30		1/7	23.00	22.46	22.43	22.38
	1/5	23.00	22.30	22.24	22.23		1/14	23.00	22.38	22.32	22.31
	3/0	22.00	21.55	22.52	21.51		8/0	22.00	21.63	22.60	21.59
	3/1	22.00	21.43	21.42	21.35		8/4	22.00	21.51	21.50	21.43
	3/2	22.00	21.37	21.31	21.30		8/7	22.00	21.45	21.39	21.38
	6/0	22.00	21.50	22.52	21.46		15/0	22.00	21.58	22.60	21.54
16QAM	1/0	22.00	21.53	22.55	21.49	16QAM	1/0	22.00	21.61	22.63	21.57
	1/2	22.00	21.46	21.43	21.38		1/7	22.00	21.54	21.51	21.46
	1/5	22.00	21.40	21.34	21.33		1/14	22.00	21.48	21.42	21.41
	3/0	21.00	20.43	21.48	20.55		8/0	21.00	20.51	21.56	20.63
	3/1	21.00	20.32	20.33	20.38		8/4	21.00	20.40	20.41	20.46
	3/2	21.00	20.22	20.20	20.33		8/7	21.00	20.30	20.28	20.41
	6/0	21.00	20.36	21.41	20.49		15/0	21.00	20.44	21.49	20.57

LTE B25/BW=5M		Average Conducted Power(dBm)				LTE B25/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			26065/1852.5	26365/1882.5	26665/1912.5				26090/1855	26365/1882.5	26640/1910
QPSK	1/0	23.00	21.32	21.18	21.22	QPSK	1/0	23.00	21.74	21.78	21.70
	1/12	23.00	21.28	21.16	21.20		1/12	23.00	21.70	21.72	21.68
	1/24	23.00	21.26	21.10	21.09		1/49	23.00	21.68	21.65	21.64
	12/0	22.00	20.41	20.27	20.31		25/0	22.00	20.83	20.87	20.79
	12/6	22.00	20.33	20.21	20.25		25/12	22.00	20.75	20.77	20.73
	12/11	22.00	20.33	20.17	20.16		25/24	22.00	20.75	20.72	20.71
	25/0	22.00	20.36	20.22	20.26		50/0	22.00	20.78	20.82	20.74
16QAM	1/0	22.00	20.39	20.25	20.29	16QAM	1/0	22.00	20.81	20.85	20.77
	1/12	22.00	20.36	20.24	20.28		1/24	22.00	20.78	20.80	20.76
	1/24	22.00	20.36	20.20	20.19		1/49	22.00	20.78	20.75	20.74
	12/0	21.00	19.47	19.33	19.37		25/0	21.00	19.89	19.93	19.85
	12/6	21.00	19.36	19.24	19.28		25/12	21.00	19.78	19.80	19.76
	12/11	21.00	19.36	19.20	19.19		25/24	21.00	19.78	19.75	19.74
	25/0	21.00	19.39	19.25	19.29		50/0	21.00	19.81	19.85	19.77
LTE B25/BW=15M		Average Conducted Power(dBm)				LTE B25/BW=20M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			26115/1857.5	26365/1882.5	26615/1907.5				26140/1860	26365/1882.5	26590/1905
QPSK	1/0	23.00	21.80	21.82	21.79	QPSK	1/0	23.00	22.32	22.40	22.38
	1/37	23.00	21.74	21.75	21.75		1/49	23.00	22.28	22.34	22.35
	1/74	23.00	21.76	21.70	21.77		1/99	23.00	22.20	22.30	22.31
	36/0	22.00	20.89	20.91	20.88		50/0	22.00	21.41	21.49	21.47
	36/18	22.00	20.79	20.80	20.80		50/24	22.00	21.33	21.39	21.40
	36/35	22.00	20.83	20.77	20.84		50/49	22.00	21.27	21.37	21.38
	75/0	22.00	20.84	20.86	20.83		100/0	22.00	21.36	21.44	21.42
16QAM	1/0	22.00	20.87	20.89	20.86	16QAM	1/0	22.00	21.39	21.47	21.45
	1/37	22.00	20.82	20.83	20.83		1/49	22.00	21.36	21.42	21.43
	1/74	22.00	20.86	20.80	20.87		1/99	22.00	21.30	21.40	21.41
	36/0	21.00	19.95	19.97	19.94		50/0	21.00	20.47	20.55	20.53
	36/18	21.00	19.82	19.83	19.83		50/24	21.00	20.36	20.42	20.43
	36/35	21.00	19.86	19.80	19.87		50/49	21.00	20.30	20.40	20.41
	75/0	21.00	19.87	19.89	19.86		100/0	21.00	20.39	20.47	20.45

**LTE Band 26**
**P-sensor off**

LTE B26/BW=1.4M		Average Conducted Power(dBm)				LTE B26/BW=3M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			26797/824.7	26915/836.5	27033/848.3				26805/825.5	26915/836.5	27025/847.5
QPSK	1/0	24.00	22.66	22.67	22.65	QPSK	1/0	24.00	22.71	22.72	22.70
	1/2	24.00	22.57	22.58	22.56		1/7	24.00	22.62	22.63	22.61
	1/5	24.00	22.41	22.42	22.40		1/14	24.00	22.46	22.47	22.45
	3/0	23.00	22.66	22.67	22.65		8/0	23.00	21.82	21.83	21.81
	3/1	23.00	22.57	22.58	22.56		8/4	23.00	21.78	21.79	21.77
	3/2	23.00	22.41	22.42	22.40		8/7	23.00	21.60	21.61	21.59
	6/0	23.00	21.77	21.78	21.76		15/0	23.00	21.82	21.83	21.81
16QAM	1/0	23.00	21.75	21.76	21.74	16QAM	1/0	23.00	21.80	21.81	21.79
	1/2	23.00	21.67	21.68	21.66		1/7	23.00	21.72	21.73	21.71
	1/5	23.00	21.52	21.53	21.51		1/14	23.00	21.57	21.58	21.56
	3/0	22.00	21.75	21.76	21.74		8/0	22.00	20.51	20.52	20.50
	3/1	22.00	21.67	21.68	21.66		8/4	22.00	20.73	20.74	20.72
	3/2	22.00	21.52	21.53	21.51		8/7	22.00	20.68	20.69	20.67
	6/0	22.00	20.60	20.47	20.45		15/0	22.00	20.65	20.66	20.64
LTE B26/BW=5M		Average Conducted Power(dBm)									
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)								
			26815/826.5	26915/836.5	27015/846.5						
QPSK	1/0	24.00	22.76	22.77	22.75						
	1/12	24.00	22.67	22.68	22.66						
	1/24	24.00	22.51	22.52	22.50						
	12/0	23.00	21.87	21.88	21.86						
	12/6	23.00	21.83	21.84	21.82						
	12/11	23.00	21.65	21.66	21.64						
	25/0	23.00	21.87	21.88	21.86						
16QAM	1/0	23.00	21.85	21.86	21.84						
	1/12	23.00	21.77	21.78	21.76						
	1/24	23.00	21.62	21.63	21.61						
	12/0	22.00	20.56	20.57	20.55						
	12/6	22.00	20.78	20.79	20.77						
	12/11	22.00	20.73	20.74	20.72						
	25/0	22.00	20.70	20.71	20.69						



LTE B26/BW=10M		Average Conducted Power(dBm)				LTE B26/BW=15M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			26840/829	26915/836.5	26990/844				26865/831.5	26915/836.5	26965/841.5
QPSK	1/0	24.00	22.42	22.05	22.06	QPSK	1/0	24.00	22.47	22.10	22.11
	1/24	24.00	22.16	22.57	21.87		1/37	24.00	22.21	22.62	21.92
	1/49	24.00	21.05	22.38	21.03		1/74	24.00	21.10	22.43	21.08
	25/0	23.00	21.53	21.16	21.17		36/0	23.00	21.58	21.21	21.22
	25/12	23.00	21.32	21.73	21.03		36/18	23.00	21.37	21.78	21.08
	25/24	23.00	20.19	21.52	20.17		36/35	23.00	20.24	21.57	20.22
	50/0	23.00	21.53	21.16	21.17		75/0	23.00	21.58	21.21	21.22
16QAM	1/0	23.00	21.51	21.14	21.15	16QAM	1/0	23.00	21.56	21.19	21.20
	1/24	23.00	21.26	21.67	20.97		1/37	23.00	21.31	21.72	21.02
	1/49	23.00	20.16	21.49	20.14		1/74	23.00	20.21	21.54	20.19
	25/0	22.00	19.10	20.43	19.08		36/0	22.00	19.15	20.48	19.13
	25/12	22.00	20.27	20.68	19.98		36/18	22.00	20.32	20.73	20.03
	25/24	22.00	20.22	20.63	19.93		36/35	22.00	20.27	20.68	19.98
	50/0	22.00	20.19	20.60	19.90		75/0	22.00	20.24	20.65	19.95

**P-sensor on**

LTE B26/BW=1.4M		Average Conducted Power(dBm)				LTE B26/BW=3M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			26797/824.7	26915/836.5	27033/848.3				26805/825.5	26915/836.5	27025/847.5
QPSK	1/0	23.00	21.56	21.62	21.68	QPSK	1/0	23.00	21.72	21.78	21.77
	1/2	23.00	21.48	21.51	21.62		1/7	23.00	21.66	21.75	21.73
	1/5	23.00	21.32	21.43	21.59		1/14	23.00	21.63	21.65	21.70
	3/0	22.00	20.65	20.71	20.77		8/0	22.00	20.81	20.87	20.86
	3/1	22.00	20.53	20.56	20.67		8/4	22.00	20.71	20.80	20.78
	3/2	22.00	20.39	20.50	20.66		8/7	22.00	20.70	20.72	20.77
	6/0	22.00	20.60	20.66	20.72		15/0	22.00	20.76	20.82	20.81
16QAM	1/0	22.00	20.63	20.69	20.75	16QAM	1/0	22.00	20.79	20.85	20.84
	1/2	22.00	20.56	20.59	20.70		1/7	22.00	20.74	20.83	20.81
	1/5	22.00	20.42	20.53	20.69		1/14	22.00	20.73	20.75	20.80
	3/0	21.00	19.71	19.77	19.83		8/0	21.00	19.87	19.93	19.92
	3/1	21.00	19.56	19.59	19.70		8/4	21.00	19.74	19.83	19.81
	3/2	21.00	19.42	19.53	19.69		8/7	21.00	19.73	19.75	19.80
	6/0	21.00	19.63	19.69	19.75		15/0	21.00	19.79	19.85	19.84

LTE B26/BW=5M		Average Conducted Power(dBm)				LTE B26/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			26815/826.5	26915/836.5	27015/846.5				26840/829	26915/836.5	26990/844
QPSK	1/0	23.00	21.90	21.96	21.89	QPSK	1/0	23.00	21.70	21.72	21.75
	1/12	23.00	21.84	21.93	21.91		1/24	23.00	21.65	21.68	21.73
	1/24	23.00	21.81	21.90	21.87		1/49	23.00	21.58	21.64	21.62
	12/0	22.00	20.99	21.05	20.98		25/0	22.00	20.79	20.81	20.84
	12/6	22.00	20.89	20.98	20.96		25/12	22.00	20.70	20.73	20.78
	12/11	22.00	20.88	20.97	20.94		25/24	22.00	20.65	20.71	20.69
	25/0	22.00	20.94	21.00	20.93		50/0	22.00	20.74	20.76	20.79
16QAM	1/0	22.00	20.97	21.03	20.96	16QAM	1/0	22.00	20.77	20.79	20.82
	1/12	22.00	20.92	21.01	20.99		1/24	22.00	20.73	20.76	20.81
	1/24	22.00	20.91	21.00	20.97		1/49	22.00	20.68	20.74	20.72
	12/0	21.00	20.05	20.11	20.04		25/0	21.00	19.85	19.87	19.90
	12/6	21.00	19.92	20.01	19.99		25/12	21.00	19.73	19.76	19.81
	12/11	21.00	19.91	20.00	19.97		25/24	21.00	19.68	19.74	19.72
	25/0	21.00	19.97	20.03	19.96		50/0	21.00	19.77	19.79	19.82
LTE B26/BW=15M		Average Conducted Power(dBm)									
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)								
			26865/831.5	26915/836.5	26965/841.5						
QPSK	1/0	23.00	21.72	21.78	21.68						
	1/37	23.00	21.74	21.72	21.64						
	1/74	23.00	21.68	21.69	21.60						
	36/0	22.00	20.81	20.87	20.77						
	36/18	22.00	20.79	20.77	20.69						
	36/35	22.00	20.75	20.76	20.67						
	75/0	22.00	20.76	20.82	20.72						
16QAM	1/0	22.00	20.79	20.85	20.75						
	1/37	22.00	20.82	20.80	20.72						
	1/74	22.00	20.78	20.79	20.70						
	36/0	21.00	19.87	19.93	19.83						
	36/18	21.00	19.82	19.80	19.72						
	36/35	21.00	19.78	19.79	19.70						
	75/0	21.00	19.79	19.85	19.75						

**LTE Band 30**
**P-sensor off**

LTE B30/BW=5M		Average Conducted Power(dBm)				LTE B30/BW=10M		Average Conducted Power(dBm)	
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)
			27685/2307.5	27710/2310	27735/2312.5				27710/2310
QPSK	1/0	17.50	17.37	17.38	17.36	QPSK	1/0	17.50	17.43
	1/12	17.50	17.38	17.39	17.37		1/12	17.50	17.44
	1/24	17.50	17.17	17.18	17.16		1/49	17.50	17.23
	12/0	16.50	16.48	16.49	16.47		25/0	17.00	16.54
	12/6	16.50	16.54	16.55	16.53		25/12	17.00	16.60
	12/11	16.50	16.31	16.32	16.30		25/24	17.00	16.37
	25/0	16.50	16.48	16.49	16.47		50/0	17.00	16.54
16QAM	1/0	16.50	16.46	16.47	16.45	16QAM	1/0	17.00	16.52
	1/12	16.50	16.48	16.49	16.47		1/24	17.00	16.54
	1/24	16.50	16.28	16.29	16.27		1/49	16.50	16.34
	12/0	15.50	15.22	15.23	15.21		25/0	15.50	15.28
	12/6	15.50	15.49	15.50	15.48		25/12	16.00	15.55
	12/11	15.50	15.44	15.45	15.43		25/24	15.50	15.50
	25/0	15.50	15.41	15.42	15.40		50/0	15.50	15.47

**P-sensor on**

LTE B30/BW=5M		Average Conducted Power(dBm)				LTE B30/BW=10M		Average Conducted Power(dBm)	
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)
			27685/2307.5	27710/2310	27735/2312.5				27710/2310
QPSK	1/0	16.50	16.33	16.30	16.34	QPSK	1/0	16.50	16.41
	1/12	16.50	16.21	16.18	16.22		1/12	16.50	16.29
	1/24	16.50	16.10	16.07	16.11		1/49	16.50	16.18
	12/0	15.50	15.34	15.31	15.35		25/0	15.50	15.42
	12/6	15.50	15.26	15.23	15.27		25/12	15.50	15.34
	12/11	15.50	15.17	15.14	15.18		25/24	15.50	15.25
	25/0	15.50	15.37	15.34	15.38		50/0	15.50	15.45
16QAM	1/0	15.50	15.40	15.37	15.41	16QAM	1/0	15.50	15.48
	1/12	15.50	15.29	15.26	15.30		1/24	15.50	15.37
	1/24	15.50	15.20	15.17	15.21		1/49	15.50	15.28
	12/0	14.50	14.46	14.43	14.47		25/0	14.50	14.49
	12/6	14.50	14.29	14.26	14.30		25/12	14.50	14.37
	12/11	14.50	14.20	14.17	14.21		25/24	14.50	14.28
	25/0	14.50	14.40	14.37	14.41		50/0	14.50	14.48

**LTE Band 38**
**P-sensor off**

LTE B38/BW=5M		Average Conducted Power(dBm)				LTE B38/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)		
			37775/2572.5	38000/2595	38225/2617.5				37800/2575	38000/2595	38200/2615
QPSK	1/0	24.00	23.58	23.61	23.56	QPSK	1/0	24.00	23.65	23.68	23.63
	1/12	24.00	23.49	23.51	23.47		1/24	24.00	23.56	23.58	23.54
	1/24	24.00	23.43	23.40	23.34		1/49	24.00	23.50	23.47	23.41
	12/0	23.00	22.67	22.70	22.65		25/0	23.00	22.74	22.77	22.72
	12/6	23.00	22.54	22.56	22.52		25/12	23.00	22.61	22.63	22.59
	12/11	23.00	22.50	22.47	22.41		25/24	23.00	22.57	22.54	22.48
	25/0	23.00	22.62	22.65	22.60		50/0	23.00	22.69	22.72	22.67
16QAM	1/0	23.00	22.65	22.68	22.63	16QAM	1/0	23.00	22.72	22.75	22.70
	1/12	23.00	22.57	22.59	22.55		1/24	23.00	22.64	22.66	22.62
	1/24	23.00	22.53	22.50	22.44		1/49	23.00	22.60	22.57	22.51
	12/0	22.00	21.57	21.57	21.49		25/0	22.00	21.64	21.64	21.56
	12/6	22.00	21.46	21.43	21.37		25/12	22.00	21.53	21.50	21.44
	12/11	22.00	21.38	21.30	21.44		25/25	22.00	21.45	21.37	21.51
	25/0	22.00	21.54	21.47	21.44		50/0	22.00	21.61	21.54	21.51
LTE B38/BW=15M		Average Conducted Power(dBm)				LTE B38/BW=20M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)		
			37825/2577.5	38000/2595.0	38175/2612.5				37850/2580	38000/2595	38150/2610
QPSK	1/0	24.00	23.70	23.73	23.68	QPSK	1/0	24.00	23.23	23.26	23.21
	1/37	24.00	23.61	23.63	23.59		1/49	24.00	23.14	23.16	23.12
	1/74	24.00	23.55	23.52	23.46		1/99	24.00	23.08	23.05	22.99
	36/0	23.00	22.79	22.82	22.77		50/0	23.00	22.92	22.95	22.90
	36/18	23.00	22.66	22.68	22.64		50/24	23.00	22.79	22.81	22.77
	36/35	23.00	22.62	22.59	22.53		50/49	23.00	22.75	22.72	22.66
	75/0	23.00	22.74	22.77	22.72		100/0	23.00	22.87	22.90	22.85
16QAM	1/0	23.00	22.77	22.80	22.75	16QAM	1/0	23.00	22.90	22.93	22.88
	1/37	23.00	22.69	22.71	22.67		1/49	23.00	22.82	22.84	22.80
	1/74	23.00	22.65	22.62	22.56		1/99	23.00	22.78	22.75	22.69
	36/0	22.00	21.69	21.69	21.61		50/0	22.00	21.82	21.82	21.74
	36/18	22.00	21.58	21.55	21.49		50/24	22.00	21.71	21.68	21.62
	36/35	22.00	21.50	21.42	21.56		50/49	22.00	21.63	21.55	21.69
	75/0	22.00	21.66	21.59	21.56		100/0	22.00	21.79	21.72	21.69

**P-sensor on**

LTE B38/BW=5M		Average Conducted Power(dBm)				LTE B38/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)		
			37775/2572.5	38000/2595	38225/2617.5				37800/2575	38000/2595	38200/2615
QPSK	1/0	23.00	22.55	22.60	22.53	QPSK	1/0	23.00	22.63	22.68	22.61
	1/12	23.00	22.44	22.51	22.40		1/24	23.00	22.52	22.59	22.48
	1/24	23.00	22.34	22.42	22.33		1/49	23.00	22.42	22.50	22.41
	12/0	22.00	21.64	21.69	21.62		25/0	22.00	21.72	21.77	21.70
	12/6	22.00	21.49	21.56	21.45		25/12	22.00	21.57	21.64	21.53
	12/11	22.00	21.41	21.49	21.40		25/24	22.00	21.49	21.57	21.48
	25/0	22.00	21.59	21.64	21.57		50/0	22.00	21.67	21.72	21.65
16QAM	1/0	22.00	21.62	21.67	21.60	16QAM	1/0	22.00	21.70	21.75	21.68
	1/12	22.00	21.52	21.59	21.48		1/24	22.00	21.60	21.67	21.56
	1/24	22.00	21.50	21.56	21.52		1/49	22.00	21.52	21.60	21.54
	12/0	21.00	20.70	20.75	20.68		25/0	21.00	20.78	20.83	20.76
	12/6	21.00	20.54	20.62	20.53		25/12	21.00	20.60	20.67	20.56
	12/11	21.00	20.51	20.58	20.50		25/25	21.00	20.52	20.60	20.51
	25/0	21.00	20.62	20.67	20.60		50/0	21.00	20.70	20.75	20.68
LTE B38/BW=15M		Average Conducted Power(dBm)				LTE B38/BW=20M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)		
			37825/2577.5	38000/2595.0	38175/2612.5				37850/2580	38000/2595	38150/2610
QPSK	1/0	23.00	22.84	22.89	22.82	QPSK	1/0	23.00	22.72	22.77	22.70
	1/37	23.00	22.73	22.80	22.69		1/49	23.00	22.61	22.68	22.57
	1/74	23.00	22.63	22.71	22.62		1/99	23.00	22.51	22.59	22.50
	36/0	22.00	21.93	21.98	21.91		50/0	22.00	21.81	21.86	21.79
	36/18	22.00	21.78	21.85	21.74		50/24	22.00	21.66	21.73	21.62
	36/35	22.00	21.70	21.78	21.69		50/49	22.00	21.58	21.66	21.57
	75/0	22.00	21.88	21.93	21.86		100/0	22.00	21.76	21.81	21.74
16QAM	1/0	22.00	21.91	21.96	21.89	16QAM	1/0	22.00	21.79	21.84	21.77
	1/37	22.00	21.81	21.88	21.77		1/49	22.00	21.69	21.76	21.65
	1/74	22.00	21.73	21.81	21.72		1/99	22.00	21.61	21.69	21.60
	36/0	21.00	20.99	21.04	20.97		50/0	21.00	20.87	20.92	20.85
	36/18	21.00	20.81	20.88	20.77		50/24	21.00	20.69	20.76	20.65
	36/35	21.00	20.73	20.81	20.72		50/49	21.00	20.61	20.69	20.60
	75/0	21.00	20.91	20.96	20.89		100/0	21.00	20.79	20.84	20.77

**LTE Band 41**

P-sensor off

LTE B41/BW=5M		Average Conducted Power(dBm)				LTE B41/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			39675/2498.5	40620/2593	41565/2687.5				39700/2501	40620/2593	41540/2685
QPSK	1/0	24.00	22.79	22.91	22.69	QPSK	1/0	24.00	22.84	22.96	22.74
	1/12	24.00	22.97	23.06	22.79		1/24	24.00	23.02	23.11	22.84
	1/24	24.00	22.96	22.96	22.69		1/49	24.00	23.01	23.01	22.74
	12/0	23.00	21.90	22.02	21.80		25/0	23.00	21.95	22.07	21.85
	12/6	23.00	22.13	22.22	21.95		25/12	23.00	22.18	22.27	22.00
	12/11	23.00	22.10	22.10	21.83		25/24	23.00	22.15	22.15	21.88
	25/0	23.00	21.90	22.02	21.80		50/0	23.00	21.95	22.07	21.85
16QAM	1/0	23.00	21.88	22.00	21.78	16QAM	1/0	23.00	21.93	22.05	21.83
	1/12	23.00	22.07	22.16	21.89		1/24	23.00	22.12	22.21	21.94
	1/24	23.00	22.07	22.07	21.80		1/49	23.00	22.12	22.12	21.85
	12/0	22.00	21.01	21.01	20.74		25/0	22.00	21.06	21.06	20.79
	12/6	22.00	21.08	21.17	20.90		25/12	22.00	21.13	21.22	20.95
	12/11	22.00	21.03	21.12	20.85		25/25	22.00	21.08	21.17	20.90
	25/0	22.00	21.00	21.09	20.82		50/0	22.00	21.05	21.14	20.87
LTE B41/BW=15M		Average Conducted Power(dBm)				LTE B41/BW=20M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			39725/2503.5	40620/2593	41515/2682.5				39750/2506	40620/2593	41490/2680
QPSK	1/0	24.00	22.89	23.01	22.79	QPSK	1/0	24.00	22.94	23.06	22.84
	1/37	24.00	23.07	23.16	22.89		1/49	24.00	23.12	23.21	22.94
	1/74	24.00	23.06	23.06	22.79		1/99	24.00	23.11	23.11	22.84
	36/0	23.00	22.00	22.12	21.90		50/0	23.00	22.05	22.17	21.95
	36/18	23.00	22.23	22.32	22.05		50/24	23.00	22.28	22.37	22.10
	36/35	23.00	22.20	22.20	21.93		50/49	23.00	22.25	22.25	21.98
	75/0	23.00	22.00	22.12	21.90		100/0	23.00	22.05	22.17	21.95
16QAM	1/0	23.00	21.98	22.10	21.88	16QAM	1/0	23.00	22.03	22.15	21.93
	1/37	23.00	22.17	22.26	21.99		1/49	23.00	22.22	22.31	22.04
	1/74	23.00	22.17	22.17	21.90		1/99	23.00	22.22	22.22	21.95
	36/0	22.00	21.11	21.11	20.84		50/0	22.00	21.16	21.16	20.89
	36/18	22.00	21.18	21.27	21.00		50/24	22.00	21.23	21.32	21.05
	36/35	22.00	21.13	21.22	20.95		50/49	22.00	21.18	21.27	21.00
	75/0	22.00	21.10	21.19	20.92		100/0	22.00	21.15	21.24	20.97

**P-sensor off (HPUE)**

LTE B41/BW=5M		Average Conducted Power(dBm)				LTE B41/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			39675/2498.5	40620/2593	41565/2687.5				39700/2501	40620/2593	41540/2685
QPSK	1/0	25.00	24.52	24.49	23.47	QPSK	1/0	25.00	24.57	24.54	23.52
	1/12	25.00	24.43	24.86	23.82		1/24	25.00	24.48	24.91	23.87
	1/24	25.00	23.99	24.18	23.61		1/49	25.00	24.04	24.23	23.66
	12/0	24.00	23.63	23.60	22.58		25/0	24.00	23.68	23.65	22.63
	12/6	24.00	23.59	24.02	22.98		25/12	24.00	23.64	24.07	23.03
	12/11	24.00	23.13	23.32	22.75		25/24	24.00	23.18	23.37	22.80
	25/0	24.00	23.63	23.60	22.58		50/0	24.00	23.68	23.65	22.63
16QAM	1/0	24.00	23.61	23.58	22.56	16QAM	1/0	24.00	23.66	23.63	22.61
	1/12	24.00	23.53	23.96	22.92		1/24	24.00	23.58	24.01	22.97
	1/24	24.00	23.10	23.29	22.72		1/49	24.00	23.15	23.34	22.77
	12/0	23.00	22.04	22.23	21.66		25/0	23.00	22.09	22.28	21.71
	12/6	23.00	22.54	22.97	21.93		25/12	23.00	22.59	23.02	21.98
	12/11	23.00	22.49	22.92	21.88		25/25	23.00	22.54	22.97	21.93
	25/0	23.00	22.46	22.89	21.85		50/0	23.00	22.51	22.94	21.90
LTE B41/BW=15M		Average Conducted Power(dBm)				LTE B41/BW=20M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			39725/2503.5	40620/2593	41515/2682.5				39750/2506	40620/2593	41490/2680
QPSK	1/0	25.00	24.62	24.59	23.57	QPSK	1/0	25.00	24.67	24.64	23.04
	1/37	25.00	24.53	24.96	23.92		1/49	25.00	24.58	24.98	23.62
	1/74	25.00	24.09	24.28	23.71		1/99	25.00	24.14	24.33	23.97
	36/0	24.00	23.73	23.70	22.68		50/0	24.00	23.78	23.75	23.76
	36/18	24.00	23.69	24.12	23.08		50/24	24.00	23.74	23.96	22.73
	36/35	24.00	23.23	23.42	22.85		50/49	24.00	23.28	23.47	23.13
	75/0	24.00	23.73	23.70	22.68		100/0	24.00	23.78	23.75	22.90
16QAM	1/0	24.00	23.71	23.68	22.66	16QAM	1/0	24.00	23.76	23.73	22.73
	1/37	24.00	23.63	24.06	23.02		1/49	24.00	23.68	24.11	22.71
	1/74	24.00	23.20	23.39	22.82		1/99	24.00	23.25	23.44	23.07
	36/0	23.00	22.14	22.33	21.76		50/0	23.00	22.19	22.38	22.87
	36/18	23.00	22.64	23.07	22.03		50/24	23.00	22.69	23.12	21.81
	36/35	23.00	22.59	23.02	21.98		50/49	23.00	22.64	23.07	22.08
	75/0	23.00	22.56	22.99	21.95		100/0	23.50	22.61	23.04	22.03

**P-sensor on**

LTE B41/BW=5M		Average Conducted Power(dBm)				LTE B41/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			39675/2498.5	40620/2593	41565/2687.5				39700/2501	40620/2593	41540/2685
QPSK	1/0	23.00	22.58	22.61	22.57	QPSK	1/0	23.00	22.67	22.70	22.66
	1/12	23.00	22.49	22.54	22.48		1/24	23.00	22.58	22.63	22.57
	1/24	23.00	22.43	22.47	22.40		1/49	23.00	22.52	22.56	22.49
	12/0	22.00	21.67	21.70	21.66		25/0	22.00	21.76	21.79	21.75
	12/6	22.00	21.54	21.59	21.53		25/12	22.00	21.63	21.68	21.62
	12/11	22.00	21.50	21.54	21.47		25/24	22.00	21.59	21.63	21.56
	25/0	22.00	21.62	21.65	21.61		50/0	22.00	21.71	21.74	21.70
16QAM	1/0	22.00	21.65	21.68	21.64	16QAM	1/0	22.00	21.74	21.77	21.73
	1/12	22.00	21.57	21.62	21.56		1/24	22.00	21.66	21.71	21.65
	1/24	22.00	21.53	21.57	21.50		1/49	22.00	21.62	21.66	21.59
	12/0	21.00	20.73	20.76	20.72		25/0	21.00	20.82	20.85	20.81
	12/6	21.00	20.57	20.62	20.56		25/12	21.00	20.66	20.71	20.65
	12/11	21.00	20.53	20.57	20.50		25/24	21.00	20.62	20.66	20.59
	25/0	21.00	20.65	20.68	20.64		50/0	21.00	20.74	20.77	20.73
LTE B41/BW=15M		Average Conducted Power(dBm)				LTE B41/BW=20M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			39725/2503.5	40620/2593	41515/2682.5				39750/2506	40620/2593	41490/2680
QPSK	1/0	23.00	22.80	22.83	22.79	QPSK	1/0	23.00	22.88	22.91	22.84
	1/37	23.00	22.71	22.76	22.70		1/49	23.00	22.79	22.84	22.78
	1/74	23.00	22.65	22.69	22.62		1/99	23.00	22.73	22.77	22.70
	36/0	22.00	21.89	21.92	21.88		50/0	22.00	21.95	21.97	21.96
	36/18	22.00	21.76	21.81	21.75		50/24	22.00	21.84	21.89	21.83
	36/35	22.00	21.72	21.76	21.69		50/49	22.00	21.80	21.84	21.77
	75/0	22.00	21.84	21.87	21.83		100/0	22.00	21.92	21.95	21.91
16QAM	1/0	22.00	21.87	21.90	21.86	16QAM	1/0	22.00	21.95	21.98	21.94
	1/37	22.00	21.79	21.84	21.78		1/49	22.00	21.87	21.92	21.86
	1/74	22.00	21.75	21.79	21.72		1/99	22.00	21.83	21.87	21.80
	36/0	21.00	20.95	20.96	20.94		50/0	21.00	20.97	20.99	20.95
	36/18	21.00	20.79	20.84	20.78		50/24	21.00	20.87	20.92	20.86
	36/35	21.00	20.75	20.79	20.72		50/49	21.00	20.83	20.87	20.80
	75/0	21.00	20.87	20.90	20.86		100/0	21.00	20.95	20.98	20.94



**LTE Band 48**
**P-sensor off**

LTE B48/BW=5M		Average Conducted Power(dBm)				LTE B48/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)		
			55265/3552.5	56232/3649.2	56715/3697.5				55290/3555	56223/3648.3	56690/3695
QPSK	1/0	21.00	20.12	20.34	20.04	QPSK	1/0	21.00	20.17	20.39	20.09
	1/12	21.00	20.37	20.61	20.12		1/24	21.00	20.42	20.66	20.17
	1/24	21.00	20.29	20.37	20.23		1/49	21.00	20.34	20.42	20.28
	12/0	20.00	19.23	19.45	19.15		25/0	20.00	19.28	19.50	19.20
	12/6	20.00	19.53	19.77	19.28		25/12	20.00	19.58	19.82	19.33
	12/11	20.00	19.43	19.51	19.37		25/24	20.00	19.48	19.56	19.42
	25/0	20.00	19.23	19.45	19.15		50/0	20.00	19.28	19.50	19.20
16QAM	1/0	20.00	19.21	19.43	19.13	16QAM	1/0	20.00	19.26	19.48	19.18
	1/12	20.00	19.47	19.71	19.22		1/24	20.00	19.52	19.76	19.27
	1/24	20.00	19.40	19.48	19.34		1/49	20.00	19.45	19.53	19.39
	12/0	19.00	18.34	18.42	18.28		25/0	19.00	18.39	18.47	18.33
	12/6	19.00	18.48	18.72	18.23		25/12	19.00	18.53	18.77	18.28
	12/11	19.00	18.43	18.67	18.18		25/25	19.00	18.48	18.72	18.23
	25/0	19.00	18.40	18.64	18.15		50/0	19.00	18.45	18.69	18.20
LTE B48/BW=15M		Average Conducted Power(dBm)				LTE B48/BW=20M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)		
			55315/3557.5	56215/3647.5	56665/3692.5				55340/3560	56207/3646.7	56640/3690
QPSK	1/0	21.00	20.22	20.44	20.14	QPSK	1/0	21.00	20.27	20.49	20.19
	1/37	21.00	20.47	20.71	20.22		1/49	21.00	20.52	20.76	20.27
	1/74	21.00	20.39	20.47	20.33		1/99	21.00	20.44	20.52	20.38
	36/0	20.00	19.33	19.55	19.25		50/0	20.00	19.38	19.60	19.30
	36/18	20.00	19.63	19.87	19.38		50/24	20.00	19.68	19.92	19.43
	36/35	20.00	19.53	19.61	19.47		50/49	20.00	19.58	19.66	19.52
	75/0	20.00	19.33	19.55	19.25		100/0	20.00	19.38	19.60	19.30
16QAM	1/0	20.00	19.31	19.53	19.23	16QAM	1/0	20.00	19.36	19.58	19.28
	1/37	20.00	19.57	19.81	19.32		1/49	20.00	19.62	19.86	19.37
	1/74	20.00	19.50	19.58	19.44		1/99	20.00	19.55	19.63	19.49
	36/0	19.00	18.44	18.52	18.38		50/0	19.00	18.49	18.57	18.43
	36/18	19.00	18.58	18.82	18.33		50/24	19.00	18.63	18.87	18.38
	36/35	19.00	18.53	18.77	18.28		50/49	19.00	18.58	18.82	18.33
	75/0	19.00	18.50	18.74	18.25		100/0	19.00	18.55	18.79	18.30

**LTE Band 48**
**P-sensor on**

LTE B48/BW=5M		Average Conducted Power(dBm)				LTE B48/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)		
			55265/3552.5	56232/3649.2	56715/3697.5				55290/3555	56223/3648.3	56690/3695
QPSK	1/0	20.00	19.75	19.78	19.75	QPSK	1/0	20.00	19.73	19.84	19.80
	1/12	20.00	19.71	19.72	19.68		1/24	20.00	19.70	19.80	19.75
	1/24	20.00	19.65	19.65	19.62		1/49	20.00	19.68	19.72	19.70
	12/0	19.00	18.84	18.87	18.84		25/0	19.00	18.82	18.93	18.89
	12/6	19.00	18.76	18.77	18.73		25/12	19.00	18.75	18.85	18.80
	12/11	19.00	18.72	18.72	18.69		25/24	19.00	18.75	18.79	18.77
	25/0	19.00	18.79	18.82	18.79		50/0	19.00	18.77	18.88	18.84
16QAM	1/0	19.00	18.82	18.85	18.82	16QAM	1/0	19.00	18.80	18.91	18.87
	1/12	19.00	18.79	18.80	18.76		1/24	19.00	18.78	18.88	18.83
	1/24	19.00	18.75	18.75	18.72		1/49	19.00	18.78	18.82	18.80
	12/0	18.00	17.90	17.93	17.90		25/0	18.00	17.88	17.99	17.95
	12/6	18.00	17.79	17.80	17.76		25/12	18.00	17.78	17.88	17.83
	12/11	18.00	17.75	17.75	17.72		25/25	18.00	17.78	17.82	17.80
	25/0	18.00	17.82	17.85	17.82		50/0	18.00	17.80	17.91	17.87
LTE B48/BW=15M		Average Conducted Power(dBm)				LTE B48/BW=20M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)		
			55315/3557.5	56215/3647.5	56665/3692.5				55340/3560	56207/3646.7	56640/3690
QPSK	1/0	20.00	19.84	19.85	19.82	QPSK	1/0	20.00	19.90	19.96	19.92
	1/37	20.00	19.82	19.81	19.75		1/49	20.00	19.88	19.94	19.85
	1/74	20.00	19.76	19.75	19.71		1/99	20.00	19.84	19.90	19.81
	36/0	19.00	18.93	18.94	18.91		50/0	19.00	18.99	18.99	18.94
	36/18	19.00	18.87	18.86	18.80		50/24	19.00	18.93	18.99	18.90
	36/35	19.00	18.83	18.82	18.78		50/49	19.00	18.91	18.97	18.88
	75/0	19.00	18.88	18.89	18.86		100/0	19.00	18.94	19.00	18.96
16QAM	1/0	19.00	18.91	18.92	18.89	16QAM	1/0	19.00	18.97	19.03	18.99
	1/37	19.00	18.90	18.89	18.83		1/49	19.00	18.96	19.02	18.93
	1/74	19.00	18.86	18.85	18.81		1/99	19.00	18.94	19.00	18.91
	36/0	18.00	17.99	18.00	17.97		50/0	18.00	18.05	18.11	18.07
	36/18	18.00	17.90	17.89	17.83		50/24	18.00	17.96	18.02	17.93
	36/35	18.00	17.86	17.85	17.81		50/49	18.00	17.94	18.00	17.91
	75/0	18.00	17.91	17.92	17.89		100/0	18.00	17.97	18.03	17.99

**LTE Band 66**
**P-sensor off**

LTE B66/BW=1.4M		Average Conducted Power(dBm)				LTE B66/BW=3M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			131979/1710.7	132322/1745.0	132665/1779.3				131987/1711.5	132322/1745.0	132657/1778.5
QPSK	1/0	21.50	20.98	20.93	20.91	QPSK	1/0	21.50	21.03	20.98	20.96
	1/12	21.50	21.06	21.21	21.08		1/12	21.50	21.11	21.26	21.13
	1/24	21.50	20.84	20.78	20.86		1/49	21.50	20.89	20.83	20.91
	12/0	20.50	20.98	20.93	20.91		25/0	20.50	20.14	20.09	20.07
	12/6	20.50	21.06	21.21	21.08		25/12	20.50	20.27	20.42	20.29
	12/11	20.50	20.84	20.78	20.86		25/24	20.50	20.03	19.97	20.05
	25/0	20.50	20.09	20.04	20.02		50/0	20.50	20.14	20.09	20.07
16QAM	1/0	20.50	20.07	20.02	20.00	16QAM	1/0	20.50	20.12	20.07	20.05
	1/12	20.50	20.16	20.31	20.18		1/24	20.50	20.21	20.36	20.23
	1/24	20.50	19.95	19.89	19.97		1/49	20.50	20.00	19.94	20.02
	12/0	19.50	20.07	20.02	20.00		25/0	19.50	18.94	18.88	18.96
	12/6	19.50	20.16	20.31	20.18		25/12	19.50	19.22	19.37	19.24
	12/11	19.50	19.95	19.89	19.97		25/24	19.50	19.17	19.32	19.19
	25/0	19.50	19.09	18.83	18.91		50/0	19.50	19.14	19.29	19.16
LTE B66/BW=5M		Average Conducted Power(dBm)				LTE B66/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			131997/1712.5	132322/1745	132647/1777.5				132022/1715	132322/1745	132622/1775
QPSK	1/0	21.50	21.08	21.03	21.01	QPSK	1/0	21.50	21.13	21.08	21.06
	1/37	21.50	21.16	21.31	21.18		1/49	21.50	21.21	21.36	21.23
	1/74	21.50	20.94	20.88	20.96		1/99	21.50	20.99	20.93	21.01
	36/0	20.50	20.19	20.14	20.12		50/0	20.50	20.24	20.19	20.17
	36/18	20.50	20.32	20.47	20.34		50/24	20.50	20.37	20.52	20.39
	36/35	20.50	20.08	20.02	20.10		50/49	20.50	20.13	20.07	20.15
	75/0	20.50	20.19	20.14	20.12		100/0	20.50	20.24	20.19	20.17
16QAM	1/0	20.50	20.17	20.12	20.10	16QAM	1/0	20.50	20.22	20.17	20.15
	1/37	20.50	20.26	20.41	20.28		1/49	20.50	20.31	20.46	20.33
	1/74	20.50	20.05	19.99	20.07		1/99	20.50	20.10	20.04	20.12
	36/0	19.50	18.99	18.93	19.01		50/0	19.50	19.04	18.98	19.06
	36/18	19.50	19.27	19.42	19.29		50/24	19.50	19.32	19.47	19.34
	36/35	19.50	19.22	19.37	19.24		50/49	19.50	19.27	19.42	19.29
	75/0	19.50	19.19	19.34	19.21		100/0	19.50	19.24	19.39	19.26

LTE B66/BW=15M		Average Conducted Power(dBm)				LTE B66/BW=20M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			132047/1717.5	132322/1745	132597/1772.5				132072/1720	132322/1745	132572/1770
QPSK	1/0	21.50	21.18	21.13	21.11	QPSK	1/0	21.50	21.23	21.18	21.16
	1/37	21.50	21.26	21.41	21.28		1/49	21.50	21.31	21.46	21.33
	1/74	21.50	21.04	20.98	21.06		1/99	21.50	21.09	21.03	21.11
	36/0	20.50	20.29	20.24	20.22		50/0	20.50	20.34	20.29	20.27
	36/18	20.50	20.42	20.57	20.44		50/24	20.50	20.47	20.49	20.49
	36/35	20.50	20.18	20.12	20.20		50/49	20.50	20.23	20.17	20.25
	75/0	20.50	20.29	20.24	20.22		100/0	20.50	20.34	20.29	20.27
16QAM	1/0	20.50	20.27	20.22	20.20	16QAM	1/0	20.50	20.32	20.27	20.25
	1/37	20.50	20.36	20.51	20.38		1/49	20.50	20.41	20.56	20.43
	1/74	20.50	20.15	20.09	20.17		1/99	20.50	20.20	20.14	20.22
	36/0	19.50	19.09	19.03	19.11		50/0	19.50	19.14	19.08	19.16
	36/18	19.50	19.37	19.52	19.39		50/24	19.50	19.42	19.57	19.44
	36/35	19.50	19.32	19.47	19.34		50/49	19.50	19.37	19.52	19.39
	75/0	19.50	19.29	19.44	19.31		100/0	19.50	19.34	19.49	19.36

**P-sensor on**

LTE B66/BW=1.4M		Average Conducted Power(dBm)				LTE B66/BW=3M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			131979/1710.7	132322/1745.0	132665/1779.3				131987/1711.5	132322/1745.0	132657/1778.5
QPSK	1/0	20.50	20.25	20.29	20.27	QPSK	1/0	20.50	20.27	20.31	20.29
	1/2	20.50	20.17	20.21	20.19		1/7	20.50	20.20	20.23	20.21
	1/5	20.50	20.12	20.13	20.12		1/14	20.50	20.14	20.16	20.15
	3/0	19.50	19.34	19.38	19.36		8/0	19.50	19.36	19.40	19.38
	3/1	19.50	19.22	19.26	19.24		8/4	19.50	19.25	19.28	19.26
	3/2	19.50	19.19	19.20	19.19		8/7	19.50	19.21	19.23	19.22
	6/0	19.50	19.29	19.33	19.31		15/0	19.50	19.31	19.35	19.33
16QAM	1/0	19.50	19.32	19.36	19.34	16QAM	1/0	19.50	19.34	19.38	19.36
	1/2	19.50	19.25	19.29	19.27		1/7	19.50	19.28	19.31	19.29
	1/5	19.50	19.22	19.23	19.22		1/14	19.50	19.24	19.26	19.25
	3/0	18.50	18.40	18.44	18.42		8/0	18.50	18.42	18.46	18.44
	3/1	18.50	18.25	18.29	18.27		8/4	18.50	18.28	18.31	18.29
	3/2	18.50	18.22	18.23	18.22		8/7	18.50	18.24	18.26	18.25
	6/0	18.50	18.32	18.36	18.34		15/0	18.50	18.34	18.38	18.36
LTE B66/BW=5M		Average Conducted Power(dBm)				LTE B66/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			131997/1712.5	132322/1745	132647/1777.5				132022/1715	132322/1745	132622/1775
QPSK	1/0	20.50	20.29	20.33	20.31	QPSK	1/0	20.50	20.36	20.38	20.37
	1/12	20.50	20.22	20.25	20.23		1/24	20.50	20.25	20.28	20.27
	1/24	20.50	20.16	20.18	20.17		1/49	20.50	20.17	20.21	20.20
	12/0	19.50	19.38	19.42	19.40		25/0	19.50	19.45	19.47	19.46
	12/6	19.50	19.27	19.30	19.28		25/12	19.50	19.30	19.33	19.32
	12/11	19.50	19.23	19.25	19.24		25/24	19.50	19.24	19.28	19.27
	25/0	19.50	19.33	19.37	19.35		50/0	19.50	19.40	19.42	19.41
16QAM	1/0	19.50	19.36	19.40	19.38	16QAM	1/0	19.50	19.43	19.45	19.44
	1/12	19.50	19.30	19.33	19.31		1/24	19.50	19.33	19.36	19.35
	1/24	19.50	19.26	19.28	19.27		1/49	19.50	19.27	19.31	19.30
	12/0	18.50	18.44	18.47	18.46		25/0	18.50	18.46	18.49	18.47
	12/6	18.50	18.30	18.33	18.31		25/12	18.50	18.33	18.36	18.35
	12/11	18.50	18.26	18.28	18.27		25/24	18.50	18.27	18.31	18.30
	25/0	18.50	18.36	18.40	18.38		50/0	18.50	18.43	18.45	18.44

LTE B66/BW=15M		Average Conducted Power(dBm)				LTE B66/BW=20M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up (dBm)	Channel/Frequency(MHz)		
			132047/1717.5	132322/1745	132597/1772.5				132072/1720	132322/1745	132572/1770
QPSK	1/0	20.50	20.28	20.30	20.29	QPSK	1/0	20.50	20.36	20.38	20.37
	1/37	20.50	20.17	20.20	20.19		1/49	20.50	20.25	20.28	20.27
	1/74	20.50	20.09	20.13	20.12		1/99	20.50	20.17	20.21	20.20
	36/0	19.50	19.37	19.39	19.38		50/0	19.50	19.45	19.47	19.46
	36/18	19.50	19.22	19.25	19.24		50/24	19.50	19.30	19.33	19.32
	36/35	19.50	19.16	19.20	19.19		50/49	19.50	19.24	19.28	19.27
	75/0	19.50	19.32	19.34	19.33		100/0	19.50	19.40	19.42	19.41
16QAM	1/0	19.50	19.35	19.37	19.36	16QAM	1/0	19.50	19.43	19.45	19.44
	1/37	19.50	19.25	19.28	19.27		1/49	19.50	19.33	19.36	19.35
	1/74	19.50	19.19	19.23	19.22		1/99	19.50	19.27	19.31	19.30
	36/0	18.50	18.43	18.45	18.44		50/0	18.50	18.51	18.53	18.52
	36/18	18.50	18.25	18.28	18.27		50/24	18.50	18.33	18.36	18.35
	36/35	18.50	18.19	18.23	18.22		50/49	18.50	18.27	18.31	18.30
	75/0	18.50	18.35	18.37	18.36		100/0	18.50	18.43	18.45	18.44

**LTE Band 71**
**P-sensor off**

LTE B71/BW=5M		Average Conducted Power(dBm)				LTE B71/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)		
			133147/665.5	133297/680.5	133447/695.5				133172/668	133297/680.5	133421/693
QPSK	1/0	24.00	22.51	22.33	22.11	QPSK	1/0	24.00	22.56	22.38	22.16
	1/12	24.00	22.88	22.31	22.48		1/24	24.00	22.93	22.36	22.53
	1/24	24.00	22.80	22.42	22.40		1/49	24.00	22.85	22.47	22.45
	12/0	23.00	21.62	21.44	21.22		25/0	23.00	21.67	21.49	21.27
	12/6	23.00	22.04	21.47	21.64		25/12	23.00	22.09	21.52	21.69
	12/11	23.00	21.94	21.56	21.54		25/24	23.00	21.99	21.61	21.59
	25/0	23.00	21.62	21.44	21.22		50/0	23.00	21.67	21.49	21.27
16QAM	1/0	23.00	21.60	21.42	21.20	16QAM	1/0	23.00	21.65	21.47	21.25
	1/12	23.00	21.98	21.41	21.58		1/24	23.00	22.03	21.46	21.63
	1/24	23.00	21.91	21.53	21.51		1/49	23.00	21.96	21.58	21.56
	12/0	22.00	20.85	20.47	20.45		25/0	22.00	20.90	20.52	20.50
	12/6	22.00	20.99	20.42	20.59		25/12	22.00	21.04	20.47	20.64
	12/11	22.00	20.94	20.37	20.54		25/25	22.00	20.99	20.42	20.59
	25/0	22.00	20.91	20.34	20.51		50/0	22.00	20.96	20.39	20.56
LTE B71/BW=15M		Average Conducted Power(dBm)				LTE B71/BW=20M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)		
			133197/670.5	133297/680.5	133397/690.5				133222/673	133297/680.5	133372/688
QPSK	1/0	24.00	22.61	22.43	22.21	QPSK	1/0	24.00	22.66	22.48	22.26
	1/37	24.00	22.98	22.41	22.58		1/49	24.00	23.03	22.46	22.63
	1/74	24.00	22.90	22.52	22.50		1/99	24.00	22.95	22.57	22.55
	36/0	23.00	21.72	21.54	21.32		50/0	23.00	21.77	21.59	21.37
	36/18	23.00	22.14	21.57	21.74		50/24	23.00	22.19	21.62	21.79
	36/35	23.00	22.04	21.66	21.64		50/49	23.00	22.09	21.71	21.69
	75/0	23.00	21.72	21.54	21.32		100/0	23.00	21.77	21.59	21.37
16QAM	1/0	23.00	21.70	21.52	21.30	16QAM	1/0	23.00	21.75	21.57	21.35
	1/37	23.00	22.08	21.51	21.68		1/49	23.00	22.13	21.56	21.73
	1/74	23.00	22.01	21.63	21.61		1/99	23.00	22.06	21.68	21.66
	36/0	22.00	20.95	20.57	20.55		50/0	22.00	21.00	20.62	20.60
	36/18	22.00	21.09	20.52	20.69		50/24	22.00	21.14	20.57	20.74
	36/35	22.00	21.04	20.47	20.64		50/49	22.00	21.09	20.52	20.69
	75/0	22.00	21.01	20.44	20.61		100/0	22.00	21.06	20.49	20.66

**P-sensor on**

LTE B71/BW=5M		Average Conducted Power(dBm)				LTE B71/BW=10M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)		
			133147/665.5	133297/680.5	133447/695.5				133172/668	133297/680.5	133421/693
QPSK	1/0	23.00	21.63	21.58	21.61	QPSK	1/0	23.00	21.68	21.64	21.63
	1/12	23.00	21.52	21.54	21.58		1/24	23.00	21.62	21.62	21.61
	1/24	23.00	21.49	21.51	21.55		1/49	23.00	21.58	21.55	21.60
	12/0	22.00	20.72	20.67	20.70		25/0	22.00	20.77	20.73	20.72
	12/6	22.00	20.57	20.59	20.63		25/12	22.00	20.67	20.67	20.66
	12/11	22.00	20.56	20.58	20.62		25/24	22.00	20.65	20.62	20.67
	25/0	22.00	20.67	20.62	20.65		50/0	22.00	20.72	20.68	20.67
16QAM	1/0	22.00	20.70	20.65	20.68	16QAM	1/0	22.00	20.75	20.71	20.70
	1/12	22.00	20.60	20.62	20.66		1/24	22.00	20.70	20.70	20.69
	1/24	22.00	20.59	20.61	20.65		1/49	22.00	20.68	20.65	20.70
	12/0	21.00	19.78	19.73	19.76		25/0	21.00	19.83	19.79	19.78
	12/6	21.00	19.60	19.62	19.66		25/12	21.00	19.70	19.70	19.69
	12/11	21.00	19.59	19.61	19.65		25/25	21.00	19.68	19.65	19.70
	25/0	21.00	19.70	19.65	19.68		50/0	21.00	19.75	19.71	19.70
LTE B71/BW=15M		Average Conducted Power(dBm)				LTE B71/BW=20M		Average Conducted Power(dBm)			
Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)			Modulation	RB Size/Offset	Max. Tune-up	Channel/Frequency(MHz)		
			133197/670.5	133297/680.5	133397/690.5				133222/673	133297/680.5	133372/688
QPSK	1/0	23.00	21.82	21.79	21.71	QPSK	1/0	23.00	21.96	21.90	21.92
	1/37	23.00	21.75	21.75	21.68		1/49	23.00	21.92	21.84	21.90
	1/74	23.00	21.70	21.70	21.64		1/99	23.00	21.88	21.80	21.87
	36/0	22.00	20.91	20.88	20.80		50/0	22.00	21.05	20.99	21.01
	36/18	22.00	20.80	20.80	20.73		50/24	22.00	20.97	20.89	20.95
	36/35	22.00	20.77	20.77	20.71		50/49	22.00	20.95	20.87	20.94
	75/0	22.00	20.86	20.83	20.75		100/0	22.00	21.00	20.94	20.96
16QAM	1/0	22.00	20.89	20.86	20.78	16QAM	1/0	22.00	21.03	20.97	20.99
	1/37	22.00	20.83	20.83	20.76		1/49	22.00	21.00	20.92	20.98
	1/74	22.00	20.80	20.80	20.74		1/99	22.00	20.98	20.90	20.97
	36/0	21.00	19.97	19.94	19.86		50/0	21.00	20.11	20.05	20.07
	36/18	21.00	19.83	19.83	19.76		50/24	21.00	20.00	19.92	19.98
	36/35	21.00	19.80	19.80	19.74		50/49	21.00	19.98	19.90	19.97
	75/0	21.00	19.89	19.86	19.78		100/0	21.00	20.03	19.97	19.99



### 9.3. Conducted power measurement results of Bluetooth

Band	Mode	Channel	Frequency (MHz)	Max Power (dBm)	AVG Power (dBm)
BR	DH5	0	2402	11.00	Not Require
		39	2441	11.00	
		78	2480	11.00	
EDR	3DH5	0	2402	9.00	
		39	2441	9.00	
		78	2480	9.00	
BLE	1M	0	2402	9.00	
		19	2440	9.00	
		39	2480	9.00	
	2M	0	2402	9.00	
		19	2440	9.00	
		39	2480	9.00	

Note:

1.WLAN antenna distance is > 20cm, so SAR testing are not require

#### 9.4. Conducted power measurements of Wi-Fi 2.4GHz Band

Band	Mode	Channel	Frequency (MHz)	Data Rate	Max Tune-Up Power (dBm)	AVG Power (dBm)	
						Main	Aux
2.4G	802.11b	1-13	2412-2462	1	21.00	Not Required	
	802.11g	1-13	2412-2462	6	22.00		
	802.11n20	1-13	2412-2462	HT0	22.00		
	802.11n40	3-11	2422-2452	HT0	18.00		
	802.11ax20	1-13	2412-2462	HE0	22.00		
	802.11ax40	3-11	2422-2452	HE0	18.00		

Note:

- 1.WLAN antenna distance is > 20cm, so SAR testing are not require

### 9.5. Conducted power measurements of 5G UNII\_1

Band	Mode	Channel	Frequency (MHz)	Data Rate	Max Tune-Up Power (dBm)	AVG Power (dBm)	
						Main	Aux
UNII_1	802.11a	36-48	5180-5240	6	21.50	Not Required	
	802.11 n20	36-48	5180-5240	HT0	21.50		
	802.11 n40	38-46	5190-5230	HT0	18.50		
	802.11 ac80	42	5210	VHT0	18.00		
	802.11 ax20	36-48	5180-5240	HE0	20.50		
	802.11 ax40	38-46	5190-5230	HE0	19.00		
	802.11 ax80	42	5210	HE0	18.00		

Note:

- 1.WLAN antenna distance is > 20cm, so SAR testing are not require

### 9.6. CONDUCTED POWER MEASUREMENTS OF 5G UNII\_2A

Band	Mode	Channel	Frequency (MHz)	Data Rate	Max Tune-Up Power (dBm)	AVG Power (dBm)	
						Main	Aux
UNII_2a	802.11a	52-64	5260-5320	6	21.50	Not Required	
	802.11 n20	52-64	5260-5320	HT0	21.50		
	802.11 n40	54-62	5270-5310	HT0	18.50		
	802.11 ac80	58	5290	VHT0	18.00		
	802.11 ac160	50	5250	VHT0	18.00		
	802.11 ax20	52-64	5260-5320	HE0	21.50		
	802.11 ax40	54-62	5270-5310	HE0	18.50		
	802.11 ax80	58	5290	HE0	18.00		
	802.11 ax160	50	5250	HE0	18.00		

Note:

- 1.WLAN antenna distance is > 20cm, so SAR testing are not require

**9.7. CONDUCTED POWER MEASUREMENTS OF 5G UNII\_2C**

Band	Mode	Channel	Frequency (MHz)	Data Rate	Max Tune-Up Power (dBm)	AVG Power (dBm)	
						Main	Aux
UNII_2c	802.11a	100-140	5500-5700	6	21.50	Not Required	
	802.11 n20	100-140	5500-5700	HT0	21.50		
	802.11 n40	102-134	5510-5670	HT0	21.50		
	802.11 ac80	106-122	5530-5610	VHT0	19.00		
	802.11 ac160	114	5570	VHT0	17.00		
	802.11 ax20	100-128	5500-5640	HE0	21.50		
	802.11 ax40	102-126	5510-5630	HE0	21.50		
	802.11 ax80	106-122	5530-5610	HE0	19.00		
802.11 ax160	114	5570	HE0	17.00			

Note:

- 1.WLAN antenna distance is > 20cm, so SAR testing are not require

**9.8. CONDUCTED POWER MEASUREMENTS OF 5G UNII\_3**

Band	Mode	Channel	Frequency (MHz)	Data Rate	Max Tune-Up Power (dBm)	AVG Power (dBm)	
						Main	Aux
5.8 UNII_3	802.11a	149-165	5745-5825	6	21.50	Not Required	
	802.11 n20	149-165	5745-5825	HT0	21.50		
	802.11 n40	151-159	5755-5795	HT0	21.50		
	802.11 ac80	155	5775	VHT0	21.00		
	802.11 ax20	149-165	5745-5825	HE0	21.50		
	802.11 ax40	151-159	5755-5795	HE0	21.50		
	802.11 ax80	155	5775	HE0	21.00		

Note:

- 1.WLAN antenna distance is > 20cm, so SAR testing are not require .

**9.9. CONDUCTED POWER MEASUREMENTS OF 6E UNII\_5**

Band	Mode	Channel	Frequency (MHz)	Data Rate	Max Tune-Up Power (dBm)	AVG Power (dBm)	
						Main	Aux
6.2 UNII_5	802.11 ax20	1 - 93	5955 - 6415	HE0	7.00	Not Required	
	802.11 ax40	3 - 43	5965 - 6165	HE0	10.00		
	802.11 ax80	7 - 87	5985 - 6385	HE0	13.00		
	802.11 ax160	15 - 79	6025 - 6345	HE0	13.50		

Note:

1.WLAN antenna distance is > 20cm, so SAR testing are not require .

**9.10. CONDUCTED POWER MEASUREMENTS OF 6E UNII\_6**

Band	Mode	Channel	Frequency (MHz)	Data Rate	Max Tune-Up Power (dBm)	AVG Power (dBm)	
						Main	Aux
6.5 UNII_6	802.11 ax20	97 - 113	6435 - 6515	HE0	7.00	Not Required	
	802.11 ax40	99 - 107	6445 - 6485	HE0	10.00		
	802.11 ax80	103 - 119	6465 - 6545	HE0	13.00		
	802.11 ax80	111	6505	HE0	13.50		

Note:

1.WLAN antenna distance is > 20cm, so SAR testing are not require .

**9.11. CONDUCTED POWER MEASUREMENTS OF 6E UNII\_7**

Band	Mode	Channel	Frequency (MHz)	Data Rate	Max Tune-Up Power (dBm)	AVG Power (dBm)	
						Main	Aux
6.7 UNII_7	802.11 ax20	117 - 181	6535 - 6855	HE0	7.00	Not Required	
	802.11 ax40	115 - 179	6525 - 6845	HE0	10.00		
	802.11 ax80	135 - 167	6625 - 6785	HE0	13.00		
	802.11 ax80	143	6665	HE0	13.50		

Note:

1.WLAN antenna distance is > 20cm, so SAR testing are not require .

**9.12. CONDUCTED POWER MEASUREMENTS OF 6E UNII\_8**

Band	Mode	Channel	Frequency (MHz)	Data Rate	Max Tune-Up Power (dBm)	AVG Power (dBm)	
						Main	Aux
7 UNII_8	802.11 ax20	185 - 233	6875 - 7115	HE0	7.00	Not Required	
	802.11 ax40	187 - 227	6885 - 7085	HE0	10.00		
	802.11 ax80	183 - 215	6865 - 7025	HE0	13.00		
	802.11 ax160	207	6985	HE0	13.50		

Note:

1.WLAN antenna distance is > 20cm, so SAR testing are not require .

### 9.13. SAR TEST RESULTS

**General Notes:**

Per KDB447498 D04, all measurement SAR results are scaled to the maximum tune-up tolerance limit to demonstrate compliant.

Per KDB447498 D04, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz. When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel must be used.

Per KDB865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$  W/kg; if the deviation among the repeated measurement is  $\leq 20\%$ , and the measured SAR  $< 1.45$  W/kg, only one repeated measurement is required.

## 10. SAR TEST RESULTS

### 10.1. Body SAR test result

#### SAR test results of WWAN

##### WCDMA

P-Sensor	Band	Mode	channel	distance (mm)	Test Position	Max Tune-up (dBm)	AVG Power (dBm)	Area Scan	SAR 1g	Reported SAR 1g	Note
on	UMTS Band II	RMC12.2K	9400	0	Bottom	23.00	22.94	0.854	0.809	0.820	
		RMC12.2K	9262	0	Bottom	23.00	22.83	0.937	<b>0.883</b>	<b>0.918</b>	1
		RMC12.2K	9538	0	Bottom	23.00	22.89	0.905	0.843	0.865	1
off		RMC12.2K	9538	14	Bottom	24.50	23.35	0.307	0.309	0.403	
on	UMTS Band IV	RMC12.2K	1413	0	Bottom	23.00	22.87	0.808	0.830	0.855	
		RMC12.2K	1312	0	Bottom	23.00	22.81	0.853	0.878	0.917	1
		RMC12.2K	1513	0	Bottom	23.00	22.84	0.885	<b>0.911</b>	<b>0.945</b>	1
		RMC12.2K	1513	0	Bottom	23.00	22.84	0.894	0.903	0.937	2
		RMC12.2K	1513	0	Bottom	23.00	22.84	0.837	0.856	0.888	3
off		RMC12.2K	1312	14	Bottom	24.50	23.22	0.291	0.304	0.408	
on	UMTS Band V	RMC12.2K	4183	0	Bottom	23.00	22.94	0.307	0.306	0.310	
		RMC12.2K	4132	0	Bottom	23.00	22.84	0.311	<b>0.309</b>	<b>0.321</b>	
		RMC12.2K	4233	0	Bottom	23.00	22.86	0.303	0.303	0.313	
off		RMC12.2K	4183	14	Bottom	24.50	23.22	0.114	0.118	0.158	

#### Note:

- Highest reported SAR is > 0.8 W/kg. Added second highest power channel for this test position
- Repeated measurements are required only when the measured SAR is  $\geq 0.80$  W/kg. If the measured SAR values are < 1.45 W/kg with  $\leq 20\%$  variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. (Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04)  
Original SAR = 0.911 W/kg, therefore second times repeat SAR is required.  
Repeat SAR = 0.903 W/kg < 1.45W/kg  
SAR variation= -0.89% < 20%
- The result used an other battery to spot check for worst channel of the original battery that the SAR result can be meet and compliant.



## LTE

P-sensor	Band	Mode	channel	RB	Offset	distance (mm)	Test Position	Max Tune-up (dBm)	AVG Power (dBm)	Area Scan	SAR 1g	Reported SAR 1g	Note
on	LTE Band 2	QPSK20M	18900	1	0	0	Bottom	23.00	22.51	0.868	0.869	0.973	
		QPSK20M	18700	1	0	0	Bottom	23.00	22.48	1.000	<b>1.020</b>	<b>1.150</b>	1
		QPSK20M	19100	1	0	0	Bottom	23.00	22.43	0.866	0.873	0.995	1
		QPSK20M	18700	1	0	0	Bottom	23.00	22.48	0.871	0.892	1.005	2
		QPSK20M	18900	1	49	0	Bottom	23.00	22.46	0.758	0.762	0.863	1
		QPSK20M	18900	1	99	0	Bottom	23.00	22.40	0.912	0.893	1.025	1
		QPSK20M	18900	100	0	0	Bottom	22.00	21.55	0.769	0.776	0.861	1
off		QPSK20M	18700	1	0	0	Bottom	23.00	22.48	0.751	0.756	0.852	3
on		QPSK20M	18900	1	49	14	Bottom	24.00	23.29	0.289	0.353	0.416	
on	LTE Band 2	QPSK20M	18900	50	0	0	Bottom	22.00	21.60	0.726	0.733	0.804	
off		QPSK20M	18900	50	24	14	Bottom	23.00	22.45	0.239	0.261	0.296	

P-sensor	Band	Mode	channel	RB	Offset	distance (mm)	Test Position	Max Tune-up (dBm)	AVG Power (dBm)	Area Scan	SAR 1g	Reported SAR 1g	Note
on	LTE Band 4	QPSK20M	20175	1	0	0	Bottom	23.00	22.38	0.924	0.935	1.078	
		QPSK20M	20050	1	0	0	Bottom	23.00	22.33	0.892	0.913	1.065	1
		QPSK20M	20300	1	0	0	Bottom	23.00	22.35	0.969	<b>0.981</b>	<b>1.139</b>	1
		QPSK20M	20175	1	49	0	Bottom	23.00	22.29	0.921	0.944	1.112	1
		QPSK20M	20175	1	99	0	Bottom	23.00	22.22	0.956	0.922	1.103	1
		QPSK20M	20175	100	0	0	Bottom	22.00	21.42	0.313	0.763	0.872	1
off		QPSK20M	20175	1	49	14	Bottom	24.00	23.02	0.230	0.363	0.455	
on		QPSK20M	20175	50	0	0	Bottom	22.00	21.47	0.479	0.728	0.822	
off	LTE Band 4	QPSK20M	20175	50	24	14	Bottom	23.00	22.18	0.122	0.208	0.251	

P-sensor	Band	Mode	channel	RB	Offset	distance (mm)	Test Position	Max Tune-up (dBm)	AVG Power (dBm)	Area Scan	SAR 1g	Reported SAR 1g	Note
on	LTE Band 5	QPSK10M	20525	1	0	0	Bottom	23.00	22.37	0.313	0.319	0.369	
		QPSK10M	20450	1	0	0	Bottom	23.00	22.32	0.321	<b>0.320</b>	<b>0.374</b>	
		QPSK10M	20600	1	0	0	Bottom	23.00	22.33	0.316	0.309	0.361	
off		QPSK10M	20525	1	0	14	Bottom	24.00	22.85	0.136	0.144	0.188	
on		QPSK10M	20525	25	0	0	Bottom	22.00	21.46	0.321	0.315	0.357	
off	LTE Band 5	QPSK10M	20525	25	0	14	Bottom	23.00	21.96	0.114	0.117	0.149	

P-sensor	Band	Mode	channel	RB	Offset	distance (mm)	Test Position	Max Tune-up (dBm)	AVG Power (dBm)	Area Scan	SAR 1g	Reported SAR 1g	Note
on	LTE Band 7	QPSK20M	21100	1	0	0	Bottom	23.00	22.84	1.020	<b>0.989</b>	<b>1.026</b>	
		QPSK20M	20850	1	0	0	Bottom	23.00	22.64	0.811	0.940	1.021	1
		QPSK20M	21350	1	0	0	Bottom	23.00	22.68	0.849	0.921	0.991	1
		QPSK20M	21100	1	49	0	Bottom	23.00	22.80	0.843	0.911	0.954	1
		QPSK20M	21100	1	99	0	Bottom	23.00	22.74	0.874	0.949	1.008	1
		QPSK20M	21100	100	0	0	Bottom	22.00	21.90	0.690	0.739	0.756	1
off		QPSK20M	21100	1	49	14	Bottom	24.00	23.07	0.285	0.301	0.373	
on		QPSK20M	21100	50	0	0	Bottom	22.00	21.93	0.691	0.741	0.753	
off	LTE Band 7	QPSK20M	21350	50	0	14	Bottom	23.00	22.97	0.225	0.237	0.239	

P-sensor	Band	Mode	channel	RB	Offset	distance (mm)	Test Position	Max Tune-up (dBm)	AVG Power (dBm)	Area Scan	SAR 1g	Reported SAR 1g	Note
on	LTE Band 12	QPSK10M	23095	1	0	0	Bottom	23.00	22.88	0.430	0.443	0.455	
		QPSK10M	23060	1	0	0	Bottom	23.00	22.81	0.442	0.431	0.450	
		QPSK10M	23130	1	0	0	Bottom	23.00	22.84	0.481	<b>0.458</b>	<b>0.475</b>	
off		QPSK10M	23095	1	0	14	Bottom	24.00	23.08	0.143	0.209	0.258	
on		QPSK10M	23095	25	0	0	Bottom	22.00	21.95	0.372	0.360	0.364	
off	LTE Band 12	QPSK10M	23095	25	0	14	Bottom	23.00	22.19	0.132	0.135	0.163	

P-sensor	Band	Mode	channel	RB	Offset	distance (mm)	Test Position	Max Tune-up (dBm)	AVG Power (dBm)	Area Scan	SAR 1g	Reported SAR 1g	Note
on	LTE Band 13	QPSK10M	23230	1	0	0	Bottom	23.00	22.21	0.456	<b>0.454</b>	<b>0.545</b>	
off		QPSK10M	23230	1	0	14	Bottom	24.00	22.62	0.143	0.226	0.311	
on	LTE Band 13	QPSK10M	23230	25	0	0	Bottom	22.00	21.30	0.308	0.365	0.429	
off		QPSK10M	23230	25	0	14	Bottom	23.00	21.73	0.142	0.145	0.194	

P-sensor	Band	Mode	channel	RB	Offset	distance (mm)	Test Position	Max Tune-up (dBm)	AVG Power (dBm)	Area Scan	SAR 1g	Reported SAR 1g	Note
on	LTE Band 14	QPSK10M	23330	1	0	0	Bottom	23.00	22.90	0.373	<b>0.353</b>	<b>0.361</b>	
off		QPSK10M	23330	1	0	14	Bottom	24.00	23.12	0.259	0.254	0.311	
on	LTE Band 14	QPSK10M	23330	25	0	0	Bottom	22.00	21.91	0.328	0.339	0.346	
off		QPSK10M	23330	25	0	14	Bottom	23.00	22.23	0.173	0.176	0.210	

P-sensor	Band	Mode	channel	RB	Offset	distance (mm)	Test Position	Max Tune-up (dBm)	AVG Power (dBm)	Area Scan	SAR 1g	Reported SAR 1g	Note
on	LTE Band 17	QPSK10M	23790	1	0	0	Bottom	23.00	21.46	0.435	<b>0.414</b>	<b>0.590</b>	
		QPSK10M	23780	1	0	0	Bottom	23.00	21.22	0.425	0.359	0.541	
		QPSK10M	23800	1	0	0	Bottom	23.00	21.23	0.135	0.360	0.541	
off	LTE Band 17	QPSK10M	23790	1	0	14	Bottom	24.00	22.70	0.163	0.163	0.220	
on		QPSK10M	23790	25	0	0	Bottom	22.00	20.55	0.159	0.344	0.480	
off		QPSK10M	23790	25	0	14	Bottom	23.00	21.90	0.106	0.129	0.166	

P-sensor	Band	Mode	channel	RB	Offset	distance (mm)	Test Position	Max Tune-up (dBm)	AVG Power (dBm)	Area Scan	SAR 1g	Reported SAR 1g	Note
on	LTE Band 25	QPSK20M	26365	1	0	0	Bottom	23.00	22.40	0.822	0.826	0.948	
		QPSK20M	26140	1	0	0	Bottom	23.00	22.32	0.872	0.875	1.023	1
		QPSK20M	26590	1	0	0	Bottom	23.00	22.38	0.832	0.844	0.974	1
		QPSK20M	26365	1	49	0	Bottom	23.00	22.34	0.941	<b>0.948</b>	<b>1.104</b>	1
		QPSK20M	26365	1	99	0	Bottom	23.00	22.30	0.866	0.868	1.020	1
		QPSK20M	26365	100	0	0	Bottom	22.00	21.44	0.770	0.769	0.875	1
off	LTE Band 25	QPSK20M	26365	1	49	14	Bottom	24.00	22.77	0.303	0.353	0.469	
on		QPSK20M	26365	50	0	0	Bottom	22.00	21.49	0.715	0.714	0.803	
off		QPSK20M	26590	50	24	14	Bottom	23.00	21.93	0.321	0.220	0.281	

P-sensor	Band	Mode	channel	RB	Offset	distance (mm)	Test Position	Max Tune-up (dBm)	AVG Power (dBm)	Area Scan	SAR 1g	Reported SAR 1g	Note
on	LTE Band 26	QPSK15M	26915	1	0	0	Bottom	23.00	21.78	0.324	0.315	0.417	
		QPSK15M	26865	1	0	0	Bottom	23.00	21.72	0.335	<b>0.324</b>	<b>0.435</b>	
		QPSK15M	26965	1	0	0	Bottom	23.00	21.68	0.324	0.320	0.434	
off	LTE Band 26	QPSK15M	26915	1	37	14	Bottom	24.00	22.62	0.176	0.175	0.240	
on		QPSK15M	26915	36	0	0	Bottom	22.00	20.87	0.322	0.313	0.406	
off		QPSK15M	26915	36	18	14	Bottom	23.00	21.78	0.113	0.123	0.163	

P-sensor	Band	Mode	channel	RB	Offset	distance (mm)	Test Position	Max Tune-up (dBm)	AVG Power (dBm)	Area Scan	SAR 1g	Reported SAR 1g	Note
on	LTE Band 30	QPSK10M	27710	1	0	0	Bottom	16.50	16.41	0.113	<b>0.120</b>	<b>0.123</b>	
off		QPSK10M	27710	1	0	14	Bottom	17.50	17.43	0.025	0.027	0.028	
on	LTE Band 30	QPSK10M	27710	25	0	0	Bottom	15.50	15.42	0.113	0.114	0.116	
off		QPSK10M	27710	25	0	14	Bottom	16.50	16.54	0.024	0.025	0.025	

P-sensor	Band	Mode	channel	RB	Offset	distance (mm)	Test Position	Max Tune-up (dBm)	AVG Power (dBm)	Area Scan	SAR 1g	Reported SAR 1g	Note
on	LTE Band 38	QPSK20M	38000	1	0	0	Bottom	23.00	22.77	0.412	0.426	0.449	
		QPSK20M	37850	1	0	0	Bottom	23.00	22.72	0.410	0.414	0.442	
		QPSK20M	38150	1	0	0	Bottom	23.00	22.70	0.337	<b>0.437</b>	<b>0.468</b>	
off	LTE Band 38	QPSK20M	38000	1	0	14	Bottom	24.00	23.26	0.221	0.229	0.272	
on		QPSK20M	38000	50	0	0	Bottom	22.00	21.86	0.347	0.344	0.355	
off		QPSK20M	38000	50	0	14	Bottom	23.00	22.95	0.156	0.198	0.200	

P-sensor	Band	Mode	channel	RB	Offset	distance (mm)	Test Position	Max Tune-up (dBm)	AVG Power (dBm)	Area Scan	SAR 1g	Reported SAR 1g	Note
on	LTE Band 41	QPSK20M	40620	1	0	0	Bottom	23.00	22.91	0.492	0.411	0.420	
		QPSK20M	39750	1	0	0	Bottom	23.00	22.88	0.345	0.356	0.366	
		QPSK20M	41490	1	0	0	Bottom	23.00	22.84	0.400	<b>0.411</b>	<b>0.426</b>	
off	LTE Band 41	QPSK20M	40620	1	49	14	Bottom	24.00	23.21	0.113	0.128	0.154	
on		QPSK20M	39750	1	49	14	Bottom	25.00	24.98	0.101	0.147	0.148	
off		QPSK20M	40620	50	0	0	Bottom	22.00	21.97	0.426	0.318	0.320	
off	LTE Band 41	QPSK20M	40620	50	24	14	Bottom	23.00	22.17	0.089	0.100	0.121	
off		QPSK20M	39750	50	24	14	Bottom	24.00	23.96	0.120	0.138	0.139	

P-sensor	Band	Mode	channel	RB	Offset	distance (mm)	Test Position	Max Tune-up (dBm)	AVG Power (dBm)	Area Scan	SAR 1g	Reported SAR 1g	Note
on	LTE Band 48	QPSK20M	56207	1	0	0	Bottom	20.00	19.96	0.338	<b>0.208</b>	<b>0.210</b>	
		QPSK20M	55340	1	0	0	Bottom	20.00	19.90	0.184	0.178	0.182	
		QPSK20M	56640	1	0	0	Bottom	20.00	19.92	0.194	0.189	0.193	
off		QPSK20M	56207	1	49	14	Bottom	21.00	20.76	0.058	0.058	0.061	
on	LTE Band 48	QPSK20M	56207	50	0	0	Bottom	19.00	18.99	0.167	0.163	0.163	
off		QPSK20M	56207	50	24	14	Bottom	20.00	19.92	0.043	0.045	0.046	

P-sensor	Band	Mode	channel	RB	Offset	distance (mm)	Test Position	Max Tune-up (dBm)	AVG Power (dBm)	Area Scan	SAR 1g	Reported SAR 1g	Note
on	LTE Band 66	QPSK20M	132322	1	0	0	Bottom	20.50	20.38	0.547	<b>0.556</b>	<b>0.572</b>	
		QPSK20M	132072	1	0	0	Bottom	20.50	20.36	0.525	0.536	0.554	
		QPSK20M	132572	1	0	0	Bottom	20.50	20.37	0.510	0.518	0.534	
off		QPSK20M	132322	1	49	14	Bottom	21.50	21.46	0.189	0.223	0.225	
on	LTE Band 66	QPSK20M	132322	50	0	0	Bottom	19.50	19.47	0.327	0.322	0.324	
off		QPSK20M	132322	50	24	14	Bottom	20.50	20.49	0.154	0.159	0.159	

P-sensor	Band	Mode	channel	RB	Offset	distance (mm)	Test Position	Max Tune-up (dBm)	AVG Power (dBm)	Area Scan	SAR 1g	Reported SAR 1g	Note
on	LTE Band 71	QPSK20M	133222	1	0	0	Bottom	23.00	21.96	0.228	0.228	0.290	
		QPSK20M	133297	1	0	0	Bottom	23.00	21.90	0.301	0.290	0.374	
		QPSK20M	133372	1	0	0	Bottom	23.00	21.92	0.148	<b>0.318</b>	<b>0.408</b>	
off		QPSK20M	133222	1	49	14	Bottom	24.00	23.03	0.041	0.041	0.051	
on	LTE Band 71	QPSK20M	133222	50	0	0	Bottom	22.00	21.05	0.266	0.282	0.351	
off		QPSK20M	133222	50	24	14	Bottom	23.00	22.19	0.032	0.032	0.039	

Note:

- Highest reported SAR is > 0.8 W/kg. Added second highest power channel for this test position
- Repeated measurements are required only when the measured SAR is  $\geq 0.80$  W/kg. If the measured SAR values are < 1.45 W/kg with  $\leq 20\%$  variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. (Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04)  
Original SAR = 1.020W/kg, therefore second times repeat SAR is required.  
Repeat SAR = 0.892 W/kg < 1.45W/kg  
SAR variation = -14.35% < 20%
- The result used an other battery to spot check for worst channel of the original battery that the SAR result can be meet and compliant.

## 11. Test Layout

### Specific Absorption Rate Test Layout




Liquid depth in the flat Phantom ( $\geq 15\text{cm}$  depth)  
HSL(750MHz)



HSL(900MHz)



HSL(1750-2600MHz)

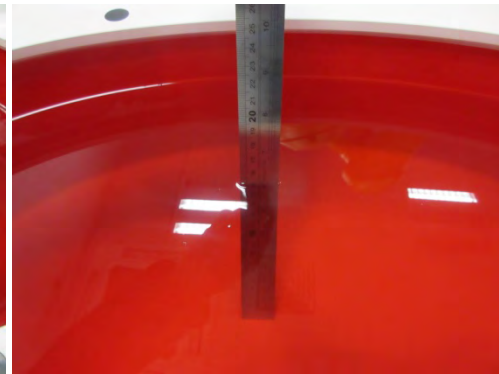

HSL(3500-3700MHz)

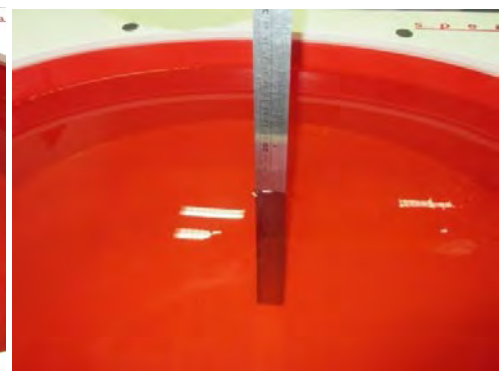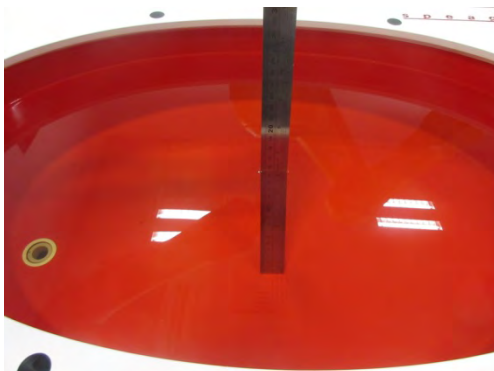

**Appendix A. SAR Plots of System Verification**

(Pls See BTL-FCC SAR-1-2212T118\_Appendix A.)

**Appendix B. SAR Plots of SAR Measurement**

(Pls See BTL-FCC SAR-1-2212T118\_Appendix B.)

**Appendix C. Calibration Certificate**

(Pls See BTL-FCC SAR-1-2212T118\_Appendix C.)

**Appendix D. Photographs of the Test Set-Up**

(Pls See BTL-FCC SAR-1-2212T118\_Appendix D.)

**End of Test Report**