



FCC SAR TEST REPORT

Report No: ZR/2020/70006
Applicant: LG Electronics USA, Inc.
Manufacturer: Huaqin Telecom Technology Co.,Ltd.
Product Name: Mobile handset
Model No.(EUT): LM-K520HMMW, LM-K520HM, LM-K525HMMW, LM-K525HM
Trade Mark: LG
FCC ID: ZNFK520HMMW
Standards: FCC 47CFR §2.1093
Date of Receipt: 2020-07-29
Date of Test: 2020-07-30 to 2020-08-19
Date of Issue: 2020-08-21
Test conclusion: **PASS ***

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Derek Yang

Wireless Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China
中国-西安-沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com



REVISION HISTORY

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2020-08-21		Original

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com



TEST SUMMARY

Frequency Band	Maximum Reported SAR(W/kg)			
	Head	Body-worn	Hotspot	Product Specific 10-g SAR
GSM850	0.27	0.44	0.61	NA
GSM1900	0.15	0.36	0.54	NA
WCDMA Band II	0.26	0.69	0.69	NA
WCDMA Band IV	0.23	0.55	0.55	NA
WCDMA Band V	0.25	0.49	0.49	NA
LTE Band 2	0.27	0.58	0.58	NA
LTE Band 4	0.25	0.53	0.53	NA
LTE Band 5	0.20	0.37	0.37	NA
LTE Band 7	0.15	1.06	1.29	2.61
LTE Band 12	0.18	0.35	0.35	NA
LTE Band 13	0.19	0.28	0.28	NA
LTE Band 17	0.18	0.33	0.33	NA
LTE Band 66	0.24	0.49	0.49	NA
WI-FI (2.4GHz)	0.89	0.20	0.20	NA
WI-FI (5GHz)	1.10	0.16	0.33	0.40
BT	0.37	0.19	0.19	NA
SAR Limited(W/kg)	1.6			4.0
Maximum Simultaneous Transmission SAR (W/kg)				
Scenario	Head	Body-worn	Hotspot	Product Specific 10-g SAR
Sum SAR	1.27	1.26	1.29	2.61
SPLSR	NA	NA	NA	NA
SPLSR Limited	0.04			0.1
Note: The Simultaneous transmission SAR is the same test position of the WWAN antenna + WiFi/BT antenna.				

Note: The Simultaneous transmission SAR is the same test position of the WWAN antenna + WiFi/BT antenna.

Approved & Released by

Simon Ling

SAR Manager

Tested by

Gavin Gao

SAR Engineer

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

Member of the SGS Group(SGS SA)



CONTENTS

1	GENERAL INFORMATION	6
1.1	DETAILS OF CLIENT	6
1.2	TEST LOCATION	6
1.3	TEST FACILITY	7
1.4	GENERAL DESCRIPTION OF EUT	8
1.4.1	DUT Antenna Locations(Back View)	10
1.5	TEST SPECIFICATION	11
1.6	RF EXPOSURE LIMITS	12
2	LABORATORY ENVIRONMENT	13
3	SAR MEASUREMENTS SYSTEM CONFIGURATION	14
3.1	THE SAR MEASUREMENT SYSTEM	14
3.2	ISOTROPIC E-FIELD PROBE EX3DV4	15
3.3	DATA ACQUISITION ELECTRONICS (DAE)	16
3.4	SAM TWIN PHANTOM	16
3.5	ELI PHANTOM	17
3.6	DEVICE HOLDER FOR TRANSMITTERS	18
3.7	MEASUREMENT PROCEDURE	19
3.7.1	Scanning procedure	19
3.7.2	Data Storage	21
3.7.3	Data Evaluation by SEMCAD	21
4	SAR MEASUREMENT VARIABILITY AND UNCERTAINTY	23
4.1	SAR MEASUREMENT VARIABILITY	23
4.2	SAR MEASUREMENT UNCERTAINTY	23
5	DESCRIPTION OF TEST POSITION	24
5.1	HEAD EXPOSURE CONDITION	24
5.1.1	SAM Phantom Shape	24
5.1.2	EUT constructions	25
5.1.3	Definition of the "cheek" position	25
5.1.4	Definition of the "tilted" position	26
5.2	BODY EXPOSURE CONDITION	27
5.2.1	Body-worn accessory exposure conditions	27
5.2.2	Wireless Router exposure conditions	28
5.3	EXTREMITY EXPOSURE CONDITIONS	28
6	SAR SYSTEM VERIFICATION PROCEDURE	29
6.1	TISSUE SIMULATE LIQUID	29
6.1.1	Recipes for Tissue Simulate Liquid	29
6.1.2	Measurement for Tissue Simulate Liquid	30
6.2	SAR SYSTEM CHECK	31
6.2.1	Justification for Extended SAR Dipole Calibrations	32
6.2.2	Summary System Check Result(s)	33
6.2.3	Detailed System Check Results	33

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com



7	TEST CONFIGURATION.....	34
7.1	3G SAR TEST REDUCTION PROCEDURE.....	34
7.2	OPERATION CONFIGURATIONS.....	34
7.2.1	GSM Test Configuration.....	34
7.2.2	WCDMA Test Configuration.....	35
7.2.3	WiFi Test Configuration.....	42
7.2.4	LTE Test Configuration.....	49
8	TEST RESULT	50
8.1	MEASUREMENT OF RF CONDUCTED POWER.....	50
8.1.1	Conducted Power of Main Antenna.....	50
8.1.2	Conducted Power of WIFI and BT.....	71
8.2	STAND-ALONE SAR TEST EVALUATION	76
8.3	MEASUREMENT OF SAR DATA.....	77
8.3.1	SAR Result of GSM850.....	77
8.3.2	SAR Result of GSM1900.....	78
8.3.3	SAR Result of WCDMA Band II.....	79
8.3.4	SAR Result of WCDMA Band IV.....	80
8.3.5	SAR Result of WCDMA Band V.....	81
8.3.6	SAR Result of LTE Band 2.....	82
8.3.7	SAR Result of LTE Band 4.....	83
8.3.8	SAR Result of LTE Band 5.....	84
8.3.9	SAR Result of LTE Band 7.....	85
8.3.10	SAR Result of LTE Band 12.....	87
8.3.11	SAR Result of LTE Band 13.....	88
8.3.12	SAR Result of LTE Band 17.....	89
8.3.13	SAR Result of LTE Band 66.....	90
8.3.14	SAR Result of WIFI 2.4G.....	91
8.3.15	SAR Result of WIFI 5G.....	92
8.4	MULTIPLE TRANSMITTER EVALUATION	94
8.4.1	Simultaneous SAR SAR test evaluation.....	94
8.4.2	Simultaneous Transmission SAR Summation Scenario.....	95
9	EQUIPMENT LIST.....	96
10	CALIBRATION CERTIFICATE.....	97
11	PHOTOGRAPHS.....	97
	APPENDIX A: DETAILED SYSTEM CHECK RESULTS	97
	APPENDIX B: DETAILED TEST RESULTS	97
	APPENDIX C: CALIBRATION CERTIFICATE.....	97
	APPENDIX D: PHOTOGRAPHS.....	97

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com



1 General Information

1.1 Details of Client

Applicant:	LG Electronics USA, Inc.
Address:	111 Sylvan Avenue, North Building Englewood Cliffs, NJ 07632
Manufacturer:	Huaqin Telecom Technology Co.,Ltd.
Address:	No.1 Building, No.9 Building, No.399,Keyuan Road,Zhangjiang Hi-tech Park, Shanghai,P.R.China

1.2 Test Location

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Xi'an Branch
Address:	Single floor D, building 1, Kanghong orange square science and technology park, No.137 keyuan 3rd road, fengdong new town, Xi 'an city, shaanxi China
Post code:	710086
Telephone:	+86 (0) 29 6282 7885
Fax:	+86 (0) 29 6282 7885
E-mail:	ee.xian@sgs.com

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com



1.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 4854.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Xi'an Branch is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4854.01.

- **FCC –Designation Number: CN1271**

SGS-CSTC Standards Technical Services Co., Ltd., Xi'an Branch has been recognized as an accredited testing laboratory.

Designation Number: CN1271. Test Firm Registration Number: 637380.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC Standards Technical Services Co., Ltd., Xi'an Branch has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0095

ISED#: 25613.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·津东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com



1.4 General Description of EUT

Product Name:	Mobile handset		
Model No.(EUT):	LM-K520HWMW, LM-K520HM, LM-K525HWMW, LM-K525HM		
Trade Mark:	LG		
FCC ID:	ZNFK520HWMW		
Device Type :	portable device		
Exposure Category:	uncontrolled environment / general population		
Product Phase:	Identical Prototype		
SN:	356635110033993 / 356635110033498 / 356635110064998		
Antenna Type:	Inner Antenna		
Device Operating Configurations :			
Modulation Mode:	GSM: GMSK, 8PSK; WCDMA: QPSK,16QAM; LTE: QPSK,16QAM,64QAM WIFI: DSSS, OFDM; BT: GFSK, $\pi/4$ DQPSK,8DPSK		
Device Class:	B		
GPRS Multi-slots Class:	12	EGPRS Multi-slots Class:	12
HSDPA UE Category:	14	HSUPA UE Category	7
DC-HSDPA UE Category:	24		
Power Class	4,tested with power level 5(GSM850)		
	1,tested with power level 0(GSM1900)		
	3, tested with power control “all 1”(WCDMA Band II/IV/V)		
	3, tested with power control Max Power(LTE Band 2/4/5/712/13/17/66)		
Frequency Bands:	Band	Tx (MHz)	Rx (MHz)
	GSM850	824~849	869~894
	GSM1900	1850~1910	1930~1990
	WCDMA Band II	1850~1910	1930~1990
	WCDMA Band IV	1710~1755	2110~2155
	WCDMA Band V	824~849	869~894
	LTE Band 2	1850 ~1910	1930 ~1990
	LTE Band 4	1710~1755	2110~2155
	LTE Band 5	824~849	869~894
	LTE Band 7	2500~2570	2620~2690
	LTE Band 12	699~716	729~746
	LTE Band 13	777~787	746~756
	LTE Band 17	704~716	734~746
	LTE Band 66	1710~1780	21100~2200
	Bluetooth	2402~2480	2402~2480
	Wi-Fi 2.4G	2412~2472	2412~2472
	Wi-Fi 5G	5150~5350	5150~5350
		5470~5725	5470~5725
5725~5850		5725~5850	
Battery Information:	Model:	BL-T51	
	Normal Voltage:	3.87V	
	Rated capacity:	3900mAh	
	Manufacturer:	ATL	
Headset Information:	Model:	EAB64468444	
	Manufacturer:	Cresyn	

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>; and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com



Difference description:

The differences between LM-K520HWMW and other models are shown in the below table:

Model		LM-K520HWMW (Full approval)	LM-K520HM (Update approval)	LM-K525HWMW (Updated approval)	LM-K525HM (Update approval)
Software version		different	different	different	different
Licensed Frequency	LTE	B1/B2/B3/B4/ B5/B7/B8/B12/B13 /B17/B28/ B38/B66	B1/B2/B3/B4/ B5/B7/B8/B12/B13 /B17/B28/ B38/B66	B1/B2/B3/B4/ B5/B7/B8/B12/B13/ B17/B28/ B38/B66	B1/B2/B3/B4/ B5/B7/B8/B12/B13 /B17/B28/ B38/B66
	UMTS	B1/B2/B4/B5/ B8	B1/B2/B4/B5/ B8	B1/B2/B4/B5/ B8	B1/B2/B4/B5/ B8
	GSM	the same	the same	the same	the same
	IC	the same	the same	the same	the same
	Antenna	the same	the same	the same	the same
Unlicensed Frequency	Bluetooth	the same	the same	the same	the same
	2.4G Wi-Fi	the same	the same	the same	the same
	IC	the same	the same	the same	the same
	Antenna	the same	the same	the same	the same
Hardware	Ram / Rom	4G/64G	4G/64G	4G/128G	4G/128G
	Camera	the same	the same	the same	the same
	PCB	the same	the same	the same	the same
	USB Port	the same	the same	the same	the same
	RJ11 Port	the same	the same	the same	the same
	RJ45 Port	the same	the same	the same	the same
	NFC	Not support	Not support	Not support	Not support
	FM	Support	Support	Support	Support
Appearance	Dimension	the same	the same	the same	the same
	Color	the same	the same	the same	the same
Accessory	Battery	the same	the same	the same	the same
	External Charger	the same	the same	the same	the same
	USB label	the same	the same	the same	the same
other	SIM card	Double SIM	Single SIM	Double SIM	Single SIM

Remark:

- 1) According to the difference description above, for the LM-K520HWMW is all test, for other models all the test data were copied from the LM-K520HWMW.
- 2) Sample 2# changes the camera and memory on the basis of LM-K520HWMW, it shares the same test data of LM-K520HWMW and additional SAR tests are performed based on the SAR worst case of LM-K520HWMW.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

1.4.1 DUT Antenna Locations(Back View)

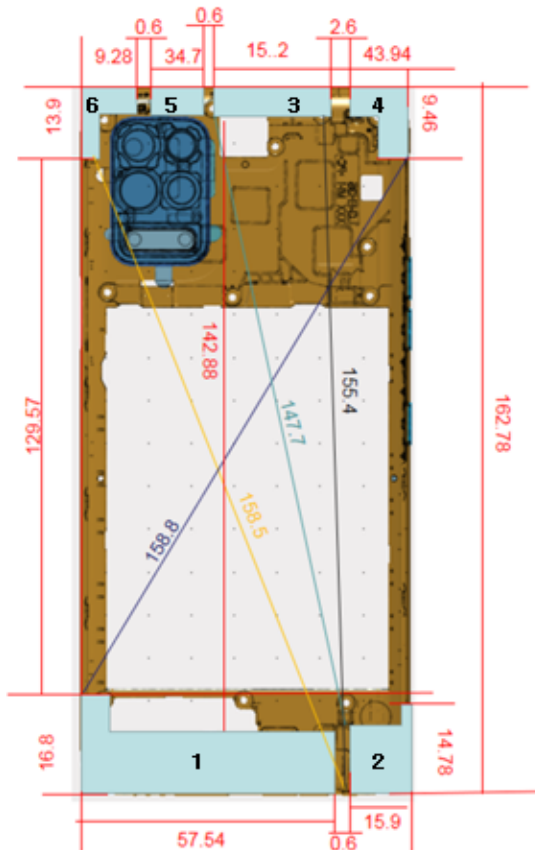

Antenna	Mode	Band
1	WCDMA	B5/8 TX&RX
	LTE	B5/7/8/12/13/17/28/38 TX&RX
	GSM	850/900 TX&RX
2	WCDMA	B1/2/4 TX&RX
	LTE	B1/2/3/4/66 TX&RX
	GSM	1800/1900 TX&RX
3	WCDMA	B1/2/3/4/5/8 2 nd Rx
	LTE	B1/2/3/4/5/8/12/13/17/28/66 2 nd Rx
	GSM	850/900/1800/1900 2 nd Rx
4	WCDMA	
	LTE	B7/38 2 nd Rx
	GSM	
5	Wi-Fi	2.4GHz/5G TX&RX
	Bluetooth	2.4GHz TX&RX
6	GPS	1.574~1.6GHz

Note:

- 1) The test device is a smart phone. The overall diagonal dimension of this device is 175 mm. Per KDB 648474 D04, because the diagonal distance of this device is ≥ 160 mm, so it is a phablet.

According to the distance between LTE/WCDMA/GSM&WIFI&BT antennas and the sides of the EUT we can draw the conclusion that:

EUT Sides for SAR Testing							
Mode	Exposure Condition	Front	Back	Left	Right	Top	Bottom
Main Antenna(Low/High Band)	Hotspot/Product specific 10g SAR	Yes	Yes	Yes	Yes	No	Yes
Main Antenna(Mid Band)	Hotspot/Product specific 10g SAR	Yes	Yes	Yes	No	No	Yes
WIFI 2.4G&5G/BT	Hotspot/Product specific 10g SAR	Yes	Yes	No	Yes	Yes	No

Table 1: EUT Sides for SAR Testing

Note:

- 1) When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

Member of the SGS Group(SGS SA)



1.5 Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
IEEE C95.1-1991	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 941225 D01	3G SAR Measurement Procedures v03r01
KDB 941225 D05	SAR for LTE Devices v02r05
KDB 941225 D06	Hotspot Mode SAR v02r01
KDB 248227 D01	SAR Guidance for IEEE 802.11 Wi-Fi SAR v02r02
KDB 648474 D04	Handset SAR v01r03
KDB 447498 D01	General RF Exposure Guidance v06
KDB 865664 D01	SAR Measurement 100 MHz to 6 GHz v01r04

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com



1.6 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain*Trunk)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com



2 Laboratory Environment

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

Table 2: The Ambient Conditions

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

3 SAR Measurements System Configuration

3.1 The SAR Measurement System

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY5 professional system). A E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-Simulate.


The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software .An arm extension for accommodation the data acquisition electronics (DAE).

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

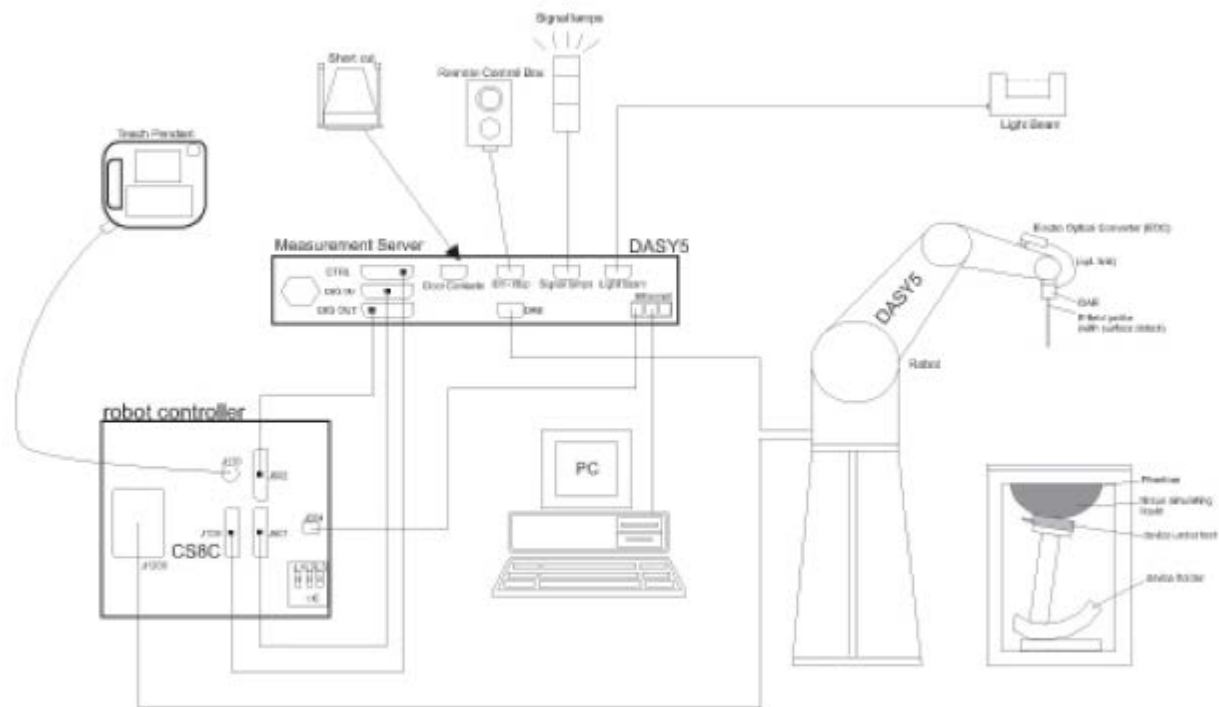

F-1. SAR Measurement System Configuration

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·津东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validating the proper functioning of the system.

3.2 Isotropic E-field Probe EX3DV4

	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·津东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

3.3 Data Acquisition Electronics (DAE)

Model	DAE	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV,400mV)	
Input Offset Voltage	< 5μV (with auto zero)	
Input Bias Current	< 50 f A	
Dimensions	60 x 60 x 68 mm	

3.4 SAM Twin Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions (incl. Wooden Support)	Length: 1000 mm Width: 500 mm Height: adjustable feet	
Filling Volume	approx. 25 liters	
Wooden Support	SPEAG standard phantom table	

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.

3.5 ELI Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	
Wooden Support	SPEAG standard phantom table	

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·津东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

3.6 Device Holder for Transmitters



F-2. Device Holder for Transmitters

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.
- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com



3.7 Measurement procedure

3.7.1 Scanning procedure

Step 1: Power reference measurement

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure.

Step 2: Area scan

The SAR distribution at the exposed side of the head was measured at a distance of 4mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm*15mm or 12mm*12mm or 10mm*10mm. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Zoom scan

Around this point, a volume of 32mm*32mm*30mm ($f \leq 2\text{GHz}$), 30mm*30mm*30mm (f for 2-3GHz) and 24mm*24mm*22mm (f for 5-6GHz) was assessed by measuring 5x5x7 points ($f \leq 2\text{GHz}$), 7x7x7 points (f for 2-3GHz) and 7x7x12 points (f for 5-6GHz). On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the centre of the dipoles is 2.0mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification). The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points were interpolated to calculate the average. All neighbouring volumes were evaluated until no neighboring volume with a higher average value was found.

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·津东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

			$\leq 3 \text{ GHz}$	$> 3 \text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			$5 \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^{\circ} \pm 1^{\circ}$	$20^{\circ} \pm 1^{\circ}$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$			$\leq 2 \text{ GHz: } \leq 15 \text{ mm}$ $2 - 3 \text{ GHz: } \leq 12 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 12 \text{ mm}$ $4 - 6 \text{ GHz: } \leq 10 \text{ mm}$
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz: } \leq 8 \text{ mm}$ $2 - 3 \text{ GHz: } \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz: } \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz: } \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 4 \text{ mm}$ $4 - 5 \text{ GHz: } \leq 3 \text{ mm}$ $5 - 6 \text{ GHz: } \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 3 \text{ mm}$ $4 - 5 \text{ GHz: } \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz: } \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz: } \geq 28 \text{ mm}$ $4 - 5 \text{ GHz: } \geq 25 \text{ mm}$ $5 - 6 \text{ GHz: } \geq 22 \text{ mm}$

Step 4: Power reference measurement (drift)

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The indicated drift is mainly the variation of the DUT's output power and should vary max. $\pm 5 \%$

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com

3.7.2 Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [m W/g], [m W/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.7.3 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
- Conversion factor	ConvFi	
- Diode compression point	Dcpi	
Device parameters:	- Frequency	f
- Crest factor	cf	
Media parameters:	- Conductivity	ε
- Density	ρ	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcp_i$$

With V_i = compensated signal of channel i (i = x, y, z)
 U_i = input signal of channel i (i = x, y, z)
cf = crest factor of exciting field (DASY parameter)
dcp i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$$

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com

H-field probes:

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2) / f$$

With V_i = compensated signal of channel i ($i = x, y, z$)

Norm i = sensor sensitivity of channel i ($i = x, y, z$)
[mV/(V/m)²] for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\epsilon \cdot 1000)$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ϵ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \text{ or } P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

4 SAR measurement variability and uncertainty

4.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
 - 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
 - 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
 - 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

4.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

5 Description of Test Position


5.1 Head Exposure Condition

5.1.1 SAM Phantom Shape




F-3. Front, back, and side views of SAM (model for the phantom shell). Full-head model is for illustration purposes only-procedures in this recommended practice are intended primarily for the phantom setup.


Note: The centre strip including the nose region has a different thickness tolerance.

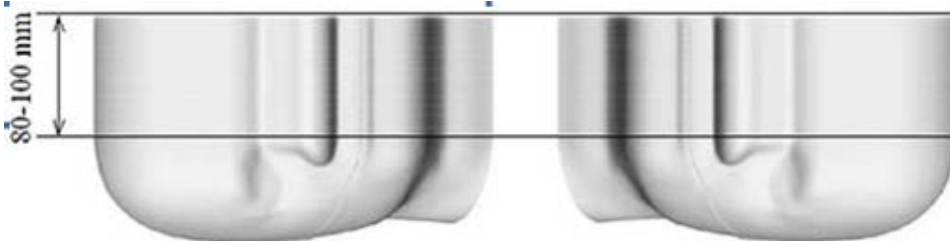

F-4. Sagittally bisected phantom with extended perimeter (shown placed on its side as used for SAR measurements)



F-5. Close-up side view of phantom, showing the ear region, N-F and B-M lines, and seven cross-sectional plane locations

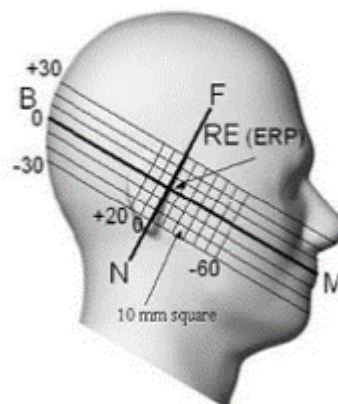

F-6. Side view of the phantom showing relevant markings and seven cross-sectional plane locations

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层


邮编 710086 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

5.1.2 EUT constructions

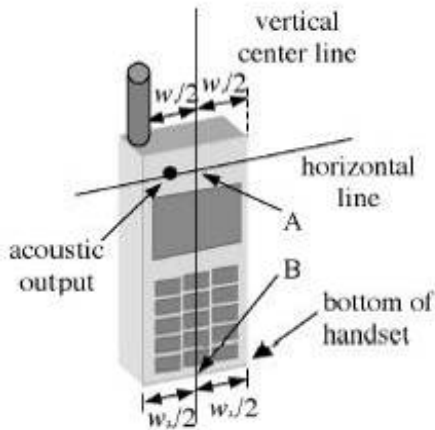

F-7. Handset vertical and horizontal reference lines—"fixed case"

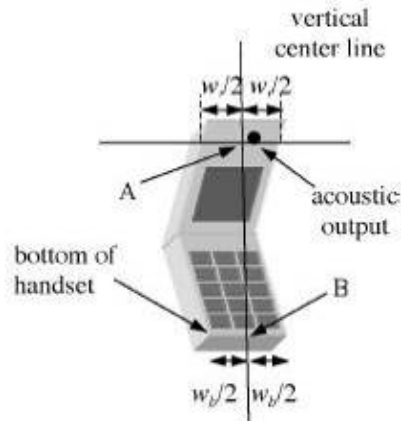

F-8. Handset vertical and horizontal reference lines—"clam-shell case"

5.1.3 Definition of the "cheek" position

- Position the device with the vertical centre line of the body of the device and the horizontal line crossing the centre of the ear piece in a plane parallel to the sagittal plane of the phantom ("initial position"). While maintaining the device in this plane, align the vertical centre line with the reference plane containing the three ear and mouth reference points (M, RE and LE) and align the centre of the ear piece with the line RE-LE.
- Translate the mobile phone box towards the phantom with the ear piece aligned with the line LE-RE until telephone touches the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the box until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China


中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com


Member of the SGS Group (SGS SA)

5.1.4 Definition of the “tilted” position

- Position the device in the “cheek” position described above;
- While maintaining the device in the reference plane described above and pivoting against the ear, move it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.

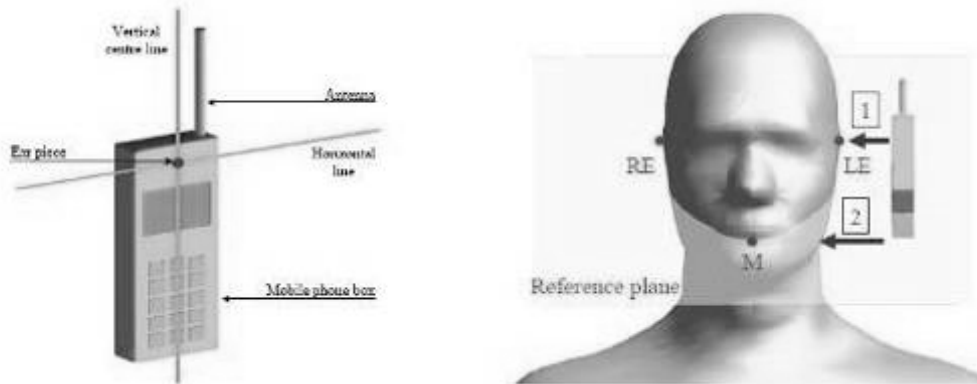

F-9. Definition of the reference lines and points, on the phone and on the phantom and initial position

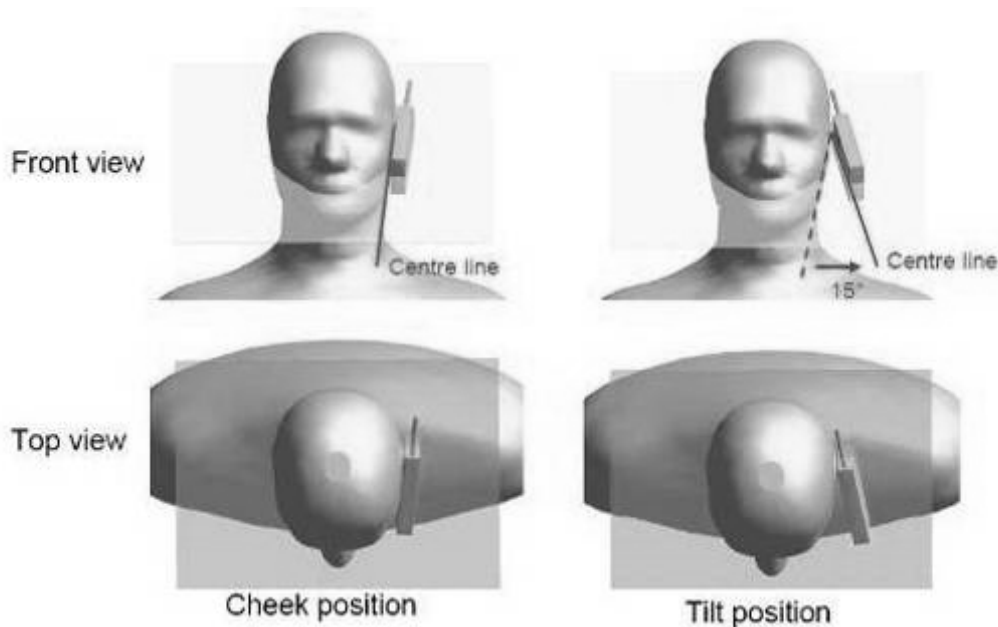

F-10. “Cheek” and “tilt” positions of the mobile phone on the left side

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

5.2 Body Exposure Condition


5.2.1 Body-worn accessory exposure conditions

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations.

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. Per FCC KDB Publication 648474 D04, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

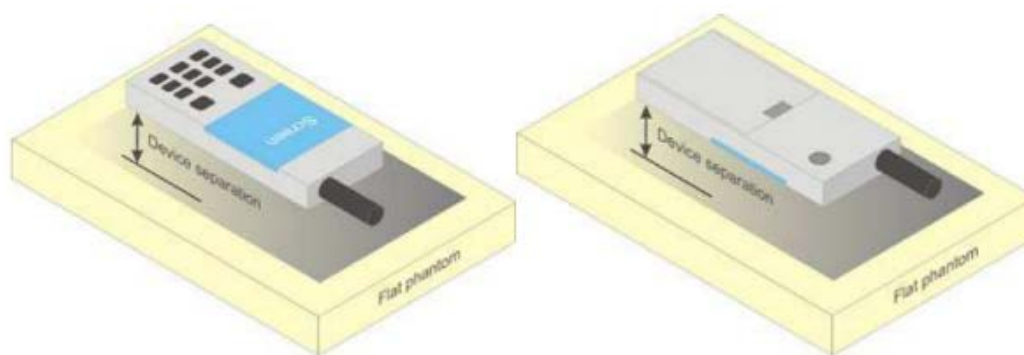

F-11. Test positions for body-worn devices

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com



5.2.2 Wireless Router exposure conditions

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. For devices with form factors smaller than $9 \text{ cm} \times 5 \text{ cm}$, a test separation distance of 5 mm is required. Although this handset $L \times W$ is $\geq 9 \text{ cm} \times 5 \text{ cm}$, a test separation distance of 5 mm is form client.

5.3 Extremity exposure conditions

Per FCC KDB 648474D04, for smart phones with a display diagonal dimension $> 15.0 \text{ cm}$ or an overall diagonal dimension $> 16.0 \text{ cm}$ that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the device is marketed as "Phablet".

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at $\leq 25 \text{ mm}$ from that surface or edge, in direct contact with a flat phantom, for Product Specific 10-g SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR $> 1.2 \text{ W/kg}$; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

Due to the SAR result, only the following frequency bands need to test with 0mm for the Product Specific 10 g SAR, the others are not required.

LTE Band 7:

Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Product Specific 10-g SAR SAR Exclusion
Hotspot Test data(Separate 10mm 1RB)											
Front side	20	QPSK 1RB_50	21350/2560	1:1	0.377	0.02	23.82	24.70	1.225	0.462	Yes
Back side	20	QPSK 1RB_50	21350/2560	1:1	0.717	0.18	23.82	24.70	1.225	0.878	Yes
Left side	20	QPSK 1RB_50	21350/2560	1:1	0.160	0.05	23.82	24.70	1.225	0.196	Yes
Right side	20	QPSK 1RB_50	21350/2560	1:1	0.140	0.02	23.82	24.70	1.225	0.171	Yes
Bottom side	20	QPSK 1RB_50	21350/2560	1:1	0.993	-0.01	23.82	24.70	1.225	1.216	No
Back side	20	QPSK 1RB_50	20850/2510	1:1	0.842	-0.05	23.71	24.70	1.256	1.058	Yes
Back side	20	QPSK 1RB_50	21100/2535	1:1	0.824	-0.06	23.69	24.70	1.262	1.040	Yes
Bottom side	20	QPSK 1RB_50	20850/2510	1:1	1.030	-0.08	23.71	24.70	1.256	1.294	No
Bottom side	20	QPSK 1RB_50	21100/2535	1:1	1.020	-0.02	23.69	24.70	1.262	1.287	No
Hotspot Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50RB_50	20850/2510	1:1	0.290	0.04	22.88	23.70	1.208	0.350	Yes
Back side	20	QPSK 50RB_50	20850/2510	1:1	0.527	0.03	22.88	23.70	1.208	0.637	Yes
Left side	20	QPSK 50RB_50	20850/2510	1:1	0.124	0.06	22.88	23.70	1.208	0.150	Yes
Right side	20	QPSK 50RB_50	20850/2510	1:1	0.122	0.02	22.88	23.70	1.208	0.147	Yes
Bottom side	20	QPSK 50RB_50	20850/2510	1:1	0.843	0.11	22.88	23.70	1.208	1.018	Yes
Bottom side	20	QPSK 50RB_0	21100/2535	1:1	0.824	-0.03	22.75	23.70	1.245	1.025	Yes
Bottom side	20	QPSK 50RB_25	21350/2560	1:1	0.791	0.14	22.84	23.70	1.219	0.964	Yes
Hotspot Test data(Separate 10mm 100%RB)											
Back side	20	QPSK 100RB_0	21350/2560	1:1	0.637	0.01	22.80	23.70	1.230	0.784	Yes
Bottom side	20	QPSK 100RB_0	21350/2560	1:1	0.741	-0.02	22.80	23.70	1.230	0.912	Yes
Hotspot Test data at the worst case with Sample 2#											
Bottom side	20	QPSK 1RB_50	20850/2510	1:1	1.020	-0.08	23.71	24.70	1.256	1.281	No

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgs.com
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com



6 SAR System Verification Procedure

6.1 Tissue Simulate Liquid

6.1.1 Recipes for Tissue Simulate Liquid

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands:

Ingredients (% by weight)	Frequency (MHz)				
	450	700-900	1750-2000	2300-2500	2500-2700
Water	38.56	40.30	55.24	55.00	54.92
Salt (NaCl)	3.95	1.38	0.31	0.2	0.23
Sucrose	56.32	57.90	0	0	0
HEC	0.98	0.24	0	0	0
Bactericide	0.19	0.18	0	0	0
Tween	0	0	44.45	44.80	44.85
Salt: 99+% Pure Sodium Chloride Water: De-ionized, 16 MΩ ⁺ resistivity Tween: Polyoxyethylene (20) sorbitan monolaurate Sucrose: 98+% Pure Sucrose HEC: Hydroxyethyl Cellulose					
HSL5GHz is composed of the following ingredients: Water: 50-65% Mineral oil: 10-30% Emulsifiers: 8-25% Sodium salt: 0-1.5%					

Table 3: Recipe of Tissue Simulate Liquid

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com



6.1.2 Measurement for Tissue Simulate Liquid

The dielectric properties for this Tissue Simulate Liquids were measured by using the Agilent Model 85070E Dielectric Probe in conjunction with Agilent E5071C Network Analyzer (300 KHz-8500 MHz). The Conductivity (σ) and Permittivity (ρ) are listed in bellow table. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was $22\pm 2^{\circ}\text{C}$.

Tissue Type	Measured Frequency (MHz)	Target Tissue ($\pm 5\%$)		Measured Tissue		Liquid Temp. ($^{\circ}\text{C}$)	Measured Date
		ϵ_r	$\sigma(\text{S/m})$	ϵ_r	$\sigma(\text{S/m})$		
750 Head	750	41.9 (39.81~44)	0.89 (0.85~0.94)	41.639	0.899	22.1	2020/8/1
835 Head	835	41.5 (39.43~43.58)	0.90 (0.86~0.95)	40.798	0.886	22.1	2020/8/2
1750 Head	1750	40.1 (38.10~42.11)	1.37 (1.30~1.44)	40.292	1.328	21.9	2020/8/3
1900 Head	1900	40.0 (38.00~42.00)	1.40 (1.33~1.47)	40.828	1.408	22.3	2020/8/5
2450 Head	2450	39.2 (37.24~41.16)	1.8 (1.71~1.89)	38.568	1.806	21.8	2020/7/30
2600 Head	2600	39.0 (37.05~40.95)	1.96 (1.86~2.06)	37.443	2.025	21.9	2020/8/19
5250 Head	5250	35.9 (34.11~37.70)	4.66 (4.47~4.95)	36.011	4.721	22.3	2020/8/12
5600 Head	5600	35.5 (33.73~37.30)	5.07 (4.82~5.32)	35.059	5.107	22.3	2020/8/13
5750 Head	5750	35.4 (33.63~37.17)	5.22 (4.96~5.48)	34.695	5.279	22.3	2020/8/14

Table 4: Measurement result of Tissue electric parameters

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

6.2 SAR System Check

The microwave circuit arrangement for system Check is sketched in F-12. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table (A power level of 250mW (below 3GHz) or 100mW (3-6GHz) was input to the dipole antenna). During the tests, the ambient temperature of the laboratory was in the range $22 \pm 2^\circ\text{C}$, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15 ± 0.5 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

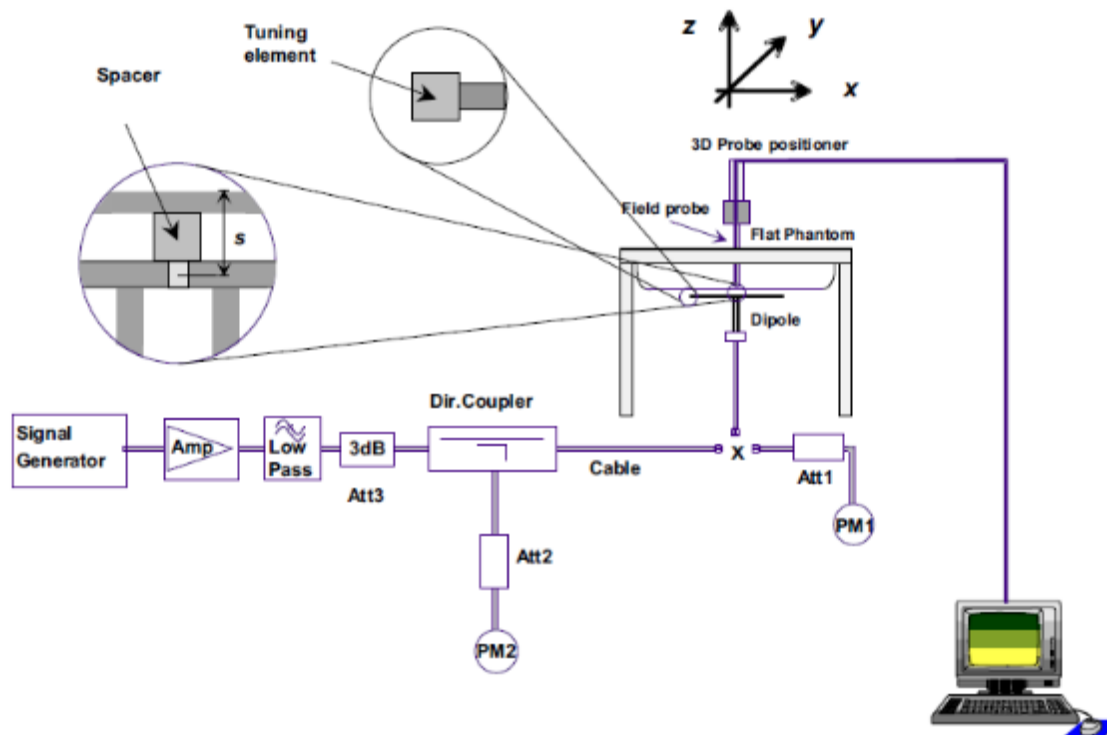

F-12. the microwave circuit arrangement used for SAR system check

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

Member of the SGS Group (SGS SA)



6.2.1 Justification for Extended SAR Dipole Calibrations

1) Referring to KDB865664 D01 requirements for dipole calibration, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) Return-loss is within 10% of calibrated measurement;
- d) Impedance is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com



6.2.2 Summary System Check Result(s)

Validation Kit		Measured SAR 250mW	Measured SAR 250mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W) (±10%)	Target SAR (normalized to 1W) (±10%)	Liquid Temp. (°C)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
D750V2	Head	2.20	1.44	8.80	5.76	8.39 (7.55~9.23)	5.63 (5.07~6.19)	22.1	2020/8/1
D835V2	Head	2.45	1.60	9.80	6.40	9.64 (8.68~10.60)	6.29 (5.66~6.92)	22.1	2020/8/2
D1750V2	Head	9.24	4.92	36.96	19.68	36.3 (32.67~39.93)	19.2 (17.28~21.12)	21.9	2020/8/3
D1900V2	Head	10.40	5.38	41.60	21.52	39.3 (35.37~43.23)	20.2 (18.18~22.22)	22.3	2020/8/5
D2450V2	Head	13.20	6.10	52.80	24.40	51.9 (46.71~57.09)	23.8 (21.42~26.18)	21.8	2020/7/30
D2600V2	Head	14.00	6.25	56.00	25.00	56.8 (51.12~62.48)	24.9 (22.41~27.39)	21.9	2020/8/19
Validation Kit		Measured SAR 100mW	Measured SAR 100mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W) (±10%)	Target SAR (normalized to 1W) (±10%)	Liquid Temp. (°C)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
D5GHzV2	Head(5.25GHz)	7.97	2.30	79.70	23.00	75.2 (67.68~82.72)	21.5 (19.35~23.65)	22.3	2020/8/12
	Head(5.6GHz)	8.48	2.42	84.80	24.20	80.0 (72.0~88.0)	22.7 (20.43~24.97)	22.3	2020/8/13
	Head(5.75GHz)	7.84	2.23	78.40	22.30	78.7 (70.83~86.57)	22.3 (20.07~24.53)	22.3	2020/8/14

Table 5: SAR System Check Result

6.2.3 Detailed System Check Results

Please see the Appendix A

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgs.com
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

7 Test Configuration

7.1 3G SAR Test Reduction Procedure

According to KDB 941225D01, in the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as "otherwise" in the applicable procedures; SAR measurement is required for the secondary mode.

7.2 Operation Configurations

7.2.1 GSM Test Configuration

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a base station by air link. Using CMW500 the power lever is set to "5" and "0" in SAR of GSM 850 and GSM 1900. The tests in the band of GSM 850 and GSM 1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

The 3G SAR test reduction procedure is applied to 8-PSK EDGE with GMSK GPRS/EDGE as the primary mode

7.2.2 WCDMA Test Configuration

1) . Output Power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1's" for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

2) . Head SAR

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure

3) . Body SAR

SAR for body configurations is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When more than 2 DPDCHn are supported by the handset, it may be necessary to configure additional DPDCHn using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

4) . HSDPA / HSUPA / DC-HSDPA

According to KDB 941225 D01v03, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA

a) HSDPA

HSDPA is configured according to the applicable UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms and a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors(β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) are set according to values indicated in the following table. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com



Sub-test	β_c	Bd	$\beta_d(\text{SF})$	β_c/β_d	β_{hs}	CM(dB)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0
2	12/15(3)	15/15(3)	64	12/15(3)	24/15	1.0	0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note1: ΔACK , ΔNACK and $\Delta\text{CQI}=8$ Ahs = $\beta_{hs}/\beta_c=30/15$ $\beta_{hs}=30/15*\beta_c$
Note2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1.A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, ΔACK and $\Delta\text{NACK}=8$ (Ahs=30/15) with $\beta_{hs}=30/15*\beta_c$, and $\Delta\text{CQI}=7$ (Ahs=24/15) with $\beta_{hs}=24/15*\beta_c$.
Note3: CM=1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI"s
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 6: settings of required H-Set 1 QPSK acc. to 3GPP 34.121

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	MaximumH S-DSCH Transport BlockBits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Table 7: HSDPA UE category

b) HSUPA

Due to inner loop power control requirements in HSUPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSUPA should be configured according to the values indicated below as well as other applicable procedures described in the „WCDMA Handset“ and „Release 5 HSUPA Data Device“ sections of 3G device.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

Sub-test ¹	β_c ²	β_d ³	β_d (SF) ³	β_c/β_d ³	β_{hs} ⁽¹⁾	β_{ec} ³	β_{ed} ³	β_c (SF) ³	β_{ed} (code) ³	CM ⁽²⁾ (dB) ³	MP R ³ (dB) ³	AG ⁽⁴⁾ Inde x ³	E-TFC I ³
1 ³	11/15 ⁽³⁾	15/15 ⁽³⁾	64 ³	11/15 ⁽³⁾	22/15 ³	209/225 ³	1039/225 ³	4 ³	1 ³	1.0 ³	0.0 ³	20 ³	75 ³
2 ³	6/15 ³	15/15 ³	64 ³	6/15 ³	12/15 ³	12/15 ³	94/75 ³	4 ³	1 ³	3.0 ³	2.0 ³	12 ³	67 ³
3 ³	15/15 ³	9/15 ³	64 ³	15/9 ³	30/15 ³	30/15 ³	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4 ³	2 ³	2.0 ³	1.0 ³	15 ³	92 ³
4 ³	2/15 ³	15/15 ³	64 ³	2/15 ³	4/15 ³	2/15 ³	56/75 ³	4 ³	1 ³	3.0 ³	2.0 ³	17 ³	71 ³
5 ³	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64 ³	15/15 ⁽⁴⁾	30/15 ³	24/15 ³	134/15 ³	4 ³	1 ³	1.0 ³	0.0 ³	21 ³	81 ³
Note 1: ΔACK, $\Delta NACK$ and $\Delta CQI = 8$ $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$ Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCCH, HS-DPCCCH, E-DPDCH and E-DPCCCH the MPR is based on the relative CM difference³ Note 3 : For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$³ Note 4 : For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$³ Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g³ Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.³													

Table 8: Subtests for UMTS Release 6 HSUPA

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF	11484	5.76
	4	4	2	4	20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF	22996	?
	4	4	10	4	20000	?
NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM. (TS25.306-7.3.0).						

Table 9: HSUPA UE category

c) DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a Second serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13.

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK.

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI's
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Table 10: settings of required H-Set 12 QPSK acc. to 3GPP 34.121

Note:

1. The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.
2. Maximum number of transmission is limited to 1,i.e.,retransmission is not allowed. The redundancy and constellation version 0 shall be used.

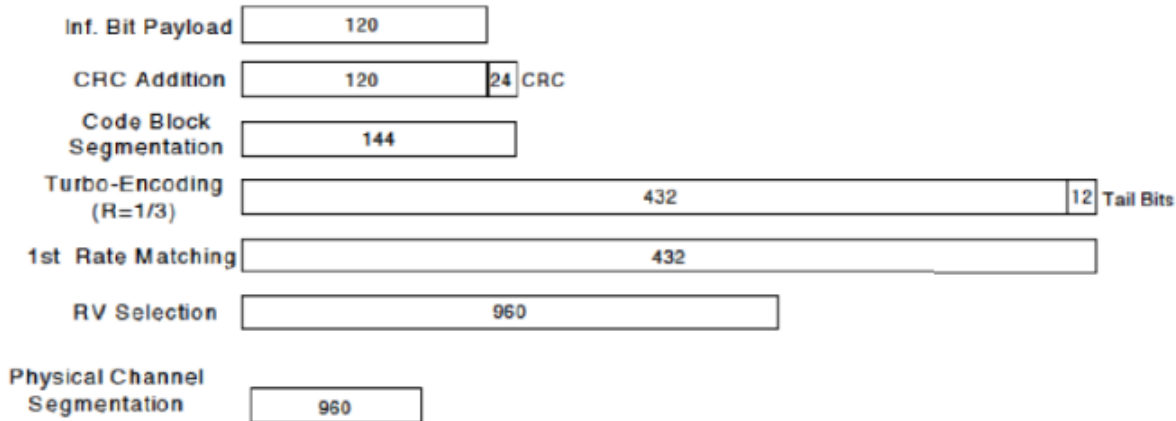


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test ^o	β_c ^o	β_d ^o	β_d ·(SF) ^o	β_c ·/ β_d ^o	$\beta_{hs}(1)$ ^o	CM(dB)(2) ^o	MPR·(dB) ^o
1 ^o	2/15 ^o	15/15 ^o	64 ^o	2/15 ^o	4/15 ^o	0.0 ^o	0 ^o
2 ^o	12/15(3) ^o	15/15(3) ^o	64 ^o	12/15(3) ^o	24/15 ^o	1.0 ^o	0 ^o
3 ^o	15/15 ^o	8/15 ^o	64 ^o	15/8 ^o	30/15 ^o	1.5 ^o	0.5 ^o
4 ^o	15/15 ^o	4/15 ^o	64 ^o	15/4 ^o	30/15 ^o	1.5 ^o	0.5 ^o

Note 1: · Δ ACK, · Δ NACK and · Δ CQI=8 $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$ ^o
Note 2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.^o
Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$ ^o

Up commands are set continuously to set the UE to Max power.

Note:

1. The Dual Carriers transmission only applies to HSDPA physical channels
2. The Dual Carriers belong to the same Node and are on adjacent carriers.
3. The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
4. The Dual Carriers operate in the same frequency band.
5. The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.
6. The device doesn't support carrier aggregation for it just can operate in Release 8.

d) HSPA+

SAR is required for Rel. 7 HSPA+ when SAR is required for Rel. 6 HSPA; otherwise, the 3G SAR test reduction procedure is applied to (uplink) HSPA+ with 12.2 kbps RMC as the primary mode. Power is measured for HSPA+ that supports uplink 16 QAM according to configurations in Table C.11.1.4 of 3GPP TS 34.121-1 to determine SAR test reduction.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{EC}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0). Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default. Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value. Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.											

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com


7.2.3 WiFi Test Configuration

A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement.

7.2.3.1 Duty cycle

1) Wi-Fi 2.4GHz 802.11b:

Duty cycle= $12.2058/12.3507=98.83\%$

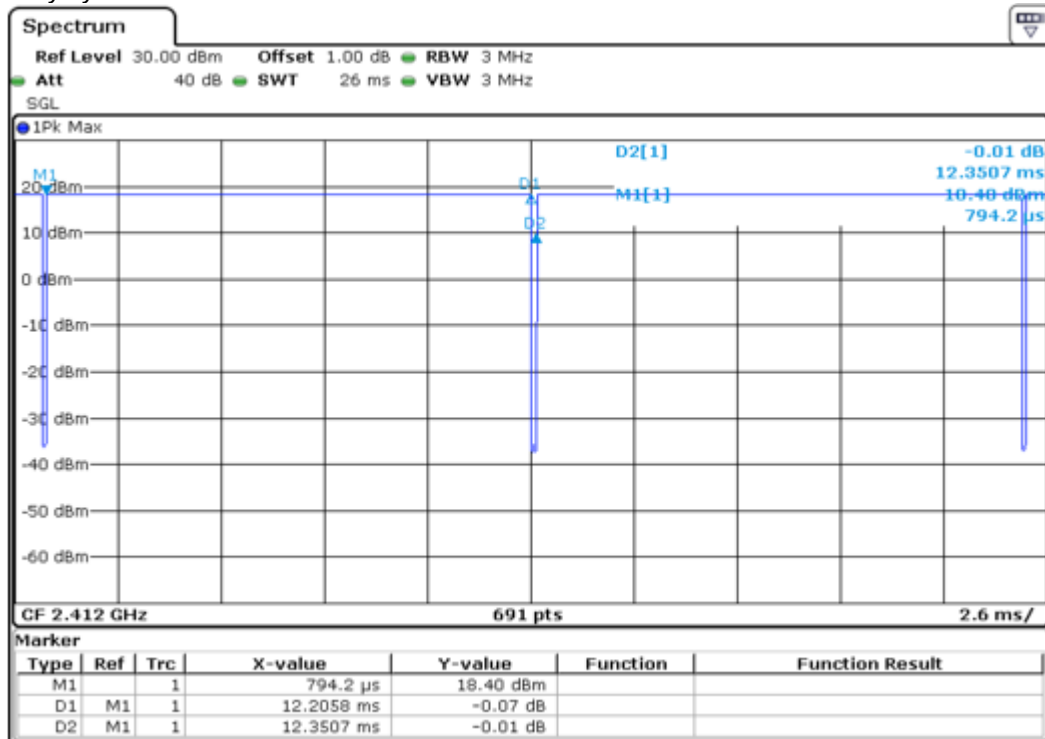

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·津东新城科原三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

2) Wi-Fi 5GHz 802.11n-HT40:
Duty cycle=2.7362/2.8406=96.32%

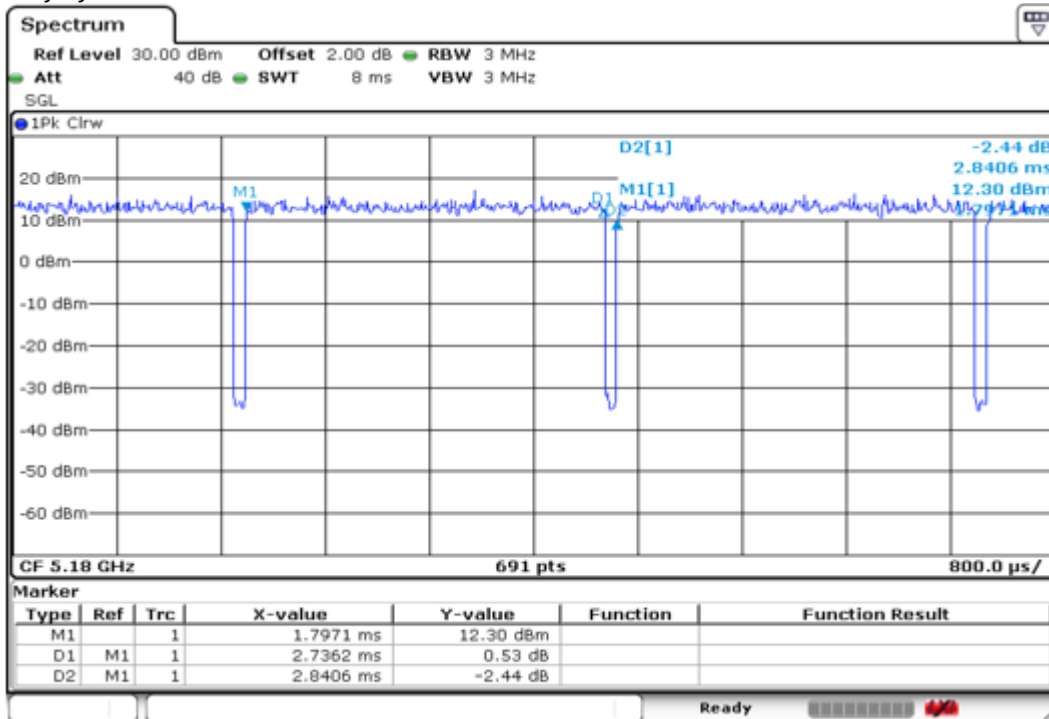

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

7.2.3.2 Initial Test Position SAR Test Reduction Procedure

DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. The initial test position procedure is described in the following:

- 1) . When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band. SAR is also not required for that exposure configuration in the subsequent test configuration(s).
- 2) . When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1-g SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and edges) are tested.
- 3) . For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested. a) Additional power measurements may be required for this step, which should be limited to those necessary for identifying the subsequent highest output power channels.

7.2.3.3 Initial Test Configuration Procedures

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required. SAR test reduction for subsequent highest output test channels is determined according to *reported* SAR of the initial test configuration. For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the *reported* SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until *reported* SAR is ≤ 1.2 W/kg or all required channels are tested.

7.2.3.4 Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.

- 1) . When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

- 2) . When the highest *reported* SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.
- 3) . The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.
 - a) SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.
 - b) SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the *reported* SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is > 1.2 W/kg or until all required channels are tested. i) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.
- 4) . SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by recursively applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:
 - a) replace "subsequent test configuration" with "next subsequent test configuration" (i.e., subsequent next highest specified maximum output power configuration)
 - b) replace "initial test configuration" with "all tested higher output power configurations"

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com



7.2.3.5 2.4 GHz WiFi SAR Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions. When SAR measurement is required for an OFDM configuration, the initial test configuration, subsequent test configuration and initial test position procedures are applied. The SAR test exclusion requirements for 802.11g/n OFDM configurations are described in following.

- **802.11b DSSS SAR Test Requirements**

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) . When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) . When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

- **2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements**

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3, including sub-sections). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) . When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) . When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

- **SAR Test Requirements for OFDM configurations**

When SAR measurement is required for 802.11 g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

7.2.3.6 5 GHz WiFi SAR Procedures

- **U-NII-1 and U-NII-2A Bands**

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following:

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.
- 3) The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50. Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest reported SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is > 1.2 W/kg, SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.

- **U-NII-2C and U-NII-3 Bands**

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, all channels that operate at 5.60 – 5.65 GHz must be included to apply the SAR test reduction and measurement procedures.

When the same transmitter and antenna(s) are used for U-NII-2C band and U-NII-3 band or 5.8 GHz band of §15.247, the bands may be aggregated to enable additional channels with 20, 40 or 80 MHz bandwidth to span across the band gap, as illustrated in Appendix B. The maximum output power for the additional band gap channels is limited to the lower of those certified for the bands. Unless band gap channels are permanently disabled, they must be considered for SAR testing. The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

• **OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements**

The initial test configuration for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

- 1) The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
- 2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- 3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- 4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n. After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.
 - a) The channel closest to mid-band frequency is selected for SAR measurement.
 - b) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

• **SAR Test Requirements for OFDM configurations**

When SAR measurement is required for 802.11 a/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

7.2.4 LTE Test Configuration

LTE modes were tested according to FCC KDB 941225 D05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The Anritsu MT8820C was used for LTE output power measurements and SAR testing. Max power control was used so the UE transmits with maximum output power during SAR testing. SAR must be measured with the maximum TTI (transmit time interval) supported by the device in each LTE configuration.

A) Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

B) MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3

C) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

D) Largest channel bandwidth standalone SAR test requirements

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

4) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is > ½ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

E) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > ½ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

8 Test Result

8.1 Measurement of RF Conducted Power

8.1.1 Conducted Power of Main Antenna

8.1.1.1 Conducted Power of GSM

GSM 850										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		128	190	251			128	190	251	
GSM(GMSK)	GSM	33.25	33.26	32.96	33.70	-9.19	24.06	24.07	23.77	24.51
GPRS/EGPRS (GMSK)	1 TX Slot	33.24	33.19	32.97	33.70	-9.19	24.05	24.00	23.78	24.51
	2 TX Slots	32.07	31.98	31.78	32.70	-6.18	25.89	25.80	25.60	26.52
	3 TX Slots	30.44	30.49	30.30	30.70	-4.42	26.02	26.07	25.88	26.28
	4 TX Slots	29.30	29.34	29.21	29.70	-3.17	26.13	26.17	26.04	26.53
EGPRS(8PSK)	1 TX Slot	27.64	27.63	27.66	27.70	-9.19	18.45	18.44	18.47	18.51
	2 TX Slots	26.60	26.65	26.64	26.70	-6.18	20.42	20.47	20.46	20.52
	3 TX Slots	24.64	24.67	24.65	24.70	-4.42	20.22	20.25	20.23	20.28
	4 TX Slots	23.56	23.67	23.63	23.70	-3.17	20.39	20.50	20.46	20.53

GSM 1900										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		512	661	810			512	661	810	
GSM(GMSK)	GSM	30.33	30.35	30.20	30.70	-9.19	21.14	21.16	21.01	21.51
GPRS/EGPRS (GMSK)	1 TX Slot	30.32	30.29	30.22	30.70	-9.19	21.13	21.10	21.03	21.51
	2 TX Slots	28.34	28.30	28.33	29.70	-6.18	22.16	22.12	22.15	23.52
	3 TX Slots	26.63	26.59	26.54	27.70	-4.42	22.21	22.17	22.12	23.28
	4 TX Slots	25.63	25.67	25.55	26.70	-3.17	22.46	22.50	22.38	23.53
EGPRS(8PSK)	1 TX Slot	26.64	26.63	26.61	26.70	-9.19	17.45	17.44	17.42	17.51
	2 TX Slots	25.61	25.57	25.57	25.70	-6.18	19.43	19.39	19.39	19.52
	3 TX Slots	23.63	23.63	23.56	23.70	-4.42	19.21	19.21	19.14	19.28
	4 TX Slots	21.63	21.61	21.64	21.70	-3.17	18.46	18.44	18.47	18.53

Table 11: Conducted Power of GSM

Note:

1) . CMW500 measures GSM peak and average output power for active timeslots. For SAR the time based average power is relevant. The difference in between depends on the duty cycle of the TDMA signal:

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.15	1:2.77	1:2.075
Time based avg. power compared to slotted avg. power	-9.19	-6.18	-4.42	-3.17

2) . The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:

$$\text{Frame-averaged power} = 10 \times \log (\text{Burst-averaged power mW} \times \text{Slot used} / 8)$$

3) . When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used



8.1.1.2 Conducted Power of WCDMA

WCDMA Band II					
Average Conducted Power(dBm)					
Channel		9262	9400	9538	Tune up
WCDMA	12.2kbps RMC	24.62	24.66	24.64	24.70
	12.2kbps AMR	24.52	24.59	24.54	24.70
HSDPA	Subtest 1	22.74	22.70	22.68	23.70
	Subtest 2	22.75	22.71	22.63	23.70
	Subtest 3	22.68	22.66	22.63	23.70
	Subtest 4	22.65	22.69	22.64	23.70
HSUPA	Subtest 1	21.56	21.54	21.56	22.70
	Subtest 2	21.54	21.57	21.49	22.70
	Subtest 3	21.58	21.43	21.42	22.70
	Subtest 4	21.43	21.53	21.40	22.70
	Subtest 5	21.49	21.46	21.53	22.70
DC-HSDPA	Subtest 1	22.41	22.51	22.45	23.70
	Subtest 2	22.49	22.46	22.35	23.70
	Subtest 3	22.42	22.33	22.40	23.70
	Subtest 4	22.41	22.42	22.37	23.70
HSPA+	16QAM	20.64	20.60	20.47	21.70

WCDMA Band IV					
Average Conducted Power(dBm)					
Channel		1312	1412	1513	Tune up
WCDMA	12.2kbps RMC	23.95	23.96	23.81	24.20
	12.2kbps AMR	23.85	23.89	23.83	24.20
HSDPA	Subtest 1	22.52	22.45	22.42	23.20
	Subtest 2	22.47	22.43	22.38	23.20
	Subtest 3	22.38	22.38	22.39	23.20
	Subtest 4	22.42	22.43	22.40	23.20
HSUPA	Subtest 1	21.29	21.29	21.35	22.20
	Subtest 2	21.27	21.28	21.25	22.20
	Subtest 3	21.32	21.16	21.19	22.20
	Subtest 4	21.18	21.32	21.16	22.20
	Subtest 5	21.24	21.21	21.28	22.20
DC-HSDPA	Subtest 1	22.14	22.26	22.20	23.20
	Subtest 2	22.22	22.21	22.12	23.20
	Subtest 3	22.22	22.10	22.13	23.20
	Subtest 4	22.16	22.13	22.12	23.20
HSPA+	16QAM	20.37	20.33	20.22	21.20

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

Member of the SGS Group(SGS SA)



WCDMA Band V					
Average Conducted Power(dBm)					
Channel		4132	4182	4233	Tune up
WCDMA	12.2kbps RMC	24.91	24.95	24.93	25.20
	12.2kbps AMR	24.87	24.93	24.92	25.20
HSDPA	Subtest 1	23.11	23.09	23.11	24.20
	Subtest 2	23.09	23.12	23.09	24.20
	Subtest 3	23.07	23.05	23.02	24.20
	Subtest 4	23.00	23.06	23.04	24.20
HSUPA	Subtest 1	21.97	22.04	21.96	23.20
	Subtest 2	21.95	22.00	21.94	23.20
	Subtest 3	22.00	22.13	21.85	23.20
	Subtest 4	21.99	22.17	22.02	23.20
	Subtest 5	22.04	22.09	22.09	23.20
DC-HSDPA	Subtest 1	23.02	22.96	22.93	24.20
	Subtest 2	22.93	23.01	22.96	24.20
	Subtest 3	22.94	22.88	22.85	24.20
	Subtest 4	22.87	22.97	22.94	24.20
HSPA+	16QAM	20.97	21.00	20.94	22.20

Table 12: Conducted Power of WCDMA

Note:

- 1) when the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

8.1.1.3 Conducted Power of LTE

LTE Band 2				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18607	18900	19193	
1.4MHz	QPSK	1	0	23.33	23.26	23.32	24.20
		1	2	23.59	23.45	23.53	24.20
		1	5	23.25	23.3	23.42	24.20
		3	0	23.42	23.35	23.51	24.20
		3	2	23.42	23.37	23.47	24.20
		3	3	23.54	23.35	23.46	24.20
		6	0	22.39	22.35	22.52	23.20
	16QAM	1	0	22.84	22.54	22.74	23.20
		1	2	22.94	22.76	22.45	23.20
		1	5	22.45	22.89	22.44	23.20
		3	0	22.45	22.3	22.38	23.20
		3	2	22.48	22.58	22.52	23.20
		3	3	22.53	22.45	22.51	23.20
		6	0	21.57	21.36	21.57	22.20
	64QAM	1	0	21.32	21.25	21.34	22.20
		1	2	21.29	21.26	21.22	22.20
		1	5	21.3	21.29	21.29	22.20
		3	0	21.07	21.18	21.28	22.20
		3	2	21.13	20.95	21.1	22.20
		3	3	21.15	20.96	21.11	22.20
		6	0	20.38	20.33	20.41	21.20
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18615	18900	19185	
3MHz	QPSK	1	0	23.33	23.28	23.28	24.20
		1	7	23.59	23.51	23.63	24.20
		1	14	23.37	23.4	23.4	24.20
		8	0	22.43	22.44	22.52	23.20
		8	4	22.46	22.49	22.56	23.20
		8	7	22.33	22.44	22.45	23.20
		15	0	22.37	22.32	22.42	23.20
	16QAM	1	0	22.69	22.58	22.65	23.20
		1	7	22.91	22.84	22.77	23.20
		1	14	22.75	22.64	22.73	23.20
		8	0	21.37	21.32	21.49	22.20
		8	4	21.45	21.36	21.45	22.20
		8	7	21.39	21.36	21.37	22.20
		15	0	21.42	21.42	21.43	22.20
	64QAM	1	0	21.17	21.28	21.38	22.20
		1	7	21.27	21.05	21.25	22.20
		1	14	21.28	21.11	21.24	22.20
		8	0	20.43	20.28	20.45	21.20

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

		8	4	20.19	20.32	20.46	21.20
		8	7	20.33	20.13	20.33	21.20
		15	0	20.37	20.2	20.31	21.20
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18625	18900	19175	
5MHz	QPSK	1	0	23.2	23.19	23.21	24.20
		1	13	23.22	23.35	23.38	24.20
		1	24	23.22	23.27	23.27	24.20
		12	0	22.2	22.3	22.43	23.20
		12	6	22.28	22.46	22.57	23.20
		12	13	22.31	22.34	22.43	23.20
		25	0	22.42	22.39	22.43	23.20
	16QAM	1	0	22.72	22.78	22.44	23.20
		1	13	22.62	22.41	22.91	23.20
		1	24	22.78	22.71	22.28	23.20
		12	0	21.28	21.29	21.53	22.20
		12	6	21.46	21.46	21.5	22.20
		12	13	21.36	21.38	21.34	22.20
		25	0	21.39	21.41	21.37	22.20
	64QAM	1	0	21.17	21.26	21.38	22.20
		1	13	21.27	21.05	21.23	22.20
		1	24	21.25	21.11	21.25	22.20
		12	0	20.43	20.29	20.47	21.20
		12	6	20.23	20.33	20.48	21.20
		12	13	20.32	20.09	20.33	21.20
		25	0	20.39	20.19	20.35	21.20
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18650	18900	19150	
10MHz	QPSK	1	0	23.4	23.5	23.48	24.20
		1	25	23.61	23.49	23.66	24.20
		1	49	23.43	23.35	23.5	24.20
		25	0	22.53	22.48	22.52	23.20
		25	13	22.43	22.58	22.54	23.20
		25	25	22.45	22.5	22.56	23.20
		50	0	22.47	22.53	22.61	23.20
	16QAM	1	0	22.49	22.67	22.95	23.20
		1	25	23.03	22.66	22.74	23.20
		1	49	22.52	22.49	22.34	23.20
		25	0	21.53	21.52	21.55	22.20
		25	13	21.61	21.57	21.5	22.20
		25	25	21.46	21.47	21.53	22.20
		50	0	21.54	21.42	21.5	22.20
	64QAM	1	0	21.17	21.26	21.41	22.20
		1	25	21.24	21.06	21.23	22.20
		1	49	21.27	21.1	21.25	22.20
		25	0	20.44	20.33	20.5	21.20
		25	13	20.21	20.36	20.44	21.20

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

		25	25	20.36	20.1	20.33	21.20
		50	0	20.38	20.2	20.33	21.20
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18675	18900	19125	
15MHz	QPSK	1	0	23.38	23.39	23.4	24.20
		1	38	23.53	23.39	23.44	24.20
		1	74	23.41	23.39	23.44	24.20
		36	0	22.44	22.55	22.63	23.20
		36	18	22.51	22.59	22.49	23.20
		36	39	22.41	22.52	22.59	23.20
		75	0	22.48	22.46	22.46	23.20
	16QAM	1	0	22.58	22.56	22.92	23.20
		1	38	23	22.74	23	23.20
		1	74	22.39	22.39	22.59	23.20
		36	0	21.48	21.51	21.46	22.20
		36	18	21.53	21.57	21.5	22.20
		36	39	21.38	21.53	21.48	22.20
		75	0	21.49	21.45	21.55	22.20
	64QAM	1	0	21.15	21.26	21.38	22.20
		1	38	21.25	21.02	21.27	22.20
		1	74	21.28	21.09	21.28	22.20
		36	0	20.45	20.32	20.49	21.20
		36	18	20.23	20.31	20.48	21.20
		36	39	20.36	20.12	20.33	21.20
		75	0	20.38	20.18	20.37	21.20
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18700	18900	19100	
20MHz	QPSK	1	0	23.31	23.41	23.27	24.20
		1	50	23.32	23.51	23.7	24.20
		1	99	23.21	23.28	23.27	24.20
		50	0	22.44	22.4	22.59	23.20
		50	25	22.41	22.46	22.46	23.20
		50	50	22.41	22.39	22.38	23.20
		100	0	22.44	22.35	22.43	23.20
	16QAM	1	0	22.49	22.76	22.46	23.20
		1	50	22.99	22.63	22.75	23.20
		1	99	22.74	22.34	22.54	23.20
		50	0	21.39	21.4	21.61	22.20
		50	25	21.41	21.5	21.63	22.20
		50	50	21.5	21.31	21.47	22.20
		100	0	21.5	21.38	21.53	22.20
	64QAM	1	0	21.27	21.38	21.52	22.20
		1	50	21.39	21.17	21.37	22.20
		1	99	21.39	21.24	21.38	22.20
		50	0	20.55	20.43	20.6	21.20
		50	25	20.34	20.46	20.58	21.20
		50	50	20.46	20.23	20.43	21.20

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgs.com
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

Member of the SGS Group (SGS SA)



		100	0	20.49	20.33	20.48	21.20
--	--	-----	---	-------	-------	-------	-------

LTE Band 4				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19957	20175	20393	
1.4MHz	QPSK	1	0	23.4	23.34	23.24	24.20
		1	2	23.55	23.37	23.15	24.20
		1	5	23.37	23.22	23.08	24.20
		3	0	23.57	23.39	23.19	24.20
		3	2	23.67	23.45	23.35	24.20
		3	3	23.46	23.3	23.22	24.20
		6	0	22.44	22.36	22.29	23.20
	16QAM	1	0	22.32	22.77	22.41	23.20
		1	2	22.75	22.67	22.54	23.20
		1	5	22.76	22.33	22.11	23.20
		3	0	22.51	22.45	22.26	23.20
		3	2	22.43	22.52	22.35	23.20
		3	3	22.47	22.4	22.22	23.20
		6	0	21.56	21.55	21.25	22.20
	64QAM	1	0	21.53	21.43	21.31	22.20
		1	2	21.5	21.47	21.1	22.20
		1	5	21.55	21.25	21.02	22.20
		3	0	21.07	21.08	21.01	22.20
		3	2	21	21.01	20.86	22.20
		3	3	21.01	20.96	20.91	22.20
		6	0	20.61	20.32	20.08	21.20
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19965	20175	20385	
3MHz	QPSK	1	0	23.32	23.4	23.26	24.20
		1	7	23.66	23.71	23.37	24.20
		1	14	23.27	23.41	23.14	24.20
		8	0	22.48	22.4	22.22	23.20
		8	4	22.5	22.4	22.31	23.20
		8	7	22.52	22.35	22.17	23.20
		15	0	22.43	22.3	22.23	23.20
	16QAM	1	0	22.32	22.93	22.59	23.20
		1	7	22.5	22.95	22.86	23.20
		1	14	22.73	22.53	22.47	23.20
		8	0	21.58	21.48	21.42	22.20
		8	4	21.67	21.58	21.42	22.20
		8	7	21.63	21.58	21.21	22.20
		15	0	21.65	21.4	21.14	22.20
	64QAM	1	0	21.22	21.18	21.12	22.20
		1	7	21.15	21.12	21.01	22.20
		1	14	21.11	21.08	21.02	22.20

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com

		8	0	20.32	20.25	20.15	21.20
		8	4	20.23	20.24	20.13	21.20
		8	7	20.25	20.2	20.06	21.20
		15	0	20.19	20.14	20.07	21.20
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19975	20175	20375	
5MHz	QPSK	1	0	23.35	23.14	22.97	24.20
		1	13	23.37	23.4	23.25	24.20
		1	24	23.18	23.07	22.99	24.20
		12	0	22.4	22.31	22.28	23.20
		12	6	22.44	22.37	22.27	23.20
		12	13	22.44	22.32	22.17	23.20
		25	0	22.43	22.41	22.26	23.20
	16QAM	1	0	22.5	22.44	22.42	23.20
		1	13	22.85	22.65	22.45	23.20
		1	24	22.38	22.31	22.28	23.20
		12	0	21.48	21.29	21.18	22.20
		12	6	21.48	21.38	21.2	22.20
		12	13	21.51	21.31	21.12	22.20
		25	0	21.55	21.4	21.18	22.20
	64QAM	1	0	21.21	21.15	21.11	22.20
		1	13	21.16	21.1	20.99	22.20
		1	24	21.14	21.1	20.97	22.20
		12	0	20.33	20.25	20.14	21.20
		12	6	20.28	20.2	20.15	21.20
		12	13	20.27	20.19	20.04	21.20
		25	0	20.2	20.17	20.07	21.20
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20000	20175	20350	
10MHz	QPSK	1	0	23.5	23.42	23.34	24.20
		1	25	23.52	23.51	23.34	24.20
		1	49	23.36	23.24	23.15	24.20
		25	0	22.5	22.44	22.33	23.20
		25	13	22.52	22.37	22.29	23.20
		25	25	22.44	22.38	22.2	23.20
		50	0	22.45	22.4	22.26	23.20
	16QAM	1	0	22.92	22.62	22.5	23.20
		1	25	22.82	22.73	22.86	23.20
		1	49	22.35	22.69	22.41	23.20
		25	0	21.57	21.4	21.39	22.20
		25	13	21.66	21.44	21.38	22.20
		25	25	21.59	21.39	21.18	22.20
		50	0	21.55	21.38	21.3	22.20
	64QAM	1	0	21.22	21.17	21.08	22.20
		1	25	21.13	21.11	20.97	22.20
		1	49	21.12	21.05	21.01	22.20
		25	0	20.36	20.26	20.17	21.20

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com

		25	13	20.23	20.19	20.17	21.20
		25	25	20.27	20.19	20.05	21.20
		50	0	20.24	20.18	20.09	21.20
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20025	20175	20325	
15MHz	QPSK	1	0	23.47	23.32	23.19	24.20
		1	38	23.44	23.46	23.21	24.20
		1	74	23.27	23.22	23.19	24.20
		36	0	22.42	22.45	22.38	23.20
		36	18	22.47	22.44	22.41	23.20
		36	39	22.48	22.39	22.28	23.20
		75	0	22.41	22.42	22.27	23.20
	16QAM	1	0	22.47	22.46	22.33	23.20
		1	38	22.59	22.56	22.65	23.20
		1	74	22.22	22.76	22.14	23.20
		36	0	21.47	21.38	21.31	22.20
		36	18	21.39	21.45	21.33	22.20
		36	39	21.45	21.3	21.27	22.20
		75	0	21.51	21.34	21.32	22.20
	64QAM	1	0	21.17	21.18	21.08	22.20
		1	38	21.17	21.12	21.02	22.20
		1	74	21.16	21.09	21.01	22.20
		36	0	20.34	20.28	20.14	21.20
		36	18	20.25	20.19	20.13	21.20
		36	39	20.27	20.23	20.05	21.20
		75	0	20.24	20.18	20.09	21.20
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20050	20175	20300	
20MHz	QPSK	1	0	23.3	23.26	23.19	24.20
		1	50	23.38	23.37	23.26	24.20
		1	99	23.17	23.09	23.06	24.20
		50	0	22.38	22.28	22.36	23.20
		50	25	22.39	22.44	22.3	23.20
		50	50	22.5	22.34	22.24	23.20
		100	0	22.4	22.33	22.25	23.20
	16QAM	1	0	22.42	22.35	22.75	23.20
		1	50	23.02	22.48	22.65	23.20
		1	99	22.41	22.65	22.25	23.20
		50	0	21.46	21.35	21.39	22.20
		50	25	21.46	21.4	21.36	22.20
		50	50	21.39	21.35	21.25	22.20
		100	0	21.36	21.31	21.22	22.20
	64QAM	1	0	21.32	21.28	21.23	22.20
		1	50	21.28	21.24	21.12	22.20
		1	99	21.26	21.2	21.12	22.20
		50	0	20.46	20.4	20.29	21.20
		50	25	20.38	20.34	20.28	21.20

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgs.com
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com

Member of the SGS Group (SGS SA)



		50	50	20.37	20.34	20.18	21.20
		100	0	20.34	20.29	20.19	21.20

LTE Band 5				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20407	20525	20643	
1.4MHz	QPSK	1	0	23.67	23.78	23.7	24.70
		1	2	23.99	23.93	23.78	24.70
		1	5	23.71	23.74	23.73	24.70
		3	0	23.83	23.92	23.71	24.70
		3	2	24.02	23.83	23.83	24.70
		3	3	23.86	23.82	23.83	24.70
		6	0	22.82	22.96	22.91	23.70
	16QAM	1	0	22.86	22.82	22.53	23.70
		1	2	22.9	23.09	22.75	23.70
		1	5	22.66	23.2	22.83	23.70
		3	0	22.67	22.87	22.67	23.70
		3	2	22.63	22.75	22.89	23.70
		3	3	22.78	22.89	22.72	23.70
		6	0	22.04	22.03	22.11	22.70
	64QAM	1	0	21.56	21.55	21.52	22.70
		1	2	21.49	21.55	21.43	22.70
		1	5	21.36	21.37	21.5	22.70
		3	0	21.46	21.41	21.39	22.70
		3	2	21.35	21.42	21.31	22.70
		3	3	21.64	21.52	21.36	22.70
		6	0	20.59	20.65	20.47	21.70
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20415	20525	20635	
3MHz	QPSK	1	0	23.67	23.71	23.71	24.70
		1	7	23.95	23.98	23.91	24.70
		1	14	23.81	23.78	23.81	24.70
		8	0	22.84	22.81	22.79	23.70
		8	4	22.87	22.87	22.91	23.70
		8	7	22.71	22.76	22.85	23.70
		15	0	22.84	22.9	22.84	23.70
	16QAM	1	0	22.87	22.64	22.58	23.70
		1	7	22.7	22.95	22.8	23.70
		1	14	23.14	22.95	23.11	23.70
		8	0	22.05	22.16	22.05	22.70
		8	4	21.84	21.92	21.96	22.70
		8	7	21.89	21.87	21.89	22.70
		15	0	21.81	21.81	21.85	22.70
	64QAM	1	0	21.68	21.65	21.66	22.70
		1	7	21.63	21.66	21.58	22.70
		1	14	21.47	21.49	21.62	22.70
		8	0	20.53	20.64	20.55	21.70
		8	4	20.58	20.61	20.68	21.70
		8	7	20.64	20.6	20.56	21.70
		15	0	20.4	20.39	20.59	21.70

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

Member of the SGS Group(SGS SA)

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20425	20525	20625	
5MHz	QPSK	1	0	23.73	23.72	23.65	24.70
		1	13	23.8	23.91	23.83	24.70
		1	24	23.74	23.68	23.74	24.70
		12	0	22.81	22.9	22.86	23.70
		12	6	22.92	22.82	22.89	23.70
		12	13	22.79	22.76	22.88	23.70
		25	0	22.86	22.82	22.82	23.70
	16QAM	1	0	22.73	22.88	22.53	23.70
		1	13	23.15	23.29	22.65	23.70
		1	24	22.81	22.75	22.96	23.70
		12	0	22.02	22.04	22.11	22.70
		12	6	21.81	21.85	21.86	22.70
		12	13	21.85	21.74	21.77	22.70
		25	0	21.76	21.91	21.78	22.70
	64QAM	1	0	21.8	21.77	21.81	22.70
		1	13	21.75	21.78	21.71	22.70
		1	24	21.58	21.59	21.76	22.70
		12	0	20.64	20.75	20.65	21.70
		12	6	20.72	20.72	20.78	21.70
		12	13	20.74	20.72	20.67	21.70
		25	0	20.53	20.53	20.71	21.70
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20450	20525	20600	
10MHz	QPSK	1	0	23.79	23.82	23.72	24.70
		1	25	23.96	23.95	23.74	24.70
		1	49	23.77	23.66	23.79	24.70
		25	0	22.84	23.07	22.95	23.70
		25	13	22.97	23	22.84	23.70
		25	25	22.87	22.93	23.03	23.70
		50	0	22.96	23.02	22.89	23.70
	16QAM	1	0	22.87	22.96	22.99	23.70
		1	25	23.06	23.42	23.19	23.70
		1	49	23.13	23.23	22.97	23.70
		25	0	22.02	22.01	22.04	22.70
		25	13	22	22	21.96	22.70
		25	25	21.85	21.85	21.98	22.70
		50	0	21.82	21.95	21.8	22.70
	64QAM	1	0	21.9	21.89	21.92	22.70
		1	25	21.89	21.9	21.86	22.70
		1	49	21.71	21.71	21.86	22.70
		25	0	20.79	20.9	20.75	21.70
		25	13	20.83	20.87	20.88	21.70
		25	25	20.85	20.82	20.79	21.70
		50	0	20.66	20.63	20.82	21.70

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

LTE Band 7				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20775	21100	21425	
5MHz	QPSK	1	0	23.5	23.66	23.63	24.70
		1	13	23.74	23.69	23.74	24.70
		1	24	23.54	23.63	23.51	24.70
		12	0	22.67	22.76	22.79	23.70
		12	6	22.79	22.83	22.87	23.70
		12	13	22.66	22.65	22.8	23.70
		25	0	22.69	22.77	22.76	23.70
	16QAM	1	0	22.84	22.74	22.8	23.70
		1	13	22.73	23.2	23.08	23.70
		1	24	22.58	22.77	22.96	23.70
		12	0	22.05	22.1	22.02	22.70
		12	6	21.77	21.88	21.85	22.70
		12	13	21.71	21.76	21.72	22.70
		25	0	21.65	21.74	21.68	22.70
	64QAM	1	0	21.62	21.65	21.68	22.70
		1	13	21.51	21.32	21.49	22.70
		1	24	21.48	21.45	21.48	22.70
		12	0	20.67	20.58	20.59	21.70
		12	6	20.77	20.77	20.78	21.70
		12	13	20.52	20.37	20.53	21.70
		25	0	20.46	20.5	20.57	21.70
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20800	21100	21400	
10MHz	QPSK	1	0	23.72	23.68	23.79	24.70
		1	25	23.77	23.95	23.94	24.70
		1	49	23.58	23.74	23.77	24.70
		25	0	22.84	22.82	22.79	23.70
		25	13	22.73	22.79	22.91	23.70
		25	25	22.8	22.75	22.94	23.70
		50	0	22.81	22.86	22.87	23.70
	16QAM	1	0	22.76	22.8	22.56	23.70
		1	25	22.78	22.97	22.92	23.70
		1	49	22.84	22.84	23.11	23.70
		25	0	22.06	22.06	22.08	22.70
		25	13	21.76	21.85	21.84	22.70
		25	25	21.9	21.79	21.79	22.70
		50	0	21.84	21.81	21.94	22.70
	64QAM	1	0	21.62	21.67	21.65	22.70
		1	25	21.5	21.58	21.46	22.70
		1	49	21.46	21.42	21.48	22.70
		25	0	20.63	20.61	20.58	21.70
		25	13	20.76	20.76	20.79	21.70
		25	25	20.54	20.37	20.51	21.70
		50	0	20.49	20.52	20.54	21.70
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20825	21100	21375	

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com

Member of the SGS Group(SGS SA)



SGS-CSTC Standards Technical Services Co., Ltd.
Xi'An Branch

Report No.: ZR/2020/7000601

Page : 62 of 97

15MHz	QPSK	1	0	23.6	23.65	23.65	24.70
		1	38	23.63	23.72	23.87	24.70
		1	74	23.72	23.72	23.72	24.70
		36	0	22.72	22.72	22.7	23.70
		36	18	22.82	22.79	22.83	23.70
		36	39	22.83	22.83	22.86	23.70
		75	0	22.72	22.77	22.77	23.70
	16QAM	1	0	22.97	22.64	22.87	23.70
		1	38	23	22.84	23.02	23.70
		1	74	22.64	23.05	22.87	23.70
		36	0	22.07	22.06	22.03	22.70
		36	18	21.8	21.77	21.82	22.70
		36	39	21.89	21.89	21.85	22.70
		75	0	21.79	21.8	21.79	22.70
	64QAM	1	0	21.76	21.78	21.8	22.70
		1	38	21.61	21.43	21.61	22.70
		1	74	21.58	21.55	21.61	22.70
		36	0	20.78	20.72	20.73	21.70
		36	18	20.89	20.88	20.91	21.70
		36	39	20.65	20.48	20.65	21.70
		75	0	20.61	20.62	20.68	21.70
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20850	21100	21350	
20MHz	QPSK	1	0	23.53	23.33	23.54	24.70
		1	50	23.71	23.69	23.82	24.70
		1	99	23.62	23.64	23.59	24.70
		50	0	22.69	22.75	22.66	23.70
		50	25	22.78	22.69	22.84	23.70
		50	50	22.88	22.68	22.8	23.70
		100	0	22.75	22.75	22.8	23.70
	16QAM	1	0	22.45	22.31	22.92	23.70
		1	50	22.92	23.02	22.94	23.70
		1	99	23.1	22.54	22.99	23.70
		50	0	22.03	22.06	22.05	22.70
		50	25	21.84	21.7	21.84	22.70
		50	50	21.81	21.81	21.87	22.70
		100	0	21.82	21.73	21.76	22.70
	64QAM	1	0	21.9	21.93	21.95	22.70
		1	50	21.71	21.55	21.72	22.70
		1	99	21.68	21.69	21.74	22.70
		50	0	20.92	20.82	20.85	21.70
		50	25	20.99	21	21.03	21.70
		50	50	20.79	20.61	20.77	21.70
		100	0	20.73	20.75	20.81	21.70

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

LTE Band 12				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				23017	23095	23173	
1.4MHz	QPSK	1	0	23.8	23.73	23.73	24.70
		1	2	23.92	23.86	23.94	24.70
		1	5	23.75	23.74	23.74	24.70
		3	0	23.61	23.68	23.61	24.70
		3	2	23.64	23.62	23.6	24.70
		3	3	23.65	23.64	23.66	24.70
	16QAM	6	0	22.84	22.83	22.84	23.70
		1	0	22.97	22.83	22.91	23.70
		1	2	23.1	23.23	23.4	23.70
		1	5	23.05	22.9	22.82	23.70
		3	0	22.67	22.57	22.65	23.70
		3	2	22.65	22.61	22.61	23.70
	64QAM	3	3	22.68	22.68	22.63	23.70
		6	0	22.08	22.05	22.01	22.70
		1	0	21.75	21.72	21.63	22.70
		1	2	21.41	21.54	21.62	22.70
		1	5	21.66	21.45	21.46	22.70
		3	0	21.6	21.62	21.49	22.70
3MHz	QPSK	3	2	21.59	21.44	21.47	22.70
		3	3	21.56	21.31	21.31	22.70
		6	0	20.76	20.5	20.53	21.70
	16QAM	1	0	23.74	23.74	23.84	24.70
		1	7	23.8	24.1	23.88	24.70
		1	14	23.88	23.93	23.68	24.70
	64QAM	8	0	22.81	22.78	22.81	23.70
		8	4	22.92	22.85	22.81	23.70
		8	7	22.77	22.87	22.74	23.70
	16QAM	15	0	22.86	22.89	22.76	23.70
		1	0	23.23	22.89	23.18	23.70
		1	7	23.32	23.09	23.09	23.70
		1	14	22.9	23.07	22.95	23.70
	64QAM	8	0	22.1	22.05	22.04	22.70
		8	4	21.93	21.83	21.87	22.70
		8	7	21.84	21.8	21.87	22.70
	16QAM	15	0	21.9	21.81	21.83	22.70
		1	0	21.72	21.74	21.62	22.70
		1	7	21.44	21.5	21.62	22.70
		1	14	21.67	21.47	21.45	22.70
	64QAM	8	0	20.73	20.7	20.88	21.70
		8	4	20.85	20.78	20.83	21.70
		8	7	20.51	20.55	20.74	21.70
		15	0	20.75	20.51	20.53	21.70
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				23035	23095	23155	

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgs.com
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

Member of the SGS Group(SGS SA)



SGS-CSTC Standards Technical Services Co., Ltd.
Xi'an Branch

Report No.: ZR/2020/7000601

Page : 64 of 97

5MHz	QPSK	1	0	23.64	23.73	23.61	24.70
		1	13	23.85	23.74	23.74	24.70
		1	24	23.8	23.61	23.8	24.70
		12	0	22.84	22.85	22.78	23.70
		12	6	22.87	22.87	22.92	23.70
		12	13	22.95	22.79	22.84	23.70
		25	0	22.89	22.9	22.74	23.70
	16QAM	1	0	23.11	23.15	23.22	23.70
		1	13	23.27	22.98	23.07	23.70
		1	24	22.96	23.23	22.89	23.70
		12	0	22.06	22.11	22.04	22.70
		12	6	21.78	21.83	21.84	22.70
		12	13	21.95	21.77	21.78	22.70
		25	0	21.89	21.84	21.9	22.70
	64QAM	1	0	21.87	21.86	21.77	22.70
		1	13	21.56	21.64	21.76	22.70
		1	24	21.79	21.59	21.58	22.70
		12	0	20.86	20.84	21	21.70
		12	6	20.96	20.91	20.95	21.70
		12	13	20.63	20.7	20.85	21.70
		25	0	20.9	20.63	20.68	21.70
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				23060	23095	23130	
10MHz	QPSK	1	0	23.72	23.81	23.84	24.70
		1	25	23.79	23.87	23.74	24.70
		1	49	23.93	23.9	23.9	24.70
		25	0	22.79	22.86	22.94	23.70
		25	13	22.86	22.84	22.87	23.70
		25	25	22.89	22.93	22.92	23.70
		50	0	22.9	22.85	22.98	23.70
	16QAM	1	0	22.99	22.91	23.17	23.70
		1	25	22.95	22.66	23.37	23.70
		1	49	23.1	23.02	23.07	23.70
		25	0	22.09	22.1	22.14	22.70
		25	13	21.84	21.9	21.99	22.70
		25	25	22.05	21.85	21.83	22.70
		50	0	21.92	21.89	22.04	22.70
	64QAM	1	0	21.99	22.01	21.92	22.70
		1	25	21.7	21.77	21.89	22.70
		1	49	21.94	21.71	21.73	22.70
		25	0	20.99	20.94	21.1	21.70
		25	13	21.09	21.06	21.08	21.70
		25	25	20.76	20.82	20.98	21.70
		50	0	21	20.77	20.81	21.70

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgs.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

LTE Band 13				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				23205	23230	23255	
5MHz	QPSK	1	0	23.8	23.85	23.83	24.70
		1	13	23.79	23.85	23.79	24.70
		1	24	23.81	23.91	23.85	24.70
		12	0	22.99	22.95	22.91	23.70
		12	6	23.01	23.06	22.98	23.70
		12	13	23.02	22.96	22.9	23.70
		25	0	23	23.06	23.01	23.70
	16QAM	1	0	23.21	23.35	23.24	23.70
		1	13	23.25	23.41	23.35	23.70
		1	24	22.94	22.93	22.84	23.70
		12	0	22.04	22.05	22.04	22.70
		12	6	21.76	21.89	21.89	22.70
		12	13	21.87	21.99	21.87	22.70
		25	0	21.88	21.98	21.76	22.70
	64QAM	1	0	21.92	21.93	21.92	22.70
		1	13	21.63	21.79	21.77	22.70
		1	24	21.76	21.84	21.77	22.70
		12	0	20.97	21.07	20.85	21.70
		12	6	21.02	20.99	21	21.70
		12	13	20.72	20.89	20.83	21.70
		25	0	20.85	20.9	20.84	21.70
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				NA	23230	NA	
10MHz	QPSK	1	0	NA	23.88	NA	24.70
		1	25	NA	24.12	NA	24.70
		1	49	NA	23.88	NA	24.70
		25	0	NA	22.96	NA	23.70
		25	13	NA	23.04	NA	23.70
		25	25	NA	23.07	NA	23.70
		50	0	NA	23.15	NA	23.70
	16QAM	1	0	NA	23.25	NA	23.70
		1	25	NA	23.37	NA	23.70
		1	49	NA	23.31	NA	23.70
		25	0	NA	22.09	NA	22.70
		25	13	NA	21.97	NA	22.70
		25	25	NA	22	NA	22.70
		50	0	NA	22.07	NA	22.70
	64QAM	1	0	NA	21.92	NA	22.70
		1	25	NA	21.83	NA	22.70
		1	49	NA	21.88	NA	22.70
		25	0	NA	21.12	NA	21.70
		25	13	NA	21.08	NA	21.70
		25	25	NA	20.92	NA	21.70
		50	0	NA	20.93	NA	21.70

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

Member of the SGS Group(SGS SA)

LTE Band 17				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				23755	23790	23825	
5MHz	QPSK	1	0	23.65	23.63	23.62	24.70
		1	13	23.79	23.81	23.81	24.70
		1	24	23.74	23.59	23.61	24.70
		12	0	22.76	22.78	22.68	23.70
		12	6	22.79	22.69	22.8	23.70
		12	13	22.7	22.7	22.68	23.70
		25	0	22.78	22.75	22.68	23.70
	16QAM	1	0	23.02	22.77	22.63	23.70
		1	13	22.84	22.81	23.22	23.70
		1	24	23.07	22.67	22.71	23.70
		12	0	22.01	22.05	22.02	22.70
		12	6	21.83	21.9	21.78	22.70
		12	13	21.74	21.77	21.72	22.70
		25	0	21.76	21.79	21.69	22.70
	64QAM	1	0	21.8	21.77	21.81	22.70
		1	13	21.63	21.52	21.52	22.70
		1	24	21.57	21.62	21.51	22.70
		12	0	20.88	20.88	20.82	21.70
		12	6	20.84	20.85	20.9	21.70
		12	13	20.68	20.56	20.67	21.70
		25	0	20.64	20.65	20.57	21.70
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				23780	23790	23800	
10MHz	QPSK	1	0	23.61	23.6	23.62	24.70
		1	25	23.85	23.78	23.8	24.70
		1	49	23.76	23.79	23.76	24.70
		25	0	22.89	22.86	22.85	23.70
		25	13	22.78	22.78	22.77	23.70
		25	25	22.82	22.83	22.78	23.70
		50	0	22.9	22.84	22.85	23.70
	16QAM	1	0	23.12	23.17	22.72	23.70
		1	25	23.08	23.2	23.26	23.70
		1	49	22.65	22.91	23.03	23.70
		25	0	22.06	22.05	22.11	22.70
		25	13	21.89	21.78	21.78	22.70
		25	25	21.83	21.85	21.76	22.70
		50	0	21.89	21.95	21.87	22.70
	64QAM	1	0	21.92	21.92	21.96	22.70
		1	25	21.78	21.63	21.67	22.70
		1	49	21.68	21.72	21.63	22.70
		25	0	20.98	21.02	20.94	21.70
		25	13	20.99	20.99	21.03	21.70
		25	25	20.83	20.71	20.77	21.70
		50	0	20.76	20.79	20.69	21.70

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

LTE Band 66				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				131979	132322	132665	
1.4MHz	QPSK	1	0	23.5	23.32	23.28	24.20
		1	2	23.76	23.42	23.26	24.20
		1	5	23.43	23.08	23.2	24.20
		3	0	23.53	23.47	23.41	24.20
		3	1	23.73	23.43	23.32	24.20
		3	3	23.57	23.12	23.3	24.20
		6	0	22.75	22.53	22.21	23.20
	16QAM	1	0	22.83	22.5	22.39	23.20
		1	2	23.15	22.59	22.85	23.20
		1	5	22.65	22.58	22.91	23.20
		3	0	22.82	22.42	22.4	23.20
		3	1	23.11	22.54	22.89	23.20
		3	3	22.63	22.43	22.76	23.20
		6	0	21.68	21.52	21.53	22.20
	64QAM	1	0	21.43	21.35	21.27	22.20
		1	2	21.43	21.12	21.13	22.20
		1	5	21.38	21.23	21.18	22.20
		3	0	21.48	21.42	21.43	22.20
		3	1	21.31	21.25	21.15	22.20
		3	3	21.31	20.98	20.99	22.20
		6	0	20.66	20.5	20.51	21.20
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				131987	132322	132657	
3MHz	QPSK	1	0	23.47	23.46	23.4	24.20
		1	7	23.74	23.55	23.28	24.20
		1	14	23.55	23.13	23.2	24.20
		8	0	22.82	22.44	22.32	23.20
		8	4	22.65	22.48	22.28	23.20
		8	7	22.69	22.34	22.36	23.20
		15	0	22.69	22.29	22.45	23.20
	16QAM	1	0	22.83	22.41	22.47	23.20
		1	7	23.07	22.51	22.93	23.20
		1	14	22.71	22.48	22.84	23.20
		8	0	21.76	21.58	21.39	22.20
		8	4	21.74	21.52	21.55	22.20
		8	7	21.71	21.52	21.42	22.20
		15	0	21.59	21.48	21.5	22.20
	64QAM	1	0	21.45	21.34	21.24	22.20
		1	7	21.42	21.11	21.11	22.20
		1	14	21.39	21.21	21.22	22.20
		8	0	20.61	20.35	20.38	21.20
		8	4	20.49	20.47	20.34	21.20

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

		8	7	20.47	20.14	20.12	21.20
		15	0	20.45	20.29	20.28	21.20
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				131997	132322	132647	
5MHz	QPSK	1	0	23.47	23.39	23.32	24.20
		1	13	23.7	23.46	23.27	24.20
		1	24	23.49	23.14	23.24	24.20
		12	0	22.72	22.44	22.3	23.20
		12	6	22.63	22.53	22.37	23.20
		12	13	22.74	22.39	22.34	23.20
		25	0	22.73	22.39	22.36	23.20
	16QAM	1	0	22.89	22.5	22.38	23.20
		1	13	23.09	22.59	22.89	23.20
		1	24	22.73	22.48	22.85	23.20
		12	0	21.66	21.5	21.46	22.20
		12	6	21.79	21.45	21.51	22.20
		12	13	21.73	21.47	21.42	22.20
		25	0	21.65	21.49	21.45	22.20
	64QAM	1	0	21.44	21.34	21.27	22.20
		1	13	21.42	21.08	21.09	22.20
		1	24	21.34	21.22	21.17	22.20
		12	0	20.62	20.38	20.41	21.20
		12	6	20.48	20.43	20.32	21.20
		12	13	20.47	20.17	20.12	21.20
		25	0	20.45	20.24	20.29	21.20
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				132022	132322	132622	
10MHz	QPSK	1	0	23.63	23.51	23.35	24.20
		1	25	23.75	23.58	23.54	24.20
		1	49	23.79	23.44	23.31	24.20
		25	0	22.65	22.53	22.44	23.20
		25	13	22.62	22.45	22.36	23.20
		25	25	22.77	22.49	22.41	23.20
		50	0	22.79	22.5	22.48	23.20
	16QAM	1	0	23.16	23.12	22.41	23.20
		1	25	22.97	22.55	22.68	23.20
		1	49	22.78	22.54	22.7	23.20
		25	0	21.74	21.54	21.47	22.20
		25	13	21.66	21.42	21.38	22.20
		25	25	21.73	21.56	21.34	22.20
		50	0	21.74	21.55	21.45	22.20
	64QAM	1	0	21.45	21.38	21.24	22.20
		1	25	21.41	21.1	21.09	22.20
		1	49	21.39	21.21	21.18	22.20
		25	0	20.62	20.37	20.39	21.20
		25	13	20.49	20.48	20.36	21.20
		25	25	20.47	20.13	20.13	21.20

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

		50	0	20.43	20.27	20.31	21.20
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				132047	132322	132597	
15MHz	QPSK	1	0	23.72	23.33	23.25	24.20
		1	38	23.65	23.37	23.34	24.20
		1	74	23.52	23.38	23.26	24.20
		36	0	22.71	22.55	22.49	23.20
		36	18	22.74	22.48	22.48	23.20
		36	39	22.72	22.45	22.39	23.20
		75	0	22.67	22.5	22.4	23.20
	16QAM	1	0	23.09	22.45	22.36	23.20
		1	38	22.89	22.73	22.99	23.20
		1	74	22.66	22.69	22.14	23.20
		36	0	21.7	21.5	21.49	22.20
		36	18	21.68	21.5	21.4	22.20
		36	39	21.73	21.53	21.5	22.20
		75	0	21.8	21.53	21.46	22.20
	64QAM	1	0	21.44	21.37	21.27	22.20
		1	38	21.39	21.1	21.06	22.20
		1	74	21.34	21.21	21.21	22.20
		36	0	20.63	20.35	20.42	21.20
		36	18	20.47	20.44	20.36	21.20
		36	39	20.49	20.14	20.16	21.20
		75	0	20.45	20.27	20.26	21.20
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				132072	132322	132572	
20MHz	QPSK	1	0	23.48	23.27	23.3	24.20
		1	50	23.62	23.53	23.47	24.20
		1	99	23.39	23.24	23.11	24.20
		50	0	22.56	22.58	22.48	23.20
		50	25	22.72	22.53	22.44	23.20
		50	50	22.73	22.46	22.31	23.20
		100	0	22.67	22.41	22.37	23.20
	16QAM	1	0	22.88	22.87	22.42	23.20
		1	50	23.02	22.64	23.14	23.20
		1	99	22.83	22.64	22.47	23.20
		50	0	21.52	21.59	21.38	22.20
		50	25	21.69	21.59	21.5	22.20
		50	50	21.65	21.34	21.31	22.20
		100	0	21.63	21.45	21.44	22.20
	64QAM	1	0	21.56	21.48	21.39	22.20
		1	50	21.53	21.22	21.21	22.20
		1	99	21.49	21.34	21.32	22.20
		50	0	20.73	20.5	20.52	21.20
		50	25	20.61	20.58	20.47	21.20
		50	50	20.62	20.27	20.27	21.20
		100	0	20.57	20.39	20.41	21.20

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

Member of the SGS Group (SGS SA)



Table 13: Conducted Power of LTE

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com



8.1.2 Conducted Power of WIFI and BT

2.4GHz	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11b	1	2412	1	18.50	17.66	No
	6	2437		18.50	18.19	Yes
	11	2462		18.50	18.03	Yes
	12	2467		5.00	4.99	No
	13	2472		5.00	4.85	No
802.11g	1	2412	6	15.00	14.33	No
	2	2417		17.00	16.39	No
	6	2437		17.00	16.91	No
	10	2457		17.00	16.37	No
	11	2462		15.00	14.42	No
	12	2467		5.00	4.61	No
	13	2472		5.00	4.35	No
802.11n HT20 SISO	1	2412	6.5	14.00	13.26	No
	2	2417		16.00	15.36	No
	6	2437		16.00	15.37	No
	10	2457		16.00	15.38	No
	11	2462		14.00	13.28	No
	12	2467		5.00	4.67	No
	13	2472		5.00	4.41	No

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11a	U-NII-1	36	5180	6	13	11.12	No
		40	5200		13	11.46	No
		44	5220		13	11.62	No
		48	5240		13	11.95	No
	U-NII-2A	52	5260		13	12.23	No
		56	5280		13	12.12	No
		60	5300		13	11.95	No
		64	5320		13	12.14	No
	U-NII-2C	100	5500		12.5	11.87	No
		104	5520		13	12.54	No
		108	5540		13	12.48	No
		112	5560		13	12.52	No
		116	5580		13	12.58	No
		120	5600		13	12.6	No
		124	5620		13	11.9	No
		128	5640		13	11.89	No
		132	5660		13	11.81	No
		136	5680		13	11.87	No
		140	5700		12.5	11.24	No
		144	5720		13	11.85	No
	U-NII-3	149	5745		13	12.14	No
		153	5765		13	11.98	No
		157	5785		13	11.79	No
		161	5805		13	11.78	No
		165	5825		13	11.77	No
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11n-HT20	U-NII-1	36	5180	MCS0	13	11.22	No
		40	5200		13	11.33	No
		44	5220		13	11.62	No
		48	5240		13	11.72	No
	U-NII-2A	52	5260		13	12.07	No
		56	5280		13	12.2	No
		60	5300		13	11.88	No
		64	5320		13	11.9	No
	U-NII-2C	100	5500		12.5	11.11	No
		104	5520		13	12.68	No
		108	5540		13	12.73	No
		112	5560		13	12.84	No
		116	5580		13	12.29	No
		120	5600		13	12.41	No
		124	5620		13	12.69	No
		128	5640		13	11.7	No
		132	5660		13	11.57	No
		136	5680		13	11.99	No

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

		140	5700		12.5	11.76	No
		144	5720		13	11.89	No
	U-NII-3	149	5745		13	11.73	No
		153	5765		13	11.75	No
		157	5785		13	11.6	No
		161	5805		13	11.79	No
		165	5825		13	11.65	No
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11n-HT40	U-NII-1	38	5190	MCS0	13	11.16	No
		46	5230		13	11.36	Yes
	U-NII-2A	54	5270		13	11.71	No
		62	5310		13	12.07	Yes
	U-NII-2C	102	5510		12.5	10.96	No
		110	5550		13	11.98	Yes
		118	5590		13	11.32	No
		126	5630		13	11.34	No
		134	5670		13	11.41	No
		142	5710		13	11.55	Yes
	U-NII-3	151	5755		13	11.38	Yes
		159	5795		13	11.22	Yes
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11ac 20M	U-NII-1	36	5180	MCS0	12	9.96	No
		40	5200		12	10.23	No
		44	5220		12	10.54	No
		48	5240		12	10.7	No
	U-NII-2A	52	5260		12	10.89	No
		56	5280		12	11.19	No
		60	5300		12	11.18	No
		64	5320		12	11.43	No
	U-NII-2C	100	5500		12	11.57	No
		104	5520		12	11.33	No
		108	5540		12	11.73	No
		112	5560		12	10.76	No
		116	5580		12	11.35	No
		120	5600		12	11.15	No
		124	5620		12	11.16	No
		128	5640		12	11.05	No
		132	5660		12	10.54	No
		136	5680		12	10.59	No
		140	5700		12	10.72	No
		144	5720		12	10.75	No
	U-NII-3	149	5745		12	10.64	No
		153	5765		12	10.69	No
		157	5785		12	10.59	No
		161	5805		12	10.64	No

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

5GHz	mode	165 Channel	5825 Frequency(MHz)	Data Rate(Mbps)	12 Tune up	10.69 Average Power (dBm)	No SAR Test
802.11ac 40M	U-NII-1	38	5190	MCS0	12	9.875	No
		46	5230		12	10.35	No
	U-NII-2A	54	5270		12	10.74	No
		62	5310		12	11.09	No
	U-NII-2C	102	5510		12	11.03	No
		110	5550		12	10.97	No
		118	5590		12	10.46	No
		126	5630		12	10.46	No
		134	5670		12	10.31	No
		142	5710		12	10.79	No
	U-NII-3	151	5755		12	10.36	No
		159	5795		12	10.68	No
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11ac 80M	U-NII-1	42	5210	MCS0	12	9.68	No
	U-NII-2A	58	5290		12	10.35	No
	U-NII-2C	106	5530		12	10.45	No
		122	5610		12	9.93	No
		138	5690		12	9.86	No
	U-NII-3	155	5775		12	9.80	No

Table 14: Conducted Power of WiFi

Note:

- Power must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band.
- Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.
 - When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.
 - When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.
- For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·津东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

BT			Tune up (dBm)	Average Conducted Power(dBm)
Modulation	Channel	Frequency(MHz)		
GFSK	0	2402	9.50	7.04
	39	2441	9.50	9.15
	78	2480	9.50	9.26
$\pi/4$ DQPSK	0	2402	9.50	6.87
	39	2441	9.50	9.28
	78	2480	9.50	9.36
8DPSK	0	2402	9.50	6.86
	39	2441	9.50	9.28
	78	2480	9.50	9.38
BLE			Tune up (dBm)	Average Conducted Power(dBm)
Modulation	Channel	Frequency(MHz)		
GFSK	0	2402	6.50	4.97
	19	2440	6.50	6.28
	39	2480	6.50	5.26

Table 15: Conducted Power of BT

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com

Member of the SGS Group(SGS SA)

8.2 Stand-alone SAR test evaluation

Unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and Product specific 10g SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Test Exclusion Threshold condition is satisfied. These test exclusion conditions are based on source-based time-averaged maximum conducted output power of the RF channel requiring evaluation, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions.

Freq. Band	Frequency (GHz)	Position	Average Power		Test Separation (mm)	Calculate Value	Exclusion Threshold	Exclusion (Y/N)
			dBm	mW				
Wi-Fi	2.45	Head	18.5	70.8	0	22.2	3	N
		Body-worn	18.5	70.8	10	11.1	3	N
		hotspot	18.5	70.8	10	11.1	3	N
Wi-Fi	5	Head	13.0	20.0	0	8.9	3	N
		Body-worn	13.0	20.0	10	4.5	3	N
		hotspot	13.0	20.0	10	4.5	3	N
Bluetooth	2.48	Head	9.5	8.9	0	2.8	3	Y
		Body-worn	9.5	8.9	10	1.4	3	Y
		hotspot	9.5	8.9	10	1.4	3	Y

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Estimated SAR Result:

Freq. Band	Frequency (GHz)	Test Position	max. power(dBm)	Test Separation (mm)	Estimated
					1g SAR (W/kg)
Bluetooth	2.48	Head	9.5	0	0.374
		Body-worn	9.5	10	0.187
		hotspot	9.5	10	0.187

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgs.com
Xi'an, Shaanxi, China

中国·西安·津东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com



8.3 Measurement of SAR Data

8.3.1 SAR Result of GSM850

Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data										
Left cheek	GSM	190/836.6	1:8.3	0.209	0.00	33.26	33.70	1.107	0.231	22.0
Left tilted	GSM	190/836.6	1:8.3	0.118	0.02	33.26	33.70	1.107	0.131	22.0
Right cheek	GSM	190/836.6	1:8.3	0.243	0.01	33.26	33.70	1.107	0.269	22.0
Right tilted	GSM	190/836.6	1:8.3	0.134	0.02	33.26	33.70	1.107	0.148	22.0
Head Test data at the worst case with Sample 2#										
Right cheek	GSM	190/836.6	1:8.3	0.226	0.12	33.26	33.70	1.107	0.250	22.0
Body worn Test data(Separate 10mm)										
Front side	GSM	190/836.6	1:8.3	0.184	0.06	33.26	33.70	1.107	0.204	22.0
Back side	GSM	190/836.6	1:8.3	0.393	0.11	33.26	33.70	1.107	0.435	22.0
Body worn Test data at the worst case with Sample 2#										
Back side	GSM	190/836.6	1:8.3	0.307	0.14	33.26	33.70	1.107	0.340	22.0
Hotspot Test data(Separate 10mm)										
Front side	GPRS 4TS	190/836.6	1:2.075	0.297	0.02	29.34	29.70	1.086	0.323	22.0
Back side	GPRS 4TS	190/836.6	1:2.075	0.558	-0.11	29.34	29.70	1.086	0.606	22.0
Left side	GPRS 4TS	190/836.6	1:2.075	0.229	0.03	29.34	29.70	1.086	0.249	22.0
Right side	GPRS 4TS	190/836.6	1:2.075	0.326	-0.01	29.34	29.70	1.086	0.354	22.0
Bottom side	GPRS 4TS	190/836.6	1:2.075	0.317	0.02	29.34	29.70	1.086	0.344	22.0
Hotspot Test data at the worst case with Sample 2#										
Back side	GPRS 4TS	190/836.6	1:2.075	0.460	-0.05	29.34	29.70	1.086	0.500	22.0

Table 16: SAR of GSM850 for Head, Body.

Note:

- 1) The maximum Scaled SAR value is marked in **bold**. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com



8.3.2 SAR Result of GSM1900

Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data										
Left cheek	GSM	661/1880	1:8.3	0.136	0.03	30.35	30.70	1.084	0.147	22.0
Left tilted	GSM	661/1880	1:8.3	0.081	0.02	30.35	30.70	1.084	0.088	22.0
Right cheek	GSM	661/1880	1:8.3	0.076	0.02	30.35	30.70	1.084	0.082	22.0
Right tilted	GSM	661/1880	1:8.3	0.066	0.03	30.35	30.70	1.084	0.072	22.0
Head Test data at the worst case with Sample 2#										
Left cheek	GSM	661/1880	1:8.3	0.118	0.03	30.35	30.70	1.084	0.128	22.0
Body worn Test data(Separate 10mm)										
Front side	GSM	661/1880	1:8.3	0.211	0.01	30.35	30.70	1.084	0.229	22.0
Back side	GSM	661/1880	1:8.3	0.331	0.02	30.35	30.70	1.084	0.359	22.0
Body worn Test data at the worst case with Sample 2#										
Back side	GSM	661/1880	1:8.3	0.329	-0.04	30.35	30.70	1.084	0.357	22.0
Hotspot Test data(Separate 10mm)										
Front side	GPRS 4TS	661/1880	1:2.075	0.094	-0.06	25.67	26.70	1.268	0.119	22.0
Back side	GPRS 4TS	661/1880	1:2.075	0.425	-0.13	25.67	26.70	1.268	0.539	22.0
Left side	GPRS 4TS	661/1880	1:2.075	0.082	0.05	25.67	26.70	1.268	0.104	22.0
Bottom side	GPRS 4TS	661/1880	1:2.075	0.085	0.03	25.67	26.70	1.268	0.108	22.0
Hotspot Test data at the worst case with Sample 2#										
Back side	GPRS 4TS	661/1880	1:2.075	0.422	-0.11	25.67	26.70	1.268	0.535	22.0

Table 17: SAR of GSM1900 for Head and Body.

Note:

- 1) The maximum Scaled SAR value is marked in **bold**. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com



8.3.3 SAR Result of WCDMA Band II

Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data										
Left cheek	RMC	9400/1880	1:1	0.262	0.03	24.66	24.70	1.009	0.264	22.0
Left tilted	RMC	9400/1880	1:1	0.163	-0.02	24.66	24.70	1.009	0.165	22.0
Right cheek	RMC	9400/1880	1:1	0.160	0.06	24.66	24.70	1.009	0.161	22.0
Right tilted	RMC	9400/1880	1:1	0.162	0.04	24.66	24.70	1.009	0.163	22.0
Head Test data at the worst case with Sample 2#										
Left cheek	RMC	9400/1880	1:1	0.210	0.02	24.66	24.70	1.009	0.212	22.0
Body worn Test data(Separate 10mm)										
Front side	RMC	9400/1880	1:1	0.435	0.06	24.66	24.70	1.009	0.439	22.0
Back side	RMC	9400/1880	1:1	0.684	0.02	24.66	24.70	1.009	0.690	22.0
Body worn Test data at the worst case with Sample 2#										
Back side	RMC	9400/1880	1:1	0.541	0.07	24.66	24.70	1.009	0.546	22.0
Hotspot Test data(Separate 10mm)										
Front side	RMC	9400/1880	1:1	0.435	0.06	24.66	24.70	1.009	0.439	22.0
Back side	RMC	9400/1880	1:1	0.684	0.02	24.66	24.70	1.009	0.690	22.0
Left side	RMC	9400/1880	1:1	0.453	0.04	24.66	24.70	1.009	0.457	22.0
Bottom side	RMC	9400/1880	1:1	0.393	-0.05	24.66	24.70	1.009	0.397	22.0
Hotspot Test data at the worst case with Sample 2#										
Back side	RMC	9400/1880	1:1	0.541	0.07	24.66	24.70	1.009	0.546	22.0

Table 18: SAR of WCDMA Band II for Head, Body.

Note:

- 1) The maximum Scaled SAR value is marked in **bold**. Graph results refer to Appendix B.
- 2) Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1-g or then testing at the other channels is not required for such test configuration(s).
- 3) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100 MHz.
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

Member of the SGS Group(SGS SA)

8.3.4 SAR Result of WCDMA Band IV

Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data										
Left cheek	RMC	1412/1732.4	1:1	0.217	0.01	23.96	24.20	1.057	0.229	22.2
Left tilted	RMC	1412/1732.4	1:1	0.128	-0.05	23.96	24.20	1.057	0.135	22.2
Right cheek	RMC	1412/1732.4	1:1	0.146	0.02	23.96	24.20	1.057	0.154	22.2
Right tilted	RMC	1412/1732.4	1:1	0.113	0.06	23.96	24.20	1.057	0.119	22.2
Head Test data at the worst case with Sample 2#										
Left cheek	RMC	1412/1732.4	1:1	0.174	-0.11	23.96	24.20	1.057	0.184	22.2
Body worn Test data(Separate 10mm)										
Front side	RMC	1412/1732.4	1:1	0.343	-0.02	23.96	24.20	1.057	0.362	22.2
Back side	RMC	1412/1732.4	1:1	0.521	-0.04	23.96	24.20	1.057	0.551	22.2
Body worn Test data at the worst case with Sample 2#										
Back side	RMC	1412/1732.4	1:1	0.403	0.01	23.96	24.20	1.057	0.426	22.2
Hotspot Test data(Separate 10mm)										
Front side	RMC	1412/1732.4	1:1	0.343	-0.02	23.96	24.20	1.057	0.362	22.2
Back side	RMC	1412/1732.4	1:1	0.521	-0.04	23.96	24.20	1.057	0.551	22.2
Left side	RMC	1412/1732.4	1:1	0.312	0.03	23.96	24.20	1.057	0.330	22.2
Bottom side	RMC	1412/1732.4	1:1	0.319	0.11	23.96	24.20	1.057	0.337	22.2
Hotspot Test data at the worst case with Sample 2#										
Back side	RMC	1412/1732.4	1:1	0.403	0.01	23.96	24.20	1.057	0.426	22.2

Table 19: SAR of WCDMA Band IV for Head, Body.

Note:

- The maximum Scaled SAR value is marked in **bold**. Graph results refer to Appendix B.
- Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.

8.3.5 SAR Result of WCDMA Band V

Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Head Test Data										
Left cheek	RMC	4182/836.4	1:1	0.215	0.03	24.95	25.20	1.059	0.228	22.0
Left tilted	RMC	4182/836.4	1:1	0.103	0.04	24.95	25.20	1.059	0.109	22.0
Right cheek	RMC	4182/836.4	1:1	0.232	0.17	24.95	25.20	1.059	0.246	22.0
Right tilted	RMC	4182/836.4	1:1	0.113	0.03	24.95	25.20	1.059	0.120	22.0
Head Test data at the worst case with Sample 2#										
Right cheek	RMC	4182/836.4	1:1	0.229	0.01	24.95	25.20	1.059	0.243	22.0
Body worn Test data(Separate 10mm)										
Front side	RMC	4182/836.4	1:1	0.227	0.02	24.95	25.20	1.059	0.240	22.0
Back side	RMC	4182/836.4	1:1	0.460	-0.01	24.95	25.20	1.059	0.487	22.0
Body worn Test data at the worst case with Sample 2#										
Back side	RMC	4182/836.4	1:1	0.354	-0.03	24.95	25.20	1.059	0.375	22.0
Hotspot Test data(Separate 10mm)										
Front side	RMC	4182/836.4	1:1	0.227	0.02	24.95	25.20	1.059	0.240	22.0
Back side	RMC	4182/836.4	1:1	0.460	-0.01	24.95	25.20	1.059	0.487	22.0
Left side	RMC	4182/836.4	1:1	0.171	0.01	24.95	25.20	1.059	0.181	22.0
Right side	RMC	4182/836.4	1:1	0.236	-0.03	24.95	25.20	1.059	0.250	22.0
Bottom side	RMC	4182/836.4	1:1	0.243	0.02	24.95	25.20	1.059	0.257	22.0
Hotspot Test data at the worst case with Sample 2#										
Back side	RMC	4182/836.4	1:1	0.354	-0.03	24.95	25.20	1.059	0.375	22.0

Table 20: SAR of WCDMA Band V for Head, Body.

Note:

- The maximum Scaled SAR value is marked in **bold**. Graph results refer to Appendix B.
- Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100MHz.
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

Member of the SGS Group(SGS SA)



8.3.6 SAR Result of LTE Band 2

Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.(°C)
Head Test data(1RB)											
Left cheek	20	QPSK 1RB_50	19100/1900	1:1	0.236	0.17	23.70	24.20	1.122	0.265	22.3
Left tilted	20	QPSK 1RB_50	19100/1900	1:1	0.110	0.03	23.70	24.20	1.122	0.123	22.3
Right cheek	20	QPSK 1RB_50	19100/1900	1:1	0.117	-0.02	23.70	24.20	1.122	0.131	22.3
Right tilted	20	QPSK 1RB_50	19100/1900	1:1	0.135	0.01	23.70	24.20	1.122	0.151	22.3
Head Test data(50%RB)											
Left cheek	20	QPSK 50RB_0	19100/1900	1:1	0.145	0.02	22.59	23.20	1.151	0.167	22.3
Left tilted	20	QPSK 50RB_0	19100/1900	1:1	0.090	0.04	22.59	23.20	1.151	0.104	22.3
Right cheek	20	QPSK 50RB_0	19100/1900	1:1	0.103	0.06	22.59	23.20	1.151	0.119	22.3
Right tilted	20	QPSK 50RB_0	19100/1900	1:1	0.111	0.02	22.59	23.20	1.151	0.128	22.3
Head Test data at the worst case with Sample 2#											
Left cheek	20	QPSK 1RB_50	19100/1900	1:1	0.187	0.03	23.70	24.20	1.122	0.210	22.3
Body worn Test data(Separate 10mm 1RB)											
Front side	20	QPSK 1RB_50	19100/1900	1:1	0.353	-0.02	23.70	24.20	1.122	0.396	22.3
Back side	20	QPSK 1RB_50	19100/1900	1:1	0.520	0.01	23.70	24.20	1.122	0.583	22.3
Body worn Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50RB_0	19100/1900	1:1	0.302	0.03	22.59	23.20	1.151	0.348	22.3
Back side	20	QPSK 50RB_0	19100/1900	1:1	0.461	0.04	22.59	23.20	1.151	0.531	22.3
Body worn Test data at the worst case with Sample 2#											
Back side	20	QPSK 1RB_50	19100/1900	1:1	0.477	-0.01	23.70	24.20	1.122	0.535	22.3
Hotspot Test data(Separate 10mm 1RB)											
Front side	20	QPSK 1RB_50	19100/1900	1:1	0.353	-0.02	23.70	24.20	1.122	0.396	22.3
Back side	20	QPSK 1RB_50	19100/1900	1:1	0.520	0.01	23.70	24.20	1.122	0.583	22.3
Left side	20	QPSK 1RB_50	19100/1900	1:1	0.345	0.03	23.70	24.20	1.122	0.387	22.3
Bottom side	20	QPSK 1RB_50	19100/1900	1:1	0.303	0.05	23.70	24.20	1.122	0.340	22.3
Hotspot Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50RB_0	19100/1900	1:1	0.302	0.03	22.59	23.20	1.151	0.348	22.3
Back side	20	QPSK 50RB_0	19100/1900	1:1	0.461	0.04	22.59	23.20	1.151	0.531	22.3
Left side	20	QPSK 50RB_0	19100/1900	1:1	0.294	0.04	22.59	23.20	1.151	0.338	22.3
Bottom side	20	QPSK 50RB_0	19100/1900	1:1	0.289	0.06	22.59	23.20	1.151	0.333	22.3
Hotspot Test data at the worst case with Sample 2#											
Back side	20	QPSK 1RB_50	19100/1900	1:1	0.477	-0.01	23.70	24.20	1.122	0.535	22.3

Table 21: SAR of LTE Band 2 for Head, Body.

Note:

- 1) The maximum Scaled SAR value is marked in **bold**. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com



8.3.7 SAR Result of LTE Band 4

Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.(°C)
Head Test data(1RB)											
Left cheek	20	QPSK 1RB_50	20050/1720	1:1	0.205	0.03	23.38	24.20	1.208	0.248	22.2
Left tilted	20	QPSK 1RB_50	20050/1720	1:1	0.107	-0.01	23.38	24.20	1.208	0.129	22.2
Right cheek	20	QPSK 1RB_50	20050/1720	1:1	0.121	0.02	23.38	24.20	1.208	0.146	22.2
Right tilted	20	QPSK 1RB_50	20050/1720	1:1	0.104	0.06	23.38	24.20	1.208	0.126	22.2
Head Test data(50%RB)											
Left cheek	20	QPSK 50RB_50	20050/1720	1:1	0.124	0.02	22.50	23.20	1.175	0.146	22.2
Left tilted	20	QPSK 50RB_50	20050/1720	1:1	0.080	-0.03	22.50	23.20	1.175	0.094	22.2
Right cheek	20	QPSK 50RB_50	20050/1720	1:1	0.104	-0.05	22.50	23.20	1.175	0.122	22.2
Right tilted	20	QPSK 50RB_50	20050/1720	1:1	0.086	0.01	22.50	23.20	1.175	0.101	22.2
Head Test data at the worst case with Sample 2#											
Left cheek	20	QPSK 1RB_50	20050/1720	1:1	0.165	0.06	23.38	24.20	1.208	0.199	22.2
Body worn Test data(Separate 10mm 1RB)											
Front side	20	QPSK 1RB_50	20050/1720	1:1	0.348	0.02	23.38	24.20	1.208	0.420	22.2
Back side	20	QPSK 1RB_50	20050/1720	1:1	0.442	-0.06	23.38	24.20	1.208	0.534	22.2
Body worn Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50RB_50	20050/1720	1:1	0.270	0.04	22.50	23.20	1.175	0.317	22.2
Back side	20	QPSK 50RB_50	20050/1720	1:1	0.400	-0.01	22.50	23.20	1.175	0.470	22.2
Body worn Test data at the worst case with Sample 2#											
Back side	20	QPSK 1RB_50	20050/1720	1:1	0.355	0.04	23.38	24.20	1.208	0.429	22.2
Hotspot Test data(Separate 10mm 1RB)											
Front side	20	QPSK 1RB_50	20050/1720	1:1	0.348	0.02	23.38	24.20	1.208	0.420	22.2
Back side	20	QPSK 1RB_50	20050/1720	1:1	0.442	-0.06	23.38	24.20	1.208	0.534	22.2
Left side	20	QPSK 1RB_50	20050/1720	1:1	0.291	-0.01	23.38	24.20	1.208	0.351	22.2
Bottom side	20	QPSK 1RB_50	20050/1720	1:1	0.286	0.03	23.38	24.20	1.208	0.345	22.2
Hotspot Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50RB_50	20050/1720	1:1	0.270	0.04	22.50	23.20	1.175	0.317	22.2
Back side	20	QPSK 50RB_50	20050/1720	1:1	0.400	-0.01	22.50	23.20	1.175	0.470	22.2
Left side	20	QPSK 50RB_50	20050/1720	1:1	0.240	0.11	22.50	23.20	1.175	0.282	22.2
Bottom side	20	QPSK 50RB_50	20050/1720	1:1	0.267	0.08	22.50	23.20	1.175	0.314	22.2
Hotspot Test data at the worst case with Sample 2#											
Back side	20	QPSK 1RB_50	20050/1720	1:1	0.355	0.04	23.38	24.20	1.208	0.429	22.2

Table 22: SAR of LTE Band 4 for Head, Body.

Note:

- 1) The maximum Scaled SAR value is marked in **bold**. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com



8.3.8 SAR Result of LTE Band 5

Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.(°C)
Head Test data(1RB)											
Left cheek	10	QPSK 1RB_25	20450/829	1:1	0.168	-0.02	23.96	24.70	1.186	0.199	22.1
Left tilted	10	QPSK 1RB_25	20450/829	1:1	0.095	0.01	23.96	24.70	1.186	0.113	22.1
Right cheek	10	QPSK 1RB_25	20450/829	1:1	0.164	0.14	23.96	24.70	1.186	0.194	22.1
Right tilted	10	QPSK 1RB_25	20450/829	1:1	0.109	-0.03	23.96	24.70	1.186	0.129	22.1
Head Test data(50%RB)											
Left cheek	10	QPSK 25RB_0	20525/836.5	1:1	0.138	-0.05	23.07	23.70	1.156	0.160	22.1
Left tilted	10	QPSK 25RB_0	20525/836.5	1:1	0.079	0.01	23.07	23.70	1.156	0.091	22.1
Right cheek	10	QPSK 25RB_0	20525/836.5	1:1	0.135	-0.05	23.07	23.70	1.156	0.156	22.1
Right tilted	10	QPSK 25RB_0	20525/836.5	1:1	0.092	0.02	23.07	23.70	1.156	0.106	22.1
Head Test data at the worst case with Sample 2#											
Left cheek	10	QPSK 1RB_25	20450/829	1:1	0.155	0.03	23.96	24.70	1.186	0.184	22.1
Body worn Test data(Separate 10mm 1RB)											
Front side	10	QPSK 1RB_25	20450/829	1:1	0.180	0.02	23.96	24.70	1.186	0.213	22.1
Back side	10	QPSK 1RB_25	20450/829	1:1	0.308	-0.18	23.96	24.70	1.186	0.365	22.1
Body worn Test data (Separate 10mm 50%RB)											
Front side	10	QPSK 25RB_0	20525/836.5	1:1	0.160	0.03	23.07	23.70	1.156	0.185	22.1
Back side	10	QPSK 25RB_0	20525/836.5	1:1	0.221	0.04	23.07	23.70	1.156	0.256	22.1
Body worn Test data at the worst case with Sample 2#											
Back side	10	QPSK 1RB_25	20450/829	1:1	0.305	-0.02	23.96	24.70	1.186	0.362	22.1
Hotspot Test data(Separate 10mm 1RB)											
Front side	10	QPSK 1RB_25	20450/829	1:1	0.180	0.02	23.96	24.70	1.186	0.213	22.1
Back side	10	QPSK 1RB_25	20450/829	1:1	0.308	-0.18	23.96	24.70	1.186	0.365	22.1
Left side	10	QPSK 1RB_25	20450/829	1:1	0.138	0.01	23.96	24.70	1.186	0.164	22.1
Right side	10	QPSK 1RB_25	20450/829	1:1	0.189	-0.05	23.96	24.70	1.186	0.224	22.1
Bottom side	10	QPSK 1RB_25	20450/829	1:1	0.181	-0.12	23.96	24.70	1.186	0.215	22.1
Hotspot Test data (Separate 10mm 50%RB)											
Front side	10	QPSK 25RB_0	20525/836.5	1:1	0.160	0.03	23.07	23.70	1.156	0.185	22.1
Back side	10	QPSK 25RB_0	20525/836.5	1:1	0.221	0.04	23.07	23.70	1.156	0.256	22.1
Left side	10	QPSK 25RB_0	20525/836.5	1:1	0.119	0.04	23.07	23.70	1.156	0.138	22.1
Right side	10	QPSK 25RB_0	20525/836.5	1:1	0.166	0.03	23.07	23.70	1.156	0.192	22.1
Bottom side	10	QPSK 25RB_0	20525/836.5	1:1	0.161	-0.13	23.07	23.70	1.156	0.186	22.1
Hotspot Test data at the worst case with Sample 2#											
Back side	10	QPSK 1RB_25	20450/829	1:1	0.305	-0.02	23.96	24.70	1.186	0.362	22.1

Table 23: SAR of LTE Band 5 for Head, Body.

Note:

- 1) The maximum Scaled SAR value is marked in **bold**. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com

8.3.9 SAR Result of LTE Band 7

Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.(°C)
Head Test data(1RB)											
Left cheek	20	QPSK 1RB_50	21350/2560	1:1	0.123	0.02	23.82	24.70	1.225	0.151	22.1
Left tilted	20	QPSK 1RB_50	21350/2560	1:1	0.083	0.03	23.82	24.70	1.225	0.102	22.1
Right cheek	20	QPSK 1RB_50	21350/2560	1:1	0.090	-0.02	23.82	24.70	1.225	0.110	22.1
Right tilted	20	QPSK 1RB_50	21350/2560	1:1	0.060	0.12	23.82	24.70	1.225	0.073	22.1
Head Test data(50%RB)											
Left cheek	20	QPSK 50RB_50	20850/2510	1:1	0.109	0.04	22.88	23.70	1.208	0.132	22.1
Left tilted	20	QPSK 50RB_50	20850/2510	1:1	0.078	-0.05	22.88	23.70	1.208	0.094	22.1
Right cheek	20	QPSK 50RB_50	20850/2510	1:1	0.081	0.07	22.88	23.70	1.208	0.098	22.1
Right tilted	20	QPSK 50RB_50	20850/2510	1:1	0.051	0.01	22.88	23.70	1.208	0.062	22.1
Head Test data at the worst case with Sample 2#											
Left cheek	20	QPSK 1RB_50	21350/2560	1:1	0.090	0.16	23.82	24.70	1.225	0.111	22.1
Body worn Test data(Separate 10mm 1RB)											
Front side	20	QPSK 1RB_50	21350/2560	1:1	0.377	0.02	23.82	24.70	1.225	0.462	22.1
Back side	20	QPSK 1RB_50	21350/2560	1:1	0.717	0.18	23.82	24.70	1.225	0.878	22.1
Back side	20	QPSK 1RB_50	20850/2510	1:1	0.842	-0.05	23.71	24.70	1.256	1.058	22.1
Back side	20	QPSK 1RB_50	21100/2535	1:1	0.824	-0.06	23.69	24.70	1.262	1.040	22.1
Body worn Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50RB_50	20850/2510	1:1	0.290	0.04	22.88	23.70	1.208	0.350	22.1
Back side	20	QPSK 50RB_50	20850/2510	1:1	0.527	0.03	22.88	23.70	1.208	0.637	22.1
Body worn Test data (Separate 10mm 100%RB)											
Back side	20	QPSK 100RB_0	21350/2560	1:1	0.637	0.01	22.80	23.70	1.230	0.784	22.1
Body worn Test data at the worst case with Sample 2#											
Back side	20	QPSK 1RB_50	20850/2510	1:1	0.825	-0.07	23.71	24.70	1.256	1.036	22.1
Hotspot Test data(Separate 10mm 1RB)											
Front side	20	QPSK 1RB_50	21350/2560	1:1	0.377	0.02	23.82	24.70	1.225	0.462	22.1
Back side	20	QPSK 1RB_50	21350/2560	1:1	0.717	0.18	23.82	24.70	1.225	0.878	22.1
Left side	20	QPSK 1RB_50	21350/2560	1:1	0.160	0.05	23.82	24.70	1.225	0.196	22.1
Right side	20	QPSK 1RB_50	21350/2560	1:1	0.140	0.02	23.82	24.70	1.225	0.171	22.1
Bottom side	20	QPSK 1RB_50	21350/2560	1:1	0.993	-0.01	23.82	24.70	1.225	1.216	22.1
Back side	20	QPSK 1RB_50	20850/2510	1:1	0.842	-0.05	23.71	24.70	1.256	1.058	22.1
Back side	20	QPSK 1RB_50	21100/2535	1:1	0.824	-0.06	23.69	24.70	1.262	1.040	22.1
Bottom side	20	QPSK 1RB_50	20850/2510	1:1	1.030	-0.08	23.71	24.70	1.256	1.294	22.1
Bottom side-Repeat	20	QPSK 1RB_50	20850/2510	1:1	1.010	0.04	23.71	24.70	1.256	1.269	22.1
Bottom side	20	QPSK 1RB_50	21100/2535	1:1	1.020	-0.02	23.69	24.70	1.262	1.287	22.1
Hotspot Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50RB_50	20850/2510	1:1	0.290	0.04	22.88	23.70	1.208	0.350	22.1
Back side	20	QPSK 50RB_50	20850/2510	1:1	0.527	0.03	22.88	23.70	1.208	0.637	22.1
Left side	20	QPSK 50RB_50	20850/2510	1:1	0.124	0.06	22.88	23.70	1.208	0.150	22.1
Right side	20	QPSK 50RB_50	20850/2510	1:1	0.122	0.02	22.88	23.70	1.208	0.147	22.1
Bottom side	20	QPSK 50RB_50	20850/2510	1:1	0.843	0.11	22.88	23.70	1.208	1.018	22.1
Bottom side	20	QPSK 50RB_0	21100/2535	1:1	0.824	-0.03	22.75	23.70	1.245	1.025	22.1
Bottom side	20	QPSK 50RB_25	21350/2560	1:1	0.791	0.14	22.84	23.70	1.219	0.964	22.1

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com

Hotspot Test data(Separate 10mm 100%RB)											
Back side	20	QPSK 100RB_0	21350/2560	1:1	0.637	0.01	22.80	23.70	1.230	0.784	22.1
Bottom side	20	QPSK 100RB_0	21350/2560	1:1	0.741	-0.02	22.80	23.70	1.230	0.912	22.1
Hotspot Test data at the worst case with Sample 2#											
Bottom side	20	QPSK 1RB_50	20850/2510	1:1	1.020	-0.08	23.71	24.70	1.256	1.281	22.1
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)10-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.(°C)
Product specific 10gSAR Test data(Separate 0mm 1RB)											
Bottom side	20	QPSK 1RB_50	21350/2560	1:1	1.670	0.04	23.82	24.70	1.225	2.045	22.1
Bottom side	20	QPSK 1RB_50	20850/2510	1:1	2.080	-0.08	23.71	24.70	1.256	2.613	22.1
Bottom side-Repeat	20	QPSK 1RB_50	20850/2510	1:1	2.060	0.06	23.71	24.70	1.256	2.587	22.1
Bottom side	20	QPSK 1RB_50	21100/2535	1:1	1.900	-0.02	23.69	24.70	1.262	2.397	22.1
Product specific 10gSAR Test data(Separate 0mm 50%RB)											
Bottom side	20	QPSK 50RB_50	20850/2510	1:1	1.650	-0.01	22.88	23.70	1.208	1.993	22.1
Product specific 10gSAR Test data(Separate 0mm 100%RB)											
Bottom side	20	QPSK 100RB_0	21350/2560	1:1	1.250	-0.09	22.80	23.70	1.230	1.538	22.1
Product specific 10gSAR Test data with Sample 2#											
Bottom side	20	QPSK 1RB_50	20850/2510	1:1	2.040	0.01	23.71	24.70	1.256	2.562	22.1

Table 24: SAR of LTE Band 7 for Head, Body and Product specific 10g SAR.

Test Position	Channel/ Frequency	Measured SAR (1g)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
	(MHz)		SAR (1g)		SAR (1g)	SAR (1g)
Bottom side	20850/2510	1.030	1.010	1.02	N/A	N/A

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.

2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).

3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

Test Position	Channel/ Frequency	Measured SAR (1g)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
	(MHz)		SAR (1g)		SAR (1g)	SAR (1g)
Bottom side	20850/2510	2.080	2.060	1.01	N/A	N/A

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.

2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).

3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

Note:

- The maximum Scaled SAR value is marked in **bold**. Graph results refer to Appendix B.
- Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100 MHz.
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgs.com.cn
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com



8.3.10 SAR Result of LTE Band 12

Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.(°C)
Head Test data(1RB)											
Left cheek	10	QPSK 1RB_49	23060/704	1:1	0.121	-0.06	23.93	24.70	1.194	0.144	22.1
Left tilted	10	QPSK 1RB_49	23060/704	1:1	0.060	0.03	23.93	24.70	1.194	0.072	22.1
Right cheek	10	QPSK 1RB_49	23060/704	1:1	0.152	0.02	23.93	24.70	1.194	0.181	22.1
Right tilted	10	QPSK 1RB_49	23060/704	1:1	0.071	0.06	23.93	24.70	1.194	0.085	22.1
Head Test data(50%RB)											
Left cheek	10	QPSK 25RB_0	23130/711	1:1	0.091	0.04	22.94	23.70	1.191	0.108	22.1
Left tilted	10	QPSK 25RB_0	23130/711	1:1	0.049	-0.02	22.94	23.70	1.191	0.058	22.1
Right cheek	10	QPSK 25RB_0	23130/711	1:1	0.104	0.05	22.94	23.70	1.191	0.124	22.1
Right tilted	10	QPSK 25RB_0	23130/711	1:1	0.060	0.03	22.94	23.70	1.191	0.071	22.1
Head Test data at the worst case with Sample 2#											
Right cheek	10	QPSK 1RB_49	23060/704	1:1	0.152	-0.07	23.93	24.70	1.194	0.181	22.1
Body worn Test data(Separate 10mm 1RB)											
Front side	10	QPSK 1RB_49	23060/704	1:1	0.173	0.03	23.93	24.70	1.194	0.207	22.1
Back side	10	QPSK 1RB_49	23060/704	1:1	0.292	-0.03	23.93	24.70	1.194	0.349	22.1
Body worn Test data (Separate 10mm 50%RB)											
Front side	10	QPSK 25RB_0	23130/711	1:1	0.140	0.01	22.94	23.70	1.191	0.167	22.1
Back side	10	QPSK 25RB_0	23130/711	1:1	0.218	-0.03	22.94	23.70	1.191	0.260	22.1
Body worn Test data at the worst case with Sample 2#											
Back side	10	QPSK 1RB_49	23060/704	1:1	0.237	-0.01	23.93	24.70	1.194	0.283	22.1
Hotspot Test data(Separate 10mm 1RB)											
Front side	10	QPSK 1RB_49	23060/704	1:1	0.173	0.03	23.93	24.70	1.194	0.207	22.1
Back side	10	QPSK 1RB_49	23060/704	1:1	0.292	-0.03	23.93	24.70	1.194	0.349	22.1
Left side	10	QPSK 1RB_49	23060/704	1:1	0.171	0.02	23.93	24.70	1.194	0.204	22.1
Right side	10	QPSK 1RB_49	23060/704	1:1	0.261	-0.12	23.93	24.70	1.194	0.312	22.1
Bottom side	10	QPSK 1RB_49	23060/704	1:1	0.096	0.04	23.93	24.70	1.194	0.115	22.1
Hotspot Test data (Separate 10mm 50%RB)											
Front side	10	QPSK 25RB_0	23130/711	1:1	0.140	0.01	22.94	23.70	1.191	0.167	22.1
Back side	10	QPSK 25RB_0	23130/711	1:1	0.218	-0.03	22.94	23.70	1.191	0.260	22.1
Left side	10	QPSK 25RB_0	23130/711	1:1	0.138	0.04	22.94	23.70	1.191	0.164	22.1
Right side	10	QPSK 25RB_0	23130/711	1:1	0.213	-0.06	22.94	23.70	1.191	0.254	22.1
Bottom side	10	QPSK 25RB_0	23130/711	1:1	0.083	0.04	22.94	23.70	1.191	0.099	22.1
Hotspot Test data at the worst case with Sample 2#											
Back side	10	QPSK 1RB_49	23060/704	1:1	0.237	-0.01	23.93	24.70	1.194	0.283	22.1

Table 25: SAR of LTE Band 12 for Head, Body.

Note:

- 1) The maximum Scaled SAR value is marked in **bold**. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com



8.3.11 SAR Result of LTE Band 13

Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.(°C)
Head Test data(1RB)											
Left cheek	10	QPSK 1RB_25	23230/782	1:1	0.118	0.02	24.12	24.70	1.143	0.135	22.1
Left tilted	10	QPSK 1RB_25	23230/782	1:1	0.076	0.03	24.12	24.70	1.143	0.087	22.1
Right cheek	10	QPSK 1RB_25	23230/782	1:1	0.162	0.12	24.12	24.70	1.143	0.185	22.1
Right tilted	10	QPSK 1RB_25	23230/782	1:1	0.095	0.04	24.12	24.70	1.143	0.109	22.1
Head Test data(50%RB)											
Left cheek	10	QPSK 25RB_25	23230/782	1:1	0.104	-0.03	23.07	23.70	1.156	0.120	22.1
Left tilted	10	QPSK 25RB_25	23230/782	1:1	0.064	-0.04	23.07	23.70	1.156	0.074	22.1
Right cheek	10	QPSK 25RB_25	23230/782	1:1	0.128	0.09	23.07	23.70	1.156	0.148	22.1
Right tilted	10	QPSK 25RB_25	23230/782	1:1	0.080	0.13	23.07	23.70	1.156	0.092	22.1
Head Test data at the worst case with Sample 2#											
Right cheek	10	QPSK 1RB_25	23230/782	1:1	0.158	-0.07	24.12	24.70	1.143	0.181	22.1
Body worn Test data(Separate 10mm 1RB)											
Front side	10	QPSK 1RB_25	23230/782	1:1	0.159	0.04	24.12	24.70	1.143	0.182	22.1
Back side	10	QPSK 1RB_25	23230/782	1:1	0.243	0.03	24.12	24.70	1.143	0.278	22.1
Body worn Test data (Separate 10mm 50%RB)											
Front side	10	QPSK 25RB_25	23230/782	1:1	0.141	0.12	23.07	23.70	1.156	0.163	22.1
Back side	10	QPSK 25RB_25	23230/782	1:1	0.204	0.11	23.07	23.70	1.156	0.236	22.1
Body worn Test data at the worst case with Sample 2#											
Back side	10	QPSK 1RB_25	23230/782	1:1	0.232	-0.03	24.12	24.70	1.143	0.265	22.1
Hotspot Test data(Separate 10mm 1RB)											
Front side	10	QPSK 1RB_25	23230/782	1:1	0.159	0.04	24.12	24.70	1.143	0.182	22.1
Back side	10	QPSK 1RB_25	23230/782	1:1	0.243	0.03	24.12	24.70	1.143	0.278	22.1
Left side	10	QPSK 1RB_25	23230/782	1:1	0.132	0.03	24.12	24.70	1.143	0.151	22.1
Right side	10	QPSK 1RB_25	23230/782	1:1	0.203	-0.04	24.12	24.70	1.143	0.232	22.1
Bottom side	10	QPSK 1RB_25	23230/782	1:1	0.120	0.06	24.12	24.70	1.143	0.137	22.1
Hotspot Test data (Separate 10mm 50%RB)											
Front side	10	QPSK 25RB_25	23230/782	1:1	0.141	0.12	23.07	23.70	1.156	0.163	22.1
Back side	10	QPSK 25RB_25	23230/782	1:1	0.204	0.11	23.07	23.70	1.156	0.236	22.1
Left side	10	QPSK 25RB_25	23230/782	1:1	0.113	-0.10	23.07	23.70	1.156	0.131	22.1
Right side	10	QPSK 25RB_25	23230/782	1:1	0.175	0.06	23.07	23.70	1.156	0.202	22.1
Bottom side	10	QPSK 25RB_25	23230/782	1:1	0.104	0.04	23.07	23.70	1.156	0.120	22.1
Hotspot Test data at the worst case with Sample 2#											
Back side	10	QPSK 1RB_25	23230/782	1:1	0.232	-0.03	24.12	24.70	1.143	0.265	22.1

Table 26: SAR of LTE Band 13 for Head, Body.

Note:

- 1) The maximum Scaled SAR value is marked in **bold**. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com



8.3.12 SAR Result of LTE Band 17

Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.(°C)
Head Test data(1RB)											
Left cheek	10	QPSK 1RB_25	23780/709	1:1	0.096	0.04	23.85	24.70	1.216	0.117	22.1
Left tilted	10	QPSK 1RB_25	23780/709	1:1	0.056	0.03	23.85	24.70	1.216	0.068	22.1
Right cheek	10	QPSK 1RB_25	23780/709	1:1	0.148	0.16	23.85	24.70	1.216	0.180	22.1
Right tilted	10	QPSK 1RB_25	23780/709	1:1	0.064	0.02	23.85	24.70	1.216	0.078	22.1
Head Test data(50%RB)											
Left cheek	10	QPSK 25RB_0	23780/709	1:1	0.077	0.01	22.89	23.70	1.205	0.093	22.1
Left tilted	10	QPSK 25RB_0	23780/709	1:1	0.045	-0.12	22.89	23.70	1.205	0.054	22.1
Right cheek	10	QPSK 25RB_0	23780/709	1:1	0.085	0.03	22.89	23.70	1.205	0.102	22.1
Right tilted	10	QPSK 25RB_0	23780/709	1:1	0.053	0.04	22.89	23.70	1.205	0.064	22.1
Head Test data at the worst case with Sample 2#											
Right cheek	10	QPSK 1RB_25	23780/709	1:1	0.143	0.05	23.85	24.70	1.216	0.174	22.1
Body worn Test data(Separate 10mm 1RB)											
Front side	10	QPSK 1RB_25	23780/709	1:1	0.154	-0.04	23.85	24.70	1.216	0.187	22.1
Back side	10	QPSK 1RB_25	23780/709	1:1	0.272	-0.03	23.85	24.70	1.216	0.331	22.1
Body worn Test data (Separate 10mm 50%RB)											
Front side	10	QPSK 25RB_0	23780/709	1:1	0.123	0.04	22.89	23.70	1.205	0.148	22.1
Back side	10	QPSK 25RB_0	23780/709	1:1	0.192	0.02	22.89	23.70	1.205	0.231	22.1
Body worn Test data at the worst case with Sample 2#											
Back side	10	QPSK 1RB_25	23780/709	1:1	0.221	-0.03	23.85	24.70	1.216	0.269	22.1
Hotspot Test data(Separate 10mm 1RB)											
Front side	10	QPSK 1RB_25	23780/709	1:1	0.154	-0.04	23.85	24.70	1.216	0.187	22.1
Back side	10	QPSK 1RB_25	23780/709	1:1	0.272	-0.03	23.85	24.70	1.216	0.331	22.1
Left side	10	QPSK 1RB_25	23780/709	1:1	0.152	-0.12	23.85	24.70	1.216	0.185	22.1
Right side	10	QPSK 1RB_25	23780/709	1:1	0.235	0.01	23.85	24.70	1.216	0.286	22.1
Bottom side	10	QPSK 1RB_25	23780/709	1:1	0.083	0.02	23.85	24.70	1.216	0.101	22.1
Hotspot Test data (Separate 10mm 50%RB)											
Front side	10	QPSK 25RB_0	23780/709	1:1	0.123	0.04	22.89	23.70	1.205	0.148	22.1
Back side	10	QPSK 25RB_0	23780/709	1:1	0.192	0.02	22.89	23.70	1.205	0.231	22.1
Left side	10	QPSK 25RB_0	23780/709	1:1	0.120	-0.06	22.89	23.70	1.205	0.145	22.1
Right side	10	QPSK 25RB_0	23780/709	1:1	0.186	0.01	22.89	23.70	1.205	0.224	22.1
Bottom side	10	QPSK 25RB_0	23780/709	1:1	0.080	0.00	22.89	23.70	1.205	0.096	22.1
Hotspot Test data at the worst case with Sample 2#											
Back side	10	QPSK 1RB_25	23780/709	1:1	0.221	-0.03	23.85	24.70	1.216	0.269	22.1

Table 27: SAR of LTE Band 17 for Head, Body.

Note:

- 1) The maximum Scaled SAR value is marked in **bold**. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com



8.3.13 SAR Result of LTE Band 66

Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.(°C)
Head Test data(1RB)											
Left cheek	20	QPSK 1RB_50	132072/1720	1:1	0.210	0.07	23.62	24.20	1.143	0.240	22.2
Left tilted	20	QPSK 1RB_50	132072/1720	1:1	0.105	0.02	23.62	24.20	1.143	0.120	22.2
Right cheek	20	QPSK 1RB_50	132072/1720	1:1	0.126	0.06	23.62	24.20	1.143	0.144	22.2
Right tilted	20	QPSK 1RB_50	132072/1720	1:1	0.106	-0.02	23.62	24.20	1.143	0.121	22.2
Head Test data(50%RB)											
Left cheek	20	QPSK 50RB_50	132072/1720	1:1	0.126	0.04	22.73	23.20	1.114	0.140	22.2
Left tilted	20	QPSK 50RB_50	132072/1720	1:1	0.091	-0.05	22.73	23.20	1.114	0.101	22.2
Right cheek	20	QPSK 50RB_50	132072/1720	1:1	0.103	0.03	22.73	23.20	1.114	0.115	22.2
Right tilted	20	QPSK 50RB_50	132072/1720	1:1	0.102	-0.04	22.73	23.20	1.114	0.114	22.2
Head Test data at the worst case with Sample 2#											
Left cheek	20	QPSK 1RB_50	132072/1720	1:1	0.163	0.05	23.62	24.20	1.143	0.186	22.2
Body worn Test data(Separate 10mm 1RB)											
Front side	20	QPSK 1RB_50	132072/1720	1:1	0.333	0.05	23.62	24.20	1.143	0.381	22.2
Back side	20	QPSK 1RB_50	132072/1720	1:1	0.426	-0.04	23.62	24.20	1.143	0.487	22.2
Body worn Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50RB_50	132072/1720	1:1	0.275	0.02	22.73	23.20	1.114	0.306	22.2
Back side	20	QPSK 50RB_50	132072/1720	1:1	0.393	-0.01	22.73	23.20	1.114	0.438	22.2
Body worn Test data at the worst case with Sample 2#											
Back side	20	QPSK 1RB_50	132072/1720	1:1	0.350	-0.07	23.62	24.20	1.143	0.400	22.2
Hotspot Test data(Separate 10mm 1RB)											
Front side	20	QPSK 1RB_50	132072/1720	1:1	0.333	0.05	23.62	24.20	1.143	0.381	22.2
Back side	20	QPSK 1RB_50	132072/1720	1:1	0.426	-0.04	23.62	24.20	1.143	0.487	22.2
Left side	20	QPSK 1RB_50	132072/1720	1:1	0.284	0.06	23.62	24.20	1.143	0.325	22.2
Bottom side	20	QPSK 1RB_50	132072/1720	1:1	0.306	0.03	23.62	24.20	1.143	0.350	22.2
Hotspot Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50RB_50	132072/1720	1:1	0.275	0.02	22.73	23.20	1.114	0.306	22.2
Back side	20	QPSK 50RB_50	132072/1720	1:1	0.393	-0.01	22.73	23.20	1.114	0.438	22.2
Left side	20	QPSK 50RB_50	132072/1720	1:1	0.244	0.03	22.73	23.20	1.114	0.272	22.2
Bottom side	20	QPSK 50RB_50	132072/1720	1:1	0.258	0.01	22.73	23.20	1.114	0.287	22.2
Hotspot Test data at the worst case with Sample 2#											
Back side	20	QPSK 1RB_50	132072/1720	1:1	0.350	-0.07	23.62	24.20	1.143	0.400	22.2

Table 28: SAR of LTE Band 66 for Head, Body.

Note:

- 1) The maximum Scaled SAR value is marked in **bold**. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com

8.3.14 SAR Result of WIFI 2.4G

Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg)1-g	Power drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.(°C)
Head Test data											
Left cheek	802.11b	6/2437	98.83%	1.012	0.781	0.12	18.19	18.50	1.074	0.849	22
Left tilted	802.11b	6/2437	98.83%	1.012	0.464	0.03	18.19	18.50	1.074	0.504	22
Right cheek	802.11b	6/2437	98.83%	1.012	0.261	0.02	18.19	18.50	1.074	0.284	22
Right tilted	802.11b	6/2437	98.83%	1.012	0.231	0.04	18.19	18.50	1.074	0.251	22
Left cheek	802.11b	11/2462	98.83%	1.012	0.787	-0.14	18.03	18.50	1.114	0.887	22
Head Test data at the worst case with Sample 2#											
Left cheek	802.11b	11/2462	98.83%	1.012	0.779	-0.01	18.03	18.50	1.114	0.878	22
Body worn Test data (Separate 10mm)											
Front side	802.11b	6/2437	98.83%	1.012	0.112	-0.02	18.19	18.50	1.074	0.122	22
Back side	802.11b	6/2437	98.83%	1.012	0.186	0.05	18.19	18.50	1.074	0.202	22
Body worn Test data at the worst case with Sample 2#											
Back side	802.11b	6/2437	98.83%	1.012	0.132	0.01	18.19	18.50	1.074	0.143	22
Hotspot Test data (Separate 10mm)											
Front side	802.11b	6/2437	98.83%	1.012	0.112	-0.02	18.19	18.50	1.074	0.122	22
Back side	802.11b	6/2437	98.83%	1.012	0.186	0.05	18.19	18.50	1.074	0.202	22
Right side	802.11b	6/2437	98.83%	1.012	0.067	0.01	18.19	18.50	1.074	0.073	22
Top side	802.11b	6/2437	98.83%	1.012	0.075	-0.02	18.19	18.50	1.074	0.082	22
Hotspot Test data at the worst case with Sample 2#											
Back side	802.11b	6/2437	98.83%	1.012	0.132	0.01	18.19	18.50	1.074	0.143	22

Table 29: SAR of WIFI 2.4G for Head and Body.

Mode	Tune-up (dBm)	Tune-up (mW)	Max Reported SAR(W/kg)	Adjusted SAR(W/kg)	SAR Test (Yes/No)
802.11b	18.50	70.79	0.887	/	Yes
802.11g	17.00	50.12	/	0.628	No
802.11n-HT20	16.00	39.81	/	0.499	No

Note:

- 1) The maximum Scaled SAR value is marked in **bold**. Graph results refer to Appendix B.
- 2) Per KDB 648474 D04, Product Specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.
- 3) When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.



8.3.15 SAR Result of WIFI 5G

Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg)1-g	Power drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.(°C)
Head Test data of U-NII-2A											
Left cheek	802.11n-HT40	62/5310	96.32%	1.038	0.281	-0.01	12.07	13.00	1.239	0.361	22.2
Left tilted	802.11n-HT40	62/5310	96.32%	1.038	0.403	-0.05	12.07	13.00	1.239	0.518	22.2
Right cheek	802.11n-HT40	62/5310	96.32%	1.038	0.286	0.02	12.07	13.00	1.239	0.368	22.2
Right tilted	802.11n-HT40	62/5310	96.32%	1.038	0.399	-0.06	12.07	13.00	1.239	0.513	22.2
Head Test data of U-NII-2C											
Left cheek	802.11n-HT40	110/5550	96.32%	1.038	0.358	0.01	11.98	13.00	1.265	0.470	22.2
Left tilted	802.11n-HT40	110/5550	96.32%	1.038	0.721	-0.02	11.98	13.00	1.265	0.947	22.2
Right cheek	802.11n-HT40	110/5550	96.32%	1.038	0.384	0.02	11.98	13.00	1.265	0.504	22.2
Right tilted	802.11n-HT40	110/5550	96.32%	1.038	0.529	-0.04	11.98	13.00	1.265	0.695	22.2
Left tilted	802.11n-HT40	142/5710	96.32%	1.038	0.760	-0.01	11.55	13.00	1.396	1.102	22.2
Head Test data of U-NII-3											
Left cheek	802.11n-HT40	151/5755	96.32%	1.038	0.403	0.04	11.38	13.00	1.452	0.608	22.2
Left tilted	802.11n-HT40	151/5755	96.32%	1.038	0.489	-0.10	11.38	13.00	1.452	0.737	22.2
Right cheek	802.11n-HT40	151/5755	96.32%	1.038	0.435	-0.01	11.38	13.00	1.452	0.656	22.2
Right tilted	802.11n-HT40	151/5755	96.32%	1.038	0.583	0.02	11.38	13.00	1.452	0.879	22.2
Right tilted	802.11n-HT40	159/5795	96.32%	1.038	0.617	0.04	11.22	13.00	1.507	0.965	22.2
Head Test data at the worst case with Sample 2#											
Left tilted	802.11n-HT40	142/5710	96.32%	1.038	0.672	-0.08	11.55	13.00	1.396	0.974	22.2
Body worn Test data of U-NII-2A (Separate 10mm)											
Front side	802.11n-HT40	62/5310	96.32%	1.038	0.073	-0.02	12.07	13.00	1.239	0.094	22.2
Back side	802.11n-HT40	62/5310	96.32%	1.038	0.088	0.03	12.07	13.00	1.239	0.113	22.2
Body worn Test data of U-NII-2C(Separate 10mm)											
Front side	802.11n-HT40	110/5550	96.32%	1.038	0.083	0.04	11.98	13.00	1.265	0.109	22.2
Back side	802.11n-HT40	110/5550	96.32%	1.038	0.081	0.01	11.98	13.00	1.265	0.106	22.2
Body worn Test data of U-NII-3(Separate 10mm)											
Front side	802.11n-HT40	151/5755	96.32%	1.038	0.108	-0.09	11.38	13.00	1.452	0.163	22.2
Back side	802.11n-HT40	151/5755	96.32%	1.038	0.090	0.02	11.38	13.00	1.452	0.136	22.2
Body worn Test data at the worst case with Sample 2#											
Front side	802.11n-HT40	151/5755	96.32%	1.038	0.067	-0.02	11.38	13.00	1.452	0.101	22.2
Hotspot Test data of U-NII-1(Separate 10mm)											
Front side	802.11n-HT40	46/5230	96.32%	1.038	0.072	0.08	11.36	13.00	1.459	0.110	22.2
Back side	802.11n-HT40	46/5230	96.32%	1.038	0.073	0.03	11.36	13.00	1.459	0.111	22.2
Right side	802.11n-HT40	46/5230	96.32%	1.038	0.069	0.02	11.36	13.00	1.459	0.105	22.2
Top side	802.11n-HT40	46/5230	96.32%	1.038	0.101	-0.08	11.36	13.00	1.459	0.153	22.2
Hotspot Test data of U-NII-3 (Separate 10mm)											
Front side	802.11n-HT40	151/5755	96.32%	1.038	0.108	-0.09	11.38	13.00	1.452	0.163	22.2
Back side	802.11n-HT40	151/5755	96.32%	1.038	0.090	0.02	11.38	13.00	1.452	0.136	22.2
Right side	802.11n-HT40	151/5755	96.32%	1.038	0.071	-0.04	11.38	13.00	1.452	0.106	22.2
Top side	802.11n-HT40	151/5755	96.32%	1.038	0.218	-0.13	11.38	13.00	1.452	0.329	22.2
Hotspot Test data at the worst case with Sample 2#											
Top side	802.11n-HT40	151/5755	96.32%	1.038	0.207	-0.06	11.38	13.00	1.452	0.312	22.2

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com



Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg)10-g	Power drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.(°C)
Product specific 10gSAR Test data of U-NII-2A(Separate 0mm)											
Front side	802.11n-HT40	62/5310	96.32%	1.038	0.109	0.02	12.07	13.00	1.239	0.140	22.2
Back side	802.11n-HT40	62/5310	96.32%	1.038	0.156	-0.04	12.07	13.00	1.239	0.201	22.2
Right side	802.11n-HT40	62/5310	96.32%	1.038	0.057	0.05	12.07	13.00	1.239	0.073	22.2
Top side	802.11n-HT40	62/5310	96.32%	1.038	0.171	-0.08	12.07	13.00	1.239	0.220	22.2
Product specific 10gSAR Test data of U-NII-2C(Separate 0mm)											
Front side	802.11n-HT40	110/5550	96.32%	1.038	0.120	0.03	11.98	13.00	1.265	0.158	22.2
Back side	802.11n-HT40	110/5550	96.32%	1.038	0.143	0.00	11.98	13.00	1.265	0.188	22.2
Right side	802.11n-HT40	110/5550	96.32%	1.038	0.061	0.01	11.98	13.00	1.265	0.079	22.2
Top side	802.11n-HT40	110/5550	96.32%	1.038	0.305	-0.02	11.98	13.00	1.265	0.400	22.2
Product specific 10gSAR Test data with Sample 2#											
Top side	802.11n-HT40	110/5550	96.32%	1.038	0.223	-0.07	11.98	13.00	1.265	0.293	22.2

Table 30: SAR of WIFI 5G for Head, Body and Product specific 10g SAR.

Note:

- 1) The maximum Scaled SAR value is marked in **bold**. Graph results refer to Appendix B.
- 2) Per KDB 648474 D04, Product Specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.
- 3) When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com



8.4 Multiple Transmitter Evaluation

8.4.1 Simultaneous SAR test evaluation

- Simultaneous Transmission Possibilities

NO.	Simultaneous Tx Combination	Head	Body	Hotspot	Product Specific 10-g (0mm)
1	GSM Voice + BT	Yes	Yes	Yes	Yes
2	GSM DATA + BT	N/A	Yes	Yes	Yes
3	GSM Voice + WiFi 2.4G	Yes	Yes	Yes	Yes
4	GSM DATA + WiFi 2.4G	N/A	Yes	Yes	Yes
5	GSM Voice + WiFi 5G	Yes	Yes	Yes	Yes
6	GSM DATA + WiFi 5G	N/A	Yes	Yes	Yes
7	UMTS + BT	Yes	Yes	Yes	Yes
8	UMTS + WiFi 2.4G	Yes	Yes	Yes	Yes
9	UMTS + WiFi 5G	Yes	Yes	Yes	Yes
10	LTE + BT	Yes	Yes	Yes	Yes
11	LTE + WiFi 2.4G	Yes	Yes	Yes	Yes
12	LTE + WiFi 5G	Yes	Yes	Yes	Yes

Note:

- WiFi 2.4G/5G and Bluetooth can't transmit simultaneously.
- The device does not support DTM function.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·津东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

Member of the SGS Group(SGS SA)

8.4.2 Simultaneous Transmission SAR Summation Scenario

Test position		Main Antenna SARmax (W/kg)													WiFi Antenna SARmax (W/kg)			Summed 1g SARmax (W/kg)
		GSM850	GSM1900	WCDMA Band II	WCDMA Band IV	WCDMA Band V	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 7	LTE Band 12	LTE Band 13	LTE Band 17	LTE Band 66	WLAN 2.4G	WLAN 5G	BT	
Head	Left Touch	0.231	0.147	0.264	0.229	0.228	0.265	0.248	0.199	0.151	0.144	0.135	0.117	0.240	0.887	0.608	0.374	1.152
	Left Tilt	0.131	0.088	0.165	0.135	0.109	0.123	0.129	0.113	0.102	0.072	0.087	0.068	0.120	0.504	1.102	0.374	1.267
	Right Touch	0.269	0.082	0.161	0.154	0.246	0.131	0.146	0.194	0.110	0.181	0.185	0.180	0.144	0.284	0.656	0.374	0.925
	Right Tilt	0.148	0.072	0.163	0.119	0.120	0.151	0.126	0.129	0.073	0.085	0.109	0.078	0.121	0.251	0.965	0.374	1.128
Body worn 10mm	Front	0.204	0.229	0.439	0.362	0.240	0.396	0.420	0.213	0.462	0.207	0.182	0.187	0.381	0.122	0.163	0.187	0.649
	Back	0.435	0.359	0.690	0.551	0.487	0.583	0.534	0.365	1.058	0.349	0.278	0.331	0.487	0.202	0.136	0.187	1.260
Hotspot	Front	0.323	0.119	0.439	0.362	0.240	0.396	0.420	0.213	0.462	0.207	0.182	0.187	0.381	0.122	0.163	0.187	0.649
	Back	0.606	0.539	0.690	0.551	0.487	0.583	0.534	0.365	1.058	0.349	0.278	0.331	0.487	0.202	0.136	0.187	1.260
	Left	0.249	0.104	0.457	0.330	0.181	0.387	0.351	0.164	0.196	0.204	0.151	0.185	0.325	/	/	/	0.457
	Right	0.354	/	/	/	0.250	/	/	0.224	0.171	0.312	0.232	0.286	/	0.073	0.106	0.187	0.541
	Top	/	/	/	/	/	/	/	/	/	/	/	/	/	0.082	0.329	0.187	0.329
	Bottom	0.344	0.108	0.397	0.337	0.257	0.340	0.345	0.215	1.294	0.115	0.137	0.101	0.350	/	/	/	1.294
Test position		Main Antenna SARmax (W/kg)													WiFi Antenna SARmax (W/kg)			Summed 10g SARmax
		GSM850	GSM1900	WCDMA Band II	WCDMA Band IV	WCDMA Band V	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 7	LTE Band 12	LTE Band 13	LTE Band 17	LTE Band 66	WLAN 2.4G	WLAN 5G	BT	
Product Specific 10-g SAR	Front	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.158	/	0.158
	Back	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.201	/	0.201
	Left	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.000
	Right	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.079	/	0.079
	Top	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.400	/	0.400
	Bottom	/	/	/	/	/	/	/	/	2.613	/	/	/	/	/	/	/	2.613

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com

Member of the SGS Group (SGS SA)



9 Equipment list

Test Platform		SPEAG DASY5 Professional				
Description		SAR Test System (Frequency range 300MHz-6GHz)				
Software Reference		DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)				
Hardware Reference						
Equipment		Manufacturer	Model	Serial Number	Calibration Date	Due date of calibration
☒	Twin Phantom	SPEAG	SAM 5	1481	NCR	NCR
☒	Twin Phantom	SPEAG	SAM 6	1824	NCR	NCR
☒	DAE	SPEAG	DAE4	1374	2019-09-24	2020-09-23
☒	DAE	SPEAG	DAE3	414	2019-12-17	2020-12-16
☒	E-Field Probe	SPEAG	EX3DV4	3789	2020-06-16	2021-06-15
☒	E-Field Probe	SPEAG	EX3DV4	3962	2020-04-01	2021-03-31
☒	Validation Kits	SPEAG	D750V3	1160	2019-05-22	2022-05-21
☒	Validation Kits	SPEAG	D835V2	4d105	2019-12-17	2022-12-16
☒	Validation Kits	SPEAG	D1750V2	1149	2019-05-21	2022-05-20
☒	Validation Kits	SPEAG	D1900V2	5d028	2019-12-17	2022-12-16
☒	Validation Kits	SPEAG	D2450V2	733	2019-12-17	2022-12-16
☒	Validation Kits	SPEAG	D2600V2	1125	2019-05-20	2022-05-19
☒	Validation Kits	SPEAG	D5GHzV2	1165	2019-12-20	2022-12-19
☒	Agilent Network Analyzer	Agilent	E5071C	MY46523591	2020-04-16	2021-04-15
☒	Dielectric Probe Kit	Agilent	85070E	US01440210	NCR	NCR
☒	Universal Radio Communication Tester	R&S	CMW500	129105	2019-11-18	2020-11-17
☒	Radio Communication Analyzer	Anritsu	MT8820C	6201010267	2020-04-02	2021-04-01
☒	RF Bi-Directional Coupler	Agilent	86205-60001	MY31400031	NCR	NCR
☒	Signal Generator	Agilent	N5171B	MY53050736	2020-04-15	2021-04-14
☒	Preamplifier	Mini-Circuits	ZHL-42W	15542	NCR	NCR
☒	Preamplifier	Compliance Directions Systems Inc.	AMP28-3W	073501433	NCR	NCR
☒	Power Meter	Agilent	E4416A	GB41292095	2020-04-15	2021-04-14
☒	Power Sensor	Agilent	8481H	MY41091234	2020-04-15	2021-04-14
☒	Power Sensor	R&S	NRP-Z92	100025	2020-04-16	2021-04-15
☒	Attenuator	SHX	TS2-3dB	30704	NCR	NCR
☒	Coaxial low pass filter	Mini-Circuits	VLF-2500(+)	NA	NCR	NCR
☒	Coaxial low pass filter	Microlab Fxr	LA-F13	NA	NCR	NCR
☒	DC POWER SUPPLY	SAKO	SK1730SL5A	NA	NCR	NCR

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China
中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层 邮编 710086 sgs.china@sgs.com

Member of the SGS Group (SGS SA)



☒	Speed reading thermometer	MingGao	T809	NA	2020-04-11	2021-04-10
☒	Humidity and Temperature Indicator	KIMTOKA	KIMTOKA	NA	2020-04-11	2021-04-10

Note: All the equipments are within the valid period when the tests are performed.

10 Calibration certificate

Please see the Appendix C

11 Photographs

Please see the Appendix D

Appendix A: Detailed System Check Results

Appendix B: Detailed Test Results

Appendix C: Calibration certificate

Appendix D: Photographs

---END---

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1/ F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, 710086 www.sgsgroup.com.cn
Xi'an, Shaanxi, China

中国·西安·沣东新城科源三路 137 号康鸿橙方科技园 1 号楼 D 单元一层

邮编 710086 sgs.china@sgs.com