


Exhibit 2S: C-Band Telemetry Beam - Emergency
 Beam Polarization: Vertical
 Peak Antenna Gain: 2.0 dBi
 Beam Peak EIRP: 9.2 dBW
 [Schedule S Beam Designation: TLMB]

(a) Azimuth Cut Antenna Gain Pattern

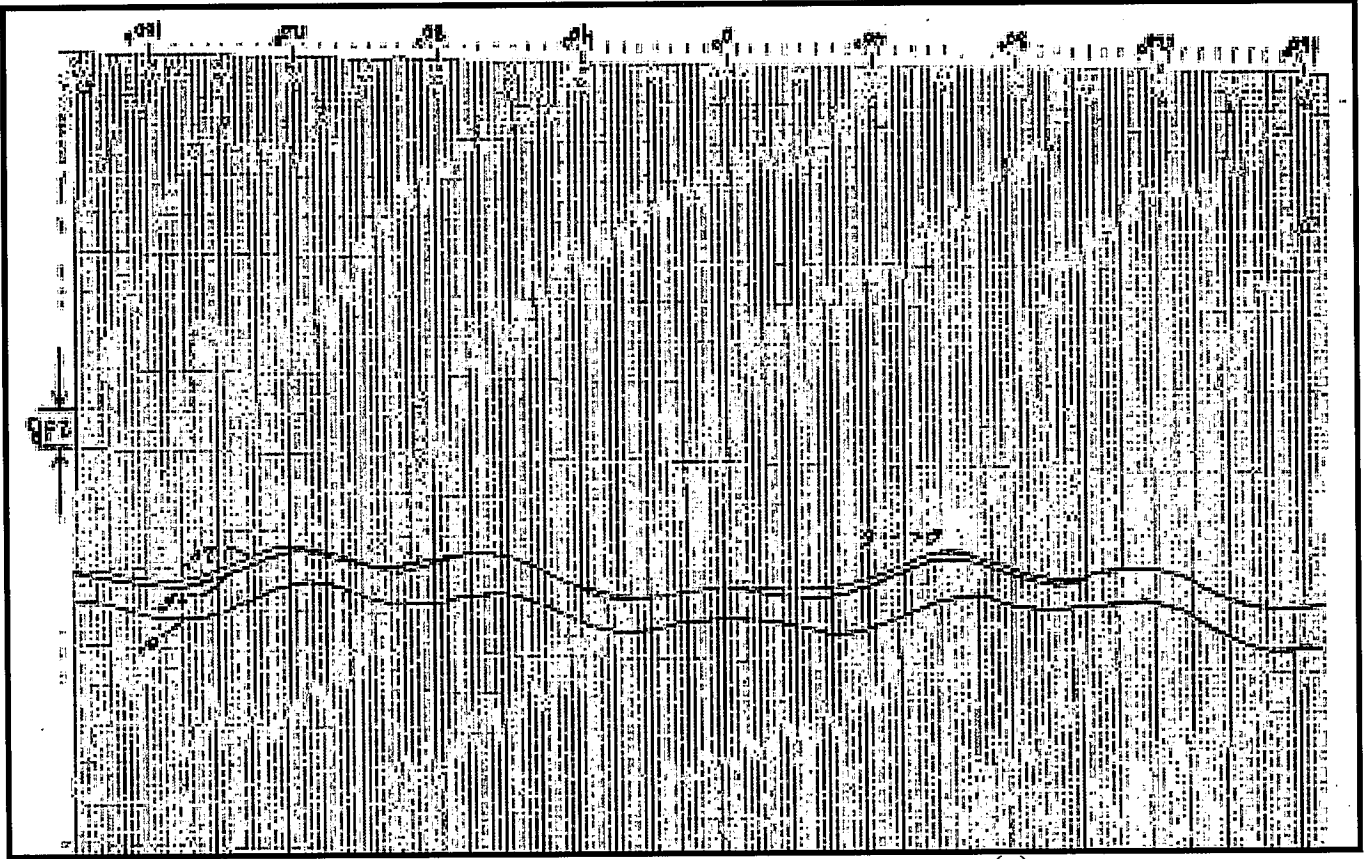


Notes:

- 1) Gain variation in azimuth shown for elevation angles of 0° and ±20°.
- 2) The x-axis represents the azimuth angle and spans from -180° to +180°. Each major axis division line represents 20° of azimuth.
- 3) The y-axis represents the antenna gain. Each major axis division line represents 2 dB of gain.

Exhibit 2S: C-Band Telemetry Beam - Emergency (continued)

Beam Polarization: Vertical
 Peak Antenna Gain: 2.0 dBi
 Beam Peak EIRP: 9.2 dBW
 [Schedule S Beam Designation: TLMB]

(b) Elevation Cut Antenna Gain Pattern

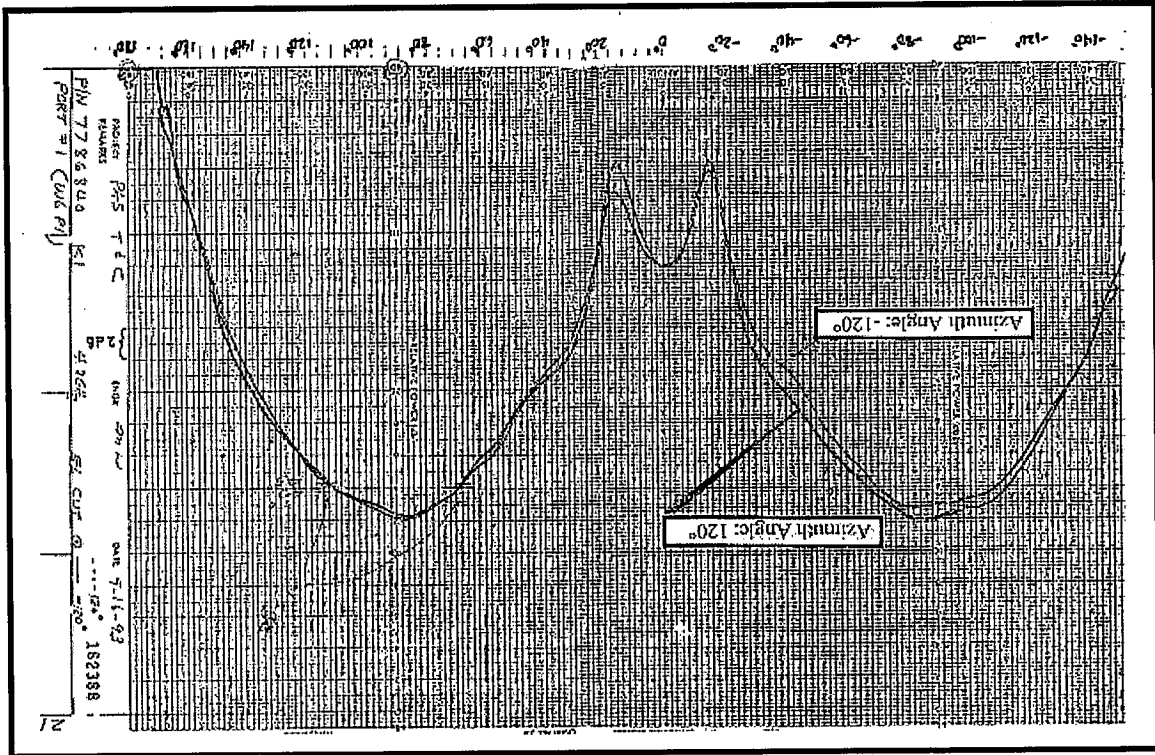

- Notes:
- 1) Gain variation in elevation shown for the azimuth angle of 0°.
 - 2) The x-axis represents the elevation angle and spans from -140° to +180°. Each major axis division line represents 20° of elevation.
 - 3) The y-axis represents the antenna gain. Each major axis division line represents 2 dB of gain.