



Exhibit 3

Vigoride-1 Spacecraft

Orbital Debris Assessment Report (ODAR)

V3

02/09/2021

Momentum Inc.
3050 Kenneth Street
Santa Clara, CA 95054
+1 (650) 564-7820

Document contains no ITAR or otherwise restricted data.

DAS Software Version used in Analysis: v3.1.0

Revision History

Revision Number	Updates	Page #	Author	Date
1	Initial Release	All	Sam Avery	6/8/20
2	Including DAS 3.1.0 software	All	Sam Avery	8/6/20
3	Minor updates based on launch date shift	All	Sam Avery	2/9/21

Table of Contents

Orbital Debris Self-Assessment Evaluation	3
Assessment Report Format	3
I. Program Management and Mission Overview	4
II. Spacecraft Description	7
III. Spacecraft Debris Released during Normal Operations	11
IV. Intentional Breakups and Potential for Explosions	12
V. Spacecraft Potential for On-Orbit Collisions	17
VI. Spacecraft Postmission Disposal Plans and Procedures	19
VII. Spacecraft Reentry Hazards	23
VIII. Tether Missions	41



Sam Avery
 Regulatory Technical Lead, Vigoride-1
 Momentus

Orbital Debris Self-Assessment Evaluation

Reqm't #	Launch Vehicle					Spacecraft				Comments <i>For all incompletes, include risk assessment (low, medium, or high risk) of non-compliance & Project Risk Tracking #</i>
	Compliant	N/A	Not Compliant	Std. Non-Compliant	Incomplete	Compliant	N/A	Not Compliant	Incomplete	
4.3-1.a <i>23 year limit</i>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	See comment 1. No debris released.
4.3-1.b <i><100 objects/year limit</i>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	See comment 1. No debris released.
4.3-2 <i>GEO +/- 200km</i>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	See comment 1. No debris released.
4.4-1 <i><0.001 Explosion Risk</i>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	See comment 1.
4.4-2 <i>Passivate Energy Sources</i>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	See comment 1.
4.4-3 <i>Limit BUL Long term Risk</i>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	See comment 1. No intentional breakups.
4.4-4 <i>Limit BUL Short term Risk</i>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	See comment 1. No intentional breakups.
4.5-1 <i><.001 10cm Impact Risk</i>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	See comment 1.
4.5-2 <i>Postmission Disposal Risk</i>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.6-1a-c <i>Disposal Method</i>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	See comment 1.
4.6-2 <i>GEO Disposal</i>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	See comment 1.
4.6-3 <i>MEO Disposal</i>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	See comment 1.
4.6-4 <i>Disposal Reliability</i>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	See comment 1.
4.7-1 <i>Ground Population Risk</i>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	See comment 1.
4.8-1 <i>Tether Risk</i>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	No tethers used.

Comment 1. This ODAR analyzes only VR-1 and provides representative information regarding the customer payloads. The launch vehicle and other launch vehicle payloads are not considered in this ODAR.

Assessment Report Format

ODAR Technical Sections Format Requirements: This ODAR follows the format recommended in NASA-STD-8719.14, Appendix A.1 and includes the content indicated at a minimum in sections 2 through 8 for the Vigoride-1 (“VR-1”) satellite. Sections 9 through 14 of the NASA standard apply to the launch vehicle ODAR and are not covered here.

I. Program Management and Mission Overview

Project Manager:

- Aliki Loper-Leddy

Foreign Government or space agency participation:

- None

Schedule of Upcoming Mission Milestones:

- Launch – June 2021

Mission Overview:

Momentum is a private U.S. company headquartered in Santa Clara, California. Momentum is engaged in the design, construction, and operation of in-space transportation spacecraft. Since its founding in 2017, Momentum has brought together a team of aerospace professionals, drawn from throughout the industry, united with the singular goal of changing how the world thinks about space transportation infrastructure. Through its revolutionary Vigoride spacecraft, each capable of transporting and delivering small satellites to tailored orbital locations, Momentum will provide efficient and inexpensive “connecting flights” in space. The ability to customize orbits using Vigoride spacecraft empowers small satellite operators by enabling greater and lower-collision risk use of all orbits, including high-density orbits. Additionally, introducing the orbit flexibility of the Vigoride spacecraft into the existing commercial rideshare launch market can accelerate commercial space station deployments by expanding the orbital reach of existing launches, thereby increasing total ridership and contributing to lower launch prices. Cheaper, faster and smarter commercial space transportation has the capability to fundamentally change how space operators interact with on-orbit infrastructure.

This ODAR evaluates the Momentum initial demonstration mission, Vigoride-1 (“VR-1”), which is planned to launch on a SpaceX Falcon-9 rocket in June 2021. For the demonstration mission, VR-1 will exhibit the capacity to transport and deploy multiple payloads. Each customer satellite payload is a commercial smallsat individually licensed and authorized to operate by each respective national jurisdiction.¹ The necessary de-orbit and debris analysis for customer satellite payloads will be addressed through the licensing process for the relevant payload.²

¹ General information regarding the customer satellites is provided in Table 1 in the application narrative.

² In the event a customer payload is unable to be launched, Momentum will launch VR-1 with a representative mass, and such mass shall not be deployed.

**Launch Vehicle:**

- Falcon-9

Expected Launch Site:

- Cape Canaveral Space Launch Complex (SLC-40 or SLCE-4E)

Operational Mission Duration:

- Planned for 180 days.

The VR-1 concept of operations is as follows:

1. Launch vehicle arrives at initial maximum orbit (550 km altitude circular sun-synchronous)³
2. VR-1 separates from launch vehicle
3. VR-1 undergoes commissioning and preliminary testing
4. VR-1 conducts orbit raising maneuvers to second orbit (max. 570 km circular sun-synchronous orbit, based on a planned 20 km raise from a notional max 550 km initial separation)
5. VR-1 deploys Payloads 1 through 5
6. VR-1 performs detailed system functional testing
7. VR-1 conducts de-orbit maneuvers (targeting 300 km perigee)

³ SpaceX reports a planned insertion orbit of 525 km (± 25 km), thus initial maximum altitude described in the concept of operations above indicated maximum injection altitude of 550 km.

Table 1: Orbital Parameters

	Insertion and Payloads 1 through 5 Deployment	VR-1 Transfer Orbit	VR-1 End-of-Life Orbit
Apogee Altitude	550 km (max)	570 km (max)	570 km (max)
Perigee Altitude	550 km (max)	570 km (max)	300 km ⁴
Inclination	~98° (Sun-Synchronous)	~98° (Sun-Synchronous)	~98°
Period	96 mins	96 mins	90-96 mins
Argument of Perigee	N/A	N/A	N/A
Local Time of the Ascending Node (LTAN)	~1:30	~1:30	~1:30
Maximum De- Orbit Life	VR-1 21 years ⁵	VR-1 17 years ⁶	VR-1 2 years

⁴ The target perigee as a result of de-orbit maneuvers is 300 km.

⁵ This is the de-orbit duration if VR-1 has both a propulsion system failure *and* a solar array deployment failure after deployment from the launch vehicle.

⁶ This is the de-orbit duration if VR-1 has a propulsion system failure after raising the orbit to 570 km altitude.

II. Spacecraft Description

Physical Description:

VR-1 has the following subsystems: Propulsion System, Structures, Mechanisms, Electric Power System, and Avionics.

VR-1 includes a primary and a secondary structural assembly with: Propellant Tanks, MET, Reaction Control System thrusters, Solar Array Assemblies, a payload adapter ring for interfacing with the “plaza deck” for deployment⁷ and, thereby, the launch vehicle, and one 12U cubesat deployer.

The VR-1 spacecraft bus includes two spring-loaded UHF antennas which are deployed after separation from the launch vehicle by a burn wire. In addition, VR-1 includes two 4-panel 150W deployable solar arrays which are deployed using a frangibolt Hold Down and Release Mechanism (HDRM). Both of these deployments are controlled by a software timer via the flight computer.

The Payloads are fully stowed in their deployers and their power is inhibited prior to on-orbit deployment. The Payloads will follow the form and mass characteristics of a standard cubesat of the relative U-size of the payload. The VR-1 spacecraft platform components all have their power inhibited until launch vehicle separation occurs.

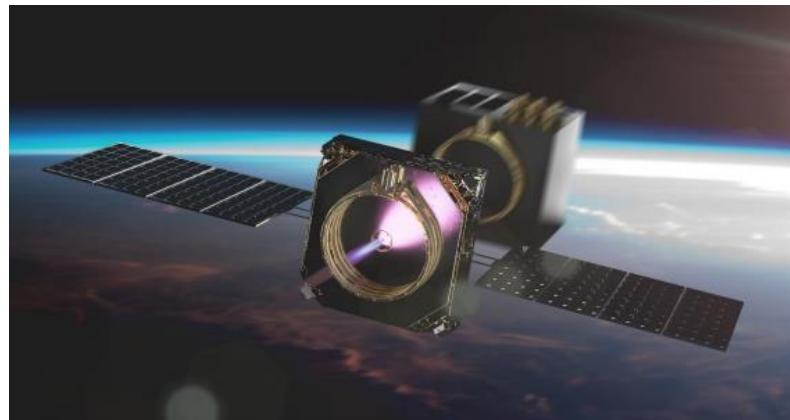


Figure 1. Artist rendering of Vigoride deploying a customer spacecraft.

⁷ A detailed description of the plaza deck is described in the narrative exhibit.

Table 2. General Spacecraft Description

Criteria	Description	Notes
Spacecraft Total Launch Mass	161 kg	Includes 6 kg of propellant.
Spacecraft Launch Dry Mass	155 kg	
Propulsion System	<p>MET and resistojet reaction control thrusters.</p> <p>See <i>Propulsion System Description</i>.</p>	Propulsion system operates using non-toxic and low-pressure liquid water propellant.
Body Dimensions	0.62x0.69x0.62 m ³	
Deployed Solar Array Dimensions	3.5x0.64x0.03 m ³	Dimensions per solar array wing.
Identification of all Fluids	<ul style="list-style-type: none"> • Liquid/vapor water mixture (propellant) • Nitrogen (tank pressurant) • Helium (tank pressurant) <p>See <i>Fluids Description</i>.</p>	
Fluids in Pressurized Batteries	None. VR-1 uses unpressurized lithium ion cells.	
Attitude Determination and Control	<p>Attitude Determination</p> <ul style="list-style-type: none"> • Star Tracker • Sun Sensors • Magnetometers • Gyroscope <p>Attitude Control</p> <ul style="list-style-type: none"> • Magnetic Torque Rods 	

	<ul style="list-style-type: none"> • Reaction Wheels • Reaction Control Thrusters <p>See <i>Attitude Determination and Control System Description</i>.</p>	
Range Safety or Pyrotechnic Devices	None	
Electrical Generation and Storage System	<p>Two 150W solar array wings for power generation.</p> <p>One Lithium-Ion 7S1P battery (~28V) and one Lithium-Ion 1S4P battery (~4.2V) are included and charged prior to launch vehicle integration. A separate failsafe deployment mechanism includes a Lithium-Ion 1S1P battery (~4.2V).</p>	
Other Stored Energy	<ul style="list-style-type: none"> • Solar array spring energy stored in hinges. • Clampband separation system spring energy. • CubeSat deployer hinged door spring energy. 	
Radioactive Materials	Not applicable.	

Propulsion System Description

The Vigoride propulsion system energizes distilled water into plasma using RF microwave energy. The plasma is expelled out of the thruster using a nozzle to produce thrust at a specific impulse (Isp) exceeding traditional chemical propulsion systems. The expected thrust and Isp will vary with input power levels but will not exceed 15 mN. The VR-1 mission will nominally include 6 ± 1 kg of liquid water propellant at launch. The 6 kg of water is roughly split into two parts: 4 kg total in two diaphragm tanks; and 2 kg total in two prototype propellant tanks. The maximum expected total impulse is approximately 25 kNs.

In addition, there are four experimental reaction control thrusters with estimated maximum thrust of 5 mN and specific impulse of 80 seconds. These reaction control thrusters use the same stored liquid water as a propellant.

Fluids Description

The propulsion system includes two diaphragm tanks with liquid water propellant pressurized using inert gaseous nitrogen. Each diaphragm tank is expected to include 2 kg of propellant. In addition, there are two prototype propellant tanks filled with water propellant and pressurized at launch using inert gaseous helium. These prototype propellant tanks are expected to include 1 kg of propellant. At spacecraft integration the diaphragm tanks are pressurized to 44 psi at 68°F, one prototype propellant tank at 50 psi at 140°F, and another prototype propellant tank at the vapor pressure of water at 3 psi at 140°F. The tanks are expected to remain within 20% of these pressures during transportation to the launch site, during launch, and post launch until thruster operations.

At the end of the mission, following a de-orbit maneuver, the propellant flow valve will be fully opened to allow all propellant and pressurant to vent into space and remove thrusting capability from the system. The spacecraft will be oriented such that any resultant thrust from the drain operations will result in a lower orbital altitude.

Attitude Determination and Control System Description

The VR-1 spacecraft includes 3-axis control with magnetic torque rods for coarse pointing and detumbling, reaction wheels for fine control (1° pointing accuracy), and experimental reaction control thrusters. For attitude determination, the spacecraft includes a star tracker, sun sensors, magnetometers, and a gyroscope, providing nominally >3° pointing knowledge.

- A sun tracking mode that is optimized for solar power generation from the satellite. The spacecraft's body will be oriented in two axes, and on-board Solar Array Drive Assemblies (SADAs) will rotate the panels along the third axis.
- A targeted tracking mode will allow the thrust axis to be pointed in any direction in inertial space.

III. Spacecraft Debris Released during Normal Operations

Payload Re-Contact Mitigation

Momentum will plan to support at least three re-contact mitigation strategies, for deployments from VR-1:

1. Payload deployments will be spaced apart by at least 90 minutes, or 1 full orbit.
2. Payload deployments will alternate between along-track deployment with the velocity vector and with the anti-velocity vector.
3. On-board propulsion may also be used for maneuvers to minimize the risk of re-contact.

Persistent Liquids and Propellant-Related Debris

During primary mission operations, any water released into space through the MET or the reaction control thrusters will be vaporized at sufficiently high temperature (>500K) to prevent the formation of debris. In the off-nominal case of a leak or flow of liquid water, there is potential for the creation of small water ice crystals. Any generated water ice crystals are expected to sublimate within minutes of exposure to sunlight.

Assessment of spacecraft compliance with Requirements 4.3-1 and 4.3-2 (per DAS v2.1.1)

- **4.3-1, Mission Related Debris Passing Through LEO:** COMPLIANT
- **4.3-2, Mission Related Debris Passing Near GEO:** COMPLIANT

IV. Intentional Breakups and Potential for Explosions

Potential causes of spacecraft breakup during deployment and mission operations:

There are two potential scenarios that could potentially lead to a breakup of the satellite:

- 1) Rupture of the propellant tank (H₂O, N₂, He)
- 2) Lithium-ion battery cell failure

Summary of failure modes and effects analyses of all credible failure modes which may lead to an accidental explosion:

- In-mission failure of a battery cell protection circuit could lead to a short circuit resulting in overheating and a very remote possibility of battery cell explosion. The battery safety systems discussed in the failure modes and effects analysis (“FMEA”) (see requirement 4.4-1 below) describe the combined faults that must occur for any of seven (7) independent, mutually exclusive failure modes to lead to an explosion.

Detailed plan for any designed spacecraft breakup, including explosions and intentional collisions:

- There are no planned breakups.

List of components which shall be passivated at End of Mission including method of passivation and amount which cannot be passivated:

- Twelve (12) Lithium-ion battery cells.

Rationale for all items which are required to be passivated, but cannot be due to their design:

- None.

Assessment of spacecraft compliance with Requirements 4.4-1 through 4.4-4:

Requirement 4.4-1: Limiting the risk to other space systems from accidental explosions during deployment and mission operations while in orbit about Earth or the Moon:

For each spacecraft and launch vehicle orbital stage employed for a mission, the program or project shall demonstrate, via failure mode and effects analyses or equivalent analyses, that the integrated probability of explosion for all credible failure modes of each spacecraft and launch vehicle is less than 0.001 (excluding small particle impacts) (Requirement 56449).

- **Compliance statement:**
 - Required Probability: 0.001.
 - Expected probability: 0.000.

Supporting Rationale and FMEA details:

- **Pressure Tank Explosion:**
 - **Effect:** A rupture of one propellant tank would release water and nitrogen or helium. Due to the low pressure (50 psi), the penetrating energy of any debris would be relatively low. The tank is enclosed in the solid aluminum structural walls of the spacecraft. These aluminum walls would contain any released debris within the body of the spacecraft.
 - **Probability:** Very low. A structural failure of the tank would need to occur, and the mechanisms by which these failures occur are very well understood. The factor of safety for all vessels is 2, and the surrounding structure has a higher factor of safety.
- **Battery explosion:**
 - **Effect:** All failure modes below might result in battery explosion with the possibility of orbital debris generation. However, in the unlikely event that a battery cell does explosively rupture, the small size, mass, and potential energy of these small batteries is such that while the spacecraft could be expected to vent gases, most debris from the battery rupture should be contained within the vessel due to the lack of penetration energy and multiple enclosures surrounding the batteries.
 - **Probability:** Extremely Low. Estimated to be less than 0.01% given that multiple independent (not common mode) faults must occur for each failure mode to cause the ultimate effect (explosion).
 - **Failure Mode 1:** Internal short circuit.
 - *Mitigation 1:* All of the following testing has or will be performed prior to flight: protoflight level sine burst, sine, and random vibration testing in all three axes, thermal vacuum cycling and extensive functional testing, system rate-limited charge and discharge cycles, and subsystem and component level functional testing. The testing helps prove that no internal short circuit sensitivity exists.
 - *Combined Faults Required for Realized Failure:* Environmental testing AND functional charge / discharge tests must both be ineffective in discovery of the failure mode.
 - **Failure Mode 2:** Internal thermal rise due to high load discharge rate.
 - *Mitigation 2:* Battery cells were tested in lab for high load discharge rates in a variety of flight-like configurations to determine the feasibility of an out-of-control thermal rise in the cell. Cells are also tested in a hot, thermal vacuum environment (5 cycles at 50°C, then to -20°C) in order

to test the upper limit of the cells' capability. No failures were observed or identified via satellite telemetry or via external monitoring circuitry.

- *Combined Faults Required for Realized Failure:* Spacecraft thermal design must be incorrect AND external over-current detection and disconnect function must fail to enable this failure mode.
- **Failure Mode 3:** Excessive discharge rate or short-circuit due to external devices failure of terminal contact with conductors not at battery voltage levels (due to abrasion or inadequate proximity separation).
 - *Mitigation 3:* Qualification testing of short circuit protection on each external circuit, design of battery packs and insulators such that no contact with nearby board traces is possible without being caused by some other mechanical failure, and observation of such other mechanical failures by protoflight level environmental tests (sine burst, random vibration, thermal cycling, and thermal-vacuum tests).
 - *Combined Faults Required for Realized Failure:* An external load must fail/short-circuit AND external over-current detection and disconnect function must all occur to enable this failure mode.
- **Failure Mode 4:** Inoperable vents.
 - *Mitigation 4:* Battery venting is not inhibited by the battery holder design or the spacecraft design. The battery can vent gases to the external environment.
 - *Combined Faults Required for Realized Failure:* The cell manufacturer OR the satellite integrator fails to install proper venting.
- **Failure Mode 5:** Crushing.
 - *Mitigation 5:* This mode is negated by spacecraft design with no moving parts in the proximity of the batteries.
 - *Combined Faults Required for Realized Failure:* A catastrophic failure must occur in an external system AND the failure must cause a collision sufficient to crush the batteries leading to an internal short circuit AND the satellite must be in a naturally sustained orbit at the time the crushing occurs.
- **Failure Mode 6:** Low level current leakage or short-circuit through battery or short-circuit through battery pack case or due to moisture-based degradation of insulators.
 - *Mitigation 6:* The battery holder and case design are made of non-conductive plastic and operation in vacuum ensures that no moisture can affect insulators.

- *Combined Faults Required for Realized Failure:* Abrasion or piercing failure of circuit board coating or wire insulators AND dislocation of battery packs AND failure of battery terminal insulators AND failure to detect such failures in environmental tests must occur to result in this failure mode.
- **Failure Mode 7:** Excess temperatures due to orbital environment and high discharge combined.
 - *Mitigation 7:* The spacecraft thermal design will negate this possibility. Thermal rise has been analyzed in combination with space environment temperatures showing that the batteries do not exceed normal allowable operating temperatures under a variety of modeled cases, including worst case orbital scenarios. Analysis shows these temperatures to be well below temperatures of concern for explosions.
 - *Combined Faults Required for Realized Failure:* Thermal analysis AND thermal design AND mission simulations in thermal-vacuum chamber testing AND over-current monitoring and control must all fail for this failure mode to occur.

Requirement 4.4-2: Design for passivation after completion of mission operations while in orbit about Earth or the Moon:

Design of all spacecraft and launch vehicle orbital stages shall include the ability to deplete all onboard sources of stored energy and disconnect all energy generation sources when they are no longer required for mission operations or postmission disposal or control to a level which cannot cause an explosion or deflagration large enough to release orbital debris or break up the spacecraft (Requirement 56450).

- Compliance statement:
 - VR-1 includes the ability to fully disconnect the Lithium Ion cells from the charging current of the solar arrays. At End-of-Life, this feature can be used to completely passivate the batteries by removing all energy from them. In the unlikely event that a battery cell does explosively rupture, the small size, mass, and potential energy of these small batteries is such that while the spacecraft could be expected to vent gases, the debris from the battery rupture should be contained within the spacecraft due to the lack of penetration energy to the multiple enclosures surrounding the batteries.
 - As discussed above in the propulsion system section, all energy will be released from the propulsion system prior to spacecraft deactivation. The spacecraft will be oriented such that any thrust generated from propellant release results in an orbit lowering maneuver. All thruster valves will be opened until all

propellant and pressurant are completely released. No attempt will be made to activate the RF microwave element, which will result in a “cold gas” thruster firing.

Requirement 4.4-3: Limiting the long-term risk to other space systems from planned breakups:

- Compliance statement:
 - Not applicable. There are no planned breakups.

Requirement 4.4-4: Limiting the short-term risk to other space systems from planned breakups:

- Compliance statement:
 - Not applicable. There are no planned breakups.

V. Spacecraft Potential for On-Orbit Collisions

While the calculated risk of on-orbit collision with large debris or other operational space stations is low, Momentus shall monitor the VR-1 throughout the operational life of the space station to ensure real-time collision avoidance and orbital maintenance maneuvers are executed as needed.⁸ Additionally, this monitoring shall assess, on an ongoing basis, the accuracy with which the targeted orbital parameters are to be maintained.⁹ Furthermore, the proposed operation of the VR-1 does not rely on or otherwise necessitate coordination with any other operational space stations and no assessment of successful coordination with such an operator has been performed to date.

Requirement 4.5-1. Limiting debris generated by collisions with large objects when operating in Earth orbit:

- For each spacecraft and launch vehicle orbital stage in or passing through LEO, the program or project shall demonstrate that, during the orbital lifetime of each spacecraft and orbital stage, the probability of accidental collision with space objects larger than 10 cm in diameter is less than 0.001 (Requirement 56506).
- **Large Object Impact and Debris Generation Probability:**
 - 2.9960E-5; COMPLIANT.

Requirement 4.5-2. Limiting debris generated by collisions with small objects when operating in Earth or lunar orbit:

- For each spacecraft, the program or project shall demonstrate that, during the mission of the spacecraft, the probability of accidental collision with orbital debris and meteoroids sufficient to prevent compliance with the applicable postmission disposal requirements is less than 0.01 (Requirement 56507).
- **Small Object Impact and Debris Generation Probability:**
 - 6.3335E-6; COMPLIANT

Identification of all systems or components required to accomplish any postmission disposal operation, including passivation and maneuvering:

- None are specifically required, but the propulsion system is expected to be used for a postmission de-orbit maneuver to decrease the time until atmospheric re-entry to less

⁸ VR-1 is capable of adjusting orbits at speeds that support dynamic collision avoidance. This near real-time orbital adjustments is feasible only when VR-1 is capable of communication with the MOC and there is ground station availability.

⁹ The Momentus assessment of the VR-1's accuracy for orbital parameter maintenance indicates performance will be within the following ranges: Apogee, $\pm 1\text{km}$; Perigee, $\pm 200\text{m}$; Inclination, $<1\%$; and the Right Ascension of the Ascending Node(s), $<1\%$.



than 2 years. The flight computer, radio hardware, battery system, and control boards will be used to vent all propellant and to disconnect the battery from the solar array current.

VI. Spacecraft Postmission Disposal Plans and Procedures

Description of spacecraft disposal option selected:

- VR-1 will de-orbit naturally by atmospheric re-entry without any intervention. However, VR-1 will attempt a de-orbit maneuver to reduce the time to atmospheric re-entry to approximately two years.

Plan for any spacecraft maneuvers required to accomplish postmission disposal:

- No maneuvers are required for postmission disposal. However, VR-1 will attempt a de-orbit maneuver as a proof of concept for future missions, as explained in the concept of operations (p. 5). Note that there is no planned controlled re-entry.

Calculation of area-to-mass ratio after postmission disposal, if the controlled reentry option is not selected:

- Spacecraft Final Mass: 161 kg (worst case mass)
- Cross-sectional Area: 1 m² (estimated average area in tumbling)
- Area to mass ratio: 0.006 m²/kg

Requirement 4.6-1. Disposal for space structures passing through LEO:

A spacecraft or orbital stage with a perigee altitude below 2000 km shall be disposed of by one of three methods: (Requirement 56557)

1. Atmospheric reentry option:
 - a. Leave the space structure in an orbit in which natural forces will lead to atmospheric reentry within 25 years after the completion of mission but no more than 30 years after launch; or
 - b. Maneuver the space structure into a controlled de-orbit trajectory as soon as practical after completion of mission.
2. Storage orbit option: Maneuver the space structure into an orbit with perigee altitude greater than 2000 km and apogee less than GEO - 500 km.
3. Direct retrieval: Retrieve the space structure and remove it from orbit within 10 years after completion of mission.


Analysis:

VR-1 will follow a concept of operations to ensure a safe disposal within 25 years of the end of the mission.¹⁰ To demonstrate the thruster, the orbit apogee will be initially raised. Following mission completion, the thruster will be used to lower the perigee and reduce orbit lifetime to


¹⁰ The VR-1 concept of operations results in a calculated worst case maximum de-orbit life of 21 years.

approximately 1 year. In the event of both a propulsion system failure *and* solar array deployment failure on launch, VR-1 is expected to undergo atmospheric re-entry within 21 years. See Table 1 *supra*.


VR-1 Failure at Launch Insertion Orbital Decay (550x550 km)¹¹

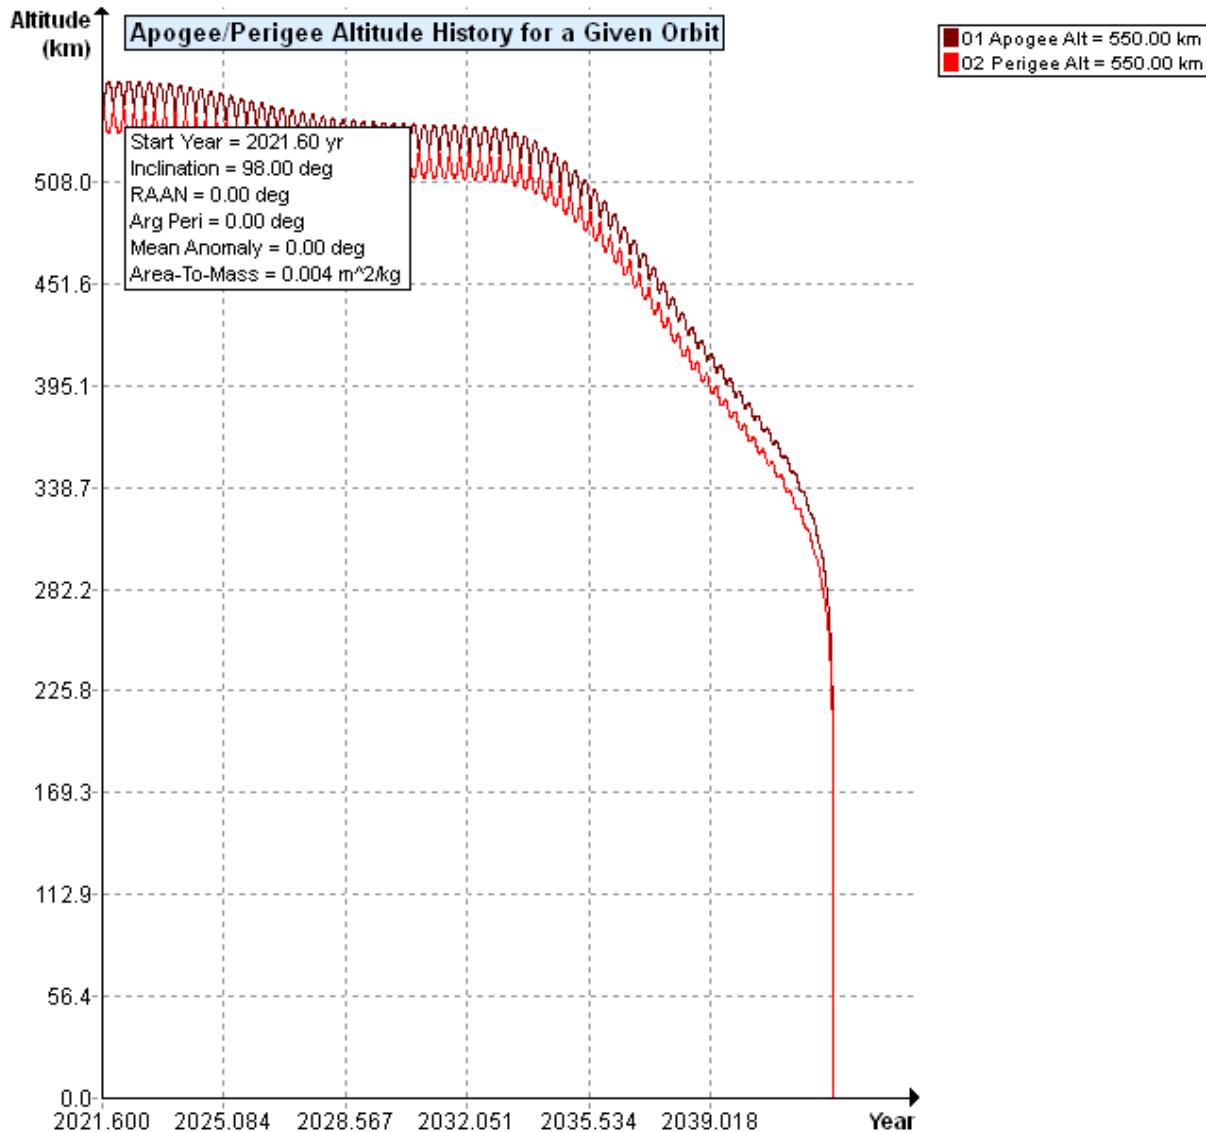

¹¹ VR-1 has an initial Area-to-Mass ratio of 0.004 m²/kg prior to deployment of its solar arrays, and a final Area-to-Mass ratio of 0.006 m²/kg post deployment of its solar arrays.

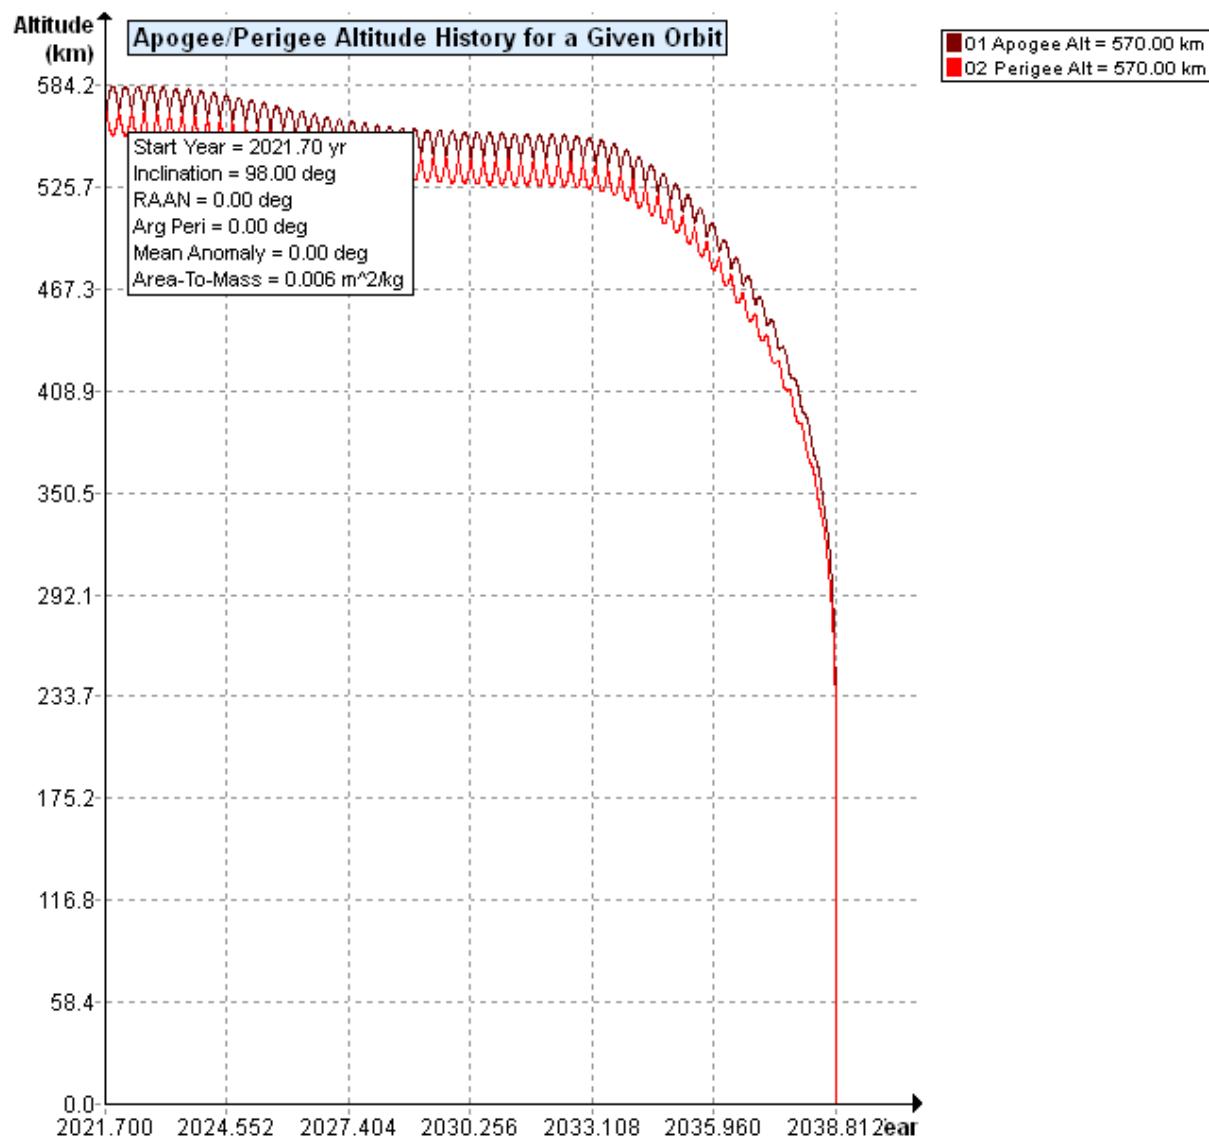VR-1 Postmission Failure Orbital Decay (570x570 km)


VR-1 Postmission De-Orbit Orbital Decay (300x570 km)

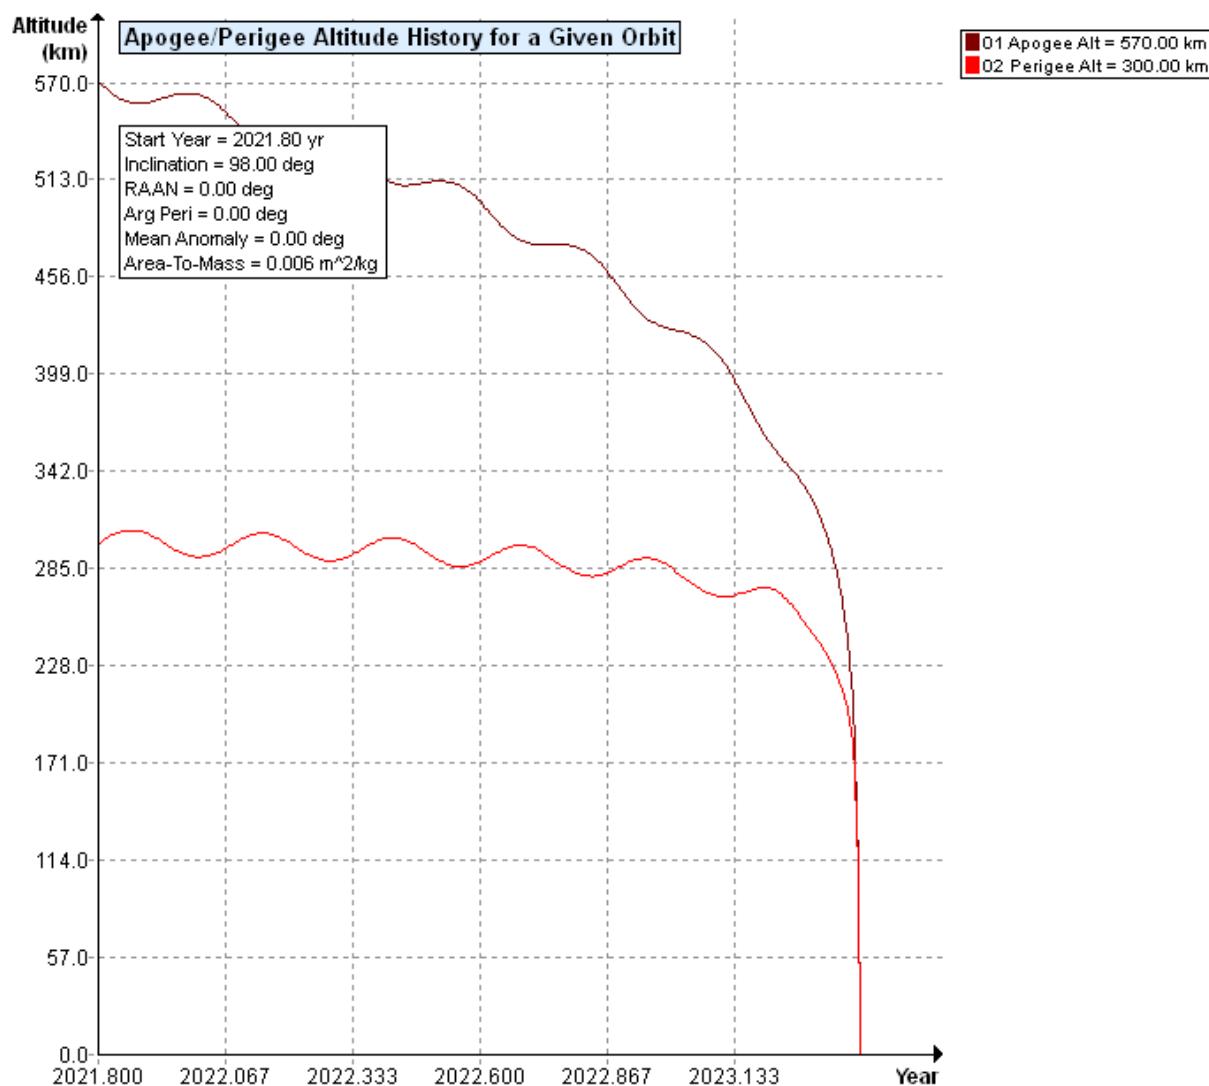

Requirement 4.6-2. Disposal for space structures near GEO.

- Not applicable.

Requirement 4.6-3. Disposal for space structures between LEO and GEO.

- Not applicable.

Requirement 4.6-4. Reliability of Postmission Disposal Operations

- Not applicable. The satellite will reenter passively without post mission disposal operations within allowable timeframe.

VII. Spacecraft Reentry Hazards

Requirement 4.7-1. Limit the risk of human casualty:

The potential for human casualty is assumed for any object with an impacting kinetic energy in excess of 15 joules:

1. For uncontrolled reentry, the risk of human casualty from surviving debris shall not exceed 0.0001 (1:10,000) (Requirement 56626).

Summary Analysis Results: DAS v3.1.0 reports that VR-1 is compliant with the requirement. As shown below, six VR-1 components may survive re-entry. However, in each case the impact energy is less than 15 joules.

Additional representative mass was added to better reflect the worst-case scenario physical mass for re-entry casualty risk. Specific to the deployer masses, as discussed, in lieu of providing constituent component level analyses, we opted to characterize the deployers and payload masses as uniform solid pieces of aluminum – which should result in a conservative assessment. Furthermore, additional piece part-level data was included to reflect the proportionally small (less than 1kg) quantity of the worst-case high-melting temperature fasteners on the VR-1.

Analysis using DAS v3.1.0:

02 09 2021; 09:04:56AM Processing Requirement 4.3-2: Return Status : Passed

=====

No Project Data Available

=====

===== End of Requirement 4.3-2 =====

02 09 2021; 09:30:49AM Processing Requirement 4.5-1: Return Status : Passed

=====

Run Data

=====

****INPUT****

Space Structure Name = Vigoride-1

Space Structure Type = Payload

Perigee Altitude = 550.000 (km)

Apogee Altitude = 550.000 (km)

Inclination = 98.000 (deg)

RAAN = 0.000 (deg)

Argument of Perigee = 0.000 (deg)

Mean Anomaly = 0.000 (deg)

Final Area-To-Mass Ratio = 0.0040 (m^2/kg)

Start Year = 2021.600 (yr)

Initial Mass = 161.000 (kg)

Final Mass = 161.000 (kg)

Duration = 1.000 (yr)

Station-Kept = False

Abandoned = True

****OUTPUT****

Collision Probability = 2.9960E-05

Returned Message: Normal Processing

Date Range Message: Normal Date Range

Status = Pass

=====

===== End of Requirement 4.5-1 =====

02 09 2021; 09:31:30AM Project Data Saved To File
02 09 2021; 09:31:30AM Project Data Saved To File
02 09 2021; 09:35:09AM Requirement 4.5-2: Compliant

=====

Spacecraft = Vigoride-1

Critical Surface = Avionics

=====

INPUT

Apogee Altitude = 550.000 (km)

Perigee Altitude = 550.000 (km)

Orbital Inclination = 98.000 (deg)

RAAN = 0.000 (deg)

Argument of Perigee = 0.000 (deg)

Mean Anomaly = 0.000 (deg)

Final Area-To-Mass = 0.0040 (m^2/kg)

Initial Mass = 161.000 (kg)

Final Mass = 161.000 (kg)

Station Kept = No

Start Year = 2021.600 (yr)



Duration = 1.000 (yr)

Orientation = Random Tumbling

CS Areal Density = 5.000 (g/cm^2)

CS Surface Area = 0.5000 (m^2)

Vector = (0.000000 (u), 0.000000 (v), 0.000000 (w))

CS Pressurized = No

Outer Wall 1 Density: 10.000 (g/cm^2) Separation: 30.000 (cm)

****OUTPUT****

Probability of Penetration = 6.3335E-06 (6.3335E-06)

Returned Error Message: Normal Processing

Date Range Error Message: Normal Date Range

===== End of Requirement 4.5-2 =====

02 09 2021; 09:35:31AM Processing Requirement 4.6 Return Status : Passed

=====

Project Data

=====

****INPUT****

Space Structure Name = Vigoride-1

Space Structure Type = Payload

Perigee Altitude = 550.000000 (km)

Apogee Altitude = 550.000000 (km)

Inclination = 98.000000 (deg)

RAAN = 0.000000 (deg)

Argument of Perigee = 0.000000 (deg)

Mean Anomaly = 0.000000 (deg)

Area-To-Mass Ratio = 0.004000 (m^2/kg)

Start Year = 2021.600000 (yr)

Initial Mass = 161.000000 (kg)

Final Mass = 161.000000 (kg)

Duration = 1.000000 (yr)

Station Kept = False

Abandoned = True

PMD Perigee Altitude = 535.229970 (km)

PMD Apogee Altitude = 563.466451 (km)

PMD Inclination = 98.041784 (deg)

PMD RAAN = 18.865591 (deg)

PMD Argument of Perigee = 103.919919 (deg)

PMD Mean Anomaly = 0.000000 (deg)

****OUTPUT****

Suggested Perigee Altitude = 535.229970 (km)

Suggested Apogee Altitude = 563.466451 (km)

Returned Error Message = Passes LEO reentry orbit criteria.

Released Year = 2042 (yr)

Requirement = 61

Compliance Status = Pass

=====

===== End of Requirement 4.6 =====

02 09 2021; 09:36:09AM *****Processing Requirement 4.7-1

Return Status : Passed

*****INPUT****

Item Number = 1

name = Vigoride-1

quantity = 1

parent = 0

materialID = 8

type = Box

Aero Mass = 161.000000

Thermal Mass = 161.000000

Diameter/Width = 0.620000

Length = 0.690000

Height = 0.620000

name = Structure

quantity = 2

parent = 1

materialID = 8

type = Box

Aero Mass = 7.700000

Thermal Mass = 7.700000

Diameter/Width = 0.250000

Length = 0.600000

Height = 0.250000

name = Diaphragm Tank Middle

quantity = 2

parent = 1

materialID = 27

type = Cylinder

Aero Mass = 0.250000

Thermal Mass = 0.250000

Diameter/Width = 0.150000

Length = 0.300000

name = Diaphragm Tank End 1

quantity = 2

parent = 1

materialID = 27

type = Sphere

Aero Mass = 0.100000

Thermal Mass = 0.100000

Diameter/Width = 0.150000

name = Diaphragm Tank End 2

quantity = 2

parent = 1

materialID = 27

type = Sphere

Aero Mass = 0.100000

Thermal Mass = 0.100000

Diameter/Width = 0.150000

name = Diaphragm Tank Liner

quantity = 2

parent = 1

materialID = 8

type = Cylinder

Aero Mass = 1.200000

Thermal Mass = 1.200000

Diameter/Width = 0.200000

Length = 0.200000

name = Prototype Tank

quantity = 2

parent = 1

materialID = 8

type = Box

Aero Mass = 1.800000

Thermal Mass = 1.800000

Diameter/Width = 0.150000

Length = 0.200000

Height = 0.150000

name = Chamber

quantity = 1

parent = 1

materialID = 54

type = Cylinder

Aero Mass = 0.030000

Thermal Mass = 0.030000

Diameter/Width = 0.030000

Length = 0.032000

name = Window

quantity = 1

parent = 1

materialID = 1

type = Cylinder

Aero Mass = 0.008000

Thermal Mass = 0.008000

Diameter/Width = 0.030000

Length = 0.015000

name = Reaction Wheels

quantity = 3

parent = 1

materialID = 54

type = Cylinder

Aero Mass = 0.080000

Thermal Mass = 0.080000

Diameter/Width = 0.080000

Length = 0.060000

name = Reaction Control Thruster

quantity = 4

parent = 1

materialID = 19

type = Box

Aero Mass = 0.085000

Thermal Mass = 0.085000

Diameter/Width = 0.050000

Length = 0.050000

Height = 0.040000

name = Shields

quantity = 4

parent = 1

materialID = 66

type = Flat Plate

Aero Mass = 0.025000

Thermal Mass = 0.025000

Diameter/Width = 0.060000

Length = 0.060000

name = 12U CubeSat Deployer Dummy

quantity = 1

parent = 1

materialID = 8

type = Box

Aero Mass = 26.400000

Thermal Mass = 26.400000

Diameter/Width = 0.400000

Length = 0.600000

Height = 0.400000

name = Radiator Plate

quantity = 1

parent = 1

materialID = 8

type = Box

Aero Mass = 3.500000

Thermal Mass = 3.500000

Diameter/Width = 0.600000

Length = 0.600000

Height = 0.020000

name = Solar Array

quantity = 2

parent = 1

materialID = 8

type = Flat Plate

Aero Mass = 2.600000

Thermal Mass = 2.600000

Diameter/Width = 0.600000

Length = 1.400000

name = 12U Cubesat Deployer

quantity = 1

parent = 1

materialID = 8

type = Box

Aero Mass = 26.500000

Thermal Mass = 26.500000

Diameter/Width = 0.400000

Length = 0.600000

Height = 0.400000

name = Payload Interface Adapter

quantity = 2

parent = 1

materialID = 8

type = Flat Plate

Aero Mass = 2.000000

Thermal Mass = 2.000000

Diameter/Width = 0.200000

Length = 0.300000

name = Payload Interface Plate

quantity = 1

parent = 1

materialID = 8

type = Box

Aero Mass = 28.000000

Thermal Mass = 28.000000

Diameter/Width = 0.600000

Length = 0.600000

Height = 0.300000

name = Structural Fasteners

quantity = 100

parent = 1

materialID = 57

type = Cylinder

Aero Mass = 0.010000

Thermal Mass = 0.010000

Diameter/Width = 0.010000

Length = 0.020000

*****OUTPUT*****

Item Number = 1

name = Vigoride-1

Demise Altitude = 77.995506

Debris Casualty Area = 0.000000

Impact Kinetic Energy = 0.000000

name = Structure

Demise Altitude = 72.456932

Debris Casualty Area = 0.000000

Impact Kinetic Energy = 0.000000

name = Diaphragm Tank Middle

Demise Altitude = 0.000000

Debris Casualty Area = 1.319117

Impact Kinetic Energy = 13.947386

name = Diaphragm Tank End 1

Demise Altitude = 0.000000

Debris Casualty Area = 1.074385

Impact Kinetic Energy = 10.209132

name = Diaphragm Tank End 2

Demise Altitude = 0.000000

Debris Casualty Area = 1.074385

Impact Kinetic Energy = 10.209132

name = Diaphragm Tank Liner

Demise Altitude = 75.059624

Debris Casualty Area = 0.000000

Impact Kinetic Energy = 0.000000

name = Prototype Tank

Demise Altitude = 73.715111

Debris Casualty Area = 0.000000

Impact Kinetic Energy = 0.000000

name = Chamber

Demise Altitude = 75.039986

Debris Casualty Area = 0.000000

Impact Kinetic Energy = 0.000000

name = Window

Demise Altitude = 0.000000

Debris Casualty Area = 0.385906

Impact Kinetic Energy = 1.099499

name = Reaction Wheels

Demise Altitude = 0.000000

Debris Casualty Area = 1.343816

Impact Kinetic Energy = 11.485331

name = Reaction Control Thruster

Demise Altitude = 76.712646

Debris Casualty Area = 0.000000

Impact Kinetic Energy = 0.000000

name = Shields

Demise Altitude = 0.000000

Debris Casualty Area = 1.742400

Impact Kinetic Energy = 2.833590

name = 12U CubeSat Deployer Dummy

Demise Altitude = 63.761108

Debris Casualty Area = 0.000000

Impact Kinetic Energy = 0.000000

name = Radiator Plate

Demise Altitude = 73.131889

Debris Casualty Area = 0.000000

Impact Kinetic Energy = 0.000000

name = Solar Array

Demise Altitude = 76.252495

Debris Casualty Area = 0.000000

Impact Kinetic Energy = 0.000000

name = 12U Cubesat Deployer

Demise Altitude = 63.710724

Debris Casualty Area = 0.000000

Impact Kinetic Energy = 0.000000

name = Payload Interface Adapter

Demise Altitude = 71.184097

Debris Casualty Area = 0.000000



Impact Kinetic Energy = 0.000000

name = Payload Interface Plate

Demise Altitude = 51.403866

Debris Casualty Area = 0.000000

Impact Kinetic Energy = 0.000000

name = Structural Fasteners

Demise Altitude = 75.827385

Debris Casualty Area = 0.000000

Impact Kinetic Energy = 0.000000

===== End of Requirement 4.7-1 =====



VIII. Tether Missions

Not applicable.