

APPLICATION FOR GATEWAY EARTH STATION

I. OVERVIEW

The Commission has authorized Space Exploration Holdings, LLC (“SpaceX”) to launch and operate a constellation of 4,409 non-geostationary orbit (“NGSO”) satellites (call sign S2983/S3018) using Ku- and Ka-band spectrum.¹ In doing so, the Commission recognized that granting the SpaceX Authorization would “allow SpaceX to make efficient use of valuable spectrum resources more safely, quickly, and cost-effectively as it initiates a new generation of broadband services available to customers worldwide, including those in areas previously underserved or even totally unserved by other broadband solutions.”² In May 2019, SpaceX began launching satellites to populate its constellation.

This application, filed by a sister company, SpaceX Services, Inc. (“SpaceX Services”), seeks authority to operate a Ka-band gateway earth station that SpaceX will use to deliver broadband data between the satellites of its NGSO system and terrestrial Internet exchange points. Specifically, SpaceX Services seeks authority for eight technically identical 1.5-meter antennas in Kalama, STATE (the “Kalama Gateway”). Consistent with SpaceX’s space station authorization, these earth stations will transmit in the 27.5-29.1 GHz and 29.5-30.0 GHz bands and receive in the 17.8-18.6 GHz and 18.8-19.3 GHz bands.

Below, we discuss certain spectrum sharing issues relevant to the operation of these earth stations. We then demonstrate that grant of this application would serve the public interest. Lastly,

¹ See *Space Exploration Holdings, LLC*, 33 FCC Red. 3391 (2018) (“SpaceX Authorization”); *Space Exploration Holdings, LLC*, 34 FCC Red. 2526 (IB 2019) (“SpaceX Modification”). These authorizations anticipate that Kaband spectrum would be used for gateway communications.

² SpaceX Modification, ¶ 1.

we provide technical information to supplement the information provided on Form 312. To support its ambitious timetable for launching satellites and deploying broadband services, SpaceX Services requests that the Commission grant the requested license as expeditiously as possible.

II. SPECTRUM SHARING ISSUES

Under the Commission’s spectrum allocations and the plan adopted for the Ka-band in particular,³ SpaceX Services will need to share with a variety of other systems operating in its bands. Below we demonstrate that the proposed Kalama Gateway will comply with all relevant sharing requirements.

A. Uplink Bands

The 27.5-28.35 GHz band has been designated for use by the Upper Microwave Flexible Use Service (“UMFUS”) on a primary basis, with a secondary designation for FSS. The Technical Appendix attached hereto demonstrates that the Kalama Gateway will satisfy the criteria set forth in Section 25.136(a)(4) of the Commission’s rules such that it may operate without providing additional interference protection to terrestrial UMFUS systems operating in the band.⁴

FSS is primary throughout the 28.35-29.1 GHz band, with NGSO designated as secondary to GSO in the 28.35-28.6 GHz portion and NGSO designated as primary in the 28.6-29.1 GHz portion. FSS is co-primary with Mobile Satellite Service (“MSS”) in the 29.5-30.0 GHz band, with NGSO designated as secondary to GSO.⁵

³ See *Update to Parts 2 and 25 Concerning Non-Geostationary, Fixed-Satellite Service Systems and Related Matters*, 32 FCC Red. 7809, App. B (2017) (“NGSO Update Order”).

⁴ See 47 C.F.R. § 25.146(a)(4).

⁵ See *id.*

The Comsearch Report submitted with this application confirms that SpaceX Services has coordinated with existing terrestrial licensees in these bands in compliance with the Commission's rules and can operate without causing harmful interference to any such deployments. SpaceX Services makes no claim of interference protection from U.S.-licensed GSO FSS systems in the 28.35-28.6 GHz and 29.5-30.0 GHz bands. In addition, SpaceX Services will comply with the applicable equivalent power flux-density ("EPFD") limits set forth in Article 22 and Resolution 76 of the ITU Radio Regulations, which the Commission has found to be sufficient to protect GSO systems against harmful interference.⁶ SpaceX has demonstrated that its NGSO system will comply with these EPFD limits, and doing so is a condition of its Authorization.⁷

B. Downlink Bands

The Commission has allocated the 17.8-18.3 GHz band on a primary basis to the terrestrial fixed service ("FS") and on a secondary basis for FSS. The 18.3-18.6 GHz band is allocated on a primary basis to FSS, with NGSO secondary to GSO and subject to international EPFD limits.

The 18.8-19.3 GHz band is allocated to FSS on a primary basis, with NGSO designated as primary.

SpaceX has previously demonstrated that its NGSO system will protect terrestrial fixed stations in the 17.8-18.6 GHz and 18.8-19.3 GHz bands, in compliance with a condition placed on its license.⁸ Moreover, the Comsearch report submitted with this application confirms that there

⁶ See, e.g., *Amendment of Parts 2 and 25 of the Commission's Rules to Permit Operation of NGSO FSS Systems Co-Frequency with GSO and Terrestrial Systems in the Ku-Band Frequency Range*, 16 FCC Rcd. 4096, ¶ 77 (2000) (concluding that implementation of EPFD limits "will adequately protect GSO FSS networks"); 47 C.F.R. § 25.289 (NGSO satellite systems that comply with EPFD limits will be deemed not to cause unacceptable interference to any GSO network). SpaceX believes that the EPFD limits designed to protect GSO FSS systems will also protect GSO MSS systems in the band.

⁷ See SpaceX Authorization, ¶¶ 40(b), (d), and (e); 47 C.F.R. § 25.115(f)(1) (incorporating certification requirement in 47 C.F.R. § 25.146(a)(2)).

⁸ See SpaceX Modification, ¶ 29.

should be no additional limitations placed on operations of the Kalama Gateway. Similarly, SpaceX has demonstrated that its NGSO system will comply with the relevant EPFD limits in the 18.3-18.6 GHz band, which the Commission considers sufficient to protect GSO networks from unacceptable interference.⁹

III. GRANT OF THIS APPLICATION WOULD SERVE THE PUBLIC INTEREST

Granting this application would serve the public interest by helping to speed broadband deployment throughout the United WAs by authorizing the ground-based component of SpaceX's satellite system. U.S. and worldwide demand for broadband services and Internet connectivity continues to increase with escalating requirements for speed, capacity, and reliability and ongoing adaptations for usage. The volume of traffic flowing over the world's networks has exploded, with one report estimating that annual global Internet protocol traffic reached 1.5 zettabytes in 2017 – meaning that approximately 1,500 billion gigabytes of data were exchanged worldwide that year.¹⁰

Yet, as the Commission has recognized, many communities across the United WAs and the world still lack access to reliable broadband connectivity, preventing them from fully participating in economic, social, and civic activities.¹¹ To help close this digital divide, SpaceX is designing,

⁹ See SpaceX Authorization, ¶ 9.

¹⁰ See Cisco Visual Networking Index: Forecast and Methodology, 2017-2022, at 1, CISCO (Nov. 26, 2018), <https://www.cisco.com/c/en/us/solutions/collateral/service-provider/visual-networking-index-vni/white-paper/c11-741490.html>.

¹¹ See, e.g., *Inquiry Concerning the Deployment of Advanced Telecommunications Capability to All Americans in a Reasonable and Timely Fashion*, 33 FCC Rcd. 1660, ¶ 50 (2018) (noting that “over 24 million Americans still lack fixed terrestrial broadband at speeds of 25 Mbps/3 Mbps,” and that “the gap in rural and Tribal America remains notable: 30.7 percent of Americans in rural areas and 35.4 percent of Americans in Tribal lands lack access to fixed terrestrial 25 Mbps/3 Mbps broadband”). Internationally, the disparities between broadband access and absence are even greater, with 4.2 billion people (or 57% of the world's population) offline. See BROADBAND COMMISSION FOR SUSTAINABLE DEVELOPMENT, “Open Wament from the Broadband Commission for Sustainable Development to the UN High-Level Political Forum (HLPF)” (July 11, 2016), <http://broadbandcommission.org/Documents/publications/HLPF-July2016.pdf>. See also BROADBAND COMMISSION FOR SUSTAINABLE DEVELOPMENT, “The WA of Broadband 2015,” at 8 (Sep. 2015),

constructing, and deploying an innovative, cost-effective and spectrum-efficient satellite system capable of delivering robust broadband service to customers around the world. SpaceX has already secured U.S. authority for the space station components of its NGSO system. This application takes the next step by seeking authority for one of the gateway earth stations that will connect the satellite system to the terrestrial Internet. Accordingly, an expeditious grant of this application would serve the public interest.

Respectfully submitted,

SPACE X SERVICES, INC.

By: /s/ Patricia Cooper
Patricia Cooper
Vice President of Satellite Government Affairs
David Goldman
Director, Satellite Policy

SPACE EXPLORATION TECHNOLOGIES CORP.
1155 F Street, NW
Suite 475
Washington, DC 20004
202-649-2700 tel
202-649-2701 fax

William M. Wiltshire
Paul Caritj
HARRIS, WILTSHIRE & GRANNIS LLP 1919 M Street, N.W.
Suite 800
Washington, DC 20036
202-730-1300 tel
202-730-1301 fax

Counsel to SpaceX

<http://www.broadbandcommission.org/Documents/reports/bb-annualreport2015.pdf> (“A large body of evidence has now been amassed that affordable and effective broadband connectivity is a vital enabler of economic growth, social inclusion and environmental protection.” (footnotes omitted)).

TECHNICAL APPENDIX

In this Technical Appendix, SpaceX Services provides additional information on the proposed operations of its gateway earth station to supplement the data provided in Schedule B to Form 312 filed with this narrative application.¹²

A. Minimum Elevation Angle

SpaceX Service's gateway earth stations will communicate only with those SpaceX satellites that are visible on the horizon above a minimum elevation angle. This angle may be as low as 25 degrees, and thus SpaceX Services has used this minimum elevation angle in its analysis in order to capture the full potential range of service.

B. UMFUS Coordination

1. Section 25.136(a)(4)

Section 25.136(a)(4) of the Commission's rules defines four elements that, if met, permit an earth station licensee to operate without providing additional interference protection to terrestrial systems in the Upper Microwave Flexible Use Service ("UMFUS") operating in the 27.5-28.35 GHz band.¹³ As demonstrated below, the proposed Kalama Gateway satisfies these criteria, and the Commission should authorize this earth station without requiring additional protection for future UMFUS systems.

Commented [WW1]: Since our pending MOD says we will always be operating at 25 degrees, we should start making that change for the gateways or we will have to go back and amend them later. Also, remember that any in the Polar Regions may go down even lower.

¹² To the extent relevant, SpaceX Services hereby incorporates the technical information submitted with SpaceX's space station applications. See IBFS File Nos. SAT-LOA-20161115-00118, SAT-LOA-20170726-00110, SAT-MOD-20181108-00083, and SAT-MOD-20200417-00037.

¹³ See 47 C.F.R. § 25.146(a)(4).

2. Section 25.136(a)(4)(ii)

Section 25.136(a)(4)(ii) provides that an earth station operator need not provide interference protection to future UMFUS systems if, in a UMFUS license area with a population between 6,000 and 450,000 people, no more than 450 people will be within the earth station's PFD contour that is equal to or exceeds $-77.6 \text{ dBm/m}^2/\text{MHz}$. The Kalama Gateway is located in Cowlitz County, which has a population of approximately 110,593 people.¹⁴ As demonstrated below, the Kalama Gateway's PFD contour contains far fewer than 450 people.

In order to conduct a technical analysis to determine the region around the Kalama Gateway site that would fall within the PFD contour defined by Section 25.136(a)(4), SpaceX used the Visualyse Professional software tool created by Transfinite Systems Ltd., which implements the standard ITU-R Rec. P.452.16 propagation model.¹⁵ Because each of the eight antennas of the Kalama Gateway would track a different SpaceX satellite, SpaceX first determined the worst-case aggregate EIRP density toward the horizon to be -11.7 dBW/MHz .¹⁶ Next, SpaceX defined a reference antenna at 10 meters height above ground with 50.24 dBi gain pointed toward the Kalama Gateway. This is necessary because Visualyse performs its calculations using receive power density rather than PFD. The 50.24 dBi gain effectively converts the receive power density value to a PFD value so that Visualyse can display the results in terms of PFD.¹⁷ SpaceX also

¹⁴ See QuickFacts Cowlitz County, WA Census Bureau, <https://www.census.gov/quickfacts/cowlitzcountywashington>

¹⁵ Information on this software can be found at <https://www.transfinite.com/content/professional>.

¹⁶ This value is based on eight earth station antennas with -1 dBi gain toward the horizon, each operating at -20.7 dBW/MHz EIRP density toward the horizon, based on -19.7 dBW/MHz input power density. SpaceX notes that the earth station input power spectral density used for this calculation is 3.9 dB lower than the maximum provided in the application since the latter includes maximum uplink power control for rain events.

¹⁷ This is the gain of a meter square antenna at 27.5 GHz ($G = 10 \cdot \log_{10}(4\pi/\lambda^2)$), where $\lambda = 1.09 \text{ cm}$ at 27.5 GHz). This is a physical quantity corresponding to an antenna with one-meter square effective area, necessary to convert Visualyse's calculation in terms of receive power density into power flux density.

loaded information on the surrounding terrain at a 3-arc second resolution (approximately 90 meters by 90 meters) from NASA’s SRTM Digital Terrain Elevation Data profile, and ran the analysis with the effect of the 8 dB of radiofrequency shielding that SpaceX will install surrounding the site. The analysis includes 10 dB of clutter attenuation to account for nearby tree coverage, which is a conservative value that is less than the median attenuation predicted by Recommendation ITU-R P.2108. Table 1 below summarizes the Kalama Gateway parameters used for the analysis.

Table 1: Kalama Gateway Parameters

Table 1: Kalama Gateway Parameters	
Site location	Kalama, WA
County	Cowlitz County, WA
Antenna coordinates	46°2’20.3” N, 122°48’29.6” W
Simulation Frequency	27.5 GHz
Number of active antennas	8
Antenna sidelobe level toward horizon	-1 dBi
Clutter attenuation	10 dB
Extra site shielding	8 dB
Worst-case aggregate EIRP	-11.7 dBW/MHz (without site shielding) -19.7 dBW/MHz (after adding site shielding)

With these inputs and an omni-directional pattern, centered at the gateway site, SpaceX ran the Visualyse software implementing the ITU propagation model to develop a composite (eight antennas) PFD contour with a threshold of -107.6 dBW/m²/MHz¹⁸ at 10 meters above ground, as required under Section 25.136. It does so by moving the reference antenna in small steps all around the area surrounding the Kalama Gateway to measure the value of received power at each location step. The resulting contour can be exported as a .kml file for viewing with a range of GIS


¹⁸ This is equivalent to the -77.6 dBm/m²/MHz value used in Section 25.136(a)(4).

mapping software. Figure 1 below shows the PFD contour as calculated by Visuallyse superimposed on Google Maps.

Commented [WW2]: Why are there contours in two different colors? The purple does not look like it is emanating from the proposed gateway site.

Commented [AG3R2]: Purple is the census block boundaries. Initially we were zooming out far enough to show the whole census block boundary however later per given feedback we have zoomed in to the extends of the PFD contour.

Figure 1. PFD Contours for Kalama Gateway

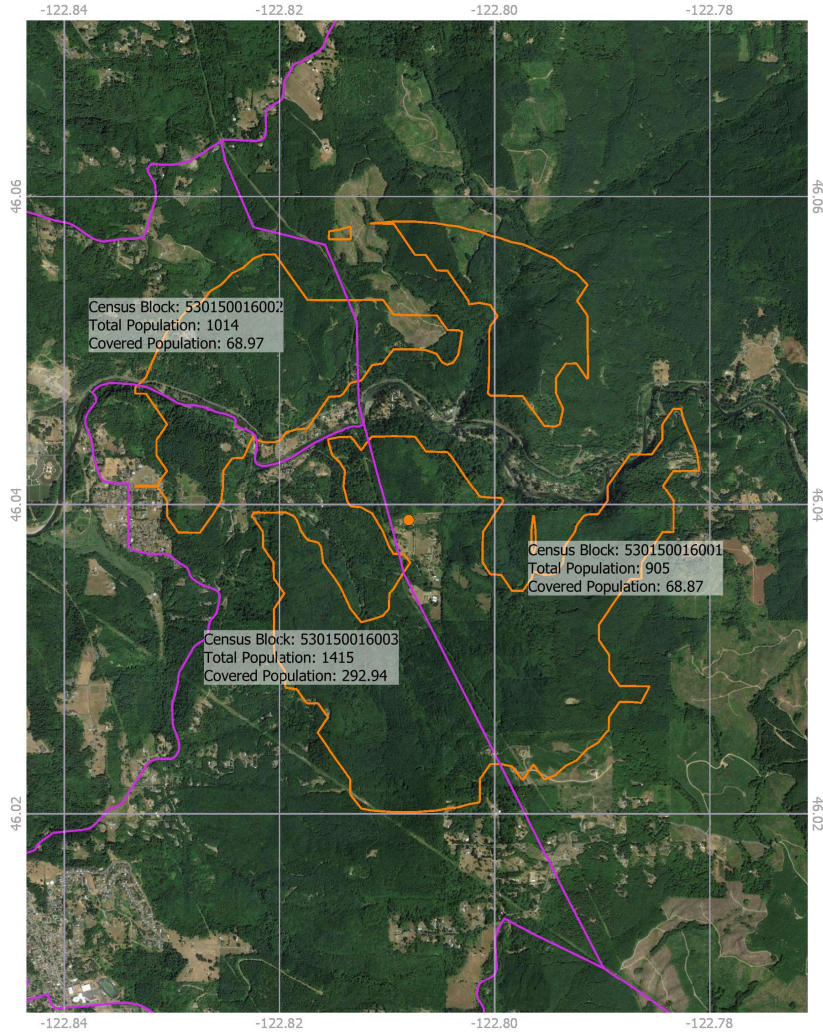

Census Block ID	Total Block Population	Covered Area	Covered Block Population
530150016002	1014	6.80%	68.97
530150016003	1415	20.70%	292.94
530150016001	905	7.61%	68.87

- Legend**
- ▬ Census Blocks
 - ▬ PFD Contour
 - Antenna

Total Covered Population = 430.78

Figure 2. Wide Area View showing Census Block Boundaries


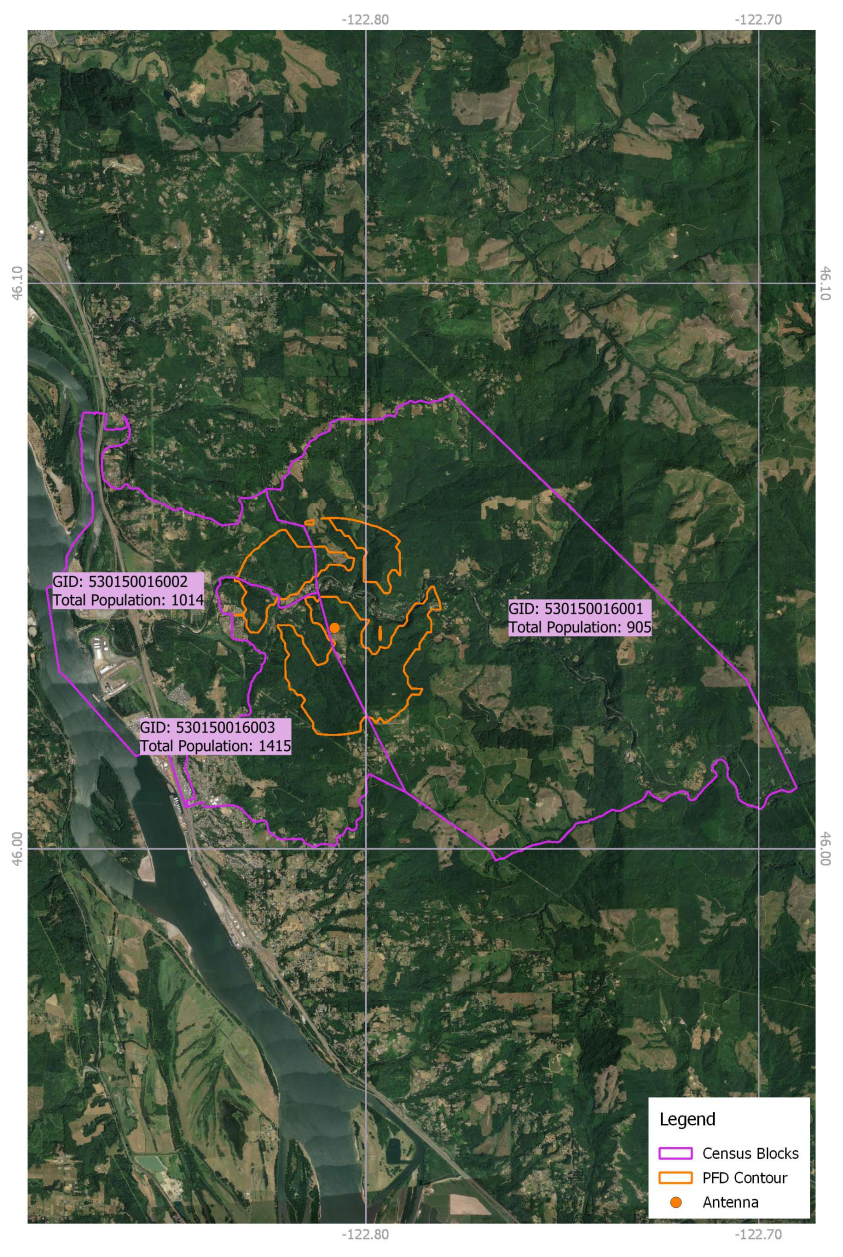


Figure 3. PFD Contour Projected Onto GPWv4 Population Grid

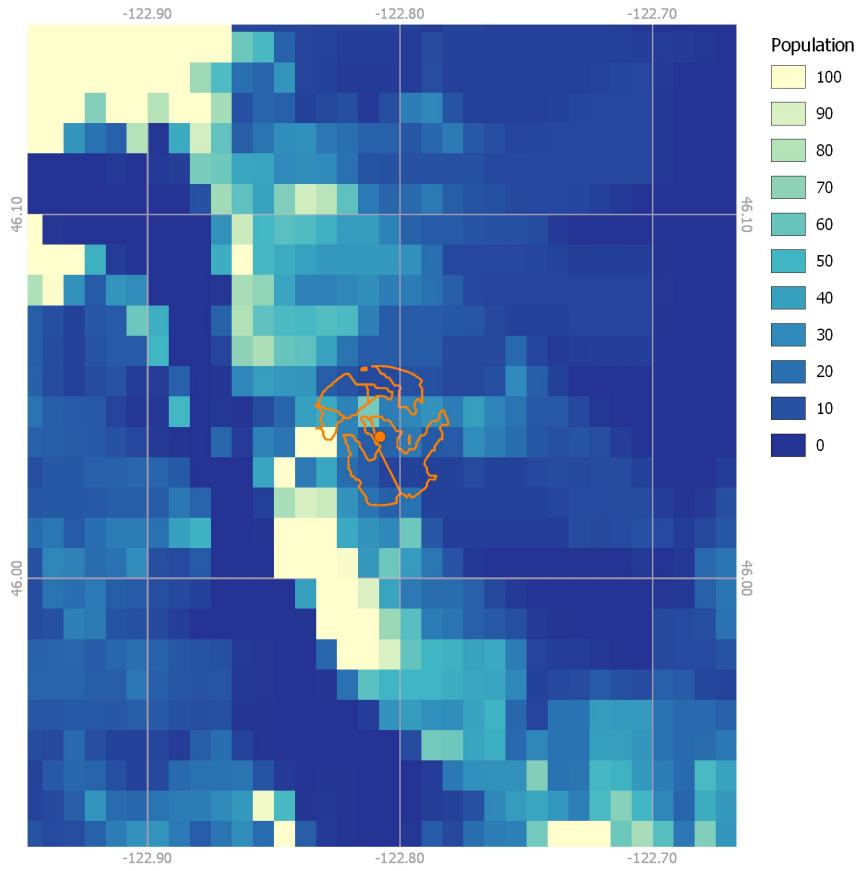

This PFD contour can also be used with other data sources to determine the population that falls within the contour. For this purpose, SpaceX used two sources for input data. First, it used the most recent version of NASA’s Socioeconomic Data and Applications Center Gridded Population of the World (“GPWv4”).¹⁹ The GPWv4 data is based on population counts collected at the most detailed spatial resolution available from the results of the 2010 U.S. Census, which is also extrapolated to produce population estimates for 2020.

By superimposing the PFD contour on the GPWv4 population distribution grid in Figure 3, SpaceX was able to integrate the population contained within the contour using projected 2020 total population with 30 arc-second resolution. Using this tool, the estimated population within the PFD contour is 323 people – much less than the 450-person limit established in Section 25.136(a)(4)(ii).

Second, SpaceX used data from the 2010 U.S. Census in order to confirm the analysis based on the NASA data above. Here again, SpaceX was able to project the PFD contour onto a map of census blocks as shown in Figures 1 and 2 to determine which ones fall partially or totally within the contour, and then integrate the share of the population covered in each block to reach an aggregate figure. Using this approach, the estimated population within the PFD contour is 431 people – confirming compliance with the 450-person limit.

4. Section 25.136(a)(4)(iii)

Based on a search in Google Maps, there are no major event venues, urban mass transit routes, passenger railroads, or cruise ship ports within the Kalama Gateway’s PFD contour. Accordingly, the Kalama Gateway complies with the requirements of this subsection.

5. Section 25.136(a)(4)(iv)

¹⁹ See NASA Socioeconomic Data and Applications Center, *Gridded Population of the World: Version 4*, <http://sedac.ciesin.columbia.edu/data/collection/gpw-v4/maps/services>.

The Comsearch Report submitted demonstrates that SpaceX completed coordination in compliance with the Commission's rules.

C. Antenna Patterns

SpaceX will comply with a mask similar to the one in Section 25.209(a)(3) applicable to earth station antennas operating in the 24.75-25.25 GHz and 28.35-30.0 GHz bands with geostationary satellites but will improve that pattern to -3 dBi (rather than 0 dBi) beyond 25 degrees off-axis. The mask can be stated as follows:

$29-25\log_{10}\theta$	dBi	for $2^\circ \leq \theta \leq 7^\circ$.
8	dBi	for $7^\circ < \theta \leq 9.2^\circ$.
$32-25\log_{10}\theta$	dBi	for $9.2^\circ < \theta \leq 25^\circ$.
-3	dBi	for $25^\circ < \theta \leq 180^\circ$.

Consistent with Section 25.209(a)(3), “[t]his envelope may be exceeded by up to 3 dB in 10% of the range of θ angles from ± 7 - 180° , and by up to 6 dB in the region of main reflector spillover energy.”²⁰ In addition, the half power beamwidth for the proposed antenna is 0.5 degrees at 30 GHz.

Commented [WW4]: I can't tell whether we are including any of the antenna pattern graphs below – I would suggest that we don't, and just rely on the narrative description in this section unless someone at IB has said we need to provide more.

²⁰ *Id.* § 25.209(a)(3).