



communications

Interstate Electronics Corporation
602 East Vermont Avenue
Post Office Box 3117
Anaheim CA 92803-3117
(714) 758-0500 Fax: (714) 758-4148

1 November 2004

Jeff Watts
SES Americom
11 Edsail Drive
Sussex, NJ 07461

Re: Application of L3 Communications, Interstate Electronics Corporation (IEC)
Call Sign: E020160
FCC File Number SES-LIC-20020611-00939

Interstate Electronics Corporation (IEC), a division of L-3 Communications has an earth station application pending before the U.S. Federal Communications Commission (FCC). IEC plans to use this Ku Band system to communicate with Intelsat Americas 5 (IA-5), which is located at 97 degrees west longitude. Your company operates the AMC1, located at 103.00 degrees west longitude. As your satellite is within 6 degrees of IA-5, the FCC requires we obtain an affidavit from you on our proposed system.

You have the right to reply to the enclosed material and may reply directly to the FCC, citing the above file number. If you do not reply within thirty (30) calendar days from the date of this notice, the FCC will construe your lack of reply as an assent to the grant of IEC's earth station application.

Sincerely,

cc.

Scott Kotler, International Bureau
Michelle A. McClure, Irwin, Campbell & Tannenwald, P.C.



Interstate Electronics Corporation (IEC), a division of L-3 Communications
Adjacent Satellite Operator Notification
Earth Station Onboard Vessel Performance

As part of a license application filed by Interstate Electronics Corporation (IEC), a division of L-3 Communications in support of the U.S. Navy TRIDENT test program, IEC operates Ku-band satellite network to facilitate the transfer of test data. IEC purchases two different bandwidth services both in the Ku-band spectrum from Telecommunications International Inc., a bandwidth reseller. IEC network architecture consist of six temporary-fixed 2.4 meter Ku-band (14.0 – 14.6 GHz) earth stations (VSATs) and two Earth Stations on aboard Vessel (ESV) - one temporary-fixed 2.0 meter and one temporary-fixed 2.4 meter. ESVs are located on aboard the USNS WATERS, which operate at least 100 miles off United States Coast line in Atlantic or Pacific Oceans during these tests. The first leased service is non-preemptible one megahertz of fulltime transponder bandwidth and the second is a 4.5-megahertz of occasional use transponder bandwidth. All the bandwidth is located on IA-5 (formally T5). IA-5 which is located 97° west. All bandwidth links are established and maintained with the IntelSat® Carrier Assurance Center. Full time bandwidth is located on IA-5 Transponder K17 Center Frequency of 14322.0/h 12022.0/v. Although IEC has full leased bandwidth, none of are links are operational 24/7/365 and when operational they are always manned by qualified personnel. The Federal Communications Commission (FCC) is requiring that IEC notify all operators of satellites that are within 6° of the orbital location of IA-5, the satellite which IEC's ESVs communicate when operating. This document provides the technical basis for adjacent satellite operators to determine that IEC's ESV systems are operating in compliance with the terms of the inter-system coordination agreement and, therefore, do not pose any more potential for interference than a land-based earth station with the same performance characteristics.

The ESV antenna system is mounted on a three axis stabilization assembly that provides free motion with 3° of freedom. This assembly allows the inertia of the antenna system to hold the antenna pointed motionless in inertial space while the ship rolls, pitches and yaws beneath the assembly. Three low friction torque motors attached to each of the three free axes of the assembly provide the required force to overcome the disturbing torque imposed on the antenna system by cable restraints, bearing friction and small air currents within the radome. These motors are also used to re-position the antenna in azimuth and elevation. This insures that the ESVs will operate with a $\pm 0.2^\circ$ pointing accuracy of the exact position of the satellite. Currently the operator will terminate ESV transmission when the antenna goes beyond $\pm 0.5^\circ$ under conditions such as when the satellite is out of range or when the satellite track is lost. Although not yet implemented an automatic muting solution will be implemented to terminate the transmission to the satellite under the same conditions. Conditions of rain fade or some type of external blockage will also mute transmission to the satellite until such time as the pointing accuracy is within a $\pm 0.2^\circ$ pointing accuracy of the satellite.

The attached table from IntelSat® provides the transmission parameters related to the operational performance of the ESV systems. Figures 1 thru 4 have been provided by the IntelSat® Carrier Assurance Center to show the co-pole and cross-pole performance of the ESV systems in the plane of the geo-stationary satellites.

Interstate Electronics Corporation (IEC), a division of L-3 Communications
 Adjacent Satellite Operator Notification
 Earth Station Onboard Vessel Performance

ESV link parameters

| | |
|--|---|
| Satellite | IA5 / Intelsat 3005 |
| Orbital Location | 97 West / 263 East |
| Beam | KU-North American Spot Beam |
| Transponder | K17 - 27 MHz transponder |
| Saturated Satellite Flux Density dBW/m ² (be) | -76.5 dBW/m ² (Beam Edge) |
| Saturates Satellite EIRP | 40.9 dBW (beam Edge) |
| Total Transponder Back-off, Input | -7.6 dB |
| Total Transponder Back-off, Output | -3.8 dB |
| Modulation & Carriers | |
| Type of Service | Occasional and Full time use |
| Modulation | QPSK |
| ESV (1) - Uplink | 14.322 GHz |
| Polarization | Horizontal |
| ESV (1) - Downlink | 12.022 GHz |
| Polarization | Vertical |
| VSAT - Uplink | 14.322 GHz |
| Polarization | Horizontal |
| VSAT - Downlink | 12.022 GHz |
| Polarization | Vertical |
| ESV (1) Antenna 8297 | |
| Antenna Diameter | 2.05 Meter |
| Major Axis | Circular 80.7 inches |
| Minor Axis | Circular 80.7 inches |
| Offset Angle | Center feed, Prime Focus, 0 degree Offset |
| TX gain at 14.0 GHz | 47.7 dBi |
| RX gain at 12.5 GHz | 46.6 dBi |
| TX cross polarization at 14.318250 GHz | 30 dBi |
| ESV (1) Power | |
| Input Power | 8 watt, AnaCom AnaSat transceiver |
| Aggregate Data Rate, FEC, Overhead | 256.0 Kbit/s / 0.750 / 0.0% |
| Allocated & Occupied Bandwidth | 247.5 / 170.7 KHz |
| Power Effective Bandwidth (PEB) | 510 KHz |
| ESV (1) Power Spectral Density | |
| Antenna Diameter, Transmit Gain | 47.1 dBi |
| Uplink entry transmit EIRP | 57.3 dBW |
| Uplink Noise Density | 41.0 dBW/4 KHz (Beam Edge) |
| Xpndr Noise Density | -18.5 dBW/4 KHz (Beam Edge) |
| Uplink Thermal C/NO (C/KT) | 79.8 dBHz |

Interstate Electronics Corporation (IEC), a division of L-3 Communications
 Adjacent Satellite Operator Notification
 Earth Station Onboard Vessel Performance

| | |
|--|---|
| <p style="text-align: center;">Satellite</p> <p style="text-align: center;">Orbital Location</p> <p style="text-align: center;">Beam</p> <p style="text-align: center;">Transponder</p> <p>Saturated Satellite Flux Density dBW/m² (be)</p> <p style="text-align: center;">Saturates Satellite EIRP</p> <p style="text-align: center;">Total Transponder Back-off, Input</p> <p style="text-align: center;">Total Transponder Back-off, Output</p> | <p>IA5 / Intelsat 3005</p> <p>97 West / 263 East</p> <p>KU-North American Spot Beam</p> <p>K17 – 27 MHz transponder</p> <p>-76.5 dBW/m² (Beam Edge)</p> <p>40.9 dBW (beam Edge)</p> <p>-4.6 dB</p> <p>-2.5 dB</p> |
| Modulation & Carriers | |
| <p style="text-align: center;">Type of Service</p> <p style="text-align: center;">Modulation and Service</p> <p style="text-align: center;">ESV (2) – Uplink</p> <p style="text-align: center;">Polarization</p> <p style="text-align: center;">ESV (2) – Downlink</p> <p style="text-align: center;">Polarization</p> <p style="text-align: center;">VSAT – Uplink</p> <p style="text-align: center;">Polarization</p> <p style="text-align: center;">VSAT – Downlink</p> <p style="text-align: center;">Polarization</p> | <p>Values</p> <p>Occasional and Full time use</p> <p>QPSK – Occasional Use</p> <p>14.322 GHz</p> <p>Horizontal</p> <p>12.022 GHz</p> <p>Vertical</p> <p>14.322 GHz</p> <p>Horizontal</p> <p>12.022 GHz</p> <p>Vertical</p> |
| ESV (2) Antenna 9997 | |
| <p style="text-align: center;">Antenna Diameter</p> <p style="text-align: center;">Major Axis</p> <p style="text-align: center;">Minor Axis</p> <p style="text-align: center;">Offset Angle</p> <p style="text-align: center;">TX gain at 14.0 GHz</p> <p style="text-align: center;">RX gain at 12.5 GHz</p> <p>TX cross polarization at 14.318250 GHz</p> | <p>Values</p> <p>2.4 Meter</p> <p>Circular 94.5 inches</p> <p>Circular 94.5 inches</p> <p>Center feed, Prime Focus, 0 degree Offset</p> <p>48.9 dBi</p> <p>47.7 dBi</p> <p>30 dBi</p> |
| ESV (2) Power | |
| <p style="text-align: center;">Input Power</p> <p>Aggregate Data Rate, FEC, Overhead</p> <p style="text-align: center;">Allocated & Occupied Bandwidth</p> <p style="text-align: center;">Power Effective Bandwidth (PEB)</p> | <p>Values</p> <p>8 watt, AnaCom AnaSat transceiver</p> <p>896.0 Kbit/s / 0.750 / 0.0%</p> <p>832.5 / 597.3 KHz</p> <p>1320 KHz</p> |
| ESV (2) Power Spectral Density | |
| <p style="text-align: center;">Antenna Diameter, Transmit Gain</p> <p style="text-align: center;">Uplink entry transmit EIRP</p> <p style="text-align: center;">Uplink Noise Density</p> <p style="text-align: center;">Xpndr Noise Density</p> <p style="text-align: center;">Uplink Thermal C/NO (C/KT)</p> | <p>Values</p> <p>49.1 dBi</p> <p>61.6 dBW</p> <p>39.8 dBW/4 KHz (Beam Edge)</p> <p>-18.5 dBW/4 KHz (Beam Edge)</p> <p>83.9 dBHz</p> |

Interstate Electronics Corporation (IEC), a division of L-3 Communications
Adjacent Satellite Operator Notification
Earth Station Onboard Vessel Performance

IA5K17 - SeaTel 8297
Plot Taken At 09/17/04 13:04:36

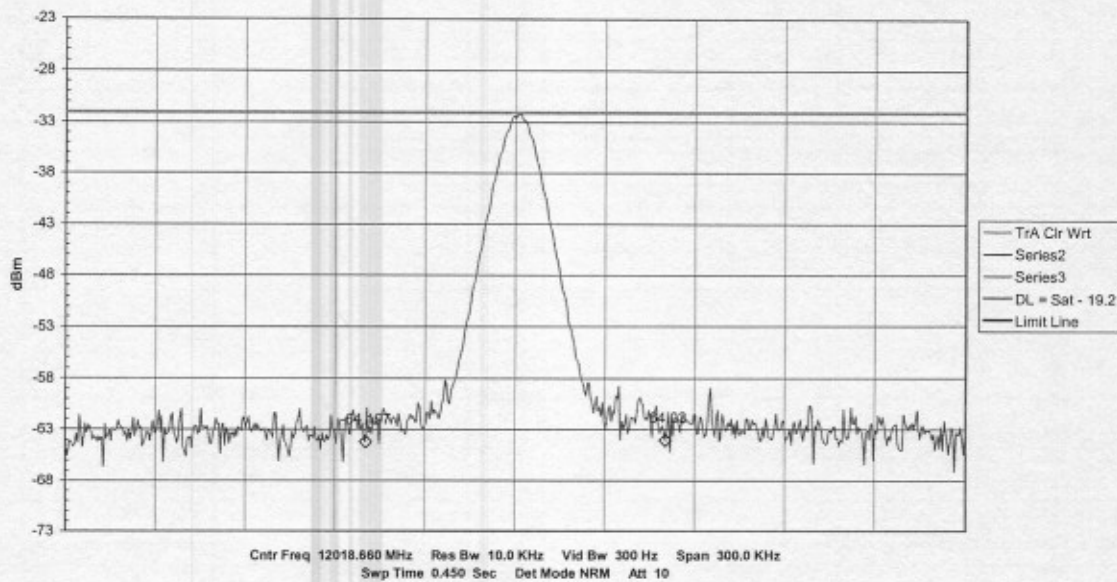


Figure 1 ESV (1) 8297 Co-pol

IA5K17 - SeaTel 8297
Plot Taken At 09/17/04 13:04:27

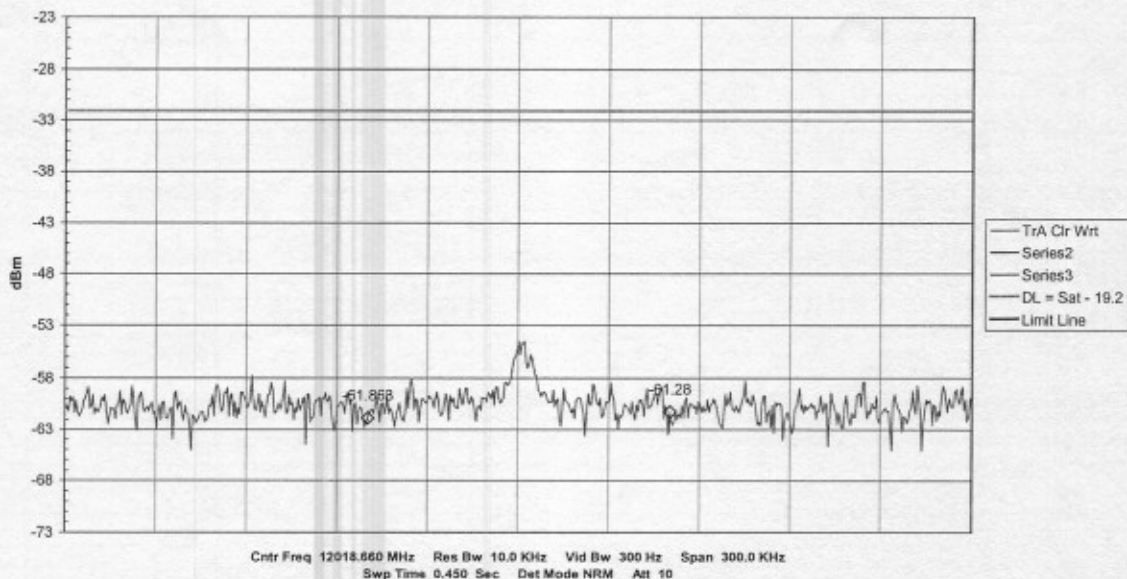


Figure 2 ESV (1) 8297 Cross-pol

Interstate Electronics Corporation (IEC), a division of L-3 Communications
Adjacent Satellite Operator Notification
Earth Station Onboard Vessel Performance

IA5K17 - SeaTel 9997
Plot Taken At 09/17/04 13:07:40

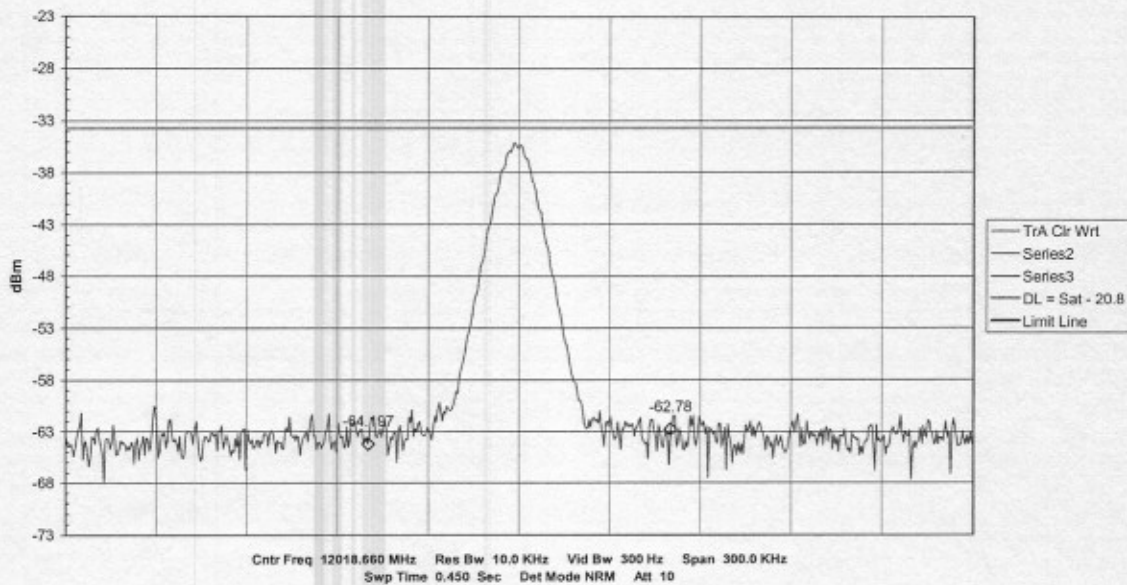


Figure 3 ESV (2) 9997 Co-pol

IA5K17 - SeaTel 9997
Plot Taken At 09/17/04 13:07:33

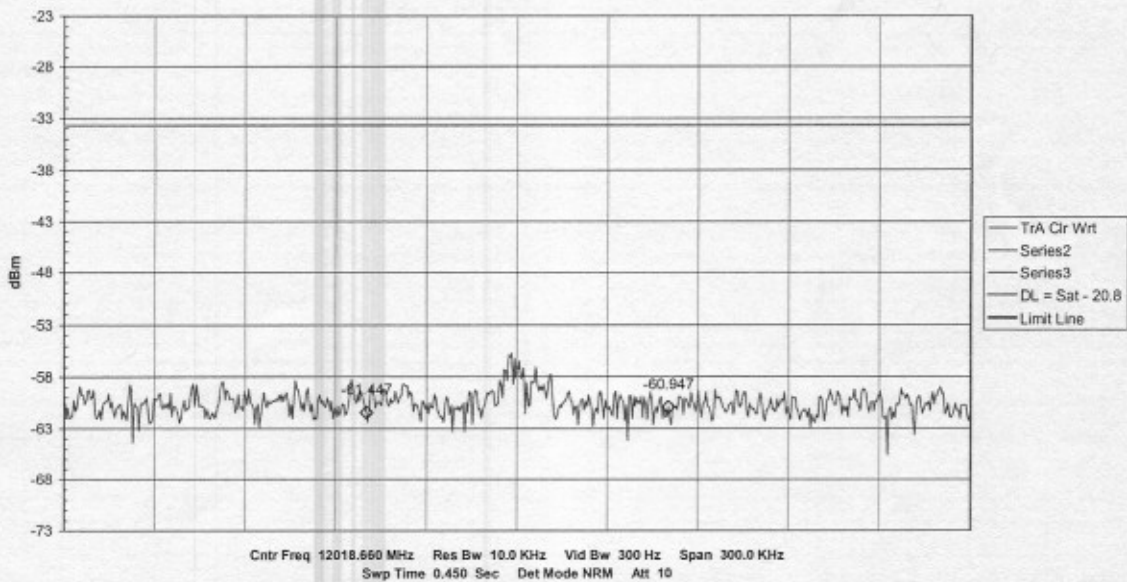


Figure 4 ESV (2) 9997 X-pol

Interstate Electronics Corporation (IEC), a division of L-3 Communications
Adjacent Satellite Operator Notification
Earth Station Onboard Vessel Performance

As can be seen from the data provided, these ESV terminals are operating within the performance requirements established by the FCC for all VSAT earth stations and within the limitations established in the inter-system coordination agreement.

If you have any questions regarding this notification, please contact:

Tom Murphy
Interstate Electronics Corporation
602 East Vermont Ave
Anaheim, CA 92805
United States of America
Telephone (714) 758-3391

Michelle A. McClure, Esq.
Irwin, Campbell & Tannenwald, P.C.
1730 Rhode Island Ave., N.W., Suite 200
Washington, DC 20036-3101
United States of America
(202) 728-0401 x133

Failure on your part to reply within 30 calendar days from the date of this notice will be construed as assent to the grant of IEC's ESV application. Replies should be filed directly with the Federal Communications Commission with copies to the individuals above.