

**Before the
FEDERAL COMMUNICATIONS COMMISSION
Washington, D.C. 20554**

In the Matter of)
)
Gogo LLC) File No. SES-LIC-_____
)
Application for Blanket Authority for Operation of)
1000 Technically Identical Ku-Band)
Transmit/Receive Earth Stations in the)
Aeronautical Mobile Satellite Service)

APPLICATION FOR BLANKET AUTHORITY

Of Counsel

Karis A. Hastings
SatCom Law LLC
1317 F Street, N.W., Suite 400
Washington, D.C. 20004
Tel: (202) 599-0975

William J Gordon
VP, Regulatory Affairs
Gogo LLC
1250 N Arlington Heights Road
Itasca, IL 60521
Tel: (202) 870-7220

Michele C. Farquhar
David L. Martin
Hogan Lovells US LLP
555 13th Street, N.W.
Washington, D.C. 20004
Tel: (202) 637-5600

Dated: June 18, 2012

TABLE OF CONTENTS

REGULATORY COMPLIANCE TABLE	i
I. INTRODUCTION.....	1
II. NETWORK DESCRIPTION.....	3
A. AES Segment	4
B. Space Segment	4
C. Ground Segment.....	6
III. SPECTRUM USE AND SHARING.....	6
A. Downlink Spectrum.....	6
B. Uplink Spectrum	7
IV. OPERATIONS PENDING ADOPTION OF AMSS RULES	9
V. SECTION 2.106 WAIVER REQUEST	10
VI. PUBLIC INTEREST SHOWING	12
VII. CONCLUSION	15

REGULATORY COMPLIANCE TABLE

FCC Rule or ITU Rec.	Citation to Application
§ 2.106 Waiver Request	Section V
§ 25.132(b)	Technical Appendix, Appendix B
§ 25.202(f)	Technical Appendix, Section 2.5.3
§ 25.218(f) & (h)	Technical Appendix, Appendix C
§ 25.220	Technical Appendix, Sections 1, 2.2, 2.3, 3.1, and 3.7, Appendix B, Appendix C
§ 25.271(c)	Technical Appendix, Section 2.6
M.1643, Part A	Technical Appendix, Section 3.1-3.2
M.1643, Part B	Technical Appendix, Section 3.3
M.1643, Part C	Technical Appendix, Section 3.4
M.1643, Part D	Technical Appendix, Section 3.5

**Before the
FEDERAL COMMUNICATIONS COMMISSION
Washington, D.C. 20554**

In the Matter of)	
)	
Gogo LLC)	File No. SES-LIC-_____
)	
Application for Blanket Authority for Operation of)	
1000 Technically Identical Ku-Band)	
Transmit/Receive Earth Stations in the)	
Aeronautical Mobile Satellite Service)	

APPLICATION FOR BLANKET AUTHORITY

Gogo LLC (“Gogo”) hereby respectfully requests that the Commission grant a blanket license authorizing Gogo to operate 1000 technically identical Ku-band transmit/receive earth stations for the provision of Aeronautical Mobile Satellite Service (“AMSS”) on domestic and international flights. Grant of the requested authority is consistent with Commission precedent and will serve the public interest by allowing Gogo to expand the coverage of its existing in-flight broadband service, enhancing competition in this important market.

I. INTRODUCTION

Gogo is the world’s leading provider of in-flight connectivity and a pioneer in wireless in-cabin digital entertainment solutions. Gogo offers service today through its proprietary platform and dedicated air-to-ground (“ATG”) network, and provides a variety of in-cabin offerings that make it easy and convenient for passengers to extend their connected lifestyles to the aircraft cabin. Gogo serves both the commercial aviation and general aviation markets. North American airlines that use the Gogo broadband service today include Delta Air Lines, American Airlines, Virgin America, Alaska Airlines, US Airways, Frontier Airlines and Air Tran Airways. From the inception of its service in August 2008 to March 1, 2012, the

company provided more than 21 million Gogo sessions to more than 5 million registered unique users.

Gogo provides in-flight broadband today across the contiguous U.S. and to portions of Alaska using the ATG network. Gogo seeks a blanket AMSS license to allow it to expand the coverage of its in-flight offerings beyond this footprint. Specifically, Gogo seeks authority to add a satellite-based component that will allow Gogo to provide continuous in-flight connectivity on transoceanic and other international flights. The satellite component of the Gogo service will use Fixed-Satellite Service (“FSS”) capacity in the conventional and extended Ku-band.¹

Gogo will employ proven antenna and modem technology in its AMSS network. Aircraft remote terminals use the AeroSat HR6400 antenna model. A previous version of this antenna was approved by the Commission, and the antenna has logged more than 40,000 flight hours with no complaints of interference.² Similarly, the iDirect modem is currently in use by other AMSS providers.

As the Commission has recognized, authorizing aircraft earth stations (“AESs”) to communicate with FSS space stations promotes efficient spectrum use and allows the delivery of important communications services to crew and consumers onboard aircraft.³ A global

¹ Specifically, Gogo will perform uplinks in the 14.0-14.5 GHz band and downlinks in the 11.7-12.2 GHz band within the U.S. Outside the U.S., alternative downlink spectrum in the 10.95-11.2 GHz, 11.45-11.7 GHz, and 12.25-12.75 GHz bands will be used.

² The antenna has been physically modified to provide space for the iDirect modem and associated interconnections.

³ See *Service Rules and Procedures to Govern the Use of Aeronautical Mobile Satellite Service Earth Stations in Frequency Bands Allocated to the Fixed Satellite Service*, IB Docket No. 05-20, Notice of Proposed Rulemaking, 20 FCC Rcd 2906 (2005) (“*Ku-Band AMSS NPRM*”) at ¶ 1.

secondary allocation for AMSS in the 14-14.5 GHz band was added in 2003, and the Commission has proposed a regulatory framework for Ku-band AMSS operations.⁴ Pending the adoption of service rules for such operations, the Commission has granted several operators blanket licenses for Ku-band AMSS networks.⁵

Grant of an AMSS blanket license to Gogo is consistent with this precedent and will serve the public interest. The introduction of a satellite component for Gogo's existing in-flight broadband network will enable Gogo to improve service to customers and will promote competition in this significant market.

II. NETWORK DESCRIPTION

The Gogo inflight system consists of three segments: the AES segment, the space segment, and the ground segment. An overview of each element is provided below, and additional detail is supplied in the attached technical narrative.

⁴ *See id.*

⁵ *See Panasonic Avionics Corporation, Application for Authority to Operate Up to 50 Technically Identical Aeronautical Mobile-Satellite Service Aircraft Earth Stations in the 14.0-14.4 GHz and 11.7-12.2 GHz Frequency Bands, Order and Authorization, 26 FCC Rcd 12557 (Int'l Bur. and OET 2011) ("Panasonic AMSS Order"); Row 44, Inc., Application for Blanket Authority to Operate up to 1,000 Technically Identical Aeronautical Mobile Satellite Service Transmit/Receive Earth Stations Aboard Commercial and Private Aircraft, Order and Authorization, 24 FCC Rcd 10223 (Int'l Bur. and OET 2009) ("Row 44 AMSS Order"); ViaSat Inc., Application for Blanket Authority for Operation of Up to 1,000 Technically Identical Ku-Band Aircraft Earth Stations in the United States and Over Territorial Waters, Order and Authorization, 22 FCC Rcd 19964 (Int'l Bur. and OET 2007) ("ViaSat AMSS Order"); ARINC Incorporated Application for Blanket Authority for Operation of up to One Thousand Technically Identical Ku-Band Transmit/Receive Airborne Mobile Stations Aboard Aircraft Operating in the United States and Adjacent Waters, Order and Authorization, 20 FCC Rcd 7553 (Int'l Bur. and OET 2005) ("ARINC AMSS Order"); Boeing Company Application for Blanket Authority to Operate Up to Eight Hundred Technically-Identical Transmit and Receive Mobile Earth Stations Aboard Aircraft in the 14.0-14.5 GHz and 11.7-12.2 GHz Frequency Bands, Order and Authorization, 16 FCC Rcd 22645 (Int'l Bur. and OET, 2001) ("Boeing AMSS Order").*

A. AES Segment

Each AES consists of the AeroSat Ku-band antenna system, which incorporates the iDirect satellite modem. These systems interface with the space segment to communicate with the ground earth segment. With input from the aircraft's navigational interface, the AeroSat antenna is steered by the antenna control system and satellite modem as the aircraft maneuvers and travels in the air.

As noted above, a previous version of the AeroSat antenna was approved by the Commission for AMSS operations in Ku-band FSS spectrum.⁶ In the current version, the antenna control unit has been physically changed to accommodate the iDirect modem. The antenna is compliant with the emission limits specified in Section 25.202(f) of the Commission's rules.⁷ In addition, the antenna is capable of maintaining a pointing accuracy of +/- 0.2 degrees, and emissions will automatically be terminated if this angle is exceeded.⁸ The antenna also conforms to the technical specifications for Ku-band AMSS operations embodied in Recommendation ITU-R M.1643.

B. Space Segment

Gogo will use transponder capacity on commercial Ku-band FSS satellites. Gogo is initially seeking authority to communicate with four Intelsat satellites, Intelsat 14 at 45° W.L., Intelsat 27 at 55.5° W.L., Intelsat 21 at 58° W.L., and Intelsat 19 at 166° E.L., and two SES satellites, NSS-703 at 47° W.L. and SES-1 at 101° W.L. Two of the Intelsat spacecraft,

⁶ See *Row 44 Inc.*, File Nos. SES-LIC-20080508-00570, SES-AMD-20080619-00826, SES-AMD-20080819-01074, SES-AMD-20080829-01117, SES-AMD-20090115-00041, SES-AMD-20090416-00501, Call Sign E080100 (granted Aug. 5, 2009).

⁷ 47 C.F.R. § 25.202(f).

⁸ Thus, the antenna complies with the pointing accuracy requirements that currently apply to earth stations on vessels ("ESVs"). See 47 C.F.R. § 25.222(a)(1)(ii) and (a)(1)(iii).

Intelsat 14 and Intelsat 19, are currently in-orbit, as are both of the SES spacecraft. Intelsat 27 and Intelsat 21 are replacement satellites scheduled for launch within the next eight months, and applications for FCC licenses for these spacecraft are pending.⁹

With the exception of NSS-703, all the satellites are or will be U.S. licensed. The Commission has authorized U.S. earth stations to communicate with NSS-703 by placing the satellite on the Permitted Space Station List (“Permitted List”) for operations in the conventional C- and Ku-bands.¹⁰ Gogo is also negotiating for capacity on other spacecraft to provide additional AMSS coverage, and will amend this application as appropriate to include these spacecraft.

Both Intelsat and SES have previously provided Ku-band capacity for mobile operations, including the provision of AMSS. Intelsat has confirmed that operation of the Gogo AMSS terminals is consistent with coordination agreements that are in place with respect to the Intelsat 21 and Intelsat 27 spacecraft.¹¹ Intelsat and SES are in the process of coordinating with operators of the satellites within 6 degrees of each of the other spacecraft to be used in the Gogo AMSS network in order to obtain confirmation that these operators have no objections to the Gogo AMSS operations.¹²

⁹ See *Intelsat License LLC*, File No. SAT-RPL-20120326-00061, Call Sign S2863 (Intelsat 21), and File Nos. SAT-LOA-20110610-00105 & SAT-AMD-20111111-00215, Call Sign S2827 (Intelsat 27).

¹⁰ See *SES Satellites (Gibraltar) Limited*, File Nos. SAT-PPL-20101103-00230 and SAT-APL-20110120-00015, Call Sign S2818, grant-stamped Oct. 31, 2011 (“*NSS-703 Grant*”). In addition to the conventional C- and Ku-bands, NSS-703 is capable of operating in certain extended Ku-band frequencies. These frequencies are not subject to inclusion on the Permitted List, but information regarding the technical characteristics of the extended Ku-band payload was included in the NSS-703 Permitted List filing. See *id.*, Attachment to Grant at 1 n.3.

¹¹ See Technical Appendix, Attachment C.

¹² See Technical Appendix, Attachment B.

C. Ground Segment

The ground segment includes the gateway earth stations and network operations centers used for overall satellite network management. A list of these is provided in the technical narrative.

III. SPECTRUM USE AND SHARING

The Gogo AMSS network will use conventional and extended Ku-band capacity to provide continuous connectivity and entertainment services on domestic and international flights. A description of each frequency band to be used by the system is provided below.

A. Downlink Spectrum

For AMSS downlink operations (communications from the satellite to the AES mobile terminals), Gogo proposes to use the 11.7-12.2 GHz conventional Ku-band spectrum for operations over the U.S. and the airspace above U.S. territorial waters. Outside the U.S., receive frequencies in the 10.95-11.2 GHz, 11.45-11.7 GHz, and 12.25-12.75 GHz bands will also be used. Gogo below requests a waiver of the Table of Allocations in Section 2.106 of the Commission's rules to use these downlink spectrum bands on a non-interference basis. Specifically, Gogo will accept interference from lawful operation of any station in the 11.7-12.2 GHz, 10.95-11.2 GHz, 11.45-11.7 GHz, and 12.25-12.75 GHz bands in accordance with the Table of Allocations. In addition, Gogo will immediately terminate its AMSS operations upon notification that such operations are causing harmful interference to any lawfully operating radio system in the 11.7-12.2 GHz, 10.95-11.2 GHz, 11.45-11.7 GHz, and 12.25-12.75 GHz bands in conformance with the Table of Allocations. Gogo's extended Ku-band operations will also

conform to footnote NG104 to the Table of Allocations, which limits operations in the 10.7-11.7 GHz spectrum to international usage.¹³

B. Uplink Spectrum

For AMSS uplink operations (communications from the AES mobile terminals to the satellite), Gogo proposes to use the 14.0-14.5 GHz conventional Ku-band spectrum. This band is allocated on a secondary basis for non-Federal-government mobile satellite service.¹⁴ As a secondary service, AMSS must protect other existing services authorized to operate in this spectrum. A description of how the Gogo network will share with each of the relevant services is provided below and in the attached technical materials.

Geostationary Orbit (“GSO”) FSS Systems: The Gogo AMSS network will protect GSO FSS systems by controlling the off-axis EIRP spectral density of the AES terminal so that it is within the parameters for other Ku-band mobile terminals under Part 25.¹⁵ The attached Technical Appendix includes a detailed description of the off-axis EIRP spectral density characteristics of the Gogo AES terminals.¹⁶ Gogo will also conform to the conditions that have typically been placed on other AMSS blanket licenses. Specifically, Gogo will immediately terminate operation of an AES upon notification that such operation is causing harmful interference.¹⁷ Furthermore, as noted above, Gogo’s operations will be fully coordinated with adjacent satellites. In the event that a GSO FSS satellite for which coordination has not been

¹³ See 47 C.F.R. § 2.106, Footnote NG104.

¹⁴ See *Ku-Band AMSS NPRM* at ¶ 19.

¹⁵ See, e.g., 47 C.F.R. § 25.222 (technical requirements for ESVs); 47 C.F.R. § 25.226 (technical requirements for vehicle mounted earth stations or “VMESs”).

¹⁶ See Technical Appendix, Appendices B and C.

¹⁷ See, e.g., *Panasonic AMSS Order* at ¶ 26(d).

completed commences operations within six degrees of one of the space stations used for the Gogo service, Gogo will demonstrate that its AMSS operation will not cause interference to the new satellite or will suspend use of that space station pending completion of coordination.¹⁸

Nongeostationary Orbit (“NGSO”) FSS Systems: Gogo recognizes that it is obligated to protect any NGSO FSS network operating in the 14.0-14.5 GHz band from harmful interference. However, there currently are no such networks in operation, and to Gogo’s knowledge, no NGSO FSS system applications are pending. In the event a future NGSO FSS network is deployed, Gogo will demonstrate that its AMSS operation will not cause interference to the new network or will suspend operations pending completion of coordination.¹⁹

Space Research Operations: The 14.0-14.2 GHz band is allocated in the U.S. for Federal operation in the Space Research Service (“SRS”), and NASA operates earth stations in the 14.0-14.05 GHz portion of the band as part of the SRS Tracking and Data Relay Satellite System (“TDRSS”). Gogo is in the process of negotiating a coordination agreement with NASA for protection of existing and future TDRSS sites from interference that could result from Gogo’s AMSS operations. Pending completion of coordination with NASA, Gogo agrees not to operate AES antennas in the 14.0-14.2 GHz band within line of site of NASA TDRSS facilities.²⁰

Terrestrial Radio Systems: At the time Gogo commences service, there will be no active FCC-licensed terrestrial services in this band with which the Gogo AMSS operations

¹⁸ *Id.* at ¶ 26(b).

¹⁹ *Id.* at ¶ 26(c).

²⁰ This approach conforms to requirements in the analogous portions of the Commission’s ESV and VMES rules. *See* 47 C.F.R. §§ 25.222(d) and 25.226(c).

could conflict.²¹ Gogo will limit the power flux density (“PFD”) of emissions to the levels stated in Recommendation ITU-R M.1643 at locations where protection of terrestrial fixed service is required.

Radio Astronomy: For purposes of protecting radio astronomy sites, Gogo will limit PFD levels to conform to Recommendation ITU-R M.1643, Part C. In addition, Gogo is in the process of negotiating a coordination agreement with the National Science Foundation concerning protection of U.S. radio astronomy observatories.

IV. OPERATIONS PENDING ADOPTION OF AMSS RULES

As noted previously, in the *Ku-Band AMSS NPRM*, the Commission has proposed a regulatory framework for AMSS operations in the Ku-band, but has not yet acted in that proceeding. Gogo recognizes that any AMSS blanket authority it receives will be subject to the requirements that are ultimately adopted in that rulemaking.

Pending completion of the rulemaking, Gogo commits to operating consistent with the general regulatory framework the Commission has adopted for other mobile uses of the Ku-band FSS spectrum, such as ESVs and VMESs. In particular, Gogo will:

- Maintain a point of contact available 24 hours per day, seven days per week, with the authority and ability to terminate operations of the Gogo AMSS system and to discuss interference concerns with other licensees and U.S. Government agencies; and

²¹ In the *Panasonic AMSS Order*, the Commission observed that footnote NG184 to the U.S. Table of Allocations permitted continued operation of grandfathered land mobile stations licensed prior to March 1, 2005 until their licenses expired. *Panasonic AMSS Order* at ¶ 22. At the time, the Commission indicated that only one such license remained in effect, with a scheduled expiration date of July 23, 2012. *Id.* This remaining license will have expired before the Commission acts on the instant Gogo AMSS application.

- Collect and maintain for one year records of the following data for each operating AES: location (latitude, longitude, altitude); aircraft attitude (pitch, yaw, roll); transmit frequency and occupied bandwidth; data rate; EIRP and target satellite. Gogo will also maintain records of instances when AES pointing error exceeds 0.2 degrees, which it will make available to the Commission or FSS system operator within twenty-four hours of receiving such a request.

V. SECTION 2.106 WAIVER REQUEST

Gogo requests a limited waiver of the Commission's rules in connection with this AMSS blanket license application. Grant of this waiver is consistent with Commission policy:

The Commission may waive a rule for good cause shown. Waiver is appropriate if special circumstances warrant a deviation from the general rule and such deviation would better serve the public interest than would strict adherence to the general rule. Generally, the Commission may grant a waiver of its rules in a particular case if the relief requested would not undermine the policy objective of the rule in question and would otherwise serve the public interest.²²

Gogo requests a waiver of the Table of Allocations in Section 2.106 of the Commission's rules to permit use of the conventional and extended Ku-band downlink frequencies, 11.7-12.2 GHz, 10.95-11.2 GHz, 11.45-11.7 GHz, and 12.25-12.75 GHz bands for AMSS operations. Grant of the requested waiver is consistent with Commission precedent regarding other AMSS Ku-band blanket license applications and will serve the public interest.

In ruling on prior AMSS blanket license requests, the Commission has granted waivers for downlink operations in the 11.7-12.2 GHz conventional Ku-band downlink spectrum "based upon either a showing that the proposed AMSS downlink transmissions will not exceed

²² *PanAmSat Licensee Corp.*, 17 FCC Rcd 10483, 10492 (Sat. Div. 2002) (footnotes omitted).

the 10 dBW/4 kHz limit for routine processing in Section 25.134(g)(2) of the Commission's rules or proof that adjacent satellite operators have consented to the operations."²³

The Commission has permitted use of the 11.45-11.7 GHz extended Ku-band frequencies for AMSS downlinks pursuant to the same rationale.²⁴ In the *Ku-Band AMSS NPRM*, the Commission recognized that "AES terminals on U.S.-registered aircraft may need to access foreign satellites while traveling outside of the United States (*e.g.*, over international waters), and therefore may need to downlink in the extended Ku-band in certain circumstances."²⁵ The Commission went on to observe that it did "not anticipate that unprotected receive-only operations in the extended Ku-band would interfere with or restrict other authorized operations in the band."²⁶ Accordingly, the Commission sought comment on whether AMSS should be permitted in the 10.95-11.2 GHz and 11.45-11.7 GHz portions of the extended Ku-band.²⁷

As noted above, the satellite operators that will provide capacity to Gogo will fully coordinate the AMSS operations with satellites within six degrees. Under these circumstances, grant of a Section 2.106 waiver is justified to permit use of the conventional and extended Ku-bands for AMSS downlinks. In addition to the portions of the extended Ku-band proposed for use in the *Ku-Band AMSS NPRM*, Gogo also proposes to use the 12.25-12.75 GHz

²³ See *Panasonic AMSS Order* at ¶ 11.

²⁴ See *Row 44 Inc.*, File No. SES-MFS-20100715-00903, Call Sign E080100, Attachment at 3 (requesting extension of the waiver of Section 2.106 that Row 44 was granted for conventional Ku-band downlinks to cover the proposed use of the 11.45-11.7 GHz band), grant-stamped Dec. 23, 2010.

²⁵ *Ku-Band AMSS NPRM* at ¶ 18 (footnote omitted).

²⁶ *Id.*

²⁷ *Id.*

band for AMSS downlinks on certain overseas routes. Pursuant to the International Table of Allocations in Section 2.106, FSS downlinks have primary status in the 12.5-12.75 GHz band in ITU Region 1 and in the 12.25-12.75 GHz band in ITU Region 3. Gogo respectfully requests a waiver of Section 2.106 to allow AMSS operations in these regions using these spectrum bands on a non-interference basis. Because these proposed operations will be fully coordinated, grant of the requested waiver will promote efficient use of spectrum and serve the public interest.

VI. PUBLIC INTEREST SHOWING

Grant of the Gogo AMSS blanket license application will promote competition in the market for in-flight broadband services, to the benefit of air travelers in the U.S. and abroad. Furthermore, grant of the application is consistent with Commission policies and precedent.

In proposing a regulatory framework for Ku-band AMSS operations, the Commission has recognized the value of in-flight services:

AMSS potentially offers consumers the benefits of broadband services while traveling by air, both domestically and internationally. Such service might be particularly attractive to passengers on long-haul flights. AMSS provides a means for passengers to access high-speed Internet and interactive entertainment, while broadband capability for crews could “enhance aircraft operations through real-time equipment and supply information, weather updates, [and] security monitoring.”²⁸

²⁸ *Ku-Band AMSS NPRM* at ¶ 2, quoting The Boeing Company, Petition for Rulemaking, Amendment of Parts 2 and 25 of the Commission’s Rules to Allocate Spectrum in the 14-14.5 GHz Band to the Aeronautical Mobile-Satellite Service and To Adopt Licensing and Service Rules for AMSS Operations in the Ku-Band, filed July 21, 2003, at 27.

Similarly, the Commission decisions granting blanket license applications have held that authorizing new AMSS operators serves the public interest by “enhancing competition in an important sector of the mobile telecommunications market in the United States.”²⁹

Grant of the Gogo AMSS application is consistent with these objectives. Adding the AMSS component to Gogo’s existing ground-based in-flight connectivity and entertainment services will allow Gogo to expand its coverage and provide continuous service on both domestic and international flights. With its technological expertise and proven record of customer service, Gogo is well-positioned to bring high-quality, reliable in-flight communications to air travelers in the U.S. and abroad.

Grant of Gogo’s application will also enhance public safety by satisfying communications requirements for U.S. government agencies providing aviation security to U.S. airlines domestically and internationally.

Finally, Gogo’s proposed AMSS network conforms to the Commission’s *DISCO II* policies, which are intended to ensure that entry by a foreign-licensed satellite will not distort competition in the U.S.³⁰ The NSS-703 spacecraft, which is the only non-U.S.-licensed satellite proposed here for use with the Gogo AMSS system, has already been evaluated by the Commission under this framework and has been placed on the Permitted List for communications with U.S.-licensed terminals in the conventional Ku-band frequencies.³¹

²⁹ See *Panasonic AMSS Order* at ¶ 1; see also *Row 44 AMSS Order* at ¶ 1; *ViaSat AMSS Order* at ¶ 1.

³⁰ See *Amendment of the Commission’s Policies to Allow Non-U.S. Licensed Space Stations providing Domestic and International Service in the United States*, Report & Order, 12 FCC Rcd 24094 (1997) (“*DISCO II*”). These policies are codified in Section 25.137 of the Commission’s rules, 47 C.F.R. § 25.137.

³¹ See *NSS-703 Grant*.

Furthermore, the Commission applies the same legal framework that governs requests for addition to the Permitted List to petitions seeking authority to use foreign-licensed satellites in bands other than the conventional C- and Ku-bands.³² Full technical information regarding NSS-703, including data relating to its extended Ku-band payload, is already on file with the Commission.³³ Accordingly, the Commission should rule that NSS-703 can be used for communications with the Gogo AES terminals in the relevant extended and international Ku-band frequencies, 10.95-11.2 GHz and 12.5-12.7 GHz.

³² See *DISCO II* at ¶ 192.

³³ See *NSS-703 Grant*, Attachment to Grant at 1 n.3.

VII. CONCLUSION

For the foregoing reasons, Gogo respectfully requests that the Commission grant Gogo authority to operate 1000 Ku-band transmit/receive earth stations for the provision of AMSS on domestic and international flights, consistent with the technical parameters specified herein.

Respectfully submitted,

GOGO LLC

By: /s/ William J. Gordon

Of Counsel

Karis A. Hastings
SatCom Law LLC
1317 F Street, N.W., Suite 400
Washington, D.C. 20004
Tel: (202) 599-0975

William J Gordon
VP, Regulatory Affairs
Gogo LLC
1250 N Arlington Heights Road
Itasca, IL 60521
Tel: (202) 870-7220

Michele C. Farquhar
David L. Martin
Hogan Lovells US LLP
555 13th Street, N.W.
Washington, D.C. 20004
Tel: (202) 637-5600

Dated: June 18, 2012



Gogo AMSS System

Technical Appendix

June 18, 2012

Table of Contents

1. Introduction.....	4
2. System Description	4
2.1. Overview.....	4
2.2. Aeronautical Segment	5
2.2.1. AES Overview	5
2.2.2. ACMU.....	5
2.2.3. Ku Antenna System	6
2.2.4. Antenna Pointing.....	6
2.3. Space Segment	6
2.3.1. Satellite System List.....	7
2.4. Ground Segment	7
2.4.1. Gateway Earth Stations	7
2.4.2. NOCs.....	8
2.5. Waveforms.....	8
2.5.1. Description.....	8
2.5.3. Out of Band Emissions	9
2.6. Network Management.....	9
2.6.1. Network Monitoring and Management	9
2.6.2. Commissioning - authorizing terminals to connect to the network	9
2.6.3. Acquisition.....	9
2.6.4. Automatic Beam Selection.....	10
2.6.5. Return Link Power Control.....	10
2.6.6. Return Link Frequency Control	10
2.6.7. Fault Management.....	10

3.	Protection of Other Co-Frequency Spectrum Users.....	11
3.1.	Protection of GSO FSS Systems.....	11
3.2.	Protection of Potential NGSO FSS Systems.....	12
3.3.	Protection of Terrestrial Radio Services.....	12
3.4.	Protection of the Radio Astronomy Service.....	13
3.5.	Protection of Space Research Service.....	13
3.6.	Downlink Transmissions in the 11.7-12.2 GHz Band.....	13
3.7.	Adjacent Satellite Operators.....	13
4.	Conclusion.....	14
	APPENDIX A: Link Budget.....	15
	APPENDIX B: Antenna Patterns.....	17
	B.1 AeroSat Gain Patterns – Co-pol Azimuth.....	17
	B.2 AeroSat Gain Patterns – Co-Pol Elevation.....	23
	B.3 AeroSat Gain Patterns – Cross-Pol.....	24
	APPENDIX C: EIRP Spectral Density Plots.....	25
	APPENDIX D: Antenna Gain and EIRP Tables.....	33
	ATTACHMENT A: Radiation Hazard Analysis.....	75
	ATTACHMENT B: Satellite Company Letters.....	82
	ATTACHMENT C: Certification of Coordination Agreements.....	86

TECHNICAL APPENDIX

This Technical Appendix describes the operational characteristics of the Aeronautical Earth Station (AES) and the Gogo Ku-band Aeronautical Mobile Satellite Service (AMSS) system.

1. Introduction

Gogo LLC (Gogo) is seeking authority to operate up to 1000 technically identical Aeronautical Earth Stations in the Ku-band to provide multimedia and data services to commercial aircraft operating over United States and its territorial waters and internationally. The terminals will transmit in the 14.0-14.5 GHz band, and will receive in the 11.7-12.2 GHz band in domestic airspace. In some portions of international airspace, the extended Ku-band spectrum, 10.95-11.2, 11.45-11.7, and 12.25-12.75 GHz, will also be used for receive operations.

The Gogo Inflight System brings Gogo's technological expertise with its terrestrial Air-to-Ground network (ATG) to the Broadband Satellite Multimedia (BSM) market, using equipment and technology previously approved by the Commission. With AeroSat's satellite antenna technology, combined with iDirect's proven modem technology in satellite communications that is currently being used for fixed and mobile VSAT applications in the commercial and government industries, Gogo seeks to provide a unique experience to the end customers.

2. System Description

2.1. Overview

A high-level representation of the system is shown in Figure 1 below. The Gogo AMSS system can logically be divided into three segments, the Space Segment, the Aeronautical Segment, and the Ground Segment.

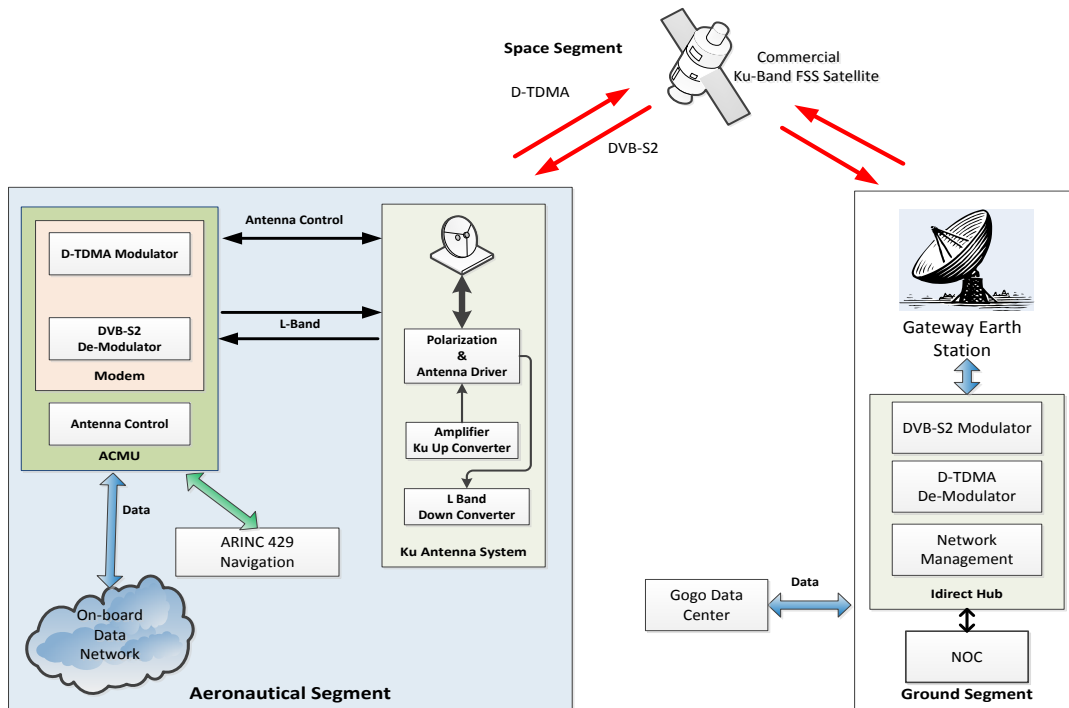


Figure 1 - AMSS System Block Diagram

2.2. Aeronautical Segment

2.2.1. AES Overview

The Aeronautical Segment consists of all operational Aeronautical Earth Stations (AESs) operating on the Gogo AMSS system. Each AES consists of the AeroSat Ku antenna system, which incorporates the iDirect satellite modem. This system interfaces with the various satellites which comprise the Space Segment (via the Ku band). The satellites in turn communicate with the Ground Segment, which consists of the Gateway Earth Stations and Network Operations Centers (NOCs) that are associated with the satellites and the overall Gogo AMSS network. Utilizing input from the aircraft's navigation system ARINC 429 interface, the antenna is steered by the antenna control system and satellite modem as the aircraft maneuvers and travels in the air. The AeroSat antenna system was previously authorized by the FCC for AMSS¹. Gogo's on-board data network interfaces with the satellite modem to provide users with access to online connectivity, as well as to in-flight entertainment content.

The AeroSat HR6400 Satellite Antenna Subsystem is made up of four major physically separated components, along with the interconnecting RF Cabling. These four major components are the radome, and the Fuselage Mounted Antenna (Antenna) both of which are mounted on the top of the aircraft fuselage and constitute the Satellite Antenna Assembly, and the Antenna Control Modem Unit (ACMU), and High Power Transceiver (HPT), both of which are mounted within the pressurized airframe, just under and in close proximity to the antenna.

2.2.2. ACMU

The ACMU is the Antenna Control Unit (ACU) of the previously authorized AeroSat antenna system, but it has been physically modified to provide space for the iDirect modem and associated interconnections. The ACMU obtains information on the aircraft's position (latitude, longitude and altitude), and attitude (roll angle, pitch angle, and heading), and on changes in those factors (roll rate, pitch rate, yaw rate, and ground speed) from the on-board Inertial Navigation System (INS) via the ARINC 429 data bus. Based on the location of the aircraft and pre-loaded maps, the modem selects the appropriate serving satellite. The ACMU controls the antenna's positioner to the correct azimuth, elevation and polarization orientation relative to the aircraft position and orientation in order to accurately point the antenna toward the target satellite. The aircraft position data (latitude and longitude) is updated every 200 milliseconds or less, and its attitude data is updated every 50 milliseconds or less for heading and every 20 milliseconds or less for pitch and roll. The positioner controls are updated continuously to maintain accurate pointing towards the satellite.

¹ See *Row 44 Inc.*, File Nos. SES-LIC-20080508-00570, SES-AMD-20080619-00826, SES-AMD-20080819-01074, SES-AMD-20080829-01117, SES-AMD-20090115-00041, SES-AMD-20090416-00501, Call Sign E080100 (granted Aug. 5, 2009).

2.2.3. Ku Antenna System

The Ku Antenna System includes the radome, the Antenna and the HPT. The radome protects the Antenna from the external environment and minimizes the impact of the fuselage-mounted equipment on the flight dynamics on the aircraft. It is transparent to RF energy over the Ku-band.

The Antenna consists of an antenna array which receives and transmits satellite signals and a Low Noise Block Amplifier (LNA). It is mounted on a positioner with an elevation over azimuth gimbal. The polarization control is integral to the antenna array. RF signals to and from the antenna are connected to the HPT via rotary joints and cables, and control and power signals connect to the ACMU via slip rings and power/control cables.

The HPT is connected between the antenna and the ACMU's modem, up-converting the L-band transmit signal to Ku-band, and down-converting the received Ku-band signal to L-band.

2.2.4. Antenna Pointing

The antenna pointing accuracy is controlled by the ACMU to a pointing error of less than 0.2° between the orbital location of the target satellite and the axis of the main lobe of the antenna. All emissions automatically cease within 100 milliseconds if the angle between the orbital location of the target satellite and the axis of the main lobe of the antenna exceeds 0.5° , and transmission is not resumed until the angle is verified to be less than 0.2° . The gimballed antenna is mechanized by a positioner that slaves the antenna beam in azimuth, elevation and polarization utilizing received signal quality to assure alignment of the positioner's reference system with that of the aircraft inertial navigation system. The pointing error is continuously computed by the ACMU from receive INS data and positioner sensors. In the event that the pointing error exceeds 0.5° , the ACMU will mute the transmitter by disabling power to the power amplifier within the HPT and will not re-enable it until the error is determined to be within 0.2° . Once the HPT is commanded to mute, power is disabled in less than 1 millisecond. The mute line is a direct connection to the Power Amplifier and requires no CPU inputs.

The control and positioner system result in less than 0.2° pointing error being maintained under normal aircraft operational conditions, including situations where the aircraft is not on the same longitude as the serving satellite.

In summary, the control system relies on a combination of the aircraft position and attitude information from the onboard aircraft computer augmented with signal strength data provided by the modem as received/processed from the satellite, providing a closed loop tracking update.

2.3. Space Segment

The Gogo AMSS system will lease transponder capacity on commercial Ku-band FSS satellites. Partial or whole transponders may be used, and transponders may be operated with a single carrier or with multiple carriers. Forward and return links may be on the same or different transponders. The spectrum will typically be within the conventional Ku band – 11.7-12.2 GHz downlink and 14.0-14.5 GHz uplink. On some satellites, receive frequencies in the extended Ku-band, 10.95-11.2, 11.45-11.7, and 12.25-12.75 GHz, will be used for international service.

2.3.1. Satellite System List

Operation of the Gogo AMSS system with these satellites will conform to the coordinated uplink off-axis EIRP spectral density limitations and downlink power density limits for the listed satellites. SES and Intelsat are in the process of coordinating the Gogo AMSS technical parameters with operators of the adjacent satellites.

Satellite	Location	Beam Coverage Area	Tx (GHz)	Rx (GHz)	Satellite Operator
SES 1	101W	North America	14-14.5	11.7 – 12.2	SES
NSS 703	313E	S2 - North Atlantic	14-14.5	11.7 – 11.95	
		S1 - North Atlantic	14-14.5	10.95 – 11.2; 11.45-11.7	
		S3 - North Atlantic	14-14.5	12.5-12.75	
IS 14	315E	So America	14-14.5	11.7 – 12.2	Intelsat
IS 27	304.5E	North Atlantic	14-14.5	11.7 – 12.2	
IS 21	302E	Brazil	14-14.5	11.7 – 12.2	
IS 19	166E	Northeast Pacific	14-14.5	12.25-12.75	
		Northwest Pacific	14-14.5	12.25-12.75	
		Australia	14-14.5	12.25-12.75	
		Southwest Pacific	14-14.5	12.25-12.75	

2.4. Ground Segment

The Ground Segment consists of the Gateway Earth Stations which interface with the Space Segment and provide overall satellite network management via one or more NOCs. Data will be transmitted to the Gogo Data Center, which will in turn direct data to/from the Internet and other data systems.

2.4.1. Gateway Earth Stations

Satellite	Teleport Location	Call Sign
SES 1	Woodbine, MD	E920698
NSS 703	Woodbine, MD	E070181
IS 14	ATL teleport ATL-C06	E940333
	ATL teleport ATL-K15	E090093
IS 27	MTN teleport MTN-K02	E030051
IS 21	TBD	N/A
IS 19	Napa teleport NAP-K31	E980460
	Napa teleport NAP-C30	E980467

2.4.2. NOCs

Gogo LLC

Network Operations Center
1250 North Arlington Heights Rd
Itasca, IL 60173
Phone: +1 866 943 4662 – NOC Engineer on Duty
Email: noc@aircell.com

SES

Network Operations Center
8000 Gainsford Court
Bristow, VA 20136
Phone: +1 703 367 7300
Email: NOC@ses.com

Intelsat

Carrier Management Center
Carrier access, measurement and monitoring for fault detection and resolution 24x7 support
Phone: +1 404 381 2600
 +1 800 321 3959
Fax: +1 404 381 2426
E-mail: cmcops@intelsat.com

Data Operations Center

IntelsatONE Broadband and managed network services 24x7 support
Phone: +1 404 381 2828
Fax: +1 404 381 2596
E-mail: doc@intelsat.com

2.5. Waveforms

2.5.1. Description

The network uses a star topology with a Time Division Multiplexed (TDM) broadcast outbound channel from a central hub location shared by a number of remote terminals. Each remote terminal transmits to the hub on a shared set of Time Division Multiple Access (TDMA) inbound channels with dynamic timeslot assignments.

2.5.2. Satellite Access Techniques

DVB-S2 with Adaptive Coding and Modulation (ACM) is utilized for the outbound channel, initially with one carrier in each satellite coverage area. All of the forward link traffic for the aircraft operating in that region will be time division multiplexed on this carrier. Modulation and coding will be varied on a frame-by-frame basis and terminals will attempt to demodulate all of the frames they receive and determine which data is addressed to them. Information regarding receive quality is transmitted back to

the hub modems via the return link so that it may adapt future frame coding and modulation to ensure acceptable performance. As traffic volumes increase in a coverage area, additional outbound carriers will be added, with each AES assigned to a particular carrier.

The return link uses iDirect's proven Deterministic TDMA (D-TDMA), a Multi-Frequency TDMA (MF-TDMA) access scheme. The hub assigns terminals time slots on one or more in-route carriers for data traffic, assuring that no carrier and time slot assignments are duplicated amongst terminals. Individual in-route carriers have a fixed modulation and coding scheme, but modulation and coding may differ amongst multiple in-route carriers that are provisioned in a coverage area. Terminals will transmit a single carrier in each of their assigned time slots. As user demand varies with time on the return link, the terminal will signal the changed demand to the hub over the return link, and the hub will adjust the number of time slots assigned to that terminal.

No contention exists in the return link as time slots on each carrier are uniquely assigned to one AES. This makes managing off-axis EIRP spectral density within the system simple and robust.

2.5.3. Out of Band Emissions

The Gogo AMSS system will comply with the emissions limitations in 47 C.F.R. §25.202(f).

2.6. Network Management

2.6.1. Network Monitoring and Management

The NOCs will be the focal points responsible for configuring, monitoring and controlling the Gogo AMSS network. iDirect's Network Management System (NMS), a widely deployed and field-proven system, will be used to access and manage the various network elements in the system.

NOCs will be staffed on a 24/7/365 basis, providing continuous supervision of the network, monitoring system performance and identifying any network element failures. The NMS provides the ability to re-configure and/or disable network elements in response to performance problems and/or element failures.

2.6.2. Commissioning - authorizing terminals to connect to the network

After an aeronautical terminal is installed on an aircraft, the AES is commissioned. The Antenna orientation is adjusted to peak on the received signal from a satellite, and its orientation is compared to and aligned with that derived from the aircraft's INS and the antenna positioner. Cable losses are measured and verified to ensure accurate transmit and receive chain calibration. The terminal information and associated profiles are entered into the NMS.

Once the terminal is fully activated and enabled into the NMS, log-in invitations will be issued and only then is it possible for a terminal to attempt to log in to the network.

2.6.3. Acquisition

Acquisition timeslots and carriers are uniquely assigned to inactive remotes, ensuring that only a single remote can transmit in an acquisition timeslot. Thus, no contention can occur on any acquisition time slot, and off-axis EIRP spectral density is deterministically controlled. Terminals may only begin transmitting to a satellite and beam that is consistent with the pre-loaded maps, and only after the antenna

has been pointed at the appropriate satellite and the log-in invitation information has been received. During acquisition, the transmit power is minimized and must be below the level that would exceed the off-axis EIRP limits established for the serving beam at the terminal's current location.

2.6.4. Automatic Beam Selection

The Gogo AMSS system uses iDirect's Automatic Beam Selection (ABS) to switch between beams as an aircraft travels between different served areas. The modem's satellite maps contain the information regarding which satellite and beam is preferred based on the terminal's geographic location. When a beam switch is required, the modem will provide the ACU with the updated satellite position, transmission will be disabled, the new antenna position will be calculated and sent to the antenna positioner, and the antenna will re-orient to the new satellite and acquire the new satellite signal. The modem will acquire synchronization of the received signal and, on receipt of a log-in invitation, will initiate signal transmissions. In the case of beam-to-beam transitions on the same satellite, the process is similar, except that no re-orientation of the antenna is required.

2.6.5. Return Link Power Control

The iDirect demodulator monitors the C/N of the signals received from served remotes, and issues power control corrections to remotes which are outside the target C/N range. These corrections adjust the return link power to the target C/N after the remote has log-in, and maintains the target level as the return link characteristics change with the remote's geographic position and operating environment.

The High Power Transceiver has a power detector, which is stable over frequency and temperature, that reports the Ku-band transmit power from the Power Amplifier (PA). This allows accurate power control to be maintained at the PA output, despite any variations in PA gain over temperature and frequency.

The modem within the ACMU also calculates the Power Spectral Density (PSD) and ensures that the remote will not exceed the PSD limits required to comply with FCC regulations.

2.6.6. Return Link Frequency Control

The modem and High Power Transceiver are phase locked to a 10 MHz reference provided within the High Power Transceiver. The return link frequency stability is determined by the frequency stability of the 10 MHz reference. If there is a loss of lock to the reference by either the High Power Transceiver or the modem, the terminal immediately ceases transmission. The frequency stability of the 10 MHz reference is ± 0.01 parts per million.

2.6.7. Fault Management

There are multiple modes of fault detection within the Antenna System and the hub. All emissions automatically cease within 100 milliseconds if the angle between the orbital location of the target satellite and the axis of the main lobe of the antenna exceeds 0.5° , and transmission is not resumed until the angle is less than 0.2° . In addition, if the ACMU loses communication with the aircraft inertial reference system, or if there is a failure of the ACMU itself, it will cause the transmitter to immediately mute. If the reference oscillator fails, the Antenna System will cease transmission. Finally, the Antenna System will

not transmit until it sees the appropriate out-route signal from the satellite; if the signal is not received, the Antenna System will not transmit.

3. Protection of Other Co-Frequency Spectrum Users

The FCC has not yet established service rules applicable to Ku-band AMSS operations, and Gogo therefore has provided the technical and coordination information specified under the requirements set forth in 47 C.F.R. §25.220. Additionally, Gogo has included technical data demonstrating compliance with two-degree satellite spacing requirements, analogous to those that currently apply to ESVs set forth in 47 C.F.R. §25.222 and VMES in 47 C.F.R. §25.226.

3.1. Protection of GSO FSS Systems

The Gogo AES will operate in accordance with the off-axis EIRP spectral density limits for Ku-band terminals in the Commission's rules.² The data rates transmitted from the terminal will vary from 500 kbits/s to 1000 kbits/s. The AES will transmit using a TDMA scheme with channel bandwidths of 4.9 MHz, 6.5 MHz, 7.3 MHz, 7.8 MHz, 8.3 MHz, and 9.6 MHz. The co-polarized off-axis EIRP spectral density levels of the AES terminal are shown in Figure 2 below at +/-7 degrees. Complete antenna patterns and EIRP spectral density plots are included in Appendices B and C, respectively. The associated data in tabular form are included in Appendix D. The terminal's off-axis EIRP spectral density, shown in Figure 2 and in Appendix C, remains below the combined off-axis EIRP spectral density limit derived from §25.209(2) and §25.212(c), as shown in the Figure below. All Gogo operations will conform to the requirements set forth by the satellite operators' coordination agreements. If Gogo is notified that any adjacent satellite operator is experiencing harmful interference from Gogo's operations, Gogo will cease terminal transmissions immediately. In addition, if another co-frequency, co-coverage GSO FSS satellite commences operation at a location within six degrees of one of Gogo's serving satellites, Gogo will cease operation absent a coordination agreement or will demonstrate that it will not cause harmful interference to the new satellite.

² Gogo is pursuing this authorization under 47 CFR §25.220. The performance of the Gogo AES antenna will also comply with the following FCC rules: §25.128(f), which governs conventional Ku-band VSATs; §25.222(a)(1)(i), which governs ESVs, and §25.226(a)(1)(i), which governs VMES operations. The Gogo AES terminal complies with off-axis EIRP spectral density limits in the azimuth plane.

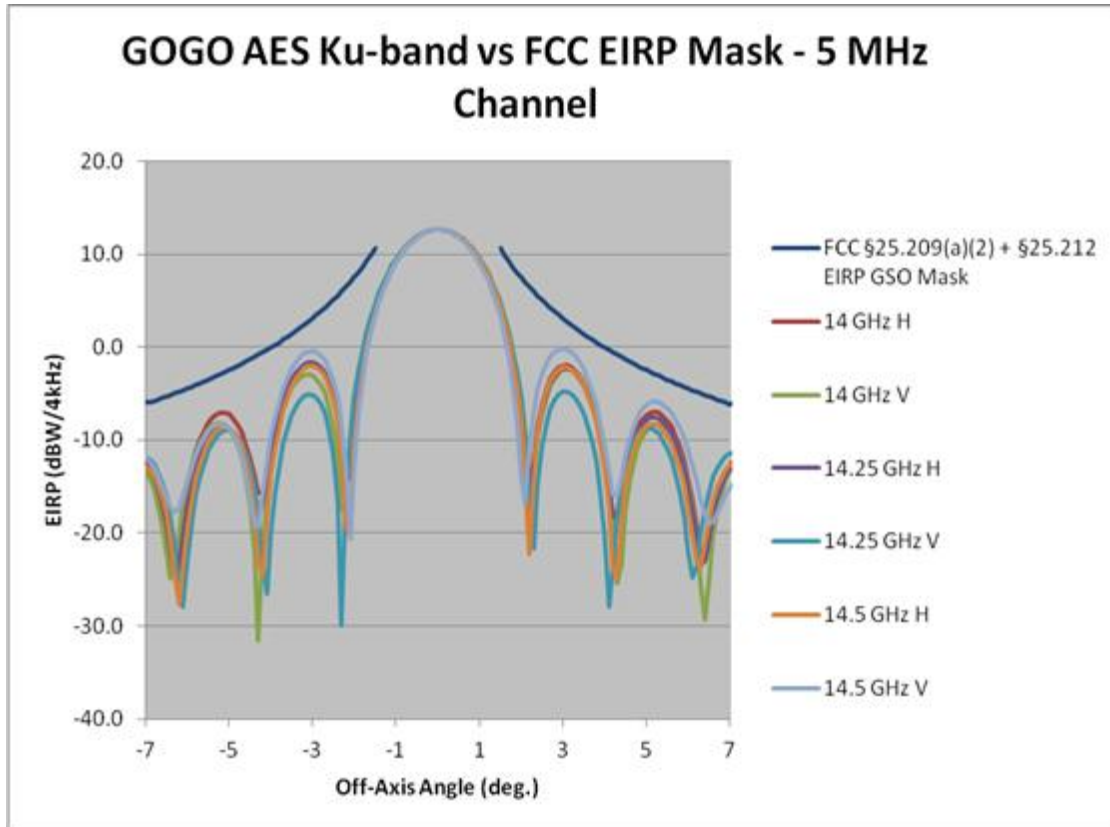


Figure 2. Maximum Off-axis EIRP Spectral Density of the Gogo Antenna

3.2. Protection of Potential NGSO FSS Systems

The Gogo AES antenna exceeds the off-axis EIRP spectral density values set forth in the Commission’s rules in directions away from the geostationary arc, also derived by combining FCC rule parts §25.209(a)(4) and §25.212(c). This off-axis EIRP spectral density mask may be intended to protect Ku-band NGSO FSS systems. However, no systems of this type are presently planned or are operating. Gogo will enter into a coordination arrangement with any future Ku-band NGSO FSS system to protect such system from interference from the Gogo AES transmissions.

3.3. Protection of Terrestrial Radio Services

Gogo has examined current spectrum use in the 14.0 to 14.5 GHz band and has determined that there are no active FCC-licensed terrestrial services in this band in North America with which its AMSS service would potentially conflict. To the extent that fixed service users are identified in this band that require protection, Gogo will limit emissions to the levels stated in Recommendation ITU-R M.1643, Part B, either directly or through operational techniques that ensure that the maximum power flux-density (pfd) levels are not exceeded at locations where protection is required.

3.4. Protection of the Radio Astronomy Service

For purposes of protecting radio astronomy sites, consistent with Recommendation ITU-R M.1643, Part C, Gogo will limit aggregate pfd in the 14.47-14.5 GHz band as follows:

-221 dBW/m²/Hz (for protection of Green Bank, Arecibo and Socorro)

-189 dBW/m²/Hz (for protection all other Radio Astronomy sites)

Gogo is in the process of negotiating a coordination agreement with the National Science Foundation obligating Gogo to limit aggregate pfd to the specified levels. Gogo will submit the final coordination agreement to the Commission once executed.

3.5. Protection of Space Research Service

Gogo recognizes the utilization of the frequency band from 14.0-14.05 GHz (and the possible use of the band from 14.05-14.2 GHz) by the National Aeronautics and Space Administration (NASA) Tracking and Data Relay Satellite System (TDRSS) for space research operations conducted at Guam; White Sands, New Mexico; and when it becomes operational, Blossom Point, Maryland. Gogo is actively engaged in discussions with NASA to develop an appropriate coordination agreement regarding the protection of these current and future TDRSS sites, and will submit the final coordination agreement to the Commission once executed.

In the meantime, Gogo agrees not to operate Gogo AES antennas within the 14.0-14.2 GHz band within line of site of NASA TDRSS facilities. This approach conforms to analogous requirements in the Commission's ESV and VMES rules.

3.6. Downlink Transmissions

Gogo seeks a waiver of the table of allocations to permit the Gogo AES antenna to receive transmissions in the FSS space-to-earth bands at 11.7-12.2, 10.95-11.2, 11.45-11.7, and 12.25-12.75 GHz. All downlink transmissions to Gogo's AES terminals will operate within the space station authorizations and coordinated limits for downlink EIRP spectral density of the Intelsat and SES satellites, as agreed by the operators of adjacent satellites within +/- 6 degrees.

Gogo will accept interference from lawful operation of any station in the 11.7-12.2, 10.95-11.2, 11.45-11.7, and 12.25-12.75 GHz bands in accordance with the U.S. Table of Frequency Allocations, 47 C.F.R. §2.106. In addition, Gogo will immediately terminate Gogo AES operations upon notification that such operations are not permitted under the terms of a coordination agreement with, or are causing harmful interference to, any lawfully operating radio system in these bands in conformance with the U.S. Table of Frequency Allocations.

3.7. Adjacent Satellite Operators

Gogo has provided its satellite operators, Intelsat and SES, with sufficient technical information to conduct coordination with all adjacent satellites within $\pm 6^\circ$ of the satellites of interest. Attachments B and C of this filing contain letters from these operators regarding the necessary coordination of the operation of the Gogo AES, including the uplink and downlink power density levels, with adjacent

satellite networks within 6° of orbital separation from the satellites to be used in the Gogo AMSS system. Once coordination is completed, Gogo will provide the certification letters. The Gogo AES will operate in conformance with existing coordination agreements with other satellite systems, and Gogo satellite operators will include the Gogo AES operations in all future satellite network coordination. Gogo agrees to comply with all coordination agreements reached by the satellite operators.

4. Conclusion

The requested authorization will allow Gogo to bring its extensive experience in pioneering ATG in-flight broadband connectivity and entertainment to a broader segment of the flying public. The Gogo AMSS system relies upon a network architecture and implementation technologies that have been previously authorized by the Commission, and which present no novel technical issues. Coordination is under way with all satellite operators that have a potential to be affected by the proposed service, assuring that other authorized users will not be subject to harmful interference. Consistent with past Commission precedents, this application should be expeditiously granted.

APPENDIX A: Link Budget

APPENDIX A: Link Budget

Forward Link Budget

Hub	Woodbine, MD
Required Eb/No	1.7 dB
Modulation	QPSK
Info Rate	29360 Kbps
FEC Rate	½
Carrier Rolloff	1.2
Satellite SFD @ 0 dB/K	-94.9 dBW/m ²
Transponder Atten	6.0 dB
Transponder ID	US Coverage

Hub Transmit

Frequency	14.3 GHz
Satellite G/T	6.2 dB/°K
Antenna Diameter	9.2 m
Carrier EIRP	65.4 dBW
Ant. Input PFD	-34.1 dBW/4kHz
Path Loss	207.3 dB
Atm/Point/Pol Loss	0.7 dB

Aircraft Receive

Terminal

Frequency	12.1 GHz
Satellite EIRP	46.0 dBW
Downlink PFD@	12.9 dBW/4kHz
Beam Center	
Receive Gain	30.8 dB
Terminal G/T	11.0 dB/°K
Path Loss	205.6 dB
Other Losses	0.6 dB

Transponder

Total OPBO	0.9 dB
Carrier OPBO	0.9 dB
C/No Thermal Up	92.3 dB-Hz
C/No Thermal Dn	78.6 dB-Hz
C/No Total	82.8 dB-Hz
C/No+Io	77.1 dB-Hz
Add'l Link Margin	0.7 dB
% BW per cxr	99.9 %
% Power per cxr	82.0 %
Xpdr BW Alloc	36.0 MHz

Return Link Budget

Terminal	Gogo AES-1
Required Eb/No	3.7 dB
Modulation	BPSK
Info Rate	1500 Kbps
FEC Rate	½
Carrier Spacing	1.35
Carrier Spreading	2.0
Satellite SFD @ 0 dB/K	-95.1 dBW/m ²
Transponder Atten	3.0 dB
Transponder ID	US Coverage

Aircraft Transmit

Terminal

Frequency	14.3 GHz
Satellite G/T	2.0 dB/°K
Antenna Diameter	0.4 m
Carrier EIRP	44.4 dBW
Ant Input PFD	-16.3 dBW/4kHz
Path Loss	207.0 dB
Atm/Point/Pol Loss	0.7 dB

Hub Receive

Frequency	12.1 GHz
Satellite EIRP	49.3 dBW
Downlink PFD@	-0.9 dBW/4kHz
Beam Center	
Hub G/T	37.3 dB/°K
Path Loss	205.7 dB
Other Losses	0.6 dB

Transponder



Total OPBO	4.0 dB
Carrier OPBO	22.5 dB
C/No Thermal Up	67.3 dB-Hz
C/No Thermal Dn	86.5 dB-Hz
C/No Total	70.5 dB-Hz
C/No+Io	65.6 dB-Hz
Add'l Link Margin	0.2 dB
% BW per cxr	22.5 %
% Power per cxr	1.4 %
Xpdr BW Alloc	8.1 MHz

APPENDIX B: Antenna Patterns



B.1 AeroSat Gain Patterns – Co-pol Azimuth

All pattern data contained in Appendix B was collected via measurements on a production antenna performed on calibrated antenna range. Provided are pattern data at bottom, middle and top of the transmit frequency band as required by §25.132(b)(1). Main beam gain for all plots is 29 dBi.



APPENDIX B: Antenna Patterns

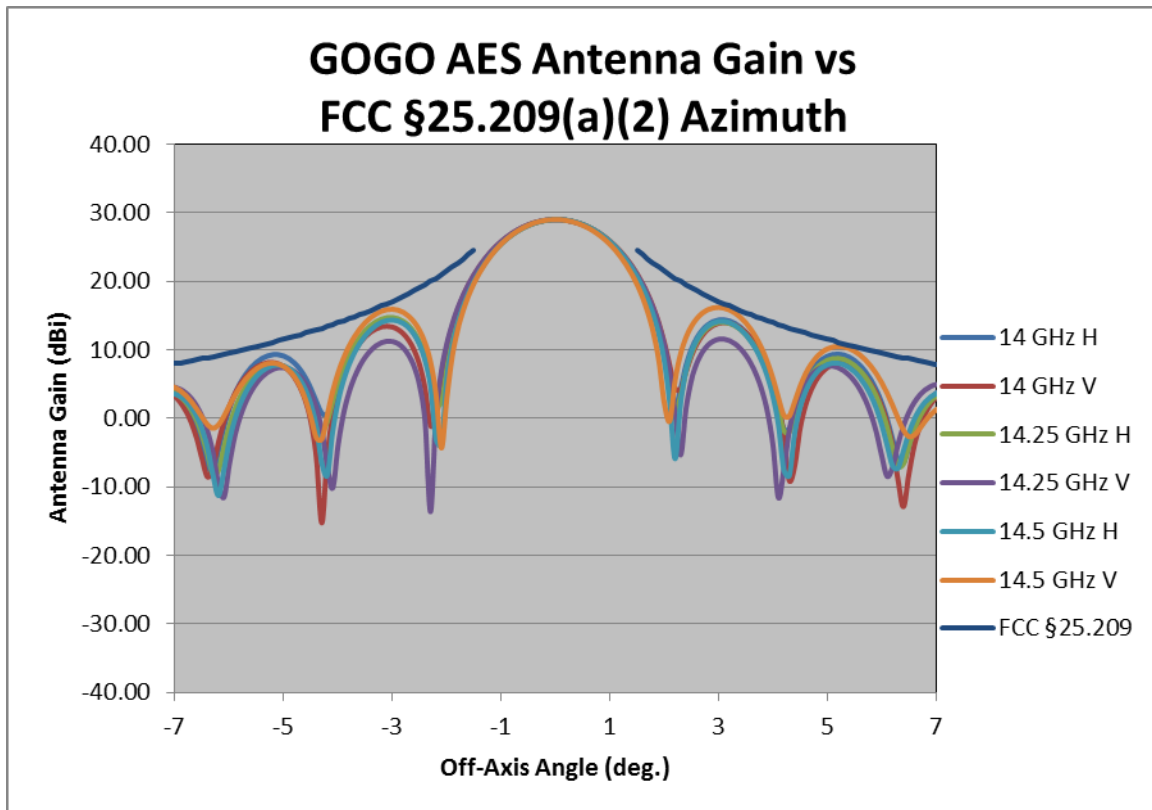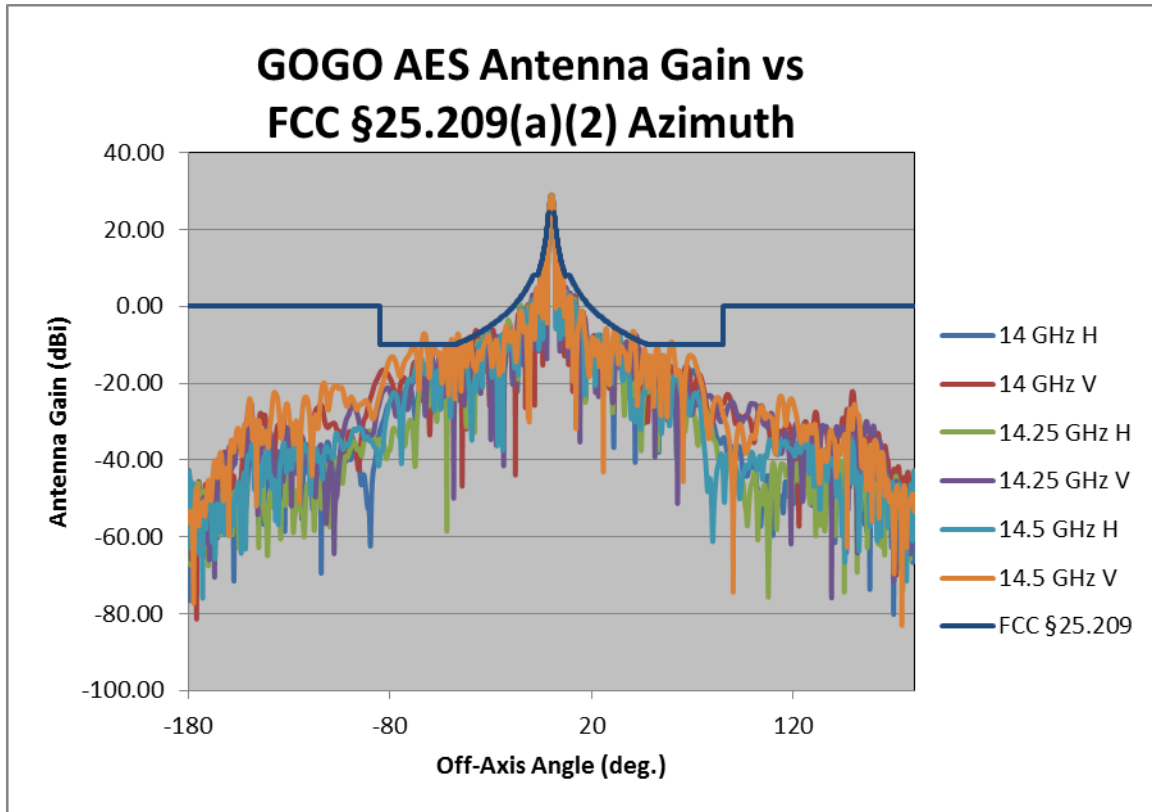

APPENDIX B: Antenna Patterns

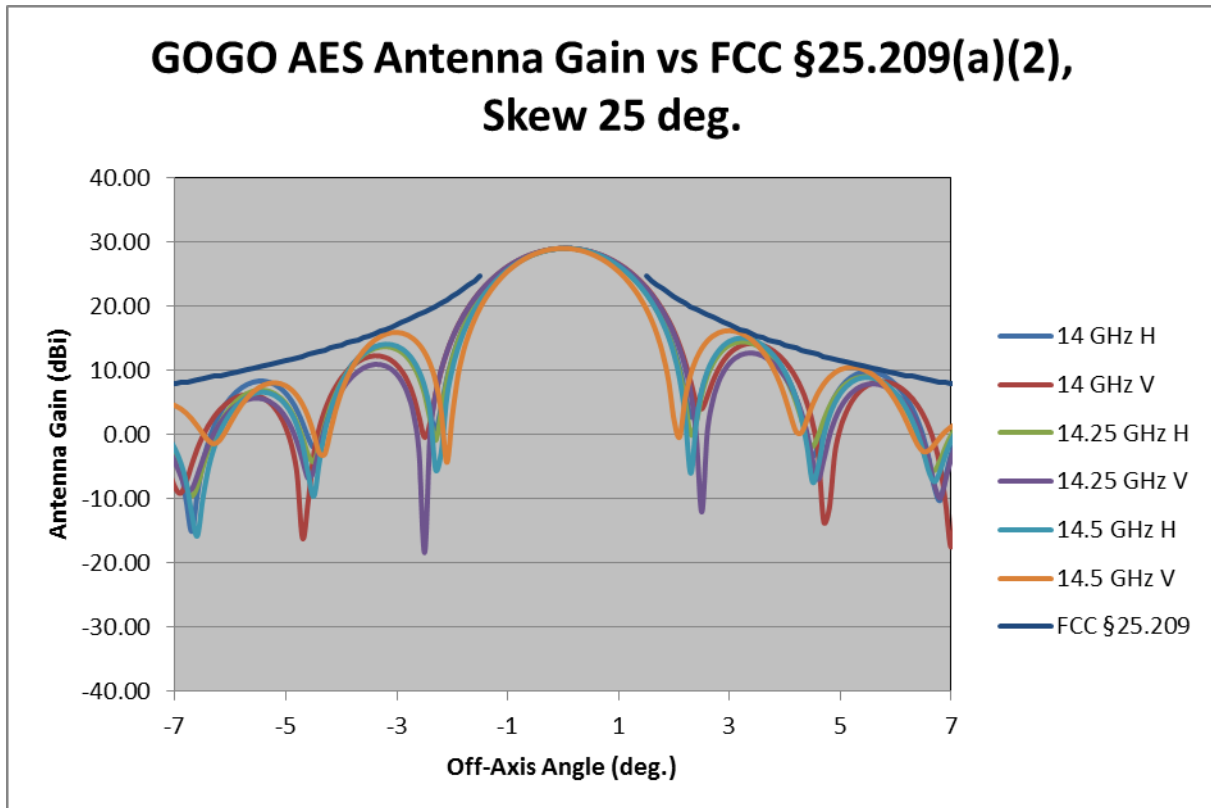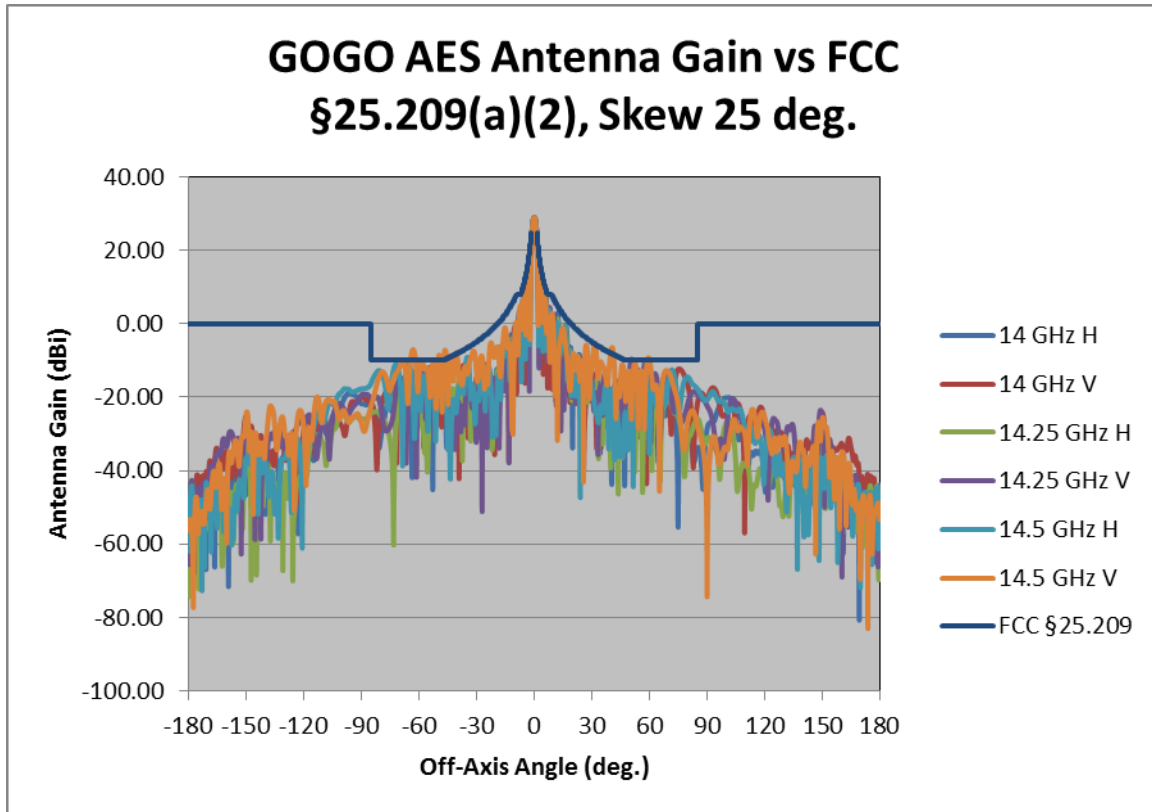


APPENDIX B: Antenna Patterns

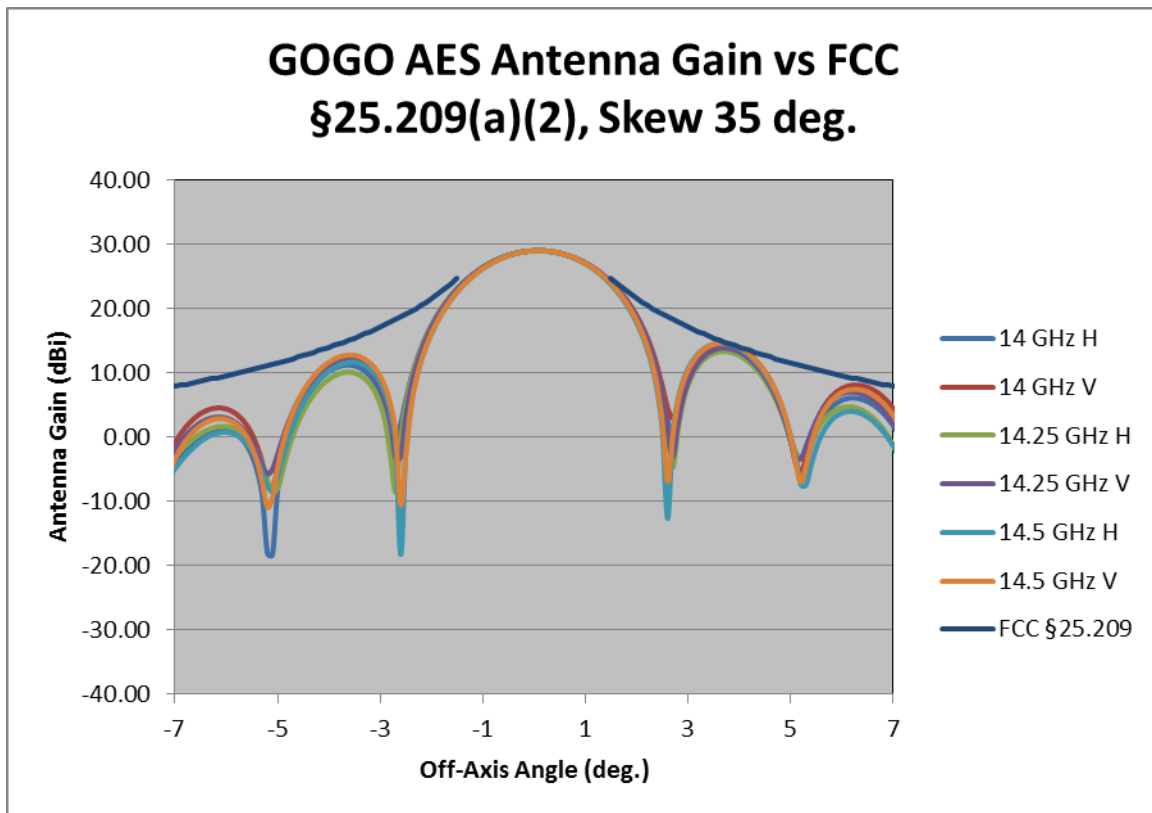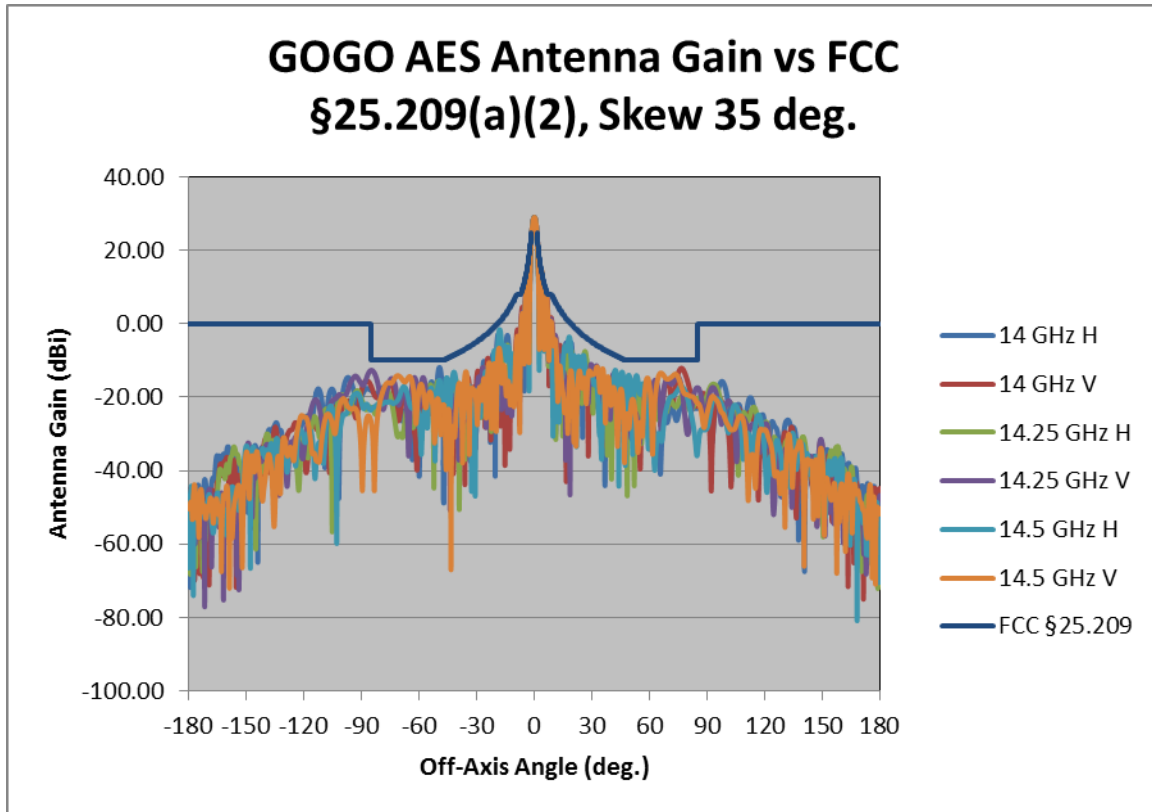


APPENDIX B: Antenna Patterns

GOGO AES Antenna Gain vs FCC §25.209(a)(2), Skew 45 deg.

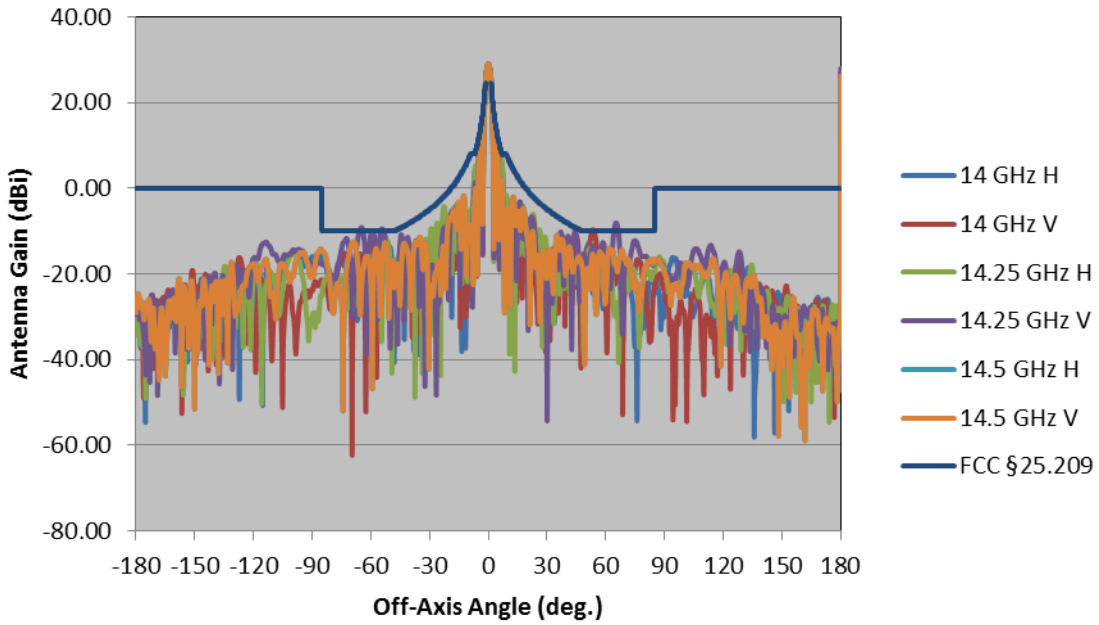


GOGO AES Antenna Gain vs FCC §25.209(a)(2), Skew 45 deg.

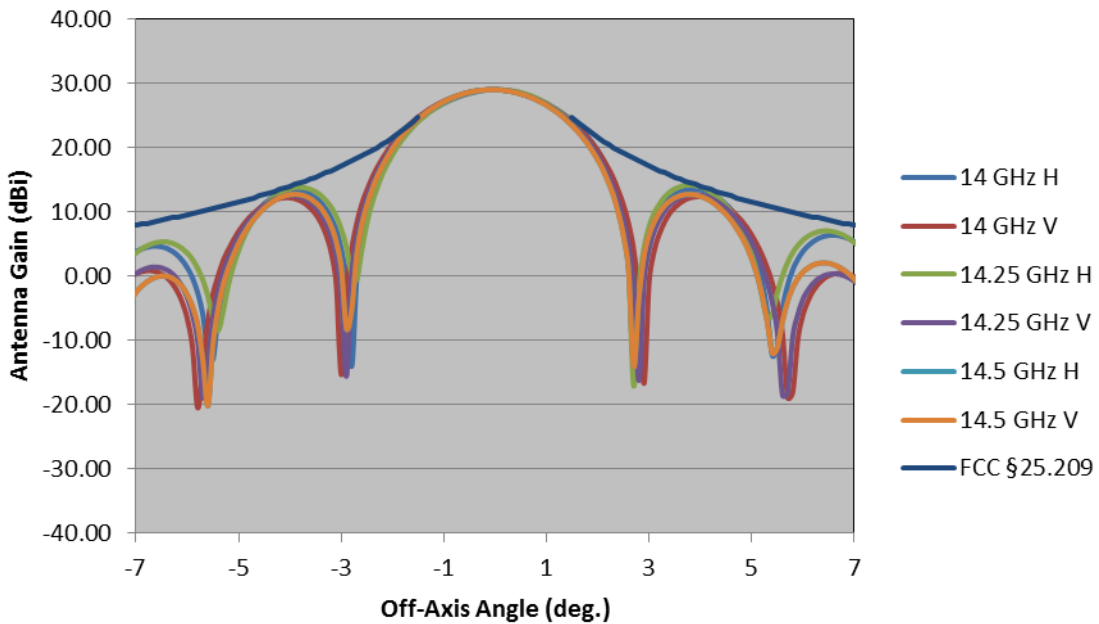


APPENDIX B: Antenna Patterns

GOGO AES Antenna Gain vs FCC §25.209(a)(2), Skew 55 deg.

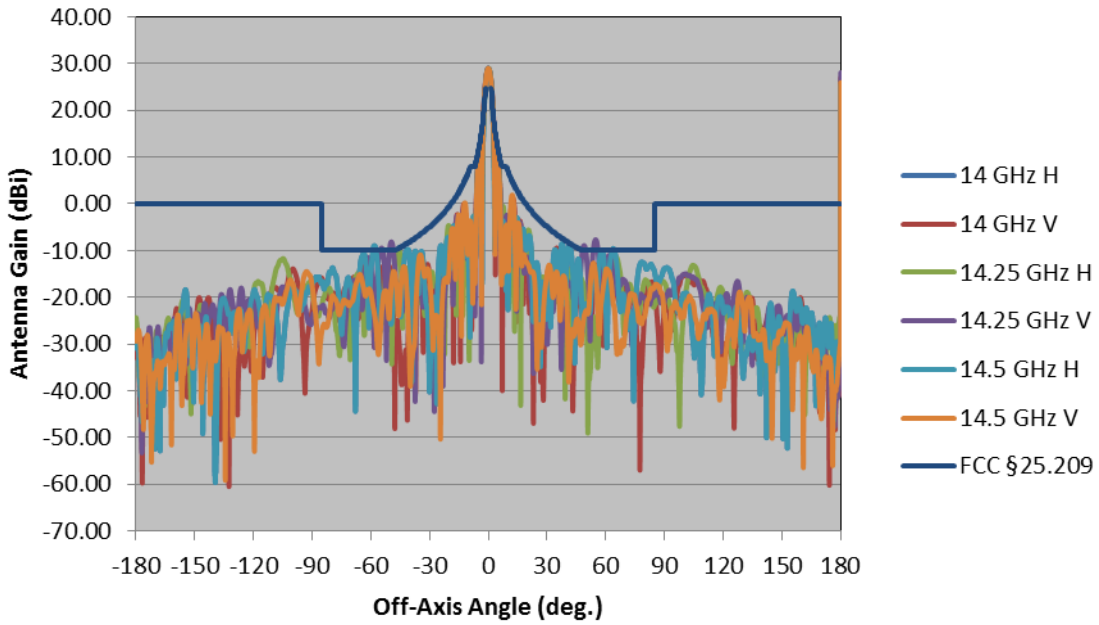


GOGO AES Antenna Gain vs FCC §25.209(a)(2), Skew 55 deg.

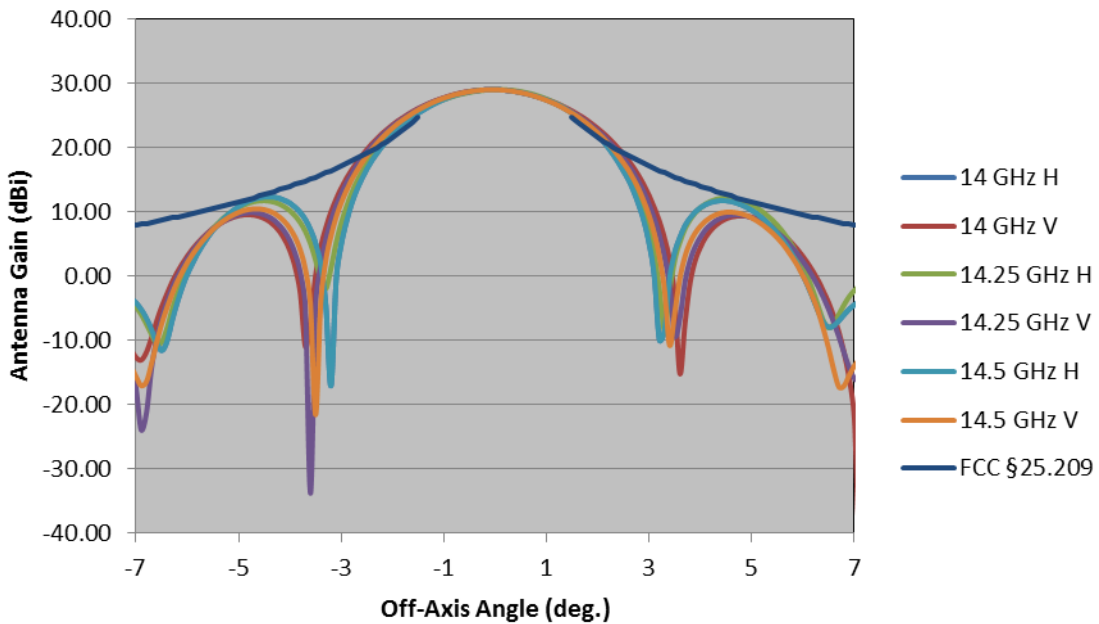



APPENDIX B: Antenna Patterns

B.2 – AeroSat Gain Patterns – Co-Pol Elevation

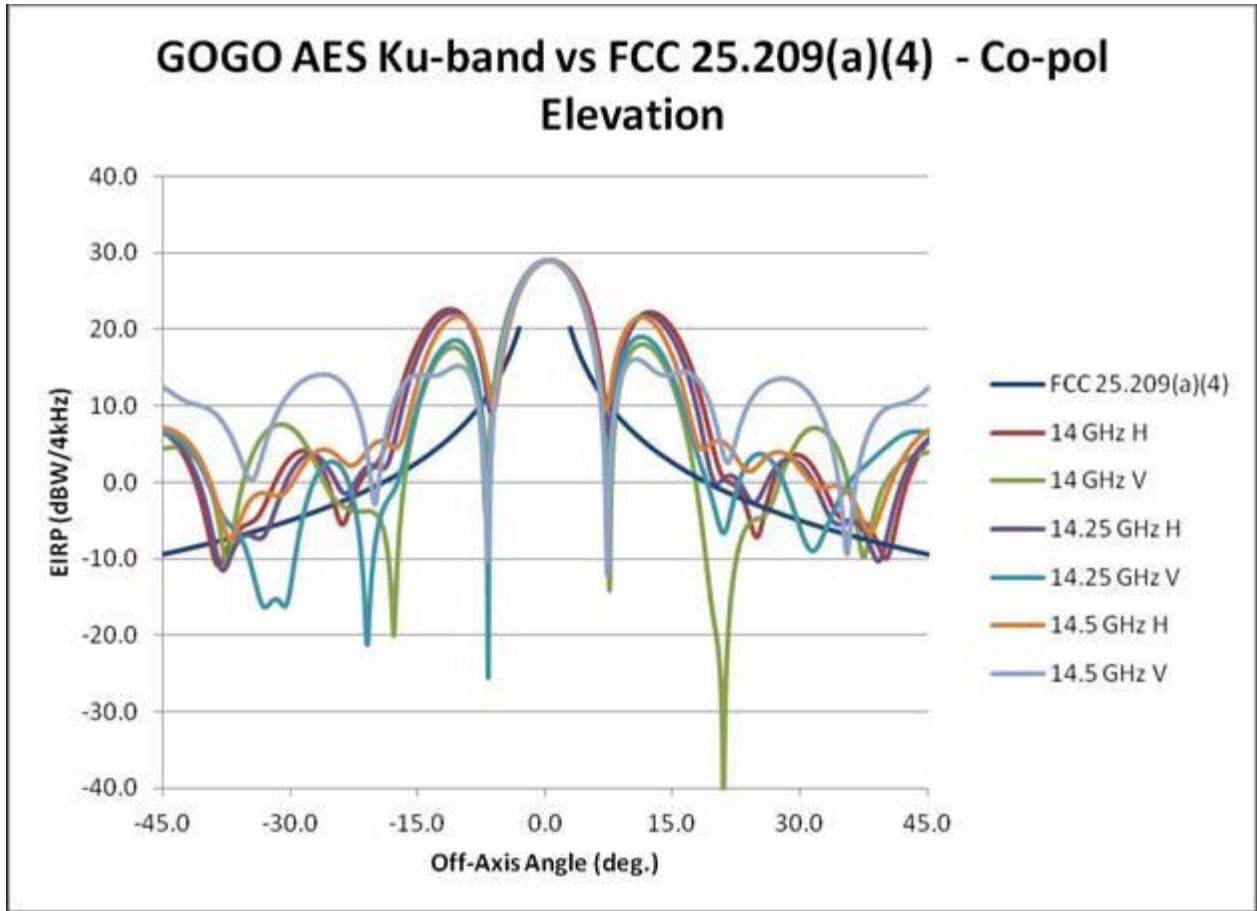

APPENDIX B: Antenna Patterns



B.3 AeroSat Gain Patterns – Cross-Pol

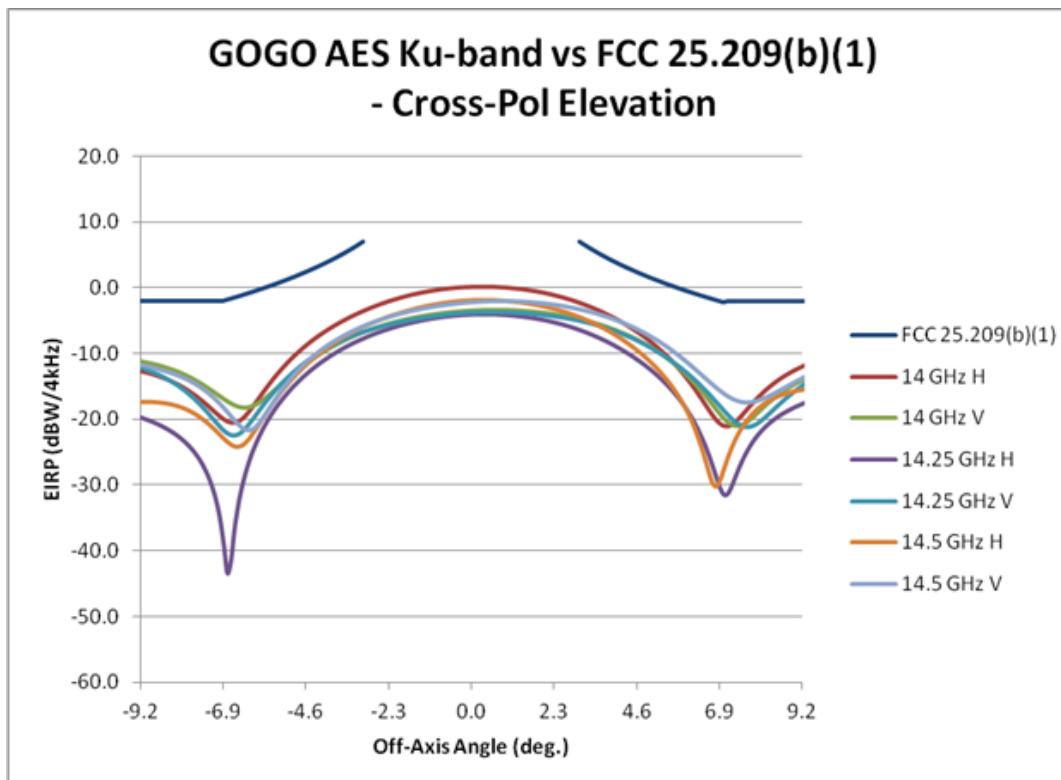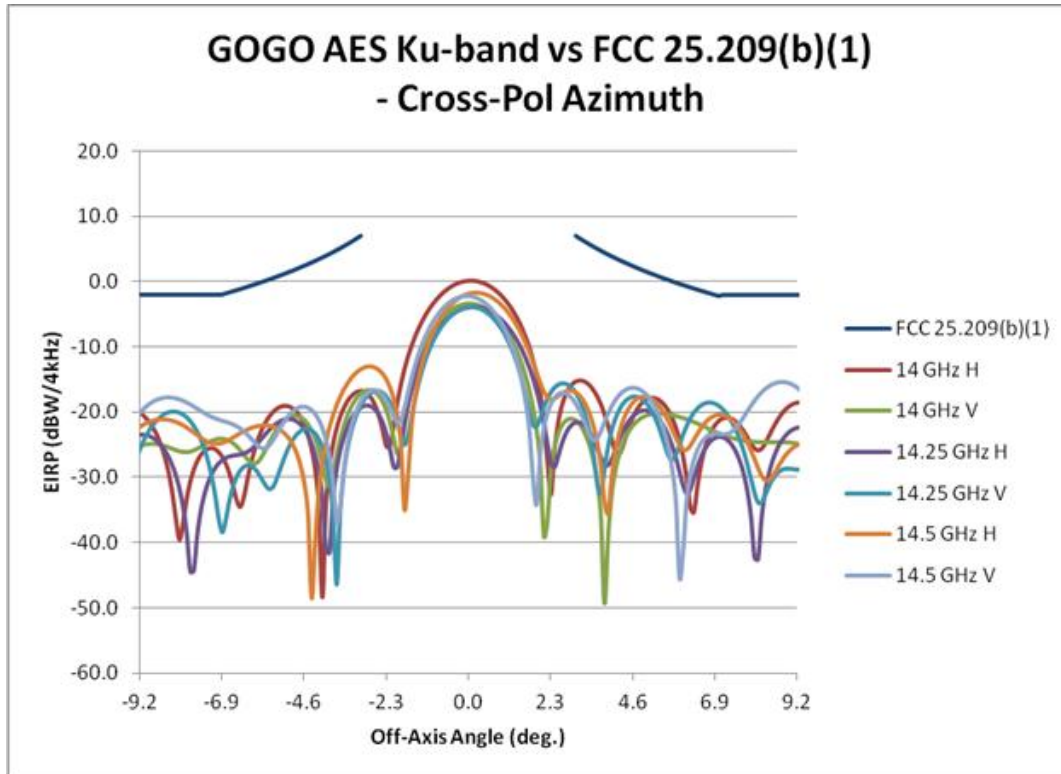



APPENDIX C: EIRP Spectral Density Plots

APPENDIX C: EIRP Spectral Density Plots



25.212(c)

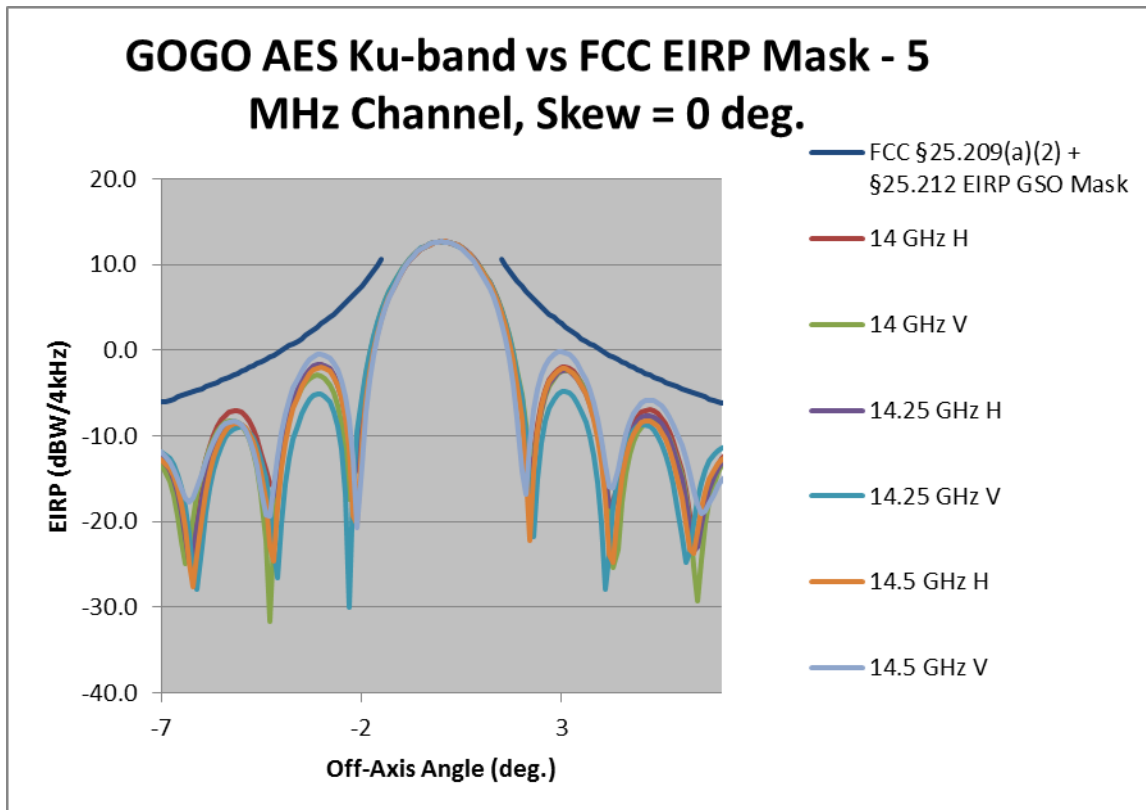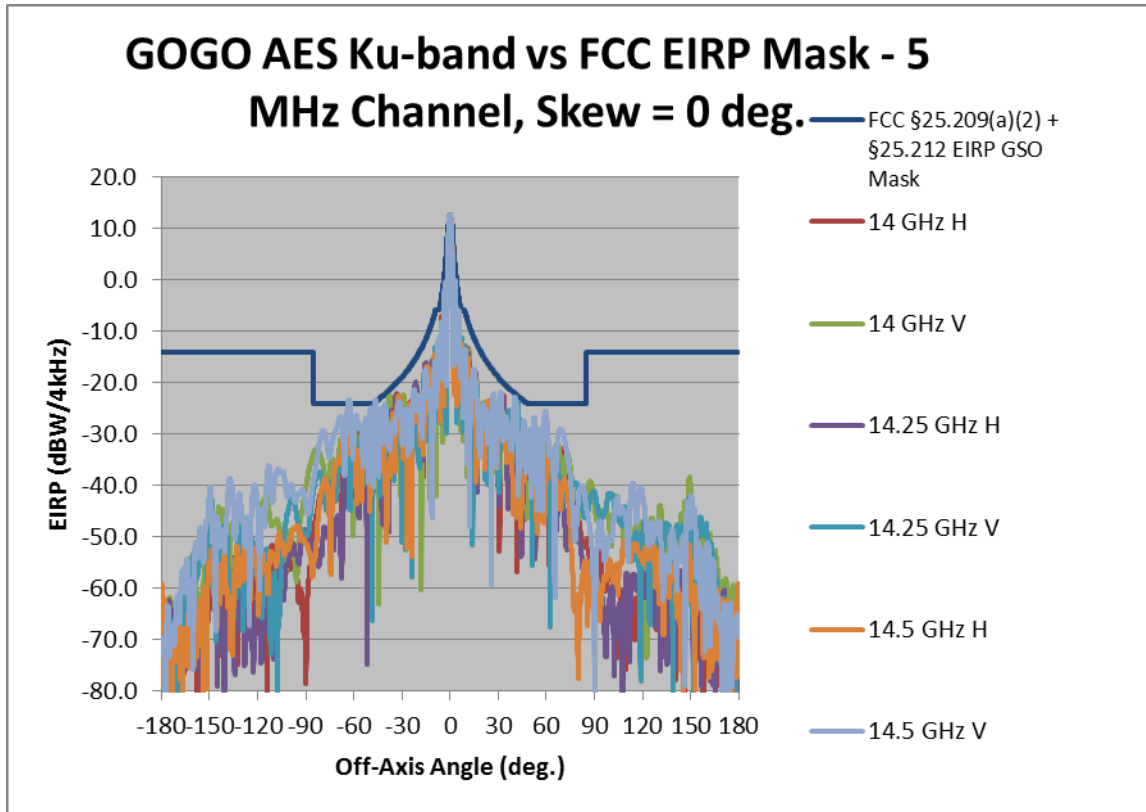



APPENDIX C: EIRP Spectral Density Plots

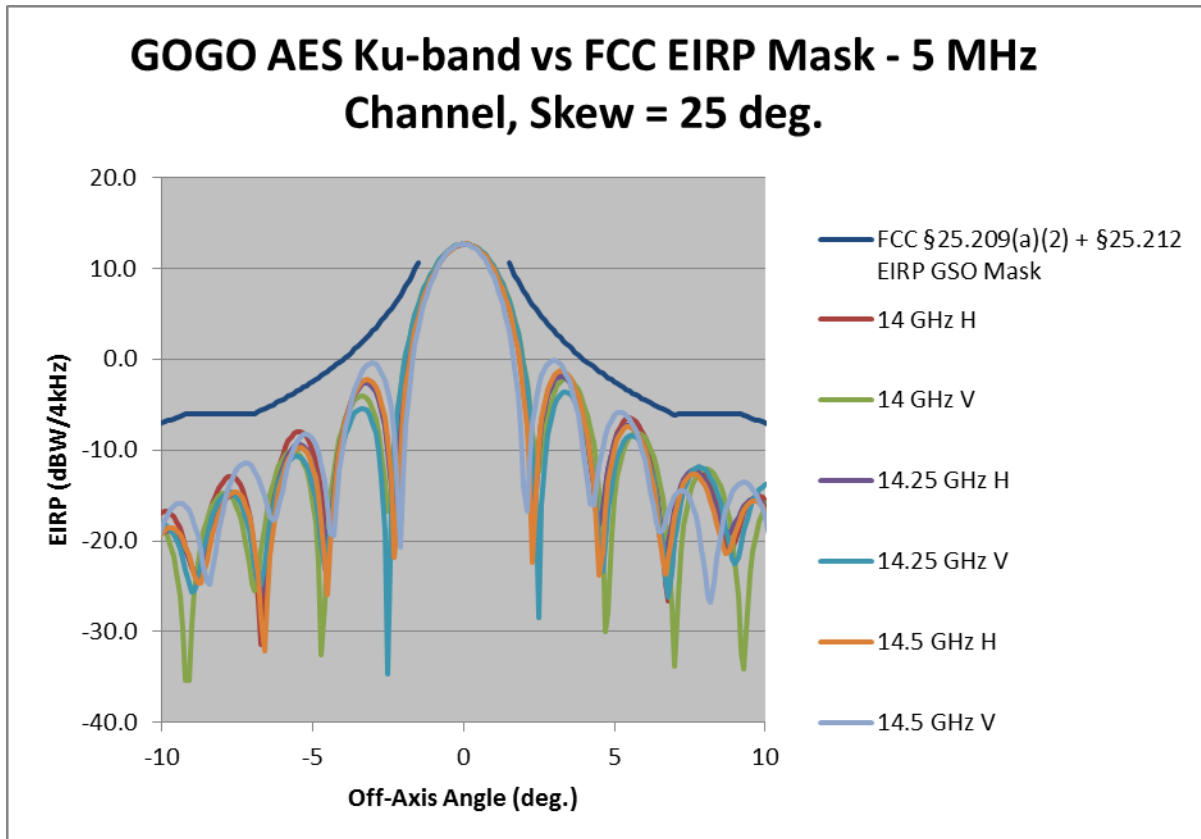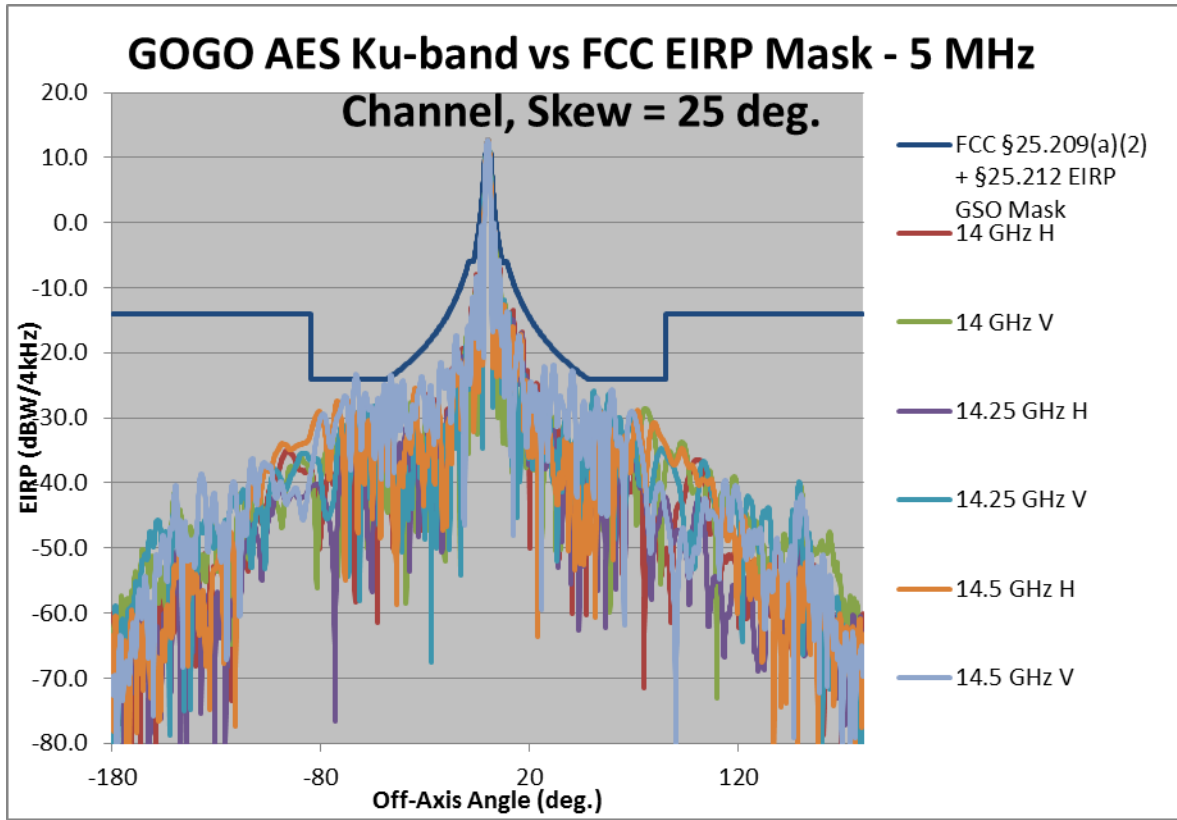



APPENDIX C: EIRP Spectral Density Plots

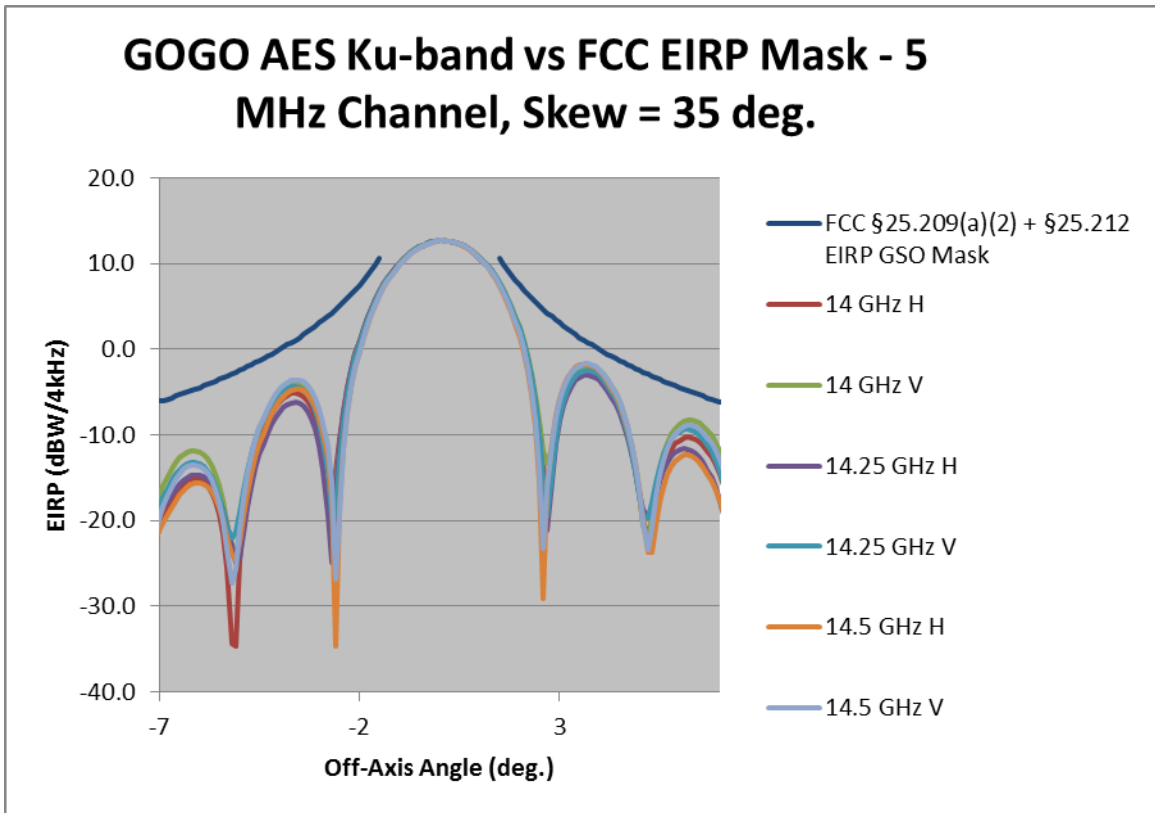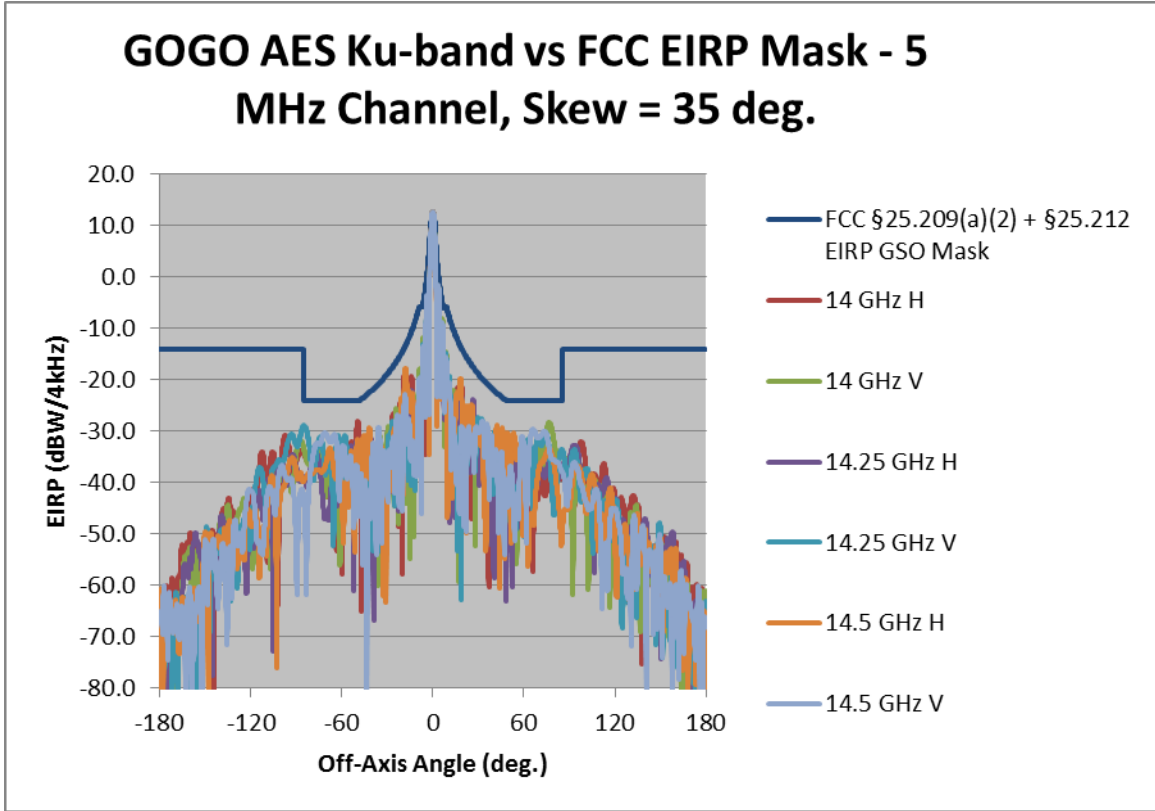



APPENDIX C: EIRP Spectral Density Plots

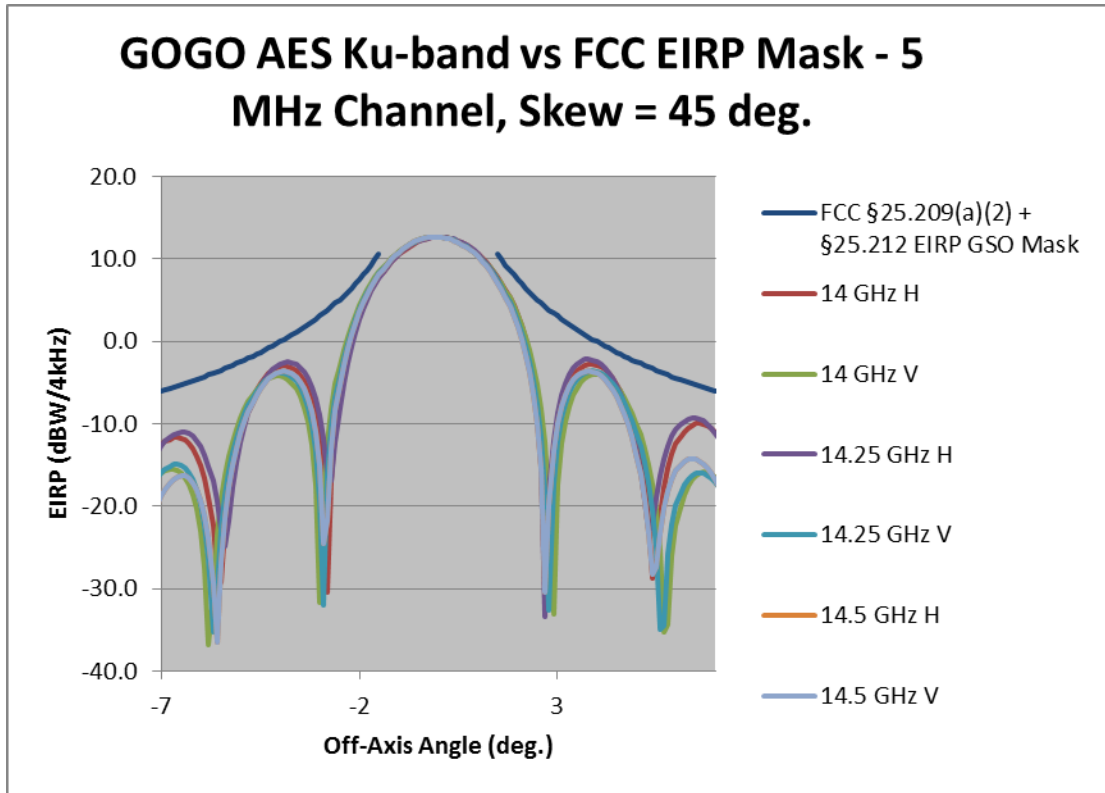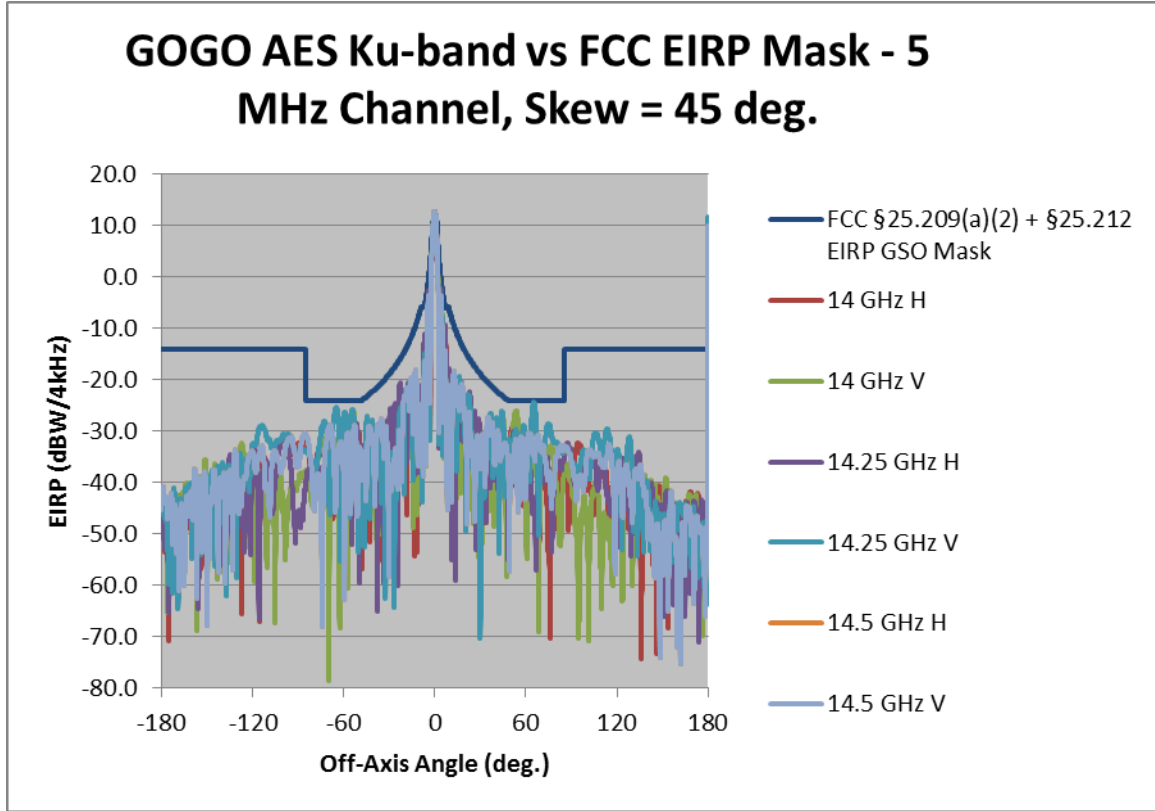


APPENDIX C: EIRP Spectral Density Plots

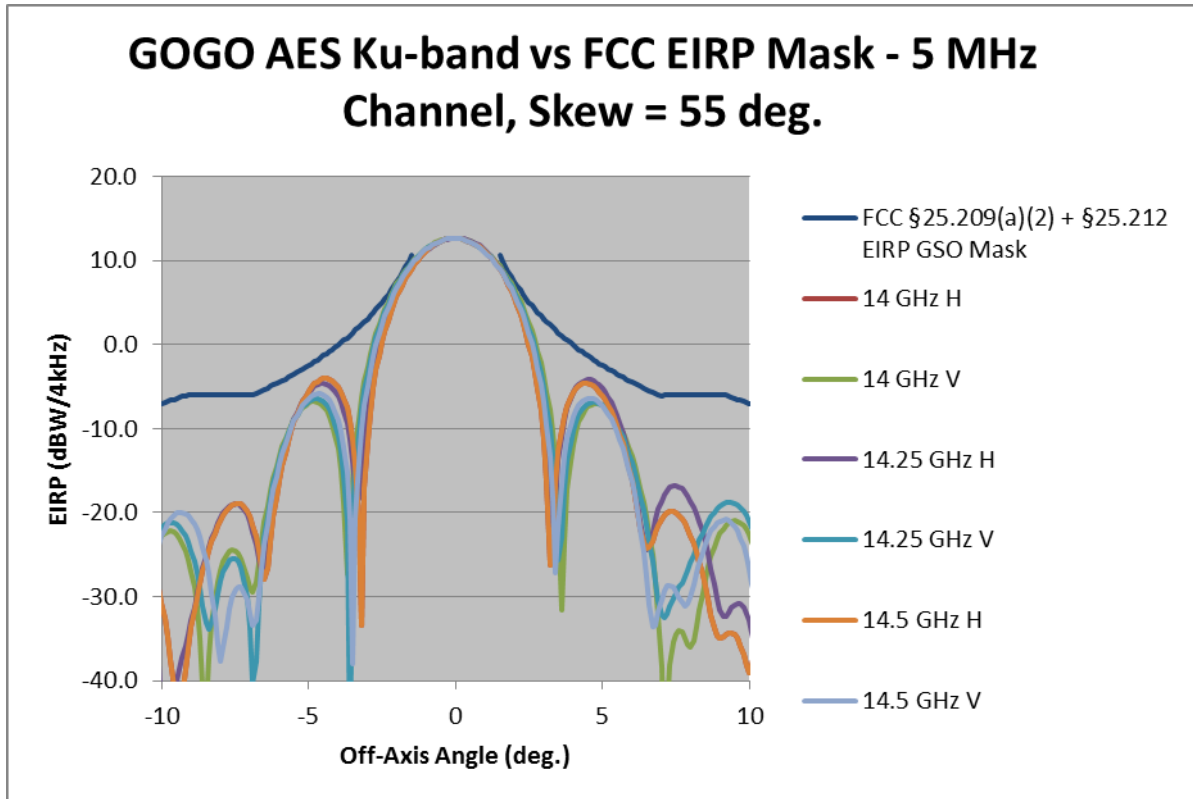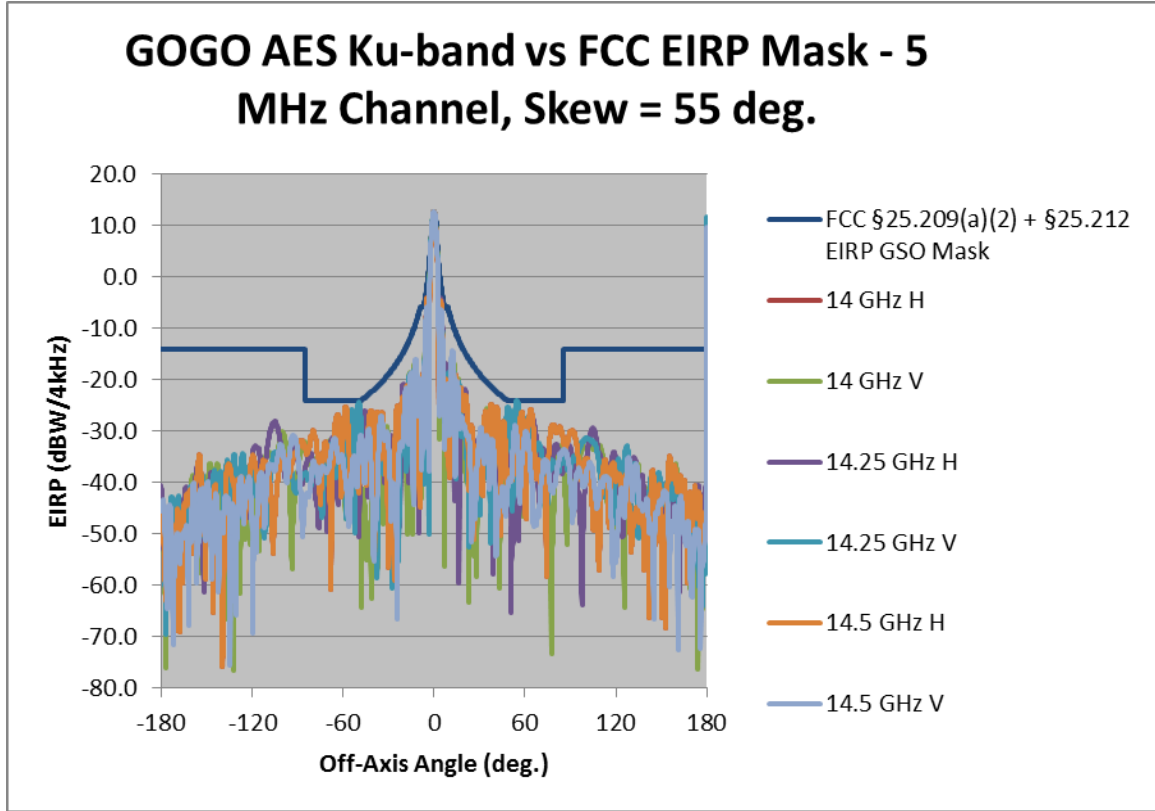

APPENDIX C: EIRP Spectral Density Plots

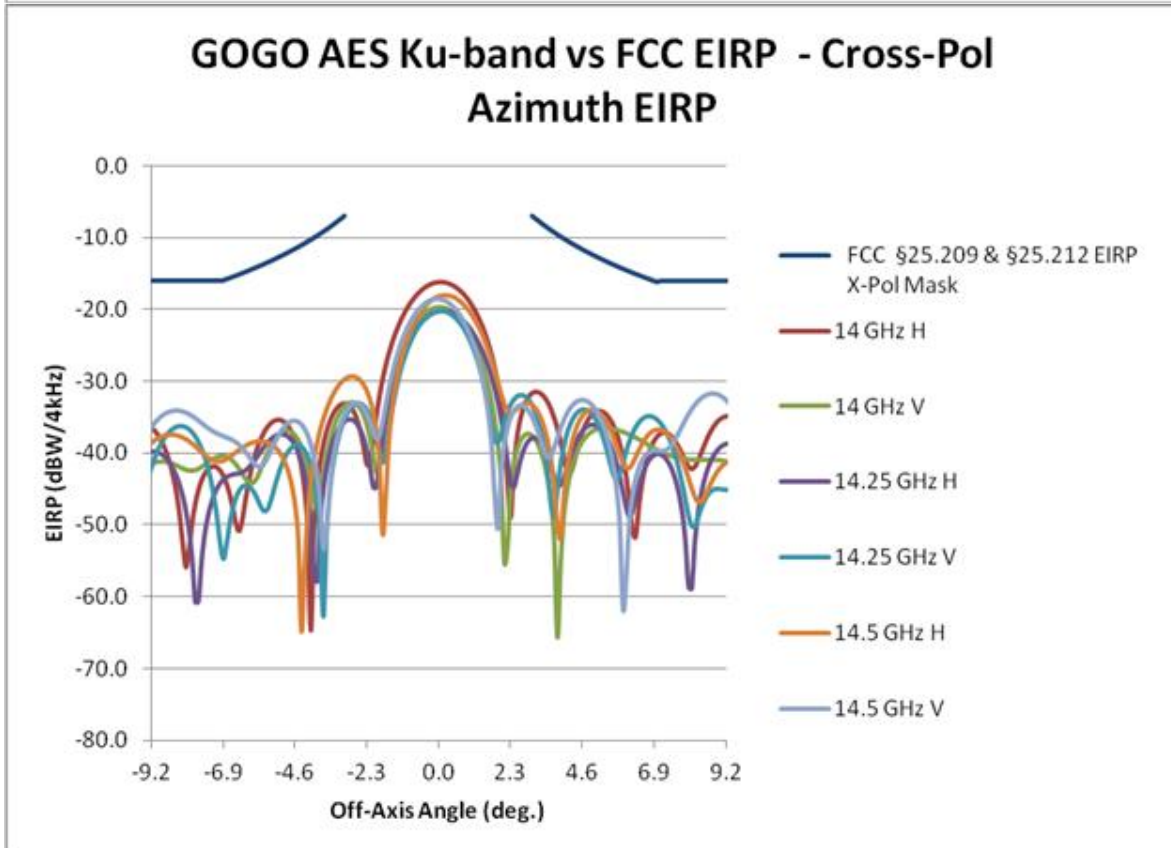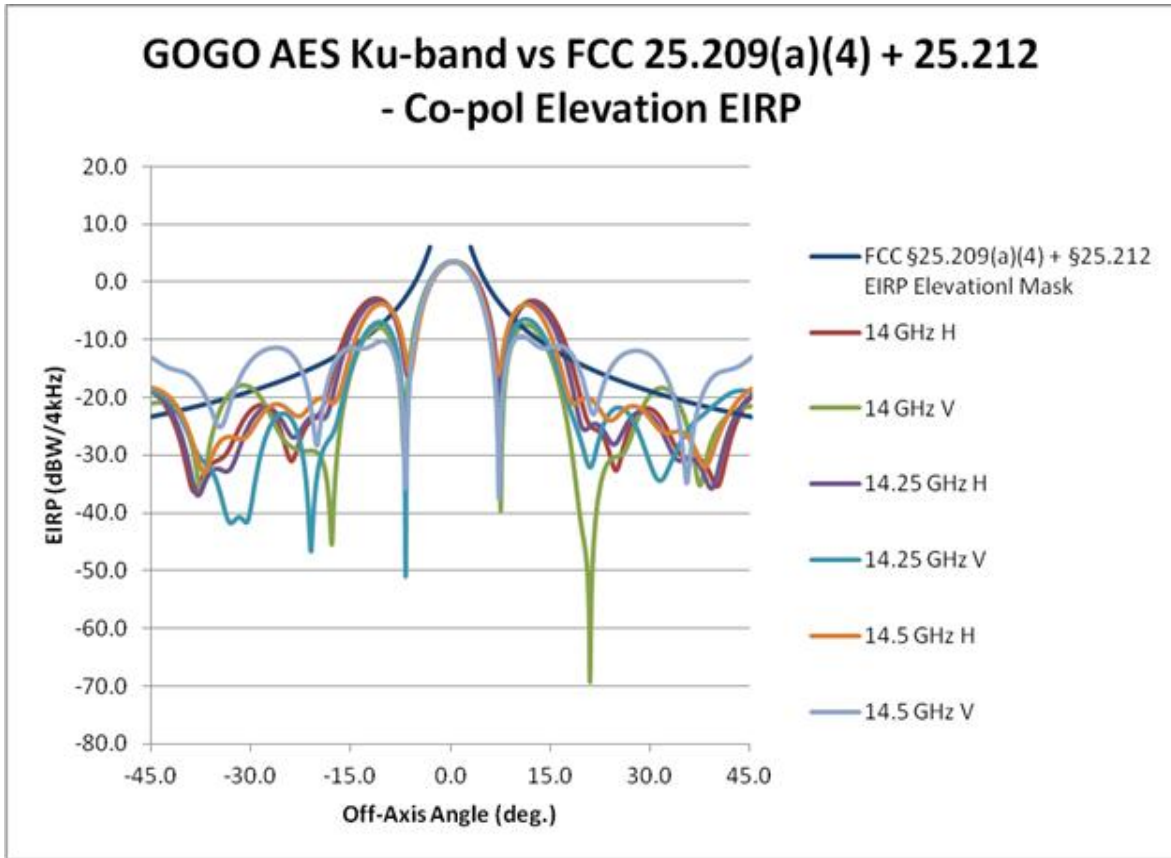

APPENDIX C: EIRP Spectral Density Plots

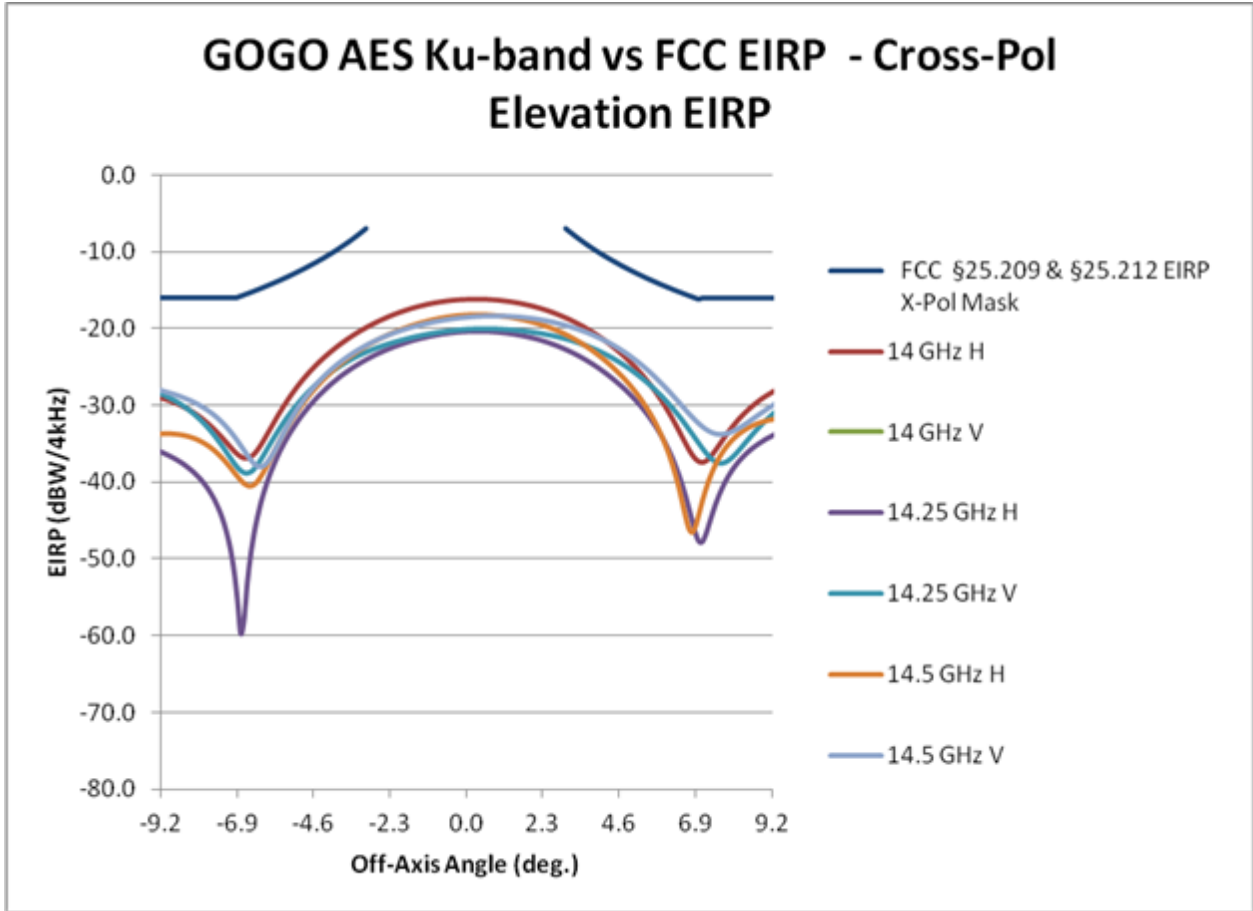

APPENDIX D: Antenna Gain and EIRP Tables

APPENDIX D: Antenna Gain and EIRP Tables

Co Pol Azimuth	Antenna Gain (dBi)							Off-Axis EIRP (dBW/4 kHz)										
Off-Axis Angle	14 GHz E	14 GHz H	14.25 GHz E	14.25 GHz H	14.5 GHz E	14.5 GHz H	Off-Axis Angle	FCC §25.209	FCC §25.209(a)(2) + §25.212 EIRP GSO Mask, Skew = 0 deg	FCC §25.209(a)(2) + §25.212 EIRP GSO Mask, Skew = 0 deg	14 GHz E	14 GHz H	14.25 GHz E	14.25 GHz H	14.5 GHz E	14.5 GHz H	Meets Mask	
-180	-50.2	-42.7	-50.8	-47.2	-42.7	-53.4	-180	0.0	-14.0	-14.0	-66.6	-59.0	-67.1	-63.5	-59.1	-69.7	Y	
-175	-47.2	-45.6	-47.0	-50.9	-55.0	-57.0	-175	0.0	-14.0	-14.0	-63.5	-61.9	-63.3	-67.2	-71.3	-73.4	Y	
-170	-48.3	-46.2	-58.0	-58.9	-49.9	-45.1	-170	0.0	-14.0	-14.0	-64.6	-62.6	-74.4	-75.3	-66.3	-61.5	Y	
-165	-47.2	-39.7	-56.2	-42.0	-55.4	-41.1	-165	0.0	-14.0	-14.0	-63.5	-56.0	-72.5	-58.4	-71.7	-57.4	Y	
-160	-48.8	-38.0	-50.5	-37.0	-51.8	-52.3	-160	0.0	-14.0	-14.0	-65.1	-54.4	-66.8	-53.3	-68.1	-68.7	Y	
-155	-53.4	-47.5	-62.9	-36.6	-47.4	-32.5	-155	0.0	-14.0	-14.0	-69.7	-63.9	-79.2	-53.0	-63.7	-48.8	Y	
-150	-38.4	-25.7	-34.1	-28.2	-39.2	-24.6	-150	0.0	-14.0	-14.0	-54.7	-42.0	-50.5	-44.5	-55.5	-40.9	Y	
-145	-54.2	-30.5	-49.3	-40.3	-47.5	-29.9	-145	0.0	-14.0	-14.0	-70.5	-46.9	-65.7	-56.6	-63.9	-46.2	Y	
-140	-41.0	-35.4	-51.6	-32.6	-42.1	-33.5	-140	0.0	-14.0	-14.0	-57.4	-51.7	-67.9	-48.9	-58.4	-49.8	Y	
-135	-37.8	-31.0	-48.3	-49.1	-44.8	-28.7	-135	0.0	-14.0	-14.0	-54.2	-47.4	-64.7	-65.5	-61.2	-45.1	Y	
-130	-39.4	-33.7	-38.5	-34.4	-37.5	-29.4	-130	0.0	-14.0	-14.0	-55.7	-50.0	-54.8	-50.8	-53.9	-45.7	Y	
-125	-44.8	-37.7	-50.5	-35.3	-44.9	-50.9	-125	0.0	-14.0	-14.0	-61.1	-54.0	-66.8	-51.6	-61.2	-67.2	Y	
-120	-42.8	-37.5	-45.7	-36.3	-42.5	-28.4	-120	0.0	-14.0	-14.0	-59.1	-53.8	-62.1	-52.6	-58.8	-44.8	Y	
-115	-44.2	-25.7	-45.0	-36.7	-39.3	-26.5	-115	0.0	-14.0	-14.0	-60.6	-42.1	-61.4	-53.1	-55.6	-42.9	Y	
-110	-38.7	-30.9	-57.4	-41.7	-38.1	-24.9	-110	0.0	-14.0	-14.0	-55.0	-47.3	-73.8	-58.0	-54.4	-41.2	Y	
-105	-41.4	-32.6	-43.8	-39.2	-34.8	-21.3	-105	0.0	-14.0	-14.0	-57.7	-49.0	-60.1	-55.5	-51.2	-37.6	Y	
-100	-39.7	-32.5	-37.3	-27.3	-35.1	-24.0	-100	0.0	-14.0	-14.0	-56.1	-48.9	-53.7	-43.6	-51.4	-40.4	Y	
-95	-43.6	-38.9	-37.7	-31.0	-31.6	-25.4	-95	0.0	-14.0	-14.0	-59.9	-55.2	-54.0	-47.3	-47.9	-41.8	Y	
-90	-59.2	-24.1	-32.5	-33.7	-35.1	-27.0	-90	0.0	-14.0	-14.0	-75.5	-40.5	-48.8	-50.1	-51.4	-43.4	Y	
-85	-32.3	-17.3	-34.6	-24.4	-39.0	-22.4	-85	-10.0	-24.0	-24.0	-48.6	-33.6	-50.9	-40.7	-55.3	-38.8	Y	
-80	-25.3	-18.8	-37.2	-22.4	-24.4	-13.5	-80	-10.0	-24.0	-24.0	-41.6	-35.1	-53.5	-38.7	-40.7	-29.8	Y	
-75	-26.0	-20.7	-34.1	-23.9	-32.1	-18.1	-75	-10.0	-24.0	-24.0	-42.3	-37.0	-50.4	-40.2	-48.4	-34.5	Y	
-70	-21.1	-21.8	-29.6	-22.0	-19.1	-11.8	-70	-10.0	-24.0	-24.0	-37.5	-38.1	-45.9	-38.3	-35.4	-28.1	Y	
-65	-20.3	-22.8	-20.8	-16.3	-13.0	-14.2	-65	-10.0	-24.0	-24.0	-36.6	-39.1	-37.1	-32.7	-29.3	-30.5	Y	
-60	-17.8	-28.3	-20.4	-12.3	-14.5	-14.5	-60	-10.0	-24.0	-24.0	-34.2	-44.6	-36.7	-28.6	-30.9	-30.8	Y	

APPENDIX D: Antenna Gain and EIRP Tables

-55	-13.0	-13.9	-15.2	-17.6	-26.5	-14.6	-55	-10.0	-24.0	-24.0	-29.3	-30.2	-31.5	-34.0	-42.9	-31.0	Y
-50	-15.6	-23.2	-15.0	-12.9	-28.6	-9.7	-50	-10.0	-24.0	-24.0	-31.9	-39.5	-31.4	-29.2	-44.9	-26.1	Y
-48	-15.1	-17.5	-17.1	-22.5	-15.5	-24.1	-48	-10.0	-24.0	-24.0	-31.4	-33.9	-33.4	-38.8	-31.9	-40.4	Y
-45	-24.7	-17.5	-14.5	-13.7	-15.3	-19.6	-45	-9.3	-23.3	-23.3	-41.0	-33.9	-30.8	-30.0	-31.6	-36.0	Y
-40	-13.7	-15.1	-17.9	-16.7	-27.1	-9.4	-40	-8.1	-22.1	-22.1	-30.1	-31.5	-34.3	-33.0	-43.5	-25.7	Y
-35	-14.7	-10.1	-16.2	-21.8	-11.6	-13.7	-35	-6.6	-20.6	-20.6	-31.1	-26.4	-32.6	-38.1	-27.9	-30.0	Y
-30	-15.1	-9.7	-20.9	-28.8	-13.6	-13.8	-30	-4.9	-18.9	-18.9	-31.4	-26.1	-37.2	-45.2	-29.9	-30.2	Y
-25	-15.8	-18.3	-24.2	-15.3	-8.5	-13.7	-25	-2.9	-16.9	-16.9	-32.2	-34.7	-40.5	-31.6	-24.8	-30.1	Y
-20	-8.6	-8.7	-8.2	-13.1	-7.1	-7.6	-20	-0.5	-14.5	-14.5	-24.9	-25.1	-24.5	-29.5	-23.5	-24.0	Y
-15	-1.6	-11.1	0.1	-6.6	-0.7	-1.2	-15	2.6	-11.4	-11.4	-18.0	-27.4	-16.2	-22.9	-17.0	-17.5	Y
-10	-2.3	0.4	-0.9	-0.9	-3.0	-2.3	-10	7.0	-7.0	-7.0	-18.6	-16.0	-17.2	-17.2	-19.3	-18.7	Y
-9.9	-1.5	1.3	-0.6	0.2	-2.1	-1.5	-9.9	7.1	-6.9	-6.9	-17.8	-15.1	-17.0	-16.2	-18.5	-17.8	Y
-9.8	-0.8	1.9	-0.3	1.1	-1.2	-0.8	-9.8	7.2	-6.8	-6.8	-17.1	-14.4	-16.6	-15.3	-17.6	-17.1	Y
-9.7	-0.1	2.4	0.1	1.8	-0.4	-0.2	-9.7	7.3	-6.7	-6.7	-16.4	-13.9	-16.2	-14.6	-16.7	-16.6	Y
-9.6	0.5	2.7	0.4	2.3	0.3	0.2	-9.6	7.4	-6.6	-6.6	-15.8	-13.6	-15.9	-14.0	-16.0	-16.2	Y
-9.5	1.0	2.8	0.7	2.7	0.9	0.4	-9.5	7.6	-6.4	-6.4	-15.3	-13.5	-15.6	-13.6	-15.4	-15.9	Y
-9.4	1.3	2.8	0.9	3.0	1.4	0.5	-9.4	7.7	-6.3	-6.3	-15.0	-13.5	-15.4	-13.3	-14.9	-15.9	Y
-9.3	1.4	2.6	1.0	3.1	1.7	0.4	-9.3	7.8	-6.2	-6.2	-14.9	-13.8	-15.3	-13.2	-14.6	-15.9	Y
-9.2	1.4	2.1	1.0	3.1	1.9	0.1	-9.2	8.0	-6.0	-6.1	-14.9	-14.2	-15.4	-13.3	-14.5	-16.2	Y
-9.1	1.3	1.5	0.8	2.9	1.9	-0.3	-9.1	8.0	-6.0	-6.0	-15.1	-14.9	-15.6	-13.5	-14.4	-16.7	Y
-9	0.9	0.6	0.4	2.5	1.7	-1.0	-9	8.0	-6.0	-5.9	-15.5	-15.8	-15.9	-13.8	-14.6	-17.3	Y
-8.9	0.3	-0.7	-0.1	2.0	1.4	-1.9	-8.9	8.0	-6.0	-5.7	-16.0	-17.0	-16.5	-14.4	-14.9	-18.2	Y
-8.8	-0.5	-2.4	-0.9	1.2	0.9	-3.1	-8.8	8.0	-6.0	-5.6	-16.8	-18.7	-17.2	-15.2	-15.5	-19.5	Y
-8.7	-1.5	-4.8	-1.9	0.1	0.1	-4.7	-8.7	8.0	-6.0	-5.5	-17.8	-21.1	-18.2	-16.2	-16.2	-21.0	Y
-8.6	-2.6	-8.5	-3.2	-1.3	-0.9	-6.5	-8.6	8.0	-6.0	-5.4	-19.0	-24.8	-19.5	-17.6	-17.3	-22.9	Y
-8.5	-3.9	-15.6	-4.6	-3.2	-2.3	-8.2	-8.5	8.0	-6.0	-5.2	-20.2	-31.9	-20.9	-19.5	-18.6	-24.5	Y
-8.4	-4.8	-25.7	-6.0	-5.6	-3.9	-8.5	-8.4	8.0	-6.0	-5.1	-21.2	-42.0	-22.3	-22.0	-20.3	-24.8	Y
-8.3	-5.0	-11.3	-6.7	-8.8	-5.8	-6.9	-8.3	8.0	-6.0	-5.0	-21.3	-27.6	-23.0	-25.1	-22.2	-23.2	Y
-8.2	-4.1	-6.1	-6.0	-11.1	-7.5	-4.6	-8.2	8.0	-6.0	-4.8	-20.4	-22.5	-22.4	-27.4	-23.8	-20.9	Y
-8.1	-2.6	-3.0	-4.5	-9.2	-7.6	-2.5	-8.1	8.0	-6.0	-4.7	-18.9	-19.4	-20.8	-25.5	-23.9	-18.8	Y
-8	-1.0	-0.8	-2.7	-5.8	-6.0	-0.7	-8	8.0	-6.0	-4.6	-17.4	-17.2	-19.0	-22.1	-22.3	-17.0	Y
-7.9	0.4	0.8	-1.0	-3.0	-3.8	0.8	-7.9	8.0	-6.0	-4.4	-15.9	-15.6	-17.4	-19.3	-20.1	-15.5	Y
-7.8	1.6	2.0	0.4	-0.9	-1.9	2.0	-7.8	8.0	-6.0	-4.3	-14.7	-14.3	-16.0	-17.2	-18.2	-14.3	Y
-7.7	2.6	2.9	1.5	0.8	-0.3	3.0	-7.7	8.0	-6.0	-4.2	-13.7	-13.4	-14.8	-15.6	-16.6	-13.4	Y
-7.6	3.4	3.6	2.4	2.0	1.0	3.7	-7.6	8.0	-6.0	-4.0	-13.0	-12.8	-13.9	-14.3	-15.3	-12.6	Y

APPENDIX D: Antenna Gain and EIRP Tables

-7.5	3.9	4.0	3.1	3.0	2.0	4.3	-7.5	8.0	-6.0	-3.9	-12.4	-12.3	-13.2	-13.3	-14.3	-12.1	Y
-7.4	4.3	4.3	3.6	3.7	2.8	4.7	-7.4	8.0	-6.0	-3.7	-12.0	-12.1	-12.7	-12.6	-13.6	-11.7	Y
-7.3	4.5	4.3	3.9	4.2	3.3	4.9	-7.3	8.0	-6.0	-3.6	-11.8	-12.0	-12.4	-12.1	-13.1	-11.5	Y
-7.2	4.5	4.2	4.0	4.5	3.6	4.9	-7.2	8.0	-6.0	-3.4	-11.8	-12.2	-12.3	-11.8	-12.8	-11.4	Y
-7.1	4.3	3.8	3.9	4.6	3.7	4.8	-7.1	8.0	-6.0	-3.3	-12.0	-12.5	-12.4	-11.7	-12.7	-11.5	Y
-7	3.9	3.2	3.6	4.5	3.5	4.5	-7	8.0	-6.0	-3.1	-12.5	-13.2	-12.7	-11.8	-12.8	-11.8	Y
-6.9	3.2	2.3	3.1	4.2	3.2	4.0	-6.9	8.0	-6.0	-3.0	-13.2	-14.1	-13.2	-12.1	-13.2	-12.3	Y
-6.8	2.2	1.0	2.3	3.7	2.5	3.3	-6.8	8.2	-5.8	-2.8	-14.2	-15.3	-14.0	-12.6	-13.8	-13.0	Y
-6.7	0.8	-0.7	1.2	2.9	1.6	2.4	-6.7	8.3	-5.7	-2.7	-15.6	-17.0	-15.2	-13.4	-14.7	-13.9	Y
-6.6	-1.2	-3.0	-0.4	1.8	0.3	1.3	-6.6	8.5	-5.5	-2.5	-17.5	-19.3	-16.7	-14.6	-16.1	-15.0	Y
-6.5	-3.8	-6.0	-2.5	0.2	-1.7	0.1	-6.5	8.7	-5.3	-2.3	-20.2	-22.4	-18.8	-16.1	-18.0	-16.2	Y
-6.4	-7.0	-8.6	-5.4	-2.0	-4.4	-1.0	-6.4	8.8	-5.2	-2.2	-23.3	-24.9	-21.7	-18.3	-20.7	-17.3	Y
-6.3	-7.9	-7.0	-8.2	-5.1	-8.4	-1.5	-6.3	9.0	-5.0	-2.0	-24.2	-23.3	-24.5	-21.5	-24.7	-17.8	Y
-6.2	-4.6	-3.5	-7.6	-9.7	-11.3	-0.9	-6.2	9.2	-4.8	-1.8	-21.0	-19.8	-23.9	-26.0	-27.6	-17.3	Y
-6.1	-1.2	-0.5	-4.2	-11.5	-7.5	0.3	-6.1	9.4	-4.6	-1.6	-17.6	-16.8	-20.5	-27.9	-23.8	-16.0	Y
-6	1.5	1.8	-1.1	-6.6	-3.2	1.9	-6	9.5	-4.5	-1.5	-14.9	-14.5	-17.4	-23.0	-19.6	-14.5	Y
-5.9	3.5	3.6	1.3	-2.6	-0.2	3.4	-5.9	9.7	-4.3	-1.3	-12.8	-12.8	-15.0	-18.9	-16.5	-13.0	Y
-5.8	5.1	5.0	3.2	0.3	2.1	4.6	-5.8	9.9	-4.1	-1.1	-11.2	-11.4	-13.2	-16.1	-14.3	-11.7	Y
-5.7	6.4	6.0	4.6	2.3	3.8	5.7	-5.7	10.1	-3.9	-0.9	-9.9	-10.3	-11.7	-14.0	-12.5	-10.6	Y
-5.6	7.4	6.9	5.7	3.9	5.1	6.6	-5.6	10.3	-3.7	-0.7	-8.9	-9.5	-10.6	-12.4	-11.2	-9.7	Y
-5.5	8.2	7.5	6.6	5.1	6.1	7.2	-5.5	10.5	-3.5	-0.5	-8.2	-8.9	-9.8	-11.2	-10.2	-9.1	Y
-5.4	8.7	7.9	7.2	6.0	6.9	7.7	-5.4	10.7	-3.3	-0.3	-7.6	-8.4	-9.1	-10.3	-9.5	-8.6	Y
-5.3	9.1	8.1	7.6	6.7	7.4	8.0	-5.3	10.9	-3.1	-0.1	-7.2	-8.2	-8.7	-9.6	-8.9	-8.4	Y
-5.2	9.3	8.1	7.8	7.2	7.7	8.1	-5.2	11.1	-2.9	0.1	-7.1	-8.2	-8.5	-9.2	-8.6	-8.3	Y
-5.1	9.3	8.0	7.8	7.4	7.8	7.9	-5.1	11.3	-2.7	0.3	-7.1	-8.4	-8.5	-9.0	-8.6	-8.4	Y
-5	9.1	7.6	7.6	7.4	7.6	7.6	-5	11.5	-2.5	0.5	-7.3	-8.8	-8.8	-8.9	-8.7	-8.8	Y
-4.9	8.7	6.9	7.1	7.2	7.3	6.9	-4.9	11.7	-2.3	0.7	-7.7	-9.4	-9.2	-9.1	-9.1	-9.4	Y
-4.8	8.0	5.9	6.4	6.8	6.6	6.0	-4.8	12.0	-2.0	1.0	-8.3	-10.4	-10.0	-9.6	-9.7	-10.3	Y
-4.7	7.1	4.5	5.3	6.1	5.6	4.7	-4.7	12.2	-1.8	1.2	-9.2	-11.8	-11.0	-10.3	-10.7	-11.7	Y
-4.6	5.9	2.5	3.8	5.0	4.2	2.8	-4.6	12.4	-1.6	1.4	-10.4	-13.8	-12.5	-11.3	-12.2	-13.6	Y
-4.5	4.3	-0.5	1.9	3.6	2.0	0.1	-4.5	12.7	-1.3	1.7	-12.0	-16.8	-14.5	-12.8	-14.3	-16.2	Y
-4.4	2.4	-5.8	-0.5	1.4	-1.3	-2.9	-4.4	12.9	-1.1	1.9	-13.9	-22.1	-16.8	-14.9	-17.6	-19.2	Y
-4.3	0.7	-15.3	-1.9	-1.7	-6.5	-3.1	-4.3	13.2	-0.8	2.2	-15.6	-31.6	-18.2	-18.1	-22.9	-19.4	Y
-4.2	0.6	-5.4	-0.5	-6.9	-8.3	0.5	-4.2	13.4	-0.6	2.4	-15.7	-21.8	-16.8	-23.2	-24.7	-15.9	Y
-4.1	2.5	0.4	2.5	-10.2	-1.9	3.9	-4.1	13.7	-0.3	2.7	-13.9	-15.9	-13.9	-26.5	-18.3	-12.4	Y

APPENDIX D: Antenna Gain and EIRP Tables

-4	4.9	4.0	5.2	-3.9	2.5	6.6	-4	13.9	-0.1	2.9	-11.5	-12.4	-11.2	-20.2	-13.8	-9.7	Y
-3.9	7.1	6.5	7.4	0.7	5.6	8.8	-3.9	14.2	0.2	3.2	-9.3	-9.9	-8.9	-15.7	-10.8	-7.5	Y
-3.8	8.9	8.4	9.2	3.8	7.8	10.5	-3.8	14.5	0.5	3.5	-7.4	-8.0	-7.1	-12.6	-8.5	-5.8	Y
-3.7	10.4	9.8	10.7	6.0	9.6	11.9	-3.7	14.8	0.8	3.8	-5.9	-6.5	-5.7	-10.4	-6.8	-4.4	Y
-3.6	11.6	11.0	11.8	7.7	11.0	13.0	-3.6	15.1	1.1	4.1	-4.7	-5.3	-4.5	-8.7	-5.4	-3.3	Y
-3.5	12.6	11.9	12.8	8.9	12.1	14.0	-3.5	15.4	1.4	4.4	-3.7	-4.4	-3.5	-7.4	-4.3	-2.4	Y
-3.4	13.4	12.6	13.5	9.9	12.9	14.7	-3.4	15.7	1.7	4.7	-2.9	-3.8	-2.8	-6.4	-3.4	-1.6	Y
-3.3	14.0	13.1	14.1	10.6	13.6	15.2	-3.3	16.0	2.0	5.0	-2.4	-3.3	-2.2	-5.7	-2.8	-1.1	Y
-3.2	14.4	13.3	14.5	11.0	14.0	15.6	-3.2	16.4	2.4	5.4	-2.0	-3.0	-1.9	-5.3	-2.3	-0.7	Y
-3.1	14.6	13.4	14.7	11.2	14.3	15.9	-3.1	16.7	2.7	5.7	-1.8	-2.9	-1.7	-5.1	-2.1	-0.5	Y
-3	14.6	13.3	14.7	11.2	14.3	15.9	-3	17.1	3.1	6.1	-1.7	-3.0	-1.6	-5.1	-2.0	-0.4	Y
-2.9	14.4	13.0	14.5	10.9	14.2	15.8	-2.9	17.4	3.4		-1.9	-3.4	-1.8	-5.4	-2.1	-0.6	Y
-2.8	14.0	12.3	14.1	10.2	13.8	15.5	-2.8	17.8	3.8		-2.3	-4.0	-2.2	-6.1	-2.5	-0.9	Y
-2.7	13.3	11.4	13.5	9.2	13.2	14.9	-2.7	18.2	4.2		-3.0	-5.0	-2.9	-7.2	-3.1	-1.4	Y
-2.6	12.3	9.9	12.5	7.5	12.2	14.0	-2.6	18.6	4.6		-4.0	-6.4	-3.8	-8.9	-4.1	-2.3	Y
-2.5	10.9	7.7	11.1	4.7	10.7	12.8	-2.5	19.1	5.1		-5.5	-8.6	-5.3	-11.6	-5.6	-3.5	Y
-2.4	8.7	4.3	9.0	-0.4	8.5	11.0	-2.4	19.5	5.5		-7.6	-12.0	-7.3	-16.8	-7.8	-5.4	Y
-2.3	5.6	-1.1	5.9	-13.6	4.8	8.2	-2.3	20.0	6.0		-10.7	-17.4	-10.4	-30.0	-11.5	-8.1	Y
-2.2	2.0	-0.3	1.9	0.4	-3.0	3.6	-2.2	20.4	6.4		-14.3	-16.6	-14.5	-15.9	-19.4	-12.8	Y
-2.1	3.3	6.0	2.3	6.9	-3.9	-4.4	-2.1	20.9	6.9		-13.0	-10.3	-14.0	-9.4	-20.2	-20.7	Y
-2	7.9	10.3	7.3	10.9	5.7	2.9	-2	21.5	7.5		-8.4	-6.0	-9.1	-5.5	-10.7	-13.4	Y
-1.9	11.7	13.4	11.3	13.8	10.5	9.0	-1.9	22.0	8.0		-4.6	-2.9	-5.1	-2.6	-5.8	-7.3	Y
-1.8	14.6	15.9	14.2	16.1	13.8	12.9	-1.8	22.6	8.6		-1.8	-0.5	-2.1	-0.3	-2.5	-3.4	Y
-1.7	16.8	17.8	16.6	18.0	16.3	15.7	-1.7	23.2	9.2		0.5	1.5	0.3	1.6	-0.1	-0.6	Y
-1.6	18.7	19.5	18.5	19.6	18.3	17.9	-1.6	23.9	9.9		2.4	3.2	2.2	3.2	2.0	1.6	Y
-1.5	20.3	20.9	20.1	21.0	20.0	19.7	-1.5	24.6	10.6		4.0	4.6	3.8	4.6	3.6	3.4	Y
-1.4	21.7	22.2	21.5	22.2	21.4	21.2	-1.4				5.3	5.8	5.2	5.9	5.0	4.9	Y
-1.3	22.8	23.3	22.7	23.3	22.6	22.5	-1.3				6.5	6.9	6.4	6.9	6.3	6.2	Y
-1.2	23.9	24.2	23.8	24.2	23.7	23.6	-1.2				7.5	7.9	7.4	7.9	7.3	7.3	Y
-1.1	24.8	25.0	24.7	25.0	24.6	24.6	-1.1				8.4	8.7	8.3	8.7	8.3	8.2	Y
-1	25.6	25.8	25.5	25.8	25.4	25.4	-1				9.2	9.4	9.1	9.4	9.1	9.1	Y
-0.9	26.2	26.4	26.2	26.4	26.1	26.2	-0.9				9.9	10.1	9.8	10.1	9.8	9.8	Y
-0.8	26.8	27.0	26.8	27.0	26.8	26.8	-0.8				10.5	10.6	10.5	10.7	10.4	10.4	Y
-0.7	27.4	27.5	27.3	27.5	27.3	27.3	-0.7				11.0	11.1	11.0	11.1	11.0	11.0	Y
-0.6	27.8	27.9	27.8	27.9	27.7	27.8	-0.6				11.5	11.5	11.4	11.6	11.4	11.4	Y

APPENDIX D: Antenna Gain and EIRP Tables

-0.5	28.2	28.2	28.1	28.2	28.1	28.2	-0.5				11.8	11.9	11.8	11.9	11.8	11.8	Y
-0.4	28.5	28.5	28.4	28.5	28.4	28.5	-0.4				12.1	12.2	12.1	12.2	12.1	12.1	Y
-0.3	28.7	28.7	28.7	28.7	28.7	28.7	-0.3				12.4	12.4	12.3	12.4	12.3	12.4	Y
-0.2	28.9	28.9	28.8	28.9	28.8	28.9	-0.2				12.5	12.5	12.5	12.5	12.5	12.5	Y
-0.1	29.0	29.0	29.0	29.0	29.0	29.0	-0.1				12.6	12.6	12.6	12.6	12.6	12.6	Y
0	29.0	29.0	29.0	29.0	29.0	29.0	0				12.7	12.7	12.7	12.7	12.7	12.7	Y
0.1	29.0	29.0	29.0	29.0	29.0	29.0	0.1				12.6	12.6	12.6	12.6	12.6	12.6	Y
0.2	28.9	28.9	28.9	28.9	28.9	28.9	0.2				12.6	12.6	12.6	12.5	12.6	12.5	Y
0.3	28.7	28.7	28.8	28.7	28.8	28.7	0.3				12.4	12.4	12.4	12.4	12.4	12.4	Y
0.4	28.5	28.5	28.6	28.5	28.5	28.5	0.4				12.2	12.2	12.2	12.2	12.2	12.1	Y
0.5	28.3	28.3	28.3	28.2	28.3	28.2	0.5				11.9	11.9	11.9	11.9	11.9	11.8	Y
0.6	27.9	27.9	27.9	27.9	27.9	27.8	0.6				11.6	11.6	11.6	11.6	11.6	11.4	Y
0.7	27.5	27.5	27.5	27.5	27.5	27.3	0.7				11.2	11.2	11.2	11.1	11.2	11.0	Y
0.8	27.0	27.0	27.0	27.0	27.0	26.8	0.8				10.7	10.7	10.7	10.7	10.7	10.4	Y
0.9	26.4	26.5	26.5	26.4	26.4	26.1	0.9				10.1	10.2	10.1	10.1	10.1	9.8	Y
1	25.8	25.9	25.8	25.8	25.8	25.4	1				9.4	9.5	9.5	9.4	9.4	9.0	Y
1.1	25.0	25.1	25.1	25.0	25.0	24.5	1.1				8.7	8.8	8.7	8.7	8.7	8.2	Y
1.2	24.2	24.3	24.2	24.2	24.1	23.5	1.2				7.8	8.0	7.9	7.9	7.8	7.2	Y
1.3	23.2	23.4	23.2	23.3	23.1	22.4	1.3				6.8	7.0	6.9	6.9	6.8	6.1	Y
1.4	22.0	22.3	22.1	22.2	22.0	21.1	1.4				5.7	6.0	5.8	5.8	5.6	4.7	Y
1.5	20.7	21.1	20.9	21.0	20.6	19.5	1.5	24.6	10.6		4.4	4.7	4.5	4.6	4.3	3.2	Y
1.6	19.2	19.7	19.4	19.6	19.1	17.7	1.6	23.9	9.9		2.9	3.3	3.0	3.2	2.8	1.3	Y
1.7	17.5	18.1	17.6	17.9	17.3	15.4	1.7	23.2	9.2		1.1	1.7	1.3	1.6	0.9	-0.9	Y
1.8	15.4	16.1	15.6	16.0	15.1	12.5	1.8	22.6	8.6		-1.0	-0.2	-0.8	-0.3	-1.3	-3.9	Y
1.9	12.7	13.9	13.0	13.7	12.2	8.4	1.9	22.0	8.0		-3.6	-2.5	-3.3	-2.7	-4.1	-7.9	Y
2	9.3	11.1	9.7	10.7	8.4	2.3	2	21.5	7.5		-7.0	-5.3	-6.6	-5.6	-8.0	-14.1	Y
2.1	5.0	7.7	5.4	6.7	2.3	-0.4	2.1	20.9	6.9		-11.4	-8.7	-10.9	-9.6	-14.1	-16.7	Y
2.2	1.6	4.4	1.2	0.6	-5.9	5.6	2.2	20.4	6.4		-14.7	-12.0	-15.1	-15.7	-22.2	-10.8	Y
2.3	4.3	4.2	3.2	-5.4	2.2	9.4	2.3	20.0	6.0		-12.1	-12.1	-13.1	-21.7	-14.2	-7.0	Y
2.4	7.7	6.7	6.9	1.3	7.0	11.8	2.4	19.5	5.5		-8.7	-9.6	-9.5	-15.0	-9.4	-4.5	Y
2.5	10.1	9.1	9.5	5.6	9.7	13.4	2.5	19.1	5.1		-6.3	-7.3	-6.9	-10.8	-6.6	-2.9	Y
2.6	11.7	10.8	11.2	8.1	11.5	14.6	2.6	18.6	4.6		-4.6	-5.5	-5.1	-8.3	-4.9	-1.8	Y
2.7	12.9	12.1	12.4	9.6	12.7	15.3	2.7	18.2	4.2		-3.5	-4.2	-3.9	-6.7	-3.7	-1.0	Y
2.8	13.6	13.0	13.2	10.6	13.4	15.8	2.8	17.8	3.8		-2.7	-3.4	-3.1	-5.7	-2.9	-0.5	Y
2.9	14.1	13.5	13.7	11.2	13.9	16.1	2.9	17.4	3.4		-2.2	-2.8	-2.6	-5.1	-2.4	-0.2	Y

APPENDIX D: Antenna Gain and EIRP Tables

3	14.3	13.9	14.0	11.5	14.1	16.2	3	17.1	3.1	6.1	-2.0	-2.5	-2.4	-4.8	-2.2	-0.2	Y
3.1	14.4	14.0	14.0	11.6	14.1	16.1	3.1	16.7	2.7	5.7	-2.0	-2.4	-2.3	-4.8	-2.2	-0.3	Y
3.2	14.2	13.9	13.9	11.3	14.0	15.8	3.2	16.4	2.4	5.4	-2.1	-2.4	-2.5	-5.0	-2.4	-0.5	Y
3.3	13.8	13.6	13.5	10.9	13.6	15.4	3.3	16.0	2.0	5.0	-2.5	-2.7	-2.8	-5.5	-2.8	-1.0	Y
3.4	13.3	13.2	13.0	10.2	13.0	14.7	3.4	15.7	1.7	4.7	-3.0	-3.2	-3.4	-6.2	-3.3	-1.6	Y
3.5	12.5	12.5	12.2	9.2	12.2	13.9	3.5	15.4	1.4	4.4	-3.8	-3.8	-4.1	-7.1	-4.1	-2.4	Y
3.6	11.6	11.7	11.2	7.9	11.2	12.9	3.6	15.1	1.1	4.1	-4.8	-4.7	-5.1	-8.4	-5.2	-3.4	Y
3.7	10.3	10.6	10.0	6.2	9.9	11.6	3.7	14.8	0.8	3.8	-6.0	-5.8	-6.3	-10.1	-6.5	-4.7	Y
3.8	8.8	9.2	8.5	4.0	8.2	10.1	3.8	14.5	0.5	3.5	-7.5	-7.1	-7.9	-12.3	-8.1	-6.2	Y
3.9	6.8	7.4	6.5	0.9	6.1	8.2	3.9	14.2	0.2	3.2	-9.5	-8.9	-9.8	-15.4	-10.3	-8.2	Y
4	4.4	5.2	4.1	-3.9	3.2	5.8	4	13.9	-0.1	2.9	-11.9	-11.1	-12.2	-20.2	-13.1	-10.5	Y
4.1	1.4	2.1	1.1	-11.6	-0.9	3.0	4.1	13.7	-0.3	2.7	-15.0	-14.2	-15.2	-27.9	-17.3	-13.3	Y
4.2	-1.5	-2.4	-1.8	-7.5	-7.5	0.5	4.2	13.4	-0.6	2.4	-17.9	-18.7	-18.1	-23.9	-23.9	-15.9	Y
4.3	-1.6	-9.1	-2.0	-1.8	-8.4	0.3	4.3	13.2	-0.8	2.2	-17.9	-25.4	-18.4	-18.1	-24.7	-16.0	Y
4.4	0.9	-6.9	0.4	1.5	-2.2	2.4	4.4	12.9	-1.1	1.9	-15.4	-23.3	-15.9	-14.8	-18.5	-13.9	Y
4.5	3.4	-1.4	2.9	3.7	1.5	4.7	4.5	12.7	-1.3	1.7	-12.9	-17.8	-13.4	-12.6	-14.8	-11.7	Y
4.6	5.4	1.9	4.8	5.2	3.9	6.5	4.6	12.4	-1.6	1.4	-11.0	-14.4	-11.5	-11.1	-12.4	-9.8	Y
4.7	6.8	4.1	6.2	6.3	5.5	7.9	4.7	12.2	-1.8	1.2	-9.5	-12.2	-10.1	-10.1	-10.8	-8.5	Y
4.8	7.8	5.6	7.3	7.0	6.6	8.9	4.8	12.0	-2.0	1.0	-8.5	-10.7	-9.1	-9.3	-9.7	-7.4	Y
4.9	8.6	6.7	8.0	7.4	7.4	9.6	4.9	11.7	-2.3	0.7	-7.8	-9.7	-8.3	-8.9	-8.9	-6.7	Y
5	9.1	7.4	8.5	7.6	7.8	10.1	5	11.5	-2.5	0.5	-7.3	-9.0	-7.9	-8.7	-8.5	-6.2	Y
5.1	9.3	7.8	8.7	7.6	8.1	10.4	5.1	11.3	-2.7	0.3	-7.0	-8.5	-7.6	-8.7	-8.3	-5.9	Y
5.2	9.4	8.0	8.7	7.4	8.1	10.5	5.2	11.1	-2.9	0.1	-7.0	-8.3	-7.6	-8.9	-8.3	-5.8	Y
5.3	9.2	8.1	8.6	7.0	7.8	10.4	5.3	10.9	-3.1	-0.1	-7.1	-8.3	-7.7	-9.4	-8.5	-5.9	Y
5.4	8.9	7.9	8.2	6.3	7.4	10.2	5.4	10.7	-3.3	-0.3	-7.4	-8.5	-8.1	-10.0	-8.9	-6.1	Y
5.5	8.4	7.5	7.7	5.4	6.8	9.8	5.5	10.5	-3.5	-0.5	-7.9	-8.9	-8.6	-10.9	-9.6	-6.5	Y
5.6	7.7	6.9	7.0	4.2	5.9	9.2	5.6	10.3	-3.7	-0.7	-8.6	-9.5	-9.4	-12.1	-10.4	-7.1	Y
5.7	6.8	6.1	6.0	2.7	4.8	8.5	5.7	10.1	-3.9	-0.9	-9.5	-10.3	-10.3	-13.7	-11.6	-7.8	Y
5.8	5.6	5.0	4.8	0.7	3.3	7.6	5.8	9.9	-4.1	-1.1	-10.7	-11.4	-11.6	-15.7	-13.0	-8.7	Y
5.9	4.2	3.6	3.2	-2.0	1.5	6.5	5.9	9.7	-4.3	-1.3	-12.2	-12.8	-13.1	-18.3	-14.9	-9.8	Y
6	2.3	1.8	1.2	-5.4	-0.9	5.2	6	9.5	-4.5	-1.5	-14.1	-14.6	-15.1	-21.7	-17.2	-11.1	Y
6.1	-0.1	-0.6	-1.2	-8.5	-3.9	3.7	6.1	9.4	-4.6	-1.6	-16.4	-17.0	-17.6	-24.8	-20.2	-12.7	Y
6.2	-3.0	-4.0	-4.3	-7.2	-6.9	1.9	6.2	9.2	-4.8	-1.8	-19.4	-20.3	-20.6	-23.5	-23.3	-14.4	Y
6.3	-6.0	-8.9	-7.0	-3.9	-7.3	0.0	6.3	9.0	-5.0	-2.0	-22.4	-25.3	-23.3	-20.2	-23.6	-16.3	Y
6.4	-6.5	-12.9	-6.7	-1.1	-4.8	-1.7	6.4	8.8	-5.2	-2.2	-22.9	-29.2	-23.0	-17.5	-21.1	-18.1	Y

APPENDIX D: Antenna Gain and EIRP Tables

6.5	-4.1	-8.2	-4.1	0.9	-2.2	-2.7	6.5	8.7	-5.3	-2.3	-20.5	-24.5	-20.4	-15.5	-18.5	-19.0	Y
6.6	-1.6	-4.0	-1.7	2.3	-0.2	-2.5	6.6	8.5	-5.5	-2.5	-17.9	-20.3	-18.0	-14.0	-16.5	-18.8	Y
6.7	0.4	-1.2	0.2	3.4	1.3	-1.5	6.7	8.3	-5.7	-2.7	-15.9	-17.6	-16.1	-13.0	-15.0	-17.9	Y
6.8	1.9	0.7	1.6	4.1	2.4	-0.4	6.8	8.2	-5.8	-2.8	-14.5	-15.6	-14.8	-12.2	-14.0	-16.8	Y
6.9	2.9	2.0	2.5	4.6	3.1	0.5	6.9	8.0	-6.0	-3.0	-13.4	-14.3	-13.8	-11.7	-13.2	-15.8	Y
7	3.7	3.0	3.2	4.9	3.6	1.2	7	7.9	-6.1	-3.1	-12.7	-13.3	-13.1	-11.4	-12.7	-15.1	Y
7.1	4.1	3.7	3.6	5.0	3.8	1.7	7.1	8.0	-6.0	-3.3	-12.2	-12.7	-12.7	-11.3	-12.5	-14.7	Y
7.2	4.4	4.1	3.8	4.9	3.9	1.8	7.2	8.0	-6.0	-3.4	-12.0	-12.3	-12.5	-11.5	-12.5	-14.5	Y
7.3	4.4	4.3	3.8	4.6	3.7	1.8	7.3	8.0	-6.0	-3.6	-11.9	-12.1	-12.6	-11.8	-12.7	-14.5	Y
7.4	4.2	4.3	3.6	4.0	3.3	1.5	7.4	8.0	-6.0	-3.7	-12.1	-12.1	-12.8	-12.3	-13.0	-14.8	Y
7.5	3.9	4.0	3.1	3.3	2.7	1.0	7.5	8.0	-6.0	-3.9	-12.5	-12.3	-13.2	-13.0	-13.6	-15.4	Y
7.6	3.3	3.6	2.5	2.3	1.9	0.1	7.6	8.0	-6.0	-4.0	-13.0	-12.7	-13.8	-14.0	-14.4	-16.2	Y
7.7	2.5	3.0	1.7	1.0	0.9	-1.0	7.7	8.0	-6.0	-4.2	-13.8	-13.4	-14.6	-15.4	-15.4	-17.4	Y
7.8	1.5	2.1	0.7	-0.8	-0.4	-2.6	7.8	8.0	-6.0	-4.3	-14.9	-14.2	-15.6	-17.1	-16.7	-18.9	Y
7.9	0.2	0.9	-0.5	-3.1	-2.0	-4.6	7.9	8.0	-6.0	-4.4	-16.2	-15.4	-16.9	-19.4	-18.4	-20.9	Y
8	-1.5	-0.6	-2.0	-6.3	-4.0	-7.2	8	8.0	-6.0	-4.6	-17.8	-17.0	-18.3	-22.6	-20.3	-23.5	Y
8.1	-3.4	-2.7	-3.6	-10.7	-6.2	-9.9	8.1	8.0	-6.0	-4.7	-19.7	-19.0	-19.9	-27.0	-22.5	-26.2	Y
8.2	-5.4	-5.5	-4.9	-13.4	-8.0	-10.5	8.2	8.0	-6.0	-4.8	-21.8	-21.8	-21.3	-29.7	-24.4	-26.8	Y
8.3	-7.0	-9.5	-5.6	-9.4	-8.4	-8.2	8.3	8.0	-6.0	-5.0	-23.4	-25.9	-22.0	-25.7	-24.8	-24.5	Y
8.4	-7.1	-15.0	-5.3	-5.5	-7.2	-5.4	8.4	8.0	-6.0	-5.1	-23.4	-31.3	-21.6	-21.8	-23.5	-21.8	Y
8.5	-5.7	-13.5	-4.3	-2.8	-5.4	-3.2	8.5	8.0	-6.0	-5.2	-22.1	-29.8	-20.6	-19.1	-21.8	-19.5	Y
8.6	-4.0	-8.4	-3.1	-0.9	-3.9	-1.5	8.6	8.0	-6.0	-5.4	-20.3	-24.7	-19.4	-17.2	-20.2	-17.8	Y
8.7	-2.5	-5.0	-2.0	0.6	-2.6	-0.1	8.7	8.0	-6.0	-5.5	-18.8	-21.3	-18.3	-15.8	-19.0	-16.5	Y
8.8	-1.3	-2.7	-1.1	1.7	-1.7	0.9	8.8	8.0	-6.0	-5.6	-17.6	-19.0	-17.4	-14.7	-18.0	-15.5	Y
8.9	-0.3	-1.0	-0.4	2.4	-1.1	1.6	8.9	8.0	-6.0	-5.7	-16.7	-17.4	-16.7	-13.9	-17.4	-14.7	Y
9	0.3	0.2	0.1	3.0	-0.7	2.2	9	8.0	-6.0	-5.9	-16.0	-16.1	-16.2	-13.3	-17.0	-14.1	Y
9.1	0.7	1.1	0.4	3.3	-0.6	2.6	9.1	8.0	-6.0	-6.0	-15.6	-15.3	-15.9	-13.0	-16.9	-13.8	Y
9.2	0.9	1.7	0.5	3.5	-0.6	2.7	9.2	8.0	-6.0	-6.1	-15.4	-14.6	-15.8	-12.8	-17.0	-13.6	Y
9.3	0.9	2.1	0.4	3.5	-0.9	2.8	9.3	7.8	-6.2	-6.2	-15.4	-14.2	-15.9	-12.8	-17.3	-13.5	Y
9.4	0.7	2.3	0.2	3.4	-1.4	2.7	9.4	7.7	-6.3	-6.3	-15.6	-14.1	-16.2	-13.0	-17.8	-13.7	Y
9.5	0.3	2.3	-0.2	3.1	-2.1	2.4	9.5	7.6	-6.4	-6.4	-16.0	-14.1	-16.5	-13.3	-18.5	-13.9	Y
9.6	-0.3	2.1	-0.7	2.6	-3.0	2.0	9.6	7.4	-6.6	-6.6	-16.6	-14.3	-17.1	-13.8	-19.3	-14.3	Y
9.7	-1.1	1.7	-1.3	1.9	-4.1	1.5	9.7	7.3	-6.7	-6.7	-17.4	-14.7	-17.7	-14.4	-20.4	-14.9	Y
9.8	-2.0	1.1	-2.0	1.1	-5.2	0.8	9.8	7.2	-6.8	-6.8	-18.4	-15.3	-18.3	-15.3	-21.5	-15.6	Y
9.9	-3.1	0.2	-2.6	0.0	-6.2	-0.1	9.9	7.1	-6.9	-6.9	-19.5	-16.1	-18.9	-16.3	-22.5	-16.4	Y

APPENDIX D: Antenna Gain and EIRP Tables

10	-4.2	-0.9	-3.0	-1.3	-6.6	-1.2	10	7.0	-7.0	-7.0	-20.5	-17.2	-19.4	-17.6	-23.0	-17.5	Y
15.0	-3.4	-11.1	-1.7	-7.7	-1.5	-1.1	15	2.6	-11.4	-11.4	-19.8	-27.4	-18.1	-24.1	-17.8	-17.5	Y
20.0	-8.8	-10.7	-10.8	-9.0	-16.8	-8.9	20	-0.5	-14.5	-14.5	-25.1	-27.0	-27.1	-25.3	-33.1	-25.3	Y
25.0	-11.5	-16.5	-12.7	-11.4	-8.2	-11.0	25	-2.9	-16.9	-16.9	-27.8	-32.8	-29.0	-27.8	-24.5	-27.3	Y
30.0	-20.4	-14.6	-21.4	-22.0	-16.5	-12.1	30	-4.9	-18.9	-18.9	-36.7	-30.9	-37.7	-38.3	-32.9	-28.5	Y
35.0	-14.6	-11.1	-16.6	-15.1	-18.1	-10.6	35	-6.6	-20.6	-20.6	-30.9	-27.4	-33.0	-31.4	-34.4	-27.0	Y
40.0	-13.6	-17.1	-16.8	-18.7	-26.0	-7.2	40	-8.1	-22.1	-22.1	-29.9	-33.5	-33.2	-35.0	-42.3	-23.6	Y
45.0	-25.4	-20.9	-29.7	-11.6	-23.7	-14.8	45	-9.3	-23.3	-23.3	-41.7	-37.2	-46.1	-27.9	-40.0	-31.2	Y
50.0	-17.4	-14.1	-15.0	-15.7	-18.4	-16.7	50	-10.0	-24.0	-24.0	-33.8	-30.5	-31.3	-32.1	-34.7	-33.0	Y
55.0	-17.2	-13.0	-20.3	-20.8	-29.4	-15.8	55	-10.0	-24.0	-24.0	-33.5	-29.4	-36.6	-37.2	-45.8	-32.1	Y
60.0	-16.5	-17.5	-22.3	-20.2	-20.8	-9.7	60	-10.0	-24.0	-24.0	-32.9	-33.8	-38.6	-36.5	-37.1	-26.1	Y
65.0	-23.0	-18.2	-30.3	-18.1	-22.4	-30.4	65	-10.0	-24.0	-24.0	-39.3	-34.5	-46.7	-34.4	-38.7	-46.7	Y
70.0	-16.7	-25.4	-25.9	-27.0	-24.1	-13.1	70	-10.0	-24.0	-24.0	-33.0	-41.7	-42.2	-43.4	-40.4	-29.4	Y
75.0	-24.0	-20.3	-27.4	-22.9	-32.2	-21.8	75	-10.0	-24.0	-24.0	-40.3	-36.6	-43.7	-39.2	-48.6	-38.1	Y
80.0	-30.3	-29.8	-33.9	-24.2	-60.7	-26.5	80	-10.0	-24.0	-24.0	-46.6	-46.2	-50.2	-40.5	-77.1	-42.8	Y
85.0	-34.5	-25.4	-40.4	-29.6	-42.0	-27.9	85	-10.0	-24.0	-24.0	-50.8	-41.7	-56.7	-45.9	-58.3	-44.3	Y
90.0	-39.0	-26.6	-48.3	-25.0	-39.8	-60.3	90	0.0	-14.0	-14.0	-55.4	-43.0	-64.7	-41.3	-56.1	-76.7	Y
95.0	-43.8	-29.0	-46.1	-29.6	-43.7	-33.8	95	0.0	-14.0	-14.0	-60.2	-45.4	-62.4	-45.9	-60.0	-50.2	Y
100.0	-41.1	-34.5	-44.7	-25.4	-38.9	-34.0	100	0.0	-14.0	-14.0	-57.4	-50.8	-61.0	-41.7	-55.3	-50.3	Y
105.0	-51.3	-27.2	-48.2	-30.4	-42.7	-27.3	105	0.0	-14.0	-14.0	-67.6	-43.6	-64.5	-46.7	-59.0	-43.6	Y
110.0	-55.9	-34.9	-40.7	-29.2	-36.5	-31.0	110	0.0	-14.0	-14.0	-72.2	-51.3	-57.0	-45.5	-52.8	-47.4	Y
115.0	-53.4	-32.9	-41.2	-35.6	-36.0	-25.5	115	0.0	-14.0	-14.0	-69.7	-49.2	-57.5	-51.9	-52.3	-41.8	Y
120.0	-50.6	-35.9	-45.4	-34.0	-37.9	-25.3	120	0.0	-14.0	-14.0	-66.9	-52.2	-61.7	-50.4	-54.2	-41.6	Y
125.0	-48.1	-31.0	-44.8	-43.4	-35.1	-31.2	125	0.0	-14.0	-14.0	-64.4	-47.4	-61.1	-59.7	-51.5	-47.6	Y
130.0	-42.1	-30.8	-39.6	-41.7	-44.9	-31.3	130	0.0	-14.0	-14.0	-58.4	-47.1	-55.9	-58.1	-61.3	-47.6	Y
135.0	-48.0	-32.3	-50.1	-31.3	-37.3	-37.4	135	0.0	-14.0	-14.0	-64.3	-48.6	-66.4	-47.7	-53.6	-53.8	Y
140.0	-46.3	-46.8	-53.3	-37.9	-41.3	-34.3	140	0.0	-14.0	-14.0	-62.6	-63.1	-69.7	-54.2	-57.7	-50.6	Y
145.0	-55.0	-30.8	-49.8	-32.2	-52.2	-34.0	145	0.0	-14.0	-14.0	-71.3	-47.1	-66.1	-48.5	-68.5	-50.3	Y
150.0	-35.6	-24.1	-34.8	-27.3	-39.4	-25.9	150	0.0	-14.0	-14.0	-51.9	-40.5	-51.2	-43.6	-55.7	-42.2	Y
155.0	-56.2	-33.9	-46.2	-33.1	-43.6	-34.6	155	0.0	-14.0	-14.0	-72.6	-50.2	-62.5	-49.4	-60.0	-51.0	Y
160.0	-47.7	-33.9	-48.3	-31.8	-53.6	-35.6	160	0.0	-14.0	-14.0	-64.0	-50.2	-64.6	-48.1	-69.9	-51.9	Y
165.0	-45.5	-36.7	-57.9	-39.7	-49.2	-43.0	165	0.0	-14.0	-14.0	-61.8	-53.1	-74.2	-56.1	-65.5	-59.4	Y
170.0	-54.4	-42.3	-50.5	-58.9	-56.8	-65.7	170	0.0	-14.0	-14.0	-70.7	-58.7	-66.9	-75.2	-73.2	-82.0	Y
175.0	-53.7	-44.5	-49.4	-51.5	-55.8	-46.7	175	0.0	-14.0	-14.0	-70.0	-60.8	-65.7	-67.8	-72.1	-63.0	Y
180.0	-50.2	-42.7	-50.8	-47.2	-42.7	-53.4	180	0.0	-14.0	-14.0	-66.6	-59.0	-67.1	-63.5	-59.1	-69.7	Y

APPENDIX D: Antenna Gain and EIRP Tables

Co Pol Azimuth	Antenna Gain (dBi)										Off-Axis EIRP (dBW/4 kHz)							
Off-Axis Angle	14 GHz E	14 GHz H	14.25 GHz E	14.25 GHz H	14.5 GHz E	14.5 GHz H	Off-Axis Angle	FCC §25.209	FCC §25.209(a)(2) + §25.212 EIRP GSO Mask, Skew = 25 deg	FCC §25.209(a)(2)+ §25.212 EIRP GSO Mask, Skew = 25 deg	14 GHz E	14 GHz H	14.25 GHz E	14.25 GHz H	14.5 GHz E	14.5 GHz H	Meets Mask	
-180	-43.8	-51.1	-50.7	-48.6	-47.0	-53.4	-180	0.0	-14.0	-14.0	-60.2	-67.4	-67.0	-64.9	-63.3	-69.7	Y	
-175	-43.7	-46.0	-51.9	-45.1	-50.1	-57.0	-175	0.0	-14.0	-14.0	-60.0	-62.3	-68.3	-61.5	-66.4	-73.4	Y	
-170	-51.0	-49.8	-50.0	-43.3	-47.1	-45.1	-170	0.0	-14.0	-14.0	-67.3	-66.1	-66.3	-59.7	-63.4	-61.5	Y	
-165	-42.3	-34.3	-44.0	-35.5	-55.3	-41.1	-165	0.0	-14.0	-14.0	-58.6	-50.6	-60.4	-51.8	-71.7	-57.4	Y	
-160	-45.9	-37.3	-55.3	-33.2	-46.7	-52.3	-160	0.0	-14.0	-14.0	-62.2	-53.7	-71.6	-49.6	-63.1	-68.7	Y	
-155	-43.3	-37.9	-43.7	-32.3	-49.8	-32.5	-155	0.0	-14.0	-14.0	-59.7	-54.3	-60.0	-48.6	-66.1	-48.8	Y	
-150	-45.6	-25.3	-36.0	-25.3	-36.4	-24.6	-150	0.0	-14.0	-14.0	-61.9	-41.7	-52.3	-41.6	-52.7	-40.9	Y	
-145	-35.6	-31.6	-47.4	-41.0	-35.2	-29.9	-145	0.0	-14.0	-14.0	-52.0	-47.9	-63.7	-57.4	-51.5	-46.2	Y	
-140	-51.3	-31.7	-38.2	-36.6	-37.6	-33.5	-140	0.0	-14.0	-14.0	-67.6	-48.0	-54.6	-53.0	-54.0	-49.8	Y	
-135	-35.5	-37.2	-47.7	-30.0	-51.0	-28.7	-135	0.0	-14.0	-14.0	-51.8	-53.6	-64.1	-46.3	-67.3	-45.1	Y	
-130	-34.9	-35.6	-41.7	-31.5	-36.6	-29.4	-130	0.0	-14.0	-14.0	-51.2	-51.9	-58.0	-47.9	-52.9	-45.7	Y	
-125	-41.7	-33.6	-52.2	-29.5	-33.9	-50.9	-125	0.0	-14.0	-14.0	-58.1	-49.9	-68.5	-45.8	-50.2	-67.2	Y	
-120	-36.3	-28.7	-37.6	-26.1	-34.9	-28.4	-120	0.0	-14.0	-14.0	-52.6	-45.0	-54.0	-42.4	-51.3	-44.8	Y	
-115	-37.2	-34.0	-32.1	-28.4	-28.8	-26.5	-115	0.0	-14.0	-14.0	-53.6	-50.3	-48.4	-44.8	-45.1	-42.9	Y	
-110	-27.8	-24.5	-32.4	-27.4	-26.9	-24.9	-110	0.0	-14.0	-14.0	-44.2	-40.8	-48.8	-43.7	-43.2	-41.2	Y	
-105	-25.1	-27.3	-29.0	-26.0	-21.8	-21.3	-105	0.0	-14.0	-14.0	-41.4	-43.7	-45.3	-42.4	-38.1	-37.6	Y	
-100	-21.6	-28.1	-24.8	-22.5	-18.3	-24.0	-100	0.0	-14.0	-14.0	-38.0	-44.4	-41.1	-38.8	-34.7	-40.4	Y	
-95	-19.0	-21.2	-26.0	-23.1	-18.6	-25.4	-95	0.0	-14.0	-14.0	-35.4	-37.6	-42.3	-39.4	-34.9	-41.8	Y	
-90	-21.8	-19.8	-26.1	-19.4	-17.7	-27.0	-90	0.0	-14.0	-14.0	-38.1	-36.1	-42.5	-35.7	-34.1	-43.4	Y	
-85	-21.2	-21.9	-24.4	-20.2	-16.2	-22.4	-85	-10.0	-24.0	-24.0	-37.5	-38.2	-40.7	-36.6	-32.5	-38.8	Y	
-80	-31.5	-23.9	-24.9	-22.5	-13.0	-13.5	-80	-10.0	-24.0	-24.0	-47.8	-40.3	-41.2	-38.9	-29.4	-29.8	Y	
-75	-22.9	-16.4	-32.0	-27.8	-18.9	-18.1	-75	-10.0	-24.0	-24.0	-39.2	-32.7	-48.3	-44.1	-35.2	-34.5	Y	
-70	-18.6	-16.6	-19.0	-14.8	-15.2	-11.8	-70	-10.0	-24.0	-24.0	-34.9	-32.9	-35.3	-31.2	-31.5	-28.1	Y	
-65	-22.9	-16.7	-18.5	-15.3	-11.2	-14.2	-65	-10.0	-24.0	-24.0	-39.2	-33.0	-34.8	-31.6	-27.6	-30.5	Y	
-60	-27.4	-13.3	-24.4	-14.8	-20.6	-14.5	-60	-10.0	-24.0	-24.0	-43.7	-29.6	-40.7	-31.1	-37.0	-30.8	Y	
-55	-17.8	-16.6	-29.6	-12.9	-25.0	-14.6	-55	-10.0	-24.0	-24.0	-34.1	-32.9	-46.0	-29.2	-41.3	-31.0	Y	

APPENDIX D: Antenna Gain and EIRP Tables

-50	-20.7	-18.9	-17.7	-14.1	-18.6	-9.7	-50	-10.0	-24.0	-24.0	-37.0	-35.2	-34.0	-30.4	-34.9	-26.1	Y
-48	-15.5	-26.4	-14.9	-13.7	-15.4	-24.1	-48	-10.0	-24.0	-24.0	-31.8	-42.7	-31.2	-30.0	-31.7	-40.4	Y
-45	-28.6	-18.7	-25.1	-20.0	-33.2	-19.6	-45	-9.3	-23.3	-23.3	-45.0	-35.1	-41.4	-36.4	-49.5	-36.0	Y
-40	-17.8	-22.2	-18.8	-22.0	-20.5	-9.4	-40	-8.1	-22.1	-22.1	-34.2	-38.5	-35.1	-38.3	-36.8	-25.7	Y
-35	-14.6	-23.0	-12.9	-14.6	-9.1	-13.7	-35	-6.6	-20.6	-20.6	-30.9	-39.3	-29.3	-30.9	-25.5	-30.0	Y
-30	-27.0	-14.6	-22.4	-30.4	-19.9	-13.8	-30	-4.9	-18.9	-18.9	-43.3	-30.9	-38.8	-46.8	-36.2	-30.2	Y
-25	-11.1	-29.6	-12.9	-23.8	-17.0	-13.7	-25	-2.9	-16.9	-16.9	-27.5	-46.0	-29.2	-40.1	-33.4	-30.1	Y
-20	-14.2	-25.1	-16.5	-17.1	-30.1	-7.6	-20	-0.5	-14.5	-14.5	-30.5	-41.4	-32.9	-33.4	-46.4	-24.0	Y
-15	-6.4	-8.5	-9.7	-13.9	-8.4	-1.2	-15	2.6	-11.4	-11.4	-22.8	-24.8	-26.1	-30.2	-24.7	-17.5	Y
-10	-0.5	-1.8	-2.9	-1.9	-2.9	-2.3	-10	7.0	-7.0	-7.0	-16.9	-18.2	-19.2	-18.2	-19.2	-18.7	Y
-9.9	-0.4	-2.4	-2.6	-1.9	-2.5	-1.5	-9.9	7.1	-6.9	-6.9	-16.8	-18.7	-19.0	-18.2	-18.9	-17.8	Y
-9.8	-0.5	-3.1	-2.5	-2.0	-2.3	-0.8	-9.8	7.2	-6.8	-6.8	-16.8	-19.4	-18.9	-18.4	-18.6	-17.1	Y
-9.7	-0.6	-4.1	-2.5	-2.4	-2.2	-0.2	-9.7	7.3	-6.7	-6.7	-17.0	-20.4	-18.9	-18.7	-18.6	-16.6	Y
-9.6	-1.0	-5.4	-2.7	-2.9	-2.3	0.2	-9.6	7.4	-6.6	-6.6	-17.3	-21.7	-19.0	-19.2	-18.6	-16.2	Y
-9.5	-1.6	-7.2	-3.0	-3.6	-2.5	0.4	-9.5	7.6	-6.4	-6.4	-17.9	-23.5	-19.3	-19.9	-18.9	-15.9	Y
-9.4	-2.3	-9.7	-3.4	-4.5	-2.9	0.5	-9.4	7.7	-6.3	-6.3	-18.6	-26.0	-19.8	-20.8	-19.3	-15.9	Y
-9.3	-3.2	-13.4	-4.0	-5.6	-3.5	0.4	-9.3	7.8	-6.2	-6.2	-19.6	-29.7	-20.4	-22.0	-19.8	-15.9	Y
-9.2	-4.4	-19.1	-4.8	-7.0	-4.3	0.1	-9.2	8.0	-6.0	-6.1	-20.7	-35.4	-21.1	-23.3	-20.6	-16.2	Y
-9.1	-5.6	-19.0	-5.7	-8.3	-5.3	-0.3	-9.1	8.0	-6.0	-6.0	-21.9	-35.4	-22.0	-24.6	-21.6	-16.7	Y
-9	-6.6	-13.0	-6.5	-9.2	-6.4	-1.0	-9	8.0	-6.0	-5.9	-23.0	-29.4	-22.9	-25.6	-22.7	-17.3	Y
-8.9	-7.0	-9.0	-7.2	-9.2	-7.5	-1.9	-8.9	8.0	-6.0	-5.7	-23.4	-25.4	-23.6	-25.5	-23.9	-18.2	Y
-8.8	-6.4	-6.3	-7.4	-8.0	-8.3	-3.1	-8.8	8.0	-6.0	-5.6	-22.8	-22.6	-23.8	-24.3	-24.7	-19.5	Y
-8.7	-5.1	-4.2	-7.0	-6.3	-8.3	-4.7	-8.7	8.0	-6.0	-5.5	-21.4	-20.5	-23.3	-22.7	-24.6	-21.0	Y
-8.6	-3.5	-2.6	-6.0	-4.7	-7.3	-6.5	-8.6	8.0	-6.0	-5.4	-19.8	-19.0	-22.3	-21.0	-23.7	-22.9	Y
-8.5	-2.0	-1.4	-4.7	-3.2	-5.9	-8.2	-8.5	8.0	-6.0	-5.2	-18.3	-17.7	-21.0	-19.5	-22.2	-24.5	Y
-8.4	-0.7	-0.4	-3.4	-1.9	-4.3	-8.5	-8.4	8.0	-6.0	-5.1	-17.0	-16.7	-19.8	-18.2	-20.6	-24.8	Y
-8.3	0.5	0.4	-2.3	-0.9	-2.9	-6.9	-8.3	8.0	-6.0	-5.0	-15.9	-16.0	-18.6	-17.2	-19.2	-23.2	Y
-8.2	1.4	0.9	-1.2	0.0	-1.7	-4.6	-8.2	8.0	-6.0	-4.8	-14.9	-15.4	-17.6	-16.3	-18.0	-20.9	Y
-8.1	2.1	1.3	-0.4	0.6	-0.7	-2.5	-8.1	8.0	-6.0	-4.7	-14.2	-15.0	-16.7	-15.7	-17.0	-18.8	Y
-8	2.7	1.5	0.3	1.1	0.2	-0.7	-8	8.0	-6.0	-4.6	-13.6	-14.8	-16.0	-15.2	-16.2	-17.0	Y
-7.9	3.1	1.6	0.8	1.5	0.8	0.8	-7.9	8.0	-6.0	-4.4	-13.2	-14.7	-15.5	-14.9	-15.5	-15.5	Y
-7.8	3.4	1.5	1.2	1.6	1.3	2.0	-7.8	8.0	-6.0	-4.3	-13.0	-14.8	-15.2	-14.7	-15.1	-14.3	Y
-7.7	3.4	1.2	1.4	1.7	1.6	3.0	-7.7	8.0	-6.0	-4.2	-12.9	-15.1	-15.0	-14.7	-14.8	-13.4	Y
-7.6	3.3	0.7	1.4	1.5	1.7	3.7	-7.6	8.0	-6.0	-4.0	-13.0	-15.6	-15.0	-14.8	-14.6	-12.6	Y
-7.5	3.1	0.0	1.2	1.2	1.6	4.3	-7.5	8.0	-6.0	-3.9	-13.3	-16.3	-15.1	-15.2	-14.7	-12.1	Y

APPENDIX D: Antenna Gain and EIRP Tables

-7.4	2.6	-0.9	0.9	0.6	1.4	4.7	-7.4	8.0	-6.0	-3.7	-13.8	-17.2	-15.5	-15.7	-14.9	-11.7	Y
-7.3	1.8	-2.2	0.3	-0.1	0.9	4.9	-7.3	8.0	-6.0	-3.6	-14.5	-18.5	-16.0	-16.5	-15.4	-11.5	Y
-7.2	0.8	-3.9	-0.5	-1.2	0.2	4.9	-7.2	8.0	-6.0	-3.4	-15.5	-20.2	-16.9	-17.5	-16.1	-11.4	Y
-7.1	-0.6	-6.0	-1.7	-2.5	-0.8	4.8	-7.1	8.0	-6.0	-3.3	-17.0	-22.3	-18.0	-18.9	-17.2	-11.5	Y
-7	-2.7	-8.3	-3.3	-4.3	-2.3	4.5	-7	8.0	-6.0	-3.1	-19.0	-24.6	-19.6	-20.6	-18.6	-11.8	Y
-6.9	-5.6	-9.2	-5.4	-6.4	-4.4	4.0	-6.9	8.0	-6.0	-3.0	-22.0	-25.5	-21.7	-22.8	-20.7	-12.3	Y
-6.8	-10.3	-7.4	-7.9	-8.4	-7.5	3.3	-6.8	8.2	-5.8	-2.8	-26.7	-23.7	-24.2	-24.7	-23.8	-13.0	Y
-6.7	-15.1	-4.7	-9.6	-8.5	-12.3	2.4	-6.7	8.3	-5.7	-2.7	-31.4	-21.0	-25.9	-24.8	-28.7	-13.9	Y
-6.6	-9.4	-2.2	-8.1	-6.4	-15.8	1.3	-6.6	8.5	-5.5	-2.5	-25.8	-18.6	-24.4	-22.8	-32.2	-15.0	Y
-6.5	-4.4	-0.2	-5.1	-3.9	-9.9	0.1	-6.5	8.7	-5.3	-2.3	-20.8	-16.6	-21.4	-20.2	-26.3	-16.2	Y
-6.4	-1.1	1.4	-2.4	-1.7	-5.3	-1.0	-6.4	8.8	-5.2	-2.2	-17.5	-14.9	-18.7	-18.0	-21.6	-17.3	Y
-6.3	1.3	2.7	-0.1	0.2	-2.1	-1.5	-6.3	9.0	-5.0	-2.0	-15.1	-13.6	-16.5	-16.2	-18.5	-17.8	Y
-6.2	3.1	3.8	1.6	1.6	0.2	-0.9	-6.2	9.2	-4.8	-1.8	-13.2	-12.5	-14.7	-14.7	-16.2	-17.3	Y
-6.1	4.5	4.6	3.1	2.8	1.9	0.3	-6.1	9.4	-4.6	-1.6	-11.8	-11.7	-13.3	-13.5	-14.4	-16.0	Y
-6	5.7	5.3	4.2	3.8	3.3	1.9	-6	9.5	-4.5	-1.5	-10.6	-11.0	-12.1	-12.6	-13.0	-14.5	Y
-5.9	6.6	5.8	5.1	4.5	4.4	3.4	-5.9	9.7	-4.3	-1.3	-9.7	-10.6	-11.2	-11.8	-11.9	-13.0	Y
-5.8	7.3	6.1	5.9	5.1	5.2	4.6	-5.8	9.9	-4.1	-1.1	-9.0	-10.2	-10.5	-11.3	-11.1	-11.7	Y
-5.7	7.8	6.2	6.4	5.4	5.9	5.7	-5.7	10.1	-3.9	-0.9	-8.5	-10.1	-10.0	-10.9	-10.5	-10.6	Y
-5.6	8.1	6.2	6.7	5.6	6.3	6.6	-5.6	10.3	-3.7	-0.7	-8.2	-10.1	-9.6	-10.7	-10.0	-9.7	Y
-5.5	8.3	6.0	6.9	5.7	6.5	7.2	-5.5	10.5	-3.5	-0.5	-8.0	-10.3	-9.4	-10.7	-9.8	-9.1	Y
-5.4	8.3	5.6	6.9	5.5	6.6	7.7	-5.4	10.7	-3.3	-0.3	-8.0	-10.7	-9.4	-10.8	-9.7	-8.6	Y
-5.3	8.1	5.0	6.7	5.2	6.5	8.0	-5.3	10.9	-3.1	-0.1	-8.2	-11.3	-9.6	-11.2	-9.9	-8.4	Y
-5.2	7.8	4.1	6.3	4.6	6.1	8.1	-5.2	11.1	-2.9	0.1	-8.6	-12.2	-10.0	-11.7	-10.2	-8.3	Y
-5.1	7.2	2.8	5.7	3.8	5.5	7.9	-5.1	11.3	-2.7	0.3	-9.1	-13.5	-10.6	-12.6	-10.9	-8.4	Y
-5	6.4	1.0	4.8	2.6	4.5	7.6	-5	11.5	-2.5	0.5	-10.0	-15.4	-11.5	-13.7	-11.8	-8.8	Y
-4.9	5.2	-1.7	3.5	1.0	3.2	6.9	-4.9	11.7	-2.3	0.7	-11.1	-18.0	-12.8	-15.3	-13.1	-9.4	Y
-4.8	3.7	-6.2	1.8	-1.2	1.3	6.0	-4.8	12.0	-2.0	1.0	-12.6	-22.5	-14.5	-17.5	-15.1	-10.3	Y
-4.7	1.8	-16.2	-0.5	-4.1	-1.6	4.7	-4.7	12.2	-1.8	1.2	-14.6	-32.5	-16.8	-20.4	-17.9	-11.7	Y
-4.6	-0.5	-10.5	-3.2	-6.8	-6.0	2.8	-4.6	12.4	-1.6	1.4	-16.8	-26.8	-19.5	-23.2	-22.4	-13.6	Y
-4.5	-2.0	-3.1	-4.2	-5.7	-9.6	0.1	-4.5	12.7	-1.3	1.7	-18.3	-19.5	-20.5	-22.0	-26.0	-16.2	Y
-4.4	-0.9	1.0	-1.7	-2.1	-4.4	-2.9	-4.4	12.9	-1.1	1.9	-17.3	-15.4	-18.1	-18.4	-20.7	-19.2	Y
-4.3	1.8	3.8	1.5	1.0	0.4	-3.1	-4.3	13.2	-0.8	2.2	-14.6	-12.6	-14.8	-15.3	-16.0	-19.4	Y
-4.2	4.4	5.9	4.2	3.5	3.7	0.5	-4.2	13.4	-0.6	2.4	-12.0	-10.5	-12.1	-12.9	-12.7	-15.9	Y
-4.1	6.6	7.5	6.4	5.4	6.1	3.9	-4.1	13.7	-0.3	2.7	-9.8	-8.8	-9.9	-11.0	-10.2	-12.4	Y
-4	8.3	8.8	8.2	6.9	8.0	6.6	-4	13.9	-0.1	2.9	-8.0	-7.5	-8.2	-9.4	-8.3	-9.7	Y

APPENDIX D: Antenna Gain and EIRP Tables

-3.9	9.8	9.9	9.6	8.1	9.6	8.8	-3.9	14.2	0.2	3.2	-6.6	-6.5	-6.7	-8.2	-6.8	-7.5	Y
-3.8	11.0	10.7	10.7	9.1	10.8	10.5	-3.8	14.5	0.5	3.5	-5.4	-5.6	-5.6	-7.3	-5.5	-5.8	Y
-3.7	11.9	11.4	11.7	9.8	11.8	11.9	-3.7	14.8	0.8	3.8	-4.4	-5.0	-4.7	-6.5	-4.5	-4.4	Y
-3.6	12.7	11.8	12.4	10.4	12.6	13.0	-3.6	15.1	1.1	4.1	-3.7	-4.5	-3.9	-6.0	-3.7	-3.3	Y
-3.5	13.2	12.1	13.0	10.7	13.2	14.0	-3.5	15.4	1.4	4.4	-3.1	-4.2	-3.3	-5.6	-3.1	-2.4	Y
-3.4	13.6	12.3	13.4	10.9	13.7	14.7	-3.4	15.7	1.7	4.7	-2.7	-4.1	-2.9	-5.4	-2.7	-1.6	Y
-3.3	13.9	12.2	13.6	10.9	13.9	15.2	-3.3	16.0	2.0	5.0	-2.5	-4.1	-2.7	-5.4	-2.4	-1.1	Y
-3.2	13.9	12.0	13.7	10.7	14.1	15.6	-3.2	16.4	2.4	5.4	-2.4	-4.3	-2.6	-5.7	-2.3	-0.7	Y
-3.1	13.8	11.5	13.6	10.2	14.0	15.9	-3.1	16.7	2.7	5.7	-2.5	-4.8	-2.7	-6.2	-2.3	-0.5	Y
-3	13.5	10.8	13.3	9.4	13.8	15.9	-3	17.1	3.1	6.1	-2.8	-5.5	-3.1	-7.0	-2.6	-0.4	Y
-2.9	13.0	9.7	12.7	8.1	13.3	15.8	-2.9	17.4	3.4		-3.4	-6.6	-3.6	-8.2	-3.0	-0.6	Y
-2.8	12.1	8.2	11.9	6.2	12.6	15.5	-2.8	17.8	3.8		-4.2	-8.1	-4.4	-10.1	-3.8	-0.9	Y
-2.7	10.9	6.0	10.7	3.2	11.5	14.9	-2.7	18.2	4.2		-5.4	-10.4	-5.7	-13.1	-4.9	-1.4	Y
-2.6	9.2	2.8	8.9	-2.7	9.9	14.0	-2.6	18.6	4.6		-7.1	-13.6	-7.4	-19.0	-6.5	-2.3	Y
-2.5	6.8	-0.4	6.3	-18.4	7.5	12.8	-2.5	19.1	5.1		-9.6	-16.8	-10.1	-34.7	-8.9	-3.5	Y
-2.4	3.3	1.8	2.3	0.2	3.4	11.0	-2.4	19.5	5.5		-13.0	-14.5	-14.0	-16.2	-12.9	-5.4	Y
-2.3	0.8	6.4	-0.9	6.2	-5.5	8.2	-2.3	20.0	6.0		-15.6	-9.9	-17.2	-10.1	-21.9	-8.1	Y
-2.2	4.3	10.0	3.6	10.0	-2.8	3.6	-2.2	20.4	6.4		-12.1	-6.3	-12.8	-6.3	-19.2	-12.8	Y
-2.1	8.6	12.8	8.3	12.8	5.7	-4.4	-2.1	20.9	6.9		-7.7	-3.5	-8.0	-3.5	-10.7	-20.7	Y
-2	12.0	15.0	11.8	15.1	10.2	2.9	-2	21.5	7.5		-4.4	-1.3	-4.5	-1.3	-6.1	-13.4	Y
-1.9	14.6	16.9	14.5	16.9	13.4	9.0	-1.9	22.0	8.0		-1.7	0.6	-1.9	0.6	-2.9	-7.3	Y
-1.8	16.7	18.5	16.6	18.5	15.8	12.9	-1.8	22.6	8.6		0.4	2.2	0.3	2.2	-0.5	-3.4	Y
-1.7	18.5	19.9	18.4	19.9	17.8	15.7	-1.7	23.2	9.2		2.1	3.6	2.1	3.6	1.4	-0.6	Y
-1.6	20.0	21.2	19.9	21.2	19.4	17.9	-1.6	23.9	9.9		3.7	4.8	3.6	4.8	3.1	1.6	Y
-1.5	21.3	22.3	21.3	22.2	20.8	19.7	-1.5	24.6	10.6		5.0	5.9	4.9	5.9	4.5	3.4	Y
-1.4	22.4	23.2	22.4	23.2	22.1	21.2	-1.4				6.1	6.9	6.1	6.9	5.7	4.9	Y
-1.3	23.5	24.1	23.4	24.1	23.1	22.5	-1.3				7.1	7.7	7.1	7.7	6.8	6.2	Y
-1.2	24.3	24.9	24.3	24.8	24.1	23.6	-1.2				8.0	8.5	8.0	8.5	7.7	7.3	Y
-1.1	25.1	25.5	25.1	25.5	24.9	24.6	-1.1				8.8	9.2	8.8	9.2	8.6	8.2	Y
-1	25.8	26.2	25.8	26.2	25.6	25.4	-1				9.5	9.8	9.5	9.8	9.3	9.1	Y
-0.9	26.5	26.7	26.4	26.7	26.3	26.2	-0.9				10.1	10.4	10.1	10.4	10.0	9.8	Y
-0.8	27.0	27.2	27.0	27.2	26.9	26.8	-0.8				10.7	10.8	10.6	10.8	10.5	10.4	Y
-0.7	27.5	27.6	27.5	27.6	27.4	27.3	-0.7				11.1	11.3	11.1	11.3	11.0	11.0	Y
-0.6	27.9	28.0	27.9	28.0	27.8	27.8	-0.6				11.5	11.6	11.5	11.6	11.4	11.4	Y
-0.5	28.2	28.3	28.2	28.3	28.1	28.2	-0.5				11.9	11.9	11.9	11.9	11.8	11.8	Y

APPENDIX D: Antenna Gain and EIRP Tables

-0.4	28.5	28.5	28.5	28.5	28.4	28.5	-0.4				12.1	12.2	12.1	12.2	12.1	12.1	Y
-0.3	28.7	28.7	28.7	28.7	28.7	28.7	-0.3				12.4	12.4	12.4	12.4	12.3	12.4	Y
-0.2	28.8	28.9	28.8	28.9	28.8	28.9	-0.2				12.5	12.5	12.5	12.5	12.5	12.5	Y
-0.1	29.0	29.0	29.0	29.0	28.9	29.0	-0.1				12.6	12.6	12.6	12.6	12.6	12.6	Y
0	29.0	29.0	29.0	29.0	29.0	29.0	0				12.7	12.7	12.7	12.7	12.7	12.7	Y
0.1	29.0	29.0	29.0	29.0	29.0	29.0	0.1				12.7	12.7	12.7	12.7	12.7	12.6	Y
0.2	28.9	28.9	28.9	28.9	28.9	28.9	0.2				12.6	12.6	12.6	12.6	12.6	12.5	Y
0.3	28.8	28.8	28.8	28.8	28.8	28.7	0.3				12.5	12.5	12.5	12.5	12.5	12.4	Y
0.4	28.6	28.7	28.6	28.7	28.7	28.5	0.4				12.3	12.4	12.3	12.3	12.3	12.1	Y
0.5	28.4	28.5	28.4	28.5	28.4	28.2	0.5				12.1	12.1	12.1	12.1	12.1	11.8	Y
0.6	28.1	28.2	28.1	28.2	28.1	27.8	0.6				11.8	11.9	11.8	11.9	11.8	11.4	Y
0.7	27.8	27.9	27.7	27.9	27.8	27.3	0.7				11.4	11.6	11.4	11.5	11.4	11.0	Y
0.8	27.3	27.5	27.3	27.5	27.3	26.8	0.8				11.0	11.2	11.0	11.2	11.0	10.4	Y
0.9	26.9	27.1	26.8	27.0	26.8	26.1	0.9				10.5	10.8	10.5	10.7	10.5	9.8	Y
1	26.3	26.6	26.2	26.5	26.3	25.4	1				10.0	10.3	9.9	10.2	9.9	9.0	Y
1.1	25.6	26.0	25.6	26.0	25.6	24.5	1.1				9.3	9.7	9.2	9.6	9.3	8.2	Y
1.2	24.9	25.4	24.8	25.3	24.8	23.5	1.2				8.6	9.0	8.5	9.0	8.5	7.2	Y
1.3	24.1	24.7	24.0	24.6	24.0	22.4	1.3				7.7	8.3	7.6	8.2	7.6	6.1	Y
1.4	23.1	23.8	23.0	23.7	23.0	21.1	1.4				6.8	7.5	6.7	7.4	6.7	4.7	Y
1.5	22.1	22.9	21.9	22.8	21.9	19.5	1.5	24.6	10.6		5.7	6.6	5.6	6.4	5.5	3.2	Y
1.6	20.8	21.9	20.7	21.7	20.6	17.7	1.6	23.9	9.9		4.5	5.5	4.3	5.4	4.3	1.3	Y
1.7	19.4	20.7	19.2	20.5	19.1	15.4	1.7	23.2	9.2		3.1	4.4	2.9	4.2	2.8	-0.9	Y
1.8	17.8	19.4	17.5	19.1	17.3	12.5	1.8	22.6	8.6		1.4	3.0	1.2	2.8	1.0	-3.9	Y
1.9	15.8	17.8	15.5	17.6	15.2	8.4	1.9	22.0	8.0		-0.5	1.5	-0.9	1.2	-1.2	-7.9	Y
2	13.4	16.0	12.9	15.7	12.4	2.3	2	21.5	7.5		-2.9	-0.3	-3.4	-0.7	-3.9	-14.1	Y
2.1	10.4	13.9	9.7	13.4	8.7	-0.4	2.1	20.9	6.9		-5.9	-2.5	-6.7	-2.9	-7.6	-16.7	Y
2.2	6.6	11.3	5.2	10.5	2.9	5.6	2.2	20.4	6.4		-9.8	-5.0	-11.2	-5.8	-13.4	-10.8	Y
2.3	2.8	8.2	0.0	6.5	-6.0	9.4	2.3	20.0	6.0		-13.6	-8.1	-16.4	-9.8	-22.4	-7.0	Y
2.4	3.5	5.0	1.9	-0.1	1.8	11.8	2.4	19.5	5.5		-12.8	-11.3	-14.4	-16.5	-14.6	-4.5	Y
2.5	6.8	4.0	6.2	-12.1	6.9	13.4	2.5	19.1	5.1		-9.5	-12.3	-10.1	-28.4	-9.5	-2.9	Y
2.6	9.4	5.9	9.1	0.4	9.8	14.6	2.6	18.6	4.6		-6.9	-10.4	-7.2	-16.0	-6.5	-1.8	Y
2.7	11.3	8.3	11.0	5.3	11.7	15.3	2.7	18.2	4.2		-5.0	-8.0	-5.3	-11.0	-4.6	-1.0	Y
2.8	12.6	10.2	12.4	8.1	13.0	15.8	2.8	17.8	3.8		-3.7	-6.1	-4.0	-8.2	-3.3	-0.5	Y
2.9	13.6	11.6	13.3	9.9	13.9	16.1	2.9	17.4	3.4		-2.8	-4.7	-3.0	-6.4	-2.4	-0.2	Y
3	14.2	12.6	13.9	11.1	14.5	16.2	3	17.1	3.1	6.1	-2.1	-3.7	-2.4	-5.2	-1.8	-0.2	Y

APPENDIX D: Antenna Gain and EIRP Tables

3.1	14.6	13.3	14.3	11.9	14.9	16.1	3.1	16.7	2.7	5.7	-1.7	-3.0	-2.1	-4.4	-1.5	-0.3	Y
3.2	14.8	13.8	14.4	12.4	15.0	15.8	3.2	16.4	2.4	5.4	-1.6	-2.5	-1.9	-3.9	-1.3	-0.5	Y
3.3	14.8	14.1	14.4	12.7	15.0	15.4	3.3	16.0	2.0	5.0	-1.6	-2.2	-1.9	-3.7	-1.3	-1.0	Y
3.4	14.6	14.2	14.2	12.7	14.8	14.7	3.4	15.7	1.7	4.7	-1.7	-2.1	-2.1	-3.6	-1.5	-1.6	Y
3.5	14.3	14.1	13.8	12.6	14.4	13.9	3.5	15.4	1.4	4.4	-2.1	-2.2	-2.5	-3.8	-1.9	-2.4	Y
3.6	13.8	13.9	13.3	12.2	13.9	12.9	3.6	15.1	1.1	4.1	-2.6	-2.4	-3.0	-4.1	-2.4	-3.4	Y
3.7	13.1	13.5	12.6	11.7	13.2	11.6	3.7	14.8	0.8	3.8	-3.3	-2.8	-3.8	-4.6	-3.1	-4.7	Y
3.8	12.2	13.0	11.6	11.0	12.3	10.1	3.8	14.5	0.5	3.5	-4.2	-3.4	-4.7	-5.3	-4.1	-6.2	Y
3.9	11.1	12.3	10.5	10.1	11.1	8.2	3.9	14.2	0.2	3.2	-5.3	-4.1	-5.9	-6.2	-5.2	-8.2	Y
4	9.7	11.4	9.0	9.0	9.7	5.8	4	13.9	-0.1	2.9	-6.7	-5.0	-7.3	-7.4	-6.6	-10.5	Y
4.1	7.9	10.2	7.2	7.5	7.9	3.0	4.1	13.7	-0.3	2.7	-8.4	-6.1	-9.1	-8.8	-8.4	-13.3	Y
4.2	5.7	8.8	5.0	5.7	5.6	0.5	4.2	13.4	-0.6	2.4	-10.6	-7.5	-11.3	-10.6	-10.7	-15.9	Y
4.3	2.9	7.1	2.3	3.3	2.5	0.3	4.3	13.2	-0.8	2.2	-13.5	-9.3	-14.0	-13.0	-13.8	-16.0	Y
4.4	-0.7	4.8	-0.6	0.2	-1.9	2.4	4.4	12.9	-1.1	1.9	-17.0	-11.5	-16.9	-16.2	-18.2	-13.9	Y
4.5	-3.4	1.7	-1.9	-4.0	-7.4	4.7	4.5	12.7	-1.3	1.7	-19.7	-14.6	-18.2	-20.4	-23.8	-11.7	Y
4.6	-1.7	-3.0	-0.2	-7.0	-5.0	6.5	4.6	12.4	-1.6	1.4	-18.0	-19.4	-16.5	-23.3	-21.3	-9.8	Y
4.7	1.5	-13.6	2.3	-3.9	-0.3	7.9	4.7	12.2	-1.8	1.2	-14.8	-30.0	-14.1	-20.3	-16.6	-8.5	Y
4.8	4.0	-11.5	4.3	-0.3	2.8	8.9	4.8	12.0	-2.0	1.0	-12.3	-27.8	-12.0	-16.6	-13.5	-7.4	Y
4.9	5.9	-3.0	5.9	2.3	4.9	9.6	4.9	11.7	-2.3	0.7	-10.4	-19.3	-10.5	-14.0	-11.4	-6.7	Y
5	7.3	0.9	7.0	4.2	6.4	10.1	5	11.5	-2.5	0.5	-9.1	-15.4	-9.3	-12.2	-10.0	-6.2	Y
5.1	8.2	3.4	7.9	5.5	7.4	10.4	5.1	11.3	-2.7	0.3	-8.1	-12.9	-8.5	-10.8	-8.9	-5.9	Y
5.2	9.0	5.1	8.5	6.5	8.1	10.5	5.2	11.1	-2.9	0.1	-7.4	-11.3	-7.9	-9.9	-8.2	-5.8	Y
5.3	9.4	6.3	8.8	7.2	8.6	10.4	5.3	10.9	-3.1	-0.1	-6.9	-10.1	-7.5	-9.2	-7.7	-5.9	Y
5.4	9.7	7.1	9.0	7.6	8.9	10.2	5.4	10.7	-3.3	-0.3	-6.6	-9.2	-7.3	-8.7	-7.5	-6.1	Y
5.5	9.8	7.7	9.0	7.9	8.9	9.8	5.5	10.5	-3.5	-0.5	-6.5	-8.6	-7.4	-8.5	-7.4	-6.5	Y
5.6	9.7	8.1	8.8	7.9	8.8	9.2	5.6	10.3	-3.7	-0.7	-6.6	-8.3	-7.5	-8.4	-7.6	-7.1	Y
5.7	9.5	8.2	8.4	7.8	8.5	8.5	5.7	10.1	-3.9	-0.9	-6.8	-8.1	-7.9	-8.5	-7.9	-7.8	Y
5.8	9.1	8.2	7.9	7.5	8.0	7.6	5.8	9.9	-4.1	-1.1	-7.2	-8.1	-8.4	-8.8	-8.4	-8.7	Y
5.9	8.5	8.1	7.2	7.0	7.3	6.5	5.9	9.7	-4.3	-1.3	-7.8	-8.3	-9.1	-9.3	-9.0	-9.8	Y
6	7.8	7.7	6.3	6.4	6.4	5.2	6	9.5	-4.5	-1.5	-8.6	-8.6	-10.0	-10.0	-9.9	-11.1	Y
6.1	6.8	7.2	5.1	5.5	5.3	3.7	6.1	9.4	-4.6	-1.6	-9.6	-9.1	-11.2	-10.8	-11.0	-12.7	Y
6.2	5.6	6.5	3.7	4.4	3.9	1.9	6.2	9.2	-4.8	-1.8	-10.8	-9.8	-12.6	-11.9	-12.5	-14.4	Y
6.3	4.0	5.6	2.0	3.0	2.1	0.0	6.3	9.0	-5.0	-2.0	-12.3	-10.8	-14.4	-13.3	-14.2	-16.3	Y
6.4	2.1	4.4	-0.2	1.2	-0.1	-1.7	6.4	8.8	-5.2	-2.2	-14.3	-11.9	-16.5	-15.1	-16.4	-18.1	Y
6.5	-0.5	2.9	-2.7	-1.1	-2.8	-2.7	6.5	8.7	-5.3	-2.3	-16.8	-13.4	-19.0	-17.4	-19.2	-19.0	Y

APPENDIX D: Antenna Gain and EIRP Tables

6.6	-3.9	1.1	-5.0	-4.2	-5.9	-2.5	6.6	8.5	-5.5	-2.5	-20.2	-15.3	-21.4	-20.5	-22.2	-18.8	Y
6.7	-8.4	-1.5	-5.6	-8.0	-7.4	-1.5	6.7	8.3	-5.7	-2.7	-24.7	-17.8	-21.9	-24.3	-23.7	-17.9	Y
6.8	-10.3	-5.0	-4.0	-9.9	-5.6	-0.4	6.8	8.2	-5.8	-2.8	-26.6	-21.4	-20.3	-26.2	-22.0	-16.8	Y
6.9	-6.5	-10.9	-1.9	-7.0	-3.0	0.5	6.9	8.0	-6.0	-3.0	-22.8	-27.2	-18.2	-23.4	-19.4	-15.8	Y
7	-3.0	-17.5	-0.1	-3.7	-0.9	1.2	7	7.9	-6.1	-3.1	-19.4	-33.9	-16.4	-20.1	-17.3	-15.1	Y
7.1	-0.6	-9.8	1.3	-1.3	0.7	1.7	7.1	8.0	-6.0	-3.3	-16.9	-26.1	-15.0	-17.6	-15.7	-14.7	Y
7.2	1.1	-4.9	2.4	0.6	1.8	1.8	7.2	8.0	-6.0	-3.4	-15.2	-21.2	-14.0	-15.8	-14.5	-14.5	Y
7.3	2.3	-2.0	3.1	1.9	2.7	1.8	7.3	8.0	-6.0	-3.6	-14.0	-18.3	-13.2	-14.4	-13.6	-14.5	Y
7.4	3.2	0.1	3.7	2.9	3.3	1.5	7.4	8.0	-6.0	-3.7	-13.1	-16.3	-12.7	-13.5	-13.1	-14.8	Y
7.5	3.8	1.5	4.0	3.6	3.6	1.0	7.5	8.0	-6.0	-3.9	-12.6	-14.8	-12.3	-12.7	-12.7	-15.4	Y
7.6	4.1	2.6	4.1	4.1	3.7	0.1	7.6	8.0	-6.0	-4.0	-12.2	-13.8	-12.2	-12.2	-12.6	-16.2	Y
7.7	4.3	3.3	4.1	4.4	3.7	-1.0	7.7	8.0	-6.0	-4.2	-12.1	-13.0	-12.2	-12.0	-12.7	-17.4	Y
7.8	4.2	3.8	3.9	4.5	3.4	-2.6	7.8	8.0	-6.0	-4.3	-12.1	-12.5	-12.5	-11.8	-12.9	-18.9	Y
7.9	4.0	4.2	3.5	4.5	3.0	-4.6	7.9	8.0	-6.0	-4.4	-12.3	-12.2	-12.8	-11.9	-13.3	-20.9	Y
8	3.6	4.3	3.0	4.2	2.4	-7.2	8	8.0	-6.0	-4.6	-12.7	-12.0	-13.3	-12.1	-13.9	-23.5	Y
8.1	3.0	4.3	2.3	3.9	1.6	-9.9	8.1	8.0	-6.0	-4.7	-13.3	-12.1	-14.0	-12.5	-14.7	-26.2	Y
8.2	2.2	4.1	1.5	3.3	0.7	-10.5	8.2	8.0	-6.0	-4.8	-14.1	-12.3	-14.8	-13.0	-15.7	-26.8	Y
8.3	1.3	3.7	0.6	2.6	-0.5	-8.2	8.3	8.0	-6.0	-5.0	-15.1	-12.6	-15.7	-13.7	-16.8	-24.5	Y
8.4	0.1	3.2	-0.4	1.7	-1.8	-5.4	8.4	8.0	-6.0	-5.1	-16.2	-13.2	-16.7	-14.7	-18.2	-21.8	Y
8.5	-1.2	2.5	-1.4	0.5	-3.2	-3.2	8.5	8.0	-6.0	-5.2	-17.6	-13.9	-17.8	-15.8	-19.5	-19.5	Y
8.6	-2.7	1.5	-2.3	-0.8	-4.4	-1.5	8.6	8.0	-6.0	-5.4	-19.0	-14.8	-18.6	-17.1	-20.8	-17.8	Y
8.7	-4.0	0.3	-2.7	-2.4	-5.0	-0.1	8.7	8.0	-6.0	-5.5	-20.3	-16.0	-19.1	-18.7	-21.4	-16.5	Y
8.8	-4.8	-1.2	-2.8	-4.1	-4.8	0.9	8.8	8.0	-6.0	-5.6	-21.1	-17.6	-19.1	-20.4	-21.2	-15.5	Y
8.9	-4.7	-3.2	-2.4	-5.6	-4.0	1.6	8.9	8.0	-6.0	-5.7	-21.0	-19.5	-18.7	-21.9	-20.3	-14.7	Y
9	-3.8	-5.9	-1.7	-6.1	-2.9	2.2	9	8.0	-6.0	-5.9	-20.2	-22.2	-18.1	-22.5	-19.2	-14.1	Y
9.1	-2.7	-9.8	-1.1	-5.4	-1.9	2.6	9.1	8.0	-6.0	-6.0	-19.0	-26.1	-17.4	-21.8	-18.2	-13.8	Y
9.2	-1.6	-15.9	-0.4	-4.0	-1.0	2.7	9.2	8.0	-6.0	-6.1	-17.9	-32.2	-16.7	-20.4	-17.3	-13.6	Y
9.3	-0.6	-17.7	0.1	-2.5	-0.3	2.8	9.3	7.8	-6.2	-6.2	-17.0	-34.1	-16.2	-18.9	-16.6	-13.5	Y
9.4	0.1	-11.4	0.5	-1.2	0.2	2.7	9.4	7.7	-6.3	-6.3	-16.2	-27.7	-15.8	-17.5	-16.1	-13.7	Y
9.5	0.7	-7.3	0.8	-0.1	0.6	2.4	9.5	7.6	-6.4	-6.4	-15.6	-23.7	-15.5	-16.4	-15.8	-13.9	Y
9.6	1.1	-4.7	0.9	0.8	0.7	2.0	9.6	7.4	-6.6	-6.6	-15.3	-21.1	-15.4	-15.5	-15.6	-14.3	Y
9.7	1.3	-2.9	0.9	1.5	0.7	1.5	9.7	7.3	-6.7	-6.7	-15.1	-19.2	-15.5	-14.9	-15.6	-14.9	Y
9.8	1.3	-1.5	0.7	2.0	0.5	0.8	9.8	7.2	-6.8	-6.8	-15.1	-17.9	-15.6	-14.4	-15.8	-15.6	Y
9.9	1.1	-0.5	0.4	2.3	0.1	-0.1	9.9	7.1	-6.9	-6.9	-15.2	-16.9	-15.9	-14.0	-16.2	-16.4	Y
10	0.8	0.2	-0.1	2.5	-0.4	-1.2	10	7.0	-7.0	-7.0	-15.6	-16.2	-16.4	-13.8	-16.8	-17.5	Y

APPENDIX D: Antenna Gain and EIRP Tables

15.0	-7.4	-10.7	-6.1	-15.5	-2.9	-1.1	15	2.6	-11.4	-11.4	-23.7	-27.1	-22.5	-31.8	-19.3	-17.5	Y
20.0	-33.8	-15.8	-14.2	-18.4	-11.4	-8.9	20	-0.5	-14.5	-14.5	-50.1	-32.2	-30.6	-34.8	-27.8	-25.3	Y
25.0	-22.3	-25.2	-16.5	-18.7	-17.3	-11.0	25	-2.9	-16.9	-16.9	-38.6	-41.5	-32.9	-35.0	-33.6	-27.3	Y
30.0	-16.6	-14.6	-16.2	-14.9	-16.9	-12.1	30	-4.9	-18.9	-18.9	-32.9	-30.9	-32.5	-31.3	-33.2	-28.5	Y
35.0	-20.8	-28.3	-26.7	-18.9	-22.3	-10.6	35	-6.6	-20.6	-20.6	-37.1	-44.7	-43.0	-35.2	-38.6	-27.0	Y
40.0	-34.4	-18.6	-37.7	-19.6	-18.0	-7.2	40	-8.1	-22.1	-22.1	-50.7	-34.9	-54.1	-35.9	-34.4	-23.6	Y
45.0	-23.8	-24.2	-28.1	-29.4	-30.0	-14.8	45	-9.3	-23.3	-23.3	-40.1	-40.5	-44.5	-45.7	-46.3	-31.2	Y
50.0	-26.6	-18.3	-25.6	-11.2	-21.6	-16.7	50	-10.0	-24.0	-24.0	-42.9	-34.6	-41.9	-27.5	-37.9	-33.0	Y
55.0	-20.4	-30.9	-23.1	-14.9	-18.5	-15.8	55	-10.0	-24.0	-24.0	-36.7	-47.2	-39.4	-31.2	-34.8	-32.1	Y
60.0	-26.9	-17.6	-22.2	-18.4	-35.3	-9.7	60	-10.0	-24.0	-24.0	-43.3	-33.9	-38.5	-34.7	-51.6	-26.1	Y
65.0	-31.5	-18.8	-28.7	-21.6	-18.2	-30.4	65	-10.0	-24.0	-24.0	-47.8	-35.1	-45.1	-38.0	-34.5	-46.7	Y
70.0	-22.6	-20.1	-19.2	-15.7	-15.3	-13.1	70	-10.0	-24.0	-24.0	-38.9	-36.5	-35.5	-32.0	-31.6	-29.4	Y
75.0	-55.2	-12.4	-25.1	-23.3	-23.8	-21.8	75	-10.0	-24.0	-24.0	-71.6	-28.7	-41.4	-39.7	-40.1	-38.1	Y
80.0	-25.8	-16.7	-32.1	-21.6	-14.4	-26.5	80	-10.0	-24.0	-24.0	-42.1	-33.0	-48.4	-37.9	-30.8	-42.8	Y
85.0	-33.9	-21.8	-25.9	-19.2	-17.7	-27.9	85	-10.0	-24.0	-24.0	-50.2	-38.1	-42.3	-35.5	-34.0	-44.3	Y
90.0	-28.7	-20.6	-31.3	-22.3	-20.8	-60.3	90	0.0	-14.0	-14.0	-45.1	-36.9	-47.7	-38.6	-37.1	-76.7	Y
95.0	-24.5	-18.8	-34.6	-34.7	-20.1	-33.8	95	0.0	-14.0	-14.0	-40.8	-35.1	-50.9	-51.0	-36.5	-50.2	Y
100.0	-20.1	-24.8	-26.9	-30.0	-22.8	-34.0	100	0.0	-14.0	-14.0	-36.5	-41.1	-43.2	-46.4	-39.1	-50.3	Y
105.0	-25.5	-23.0	-38.4	-21.5	-23.7	-27.3	105	0.0	-14.0	-14.0	-41.9	-39.3	-54.7	-37.9	-40.0	-43.6	Y
110.0	-33.0	-38.1	-38.7	-29.2	-29.3	-31.0	110	0.0	-14.0	-14.0	-49.3	-54.4	-55.0	-45.6	-45.6	-47.4	Y
115.0	-34.8	-29.8	-44.1	-28.5	-32.5	-25.5	115	0.0	-14.0	-14.0	-51.1	-46.1	-60.4	-44.8	-48.9	-41.8	Y
120.0	-43.9	-26.9	-40.5	-28.6	-39.9	-25.3	120	0.0	-14.0	-14.0	-60.2	-43.2	-56.8	-44.9	-56.3	-41.6	Y
125.0	-39.2	-30.1	-38.4	-25.8	-38.5	-31.2	125	0.0	-14.0	-14.0	-55.5	-46.4	-54.8	-42.1	-54.8	-47.6	Y
130.0	-38.4	-37.0	-51.3	-34.1	-38.4	-31.3	130	0.0	-14.0	-14.0	-54.7	-53.4	-67.6	-50.4	-54.8	-47.6	Y
135.0	-41.6	-35.3	-40.9	-28.3	-36.4	-37.4	135	0.0	-14.0	-14.0	-57.9	-51.6	-57.2	-44.7	-52.7	-53.8	Y
140.0	-36.9	-39.9	-41.5	-41.8	-45.6	-34.3	140	0.0	-14.0	-14.0	-53.2	-56.2	-57.9	-58.2	-61.9	-50.6	Y
145.0	-43.8	-33.6	-42.5	-36.8	-35.4	-34.0	145	0.0	-14.0	-14.0	-60.2	-49.9	-58.8	-53.2	-51.7	-50.3	Y
150.0	-35.2	-24.1	-33.6	-26.1	-36.8	-25.9	150	0.0	-14.0	-14.0	-51.5	-40.5	-49.9	-42.5	-53.1	-42.2	Y
155.0	-35.7	-34.5	-41.6	-35.5	-47.2	-34.6	155	0.0	-14.0	-14.0	-52.0	-50.8	-57.9	-51.8	-63.5	-51.0	Y
160.0	-41.0	-32.5	-50.8	-50.4	-41.6	-35.6	160	0.0	-14.0	-14.0	-57.3	-48.9	-67.1	-66.7	-58.0	-51.9	Y
165.0	-46.8	-33.6	-42.4	-43.9	-47.6	-43.0	165	0.0	-14.0	-14.0	-63.1	-50.0	-58.8	-60.2	-64.0	-59.4	Y
170.0	-45.7	-46.6	-52.1	-47.2	-60.4	-65.7	170	0.0	-14.0	-14.0	-62.1	-62.9	-68.4	-63.5	-76.7	-82.0	Y
175.0	-46.1	-42.1	-44.0	-58.1	-45.8	-46.7	175	0.0	-14.0	-14.0	-62.4	-58.4	-60.4	-74.4	-62.1	-63.0	Y
180.0	-43.8	-51.1	-50.7	-48.6	-47.0	-53.4	180	0.0	-14.0	-14.0	-60.2	-67.4	-67.0	-64.9	-63.3	-69.7	Y

APPENDIX D: Antenna Gain and EIRP Tables

Co Pol Azimuth	Antenna Gain (dBi)									Off-Axis EIRP (dBW/4 kHz)							
Off-Axis Angle	14 GHz E	14 GHz H	14.25 GHz E	14.25 GHz H	14.5 GHz E	14.5 GHz H	Off-Axis Angle	FCC §25.209	FCC §25.209(a)(2) + §25.212 EIRP GSO Mask, Skew = 35 deg	FCC §25.209(a)(2)+ §25.212 EIRP GSO Mask, Skew = 35 deg	14 GHz E	14 GHz H	14.25 GHz E	14.25 GHz H	14.5 GHz E	14.5 GHz H	Meets Mask
-180	-47.0	-45.0	-48.7	-46.7	-66.5	-50.3	-180	0.0	-14.0	-14.0	-63.3	-61.4	-65.0	-63.1	-82.8	-66.6	Y
-175	-43.9	-50.4	-46.3	-52.0	-46.3	-52.0	-175	0.0	-14.0	-14.0	-60.2	-66.8	-62.6	-68.3	-62.7	-68.4	Y
-170	-57.6	-58.4	-51.0	-48.3	-48.0	-50.9	-170	0.0	-14.0	-14.0	-73.9	-74.7	-67.3	-64.6	-64.4	-67.3	Y
-165	-35.9	-43.0	-46.3	-48.4	-46.1	-49.0	-165	0.0	-14.0	-14.0	-52.3	-59.4	-62.6	-64.7	-62.5	-65.4	Y
-160	-34.2	-36.3	-38.2	-49.9	-50.8	-44.1	-160	0.0	-14.0	-14.0	-50.5	-52.7	-54.5	-66.3	-67.1	-60.5	Y
-155	-38.3	-50.3	-35.4	-59.8	-45.1	-45.6	-155	0.0	-14.0	-14.0	-54.6	-66.7	-51.8	-76.1	-61.5	-61.9	Y
-150	-39.1	-37.4	-40.9	-36.5	-33.3	-35.2	-150	0.0	-14.0	-14.0	-55.5	-53.8	-57.2	-52.8	-49.7	-51.5	Y
-145	-33.7	-39.7	-61.3	-41.3	-35.5	-36.1	-145	0.0	-14.0	-14.0	-50.1	-56.1	-77.6	-57.7	-51.9	-52.5	Y
-140	-33.9	-31.3	-31.7	-33.6	-36.2	-41.8	-140	0.0	-14.0	-14.0	-50.3	-47.6	-48.1	-49.9	-52.5	-58.2	Y
-135	-27.5	-28.2	-32.2	-35.8	-35.8	-50.2	-135	0.0	-14.0	-14.0	-43.8	-44.5	-48.6	-52.2	-52.1	-66.6	Y
-130	-32.9	-33.3	-32.1	-36.1	-33.8	-31.3	-130	0.0	-14.0	-14.0	-49.3	-49.7	-48.4	-52.5	-50.1	-47.6	Y
-125	-36.8	-27.3	-36.5	-31.6	-35.8	-36.7	-125	0.0	-14.0	-14.0	-53.2	-43.7	-52.9	-47.9	-52.1	-53.0	Y
-120	-26.8	-35.7	-30.4	-35.4	-30.9	-25.3	-120	0.0	-14.0	-14.0	-43.1	-52.0	-46.7	-51.7	-47.2	-41.7	Y
-115	-23.8	-26.5	-25.5	-21.3	-34.9	-35.2	-115	0.0	-14.0	-14.0	-40.1	-42.8	-41.8	-37.7	-51.3	-51.5	Y
-110	-24.4	-23.9	-24.7	-30.1	-37.2	-29.0	-110	0.0	-14.0	-14.0	-40.7	-40.2	-41.1	-46.5	-53.6	-45.3	Y
-105	-17.9	-27.3	-46.1	-20.8	-23.6	-27.5	-105	0.0	-14.0	-14.0	-34.2	-43.7	-62.4	-37.1	-39.9	-43.9	Y
-100	-20.0	-23.2	-19.3	-19.9	-25.6	-20.6	-100	0.0	-14.0	-14.0	-36.3	-39.5	-35.6	-36.2	-42.0	-36.9	Y
-95	-16.3	-22.0	-21.5	-15.4	-20.6	-23.3	-95	0.0	-14.0	-14.0	-32.7	-38.3	-37.8	-31.7	-36.9	-39.6	Y
-90	-19.9	-18.3	-20.5	-16.4	-21.4	-37.1	-90	0.0	-14.0	-14.0	-36.2	-34.6	-36.8	-32.7	-37.7	-53.4	Y
-85	-18.1	-16.9	-22.7	-12.7	-23.5	-26.7	-85	-10.0	-24.0	-24.0	-34.4	-33.2	-39.0	-29.0	-39.8	-43.0	Y
-80	-17.9	-20.3	-20.3	-20.5	-21.8	-20.5	-80	-10.0	-24.0	-24.0	-34.3	-36.6	-36.6	-36.9	-38.2	-36.8	Y
-75	-20.2	-15.9	-19.7	-15.2	-21.2	-16.2	-75	-10.0	-24.0	-24.0	-36.5	-32.3	-36.0	-31.6	-37.6	-32.5	Y
-70	-22.4	-25.0	-30.0	-21.4	-19.5	-14.4	-70	-10.0	-24.0	-24.0	-38.7	-41.4	-46.3	-37.8	-35.9	-30.7	Y
-65	-24.9	-25.7	-23.7	-28.9	-21.6	-14.4	-65	-10.0	-24.0	-24.0	-41.3	-42.0	-40.0	-45.3	-38.0	-30.7	Y
-60	-38.7	-28.5	-25.6	-22.9	-25.6	-18.0	-60	-10.0	-24.0	-24.0	-55.0	-44.8	-42.0	-39.3	-41.9	-34.3	Y
-55	-19.6	-24.6	-19.0	-19.2	-23.2	-19.2	-55	-10.0	-24.0	-24.0	-36.0	-40.9	-35.3	-35.5	-39.5	-35.6	Y
-50	-13.0	-26.0	-15.9	-23.2	-16.5	-20.6	-50	-10.0	-24.0	-24.0	-29.4	-42.3	-32.2	-39.5	-32.8	-36.9	Y

APPENDIX D: Antenna Gain and EIRP Tables

-48	-17.1	-21.6	-22.0	-23.9	-20.5	-24.3	-48	-10.0	-24.0	-24.0	-33.5	-38.0	-38.3	-40.3	-36.9	-40.7	Y
-45	-19.2	-24.7	-22.3	-25.5	-15.8	-23.9	-45	-9.3	-23.3	-23.3	-35.5	-41.0	-38.6	-41.9	-32.2	-40.2	Y
-40	-27.5	-28.4	-19.1	-25.9	-22.7	-18.7	-40	-8.1	-22.1	-22.1	-43.9	-44.8	-35.4	-42.3	-39.1	-35.0	Y
-35	-21.6	-15.9	-29.8	-20.6	-23.3	-14.3	-35	-6.6	-20.6	-20.6	-37.9	-32.2	-46.2	-36.9	-39.6	-30.6	Y
-30	-27.3	-15.2	-21.8	-20.9	-20.4	-23.7	-30	-4.9	-18.9	-18.9	-43.6	-31.6	-38.2	-37.2	-36.8	-40.0	Y
-25	-17.6	-14.8	-15.2	-28.2	-13.4	-25.7	-25	-2.9	-16.9	-16.9	-34.0	-31.2	-31.5	-44.6	-29.7	-42.0	Y
-20	-14.2	-15.9	-21.9	-20.5	-11.6	-20.1	-20	-0.5	-14.5	-14.5	-30.5	-32.3	-38.2	-36.8	-27.9	-36.4	Y
-15	-8.3	-28.9	-9.2	-18.1	-8.1	-15.8	-15	2.6	-11.4	-11.4	-24.7	-45.2	-25.6	-34.5	-24.5	-32.1	Y
-10	-13.1	-12.4	-13.2	-14.6	-9.3	-14.7	-10	7.0	-7.0	-7.0	-29.5	-28.8	-29.6	-31.0	-25.6	-31.0	Y
-9.9	-13.5	-11.0	-13.1	-13.7	-9.5	-12.9	-9.9	7.1	-6.9	-6.9	-29.8	-27.3	-29.4	-30.0	-25.8	-29.2	Y
-9.8	-14.0	-9.5	-13.0	-12.6	-9.7	-11.3	-9.8	7.2	-6.8	-6.8	-30.3	-25.9	-29.3	-28.9	-26.0	-27.6	Y
-9.7	-14.6	-8.1	-12.8	-11.5	-9.9	-9.9	-9.7	7.3	-6.7	-6.7	-30.9	-24.5	-29.1	-27.8	-26.2	-26.2	Y
-9.6	-15.4	-6.9	-12.7	-10.4	-10.1	-8.7	-9.6	7.4	-6.6	-6.6	-31.7	-23.2	-29.0	-26.7	-26.5	-25.0	Y
-9.5	-16.2	-5.8	-12.6	-9.3	-10.4	-7.6	-9.5	7.6	-6.4	-6.4	-32.6	-22.1	-29.0	-25.7	-26.8	-23.9	Y
-9.4	-17.2	-4.8	-12.6	-8.4	-10.8	-6.7	-9.4	7.7	-6.3	-6.3	-33.5	-21.1	-28.9	-24.7	-27.1	-23.0	Y
-9.3	-18.0	-4.0	-12.6	-7.5	-11.2	-5.9	-9.3	7.8	-6.2	-6.2	-34.4	-20.3	-28.9	-23.8	-27.6	-22.2	Y
-9.2	-18.6	-3.3	-12.5	-6.7	-11.8	-5.2	-9.2	8.0	-6.0	-6.1	-34.9	-19.6	-28.9	-23.1	-28.1	-21.5	Y
-9.1	-18.5	-2.7	-12.5	-6.1	-12.4	-4.6	-9.1	8.0	-6.0	-6.0	-34.8	-19.0	-28.8	-22.4	-28.7	-20.9	Y
-9	-17.8	-2.2	-12.4	-5.5	-13.1	-4.1	-9	8.0	-6.0	-5.9	-34.2	-18.6	-28.8	-21.9	-29.4	-20.4	Y
-8.9	-16.8	-1.9	-12.3	-5.1	-13.8	-3.7	-8.9	8.0	-6.0	-5.7	-33.1	-18.2	-28.6	-21.4	-30.2	-20.1	Y
-8.8	-15.6	-1.7	-12.1	-4.8	-14.6	-3.5	-8.8	8.0	-6.0	-5.6	-32.0	-18.0	-28.4	-21.1	-31.0	-19.8	Y
-8.7	-14.6	-1.6	-11.8	-4.6	-15.4	-3.3	-8.7	8.0	-6.0	-5.5	-30.9	-17.9	-28.1	-20.9	-31.8	-19.7	Y
-8.6	-13.7	-1.6	-11.5	-4.5	-16.1	-3.3	-8.6	8.0	-6.0	-5.4	-30.0	-18.0	-27.8	-20.8	-32.5	-19.6	Y
-8.5	-13.0	-1.8	-11.1	-4.6	-16.6	-3.4	-8.5	8.0	-6.0	-5.2	-29.3	-18.2	-27.5	-20.9	-33.0	-19.7	Y
-8.4	-12.5	-2.2	-10.8	-4.7	-16.9	-3.6	-8.4	8.0	-6.0	-5.1	-28.8	-18.5	-27.1	-21.1	-33.2	-20.0	Y
-8.3	-12.2	-2.7	-10.4	-5.1	-16.8	-4.0	-8.3	8.0	-6.0	-5.0	-28.6	-19.0	-26.8	-21.4	-33.1	-20.3	Y
-8.2	-12.2	-3.4	-10.1	-5.6	-16.5	-4.6	-8.2	8.0	-6.0	-4.8	-28.5	-19.8	-26.4	-21.9	-32.8	-20.9	Y
-8.1	-12.3	-4.4	-9.8	-6.3	-16.0	-5.4	-8.1	8.0	-6.0	-4.7	-28.7	-20.8	-26.1	-22.7	-32.3	-21.8	Y
-8	-12.7	-5.8	-9.5	-7.3	-15.4	-6.5	-8	8.0	-6.0	-4.6	-29.1	-22.1	-25.8	-23.6	-31.7	-22.9	Y
-7.9	-13.3	-7.7	-9.1	-8.5	-14.7	-8.1	-7.9	8.0	-6.0	-4.4	-29.6	-24.1	-25.5	-24.8	-31.0	-24.4	Y
-7.8	-14.0	-10.6	-8.8	-9.8	-13.9	-10.3	-7.8	8.0	-6.0	-4.3	-30.3	-26.9	-25.1	-26.2	-30.2	-26.6	Y
-7.7	-14.4	-15.3	-8.4	-11.1	-12.9	-13.6	-7.7	8.0	-6.0	-4.2	-30.8	-31.7	-24.7	-27.5	-29.3	-29.9	Y
-7.6	-14.3	-27.5	-7.8	-11.7	-11.9	-19.8	-7.6	8.0	-6.0	-4.0	-30.6	-43.9	-24.2	-28.0	-28.3	-36.1	Y
-7.5	-13.2	-18.7	-7.2	-10.8	-10.8	-29.7	-7.5	8.0	-6.0	-3.9	-29.6	-35.1	-23.5	-27.2	-27.1	-46.0	Y
-7.4	-11.6	-11.5	-6.5	-9.0	-9.6	-16.8	-7.4	8.0	-6.0	-3.7	-27.9	-27.8	-22.8	-25.3	-26.0	-33.1	Y

APPENDIX D: Antenna Gain and EIRP Tables

-7.3	-9.7	-7.5	-5.6	-7.0	-8.4	-11.3	-7.3	8.0	-6.0	-3.6	-26.0	-23.8	-22.0	-23.3	-24.7	-27.6	Y
-7.2	-7.9	-4.7	-4.8	-5.1	-7.2	-7.9	-7.2	8.0	-6.0	-3.4	-24.2	-21.1	-21.1	-21.4	-23.5	-24.2	Y
-7.1	-6.2	-2.6	-3.9	-3.5	-6.0	-5.4	-7.1	8.0	-6.0	-3.3	-22.5	-19.0	-20.2	-19.8	-22.3	-21.7	Y
-7	-4.7	-1.0	-3.0	-2.1	-4.9	-3.5	-7	8.0	-6.0	-3.1	-21.1	-17.3	-19.3	-18.4	-21.2	-19.8	Y
-6.9	-3.4	0.4	-2.2	-0.9	-3.9	-1.9	-6.9	8.0	-6.0	-3.0	-19.8	-16.0	-18.5	-17.2	-20.2	-18.3	Y
-6.8	-2.3	1.5	-1.4	0.2	-2.9	-0.7	-6.8	8.2	-5.8	-2.8	-18.7	-14.9	-17.7	-16.2	-19.3	-17.0	Y
-6.7	-1.4	2.4	-0.7	1.0	-2.1	0.3	-6.7	8.3	-5.7	-2.7	-17.7	-14.0	-17.0	-15.3	-18.4	-16.0	Y
-6.6	-0.6	3.1	0.0	1.7	-1.3	1.2	-6.6	8.5	-5.5	-2.5	-16.9	-13.2	-16.4	-14.6	-17.7	-15.2	Y
-6.5	0.1	3.7	0.5	2.3	-0.7	1.8	-6.5	8.7	-5.3	-2.3	-16.2	-12.7	-15.8	-14.1	-17.0	-14.5	Y
-6.4	0.6	4.1	1.0	2.7	-0.2	2.3	-6.4	8.8	-5.2	-2.2	-15.7	-12.2	-15.4	-13.7	-16.5	-14.0	Y
-6.3	1.0	4.4	1.3	3.0	0.3	2.6	-6.3	9.0	-5.0	-2.0	-15.3	-12.0	-15.0	-13.4	-16.1	-13.7	Y
-6.2	1.2	4.5	1.6	3.1	0.6	2.8	-6.2	9.2	-4.8	-1.8	-15.1	-11.8	-14.8	-13.2	-15.8	-13.5	Y
-6.1	1.3	4.5	1.7	3.1	0.7	2.9	-6.1	9.4	-4.6	-1.6	-15.0	-11.8	-14.7	-13.2	-15.6	-13.5	Y
-6	1.2	4.4	1.7	3.0	0.7	2.7	-6	9.5	-4.5	-1.5	-15.1	-12.0	-14.7	-13.4	-15.6	-13.6	Y
-5.9	1.0	4.1	1.5	2.6	0.6	2.4	-5.9	9.7	-4.3	-1.3	-15.4	-12.3	-14.8	-13.7	-15.7	-13.9	Y
-5.8	0.5	3.5	1.2	2.1	0.3	1.9	-5.8	9.9	-4.1	-1.1	-15.9	-12.8	-15.2	-14.2	-16.1	-14.4	Y
-5.7	-0.3	2.8	0.7	1.4	-0.2	1.1	-5.7	10.1	-3.9	-0.9	-16.6	-13.5	-15.7	-14.9	-16.6	-15.2	Y
-5.6	-1.4	1.8	-0.1	0.4	-1.0	0.0	-5.6	10.3	-3.7	-0.7	-17.7	-14.5	-16.4	-15.9	-17.4	-16.4	Y
-5.5	-2.9	0.4	-1.1	-0.9	-2.1	-1.6	-5.5	10.5	-3.5	-0.5	-19.3	-15.9	-17.4	-17.2	-18.5	-17.9	Y
-5.4	-5.3	-1.4	-2.5	-2.6	-3.6	-3.9	-5.4	10.7	-3.3	-0.3	-21.6	-17.8	-18.8	-18.9	-20.0	-20.2	Y
-5.3	-9.2	-4.0	-4.3	-4.4	-5.6	-7.1	-5.3	10.9	-3.1	-0.1	-25.5	-20.3	-20.6	-20.8	-21.9	-23.5	Y
-5.2	-18.1	-7.0	-6.6	-5.7	-7.6	-10.9	-5.2	11.1	-2.9	0.1	-34.4	-23.3	-22.9	-22.1	-24.0	-27.3	Y
-5.1	-18.3	-8.0	-8.6	-5.0	-8.3	-9.4	-5.1	11.3	-2.7	0.3	-34.7	-24.3	-24.9	-21.4	-24.6	-25.7	Y
-5	-8.2	-5.0	-8.0	-2.7	-6.2	-4.7	-5	11.5	-2.5	0.5	-24.6	-21.3	-24.3	-19.0	-22.6	-21.0	Y
-4.9	-3.4	-1.4	-5.1	-0.1	-3.2	-1.0	-4.9	11.7	-2.3	0.7	-19.8	-17.8	-21.5	-16.5	-19.5	-17.4	Y
-4.8	-0.2	1.4	-2.2	2.1	-0.5	1.7	-4.8	12.0	-2.0	1.0	-16.6	-14.9	-18.5	-14.2	-16.8	-14.6	Y
-4.7	2.1	3.6	0.3	4.0	1.8	3.9	-4.7	12.2	-1.8	1.2	-14.2	-12.7	-16.0	-12.3	-14.6	-12.4	Y
-4.6	4.0	5.4	2.3	5.6	3.7	5.7	-4.6	12.4	-1.6	1.4	-12.3	-10.9	-14.0	-10.7	-12.7	-10.7	Y
-4.5	5.6	6.9	4.0	7.0	5.3	7.2	-4.5	12.7	-1.3	1.7	-10.7	-9.4	-12.3	-9.3	-11.1	-9.2	Y
-4.4	6.9	8.2	5.4	8.2	6.6	8.4	-4.4	12.9	-1.1	1.9	-9.4	-8.2	-10.9	-8.2	-9.7	-7.9	Y
-4.3	8.0	9.2	6.6	9.1	7.8	9.4	-4.3	13.2	-0.8	2.2	-8.4	-7.1	-9.7	-7.2	-8.6	-6.9	Y
-4.2	8.9	10.1	7.6	9.9	8.8	10.3	-4.2	13.4	-0.6	2.4	-7.5	-6.3	-8.8	-6.4	-7.6	-6.0	Y
-4.1	9.6	10.8	8.4	10.6	9.6	11.1	-4.1	13.7	-0.3	2.7	-6.7	-5.6	-8.0	-5.7	-6.8	-5.3	Y
-4	10.2	11.3	9.0	11.2	10.3	11.6	-4	13.9	-0.1	2.9	-6.1	-5.0	-7.3	-5.2	-6.1	-4.7	Y
-3.9	10.7	11.8	9.5	11.6	10.8	12.1	-3.9	14.2	0.2	3.2	-5.7	-4.6	-6.8	-4.8	-5.5	-4.2	Y

APPENDIX D: Antenna Gain and EIRP Tables

-3.8	11.0	12.0	9.9	11.9	11.2	12.5	-3.8	14.5	0.5	3.5	-5.4	-4.3	-6.5	-4.5	-5.1	-3.9	Y
-3.7	11.2	12.2	10.1	12.0	11.5	12.7	-3.7	14.8	0.8	3.8	-5.2	-4.1	-6.3	-4.3	-4.9	-3.7	Y
-3.6	11.2	12.2	10.1	12.0	11.6	12.8	-3.6	15.1	1.1	4.1	-5.1	-4.1	-6.2	-4.3	-4.7	-3.6	Y
-3.5	11.1	12.1	10.0	11.9	11.6	12.7	-3.5	15.4	1.4	4.4	-5.3	-4.3	-6.4	-4.5	-4.7	-3.6	Y
-3.4	10.8	11.8	9.6	11.6	11.4	12.5	-3.4	15.7	1.7	4.7	-5.6	-4.6	-6.7	-4.8	-4.9	-3.8	Y
-3.3	10.3	11.3	9.1	11.1	11.1	12.1	-3.3	16.0	2.0	5.0	-6.1	-5.1	-7.3	-5.3	-5.2	-4.2	Y
-3.2	9.5	10.5	8.2	10.3	10.5	11.5	-3.2	16.4	2.4	5.4	-6.8	-5.8	-8.1	-6.0	-5.8	-4.8	Y
-3.1	8.4	9.5	7.0	9.2	9.7	10.7	-3.1	16.7	2.7	5.7	-7.9	-6.9	-9.4	-7.1	-6.7	-5.7	Y
-3	6.9	8.0	5.1	7.7	8.4	9.4	-3	17.1	3.1	6.1	-9.4	-8.3	-11.3	-8.6	-7.9	-6.9	Y
-2.9	4.9	5.9	2.2	5.5	6.6	7.7	-2.9	17.4	3.4		-11.5	-10.4	-14.2	-10.8	-9.7	-8.7	Y
-2.8	2.2	3.0	-3.0	2.1	3.8	5.0	-2.8	17.8	3.8		-14.2	-13.3	-19.3	-14.2	-12.6	-11.3	Y
-2.7	0.2	-0.3	-8.6	-3.4	-1.3	0.5	-2.7	18.2	4.2		-16.2	-16.6	-24.9	-19.7	-17.7	-15.8	Y
-2.6	2.1	0.5	-0.3	-3.1	-18.3	-10.6	-2.6	18.6	4.6		-14.2	-15.8	-16.7	-19.4	-34.6	-26.9	Y
-2.5	5.9	4.8	5.2	3.3	-1.8	-2.8	-2.5	19.1	5.1		-10.5	-11.5	-11.2	-13.0	-18.2	-19.2	Y
-2.4	9.1	8.5	8.8	7.7	5.0	4.6	-2.4	19.5	5.5		-7.2	-7.8	-7.5	-8.6	-11.4	-11.7	Y
-2.3	11.8	11.4	11.6	10.9	9.0	8.9	-2.3	20.0	6.0		-4.6	-5.0	-4.7	-5.5	-7.3	-7.4	Y
-2.2	14.0	13.7	13.8	13.3	11.9	11.9	-2.2	20.4	6.4		-2.4	-2.6	-2.5	-3.0	-4.4	-4.4	Y
-2.1	15.8	15.7	15.7	15.3	14.3	14.3	-2.1	20.9	6.9		-0.5	-0.7	-0.6	-1.0	-2.1	-2.1	Y
-2	17.4	17.3	17.3	17.1	16.2	16.2	-2	21.5	7.5		1.1	1.0	1.0	0.7	-0.2	-0.1	Y
-1.9	18.8	18.7	18.7	18.5	17.8	17.8	-1.9	22.0	8.0		2.5	2.4	2.4	2.2	1.5	1.5	Y
-1.8	20.1	20.0	20.0	19.8	19.2	19.3	-1.8	22.6	8.6		3.7	3.7	3.7	3.5	2.9	2.9	Y
-1.7	21.2	21.1	21.1	21.0	20.5	20.5	-1.7	23.2	9.2		4.8	4.8	4.8	4.7	4.1	4.2	Y
-1.6	22.2	22.2	22.1	22.0	21.6	21.6	-1.6	23.9	9.9		5.8	5.8	5.8	5.7	5.2	5.3	Y
-1.5	23.1	23.1	23.0	22.9	22.6	22.6	-1.5	24.6	10.6		6.7	6.7	6.7	6.6	6.2	6.3	Y
-1.4	23.9	23.9	23.8	23.8	23.5	23.5	-1.4				7.5	7.5	7.5	7.4	7.1	7.2	Y
-1.3	24.6	24.6	24.6	24.5	24.3	24.3	-1.3				8.3	8.3	8.2	8.2	7.9	7.9	Y
-1.2	25.3	25.3	25.2	25.2	25.0	25.0	-1.2				8.9	8.9	8.9	8.9	8.6	8.7	Y
-1.1	25.9	25.9	25.8	25.8	25.6	25.6	-1.1				9.5	9.5	9.5	9.5	9.3	9.3	Y
-1	26.4	26.4	26.4	26.4	26.2	26.2	-1				10.1	10.1	10.0	10.0	9.9	9.9	Y
-0.9	26.9	26.9	26.9	26.8	26.7	26.7	-0.9				10.6	10.5	10.5	10.5	10.4	10.4	Y
-0.8	27.3	27.3	27.3	27.3	27.2	27.2	-0.8				11.0	11.0	11.0	10.9	10.8	10.8	Y
-0.7	27.7	27.7	27.7	27.7	27.6	27.6	-0.7				11.4	11.3	11.3	11.3	11.2	11.2	Y
-0.6	28.0	28.0	28.0	28.0	27.9	27.9	-0.6				11.7	11.7	11.7	11.6	11.6	11.6	Y
-0.5	28.3	28.3	28.3	28.3	28.2	28.2	-0.5				12.0	11.9	11.9	11.9	11.9	11.9	Y
-0.4	28.5	28.5	28.5	28.5	28.5	28.5	-0.4				12.2	12.2	12.2	12.2	12.1	12.1	Y

APPENDIX D: Antenna Gain and EIRP Tables

-0.3	28.7	28.7	28.7	28.7	28.7	28.7	-0.3				12.4	12.4	12.4	12.4	12.3	12.3	Y
-0.2	28.8	28.8	28.8	28.8	28.8	28.8	-0.2				12.5	12.5	12.5	12.5	12.5	12.5	Y
-0.1	28.9	28.9	28.9	28.9	28.9	28.9	-0.1				12.6	12.6	12.6	12.6	12.6	12.6	Y
0	29.0	29.0	29.0	29.0	29.0	29.0	0				12.7	12.7	12.7	12.7	12.7	12.6	Y
0.1	29.0	29.0	29.0	29.0	29.0	29.0	0.1				12.7	12.7	12.7	12.7	12.7	12.7	Y
0.2	29.0	29.0	29.0	29.0	29.0	29.0	0.2				12.6	12.6	12.6	12.6	12.6	12.6	Y
0.3	28.9	28.9	28.9	28.9	28.9	28.9	0.3				12.6	12.6	12.6	12.6	12.6	12.6	Y
0.4	28.8	28.8	28.8	28.8	28.8	28.8	0.4				12.4	12.4	12.4	12.4	12.4	12.4	Y
0.5	28.6	28.6	28.6	28.6	28.6	28.6	0.5				12.3	12.3	12.3	12.3	12.3	12.3	Y
0.6	28.4	28.4	28.4	28.4	28.4	28.4	0.6				12.0	12.1	12.0	12.1	12.0	12.1	Y
0.7	28.1	28.2	28.1	28.1	28.1	28.1	0.7				11.8	11.8	11.8	11.8	11.8	11.8	Y
0.8	27.8	27.8	27.8	27.8	27.8	27.8	0.8				11.5	11.5	11.5	11.5	11.4	11.5	Y
0.9	27.4	27.5	27.4	27.5	27.4	27.4	0.9				11.1	11.2	11.1	11.1	11.0	11.1	Y
1	27.0	27.1	27.0	27.1	26.9	27.0	1				10.7	10.8	10.7	10.7	10.6	10.7	Y
1.1	26.6	26.6	26.5	26.6	26.4	26.5	1.1				10.2	10.3	10.2	10.3	10.1	10.2	Y
1.2	26.0	26.1	26.0	26.1	25.9	26.0	1.2				9.7	9.8	9.7	9.7	9.5	9.6	Y
1.3	25.4	25.5	25.4	25.5	25.2	25.4	1.3				9.1	9.2	9.1	9.1	8.9	9.0	Y
1.4	24.7	24.9	24.7	24.8	24.5	24.7	1.4				8.4	8.5	8.4	8.5	8.2	8.3	Y
1.5	24.0	24.1	24.0	24.0	23.7	23.9	1.5	24.6	10.6		7.7	7.8	7.6	7.7	7.4	7.5	Y
1.6	23.2	23.3	23.1	23.2	22.8	23.0	1.6	23.9	9.9		6.8	7.0	6.8	6.9	6.4	6.6	Y
1.7	22.2	22.4	22.2	22.3	21.8	22.0	1.7	23.2	9.2		5.9	6.0	5.8	5.9	5.4	5.6	Y
1.8	21.2	21.3	21.1	21.2	20.6	20.8	1.8	22.6	8.6		4.8	5.0	4.8	4.9	4.3	4.5	Y
1.9	20.0	20.2	19.9	20.0	19.3	19.6	1.9	22.0	8.0		3.6	3.8	3.6	3.7	2.9	3.2	Y
2	18.6	18.8	18.5	18.7	17.7	18.1	2	21.5	7.5		2.3	2.5	2.2	2.3	1.4	1.7	Y
2.1	17.1	17.3	17.0	17.1	15.9	16.3	2.1	20.9	6.9		0.7	1.0	0.6	0.8	-0.4	0.0	Y
2.2	15.2	15.6	15.1	15.3	13.7	14.2	2.2	20.4	6.4		-1.1	-0.8	-1.2	-1.1	-2.6	-2.2	Y
2.3	13.0	13.5	12.9	13.0	10.9	11.5	2.3	20.0	6.0		-3.3	-2.9	-3.5	-3.3	-5.4	-4.9	Y
2.4	10.3	10.9	10.1	10.2	7.1	7.8	2.4	19.5	5.5		-6.0	-5.4	-6.3	-6.1	-9.2	-8.5	Y
2.5	6.9	7.9	6.3	6.5	0.8	2.2	2.5	19.1	5.1		-9.5	-8.5	-10.1	-9.9	-15.5	-14.1	Y
2.6	2.6	4.5	0.6	1.0	-12.7	-7.0	2.6	18.6	4.6		-13.8	-11.9	-15.8	-15.3	-29.0	-23.3	Y
2.7	0.4	3.0	-4.8	-3.1	0.4	0.2	2.7	18.2	4.2		-15.9	-13.3	-21.1	-19.5	-16.0	-16.2	Y
2.8	3.4	4.9	1.1	2.0	5.7	5.4	2.8	17.8	3.8		-12.9	-11.4	-15.3	-14.4	-10.6	-11.0	Y
2.9	6.6	7.5	5.4	6.0	8.7	8.4	2.9	17.4	3.4		-9.7	-8.8	-10.9	-10.3	-7.7	-7.9	Y
3	8.9	9.6	8.1	8.6	10.6	10.4	3	17.1	3.1	6.1	-7.4	-6.8	-8.3	-7.7	-5.7	-5.9	Y
3.1	10.6	11.1	9.9	10.4	12.0	11.8	3.1	16.7	2.7	5.7	-5.8	-5.2	-6.5	-6.0	-4.3	-4.5	Y

APPENDIX D: Antenna Gain and EIRP Tables

3.2	11.7	12.2	11.1	11.6	13.0	12.8	3.2	16.4	2.4	5.4	-4.6	-4.1	-5.2	-4.7	-3.3	-3.5	Y
3.3	12.6	13.1	12.0	12.5	13.7	13.6	3.3	16.0	2.0	5.0	-3.8	-3.2	-4.3	-3.8	-2.6	-2.8	Y
3.4	13.2	13.7	12.6	13.1	14.2	14.1	3.4	15.7	1.7	4.7	-3.2	-2.6	-3.7	-3.2	-2.2	-2.2	Y
3.5	13.6	14.1	13.0	13.6	14.4	14.4	3.5	15.4	1.4	4.4	-2.8	-2.2	-3.3	-2.8	-1.9	-1.9	Y
3.6	13.8	14.3	13.3	13.8	14.6	14.6	3.6	15.1	1.1	4.1	-2.6	-2.0	-3.1	-2.6	-1.8	-1.7	Y
3.7	13.8	14.4	13.3	13.9	14.6	14.6	3.7	14.8	0.8	3.8	-2.5	-1.9	-3.0	-2.5	-1.8	-1.7	Y
3.8	13.8	14.3	13.2	13.8	14.4	14.5	3.8	14.5	0.5	3.5	-2.6	-2.0	-3.1	-2.5	-1.9	-1.8	Y
3.9	13.6	14.2	13.0	13.6	14.2	14.3	3.9	14.2	0.2	3.2	-2.8	-2.2	-3.3	-2.8	-2.2	-2.0	Y
4	13.2	13.8	12.7	13.2	13.8	13.9	4	13.9	-0.1	2.9	-3.1	-2.5	-3.7	-3.1	-2.6	-2.4	Y
4.1	12.7	13.4	12.2	12.8	13.3	13.5	4.1	13.7	-0.3	2.7	-3.6	-2.9	-4.2	-3.6	-3.1	-2.9	Y
4.2	12.1	12.8	11.6	12.2	12.6	12.9	4.2	13.4	-0.6	2.4	-4.2	-3.5	-4.8	-4.2	-3.7	-3.5	Y
4.3	11.4	12.1	10.8	11.4	11.9	12.1	4.3	13.2	-0.8	2.2	-5.0	-4.3	-5.5	-4.9	-4.5	-4.2	Y
4.4	10.5	11.2	9.9	10.5	10.9	11.2	4.4	12.9	-1.1	1.9	-5.9	-5.1	-6.5	-5.9	-5.4	-5.1	Y
4.5	9.4	10.1	8.8	9.3	9.8	10.1	4.5	12.7	-1.3	1.7	-7.0	-6.2	-7.6	-7.0	-6.5	-6.2	Y
4.6	8.1	8.8	7.5	8.0	8.5	8.8	4.6	12.4	-1.6	1.4	-8.3	-7.5	-8.9	-8.3	-7.8	-7.5	Y
4.7	6.5	7.2	6.0	6.4	7.0	7.3	4.7	12.2	-1.8	1.2	-9.8	-9.1	-10.4	-9.9	-9.3	-9.0	Y
4.8	4.6	5.3	4.2	4.5	5.2	5.4	4.8	12.0	-2.0	1.0	-11.7	-11.1	-12.2	-11.9	-11.2	-10.9	Y
4.9	2.3	2.8	2.1	2.1	2.9	3.0	4.9	11.7	-2.3	0.7	-14.1	-13.5	-14.3	-14.2	-13.4	-13.3	Y
5	-0.6	-0.4	-0.3	-0.6	0.0	0.0	5	11.5	-2.5	0.5	-16.9	-16.7	-16.6	-17.0	-16.3	-16.4	Y
5.1	-3.8	-4.2	-2.4	-3.1	-3.6	-3.9	5.1	11.3	-2.7	0.3	-20.1	-20.5	-18.7	-19.4	-19.9	-20.3	Y
5.2	-5.4	-5.9	-3.2	-3.4	-7.4	-7.0	5.2	11.1	-2.9	0.1	-21.7	-22.2	-19.6	-19.7	-23.8	-23.4	Y
5.3	-3.7	-3.1	-2.3	-1.5	-7.4	-4.4	5.3	10.9	-3.1	-0.1	-20.0	-19.4	-18.6	-17.8	-23.8	-20.7	Y
5.4	-1.1	0.0	-0.7	0.7	-4.3	-1.0	5.4	10.7	-3.3	-0.3	-17.5	-16.3	-17.0	-15.6	-20.6	-17.3	Y
5.5	1.0	2.4	0.9	2.5	-1.6	1.6	5.5	10.5	-3.5	-0.5	-15.3	-14.0	-15.5	-13.8	-17.9	-14.8	Y
5.6	2.6	4.1	2.1	3.9	0.3	3.4	5.6	10.3	-3.7	-0.7	-13.7	-12.2	-14.2	-12.4	-16.0	-12.9	Y
5.7	3.8	5.4	3.1	5.0	1.7	4.8	5.7	10.1	-3.9	-0.9	-12.5	-10.9	-13.2	-11.3	-14.6	-11.6	Y
5.8	4.7	6.4	3.8	5.8	2.7	5.8	5.8	9.9	-4.1	-1.1	-11.7	-10.0	-12.5	-10.5	-13.7	-10.6	Y
5.9	5.3	7.1	4.3	6.4	3.3	6.5	5.9	9.7	-4.3	-1.3	-11.0	-9.3	-12.0	-10.0	-13.0	-9.9	Y
6	5.7	7.6	4.6	6.7	3.7	7.0	6	9.5	-4.5	-1.5	-10.6	-8.8	-11.7	-9.6	-12.6	-9.4	Y
6.1	6.0	7.9	4.7	6.9	4.0	7.3	6.1	9.4	-4.6	-1.6	-10.3	-8.4	-11.6	-9.4	-12.4	-9.1	Y
6.2	6.1	8.1	4.7	7.0	4.0	7.4	6.2	9.2	-4.8	-1.8	-10.3	-8.3	-11.7	-9.3	-12.4	-8.9	Y
6.3	6.0	8.1	4.5	6.9	3.8	7.4	6.3	9.0	-5.0	-2.0	-10.3	-8.2	-11.8	-9.4	-12.5	-8.9	Y
6.4	5.8	8.0	4.2	6.7	3.5	7.3	6.4	8.8	-5.2	-2.2	-10.5	-8.4	-12.2	-9.6	-12.8	-9.1	Y
6.5	5.5	7.7	3.7	6.3	3.1	7.0	6.5	8.7	-5.3	-2.3	-10.8	-8.6	-12.7	-10.0	-13.2	-9.3	Y
6.6	5.1	7.4	3.0	5.8	2.5	6.6	6.6	8.5	-5.5	-2.5	-11.3	-9.0	-13.3	-10.5	-13.8	-9.8	Y

APPENDIX D: Antenna Gain and EIRP Tables

6.7	4.5	6.9	2.2	5.1	1.8	6.0	6.7	8.3	-5.7	-2.7	-11.9	-9.5	-14.1	-11.2	-14.6	-10.3	Y
6.8	3.7	6.2	1.3	4.3	0.9	5.3	6.8	8.2	-5.8	-2.8	-12.6	-10.1	-15.1	-12.0	-15.5	-11.0	Y
6.9	2.8	5.4	0.1	3.3	-0.2	4.4	6.9	8.0	-6.0	-3.0	-13.5	-10.9	-16.2	-13.0	-16.5	-11.9	Y
7	1.8	4.4	-1.3	2.1	-1.4	3.4	7	7.9	-6.1	-3.1	-14.6	-11.9	-17.7	-14.3	-17.7	-13.0	Y
7.1	0.5	3.2	-3.0	0.6	-2.7	2.1	7.1	8.0	-6.0	-3.3	-15.8	-13.1	-19.3	-15.8	-19.1	-14.3	Y
7.2	-1.0	1.8	-5.0	-1.2	-4.1	0.5	7.2	8.0	-6.0	-3.4	-17.4	-14.6	-21.4	-17.6	-20.4	-15.8	Y
7.3	-2.8	-0.1	-7.4	-3.5	-5.4	-1.3	7.3	8.0	-6.0	-3.6	-19.2	-16.4	-23.8	-19.8	-21.7	-17.7	Y
7.4	-5.1	-2.4	-9.9	-6.2	-6.4	-3.6	7.4	8.0	-6.0	-3.7	-21.4	-18.7	-26.3	-22.5	-22.7	-20.0	Y
7.5	-7.7	-5.5	-11.6	-9.1	-6.7	-6.4	7.5	8.0	-6.0	-3.9	-24.1	-21.8	-27.9	-25.4	-23.1	-22.7	Y
7.6	-10.8	-10.1	-11.2	-10.2	-6.5	-9.1	7.6	8.0	-6.0	-4.0	-27.2	-26.4	-27.5	-26.5	-22.8	-25.4	Y
7.7	-13.2	-16.8	-9.4	-8.5	-5.9	-10.0	7.7	8.0	-6.0	-4.2	-29.5	-33.1	-25.8	-24.8	-22.2	-26.4	Y
7.8	-12.7	-14.2	-7.7	-6.0	-5.2	-8.3	7.8	8.0	-6.0	-4.3	-29.0	-30.5	-24.0	-22.4	-21.5	-24.7	Y
7.9	-10.5	-8.8	-6.2	-4.0	-4.5	-6.0	7.9	8.0	-6.0	-4.4	-26.8	-25.1	-22.5	-20.3	-20.8	-22.4	Y
8	-8.4	-5.4	-5.1	-2.4	-3.9	-4.1	8	8.0	-6.0	-4.6	-24.7	-21.7	-21.4	-18.7	-20.3	-20.4	Y
8.1	-6.8	-3.2	-4.3	-1.2	-3.6	-2.6	8.1	8.0	-6.0	-4.7	-23.1	-19.5	-20.6	-17.5	-19.9	-18.9	Y
8.2	-5.6	-1.6	-3.8	-0.3	-3.3	-1.5	8.2	8.0	-6.0	-4.8	-21.9	-17.9	-20.1	-16.6	-19.6	-17.8	Y
8.3	-4.8	-0.4	-3.4	0.4	-3.2	-0.6	8.3	8.0	-6.0	-5.0	-21.1	-16.8	-19.8	-15.9	-19.6	-17.0	Y
8.4	-4.2	0.4	-3.3	0.9	-3.3	0.0	8.4	8.0	-6.0	-5.1	-20.6	-15.9	-19.6	-15.4	-19.6	-16.4	Y
8.5	-3.9	1.0	-3.3	1.2	-3.5	0.4	8.5	8.0	-6.0	-5.2	-20.3	-15.3	-19.6	-15.1	-19.8	-15.9	Y
8.6	-3.8	1.4	-3.5	1.4	-3.8	0.6	8.6	8.0	-6.0	-5.4	-20.2	-14.9	-19.8	-15.0	-20.2	-15.7	Y
8.7	-3.9	1.6	-3.8	1.4	-4.3	0.7	8.7	8.0	-6.0	-5.5	-20.2	-14.7	-20.2	-15.0	-20.7	-15.6	Y
8.8	-4.1	1.7	-4.3	1.3	-5.0	0.7	8.8	8.0	-6.0	-5.6	-20.5	-14.7	-20.7	-15.1	-21.3	-15.7	Y
8.9	-4.5	1.6	-5.0	1.1	-5.8	0.5	8.9	8.0	-6.0	-5.7	-20.9	-14.7	-21.3	-15.3	-22.1	-15.9	Y
9	-5.1	1.4	-5.8	0.7	-6.8	0.2	9	8.0	-6.0	-5.9	-21.4	-14.9	-22.1	-15.6	-23.1	-16.2	Y
9.1	-5.8	1.1	-6.8	0.3	-8.0	-0.3	9.1	8.0	-6.0	-6.0	-22.2	-15.3	-23.1	-16.0	-24.3	-16.6	Y
9.2	-6.8	0.6	-8.0	-0.2	-9.4	-0.8	9.2	8.0	-6.0	-6.1	-23.1	-15.7	-24.3	-16.5	-25.7	-17.1	Y
9.3	-7.9	0.0	-9.4	-0.8	-11.1	-1.4	9.3	7.8	-6.2	-6.2	-24.2	-16.3	-25.8	-17.1	-27.5	-17.8	Y
9.4	-9.2	-0.7	-11.1	-1.4	-13.2	-2.2	9.4	7.7	-6.3	-6.3	-25.6	-17.0	-27.5	-17.8	-29.5	-18.5	Y
9.5	-10.8	-1.5	-13.1	-2.1	-15.8	-3.0	9.5	7.6	-6.4	-6.4	-27.2	-17.8	-29.4	-18.5	-32.1	-19.3	Y
9.6	-12.7	-2.4	-15.4	-2.8	-19.2	-3.8	9.6	7.4	-6.6	-6.6	-29.1	-18.7	-31.7	-19.1	-35.5	-20.1	Y
9.7	-15.0	-3.4	-17.8	-3.4	-24.0	-4.6	9.7	7.3	-6.7	-6.7	-31.3	-19.7	-34.1	-19.7	-40.3	-20.9	Y
9.8	-17.5	-4.4	-19.8	-3.9	-30.5	-5.3	9.8	7.2	-6.8	-6.8	-33.8	-20.7	-36.1	-20.2	-46.8	-21.6	Y
9.9	-20.1	-5.3	-20.3	-4.1	-29.1	-5.8	9.9	7.1	-6.9	-6.9	-36.4	-21.7	-36.6	-20.5	-45.4	-22.1	Y
10	-21.6	-6.0	-19.5	-4.2	-24.4	-6.0	10	7.0	-7.0	-7.0	-37.9	-22.4	-35.8	-20.6	-40.8	-22.3	Y
15.0	-16.7	-17.8	-27.3	-13.3	-10.9	-18.9	15	2.6	-11.4	-11.4	-33.0	-34.2	-43.6	-29.6	-27.3	-35.3	Y

APPENDIX D: Antenna Gain and EIRP Tables

20.0	-9.6	-15.2	-14.4	-16.1	-15.8	-18.4	20	-0.5	-14.5	-14.5	-26.0	-31.5	-30.7	-32.4	-32.2	-34.8	Y
25.0	-20.2	-12.5	-18.8	-12.7	-11.0	-17.5	25	-2.9	-16.9	-16.9	-36.5	-28.8	-35.1	-29.1	-27.4	-33.8	Y
30.0	-14.5	-13.4	-16.1	-11.6	-13.8	-13.9	30	-4.9	-18.9	-18.9	-30.8	-29.7	-32.5	-28.0	-30.2	-30.3	Y
35.0	-23.4	-13.7	-24.2	-15.3	-36.7	-14.0	35	-6.6	-20.6	-20.6	-39.8	-30.0	-40.5	-31.6	-53.1	-30.3	Y
40.0	-22.0	-31.9	-32.3	-20.8	-20.5	-22.2	40	-8.1	-22.1	-22.1	-38.3	-48.2	-48.6	-37.2	-36.8	-38.5	Y
45.0	-24.3	-17.3	-23.0	-27.3	-15.7	-17.9	45	-9.3	-23.3	-23.3	-40.7	-33.6	-39.3	-43.7	-32.0	-34.2	Y
50.0	-15.1	-22.3	-18.5	-28.5	-15.5	-24.7	50	-10.0	-24.0	-24.0	-31.4	-38.6	-34.9	-44.8	-31.9	-41.0	Y
55.0	-21.3	-37.2	-22.6	-32.1	-19.1	-27.5	55	-10.0	-24.0	-24.0	-37.7	-53.6	-39.0	-48.4	-35.4	-43.8	Y
60.0	-28.0	-33.0	-29.0	-31.8	-31.6	-16.7	60	-10.0	-24.0	-24.0	-44.3	-49.3	-45.3	-48.1	-48.0	-33.1	Y
65.0	-33.3	-23.3	-24.6	-19.5	-29.8	-13.9	65	-10.0	-24.0	-24.0	-49.6	-39.6	-41.0	-35.8	-46.2	-30.3	Y
70.0	-25.3	-16.1	-21.8	-15.5	-20.9	-15.0	70	-10.0	-24.0	-24.0	-41.7	-32.4	-38.1	-31.8	-37.2	-31.4	Y
75.0	-25.0	-13.5	-21.7	-14.4	-17.9	-14.6	75	-10.0	-24.0	-24.0	-41.3	-29.8	-38.0	-30.8	-34.2	-30.9	Y
80.0	-21.3	-15.9	-22.2	-30.1	-20.5	-19.4	80	-10.0	-24.0	-24.0	-37.7	-32.2	-38.6	-46.5	-36.8	-35.7	Y
85.0	-23.0	-22.2	-20.3	-17.4	-35.5	-21.6	85	-10.0	-24.0	-24.0	-39.4	-38.5	-36.7	-33.7	-51.8	-37.9	Y
90.0	-20.2	-21.2	-19.5	-23.7	-28.4	-24.5	90	0.0	-14.0	-14.0	-36.6	-37.6	-35.9	-40.1	-44.8	-40.8	Y
95.0	-19.9	-21.2	-17.0	-19.4	-20.4	-20.8	95	0.0	-14.0	-14.0	-36.2	-37.5	-33.3	-35.7	-36.7	-37.1	Y
100.0	-18.4	-26.3	-22.3	-21.8	-26.9	-26.7	100	0.0	-14.0	-14.0	-34.8	-42.6	-38.6	-38.2	-43.2	-43.0	Y
105.0	-22.8	-24.7	-27.7	-33.7	-22.3	-27.9	105	0.0	-14.0	-14.0	-39.2	-41.1	-44.1	-50.1	-38.6	-44.2	Y
110.0	-27.9	-30.6	-25.0	-26.5	-31.6	-29.9	110	0.0	-14.0	-14.0	-44.2	-46.9	-41.3	-42.9	-48.0	-46.3	Y
115.0	-26.4	-28.3	-23.0	-27.3	-28.4	-43.3	115	0.0	-14.0	-14.0	-42.7	-44.7	-39.3	-43.6	-44.8	-59.6	Y
120.0	-27.4	-36.1	-27.1	-27.4	-34.9	-28.8	120	0.0	-14.0	-14.0	-43.7	-52.4	-43.4	-43.7	-51.2	-45.1	Y
125.0	-27.7	-38.2	-30.8	-50.4	-38.2	-40.5	125	0.0	-14.0	-14.0	-44.0	-54.5	-47.2	-66.7	-54.6	-56.8	Y
130.0	-29.9	-30.5	-36.5	-37.4	-42.2	-42.2	130	0.0	-14.0	-14.0	-46.3	-46.8	-52.8	-53.7	-58.5	-58.5	Y
135.0	-28.2	-31.1	-37.6	-39.3	-30.3	-39.8	135	0.0	-14.0	-14.0	-44.5	-47.4	-53.9	-55.6	-46.6	-56.1	Y
140.0	-40.9	-44.4	-30.7	-38.9	-33.1	-40.6	140	0.0	-14.0	-14.0	-57.3	-60.7	-47.1	-55.2	-49.4	-57.0	Y
145.0	-40.0	-44.9	-43.0	-38.8	-39.9	-42.4	145	0.0	-14.0	-14.0	-56.3	-61.2	-59.3	-55.2	-56.2	-58.7	Y
150.0	-49.0	-33.4	-42.5	-32.7	-34.7	-36.0	150	0.0	-14.0	-14.0	-65.3	-49.7	-58.8	-49.1	-51.0	-52.4	Y
155.0	-41.1	-50.2	-34.9	-44.7	-41.2	-47.8	155	0.0	-14.0	-14.0	-57.4	-66.5	-51.3	-61.1	-57.5	-64.2	Y
160.0	-35.4	-43.8	-42.8	-49.1	-36.5	-43.6	160	0.0	-14.0	-14.0	-51.7	-60.1	-59.1	-65.4	-52.8	-59.9	Y
165.0	-43.8	-46.9	-39.4	-51.7	-50.0	-48.1	165	0.0	-14.0	-14.0	-60.1	-63.2	-55.7	-68.0	-66.3	-64.4	Y
170.0	-48.0	-51.4	-56.5	-52.3	-50.9	-48.6	170	0.0	-14.0	-14.0	-64.4	-67.7	-72.9	-68.6	-67.2	-64.9	Y
175.0	-46.9	-48.2	-48.3	-59.3	-54.2	-43.8	175	0.0	-14.0	-14.0	-63.3	-64.5	-64.6	-75.6	-70.6	-60.2	Y
180.0	-47.0	-45.0	-48.7	-46.7	-66.5	-50.3	180	0.0	-14.0	-14.0	-63.3	-61.4	-65.0	-63.1	-82.8	-66.6	Y

APPENDIX D: Antenna Gain and EIRP Tables

Co Pol Azimuth	Antenna Gain (dBi)									Off-Axis EIRP (dBW/4 kHz)							
Off-Axis Angle	14 GHz E	14 GHz H	14.25 GHz E	14.25 GHz H	14.5 GHz E	14.5 GHz H	Off-Axis Angle	FCC §25.209	FCC §25.209(a)(2) + §25.212 EIRP GSO Mask, Skew = 45 deg	FCC §25.209(a)(2) + §25.212 EIRP GSO Mask, Skew = 45 deg	14 GHz E	14 GHz H	14.25 GHz E	14.25 GHz H	14.5 GHz E	14.5 GHz H	Meets Mask
-180	-28.5	-28.4	-26.0	-29.5	-29.0	-29.0	-180	0.0	-14.0	-14.0	-44.9	-44.8	-42.4	-45.8	-45.3	-45.3	Y
-175	-49.1	-36.5	-47.4	-43.5	-27.5	-27.5	-175	0.0	-14.0	-14.0	-65.4	-52.8	-63.7	-59.9	-43.9	-43.9	Y
-170	-27.8	-26.2	-28.2	-29.9	-36.8	-36.8	-170	0.0	-14.0	-14.0	-44.2	-42.5	-44.6	-46.2	-53.1	-53.1	Y
-165	-33.4	-27.9	-34.3	-28.8	-43.1	-43.1	-165	0.0	-14.0	-14.0	-49.7	-44.3	-50.6	-45.1	-59.4	-59.4	Y
-160	-26.4	-28.1	-26.2	-38.5	-27.9	-27.9	-160	0.0	-14.0	-14.0	-42.8	-44.4	-42.6	-54.8	-44.2	-44.2	Y
-155	-29.3	-22.5	-37.4	-23.4	-25.1	-25.1	-155	0.0	-14.0	-14.0	-45.7	-38.8	-53.7	-39.7	-41.4	-41.4	Y
-150	-23.0	-29.1	-29.8	-29.3	-42.6	-42.6	-150	0.0	-14.0	-14.0	-39.4	-45.4	-46.2	-45.6	-58.9	-58.9	Y
-145	-29.9	-20.7	-31.3	-33.0	-22.1	-22.1	-145	0.0	-14.0	-14.0	-46.2	-37.0	-47.6	-49.3	-38.4	-38.4	Y
-140	-27.1	-25.4	-28.2	-20.1	-25.4	-25.4	-140	0.0	-14.0	-14.0	-43.4	-41.8	-44.5	-36.4	-41.8	-41.8	Y
-135	-35.6	-37.5	-18.6	-22.3	-23.9	-23.9	-135	0.0	-14.0	-14.0	-51.9	-53.8	-34.9	-38.7	-40.2	-40.2	Y
-130	-22.0	-26.1	-24.3	-25.6	-24.2	-24.2	-130	0.0	-14.0	-14.0	-38.3	-42.4	-40.6	-41.9	-40.6	-40.6	Y
-125	-22.3	-22.2	-33.0	-19.2	-22.8	-22.8	-125	0.0	-14.0	-14.0	-38.6	-38.5	-49.4	-35.5	-39.1	-39.1	Y
-120	-26.8	-28.3	-20.0	-16.3	-17.7	-17.7	-120	0.0	-14.0	-14.0	-43.1	-44.6	-36.3	-32.6	-34.0	-34.0	Y
-115	-32.2	-22.0	-30.9	-12.9	-17.7	-17.7	-115	0.0	-14.0	-14.0	-48.5	-38.4	-47.2	-29.2	-34.1	-34.1	Y
-110	-23.9	-32.6	-20.4	-15.5	-25.1	-25.1	-110	0.0	-14.0	-14.0	-40.3	-49.0	-36.7	-31.8	-41.4	-41.4	Y
-105	-19.8	-42.8	-23.1	-16.2	-17.6	-17.6	-105	0.0	-14.0	-14.0	-36.2	-59.1	-39.4	-32.5	-34.0	-34.0	Y
-100	-15.3	-29.0	-15.3	-14.5	-20.6	-20.6	-100	0.0	-14.0	-14.0	-31.6	-45.3	-31.7	-30.8	-37.0	-37.0	Y
-95	-17.8	-25.3	-20.6	-14.5	-15.1	-15.1	-95	0.0	-14.0	-14.0	-34.2	-41.7	-37.0	-30.9	-31.4	-31.4	Y
-90	-15.9	-24.0	-29.8	-18.0	-20.0	-20.0	-90	0.0	-14.0	-14.0	-32.3	-40.3	-46.1	-34.3	-36.3	-36.3	Y
-85	-15.6	-21.7	-24.8	-17.7	-14.4	-14.4	-85	-10.0	-24.0	-24.0	-31.9	-38.0	-41.1	-34.1	-30.8	-30.8	Y
-80	-21.6	-27.3	-21.3	-20.5	-27.0	-27.0	-80	-10.0	-24.0	-24.0	-38.0	-43.6	-37.7	-36.9	-43.3	-43.3	Y
-75	-16.3	-16.6	-20.8	-14.0	-26.3	-26.3	-75	-10.0	-24.0	-24.0	-32.7	-32.9	-37.2	-30.4	-42.7	-42.7	Y
-70	-21.5	-32.1	-20.9	-20.6	-13.2	-13.2	-70	-10.0	-24.0	-24.0	-37.8	-48.5	-37.2	-37.0	-29.5	-29.5	Y
-65	-18.2	-16.1	-20.6	-9.2	-25.1	-25.1	-65	-10.0	-24.0	-24.0	-34.5	-32.4	-36.9	-25.5	-41.4	-41.4	Y
-60	-22.0	-14.8	-19.3	-10.6	-22.9	-22.9	-60	-10.0	-24.0	-24.0	-38.3	-31.1	-35.7	-26.9	-39.2	-39.2	Y

APPENDIX D: Antenna Gain and EIRP Tables

-55	-32.7	-10.3	-26.1	-10.2	-26.4	-26.4	-55	-10.0	-24.0	-24.0	-49.1	-26.6	-42.4	-26.5	-42.8	-42.8	Y
-50	-14.1	-27.2	-19.5	-36.0	-18.5	-18.5	-50	-10.0	-24.0	-24.0	-30.4	-43.5	-35.8	-52.4	-34.9	-34.9	Y
-48	-32.6	-21.1	-17.1	-19.7	-23.2	-23.2	-48	-10.0	-24.0	-24.0	-49.0	-37.4	-33.5	-36.1	-39.5	-39.5	Y
-45	-17.1	-15.6	-22.9	-11.9	-25.4	-25.4	-45	-9.3	-23.3	-23.3	-33.4	-31.9	-39.2	-28.3	-41.7	-41.7	Y
-40	-22.3	-17.8	-27.2	-14.6	-21.7	-21.7	-40	-8.1	-22.1	-22.1	-38.6	-34.1	-43.5	-30.9	-38.0	-38.0	Y
-35	-28.2	-19.3	-16.6	-22.1	-11.4	-11.4	-35	-6.6	-20.6	-20.6	-44.5	-35.6	-33.0	-38.5	-27.7	-27.7	Y
-30	-17.2	-17.1	-12.9	-25.0	-29.1	-29.1	-30	-4.9	-18.9	-18.9	-33.6	-33.5	-29.2	-41.3	-45.4	-45.4	Y
-25	-23.8	-23.6	-13.9	-24.9	-18.1	-18.1	-25	-2.9	-16.9	-16.9	-40.2	-40.0	-30.2	-41.3	-34.5	-34.5	Y
-20	-8.7	-16.3	-6.2	-14.6	-6.9	-6.9	-20	-0.5	-14.5	-14.5	-25.1	-32.6	-22.6	-30.9	-23.3	-23.3	Y
-15	-11.0	-7.3	-8.5	-9.8	-3.6	-3.6	-15	2.6	-11.4	-11.4	-27.3	-23.6	-24.8	-26.2	-19.9	-19.9	Y
-10	-10.2	-14.6	-13.5	-15.4	-8.8	-8.8	-10	7.0	-7.0	-7.0	-26.5	-31.0	-29.8	-31.7	-25.2	-25.2	Y
-9.9	-9.0	-16.7	-11.7	-17.3	-9.3	-9.3	-9.9	7.1	-6.9	-6.9	-25.4	-33.0	-28.1	-33.7	-25.6	-25.6	Y
-9.8	-8.1	-19.3	-10.3	-19.2	-9.8	-9.8	-9.8	7.2	-6.8	-6.8	-24.4	-35.6	-26.6	-35.6	-26.2	-26.2	Y
-9.7	-7.2	-22.4	-9.0	-19.7	-10.5	-10.5	-9.7	7.3	-6.7	-6.7	-23.6	-38.7	-25.3	-36.0	-26.8	-26.8	Y
-9.6	-6.6	-25.5	-8.0	-18.7	-11.2	-11.2	-9.6	7.4	-6.6	-6.6	-23.0	-41.9	-24.3	-35.1	-27.5	-27.5	Y
-9.5	-6.1	-24.7	-7.1	-17.0	-11.8	-11.8	-9.5	7.6	-6.4	-6.4	-22.5	-41.1	-23.4	-33.3	-28.1	-28.1	Y
-9.4	-5.7	-21.9	-6.4	-15.3	-12.1	-12.1	-9.4	7.7	-6.3	-6.3	-22.1	-38.2	-22.7	-31.7	-28.5	-28.5	Y
-9.3	-5.5	-19.4	-5.8	-13.9	-12.2	-12.2	-9.3	7.8	-6.2	-6.2	-21.8	-35.7	-22.1	-30.2	-28.5	-28.5	Y
-9.2	-5.3	-17.5	-5.3	-12.7	-11.9	-11.9	-9.2	8.0	-6.0	-6.1	-21.7	-33.9	-21.6	-29.1	-28.3	-28.3	Y
-9.1	-5.3	-16.4	-5.0	-12.0	-11.5	-11.5	-9.1	8.0	-6.0	-6.0	-21.7	-32.7	-21.4	-28.3	-27.8	-27.8	Y
-9	-5.5	-15.7	-4.8	-11.5	-10.8	-10.8	-9	8.0	-6.0	-5.9	-21.9	-32.0	-21.2	-27.8	-27.2	-27.2	Y
-8.9	-5.9	-15.4	-4.8	-11.3	-10.3	-10.3	-8.9	8.0	-6.0	-5.7	-22.2	-31.7	-21.2	-27.6	-26.6	-26.6	Y
-8.8	-6.4	-15.5	-5.0	-11.4	-9.8	-9.8	-8.8	8.0	-6.0	-5.6	-22.7	-31.9	-21.3	-27.7	-26.2	-26.2	Y
-8.7	-7.2	-16.1	-5.3	-11.8	-9.5	-9.5	-8.7	8.0	-6.0	-5.5	-23.5	-32.4	-21.7	-28.1	-25.8	-25.8	Y
-8.6	-8.2	-17.4	-5.9	-12.6	-9.4	-9.4	-8.6	8.0	-6.0	-5.4	-24.5	-33.7	-22.2	-28.9	-25.7	-25.7	Y
-8.5	-9.5	-19.3	-6.7	-13.9	-9.5	-9.5	-8.5	8.0	-6.0	-5.2	-25.9	-35.7	-23.0	-30.2	-25.9	-25.9	Y
-8.4	-11.1	-22.3	-7.7	-16.0	-9.8	-9.8	-8.4	8.0	-6.0	-5.1	-27.4	-38.6	-24.0	-32.3	-26.2	-26.2	Y
-8.3	-12.5	-24.0	-9.0	-19.3	-10.5	-10.5	-8.3	8.0	-6.0	-5.0	-28.8	-40.3	-25.3	-35.6	-26.8	-26.8	Y
-8.2	-12.8	-20.8	-10.4	-25.9	-11.5	-11.5	-8.2	8.0	-6.0	-4.8	-29.1	-37.1	-26.7	-42.2	-27.9	-27.9	Y
-8.1	-11.3	-16.4	-11.3	-27.6	-13.1	-13.1	-8.1	8.0	-6.0	-4.7	-27.6	-32.7	-27.7	-44.0	-29.4	-29.4	Y
-8	-8.9	-13.0	-10.9	-18.9	-15.3	-15.3	-8	8.0	-6.0	-4.6	-25.3	-29.3	-27.3	-35.2	-31.7	-31.7	Y
-7.9	-6.6	-10.3	-9.3	-13.9	-18.8	-18.8	-7.9	8.0	-6.0	-4.4	-23.0	-26.6	-25.6	-30.3	-35.1	-35.1	Y
-7.8	-4.6	-8.0	-7.1	-10.6	-22.6	-22.6	-7.8	8.0	-6.0	-4.3	-20.9	-24.3	-23.4	-26.9	-38.9	-38.9	Y
-7.7	-2.8	-6.2	-4.9	-8.1	-19.8	-19.8	-7.7	8.0	-6.0	-4.2	-19.2	-22.5	-21.3	-24.4	-36.2	-36.2	Y
-7.6	-1.4	-4.7	-3.1	-6.1	-15.0	-15.0	-7.6	8.0	-6.0	-4.0	-17.7	-21.0	-19.5	-22.4	-31.3	-31.3	Y

APPENDIX D: Antenna Gain and EIRP Tables

-7.5	-0.1	-3.4	-1.5	-4.4	-11.4	-11.4	-7.5	8.0	-6.0	-3.9	-16.4	-19.7	-17.8	-20.8	-27.7	-27.7	Y
-7.4	0.9	-2.3	-0.2	-3.1	-8.8	-8.8	-7.4	8.0	-6.0	-3.7	-15.4	-18.6	-16.5	-19.4	-25.1	-25.1	Y
-7.3	1.8	-1.4	1.0	-2.0	-6.7	-6.7	-7.3	8.0	-6.0	-3.6	-14.5	-17.8	-15.4	-18.3	-23.1	-23.1	Y
-7.2	2.6	-0.7	2.0	-1.0	-5.0	-5.0	-7.2	8.0	-6.0	-3.4	-13.7	-17.0	-14.3	-17.4	-21.3	-21.3	Y
-7.1	3.3	-0.1	2.9	-0.3	-3.7	-3.7	-7.1	8.0	-6.0	-3.3	-13.1	-16.4	-13.5	-16.6	-20.0	-20.0	Y
-7	3.8	0.3	3.6	0.4	-2.5	-2.5	-7	8.0	-6.0	-3.1	-12.5	-16.0	-12.7	-15.9	-18.8	-18.8	Y
-6.9	4.2	0.7	4.2	0.9	-1.6	-1.6	-6.9	8.0	-6.0	-3.0	-12.1	-15.7	-12.1	-15.5	-18.0	-18.0	Y
-6.8	4.5	0.8	4.7	1.2	-1.0	-1.0	-6.8	8.2	-5.8	-2.8	-11.9	-15.5	-11.7	-15.1	-17.3	-17.3	Y
-6.7	4.6	0.8	5.0	1.4	-0.5	-0.5	-6.7	8.3	-5.7	-2.7	-11.7	-15.5	-11.3	-15.0	-16.8	-16.8	Y
-6.6	4.6	0.7	5.2	1.4	-0.1	-0.1	-6.6	8.5	-5.5	-2.5	-11.7	-15.7	-11.1	-14.9	-16.5	-16.5	Y
-6.5	4.5	0.3	5.3	1.3	0.0	0.0	-6.5	8.7	-5.3	-2.3	-11.8	-16.0	-11.0	-15.1	-16.3	-16.3	Y
-6.4	4.3	-0.2	5.3	1.0	0.0	0.0	-6.4	8.8	-5.2	-2.2	-12.0	-16.6	-11.0	-15.4	-16.4	-16.4	Y
-6.3	3.9	-1.1	5.1	0.4	-0.3	-0.3	-6.3	9.0	-5.0	-2.0	-12.4	-17.4	-11.2	-15.9	-16.6	-16.6	Y
-6.2	3.3	-2.3	4.8	-0.4	-0.9	-0.9	-6.2	9.2	-4.8	-1.8	-13.1	-18.7	-11.5	-16.8	-17.2	-17.2	Y
-6.1	2.4	-4.1	4.3	-1.7	-1.6	-1.6	-6.1	9.4	-4.6	-1.6	-13.9	-20.4	-12.1	-18.0	-18.0	-18.0	Y
-6	1.3	-6.7	3.6	-3.3	-2.9	-2.9	-6	9.5	-4.5	-1.5	-15.1	-23.0	-12.8	-19.7	-19.3	-19.3	Y
-5.9	-0.3	-11.2	2.6	-6.0	-4.8	-4.8	-5.9	9.7	-4.3	-1.3	-16.7	-27.5	-13.8	-22.3	-21.1	-21.1	Y
-5.8	-2.6	-20.5	1.2	-10.1	-7.6	-7.6	-5.8	9.9	-4.1	-1.1	-18.9	-36.8	-15.2	-26.4	-24.0	-24.0	Y
-5.7	-6.0	-14.3	-0.6	-19.0	-13.1	-13.1	-5.7	10.1	-3.9	-0.9	-22.3	-30.6	-16.9	-35.3	-29.4	-29.4	Y
-5.6	-11.7	-7.0	-3.1	-13.4	-20.2	-20.2	-5.6	10.3	-3.7	-0.7	-28.1	-23.3	-19.5	-29.7	-36.5	-36.5	Y
-5.5	-12.9	-2.8	-6.7	-6.4	-10.6	-10.6	-5.5	10.5	-3.5	-0.5	-29.3	-19.1	-23.0	-22.7	-26.9	-26.9	Y
-5.4	-6.1	0.0	-8.5	-2.3	-5.1	-5.1	-5.4	10.7	-3.3	-0.3	-22.4	-16.3	-24.9	-18.6	-21.4	-21.4	Y
-5.3	-1.7	2.4	-5.4	0.7	-1.3	-1.3	-5.3	10.9	-3.1	-0.1	-18.0	-13.9	-21.7	-15.7	-17.7	-17.7	Y
-5.2	1.5	4.1	-1.4	2.8	1.2	1.2	-5.2	11.1	-2.9	0.1	-14.9	-12.2	-17.7	-13.6	-15.1	-15.1	Y
-5.1	3.7	5.6	1.6	4.6	3.3	3.3	-5.1	11.3	-2.7	0.3	-12.6	-10.7	-14.8	-11.7	-13.1	-13.1	Y
-5	5.6	7.0	4.0	6.1	5.1	5.1	-5	11.5	-2.5	0.5	-10.7	-9.4	-12.3	-10.2	-11.2	-11.2	Y
-4.9	7.2	8.1	6.0	7.5	6.6	6.6	-4.9	11.7	-2.3	0.7	-9.1	-8.2	-10.3	-8.8	-9.7	-9.7	Y
-4.8	8.5	9.1	7.6	8.6	7.9	7.9	-4.8	12.0	-2.0	1.0	-7.8	-7.3	-8.7	-7.8	-8.5	-8.5	Y
-4.7	9.6	9.8	8.9	9.5	8.9	8.9	-4.7	12.2	-1.8	1.2	-6.7	-6.5	-7.4	-6.9	-7.4	-7.4	Y
-4.6	10.5	10.5	10.0	10.3	9.8	9.8	-4.6	12.4	-1.6	1.4	-5.8	-5.9	-6.3	-6.1	-6.5	-6.5	Y
-4.5	11.3	11.1	11.0	10.9	10.6	10.6	-4.5	12.7	-1.3	1.7	-5.1	-5.3	-5.4	-5.4	-5.8	-5.8	Y
-4.4	11.9	11.5	11.7	11.5	11.2	11.2	-4.4	12.9	-1.1	1.9	-4.4	-4.8	-4.6	-4.9	-5.1	-5.1	Y
-4.3	12.4	11.8	12.4	11.9	11.8	11.8	-4.3	13.2	-0.8	2.2	-3.9	-4.5	-4.0	-4.4	-4.6	-4.6	Y
-4.2	12.8	12.1	12.9	12.2	12.2	12.2	-4.2	13.4	-0.6	2.4	-3.5	-4.3	-3.4	-4.1	-4.1	-4.1	Y
-4.1	13.1	12.2	13.3	12.4	12.5	12.5	-4.1	13.7	-0.3	2.7	-3.2	-4.2	-3.0	-3.9	-3.9	-3.9	Y

APPENDIX D: Antenna Gain and EIRP Tables

-4	13.3	12.2	13.6	12.5	12.7	12.7	-4	13.9	-0.1	2.9	-3.1	-4.2	-2.7	-3.8	-3.7	-3.7	Y
-3.9	13.3	12.0	13.8	12.5	12.7	12.7	-3.9	14.2	0.2	3.2	-3.0	-4.3	-2.6	-3.9	-3.6	-3.6	Y
-3.8	13.3	11.7	13.8	12.3	12.7	12.7	-3.8	14.5	0.5	3.5	-3.1	-4.6	-2.5	-4.0	-3.7	-3.7	Y
-3.7	13.1	11.3	13.7	12.0	12.4	12.4	-3.7	14.8	0.8	3.8	-3.3	-5.1	-2.6	-4.4	-3.9	-3.9	Y
-3.6	12.7	10.6	13.5	11.5	12.0	12.0	-3.6	15.1	1.1	4.1	-3.6	-5.8	-2.8	-4.9	-4.3	-4.3	Y
-3.5	12.2	9.6	13.1	10.7	11.4	11.4	-3.5	15.4	1.4	4.4	-4.2	-6.7	-3.2	-5.6	-4.9	-4.9	Y
-3.4	11.5	8.3	12.6	9.7	10.6	10.6	-3.4	15.7	1.7	4.7	-4.9	-8.0	-3.8	-6.6	-5.7	-5.7	Y
-3.3	10.4	6.5	11.8	8.3	9.4	9.4	-3.3	16.0	2.0	5.0	-5.9	-9.8	-4.5	-8.0	-6.9	-6.9	Y
-3.2	9.0	3.8	10.8	6.3	7.8	7.8	-3.2	16.4	2.4	5.4	-7.3	-12.6	-5.6	-10.1	-8.5	-8.5	Y
-3.1	7.1	-1.2	9.3	3.0	5.3	5.3	-3.1	16.7	2.7	5.7	-9.2	-17.6	-7.0	-13.3	-11.0	-11.0	Y
-3	4.1	-15.4	7.3	-3.3	1.3	1.3	-3	17.1	3.1	6.1	-12.2	-31.7	-9.1	-19.6	-15.1	-15.1	Y
-2.9	-1.0	-2.7	4.5	-15.6	-8.2	-8.2	-2.9	17.4	3.4		-17.3	-19.0	-11.9	-31.9	-24.5	-24.5	Y
-2.8	-14.1	4.0	0.3	0.0	-5.4	-5.4	-2.8	17.8	3.8		-30.4	-12.3	-16.0	-16.4	-21.8	-21.8	Y
-2.7	-0.6	8.2	-0.6	5.9	3.2	3.2	-2.7	18.2	4.2		-16.9	-8.2	-16.9	-10.5	-13.1	-13.1	Y
-2.6	5.6	11.2	4.0	9.5	8.0	8.0	-2.6	18.6	4.6		-10.8	-5.1	-12.3	-6.8	-8.3	-8.3	Y
-2.5	9.5	13.4	8.2	12.2	11.0	11.0	-2.5	19.1	5.1		-6.8	-3.0	-8.1	-4.2	-5.3	-5.3	Y
-2.4	12.3	15.3	11.3	14.3	13.4	13.4	-2.4	19.5	5.5		-4.0	-1.0	-5.0	-2.0	-2.9	-2.9	Y
-2.3	14.5	16.9	13.7	16.1	15.5	15.5	-2.3	20.0	6.0		-1.8	0.5	-2.6	-0.2	-0.9	-0.9	Y
-2.2	16.4	18.3	15.8	17.6	17.1	17.1	-2.2	20.4	6.4		0.1	1.9	-0.6	1.3	0.7	0.7	Y
-2.1	18.0	19.5	17.4	19.0	18.6	18.6	-2.1	20.9	6.9		1.7	3.2	1.1	2.6	2.2	2.2	Y
-2	19.4	20.7	18.9	20.3	19.9	19.9	-2	21.5	7.5		3.0	4.3	2.6	3.9	3.5	3.5	Y
-1.9	20.6	21.7	20.2	21.3	21.0	21.0	-1.9	22.0	8.0		4.3	5.3	3.9	4.9	4.6	4.6	Y
-1.8	21.7	22.5	21.4	22.2	22.0	22.0	-1.8	22.6	8.6		5.3	6.2	5.0	5.9	5.6	5.6	Y
-1.7	22.6	23.4	22.3	23.1	22.9	22.9	-1.7	23.2	9.2		6.2	7.0	6.0	6.7	6.5	6.5	Y
-1.6	23.4	24.1	23.2	23.8	23.7	23.7	-1.6	23.9	9.9		7.1	7.7	6.9	7.5	7.3	7.3	Y
-1.5	24.2	24.7	24.0	24.6	24.4	24.4	-1.5	24.6	10.6		7.8	8.4	7.7	8.2	8.1	8.1	Y
-1.4	24.8	25.3	24.7	25.1	25.1	25.1	-1.4				8.4	9.0	8.4	8.8	8.7	8.7	Y
-1.3	25.4	25.9	25.4	25.7	25.7	25.7	-1.3				9.1	9.6	9.1	9.4	9.4	9.4	Y
-1.2	26.0	26.4	26.0	26.3	26.2	26.2	-1.2				9.6	10.1	9.6	9.9	9.9	9.9	Y
-1.1	26.5	26.8	26.5	26.7	26.7	26.7	-1.1				10.1	10.5	10.2	10.4	10.4	10.4	Y
-1	26.9	27.2	27.0	27.1	27.2	27.2	-1				10.6	10.9	10.6	10.8	10.8	10.8	Y
-0.9	27.3	27.6	27.3	27.5	27.5	27.5	-0.9				10.9	11.2	11.0	11.2	11.2	11.2	Y
-0.8	27.6	27.9	27.7	27.9	27.9	27.9	-0.8				11.3	11.6	11.4	11.5	11.5	11.5	Y
-0.7	27.9	28.2	28.0	28.1	28.2	28.2	-0.7				11.6	11.8	11.7	11.8	11.8	11.8	Y
-0.6	28.2	28.4	28.3	28.4	28.4	28.4	-0.6				11.9	12.1	11.9	12.0	12.1	12.1	Y

APPENDIX D: Antenna Gain and EIRP Tables

-0.5	28.4	28.6	28.5	28.6	28.6	28.6	-0.5				12.1	12.3	12.2	12.2	12.3	12.3	Y
-0.4	28.6	28.8	28.7	28.7	28.8	28.8	-0.4				12.3	12.4	12.3	12.4	12.4	12.4	Y
-0.3	28.8	28.9	28.8	28.9	28.9	28.9	-0.3				12.4	12.6	12.5	12.6	12.6	12.6	Y
-0.2	28.9	29.0	28.9	29.0	29.0	29.0	-0.2				12.6	12.6	12.6	12.6	12.6	12.6	Y
-0.1	29.0	29.0	29.0	29.0	29.0	29.0	-0.1				12.6	12.7	12.6	12.7	12.7	12.7	Y
0	29.0	29.0	29.0	29.0	29.0	29.0	0				12.7	12.7	12.7	12.7	12.7	12.7	Y
0.1	29.0	29.0	29.0	29.0	28.9	28.9	0.1				12.7	12.6	12.6	12.6	12.6	12.6	Y
0.2	28.9	28.9	28.9	28.9	28.9	28.9	0.2				12.6	12.5	12.6	12.5	12.5	12.5	Y
0.3	28.8	28.8	28.8	28.7	28.7	28.7	0.3				12.5	12.4	12.5	12.4	12.4	12.4	Y
0.4	28.7	28.6	28.7	28.6	28.5	28.5	0.4				12.3	12.3	12.4	12.2	12.2	12.2	Y
0.5	28.5	28.4	28.5	28.3	28.3	28.3	0.5				12.1	12.1	12.2	12.0	12.0	12.0	Y
0.6	28.2	28.2	28.3	28.1	28.1	28.1	0.6				11.9	11.8	12.0	11.8	11.7	11.7	Y
0.7	28.0	27.9	28.0	27.8	27.8	27.8	0.7				11.6	11.5	11.7	11.5	11.4	11.4	Y
0.8	27.6	27.5	27.7	27.4	27.4	27.4	0.8				11.3	11.2	11.4	11.1	11.1	11.1	Y
0.9	27.3	27.2	27.3	27.1	27.0	27.0	0.9				10.9	10.8	11.0	10.7	10.7	10.7	Y
1	26.9	26.8	26.9	26.7	26.6	26.6	1				10.5	10.5	10.5	10.3	10.2	10.2	Y
1.1	26.4	26.3	26.4	26.2	26.0	26.0	1.1				10.1	10.0	10.0	9.8	9.7	9.7	Y
1.2	25.9	25.9	25.8	25.6	25.5	25.5	1.2				9.6	9.5	9.5	9.3	9.2	9.2	Y
1.3	25.4	25.3	25.2	25.0	24.9	24.9	1.3				9.0	9.0	8.9	8.7	8.5	8.5	Y
1.4	24.8	24.7	24.5	24.4	24.1	24.1	1.4				8.5	8.3	8.2	8.0	7.8	7.8	Y
1.5	24.1	24.0	23.7	23.6	23.4	23.4	1.5	24.6	10.6		7.8	7.7	7.4	7.3	7.1	7.1	Y
1.6	23.4	23.3	22.9	22.9	22.6	22.6	1.6	23.9	9.9		7.1	6.9	6.6	6.5	6.2	6.2	Y
1.7	22.6	22.5	22.0	22.0	21.6	21.6	1.7	23.2	9.2		6.2	6.2	5.6	5.7	5.3	5.3	Y
1.8	21.7	21.6	21.0	21.0	20.6	20.6	1.8	22.6	8.6		5.4	5.2	4.6	4.7	4.2	4.2	Y
1.9	20.7	20.6	19.8	19.9	19.4	19.4	1.9	22.0	8.0		4.3	4.2	3.5	3.6	3.0	3.0	Y
2	19.5	19.5	18.5	18.7	18.1	18.1	2	21.5	7.5		3.2	3.2	2.2	2.4	1.7	1.7	Y
2.1	18.2	18.2	17.0	17.3	16.5	16.5	2.1	20.9	6.9		1.8	1.9	0.6	0.9	0.2	0.2	Y
2.2	16.6	16.8	15.3	15.7	14.7	14.7	2.2	20.4	6.4		0.3	0.5	-1.1	-0.6	-1.6	-1.6	Y
2.3	14.8	15.3	13.1	13.8	12.6	12.6	2.3	20.0	6.0		-1.6	-1.1	-3.2	-2.5	-3.7	-3.7	Y
2.4	12.5	13.3	10.4	11.5	9.9	9.9	2.4	19.5	5.5		-3.8	-3.0	-5.9	-4.8	-6.5	-6.5	Y
2.5	9.6	11.1	6.8	8.6	6.3	6.3	2.5	19.1	5.1		-6.8	-5.3	-9.5	-7.7	-10.1	-10.1	Y
2.6	5.5	8.1	1.1	4.6	0.9	0.9	2.6	18.6	4.6		-10.8	-8.2	-15.3	-11.7	-15.5	-15.5	Y
2.7	-1.0	4.0	-17.1	-2.3	-14.1	-14.1	2.7	18.2	4.2		-17.3	-12.3	-33.5	-18.6	-30.5	-30.5	Y
2.8	-6.8	-3.1	-1.9	-16.3	-3.6	-3.6	2.8	17.8	3.8		-23.1	-19.5	-18.2	-32.6	-19.9	-19.9	Y
2.9	1.3	-16.7	4.3	-0.9	3.1	3.1	2.9	17.4	3.4		-15.1	-33.0	-12.0	-17.2	-13.2	-13.2	Y

APPENDIX D: Antenna Gain and EIRP Tables

3	5.7	-1.0	7.7	4.2	6.4	6.4	3	17.1	3.1	6.1	-10.6	-17.3	-8.7	-12.1	-10.0	-10.0	Y
3.1	8.4	3.9	9.8	7.0	8.5	8.5	3.1	16.7	2.7	5.7	-8.0	-12.4	-6.5	-9.4	-7.9	-7.9	Y
3.2	9.9	6.5	11.2	8.7	9.9	9.9	3.2	16.4	2.4	5.4	-6.4	-9.8	-5.2	-7.6	-6.4	-6.4	Y
3.3	11.2	8.4	12.3	10.1	10.9	10.9	3.3	16.0	2.0	5.0	-5.1	-8.0	-4.1	-6.2	-5.4	-5.4	Y
3.4	12.1	9.8	13.0	11.0	11.7	11.7	3.4	15.7	1.7	4.7	-4.3	-6.6	-3.3	-5.3	-4.7	-4.7	Y
3.5	12.7	10.7	13.6	11.7	12.2	12.2	3.5	15.4	1.4	4.4	-3.6	-5.7	-2.8	-4.6	-4.2	-4.2	Y
3.6	13.1	11.3	13.9	12.2	12.5	12.5	3.6	15.1	1.1	4.1	-3.2	-5.0	-2.4	-4.2	-3.8	-3.8	Y
3.7	13.4	11.9	14.1	12.5	12.7	12.7	3.7	14.8	0.8	3.8	-2.9	-4.5	-2.2	-3.8	-3.7	-3.7	Y
3.8	13.5	12.2	14.2	12.7	12.7	12.7	3.8	14.5	0.5	3.5	-2.8	-4.2	-2.2	-3.7	-3.6	-3.6	Y
3.9	13.5	12.3	14.1	12.7	12.6	12.6	3.9	14.2	0.2	3.2	-2.8	-4.0	-2.3	-3.6	-3.7	-3.7	Y
4	13.4	12.4	13.9	12.6	12.4	12.4	4	13.9	-0.1	2.9	-2.9	-4.0	-2.5	-3.7	-3.9	-3.9	Y
4.1	13.2	12.3	13.5	12.4	12.1	12.1	4.1	13.7	-0.3	2.7	-3.1	-4.0	-2.8	-3.9	-4.2	-4.2	Y
4.2	12.9	12.1	13.1	12.1	11.7	11.7	4.2	13.4	-0.6	2.4	-3.5	-4.2	-3.2	-4.2	-4.7	-4.7	Y
4.3	12.4	11.8	12.5	11.7	11.1	11.1	4.3	13.2	-0.8	2.2	-3.9	-4.5	-3.8	-4.6	-5.2	-5.2	Y
4.4	11.9	11.4	11.8	11.2	10.4	10.4	4.4	12.9	-1.1	1.9	-4.5	-5.0	-4.5	-5.2	-5.9	-5.9	Y
4.5	11.1	10.9	11.0	10.5	9.6	9.6	4.5	12.7	-1.3	1.7	-5.2	-5.5	-5.4	-5.8	-6.7	-6.7	Y
4.6	10.3	10.2	9.9	9.8	8.6	8.6	4.6	12.4	-1.6	1.4	-6.0	-6.1	-6.4	-6.6	-7.7	-7.7	Y
4.7	9.2	9.5	8.7	8.9	7.5	7.5	4.7	12.2	-1.8	1.2	-7.1	-6.9	-7.6	-7.4	-8.9	-8.9	Y
4.8	8.0	8.6	7.2	7.9	6.2	6.2	4.8	12.0	-2.0	1.0	-8.3	-7.7	-9.1	-8.5	-10.2	-10.2	Y
4.9	6.6	7.6	5.5	6.7	4.7	4.7	4.9	11.7	-2.3	0.7	-9.7	-8.7	-10.8	-9.6	-11.7	-11.7	Y
5	4.7	6.4	3.3	5.2	2.6	2.6	5	11.5	-2.5	0.5	-11.6	-9.9	-13.0	-11.1	-13.7	-13.7	Y
5.1	2.4	5.0	0.5	3.6	0.3	0.3	5.1	11.3	-2.7	0.3	-13.9	-11.4	-15.8	-12.8	-16.1	-16.1	Y
5.2	-0.8	3.3	-3.2	1.6	-2.9	-2.9	5.2	11.1	-2.9	0.1	-17.1	-13.0	-19.5	-14.8	-19.2	-19.2	Y
5.3	-5.4	1.3	-6.6	-1.0	-7.0	-7.0	5.3	10.9	-3.1	-0.1	-21.7	-15.0	-22.9	-17.3	-23.3	-23.3	Y
5.4	-12.4	-1.1	-5.9	-4.1	-12.0	-12.0	5.4	10.7	-3.3	-0.3	-28.7	-17.4	-22.2	-20.4	-28.3	-28.3	Y
5.5	-11.0	-4.2	-2.6	-8.9	-11.1	-11.1	5.5	10.5	-3.5	-0.5	-27.4	-20.5	-18.9	-25.2	-27.4	-27.4	Y
5.6	-5.0	-9.0	0.1	-18.6	-7.0	-7.0	5.6	10.3	-3.7	-0.7	-21.4	-25.4	-16.3	-34.9	-23.3	-23.3	Y
5.7	-1.5	-18.9	2.1	-18.2	-3.9	-3.9	5.7	10.1	-3.9	-0.9	-17.8	-35.2	-14.2	-34.5	-20.2	-20.2	Y
5.8	1.0	-18.1	3.7	-9.4	-1.8	-1.8	5.8	9.9	-4.1	-1.1	-15.3	-34.4	-12.7	-25.8	-18.1	-18.1	Y
5.9	2.6	-9.8	4.8	-6.0	-0.4	-0.4	5.9	9.7	-4.3	-1.3	-13.7	-26.2	-11.6	-22.3	-16.7	-16.7	Y
6	3.9	-6.0	5.6	-3.6	0.6	0.6	6	9.5	-4.5	-1.5	-12.5	-22.4	-10.7	-19.9	-15.7	-15.7	Y
6.1	4.7	-3.8	6.2	-2.2	1.3	1.3	6.1	9.4	-4.6	-1.6	-11.6	-20.2	-10.1	-18.5	-15.1	-15.1	Y
6.2	5.4	-2.3	6.6	-1.1	1.7	1.7	6.2	9.2	-4.8	-1.8	-11.0	-18.6	-9.7	-17.5	-14.6	-14.6	Y
6.3	5.8	-1.2	6.9	-0.4	2.0	2.0	6.3	9.0	-5.0	-2.0	-10.5	-17.5	-9.4	-16.7	-14.4	-14.4	Y
6.4	6.2	-0.4	7.0	0.0	2.1	2.1	6.4	8.8	-5.2	-2.2	-10.2	-16.8	-9.3	-16.3	-14.3	-14.3	Y

APPENDIX D: Antenna Gain and EIRP Tables

6.5	6.3	0.0	7.0	0.3	2.0	2.0	6.5	8.7	-5.3	-2.3	-10.0	-16.3	-9.3	-16.1	-14.4	-14.4	Y
6.6	6.4	0.3	6.9	0.4	1.8	1.8	6.6	8.5	-5.5	-2.5	-10.0	-16.0	-9.5	-16.0	-14.6	-14.6	Y
6.7	6.3	0.4	6.7	0.3	1.4	1.4	6.7	8.3	-5.7	-2.7	-10.1	-15.9	-9.7	-16.1	-14.9	-14.9	Y
6.8	6.1	0.4	6.3	0.1	0.9	0.9	6.8	8.2	-5.8	-2.8	-10.2	-15.9	-10.0	-16.3	-15.4	-15.4	Y
6.9	5.8	0.2	5.8	-0.3	0.3	0.3	6.9	8.0	-6.0	-3.0	-10.5	-16.1	-10.5	-16.6	-16.0	-16.0	Y
7	5.4	-0.1	5.2	-0.8	-0.5	-0.5	7	7.9	-6.1	-3.1	-11.0	-16.4	-11.1	-17.1	-16.8	-16.8	Y
7.1	4.8	-0.5	4.5	-1.4	-1.4	-1.4	7.1	8.0	-6.0	-3.3	-11.5	-16.9	-11.8	-17.8	-17.7	-17.7	Y
7.2	4.1	-1.1	3.6	-2.2	-2.5	-2.5	7.2	8.0	-6.0	-3.4	-12.2	-17.4	-12.7	-18.6	-18.8	-18.8	Y
7.3	3.4	-1.8	2.6	-3.1	-3.7	-3.7	7.3	8.0	-6.0	-3.6	-13.0	-18.1	-13.7	-19.5	-20.0	-20.0	Y
7.4	2.4	-2.6	1.4	-4.2	-5.1	-5.1	7.4	8.0	-6.0	-3.7	-13.9	-18.9	-14.9	-20.5	-21.4	-21.4	Y
7.5	1.3	-3.5	0.0	-5.5	-6.7	-6.7	7.5	8.0	-6.0	-3.9	-15.0	-19.9	-16.3	-21.8	-23.1	-23.1	Y
7.6	0.1	-4.5	-1.6	-6.8	-8.5	-8.5	7.6	8.0	-6.0	-4.0	-16.2	-20.9	-18.0	-23.2	-24.9	-24.9	Y
7.7	-1.3	-5.7	-3.6	-8.4	-10.8	-10.8	7.7	8.0	-6.0	-4.2	-17.7	-22.0	-19.9	-24.7	-27.1	-27.1	Y
7.8	-3.0	-7.1	-5.8	-10.2	-13.3	-13.3	7.8	8.0	-6.0	-4.3	-19.3	-23.4	-22.1	-26.5	-29.7	-29.7	Y
7.9	-4.8	-8.5	-8.0	-12.0	-16.4	-16.4	7.9	8.0	-6.0	-4.4	-21.2	-24.8	-24.4	-28.3	-32.7	-32.7	Y
8	-6.8	-10.1	-9.6	-13.7	-20.2	-20.2	8	8.0	-6.0	-4.6	-23.1	-26.4	-25.9	-30.1	-36.5	-36.5	Y
8.1	-8.2	-11.6	-9.4	-14.8	-24.7	-24.7	8.1	8.0	-6.0	-4.7	-24.5	-28.0	-25.7	-31.1	-41.1	-41.1	Y
8.2	-8.7	-13.1	-7.9	-14.9	-29.0	-29.0	8.2	8.0	-6.0	-4.8	-25.1	-29.4	-24.2	-31.3	-45.3	-45.3	Y
8.3	-8.1	-14.3	-6.4	-14.4	-29.1	-29.1	8.3	8.0	-6.0	-5.0	-24.5	-30.6	-22.7	-30.8	-45.5	-45.5	Y
8.4	-7.0	-14.9	-4.9	-13.7	-26.8	-26.8	8.4	8.0	-6.0	-5.1	-23.4	-31.2	-21.3	-30.0	-43.1	-43.1	Y
8.5	-5.8	-15.2	-3.8	-12.8	-24.6	-24.6	8.5	8.0	-6.0	-5.2	-22.1	-31.5	-20.2	-29.2	-40.9	-40.9	Y
8.6	-4.8	-15.1	-3.0	-12.2	-22.5	-22.5	8.6	8.0	-6.0	-5.4	-21.1	-31.4	-19.4	-28.5	-38.8	-38.8	Y
8.7	-3.9	-14.8	-2.3	-11.6	-20.4	-20.4	8.7	8.0	-6.0	-5.5	-20.2	-31.1	-18.7	-28.0	-36.7	-36.7	Y
8.8	-3.2	-14.5	-1.9	-11.2	-18.1	-18.1	8.8	8.0	-6.0	-5.6	-19.6	-30.8	-18.3	-27.5	-34.4	-34.4	Y
8.9	-2.8	-14.1	-1.7	-10.9	-15.9	-15.9	8.9	8.0	-6.0	-5.7	-19.1	-30.5	-18.0	-27.2	-32.2	-32.2	Y
9	-2.5	-13.9	-1.6	-10.6	-13.9	-13.9	9	8.0	-6.0	-5.9	-18.8	-30.2	-17.9	-27.0	-30.3	-30.3	Y
9.1	-2.4	-13.6	-1.6	-10.4	-12.1	-12.1	9.1	8.0	-6.0	-6.0	-18.7	-29.9	-17.9	-26.8	-28.4	-28.4	Y
9.2	-2.3	-13.1	-1.8	-10.2	-10.6	-10.6	9.2	8.0	-6.0	-6.1	-18.7	-29.5	-18.1	-26.6	-26.9	-26.9	Y
9.3	-2.5	-12.7	-2.1	-10.0	-9.2	-9.2	9.3	7.8	-6.2	-6.2	-18.8	-29.0	-18.4	-26.3	-25.6	-25.6	Y
9.4	-2.7	-12.1	-2.5	-9.7	-8.1	-8.1	9.4	7.7	-6.3	-6.3	-19.0	-28.5	-18.8	-26.0	-24.5	-24.5	Y
9.5	-3.0	-11.5	-3.0	-9.5	-7.2	-7.2	9.5	7.6	-6.4	-6.4	-19.4	-27.8	-19.4	-25.8	-23.5	-23.5	Y
9.6	-3.5	-10.9	-3.7	-9.2	-6.4	-6.4	9.6	7.4	-6.6	-6.6	-19.9	-27.2	-20.1	-25.5	-22.7	-22.7	Y
9.7	-4.2	-10.2	-4.5	-8.9	-5.8	-5.8	9.7	7.3	-6.7	-6.7	-20.5	-26.6	-20.8	-25.2	-22.1	-22.1	Y
9.8	-4.9	-9.6	-5.4	-8.7	-5.3	-5.3	9.8	7.2	-6.8	-6.8	-21.2	-26.0	-21.8	-25.0	-21.7	-21.7	Y
9.9	-5.7	-9.1	-6.5	-8.5	-5.0	-5.0	9.9	7.1	-6.9	-6.9	-22.1	-25.4	-22.9	-24.8	-21.3	-21.3	Y

APPENDIX D: Antenna Gain and EIRP Tables

10	-6.7	-8.5	-7.8	-8.3	-4.8	-4.8	10	7.0	-7.0	-7.0	-23.1	-24.9	-24.1	-24.7	-21.2	-21.2	Y
15.0	-12.6	-8.6	-11.1	-7.7	-5.4	-5.4	15	2.6	-11.4	-11.4	-28.9	-25.0	-27.4	-24.1	-21.7	-21.7	Y
20.0	-9.2	-22.0	-7.2	-16.7	-11.8	-11.8	20	-0.5	-14.5	-14.5	-25.5	-38.3	-23.5	-33.0	-28.2	-28.2	Y
25.0	-15.4	-28.9	-16.4	-21.1	-16.1	-16.1	25	-2.9	-16.9	-16.9	-31.8	-45.3	-32.7	-37.4	-32.4	-32.4	Y
30.0	-23.4	-23.5	-18.2	-54.1	-19.9	-19.9	30	-4.9	-18.9	-18.9	-39.7	-39.8	-34.5	-70.4	-36.2	-36.2	Y
35.0	-19.8	-20.3	-17.6	-16.6	-11.0	-11.0	35	-6.6	-20.6	-20.6	-36.1	-36.6	-33.9	-32.9	-27.3	-27.3	Y
40.0	-16.2	-13.6	-17.9	-12.5	-18.0	-18.0	40	-8.1	-22.1	-22.1	-32.6	-30.0	-34.2	-28.8	-34.3	-34.3	Y
45.0	-23.1	-11.3	-22.0	-11.5	-17.3	-17.3	45	-9.3	-23.3	-23.3	-39.4	-27.6	-38.3	-27.8	-33.6	-33.6	Y
50.0	-14.3	-16.2	-20.8	-19.5	-20.3	-20.3	50	-10.0	-24.0	-24.0	-30.7	-32.6	-37.1	-35.8	-36.6	-36.6	Y
55.0	-15.1	-12.4	-20.5	-16.2	-29.4	-29.4	55	-10.0	-24.0	-24.0	-31.4	-28.8	-36.8	-32.5	-45.7	-45.7	Y
60.0	-24.8	-27.6	-20.3	-17.4	-25.6	-25.6	60	-10.0	-24.0	-24.0	-41.1	-43.9	-36.6	-33.7	-41.9	-41.9	Y
65.0	-18.8	-20.5	-28.0	-8.2	-17.3	-17.3	65	-10.0	-24.0	-24.0	-35.1	-36.9	-44.3	-24.6	-33.7	-33.7	Y
70.0	-20.6	-21.6	-19.4	-16.9	-16.6	-16.6	70	-10.0	-24.0	-24.0	-36.9	-37.9	-35.7	-33.3	-32.9	-32.9	Y
75.0	-36.6	-18.7	-21.9	-12.2	-21.6	-21.6	75	-10.0	-24.0	-24.0	-52.9	-35.0	-38.2	-28.6	-37.9	-37.9	Y
80.0	-28.2	-24.6	-19.7	-15.9	-18.5	-18.5	80	-10.0	-24.0	-24.0	-44.6	-41.0	-36.0	-32.2	-34.8	-34.8	Y
85.0	-20.7	-22.6	-19.2	-16.8	-16.5	-16.5	85	-10.0	-24.0	-24.0	-37.0	-38.9	-35.6	-33.2	-32.9	-32.9	Y
90.0	-25.2	-23.1	-19.2	-19.6	-19.7	-19.7	90	0.0	-14.0	-14.0	-41.6	-39.4	-35.5	-35.9	-36.0	-36.0	Y
95.0	-16.7	-38.9	-22.6	-21.5	-23.8	-23.8	95	0.0	-14.0	-14.0	-33.0	-55.2	-38.9	-37.8	-40.1	-40.1	Y
100.0	-24.9	-29.0	-21.5	-19.0	-19.1	-19.1	100	0.0	-14.0	-14.0	-41.3	-45.3	-37.8	-35.3	-35.5	-35.5	Y
105.0	-28.9	-24.9	-19.0	-14.4	-18.1	-18.1	105	0.0	-14.0	-14.0	-45.3	-41.2	-35.3	-30.7	-34.5	-34.5	Y
110.0	-21.4	-47.8	-19.3	-18.6	-19.9	-19.9	110	0.0	-14.0	-14.0	-37.7	-64.1	-35.6	-34.9	-36.2	-36.2	Y
115.0	-34.1	-32.4	-27.4	-14.7	-16.5	-16.5	115	0.0	-14.0	-14.0	-50.5	-48.7	-43.8	-31.1	-32.8	-32.8	Y
120.0	-32.3	-26.9	-20.7	-17.6	-22.4	-22.4	120	0.0	-14.0	-14.0	-48.6	-43.2	-37.0	-34.0	-38.8	-38.8	Y
125.0	-27.2	-23.2	-25.1	-22.1	-22.0	-22.0	125	0.0	-14.0	-14.0	-43.5	-39.5	-41.4	-38.4	-38.3	-38.3	Y
130.0	-29.4	-38.4	-24.0	-22.3	-31.3	-31.3	130	0.0	-14.0	-14.0	-45.8	-54.7	-40.3	-38.6	-47.6	-47.6	Y
135.0	-30.2	-24.3	-18.9	-22.1	-21.2	-21.2	135	0.0	-14.0	-14.0	-46.5	-40.6	-35.2	-38.4	-37.5	-37.5	Y
140.0	-31.3	-24.2	-28.8	-24.0	-31.1	-31.1	140	0.0	-14.0	-14.0	-47.6	-40.5	-45.1	-40.4	-47.4	-47.4	Y
145.0	-31.8	-24.1	-34.8	-27.6	-40.3	-40.3	145	0.0	-14.0	-14.0	-48.1	-40.4	-51.1	-44.0	-56.6	-56.6	Y
150.0	-26.2	-32.7	-32.2	-35.3	-39.3	-39.3	150	0.0	-14.0	-14.0	-42.6	-49.0	-48.5	-51.7	-55.7	-55.7	Y
155.0	-34.1	-25.3	-28.0	-28.5	-28.2	-28.2	155	0.0	-14.0	-14.0	-50.5	-41.6	-44.4	-44.9	-44.5	-44.5	Y
160.0	-29.0	-38.5	-35.7	-29.6	-51.8	-51.8	160	0.0	-14.0	-14.0	-45.3	-54.8	-52.1	-46.0	-68.1	-68.1	Y
165.0	-28.1	-30.0	-48.2	-29.2	-32.0	-32.0	165	0.0	-14.0	-14.0	-44.4	-46.3	-64.5	-45.5	-48.4	-48.4	Y
170.0	-32.9	-29.2	-37.6	-28.8	-32.9	-32.9	170	0.0	-14.0	-14.0	-49.2	-45.5	-53.9	-45.1	-49.3	-49.3	Y
175.0	-30.6	-34.9	-29.3	-36.9	-33.4	-33.4	175	0.0	-14.0	-14.0	-46.9	-51.2	-45.6	-53.2	-49.7	-49.7	Y
180.0	25.9	27.1	26.4	28.0	26.2	26.2	180	0.0	-14.0	-14.0	9.6	10.8	10.1	11.7	9.9	9.9	N

APPENDIX D: Antenna Gain and EIRP Tables

Co Pol Azimuth	Antenna Gain (dBi)									Off-Axis EIRP (dBW/4 kHz)							
Off-Axis Angle	14 GHz E	14 GHz H	14.25 GHz E	14.25 GHz H	14.5 GHz E	14.5 GHz H	Off-Axis Angle	FCC §25.209	FCC §25.209(a)(2) + §25.212 EIRP GSO Mask, Skew = 55 deg	FCC §25.209(a)(2) + §25.212 EIRP GSO Mask, Skew = 55 deg	14 GHz E	14 GHz H	14.25 GHz E	14.25 GHz H	14.5 GHz E	14.5 GHz H	Meets Mask
-180	-30.8	-32.9	-24.3	-30.8	-30.8	-29.4	-180	0.0	-14.0	-14.0	-47.2	-49.2	-40.6	-47.2	-47.2	-45.7	Y
-175	-33.3	-30.1	-36.2	-34.8	-33.3	-30.1	-175	0.0	-14.0	-14.0	-49.6	-46.4	-52.6	-51.2	-49.6	-46.5	Y
-170	-34.6	-43.0	-28.5	-52.1	-34.6	-35.9	-170	0.0	-14.0	-14.0	-50.9	-59.3	-44.8	-68.4	-50.9	-52.3	Y
-165	-28.4	-27.7	-27.1	-29.4	-28.4	-33.5	-165	0.0	-14.0	-14.0	-44.7	-44.1	-43.4	-45.8	-44.7	-49.9	Y
-160	-30.1	-24.1	-26.0	-24.9	-30.1	-32.5	-160	0.0	-14.0	-14.0	-46.4	-40.5	-42.3	-41.2	-46.4	-48.9	Y
-155	-18.5	-23.3	-22.0	-27.8	-18.5	-31.7	-155	0.0	-14.0	-14.0	-34.8	-39.6	-38.3	-44.2	-34.8	-48.1	Y
-150	-29.6	-26.1	-25.1	-30.3	-29.6	-25.0	-150	0.0	-14.0	-14.0	-45.9	-42.4	-41.4	-46.7	-45.9	-41.3	Y
-145	-27.3	-24.1	-24.7	-21.2	-27.3	-30.9	-145	0.0	-14.0	-14.0	-43.7	-40.4	-41.0	-37.6	-43.7	-47.3	Y
-140	-45.6	-26.8	-44.3	-22.6	-45.6	-31.5	-140	0.0	-14.0	-14.0	-61.9	-43.2	-60.7	-38.9	-61.9	-47.8	Y
-135	-20.3	-22.9	-23.0	-24.6	-20.3	-31.6	-135	0.0	-14.0	-14.0	-36.6	-39.2	-39.4	-40.9	-36.6	-47.9	Y
-130	-23.2	-31.8	-26.2	-23.8	-23.2	-33.3	-130	0.0	-14.0	-14.0	-39.5	-48.2	-42.6	-40.1	-39.5	-49.6	Y
-125	-30.6	-33.2	-30.9	-21.9	-30.6	-28.4	-125	0.0	-14.0	-14.0	-46.9	-49.6	-47.2	-38.3	-46.9	-44.7	Y
-120	-18.7	-29.7	-19.1	-20.7	-18.7	-33.4	-120	0.0	-14.0	-14.0	-35.1	-46.1	-35.5	-37.1	-35.1	-49.7	Y
-115	-29.5	-33.7	-18.4	-24.5	-29.5	-22.3	-115	0.0	-14.0	-14.0	-45.8	-50.1	-34.7	-40.9	-45.8	-38.7	Y
-110	-21.0	-17.8	-16.9	-28.5	-21.0	-22.7	-110	0.0	-14.0	-14.0	-37.4	-34.2	-33.2	-44.8	-37.4	-39.0	Y
-105	-30.0	-19.8	-11.7	-17.8	-30.0	-21.4	-105	0.0	-14.0	-14.0	-46.4	-36.1	-28.0	-34.1	-46.4	-37.7	Y
-100	-17.3	-14.0	-18.7	-18.7	-17.3	-17.1	-100	0.0	-14.0	-14.0	-33.7	-30.3	-35.1	-35.1	-33.7	-33.4	Y
-95	-21.4	-28.0	-19.5	-20.1	-21.4	-17.2	-95	0.0	-14.0	-14.0	-37.7	-44.3	-35.9	-36.4	-37.7	-33.6	Y
-90	-16.9	-22.7	-18.4	-24.7	-16.9	-17.8	-90	0.0	-14.0	-14.0	-33.2	-39.0	-34.7	-41.0	-33.2	-34.1	Y
-85	-16.5	-16.0	-21.6	-22.1	-16.5	-27.1	-85	-10.0	-24.0	-24.0	-32.9	-32.3	-38.0	-38.5	-32.9	-43.4	Y
-80	-14.1	-20.0	-20.1	-22.5	-14.1	-19.8	-80	-10.0	-24.0	-24.0	-30.4	-36.3	-36.4	-38.9	-30.4	-36.2	Y
-75	-27.8	-21.0	-25.9	-26.1	-27.8	-21.9	-75	-10.0	-24.0	-24.0	-44.1	-37.4	-42.3	-42.4	-44.1	-38.2	Y
-70	-17.8	-17.3	-26.9	-17.2	-17.8	-21.0	-70	-10.0	-24.0	-24.0	-34.2	-33.6	-43.3	-33.5	-34.2	-37.4	Y
-65	-11.8	-15.7	-17.7	-21.6	-11.8	-15.7	-65	-10.0	-24.0	-24.0	-28.1	-32.0	-34.0	-38.0	-28.1	-32.0	Y
-60	-14.2	-18.8	-17.4	-13.9	-14.2	-19.1	-60	-10.0	-24.0	-24.0	-30.6	-35.1	-33.7	-30.2	-30.6	-35.5	Y
-55	-24.9	-14.0	-24.6	-9.6	-24.9	-25.9	-55	-10.0	-24.0	-24.0	-41.3	-30.3	-41.0	-26.0	-41.3	-42.3	Y
-50	-25.2	-14.3	-20.3	-8.5	-25.2	-19.7	-50	-10.0	-24.0	-24.0	-41.5	-30.6	-36.6	-24.8	-41.5	-36.0	Y

APPENDIX D: Antenna Gain and EIRP Tables

-48	-20.6	-35.2	-16.8	-12.5	-20.6	-14.7	-48	-10.0	-24.0	-24.0	-36.9	-51.6	-33.1	-28.8	-36.9	-31.0	Y
-45	-23.1	-34.6	-11.5	-22.1	-23.1	-19.3	-45	-9.3	-23.3	-23.3	-39.4	-51.0	-27.8	-38.5	-39.4	-35.7	Y
-40	-12.7	-17.0	-22.9	-18.1	-12.7	-37.7	-40	-8.1	-22.1	-22.1	-29.0	-33.3	-39.3	-34.5	-29.0	-54.1	Y
-35	-12.5	-12.7	-17.9	-15.6	-12.5	-11.0	-35	-6.6	-20.6	-20.6	-28.9	-29.0	-34.3	-32.0	-28.9	-27.3	Y
-30	-39.5	-15.7	-23.1	-18.8	-39.5	-16.2	-30	-4.9	-18.9	-18.9	-55.8	-32.0	-39.5	-35.1	-55.8	-32.5	Y
-25	-10.5	-18.9	-18.1	-15.8	-10.5	-29.0	-25	-2.9	-16.9	-16.9	-26.8	-35.3	-34.4	-32.1	-26.8	-45.4	Y
-20	-9.7	-9.4	-5.1	-9.4	-9.7	-13.2	-20	-0.5	-14.5	-14.5	-26.0	-25.7	-21.4	-25.7	-26.0	-29.6	Y
-15	-4.7	-5.6	-4.1	-6.2	-4.7	-2.5	-15	2.6	-11.4	-11.4	-21.0	-21.9	-20.4	-22.6	-21.0	-18.8	Y
-10	-14.5	-6.4	-26.4	-5.4	-14.5	-6.5	-10	7.0	-7.0	-7.0	-30.8	-22.8	-42.7	-21.8	-30.8	-22.8	Y
-9.9	-16.3	-6.1	-32.1	-5.1	-16.3	-5.6	-9.9	7.1	-6.9	-6.9	-32.6	-22.4	-48.5	-21.4	-32.6	-21.9	Y
-9.8	-18.4	-5.9	-33.5	-4.9	-18.4	-4.9	-9.8	7.2	-6.8	-6.8	-34.8	-22.2	-49.8	-21.3	-34.8	-21.2	Y
-9.7	-21.3	-5.9	-28.9	-4.8	-21.3	-4.4	-9.7	7.3	-6.7	-6.7	-37.6	-22.2	-45.2	-21.2	-37.6	-20.7	Y
-9.6	-24.4	-6.0	-25.6	-4.9	-24.4	-4.0	-9.6	7.4	-6.6	-6.6	-40.8	-22.3	-42.0	-21.2	-40.8	-20.3	Y
-9.5	-27.9	-6.2	-23.7	-5.1	-27.9	-3.7	-9.5	7.6	-6.4	-6.4	-44.2	-22.6	-40.0	-21.4	-44.2	-20.1	Y
-9.4	-28.6	-6.7	-22.2	-5.4	-28.6	-3.6	-9.4	7.7	-6.3	-6.3	-44.9	-23.0	-38.5	-21.7	-44.9	-20.0	Y
-9.3	-25.7	-7.3	-20.8	-5.8	-25.7	-3.6	-9.3	7.8	-6.2	-6.2	-42.1	-23.7	-37.2	-22.2	-42.1	-20.0	Y
-9.2	-22.3	-8.2	-19.6	-6.5	-22.3	-3.8	-9.2	8.0	-6.0	-6.1	-38.6	-24.5	-35.9	-22.8	-38.6	-20.1	Y
-9.1	-19.6	-9.2	-18.1	-7.2	-19.6	-4.0	-9.1	8.0	-6.0	-6.0	-36.0	-25.6	-34.4	-23.6	-36.0	-20.4	Y
-9	-17.3	-10.7	-16.4	-8.2	-17.3	-4.4	-9	8.0	-6.0	-5.9	-33.6	-27.0	-32.8	-24.5	-33.6	-20.8	Y
-8.9	-15.3	-12.5	-14.9	-9.4	-15.3	-5.0	-8.9	8.0	-6.0	-5.7	-31.6	-28.8	-31.2	-25.7	-31.6	-21.3	Y
-8.8	-13.7	-14.9	-13.2	-10.8	-13.7	-5.7	-8.8	8.0	-6.0	-5.6	-30.0	-31.2	-29.6	-27.2	-30.0	-22.1	Y
-8.7	-12.0	-18.5	-11.7	-12.7	-12.0	-6.6	-8.7	8.0	-6.0	-5.5	-28.3	-34.9	-28.1	-29.0	-28.3	-23.0	Y
-8.6	-10.5	-24.2	-10.2	-14.7	-10.5	-7.8	-8.6	8.0	-6.0	-5.4	-26.9	-40.5	-26.6	-31.1	-26.9	-24.2	Y
-8.5	-9.3	-26.9	-8.9	-16.7	-9.3	-9.3	-8.5	8.0	-6.0	-5.2	-25.6	-43.2	-25.2	-33.0	-25.6	-25.6	Y
-8.4	-8.1	-20.9	-7.7	-17.6	-8.1	-11.0	-8.4	8.0	-6.0	-5.1	-24.4	-37.2	-24.1	-33.9	-24.4	-27.3	Y
-8.3	-7.0	-16.7	-6.7	-16.8	-7.0	-13.3	-8.3	8.0	-6.0	-5.0	-23.4	-33.0	-23.0	-33.2	-23.4	-29.6	Y
-8.2	-6.1	-13.9	-5.7	-15.0	-6.1	-16.0	-8.2	8.0	-6.0	-4.8	-22.4	-30.2	-22.1	-31.4	-22.4	-32.4	Y
-8.1	-5.2	-11.9	-4.9	-13.3	-5.2	-19.3	-8.1	8.0	-6.0	-4.7	-21.6	-28.2	-21.3	-29.6	-21.6	-35.7	Y
-8	-4.5	-10.5	-4.3	-11.8	-4.5	-21.3	-8	8.0	-6.0	-4.6	-20.9	-26.9	-20.6	-28.1	-20.9	-37.6	Y
-7.9	-3.9	-9.5	-3.7	-10.7	-3.9	-19.6	-7.9	8.0	-6.0	-4.4	-20.3	-25.8	-20.0	-27.0	-20.3	-36.0	Y
-7.8	-3.4	-8.7	-3.2	-9.8	-3.4	-17.2	-7.8	8.0	-6.0	-4.3	-19.7	-25.1	-19.6	-26.2	-19.7	-33.5	Y
-7.7	-3.0	-8.3	-2.9	-9.3	-3.0	-15.1	-7.7	8.0	-6.0	-4.2	-19.3	-24.6	-19.2	-25.6	-19.3	-31.4	Y
-7.6	-2.7	-8.1	-2.7	-9.1	-2.7	-13.7	-7.6	8.0	-6.0	-4.0	-19.0	-24.4	-19.0	-25.4	-19.0	-30.1	Y
-7.5	-2.6	-8.2	-2.6	-9.1	-2.6	-12.9	-7.5	8.0	-6.0	-3.9	-18.9	-24.5	-18.9	-25.4	-18.9	-29.2	Y
-7.4	-2.5	-8.5	-2.7	-9.5	-2.5	-12.5	-7.4	8.0	-6.0	-3.7	-18.9	-24.9	-19.0	-25.8	-18.9	-28.8	Y

APPENDIX D: Antenna Gain and EIRP Tables

-7.3	-2.6	-9.2	-2.9	-10.2	-2.6	-12.5	-7.3	8.0	-6.0	-3.6	-19.0	-25.5	-19.2	-26.5	-19.0	-28.8	Y
-7.2	-3.0	-10.1	-3.3	-11.5	-3.0	-13.0	-7.2	8.0	-6.0	-3.4	-19.3	-26.5	-19.6	-27.9	-19.3	-29.4	Y
-7.1	-3.4	-11.4	-3.9	-13.7	-3.4	-14.1	-7.1	8.0	-6.0	-3.3	-19.8	-27.7	-20.2	-30.0	-19.8	-30.4	Y
-7	-4.2	-12.7	-4.8	-17.4	-4.2	-15.7	-7	8.0	-6.0	-3.1	-20.5	-29.0	-21.1	-33.8	-20.5	-32.0	Y
-6.9	-5.2	-13.1	-6.0	-23.9	-5.2	-17.1	-6.9	8.0	-6.0	-3.0	-21.5	-29.4	-22.3	-40.3	-21.5	-33.4	Y
-6.8	-6.6	-11.9	-7.4	-21.4	-6.6	-16.5	-6.8	8.2	-5.8	-2.8	-22.9	-28.2	-23.8	-37.7	-22.9	-32.8	Y
-6.7	-8.3	-9.7	-9.1	-14.4	-8.3	-13.7	-6.7	8.3	-5.7	-2.7	-24.6	-26.0	-25.4	-30.8	-24.6	-30.0	Y
-6.6	-10.4	-7.1	-10.6	-9.8	-10.4	-10.4	-6.6	8.5	-5.5	-2.5	-26.8	-23.4	-26.9	-26.1	-26.8	-26.7	Y
-6.5	-11.6	-4.8	-10.3	-6.6	-11.6	-7.4	-6.5	8.7	-5.3	-2.3	-27.9	-21.1	-26.6	-22.9	-27.9	-23.7	Y
-6.4	-10.3	-2.8	-8.2	-4.1	-10.3	-5.0	-6.4	8.8	-5.2	-2.2	-26.6	-19.2	-24.6	-20.4	-26.6	-21.3	Y
-6.3	-7.0	-1.0	-5.3	-2.0	-7.0	-2.8	-6.3	9.0	-5.0	-2.0	-23.3	-17.3	-21.6	-18.3	-23.3	-19.1	Y
-6.2	-4.2	0.5	-2.8	-0.2	-4.2	-0.9	-6.2	9.2	-4.8	-1.8	-20.5	-15.8	-19.1	-16.5	-20.5	-17.3	Y
-6.1	-1.7	1.9	-0.7	1.3	-1.7	0.6	-6.1	9.4	-4.6	-1.6	-18.1	-14.4	-17.0	-15.0	-18.1	-15.7	Y
-6	0.3	3.1	1.2	2.6	0.3	2.1	-6	9.5	-4.5	-1.5	-16.0	-13.2	-15.2	-13.7	-16.0	-14.2	Y
-5.9	2.0	4.2	2.7	3.9	2.0	3.4	-5.9	9.7	-4.3	-1.3	-14.4	-12.1	-13.6	-12.5	-14.4	-13.0	Y
-5.8	3.5	5.1	4.1	4.9	3.5	4.5	-5.8	9.9	-4.1	-1.1	-12.8	-11.2	-12.2	-11.5	-12.8	-11.8	Y
-5.7	4.9	6.0	5.3	5.8	4.9	5.5	-5.7	10.1	-3.9	-0.9	-11.5	-10.3	-11.0	-10.5	-11.5	-10.8	Y
-5.6	6.1	6.7	6.4	6.6	6.1	6.4	-5.6	10.3	-3.7	-0.7	-10.3	-9.6	-9.9	-9.7	-10.3	-9.9	Y
-5.5	7.1	7.4	7.4	7.4	7.1	7.3	-5.5	10.5	-3.5	-0.5	-9.2	-8.9	-8.9	-9.0	-9.2	-9.1	Y
-5.4	8.1	8.0	8.2	8.0	8.1	8.0	-5.4	10.7	-3.3	-0.3	-8.3	-8.4	-8.1	-8.4	-8.3	-8.4	Y
-5.3	8.9	8.5	9.0	8.5	8.9	8.6	-5.3	10.9	-3.1	-0.1	-7.4	-7.9	-7.3	-7.8	-7.4	-7.8	Y
-5.2	9.6	8.8	9.6	8.9	9.6	9.1	-5.2	11.1	-2.9	0.1	-6.7	-7.5	-6.7	-7.4	-6.7	-7.2	Y
-5.1	10.2	9.1	10.2	9.3	10.2	9.5	-5.1	11.3	-2.7	0.3	-6.1	-7.2	-6.2	-7.0	-6.1	-6.8	Y
-5	10.8	9.4	10.7	9.6	10.8	9.9	-5	11.5	-2.5	0.5	-5.5	-7.0	-5.7	-6.8	-5.5	-6.4	Y
-4.9	11.3	9.5	11.0	9.8	11.3	10.2	-4.9	11.7	-2.3	0.7	-5.1	-6.8	-5.3	-6.6	-5.1	-6.1	Y
-4.8	11.7	9.5	11.3	9.9	11.7	10.4	-4.8	12.0	-2.0	1.0	-4.7	-6.8	-5.0	-6.5	-4.7	-6.0	Y
-4.7	11.9	9.5	11.6	9.9	11.9	10.5	-4.7	12.2	-1.8	1.2	-4.4	-6.9	-4.8	-6.5	-4.4	-5.9	Y
-4.6	12.1	9.3	11.7	9.8	12.1	10.4	-4.6	12.4	-1.6	1.4	-4.2	-7.1	-4.6	-6.6	-4.2	-5.9	Y
-4.5	12.3	9.0	11.7	9.5	12.3	10.3	-4.5	12.7	-1.3	1.7	-4.1	-7.4	-4.6	-6.8	-4.1	-6.0	Y
-4.4	12.3	8.5	11.6	9.2	12.3	10.1	-4.4	12.9	-1.1	1.9	-4.0	-7.8	-4.7	-7.2	-4.0	-6.2	Y
-4.3	12.3	7.8	11.5	8.6	12.3	9.7	-4.3	13.2	-0.8	2.2	-4.1	-8.5	-4.9	-7.7	-4.1	-6.6	Y
-4.2	12.1	6.9	11.2	7.9	12.1	9.1	-4.2	13.4	-0.6	2.4	-4.3	-9.4	-5.2	-8.5	-4.3	-7.2	Y
-4.1	11.7	5.6	10.7	6.9	11.7	8.4	-4.1	13.7	-0.3	2.7	-4.6	-10.7	-5.6	-9.5	-4.6	-7.9	Y
-4	11.3	3.9	10.2	5.5	11.3	7.4	-4	13.9	-0.1	2.9	-5.0	-12.4	-6.2	-10.9	-5.0	-9.0	Y
-3.9	10.7	1.4	9.4	3.5	10.7	6.0	-3.9	14.2	0.2	3.2	-5.6	-15.0	-7.0	-12.8	-5.6	-10.3	Y

APPENDIX D: Antenna Gain and EIRP Tables

-3.8	9.9	-2.7	8.3	0.6	9.9	4.0	-3.8	14.5	0.5	3.5	-6.5	-19.0	-8.0	-15.7	-6.5	-12.3	Y
-3.7	8.8	-11.0	7.0	-4.9	8.8	1.0	-3.7	14.8	0.8	3.8	-7.6	-27.3	-9.4	-21.3	-7.6	-15.3	Y
-3.6	7.2	-7.0	5.0	-33.8	7.2	-4.5	-3.6	15.1	1.1	4.1	-9.1	-23.4	-11.3	-50.1	-9.1	-20.9	Y
-3.5	5.1	0.1	2.4	-4.7	5.1	-21.6	-3.5	15.4	1.4	4.4	-11.3	-16.2	-13.9	-21.1	-11.3	-37.9	Y
-3.4	1.8	4.5	-0.6	1.8	1.8	-4.2	-3.4	15.7	1.7	4.7	-14.5	-11.9	-16.9	-14.6	-14.5	-20.5	Y
-3.3	-4.6	7.5	-2.0	5.7	-4.6	2.5	-3.3	16.0	2.0	5.0	-21.0	-8.8	-18.3	-10.6	-21.0	-13.9	Y
-3.2	-17.1	10.0	1.2	8.7	-17.1	6.3	-3.2	16.4	2.4	5.4	-33.4	-6.4	-15.1	-7.7	-33.4	-10.1	Y
-3.1	-0.6	12.0	5.2	10.9	-0.6	9.2	-3.1	16.7	2.7	5.7	-17.0	-4.3	-11.1	-5.4	-17.0	-7.1	Y
-3	5.0	13.7	8.3	12.8	5.0	11.4	-3	17.1	3.1	6.1	-11.3	-2.7	-8.0	-3.5	-11.3	-4.9	Y
-2.9	8.4	15.2	10.7	14.5	8.4	13.3	-2.9	17.4	3.4		-7.9	-1.2	-5.6	-1.9	-7.9	-3.0	Y
-2.8	11.2	16.5	12.9	15.9	11.2	15.0	-2.8	17.8	3.8		-5.1	0.1	-3.4	-0.5	-5.1	-1.4	Y
-2.7	13.4	17.6	14.7	17.1	13.4	16.3	-2.7	18.2	4.2		-2.9	1.3	-1.7	0.8	-2.9	0.0	Y
-2.6	15.1	18.7	16.2	18.3	15.1	17.6	-2.6	18.6	4.6		-1.2	2.4	-0.2	1.9	-1.2	1.3	Y
-2.5	16.7	19.7	17.5	19.3	16.7	18.7	-2.5	19.1	5.1		0.4	3.3	1.2	3.0	0.4	2.4	Y
-2.4	18.0	20.6	18.8	20.3	18.0	19.8	-2.4	19.5	5.5		1.7	4.3	2.4	3.9	1.7	3.4	Y
-2.3	19.1	21.4	19.8	21.1	19.1	20.7	-2.3	20.0	6.0		2.8	5.0	3.5	4.8	2.8	4.3	Y
-2.2	20.2	22.2	20.8	21.9	20.2	21.5	-2.2	20.4	6.4		3.9	5.8	4.5	5.6	3.9	5.2	Y
-2.1	21.2	22.9	21.7	22.6	21.2	22.3	-2.1	20.9	6.9		4.8	6.5	5.4	6.3	4.8	6.0	Y
-2	22.0	23.5	22.5	23.3	22.0	23.0	-2	21.5	7.5		5.7	7.2	6.2	7.0	5.7	6.7	Y
-1.9	22.9	24.1	23.3	24.0	22.9	23.7	-1.9	22.0	8.0		6.5	7.8	7.0	7.6	6.5	7.4	Y
-1.8	23.5	24.6	23.9	24.5	23.5	24.3	-1.8	22.6	8.6		7.2	8.3	7.6	8.2	7.2	8.0	Y
-1.7	24.2	25.2	24.5	25.0	24.2	24.8	-1.7	23.2	9.2		7.8	8.8	8.2	8.7	7.8	8.5	Y
-1.6	24.8	25.6	25.1	25.5	24.8	25.4	-1.6	23.9	9.9		8.5	9.3	8.8	9.2	8.5	9.0	Y
-1.5	25.3	26.1	25.6	26.0	25.3	25.8	-1.5	24.6	10.6		9.0	9.7	9.3	9.6	9.0	9.5	Y
-1.4	25.8	26.5	26.0	26.4	25.8	26.3	-1.4				9.5	10.1	9.7	10.0	9.5	9.9	Y
-1.3	26.3	26.8	26.5	26.8	26.3	26.7	-1.3				10.0	10.5	10.1	10.4	10.0	10.4	Y
-1.2	26.7	27.2	26.8	27.1	26.7	27.1	-1.2				10.4	10.8	10.5	10.8	10.4	10.7	Y
-1.1	27.1	27.5	27.2	27.4	27.1	27.4	-1.1				10.8	11.1	10.9	11.1	10.8	11.1	Y
-1	27.5	27.7	27.5	27.7	27.5	27.7	-1				11.1	11.4	11.2	11.4	11.1	11.3	Y
-0.9	27.8	28.0	27.8	28.0	27.8	27.9	-0.9				11.5	11.7	11.4	11.6	11.5	11.6	Y
-0.8	28.1	28.2	28.0	28.2	28.1	28.2	-0.8				11.7	11.9	11.7	11.8	11.7	11.8	Y
-0.7	28.3	28.4	28.2	28.4	28.3	28.4	-0.7				12.0	12.1	11.9	12.0	12.0	12.0	Y
-0.6	28.5	28.6	28.4	28.5	28.5	28.6	-0.6				12.2	12.3	12.1	12.2	12.2	12.2	Y
-0.5	28.7	28.7	28.6	28.7	28.7	28.7	-0.5				12.3	12.4	12.2	12.3	12.3	12.4	Y
-0.4	28.8	28.8	28.7	28.8	28.8	28.8	-0.4				12.5	12.5	12.4	12.5	12.5	12.5	Y

APPENDIX D: Antenna Gain and EIRP Tables

-0.3	28.9	28.9	28.8	28.9	28.9	28.9	-0.3				12.6	12.6	12.5	12.6	12.6	12.6	Y
-0.2	29.0	29.0	28.9	29.0	29.0	29.0	-0.2				12.6	12.6	12.6	12.6	12.6	12.6	Y
-0.1	29.0	29.0	29.0	29.0	29.0	29.0	-0.1				12.7	12.7	12.6	12.7	12.7	12.7	Y
0	29.0	29.0	29.0	29.0	29.0	29.0	0				12.7	12.7	12.7	12.7	12.7	12.7	Y
0.1	29.0	29.0	29.0	29.0	29.0	28.9	0.1				12.6	12.6	12.7	12.6	12.6	12.6	Y
0.2	28.9	28.9	29.0	28.9	28.9	28.9	0.2				12.6	12.6	12.6	12.6	12.6	12.6	Y
0.3	28.8	28.8	28.9	28.8	28.8	28.8	0.3				12.5	12.5	12.6	12.5	12.5	12.5	Y
0.4	28.7	28.7	28.8	28.7	28.7	28.7	0.4				12.4	12.4	12.5	12.4	12.4	12.3	Y
0.5	28.6	28.6	28.7	28.5	28.6	28.5	0.5				12.2	12.3	12.4	12.2	12.2	12.2	Y
0.6	28.4	28.4	28.5	28.4	28.4	28.4	0.6				12.0	12.1	12.2	12.0	12.0	12.0	Y
0.7	28.2	28.2	28.4	28.2	28.2	28.1	0.7				11.9	11.9	12.0	11.8	11.9	11.8	Y
0.8	27.9	28.0	28.1	27.9	27.9	27.9	0.8				11.6	11.7	11.8	11.6	11.6	11.6	Y
0.9	27.7	27.7	27.8	27.7	27.7	27.6	0.9				11.4	11.4	11.5	11.3	11.4	11.3	Y
1	27.4	27.5	27.5	27.4	27.4	27.3	1				11.1	11.1	11.2	11.1	11.1	11.0	Y
1.1	27.1	27.2	27.2	27.1	27.1	27.0	1.1				10.7	10.8	10.9	10.8	10.7	10.7	Y
1.2	26.7	26.9	26.8	26.7	26.7	26.7	1.2				10.4	10.5	10.5	10.4	10.4	10.3	Y
1.3	26.3	26.5	26.4	26.4	26.3	26.2	1.3				10.0	10.2	10.1	10.0	10.0	9.9	Y
1.4	25.8	26.1	25.9	25.9	25.8	25.8	1.4				9.5	9.8	9.6	9.6	9.5	9.5	Y
1.5	25.3	25.7	25.4	25.5	25.3	25.3	1.5	24.6	10.6		9.0	9.3	9.1	9.1	9.0	9.0	Y
1.6	24.8	25.2	24.9	25.0	24.8	24.8	1.6	23.9	9.9		8.4	8.9	8.6	8.6	8.4	8.5	Y
1.7	24.1	24.7	24.3	24.5	24.1	24.2	1.7	23.2	9.2		7.8	8.4	8.0	8.1	7.8	7.9	Y
1.8	23.5	24.2	23.7	23.9	23.5	23.7	1.8	22.6	8.6		7.1	7.8	7.3	7.5	7.1	7.3	Y
1.9	22.7	23.6	23.0	23.3	22.7	23.0	1.9	22.0	8.0		6.4	7.2	6.6	6.9	6.4	6.6	Y
2	21.9	23.0	22.2	22.6	21.9	22.3	2	21.5	7.5		5.6	6.6	5.9	6.2	5.6	5.9	Y
2.1	21.0	22.3	21.4	21.9	21.0	21.5	2.1	20.9	6.9		4.7	5.9	5.1	5.5	4.7	5.2	Y
2.2	20.0	21.6	20.5	21.1	20.0	20.6	2.2	20.4	6.4		3.7	5.2	4.2	4.7	3.7	4.3	Y
2.3	18.9	20.7	19.5	20.2	18.9	19.7	2.3	20.0	6.0		2.6	4.4	3.2	3.9	2.6	3.4	Y
2.4	17.7	19.9	18.4	19.3	17.7	18.7	2.4	19.5	5.5		1.4	3.5	2.1	3.0	1.4	2.4	Y
2.5	16.3	19.0	17.2	18.3	16.3	17.6	2.5	19.1	5.1		0.0	2.6	0.8	2.0	0.0	1.3	Y
2.6	14.9	18.0	15.9	17.2	14.9	16.4	2.6	18.6	4.6		-1.4	1.6	-0.5	0.9	-1.4	0.1	Y
2.7	13.1	16.8	14.3	16.0	13.1	15.0	2.7	18.2	4.2		-3.2	0.5	-2.0	-0.3	-3.2	-1.3	Y
2.8	11.0	15.6	12.4	14.6	11.0	13.5	2.8	17.8	3.8		-5.3	-0.8	-3.9	-1.8	-5.3	-2.9	Y
2.9	8.5	14.2	10.2	13.0	8.5	11.6	2.9	17.4	3.4		-7.8	-2.2	-6.1	-3.3	-7.8	-4.8	Y
3	5.1	12.5	7.4	11.1	5.1	9.4	3	17.1	3.1	6.1	-11.3	-3.8	-9.0	-5.2	-11.3	-6.9	Y
3.1	0.1	10.6	3.5	9.0	0.1	6.7	3.1	16.7	2.7	5.7	-16.3	-5.7	-12.8	-7.3	-16.3	-9.7	Y

APPENDIX D: Antenna Gain and EIRP Tables

3.2	-9.9	8.5	-2.1	6.4	-9.9	3.1	3.2	16.4	2.4	5.4	-26.2	-7.8	-18.4	-9.9	-26.2	-13.3	Y
3.3	-8.6	5.9	-8.4	3.0	-8.6	-2.0	3.3	16.0	2.0	5.0	-24.9	-10.4	-24.7	-13.3	-24.9	-18.4	Y
3.4	-0.3	2.4	-2.4	-1.6	-0.3	-10.8	3.4	15.7	1.7	4.7	-16.7	-13.9	-18.7	-17.9	-16.7	-27.1	Y
3.5	3.7	-3.4	2.5	-9.3	3.7	-5.6	3.5	15.4	1.4	4.4	-12.6	-19.7	-13.8	-25.6	-12.6	-21.9	Y
3.6	6.0	-15.2	5.3	-6.6	6.0	-0.4	3.6	15.1	1.1	4.1	-10.3	-31.5	-11.1	-22.9	-10.3	-16.7	Y
3.7	7.8	-7.3	7.4	-0.9	7.8	3.1	3.7	14.8	0.8	3.8	-8.5	-23.7	-9.0	-17.2	-8.5	-13.2	Y
3.8	9.0	-1.0	8.8	2.5	9.0	5.2	3.8	14.5	0.5	3.5	-7.3	-17.3	-7.6	-13.9	-7.3	-11.1	Y
3.9	10.0	2.4	9.8	4.6	10.0	6.7	3.9	14.2	0.2	3.2	-6.4	-13.9	-6.5	-11.7	-6.4	-9.6	Y
4	10.6	4.5	10.6	6.1	10.6	7.8	4	13.9	-0.1	2.9	-5.7	-11.9	-5.7	-10.3	-5.7	-8.6	Y
4.1	11.1	6.0	11.2	7.2	11.1	8.6	4.1	13.7	-0.3	2.7	-5.2	-10.3	-5.1	-9.1	-5.2	-7.8	Y
4.2	11.5	7.1	11.6	8.0	11.5	9.1	4.2	13.4	-0.6	2.4	-4.9	-9.3	-4.7	-8.3	-4.9	-7.2	Y
4.3	11.6	7.9	11.9	8.6	11.6	9.5	4.3	13.2	-0.8	2.2	-4.7	-8.5	-4.4	-7.7	-4.7	-6.8	Y
4.4	11.7	8.5	12.1	9.0	11.7	9.8	4.4	12.9	-1.1	1.9	-4.6	-7.8	-4.2	-7.3	-4.6	-6.5	Y
4.5	11.7	8.9	12.2	9.3	11.7	9.9	4.5	12.7	-1.3	1.7	-4.6	-7.4	-4.2	-7.0	-4.6	-6.4	Y
4.6	11.6	9.2	12.1	9.5	11.6	9.9	4.6	12.4	-1.6	1.4	-4.7	-7.2	-4.2	-6.9	-4.7	-6.4	Y
4.7	11.4	9.3	12.0	9.5	11.4	9.9	4.7	12.2	-1.8	1.2	-5.0	-7.0	-4.3	-6.8	-5.0	-6.5	Y
4.8	11.1	9.4	11.8	9.5	11.1	9.7	4.8	12.0	-2.0	1.0	-5.3	-7.0	-4.5	-6.9	-5.3	-6.7	Y
4.9	10.7	9.3	11.5	9.3	10.7	9.4	4.9	11.7	-2.3	0.7	-5.6	-7.0	-4.8	-7.0	-5.6	-6.9	Y
5	10.2	9.2	11.1	9.1	10.2	9.0	5	11.5	-2.5	0.5	-6.1	-7.2	-5.2	-7.2	-6.1	-7.3	Y
5.1	9.7	8.9	10.6	8.8	9.7	8.6	5.1	11.3	-2.7	0.3	-6.6	-7.4	-5.7	-7.6	-6.6	-7.7	Y
5.2	9.1	8.6	10.1	8.4	9.1	8.0	5.2	11.1	-2.9	0.1	-7.3	-7.7	-6.3	-7.9	-7.3	-8.3	Y
5.3	8.3	8.2	9.4	7.9	8.3	7.4	5.3	10.9	-3.1	-0.1	-8.0	-8.1	-6.9	-8.4	-8.0	-8.9	Y
5.4	7.5	7.7	8.7	7.4	7.5	6.7	5.4	10.7	-3.3	-0.3	-8.8	-8.6	-7.6	-8.9	-8.8	-9.6	Y
5.5	6.6	7.2	7.9	6.8	6.6	5.9	5.5	10.5	-3.5	-0.5	-9.7	-9.2	-8.5	-9.6	-9.7	-10.4	Y
5.6	5.6	6.5	6.9	6.1	5.6	5.0	5.6	10.3	-3.7	-0.7	-10.7	-9.8	-9.4	-10.3	-10.7	-11.3	Y
5.7	4.5	5.8	5.8	5.3	4.5	4.0	5.7	10.1	-3.9	-0.9	-11.8	-10.5	-10.5	-11.1	-11.8	-12.4	Y
5.8	3.2	5.0	4.6	4.3	3.2	2.8	5.8	9.9	-4.1	-1.1	-13.1	-11.4	-11.8	-12.0	-13.1	-13.5	Y
5.9	1.8	4.1	3.2	3.4	1.8	1.5	5.9	9.7	-4.3	-1.3	-14.6	-12.3	-13.2	-13.0	-14.6	-14.8	Y
6	0.1	3.0	1.5	2.3	0.1	0.0	6	9.5	-4.5	-1.5	-16.2	-13.3	-14.8	-14.1	-16.2	-16.3	Y
6.1	-1.6	1.9	-0.3	1.1	-1.6	-1.6	6.1	9.4	-4.6	-1.6	-18.0	-14.4	-16.6	-15.3	-18.0	-17.9	Y
6.2	-3.6	0.7	-2.4	-0.2	-3.6	-3.5	6.2	9.2	-4.8	-1.8	-19.9	-15.7	-18.7	-16.6	-19.9	-19.8	Y
6.3	-5.6	-0.8	-4.8	-1.7	-5.6	-5.6	6.3	9.0	-5.0	-2.0	-21.9	-17.1	-21.1	-18.0	-21.9	-22.0	Y
6.4	-7.2	-2.4	-7.0	-3.4	-7.2	-8.3	6.4	8.8	-5.2	-2.2	-23.6	-18.8	-23.4	-19.7	-23.6	-24.7	Y
6.5	-8.0	-4.2	-8.1	-5.2	-8.0	-11.3	6.5	8.7	-5.3	-2.3	-24.3	-20.5	-24.4	-21.5	-24.3	-27.6	Y
6.6	-7.7	-6.3	-7.4	-7.2	-7.7	-14.6	6.6	8.5	-5.5	-2.5	-24.1	-22.6	-23.8	-23.6	-24.1	-31.0	Y

APPENDIX D: Antenna Gain and EIRP Tables

6.7	-6.9	-8.8	-6.0	-9.5	-6.9	-17.3	6.7	8.3	-5.7	-2.7	-23.3	-25.1	-22.3	-25.8	-23.3	-33.6	Y
6.8	-6.0	-11.9	-4.5	-12.0	-6.0	-17.1	6.8	8.2	-5.8	-2.8	-22.3	-28.3	-20.8	-28.3	-22.3	-33.4	Y
6.9	-5.2	-15.9	-3.2	-14.2	-5.2	-15.5	6.9	8.0	-6.0	-3.0	-21.5	-32.3	-19.5	-30.6	-21.5	-31.8	Y
7	-4.5	-22.1	-2.3	-15.9	-4.5	-14.0	7	7.9	-6.1	-3.1	-20.8	-38.4	-18.6	-32.2	-20.8	-30.3	Y
7.1	-4.0	-39.9	-1.5	-16.2	-4.0	-13.0	7.1	8.0	-6.0	-3.3	-20.3	-56.3	-17.9	-32.6	-20.3	-29.3	Y
7.2	-3.7	-27.4	-1.0	-15.6	-3.7	-12.4	7.2	8.0	-6.0	-3.4	-20.0	-43.7	-17.3	-32.0	-20.0	-28.8	Y
7.3	-3.6	-21.8	-0.7	-14.7	-3.6	-12.4	7.3	8.0	-6.0	-3.6	-19.9	-38.1	-17.0	-31.1	-19.9	-28.7	Y
7.4	-3.6	-19.1	-0.5	-13.9	-3.6	-12.6	7.4	8.0	-6.0	-3.7	-19.9	-35.4	-16.8	-30.3	-19.9	-28.9	Y
7.5	-3.7	-18.1	-0.5	-13.2	-3.7	-13.1	7.5	8.0	-6.0	-3.9	-20.1	-34.4	-16.8	-29.5	-20.1	-29.4	Y
7.6	-4.0	-17.6	-0.6	-12.6	-4.0	-13.7	7.6	8.0	-6.0	-4.0	-20.3	-34.0	-16.9	-28.9	-20.3	-30.1	Y
7.7	-4.4	-17.8	-0.8	-12.0	-4.4	-14.4	7.7	8.0	-6.0	-4.2	-20.7	-34.2	-17.2	-28.3	-20.7	-30.7	Y
7.8	-4.9	-18.6	-1.2	-11.2	-4.9	-14.8	7.8	8.0	-6.0	-4.3	-21.3	-34.9	-17.5	-27.6	-21.3	-31.1	Y
7.9	-5.6	-19.3	-1.7	-10.5	-5.6	-14.6	7.9	8.0	-6.0	-4.4	-21.9	-35.7	-18.0	-26.8	-21.9	-30.9	Y
8	-6.4	-19.7	-2.3	-9.6	-6.4	-13.6	8	8.0	-6.0	-4.6	-22.7	-36.1	-18.6	-25.9	-22.7	-30.0	Y
8.1	-7.3	-18.9	-3.0	-8.7	-7.3	-12.2	8.1	8.0	-6.0	-4.7	-23.6	-35.3	-19.3	-25.0	-23.6	-28.6	Y
8.2	-8.4	-17.2	-3.8	-7.8	-8.4	-10.9	8.2	8.0	-6.0	-4.8	-24.7	-33.6	-20.2	-24.1	-24.7	-27.2	Y
8.3	-9.6	-15.2	-4.8	-6.9	-9.6	-9.6	8.3	8.0	-6.0	-5.0	-25.9	-31.5	-21.1	-23.3	-25.9	-25.9	Y
8.4	-10.9	-13.3	-5.9	-6.1	-10.9	-8.4	8.4	8.0	-6.0	-5.1	-27.2	-29.6	-22.3	-22.5	-27.2	-24.7	Y
8.5	-12.4	-11.6	-7.2	-5.4	-12.4	-7.4	8.5	8.0	-6.0	-5.2	-28.8	-27.9	-23.6	-21.7	-28.8	-23.7	Y
8.6	-14.0	-10.1	-8.6	-4.7	-14.0	-6.6	8.6	8.0	-6.0	-5.4	-30.3	-26.4	-24.9	-21.1	-30.3	-22.9	Y
8.7	-15.8	-8.8	-10.3	-4.2	-15.8	-5.9	8.7	8.0	-6.0	-5.5	-32.1	-25.2	-26.7	-20.5	-32.1	-22.2	Y
8.8	-17.3	-7.7	-12.2	-3.6	-17.3	-5.3	8.8	8.0	-6.0	-5.6	-33.6	-24.0	-28.5	-20.0	-33.6	-21.6	Y
8.9	-18.3	-6.9	-13.8	-3.2	-18.3	-4.9	8.9	8.0	-6.0	-5.7	-34.7	-23.2	-30.2	-19.5	-34.7	-21.3	Y
9	-18.6	-6.1	-15.2	-2.9	-18.6	-4.7	9	8.0	-6.0	-5.9	-34.9	-22.5	-31.5	-19.2	-34.9	-21.0	Y
9.1	-18.5	-5.6	-16.0	-2.6	-18.5	-4.5	9.1	8.0	-6.0	-6.0	-34.8	-21.9	-32.3	-19.0	-34.8	-20.8	Y
9.2	-18.1	-5.1	-15.9	-2.5	-18.1	-4.5	9.2	8.0	-6.0	-6.1	-34.5	-21.5	-32.3	-18.8	-34.5	-20.8	Y
9.3	-18.0	-4.8	-15.5	-2.4	-18.0	-4.6	9.3	7.8	-6.2	-6.2	-34.4	-21.2	-31.8	-18.7	-34.4	-21.0	Y
9.4	-17.9	-4.7	-15.0	-2.4	-17.9	-4.8	9.4	7.7	-6.3	-6.3	-34.3	-21.0	-31.3	-18.8	-34.3	-21.2	Y
9.5	-18.1	-4.6	-14.6	-2.5	-18.1	-5.3	9.5	7.6	-6.4	-6.4	-34.5	-21.0	-30.9	-18.9	-34.5	-21.6	Y
9.6	-18.6	-4.7	-14.4	-2.8	-18.6	-5.9	9.6	7.4	-6.6	-6.6	-34.9	-21.0	-30.7	-19.1	-34.9	-22.2	Y
9.7	-19.4	-4.9	-14.5	-3.1	-19.4	-6.7	9.7	7.3	-6.7	-6.7	-35.8	-21.2	-30.8	-19.4	-35.8	-23.0	Y
9.8	-20.5	-5.2	-14.9	-3.5	-20.5	-7.6	9.8	7.2	-6.8	-6.8	-36.8	-21.5	-31.2	-19.8	-36.8	-23.9	Y
9.9	-21.8	-5.7	-15.6	-4.0	-21.8	-8.8	9.9	7.1	-6.9	-6.9	-38.2	-22.0	-32.0	-20.3	-38.2	-25.2	Y
10	-22.7	-6.3	-16.5	-4.7	-22.7	-10.4	10	7.0	-7.0	-7.0	-39.0	-22.6	-32.8	-21.0	-39.0	-26.7	Y
15.0	-3.7	-8.7	-4.9	-8.6	-3.7	-4.7	15	2.6	-11.4	-11.4	-20.1	-25.1	-21.2	-24.9	-20.1	-21.0	Y

APPENDIX D: Antenna Gain and EIRP Tables

20.0	-8.1	-12.4	-6.2	-11.8	-8.1	-12.8	20	-0.5	-14.5	-14.5	-24.4	-28.7	-22.6	-28.1	-24.4	-29.1	Y
25.0	-12.9	-18.5	-20.1	-16.6	-12.9	-35.2	25	-2.9	-16.9	-16.9	-29.3	-34.9	-36.5	-32.9	-29.3	-51.5	Y
30.0	-17.8	-15.5	-17.9	-30.1	-17.8	-14.7	30	-4.9	-18.9	-18.9	-34.2	-31.9	-34.2	-46.4	-34.2	-31.0	Y
35.0	-12.7	-9.4	-19.0	-14.3	-12.7	-14.6	35	-6.6	-20.6	-20.6	-29.0	-25.8	-35.3	-30.7	-29.0	-31.0	Y
40.0	-13.7	-13.5	-18.1	-16.3	-13.7	-21.3	40	-8.1	-22.1	-22.1	-30.1	-29.8	-34.4	-32.6	-30.1	-37.6	Y
45.0	-15.7	-21.8	-16.4	-18.5	-15.7	-24.8	45	-9.3	-23.3	-23.3	-32.1	-38.1	-32.7	-34.8	-32.1	-41.1	Y
50.0	-23.1	-19.1	-22.6	-11.0	-23.1	-22.8	50	-10.0	-24.0	-24.0	-39.4	-35.4	-38.9	-27.4	-39.4	-39.2	Y
55.0	-16.0	-13.4	-28.4	-7.7	-16.0	-16.2	55	-10.0	-24.0	-24.0	-32.3	-29.8	-44.8	-24.1	-32.3	-32.6	Y
60.0	-21.5	-18.0	-11.9	-12.6	-21.5	-14.1	60	-10.0	-24.0	-24.0	-37.8	-34.3	-28.3	-28.9	-37.8	-30.4	Y
65.0	-11.2	-17.3	-11.8	-18.9	-11.2	-26.8	65	-10.0	-24.0	-24.0	-27.5	-33.6	-28.1	-35.3	-27.5	-43.1	Y
70.0	-22.4	-18.4	-23.0	-16.6	-22.4	-26.4	70	-10.0	-24.0	-24.0	-38.8	-34.7	-39.3	-33.0	-38.8	-42.7	Y
75.0	-22.5	-22.5	-21.8	-26.5	-22.5	-20.3	75	-10.0	-24.0	-24.0	-38.8	-38.9	-38.1	-42.9	-38.8	-36.6	Y
80.0	-13.1	-22.4	-16.4	-20.2	-13.1	-23.8	80	-10.0	-24.0	-24.0	-29.4	-38.7	-32.7	-36.6	-29.4	-40.1	Y
85.0	-14.8	-18.9	-21.5	-18.9	-14.8	-17.5	85	-10.0	-24.0	-24.0	-31.2	-35.2	-37.9	-35.3	-31.2	-33.8	Y
90.0	-13.8	-21.8	-17.0	-20.7	-13.8	-24.2	90	0.0	-14.0	-14.0	-30.1	-38.2	-33.3	-37.1	-30.1	-40.5	Y
95.0	-18.3	-24.0	-25.4	-17.9	-18.3	-21.5	95	0.0	-14.0	-14.0	-34.7	-40.3	-41.7	-34.3	-34.7	-37.8	Y
100.0	-19.2	-15.2	-22.0	-15.1	-19.2	-23.7	100	0.0	-14.0	-14.0	-35.6	-31.5	-38.3	-31.5	-35.6	-40.0	Y
105.0	-31.5	-17.3	-13.3	-15.9	-31.5	-22.3	105	0.0	-14.0	-14.0	-47.8	-33.6	-29.6	-32.2	-47.8	-38.7	Y
110.0	-28.2	-16.8	-18.8	-22.9	-28.2	-23.6	110	0.0	-14.0	-14.0	-44.5	-33.1	-35.1	-39.3	-44.5	-40.0	Y
115.0	-29.1	-28.8	-24.9	-22.1	-29.1	-23.0	115	0.0	-14.0	-14.0	-45.5	-45.2	-41.3	-38.5	-45.5	-39.4	Y
120.0	-23.2	-30.1	-19.2	-22.0	-23.2	-37.2	120	0.0	-14.0	-14.0	-39.5	-46.5	-35.5	-38.4	-39.5	-53.6	Y
125.0	-26.7	-35.0	-30.9	-21.5	-26.7	-28.7	125	0.0	-14.0	-14.0	-43.0	-51.4	-47.2	-37.9	-43.0	-45.1	Y
130.0	-36.1	-25.7	-26.3	-29.6	-36.1	-21.9	130	0.0	-14.0	-14.0	-52.4	-42.0	-42.7	-45.9	-52.4	-38.2	Y
135.0	-31.2	-20.9	-24.1	-32.5	-31.2	-25.7	135	0.0	-14.0	-14.0	-47.5	-37.2	-40.4	-48.8	-47.5	-42.1	Y
140.0	-28.5	-32.7	-32.7	-30.1	-28.5	-27.1	140	0.0	-14.0	-14.0	-44.8	-49.1	-49.1	-46.5	-44.8	-43.5	Y
145.0	-23.6	-29.4	-33.4	-26.6	-23.6	-48.4	145	0.0	-14.0	-14.0	-39.9	-45.8	-49.8	-42.9	-39.9	-64.7	Y
150.0	-33.2	-27.0	-25.8	-26.8	-33.2	-27.6	150	0.0	-14.0	-14.0	-49.5	-43.3	-42.1	-43.1	-49.5	-43.9	Y
155.0	-19.2	-22.5	-32.1	-26.0	-19.2	-37.1	155	0.0	-14.0	-14.0	-35.5	-38.9	-48.4	-42.4	-35.5	-53.5	Y
160.0	-24.4	-21.1	-26.6	-23.1	-24.4	-30.6	160	0.0	-14.0	-14.0	-40.8	-37.5	-42.9	-39.4	-40.8	-46.9	Y
165.0	-23.4	-30.8	-31.0	-27.5	-23.4	-33.7	165	0.0	-14.0	-14.0	-39.7	-47.1	-47.3	-43.8	-39.7	-50.0	Y
170.0	-29.4	-33.4	-29.0	-30.3	-29.4	-45.7	170	0.0	-14.0	-14.0	-45.7	-49.7	-45.3	-46.6	-45.7	-62.1	Y
175.0	-25.6	-36.8	-27.7	-40.0	-25.6	-35.1	175	0.0	-14.0	-14.0	-41.9	-53.1	-44.0	-56.4	-41.9	-51.4	Y
180.0	25.4	27.0	26.2	28.1	25.4	26.0	180	0.0	-14.0	-14.0	9.1	10.7	9.8	11.7	9.1	9.6	N

I, Timothy Joyce, hereby certify under penalty of perjury that I am the technically qualified person responsible for the preparation of the technical materials contained in the Gogo Application for Aeronautical Mobile Satellite Service and the Technical Appendix, that I am familiar with Part 25 of the Commission's Rules (47 C.F.R. Part 25), and that I have either prepared or reviewed the technical information submitted in this application and found it to be complete and accurate to the best of my knowledge and belief.

By: /s/ Timothy Joyce _____

Timothy Joyce

VP of RF Engineering

Gogo LLC

June 18, 2012

ATTACHMENT A: Radiation Hazard Analysis

ATTACHMENT A: Radiation Hazard Analysis

AES

This analysis predicts the radiation levels around a proposed earth station terminal, comprised of one array type antenna. This report is developed in accordance with the prediction methods contained in OET Bulletin No. 65, Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields, Edition 97-01, pp 26-30. The maximum level of non-ionizing radiation to which employees may be exposed is limited to a power density level of 5 milliwatts per square centimeter (5 mW/cm^2) averaged over any 6 minute period in a controlled environment and the maximum level of non-ionizing radiation to which the general public is exposed is limited to a power density level of 1 milliwatt per square centimeter (1 mW/cm^2) averaged over any 30 minute period in a uncontrolled environment. Note that the worst-case radiation hazards exist along the beam axis. Under normal circumstances, it is highly unlikely that the antenna axis will be aligned with any occupied area since that would represent a blockage to the desired signals, thus rendering the link unusable.

Earth Station Technical Parameter Table

Antenna Aperture Width	0.62484125 meters
Antenna Aperture Height	0.17272 meters
Antenna Surface Area	.1069 sq. meters
Antenna Isotropic Gain	29.0 dBi
Number of Identical Adjacent Antennas	1
Nominal Frequency	14.25 GHz
Nominal Wavelength (λ)	0.0211 meters
Maximum Transmit Power / Carrier	35.0 Watts
Number of Carriers	1
Total Transmit Power	35.0 Watts
W/G Loss from Transmitter to Feed	0.0 dB
Total Feed Input Power	35 Watts
Near Field Limit	$R_{nf} = D^2/4\lambda = 4.64$ meters
Far Field Limit	$R_{ff} = 0.6 D^2/\lambda = 11.13$ meters
Transition Region	R_{nf} to R_{ff}

In the following sections, the power density in the above regions, as well as other critically important areas will be calculated and evaluated. The calculations are done in the order discussed in OET Bulletin 65.

1.0 At the Antenna Surface

The power density at the antenna radiating surface can be calculated from the expression:

$$PD_{refl} = 4P/A = \mathbf{126.758} \text{ mW/cm}^2 \quad (1)$$

Where: P = total power at feed, milliwatts

A = Total area of reflector, sq. cm

In the normal range of transmit powers for satellite antennas, the power densities at or around the reflector surface are expected to exceed safe levels. This area will not be accessible to the general public. Operators and technicians should receive training specifying this area as a high exposure area. Procedures must be established that will assure that all transmitters are rerouted or turned off before access by maintenance personnel to this area is possible.

2.0 On-Axis Near Field Region

The geometrical limits of the radiated power in the near field approximate a cylindrical volume with a diameter equal to that of the antenna. In the near field, the power density is neither uniform nor does its value vary uniformly with distance from the antenna. For the purpose of considering radiation hazard it is assumed that the on-axis flux density is at its maximum value throughout the length of this region. The length of this region, i.e., the distance from the antenna to the end of the near field, is computed as R_{nf} above.

The maximum power density in the near field is given by:

$$PD_{nf} = (16\epsilon P)/(\pi D^2) = \mathbf{32.957} \text{ mW/cm}^2 \quad (2)$$

from 0 to 4.64 meters

Evaluation

Uncontrolled Environment: **Does Not Meet Uncontrolled Limits**

Controlled Environment: **Does not Meet Controlled Limits**

3.0 On-Axis Transition Region

The transition region is located between the near and far field regions. As stated in Bulletin 65, the power density begins to vary inversely with distance in the transition region. The maximum power density in the transition region will not exceed that calculated for the near field region, and the transition region begins at that value. The maximum value for a given distance within the transition region may be computed for the point of interest according to:

$$PD_t = (PD_{nf})(R_{nf})/R = \text{dependent on } R \quad (3)$$

where: PD_{nf} = near field power density

ATTACHMENT A: Radiation Hazard Analysis

R_{nf} = near field distance

R = distance to point of interest

For: $4.64 < R < 11.1$ meters

We use Eq (3) to determine the safe on-axis distances required for the two occupancy conditions:

Evaluation

Uncontrolled Environment Safe Operating Distance,(meters), R_{safeu} : 150.0

Controlled Environment Safe Operating Distance,(meters), R_{safec} : 30.0

4.0 On-Axis Far-Field Region

The on- axis power density in the far field region (PD_{ff}) varies inversely with the square of the distance as follows:

$$PD_{ff} = PG/(4\pi R^2) = \text{dependent on } R \text{ (4)}$$

where: P = total power at feed

G = Numeric Antenna gain in the direction of interest relative to isotropic radiator

R = distance to the point of interest

For: $R > R_{ff} = 11.1$ meters

$$PD_{ff} = \mathbf{1.840} \text{ mW/cm}^2 \text{ at } R_{ff}$$

We use Eq (4) to determine the safe on-axis distances required for the two occupancy conditions:

Evaluation

Uncontrolled Environment Safe Operating Distance,(meters), R_{safeu} : See Section 3

Controlled Environment Safe Operating Distance,(meters), R_{safec} : See Section 3

5.0 Off-Axis Levels at the Far Field Limit and Beyond

In the far field region, the power is distributed in a pattern of maxima and minima (side lobes) as a function of the off-axis angle between the antenna center line and the point of interest. Off-axis power density in the far field can be estimated using the antenna radiation patterns prescribed for the antenna in use. This will correspond to the antenna gain pattern for an off-axis angle. For the Gogo AES antenna at 1 degree off axis the antenna gain is:

$$G_{off} = 25.7 \text{ dBi at } 1 \text{ degree}$$

ATTACHMENT A: Radiation Hazard Analysis

Considering that satellite antenna beams are aimed skyward, power density in the far field will usually not be a problem except at low look angles. In these cases, the off axis gain reduction may be used to further reduce the power density levels.

For example: At one (1) degree off axis at the far-field limit, we can calculate the power density as:

$$G_{\text{off}} = 25.7 \text{ dBi} = 371.5 \text{ numeric}$$

$$PD_{1 \text{ deg off-axis}} = PD_{\text{ff}} \times 371.5/G = .8671 \text{ mW/cm}^2 \text{ (5)}$$

6.0 Off-Axis power density in the Near Field and Transitional Regions

According to Bulletin 65, off-axis calculations in the near field may be performed as follows: assuming that the point of interest is at least one antenna diameter removed from the center of the main beam, the power density at that point is at least a factor of 100 (20 dB) less than the value calculated for the equivalent on-axis power density in the main beam. Therefore, for regions at least D_{eff} meters away from the center line of the antenna in any direction, the power density exposure is at least 20 dB below the main beam level as follows:

$$PD_{\text{nf(off-axis)}} = PD_{\text{nf}} / 100 = \mathbf{0.32957} \text{ mW/cm}^2 \text{ at } D \text{ off axis (6)}$$

See Section 7 for the calculation of the distance vs. elevation angle required to achieve this rule for a given object height.

7.0 Evaluation of Safe Occupancy Area in Front of Antenna

The distance (S) from a vertical axis passing through the antenna center to a safe off axis location in front of the antenna can be determined based on the effective antenna diameter rule (Item 6.0). Assuming a flat area in front of the antenna, the relationship is:

$$S = (D_{\text{eff}} / \sin \alpha) + (2(h - GD_{\text{eff}}) - D_{\text{eff}} - 2) / (2 \tan \alpha) \text{ (7)}$$

Where: α = minimum elevation angle of antenna

D = effective antenna diameter in meters

h = maximum height of object to be cleared, meters

For distances equal or greater than determined by equation (7), the radiation hazard will be below safe levels for all but the most powerful stations (> 4 kilowatts RF at the feed).

For D = 0.62484125 meters

 h = 2.0 meters

ATTACHMENT A: Radiation Hazard Analysis

GD = 1.0 meters - elevated height of earth station above ground (min)

Then:

α	S
10	7.5 meters
15	5.0meters
20	3.7 meters
25	3.0 meters
30	2.4 meters

This is fuselage mounted antenna, and all persons working on or near the antenna will be properly trained regarding radiation hazard. The antenna transmitter will be disabled any time work inside the radome is in progress.

Summary

The earth station site will be on top of the fuselage and will be protected from uncontrolled access. There will also be proper emission warning signs placed and all operating personnel will be aware of the human exposure levels at and around the earth station. The applicant agrees to abide by the conditions specified in Condition 5208 provided below:

Condition 5208 - The licensee shall take all necessary measures to ensure that the antenna does not create potential exposure of humans to radiofrequency radiation in excess of the FCC exposure limits defined in 47 CFR 1.1307(b) and 1.1310 wherever such exposures might occur. Measures must be taken to ensure compliance with limits for both occupational/controlled exposure and for general population/uncontrolled exposure, as defined in these rule sections. Compliance can be accomplished in most cases by appropriate restrictions such as fencing. Requirements for restrictions can be determined by predictions based on calculations, modeling or by field measurements. The FCC's OET Bulletin 65 (available on-line at www.fcc.gov/oet/rfsafety) provides information on predicting exposure levels and on methods for ensuring compliance, including the use of warning and alerting signs and protective equipment for worker.

ATTACHMENT A: Radiation Hazard Analysis

The following table summarizes all of the above calculations:

Table - Summary of All RadHaz Parameters				AES
Parameter	Abbr.		Units	Formula
Dish #		Hub		
Antenna Dimenstions	Dma	0.619126238	meters	major axis (azimuth)
Effective Aperture Diameter	Deff	0.375	meters	
Antenna Centerline	h	0.5	meters	
Antenna Surface Area	Sa	0.1069	meters ²	$(\pi * Deff^2) / 4$
Frequency of Operation	f	14.25	GHz	
Wavelength	λ	0.0211	meters	c / f
HPA Output Power	P _{HPA}	35.0	watts	
HPA to Antenna Loss	L _{tx}	0.0	dB	
Transmit Power at Flange	P	15.4	dBW	$10 * \text{Log}(P_{HPA}) - L_{tx}$
		35		
Antenna Gain	G _{es}	29.0	dBi	
		788.3	n/a	
PI	π	3.1415927	n/a	
Antenna Aperture Efficiency	η	26.00%	n/a	$G_{es} / (\pi * Df / \lambda)^2$
1. Reflector Surface Region Calculations				
Reflector Surface Power Density	PD _{as}	1267.58	W/m ²	$(16 * P) / (\pi * Deff^2)$
		126.758	mW/cm ²	Does Not Meet Uncontrolled Limits
				Does not Meet Controlled Limits
2. On-Axis Near Field Calculations				
Extent of Near Field	Rn	4.55	meters	$Dma^2 / (4 * \lambda)$
		14.93	feet	
Near Field Power Density	PD _{nf}	329.57	W/m ²	$(16 * \eta * P) / (\pi * Deff^2)$
		32.957	mW/cm ²	Does Not Meet Uncontrolled Limits
				Does not Meet Controlled Limits
3. On-Axis Transition Region Calculations				
Extent of Transition Region (min)	Rtr	4.55	meters	$Dma^2 / (4 * \lambda)$
Extent of Transition Region (min)		14.93	feet	
Extent of Transition Region (max)	Rtr	10.92	meters	$(0.6 * Dma^2) / \lambda$
Extent of Transition Region (max)		35.83	feet	
Worst Case Transition Region Power Density	PD _{tr}	329.57	W/m ²	$(16 * \eta * P) / (\pi * Deff^2)$
		32.957	mW/cm ²	Does Not Meet Uncontrolled Limits
				Does not Meet Controlled Limits
Uncontrolled Environment Safe Operating Distar	Rsu	150.0	m	$=(PD_{nf}) * (R_{nf}) / R_{su}$
Controlled Environment Safe Operating Distance	Rsc	30.0	m	$=(PD_{nf}) * (R_{nf}) / R_{sc}$
4. On-Axis Far Field Calculations				
Distance to the Far Field Region	Rf	10.9	meters	$(0.6 * Dma^2) / \lambda$
		35.83	feet	
On-Axis Power Density in the Far Field	PD _{ff}	18.40	W/m ²	$(G_{es} * P) / (4 * \pi * Rf^2)$
		1.840	mW/cm ²	Does Not Meet Uncontrolled Limits
				Meets Controlled Limits
5. Off-Axis Levels at the Far Field Limit and Beyond				
Reflector Surface Power Density	PD _s	8.671	W/m ²	$(G_{es} * P) / (4 * \pi * Rf^2) * (Goa / Ges)$
Goa/Ges at example angle θ 1 degree		0.471		$Goa = 25.7 \text{ dBi at } 2 \text{ deg.}$
		0.8671	mW/cm ²	Meets Controlled Limits
6. Off-axis Power Density in the Near Field and Transitional Regions Calculations				
Power density 1/100 of Wn for one diameter removed	PD _s	3.2957	W/m ²	$((16 * \eta * P) / (\pi * Deff^2)) / 100$
		0.32957	mW/cm ²	Meets Uncontrolled Limits
7. Off-Axis Safe Distances from Earth Station				
α = minimum elevation angle of antenna		10	deg	$S = (Dma / \sin \alpha) + (2h - Dma - 2) / (2 \tan \alpha)$
h = maximum height of object to be cleared, meters		2.0	m	
GD = Ground Elevation Delta antenna-obstacle		0.0	m	
elevation angle	10	7.5	m	
	15	5.0	m	
	20	3.7	m	
	25	2.9	m	
	30	2.4	m	
Note: Maximum FCC power density limits for 6 GHz is 1 mW/cm ² for general population/uncontrolled exposure as per FCC OE&T Bulletin No. 65, Edition 97-01 August 1997, Appendix A page 67.				

ATTACHMENT B: Satellite Company Letters



15 June 2012

Federal Communications Commission
International Bureau
445 12th Street, S.W.
Washington, DC 20554

Subject: Certification of SES regarding initiation of adjacent satellite network coordination

To Whom It May Concern:

This letter confirms that SES has initiated coordination of the planned Gogo non-conforming aircraft earth station operations with all adjacent satellite operators within 6° of orbital separation from SES-1 and NSS-703 pursuant to Section 25.220 of the Commission's rules. In particular, SES has initiated coordination of Gogo's planned operations on SES-1 with Intelsat with respect to Galaxy 3C (95°W), Galaxy 19 (97°W) and Galaxy 16 (99.2°W), and the coordination of GoGo's planned operations on NSS-703 with Intelsat with respect to Intelsat 707 (53°W), Intelsat 1R (50°W), Intelsat 14 (45°W) and Intelsat 11 (43.1°W).

Once the coordination is complete, SES will provide a statement certifying that the necessary coordination pursuant to Section 25.220 of the Commission's rules has been completed.

Sincerely,

A handwritten signature in blue ink, appearing to read 'Kim M Baum', written over a horizontal line.

Kimberly M. Baum
Vice President
Spectrum Management & Development
SES

June 17, 2012

Federal Communication Commission
International Bureau
445 12th Street SW
Washington, D.D. 20554



**Re: Summary of Intelsat Coordination Agreement and Affidavit Status
relating to Gogo LLC License Application**

To Whom It May Concern:

The status of existing coordination agreements and affidavit requirements for the Gogo FCC license application are shown below. This letter certifies that Intelsat has the agreements cited, and they are in effect.

Only two affidavits are required, one for IS-21 (302°) and the other for IS-27 (304.5°E), both of these affidavits have been sent to the operators concerned. Intelsat coordination agreements with other operators cover all other situations where a satellite is operating in the same frequency band as the Gogo system within +/- 6° of the Intelsat satellite.

IS-19 (166°E)

No affidavits are required for IS-19 (166°E). Intelsat has coordination agreements in place with Optus, Sky Perfect JSAT and GE, who are the operators of all satellites operational in the bands used by the Gogo system within +/- 6° of IS-19. The Gogo system parameters are within the scope of the agreements.

IS-21 (302°E)

One affidavit is required from EchoStar for IS-21 (302°). The affidavit has been sent to the consultant working for Echostar.

Intelsat has coordination agreements in place with Hispamar and Telesat Canada, who are the operators of the only other satellites operational within +/- 6° of IS-21 in the bands that are used by the Gogo system. The Gogo system parameters are within the scope of the agreements.


IS-27 (304.5°E)

No affidavits are required for IS-27 (304.5°E). Intelsat has a coordination agreement in effect with Hispamar, which is the only operator of satellites operational within +/- 6° of IS-27 in the bands that are used by the Gogo system. The Gogo system parameters are within the scope of the agreement.

IS-14 (315°E)

One affidavit is required for SES World Skies for IS-27 (315°). There are no other operators with satellites operating within +/- 6° of IS-14 in the bands used by the Gogo system.

Sincerely,

A handwritten signature in black ink, appearing to read 'Alan Yates', with a long horizontal flourish extending to the right.

Alan Yates
Senior Technical Advisor, Spectrum Strategy
Intelsat, LLC

ATTACHMENT C: Certification of Coordination Agreements

15 June 2012

Federal Communications Commission
International Bureau
445 12th Street SW
Washington, D.C. 20554



Re: Certification of Agreements for IS-19 166E

To Whom It May Concern:

Intelsat is aware that Gogo LLC. ("Gogo") is seeking a blanket authorization from the Federal Communications Commission ("FCC") for authority to operate, on a non-conforming basis transmit/receive antennas for aeronautical mobile-satellite services ("AMSS") using fixed-satellite service ("FSS") frequencies pursuant to ITU RR 5.504A. Gogo is seeking an FCC authorization to utilize Intelsat's IS-19 satellite at 166°E.

This letter certifies that Intelsat has coordination agreements in effect with the operators of all satellites within +/- 6° of Intelsat's IS-19 satellite at 166E longitude that operate in the 14.00-14.5 GHz frequency band. The scope of these agreements encompasses the technical and operational characteristics of the Gogo system as contained in Gogo's license application to the FCC.

Sincerely,

A handwritten signature in black ink, appearing to read "Alan Yates", written over a horizontal line.

15 June 2012

Alan Yates,
Senior Technical Advisor,
Spectrum Strategy
Intelsat, LLC

15 June 2012

Federal Communications Commission
International Bureau
445 12th Street SW
Washington, D.C. 20554



Re: Certification of Agreements for IS-27 304.5°E

To Whom It May Concern:

Intelsat is aware that Gogo LLC. ("Gogo") is seeking a blanket authorization from the Federal Communications Commission ("FCC") for authority to operate, on a non-conforming basis transmit/receive antennas for aeronautical mobile-satellite services ("AMSS") using fixed-satellite service ("FSS") frequencies pursuant to ITU RR 5.504A. Gogo is seeking an FCC authorization to utilize Intelsat's IS-27 satellite at 304.5°E.

This letter certifies that Intelsat has coordination agreements in effect with the operators of all satellites within +/- 6° of Intelsat's IS-27 satellite at 304.5°E longitude that operate in the 14.00-14.5 GHz frequency band. The scope of these agreements encompasses the technical and operational characteristics of the Gogo system as contained in Gogo's license application to the FCC.

Sincerely,

A handwritten signature in black ink, appearing to be "Alan Yates", written over a horizontal line.

15 June 2012

Alan Yates,
Senior Technical Advisor,
Spectrum Strategy
Intelsat, LLC