

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Azimuth LHCP, -180° to +180° @ 1.0° increment

27.55 GHz Antenna Pattern in Co-pol Az LHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
-179.0	-20.9	0.0	-20.9
-178.0	-26.7	0.0	-26.7
-177.0	-26.5	0.0	-26.5
-176.0	-18.2	0.0	-18.2
-175.0	-20.9	0.0	-20.9
-174.0	-21.1	0.0	-21.1
-173.0	-23.3	0.0	-23.3
-172.0	-25.7	0.0	-25.7
-171.0	-22.9	0.0	-22.9
-170.0	-24.2	0.0	-24.2
-169.0	-22.5	0.0	-22.5
-168.0	-21.9	0.0	-21.9
-167.0	-27.9	0.0	-27.9
-166.0	-26.2	0.0	-26.2
-165.0	-19.5	0.0	-19.5
-164.0	-18.2	0.0	-18.2
-163.0	-21.6	0.0	-21.6
-162.0	-27.5	0.0	-27.5
-161.0	-25.5	0.0	-25.5
-160.0	-24.3	0.0	-24.3
-159.0	-17.4	0.0	-17.4
-158.0	-20.6	0.0	-20.6
-157.0	-18.7	0.0	-18.7
-156.0	-17.8	0.0	-17.8
-155.0	-26.4	0.0	-26.4
-154.0	-17.1	0.0	-17.1
-153.0	-22.6	0.0	-22.6
-152.0	-19.3	0.0	-19.3
-151.0	-14.8	0.0	-14.8
-150.0	-18.1	0.0	-18.1
-149.0	-16.6	0.0	-16.6
-148.0	-22.1	0.0	-22.1
-147.0	-24.1	0.0	-24.1
-146.0	-15.1	0.0	-15.1
-145.0	-18.9	0.0	-18.9
-144.0	-16.7	0.0	-16.7
-143.0	-14.5	0.0	-14.5
-142.0	-14.8	0.0	-14.8
-141.0	-14.2	0.0	-14.2
-140.0	-19.3	0.0	-19.3
-139.0	-16.6	0.0	-16.6
-138.0	-13.8	0.0	-13.8
-137.0	-24.9	0.0	-24.9
-136.0	-17.6	0.0	-17.6
-135.0	-15.6	0.0	-15.6
-134.0	-19.6	0.0	-19.6
-133.0	-19.4	0.0	-19.4
-132.0	-17.1	0.0	-17.1
-131.0	-18.8	0.0	-18.8
-130.0	-18.5	0.0	-18.5
-129.0	-14.9	0.0	-14.9
-128.0	-16.7	0.0	-16.7
-127.0	-21.7	0.0	-21.7
-126.0	-16.7	0.0	-16.7
-125.0	-15.8	0.0	-15.8
-124.0	-15.7	0.0	-15.7
-123.0	-19.9	0.0	-19.9
-122.0	-19.6	0.0	-19.6
-121.0	-17.4	0.0	-17.4
-120.0	-21.6	0.0	-21.6

27.55 GHz Antenna Pattern in Co-pol Az LHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
0.0	52.1		
1.0	17.2		
2.0	11.5	21.5	-10.0
3.0	3.6	17.1	-13.4
4.0	5.9	13.9	-8.1
5.0	-2.8	11.5	-14.3
6.0	-0.4	9.5	-10.0
7.0	3.3	7.9	-4.6
8.0	-2.5	8.0	-10.5
9.0	-5.5	8.0	-13.5
10.0	-13.8	7.0	-20.8
11.0	-7.5	6.0	-13.4
12.0	-4.9	5.0	-10.0
13.0	-15.4	4.2	-19.5
14.0	-9.2	3.3	-12.6
15.0	-5.3	2.6	-7.9
16.0	-7.2	1.9	-9.1
17.0	-7.2	1.2	-8.4
18.0	-6.8	0.6	-7.4
19.0	-5.7	0.0	-5.7
20.0	-23.1	-0.5	-22.6
21.0	-16.5	-1.1	-15.4
22.0	-6.1	-1.6	-4.5
23.0	-7.9	-2.0	-5.8
24.0	-10.1	-2.5	-7.6
25.0	-11.5	-2.9	-8.6
26.0	-12.1	-3.4	-8.7
27.0	-12.1	-3.8	-8.3
28.0	-11.4	-4.2	-7.2
29.0	-6.3	-4.6	-1.8
30.0	-6.5	-4.9	-1.6
31.0	-5.2	-5.3	0.1
32.0	-4.3	-5.6	1.4
33.0	-5.8	-6.0	0.2
34.0	-3.4	-6.3	2.9
35.0	-4.9	-6.6	1.7
36.0	-2.9	-6.9	4.0
37.0	-3.0	-7.2	4.2
38.0	-6.1	-7.5	1.4
39.0	-5.1	-7.8	2.7
40.0	-7.4	-8.1	0.7
41.0	-8.9	-8.3	-0.5
42.0	-9.3	-8.6	-0.7
43.0	-12.5	-8.8	-3.7
44.0	-10.4	-9.1	-1.3
45.0	-11.0	-9.3	-1.7
46.0	-5.2	-9.6	4.4
47.0	-9.5	-9.8	0.3
48.0	-8.9	-10.0	1.2
49.0	-13.7	-10.0	-3.7
50.0	-14.0	-10.0	-4.0
51.0	-9.4	-10.0	0.6
52.0	-7.4	-10.0	2.6
53.0	-7.9	-10.0	2.1
54.0	-8.9	-10.0	1.1
55.0	-13.3	-10.0	-3.3
56.0	-14.7	-10.0	-4.7
57.0	-11.3	-10.0	-1.3
58.0	-11.6	-10.0	-1.6
59.0	-11.8	-10.0	-1.8

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Azimuth LHCP, -180° to +180° @ 1.0° increment

-119.0	-20.4	0.0	-20.4
-118.0	-26.4	0.0	-26.4
-117.0	-20.8	0.0	-20.8
-116.0	-18.3	0.0	-18.3
-115.0	-18.6	0.0	-18.6
-114.0	-20.2	0.0	-20.2
-113.0	-19.3	0.0	-19.3
-112.0	-20.9	0.0	-20.9
-111.0	-20.2	0.0	-20.2
-110.0	-19.0	0.0	-19.0
-109.0	-14.5	0.0	-14.5
-108.0	-20.8	0.0	-20.8
-107.0	-21.5	0.0	-21.5
-106.0	-19.2	0.0	-19.2
-105.0	-18.4	0.0	-18.4
-104.0	-18.0	0.0	-18.0
-103.0	-21.0	0.0	-21.0
-102.0	-24.7	0.0	-24.7
-101.0	-15.1	0.0	-15.1
-100.0	-18.9	0.0	-18.9
-99.0	-26.4	0.0	-26.4
-98.0	-14.1	0.0	-14.1
-97.0	-13.6	0.0	-13.6
-96.0	-12.9	0.0	-12.9
-95.0	-16.6	0.0	-16.6
-94.0	-17.7	0.0	-17.7
-93.0	-17.7	0.0	-17.7
-92.0	-12.0	0.0	-12.0
-91.0	-14.7	0.0	-14.7
-90.0	-16.2	0.0	-16.2
-89.0	-13.8	0.0	-13.8
-88.0	-18.2	0.0	-18.2
-87.0	-13.4	0.0	-13.4
-86.0	-12.2	0.0	-12.2
-85.0	-12.3	-10.0	-2.3
-84.0	-16.9	-10.0	-6.9
-83.0	-19.5	-10.0	-9.5
-82.0	-15.3	-10.0	-5.3
-81.0	-12.5	-10.0	-2.5
-80.0	-10.7	-10.0	-0.7
-79.0	-11.3	-10.0	-1.3
-78.0	-10.5	-10.0	-0.5
-77.0	-11.5	-10.0	-1.5
-76.0	-12.6	-10.0	-2.6
-75.0	-11.3	-10.0	-1.3
-74.0	-10.8	-10.0	-0.8
-73.0	-8.3	-10.0	1.7
-72.0	-8.2	-10.0	1.8
-71.0	-8.7	-10.0	1.3
-70.0	-7.8	-10.0	2.2
-69.0	-6.9	-10.0	3.1
-68.0	-5.8	-10.0	4.2
-67.0	-6.2	-10.0	3.8
-66.0	-5.3	-10.0	4.7
-65.0	-8.9	-10.0	1.1
-64.0	-8.1	-10.0	1.9
-63.0	-8.5	-10.0	1.5
-62.0	-9.6	-10.0	0.4
-61.0	-7.2	-10.0	2.8
-60.0	-10.1	-10.0	-0.1
-59.0	-10.8	-10.0	-0.8
-58.0	-10.1	-10.0	-0.1
-57.0	-11.1	-10.0	-1.1

60.0	-16.5	-10.0	-6.5
61.0	-17.9	-10.0	-7.9
62.0	-15.2	-10.0	-5.2
63.0	-13.0	-10.0	-3.0
64.0	-17.3	-10.0	-7.3
65.0	-19.7	-10.0	-9.7
66.0	-11.2	-10.0	-1.2
67.0	-17.3	-10.0	-7.3
68.0	-14.5	-10.0	-4.5
69.0	-14.8	-10.0	-4.8
70.0	-13.2	-10.0	-3.2
71.0	-16.2	-10.0	-6.2
72.0	-19.1	-10.0	-9.1
73.0	-13.4	-10.0	-3.4
74.0	-19.3	-10.0	-9.3
75.0	-25.5	-10.0	-15.5
76.0	-16.4	-10.0	-6.4
77.0	-16.4	-10.0	-6.4
78.0	-21.0	-10.0	-11.0
79.0	-22.0	-10.0	-12.0
80.0	-24.3	-10.0	-14.3
81.0	-20.9	-10.0	-10.9
82.0	-26.0	-10.0	-16.0
83.0	-18.1	-10.0	-8.1
84.0	-24.0	-10.0	-14.0
85.0	-25.7	-10.0	-15.7
86.0	-21.1	0.0	-21.1
87.0	-22.6	0.0	-22.6
88.0	-19.0	0.0	-19.0
89.0	-20.0	0.0	-20.0
90.0	-23.1	0.0	-23.1
91.0	-20.8	0.0	-20.8
92.0	-21.3	0.0	-21.3
93.0	-19.9	0.0	-19.9
94.0	-22.3	0.0	-22.3
95.0	-23.9	0.0	-23.9
96.0	-25.8	0.0	-25.8
97.0	-26.1	0.0	-26.1
98.0	-19.2	0.0	-19.2
99.0	-25.3	0.0	-25.3
100.0	-17.6	0.0	-17.6
101.0	-17.5	0.0	-17.5
102.0	-24.6	0.0	-24.6
103.0	-27.6	0.0	-27.6
104.0	-27.9	0.0	-27.9
105.0	-20.0	0.0	-20.0
106.0	-23.9	0.0	-23.9
107.0	-25.1	0.0	-25.1
108.0	-21.1	0.0	-21.1
109.0	-21.3	0.0	-21.3
110.0	-27.9	0.0	-27.9
111.0	-21.3	0.0	-21.3
112.0	-22.8	0.0	-22.8
113.0	-15.5	0.0	-15.5
114.0	-21.9	0.0	-21.9
115.0	-20.5	0.0	-20.5
116.0	-18.7	0.0	-18.7
117.0	-18.2	0.0	-18.2
118.0	-21.3	0.0	-21.3
119.0	-16.7	0.0	-16.7
120.0	-27.9	0.0	-27.9
121.0	-21.5	0.0	-21.5
122.0	-17.6	0.0	-17.6

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Azimuth LHCP, -180° to +180° @ 1.0° increment

-56.0	-9.1	-10.0	0.9
-55.0	-13.6	-10.0	-3.6
-54.0	-11.4	-10.0	-1.4
-53.0	-14.3	-10.0	-4.3
-52.0	-13.3	-10.0	-3.3
-51.0	-18.3	-10.0	-8.3
-50.0	-12.7	-10.0	-2.7
-49.0	-15.6	-10.0	-5.6
-48.0	-15.3	-10.0	-5.3
-47.0	-19.3	-9.8	-9.5
-46.0	-13.8	-9.6	-4.2
-45.0	-17.5	-9.3	-8.1
-44.0	-23.2	-9.1	-14.1
-43.0	-22.2	-8.8	-13.4
-42.0	-22.2	-8.6	-13.6
-41.0	-20.6	-8.3	-12.3
-40.0	-15.6	-8.1	-7.6
-39.0	-22.7	-7.8	-14.9
-38.0	-16.5	-7.5	-9.0
-37.0	-15.8	-7.2	-8.6
-36.0	-19.3	-6.9	-12.3
-35.0	-18.5	-6.6	-11.9
-34.0	-22.3	-6.3	-16.0
-33.0	-20.6	-6.0	-14.7
-32.0	-23.6	-5.6	-18.0
-31.0	-18.1	-5.3	-12.9
-30.0	-15.0	-4.9	-10.1
-29.0	-18.0	-4.6	-13.4
-28.0	-16.6	-4.2	-12.4
-27.0	-17.3	-3.8	-13.5
-26.0	-17.3	-3.4	-13.9
-25.0	-20.0	-2.9	-17.0
-24.0	-17.3	-2.5	-14.8
-23.0	-15.7	-2.0	-13.7
-22.0	-15.4	-1.6	-13.8
-21.0	-16.3	-1.1	-15.2
-20.0	-18.9	-0.5	-18.4
-19.0	-12.6	0.0	-12.7
-18.0	-18.1	0.6	-18.7
-17.0	-14.3	1.2	-15.5
-16.0	-17.5	1.9	-19.4
-15.0	-17.7	2.6	-20.3
-14.0	-25.8	3.3	-29.1
-13.0	-6.8	4.2	-11.0
-12.0	-4.1	5.0	-9.2
-11.0	-7.6	6.0	-13.6
-10.0	-5.5	7.0	-12.5
-9.0	-3.5	8.0	-11.5
-8.0	-4.1	8.0	-12.1
-7.0	1.8	7.9	-6.1
-6.0	-10.6	9.5	-20.2
-5.0	2.7	11.5	-8.9
-4.0	5.3	13.9	-8.7
-3.0	8.9	17.1	-8.2
-2.0	11.7	21.5	-9.8
-1.0	21.0		
0.0	52.1		

123.0	-20.4	0.0	-20.4
124.0	-21.7	0.0	-21.7
125.0	-25.7	0.0	-25.7
126.0	-24.9	0.0	-24.9
127.0	-19.6	0.0	-19.6
128.0	-27.9	0.0	-27.9
129.0	-25.8	0.0	-25.8
130.0	-22.0	0.0	-22.0
131.0	-20.6	0.0	-20.6
132.0	-21.8	0.0	-21.8
133.0	-24.8	0.0	-24.8
134.0	-23.8	0.0	-23.8
135.0	-23.4	0.0	-23.4
136.0	-23.1	0.0	-23.1
137.0	-21.8	0.0	-21.8
138.0	-19.0	0.0	-19.0
139.0	-23.1	0.0	-23.1
140.0	-23.6	0.0	-23.6
141.0	-21.1	0.0	-21.1
142.0	-26.3	0.0	-26.3
143.0	-18.5	0.0	-18.5
144.0	-27.9	0.0	-27.9
145.0	-21.1	0.0	-21.1
146.0	-23.5	0.0	-23.5
147.0	-19.7	0.0	-19.7
148.0	-24.1	0.0	-24.1
149.0	-23.3	0.0	-23.3
150.0	-22.0	0.0	-22.0
151.0	-27.9	0.0	-27.9
152.0	-23.3	0.0	-23.3
153.0	-21.9	0.0	-21.9
154.0	-23.1	0.0	-23.1
155.0	-17.8	0.0	-17.8
156.0	-27.9	0.0	-27.9
157.0	-27.0	0.0	-27.0
158.0	-23.3	0.0	-23.3
159.0	-27.2	0.0	-27.2
160.0	-14.9	0.0	-14.9
161.0	-22.5	0.0	-22.5
162.0	-22.3	0.0	-22.3
163.0	-19.8	0.0	-19.8
164.0	-16.6	0.0	-16.6
165.0	-20.0	0.0	-20.0
166.0	-22.5	0.0	-22.5
167.0	-21.2	0.0	-21.2
168.0	-24.4	0.0	-24.4
169.0	-27.3	0.0	-27.3
170.0	-20.9	0.0	-20.9
171.0	-21.2	0.0	-21.2
172.0	-27.9	0.0	-27.9
173.0	-20.3	0.0	-20.3
174.0	-19.1	0.0	-19.1
175.0	-27.9	0.0	-27.9
176.0	-24.3	0.0	-24.3
177.0	-20.9	0.0	-20.9
178.0	-24.6	0.0	-24.6
179.0	-19.3	0.0	-19.3

Orbit Communication Systems Ltd.

AL AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Azimuth LHCP, -10° to +10° @ 0.1° increment

27.55 GHz Antenna Pattern in Co-pol Az LHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
-10.0	-5.5	7.0	-12.5
-9.9	-2.7	7.1	-9.8
-9.8	-1.9	7.2	-9.1
-9.7	-2.3	7.3	-9.6
-9.6	-3.4	7.4	-10.9
-9.5	-7.4	7.6	-15.0
-9.4	-12.0	7.7	-19.7
-9.3	-7.2	7.8	-14.9
-9.2	-3.0	8.0	-11.0
-9.1	-2.7	8.0	-10.7
-9.0	-3.5	8.0	-11.5
-8.9	-5.9	8.0	-13.9
-8.8	-4.3	8.0	-12.3
-8.7	-2.8	8.0	-10.8
-8.6	-2.5	8.0	-10.5
-8.5	-4.0	8.0	-12.0
-8.4	-6.4	8.0	-14.4
-8.3	-5.4	8.0	-13.4
-8.2	-2.3	8.0	-10.3
-8.1	-0.7	8.0	-8.7
-8.0	-4.1	8.0	-12.1
-7.9	-13.6	8.0	-21.6
-7.8	-11.4	8.0	-19.4
-7.7	-5.4	8.0	-13.4
-7.6	-3.3	8.0	-11.3
-7.5	-2.8	8.0	-10.8
-7.4	-5.8	8.0	-13.8
-7.3	-0.4	8.0	-8.4
-7.2	2.1	8.0	-5.9
-7.1	2.3	8.0	-5.7
-7.0	1.8	7.9	-6.1
-6.9	3.5	8.0	-4.6
-6.8	4.7	8.2	-3.5
-6.7	4.0	8.3	-4.4
-6.6	3.5	8.5	-5.0
-6.5	2.0	8.7	-6.7
-6.4	-2.2	8.8	-11.1
-6.3	-8.2	9.0	-17.2
-6.2	-3.4	9.2	-12.6
-6.1	-2.3	9.4	-11.7
-6.0	-10.6	9.5	-20.2
-5.9	-2.3	9.7	-12.0
-5.8	2.0	9.9	-8.0
-5.7	0.1	10.1	-10.0
-5.6	-15.2	10.3	-25.5
-5.5	-2.1	10.5	-12.6
-5.4	0.5	10.7	-10.2
-5.3	-2.9	10.9	-13.8
-5.2	-0.4	11.1	-11.5
-5.1	2.5	11.3	-8.8
-5.0	2.7	11.5	-8.9
-4.9	2.0	11.7	-9.7
-4.8	2.3	12.0	-9.7
-4.7	3.1	12.2	-9.1
-4.6	2.1	12.4	-10.4
-4.5	-0.8	12.7	-13.5
-4.4	-4.1	12.9	-17.0
-4.3	-2.3	13.2	-15.5
-4.2	1.8	13.4	-11.6
-4.1	4.1	13.7	-9.6

27.55 GHz Antenna Pattern in Co-pol Az LHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
0.0	52.1		
0.1	51.5		
0.2	49.3		
0.3	45.4		
0.4	40.0		
0.5	34.1		
0.6	27.7		
0.7	26.5		
0.8	28.4		
0.9	26.9		
1.0	17.2		
1.1	18.3		
1.2	21.0		
1.3	17.0		
1.4	9.5		
1.5	11.5	24.6	-13.1
1.6	11.8	23.9	-12.1
1.7	15.9	23.2	-7.4
1.8	17.6	22.6	-5.0
1.9	16.0	22.0	-6.0
2.0	11.5	21.5	-10.0
2.1	5.0	20.9	-16.0
2.2	-2.4	20.4	-22.8
2.3	3.1	20.0	-16.9
2.4	4.5	19.5	-15.0
2.5	3.5	19.1	-15.6
2.6	3.0	18.6	-15.6
2.7	0.0	18.2	-18.2
2.8	-1.5	17.8	-19.3
2.9	3.2	17.4	-14.2
3.0	3.6	17.1	-13.4
3.1	6.1	16.7	-10.6
3.2	8.7	16.4	-7.7
3.3	8.2	16.0	-7.9
3.4	2.7	15.7	-13.0
3.5	-9.8	15.4	-25.2
3.6	-1.7	15.1	-16.8
3.7	-15.1	14.8	-29.9
3.8	3.8	14.5	-10.7
3.9	7.5	14.2	-6.7
4.0	5.9	13.9	-8.1
4.1	0.5	13.7	-13.2
4.2	-3.8	13.4	-17.3
4.3	-0.4	13.2	-13.5
4.4	0.6	12.9	-12.3
4.5	-0.2	12.7	-12.9
4.6	-1.1	12.4	-13.5
4.7	-0.4	12.2	-12.6
4.8	0.3	12.0	-11.6
4.9	-0.5	11.7	-12.2
5.0	-2.8	11.5	-14.3
5.1	-7.4	11.3	-18.7
5.2	-12.3	11.1	-23.4
5.3	-7.4	10.9	-18.3
5.4	-6.5	10.7	-17.2
5.5	-12.7	10.5	-23.2
5.6	-4.9	10.3	-15.2
5.7	0.5	10.1	-9.6
5.8	1.6	9.9	-8.3
5.9	1.3	9.7	-8.4

Orbit Communication Systems Ltd.

AL AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
 Co-pol Azimuth LHCP, -10° to +10° @ 0.1° increment

-4.0	5.3	13.9	-8.7
-3.9	8.3	14.2	-5.9
-3.8	10.2	14.5	-4.3
-3.7	8.1	14.8	-6.7
-3.6	-3.7	15.1	-18.8
-3.5	0.3	15.4	-15.1
-3.4	0.8	15.7	-15.0
-3.3	3.2	16.0	-12.9
-3.2	8.3	16.4	-8.0
-3.1	8.4	16.7	-8.3
-3.0	8.9	17.1	-8.2
-2.9	11.4	17.4	-6.0
-2.8	11.7	17.8	-6.1
-2.7	8.7	18.2	-9.5
-2.6	3.7	18.6	-14.9
-2.5	0.6	19.1	-18.5
-2.4	5.5	19.5	-14.0
-2.3	7.7	20.0	-12.2
-2.2	5.0	20.4	-15.5
-2.1	6.0	20.9	-15.0
-2.0	11.7	21.5	-9.8
-1.9	11.6	22.0	-10.4
-1.8	10.1	22.6	-12.5
-1.7	8.1	23.2	-15.1
-1.6	-0.9	23.9	-24.8
-1.5	12.8	24.6	-11.8
-1.4	18.1		
-1.3	20.0		
-1.2	22.0		
-1.1	22.9		
-1.0	21.0		
-0.9	13.3		
-0.8	11.8		
-0.7	11.6		
-0.6	22.9		
-0.5	33.0		
-0.4	40.6		
-0.3	46.2		
-0.2	49.7		
-0.1	51.6		
0.0	52.1		

6.0	-0.4	9.5	-10.0
6.1	-8.4	9.4	-17.7
6.2	-12.9	9.2	-22.1
6.3	-4.6	9.0	-13.6
6.4	-3.7	8.8	-12.6
6.5	-6.6	8.7	-15.3
6.6	-4.0	8.5	-12.5
6.7	-3.4	8.3	-11.8
6.8	-0.1	8.2	-8.3
6.9	2.6	8.0	-5.4
7.0	3.3	7.9	-4.6
7.1	3.4	8.0	-4.6
7.2	2.9	8.0	-5.1
7.3	-0.1	8.0	-8.1
7.4	-9.9	8.0	-17.9
7.5	-3.9	8.0	-11.9
7.6	-0.8	8.0	-8.8
7.7	-2.3	8.0	-10.3
7.8	-6.9	8.0	-14.9
7.9	-4.7	8.0	-12.7
8.0	-2.5	8.0	-10.5
8.1	0.2	8.0	-7.8
8.2	1.1	8.0	-6.9
8.3	-0.5	8.0	-8.5
8.4	-2.3	8.0	-10.3
8.5	-3.3	8.0	-11.3
8.6	-5.3	8.0	-13.3
8.7	-8.0	8.0	-16.0
8.8	-5.6	8.0	-13.6
8.9	-3.9	8.0	-11.9
9.0	-5.5	8.0	-13.5
9.1	-9.4	8.0	-17.4
9.2	-12.0	8.0	-20.0
9.3	-9.3	7.8	-17.1
9.4	-4.0	7.7	-11.7
9.5	-3.6	7.6	-11.2
9.6	-5.2	7.4	-12.6
9.7	-14.3	7.3	-21.7
9.8	-8.1	7.2	-15.3
9.9	-9.3	7.1	-16.4
10.0	-13.8	7.0	-20.8

Orbit Communication Systems Ltd.

AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Elevation LHCP, -30° to +30° @ 0.5° increment

27.55 GHz Antenna Pattern in Co-pol EI LHCP

Angle Degrees	Gain dBi	Mask dBi	Over Mask dB
-30.0	-7.7	-4.9	-2.8
-29.5	-10.1	-4.7	-5.3
-29.0	-11.7	-4.6	-7.1
-28.5	-11.5	-4.4	-7.1
-28.0	-10.6	-4.2	-6.5
-27.5	-12.3	-4.0	-8.3
-27.0	-7.9	-3.8	-4.2
-26.5	-9.9	-3.6	-6.3
-26.0	-18.1	-3.4	-14.8
-25.5	-14.0	-3.2	-10.8
-25.0	-16.3	-2.9	-13.4
-24.5	-8.9	-2.7	-6.2
-24.0	-10.4	-2.5	-7.9
-23.5	-8.1	-2.3	-5.8
-23.0	-14.6	-2.0	-12.5
-22.5	-7.0	-1.8	-5.2
-22.0	-5.5	-1.6	-4.0
-21.5	-6.2	-1.3	-4.9
-21.0	-16.3	-1.1	-15.2
-20.5	-8.9	-0.8	-8.1
-20.0	-3.3	-0.5	-2.8
-19.5	0.2	-0.3	0.4
-19.0	1.4	0.0	1.4
-18.5	-2.0	0.3	-2.3
-18.0	-3.3	0.6	-4.0
-17.5	-19.1	0.9	-20.0
-17.0	-23.4	1.2	-24.6
-16.5	-14.1	1.6	-15.6
-16.0	-12.5	1.9	-14.4
-15.5	-8.0	2.2	-10.2
-15.0	-21.1	2.6	-23.7
-14.5	-7.3	3.0	-10.2
-14.0	-15.0	3.3	-18.3
-13.5	-10.9	3.7	-14.7
-13.0	-8.5	4.2	-12.6
-12.5	-11.0	4.6	-15.6
-12.0	-7.1	5.0	-12.1
-11.5	-19.4	5.5	-24.9
-11.0	-7.7	6.0	-13.7
-10.5	-10.5	6.5	-17.0
-10.0	-7.4	7.0	-14.4
-9.5	-18.5	7.6	-26.0
-9.0	-11.2	8.1	-19.4
-8.5	-2.5	8.8	-11.2
-8.0	-8.2	9.4	-17.6
-7.5	-2.7	10.1	-12.8
-7.0	-4.8	10.9	-15.7
-6.5	-1.7	11.7	-13.4
-6.0	-4.8	12.5	-17.3
-5.5	-10.7	13.5	-24.2
-5.0	4.5	14.5	-10.0
-4.5	4.3	15.7	-11.4
-4.0	-7.1	16.9	-24.0
-3.5	3.3	18.4	-15.1
-3.0	11.3	20.1	-8.8
-2.5	12.5		
-2.0	7.4		
-1.5	14.8		
-1.0	20.6		
-0.5	36.4		
0.0	52.1		

27.55 GHz Antenna Pattern in Co-pol EI LHCP

Angle Degrees	Gain dBi	Mask dBi	Over Mask dB
0.0	52.1		
0.5	37.5		
1.0	18.1		
1.5	8.1		
2.0	7.4		
2.5	10.0		
3.0	-5.1	20.1	-25.1
3.5	13.9	18.4	-4.5
4.0	11.3	16.9	-5.7
4.5	4.3	15.7	-11.4
5.0	7.0	14.5	-7.6
5.5	-9.1	13.5	-22.5
6.0	-2.0	12.5	-14.5
6.5	0.4	11.7	-11.3
7.0	1.4	10.9	-9.5
7.5	-6.3	10.1	-16.4
8.0	-8.1	9.4	-17.5
8.5	-14.4	8.8	-23.2
9.0	-9.8	8.1	-18.0
9.5	-3.8	7.6	-11.4
10.0	-7.2	7.0	-14.2
10.5	-5.0	6.5	-11.5
11.0	-3.1	6.0	-9.1
11.5	-2.1	5.5	-7.6
12.0	-1.4	5.0	-6.5
12.5	-2.1	4.6	-6.7
13.0	-9.0	4.2	-13.1
13.5	-10.8	3.7	-14.5
14.0	-13.5	3.3	-16.8
14.5	-9.4	3.0	-12.3
15.0	-12.9	2.6	-15.5
15.5	-11.6	2.2	-13.8
16.0	-22.1	1.9	-24.0
16.5	-14.3	1.6	-15.9
17.0	-19.8	1.2	-21.1
17.5	-19.9	0.9	-20.8
18.0	-21.5	0.6	-22.1
18.5	-10.7	0.3	-11.0
19.0	-10.7	0.0	-10.7
19.5	-17.7	-0.3	-17.4
20.0	-27.3	-0.5	-26.8
20.5	-19.3	-0.8	-18.5
21.0	-15.4	-1.1	-14.3
21.5	-15.5	-1.3	-14.2
22.0	-13.1	-1.6	-11.6
22.5	-17.6	-1.8	-15.8
23.0	-27.5	-2.0	-25.4
23.5	-22.0	-2.3	-19.7
24.0	-22.0	-2.5	-19.5
24.5	-25.2	-2.7	-22.4
25.0	-13.5	-2.9	-10.5
25.5	-17.5	-3.2	-14.3
26.0	-16.0	-3.4	-12.7
26.5	-18.1	-3.6	-14.6
27.0	-14.1	-3.8	-10.3
27.5	-23.1	-4.0	-19.1
28.0	-20.7	-4.2	-16.5
28.5	-22.3	-4.4	-17.9
29.0	-26.0	-4.6	-21.4
29.5	-18.3	-4.7	-13.6
30.0	-15.8	-4.9	-10.9

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Elevation LHCP, -10° to +10° @ 0.1° increment

27.55 GHz Antenna Pattern in Co-pol EI LHCP

Angle Degrees	Gain dBi	Mask dBi	Over Mask dB
-10.0	-7.4	7.0	-14.4
-9.9	-5.2	7.1	-12.3
-9.8	-3.2	7.2	-10.4
-9.7	-3.9	7.3	-11.2
-9.6	-16.0	7.4	-23.5
-9.5	-18.5	7.6	-26.0
-9.4	-9.5	7.7	-17.2
-9.3	-6.1	7.8	-13.9
-9.2	-6.2	7.9	-14.1
-9.1	-8.1	8.0	-16.1
-9.0	-11.2	8.1	-19.4
-8.9	-8.5	8.3	-16.8
-8.8	-8.4	8.4	-16.8
-8.7	-16.2	8.5	-24.7
-8.6	-8.6	8.6	-17.2
-8.5	-2.5	8.8	-11.2
-8.4	-1.0	8.9	-9.9
-8.3	-0.1	9.0	-9.1
-8.2	-0.2	9.2	-9.4
-8.1	-1.6	9.3	-10.9
-8.0	-8.2	9.4	-17.6
-7.9	-20.8	9.6	-30.4
-7.8	-11.8	9.7	-21.5
-7.7	-7.2	9.8	-17.1
-7.6	-4.9	10.0	-14.8
-7.5	-2.7	10.1	-12.8
-7.4	-0.9	10.3	-11.2
-7.3	0.1	10.4	-10.4
-7.2	-1.5	10.6	-12.1
-7.1	-8.1	10.7	-18.8
-7.0	-4.8	10.9	-15.7
-6.9	-6.2	11.0	-17.2
-6.8	-10.0	11.2	-21.2
-6.7	-5.3	11.3	-16.6
-6.6	-2.0	11.5	-13.5
-6.5	-1.7	11.7	-13.4
-6.4	-0.7	11.8	-12.6
-6.3	0.6	12.0	-11.4
-6.2	-0.7	12.2	-12.9
-6.1	-3.8	12.4	-16.1
-6.0	-4.8	12.5	-17.3
-5.9	-7.6	12.7	-20.3
-5.8	-10.2	12.9	-23.1
-5.7	-9.4	13.1	-22.5
-5.6	-10.4	13.3	-23.7
-5.5	-10.7	13.5	-24.2
-5.4	-3.1	13.7	-16.8
-5.3	1.4	13.9	-12.5
-5.2	3.1	14.1	-11.0
-5.1	4.3	14.3	-10.0
-5.0	4.5	14.5	-10.0
-4.9	5.1	14.7	-9.7
-4.8	4.6	15.0	-10.3
-4.7	1.0	15.2	-14.2
-4.6	-5.9	15.4	-21.3
-4.5	4.3	15.7	-11.4
-4.4	8.2	15.9	-7.7
-4.3	9.5	16.2	-6.7
-4.2	8.4	16.4	-8.0
-4.1	4.6	16.7	-12.1

27.55 GHz Antenna Pattern in Co-pol EI LHCP

Angle Degrees	Gain dBi	Mask dBi	Over Mask dB
0.0	52.1		
0.1	51.4		
0.2	49.1		
0.3	45.3		
0.4	40.9		
0.5	37.5		
0.6	33.3		
0.7	25.1		
0.8	8.3		
0.9	15.5		
1.0	18.1		
1.1	20.4		
1.2	18.9		
1.3	11.4		
1.4	9.6		
1.5	8.1		
1.6	12.9		
1.7	15.5		
1.8	14.8		
1.9	10.5		
2.0	7.4		
2.1	8.5		
2.2	12.2		
2.3	13.7		
2.4	12.9		
2.5	10.0		
2.6	5.9		
2.7	-6.7		
2.8	2.4		
2.9	3.9		
3.0	-5.1	20.1	-25.1
3.1	0.0	19.7	-19.7
3.2	0.8	19.4	-18.5
3.3	5.6	19.0	-13.5
3.4	11.4	18.7	-7.3
3.5	13.9	18.4	-4.5
3.6	13.3	18.1	-4.8
3.7	9.7	17.8	-8.1
3.8	7.9	17.5	-9.6
3.9	10.3	17.2	-6.9
4.0	11.3	16.9	-5.7
4.1	9.9	16.7	-6.8
4.2	8.4	16.4	-8.0
4.3	8.3	16.2	-7.8
4.4	7.8	15.9	-8.1
4.5	4.3	15.7	-11.4
4.6	1.3	15.4	-14.1
4.7	1.3	15.2	-13.9
4.8	3.0	15.0	-12.0
4.9	4.9	14.7	-9.9
5.0	7.0	14.5	-7.6
5.1	8.5	14.3	-5.8
5.2	9.2	14.1	-4.9
5.3	7.4	13.9	-6.5
5.4	1.9	13.7	-11.8
5.5	-9.1	13.5	-22.5
5.6	-1.9	13.3	-15.2
5.7	-3.2	13.1	-16.3
5.8	-2.1	12.9	-15.0
5.9	-0.8	12.7	-13.6

Orbit Communication Systems Ltd.
 AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
 Co-pol Elevation LHCP, -10° to +10° @ 0.1° increment

-4.0	-7.1	16.9	-24.0
-3.9	6.5	17.2	-10.7
-3.8	9.5	17.5	-8.0
-3.7	9.6	17.8	-8.2
-3.6	7.2	18.1	-10.9
-3.5	3.3	18.4	-15.1
-3.4	-6.4	18.7	-25.2
-3.3	-5.5	19.0	-24.5
-3.2	-9.3	19.4	-28.6
-3.1	4.1	19.7	-15.6
-3.0	11.3	20.1	-8.8
-2.9	13.2		
-2.8	12.3		
-2.7	9.7		
-2.6	10.4		
-2.5	12.5		
-2.4	14.0		
-2.3	14.4		
-2.2	13.2		
-2.1	10.6		
-2.0	7.4		
-1.9	2.6		
-1.8	4.5		
-1.7	11.7		
-1.6	14.6		
-1.5	14.8		
-1.4	12.8		
-1.3	19.3		
-1.2	22.9		
-1.1	22.9		
-1.0	20.6		
-0.9	21.8		
-0.8	25.2		
-0.7	29.7		
-0.6	33.4		
-0.5	36.4		
-0.4	41.2		
-0.3	46.4		
-0.2	49.9		
-0.1	51.7		
0.0	52.1		

6.0	-2.0	12.5	-14.5
6.1	-9.6	12.4	-21.9
6.2	-3.8	12.2	-16.0
6.3	0.8	12.0	-11.2
6.4	0.9	11.8	-10.9
6.5	0.4	11.7	-11.3
6.6	-0.1	11.5	-11.6
6.7	1.7	11.3	-9.7
6.8	3.9	11.2	-7.3
6.9	4.0	11.0	-7.0
7.0	1.4	10.9	-9.5
7.1	-7.7	10.7	-18.5
7.2	-13.2	10.6	-23.8
7.3	-7.6	10.4	-18.0
7.4	-10.2	10.3	-20.5
7.5	-6.3	10.1	-16.4
7.6	-7.4	10.0	-17.3
7.7	-5.3	9.8	-15.2
7.8	-5.1	9.7	-14.8
7.9	-7.2	9.6	-16.8
8.0	-8.1	9.4	-17.5
8.1	-14.1	9.3	-23.4
8.2	-21.8	9.2	-31.0
8.3	-11.8	9.0	-20.9
8.4	-10.6	8.9	-19.5
8.5	-14.4	8.8	-23.2
8.6	-5.7	8.6	-14.3
8.7	-5.2	8.5	-13.8
8.8	-4.5	8.4	-12.9
8.9	-7.6	8.3	-15.8
9.0	-9.8	8.1	-18.0
9.1	-6.9	8.0	-14.9
9.2	-7.9	7.9	-15.8
9.3	-14.8	7.8	-22.6
9.4	-9.2	7.7	-16.8
9.5	-3.8	7.6	-11.4
9.6	-1.7	7.4	-9.1
9.7	-0.7	7.3	-8.0
9.8	-1.1	7.2	-8.3
9.9	-3.1	7.1	-10.2
10.0	-7.2	7.0	-14.2

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
X-pol Azimuth LHCP, -10° to +10° @ 0.1° increment

27.55 GHz Antenna Pattern in X-pol Az LHCP

Angle Degrees	Gain dBi	Mask dBi	Over Mask dB
-10.0	-5.5	-2.0	-3.5
-9.9	-6.1	-2.0	-4.1
-9.8	-10.9	-2.0	-8.9
-9.7	-7.3	-2.0	-5.3
-9.6	-5.9	-2.0	-3.9
-9.5	-6.2	-2.0	-4.2
-9.4	-7.6	-2.0	-5.6
-9.3	-8.9	-2.0	-6.9
-9.2	-9.1	-2.0	-7.1
-9.1	-11.5	-2.0	-9.5
-9.0	-12.7	-2.0	-10.7
-8.9	-16.5	-2.0	-14.5
-8.8	-9.2	-2.0	-7.2
-8.7	-7.0	-2.0	-5.0
-8.6	-6.5	-2.0	-4.5
-8.5	-5.5	-2.0	-3.5
-8.4	-5.3	-2.0	-3.3
-8.3	-7.4	-2.0	-5.4
-8.2	-7.1	-2.0	-5.1
-8.1	-5.8	-2.0	-3.8
-8.0	-2.3	-2.0	-0.3
-7.9	-3.1	-2.0	-1.1
-7.8	-3.9	-2.0	-1.9
-7.7	-7.0	-2.0	-5.0
-7.6	-12.5	-2.0	-10.5
-7.5	-5.4	-2.0	-3.4
-7.4	-2.5	-2.0	-0.5
-7.3	-0.8	-2.0	1.2
-7.2	-2.9	-2.0	-0.9
-7.1	-6.5	-2.0	-4.5
-7.0	-17.8	-2.1	-15.7
-6.9	-14.8	-2.0	-12.8
-6.8	-8.8	-1.8	-7.0
-6.7	-4.3	-1.7	-2.6
-6.6	-2.2	-1.5	-0.7
-6.5	-3.4	-1.3	-2.0
-6.4	-3.5	-1.2	-2.3
-6.3	-2.8	-1.0	-1.8
-6.2	-1.3	-0.8	-0.4
-6.1	-1.5	-0.6	-0.9
-6.0	-3.1	-0.5	-2.6
-5.9	-7.9	-0.3	-7.6
-5.8	-3.9	-0.1	-3.8
-5.7	-1.8	0.1	-1.9
-5.6	-0.4	0.3	-0.7
-5.5	-0.3	0.5	-0.8
-5.4	-4.5	0.7	-5.2
-5.3	-9.8	0.9	-10.7
-5.2	-18.0	1.1	-19.1
-5.1	-11.0	1.3	-12.3
-5.0	-5.0	1.5	-6.5
-4.9	-5.0	1.7	-6.8
-4.8	-9.3	2.0	-11.2
-4.7	-14.5	2.2	-16.7
-4.6	-8.0	2.4	-10.4
-4.5	-7.9	2.7	-10.6
-4.4	-9.6	2.9	-12.5
-4.3	-3.7	3.2	-6.9
-4.2	-0.4	3.4	-3.9
-4.1	-1.0	3.7	-4.7


27.55 GHz Antenna Pattern in X-pol Az LHCP

Angle Degrees	Gain dBi	Mask dBi	Over Mask dB
0.0	22.5		
0.1	23.4		
0.2	25.1		
0.3	25.9		
0.4	25.2		
0.5	22.9		
0.6	16.7		
0.7	0.6		
0.8	8.6		
0.9	13.4		
1.0	14.4		
1.1	11.5		
1.2	-2.5		
1.3	6.1		
1.4	9.2		
1.5	6.5		
1.6	1.6		
1.7	4.3		
1.8	4.4	12.6	-8.2
1.9	-1.1	12.0	-13.2
2.0	-6.2	11.5	-17.7
2.1	-10.1	10.9	-21.0
2.2	-6.5	10.4	-16.9
2.3	-1.4	10.0	-11.4
2.4	-1.8	9.5	-11.3
2.5	-5.7	9.1	-14.8
2.6	-12.7	8.6	-21.3
2.7	-12.6	8.2	-20.8
2.8	-10.4	7.8	-18.2
2.9	-12.6	7.4	-20.0
3.0	-19.9	7.1	-27.0
3.1	-13.8	6.7	-20.5
3.2	-15.8	6.4	-22.2
3.3	-14.4	6.0	-20.5
3.4	-8.0	5.7	-13.7
3.5	-11.9	5.4	-17.3
3.6	-18.5	5.1	-23.6
3.7	-10.7	4.8	-15.5
3.8	-4.9	4.5	-9.4
3.9	-8.3	4.2	-12.5
4.0	-27.9	3.9	-31.9
4.1	-9.6	3.7	-13.3
4.2	-7.6	3.4	-11.1
4.3	-10.3	3.2	-13.4
4.4	-15.2	2.9	-18.1
4.5	-16.7	2.7	-19.4
4.6	-20.5	2.4	-23.0
4.7	-11.9	2.2	-14.1
4.8	-16.7	2.0	-18.7
4.9	-14.6	1.7	-16.4
5.0	-11.9	1.5	-13.5
5.1	-11.3	1.3	-12.6
5.2	-16.3	1.1	-17.4
5.3	-10.8	0.9	-11.7
5.4	-9.1	0.7	-9.7
5.5	-12.0	0.5	-12.5
5.6	-13.0	0.3	-13.3
5.7	-7.7	0.1	-7.8
5.8	-7.6	-0.1	-7.5
5.9	-9.2	-0.3	-8.9

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
X-pol Azimuth LHCP, -10° to +10° @ 0.1° increment


-4.0	-2.3	3.9	-6.3
-3.9	-4.6	4.2	-8.8
-3.8	0.6	4.5	-3.9
-3.7	2.0	4.8	-2.8
-3.6	1.2	5.1	-3.9
-3.5	-0.7	5.4	-6.1
-3.4	-3.2	5.7	-8.9
-3.3	-4.5	6.0	-10.5
-3.2	-6.9	6.4	-13.2
-3.1	-12.8	6.7	-19.6
-3.0	-9.6	7.1	-16.7
-2.9	-2.9	7.4	-10.3
-2.8	-2.5	7.8	-10.3
-2.7	-6.0	8.2	-14.2
-2.6	-5.5	8.6	-14.2
-2.5	-5.5	9.1	-14.5
-2.4	-7.3	9.5	-16.8
-2.3	-1.4	10.0	-11.3
-2.2	-0.4	10.4	-10.9
-2.1	-5.2	10.9	-16.1
-2.0	-4.0	11.5	-15.5
-1.9	-4.3	12.0	-16.3
-1.8	-4.5	12.6	-17.1
-1.7	-1.1		
-1.6	0.1		
-1.5	2.9		
-1.4	4.0		
-1.3	1.3		
-1.2	4.8		
-1.1	9.3		
-1.0	10.6		
-0.9	10.6		
-0.8	4.5		
-0.7	14.0		
-0.6	22.9		
-0.5	27.1		
-0.4	28.7		
-0.3	28.3		
-0.2	26.8		
-0.1	24.0		
0.0	22.5		

6.0	-17.3	-0.5	-16.8
6.1	-24.0	-0.6	-23.3
6.2	-11.3	-0.8	-10.5
6.3	-6.8	-1.0	-5.9
6.4	-8.9	-1.2	-7.7
6.5	-8.2	-1.3	-6.8
6.6	-7.2	-1.5	-5.7
6.7	-5.3	-1.7	-3.7
6.8	-5.4	-1.8	-3.6
6.9	-6.0	-2.0	-4.0
7.0	-8.9	-2.1	-6.8
7.1	-7.2	-2.0	-5.2
7.2	-9.3	-2.0	-7.3
7.3	-12.0	-2.0	-10.0
7.4	-12.2	-2.0	-10.2
7.5	-11.8	-2.0	-9.8
7.6	-8.7	-2.0	-6.7
7.7	-5.7	-2.0	-3.7
7.8	-5.7	-2.0	-3.7
7.9	-7.2	-2.0	-5.2
8.0	-6.5	-2.0	-4.5
8.1	-5.3	-2.0	-3.3
8.2	-6.4	-2.0	-4.4
8.3	-8.3	-2.0	-6.3
8.4	-8.2	-2.0	-6.2
8.5	-8.3	-2.0	-6.3
8.6	-9.7	-2.0	-7.7
8.7	-12.1	-2.0	-10.1
8.8	-11.7	-2.0	-9.7
8.9	-13.8	-2.0	-11.8
9.0	-19.1	-2.0	-17.1
9.1	-21.8	-2.0	-19.8
9.2	-17.2	-2.0	-15.2
9.3	-13.4	-2.0	-11.4
9.4	-13.2	-2.0	-11.2
9.5	-8.4	-2.0	-6.4
9.6	-7.6	-2.0	-5.6
9.7	-6.6	-2.0	-4.6
9.8	-9.8	-2.0	-7.8
9.9	-15.0	-2.0	-13.0
10.0	-11.3	-2.0	-9.3

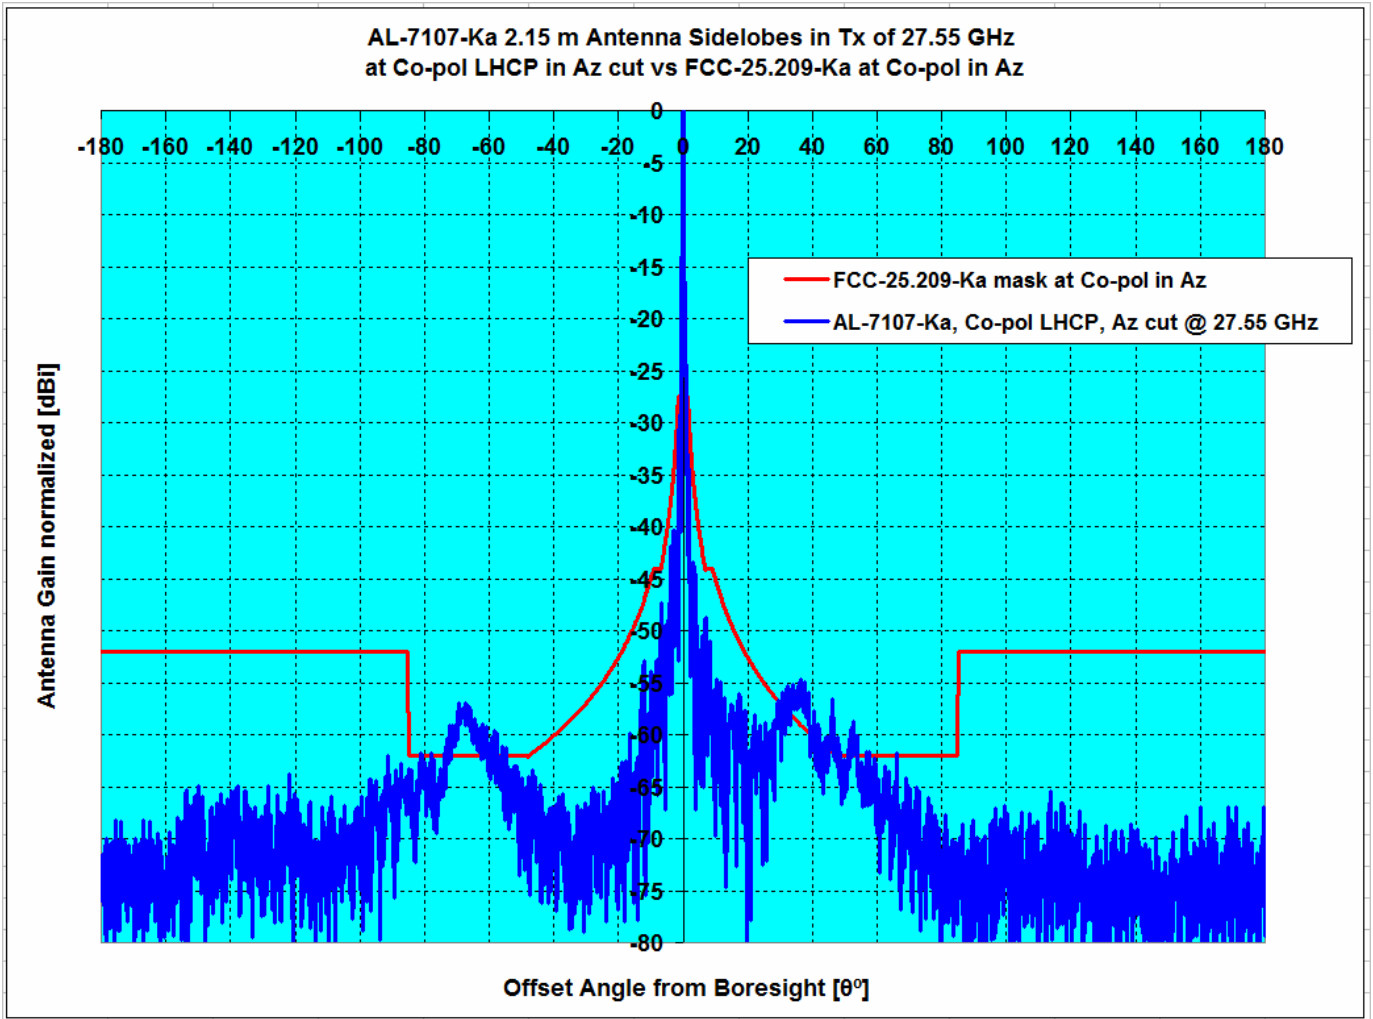


Description	Plane, CirP	Frequency	Ant. Gain	Peak Excursions dB		Over Mask %	
				1.5°≤θ≤7°	7°≤θ≤180°	1.5°≤θ≤7°	7°≤θ≤180°
FCC-25.209-Ka, Co-pol Az, vs AL-7107-Ka	Az , LHCP	27.55	52.06	-3.48	5.11	0.00%	8.04%


Orbit Communication Systems Ltd.
 AL-7107-Ka, 2.15 m Antenna, Pattern, Co-pol, Azimuth LHCP

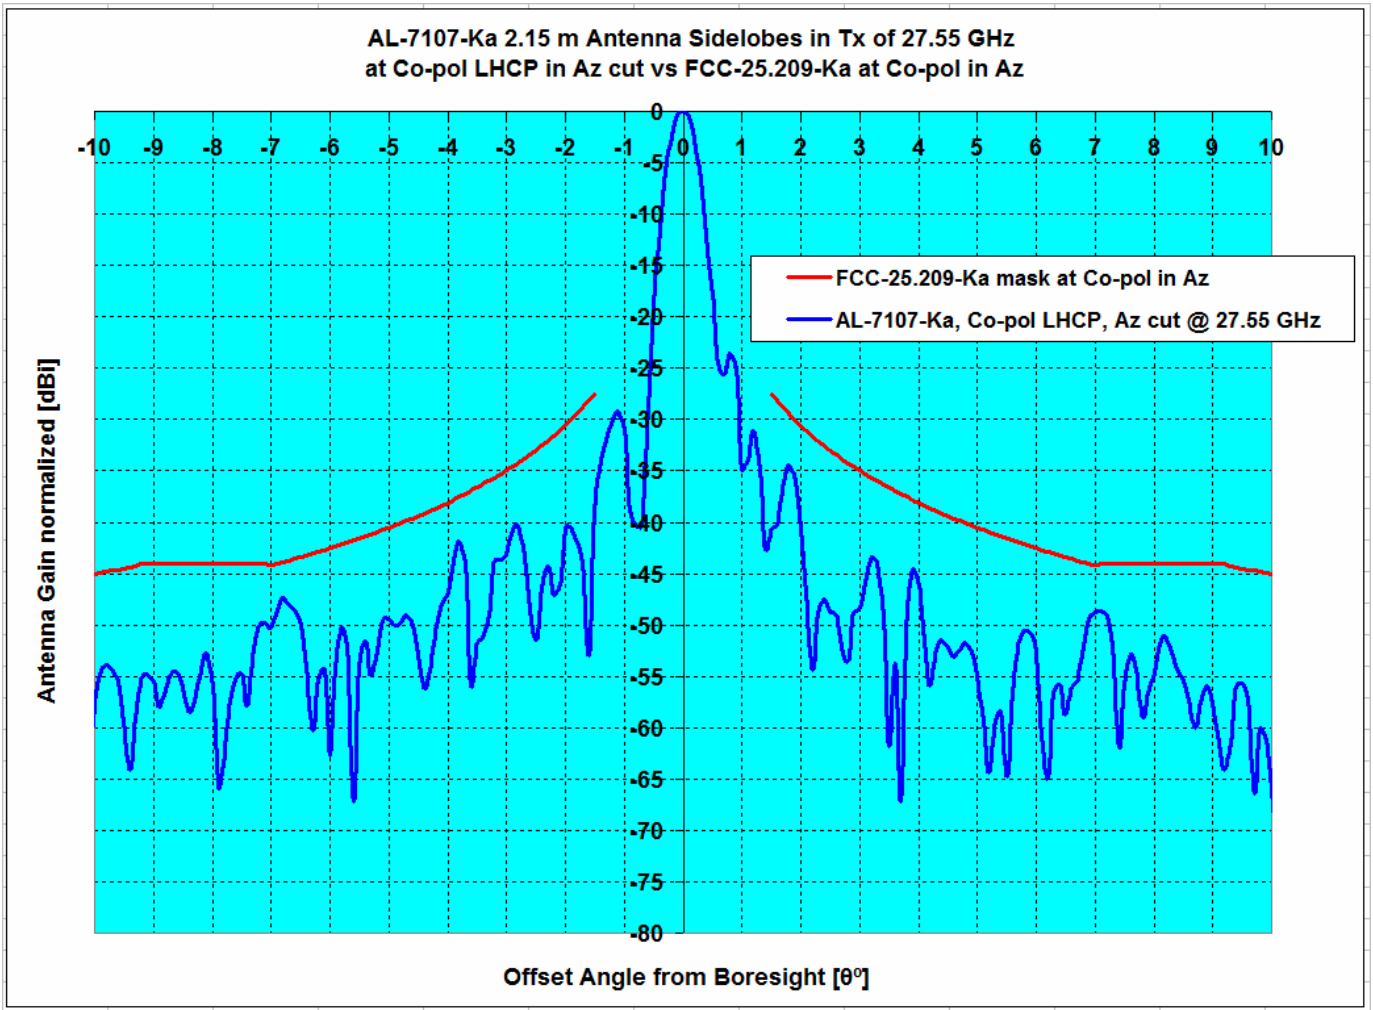

Description	Plane, CirP	Frequency	Ant. Gain	Peak Excursions dB		Over Mask %	
				1.5°≤θ≤7°	7°≤θ≤180°	1.5°≤θ≤7°	7°≤θ≤180°
FCC-25.209-Ka, Co-pol Az, vs AL-7107-Ka	Az , LHCP	27.55	52.06	-3.48	5.11	0.00%	8.04%

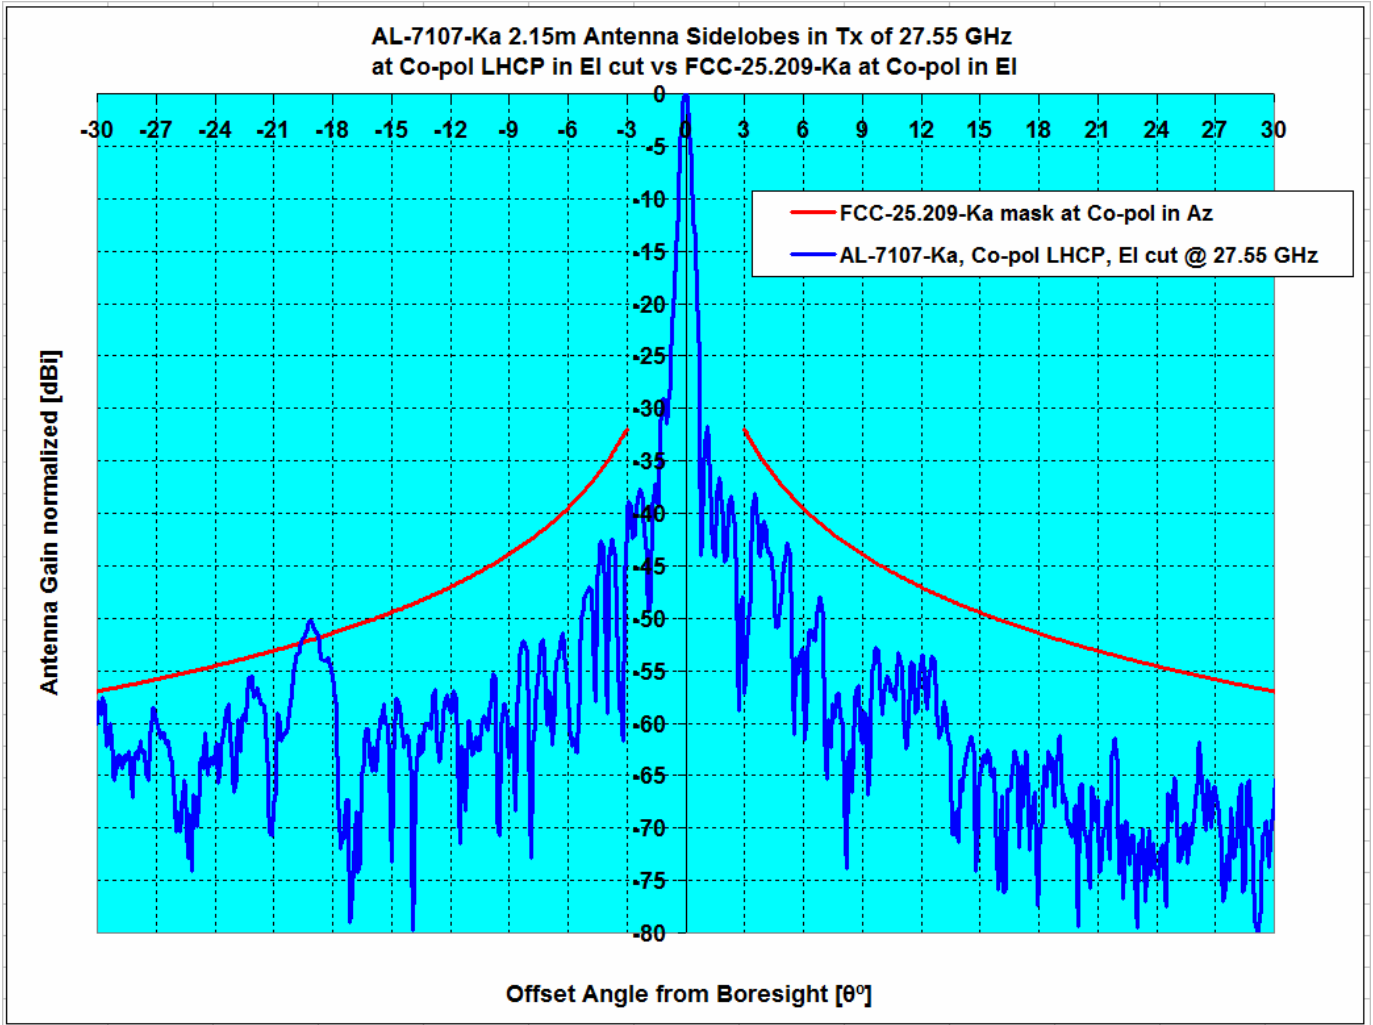


Description	Plane, CirP	Frequency	Ant. Gain	Peak Excursions dB		Over Mask %	
				3°≤θ≤7°	7°≤θ≤30°	3°≤θ≤7°	7°≤θ≤30°
Pattern Rule vs Antenna System	Type	GHz	dBi				
FCC-25.209-Ka, Co-pol EI, vs AL-7107-Ka	EI , LHCP	27.55	52.06	-4.46	1.83	0.00%	1.66%

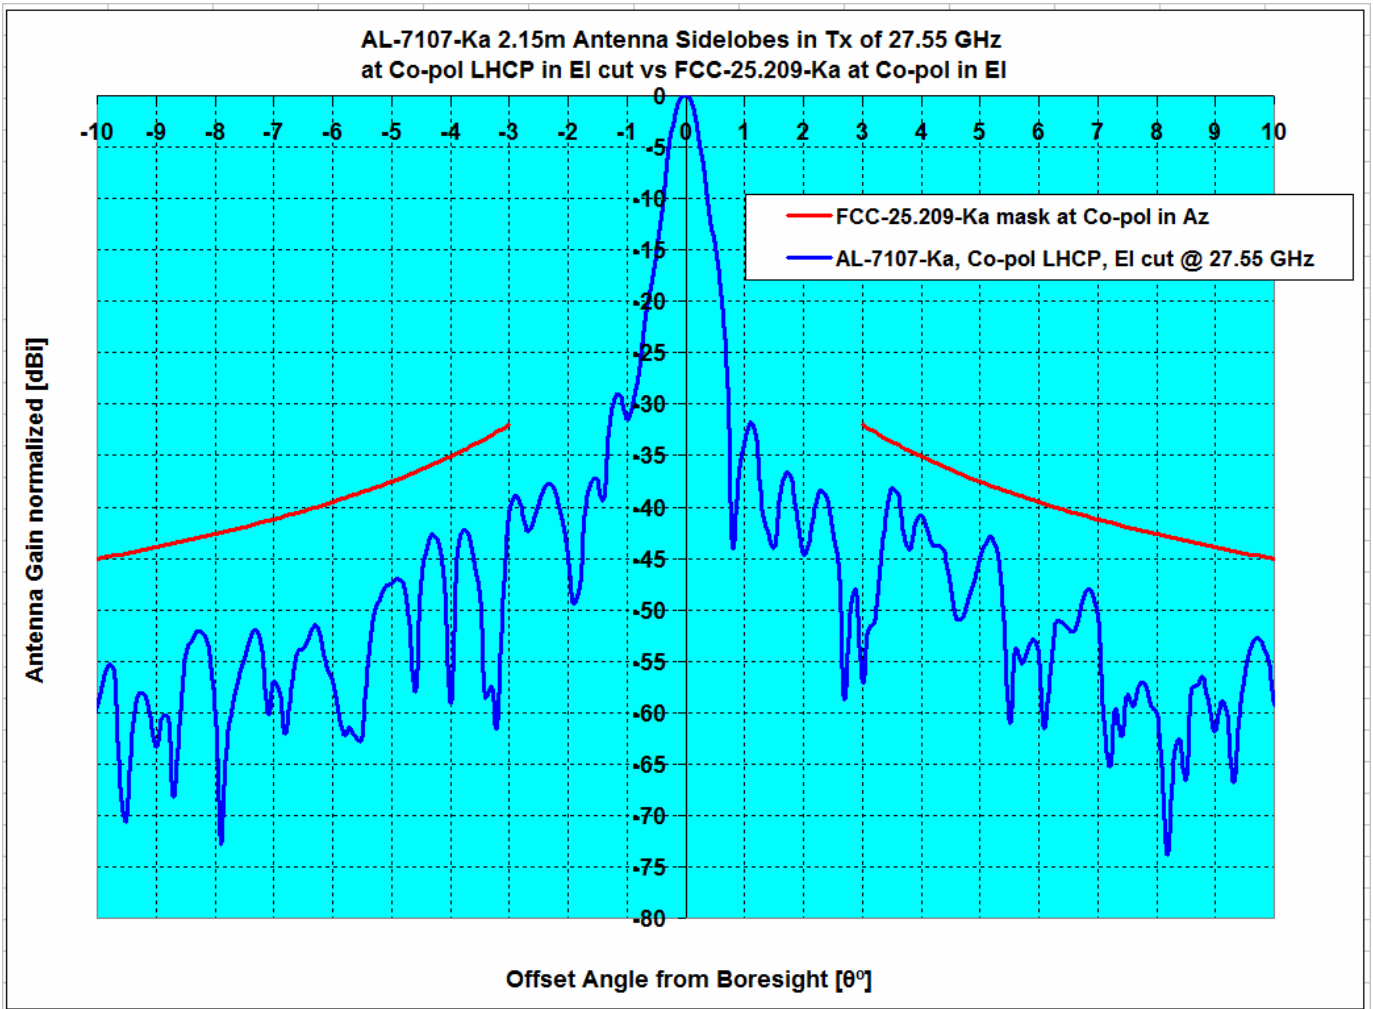

Description	Plane, CirP	Frequency	Ant. Gain	Peak Excursions dB		Over Mask %	
				3°≤θ≤7°	7°≤θ≤30°	3°≤θ≤7°	7°≤θ≤30°
FCC-25.209-Ka, Co-pol EI, vs AL-7107-Ka	EI , LHCP	27.55	52.06	-4.46	1.83	0.00%	1.66%

Orbit Communication Systems Ltd.
 AL-7107-Ka, 2.15 m Antenna, Pattern, X-pol, Azimuth LHCP

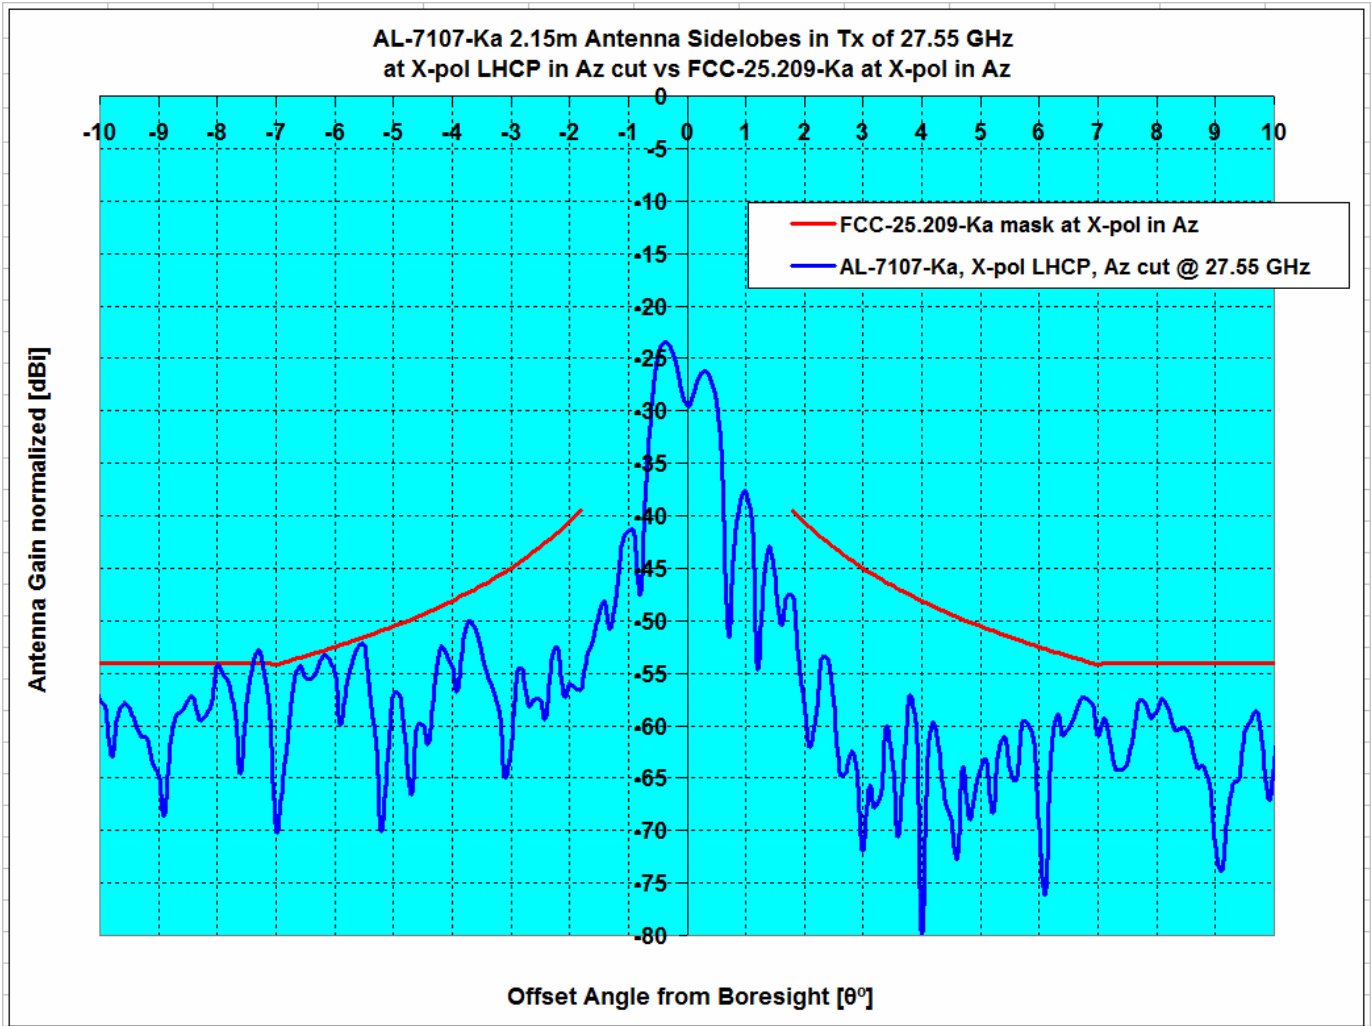

Description	Plane, CirP Type	Frequency GHz	Ant. Gain dBi	Peak Excursions dB		Over Mask %	
				$1.8^\circ \leq \theta \leq 7^\circ$	$1.8^\circ \leq \theta \leq 9.2^\circ$	$1.8^\circ \leq \theta \leq 7^\circ$	$1.8^\circ \leq \theta \leq 9.2^\circ$
FCC-25.209-Ka, X-pol Az, vs AL-7107-Ka	Az , LHCP	27.55	52.06	-0.44	1.22	0.00%	0.60%

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Azimuth RHCP, -180° to +180° @ 1.0° increment

27.55 GHz Antenna Pattern in Co-pol Az RHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
-179.0	-20.9	0.0	-20.9
-178.0	-26.7	0.0	-26.7
-177.0	-26.5	0.0	-26.5
-176.0	-18.2	0.0	-18.2
-175.0	-20.9	0.0	-20.9
-174.0	-21.1	0.0	-21.1
-173.0	-23.3	0.0	-23.3
-172.0	-25.7	0.0	-25.7
-171.0	-22.9	0.0	-22.9
-170.0	-24.2	0.0	-24.2
-169.0	-22.5	0.0	-22.5
-168.0	-21.9	0.0	-21.9
-167.0	-27.9	0.0	-27.9
-166.0	-26.2	0.0	-26.2
-165.0	-19.5	0.0	-19.5
-164.0	-18.2	0.0	-18.2
-163.0	-21.6	0.0	-21.6
-162.0	-27.5	0.0	-27.5
-161.0	-25.5	0.0	-25.5
-160.0	-24.3	0.0	-24.3
-159.0	-17.4	0.0	-17.4
-158.0	-20.6	0.0	-20.6
-157.0	-18.7	0.0	-18.7
-156.0	-17.8	0.0	-17.8
-155.0	-26.4	0.0	-26.4
-154.0	-17.1	0.0	-17.1
-153.0	-22.6	0.0	-22.6
-152.0	-19.3	0.0	-19.3
-151.0	-14.8	0.0	-14.8
-150.0	-18.1	0.0	-18.1
-149.0	-16.6	0.0	-16.6
-148.0	-22.1	0.0	-22.1
-147.0	-24.1	0.0	-24.1
-146.0	-15.1	0.0	-15.1
-145.0	-18.9	0.0	-18.9
-144.0	-16.7	0.0	-16.7
-143.0	-14.5	0.0	-14.5
-142.0	-14.8	0.0	-14.8
-141.0	-14.2	0.0	-14.2
-140.0	-19.3	0.0	-19.3
-139.0	-16.6	0.0	-16.6
-138.0	-13.8	0.0	-13.8
-137.0	-24.9	0.0	-24.9
-136.0	-17.6	0.0	-17.6
-135.0	-15.6	0.0	-15.6
-134.0	-19.6	0.0	-19.6
-133.0	-19.4	0.0	-19.4
-132.0	-17.1	0.0	-17.1
-131.0	-18.8	0.0	-18.8
-130.0	-18.5	0.0	-18.5
-129.0	-14.9	0.0	-14.9
-128.0	-16.7	0.0	-16.7
-127.0	-21.7	0.0	-21.7
-126.0	-16.7	0.0	-16.7
-125.0	-15.8	0.0	-15.8
-124.0	-15.7	0.0	-15.7
-123.0	-19.9	0.0	-19.9
-122.0	-19.6	0.0	-19.6

27.55 GHz Antenna Pattern in Co-pol Az RHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
0.0	52.1		
1.0	17.2		
2.0	11.5	21.5	-10.0
3.0	3.6	17.1	-13.4
4.0	5.9	13.9	-8.1
5.0	-2.8	11.5	-14.3
6.0	-0.4	9.5	-10.0
7.0	3.3	7.9	-4.6
8.0	-2.5	8.0	-10.5
9.0	-5.5	8.0	-13.5
10.0	-13.8	7.0	-20.8
11.0	-7.5	6.0	-13.4
12.0	-4.9	5.0	-10.0
13.0	-15.4	4.2	-19.5
14.0	-9.2	3.3	-12.6
15.0	-5.3	2.6	-7.9
16.0	-7.2	1.9	-9.1
17.0	-7.2	1.2	-8.4
18.0	-6.8	0.6	-7.4
19.0	-5.7	0.0	-5.7
20.0	-23.1	-0.5	-22.6
21.0	-16.5	-1.1	-15.4
22.0	-6.1	-1.6	-4.5
23.0	-7.9	-2.0	-5.8
24.0	-10.1	-2.5	-7.6
25.0	-11.5	-2.9	-8.6
26.0	-12.1	-3.4	-8.7
27.0	-12.1	-3.8	-8.3
28.0	-11.4	-4.2	-7.2
29.0	-6.3	-4.6	-1.8
30.0	-6.5	-4.9	-1.6
31.0	-5.2	-5.3	0.1
32.0	-4.3	-5.6	1.4
33.0	-5.8	-6.0	0.2
34.0	-3.4	-6.3	2.9
35.0	-4.9	-6.6	1.7
36.0	-2.9	-6.9	4.0
37.0	-3.0	-7.2	4.2
38.0	-6.1	-7.5	1.4
39.0	-5.1	-7.8	2.7
40.0	-7.4	-8.1	0.7
41.0	-8.9	-8.3	-0.5
42.0	-9.3	-8.6	-0.7
43.0	-12.5	-8.8	-3.7
44.0	-10.4	-9.1	-1.3
45.0	-11.0	-9.3	-1.7
46.0	-5.2	-9.6	4.4
47.0	-9.5	-9.8	0.3
48.0	-8.9	-10.0	1.2
49.0	-13.7	-10.0	-3.7
50.0	-14.0	-10.0	-4.0
51.0	-9.4	-10.0	0.6
52.0	-7.4	-10.0	2.6
53.0	-7.9	-10.0	2.1
54.0	-8.9	-10.0	1.1
55.0	-13.3	-10.0	-3.3
56.0	-14.7	-10.0	-4.7
57.0	-11.3	-10.0	-1.3

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Azimuth RHCP, -180° to +180° @ 1.0° increment

-121.0	-17.4	0.0	-17.4
-120.0	-21.6	0.0	-21.6
-119.0	-20.4	0.0	-20.4
-118.0	-26.4	0.0	-26.4
-117.0	-20.8	0.0	-20.8
-116.0	-18.3	0.0	-18.3
-115.0	-18.6	0.0	-18.6
-114.0	-20.2	0.0	-20.2
-113.0	-19.3	0.0	-19.3
-112.0	-20.9	0.0	-20.9
-111.0	-20.2	0.0	-20.2
-110.0	-19.0	0.0	-19.0
-109.0	-14.5	0.0	-14.5
-108.0	-20.8	0.0	-20.8
-107.0	-21.5	0.0	-21.5
-106.0	-19.2	0.0	-19.2
-105.0	-18.4	0.0	-18.4
-104.0	-18.0	0.0	-18.0
-103.0	-21.0	0.0	-21.0
-102.0	-24.7	0.0	-24.7
-101.0	-15.1	0.0	-15.1
-100.0	-18.9	0.0	-18.9
-99.0	-26.4	0.0	-26.4
-98.0	-14.1	0.0	-14.1
-97.0	-13.6	0.0	-13.6
-96.0	-12.9	0.0	-12.9
-95.0	-16.6	0.0	-16.6
-94.0	-17.7	0.0	-17.7
-93.0	-17.7	0.0	-17.7
-92.0	-12.0	0.0	-12.0
-91.0	-14.7	0.0	-14.7
-90.0	-16.2	0.0	-16.2
-89.0	-13.8	0.0	-13.8
-88.0	-18.2	0.0	-18.2
-87.0	-13.4	0.0	-13.4
-86.0	-12.2	0.0	-12.2
-85.0	-12.3	-10.0	-2.3
-84.0	-16.9	-10.0	-6.9
-83.0	-19.5	-10.0	-9.5
-82.0	-15.3	-10.0	-5.3
-81.0	-12.5	-10.0	-2.5
-80.0	-10.7	-10.0	-0.7
-79.0	-11.3	-10.0	-1.3
-78.0	-10.5	-10.0	-0.5
-77.0	-11.5	-10.0	-1.5
-76.0	-12.6	-10.0	-2.6
-75.0	-11.3	-10.0	-1.3
-74.0	-10.8	-10.0	-0.8
-73.0	-8.3	-10.0	1.7
-72.0	-8.2	-10.0	1.8
-71.0	-8.7	-10.0	1.3
-70.0	-7.8	-10.0	2.2
-69.0	-6.9	-10.0	3.1
-68.0	-5.8	-10.0	4.2
-67.0	-6.2	-10.0	3.8
-66.0	-5.3	-10.0	4.7
-65.0	-8.9	-10.0	1.1
-64.0	-8.1	-10.0	1.9
-63.0	-8.5	-10.0	1.5
-62.0	-9.6	-10.0	0.4
-61.0	-7.2	-10.0	2.8
-60.0	-10.1	-10.0	-0.1
-59.0	-10.8	-10.0	-0.8

58.0	-11.6	-10.0	-1.6
59.0	-11.8	-10.0	-1.8
60.0	-16.5	-10.0	-6.5
61.0	-17.9	-10.0	-7.9
62.0	-15.2	-10.0	-5.2
63.0	-13.0	-10.0	-3.0
64.0	-17.3	-10.0	-7.3
65.0	-19.7	-10.0	-9.7
66.0	-11.2	-10.0	-1.2
67.0	-17.3	-10.0	-7.3
68.0	-14.5	-10.0	-4.5
69.0	-14.8	-10.0	-4.8
70.0	-13.2	-10.0	-3.2
71.0	-16.2	-10.0	-6.2
72.0	-19.1	-10.0	-9.1
73.0	-13.4	-10.0	-3.4
74.0	-19.3	-10.0	-9.3
75.0	-25.5	-10.0	-15.5
76.0	-16.4	-10.0	-6.4
77.0	-16.4	-10.0	-6.4
78.0	-21.0	-10.0	-11.0
79.0	-22.0	-10.0	-12.0
80.0	-24.3	-10.0	-14.3
81.0	-20.9	-10.0	-10.9
82.0	-26.0	-10.0	-16.0
83.0	-18.1	-10.0	-8.1
84.0	-24.0	-10.0	-14.0
85.0	-25.7	-10.0	-15.7
86.0	-21.1	0.0	-21.1
87.0	-22.6	0.0	-22.6
88.0	-19.0	0.0	-19.0
89.0	-20.0	0.0	-20.0
90.0	-23.1	0.0	-23.1
91.0	-20.8	0.0	-20.8
92.0	-21.3	0.0	-21.3
93.0	-19.9	0.0	-19.9
94.0	-22.3	0.0	-22.3
95.0	-23.9	0.0	-23.9
96.0	-25.8	0.0	-25.8
97.0	-26.1	0.0	-26.1
98.0	-19.2	0.0	-19.2
99.0	-25.3	0.0	-25.3
100.0	-17.6	0.0	-17.6
101.0	-17.5	0.0	-17.5
102.0	-24.6	0.0	-24.6
103.0	-27.6	0.0	-27.6
104.0	-27.9	0.0	-27.9
105.0	-20.0	0.0	-20.0
106.0	-23.9	0.0	-23.9
107.0	-25.1	0.0	-25.1
108.0	-21.1	0.0	-21.1
109.0	-21.3	0.0	-21.3
110.0	-27.9	0.0	-27.9
111.0	-21.3	0.0	-21.3
112.0	-22.8	0.0	-22.8
113.0	-15.5	0.0	-15.5
114.0	-21.9	0.0	-21.9
115.0	-20.5	0.0	-20.5
116.0	-18.7	0.0	-18.7
117.0	-18.2	0.0	-18.2
118.0	-21.3	0.0	-21.3
119.0	-16.7	0.0	-16.7
120.0	-27.9	0.0	-27.9

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Azimuth RHCP, -180° to +180° @ 1.0° increment

-58.0	-10.1	-10.0	-0.1
-57.0	-11.1	-10.0	-1.1
-56.0	-9.1	-10.0	0.9
-55.0	-13.6	-10.0	-3.6
-54.0	-11.4	-10.0	-1.4
-53.0	-14.3	-10.0	-4.3
-52.0	-13.3	-10.0	-3.3
-51.0	-18.3	-10.0	-8.3
-50.0	-12.7	-10.0	-2.7
-49.0	-15.6	-10.0	-5.6
-48.0	-15.3	-10.0	-5.3
-47.0	-19.3	-9.8	-9.5
-46.0	-13.8	-9.6	-4.2
-45.0	-17.5	-9.3	-8.1
-44.0	-23.2	-9.1	-14.1
-43.0	-22.2	-8.8	-13.4
-42.0	-22.2	-8.6	-13.6
-41.0	-20.6	-8.3	-12.3
-40.0	-15.6	-8.1	-7.6
-39.0	-22.7	-7.8	-14.9
-38.0	-16.5	-7.5	-9.0
-37.0	-15.8	-7.2	-8.6
-36.0	-19.3	-6.9	-12.3
-35.0	-18.5	-6.6	-11.9
-34.0	-22.3	-6.3	-16.0
-33.0	-20.6	-6.0	-14.7
-32.0	-23.6	-5.6	-18.0
-31.0	-18.1	-5.3	-12.9
-30.0	-15.0	-4.9	-10.1
-29.0	-18.0	-4.6	-13.4
-28.0	-16.6	-4.2	-12.4
-27.0	-17.3	-3.8	-13.5
-26.0	-17.3	-3.4	-13.9
-25.0	-20.0	-2.9	-17.0
-24.0	-17.3	-2.5	-14.8
-23.0	-15.7	-2.0	-13.7
-22.0	-15.4	-1.6	-13.8
-21.0	-16.3	-1.1	-15.2
-20.0	-18.9	-0.5	-18.4
-19.0	-12.6	0.0	-12.7
-18.0	-18.1	0.6	-18.7
-17.0	-14.3	1.2	-15.5
-16.0	-17.5	1.9	-19.4
-15.0	-17.7	2.6	-20.3
-14.0	-25.8	3.3	-29.1
-13.0	-6.8	4.2	-11.0
-12.0	-4.1	5.0	-9.2
-11.0	-7.6	6.0	-13.6
-10.0	-5.5	7.0	-12.5
-9.0	-3.5	8.0	-11.5
-8.0	-4.1	8.0	-12.1
-7.0	1.8	7.9	-6.1
-6.0	-10.6	9.5	-20.2
-5.0	2.7	11.5	-8.9
-4.0	5.3	13.9	-8.7
-3.0	8.9	17.1	-8.2
-2.0	11.7	21.5	-9.8
-1.0	21.0		
0.0	52.1		

121.0	-21.5	0.0	-21.5
122.0	-17.6	0.0	-17.6
123.0	-20.4	0.0	-20.4
124.0	-21.7	0.0	-21.7
125.0	-25.7	0.0	-25.7
126.0	-24.9	0.0	-24.9
127.0	-19.6	0.0	-19.6
128.0	-27.9	0.0	-27.9
129.0	-25.8	0.0	-25.8
130.0	-22.0	0.0	-22.0
131.0	-20.6	0.0	-20.6
132.0	-21.8	0.0	-21.8
133.0	-24.8	0.0	-24.8
134.0	-23.8	0.0	-23.8
135.0	-23.4	0.0	-23.4
136.0	-23.1	0.0	-23.1
137.0	-21.8	0.0	-21.8
138.0	-19.0	0.0	-19.0
139.0	-23.1	0.0	-23.1
140.0	-23.6	0.0	-23.6
141.0	-21.1	0.0	-21.1
142.0	-26.3	0.0	-26.3
143.0	-18.5	0.0	-18.5
144.0	-27.9	0.0	-27.9
145.0	-21.1	0.0	-21.1
146.0	-23.5	0.0	-23.5
147.0	-19.7	0.0	-19.7
148.0	-24.1	0.0	-24.1
149.0	-23.3	0.0	-23.3
150.0	-22.0	0.0	-22.0
151.0	-27.9	0.0	-27.9
152.0	-23.3	0.0	-23.3
153.0	-21.9	0.0	-21.9
154.0	-23.1	0.0	-23.1
155.0	-17.8	0.0	-17.8
156.0	-27.9	0.0	-27.9
157.0	-27.0	0.0	-27.0
158.0	-23.3	0.0	-23.3
159.0	-27.2	0.0	-27.2
160.0	-14.9	0.0	-14.9
161.0	-22.5	0.0	-22.5
162.0	-22.3	0.0	-22.3
163.0	-19.8	0.0	-19.8
164.0	-16.6	0.0	-16.6
165.0	-20.0	0.0	-20.0
166.0	-22.5	0.0	-22.5
167.0	-21.2	0.0	-21.2
168.0	-24.4	0.0	-24.4
169.0	-27.3	0.0	-27.3
170.0	-20.9	0.0	-20.9
171.0	-21.2	0.0	-21.2
172.0	-27.9	0.0	-27.9
173.0	-20.3	0.0	-20.3
174.0	-19.1	0.0	-19.1
175.0	-27.9	0.0	-27.9
176.0	-24.3	0.0	-24.3
177.0	-20.9	0.0	-20.9
178.0	-24.6	0.0	-24.6
179.0	-19.3	0.0	-19.3

Orbit Communication Systems Ltd.

AL AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
 Co-pol Azimuth RHCP, -10° to +10° @ 0.1° increment

27.55 GHz Antenna Pattern in Co-pol Az RHCP

Angle Degrees	Gain dBi	Mask dBi	Over Mask dB
-10.0	-2.9	7.0	-9.9
-9.9	-2.7	7.1	-9.8
-9.8	-2.1	7.2	-9.3
-9.7	-6.0	7.3	-13.3
-9.6	-8.3	7.4	-15.7
-9.5	-6.8	7.6	-14.4
-9.4	-14.7	7.7	-22.4
-9.3	-6.0	7.8	-13.8
-9.2	-3.8	8.0	-11.8
-9.1	-4.8	8.0	-12.8
-9.0	-10.7	8.0	-18.7
-8.9	-24.0	8.0	-32.0
-8.8	-19.9	8.0	-27.9
-8.7	-13.1	8.0	-21.1
-8.6	-13.2	8.0	-21.2
-8.5	-16.3	8.0	-24.3
-8.4	-11.2	8.0	-19.2
-8.3	-6.2	8.0	-14.2
-8.2	-2.1	8.0	-10.1
-8.1	-1.1	8.0	-9.1
-8.0	-3.6	8.0	-11.6
-7.9	-7.5	8.0	-15.5
-7.8	-2.4	8.0	-10.4
-7.7	0.1	8.0	-7.9
-7.6	1.4	8.0	-6.6
-7.5	-0.3	8.0	-8.3
-7.4	-7.4	8.0	-15.4
-7.3	-6.5	8.0	-14.5
-7.2	-0.8	8.0	-8.8
-7.1	0.1	8.0	-7.9
-7.0	0.2	7.9	-7.7
-6.9	2.9	8.0	-5.1
-6.8	3.8	8.2	-4.3
-6.7	3.3	8.3	-5.0
-6.6	1.5	8.5	-7.0
-6.5	-0.3	8.7	-8.9
-6.4	-0.4	8.8	-9.3
-6.3	-3.9	9.0	-12.9
-6.2	-11.2	9.2	-20.4
-6.1	-12.6	9.4	-21.9
-6.0	-3.2	9.5	-12.7
-5.9	1.1	9.7	-8.6
-5.8	1.8	9.9	-8.1
-5.7	-3.2	10.1	-13.3
-5.6	-4.1	10.3	-14.4
-5.5	1.9	10.5	-8.6
-5.4	2.5	10.7	-8.2
-5.3	-4.2	10.9	-15.1
-5.2	-4.5	11.1	-15.6
-5.1	1.1	11.3	-10.2
-5.0	2.1	11.5	-9.4
-4.9	2.4	11.7	-9.3
-4.8	2.8	12.0	-9.2
-4.7	3.7	12.2	-8.5
-4.6	3.9	12.4	-8.6
-4.5	2.7	12.7	-9.9
-4.4	1.1	12.9	-11.8
-4.3	0.5	13.2	-12.7
-4.2	2.6	13.4	-10.8
-4.1	3.9	13.7	-9.8

27.55 GHz Antenna Pattern in Co-pol Az RHCP

Angle Degrees	Gain dBi	Mask dBi	Over Mask dB
0.0	52.0		
0.1	51.3		
0.2	49.0		
0.3	44.7		
0.4	38.8		
0.5	32.1		
0.6	26.0		
0.7	27.0		
0.8	28.5		
0.9	25.7		
1.0	17.7		
1.1	16.9		
1.2	19.7		
1.3	14.8		
1.4	5.7		
1.5	9.9	24.6	-14.7
1.6	10.5	23.9	-13.4
1.7	15.7	23.2	-7.5
1.8	16.4	22.6	-6.2
1.9	14.3	22.0	-7.8
2.0	7.4	21.5	-14.0
2.1	3.9	20.9	-17.1
2.2	0.1	20.4	-20.4
2.3	-3.9	20.0	-23.9
2.4	1.8	19.5	-17.7
2.5	3.1	19.1	-15.9
2.6	3.7	18.6	-14.9
2.7	2.3	18.2	-15.9
2.8	1.0	17.8	-16.8
2.9	2.4	17.4	-15.0
3.0	3.7	17.1	-13.4
3.1	7.2	16.7	-9.5
3.2	9.0	16.4	-7.4
3.3	8.4	16.0	-7.6
3.4	2.8	15.7	-12.9
3.5	-9.1	15.4	-24.5
3.6	-3.9	15.1	-19.0
3.7	-4.2	14.8	-19.0
3.8	4.2	14.5	-10.3
3.9	7.3	14.2	-6.9
4.0	5.9	13.9	-8.1
4.1	-0.4	13.7	-14.0
4.2	-2.7	13.4	-16.1
4.3	1.2	13.2	-11.9
4.4	0.2	12.9	-12.8
4.5	-1.8	12.7	-14.5
4.6	-2.3	12.4	-14.7
4.7	0.2	12.2	-12.0
4.8	1.2	12.0	-10.8
4.9	0.7	11.7	-11.0
5.0	-1.8	11.5	-13.3
5.1	-10.5	11.3	-21.8
5.2	-14.5	11.1	-25.6
5.3	-6.9	10.9	-17.8
5.4	-9.7	10.7	-20.4
5.5	-11.1	10.5	-21.6
5.6	-4.5	10.3	-14.8
5.7	-1.3	10.1	-11.4
5.8	0.8	9.9	-9.1
5.9	0.5	9.7	-9.3

Orbit Communication Systems Ltd.

AL AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
 Co-pol Azimuth RHCP, -10° to +10° @ 0.1° increment

-4.0	5.9	13.9	-8.1
-3.9	8.7	14.2	-5.5
-3.8	9.3	14.5	-5.2
-3.7	6.5	14.8	-8.3
-3.6	-2.3	15.1	-17.4
-3.5	0.8	15.4	-14.6
-3.4	2.6	15.7	-13.1
-3.3	3.9	16.0	-12.2
-3.2	8.1	16.4	-8.2
-3.1	8.9	16.7	-7.8
-3.0	9.1	17.1	-7.9
-2.9	11.6	17.4	-5.9
-2.8	11.5	17.8	-6.3
-2.7	9.1	18.2	-9.1
-2.6	1.7	18.6	-16.9
-2.5	-9.9	19.1	-29.0
-2.4	2.5	19.5	-17.0
-2.3	5.9	20.0	-14.0
-2.2	3.2	20.4	-17.2
-2.1	1.2	20.9	-19.7
-2.0	10.2	21.5	-11.3
-1.9	10.9	22.0	-11.1
-1.8	10.6	22.6	-12.0
-1.7	9.7	23.2	-13.5
-1.6	4.7	23.9	-19.2
-1.5	10.9	24.6	-13.7
-1.4	16.9		
-1.3	19.0		
-1.2	20.5		
-1.1	20.8		
-1.0	17.6		
-0.9	16.4		
-0.8	19.9		
-0.7	20.1		
-0.6	26.0		
-0.5	34.9		
-0.4	41.8		
-0.3	46.8		
-0.2	50.1		
-0.1	51.7		
0.0	52.0		

6.0	-2.3	9.5	-11.9
6.1	-12.6	9.4	-22.0
6.2	-8.1	9.2	-17.3
6.3	-5.1	9.0	-14.1
6.4	-3.2	8.8	-12.0
6.5	-1.7	8.7	-10.4
6.6	-4.0	8.5	-12.5
6.7	-2.4	8.3	-10.7
6.8	0.4	8.2	-7.8
6.9	3.3	8.0	-4.7
7.0	3.9	7.9	-4.0
7.1	3.9	8.0	-4.1
7.2	2.5	8.0	-5.5
7.3	-2.0	8.0	-10.0
7.4	-8.4	8.0	-16.4
7.5	-2.9	8.0	-10.9
7.6	-1.2	8.0	-9.2
7.7	-3.3	8.0	-11.3
7.8	-12.9	8.0	-20.9
7.9	-4.0	8.0	-12.0
8.0	0.0	8.0	-8.0
8.1	1.1	8.0	-6.9
8.2	0.3	8.0	-7.7
8.3	-2.2	8.0	-10.2
8.4	-5.8	8.0	-13.8
8.5	-7.2	8.0	-15.2
8.6	-4.7	8.0	-12.7
8.7	-6.7	8.0	-14.7
8.8	-4.9	8.0	-12.9
8.9	-2.8	8.0	-10.8
9.0	-2.8	8.0	-10.8
9.1	-6.1	8.0	-14.1
9.2	-13.9	8.0	-21.9
9.3	-10.9	7.8	-18.7
9.4	-5.2	7.7	-12.9
9.5	-4.5	7.6	-12.1
9.6	-10.9	7.4	-18.3
9.7	-16.2	7.3	-23.5
9.8	-7.3	7.2	-14.5
9.9	-5.5	7.1	-12.6
10.0	-8.4	7.0	-15.4

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Elevation RHCP, -30° to +30° @ 0.5° increment

27.55 GHz Antenna Pattern in Co-pol EI RHCP

Angle Degrees	Gain dBi	Mask dBi	Over Mask dB
-30.0	-7.7	-4.9	-2.8
-29.5	-10.1	-4.7	-5.3
-29.0	-11.7	-4.6	-7.1
-28.5	-11.5	-4.4	-7.1
-28.0	-10.6	-4.2	-6.5
-27.5	-12.3	-4.0	-8.3
-27.0	-7.9	-3.8	-4.2
-26.5	-9.9	-3.6	-6.3
-26.0	-18.1	-3.4	-14.8
-25.5	-14.0	-3.2	-10.8
-25.0	-16.3	-2.9	-13.4
-24.5	-8.9	-2.7	-6.2
-24.0	-10.4	-2.5	-7.9
-23.5	-8.1	-2.3	-5.8
-23.0	-14.6	-2.0	-12.5
-22.5	-7.0	-1.8	-5.2
-22.0	-5.5	-1.6	-4.0
-21.5	-6.2	-1.3	-4.9
-21.0	-16.3	-1.1	-15.2
-20.5	-8.9	-0.8	-8.1
-20.0	-3.3	-0.5	-2.8
-19.5	0.2	-0.3	0.4
-19.0	1.4	0.0	1.4
-18.5	-2.0	0.3	-2.3
-18.0	-3.3	0.6	-4.0
-17.5	-19.1	0.9	-20.0
-17.0	-23.4	1.2	-24.6
-16.5	-14.1	1.6	-15.6
-16.0	-12.5	1.9	-14.4
-15.5	-8.0	2.2	-10.2
-15.0	-21.1	2.6	-23.7
-14.5	-7.3	3.0	-10.2
-14.0	-15.0	3.3	-18.3
-13.5	-10.9	3.7	-14.7
-13.0	-8.5	4.2	-12.6
-12.5	-11.0	4.6	-15.6
-12.0	-7.1	5.0	-12.1
-11.5	-19.4	5.5	-24.9
-11.0	-7.7	6.0	-13.7
-10.5	-10.5	6.5	-17.0
-10.0	-7.4	7.0	-14.4
-9.5	-18.5	7.6	-26.0
-9.0	-11.2	8.1	-19.4
-8.5	-2.5	8.8	-11.2
-8.0	-8.2	9.4	-17.6
-7.5	-2.7	10.1	-12.8
-7.0	-4.8	10.9	-15.7
-6.5	-1.7	11.7	-13.4
-6.0	-4.8	12.5	-17.3
-5.5	-10.7	13.5	-24.2
-5.0	4.5	14.5	-10.0
-4.5	4.3	15.7	-11.4
-4.0	-7.1	16.9	-24.0
-3.5	3.3	18.4	-15.1
-3.0	11.3	20.1	-8.8
-2.5	12.5		
-2.0	7.4		
-1.5	14.8		
-1.0	20.6		
-0.5	36.4		
0.0	52.1		

27.55 GHz Antenna Pattern in Co-pol EI RHCP

Angle Degrees	Gain dBi	Mask dBi	Over Mask dB
0.0	52.1		
0.5	37.5		
1.0	18.1		
1.5	8.1		
2.0	7.4		
2.5	10.0		
3.0	-5.1	20.1	-25.1
3.5	13.9	18.4	-4.5
4.0	11.3	16.9	-5.7
4.5	4.3	15.7	-11.4
5.0	7.0	14.5	-7.6
5.5	-9.1	13.5	-22.5
6.0	-2.0	12.5	-14.5
6.5	0.4	11.7	-11.3
7.0	1.4	10.9	-9.5
7.5	-6.3	10.1	-16.4
8.0	-8.1	9.4	-17.5
8.5	-14.4	8.8	-23.2
9.0	-9.8	8.1	-18.0
9.5	-3.8	7.6	-11.4
10.0	-7.2	7.0	-14.2
10.5	-5.0	6.5	-11.5
11.0	-3.1	6.0	-9.1
11.5	-2.1	5.5	-7.6
12.0	-1.4	5.0	-6.5
12.5	-2.1	4.6	-6.7
13.0	-9.0	4.2	-13.1
13.5	-10.8	3.7	-14.5
14.0	-13.5	3.3	-16.8
14.5	-9.4	3.0	-12.3
15.0	-12.9	2.6	-15.5
15.5	-11.6	2.2	-13.8
16.0	-22.1	1.9	-24.0
16.5	-14.3	1.6	-15.9
17.0	-19.8	1.2	-21.1
17.5	-19.9	0.9	-20.8
18.0	-21.5	0.6	-22.1
18.5	-10.7	0.3	-11.0
19.0	-10.7	0.0	-10.7
19.5	-17.7	-0.3	-17.4
20.0	-27.3	-0.5	-26.8
20.5	-19.3	-0.8	-18.5
21.0	-15.4	-1.1	-14.3
21.5	-15.5	-1.3	-14.2
22.0	-13.1	-1.6	-11.6
22.5	-17.6	-1.8	-15.8
23.0	-27.5	-2.0	-25.4
23.5	-22.0	-2.3	-19.7
24.0	-22.0	-2.5	-19.5
24.5	-25.2	-2.7	-22.4
25.0	-13.5	-2.9	-10.5
25.5	-17.5	-3.2	-14.3
26.0	-16.0	-3.4	-12.7
26.5	-18.1	-3.6	-14.6
27.0	-14.1	-3.8	-10.3
27.5	-23.1	-4.0	-19.1
28.0	-20.7	-4.2	-16.5
28.5	-22.3	-4.4	-17.9
29.0	-26.0	-4.6	-21.4
29.5	-18.3	-4.7	-13.6
30.0	-15.8	-4.9	-10.9

Orbit Communication Systems Ltd.
 AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
 Co-pol Elevation RHCP, -10° to +10° @ 0.1° increment

27.55 GHz Antenna Pattern in Co-pol EI RHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
-10.0	-3.4	7.0	-10.4
-9.9	-1.4	7.1	-8.5
-9.8	-0.5	7.2	-7.7
-9.7	-3.0	7.3	-10.3
-9.6	-6.4	7.4	-13.9
-9.5	-13.5	7.6	-21.1
-9.4	-11.8	7.7	-19.5
-9.3	-9.4	7.8	-17.2
-9.2	-9.8	7.9	-17.7
-9.1	-11.4	8.0	-19.4
-9.0	-5.8	8.1	-14.0
-8.9	-3.0	8.3	-11.3
-8.8	-4.3	8.4	-12.7
-8.7	-6.5	8.5	-15.1
-8.6	-9.7	8.6	-18.3
-8.5	-5.5	8.8	-14.3
-8.4	-3.9	8.9	-12.8
-8.3	-3.6	9.0	-12.7
-8.2	-4.8	9.2	-13.9
-8.1	-6.9	9.3	-16.2
-8.0	-10.3	9.4	-19.7
-7.9	-9.7	9.6	-19.3
-7.8	-13.4	9.7	-23.1
-7.7	-13.0	9.8	-22.8
-7.6	-8.3	10.0	-18.2
-7.5	-4.2	10.1	-14.3
-7.4	-1.1	10.3	-11.4
-7.3	-1.1	10.4	-11.5
-7.2	-3.6	10.6	-14.2
-7.1	-10.5	10.7	-21.2
-7.0	-3.8	10.9	-14.7
-6.9	-1.1	11.0	-12.2
-6.8	-6.5	11.2	-17.7
-6.7	-3.8	11.3	-15.2
-6.6	-2.8	11.5	-14.3
-6.5	-2.0	11.7	-13.7
-6.4	-0.2	11.8	-12.0
-6.3	1.5	12.0	-10.5
-6.2	0.3	12.2	-11.9
-6.1	-1.7	12.4	-14.1
-6.0	-3.7	12.5	-16.3
-5.9	-4.3	12.7	-17.1
-5.8	-5.8	12.9	-18.7
-5.7	-4.4	13.1	-17.5
-5.6	-7.1	13.3	-20.4
-5.5	-7.5	13.5	-21.0
-5.4	-4.6	13.7	-18.3
-5.3	0.2	13.9	-13.7
-5.2	2.5	14.1	-11.6
-5.1	3.6	14.3	-10.7
-5.0	3.9	14.5	-10.6
-4.9	4.8	14.7	-9.9
-4.8	4.7	15.0	-10.3
-4.7	1.1	15.2	-14.1
-4.6	-9.1	15.4	-24.5
-4.5	4.1	15.7	-11.6
-4.4	8.3	15.9	-7.6
-4.3	9.1	16.2	-7.1
-4.2	8.6	16.4	-7.8
-4.1	4.1	16.7	-12.6

27.55 GHz Antenna Pattern in Co-pol EI RHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
0.0	52.0		
0.1	51.3		
0.2	49.1		
0.3	45.4		
0.4	41.3		
0.5	37.9		
0.6	33.8		
0.7	24.7		
0.8	11.9		
0.9	19.3		
1.0	21.1		
1.1	22.6		
1.2	20.8		
1.3	12.7		
1.4	8.4		
1.5	9.1		
1.6	12.7		
1.7	16.7		
1.8	16.5		
1.9	12.2		
2.0	9.5		
2.1	9.3		
2.2	11.3		
2.3	13.6		
2.4	13.0		
2.5	10.6		
2.6	8.7		
2.7	4.2		
2.8	-2.9		
2.9	4.7		
3.0	2.6	20.1	-17.5
3.1	-5.6	19.7	-25.3
3.2	3.9	19.4	-15.5
3.3	3.4	19.0	-15.6
3.4	9.3	18.7	-9.4
3.5	13.2	18.4	-5.2
3.6	13.6	18.1	-4.5
3.7	11.7	17.8	-6.1
3.8	7.4	17.5	-10.1
3.9	9.4	17.2	-7.8
4.0	12.3	16.9	-4.7
4.1	12.0	16.7	-4.7
4.2	10.3	16.4	-6.1
4.3	8.6	16.2	-7.6
4.4	7.9	15.9	-8.0
4.5	5.9	15.7	-9.7
4.6	3.4	15.4	-12.0
4.7	3.1	15.2	-12.1
4.8	4.8	15.0	-10.2
4.9	4.8	14.7	-10.0
5.0	5.6	14.5	-8.9
5.1	7.0	14.3	-7.3
5.2	8.0	14.1	-6.1
5.3	7.9	13.9	-6.0
5.4	4.1	13.7	-9.6
5.5	-6.3	13.5	-19.8
5.6	-6.8	13.3	-20.1
5.7	-4.7	13.1	-17.8
5.8	-3.8	12.9	-16.7
5.9	-1.1	12.7	-13.9

Orbit Communication Systems Ltd.
 AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
 Co-pol Elevation RHCP, -10° to +10° @ 0.1° increment

-4.0	-2.6	16.9	-19.5
-3.9	7.7	17.2	-9.5
-3.8	9.9	17.5	-7.6
-3.7	9.7	17.8	-8.1
-3.6	7.9	18.1	-10.2
-3.5	4.9	18.4	-13.5
-3.4	-6.5	18.7	-25.2
-3.3	-0.8	19.0	-19.8
-3.2	-3.2	19.4	-22.5
-3.1	3.1	19.7	-16.6
-3.0	11.2	20.1	-8.8
-2.9	13.3		
-2.8	13.0		
-2.7	10.3		
-2.6	10.3		
-2.5	12.9		
-2.4	13.9		
-2.3	14.1		
-2.2	11.9		
-2.1	9.4		
-2.0	7.4		
-1.9	6.0		
-1.8	6.2		
-1.7	12.3		
-1.6	15.9		
-1.5	16.4		
-1.4	14.5		
-1.3	18.9		
-1.2	23.2		
-1.1	23.7		
-1.0	21.1		
-0.9	20.3		
-0.8	24.8		
-0.7	28.8		
-0.6	32.8		
-0.5	35.8		
-0.4	40.3		
-0.3	45.9		
-0.2	49.8		
-0.1	51.7		
0.0	52.0		

6.0	-2.3	12.5	-14.8
6.1	-3.9	12.4	-16.3
6.2	-1.4	12.2	-13.6
6.3	1.4	12.0	-10.6
6.4	1.5	11.8	-10.3
6.5	2.3	11.7	-9.4
6.6	1.7	11.5	-9.8
6.7	2.5	11.3	-8.9
6.8	4.3	11.2	-6.8
6.9	4.9	11.0	-6.1
7.0	3.4	10.9	-7.5
7.1	-2.8	10.7	-13.5
7.2	-11.8	10.6	-22.4
7.3	-12.0	10.4	-22.4
7.4	-8.4	10.3	-18.7
7.5	-5.0	10.1	-15.1
7.6	-3.9	10.0	-13.8
7.7	-4.6	9.8	-14.4
7.8	-5.2	9.7	-14.9
7.9	-7.5	9.6	-17.1
8.0	-4.3	9.4	-13.7
8.1	-2.9	9.3	-12.2
8.2	-7.4	9.2	-16.6
8.3	-12.0	9.0	-21.0
8.4	-6.8	8.9	-15.7
8.5	-5.5	8.8	-14.2
8.6	-7.0	8.6	-15.7
8.7	-9.0	8.5	-17.5
8.8	-12.3	8.4	-20.6
8.9	-13.9	8.3	-22.1
9.0	-14.1	8.1	-22.3
9.1	-13.8	8.0	-21.8
9.2	-8.7	7.9	-16.6
9.3	-10.0	7.8	-17.8
9.4	-24.4	7.7	-32.0
9.5	-10.5	7.6	-18.0
9.6	-5.1	7.4	-12.5
9.7	-1.6	7.3	-9.0
9.8	-1.1	7.2	-8.3
9.9	-1.8	7.1	-8.9
10.0	-3.4	7.0	-10.4

Orbit Communication Systems Ltd.
 AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
 X-pol Azimuth RHCP, -10° to +10° @ 0.1° increment

27.55 GHz Antenna Pattern in X-pol Az RHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
-10.0	-7.5	-2.0	-5.5
-9.9	-10.8	-2.0	-8.8
-9.8	-12.5	-2.0	-10.5
-9.7	-17.0	-2.0	-15.0
-9.6	-15.1	-2.0	-13.1
-9.5	-16.9	-2.0	-14.9
-9.4	-14.4	-2.0	-12.4
-9.3	-11.3	-2.0	-9.3
-9.2	-10.0	-2.0	-8.0
-9.1	-6.8	-2.0	-4.8
-9.0	-6.3	-2.0	-4.3
-8.9	-7.0	-2.0	-5.0
-8.8	-8.6	-2.0	-6.6
-8.7	-12.8	-2.0	-10.8
-8.6	-18.3	-2.0	-16.3
-8.5	-16.7	-2.0	-14.7
-8.4	-23.6	-2.0	-21.6
-8.3	-17.1	-2.0	-15.1
-8.2	-12.3	-2.0	-10.3
-8.1	-8.8	-2.0	-6.8
-8.0	-6.7	-2.0	-4.7
-7.9	-7.9	-2.0	-5.9
-7.8	-7.6	-2.0	-5.6
-7.7	-7.2	-2.0	-5.2
-7.6	-6.6	-2.0	-4.6
-7.5	-6.7	-2.0	-4.7
-7.4	-6.3	-2.0	-4.3
-7.3	-4.3	-2.0	-2.3
-7.2	-4.9	-2.0	-2.9
-7.1	-6.0	-2.0	-4.0
-7.0	-7.6	-2.1	-5.5
-6.9	-6.7	-2.0	-4.7
-6.8	-6.1	-1.8	-4.3
-6.7	-7.5	-1.7	-5.9
-6.6	-8.8	-1.5	-7.3
-6.5	-7.3	-1.3	-5.9
-6.4	-5.3	-1.2	-4.2
-6.3	-3.7	-1.0	-2.7
-6.2	-5.4	-0.8	-4.6
-6.1	-7.7	-0.6	-7.1
-6.0	-11.9	-0.5	-11.4
-5.9	-5.2	-0.3	-4.9
-5.8	-3.4	-0.1	-3.3
-5.7	-5.3	0.1	-5.4
-5.6	-11.3	0.3	-11.6
-5.5	-8.2	0.5	-8.7
-5.4	-6.9	0.7	-7.6
-5.3	-8.6	0.9	-9.5
-5.2	-16.6	1.1	-17.7
-5.1	-15.9	1.3	-17.2
-5.0	-8.2	1.5	-9.7
-4.9	-8.2	1.7	-9.9
-4.8	-12.2	2.0	-14.1
-4.7	-11.8	2.2	-14.0
-4.6	-8.2	2.4	-10.6
-4.5	-8.2	2.7	-10.9
-4.4	-9.6	2.9	-12.5
-4.3	-14.6	3.2	-17.8
-4.2	-15.3	3.4	-18.7
-4.1	-5.6	3.7	-9.3


27.55 GHz Antenna Pattern in X-pol Az RHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
0.0	20.3		
0.1	18.8		
0.2	9.9		
0.3	22.2		
0.4	25.1		
0.5	25.2		
0.6	22.3		
0.7	15.0		
0.8	2.0		
0.9	1.8		
1.0	6.9		
1.1	10.7		
1.2	10.9		
1.3	6.8		
1.4	1.6		
1.5	4.0		
1.6	1.8		
1.7	-3.6		
1.8	-3.2	12.6	-15.8
1.9	-0.1	12.0	-12.2
2.0	0.6	11.5	-10.9
2.1	0.0	10.9	-10.9
2.2	-7.1	10.4	-17.5
2.3	-12.0	10.0	-22.0
2.4	-4.2	9.5	-13.7
2.5	-3.3	9.1	-12.4
2.6	-5.4	8.6	-14.1
2.7	-13.2	8.2	-21.4
2.8	-3.2	7.8	-11.0
2.9	-0.4	7.4	-7.9
3.0	-2.3	7.1	-9.3
3.1	-8.6	6.7	-15.3
3.2	-9.9	6.4	-16.3
3.3	-7.8	6.0	-13.9
3.4	-14.7	5.7	-20.4
3.5	-9.0	5.4	-14.4
3.6	-4.8	5.1	-9.9
3.7	-8.9	4.8	-13.7
3.8	-16.2	4.5	-20.7
3.9	-9.4	4.2	-13.6
4.0	-7.6	3.9	-11.6
4.1	-9.7	3.7	-13.3
4.2	-10.0	3.4	-13.4
4.3	-9.7	3.2	-12.8
4.4	-8.6	2.9	-11.6
4.5	-8.4	2.7	-11.1
4.6	-7.8	2.4	-10.2
4.7	-5.6	2.2	-7.8
4.8	-4.8	2.0	-6.8
4.9	-8.8	1.7	-10.5
5.0	-18.5	1.5	-20.1
5.1	-23.8	1.3	-25.1
5.2	-17.5	1.1	-18.6
5.3	-11.1	0.9	-12.0
5.4	-7.9	0.7	-8.6
5.5	-7.3	0.5	-7.8
5.6	-7.3	0.3	-7.6
5.7	-4.7	0.1	-4.8
5.8	-3.5	-0.1	-3.4
5.9	-7.4	-0.3	-7.1


Orbit Communication Systems Ltd.
 AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
 X-pol Azimuth RHCP, -10° to +10° @ 0.1° increment

-4.0	-3.7	3.9	-7.7
-3.9	-5.3	4.2	-9.5
-3.8	-8.3	4.5	-12.8
-3.7	-2.1	4.8	-6.9
-3.6	-1.0	5.1	-6.1
-3.5	-1.9	5.4	-7.3
-3.4	-6.9	5.7	-12.6
-3.3	-4.4	6.0	-10.4
-3.2	-1.3	6.4	-7.7
-3.1	-4.7	6.7	-11.4
-3.0	-15.0	7.1	-22.1
-2.9	-6.9	7.4	-14.3
-2.8	-10.5	7.8	-18.3
-2.7	-8.6	8.2	-16.8
-2.6	-3.4	8.6	-12.1
-2.5	-3.7	9.1	-12.7
-2.4	-3.6	9.5	-13.1
-2.3	0.9	10.0	-9.1
-2.2	2.0	10.4	-8.5
-2.1	1.6	10.9	-9.3
-2.0	1.6	11.5	-9.9
-1.9	-5.5	12.0	-17.6
-1.8	-2.5	12.6	-15.1
-1.7	4.6		
-1.6	5.8		
-1.5	7.3		
-1.4	10.5		
-1.3	9.8		
-1.2	5.8		
-1.1	11.3		
-1.0	15.3		
-0.9	16.1		
-0.8	16.5		
-0.7	19.7		
-0.6	23.8		
-0.5	26.5		
-0.4	27.2		
-0.3	26.1		
-0.2	21.4		
-0.1	15.8		
0.0	20.3		


6.0	-8.9	-0.5	-8.4
6.1	-11.4	-0.6	-10.8
6.2	-15.9	-0.8	-15.1
6.3	-18.3	-1.0	-17.4
6.4	-15.0	-1.2	-13.8
6.5	-14.3	-1.3	-12.9
6.6	-9.6	-1.5	-8.1
6.7	-7.4	-1.7	-5.8
6.8	-7.8	-1.8	-6.0
6.9	-10.7	-2.0	-8.7
7.0	-11.6	-2.1	-9.5
7.1	-13.1	-2.0	-11.1
7.2	-20.8	-2.0	-18.8
7.3	-17.3	-2.0	-15.3
7.4	-16.6	-2.0	-14.6
7.5	-17.2	-2.0	-15.2
7.6	-10.0	-2.0	-8.0
7.7	-8.6	-2.0	-6.6
7.8	-10.9	-2.0	-8.9
7.9	-14.2	-2.0	-12.2
8.0	-15.8	-2.0	-13.8
8.1	-17.5	-2.0	-15.5
8.2	-19.2	-2.0	-17.2
8.3	-17.6	-2.0	-15.6
8.4	-13.7	-2.0	-11.7
8.5	-18.4	-2.0	-16.4
8.6	-25.2	-2.0	-23.2
8.7	-13.8	-2.0	-11.8
8.8	-15.0	-2.0	-13.0
8.9	-8.7	-2.0	-6.7
9.0	-6.3	-2.0	-4.3
9.1	-5.3	-2.0	-3.3
9.2	-6.9	-2.0	-4.9
9.3	-7.0	-2.0	-5.0
9.4	-10.6	-2.0	-8.6
9.5	-6.7	-2.0	-4.7
9.6	-5.5	-2.0	-3.5
9.7	-4.5	-2.0	-2.5
9.8	-5.9	-2.0	-3.9
9.9	-11.6	-2.0	-9.6
10.0	-12.6	-2.0	-10.6

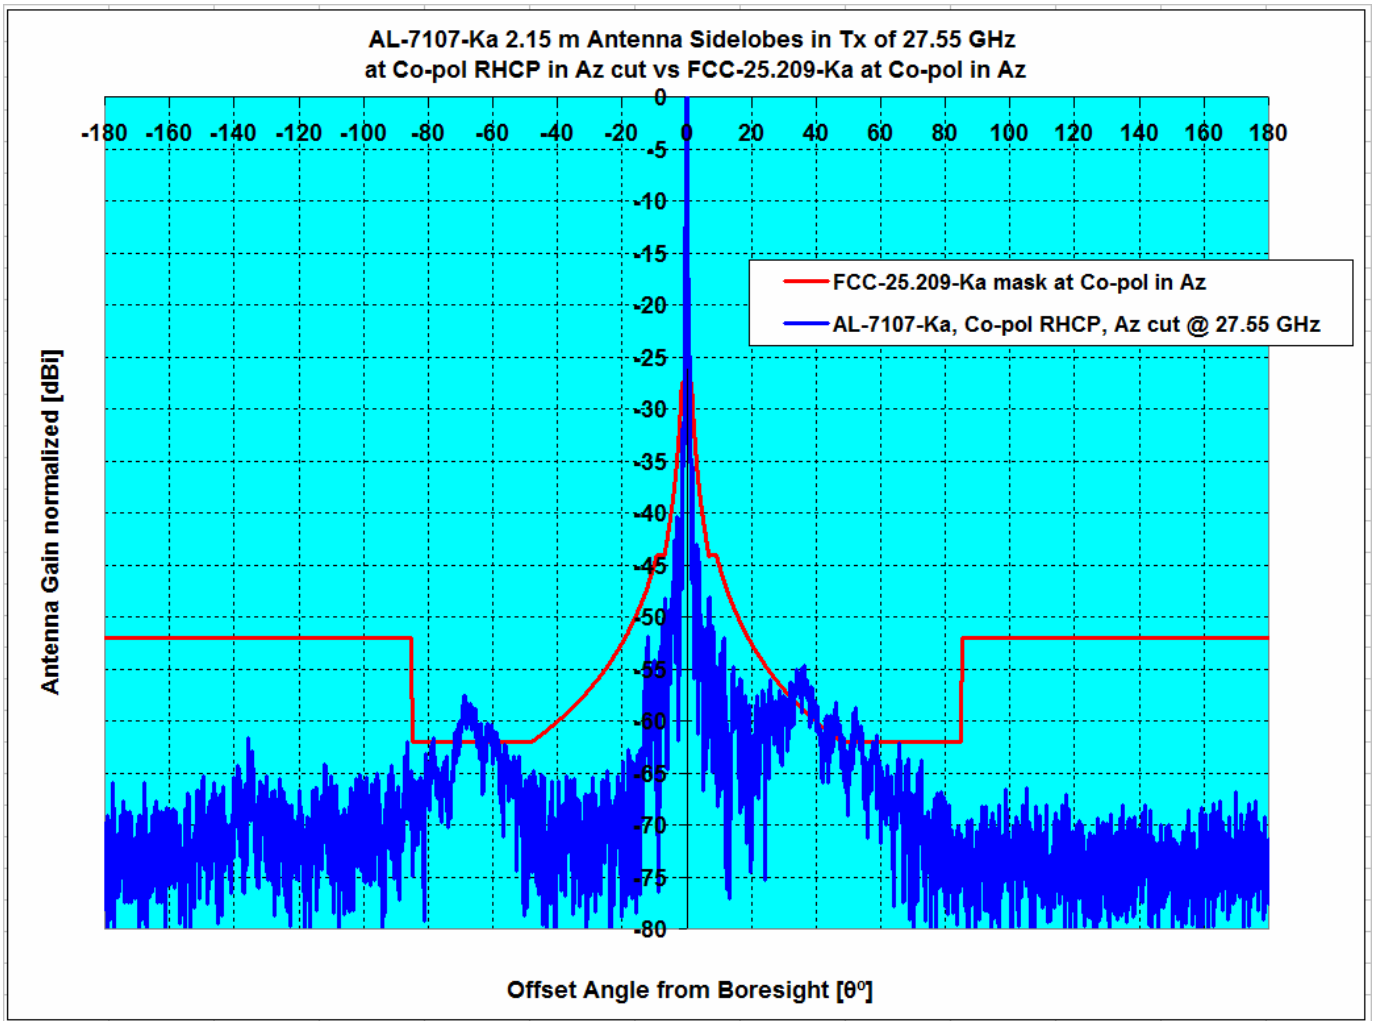


Description	Plane, CirP	Frequency	Ant. Gain	Peak Excursions dB		Over Mask %	
				1.5°≤θ≤7°	7°≤θ≤180°	1.5°≤θ≤7°	7°≤θ≤180°
FCC-25.209-Ka, Co-pol Az, vs AL-7107-Ka	Az , RHCP	27.55	52.02	-3.99	4.44	0.00%	6.55%

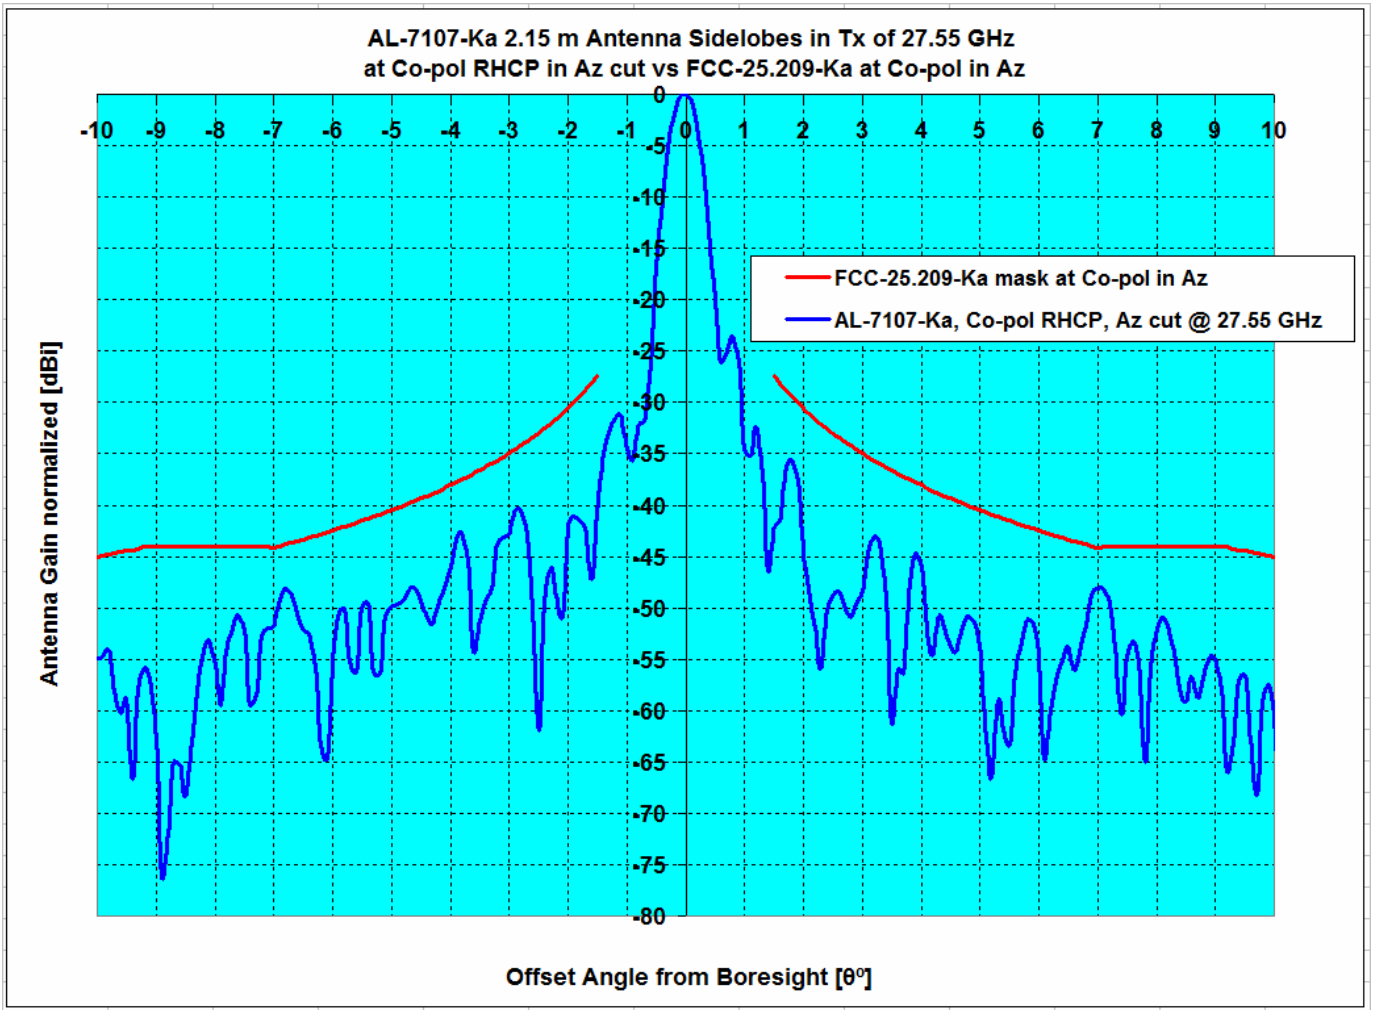

Description	Plane, CirP Type	Frequency GHz	Ant. Gain dBi	Peak Excursions dB		Over Mask %	
				1.5°≤θ≤7°	7°≤θ≤180°	1.5°≤θ≤7°	7°≤θ≤180°
FCC-25.209-Ka, Co-pol Az, vs AL-7107-Ka	Az , RHCP	27.55	52.02	-3.99	4.44	0.00%	6.55%

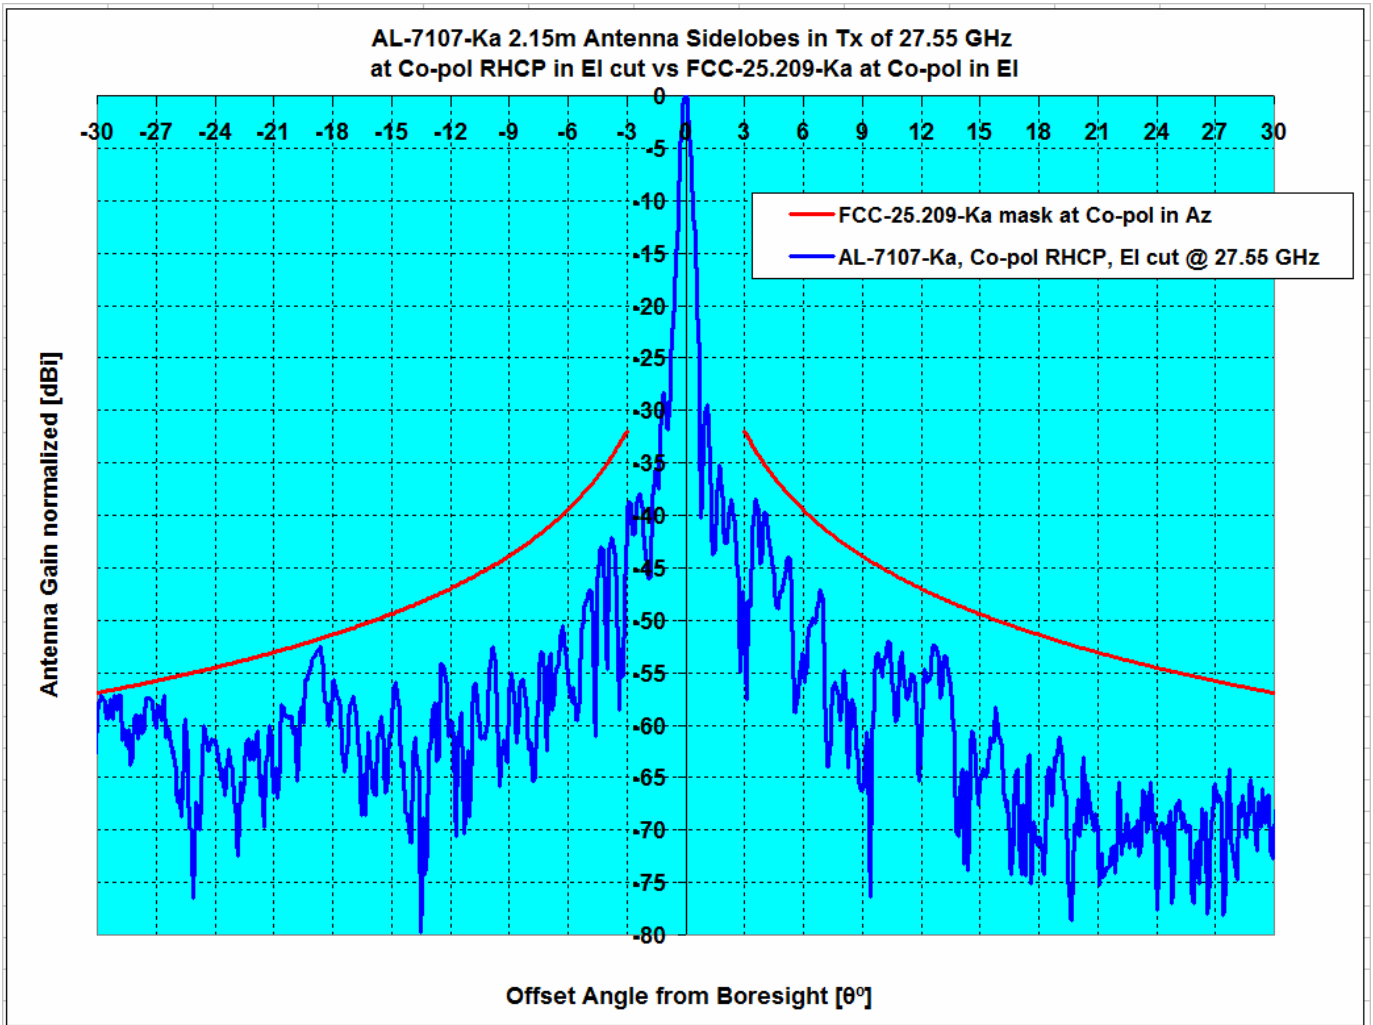


Description	Plane, CirP	Frequency	Ant. Gain	Peak Excursions dB		Over Mask %	
				3°≤θ≤7°	7°≤θ≤30°	3°≤θ≤7°	7°≤θ≤30°
Pattern Rule vs Antenna System	Type	GHz	dBi				
FCC-25.209-Ka, Co-pol EI, vs AL-7107-Ka	EI , RHCP	27.55	52.02	-4.53	-0.33	0.00%	0.00%

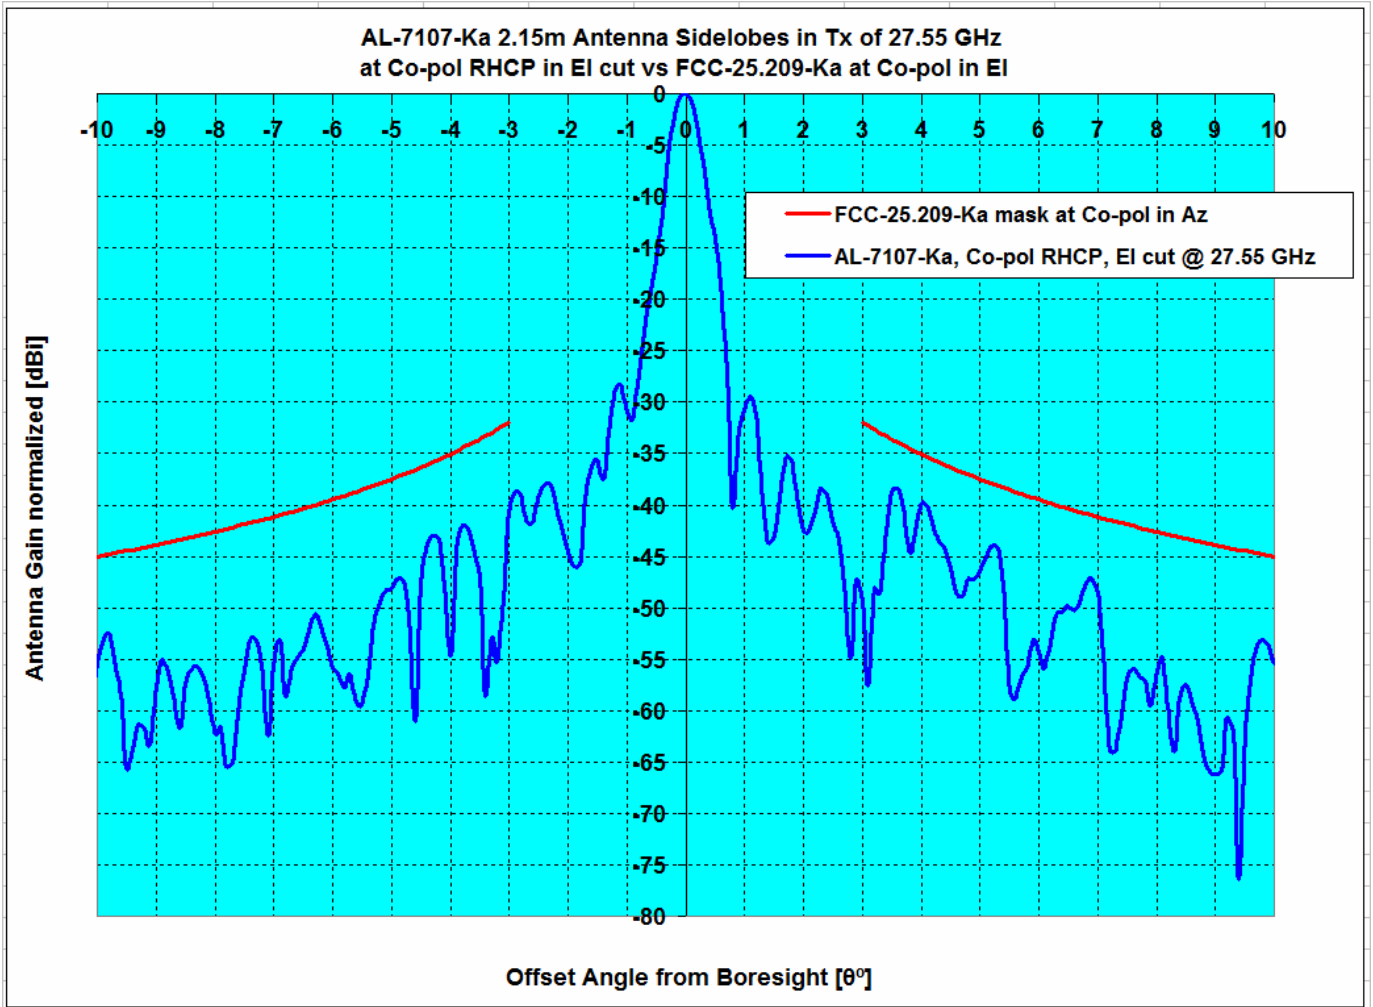

Description	Plane, CirP	Frequency	Ant. Gain	Peak Excursions dB		Over Mask %	
				3°≤θ≤7°	7°≤θ≤30°	3°≤θ≤7°	7°≤θ≤30°
FCC-25.209-Ka, Co-pol EI, vs AL-7107-Ka	EI , RHCP	27.55	52.02	-4.53	-0.33	0.00%	0.00%

Orbit Communication Systems Ltd.
 AL-7107-Ka, 2.15 m Antenna, Pattern, X-pol, Azimuth RHCP

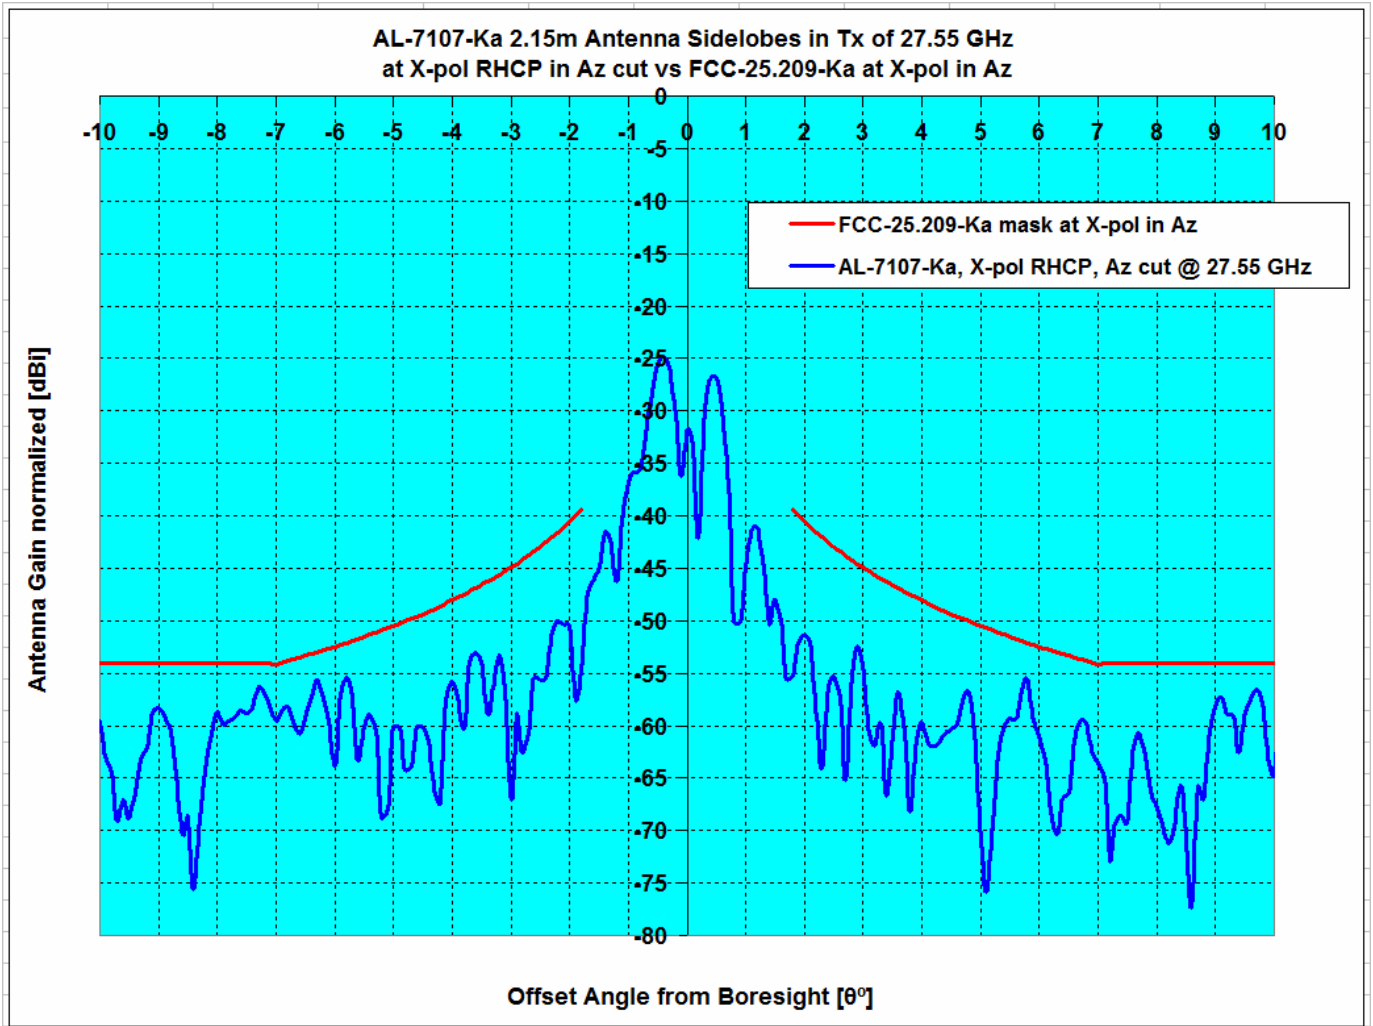

Description	Plane, CirP	Frequency	Ant. Gain	Peak Excursions dB		Over Mask %	
				1.8°≤θ≤7°	1.8°≤θ≤9.2°	1.8°≤θ≤7°	1.8°≤θ≤9.2°
Pattern Rule vs Antenna System	Type	GHz	dBi				
FCC-25.209-Ka, X-pol Az, vs AL-7107-Ka	Az , RHCP	27.55	52.02	-2.70	-2.32	0.00%	0.00%

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Azimuth LHCP, -180° to +180° @ 1.0° increment

28.30 GHz Antenna Pattern in Co-pol Az LHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
-179.0	-23.3	0.0	-23.3
-178.0	-25.3	0.0	-25.3
-177.0	-18.7	0.0	-18.7
-176.0	-27.6	0.0	-27.6
-175.0	-18.5	0.0	-18.5
-174.0	-27.5	0.0	-27.5
-173.0	-21.8	0.0	-21.8
-172.0	-24.4	0.0	-24.4
-171.0	-18.7	0.0	-18.7
-170.0	-27.6	0.0	-27.6
-169.0	-25.5	0.0	-25.5
-168.0	-19.5	0.0	-19.5
-167.0	-20.6	0.0	-20.6
-166.0	-20.1	0.0	-20.1
-165.0	-25.7	0.0	-25.7
-164.0	-27.6	0.0	-27.6
-163.0	-26.7	0.0	-26.7
-162.0	-22.4	0.0	-22.4
-161.0	-22.7	0.0	-22.7
-160.0	-22.7	0.0	-22.7
-159.0	-25.5	0.0	-25.5
-158.0	-22.9	0.0	-22.9
-157.0	-27.6	0.0	-27.6
-156.0	-23.9	0.0	-23.9
-155.0	-16.8	0.0	-16.8
-154.0	-23.9	0.0	-23.9
-153.0	-26.7	0.0	-26.7
-152.0	-18.6	0.0	-18.6
-151.0	-14.8	0.0	-14.8
-150.0	-13.9	0.0	-13.9
-149.0	-15.8	0.0	-15.8
-148.0	-27.6	0.0	-27.6
-147.0	-18.7	0.0	-18.7
-146.0	-17.5	0.0	-17.5
-145.0	-21.6	0.0	-21.6
-144.0	-17.3	0.0	-17.3
-143.0	-18.9	0.0	-18.9
-142.0	-16.5	0.0	-16.5
-141.0	-12.3	0.0	-12.3
-140.0	-15.7	0.0	-15.7
-139.0	-22.2	0.0	-22.2
-138.0	-24.1	0.0	-24.1
-137.0	-17.5	0.0	-17.5
-136.0	-20.8	0.0	-20.8
-135.0	-20.9	0.0	-20.9
-134.0	-25.3	0.0	-25.3
-133.0	-25.5	0.0	-25.5
-132.0	-27.6	0.0	-27.6
-131.0	-27.6	0.0	-27.6
-130.0	-23.4	0.0	-23.4
-129.0	-19.0	0.0	-19.0
-128.0	-27.6	0.0	-27.6
-127.0	-23.5	0.0	-23.5
-126.0	-18.5	0.0	-18.5
-125.0	-27.6	0.0	-27.6
-124.0	-18.9	0.0	-18.9
-123.0	-27.0	0.0	-27.0
-122.0	-16.5	0.0	-16.5
-121.0	-20.3	0.0	-20.3
-120.0	-23.3	0.0	-23.3

28.30 GHz Antenna Pattern in Co-pol Az LHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
0.0	52.4		
1.0	17.1		
2.0	10.6	21.5	-10.9
3.0	0.4	17.1	-16.6
4.0	-7.9	13.9	-21.8
5.0	-1.2	11.5	-12.7
6.0	-10.1	9.5	-19.6
7.0	0.0	7.9	-7.9
8.0	-2.9	8.0	-10.9
9.0	-10.0	8.0	-18.0
10.0	-3.5	7.0	-10.5
11.0	-1.5	6.0	-7.5
12.0	-3.5	5.0	-8.5
13.0	-5.5	4.2	-9.7
14.0	-13.6	3.3	-17.0
15.0	-8.0	2.6	-10.6
16.0	-16.4	1.9	-18.3
17.0	-26.4	1.2	-27.6
18.0	-14.3	0.6	-14.9
19.0	-8.3	0.0	-8.3
20.0	-16.9	-0.5	-16.4
21.0	-18.1	-1.1	-17.1
22.0	-5.9	-1.6	-4.3
23.0	-8.0	-2.0	-6.0
24.0	-10.2	-2.5	-7.7
25.0	-14.9	-2.9	-12.0
26.0	-8.9	-3.4	-5.5
27.0	-7.3	-3.8	-3.5
28.0	-8.6	-4.2	-4.4
29.0	-7.5	-4.6	-2.9
30.0	-8.4	-4.9	-3.4
31.0	-6.4	-5.3	-1.1
32.0	-5.4	-5.6	0.2
33.0	-3.9	-6.0	2.1
34.0	-5.5	-6.3	0.8
35.0	-8.1	-6.6	-1.5
36.0	-4.5	-6.9	2.4
37.0	-7.6	-7.2	-0.4
38.0	-5.0	-7.5	2.5
39.0	-7.1	-7.8	0.7
40.0	-8.0	-8.1	0.1
41.0	-10.5	-8.3	-2.2
42.0	-9.4	-8.6	-0.9
43.0	-11.2	-8.8	-2.3
44.0	-10.3	-9.1	-1.2
45.0	-8.9	-9.3	0.4
46.0	-6.7	-9.6	2.8
47.0	-9.2	-9.8	0.6
48.0	-15.2	-10.0	-5.1
49.0	-13.9	-10.0	-3.9
50.0	-12.6	-10.0	-2.6
51.0	-10.9	-10.0	-0.9
52.0	-10.3	-10.0	-0.3
53.0	-13.6	-10.0	-3.6
54.0	-14.2	-10.0	-4.2
55.0	-22.1	-10.0	-12.1
56.0	-17.3	-10.0	-7.3
57.0	-15.4	-10.0	-5.4
58.0	-15.6	-10.0	-5.6
59.0	-19.4	-10.0	-9.4

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Azimuth LHCP, -180° to +180° @ 1.0° increment

-119.0	-20.2	0.0	-20.2
-118.0	-22.4	0.0	-22.4
-117.0	-21.3	0.0	-21.3
-116.0	-22.3	0.0	-22.3
-115.0	-20.2	0.0	-20.2
-114.0	-19.3	0.0	-19.3
-113.0	-27.3	0.0	-27.3
-112.0	-25.8	0.0	-25.8
-111.0	-16.7	0.0	-16.7
-110.0	-19.2	0.0	-19.2
-109.0	-18.1	0.0	-18.1
-108.0	-14.4	0.0	-14.4
-107.0	-22.5	0.0	-22.5
-106.0	-26.4	0.0	-26.4
-105.0	-22.3	0.0	-22.3
-104.0	-22.2	0.0	-22.2
-103.0	-23.8	0.0	-23.8
-102.0	-22.4	0.0	-22.4
-101.0	-27.3	0.0	-27.3
-100.0	-16.1	0.0	-16.1
-99.0	-15.0	0.0	-15.0
-98.0	-17.8	0.0	-17.8
-97.0	-19.5	0.0	-19.5
-96.0	-11.1	0.0	-11.1
-95.0	-14.1	0.0	-14.1
-94.0	-17.9	0.0	-17.9
-93.0	-19.2	0.0	-19.2
-92.0	-15.9	0.0	-15.9
-91.0	-14.9	0.0	-14.9
-90.0	-14.9	0.0	-14.9
-89.0	-15.3	0.0	-15.3
-88.0	-20.4	0.0	-20.4
-87.0	-13.3	0.0	-13.3
-86.0	-14.4	0.0	-14.4
-85.0	-14.4	-10.0	-4.4
-84.0	-15.1	-10.0	-5.1
-83.0	-14.6	-10.0	-4.6
-82.0	-13.1	-10.0	-3.1
-81.0	-16.5	-10.0	-6.5
-80.0	-10.3	-10.0	-0.3
-79.0	-10.0	-10.0	0.0
-78.0	-9.9	-10.0	0.1
-77.0	-12.9	-10.0	-2.9
-76.0	-12.9	-10.0	-2.9
-75.0	-11.4	-10.0	-1.4
-74.0	-11.7	-10.0	-1.7
-73.0	-11.0	-10.0	-1.0
-72.0	-8.9	-10.0	1.1
-71.0	-8.3	-10.0	1.7
-70.0	-6.4	-10.0	3.6
-69.0	-6.4	-10.0	3.6
-68.0	-4.3	-10.0	5.7
-67.0	-6.6	-10.0	3.4
-66.0	-6.1	-10.0	3.9
-65.0	-7.0	-10.0	3.0
-64.0	-7.3	-10.0	2.7
-63.0	-8.4	-10.0	1.6
-62.0	-9.1	-10.0	0.9
-61.0	-9.8	-10.0	0.2
-60.0	-8.9	-10.0	1.1
-59.0	-10.2	-10.0	-0.2
-58.0	-11.1	-10.0	-1.1
-57.0	-14.7	-10.0	-4.7

60.0	-17.8	-10.0	-7.8
61.0	-26.4	-10.0	-16.4
62.0	-20.4	-10.0	-10.4
63.0	-12.8	-10.0	-2.8
64.0	-19.5	-10.0	-9.5
65.0	-12.2	-10.0	-2.2
66.0	-20.0	-10.0	-10.0
67.0	-18.8	-10.0	-8.8
68.0	-25.8	-10.0	-15.8
69.0	-16.0	-10.0	-6.0
70.0	-24.6	-10.0	-14.6
71.0	-25.0	-10.0	-15.0
72.0	-23.0	-10.0	-13.0
73.0	-15.9	-10.0	-5.9
74.0	-20.0	-10.0	-10.0
75.0	-19.5	-10.0	-9.5
76.0	-21.6	-10.0	-11.6
77.0	-20.9	-10.0	-10.9
78.0	-27.6	-10.0	-17.6
79.0	-23.2	-10.0	-13.2
80.0	-27.0	-10.0	-17.0
81.0	-26.4	-10.0	-16.4
82.0	-22.3	-10.0	-12.3
83.0	-27.5	-10.0	-17.5
84.0	-22.5	-10.0	-12.5
85.0	-27.6	-10.0	-17.6
86.0	-18.4	0.0	-18.4
87.0	-25.3	0.0	-25.3
88.0	-23.9	0.0	-23.9
89.0	-27.6	0.0	-27.6
90.0	-23.1	0.0	-23.1
91.0	-22.6	0.0	-22.6
92.0	-25.5	0.0	-25.5
93.0	-27.6	0.0	-27.6
94.0	-27.6	0.0	-27.6
95.0	-21.9	0.0	-21.9
96.0	-20.2	0.0	-20.2
97.0	-21.6	0.0	-21.6
98.0	-19.0	0.0	-19.0
99.0	-23.9	0.0	-23.9
100.0	-27.2	0.0	-27.2
101.0	-22.1	0.0	-22.1
102.0	-18.8	0.0	-18.8
103.0	-23.2	0.0	-23.2
104.0	-27.6	0.0	-27.6
105.0	-27.6	0.0	-27.6
106.0	-27.6	0.0	-27.6
107.0	-21.8	0.0	-21.8
108.0	-21.0	0.0	-21.0
109.0	-23.5	0.0	-23.5
110.0	-27.6	0.0	-27.6
111.0	-20.2	0.0	-20.2
112.0	-27.6	0.0	-27.6
113.0	-27.6	0.0	-27.6
114.0	-21.8	0.0	-21.8
115.0	-21.3	0.0	-21.3
116.0	-24.5	0.0	-24.5
117.0	-25.8	0.0	-25.8
118.0	-23.8	0.0	-23.8
119.0	-22.4	0.0	-22.4
120.0	-23.4	0.0	-23.4
121.0	-20.5	0.0	-20.5
122.0	-26.9	0.0	-26.9

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Azimuth LHCP, -180° to +180° @ 1.0° increment

-56.0	-15.3	-10.0	-5.3
-55.0	-14.7	-10.0	-4.7
-54.0	-16.3	-10.0	-6.3
-53.0	-14.3	-10.0	-4.3
-52.0	-18.2	-10.0	-8.2
-51.0	-15.7	-10.0	-5.7
-50.0	-18.2	-10.0	-8.2
-49.0	-14.3	-10.0	-4.3
-48.0	-14.6	-10.0	-4.6
-47.0	-20.8	-9.8	-11.0
-46.0	-17.9	-9.6	-8.3
-45.0	-19.1	-9.3	-9.8
-44.0	-16.5	-9.1	-7.5
-43.0	-17.2	-8.8	-8.3
-42.0	-16.8	-8.6	-8.2
-41.0	-10.7	-8.3	-2.4
-40.0	-27.6	-8.1	-19.5
-39.0	-17.2	-7.8	-9.4
-38.0	-16.3	-7.5	-8.8
-37.0	-20.2	-7.2	-13.0
-36.0	-15.6	-6.9	-8.7
-35.0	-22.8	-6.6	-16.2
-34.0	-18.4	-6.3	-12.1
-33.0	-25.3	-6.0	-19.3
-32.0	-16.2	-5.6	-10.5
-31.0	-16.0	-5.3	-10.8
-30.0	-20.2	-4.9	-15.2
-29.0	-20.2	-4.6	-15.7
-28.0	-19.2	-4.2	-15.1
-27.0	-21.7	-3.8	-17.9
-26.0	-11.8	-3.4	-8.4
-25.0	-18.8	-2.9	-15.9
-24.0	-17.6	-2.5	-15.1
-23.0	-19.8	-2.0	-17.7
-22.0	-17.5	-1.6	-15.9
-21.0	-22.7	-1.1	-21.6
-20.0	-24.2	-0.5	-23.7
-19.0	-17.9	0.0	-17.9
-18.0	-17.0	0.6	-17.6
-17.0	-14.6	1.2	-15.8
-16.0	-24.2	1.9	-26.1
-15.0	-27.6	2.6	-30.2
-14.0	-10.3	3.3	-13.6
-13.0	-14.8	4.2	-19.0
-12.0	-7.3	5.0	-12.3
-11.0	-10.9	6.0	-16.9
-10.0	-7.9	7.0	-14.9
-9.0	-17.0	8.0	-25.0
-8.0	-11.4	8.0	-19.4
-7.0	-0.8	7.9	-8.7
-6.0	-1.1	9.5	-10.7
-5.0	5.0	11.5	-6.6
-4.0	9.5	13.9	-4.5
-3.0	4.9	17.1	-12.1
-2.0	12.5	21.5	-9.0
-1.0	20.8		
0.0	52.4		

123.0	-21.4	0.0	-21.4
124.0	-27.6	0.0	-27.6
125.0	-21.1	0.0	-21.1
126.0	-27.6	0.0	-27.6
127.0	-27.6	0.0	-27.6
128.0	-27.6	0.0	-27.6
129.0	-23.1	0.0	-23.1
130.0	-23.0	0.0	-23.0
131.0	-19.2	0.0	-19.2
132.0	-27.6	0.0	-27.6
133.0	-25.8	0.0	-25.8
134.0	-26.2	0.0	-26.2
135.0	-22.5	0.0	-22.5
136.0	-22.1	0.0	-22.1
137.0	-25.2	0.0	-25.2
138.0	-22.2	0.0	-22.2
139.0	-27.6	0.0	-27.6
140.0	-24.7	0.0	-24.7
141.0	-24.0	0.0	-24.0
142.0	-27.2	0.0	-27.2
143.0	-26.3	0.0	-26.3
144.0	-23.6	0.0	-23.6
145.0	-26.1	0.0	-26.1
146.0	-27.6	0.0	-27.6
147.0	-27.6	0.0	-27.6
148.0	-26.3	0.0	-26.3
149.0	-23.5	0.0	-23.5
150.0	-25.5	0.0	-25.5
151.0	-27.6	0.0	-27.6
152.0	-27.6	0.0	-27.6
153.0	-22.1	0.0	-22.1
154.0	-27.6	0.0	-27.6
155.0	-27.6	0.0	-27.6
156.0	-26.4	0.0	-26.4
157.0	-27.6	0.0	-27.6
158.0	-27.6	0.0	-27.6
159.0	-23.9	0.0	-23.9
160.0	-22.1	0.0	-22.1
161.0	-19.4	0.0	-19.4
162.0	-18.4	0.0	-18.4
163.0	-25.6	0.0	-25.6
164.0	-20.1	0.0	-20.1
165.0	-23.4	0.0	-23.4
166.0	-21.0	0.0	-21.0
167.0	-27.6	0.0	-27.6
168.0	-22.7	0.0	-22.7
169.0	-23.9	0.0	-23.9
170.0	-18.5	0.0	-18.5
171.0	-22.5	0.0	-22.5
172.0	-23.6	0.0	-23.6
173.0	-22.5	0.0	-22.5
174.0	-27.6	0.0	-27.6
175.0	-27.6	0.0	-27.6
176.0	-27.2	0.0	-27.2
177.0	-27.2	0.0	-27.2
178.0	-23.6	0.0	-23.6
179.0	-23.9	0.0	-23.9

Orbit Communication Systems Ltd.

AL AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Azimuth LHCP, -10° to +10° @ 0.1° increment

28.30 GHz Antenna Pattern in Co-pol Az LHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
-10.0	-7.9	7.0	-14.9
-9.9	-7.5	7.1	-14.6
-9.8	-7.3	7.2	-14.5
-9.7	-6.2	7.3	-13.6
-9.6	-10.2	7.4	-17.7
-9.5	-7.7	7.6	-15.3
-9.4	-3.9	7.7	-11.6
-9.3	-1.9	7.8	-9.7
-9.2	-2.5	8.0	-10.5
-9.1	-6.7	8.0	-14.7
-9.0	-17.0	8.0	-25.0
-8.9	-11.6	8.0	-19.6
-8.8	-13.7	8.0	-21.7
-8.7	-15.7	8.0	-23.7
-8.6	-14.7	8.0	-22.7
-8.5	-15.2	8.0	-23.2
-8.4	-14.5	8.0	-22.5
-8.3	-27.6	8.0	-35.6
-8.2	-15.5	8.0	-23.5
-8.1	-13.2	8.0	-21.2
-8.0	-11.4	8.0	-19.4
-7.9	-5.7	8.0	-13.7
-7.8	-4.5	8.0	-12.5
-7.7	-4.8	8.0	-12.8
-7.6	-4.4	8.0	-12.4
-7.5	-5.4	8.0	-13.4
-7.4	-4.0	8.0	-12.0
-7.3	-1.9	8.0	-9.9
-7.2	-5.1	8.0	-13.1
-7.1	-10.7	8.0	-18.7
-7.0	-0.8	7.9	-8.7
-6.9	1.4	8.0	-6.6
-6.8	2.7	8.2	-5.5
-6.7	4.1	8.3	-4.2
-6.6	4.3	8.5	-4.2
-6.5	2.5	8.7	-6.1
-6.4	-0.1	8.8	-9.0
-6.3	-1.7	9.0	-10.7
-6.2	0.4	9.2	-8.8
-6.1	1.4	9.4	-8.0
-6.0	-1.1	9.5	-10.7
-5.9	-0.8	9.7	-10.5
-5.8	0.9	9.9	-9.0
-5.7	0.3	10.1	-9.8
-5.6	-5.1	10.3	-15.4
-5.5	-5.4	10.5	-15.9
-5.4	2.2	10.7	-8.5
-5.3	2.3	10.9	-8.6
-5.2	-5.1	11.1	-16.2
-5.1	-0.3	11.3	-11.6
-5.0	5.0	11.5	-6.6
-4.9	5.3	11.7	-6.4
-4.8	1.6	12.0	-10.3
-4.7	-2.7	12.2	-14.9
-4.6	4.3	12.4	-8.1
-4.5	6.4	12.7	-6.3
-4.4	4.7	12.9	-8.3
-4.3	0.3	13.2	-12.9
-4.2	-5.9	13.4	-19.3
-4.1	1.0	13.7	-12.7

28.30 GHz Antenna Pattern in Co-pol Az LHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
0.0	52.4		
0.1	51.9		
0.2	49.6		
0.3	45.6		
0.4	40.0		
0.5	34.3		
0.6	28.3		
0.7	29.1		
0.8	30.4		
0.9	27.7		
1.0	17.1		
1.1	19.1		
1.2	19.7		
1.3	14.1		
1.4	10.6		
1.5	10.4	24.6	-14.2
1.6	12.5	23.9	-11.4
1.7	16.5	23.2	-6.7
1.8	16.4	22.6	-6.3
1.9	13.5	22.0	-8.6
2.0	10.6	21.5	-10.9
2.1	5.3	20.9	-15.7
2.2	-3.7	20.4	-24.2
2.3	7.1	20.0	-12.8
2.4	8.6	19.5	-10.9
2.5	7.4	19.1	-11.7
2.6	4.7	18.6	-13.9
2.7	-1.5	18.2	-19.8
2.8	-9.7	17.8	-27.5
2.9	-2.4	17.4	-19.9
3.0	0.4	17.1	-16.6
3.1	4.8	16.7	-11.9
3.2	5.2	16.4	-11.2
3.3	2.7	16.0	-13.3
3.4	0.3	15.7	-15.4
3.5	-4.6	15.4	-20.0
3.6	-1.8	15.1	-16.9
3.7	5.0	14.8	-9.8
3.8	5.1	14.5	-9.4
3.9	0.1	14.2	-14.1
4.0	-7.9	13.9	-21.8
4.1	-2.9	13.7	-16.5
4.2	-5.2	13.4	-18.6
4.3	0.5	13.2	-12.7
4.4	2.8	12.9	-10.2
4.5	4.0	12.7	-8.7
4.6	4.5	12.4	-7.9
4.7	3.2	12.2	-9.0
4.8	-6.3	12.0	-18.3
4.9	-4.0	11.7	-15.7
5.0	-1.2	11.5	-12.7
5.1	-6.6	11.3	-17.9
5.2	-2.6	11.1	-13.7
5.3	-0.6	10.9	-11.5
5.4	-4.5	10.7	-15.2
5.5	-5.2	10.5	-15.7
5.6	0.1	10.3	-10.2
5.7	1.1	10.1	-9.1
5.8	1.4	9.9	-8.5
5.9	-1.1	9.7	-10.8

Orbit Communication Systems Ltd.

AL AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
 Co-pol Azimuth LHCP, -10° to +10° @ 0.1° increment

-4.0	9.5	13.9	-4.5
-3.9	12.0	14.2	-2.2
-3.8	10.5	14.5	-4.0
-3.7	0.9	14.8	-13.9
-3.6	7.0	15.1	-8.1
-3.5	10.2	15.4	-5.2
-3.4	8.9	15.7	-6.8
-3.3	4.9	16.0	-11.2
-3.2	7.7	16.4	-8.6
-3.1	8.8	16.7	-7.9
-3.0	4.9	17.1	-12.1
-2.9	6.6	17.4	-10.9
-2.8	9.6	17.8	-8.2
-2.7	8.5	18.2	-9.7
-2.6	1.6	18.6	-17.0
-2.5	-4.6	19.1	-23.7
-2.4	-0.9	19.5	-20.4
-2.3	6.5	20.0	-13.5
-2.2	7.1	20.4	-13.4
-2.1	7.4	20.9	-13.6
-2.0	12.5	21.5	-9.0
-1.9	12.9	22.0	-9.2
-1.8	7.2	22.6	-15.4
-1.7	8.8	23.2	-14.4
-1.6	9.7	23.9	-14.2
-1.5	4.7	24.6	-19.9
-1.4	17.3		
-1.3	19.9		
-1.2	20.4		
-1.1	21.2		
-1.0	20.8		
-0.9	16.1		
-0.8	11.8		
-0.7	10.5		
-0.6	18.5		
-0.5	30.7		
-0.4	39.7		
-0.3	45.8		
-0.2	49.9		
-0.1	51.9		
0.0	52.4		

6.0	-10.1	9.5	-19.6
6.1	-3.1	9.4	-12.5
6.2	-0.2	9.2	-9.3
6.3	0.3	9.0	-8.7
6.4	2.0	8.8	-6.8
6.5	2.0	8.7	-6.7
6.6	0.6	8.5	-7.9
6.7	-0.4	8.3	-8.7
6.8	0.7	8.2	-7.5
6.9	1.3	8.0	-6.7
7.0	0.0	7.9	-7.9
7.1	-2.4	8.0	-10.4
7.2	-10.1	8.0	-18.1
7.3	-6.8	8.0	-14.8
7.4	-1.8	8.0	-9.8
7.5	-1.8	8.0	-9.8
7.6	-4.5	8.0	-12.5
7.7	-6.0	8.0	-14.0
7.8	-6.1	8.0	-14.1
7.9	-3.7	8.0	-11.7
8.0	-2.9	8.0	-10.9
8.1	-5.1	8.0	-13.1
8.2	-9.7	8.0	-17.7
8.3	-4.4	8.0	-12.4
8.4	-6.2	8.0	-14.2
8.5	-6.3	8.0	-14.3
8.6	-6.4	8.0	-14.4
8.7	-4.5	8.0	-12.5
8.8	-5.4	8.0	-13.4
8.9	-7.9	8.0	-15.9
9.0	-10.0	8.0	-18.0
9.1	-7.4	8.0	-15.4
9.2	-5.8	8.0	-13.8
9.3	-4.6	7.8	-12.4
9.4	-6.5	7.7	-14.2
9.5	-12.0	7.6	-19.6
9.6	-9.3	7.4	-16.8
9.7	-4.9	7.3	-12.3
9.8	-3.7	7.2	-11.0
9.9	-3.3	7.1	-10.4
10.0	-3.5	7.0	-10.5

Orbit Communication Systems Ltd.
 AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
 Co-pol Elevation LHCP, -30° to +30° @ 0.5° increment

28.30 GHz Antenna Pattern in Co-pol EI LHCP

Angle Degrees	Gain dBi	Mask dBi	Over Mask dB
-30.0	-8.9	-4.9	-4.0
-29.5	-8.2	-4.7	-3.5
-29.0	-11.1	-4.6	-6.6
-28.5	-9.4	-4.4	-5.1
-28.0	-10.5	-4.2	-6.4
-27.5	-11.4	-4.0	-7.4
-27.0	-14.6	-3.8	-10.8
-26.5	-11.7	-3.6	-8.2
-26.0	-13.1	-3.4	-9.7
-25.5	-11.1	-3.2	-7.9
-25.0	-7.1	-2.9	-4.1
-24.5	-6.9	-2.7	-4.2
-24.0	-6.2	-2.5	-3.7
-23.5	-16.4	-2.3	-14.1
-23.0	-19.0	-2.0	-17.0
-22.5	-9.0	-1.8	-7.2
-22.0	-5.7	-1.6	-4.1
-21.5	-5.0	-1.3	-3.7
-21.0	-13.8	-1.1	-12.7
-20.5	-5.7	-0.8	-4.9
-20.0	-6.0	-0.5	-5.5
-19.5	-1.6	-0.3	-1.3
-19.0	-1.6	0.0	-1.6
-18.5	-2.8	0.3	-3.1
-18.0	-14.4	0.6	-15.0
-17.5	-23.5	0.9	-24.4
-17.0	-15.1	1.2	-16.4
-16.5	-14.3	1.6	-15.9
-16.0	-18.3	1.9	-20.2
-15.5	-13.5	2.2	-15.8
-15.0	-9.1	2.6	-11.7
-14.5	-17.0	3.0	-19.9
-14.0	-2.1	3.3	-5.4
-13.5	-6.7	3.7	-10.5
-13.0	-9.7	4.2	-13.9
-12.5	-11.8	4.6	-16.4
-12.0	-6.5	5.0	-11.5
-11.5	-6.0	5.5	-11.5
-11.0	-13.0	6.0	-19.0
-10.5	-10.3	6.5	-16.8
-10.0	-6.5	7.0	-13.5
-9.5	-6.6	7.6	-14.2
-9.0	-2.8	8.1	-10.9
-8.5	-8.5	8.8	-17.2
-8.0	-2.4	9.4	-11.8
-7.5	-10.0	10.1	-20.2
-7.0	-2.0	10.9	-12.9
-6.5	-5.7	11.7	-17.4
-6.0	-1.1	12.5	-13.7
-5.5	-1.6	13.5	-15.1
-5.0	1.5	14.5	-13.1
-4.5	1.5	15.7	-14.2
-4.0	2.9	16.9	-14.0
-3.5	4.7	18.4	-13.7
-3.0	10.6		
-2.5	9.4		
-2.0	8.1		
-1.5	17.9		
-1.0	21.1		
-0.5	35.7		
0.0	52.4		

28.30 GHz Antenna Pattern in Co-pol EI LHCP

Angle Degrees	Gain dBi	Mask dBi	Over Mask dB
0.0	52.4		
0.5	38.0		
1.0	16.8		
1.5	9.7		
2.0	5.4		
2.5	10.1		
3.0	7.5		
3.5	8.5	18.4	-9.9
4.0	13.0	16.9	-4.0
4.5	-1.0	15.7	-16.6
5.0	7.3	14.5	-7.2
5.5	-12.4	13.5	-25.9
6.0	-1.8	12.5	-14.4
6.5	0.9	11.7	-10.8
7.0	-1.8	10.9	-12.7
7.5	-12.0	10.1	-22.1
8.0	-14.6	9.4	-24.0
8.5	-1.5	8.8	-10.3
9.0	-2.8	8.1	-11.0
9.5	-9.7	7.6	-17.3
10.0	-0.2	7.0	-7.2
10.5	-4.7	6.5	-11.1
11.0	-8.1	6.0	-14.1
11.5	-13.2	5.5	-18.6
12.0	-13.1	5.0	-18.1
12.5	-5.9	4.6	-10.5
13.0	-4.3	4.2	-8.4
13.5	-8.9	3.7	-12.6
14.0	-17.5	3.3	-20.8
14.5	-12.7	3.0	-15.7
15.0	-12.0	2.6	-14.6
15.5	-15.1	2.2	-17.4
16.0	-18.5	1.9	-20.3
16.5	-16.7	1.6	-18.2
17.0	-15.4	1.2	-16.7
17.5	-22.5	0.9	-23.5
18.0	-13.5	0.6	-14.1
18.5	-17.0	0.3	-17.3
19.0	-12.1	0.0	-12.1
19.5	-12.8	-0.3	-12.6
20.0	-18.1	-0.5	-17.6
20.5	-12.0	-0.8	-11.2
21.0	-26.3	-1.1	-25.3
21.5	-26.9	-1.3	-25.6
22.0	-18.6	-1.6	-17.1
22.5	-12.9	-1.8	-11.1
23.0	-16.0	-2.0	-14.0
23.5	-15.0	-2.3	-12.7
24.0	-21.6	-2.5	-19.1
24.5	-19.9	-2.7	-17.2
25.0	-15.4	-2.9	-12.4
25.5	-19.2	-3.2	-16.1
26.0	-27.6	-3.4	-24.2
26.5	-19.8	-3.6	-16.2
27.0	-20.5	-3.8	-16.7
27.5	-15.7	-4.0	-11.7
28.0	-14.3	-4.2	-10.1
28.5	-17.6	-4.4	-13.2
29.0	-17.5	-4.6	-13.0
29.5	-15.3	-4.7	-10.6
30.0	-24.6	-4.9	-19.7

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Elevation LHCP, -10° to +10° @ 0.1° increment

28.30 GHz Antenna Pattern in Co-pol EI LHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
-10.0	-6.5	7.0	-13.5
-9.9	-5.3	7.1	-12.4
-9.8	-7.3	7.2	-14.5
-9.7	-12.0	7.3	-19.3
-9.6	-7.5	7.4	-15.0
-9.5	-6.6	7.6	-14.2
-9.4	-10.3	7.7	-18.0
-9.3	-12.4	7.8	-20.2
-9.2	-5.1	7.9	-13.0
-9.1	-2.8	8.0	-10.8
-9.0	-2.8	8.1	-10.9
-8.9	-5.3	8.3	-13.6
-8.8	-14.1	8.4	-22.5
-8.7	-9.5	8.5	-18.0
-8.6	-5.6	8.6	-14.3
-8.5	-8.5	8.8	-17.2
-8.4	-6.1	8.9	-15.0
-8.3	-3.3	9.0	-12.3
-8.2	-1.8	9.2	-10.9
-8.1	-1.4	9.3	-10.7
-8.0	-2.4	9.4	-11.8
-7.9	-4.4	9.6	-14.0
-7.8	-10.6	9.7	-20.3
-7.7	-12.2	9.8	-22.1
-7.6	-12.1	10.0	-22.1
-7.5	-10.0	10.1	-20.2
-7.4	-4.2	10.3	-14.4
-7.3	-0.7	10.4	-11.1
-7.2	1.7	10.6	-8.8
-7.1	1.9	10.7	-8.9
-7.0	-2.0	10.9	-12.9
-6.9	-14.1	11.0	-25.2
-6.8	-0.9	11.2	-12.1
-6.7	-0.4	11.3	-11.8
-6.6	-4.8	11.5	-16.3
-6.5	-5.7	11.7	-17.4
-6.4	-2.0	11.8	-13.8
-6.3	-1.0	12.0	-13.1
-6.2	0.0	12.2	-12.2
-6.1	-0.6	12.4	-13.0
-6.0	-1.1	12.5	-13.7
-5.9	0.3	12.7	-12.4
-5.8	1.5	12.9	-11.4
-5.7	0.3	13.1	-12.8
-5.6	-0.9	13.3	-14.2
-5.5	-1.6	13.5	-15.1
-5.4	-4.1	13.7	-17.8
-5.3	0.1	13.9	-13.8
-5.2	3.6	14.1	-10.5
-5.1	3.5	14.3	-10.8
-5.0	1.5	14.5	-13.1
-4.9	-0.7	14.7	-15.4
-4.8	-0.4	15.0	-15.4
-4.7	1.2	15.2	-14.0
-4.6	2.0	15.4	-13.5
-4.5	1.5	15.7	-14.2
-4.4	3.1	15.9	-12.8
-4.3	5.7	16.2	-10.4
-4.2	7.0	16.4	-9.4
-4.1	6.3	16.7	-10.3

28.30 GHz Antenna Pattern in Co-pol EI LHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
0.0	52.4		
0.1	51.7		
0.2	49.3		
0.3	45.2		
0.4	40.9		
0.5	38.0		
0.6	33.6		
0.7	24.4		
0.8	16.4		
0.9	17.4		
1.0	16.8		
1.1	19.0		
1.2	16.6		
1.3	7.2		
1.4	9.1		
1.5	9.7		
1.6	14.0		
1.7	14.6		
1.8	10.6		
1.9	6.2		
2.0	5.4		
2.1	6.5		
2.2	10.9		
2.3	11.6		
2.4	10.9		
2.5	10.1		
2.6	7.0		
2.7	-3.3		
2.8	-9.3		
2.9	-2.2		
3.0	7.5		
3.1	9.7		
3.2	7.5		
3.3	1.4		
3.4	4.6		
3.5	8.5	18.4	-9.9
3.6	9.7	18.1	-8.4
3.7	9.0	17.8	-8.8
3.8	9.2	17.5	-8.3
3.9	12.3	17.2	-4.9
4.0	13.0	16.9	-4.0
4.1	12.7	16.7	-4.0
4.2	12.9	16.4	-3.5
4.3	12.6	16.2	-3.6
4.4	9.1	15.9	-6.9
4.5	-1.0	15.7	-16.6
4.6	-7.0	15.4	-22.4
4.7	-1.9	15.2	-17.1
4.8	4.2	15.0	-10.8
4.9	6.8	14.7	-8.0
5.0	7.3	14.5	-7.2
5.1	6.7	14.3	-7.6
5.2	4.8	14.1	-9.3
5.3	1.3	13.9	-12.6
5.4	-1.9	13.7	-15.6
5.5	-12.4	13.5	-25.9
5.6	-5.0	13.3	-18.3
5.7	0.0	13.1	-13.1
5.8	-1.3	12.9	-14.3
5.9	-6.0	12.7	-18.7

Orbit Communication Systems Ltd.
 AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
 Co-pol Elevation LHCP, -10° to +10° @ 0.1° increment

-4.0	2.9	16.9	-14.0
-3.9	-1.8	17.2	-19.0
-3.8	5.8	17.5	-11.7
-3.7	7.7	17.8	-10.1
-3.6	7.0	18.1	-11.0
-3.5	4.7	18.4	-13.7
-3.4	0.9		
-3.3	0.6		
-3.2	0.5		
-3.1	1.5		
-3.0	10.6		
-2.9	14.0		
-2.8	14.1		
-2.7	12.0		
-2.6	8.0		
-2.5	9.4		
-2.4	10.8		
-2.3	12.3		
-2.2	12.8		
-2.1	11.1		
-2.0	8.1		
-1.9	7.1		
-1.8	5.3		
-1.7	8.7		
-1.6	15.0		
-1.5	17.9		
-1.4	16.7		
-1.3	15.9		
-1.2	21.3		
-1.1	22.6		
-1.0	21.1		
-0.9	22.1		
-0.8	25.1		
-0.7	29.3		
-0.6	33.2		
-0.5	35.7		
-0.4	40.4		
-0.3	46.0		
-0.2	49.9		
-0.1	52.0		
0.0	52.4		

6.0	-1.8	12.5	-14.4
6.1	-1.0	12.4	-13.4
6.2	-1.6	12.2	-13.8
6.3	-2.7	12.0	-14.7
6.4	-2.0	11.8	-13.8
6.5	0.9	11.7	-10.8
6.6	3.8	11.5	-7.7
6.7	3.5	11.3	-7.9
6.8	2.2	11.2	-9.0
6.9	-0.5	11.0	-11.5
7.0	-1.8	10.9	-12.7
7.1	-6.2	10.7	-16.9
7.2	-2.1	10.6	-12.7
7.3	1.2	10.4	-9.3
7.4	-0.4	10.3	-10.6
7.5	-12.0	10.1	-22.1
7.6	-7.3	10.0	-17.3
7.7	-5.2	9.8	-15.1
7.8	-10.2	9.7	-19.9
7.9	-22.4	9.6	-31.9
8.0	-14.6	9.4	-24.0
8.1	-12.6	9.3	-21.9
8.2	-8.3	9.2	-17.5
8.3	-6.0	9.0	-15.0
8.4	-2.6	8.9	-11.5
8.5	-1.5	8.8	-10.3
8.6	-4.8	8.6	-13.4
8.7	-4.8	8.5	-13.3
8.8	-4.6	8.4	-13.0
8.9	-2.5	8.3	-10.8
9.0	-2.8	8.1	-11.0
9.1	-7.6	8.0	-15.6
9.2	-11.6	7.9	-19.5
9.3	-9.0	7.8	-16.8
9.4	-8.8	7.7	-16.5
9.5	-9.7	7.6	-17.3
9.6	-18.5	7.4	-25.9
9.7	-5.2	7.3	-12.5
9.8	-2.0	7.2	-9.2
9.9	0.0	7.1	-7.1
10.0	-0.2	7.0	-7.2

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
X-pol Azimuth LHCP, -10° to +10° @ 0.1° increment

28.30 GHz Antenna Pattern in X-pol Az LHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
-10.0	-15.9	-2.0	-13.9
-9.9	-15.9	-2.0	-13.9
-9.8	-14.2	-2.0	-12.2
-9.7	-15.2	-2.0	-13.2
-9.6	-15.9	-2.0	-13.9
-9.5	-14.2	-2.0	-12.2
-9.4	-13.6	-2.0	-11.6
-9.3	-12.0	-2.0	-10.0
-9.2	-10.0	-2.0	-8.0
-9.1	-6.9	-2.0	-4.9
-9.0	-5.1	-2.0	-3.1
-8.9	-4.4	-2.0	-2.4
-8.8	-5.7	-2.0	-3.7
-8.7	-7.2	-2.0	-5.2
-8.6	-9.3	-2.0	-7.3
-8.5	-8.9	-2.0	-6.9
-8.4	-7.8	-2.0	-5.8
-8.3	-7.1	-2.0	-5.1
-8.2	-9.5	-2.0	-7.5
-8.1	-11.9	-2.0	-9.9
-8.0	-11.6	-2.0	-9.6
-7.9	-9.8	-2.0	-7.8
-7.8	-8.4	-2.0	-6.4
-7.7	-9.4	-2.0	-7.4
-7.6	-12.9	-2.0	-10.9
-7.5	-10.3	-2.0	-8.3
-7.4	-6.0	-2.0	-4.0
-7.3	-4.1	-2.0	-2.1
-7.2	-5.1	-2.0	-3.1
-7.1	-5.0	-2.0	-3.0
-7.0	-3.3	-2.1	-1.1
-6.9	-0.9	-2.0	1.0
-6.8	-0.7	-1.8	1.1
-6.7	-2.7	-1.7	-1.1
-6.6	-9.5	-1.5	-8.1
-6.5	-7.1	-1.3	-5.8
-6.4	-6.9	-1.2	-5.7
-6.3	-11.1	-1.0	-10.1
-6.2	-15.5	-0.8	-14.7
-6.1	-11.7	-0.6	-11.0
-6.0	-12.3	-0.5	-11.8
-5.9	-11.9	-0.3	-11.6
-5.8	-9.1	-0.1	-9.1
-5.7	-8.2	0.1	-8.3
-5.6	-13.6	0.3	-13.9
-5.5	-21.4	0.5	-21.9
-5.4	-10.1	0.7	-10.8
-5.3	-4.1	0.9	-5.0
-5.2	-2.2	1.1	-3.3
-5.1	-2.2	1.3	-3.6
-5.0	-8.1	1.5	-9.6
-4.9	-7.5	1.7	-9.3
-4.8	-2.9	2.0	-4.9
-4.7	-3.6	2.2	-5.8
-4.6	-10.3	2.4	-12.8
-4.5	-11.7	2.7	-14.4
-4.4	-13.9	2.9	-16.8
-4.3	-3.8	3.2	-7.0
-4.2	-0.2	3.4	-3.7
-4.1	-0.8	3.7	-4.5


28.30 GHz Antenna Pattern in X-pol Az LHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
0.0	17.6		
0.1	16.5		
0.2	22.3		
0.3	25.9		
0.4	26.5		
0.5	24.6		
0.6	21.0		
0.7	11.6		
0.8	9.1		
0.9	14.4		
1.0	15.9		
1.1	14.5		
1.2	8.8		
1.3	5.2		
1.4	6.4		
1.5	5.0		
1.6	5.7		
1.7	6.6		
1.8	4.6	12.6	-8.0
1.9	-1.0	12.0	-13.0
2.0	-6.4	11.5	-17.8
2.1	-3.9	10.9	-14.9
2.2	-0.6	10.4	-11.1
2.3	-1.2	10.0	-11.1
2.4	-5.3	9.5	-14.8
2.5	-5.9	9.1	-14.9
2.6	-5.6	8.6	-14.3
2.7	-6.7	8.2	-14.9
2.8	-4.5	7.8	-12.3
2.9	-5.3	7.4	-12.7
3.0	-8.9	7.1	-16.0
3.1	-5.7	6.7	-12.4
3.2	-6.1	6.4	-12.4
3.3	-8.7	6.0	-14.7
3.4	-7.1	5.7	-12.8
3.5	-8.1	5.4	-13.5
3.6	-9.6	5.1	-14.7
3.7	-3.0	4.8	-7.8
3.8	-4.3	4.5	-8.8
3.9	-12.7	4.2	-16.9
4.0	-13.7	3.9	-17.7
4.1	-7.5	3.7	-11.2
4.2	-10.3	3.4	-13.7
4.3	-14.6	3.2	-17.7
4.4	-9.5	2.9	-12.4
4.5	-9.7	2.7	-12.4
4.6	-9.2	2.4	-11.6
4.7	-7.6	2.2	-9.8
4.8	-7.8	2.0	-9.8
4.9	-8.2	1.7	-9.9
5.0	-7.3	1.5	-8.8
5.1	-10.2	1.3	-11.5
5.2	-12.6	1.1	-13.7
5.3	-13.1	0.9	-14.0
5.4	-14.1	0.7	-14.8
5.5	-11.9	0.5	-12.4
5.6	-10.6	0.3	-10.9
5.7	-10.7	0.1	-10.8
5.8	-10.0	-0.1	-9.9
5.9	-9.7	-0.3	-9.4


Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
X-pol Azimuth LHCP, -10° to +10° @ 0.1° increment

-4.0	-7.2	3.9	-11.1
-3.9	-10.8	4.2	-15.0
-3.8	-5.1	4.5	-9.6
-3.7	-4.8	4.8	-9.6
-3.6	-3.7	5.1	-8.8
-3.5	-2.1	5.4	-7.5
-3.4	-2.7	5.7	-8.4
-3.3	-6.1	6.0	-12.2
-3.2	-6.2	6.4	-12.6
-3.1	-0.7	6.7	-7.4
-3.0	-2.1	7.1	-9.1
-2.9	-11.9	7.4	-19.4
-2.8	-7.9	7.8	-15.7
-2.7	-5.8	8.2	-14.0
-2.6	-8.0	8.6	-16.6
-2.5	-7.8	9.1	-16.8
-2.4	-12.0	9.5	-21.5
-2.3	-9.2	10.0	-19.2
-2.2	-3.7	10.4	-14.1
-2.1	-7.8	10.9	-18.7
-2.0	-6.2	11.5	-17.7
-1.9	-3.6	12.0	-15.7
-1.8	-9.9	12.6	-22.5
-1.7	2.3		
-1.6	6.1		
-1.5	6.4		
-1.4	5.5		
-1.3	5.5		
-1.2	9.1		
-1.1	12.7		
-1.0	15.1		
-0.9	14.9		
-0.8	8.5		
-0.7	15.8		
-0.6	24.9		
-0.5	29.3		
-0.4	31.0		
-0.3	30.5		
-0.2	28.6		
-0.1	23.9		
0.0	17.6		

6.0	-11.5	-0.5	-11.0
6.1	-13.7	-0.6	-13.0
6.2	-11.1	-0.8	-10.3
6.3	-8.8	-1.0	-7.9
6.4	-9.2	-1.2	-8.0
6.5	-13.6	-1.3	-12.3
6.6	-17.9	-1.5	-16.4
6.7	-20.2	-1.7	-18.5
6.8	-18.2	-1.8	-16.4
6.9	-18.3	-2.0	-16.3
7.0	-12.0	-2.1	-9.8
7.1	-8.4	-2.0	-6.4
7.2	-8.3	-2.0	-6.3
7.3	-8.1	-2.0	-6.1
7.4	-12.2	-2.0	-10.2
7.5	-13.0	-2.0	-11.0
7.6	-13.6	-2.0	-11.6
7.7	-17.3	-2.0	-15.3
7.8	-18.7	-2.0	-16.7
7.9	-8.7	-2.0	-6.7
8.0	-6.2	-2.0	-4.2
8.1	-7.1	-2.0	-5.1
8.2	-10.4	-2.0	-8.4
8.3	-11.8	-2.0	-9.8
8.4	-12.6	-2.0	-10.6
8.5	-12.7	-2.0	-10.7
8.6	-11.7	-2.0	-9.7
8.7	-16.3	-2.0	-14.3
8.8	-11.0	-2.0	-9.0
8.9	-7.4	-2.0	-5.4
9.0	-7.6	-2.0	-5.6
9.1	-9.7	-2.0	-7.7
9.2	-14.1	-2.0	-12.1
9.3	-18.5	-2.0	-16.5
9.4	-17.1	-2.0	-15.1
9.5	-15.4	-2.0	-13.4
9.6	-14.7	-2.0	-12.7
9.7	-14.3	-2.0	-12.3
9.8	-13.7	-2.0	-11.7
9.9	-17.6	-2.0	-15.6
10.0	-26.1	-2.0	-24.1

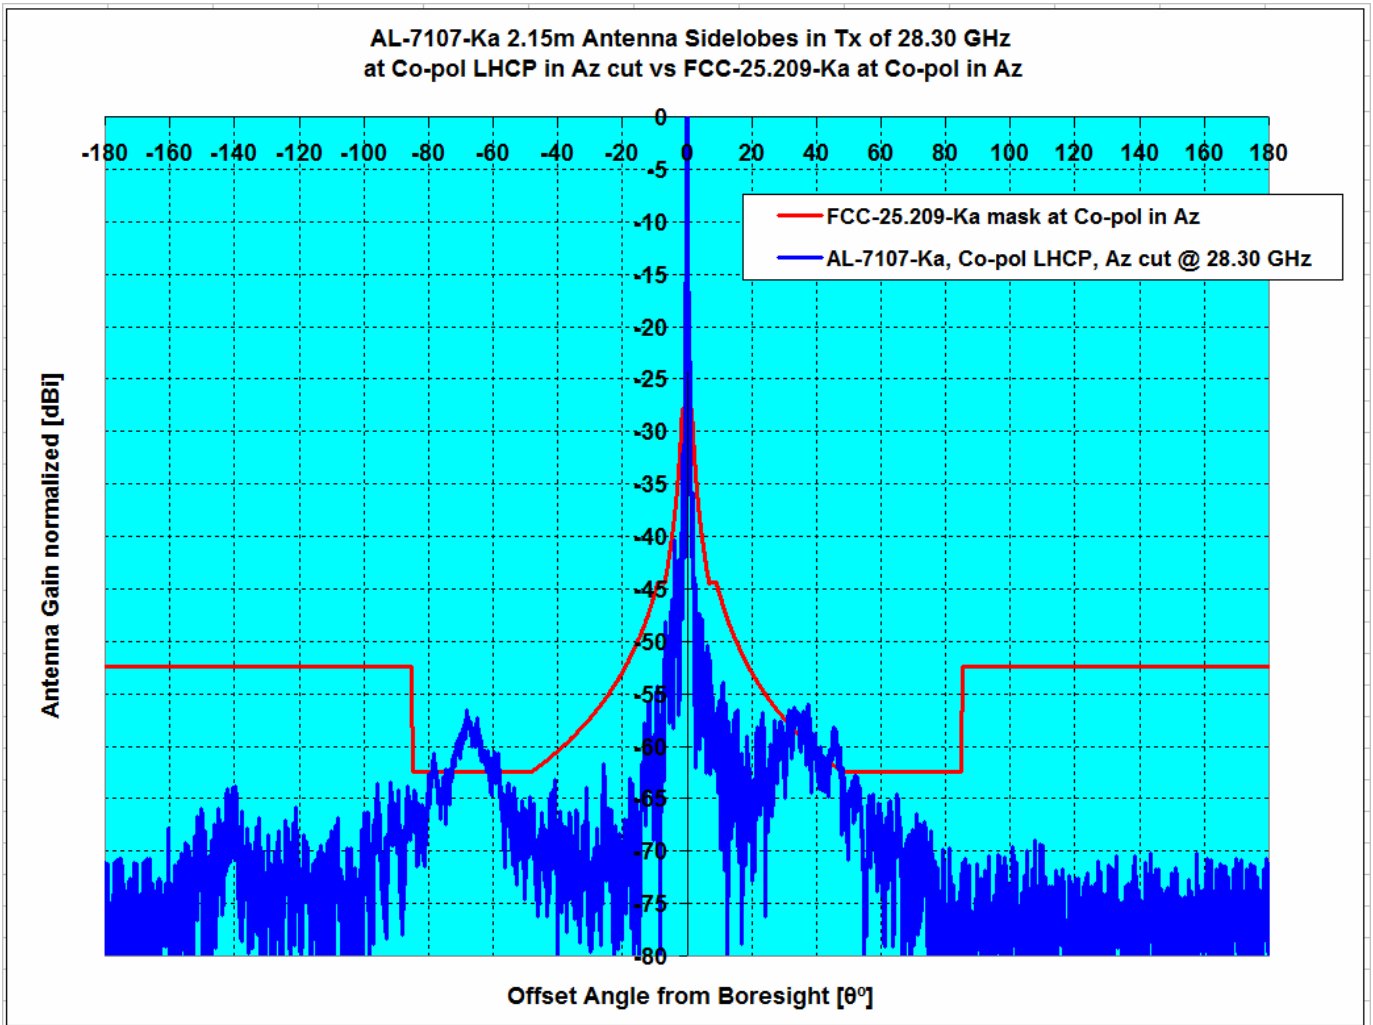


Description	Plane, CirP Type	Frequency GHz	Ant. Gain dBi	Peak Excursions dB		Over Mask %	
				1.5°≤θ≤7°	7°≤θ≤180°	1.5°≤θ≤7°	7°≤θ≤180°
FCC-25.209-Ka, Co-pol Az, vs AL-7107-Ka	Az , LHCP	28.30	52.43	-2.23	5.85	0.00%	6.94%

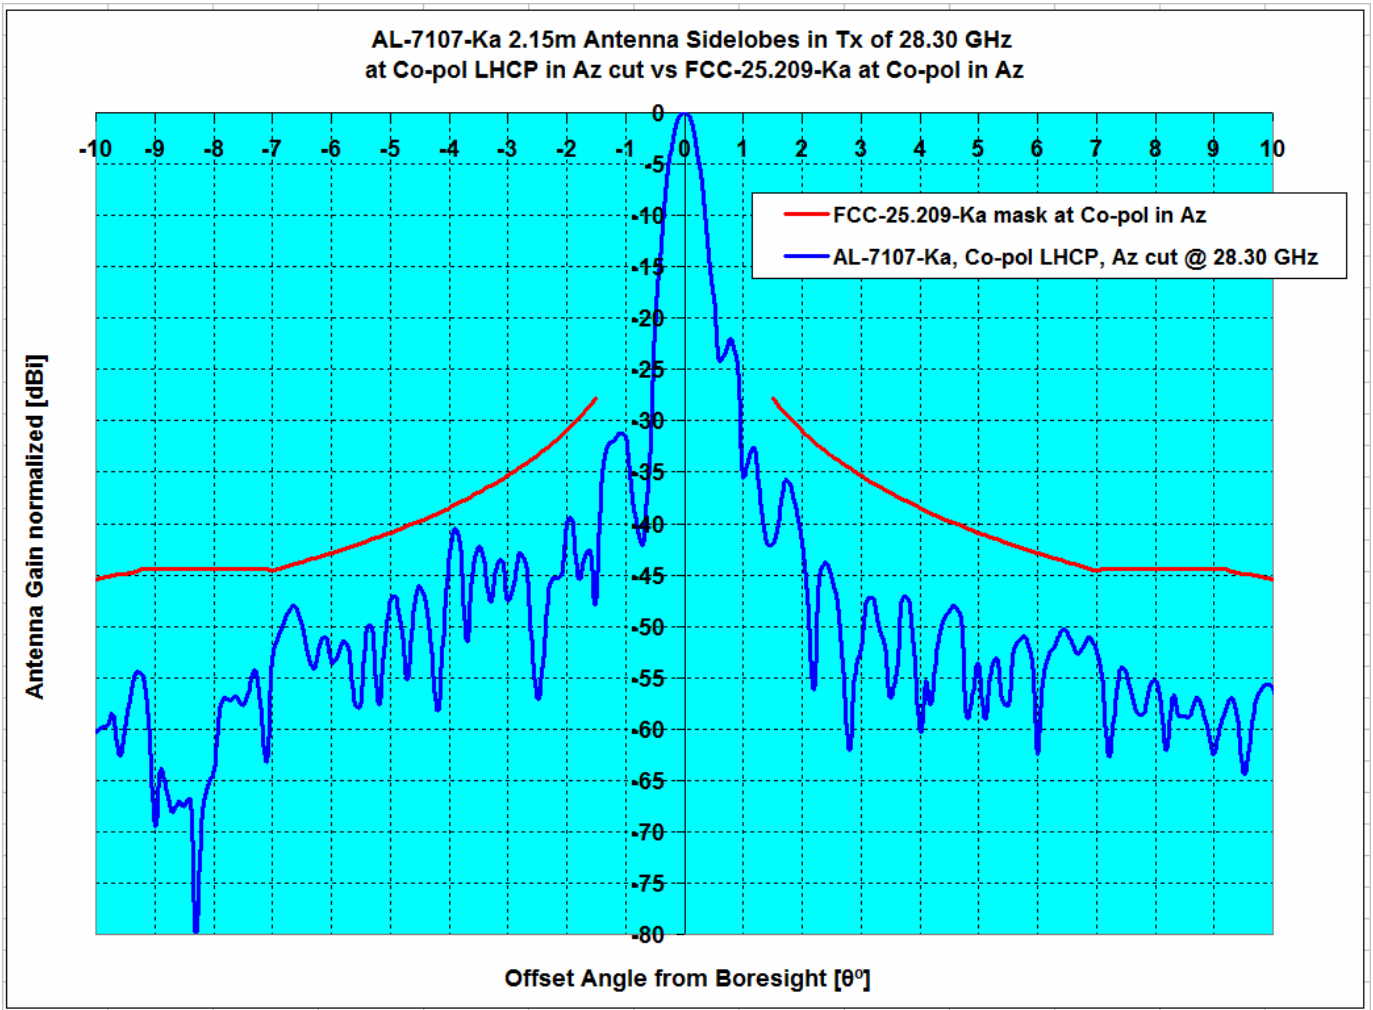


Description	Plane, CirP	Frequency	Ant. Gain	Peak Excursions dB		Over Mask %	
				1.5°≤θ≤7°	7°≤θ≤180°	1.5°≤θ≤7°	7°≤θ≤180°
FCC-25.209-Ka, Co-pol Az, vs AL-7107-Ka	Az , LHCP	28.30	52.43	-2.23	5.85	0.00%	6.94%

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern, Co-pol, Elevation LHCP

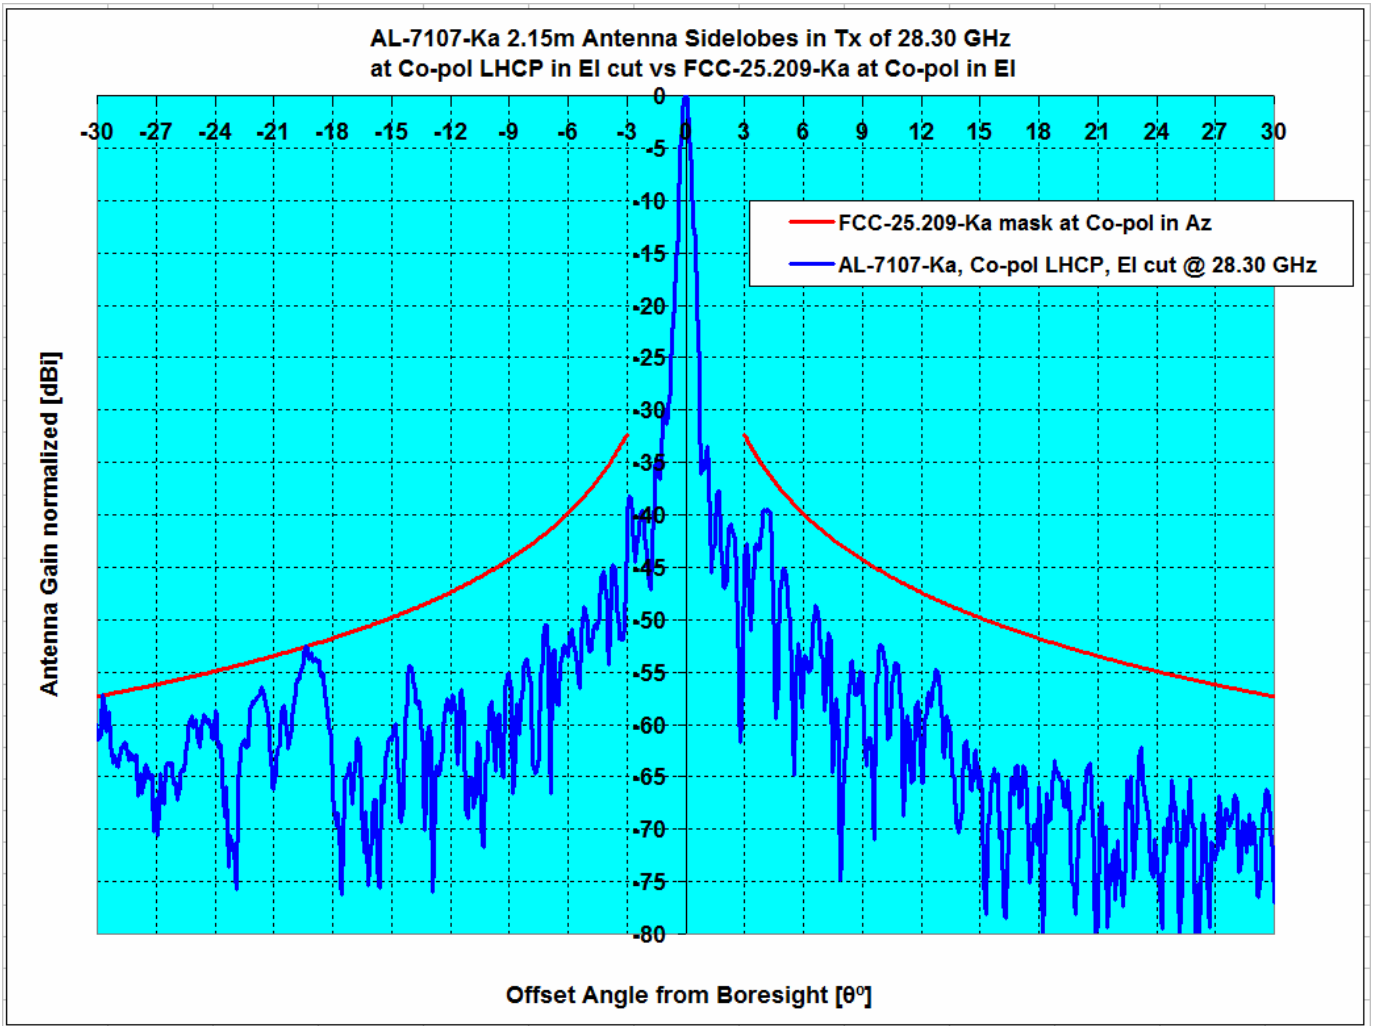


Description	Plane, CirP	Frequency	Ant. Gain	Peak Excursions dB		Over Mask %	
				3°≤θ≤7°	7°≤θ≤30°	3°≤θ≤7°	7°≤θ≤30°
Pattern Rule vs Antenna System	Type	GHz	dBi				
FCC-25.209-Ka, Co-pol EI, vs AL-7107-Ka	EI , LHCP	28.30	52.43	-3.53	0.07	0.00%	0.18%

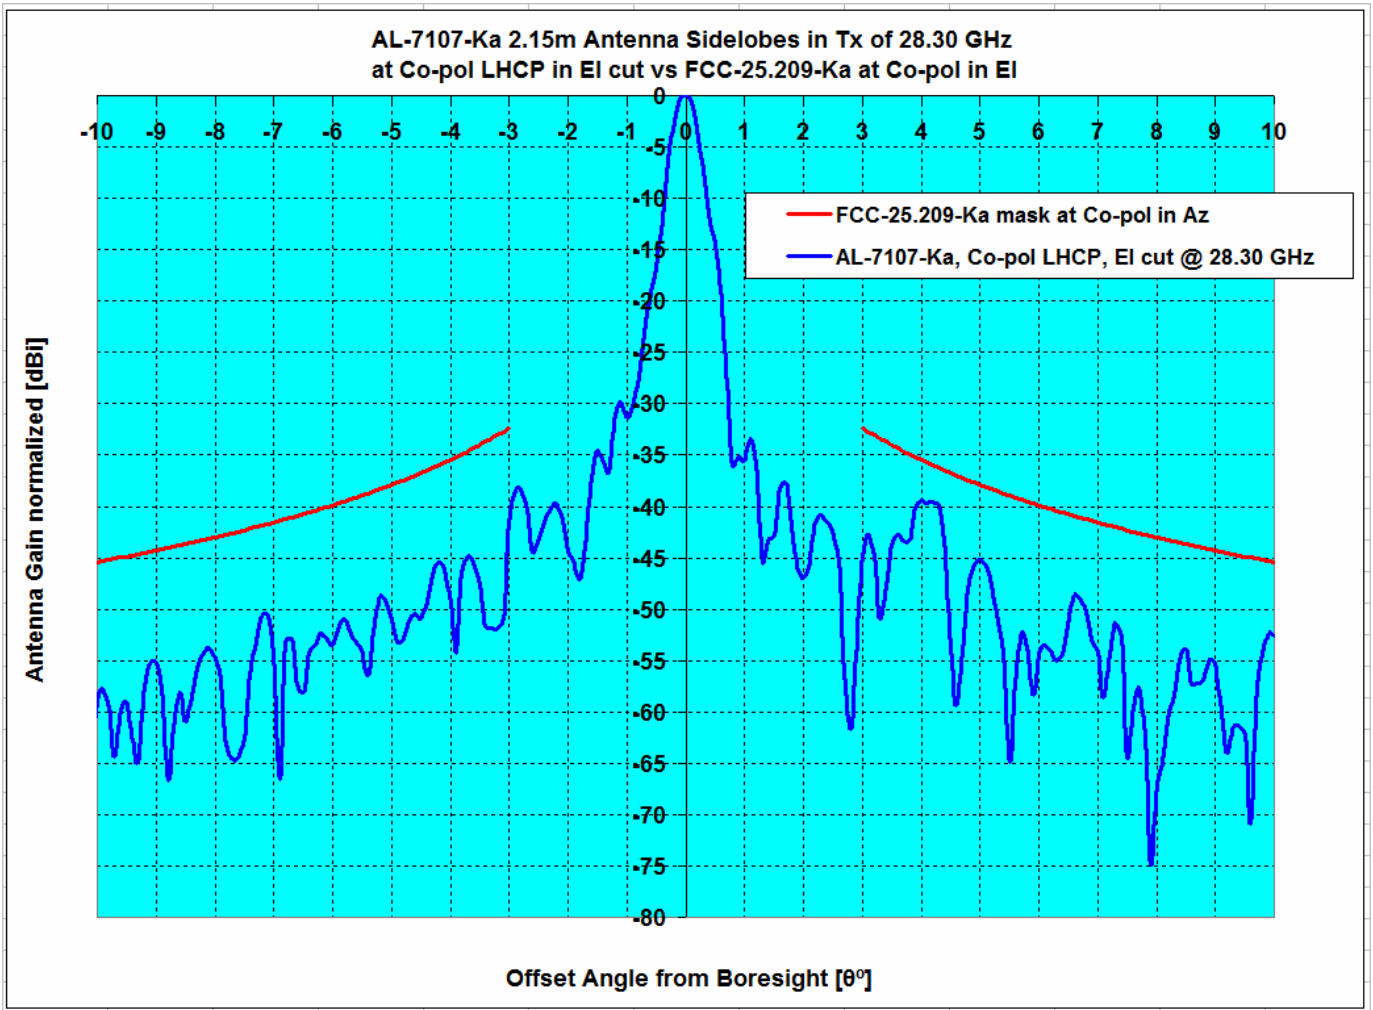

Description	Plane, CirP	Frequency	Ant. Gain	Peak Excursions dB		Over Mask %	
				3°≤θ≤7°	7°≤θ≤30°	3°≤θ≤7°	7°≤θ≤30°
Pattern Rule vs Antenna System	Type	GHz	dBi				
FCC-25.209-Ka, Co-pol EI, vs AL-7107-Ka	EI , LHCP	28.30	52.43	-3.53	0.07	0.00%	0.18%

Orbit Communication Systems Ltd.
 AL-7107-Ka, 2.15 m Antenna, Pattern, X-pol, Azimuth LHCP

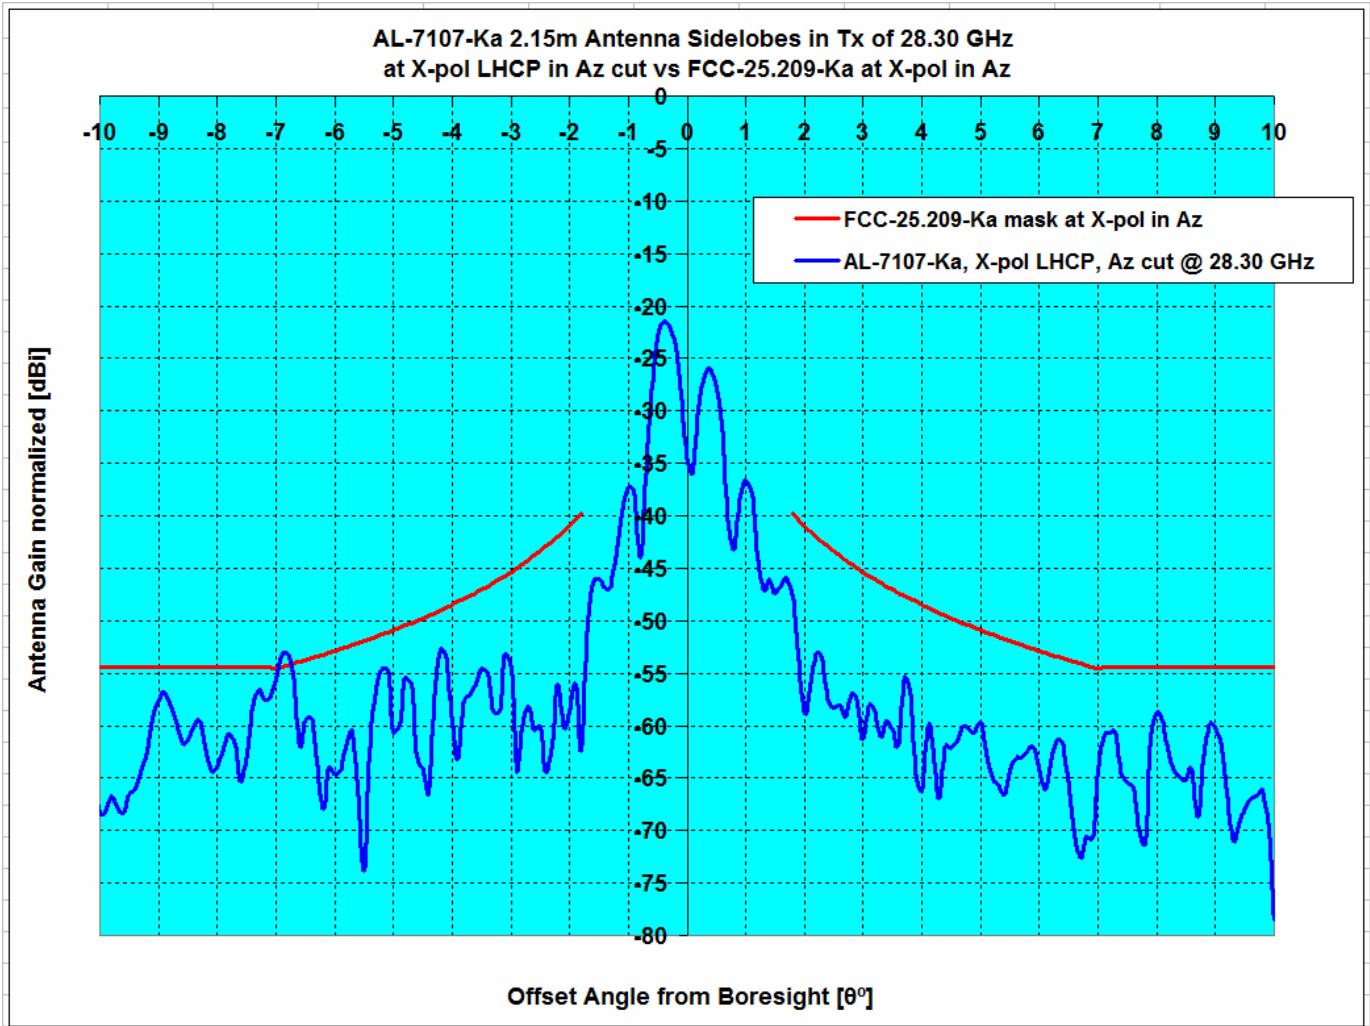

Description	Plane, CirP	Frequency	Ant. Gain	Peak Excursions dB		Over Mask %	
				1.8°≤θ≤7°	1.8°≤θ≤9.2°	1.8°≤θ≤7°	1.8°≤θ≤9.2°
Pattern Rule vs Antenna System	Type	GHz	dBi				
FCC-25.209-Ka, X-pol Az, vs AL-7107-Ka	Az , LHCP	28.30	52.43	1.06	1.06	1.89%	1.20%

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Azimuth RHCP, -180° to +180° @ 1.0° increment

28.30 GHz Antenna Pattern in Co-pol Az RHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
-179.0	-23.3	0.0	-23.3
-178.0	-25.3	0.0	-25.3
-177.0	-18.7	0.0	-18.7
-176.0	-27.6	0.0	-27.6
-175.0	-18.5	0.0	-18.5
-174.0	-27.5	0.0	-27.5
-173.0	-21.8	0.0	-21.8
-172.0	-24.4	0.0	-24.4
-171.0	-18.7	0.0	-18.7
-170.0	-27.6	0.0	-27.6
-169.0	-25.5	0.0	-25.5
-168.0	-19.5	0.0	-19.5
-167.0	-20.6	0.0	-20.6
-166.0	-20.1	0.0	-20.1
-165.0	-25.7	0.0	-25.7
-164.0	-27.6	0.0	-27.6
-163.0	-26.7	0.0	-26.7
-162.0	-22.4	0.0	-22.4
-161.0	-22.7	0.0	-22.7
-160.0	-22.7	0.0	-22.7
-159.0	-25.5	0.0	-25.5
-158.0	-22.9	0.0	-22.9
-157.0	-27.6	0.0	-27.6
-156.0	-23.9	0.0	-23.9
-155.0	-16.8	0.0	-16.8
-154.0	-23.9	0.0	-23.9
-153.0	-26.7	0.0	-26.7
-152.0	-18.6	0.0	-18.6
-151.0	-14.8	0.0	-14.8
-150.0	-13.9	0.0	-13.9
-149.0	-15.8	0.0	-15.8
-148.0	-27.6	0.0	-27.6
-147.0	-18.7	0.0	-18.7
-146.0	-17.5	0.0	-17.5
-145.0	-21.6	0.0	-21.6
-144.0	-17.3	0.0	-17.3
-143.0	-18.9	0.0	-18.9
-142.0	-16.5	0.0	-16.5
-141.0	-12.3	0.0	-12.3
-140.0	-15.7	0.0	-15.7
-139.0	-22.2	0.0	-22.2
-138.0	-24.1	0.0	-24.1
-137.0	-17.5	0.0	-17.5
-136.0	-20.8	0.0	-20.8
-135.0	-20.9	0.0	-20.9
-134.0	-25.3	0.0	-25.3
-133.0	-25.5	0.0	-25.5
-132.0	-27.6	0.0	-27.6
-131.0	-27.6	0.0	-27.6
-130.0	-23.4	0.0	-23.4
-129.0	-19.0	0.0	-19.0
-128.0	-27.6	0.0	-27.6
-127.0	-23.5	0.0	-23.5
-126.0	-18.5	0.0	-18.5
-125.0	-27.6	0.0	-27.6
-124.0	-18.9	0.0	-18.9
-123.0	-27.0	0.0	-27.0
-122.0	-16.5	0.0	-16.5
-121.0	-20.3	0.0	-20.3
-120.0	-23.3	0.0	-23.3

28.30 GHz Antenna Pattern in Co-pol Az RHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
0.0	52.4		
1.0	17.1		
2.0	10.6	21.5	-10.9
3.0	0.4	17.1	-16.6
4.0	-7.9	13.9	-21.8
5.0	-1.2	11.5	-12.7
6.0	-10.1	9.5	-19.6
7.0	0.0	7.9	-7.9
8.0	-2.9	8.0	-10.9
9.0	-10.0	8.0	-18.0
10.0	-3.5	7.0	-10.5
11.0	-1.5	6.0	-7.5
12.0	-3.5	5.0	-8.5
13.0	-5.5	4.2	-9.7
14.0	-13.6	3.3	-17.0
15.0	-8.0	2.6	-10.6
16.0	-16.4	1.9	-18.3
17.0	-26.4	1.2	-27.6
18.0	-14.3	0.6	-14.9
19.0	-8.3	0.0	-8.3
20.0	-16.9	-0.5	-16.4
21.0	-18.1	-1.1	-17.1
22.0	-5.9	-1.6	-4.3
23.0	-8.0	-2.0	-6.0
24.0	-10.2	-2.5	-7.7
25.0	-14.9	-2.9	-12.0
26.0	-8.9	-3.4	-5.5
27.0	-7.3	-3.8	-3.5
28.0	-8.6	-4.2	-4.4
29.0	-7.5	-4.6	-2.9
30.0	-8.4	-4.9	-3.4
31.0	-6.4	-5.3	-1.1
32.0	-5.4	-5.6	0.2
33.0	-3.9	-6.0	2.1
34.0	-5.5	-6.3	0.8
35.0	-8.1	-6.6	-1.5
36.0	-4.5	-6.9	2.4
37.0	-7.6	-7.2	-0.4
38.0	-5.0	-7.5	2.5
39.0	-7.1	-7.8	0.7
40.0	-8.0	-8.1	0.1
41.0	-10.5	-8.3	-2.2
42.0	-9.4	-8.6	-0.9
43.0	-11.2	-8.8	-2.3
44.0	-10.3	-9.1	-1.2
45.0	-8.9	-9.3	0.4
46.0	-6.7	-9.6	2.8
47.0	-9.2	-9.8	0.6
48.0	-15.2	-10.0	-5.1
49.0	-13.9	-10.0	-3.9
50.0	-12.6	-10.0	-2.6
51.0	-10.9	-10.0	-0.9
52.0	-10.3	-10.0	-0.3
53.0	-13.6	-10.0	-3.6
54.0	-14.2	-10.0	-4.2
55.0	-22.1	-10.0	-12.1
56.0	-17.3	-10.0	-7.3
57.0	-15.4	-10.0	-5.4
58.0	-15.6	-10.0	-5.6
59.0	-19.4	-10.0	-9.4

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Azimuth RHCP, -180° to +180° @ 1.0° increment

-119.0	-20.2	0.0	-20.2
-118.0	-22.4	0.0	-22.4
-117.0	-21.3	0.0	-21.3
-116.0	-22.3	0.0	-22.3
-115.0	-20.2	0.0	-20.2
-114.0	-19.3	0.0	-19.3
-113.0	-27.3	0.0	-27.3
-112.0	-25.8	0.0	-25.8
-111.0	-16.7	0.0	-16.7
-110.0	-19.2	0.0	-19.2
-109.0	-18.1	0.0	-18.1
-108.0	-14.4	0.0	-14.4
-107.0	-22.5	0.0	-22.5
-106.0	-26.4	0.0	-26.4
-105.0	-22.3	0.0	-22.3
-104.0	-22.2	0.0	-22.2
-103.0	-23.8	0.0	-23.8
-102.0	-22.4	0.0	-22.4
-101.0	-27.3	0.0	-27.3
-100.0	-16.1	0.0	-16.1
-99.0	-15.0	0.0	-15.0
-98.0	-17.8	0.0	-17.8
-97.0	-19.5	0.0	-19.5
-96.0	-11.1	0.0	-11.1
-95.0	-14.1	0.0	-14.1
-94.0	-17.9	0.0	-17.9
-93.0	-19.2	0.0	-19.2
-92.0	-15.9	0.0	-15.9
-91.0	-14.9	0.0	-14.9
-90.0	-14.9	0.0	-14.9
-89.0	-15.3	0.0	-15.3
-88.0	-20.4	0.0	-20.4
-87.0	-13.3	0.0	-13.3
-86.0	-14.4	0.0	-14.4
-85.0	-14.4	-10.0	-4.4
-84.0	-15.1	-10.0	-5.1
-83.0	-14.6	-10.0	-4.6
-82.0	-13.1	-10.0	-3.1
-81.0	-16.5	-10.0	-6.5
-80.0	-10.3	-10.0	-0.3
-79.0	-10.0	-10.0	0.0
-78.0	-9.9	-10.0	0.1
-77.0	-12.9	-10.0	-2.9
-76.0	-12.9	-10.0	-2.9
-75.0	-11.4	-10.0	-1.4
-74.0	-11.7	-10.0	-1.7
-73.0	-11.0	-10.0	-1.0
-72.0	-8.9	-10.0	1.1
-71.0	-8.3	-10.0	1.7
-70.0	-6.4	-10.0	3.6
-69.0	-6.4	-10.0	3.6
-68.0	-4.3	-10.0	5.7
-67.0	-6.6	-10.0	3.4
-66.0	-6.1	-10.0	3.9
-65.0	-7.0	-10.0	3.0
-64.0	-7.3	-10.0	2.7
-63.0	-8.4	-10.0	1.6
-62.0	-9.1	-10.0	0.9
-61.0	-9.8	-10.0	0.2
-60.0	-8.9	-10.0	1.1
-59.0	-10.2	-10.0	-0.2
-58.0	-11.1	-10.0	-1.1
-57.0	-14.7	-10.0	-4.7

60.0	-17.8	-10.0	-7.8
61.0	-26.4	-10.0	-16.4
62.0	-20.4	-10.0	-10.4
63.0	-12.8	-10.0	-2.8
64.0	-19.5	-10.0	-9.5
65.0	-12.2	-10.0	-2.2
66.0	-20.0	-10.0	-10.0
67.0	-18.8	-10.0	-8.8
68.0	-25.8	-10.0	-15.8
69.0	-16.0	-10.0	-6.0
70.0	-24.6	-10.0	-14.6
71.0	-25.0	-10.0	-15.0
72.0	-23.0	-10.0	-13.0
73.0	-15.9	-10.0	-5.9
74.0	-20.0	-10.0	-10.0
75.0	-19.5	-10.0	-9.5
76.0	-21.6	-10.0	-11.6
77.0	-20.9	-10.0	-10.9
78.0	-27.6	-10.0	-17.6
79.0	-23.2	-10.0	-13.2
80.0	-27.0	-10.0	-17.0
81.0	-26.4	-10.0	-16.4
82.0	-22.3	-10.0	-12.3
83.0	-27.5	-10.0	-17.5
84.0	-22.5	-10.0	-12.5
85.0	-27.6	-10.0	-17.6
86.0	-18.4	0.0	-18.4
87.0	-25.3	0.0	-25.3
88.0	-23.9	0.0	-23.9
89.0	-27.6	0.0	-27.6
90.0	-23.1	0.0	-23.1
91.0	-22.6	0.0	-22.6
92.0	-25.5	0.0	-25.5
93.0	-27.6	0.0	-27.6
94.0	-27.6	0.0	-27.6
95.0	-21.9	0.0	-21.9
96.0	-20.2	0.0	-20.2
97.0	-21.6	0.0	-21.6
98.0	-19.0	0.0	-19.0
99.0	-23.9	0.0	-23.9
100.0	-27.2	0.0	-27.2
101.0	-22.1	0.0	-22.1
102.0	-18.8	0.0	-18.8
103.0	-23.2	0.0	-23.2
104.0	-27.6	0.0	-27.6
105.0	-27.6	0.0	-27.6
106.0	-27.6	0.0	-27.6
107.0	-21.8	0.0	-21.8
108.0	-21.0	0.0	-21.0
109.0	-23.5	0.0	-23.5
110.0	-27.6	0.0	-27.6
111.0	-20.2	0.0	-20.2
112.0	-27.6	0.0	-27.6
113.0	-27.6	0.0	-27.6
114.0	-21.8	0.0	-21.8
115.0	-21.3	0.0	-21.3
116.0	-24.5	0.0	-24.5
117.0	-25.8	0.0	-25.8
118.0	-23.8	0.0	-23.8
119.0	-22.4	0.0	-22.4
120.0	-23.4	0.0	-23.4
121.0	-20.5	0.0	-20.5
122.0	-26.9	0.0	-26.9

Orbit Communication Systems Ltd.
 AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
 Co-pol Azimuth RHCP, -180° to +180° @ 1.0° increment

-56.0	-15.3	-10.0	-5.3
-55.0	-14.7	-10.0	-4.7
-54.0	-16.3	-10.0	-6.3
-53.0	-14.3	-10.0	-4.3
-52.0	-18.2	-10.0	-8.2
-51.0	-15.7	-10.0	-5.7
-50.0	-18.2	-10.0	-8.2
-49.0	-14.3	-10.0	-4.3
-48.0	-14.6	-10.0	-4.6
-47.0	-20.8	-9.8	-11.0
-46.0	-17.9	-9.6	-8.3
-45.0	-19.1	-9.3	-9.8
-44.0	-16.5	-9.1	-7.5
-43.0	-17.2	-8.8	-8.3
-42.0	-16.8	-8.6	-8.2
-41.0	-10.7	-8.3	-2.4
-40.0	-27.6	-8.1	-19.5
-39.0	-17.2	-7.8	-9.4
-38.0	-16.3	-7.5	-8.8
-37.0	-20.2	-7.2	-13.0
-36.0	-15.6	-6.9	-8.7
-35.0	-22.8	-6.6	-16.2
-34.0	-18.4	-6.3	-12.1
-33.0	-25.3	-6.0	-19.3
-32.0	-16.2	-5.6	-10.5
-31.0	-16.0	-5.3	-10.8
-30.0	-20.2	-4.9	-15.2
-29.0	-20.2	-4.6	-15.7
-28.0	-19.2	-4.2	-15.1
-27.0	-21.7	-3.8	-17.9
-26.0	-11.8	-3.4	-8.4
-25.0	-18.8	-2.9	-15.9
-24.0	-17.6	-2.5	-15.1
-23.0	-19.8	-2.0	-17.7
-22.0	-17.5	-1.6	-15.9
-21.0	-22.7	-1.1	-21.6
-20.0	-24.2	-0.5	-23.7
-19.0	-17.9	0.0	-17.9
-18.0	-17.0	0.6	-17.6
-17.0	-14.6	1.2	-15.8
-16.0	-24.2	1.9	-26.1
-15.0	-27.6	2.6	-30.2
-14.0	-10.3	3.3	-13.6
-13.0	-14.8	4.2	-19.0
-12.0	-7.3	5.0	-12.3
-11.0	-10.9	6.0	-16.9
-10.0	-7.9	7.0	-14.9
-9.0	-17.0	8.0	-25.0
-8.0	-11.4	8.0	-19.4
-7.0	-0.8	7.9	-8.7
-6.0	-1.1	9.5	-10.7
-5.0	5.0	11.5	-6.6
-4.0	9.5	13.9	-4.5
-3.0	4.9	17.1	-12.1
-2.0	12.5	21.5	-9.0
-1.0	20.8		
0.0	52.4		

123.0	-21.4	0.0	-21.4
124.0	-27.6	0.0	-27.6
125.0	-21.1	0.0	-21.1
126.0	-27.6	0.0	-27.6
127.0	-27.6	0.0	-27.6
128.0	-27.6	0.0	-27.6
129.0	-23.1	0.0	-23.1
130.0	-23.0	0.0	-23.0
131.0	-19.2	0.0	-19.2
132.0	-27.6	0.0	-27.6
133.0	-25.8	0.0	-25.8
134.0	-26.2	0.0	-26.2
135.0	-22.5	0.0	-22.5
136.0	-22.1	0.0	-22.1
137.0	-25.2	0.0	-25.2
138.0	-22.2	0.0	-22.2
139.0	-27.6	0.0	-27.6
140.0	-24.7	0.0	-24.7
141.0	-24.0	0.0	-24.0
142.0	-27.2	0.0	-27.2
143.0	-26.3	0.0	-26.3
144.0	-23.6	0.0	-23.6
145.0	-26.1	0.0	-26.1
146.0	-27.6	0.0	-27.6
147.0	-27.6	0.0	-27.6
148.0	-26.3	0.0	-26.3
149.0	-23.5	0.0	-23.5
150.0	-25.5	0.0	-25.5
151.0	-27.6	0.0	-27.6
152.0	-27.6	0.0	-27.6
153.0	-22.1	0.0	-22.1
154.0	-27.6	0.0	-27.6
155.0	-27.6	0.0	-27.6
156.0	-26.4	0.0	-26.4
157.0	-27.6	0.0	-27.6
158.0	-27.6	0.0	-27.6
159.0	-23.9	0.0	-23.9
160.0	-22.1	0.0	-22.1
161.0	-19.4	0.0	-19.4
162.0	-18.4	0.0	-18.4
163.0	-25.6	0.0	-25.6
164.0	-20.1	0.0	-20.1
165.0	-23.4	0.0	-23.4
166.0	-21.0	0.0	-21.0
167.0	-27.6	0.0	-27.6
168.0	-22.7	0.0	-22.7
169.0	-23.9	0.0	-23.9
170.0	-18.5	0.0	-18.5
171.0	-22.5	0.0	-22.5
172.0	-23.6	0.0	-23.6
173.0	-22.5	0.0	-22.5
174.0	-27.6	0.0	-27.6
175.0	-27.6	0.0	-27.6
176.0	-27.2	0.0	-27.2
177.0	-27.2	0.0	-27.2
178.0	-23.6	0.0	-23.6
179.0	-23.9	0.0	-23.9

Orbit Communication Systems Ltd.

AL AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Azimuth RHCP, -10° to +10° @ 0.1° increment

28.30 GHz Antenna Pattern in Co-pol Az RHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
-10.0	-7.6	7.0	-14.6
-9.9	-5.8	7.1	-12.9
-9.8	-5.4	7.2	-12.6
-9.7	-5.6	7.3	-12.9
-9.6	-7.9	7.4	-15.3
-9.5	-7.5	7.6	-15.0
-9.4	-4.7	7.7	-12.4
-9.3	-3.2	7.8	-11.0
-9.2	-3.7	8.0	-11.7
-9.1	-11.3	8.0	-19.3
-9.0	-7.9	8.0	-15.9
-8.9	-4.8	8.0	-12.8
-8.8	-4.8	8.0	-12.8
-8.7	-7.1	8.0	-15.1
-8.6	-7.1	8.0	-15.1
-8.5	-3.9	8.0	-11.9
-8.4	-3.3	8.0	-11.3
-8.3	-3.7	8.0	-11.7
-8.2	-3.1	8.0	-11.1
-8.1	-4.1	8.0	-12.1
-8.0	-4.5	8.0	-12.5
-7.9	-6.3	8.0	-14.3
-7.8	-6.2	8.0	-14.2
-7.7	-4.6	8.0	-12.6
-7.6	-3.4	8.0	-11.4
-7.5	-6.4	8.0	-14.4
-7.4	-9.0	8.0	-17.0
-7.3	-4.0	8.0	-12.0
-7.2	-9.0	8.0	-17.0
-7.1	-5.1	8.0	-13.1
-7.0	2.0	7.9	-5.9
-6.9	4.7	8.0	-3.4
-6.8	5.7	8.2	-2.5
-6.7	6.2	8.3	-2.1
-6.6	5.1	8.5	-3.4
-6.5	3.3	8.7	-5.4
-6.4	-0.5	8.8	-9.4
-6.3	-3.3	9.0	-12.3
-6.2	-0.9	9.2	-10.1
-6.1	-1.0	9.4	-10.4
-6.0	-4.3	9.5	-13.8
-5.9	-3.7	9.7	-13.5
-5.8	-1.3	9.9	-11.2
-5.7	-1.0	10.1	-11.1
-5.6	-5.5	10.3	-15.8
-5.5	-7.3	10.5	-17.8
-5.4	-1.1	10.7	-11.8
-5.3	-1.2	10.9	-12.1
-5.2	-4.1	11.1	-15.2
-5.1	2.4	11.3	-8.9
-5.0	3.7	11.5	-7.8
-4.9	1.0	11.7	-10.8
-4.8	-5.1	12.0	-17.1
-4.7	-1.6	12.2	-13.8
-4.6	4.5	12.4	-8.0
-4.5	6.5	12.7	-6.2
-4.4	4.6	12.9	-8.3
-4.3	-3.9	13.2	-17.1
-4.2	-6.0	13.4	-19.4
-4.1	5.3	13.7	-8.4

28.30 GHz Antenna Pattern in Co-pol Az RHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
0.0	52.5		
0.1	51.7		
0.2	49.0		
0.3	44.4		
0.4	38.4		
0.5	32.9		
0.6	27.8		
0.7	28.5		
0.8	29.2		
0.9	25.2		
1.0	9.5		
1.1	19.5		
1.2	19.3		
1.3	9.4		
1.4	9.2		
1.5	7.1	24.6	-17.5
1.6	12.4	23.9	-11.5
1.7	16.2	23.2	-7.0
1.8	15.0	22.6	-7.6
1.9	10.9	22.0	-11.1
2.0	10.9	21.5	-10.6
2.1	9.4	20.9	-11.6
2.2	2.6	20.4	-17.9
2.3	6.0	20.0	-13.9
2.4	7.7	19.5	-11.8
2.5	7.9	19.1	-11.1
2.6	6.9	18.6	-11.7
2.7	1.3	18.2	-16.9
2.8	-2.8	17.8	-20.6
2.9	-0.8	17.4	-18.2
3.0	2.0	17.1	-15.0
3.1	5.6	16.7	-11.1
3.2	6.0	16.4	-10.4
3.3	2.8	16.0	-13.3
3.4	-0.4	15.7	-16.1
3.5	-7.4	15.4	-22.8
3.6	0.9	15.1	-14.2
3.7	4.8	14.8	-10.0
3.8	4.0	14.5	-10.5
3.9	-5.4	14.2	-19.6
4.0	-7.8	13.9	-21.8
4.1	-3.9	13.7	-17.6
4.2	-5.9	13.4	-19.4
4.3	1.3	13.2	-11.9
4.4	3.7	12.9	-9.2
4.5	4.8	12.7	-7.9
4.6	5.3	12.4	-7.1
4.7	2.7	12.2	-9.5
4.8	-6.1	12.0	-18.1
4.9	-5.5	11.7	-17.2
5.0	-4.7	11.5	-16.3
5.1	-5.9	11.3	-17.2
5.2	-1.6	11.1	-12.7
5.3	-2.5	10.9	-13.4
5.4	-9.1	10.7	-19.8
5.5	-4.3	10.5	-14.8
5.6	0.9	10.3	-9.4
5.7	1.5	10.1	-8.6
5.8	0.8	9.9	-9.1
5.9	-2.0	9.7	-11.7

Orbit Communication Systems Ltd.

AL AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Azimuth RHCP, -10° to +10° @ 0.1° increment

-4.0	10.4	13.9	-3.5
-3.9	11.5	14.2	-2.7
-3.8	9.6	14.5	-4.9
-3.7	0.5	14.8	-14.3
-3.6	7.7	15.1	-7.4
-3.5	9.9	15.4	-5.5
-3.4	7.7	15.7	-8.0
-3.3	2.3	16.0	-13.7
-3.2	7.0	16.4	-9.4
-3.1	7.9	16.7	-8.8
-3.0	6.8	17.1	-10.3
-2.9	9.1	17.4	-8.3
-2.8	10.4	17.8	-7.4
-2.7	8.1	18.2	-10.2
-2.6	-2.0	18.6	-20.6
-2.5	-4.2	19.1	-23.3
-2.4	-2.6	19.5	-22.1
-2.3	4.6	20.0	-15.3
-2.2	5.7	20.4	-14.8
-2.1	8.7	20.9	-12.2
-2.0	12.3	21.5	-9.1
-1.9	12.1	22.0	-9.9
-1.8	6.3	22.6	-16.3
-1.7	9.8	23.2	-13.4
-1.6	10.3	23.9	-13.6
-1.5	4.3	24.6	-20.3
-1.4	15.9		
-1.3	18.2		
-1.2	18.6		
-1.1	19.3		
-1.0	18.1		
-0.9	17.6		
-0.8	21.2		
-0.7	20.3		
-0.6	21.9		
-0.5	33.9		
-0.4	41.4		
-0.3	47.0		
-0.2	50.5		
-0.1	52.2		
0.0	52.5		

6.0	-9.2	9.5	-18.7
6.1	-3.5	9.4	-12.9
6.2	0.9	9.2	-8.3
6.3	1.4	9.0	-7.6
6.4	1.9	8.8	-7.0
6.5	0.8	8.7	-7.8
6.6	-0.7	8.5	-9.2
6.7	-0.8	8.3	-9.1
6.8	0.1	8.2	-8.1
6.9	0.5	8.0	-7.5
7.0	-0.4	7.9	-8.3
7.1	-3.0	8.0	-11.0
7.2	-13.3	8.0	-21.3
7.3	-8.3	8.0	-16.3
7.4	-4.0	8.0	-12.0
7.5	-4.6	8.0	-12.6
7.6	-6.5	8.0	-14.5
7.7	-4.5	8.0	-12.5
7.8	-2.2	8.0	-10.2
7.9	-1.5	8.0	-9.5
8.0	-1.8	8.0	-9.8
8.1	-3.8	8.0	-11.8
8.2	-11.1	8.0	-19.1
8.3	-7.2	8.0	-15.2
8.4	-4.4	8.0	-12.4
8.5	-4.2	8.0	-12.2
8.6	-5.0	8.0	-13.0
8.7	-5.0	8.0	-13.0
8.8	-6.4	8.0	-14.4
8.9	-7.9	8.0	-15.9
9.0	-9.1	8.0	-17.1
9.1	-9.8	8.0	-17.8
9.2	-10.7	8.0	-18.7
9.3	-17.4	7.8	-25.2
9.4	-14.6	7.7	-22.3
9.5	-6.6	7.6	-14.2
9.6	-5.1	7.4	-12.6
9.7	-4.8	7.3	-12.1
9.8	-5.0	7.2	-12.2
9.9	-5.4	7.1	-12.5
10.0	-5.8	7.0	-12.8

Orbit Communication Systems Ltd.
 AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
 Co-pol Elevation RHCP, -30° to +30° @ 0.5° increment

28.30 GHz Antenna Pattern in Co-pol EI RHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
-30.0	-8.9	-4.9	-4.0
-29.5	-8.2	-4.7	-3.5
-29.0	-11.1	-4.6	-6.6
-28.5	-9.4	-4.4	-5.1
-28.0	-10.5	-4.2	-6.4
-27.5	-11.4	-4.0	-7.4
-27.0	-14.6	-3.8	-10.8
-26.5	-11.7	-3.6	-8.2
-26.0	-13.1	-3.4	-9.7
-25.5	-11.1	-3.2	-7.9
-25.0	-7.1	-2.9	-4.1
-24.5	-6.9	-2.7	-4.2
-24.0	-6.2	-2.5	-3.7
-23.5	-16.4	-2.3	-14.1
-23.0	-19.0	-2.0	-17.0
-22.5	-9.0	-1.8	-7.2
-22.0	-5.7	-1.6	-4.1
-21.5	-5.0	-1.3	-3.7
-21.0	-13.8	-1.1	-12.7
-20.5	-5.7	-0.8	-4.9
-20.0	-6.0	-0.5	-5.5
-19.5	-1.6	-0.3	-1.3
-19.0	-1.6	0.0	-1.6
-18.5	-2.8	0.3	-3.1
-18.0	-14.4	0.6	-15.0
-17.5	-23.5	0.9	-24.4
-17.0	-15.1	1.2	-16.4
-16.5	-14.3	1.6	-15.9
-16.0	-18.3	1.9	-20.2
-15.5	-13.5	2.2	-15.8
-15.0	-9.1	2.6	-11.7
-14.5	-17.0	3.0	-19.9
-14.0	-2.1	3.3	-5.4
-13.5	-6.7	3.7	-10.5
-13.0	-9.7	4.2	-13.9
-12.5	-11.8	4.6	-16.4
-12.0	-6.5	5.0	-11.5
-11.5	-6.0	5.5	-11.5
-11.0	-13.0	6.0	-19.0
-10.5	-10.3	6.5	-16.8
-10.0	-6.5	7.0	-13.5
-9.5	-6.6	7.6	-14.2
-9.0	-2.8	8.1	-10.9
-8.5	-8.5	8.8	-17.2
-8.0	-2.4	9.4	-11.8
-7.5	-10.0	10.1	-20.2
-7.0	-2.0	10.9	-12.9
-6.5	-5.7	11.7	-17.4
-6.0	-1.1	12.5	-13.7
-5.5	-1.6	13.5	-15.1
-5.0	1.5	14.5	-13.1
-4.5	1.5	15.7	-14.2
-4.0	2.9	16.9	-14.0
-3.5	4.7	18.4	-13.7
-3.0	10.6		
-2.5	9.4		
-2.0	8.1		
-1.5	17.9		
-1.0	21.1		
-0.5	35.7		
0.0	52.4		

28.30 GHz Antenna Pattern in Co-pol EI RHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
0.0	52.4		
0.5	38.0		
1.0	16.8		
1.5	9.7		
2.0	5.4		
2.5	10.1		
3.0	7.5		
3.5	8.5	18.4	-9.9
4.0	13.0	16.9	-4.0
4.5	-1.0	15.7	-16.6
5.0	7.3	14.5	-7.2
5.5	-12.4	13.5	-25.9
6.0	-1.8	12.5	-14.4
6.5	0.9	11.7	-10.8
7.0	-1.8	10.9	-12.7
7.5	-12.0	10.1	-22.1
8.0	-14.6	9.4	-24.0
8.5	-1.5	8.8	-10.3
9.0	-2.8	8.1	-11.0
9.5	-9.7	7.6	-17.3
10.0	-0.2	7.0	-7.2
10.5	-4.7	6.5	-11.1
11.0	-8.1	6.0	-14.1
11.5	-13.2	5.5	-18.6
12.0	-13.1	5.0	-18.1
12.5	-5.9	4.6	-10.5
13.0	-4.3	4.2	-8.4
13.5	-8.9	3.7	-12.6
14.0	-17.5	3.3	-20.8
14.5	-12.7	3.0	-15.7
15.0	-12.0	2.6	-14.6
15.5	-15.1	2.2	-17.4
16.0	-18.5	1.9	-20.3
16.5	-16.7	1.6	-18.2
17.0	-15.4	1.2	-16.7
17.5	-22.5	0.9	-23.5
18.0	-13.5	0.6	-14.1
18.5	-17.0	0.3	-17.3
19.0	-12.1	0.0	-12.1
19.5	-12.8	-0.3	-12.6
20.0	-18.1	-0.5	-17.6
20.5	-12.0	-0.8	-11.2
21.0	-26.3	-1.1	-25.3
21.5	-26.9	-1.3	-25.6
22.0	-18.6	-1.6	-17.1
22.5	-12.9	-1.8	-11.1
23.0	-16.0	-2.0	-14.0
23.5	-15.0	-2.3	-12.7
24.0	-21.6	-2.5	-19.1
24.5	-19.9	-2.7	-17.2
25.0	-15.4	-2.9	-12.4
25.5	-19.2	-3.2	-16.1
26.0	-27.6	-3.4	-24.2
26.5	-19.8	-3.6	-16.2
27.0	-20.5	-3.8	-16.7
27.5	-15.7	-4.0	-11.7
28.0	-14.3	-4.2	-10.1
28.5	-17.6	-4.4	-13.2
29.0	-17.5	-4.6	-13.0
29.5	-15.3	-4.7	-10.6
30.0	-24.6	-4.9	-19.7

Orbit Communication Systems Ltd.
 AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
 Co-pol Elevation RHCP, -10° to +10° @ 0.1° increment

28.30 GHz Antenna Pattern in Co-pol EI RHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
-10.0	-13.2	7.0	-20.2
-9.9	-9.8	7.1	-16.9
-9.8	-7.0	7.2	-14.2
-9.7	-5.9	7.3	-13.2
-9.6	-5.0	7.4	-12.5
-9.5	-4.2	7.6	-11.8
-9.4	-4.6	7.7	-12.3
-9.3	-9.3	7.8	-17.1
-9.2	-12.8	7.9	-20.7
-9.1	-7.4	8.0	-15.4
-9.0	-3.0	8.1	-11.2
-8.9	-3.0	8.3	-11.3
-8.8	-5.9	8.4	-14.3
-8.7	-11.7	8.5	-20.2
-8.6	-8.2	8.6	-16.8
-8.5	-12.3	8.8	-21.1
-8.4	-17.1	8.9	-26.0
-8.3	-10.0	9.0	-19.1
-8.2	-4.8	9.2	-13.9
-8.1	-2.5	9.3	-11.8
-8.0	-3.1	9.4	-12.5
-7.9	-6.0	9.6	-15.6
-7.8	-15.5	9.7	-25.2
-7.7	-7.6	9.8	-17.5
-7.6	-5.6	10.0	-15.6
-7.5	-9.0	10.1	-19.2
-7.4	-17.5	10.3	-27.7
-7.3	-5.6	10.4	-16.0
-7.2	-1.2	10.6	-11.7
-7.1	0.8	10.7	-9.9
-7.0	0.0	10.9	-10.9
-6.9	-11.1	11.0	-22.1
-6.8	-1.7	11.2	-12.9
-6.7	1.8	11.3	-9.5
-6.6	-0.8	11.5	-12.4
-6.5	-7.3	11.7	-19.0
-6.4	-4.8	11.8	-16.6
-6.3	-3.0	12.0	-15.0
-6.2	-1.1	12.2	-13.2
-6.1	-0.5	12.4	-12.9
-6.0	-0.7	12.5	-13.2
-5.9	-0.5	12.7	-13.2
-5.8	0.8	12.9	-12.1
-5.7	-1.2	13.1	-14.3
-5.6	-2.5	13.3	-15.8
-5.5	-0.3	13.5	-13.8
-5.4	-2.6	13.7	-16.3
-5.3	-0.7	13.9	-14.6
-5.2	3.1	14.1	-11.0
-5.1	4.1	14.3	-10.2
-5.0	2.0	14.5	-12.5
-4.9	-1.1	14.7	-15.9
-4.8	-2.8	15.0	-17.7
-4.7	-0.2	15.2	-15.4
-4.6	0.9	15.4	-14.5
-4.5	1.2	15.7	-14.5
-4.4	1.3	15.9	-14.7
-4.3	2.6	16.2	-13.5
-4.2	4.7	16.4	-11.7
-4.1	4.7	16.7	-11.9

28.30 GHz Antenna Pattern in Co-pol EI RHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
0.0	52.5		
0.1	51.7		
0.2	49.0		
0.3	44.5		
0.4	40.8		
0.5	37.4		
0.6	32.0		
0.7	15.3		
0.8	21.5		
0.9	20.7		
1.0	19.8		
1.1	20.0		
1.2	15.5		
1.3	4.7		
1.4	10.1		
1.5	9.2		
1.6	14.0		
1.7	14.5		
1.8	12.1		
1.9	8.2		
2.0	6.5		
2.1	8.3		
2.2	10.1		
2.3	9.6		
2.4	10.0		
2.5	10.1		
2.6	6.9		
2.7	0.1		
2.8	-11.8		
2.9	1.8		
3.0	6.7		
3.1	6.2		
3.2	3.7		
3.3	6.9		
3.4	7.8		
3.5	9.6	18.4	-8.8
3.6	9.7	18.1	-8.4
3.7	8.8	17.8	-9.0
3.8	11.3	17.5	-6.2
3.9	13.5	17.2	-3.8
4.0	13.3	16.9	-3.7
4.1	12.3	16.7	-4.4
4.2	12.4	16.4	-4.0
4.3	10.5	16.2	-5.6
4.4	2.9	15.9	-13.0
4.5	-9.0	15.7	-24.7
4.6	1.6	15.4	-13.8
4.7	5.1	15.2	-10.1
4.8	6.9	15.0	-8.1
4.9	6.4	14.7	-8.4
5.0	4.9	14.5	-9.6
5.1	3.6	14.3	-10.7
5.2	0.9	14.1	-13.2
5.3	-7.8	13.9	-21.7
5.4	-10.3	13.7	-24.0
5.5	-3.6	13.5	-17.1
5.6	-3.0	13.3	-16.3
5.7	-5.1	13.1	-18.2
5.8	-5.2	12.9	-18.1
5.9	-2.3	12.7	-15.0

Orbit Communication Systems Ltd.
 AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
 Co-pol Elevation RHCP, -10° to +10° @ 0.1° increment

-4.0	2.3	16.9	-14.7
-3.9	-1.5	17.2	-18.8
-3.8	4.2	17.5	-13.3
-3.7	6.0	17.8	-11.8
-3.6	5.0	18.1	-13.1
-3.5	3.0	18.4	-15.4
-3.4	-1.3		
-3.3	-2.7		
-3.2	-3.1		
-3.1	-3.9		
-3.0	9.3		
-2.9	13.7		
-2.8	13.8		
-2.7	11.3		
-2.6	7.7		
-2.5	10.1		
-2.4	12.4		
-2.3	13.7		
-2.2	13.8		
-2.1	11.6		
-2.0	7.8		
-1.9	6.6		
-1.8	5.2		
-1.7	8.6		
-1.6	15.4		
-1.5	17.9		
-1.4	16.7		
-1.3	16.2		
-1.2	21.8		
-1.1	22.9		
-1.0	20.1		
-0.9	21.5		
-0.8	25.3		
-0.7	29.5		
-0.6	32.8		
-0.5	35.1		
-0.4	40.2		
-0.3	46.4		
-0.2	50.2		
-0.1	52.2		
0.0	52.5		

6.0	-2.3	12.5	-14.9
6.1	-3.4	12.4	-15.7
6.2	-1.9	12.2	-14.1
6.3	-1.2	12.0	-13.3
6.4	-0.6	11.8	-12.4
6.5	0.6	11.7	-11.1
6.6	2.8	11.5	-8.7
6.7	2.5	11.3	-8.8
6.8	0.4	11.2	-10.7
6.9	-3.1	11.0	-14.2
7.0	-13.4	10.9	-24.3
7.1	-4.7	10.7	-15.5
7.2	-2.2	10.6	-12.8
7.3	-4.6	10.4	-15.0
7.4	-9.1	10.3	-19.4
7.5	-3.8	10.1	-13.9
7.6	-2.8	10.0	-12.8
7.7	-7.1	9.8	-16.9
7.8	-3.9	9.7	-13.6
7.9	-3.4	9.6	-13.0
8.0	-5.0	9.4	-14.4
8.1	-5.6	9.3	-14.9
8.2	-4.2	9.2	-13.4
8.3	-3.0	9.0	-12.0
8.4	-2.7	8.9	-11.6
8.5	-8.0	8.8	-16.8
8.6	-8.9	8.6	-17.5
8.7	-11.7	8.5	-20.2
8.8	-27.5	8.4	-35.9
8.9	-14.1	8.3	-22.4
9.0	-7.5	8.1	-15.7
9.1	-2.2	8.0	-10.2
9.2	-1.2	7.9	-9.1
9.3	-2.0	7.8	-9.8
9.4	-4.1	7.7	-11.8
9.5	-3.5	7.6	-11.1
9.6	-0.4	7.4	-7.9
9.7	1.6	7.3	-5.7
9.8	2.0	7.2	-5.3
9.9	1.1	7.1	-6.0
10.0	-0.3	7.0	-7.3

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
X-pol Azimuth RHCP, -10° to +10° @ 0.1° increment

28.30 GHz Antenna Pattern in X-pol Az RHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
-10.0	-9.3	-2.0	-7.3
-9.9	-8.7	-2.0	-6.7
-9.8	-8.5	-2.0	-6.5
-9.7	-6.1	-2.0	-4.1
-9.6	-6.5	-2.0	-4.5
-9.5	-5.1	-2.0	-3.1
-9.4	-5.5	-2.0	-3.5
-9.3	-5.9	-2.0	-3.9
-9.2	-5.7	-2.0	-3.7
-9.1	-4.4	-2.0	-2.4
-9.0	-6.1	-2.0	-4.1
-8.9	-6.6	-2.0	-4.6
-8.8	-8.0	-2.0	-6.0
-8.7	-5.1	-2.0	-3.1
-8.6	-3.5	-2.0	-1.5
-8.5	-3.1	-2.0	-1.1
-8.4	-3.8	-2.0	-1.8
-8.3	-4.8	-2.0	-2.8
-8.2	-3.9	-2.0	-1.9
-8.1	-4.3	-2.0	-2.3
-8.0	-6.6	-2.0	-4.6
-7.9	-10.0	-2.0	-8.0
-7.8	-8.3	-2.0	-6.3
-7.7	-5.9	-2.0	-3.9
-7.6	-5.4	-2.0	-3.4
-7.5	-4.7	-2.0	-2.7
-7.4	-2.1	-2.0	-0.1
-7.3	-1.2	-2.0	0.8
-7.2	-1.8	-2.0	0.2
-7.1	-4.0	-2.0	-2.0
-7.0	-5.1	-2.1	-3.0
-6.9	-4.6	-2.0	-2.7
-6.8	-3.8	-1.8	-2.0
-6.7	-3.2	-1.7	-1.6
-6.6	-4.2	-1.5	-2.8
-6.5	-8.1	-1.3	-6.8
-6.4	-15.0	-1.2	-13.9
-6.3	-13.3	-1.0	-12.3
-6.2	-17.2	-0.8	-16.4
-6.1	-13.1	-0.6	-12.4
-6.0	-6.4	-0.5	-5.9
-5.9	-4.5	-0.3	-4.2
-5.8	-6.7	-0.1	-6.6
-5.7	-17.8	0.1	-17.9
-5.6	-7.0	0.3	-7.3
-5.5	-5.0	0.5	-5.5
-5.4	-6.0	0.7	-6.7
-5.3	-11.0	0.9	-11.8
-5.2	-4.7	1.1	-5.8
-5.1	-1.6	1.3	-3.0
-5.0	-1.7	1.5	-3.2
-4.9	-3.9	1.7	-5.6
-4.8	-23.8	2.0	-25.8
-4.7	-4.9	2.2	-7.1
-4.6	-2.5	2.4	-4.9
-4.5	-4.3	2.7	-7.0
-4.4	-2.8	2.9	-5.7
-4.3	-1.8	3.2	-4.9
-4.2	-6.6	3.4	-10.0
-4.1	-5.2	3.7	-8.8


28.30 GHz Antenna Pattern in X-pol Az RHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
0.0	27.6		
0.1	26.8		
0.2	28.6		
0.3	30.1		
0.4	29.6		
0.5	27.3		
0.6	21.9		
0.7	13.7		
0.8	4.1		
0.9	9.6		
1.0	14.8		
1.1	14.1		
1.2	7.5		
1.3	2.3		
1.4	7.3		
1.5	6.0		
1.6	2.0		
1.7	0.4		
1.8	-5.0	12.6	-17.6
1.9	-14.1	12.0	-26.1
2.0	-6.6	11.5	-18.1
2.1	-5.6	10.9	-16.5
2.2	-10.6	10.4	-21.1
2.3	-10.5	10.0	-20.4
2.4	-3.6	9.5	-13.1
2.5	-3.5	9.1	-12.5
2.6	-7.4	8.6	-16.0
2.7	-0.5	8.2	-8.8
2.8	0.7	7.8	-7.1
2.9	-0.6	7.4	-8.1
3.0	-7.4	7.1	-14.5
3.1	-10.7	6.7	-17.4
3.2	-10.9	6.4	-17.3
3.3	-16.5	6.0	-22.5
3.4	-8.2	5.7	-14.0
3.5	-10.0	5.4	-15.4
3.6	-11.0	5.1	-16.1
3.7	-9.5	4.8	-14.2
3.8	-12.1	4.5	-16.6
3.9	-9.7	4.2	-14.0
4.0	-6.8	3.9	-10.7
4.1	-7.3	3.7	-11.0
4.2	-10.3	3.4	-13.7
4.3	-10.7	3.2	-13.9
4.4	-11.3	2.9	-14.2
4.5	-9.8	2.7	-12.5
4.6	-5.9	2.4	-8.3
4.7	-7.0	2.2	-9.2
4.8	-11.5	2.0	-13.5
4.9	-14.1	1.7	-15.8
5.0	-12.7	1.5	-14.2
5.1	-10.1	1.3	-11.4
5.2	-11.4	1.1	-12.5
5.3	-12.0	0.9	-12.9
5.4	-6.1	0.7	-6.8
5.5	-5.3	0.5	-5.8
5.6	-6.1	0.3	-6.4
5.7	-11.5	0.1	-11.6
5.8	-12.9	-0.1	-12.8
5.9	-14.1	-0.3	-13.8


Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
X-pol Azimuth RHCP, -10° to +10° @ 0.1° increment

-4.0	1.1	3.9	-2.8
-3.9	1.1	4.2	-3.1
-3.8	-3.0	4.5	-7.6
-3.7	-3.1	4.8	-7.9
-3.6	-2.0	5.1	-7.1
-3.5	-5.7	5.4	-11.1
-3.4	-7.8	5.7	-13.5
-3.3	-5.6	6.0	-11.7
-3.2	-9.8	6.4	-16.2
-3.1	-9.4	6.7	-16.1
-3.0	-3.0	7.1	-10.0
-2.9	-2.9	7.4	-10.4
-2.8	-5.3	7.8	-13.1
-2.7	-5.9	8.2	-14.1
-2.6	-4.4	8.6	-13.0
-2.5	-7.0	9.1	-16.0
-2.4	-3.0	9.5	-12.5
-2.3	1.5	10.0	-8.5
-2.2	2.5	10.4	-8.0
-2.1	3.9	10.9	-7.0
-2.0	2.9	11.5	-8.6
-1.9	-8.9	12.0	-20.9
-1.8	4.3	12.6	-8.3
-1.7	8.1		
-1.6	8.9		
-1.5	9.8		
-1.4	9.9		
-1.3	5.5		
-1.2	8.0		
-1.1	13.9		
-1.0	14.8		
-0.9	14.7		
-0.8	19.2		
-0.7	24.2		
-0.6	26.9		
-0.5	28.3		
-0.4	27.5		
-0.3	22.3		
-0.2	21.8		
-0.1	26.9		
0.0	27.6		


6.0	-18.3	-0.5	-17.9
6.1	-17.1	-0.6	-16.4
6.2	-18.1	-0.8	-17.3
6.3	-13.9	-1.0	-12.9
6.4	-8.8	-1.2	-7.6
6.5	-8.2	-1.3	-6.9
6.6	-9.3	-1.5	-7.8
6.7	-8.8	-1.7	-7.1
6.8	-7.5	-1.8	-5.7
6.9	-6.2	-2.0	-4.2
7.0	-7.3	-2.1	-5.1
7.1	-9.2	-2.0	-7.2
7.2	-10.4	-2.0	-8.4
7.3	-12.8	-2.0	-10.8
7.4	-14.5	-2.0	-12.5
7.5	-11.3	-2.0	-9.3
7.6	-8.7	-2.0	-6.7
7.7	-6.6	-2.0	-4.6
7.8	-5.0	-2.0	-3.0
7.9	-5.3	-2.0	-3.3
8.0	-6.1	-2.0	-4.1
8.1	-6.8	-2.0	-4.8
8.2	-8.3	-2.0	-6.3
8.3	-11.3	-2.0	-9.3
8.4	-12.9	-2.0	-10.9
8.5	-12.3	-2.0	-10.3
8.6	-10.0	-2.0	-8.0
8.7	-6.7	-2.0	-4.7
8.8	-5.6	-2.0	-3.6
8.9	-9.5	-2.0	-7.5
9.0	-9.6	-2.0	-7.6
9.1	-8.7	-2.0	-6.7
9.2	-9.6	-2.0	-7.6
9.3	-10.6	-2.0	-8.6
9.4	-11.9	-2.0	-9.9
9.5	-14.4	-2.0	-12.4
9.6	-13.1	-2.0	-11.1
9.7	-8.2	-2.0	-6.2
9.8	-9.6	-2.0	-7.6
9.9	-22.1	-2.0	-20.1
10.0	-10.8	-2.0	-8.8

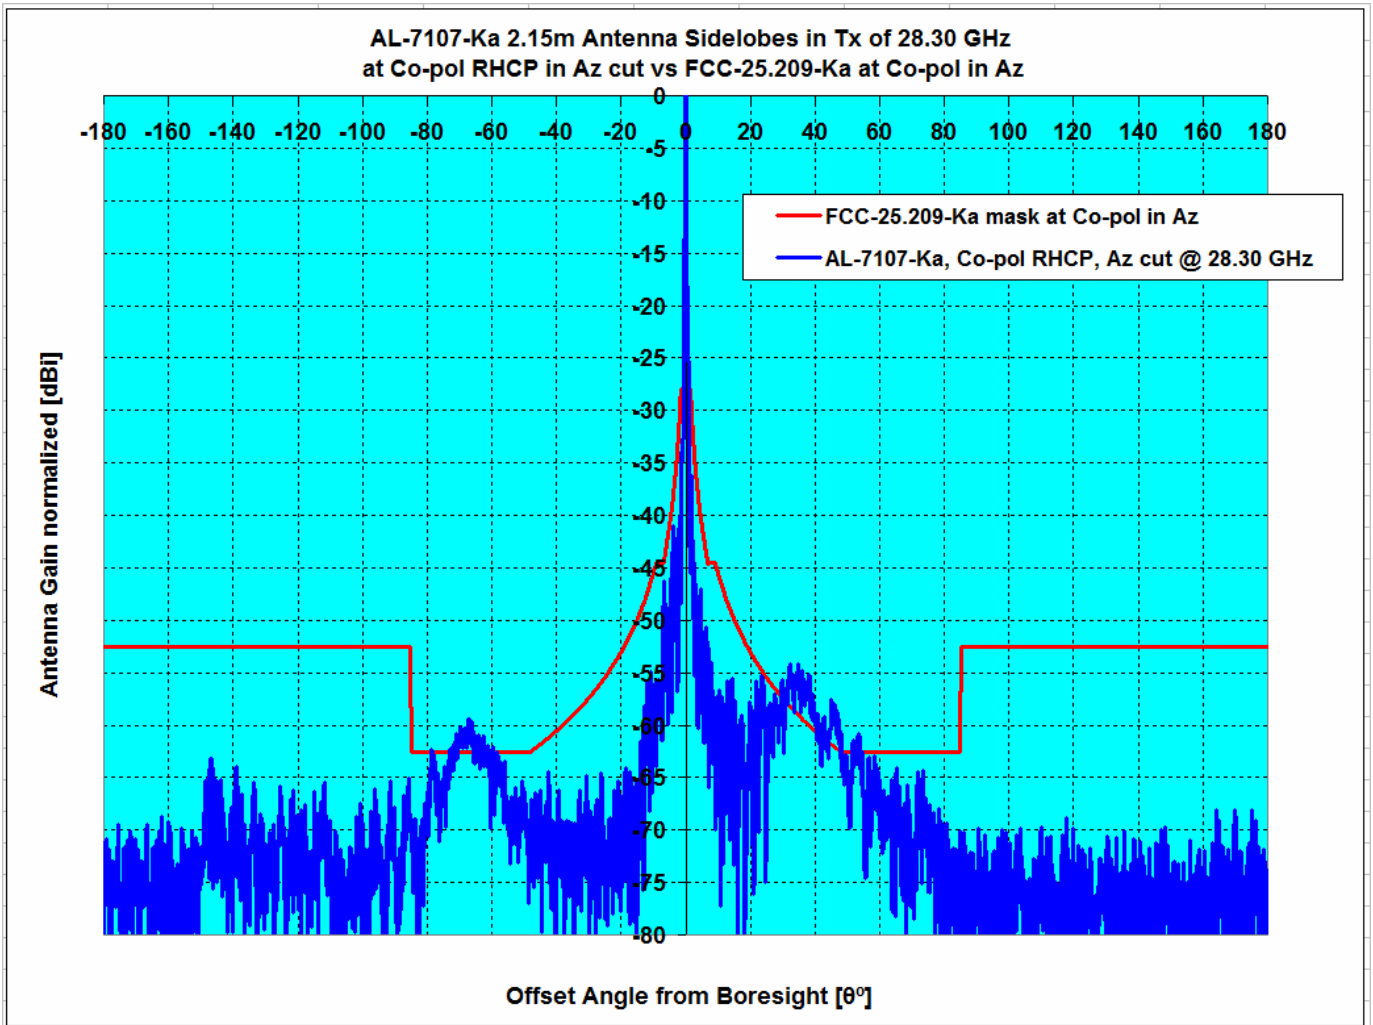


Description	Plane, CirP Type	Frequency GHz	Ant. Gain dBi	Peak Excursions dB		Over Mask %	
				1.5°≤θ≤7°	7°≤θ≤180°	1.5°≤θ≤7°	7°≤θ≤180°
FCC-25.209-Ka, Co-pol Az, vs AL-7107-Ka	Az , RHCP	28.30	52.51	-2.13	4.92	0.00%	7.22%

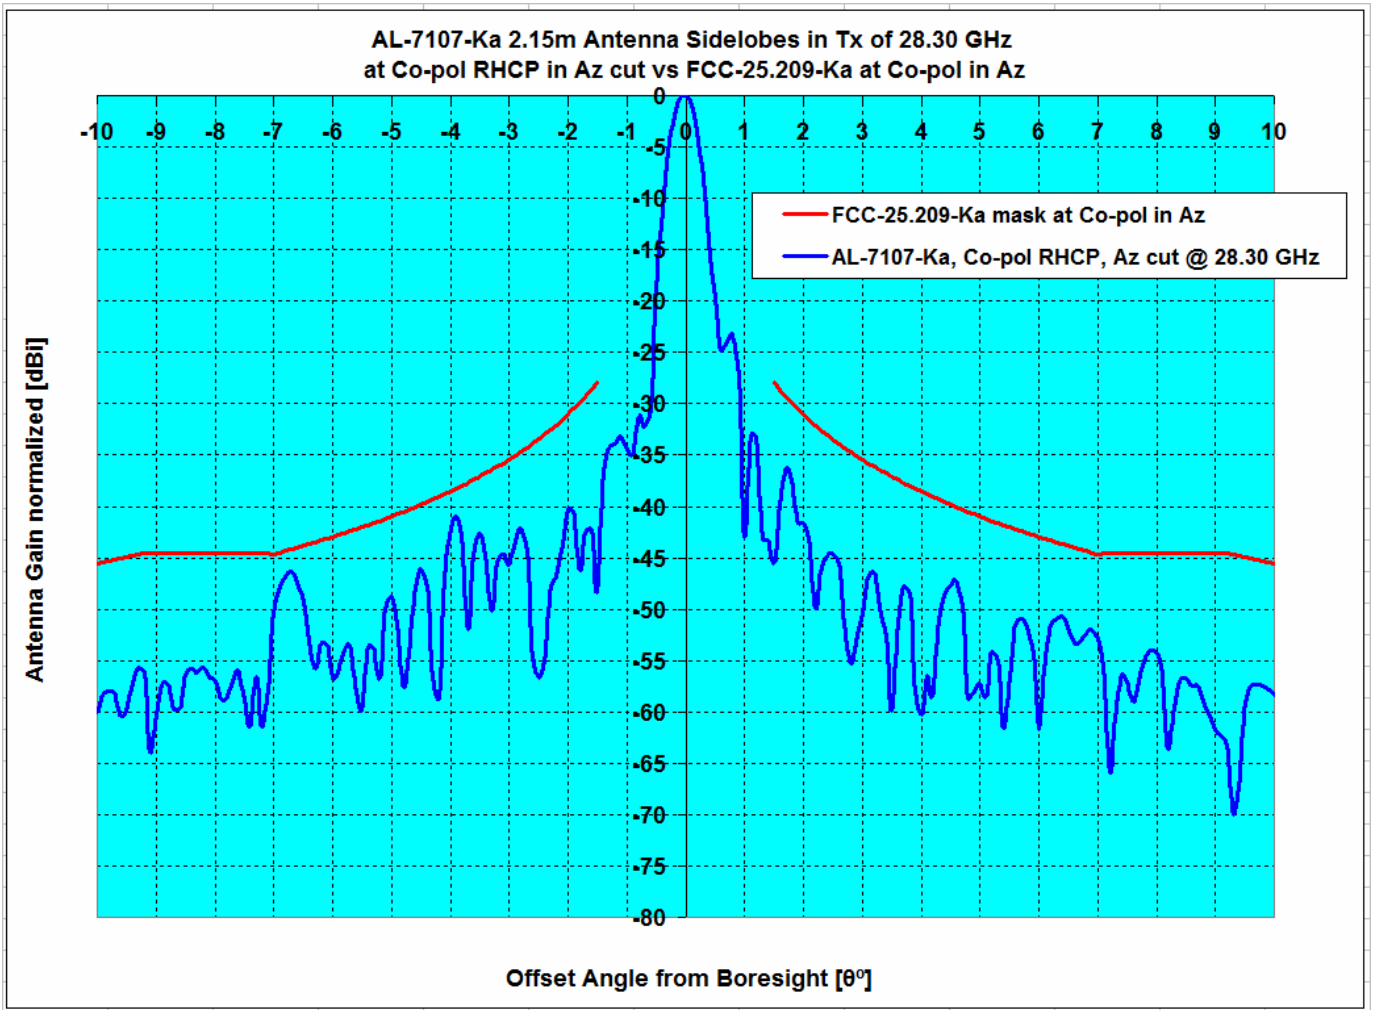

Description	Plane, CirP	Frequency	Ant. Gain	Peak Excursions dB		Over Mask %	
				1.5°≤θ≤7°	7°≤θ≤180°	1.5°≤θ≤7°	7°≤θ≤180°
FCC-25.209-Ka, Co-pol Az, vs AL-7107-Ka	Az , RHCP	28.30	52.51	-2.13	4.92	0.00%	7.22%

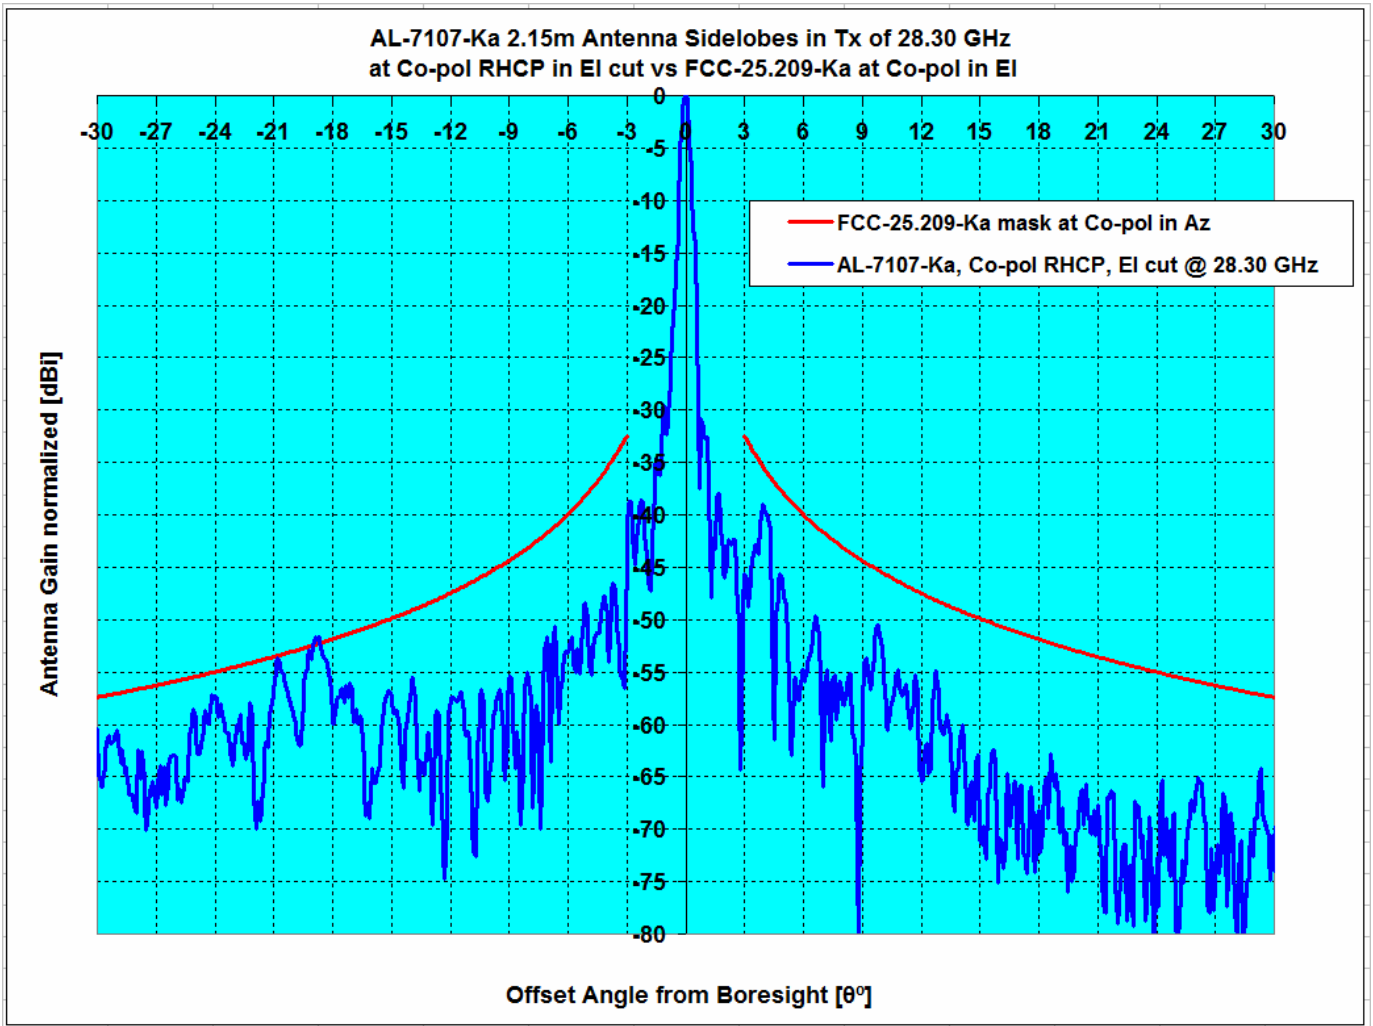


Description	Plane, CirP	Frequency	Ant. Gain	Peak Excursions dB		Over Mask %	
				3°≤θ≤7°	7°≤θ≤30°	3°≤θ≤7°	7°≤θ≤30°
Pattern Rule vs Antenna System	Type	GHz	dBi				
FCC-25.209-Ka, Co-pol EI, vs AL-7107-Ka	EI, RHCP	28.30	52.51	-3.67	0.77	0.00%	0.55%

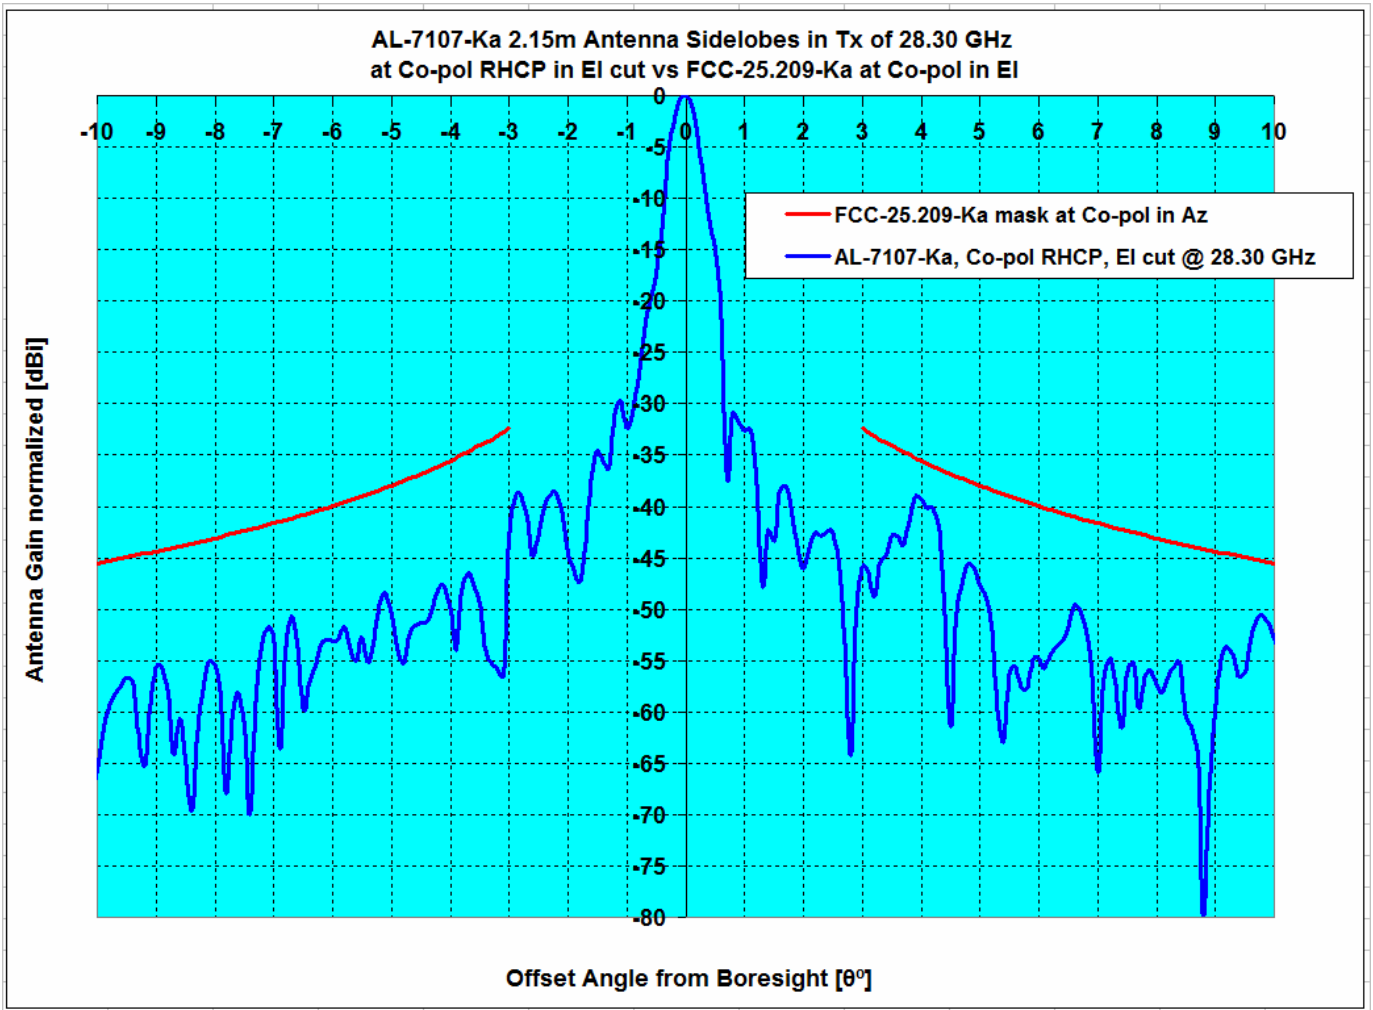

Description	Plane, CirP Type	Frequency GHz	Ant. Gain dBi	Peak Excursions dB		Over Mask %	
				3°≤θ≤7°	7°≤θ≤30°	3°≤θ≤7°	7°≤θ≤30°
FCC-25.209-Ka, Co-pol EI, vs AL-7107-Ka	EI, RHCP	28.30	52.51	-3.67	0.77	0.00%	0.55%

Orbit Communication Systems Ltd.
 AL-7107-Ka, 2.15 m Antenna, Pattern, X-pol, Azimuth RHCP

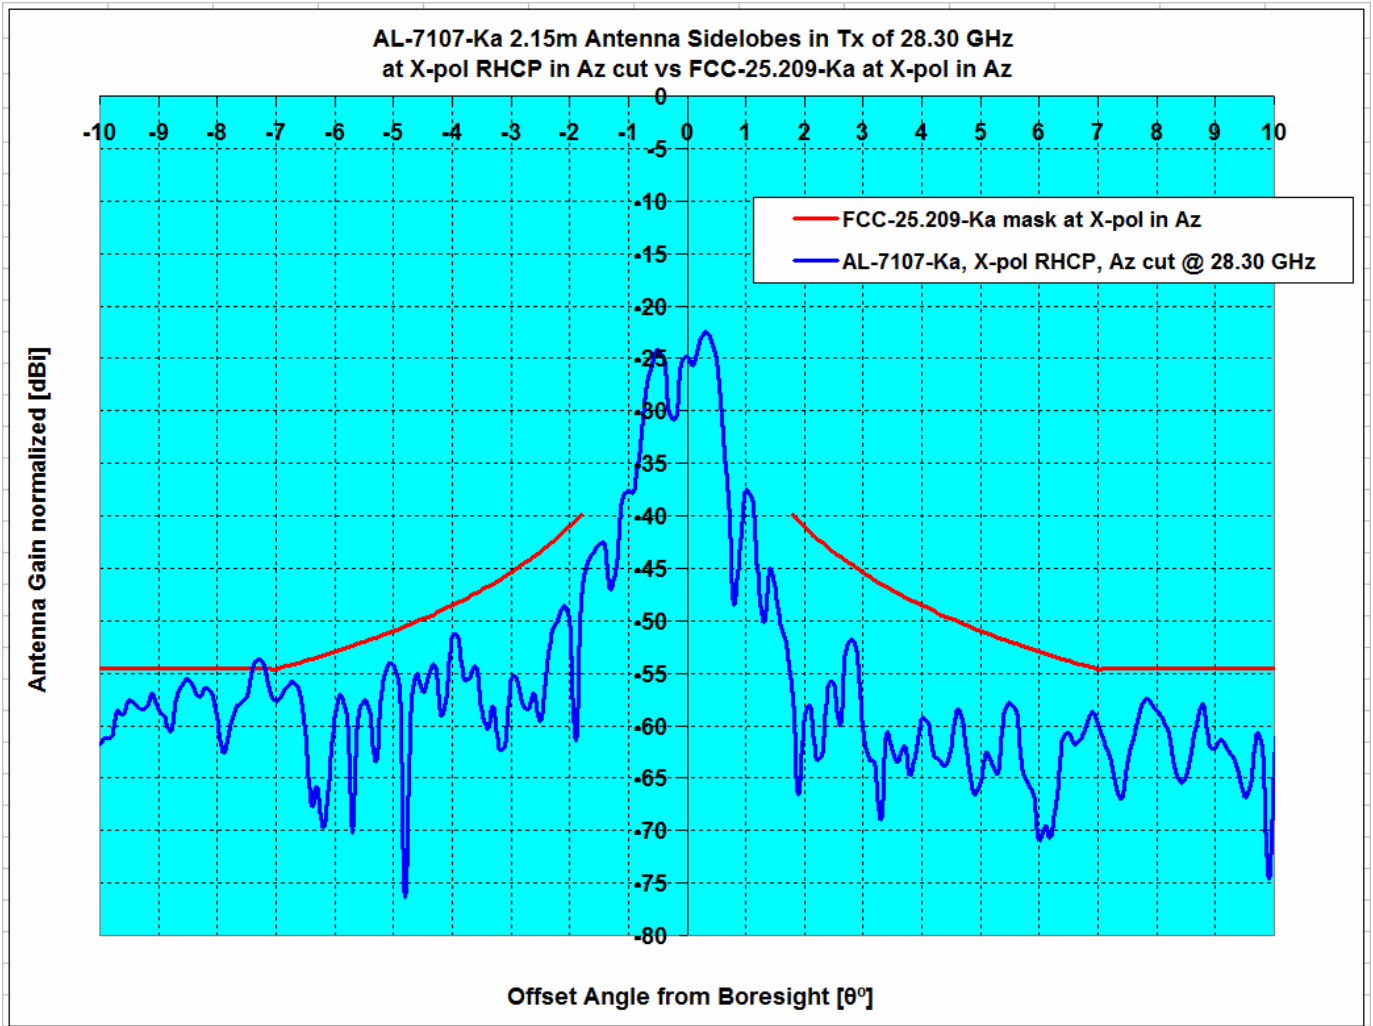

Description	Plane, CirP	Frequency	Ant. Gain	Peak Excursions dB		Over Mask %	
				1.8°≤θ≤7°	1.8°≤θ≤9.2°	1.8°≤θ≤7°	1.8°≤θ≤9.2°
Pattern Rule vs Antenna System	Type	GHz	dBi				
FCC-25.209-Ka, X-pol Az, vs AL-7107-Ka	Az , RHCP	28.30	52.51	-1.58	0.81	0.00%	1.20%

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Azimuth LHCP, -180° to +180° @ 1.0° increment

29.15 GHz Antenna Pattern in Co-pol Az LHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
-179.0	-25.9	0.0	-25.9
-178.0	-18.2	0.0	-18.2
-177.0	-20.5	0.0	-20.5
-176.0	-25.0	0.0	-25.0
-175.0	-27.4	0.0	-27.4
-174.0	-27.4	0.0	-27.4
-173.0	-26.9	0.0	-26.9
-172.0	-27.4	0.0	-27.4
-171.0	-23.9	0.0	-23.9
-170.0	-25.9	0.0	-25.9
-169.0	-18.2	0.0	-18.2
-168.0	-20.5	0.0	-20.5
-167.0	-25.0	0.0	-25.0
-166.0	-27.4	0.0	-27.4
-165.0	-27.4	0.0	-27.4
-164.0	-26.9	0.0	-26.9
-163.0	-27.4	0.0	-27.4
-162.0	-19.4	0.0	-19.4
-161.0	-20.8	0.0	-20.8
-160.0	-27.0	0.0	-27.0
-159.0	-26.0	0.0	-26.0
-158.0	-27.4	0.0	-27.4
-157.0	-19.8	0.0	-19.8
-156.0	-27.4	0.0	-27.4
-155.0	-27.4	0.0	-27.4
-154.0	-20.7	0.0	-20.7
-153.0	-22.6	0.0	-22.6
-152.0	-15.2	0.0	-15.2
-151.0	-19.3	0.0	-19.3
-150.0	-17.7	0.0	-17.7
-149.0	-27.4	0.0	-27.4
-148.0	-25.8	0.0	-25.8
-147.0	-24.5	0.0	-24.5
-146.0	-15.8	0.0	-15.8
-145.0	-15.5	0.0	-15.5
-144.0	-20.2	0.0	-20.2
-143.0	-20.2	0.0	-20.2
-142.0	-21.6	0.0	-21.6
-141.0	-20.2	0.0	-20.2
-140.0	-16.0	0.0	-16.0
-139.0	-20.2	0.0	-20.2
-138.0	-20.6	0.0	-20.6
-137.0	-20.5	0.0	-20.5
-136.0	-23.7	0.0	-23.7
-135.0	-15.0	0.0	-15.0
-134.0	-15.9	0.0	-15.9
-133.0	-27.4	0.0	-27.4
-132.0	-25.2	0.0	-25.2
-131.0	-22.1	0.0	-22.1
-130.0	-16.0	0.0	-16.0
-129.0	-16.1	0.0	-16.1
-128.0	-18.9	0.0	-18.9
-127.0	-15.9	0.0	-15.9
-126.0	-15.0	0.0	-15.0
-125.0	-22.5	0.0	-22.5
-124.0	-19.5	0.0	-19.5
-123.0	-20.8	0.0	-20.8
-122.0	-25.3	0.0	-25.3
-121.0	-20.6	0.0	-20.6
-120.0	-26.0	0.0	-26.0

29.15 GHz Antenna Pattern in Co-pol Az LHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
0.0	52.6		
1.0	15.7		
2.0	10.0	21.5	-11.5
3.0	9.1	17.1	-8.0
4.0	-4.1	13.9	-18.1
5.0	-10.4	11.5	-21.9
6.0	0.3	9.5	-9.2
7.0	-14.1	7.9	-21.9
8.0	-5.4	8.0	-13.4
9.0	-3.3	8.0	-11.3
10.0	-5.3	7.0	-12.3
11.0	-15.6	6.0	-21.5
12.0	-3.1	5.0	-8.1
13.0	-6.7	4.2	-10.9
14.0	-12.7	3.3	-16.0
15.0	-17.4	2.6	-20.0
16.0	-23.4	1.9	-25.3
17.0	-16.6	1.2	-17.9
18.0	-14.4	0.6	-15.0
19.0	-19.6	0.0	-19.6
20.0	-10.9	-0.5	-10.3
21.0	-15.4	-1.1	-14.3
22.0	-4.5	-1.6	-3.0
23.0	-3.7	-2.0	-1.7
24.0	-5.9	-2.5	-3.4
25.0	-11.3	-2.9	-8.3
26.0	-7.7	-3.4	-4.3
27.0	-7.5	-3.8	-3.7
28.0	-13.5	-4.2	-9.3
29.0	-8.8	-4.6	-4.3
30.0	-7.2	-4.9	-2.3
31.0	-5.8	-5.3	-0.5
32.0	-9.8	-5.6	-4.2
33.0	-5.0	-6.0	0.9
34.0	-10.9	-6.3	-4.6
35.0	-9.4	-6.6	-2.8
36.0	-5.1	-6.9	1.9
37.0	-6.4	-7.2	0.8
38.0	-9.6	-7.5	-2.1
39.0	-9.4	-7.8	-1.6
40.0	-9.6	-8.1	-1.5
41.0	-12.3	-8.3	-4.0
42.0	-11.1	-8.6	-2.5
43.0	-11.7	-8.8	-2.9
44.0	-9.0	-9.1	0.1
45.0	-9.2	-9.3	0.1
46.0	-9.5	-9.6	0.1
47.0	-7.6	-9.8	2.2
48.0	-14.1	-10.0	-4.1
49.0	-10.6	-10.0	-0.6
50.0	-13.3	-10.0	-3.3
51.0	-21.6	-10.0	-11.6
52.0	-16.7	-10.0	-6.7
53.0	-14.1	-10.0	-4.1
54.0	-16.3	-10.0	-6.3
55.0	-19.5	-10.0	-9.5
56.0	-26.5	-10.0	-16.5
57.0	-23.2	-10.0	-13.2
58.0	-19.6	-10.0	-9.6
59.0	-25.0	-10.0	-15.0

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Azimuth LHCP, -180° to +180° @ 1.0° increment

-119.0	-26.2	0.0	-26.2
-118.0	-24.0	0.0	-24.0
-117.0	-26.3	0.0	-26.3
-116.0	-22.1	0.0	-22.1
-115.0	-27.4	0.0	-27.4
-114.0	-22.4	0.0	-22.4
-113.0	-17.6	0.0	-17.6
-112.0	-19.9	0.0	-19.9
-111.0	-17.4	0.0	-17.4
-110.0	-17.3	0.0	-17.3
-109.0	-27.4	0.0	-27.4
-108.0	-24.7	0.0	-24.7
-107.0	-25.2	0.0	-25.2
-106.0	-20.2	0.0	-20.2
-105.0	-20.5	0.0	-20.5
-104.0	-19.9	0.0	-19.9
-103.0	-20.1	0.0	-20.1
-102.0	-16.2	0.0	-16.2
-101.0	-23.3	0.0	-23.3
-100.0	-17.0	0.0	-17.0
-99.0	-20.0	0.0	-20.0
-98.0	-27.4	0.0	-27.4
-97.0	-23.7	0.0	-23.7
-96.0	-27.4	0.0	-27.4
-95.0	-19.7	0.0	-19.7
-94.0	-19.6	0.0	-19.6
-93.0	-22.6	0.0	-22.6
-92.0	-20.0	0.0	-20.0
-91.0	-18.8	0.0	-18.8
-90.0	-21.7	0.0	-21.7
-89.0	-27.2	0.0	-27.2
-88.0	-18.7	0.0	-18.7
-87.0	-15.9	0.0	-15.9
-86.0	-13.3	0.0	-13.3
-85.0	-13.3	-10.0	-3.3
-84.0	-15.3	-10.0	-5.3
-83.0	-20.2	-10.0	-10.2
-82.0	-20.2	-10.0	-10.2
-81.0	-12.7	-10.0	-2.7
-80.0	-12.8	-10.0	-2.8
-79.0	-10.3	-10.0	-0.3
-78.0	-9.3	-10.0	0.7
-77.0	-16.7	-10.0	-6.7
-76.0	-14.2	-10.0	-4.2
-75.0	-14.6	-10.0	-4.6
-74.0	-10.9	-10.0	-0.9
-73.0	-10.2	-10.0	-0.2
-72.0	-6.9	-10.0	3.1
-71.0	-6.7	-10.0	3.3
-70.0	-5.8	-10.0	4.2
-69.0	-6.8	-10.0	3.2
-68.0	-4.7	-10.0	5.3
-67.0	-4.6	-10.0	5.4
-66.0	-5.1	-10.0	4.9
-65.0	-6.4	-10.0	3.6
-64.0	-4.8	-10.0	5.2
-63.0	-6.9	-10.0	3.1
-62.0	-7.4	-10.0	2.6
-61.0	-9.4	-10.0	0.6
-60.0	-10.4	-10.0	-0.4
-59.0	-11.1	-10.0	-1.1
-58.0	-11.5	-10.0	-1.5
-57.0	-15.0	-10.0	-5.0

60.0	-22.4	-10.0	-12.4
61.0	-25.4	-10.0	-15.4
62.0	-24.5	-10.0	-14.5
63.0	-27.4	-10.0	-17.4
64.0	-18.1	-10.0	-8.1
65.0	-19.8	-10.0	-9.8
66.0	-27.4	-10.0	-17.4
67.0	-19.9	-10.0	-9.9
68.0	-25.1	-10.0	-15.1
69.0	-21.3	-10.0	-11.3
70.0	-20.3	-10.0	-10.3
71.0	-19.9	-10.0	-9.9
72.0	-16.1	-10.0	-6.1
73.0	-15.1	-10.0	-5.1
74.0	-17.3	-10.0	-7.3
75.0	-17.4	-10.0	-7.4
76.0	-19.9	-10.0	-9.9
77.0	-27.4	-10.0	-17.4
78.0	-20.4	-10.0	-10.4
79.0	-27.4	-10.0	-17.4
80.0	-21.5	-10.0	-11.5
81.0	-22.2	-10.0	-12.2
82.0	-23.5	-10.0	-13.5
83.0	-23.1	-10.0	-13.1
84.0	-26.5	-10.0	-16.5
85.0	-27.4	-10.0	-17.4
86.0	-25.4	0.0	-25.4
87.0	-21.5	0.0	-21.5
88.0	-19.6	0.0	-19.6
89.0	-25.7	0.0	-25.7
90.0	-18.6	0.0	-18.6
91.0	-25.0	0.0	-25.0
92.0	-26.8	0.0	-26.8
93.0	-27.4	0.0	-27.4
94.0	-18.2	0.0	-18.2
95.0	-25.1	0.0	-25.1
96.0	-22.6	0.0	-22.6
97.0	-24.3	0.0	-24.3
98.0	-25.3	0.0	-25.3
99.0	-27.3	0.0	-27.3
100.0	-19.9	0.0	-19.9
101.0	-21.8	0.0	-21.8
102.0	-24.4	0.0	-24.4
103.0	-22.8	0.0	-22.8
104.0	-22.2	0.0	-22.2
105.0	-19.6	0.0	-19.6
106.0	-24.5	0.0	-24.5
107.0	-23.1	0.0	-23.1
108.0	-23.4	0.0	-23.4
109.0	-24.9	0.0	-24.9
110.0	-23.0	0.0	-23.0
111.0	-24.6	0.0	-24.6
112.0	-19.7	0.0	-19.7
113.0	-24.1	0.0	-24.1
114.0	-25.2	0.0	-25.2
115.0	-22.9	0.0	-22.9
116.0	-23.2	0.0	-23.2
117.0	-27.1	0.0	-27.1
118.0	-25.0	0.0	-25.0
119.0	-27.0	0.0	-27.0
120.0	-27.4	0.0	-27.4
121.0	-26.7	0.0	-26.7
122.0	-21.1	0.0	-21.1

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Azimuth LHCP, -180° to +180° @ 1.0° increment

-56.0	-15.1	-10.0	-5.1
-55.0	-14.6	-10.0	-4.6
-54.0	-15.9	-10.0	-5.9
-53.0	-11.4	-10.0	-1.4
-52.0	-11.8	-10.0	-1.8
-51.0	-15.5	-10.0	-5.5
-50.0	-15.8	-10.0	-5.8
-49.0	-16.5	-10.0	-6.5
-48.0	-20.7	-10.0	-10.7
-47.0	-27.4	-9.8	-17.6
-46.0	-14.0	-9.6	-4.4
-45.0	-15.7	-9.3	-6.4
-44.0	-12.7	-9.1	-3.6
-43.0	-18.4	-8.8	-9.6
-42.0	-16.2	-8.6	-7.6
-41.0	-17.4	-8.3	-9.0
-40.0	-16.9	-8.1	-8.9
-39.0	-22.9	-7.8	-15.1
-38.0	-22.0	-7.5	-14.5
-37.0	-18.9	-7.2	-11.7
-36.0	-14.3	-6.9	-7.4
-35.0	-18.4	-6.6	-11.8
-34.0	-15.6	-6.3	-9.3
-33.0	-16.2	-6.0	-10.2
-32.0	-17.3	-5.6	-11.6
-31.0	-19.6	-5.3	-14.3
-30.0	-14.8	-4.9	-9.9
-29.0	-18.2	-4.6	-13.7
-28.0	-19.4	-4.2	-15.2
-27.0	-21.4	-3.8	-17.6
-26.0	-21.2	-3.4	-17.8
-25.0	-10.8	-2.9	-7.8
-24.0	-19.7	-2.5	-17.2
-23.0	-18.1	-2.0	-16.1
-22.0	-19.3	-1.6	-17.8
-21.0	-19.3	-1.1	-18.2
-20.0	-18.0	-0.5	-17.5
-19.0	-20.8	0.0	-20.8
-18.0	-19.2	0.6	-19.8
-17.0	-18.9	1.2	-20.2
-16.0	-8.8	1.9	-10.7
-15.0	-22.5	2.6	-25.1
-14.0	-12.8	3.3	-16.2
-13.0	-10.9	4.2	-15.1
-12.0	-12.0	5.0	-17.1
-11.0	-6.4	6.0	-12.4
-10.0	-3.1	7.0	-10.1
-9.0	-8.1	8.0	-16.1
-8.0	-7.7	8.0	-15.7
-7.0	-2.7	7.9	-10.5
-6.0	0.8	9.5	-8.8
-5.0	-8.5	11.5	-20.0
-4.0	-5.6	13.9	-19.6
-3.0	7.9	17.1	-9.2
-2.0	4.7	21.5	-16.7
-1.0	17.2		
0.0	52.6		

123.0	-25.5	0.0	-25.5
124.0	-22.2	0.0	-22.2
125.0	-19.5	0.0	-19.5
126.0	-27.4	0.0	-27.4
127.0	-24.9	0.0	-24.9
128.0	-21.7	0.0	-21.7
129.0	-25.5	0.0	-25.5
130.0	-21.6	0.0	-21.6
131.0	-26.1	0.0	-26.1
132.0	-27.4	0.0	-27.4
133.0	-27.4	0.0	-27.4
134.0	-25.8	0.0	-25.8
135.0	-27.1	0.0	-27.1
136.0	-26.9	0.0	-26.9
137.0	-27.4	0.0	-27.4
138.0	-21.9	0.0	-21.9
139.0	-24.9	0.0	-24.9
140.0	-22.5	0.0	-22.5
141.0	-20.8	0.0	-20.8
142.0	-27.4	0.0	-27.4
143.0	-25.8	0.0	-25.8
144.0	-27.4	0.0	-27.4
145.0	-27.4	0.0	-27.4
146.0	-24.8	0.0	-24.8
147.0	-23.5	0.0	-23.5
148.0	-27.4	0.0	-27.4
149.0	-23.6	0.0	-23.6
150.0	-23.9	0.0	-23.9
151.0	-27.1	0.0	-27.1
152.0	-26.7	0.0	-26.7
153.0	-22.1	0.0	-22.1
154.0	-27.4	0.0	-27.4
155.0	-18.6	0.0	-18.6
156.0	-27.4	0.0	-27.4
157.0	-27.4	0.0	-27.4
158.0	-27.4	0.0	-27.4
159.0	-25.5	0.0	-25.5
160.0	-25.5	0.0	-25.5
161.0	-20.0	0.0	-20.0
162.0	-26.2	0.0	-26.2
163.0	-20.2	0.0	-20.2
164.0	-24.1	0.0	-24.1
165.0	-27.4	0.0	-27.4
166.0	-24.5	0.0	-24.5
167.0	-27.4	0.0	-27.4
168.0	-27.4	0.0	-27.4
169.0	-27.4	0.0	-27.4
170.0	-27.0	0.0	-27.0
171.0	-26.5	0.0	-26.5
172.0	-27.4	0.0	-27.4
173.0	-27.4	0.0	-27.4
174.0	-22.7	0.0	-22.7
175.0	-24.8	0.0	-24.8
176.0	-23.7	0.0	-23.7
177.0	-27.4	0.0	-27.4
178.0	-27.4	0.0	-27.4
179.0	-23.9	0.0	-23.9

Orbit Communication Systems Ltd.

AL AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
 Co-pol Azimuth LHCP, -10° to +10° @ 0.1° increment

29.15 GHz Antenna Pattern in Co-pol Az LHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
-10.0	-3.1	7.0	-10.1
-9.9	-1.1	7.1	-8.2
-9.8	0.0	7.2	-7.2
-9.7	-0.9	7.3	-8.2
-9.6	-3.1	7.4	-10.6
-9.5	-5.3	7.6	-12.9
-9.4	-4.9	7.7	-12.6
-9.3	-3.9	7.8	-11.7
-9.2	-7.4	8.0	-15.4
-9.1	-21.4	8.0	-29.4
-9.0	-8.1	8.0	-16.1
-8.9	-10.1	8.0	-18.1
-8.8	-15.8	8.0	-23.8
-8.7	-13.9	8.0	-21.9
-8.6	-12.0	8.0	-20.0
-8.5	-10.7	8.0	-18.7
-8.4	-11.6	8.0	-19.6
-8.3	-22.0	8.0	-30.0
-8.2	-11.0	8.0	-19.0
-8.1	-8.0	8.0	-16.0
-8.0	-7.7	8.0	-15.7
-7.9	-5.5	8.0	-13.5
-7.8	-4.3	8.0	-12.3
-7.7	-1.4	8.0	-9.4
-7.6	-0.2	8.0	-8.2
-7.5	-1.4	8.0	-9.4
-7.4	-1.9	8.0	-9.9
-7.3	0.6	8.0	-7.4
-7.2	1.2	8.0	-6.8
-7.1	0.6	8.0	-7.4
-7.0	-2.7	7.9	-10.5
-6.9	1.6	8.0	-6.5
-6.8	4.5	8.2	-3.7
-6.7	4.1	8.3	-4.2
-6.6	0.3	8.5	-8.2
-6.5	-0.8	8.7	-9.4
-6.4	1.1	8.8	-7.7
-6.3	2.0	9.0	-7.0
-6.2	2.1	9.2	-7.1
-6.1	1.7	9.4	-7.7
-6.0	0.8	9.5	-8.8
-5.9	-4.8	9.7	-14.5
-5.8	-9.4	9.9	-19.4
-5.7	-9.5	10.1	-19.6
-5.6	-11.1	10.3	-21.4
-5.5	-4.8	10.5	-15.3
-5.4	-6.1	10.7	-16.8
-5.3	-11.4	10.9	-22.3
-5.2	-0.5	11.1	-11.6
-5.1	0.5	11.3	-10.8
-5.0	-8.5	11.5	-20.0
-4.9	0.6	11.7	-11.1
-4.8	3.9	12.0	-8.1
-4.7	3.7	12.2	-8.5
-4.6	-0.2	12.4	-12.7
-4.5	2.0	12.7	-10.7
-4.4	6.2	12.9	-6.7
-4.3	6.8	13.2	-6.4
-4.2	3.1	13.4	-10.3
-4.1	-6.1	13.7	-19.8

29.15 GHz Antenna Pattern in Co-pol Az LHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
0.0	52.6		
0.1	52.1		
0.2	49.8		
0.3	45.8		
0.4	41.1		
0.5	36.3		
0.6	30.2		
0.7	30.3		
0.8	30.7		
0.9	27.6		
1.0	15.7		
1.1	16.3		
1.2	13.9		
1.3	11.0		
1.4	16.1		
1.5	15.6	24.6	-9.0
1.6	17.2	23.9	-6.7
1.7	17.8	23.2	-5.4
1.8	15.5	22.6	-7.1
1.9	11.3	22.0	-10.7
2.0	10.0	21.5	-11.5
2.1	3.6	20.9	-17.4
2.2	1.7	20.4	-18.7
2.3	6.1	20.0	-13.9
2.4	5.7	19.5	-13.8
2.5	5.5	19.1	-13.5
2.6	2.4	18.6	-16.2
2.7	-0.1	18.2	-18.3
2.8	5.3	17.8	-12.5
2.9	7.2	17.4	-10.2
3.0	9.1	17.1	-8.0
3.1	9.3	16.7	-7.4
3.2	5.0	16.4	-11.4
3.3	-8.7	16.0	-24.8
3.4	-5.4	15.7	-21.1
3.5	-8.2	15.4	-23.6
3.6	4.0	15.1	-11.1
3.7	6.1	14.8	-8.7
3.8	3.6	14.5	-10.9
3.9	-6.5	14.2	-20.8
4.0	-4.1	13.9	-18.1
4.1	0.1	13.7	-13.6
4.2	2.2	13.4	-11.2
4.3	1.7	13.2	-11.4
4.4	0.7	12.9	-12.2
4.5	-1.2	12.7	-13.8
4.6	-4.5	12.4	-17.0
4.7	-4.3	12.2	-16.5
4.8	-2.6	12.0	-14.5
4.9	-7.5	11.7	-19.3
5.0	-10.4	11.5	-21.9
5.1	-4.9	11.3	-16.2
5.2	-5.1	11.1	-16.2
5.3	0.3	10.9	-10.6
5.4	3.7	10.7	-7.0
5.5	2.2	10.5	-8.3
5.6	-1.1	10.3	-11.4
5.7	-5.4	10.1	-15.5
5.8	-6.4	9.9	-16.3
5.9	-2.4	9.7	-12.1

Orbit Communication Systems Ltd.
AL AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Azimuth LHCP, -10° to +10° @ 0.1° increment

-4.0	-5.6	13.9	-19.6
-3.9	6.4	14.2	-7.8
-3.8	11.2	14.5	-3.3
-3.7	11.7	14.8	-3.1
-3.6	8.0	15.1	-7.1
-3.5	-3.3	15.4	-18.7
-3.4	6.3	15.7	-9.4
-3.3	7.0	16.0	-9.0
-3.2	5.1	16.4	-11.2
-3.1	6.4	16.7	-10.3
-3.0	7.9	17.1	-9.2
-2.9	6.3	17.4	-11.1
-2.8	9.1	17.8	-8.7
-2.7	11.5	18.2	-6.7
-2.6	10.4	18.6	-8.3
-2.5	5.3	19.1	-13.8
-2.4	-2.4	19.5	-21.9
-2.3	-3.5	20.0	-23.5
-2.2	4.1	20.4	-16.4
-2.1	2.6	20.9	-18.3
-2.0	4.7	21.5	-16.7
-1.9	10.5	22.0	-11.5
-1.8	9.6	22.6	-13.0
-1.7	3.7	23.2	-19.6
-1.6	4.3	23.9	-19.6
-1.5	3.1	24.6	-21.5
-1.4	15.0		
-1.3	18.8		
-1.2	19.0		
-1.1	19.0		
-1.0	17.2		
-0.9	11.0		
-0.8	15.9		
-0.7	14.0		
-0.6	23.0		
-0.5	32.8		
-0.4	39.9		
-0.3	45.8		
-0.2	49.9		
-0.1	52.1		
0.0	52.6		

6.0	0.3	9.5	-9.2
6.1	-0.4	9.4	-9.7
6.2	1.4	9.2	-7.8
6.3	0.7	9.0	-8.3
6.4	1.7	8.8	-7.2
6.5	3.3	8.7	-5.4
6.6	4.2	8.5	-4.3
6.7	3.2	8.3	-5.2
6.8	1.1	8.2	-7.1
6.9	-3.6	8.0	-11.6
7.0	-14.1	7.9	-21.9
7.1	-2.0	8.0	-10.0
7.2	-1.5	8.0	-9.5
7.3	-3.8	8.0	-11.8
7.4	-8.8	8.0	-16.8
7.5	-6.5	8.0	-14.5
7.6	-4.2	8.0	-12.2
7.7	-1.8	8.0	-9.8
7.8	-3.3	8.0	-11.3
7.9	-6.4	8.0	-14.4
8.0	-5.4	8.0	-13.4
8.1	-2.0	8.0	-10.0
8.2	-2.9	8.0	-10.9
8.3	-2.0	8.0	-10.0
8.4	-2.3	8.0	-10.3
8.5	-5.0	8.0	-13.0
8.6	-11.5	8.0	-19.5
8.7	-15.8	8.0	-23.8
8.8	-13.6	8.0	-21.6
8.9	-4.8	8.0	-12.8
9.0	-3.3	8.0	-11.3
9.1	-3.1	8.0	-11.1
9.2	-6.1	8.0	-14.1
9.3	-3.4	7.8	-11.1
9.4	-1.0	7.7	-8.6
9.5	-1.4	7.6	-8.9
9.6	-1.7	7.4	-9.2
9.7	-6.2	7.3	-13.6
9.8	-12.8	7.2	-20.0
9.9	-14.5	7.1	-21.6
10.0	-5.3	7.0	-12.3

Orbit Communication Systems Ltd.

AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Elevation LHCP, -30° to +30° @ 0.5° increment

29.15 GHz Antenna Pattern in Co-pol EI LHCP

Angle Degrees	Gain dBi	Mask dBi	Over Mask dB
-30.0	-7.6	-4.9	-2.7
-29.5	-9.3	-4.7	-4.5
-29.0	-9.0	-4.6	-4.5
-28.5	-7.4	-4.4	-3.1
-28.0	-9.3	-4.2	-5.1
-27.5	-13.4	-4.0	-9.4
-27.0	-12.8	-3.8	-9.1
-26.5	-12.4	-3.6	-8.8
-26.0	-7.6	-3.4	-4.2
-25.5	-7.8	-3.2	-4.7
-25.0	-13.4	-2.9	-10.4
-24.5	-5.6	-2.7	-2.8
-24.0	-8.2	-2.5	-5.7
-23.5	-14.3	-2.3	-12.0
-23.0	-14.6	-2.0	-12.5
-22.5	-18.2	-1.8	-16.4
-22.0	-16.2	-1.6	-14.6
-21.5	-6.2	-1.3	-4.9
-21.0	-6.2	-1.1	-5.1
-20.5	-6.1	-0.8	-5.3
-20.0	-2.2	-0.5	-1.7
-19.5	-0.5	-0.3	-0.3
-19.0	-0.5	0.0	-0.5
-18.5	-2.6	0.3	-2.9
-18.0	-5.4	0.6	-6.0
-17.5	-12.2	0.9	-13.1
-17.0	-11.4	1.2	-12.6
-16.5	-11.3	1.6	-12.8
-16.0	-19.4	1.9	-21.3
-15.5	-11.4	2.2	-13.6
-15.0	-4.8	2.6	-7.4
-14.5	-10.5	3.0	-13.5
-14.0	-4.3	3.3	-7.7
-13.5	-9.2	3.7	-12.9
-13.0	-6.5	4.2	-10.6
-12.5	-4.3	4.6	-8.9
-12.0	-15.5	5.0	-20.5
-11.5	-5.2	5.5	-10.7
-11.0	-6.8	6.0	-12.8
-10.5	-6.6	6.5	-13.1
-10.0	-9.6	7.0	-16.6
-9.5	-4.5	7.6	-12.1
-9.0	-5.3	8.1	-13.4
-8.5	-10.2	8.8	-19.0
-8.0	-2.9	9.4	-12.4
-7.5	-7.3	10.1	-17.4
-7.0	1.0	10.9	-9.8
-6.5	1.0	11.7	-10.7
-6.0	1.3	12.5	-11.2
-5.5	-0.8	13.5	-14.3
-5.0	3.8	14.5	-10.7
-4.5	4.6	15.7	-11.0
-4.0	10.0	16.9	-6.9
-3.5	8.8	18.4	-9.6
-3.0	-1.5		
-2.5	11.3		
-2.0	11.7		
-1.5	18.8		
-1.0	22.6		
-0.5	34.4		
0.0	52.6		

29.15 GHz Antenna Pattern in Co-pol EI LHCP

Angle Degrees	Gain dBi	Mask dBi	Over Mask dB
0.0	52.6		
0.5	37.1		
1.0	18.1		
1.5	10.2		
2.0	10.3		
2.5	6.9		
3.0	1.1		
3.5	12.4	18.4	-6.0
4.0	14.0	16.9	-2.9
4.5	2.9	15.7	-12.8
5.0	10.3	14.5	-4.3
5.5	2.8	13.5	-10.7
6.0	-3.4	12.5	-16.0
6.5	2.4	11.7	-9.3
7.0	-4.1	10.9	-15.0
7.5	-11.7	10.1	-21.8
8.0	-7.8	9.4	-17.2
8.5	-7.8	8.8	-16.5
9.0	-7.6	8.1	-15.7
9.5	-5.3	7.6	-12.9
10.0	1.0	7.0	-6.0
10.5	-8.9	6.5	-15.3
11.0	-5.1	6.0	-11.0
11.5	-6.7	5.5	-12.1
12.0	-10.0	5.0	-15.0
12.5	-2.5	4.6	-7.1
13.0	-3.9	4.2	-8.1
13.5	-8.1	3.7	-11.8
14.0	-19.9	3.3	-23.2
14.5	-14.1	3.0	-17.0
15.0	-12.9	2.6	-15.5
15.5	-23.7	2.2	-25.9
16.0	-25.9	1.9	-27.8
16.5	-11.2	1.6	-12.8
17.0	-14.8	1.2	-16.1
17.5	-15.9	0.9	-16.8
18.0	-12.5	0.6	-13.2
18.5	-11.1	0.3	-11.4
19.0	-26.4	0.0	-26.5
19.5	-10.5	-0.3	-10.3
20.0	-15.3	-0.5	-14.8
20.5	-15.6	-0.8	-14.8
21.0	-14.4	-1.1	-13.4
21.5	-16.2	-1.3	-14.8
22.0	-16.7	-1.6	-15.2
22.5	-14.3	-1.8	-12.5
23.0	-18.5	-2.0	-16.4
23.5	-15.9	-2.3	-13.6
24.0	-20.1	-2.5	-17.6
24.5	-26.6	-2.7	-23.9
25.0	-22.3	-2.9	-19.3
25.5	-20.3	-3.2	-17.2
26.0	-21.3	-3.4	-17.9
26.5	-18.1	-3.6	-14.5
27.0	-19.6	-3.8	-15.8
27.5	-20.4	-4.0	-16.4
28.0	-22.4	-4.2	-18.3
28.5	-23.5	-4.4	-19.2
29.0	-22.5	-4.6	-17.9
29.5	-21.3	-4.7	-16.5
30.0	-18.5	-4.9	-13.6

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Elevation LHCP, -10° to +10° @ 0.1° increment

29.15 GHz Antenna Pattern in Co-pol EI LHCP

Angle Degrees	Gain dBi	Mask dBi	Over Mask dB
-10.0	-9.6	7.0	-16.6
-9.9	-17.7	7.1	-24.8
-9.8	-11.4	7.2	-18.6
-9.7	-3.5	7.3	-10.8
-9.6	-2.1	7.4	-9.5
-9.5	-4.5	7.6	-12.1
-9.4	-10.7	7.7	-18.4
-9.3	-12.1	7.8	-19.9
-9.2	-9.6	7.9	-17.5
-9.1	-10.0	8.0	-18.0
-9.0	-5.3	8.1	-13.4
-8.9	-3.8	8.3	-12.1
-8.8	-2.5	8.4	-10.9
-8.7	-2.0	8.5	-10.5
-8.6	-3.3	8.6	-11.9
-8.5	-10.2	8.8	-19.0
-8.4	-8.5	8.9	-17.4
-8.3	-7.6	9.0	-16.6
-8.2	-5.2	9.2	-14.4
-8.1	-4.4	9.3	-13.7
-8.0	-2.9	9.4	-12.4
-7.9	-2.1	9.6	-11.6
-7.8	-1.8	9.7	-11.5
-7.7	-2.6	9.8	-12.4
-7.6	-5.3	10.0	-15.3
-7.5	-7.3	10.1	-17.4
-7.4	-7.0	10.3	-17.2
-7.3	-8.7	10.4	-19.1
-7.2	-12.2	10.6	-22.8
-7.1	-4.4	10.7	-15.2
-7.0	1.0	10.9	-9.8
-6.9	2.1	11.0	-8.9
-6.8	-0.1	11.2	-11.3
-6.7	-7.6	11.3	-18.9
-6.6	0.9	11.5	-10.6
-6.5	1.0	11.7	-10.7
-6.4	-1.6	11.8	-13.4
-6.3	-7.1	12.0	-19.1
-6.2	-2.5	12.2	-14.7
-6.1	-0.2	12.4	-12.5
-6.0	1.3	12.5	-11.2
-5.9	-0.1	12.7	-12.9
-5.8	-2.4	12.9	-15.3
-5.7	0.6	13.1	-12.5
-5.6	1.5	13.3	-11.8
-5.5	-0.8	13.5	-14.3
-5.4	-4.5	13.7	-18.2
-5.3	-6.0	13.9	-19.9
-5.2	-6.5	14.1	-20.6
-5.1	0.6	14.3	-13.7
-5.0	3.8	14.5	-10.7
-4.9	3.7	14.7	-11.0
-4.8	4.1	15.0	-10.8
-4.7	4.6	15.2	-10.6
-4.6	5.7	15.4	-9.7
-4.5	4.6	15.7	-11.0
-4.4	-1.7	15.9	-17.6
-4.3	3.0	16.2	-13.2
-4.2	8.4	16.4	-8.0
-4.1	10.1	16.7	-6.6

29.15 GHz Antenna Pattern in Co-pol EI LHCP

Angle Degrees	Gain dBi	Mask dBi	Over Mask dB
0.0	52.6		
0.1	51.8		
0.2	49.1		
0.3	44.3		
0.4	39.7		
0.5	37.1		
0.6	32.5		
0.7	22.0		
0.8	10.3		
0.9	6.1		
1.0	18.1		
1.1	19.5		
1.2	12.7		
1.3	9.6		
1.4	11.9		
1.5	10.2		
1.6	13.7		
1.7	13.7		
1.8	11.3		
1.9	10.3		
2.0	10.3		
2.1	12.7		
2.2	13.9		
2.3	12.6		
2.4	9.6		
2.5	6.9		
2.6	0.5		
2.7	-7.7		
2.8	-1.3		
2.9	3.1		
3.0	1.1		
3.1	0.5		
3.2	9.8		
3.3	12.5		
3.4	13.5		
3.5	12.4	18.4	-6.0
3.6	10.5	18.1	-7.6
3.7	11.3	17.8	-6.5
3.8	13.0	17.5	-4.5
3.9	13.5	17.2	-3.7
4.0	14.0	16.9	-2.9
4.1	13.7	16.7	-3.0
4.2	12.4	16.4	-4.0
4.3	8.2	16.2	-8.0
4.4	2.3	15.9	-13.6
4.5	2.9	15.7	-12.8
4.6	4.6	15.4	-10.8
4.7	6.3	15.2	-8.9
4.8	7.5	15.0	-7.5
4.9	9.7	14.7	-5.0
5.0	10.3	14.5	-4.3
5.1	8.1	14.3	-6.2
5.2	1.7	14.1	-12.4
5.3	-2.9	13.9	-16.8
5.4	2.9	13.7	-10.8
5.5	2.8	13.5	-10.7
5.6	-1.2	13.3	-14.5
5.7	-5.2	13.1	-18.3
5.8	-3.3	12.9	-16.2
5.9	-1.1	12.7	-13.9

Orbit Communication Systems Ltd.
 AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
 Co-pol Elevation LHCP, -10° to +10° @ 0.1° increment

-4.0	10.0	16.9	-6.9
-3.9	6.3	17.2	-10.9
-3.8	-10.6	17.5	-28.1
-3.7	6.6	17.8	-11.2
-3.6	9.2	18.1	-8.9
-3.5	8.8	18.4	-9.6
-3.4	7.1		
-3.3	1.2		
-3.2	-4.8		
-3.1	3.4		
-3.0	-1.5		
-2.9	9.3		
-2.8	14.5		
-2.7	15.4		
-2.6	13.3		
-2.5	11.3		
-2.4	12.8		
-2.3	13.8		
-2.2	13.9		
-2.1	13.2		
-2.0	11.7		
-1.9	9.8		
-1.8	7.7		
-1.7	11.8		
-1.6	15.8		
-1.5	18.8		
-1.4	18.3		
-1.3	13.1		
-1.2	20.5		
-1.1	23.5		
-1.0	22.6		
-0.9	21.9		
-0.8	25.1		
-0.7	27.9		
-0.6	31.9		
-0.5	34.4		
-0.4	39.2		
-0.3	45.7		
-0.2	50.0		
-0.1	52.2		
0.0	52.6		

6.0	-3.4	12.5	-16.0
6.1	-9.0	12.4	-21.4
6.2	-8.7	12.2	-20.9
6.3	-4.5	12.0	-16.5
6.4	0.8	11.8	-11.0
6.5	2.4	11.7	-9.3
6.6	1.9	11.5	-9.6
6.7	-0.2	11.3	-11.5
6.8	-2.0	11.2	-13.2
6.9	-6.0	11.0	-17.1
7.0	-4.1	10.9	-15.0
7.1	-0.8	10.7	-11.5
7.2	-1.0	10.6	-11.6
7.3	-2.8	10.4	-13.2
7.4	-3.9	10.3	-14.2
7.5	-11.7	10.1	-21.8
7.6	-5.7	10.0	-15.7
7.7	-1.5	9.8	-11.4
7.8	-1.8	9.7	-11.5
7.9	-3.7	9.6	-13.3
8.0	-7.8	9.4	-17.2
8.1	-10.5	9.3	-19.8
8.2	-27.1	9.2	-36.3
8.3	-10.9	9.0	-19.9
8.4	-5.2	8.9	-14.1
8.5	-7.8	8.8	-16.5
8.6	-12.7	8.6	-21.4
8.7	-9.5	8.5	-18.0
8.8	-8.7	8.4	-17.1
8.9	-7.6	8.3	-15.9
9.0	-7.6	8.1	-15.7
9.1	-12.3	8.0	-20.3
9.2	-16.6	7.9	-24.5
9.3	-20.1	7.8	-27.9
9.4	-10.2	7.7	-17.8
9.5	-5.3	7.6	-12.9
9.6	-2.7	7.4	-10.1
9.7	-0.2	7.3	-7.5
9.8	1.6	7.2	-5.7
9.9	2.1	7.1	-5.0
10.0	1.0	7.0	-6.0

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
X-pol Azimuth LHCP, -10° to +10° @ 0.1° increment

29.15 GHz Antenna Pattern in X-pol Az LHCP

Angle Degrees	Gain dBi	Mask dBi	Over Mask dB
-10.0	-10.4	-2.0	-8.4
-9.9	-9.1	-2.0	-7.1
-9.8	-11.5	-2.0	-9.5
-9.7	-11.2	-2.0	-9.2
-9.6	-10.6	-2.0	-8.6
-9.5	-8.6	-2.0	-6.6
-9.4	-9.9	-2.0	-7.9
-9.3	-8.2	-2.0	-6.2
-9.2	-7.5	-2.0	-5.5
-9.1	-5.4	-2.0	-3.4
-9.0	-6.6	-2.0	-4.6
-8.9	-6.9	-2.0	-4.9
-8.8	-8.2	-2.0	-6.2
-8.7	-11.3	-2.0	-9.3
-8.6	-14.3	-2.0	-12.3
-8.5	-10.0	-2.0	-8.0
-8.4	-8.8	-2.0	-6.8
-8.3	-12.3	-2.0	-10.3
-8.2	-15.4	-2.0	-13.4
-8.1	-18.6	-2.0	-16.6
-8.0	-16.6	-2.0	-14.6
-7.9	-16.9	-2.0	-14.9
-7.8	-20.4	-2.0	-18.4
-7.7	-17.4	-2.0	-15.4
-7.6	-11.9	-2.0	-9.9
-7.5	-9.7	-2.0	-7.7
-7.4	-10.0	-2.0	-8.0
-7.3	-12.4	-2.0	-10.4
-7.2	-6.7	-2.0	-4.7
-7.1	-2.1	-2.0	-0.1
-7.0	-0.2	-2.1	1.9
-6.9	-0.8	-2.0	1.2
-6.8	-3.2	-1.8	-1.4
-6.7	-8.4	-1.7	-6.8
-6.6	-11.1	-1.5	-9.6
-6.5	-10.6	-1.3	-9.3
-6.4	-9.6	-1.2	-8.5
-6.3	-18.9	-1.0	-17.9
-6.2	-15.4	-0.8	-14.6
-6.1	-11.1	-0.6	-10.5
-6.0	-11.2	-0.5	-10.8
-5.9	-17.2	-0.3	-17.0
-5.8	-22.1	-0.1	-22.0
-5.7	-16.6	0.1	-16.7
-5.6	-9.7	0.3	-10.0
-5.5	-5.5	0.5	-6.0
-5.4	-2.7	0.7	-3.4
-5.3	-1.1	0.9	-2.0
-5.2	-3.2	1.1	-4.3
-5.1	-16.4	1.3	-17.7
-5.0	-5.2	1.5	-6.7
-4.9	-1.5	1.7	-3.3
-4.8	-3.9	2.0	-5.9
-4.7	-9.9	2.2	-12.1
-4.6	-5.1	2.4	-7.6
-4.5	-3.6	2.7	-6.2
-4.4	-6.0	2.9	-8.9
-4.3	-8.2	3.2	-11.3
-4.2	-6.3	3.4	-9.7
-4.1	-2.4	3.7	-6.1


29.15 GHz Antenna Pattern in X-pol Az LHCP

Angle Degrees	Gain dBi	Mask dBi	Over Mask dB
0.0	23.4		
0.1	20.7		
0.2	24.2		
0.3	28.3		
0.4	29.1		
0.5	28.1		
0.6	24.4		
0.7	17.2		
0.8	1.4		
0.9	10.6		
1.0	14.3		
1.1	14.1		
1.2	12.7		
1.3	13.1		
1.4	12.9		
1.5	11.1		
1.6	7.5		
1.7	5.6		
1.8	3.2	12.6	-9.4
1.9	0.6	12.0	-11.5
2.0	-0.1	11.5	-11.5
2.1	1.3	10.9	-9.7
2.2	2.3	10.4	-8.2
2.3	0.8	10.0	-9.1
2.4	-2.4	9.5	-11.9
2.5	-7.9	9.1	-16.9
2.6	-6.7	8.6	-15.3
2.7	-3.6	8.2	-11.8
2.8	-5.5	7.8	-13.3
2.9	-8.3	7.4	-15.7
3.0	-4.3	7.1	-11.4
3.1	-6.3	6.7	-13.0
3.2	-8.8	6.4	-15.2
3.3	-7.8	6.0	-13.9
3.4	-6.4	5.7	-12.1
3.5	-5.9	5.4	-11.3
3.6	-2.8	5.1	-7.9
3.7	-4.1	4.8	-8.9
3.8	-8.8	4.5	-13.3
3.9	-6.5	4.2	-10.7
4.0	-4.4	3.9	-8.3
4.1	-7.6	3.7	-11.3
4.2	-12.4	3.4	-15.8
4.3	-10.9	3.2	-14.0
4.4	-11.2	2.9	-14.1
4.5	-9.0	2.7	-11.7
4.6	-5.9	2.4	-8.3
4.7	-6.2	2.2	-8.4
4.8	-7.9	2.0	-9.9
4.9	-9.3	1.7	-11.0
5.0	-7.5	1.5	-9.0
5.1	-8.9	1.3	-10.2
5.2	-9.5	1.1	-10.6
5.3	-14.1	0.9	-15.0
5.4	-21.2	0.7	-21.9
5.5	-10.5	0.5	-11.0
5.6	-8.1	0.3	-8.4
5.7	-12.3	0.1	-12.5
5.8	-12.7	-0.1	-12.6
5.9	-11.6	-0.3	-11.3


Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
X-pol Azimuth LHCP, -10° to +10° @ 0.1° increment

-4.0	-3.3	3.9	-7.3
-3.9	-7.5	4.2	-11.7
-3.8	-13.7	4.5	-18.2
-3.7	-22.0	4.8	-26.8
-3.6	-8.9	5.1	-14.0
-3.5	-4.1	5.4	-9.5
-3.4	-1.8	5.7	-7.5
-3.3	-0.9	6.0	-6.9
-3.2	-4.4	6.4	-10.8
-3.1	-12.1	6.7	-18.8
-3.0	-5.9	7.1	-13.0
-2.9	-5.1	7.4	-12.6
-2.8	-6.9	7.8	-14.8
-2.7	-14.4	8.2	-22.6
-2.6	-9.1	8.6	-17.7
-2.5	-4.8	9.1	-13.9
-2.4	-5.5	9.5	-15.0
-2.3	-22.3	10.0	-32.3
-2.2	-11.2	10.4	-21.6
-2.1	-10.6	10.9	-21.5
-2.0	-5.6	11.5	-17.0
-1.9	-1.6	12.0	-13.7
-1.8	-2.8	12.6	-15.5
-1.7	2.7		
-1.6	7.4		
-1.5	9.8		
-1.4	11.1		
-1.3	11.8		
-1.2	12.2		
-1.1	12.9		
-1.0	13.5		
-0.9	13.5		
-0.8	10.7		
-0.7	14.4		
-0.6	23.9		
-0.5	28.6		
-0.4	30.3		
-0.3	30.1		
-0.2	27.9		
-0.1	24.5		
0.0	23.4		


6.0	-12.1	-0.5	-11.6
6.1	-13.2	-0.6	-12.5
6.2	-16.7	-0.8	-15.9
6.3	-22.3	-1.0	-21.3
6.4	-14.3	-1.2	-13.1
6.5	-13.3	-1.3	-11.9
6.6	-14.7	-1.5	-13.2
6.7	-8.5	-1.7	-6.8
6.8	-5.3	-1.8	-3.5
6.9	-5.2	-2.0	-3.3
7.0	-7.0	-2.1	-4.9
7.1	-11.6	-2.0	-9.6
7.2	-12.8	-2.0	-10.8
7.3	-13.2	-2.0	-11.2
7.4	-13.2	-2.0	-11.2
7.5	-15.0	-2.0	-13.0
7.6	-16.4	-2.0	-14.4
7.7	-11.0	-2.0	-9.0
7.8	-13.0	-2.0	-11.0
7.9	-14.6	-2.0	-12.6
8.0	-19.7	-2.0	-17.7
8.1	-19.4	-2.0	-17.4
8.2	-15.2	-2.0	-13.2
8.3	-15.8	-2.0	-13.8
8.4	-14.0	-2.0	-12.0
8.5	-12.8	-2.0	-10.8
8.6	-11.0	-2.0	-9.0
8.7	-12.2	-2.0	-10.2
8.8	-16.4	-2.0	-14.4
8.9	-17.8	-2.0	-15.8
9.0	-21.4	-2.0	-19.4
9.1	-16.9	-2.0	-14.9
9.2	-17.7	-2.0	-15.7
9.3	-16.1	-2.0	-14.1
9.4	-20.0	-2.0	-18.0
9.5	-24.9	-2.0	-22.9
9.6	-24.1	-2.0	-22.1
9.7	-13.0	-2.0	-11.0
9.8	-10.5	-2.0	-8.5
9.9	-8.9	-2.0	-6.9
10.0	-9.6	-2.0	-7.6

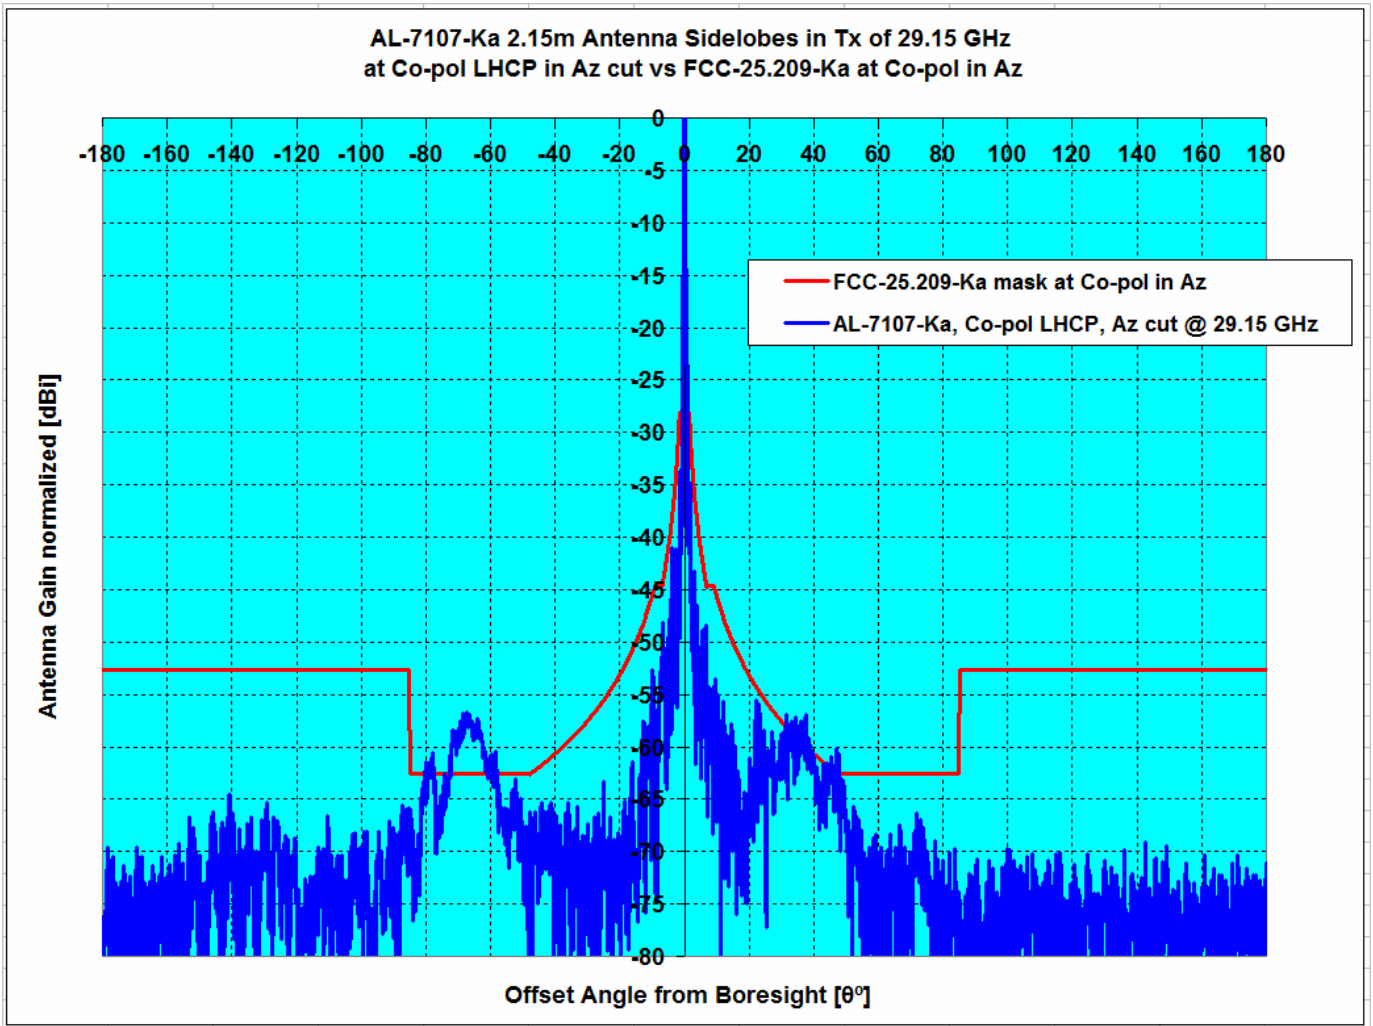


Description	Plane, CirP	Frequency	Ant. Gain	Peak Excursions dB		Over Mask %	
				1.5°≤θ≤7°	7°≤θ≤180°	1.5°≤θ≤7°	7°≤θ≤180°
Pattern Rule vs Antenna System	Type	GHz	dBi				
FCC-25.209-Ka, Co-pol Az, vs AL-7107-Ka	Az , LHCP	29.15	52.63	-3.12	5.91	0.00%	5.71%

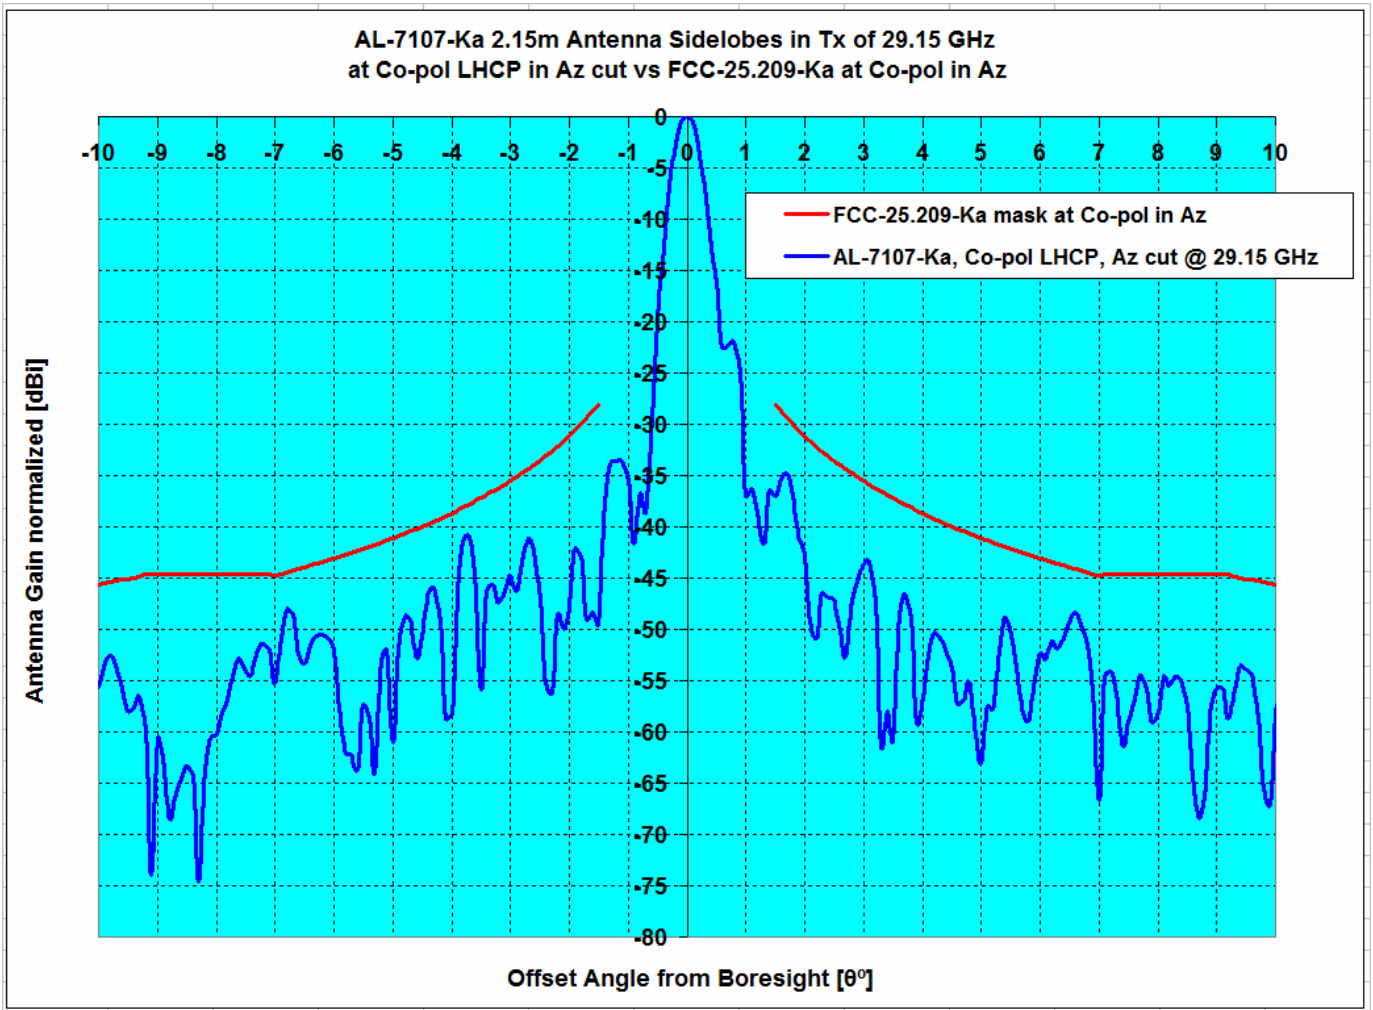

Description	Plane, CirP	Frequency	Ant. Gain	Peak Excursions dB		Over Mask %	
				1.5°≤θ≤7°	7°≤θ≤180°	1.5°≤θ≤7°	7°≤θ≤180°
FCC-25.209-Ka, Co-pol Az, vs AL-7107-Ka	Az , LHCP	29.15	52.63	-3.12	5.91	0.00%	5.71%

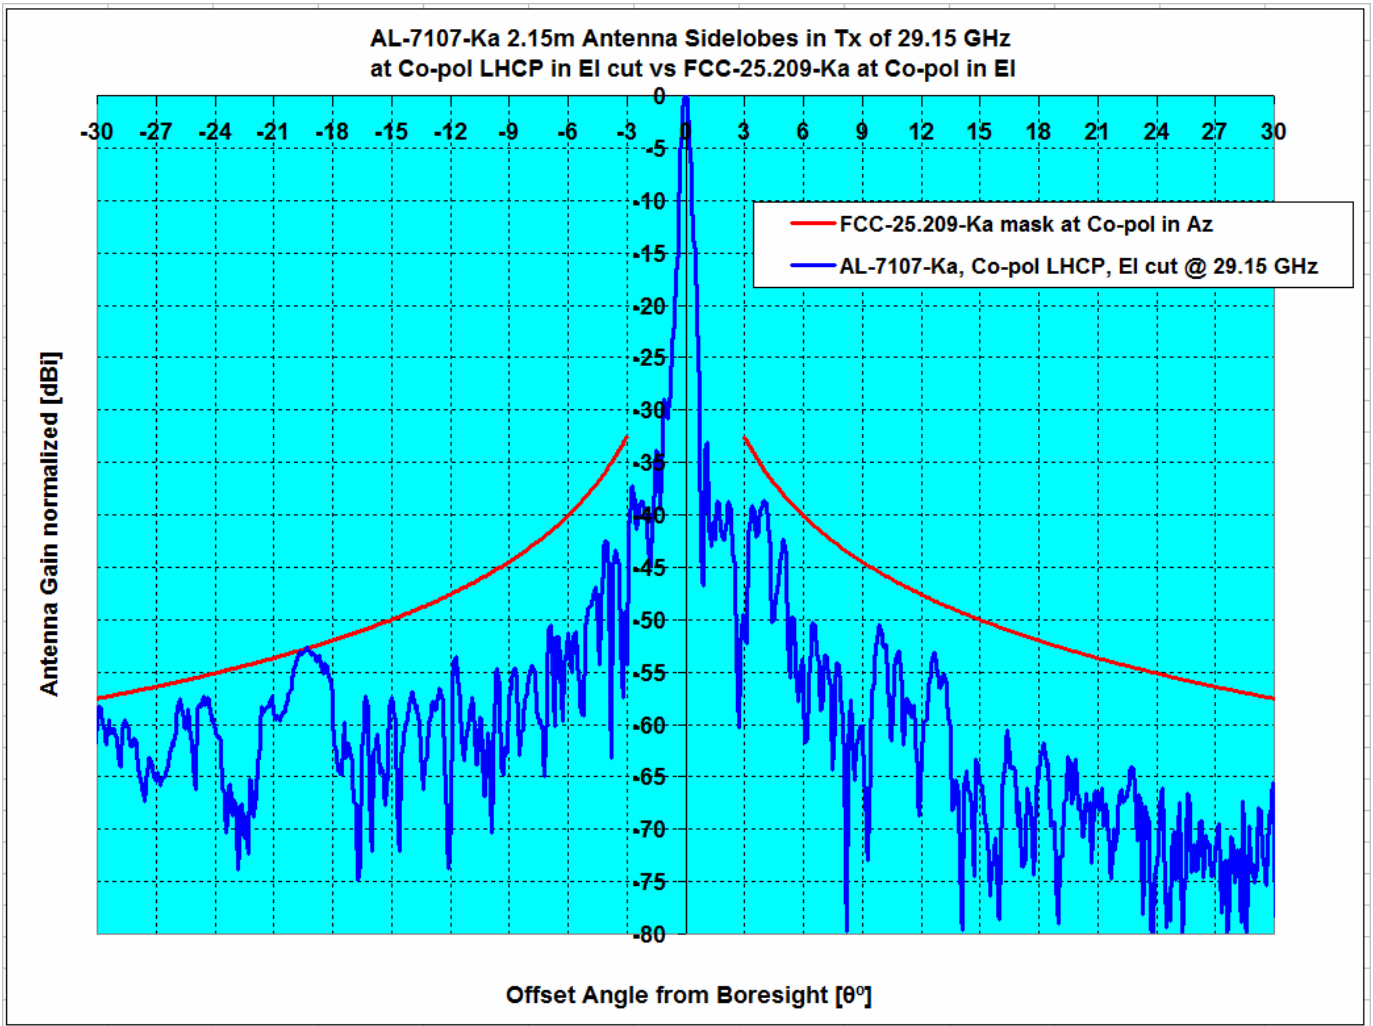


Description	Plane, CirP	Frequency	Ant. Gain	Peak Excursions dB		Over Mask %	
				3°≤θ≤7°	7°≤θ≤30°	3°≤θ≤7°	7°≤θ≤30°
Pattern Rule vs Antenna System	Type	GHz	dBi				
FCC-25.209-Ka, Co-pol EI, vs AL-7107-Ka	EI , LHCP	29.15	52.63	-2.92	0.16	0.00%	0.37%

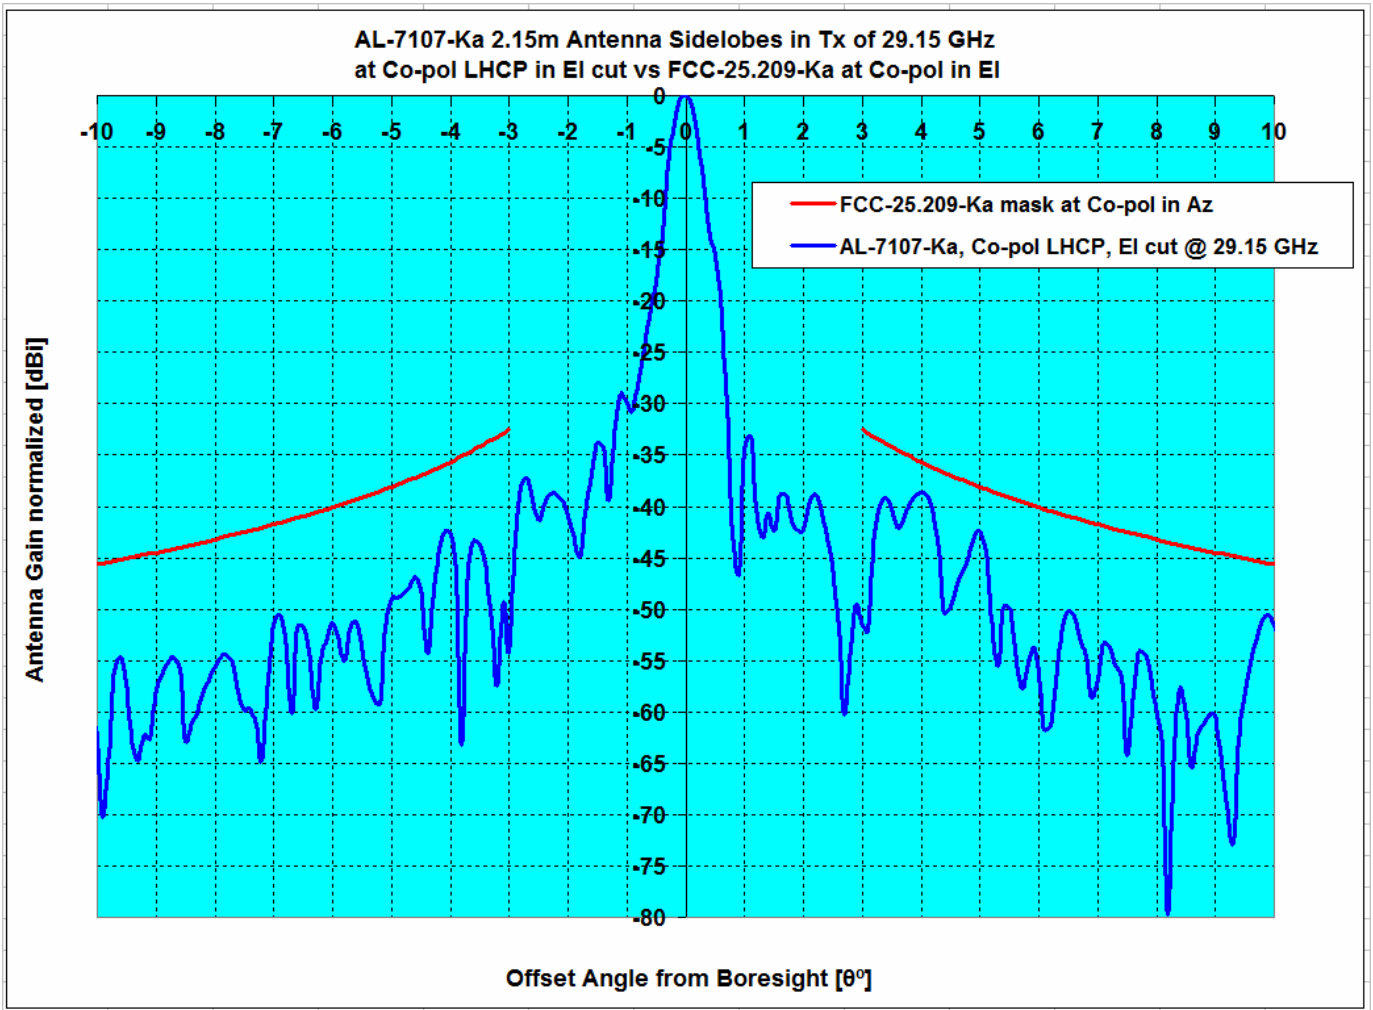

Description	Plane, CirP Type	Frequency GHz	Ant. Gain dBi	Peak Excursions dB		Over Mask %	
				3°≤θ≤7°	7°≤θ≤30°	3°≤θ≤7°	7°≤θ≤30°
FCC-25.209-Ka, Co-pol EI, vs AL-7107-Ka	EI , LHCP	29.15	52.63	-2.92	0.16	0.00%	0.37%

Orbit Communication Systems Ltd.
 AL-7107-Ka, 2.15 m Antenna, Pattern, X-pol, Azimuth LHCP

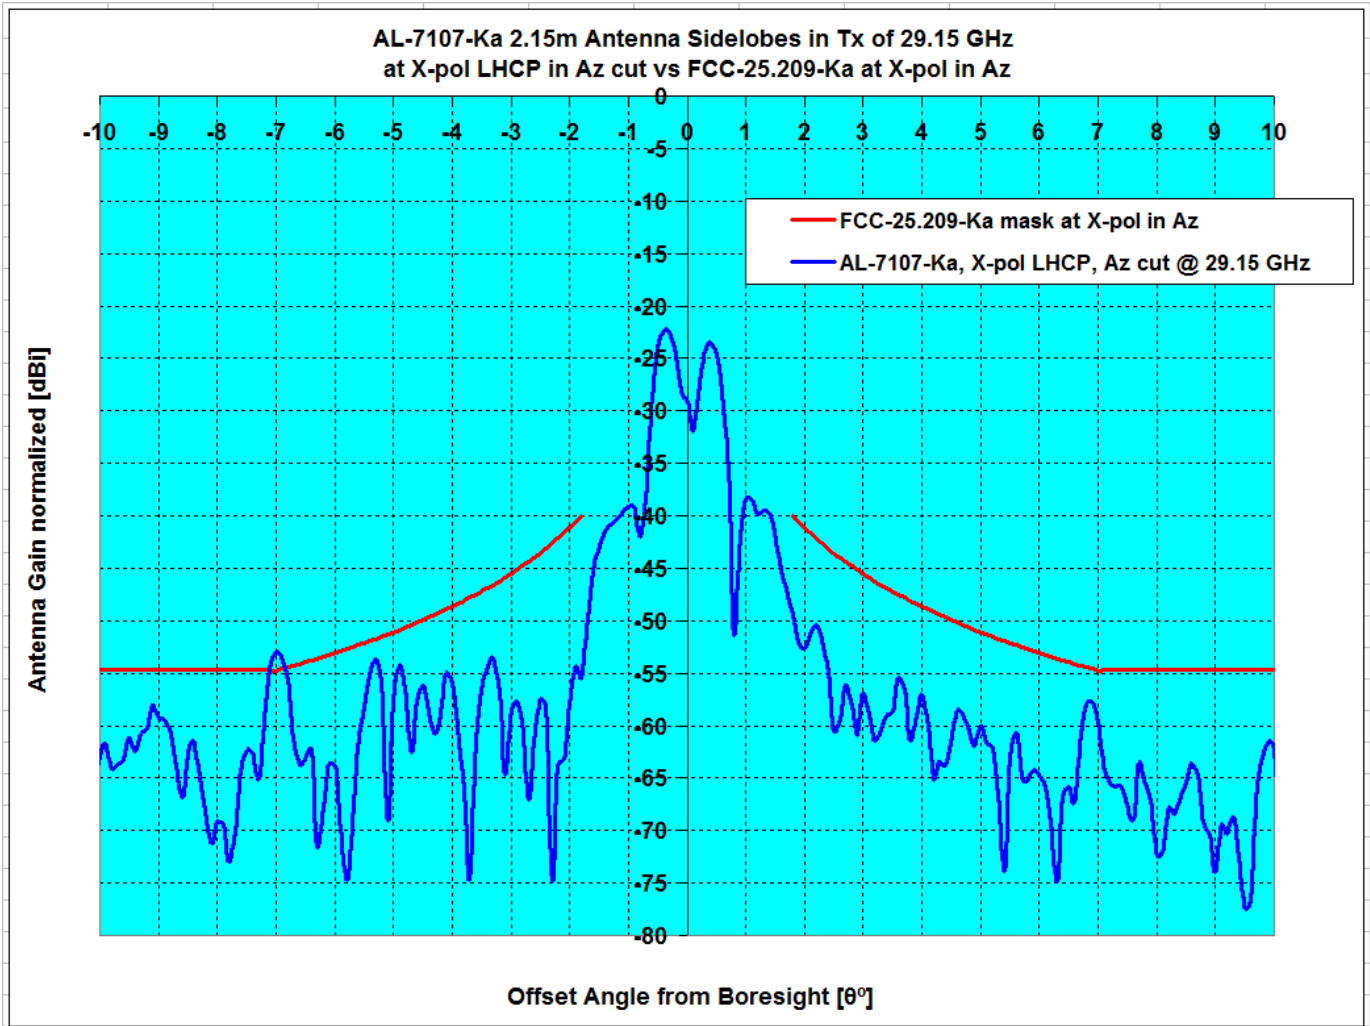

Description	Plane, CirP	Frequency	Ant. Gain	Peak Excursions dB		Over Mask %	
				1.8°≤θ≤7°	1.8°≤θ≤9.2°	1.8°≤θ≤7°	1.8°≤θ≤9.2°
Pattern Rule vs Antenna System	Type	GHz	dBi				
FCC-25.209-Ka, X-pol Az, vs AL-7107-Ka	Az , LHCP	29.15	52.63	1.89	1.89	1.89%	1.20%

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Azimuth RHCP, -180° to +180° @ 1.0° increment

29.15 GHz Antenna Pattern in Co-pol Az RHCP

Angle Degrees	Gain dBi	Mask dBi	Over Mask dB
-179.0	-25.9	0.0	-25.9
-178.0	-18.2	0.0	-18.2
-177.0	-20.5	0.0	-20.5
-176.0	-25.0	0.0	-25.0
-175.0	-27.4	0.0	-27.4
-174.0	-27.4	0.0	-27.4
-173.0	-26.9	0.0	-26.9
-172.0	-27.4	0.0	-27.4
-171.0	-23.9	0.0	-23.9
-170.0	-25.9	0.0	-25.9
-169.0	-18.2	0.0	-18.2
-168.0	-20.5	0.0	-20.5
-167.0	-25.0	0.0	-25.0
-166.0	-27.4	0.0	-27.4
-165.0	-27.4	0.0	-27.4
-164.0	-26.9	0.0	-26.9
-163.0	-27.4	0.0	-27.4
-162.0	-19.4	0.0	-19.4
-161.0	-20.8	0.0	-20.8
-160.0	-27.0	0.0	-27.0
-159.0	-26.0	0.0	-26.0
-158.0	-27.4	0.0	-27.4
-157.0	-19.8	0.0	-19.8
-156.0	-27.4	0.0	-27.4
-155.0	-27.4	0.0	-27.4
-154.0	-20.7	0.0	-20.7
-153.0	-22.6	0.0	-22.6
-152.0	-15.2	0.0	-15.2
-151.0	-19.3	0.0	-19.3
-150.0	-17.7	0.0	-17.7
-149.0	-27.4	0.0	-27.4
-148.0	-25.8	0.0	-25.8
-147.0	-24.5	0.0	-24.5
-146.0	-15.8	0.0	-15.8
-145.0	-15.5	0.0	-15.5
-144.0	-20.2	0.0	-20.2
-143.0	-20.2	0.0	-20.2
-142.0	-21.6	0.0	-21.6
-141.0	-20.2	0.0	-20.2
-140.0	-16.0	0.0	-16.0
-139.0	-20.2	0.0	-20.2
-138.0	-20.6	0.0	-20.6
-137.0	-20.5	0.0	-20.5
-136.0	-23.7	0.0	-23.7
-135.0	-15.0	0.0	-15.0
-134.0	-15.9	0.0	-15.9
-133.0	-27.4	0.0	-27.4
-132.0	-25.2	0.0	-25.2
-131.0	-22.1	0.0	-22.1
-130.0	-16.0	0.0	-16.0
-129.0	-16.1	0.0	-16.1
-128.0	-18.9	0.0	-18.9
-127.0	-15.9	0.0	-15.9
-126.0	-15.0	0.0	-15.0
-125.0	-22.5	0.0	-22.5
-124.0	-19.5	0.0	-19.5
-123.0	-20.8	0.0	-20.8
-122.0	-25.3	0.0	-25.3
-121.0	-20.6	0.0	-20.6
-120.0	-26.0	0.0	-26.0

29.15 GHz Antenna Pattern in Co-pol Az RHCP

Angle Degrees	Gain dBi	Mask dBi	Over Mask dB
0.0	52.6		
1.0	15.7		
2.0	10.0	21.5	-11.5
3.0	9.1	17.1	-8.0
4.0	-4.1	13.9	-18.1
5.0	-10.4	11.5	-21.9
6.0	0.3	9.5	-9.2
7.0	-14.1	7.9	-21.9
8.0	-5.4	8.0	-13.4
9.0	-3.3	8.0	-11.3
10.0	-5.3	7.0	-12.3
11.0	-15.6	6.0	-21.5
12.0	-3.1	5.0	-8.1
13.0	-6.7	4.2	-10.9
14.0	-12.7	3.3	-16.0
15.0	-17.4	2.6	-20.0
16.0	-23.4	1.9	-25.3
17.0	-16.6	1.2	-17.9
18.0	-14.4	0.6	-15.0
19.0	-19.6	0.0	-19.6
20.0	-10.9	-0.5	-10.3
21.0	-15.4	-1.1	-14.3
22.0	-4.5	-1.6	-3.0
23.0	-3.7	-2.0	-1.7
24.0	-5.9	-2.5	-3.4
25.0	-11.3	-2.9	-8.3
26.0	-7.7	-3.4	-4.3
27.0	-7.5	-3.8	-3.7
28.0	-13.5	-4.2	-9.3
29.0	-8.8	-4.6	-4.3
30.0	-7.2	-4.9	-2.3
31.0	-5.8	-5.3	-0.5
32.0	-9.8	-5.6	-4.2
33.0	-5.0	-6.0	0.9
34.0	-10.9	-6.3	-4.6
35.0	-9.4	-6.6	-2.8
36.0	-5.1	-6.9	1.9
37.0	-6.4	-7.2	0.8
38.0	-9.6	-7.5	-2.1
39.0	-9.4	-7.8	-1.6
40.0	-9.6	-8.1	-1.5
41.0	-12.3	-8.3	-4.0
42.0	-11.1	-8.6	-2.5
43.0	-11.7	-8.8	-2.9
44.0	-9.0	-9.1	0.1
45.0	-9.2	-9.3	0.1
46.0	-9.5	-9.6	0.1
47.0	-7.6	-9.8	2.2
48.0	-14.1	-10.0	-4.1
49.0	-10.6	-10.0	-0.6
50.0	-13.3	-10.0	-3.3
51.0	-21.6	-10.0	-11.6
52.0	-16.7	-10.0	-6.7
53.0	-14.1	-10.0	-4.1
54.0	-16.3	-10.0	-6.3
55.0	-19.5	-10.0	-9.5
56.0	-26.5	-10.0	-16.5
57.0	-23.2	-10.0	-13.2
58.0	-19.6	-10.0	-9.6
59.0	-25.0	-10.0	-15.0

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Azimuth RHCP, -180° to +180° @ 1.0° increment

-119.0	-26.2	0.0	-26.2
-118.0	-24.0	0.0	-24.0
-117.0	-26.3	0.0	-26.3
-116.0	-22.1	0.0	-22.1
-115.0	-27.4	0.0	-27.4
-114.0	-22.4	0.0	-22.4
-113.0	-17.6	0.0	-17.6
-112.0	-19.9	0.0	-19.9
-111.0	-17.4	0.0	-17.4
-110.0	-17.3	0.0	-17.3
-109.0	-27.4	0.0	-27.4
-108.0	-24.7	0.0	-24.7
-107.0	-25.2	0.0	-25.2
-106.0	-20.2	0.0	-20.2
-105.0	-20.5	0.0	-20.5
-104.0	-19.9	0.0	-19.9
-103.0	-20.1	0.0	-20.1
-102.0	-16.2	0.0	-16.2
-101.0	-23.3	0.0	-23.3
-100.0	-17.0	0.0	-17.0
-99.0	-20.0	0.0	-20.0
-98.0	-27.4	0.0	-27.4
-97.0	-23.7	0.0	-23.7
-96.0	-27.4	0.0	-27.4
-95.0	-19.7	0.0	-19.7
-94.0	-19.6	0.0	-19.6
-93.0	-22.6	0.0	-22.6
-92.0	-20.0	0.0	-20.0
-91.0	-18.8	0.0	-18.8
-90.0	-21.7	0.0	-21.7
-89.0	-27.2	0.0	-27.2
-88.0	-18.7	0.0	-18.7
-87.0	-15.9	0.0	-15.9
-86.0	-13.3	0.0	-13.3
-85.0	-13.3	-10.0	-3.3
-84.0	-15.3	-10.0	-5.3
-83.0	-20.2	-10.0	-10.2
-82.0	-20.2	-10.0	-10.2
-81.0	-12.7	-10.0	-2.7
-80.0	-12.8	-10.0	-2.8
-79.0	-10.3	-10.0	-0.3
-78.0	-9.3	-10.0	0.7
-77.0	-16.7	-10.0	-6.7
-76.0	-14.2	-10.0	-4.2
-75.0	-14.6	-10.0	-4.6
-74.0	-10.9	-10.0	-0.9
-73.0	-10.2	-10.0	-0.2
-72.0	-6.9	-10.0	3.1
-71.0	-6.7	-10.0	3.3
-70.0	-5.8	-10.0	4.2
-69.0	-6.8	-10.0	3.2
-68.0	-4.7	-10.0	5.3
-67.0	-4.6	-10.0	5.4
-66.0	-5.1	-10.0	4.9
-65.0	-6.4	-10.0	3.6
-64.0	-4.8	-10.0	5.2
-63.0	-6.9	-10.0	3.1
-62.0	-7.4	-10.0	2.6
-61.0	-9.4	-10.0	0.6
-60.0	-10.4	-10.0	-0.4
-59.0	-11.1	-10.0	-1.1
-58.0	-11.5	-10.0	-1.5
-57.0	-15.0	-10.0	-5.0

60.0	-22.4	-10.0	-12.4
61.0	-25.4	-10.0	-15.4
62.0	-24.5	-10.0	-14.5
63.0	-27.4	-10.0	-17.4
64.0	-18.1	-10.0	-8.1
65.0	-19.8	-10.0	-9.8
66.0	-27.4	-10.0	-17.4
67.0	-19.9	-10.0	-9.9
68.0	-25.1	-10.0	-15.1
69.0	-21.3	-10.0	-11.3
70.0	-20.3	-10.0	-10.3
71.0	-19.9	-10.0	-9.9
72.0	-16.1	-10.0	-6.1
73.0	-15.1	-10.0	-5.1
74.0	-17.3	-10.0	-7.3
75.0	-17.4	-10.0	-7.4
76.0	-19.9	-10.0	-9.9
77.0	-27.4	-10.0	-17.4
78.0	-20.4	-10.0	-10.4
79.0	-27.4	-10.0	-17.4
80.0	-21.5	-10.0	-11.5
81.0	-22.2	-10.0	-12.2
82.0	-23.5	-10.0	-13.5
83.0	-23.1	-10.0	-13.1
84.0	-26.5	-10.0	-16.5
85.0	-27.4	-10.0	-17.4
86.0	-25.4	0.0	-25.4
87.0	-21.5	0.0	-21.5
88.0	-19.6	0.0	-19.6
89.0	-25.7	0.0	-25.7
90.0	-18.6	0.0	-18.6
91.0	-25.0	0.0	-25.0
92.0	-26.8	0.0	-26.8
93.0	-27.4	0.0	-27.4
94.0	-18.2	0.0	-18.2
95.0	-25.1	0.0	-25.1
96.0	-22.6	0.0	-22.6
97.0	-24.3	0.0	-24.3
98.0	-25.3	0.0	-25.3
99.0	-27.3	0.0	-27.3
100.0	-19.9	0.0	-19.9
101.0	-21.8	0.0	-21.8
102.0	-24.4	0.0	-24.4
103.0	-22.8	0.0	-22.8
104.0	-22.2	0.0	-22.2
105.0	-19.6	0.0	-19.6
106.0	-24.5	0.0	-24.5
107.0	-23.1	0.0	-23.1
108.0	-23.4	0.0	-23.4
109.0	-24.9	0.0	-24.9
110.0	-23.0	0.0	-23.0
111.0	-24.6	0.0	-24.6
112.0	-19.7	0.0	-19.7
113.0	-24.1	0.0	-24.1
114.0	-25.2	0.0	-25.2
115.0	-22.9	0.0	-22.9
116.0	-23.2	0.0	-23.2
117.0	-27.1	0.0	-27.1
118.0	-25.0	0.0	-25.0
119.0	-27.0	0.0	-27.0
120.0	-27.4	0.0	-27.4
121.0	-26.7	0.0	-26.7
122.0	-21.1	0.0	-21.1

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Azimuth RHCP, -180° to +180° @ 1.0° increment

-56.0	-15.1	-10.0	-5.1
-55.0	-14.6	-10.0	-4.6
-54.0	-15.9	-10.0	-5.9
-53.0	-11.4	-10.0	-1.4
-52.0	-11.8	-10.0	-1.8
-51.0	-15.5	-10.0	-5.5
-50.0	-15.8	-10.0	-5.8
-49.0	-16.5	-10.0	-6.5
-48.0	-20.7	-10.0	-10.7
-47.0	-27.4	-9.8	-17.6
-46.0	-14.0	-9.6	-4.4
-45.0	-15.7	-9.3	-6.4
-44.0	-12.7	-9.1	-3.6
-43.0	-18.4	-8.8	-9.6
-42.0	-16.2	-8.6	-7.6
-41.0	-17.4	-8.3	-9.0
-40.0	-16.9	-8.1	-8.9
-39.0	-22.9	-7.8	-15.1
-38.0	-22.0	-7.5	-14.5
-37.0	-18.9	-7.2	-11.7
-36.0	-14.3	-6.9	-7.4
-35.0	-18.4	-6.6	-11.8
-34.0	-15.6	-6.3	-9.3
-33.0	-16.2	-6.0	-10.2
-32.0	-17.3	-5.6	-11.6
-31.0	-19.6	-5.3	-14.3
-30.0	-14.8	-4.9	-9.9
-29.0	-18.2	-4.6	-13.7
-28.0	-19.4	-4.2	-15.2
-27.0	-21.4	-3.8	-17.6
-26.0	-21.2	-3.4	-17.8
-25.0	-10.8	-2.9	-7.8
-24.0	-19.7	-2.5	-17.2
-23.0	-18.1	-2.0	-16.1
-22.0	-19.3	-1.6	-17.8
-21.0	-19.3	-1.1	-18.2
-20.0	-18.0	-0.5	-17.5
-19.0	-20.8	0.0	-20.8
-18.0	-19.2	0.6	-19.8
-17.0	-18.9	1.2	-20.2
-16.0	-8.8	1.9	-10.7
-15.0	-22.5	2.6	-25.1
-14.0	-12.8	3.3	-16.2
-13.0	-10.9	4.2	-15.1
-12.0	-12.0	5.0	-17.1
-11.0	-6.4	6.0	-12.4
-10.0	-3.1	7.0	-10.1
-9.0	-8.1	8.0	-16.1
-8.0	-7.7	8.0	-15.7
-7.0	-2.7	7.9	-10.5
-6.0	0.8	9.5	-8.8
-5.0	-8.5	11.5	-20.0
-4.0	-5.6	13.9	-19.6
-3.0	7.9	17.1	-9.2
-2.0	4.7	21.5	-16.7
-1.0	17.2		
0.0	52.6		

123.0	-25.5	0.0	-25.5
124.0	-22.2	0.0	-22.2
125.0	-19.5	0.0	-19.5
126.0	-27.4	0.0	-27.4
127.0	-24.9	0.0	-24.9
128.0	-21.7	0.0	-21.7
129.0	-25.5	0.0	-25.5
130.0	-21.6	0.0	-21.6
131.0	-26.1	0.0	-26.1
132.0	-27.4	0.0	-27.4
133.0	-27.4	0.0	-27.4
134.0	-25.8	0.0	-25.8
135.0	-27.1	0.0	-27.1
136.0	-26.9	0.0	-26.9
137.0	-27.4	0.0	-27.4
138.0	-21.9	0.0	-21.9
139.0	-24.9	0.0	-24.9
140.0	-22.5	0.0	-22.5
141.0	-20.8	0.0	-20.8
142.0	-27.4	0.0	-27.4
143.0	-25.8	0.0	-25.8
144.0	-27.4	0.0	-27.4
145.0	-27.4	0.0	-27.4
146.0	-24.8	0.0	-24.8
147.0	-23.5	0.0	-23.5
148.0	-27.4	0.0	-27.4
149.0	-23.6	0.0	-23.6
150.0	-23.9	0.0	-23.9
151.0	-27.1	0.0	-27.1
152.0	-26.7	0.0	-26.7
153.0	-22.1	0.0	-22.1
154.0	-27.4	0.0	-27.4
155.0	-18.6	0.0	-18.6
156.0	-27.4	0.0	-27.4
157.0	-27.4	0.0	-27.4
158.0	-27.4	0.0	-27.4
159.0	-25.5	0.0	-25.5
160.0	-25.5	0.0	-25.5
161.0	-20.0	0.0	-20.0
162.0	-26.2	0.0	-26.2
163.0	-20.2	0.0	-20.2
164.0	-24.1	0.0	-24.1
165.0	-27.4	0.0	-27.4
166.0	-24.5	0.0	-24.5
167.0	-27.4	0.0	-27.4
168.0	-27.4	0.0	-27.4
169.0	-27.4	0.0	-27.4
170.0	-27.0	0.0	-27.0
171.0	-26.5	0.0	-26.5
172.0	-27.4	0.0	-27.4
173.0	-27.4	0.0	-27.4
174.0	-22.7	0.0	-22.7
175.0	-24.8	0.0	-24.8
176.0	-23.7	0.0	-23.7
177.0	-27.4	0.0	-27.4
178.0	-27.4	0.0	-27.4
179.0	-23.9	0.0	-23.9

Orbit Communication Systems Ltd.

AL AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Azimuth RHCP, -10° to +10° @ 0.1° increment

29.15 GHz Antenna Pattern in Co-pol Az RHCP

Angle Degrees	Gain dBi	Mask dBi	Over Mask dB
-10.0	-0.6	7.0	-7.6
-9.9	0.3	7.1	-6.8
-9.8	0.3	7.2	-6.9
-9.7	-0.9	7.3	-8.3
-9.6	-2.9	7.4	-10.3
-9.5	-4.9	7.6	-12.5
-9.4	-5.2	7.7	-12.9
-9.3	-7.7	7.8	-15.5
-9.2	-14.0	8.0	-22.0
-9.1	-9.9	8.0	-17.9
-9.0	-5.1	8.0	-13.1
-8.9	-4.5	8.0	-12.5
-8.8	-8.0	8.0	-16.0
-8.7	-14.3	8.0	-22.3
-8.6	-10.8	8.0	-18.8
-8.5	-5.9	8.0	-13.9
-8.4	-4.6	8.0	-12.6
-8.3	-7.4	8.0	-15.4
-8.2	-8.6	8.0	-16.6
-8.1	-9.0	8.0	-17.0
-8.0	-8.1	8.0	-16.1
-7.9	-5.5	8.0	-13.5
-7.8	-1.8	8.0	-9.8
-7.7	0.2	8.0	-7.8
-7.6	0.9	8.0	-7.1
-7.5	0.5	8.0	-7.5
-7.4	1.0	8.0	-7.0
-7.3	1.8	8.0	-6.2
-7.2	0.6	8.0	-7.4
-7.1	-4.9	8.0	-12.9
-7.0	-7.0	7.9	-14.9
-6.9	2.9	8.0	-5.1
-6.8	4.5	8.2	-3.6
-6.7	3.3	8.3	-5.1
-6.6	-1.4	8.5	-9.9
-6.5	1.7	8.7	-7.0
-6.4	3.5	8.8	-5.3
-6.3	3.9	9.0	-5.2
-6.2	3.8	9.2	-5.4
-6.1	3.7	9.4	-5.7
-6.0	2.4	9.5	-7.1
-5.9	-2.3	9.7	-12.1
-5.8	-12.0	9.9	-21.9
-5.7	-11.6	10.1	-21.7
-5.6	-14.6	10.3	-24.9
-5.5	-11.1	10.5	-21.6
-5.4	-14.2	10.7	-24.9
-5.3	-1.1	10.9	-12.0
-5.2	1.1	11.1	-10.0
-5.1	-1.5	11.3	-12.8
-5.0	-3.2	11.5	-14.7
-4.9	3.2	11.7	-8.5
-4.8	4.4	12.0	-7.6
-4.7	1.6	12.2	-10.6
-4.6	-5.3	12.4	-17.8
-4.5	0.6	12.7	-12.0
-4.4	6.2	12.9	-6.7
-4.3	7.0	13.2	-6.1
-4.2	2.6	13.4	-10.8
-4.1	-15.4	13.7	-29.1

29.15 GHz Antenna Pattern in Co-pol Az RHCP

Angle Degrees	Gain dBi	Mask dBi	Over Mask dB
0.0	52.8		
0.1	52.1		
0.2	49.5		
0.3	45.1		
0.4	40.0		
0.5	35.5		
0.6	29.5		
0.7	29.6		
0.8	30.4		
0.9	27.5		
1.0	16.6		
1.1	17.2		
1.2	13.8		
1.3	11.1		
1.4	16.2		
1.5	14.7	24.6	-9.9
1.6	16.2	23.9	-7.7
1.7	17.9	23.2	-5.4
1.8	15.7	22.6	-6.9
1.9	10.4	22.0	-11.6
2.0	9.5	21.5	-12.0
2.1	5.3	20.9	-15.6
2.2	1.1	20.4	-19.3
2.3	4.7	20.0	-15.3
2.4	6.2	19.5	-13.3
2.5	7.4	19.1	-11.7
2.6	5.2	18.6	-13.4
2.7	0.1	18.2	-18.1
2.8	5.1	17.8	-12.7
2.9	7.0	17.4	-10.4
3.0	9.4	17.1	-7.7
3.1	9.7	16.7	-7.0
3.2	7.8	16.4	-8.6
3.3	-0.1	16.0	-16.2
3.4	-15.6	15.7	-31.3
3.5	-4.3	15.4	-19.7
3.6	2.9	15.1	-12.2
3.7	4.4	14.8	-10.4
3.8	2.0	14.5	-12.5
3.9	-6.2	14.2	-20.5
4.0	-7.7	13.9	-21.6
4.1	-1.3	13.7	-15.0
4.2	2.6	13.4	-10.8
4.3	3.0	13.2	-10.1
4.4	2.7	12.9	-10.2
4.5	1.9	12.7	-10.8
4.6	-0.8	12.4	-13.2
4.7	-9.6	12.2	-21.8
4.8	-4.0	12.0	-16.0
4.9	-7.7	11.7	-19.4
5.0	-8.2	11.5	-19.7
5.1	-3.4	11.3	-14.7
5.2	-5.4	11.1	-16.5
5.3	-3.8	10.9	-14.7
5.4	0.5	10.7	-10.2
5.5	1.5	10.5	-9.0
5.6	-0.4	10.3	-10.7
5.7	-4.5	10.1	-14.6
5.8	-12.0	9.9	-21.9
5.9	-4.9	9.7	-14.6

Orbit Communication Systems Ltd.

AL AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
 Co-pol Azimuth RHCP, -10° to +10° @ 0.1° increment

-4.0	0.7	13.9	-13.2
-3.9	7.8	14.2	-6.5
-3.8	11.0	14.5	-3.5
-3.7	11.0	14.8	-3.8
-3.6	6.6	15.1	-8.5
-3.5	0.4	15.4	-15.0
-3.4	5.7	15.7	-10.0
-3.3	5.0	16.0	-11.0
-3.2	0.5	16.4	-15.8
-3.1	5.9	16.7	-10.8
-3.0	7.1	17.1	-10.0
-2.9	7.6	17.4	-9.8
-2.8	11.6	17.8	-6.2
-2.7	13.1	18.2	-5.1
-2.6	11.1	18.6	-7.5
-2.5	5.0	19.1	-14.0
-2.4	-2.4	19.5	-21.9
-2.3	0.2	20.0	-19.8
-2.2	4.2	20.4	-16.3
-2.1	1.1	20.9	-19.8
-2.0	6.1	21.5	-15.4
-1.9	11.3	22.0	-10.7
-1.8	9.9	22.6	-12.7
-1.7	3.5	23.2	-19.7
-1.6	6.7	23.9	-17.2
-1.5	4.8	24.6	-19.8
-1.4	14.5		
-1.3	19.0		
-1.2	19.5		
-1.1	18.9		
-1.0	16.0		
-0.9	6.8		
-0.8	18.4		
-0.7	18.4		
-0.6	19.7		
-0.5	32.4		
-0.4	40.3		
-0.3	46.3		
-0.2	50.3		
-0.1	52.3		
0.0	52.8		

6.0	-0.5	9.5	-10.1
6.1	0.9	9.4	-8.5
6.2	2.2	9.2	-7.0
6.3	1.8	9.0	-7.2
6.4	0.2	8.8	-8.7
6.5	1.2	8.7	-7.5
6.6	3.2	8.5	-5.3
6.7	2.6	8.3	-5.8
6.8	0.6	8.2	-7.6
6.9	-3.0	8.0	-11.1
7.0	-14.4	7.9	-22.3
7.1	-4.2	8.0	-12.2
7.2	-1.5	8.0	-9.5
7.3	-3.0	8.0	-11.0
7.4	-6.5	8.0	-14.5
7.5	-5.2	8.0	-13.2
7.6	-4.1	8.0	-12.1
7.7	-1.8	8.0	-9.8
7.8	-3.3	8.0	-11.3
7.9	-6.7	8.0	-14.7
8.0	-13.7	8.0	-21.7
8.1	-5.8	8.0	-13.8
8.2	-6.5	8.0	-14.5
8.3	-5.4	8.0	-13.4
8.4	-4.3	8.0	-12.3
8.5	-6.0	8.0	-14.0
8.6	-11.0	8.0	-19.0
8.7	-20.2	8.0	-28.2
8.8	-15.9	8.0	-23.9
8.9	-8.1	8.0	-16.1
9.0	-5.2	8.0	-13.2
9.1	-8.4	8.0	-16.4
9.2	-10.2	8.0	-18.2
9.3	-6.5	7.8	-14.3
9.4	-3.6	7.7	-11.3
9.5	-3.7	7.6	-11.3
9.6	-4.8	7.4	-12.2
9.7	-6.5	7.3	-13.8
9.8	-9.0	7.2	-16.2
9.9	-11.9	7.1	-19.0
10.0	-7.7	7.0	-14.7

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Elevation RHCP, -30° to +30° @ 0.5° increment

29.15 GHz Antenna Pattern in Co-pol EI RHCP

Angle Degrees	Gain dBi	Mask dBi	Over Mask dB
-30.0	-7.6	-4.9	-2.7
-29.5	-9.3	-4.7	-4.5
-29.0	-9.0	-4.6	-4.5
-28.5	-7.4	-4.4	-3.1
-28.0	-9.3	-4.2	-5.1
-27.5	-13.4	-4.0	-9.4
-27.0	-12.8	-3.8	-9.1
-26.5	-12.4	-3.6	-8.8
-26.0	-7.6	-3.4	-4.2
-25.5	-7.8	-3.2	-4.7
-25.0	-13.4	-2.9	-10.4
-24.5	-5.6	-2.7	-2.8
-24.0	-8.2	-2.5	-5.7
-23.5	-14.3	-2.3	-12.0
-23.0	-14.6	-2.0	-12.5
-22.5	-18.2	-1.8	-16.4
-22.0	-16.2	-1.6	-14.6
-21.5	-6.2	-1.3	-4.9
-21.0	-6.2	-1.1	-5.1
-20.5	-6.1	-0.8	-5.3
-20.0	-2.2	-0.5	-1.7
-19.5	-0.5	-0.3	-0.3
-19.0	-0.5	0.0	-0.5
-18.5	-2.6	0.3	-2.9
-18.0	-5.4	0.6	-6.0
-17.5	-12.2	0.9	-13.1
-17.0	-11.4	1.2	-12.6
-16.5	-11.3	1.6	-12.8
-16.0	-19.4	1.9	-21.3
-15.5	-11.4	2.2	-13.6
-15.0	-4.8	2.6	-7.4
-14.5	-10.5	3.0	-13.5
-14.0	-4.3	3.3	-7.7
-13.5	-9.2	3.7	-12.9
-13.0	-6.5	4.2	-10.6
-12.5	-4.3	4.6	-8.9
-12.0	-15.5	5.0	-20.5
-11.5	-5.2	5.5	-10.7
-11.0	-6.8	6.0	-12.8
-10.5	-6.6	6.5	-13.1
-10.0	-9.6	7.0	-16.6
-9.5	-4.5	7.6	-12.1
-9.0	-5.3	8.1	-13.4
-8.5	-10.2	8.8	-19.0
-8.0	-2.9	9.4	-12.4
-7.5	-7.3	10.1	-17.4
-7.0	1.0	10.9	-9.8
-6.5	1.0	11.7	-10.7
-6.0	1.3	12.5	-11.2
-5.5	-0.8	13.5	-14.3
-5.0	3.8	14.5	-10.7
-4.5	4.6	15.7	-11.0
-4.0	10.0	16.9	-6.9
-3.5	8.8	18.4	-9.6
-3.0	-1.5		
-2.5	11.3		
-2.0	11.7		
-1.5	18.8		
-1.0	22.6		
-0.5	34.4		
0.0	52.6		

29.15 GHz Antenna Pattern in Co-pol EI RHCP

Angle Degrees	Gain dBi	Mask dBi	Over Mask dB
0.0	52.6		
0.5	37.1		
1.0	18.1		
1.5	10.2		
2.0	10.3		
2.5	6.9		
3.0	1.1		
3.5	12.4	18.4	-6.0
4.0	14.0	16.9	-2.9
4.5	2.9	15.7	-12.8
5.0	10.3	14.5	-4.3
5.5	2.8	13.5	-10.7
6.0	-3.4	12.5	-16.0
6.5	2.4	11.7	-9.3
7.0	-4.1	10.9	-15.0
7.5	-11.7	10.1	-21.8
8.0	-7.8	9.4	-17.2
8.5	-7.8	8.8	-16.5
9.0	-7.6	8.1	-15.7
9.5	-5.3	7.6	-12.9
10.0	1.0	7.0	-6.0
10.5	-8.9	6.5	-15.3
11.0	-5.1	6.0	-11.0
11.5	-6.7	5.5	-12.1
12.0	-10.0	5.0	-15.0
12.5	-2.5	4.6	-7.1
13.0	-3.9	4.2	-8.1
13.5	-8.1	3.7	-11.8
14.0	-19.9	3.3	-23.2
14.5	-14.1	3.0	-17.0
15.0	-12.9	2.6	-15.5
15.5	-23.7	2.2	-25.9
16.0	-25.9	1.9	-27.8
16.5	-11.2	1.6	-12.8
17.0	-14.8	1.2	-16.1
17.5	-15.9	0.9	-16.8
18.0	-12.5	0.6	-13.2
18.5	-11.1	0.3	-11.4
19.0	-26.4	0.0	-26.5
19.5	-10.5	-0.3	-10.3
20.0	-15.3	-0.5	-14.8
20.5	-15.6	-0.8	-14.8
21.0	-14.4	-1.1	-13.4
21.5	-16.2	-1.3	-14.8
22.0	-16.7	-1.6	-15.2
22.5	-14.3	-1.8	-12.5
23.0	-18.5	-2.0	-16.4
23.5	-15.9	-2.3	-13.6
24.0	-20.1	-2.5	-17.6
24.5	-26.6	-2.7	-23.9
25.0	-22.3	-2.9	-19.3
25.5	-20.3	-3.2	-17.2
26.0	-21.3	-3.4	-17.9
26.5	-18.1	-3.6	-14.5
27.0	-19.6	-3.8	-15.8
27.5	-20.4	-4.0	-16.4
28.0	-22.4	-4.2	-18.3
28.5	-23.5	-4.4	-19.2
29.0	-22.5	-4.6	-17.9
29.5	-21.3	-4.7	-16.5
30.0	-18.5	-4.9	-13.6

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
Co-pol Elevation RHCP, -10° to +10° @ 0.1° increment

29.15 GHz Antenna Pattern in Co-pol EI RHCP

Angle Degrees	Gain dBi	Mask dBi	Over Mask dB
-10.0	-3.3	7.0	-10.3
-9.9	-4.4	7.1	-11.5
-9.8	-3.0	7.2	-10.2
-9.7	-0.4	7.3	-7.7
-9.6	0.3	7.4	-7.2
-9.5	-3.4	7.6	-11.0
-9.4	-10.7	7.7	-18.4
-9.3	-6.7	7.8	-14.5
-9.2	-7.8	7.9	-15.7
-9.1	-18.8	8.0	-26.9
-9.0	-7.4	8.1	-15.5
-8.9	-6.0	8.3	-14.3
-8.8	-8.7	8.4	-17.1
-8.7	-1.9	8.5	-10.4
-8.6	0.3	8.6	-8.4
-8.5	-1.6	8.8	-10.3
-8.4	-9.7	8.9	-18.6
-8.3	-18.5	9.0	-27.6
-8.2	-13.1	9.2	-22.3
-8.1	-11.2	9.3	-20.4
-8.0	-6.3	9.4	-15.7
-7.9	-4.0	9.6	-13.6
-7.8	-1.9	9.7	-11.6
-7.7	-1.2	9.8	-11.0
-7.6	-4.6	10.0	-14.6
-7.5	-16.5	10.1	-26.6
-7.4	-13.3	10.3	-23.5
-7.3	-14.6	10.4	-25.0
-7.2	-18.3	10.6	-28.9
-7.1	-8.4	10.7	-19.1
-7.0	-1.1	10.9	-12.0
-6.9	1.7	11.0	-9.3
-6.8	0.6	11.2	-10.6
-6.7	-2.9	11.3	-14.2
-6.6	-0.3	11.5	-11.8
-6.5	1.4	11.7	-10.3
-6.4	-0.8	11.8	-12.7
-6.3	-7.1	12.0	-19.2
-6.2	-4.2	12.2	-16.3
-6.1	-1.9	12.4	-14.3
-6.0	0.3	12.5	-12.3
-5.9	0.8	12.7	-12.0
-5.8	-2.4	12.9	-15.3
-5.7	-1.2	13.1	-14.3
-5.6	0.9	13.3	-12.4
-5.5	-1.2	13.5	-14.6
-5.4	-6.9	13.7	-20.6
-5.3	-5.7	13.9	-19.6
-5.2	-4.6	14.1	-18.7
-5.1	-0.9	14.3	-15.2
-5.0	1.8	14.5	-12.8
-4.9	2.9	14.7	-11.8
-4.8	1.8	15.0	-13.2
-4.7	2.1	15.2	-13.1
-4.6	3.9	15.4	-11.5
-4.5	3.3	15.7	-12.3
-4.4	-0.5	15.9	-16.4
-4.3	2.1	16.2	-14.0
-4.2	7.1	16.4	-9.3
-4.1	8.9	16.7	-7.8

29.15 GHz Antenna Pattern in Co-pol EI RHCP

Angle Degrees	Gain dBi	Mask dBi	Over Mask dB
0.0	52.8		
0.1	52.0		
0.2	49.4		
0.3	44.9		
0.4	40.5		
0.5	37.4		
0.6	32.8		
0.7	20.2		
0.8	20.0		
0.9	17.8		
1.0	15.9		
1.1	18.4		
1.2	13.8		
1.3	6.6		
1.4	9.9		
1.5	6.3		
1.6	12.1		
1.7	12.2		
1.8	10.0		
1.9	11.6		
2.0	12.6		
2.1	13.7		
2.2	14.1		
2.3	13.3		
2.4	12.1		
2.5	8.9		
2.6	0.2		
2.7	-0.8		
2.8	-1.3		
2.9	-2.3		
3.0	0.1		
3.1	-0.3		
3.2	8.4		
3.3	11.8		
3.4	12.3		
3.5	11.0	18.4	-7.4
3.6	9.2	18.1	-8.9
3.7	11.0	17.8	-6.8
3.8	13.0	17.5	-4.5
3.9	13.2	17.2	-4.0
4.0	13.0	16.9	-3.9
4.1	12.3	16.7	-4.3
4.2	9.3	16.4	-7.1
4.3	1.3	16.2	-14.9
4.4	2.1	15.9	-13.9
4.5	3.2	15.7	-12.4
4.6	4.4	15.4	-11.1
4.7	5.5	15.2	-9.7
4.8	6.1	15.0	-8.9
4.9	9.0	14.7	-5.7
5.0	9.5	14.5	-5.0
5.1	7.3	14.3	-7.0
5.2	-1.8	14.1	-15.9
5.3	-5.5	13.9	-19.4
5.4	-1.0	13.7	-14.6
5.5	-3.5	13.5	-16.9
5.6	-6.9	13.3	-20.2
5.7	-11.7	13.1	-24.8
5.8	-6.6	12.9	-19.5
5.9	-6.7	12.7	-19.4

Orbit Communication Systems Ltd.
 AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
 Co-pol Elevation RHCP, -10° to +10° @ 0.1° increment

-4.0	8.6	16.9	-8.3
-3.9	5.5	17.2	-11.7
-3.8	-10.7	17.5	-28.2
-3.7	4.8	17.8	-13.0
-3.6	8.2	18.1	-9.8
-3.5	8.0	18.4	-10.4
-3.4	6.7		
-3.3	2.0		
-3.2	-7.6		
-3.1	4.0		
-3.0	0.9		
-2.9	6.5		
-2.8	13.5		
-2.7	14.7		
-2.6	12.7		
-2.5	10.2		
-2.4	13.5		
-2.3	14.5		
-2.2	14.4		
-2.1	13.6		
-2.0	10.8		
-1.9	7.1		
-1.8	5.9		
-1.7	9.3		
-1.6	16.0		
-1.5	19.4		
-1.4	19.7		
-1.3	13.8		
-1.2	17.5		
-1.1	22.7		
-1.0	22.5		
-0.9	20.9		
-0.8	24.4		
-0.7	28.0		
-0.6	31.0		
-0.5	32.7		
-0.4	38.2		
-0.3	45.4		
-0.2	50.0		
-0.1	52.3		
0.0	52.8		

6.0	-11.2	12.5	-23.7
6.1	-11.2	12.4	-23.5
6.2	-9.0	12.2	-21.2
6.3	-2.4	12.0	-14.4
6.4	1.3	11.8	-10.6
6.5	2.0	11.7	-9.6
6.6	0.3	11.5	-11.2
6.7	-1.8	11.3	-13.1
6.8	-4.7	11.2	-15.8
6.9	-10.5	11.0	-21.5
7.0	-3.9	10.9	-14.8
7.1	-0.2	10.7	-10.9
7.2	0.0	10.6	-10.5
7.3	-1.1	10.4	-11.5
7.4	-4.5	10.3	-14.8
7.5	-14.5	10.1	-24.7
7.6	-4.3	10.0	-14.3
7.7	-2.1	9.8	-11.9
7.8	-1.6	9.7	-11.3
7.9	-2.3	9.6	-11.9
8.0	-4.1	9.4	-13.5
8.1	-8.0	9.3	-17.3
8.2	-7.7	9.2	-16.8
8.3	-4.6	9.0	-13.7
8.4	-5.7	8.9	-14.6
8.5	-9.0	8.8	-17.8
8.6	-7.2	8.6	-15.8
8.7	-5.2	8.5	-13.8
8.8	-6.9	8.4	-15.3
8.9	-9.5	8.3	-17.8
9.0	-13.3	8.1	-21.5
9.1	-13.3	8.0	-21.3
9.2	-8.8	7.9	-16.7
9.3	-9.2	7.8	-17.0
9.4	-7.8	7.7	-15.5
9.5	-2.8	7.6	-10.3
9.6	0.3	7.4	-7.1
9.7	2.8	7.3	-4.5
9.8	3.2	7.2	-4.1
9.9	3.2	7.1	-3.9
10.0	0.6	7.0	-6.4

Orbit Communication Systems Ltd.
AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
X-pol Azimuth RHCP, -10° to +10° @ 0.1° increment

29.15 GHz Antenna Pattern in X-pol Az RHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
-10.0	-8.3	-2.0	-6.3
-9.9	-9.1	-2.0	-7.1
-9.8	-8.2	-2.0	-6.2
-9.7	-7.6	-2.0	-5.6
-9.6	-6.4	-2.0	-4.4
-9.5	-5.9	-2.0	-3.9
-9.4	-4.5	-2.0	-2.5
-9.3	-4.0	-2.0	-2.0
-9.2	-4.4	-2.0	-2.4
-9.1	-6.7	-2.0	-4.7
-9.0	-9.4	-2.0	-7.4
-8.9	-12.6	-2.0	-10.6
-8.8	-13.0	-2.0	-11.0
-8.7	-12.2	-2.0	-10.2
-8.6	-12.6	-2.0	-10.6
-8.5	-11.1	-2.0	-9.1
-8.4	-8.3	-2.0	-6.3
-8.3	-5.8	-2.0	-3.8
-8.2	-6.4	-2.0	-4.4
-8.1	-8.6	-2.0	-6.6
-8.0	-13.5	-2.0	-11.5
-7.9	-10.7	-2.0	-8.7
-7.8	-8.3	-2.0	-6.3
-7.7	-6.8	-2.0	-4.8
-7.6	-9.2	-2.0	-7.2
-7.5	-8.0	-2.0	-6.0
-7.4	-4.0	-2.0	-2.0
-7.3	-2.8	-2.0	-0.8
-7.2	-3.7	-2.0	-1.7
-7.1	-1.7	-2.0	0.3
-7.0	-0.7	-2.1	1.4
-6.9	-0.6	-2.0	1.4
-6.8	-2.2	-1.8	-0.4
-6.7	-4.6	-1.7	-2.9
-6.6	-4.2	-1.5	-2.7
-6.5	-1.7	-1.3	-0.4
-6.4	-1.5	-1.2	-0.4
-6.3	-3.9	-1.0	-2.9
-6.2	-9.4	-0.8	-8.6
-6.1	-21.5	-0.6	-20.8
-6.0	-14.5	-0.5	-14.1
-5.9	-15.6	-0.3	-15.3
-5.8	-10.2	-0.1	-10.1
-5.7	-7.3	0.1	-7.4
-5.6	-5.6	0.3	-5.9
-5.5	-11.7	0.5	-12.2
-5.4	-17.1	0.7	-17.8
-5.3	-8.1	0.9	-9.0
-5.2	-6.5	1.1	-7.6
-5.1	-15.0	1.3	-16.3
-5.0	-6.9	1.5	-8.4
-4.9	-1.8	1.7	-3.5
-4.8	-0.6	2.0	-2.6
-4.7	-2.2	2.2	-4.4
-4.6	-10.8	2.4	-13.2
-4.5	-15.9	2.7	-18.6
-4.4	-6.1	2.9	-9.0
-4.3	0.2	3.2	-3.0
-4.2	2.9	3.4	-0.6
-4.1	2.5	3.7	-1.2


29.15 GHz Antenna Pattern in X-pol Az RHCP

Angle	Gain	Mask	Over Mask
Degrees	dBi	dBi	dB
0.0	27.0		
0.1	25.2		
0.2	30.7		
0.3	32.9		
0.4	32.9		
0.5	30.6		
0.6	25.6		
0.7	19.5		
0.8	12.4		
0.9	2.2		
1.0	12.6		
1.1	12.2		
1.2	6.8		
1.3	7.0		
1.4	8.4		
1.5	8.4		
1.6	7.1		
1.7	2.9		
1.8	-9.5	12.6	-22.1
1.9	-8.6	12.0	-20.6
2.0	-10.9	11.5	-22.4
2.1	-5.3	10.9	-16.2
2.2	-3.0	10.4	-13.4
2.3	-1.9	10.0	-11.9
2.4	-2.3	9.5	-11.8
2.5	-4.0	9.1	-13.0
2.6	-1.5	8.6	-10.2
2.7	1.5	8.2	-6.7
2.8	2.1	7.8	-5.8
2.9	-1.4	7.4	-8.8
3.0	-6.7	7.1	-13.8
3.1	-6.6	6.7	-13.3
3.2	-9.0	6.4	-15.4
3.3	-15.3	6.0	-21.3
3.4	-26.9	5.7	-32.6
3.5	-16.8	5.4	-22.2
3.6	-18.3	5.1	-23.4
3.7	-11.1	4.8	-15.9
3.8	-12.2	4.5	-16.7
3.9	-22.3	4.2	-26.5
4.0	-8.7	3.9	-12.6
4.1	-3.5	3.7	-7.1
4.2	-4.9	3.4	-8.3
4.3	-5.8	3.2	-8.9
4.4	-4.7	2.9	-7.6
4.5	-4.6	2.7	-7.3
4.6	-10.0	2.4	-12.4
4.7	-17.0	2.2	-19.2
4.8	-17.3	2.0	-19.3
4.9	-16.0	1.7	-17.8
5.0	-13.1	1.5	-14.6
5.1	-11.2	1.3	-12.5
5.2	-10.8	1.1	-11.9
5.3	-5.5	0.9	-6.4
5.4	-4.1	0.7	-4.8
5.5	-5.9	0.5	-6.4
5.6	-9.5	0.3	-9.8
5.7	-15.7	0.1	-15.8
5.8	-21.3	-0.1	-21.2
5.9	-15.3	-0.3	-15.0


Orbit Communication Systems Ltd.
 AL-7107-Ka, 2.15 m Antenna, Pattern Data Table
 X-pol Azimuth RHCP, -10° to +10° @ 0.1° increment

-4.0	-2.4	3.9	-6.4
-3.9	-9.7	4.2	-14.0
-3.8	-1.3	4.5	-5.8
-3.7	-1.5	4.8	-6.3
-3.6	-8.4	5.1	-13.5
-3.5	-8.4	5.4	-13.8
-3.4	-8.8	5.7	-14.5
-3.3	-25.0	6.0	-31.0
-3.2	-7.7	6.4	-14.1
-3.1	-8.3	6.7	-15.0
-3.0	-20.3	7.1	-27.3
-2.9	-4.5	7.4	-12.0
-2.8	-2.2	7.8	-10.0
-2.7	-5.8	8.2	-14.0
-2.6	-21.5	8.6	-30.1
-2.5	-11.9	9.1	-21.0
-2.4	-1.9	9.5	-11.4
-2.3	3.4	10.0	-6.6
-2.2	4.5	10.4	-6.0
-2.1	3.6	10.9	-7.3
-2.0	1.2	11.5	-10.3
-1.9	-8.5	12.0	-20.5
-1.8	2.8	12.6	-9.9
-1.7	8.9		
-1.6	11.0		
-1.5	11.5		
-1.4	11.1		
-1.3	7.3		
-1.2	7.7		
-1.1	14.0		
-1.0	16.0		
-0.9	17.1		
-0.8	20.5		
-0.7	25.0		
-0.6	28.2		
-0.5	29.2		
-0.4	27.3		
-0.3	17.7		
-0.2	25.0		
-0.1	28.3		
0.0	27.0		


6.0	-13.5	-0.5	-13.0
6.1	-10.5	-0.6	-9.9
6.2	-7.2	-0.8	-6.4
6.3	-7.2	-1.0	-6.2
6.4	-8.3	-1.2	-7.1
6.5	-6.8	-1.3	-5.5
6.6	-4.7	-1.5	-3.2
6.7	-4.1	-1.7	-2.5
6.8	-4.3	-1.8	-2.5
6.9	-7.2	-2.0	-5.2
7.0	-10.1	-2.1	-8.0
7.1	-15.4	-2.0	-13.4
7.2	-17.5	-2.0	-15.5
7.3	-25.5	-2.0	-23.5
7.4	-22.7	-2.0	-20.7
7.5	-14.2	-2.0	-12.2
7.6	-9.4	-2.0	-7.4
7.7	-8.8	-2.0	-6.8
7.8	-14.8	-2.0	-12.8
7.9	-17.2	-2.0	-15.2
8.0	-9.8	-2.0	-7.8
8.1	-11.2	-2.0	-9.2
8.2	-14.2	-2.0	-12.2
8.3	-17.6	-2.0	-15.6
8.4	-14.6	-2.0	-12.6
8.5	-11.6	-2.0	-9.6
8.6	-11.2	-2.0	-9.2
8.7	-11.6	-2.0	-9.6
8.8	-12.0	-2.0	-10.0
8.9	-10.5	-2.0	-8.5
9.0	-9.7	-2.0	-7.7
9.1	-13.5	-2.0	-11.5
9.2	-10.9	-2.0	-8.9
9.3	-11.3	-2.0	-9.3
9.4	-13.4	-2.0	-11.4
9.5	-21.7	-2.0	-19.7
9.6	-23.6	-2.0	-21.6
9.7	-22.0	-2.0	-20.0
9.8	-19.0	-2.0	-17.0
9.9	-12.0	-2.0	-10.0
10.0	-11.9	-2.0	-9.9

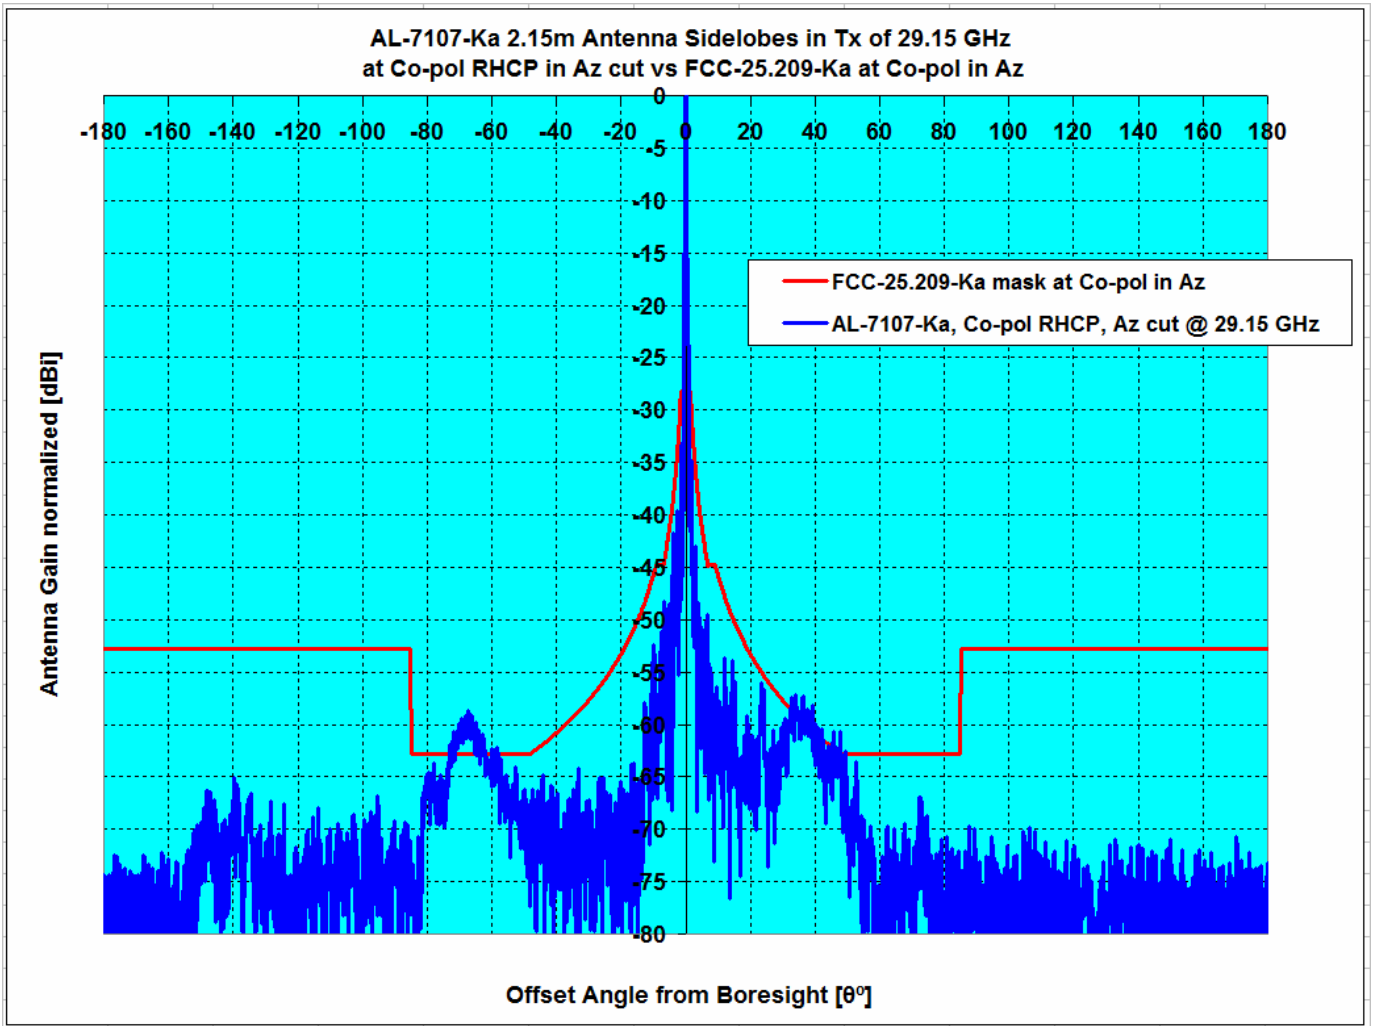


Description	Plane, CirP	Frequency	Ant. Gain	Peak Excursions dB		Over Mask %	
				1.5°≤θ≤7°	7°≤θ≤180°	1.5°≤θ≤7°	7°≤θ≤180°
Pattern Rule vs Antenna System	Type	GHz	dBi				
FCC-25.209-Ka, Co-pol Az, vs AL-7107-Ka	Az , RHCP	29.15	52.77	-3.52	4.12	0.00%	4.65%

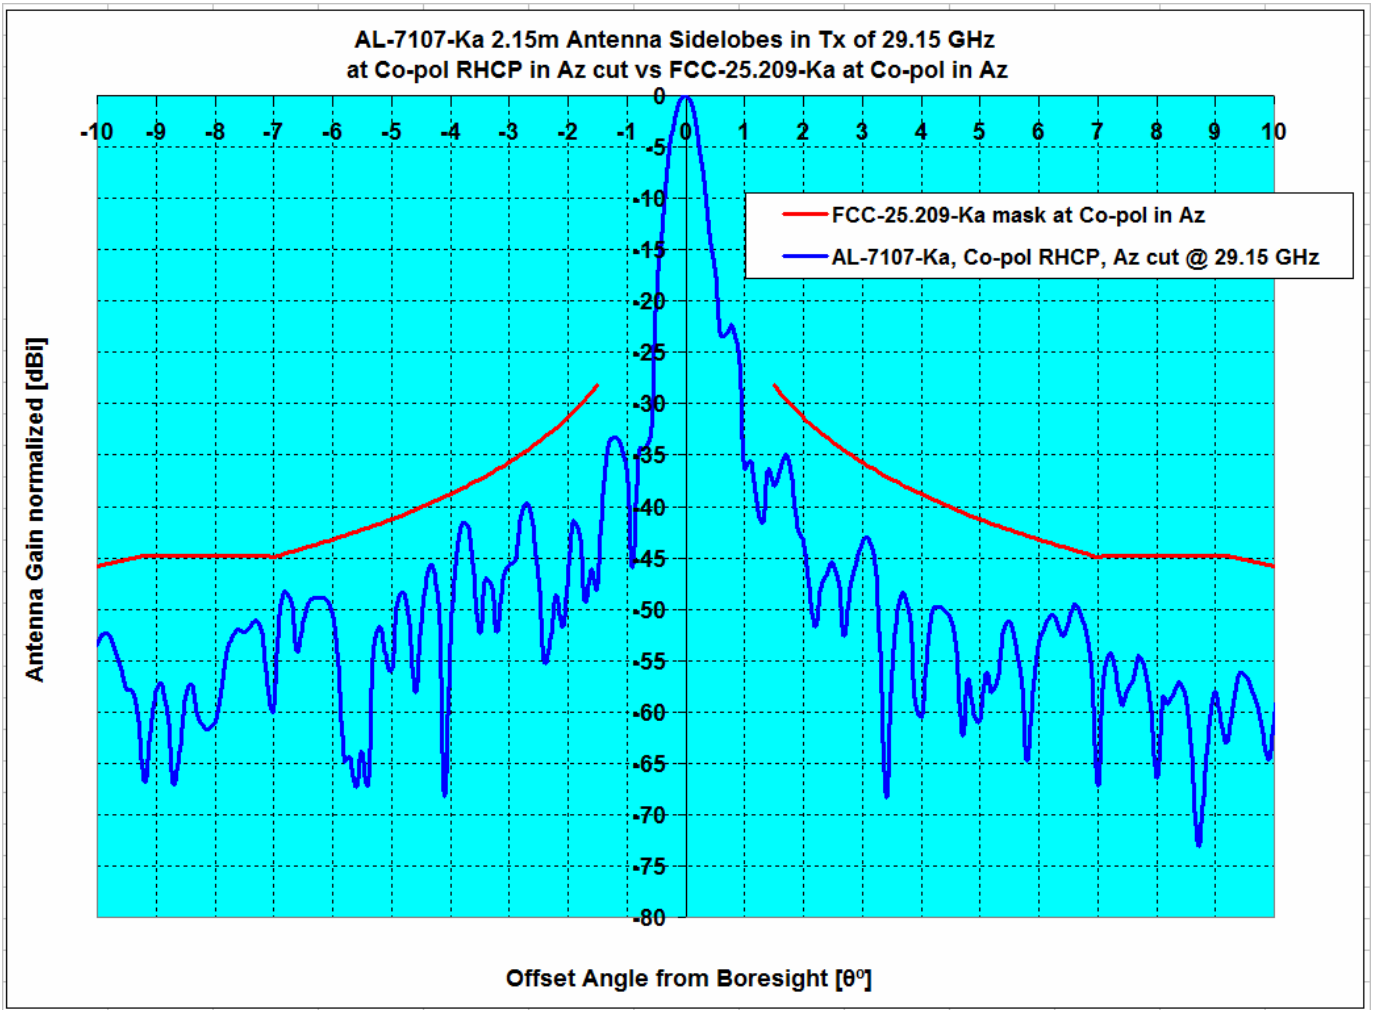

Description	Plane, CirP Type	Frequency GHz	Ant. Gain dBi	Peak Excursions dB		Over Mask %	
				1.5°≤θ≤7°	7°≤θ≤180°	1.5°≤θ≤7°	7°≤θ≤180°
FCC-25.209-Ka, Co-pol Az, vs AL-7107-Ka	Az , RHCP	29.15	52.77	-3.52	4.12	0.00%	4.65%

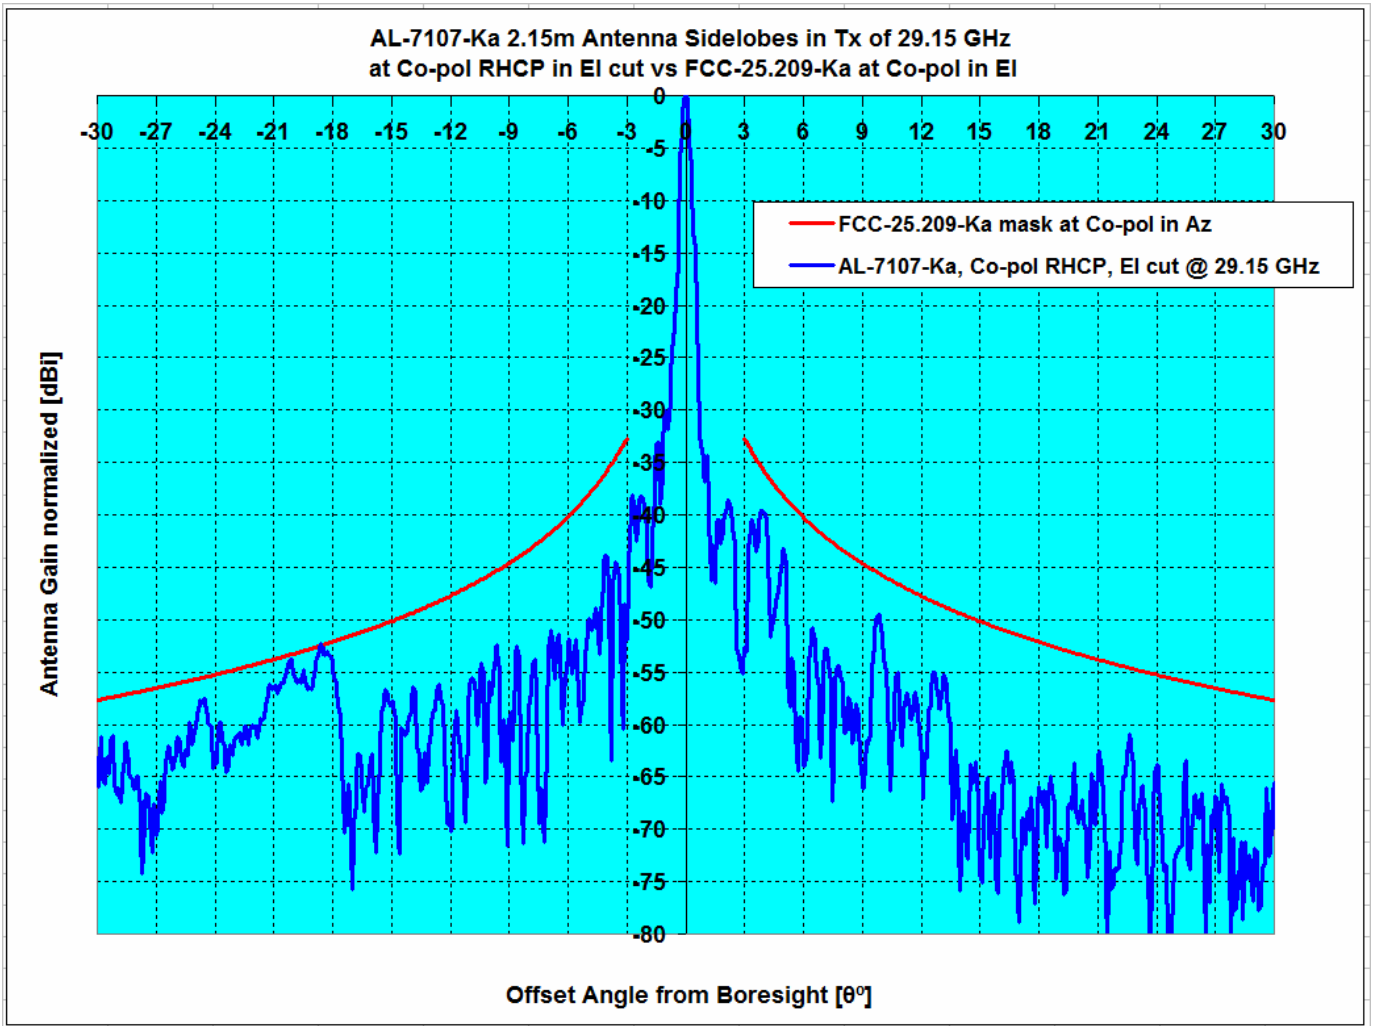


Description	Plane, CirP	Frequency	Ant. Gain	Peak Excursions dB		Over Mask %	
				3°≤θ≤7°	7°≤θ≤30°	3°≤θ≤7°	7°≤θ≤30°
Pattern Rule vs Antenna System	Type	GHz	dBi				
FCC-25.209-Ka, Co-pol EI, vs AL-7107-Ka	EI, RHCP	29.15	52.77	-3.94	0.16	0.00%	0.18%

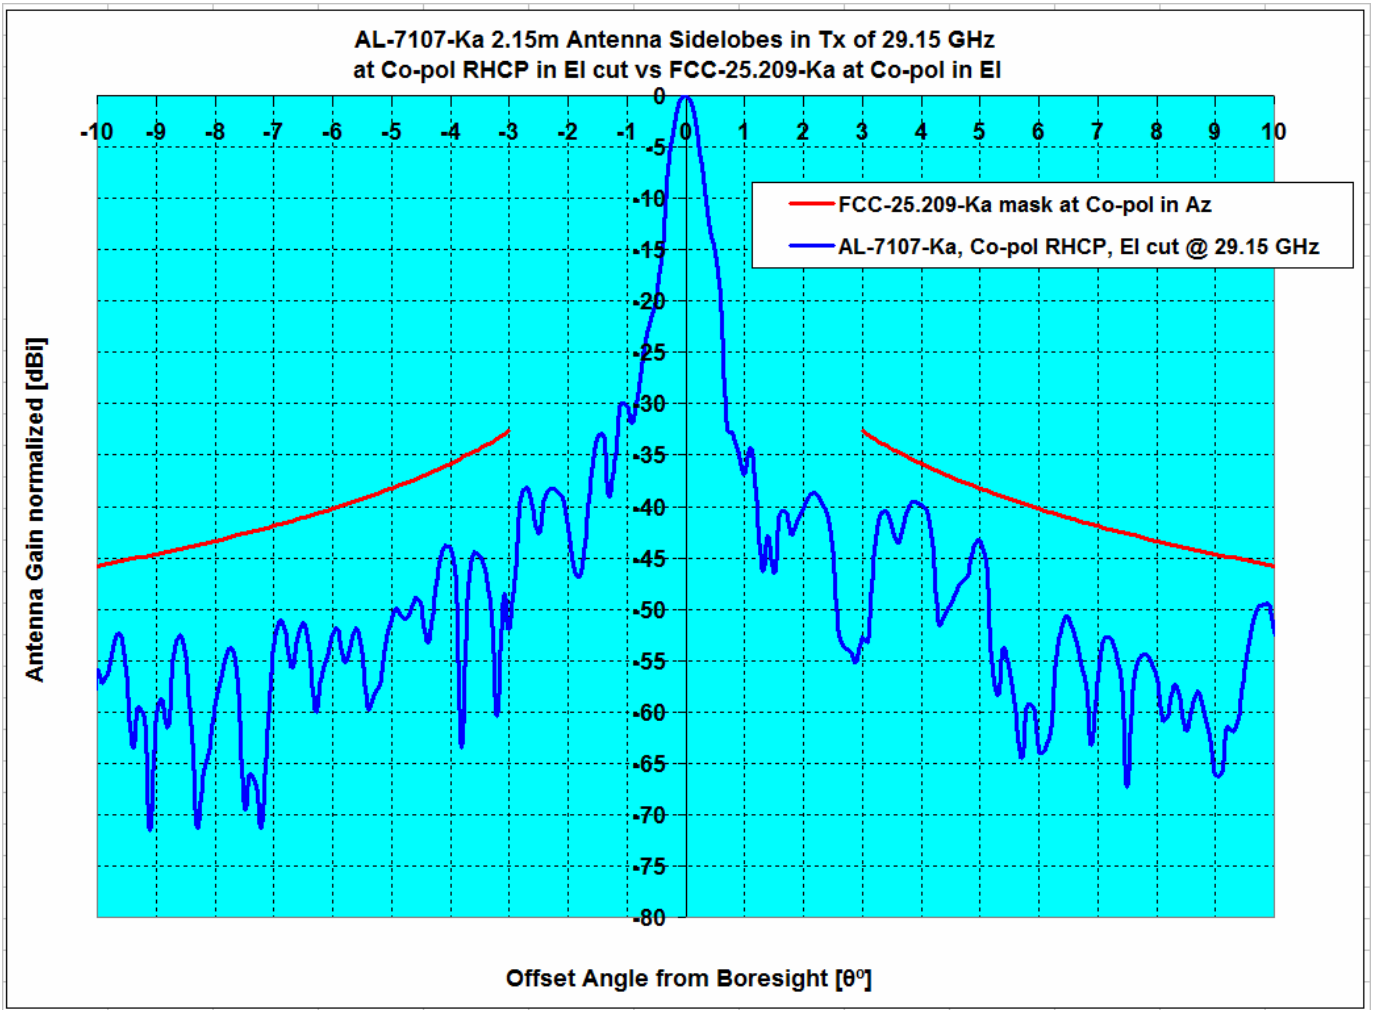

Description	Plane, CirP	Frequency	Ant. Gain	Peak Excursions dB		Over Mask %	
				3°≤θ≤7°	7°≤θ≤30°	3°≤θ≤7°	7°≤θ≤30°
FCC-25.209-Ka, Co-pol EI, vs AL-7107-Ka	EI, RHCP	29.15	52.77	-3.94	0.16	0.00%	0.18%

Orbit Communication Systems Ltd.
 AL-7107-Ka, 2.15 m Antenna, Pattern, X-pol, Azimuth RHCP

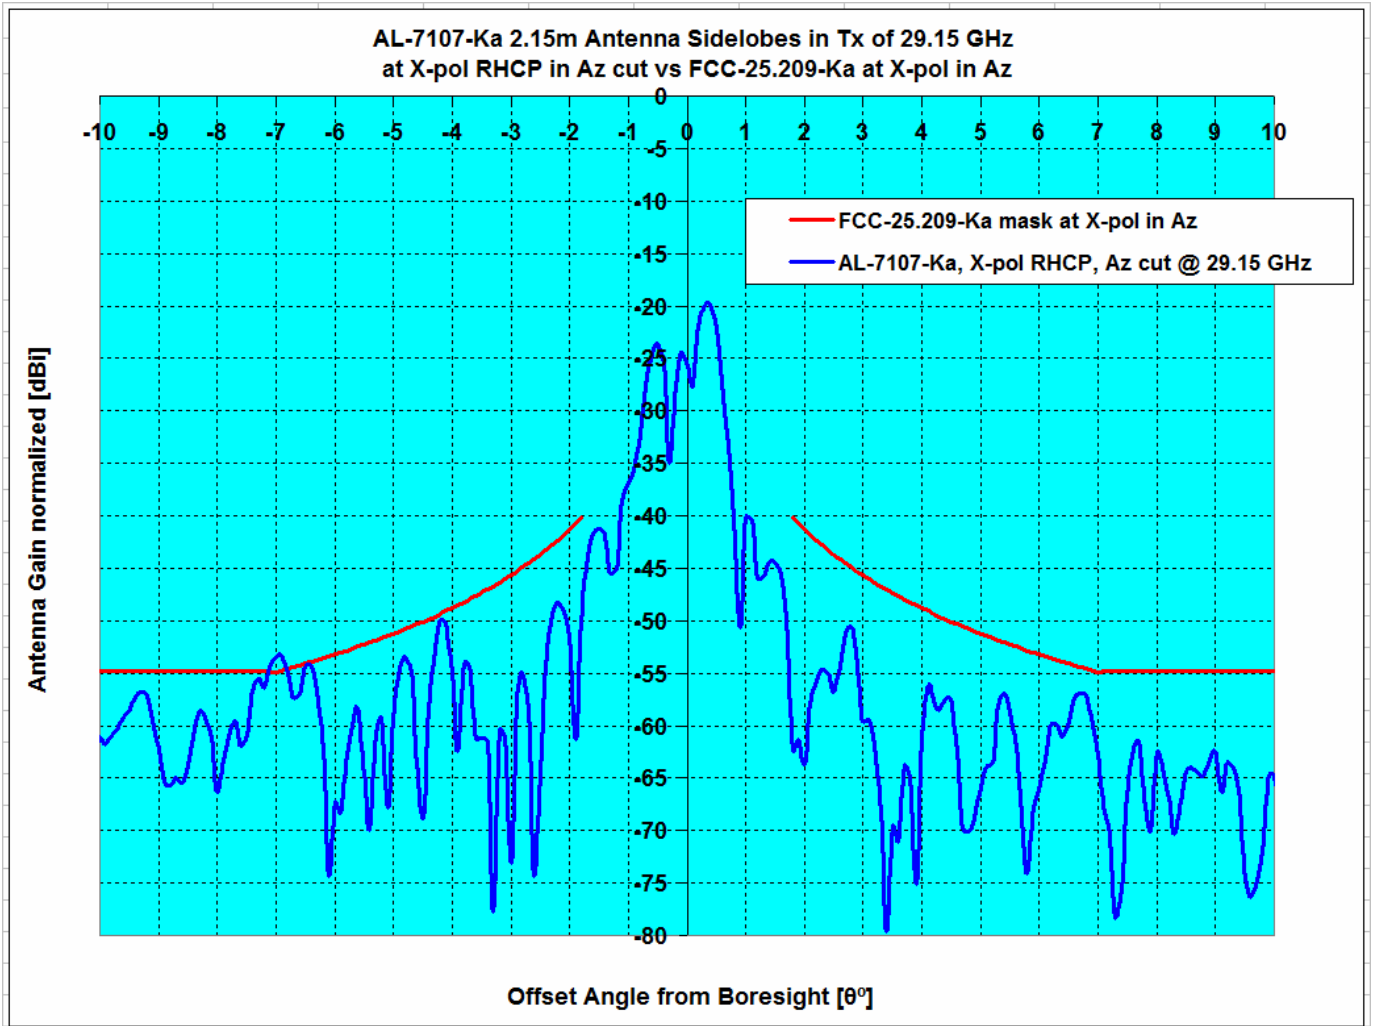

Description	Plane, CirP	Frequency	Ant. Gain	Peak Excursions dB		Over Mask %	
				1.8°≤θ≤7°	1.8°≤θ≤9.2°	1.8°≤θ≤7°	1.8°≤θ≤9.2°
Pattern Rule vs Antenna System	Type	GHz	dBi				
FCC-25.209-Ka, X-pol Az, vs AL-7107-Ka	Az , RHCP	29.15	52.77	1.40	1.40	1.89%	1.81%