

# EXHIBIT A

# FREQUENCY COORDINATION AND INTERFERENCE ANALYSIS REPORT

Prepared for

**INTELSAT, LLC  
NUEVO, CALIFORNIA  
(Call Sign: E020314)**

**Satellite Earth Station**

Prepared By:

**COMSEARCH  
19700 JANELIA FARM BOULEVARD  
ASHBURN, VIRGINIA 20147  
FEBRUARY 23, 2004**

## TABLE OF CONTENTS

1. CONCLUSIONS .....	3
2. SUMMARY OF RESULTS .....	4
3. SUPPLEMENTAL SHOWING .....	5
4. EARTH STATION COORDINATION DATA .....	6
5. CERTIFICATION .....	10

## 1. CONCLUSIONS

An interference study considering all existing, proposed and prior coordinated microwave facilities within the coordination contours of the proposed earth station demonstrates that this site will operate satisfactorily with the common carrier microwave environment. Further, there will be no restrictions of its operation due to interference considerations.

## 2. SUMMARY OF RESULTS

A number of great circle interference cases were identified during the interference study of the proposed earth station. Each of the cases, which exceeded the interference objective on a line-of-sight basis, was profiled and the propagation losses estimated using NBS TN101 (Revised) techniques. The losses were found to be sufficient to reduce the signal levels to acceptable magnitudes in every case.

The following companies reported potential great circle interference conflicts that did not meet the objectives on a line-of-sight basis. When over-the-horizon losses are considered on the interfering paths, sufficient blockage exists to negate harmful interference from occurring with the proposed transmit-receive earth station.

### Company

AT&T Wirreless Services of San Diego, LLC  
Verizon (VAW), LLC (CA)  
Verizon California, Inc.  
San Diego County  
San Bernardino County of California  
Union Pacific Railroad Company  
Los Angeles SMSA Ltd. Partnership  
Southern California Edison Company  
Southern California Gas Company  
CNG Communications, Inc.  
AB Cellular LA, LLC  
Arch Wireless License Company, LLC

No Other Carriers Reported Potential Interference Cases.

### 3. SUPPLEMENTAL SHOWING

Pursuant to Part 25.203(c) of the FCC Rules and Regulations, the satellite earth station proposed in this application was coordinated by Comsearch using computer techniques and in accordance with Part 25 of the FCC Rules and Regulations.

Coordination data for this earth station was sent to the below listed carriers with a letter dated November 4, 2003. A minor revision was forwarded on February 13, 2004.

Company

AB CELLULAR LA, LLC  
AT&T WIRELESS SER OF FL - SOUTHERN CALIF  
AT&T Wireless Services of San Diego, LLC  
CALIFORNIA, STATE OF  
CARITAS TELECOMMUNICATIONS  
CNG Communications, Inc.  
COAST COMMUNITY COLLEGE DISTRICT  
Fresno MSA Limited Partnership  
KERN COUNTY CALIFORNIA  
KERN ED TELECOM CONSORTIUM  
LB Tower Company LLC  
LOS ANGELES CITY COMMUNICATIONS SERVICES  
LOS ANGELES COUNTY DEPT OF PUBLIC WORKS  
LOS ANGELES SMSA LTD. PARTNERSHIP  
Los Angeles County FCC Licensing Section  
METROPOLITAN WATER DIST OF SO CALIFORNIA  
MICROWAVE SERVICE COMPANY  
MONTEBELLO CITY CALIFORNIA  
MUT LICENSING INC  
NEXTEL OF CALIFORNIA INC  
NextWeb, Inc.  
ORANGE COUNTY GSA COMMUNICATIONS DIV  
Pacific Bell  
RIVERSIDE COUNTY OF  
SAN BERNARDINO COUNTY OF CALIFORNIA  
SAN DIEGO COUNTY  
SAN DIEGO GAS & ELECTRIC COMPANY  
SOUTHWESTERN BELL MOBILE SYSTEMS, LLC  
Southern California Edison Company  
Southern California Gas Company  
TV MICROWAVES CO  
UNION PACIFIC RAILROAD COMPANY  
VERIZON WIRELESS (VAW) LLC (CA)  
Verizon California Inc.  
Western Technical Services

## 4. EARTH STATION COORDINATION DATA

This section presents the data pertinent to frequency coordination of the proposed earth station that was circulated to all carriers within its coordination contours.

Date: 02/13/2004  
 Job Number:

**Administrative Information**

Status ENGINEER PROPOSAL  
 Call Sign E020314  
 Licensee Code INTELS  
 Licensee Name INTELSAT, LLC

**Site Information** **NUEVO, CALIFORNIA**

Venue Name  
 Latitude (NAD 83) 33° 47' 46.0" N  
 Longitude (NAD 83) 117° 5' 14.0" W  
 Climate Zone A  
 Rain Zone 4  
 Ground Elevation (AMSL) 548.61 m / 1799.9 ft

**Link Information**

Satellite Type Geostationary  
 Mode TR - Transmit-Receive  
 Modulation Analog and Digital  
 Satellite Arc 50° W to 190° West Longitude  
 Azimuth Range 103.2° to 260.3°  
 Corresponding Elevation Angles 10.3° / 5.5°  
 Antenna Centerline (AGL) 11.0 m / 36.1 ft

**Antenna Information**

Manufacturer  
 Model  
 Gain / Diameter  
 3-dB / 15-dB Beamwidth

**Receive**

Vertex Corporation  
 16.4 Meter  
 54.8 dBi / 16.4 m  
 0.32° / 0.68°

**Transmit**

Vertex Corporation  
 16.4 Meter  
 59.0 dBi / 16.4 m  
 0.20° / 0.40°

36M0F3F 43K8G7W - 72M0G7W

Max Available RF Power	(dBW/4 kHz)	0.0	-2.7	-15.5
	(dBW/MHz)	24.0	7.7	8.5
Maximum EIRP	(dBW/4 kHz)	59.0	56.3	43.5
	(dBW/MHz)	83.0	66.7	67.5

Interference Objectives:	Long Term	-156.0 dBW/MHz	20%	-154.0 dBW/4 kHz	20%
	Short Term	-146.0 dBW/MHz	0.01%	-131.0 dBW/4 kHz	0.0025%

**Frequency Information**

Emission / Frequency Range (MHz)

**Receive 4.0 GHz**

36M0F3F / 3625.0 - 4200.0  
 43K8G7W - 72M0G7W / 3625.0 - 4200.0

**Transmit 6.1 GHz**

36M0F3F / 5850.0 - 6425.0  
 43K8G7W - 72M0G7W / 5850.0 - 6425.0

Max Great Circle Coordination Distance	733.5 km / 455.7 mi	474.3 km / 294.7 mi
Precipitation Scatter Contour Radius	396.8 km / 246.5 mi	120.8 km / 75.1 mi



**Coordination Values****NUEVO, CA**

Licensee Name INTELSAT, LLC  
 Latitude (NAD 83) 33° 47' 46.0" N  
 Longitude (NAD 83) 117° 5' 14.0" W  
 Ground Elevation (AMSL) 548.61 m / 1799.9 ft  
 Antenna Centerline (AGL) 11.0 m / 36.1 ft  
 Antenna Model Vertex Corporation 16.4 Meter  
 Antenna Mode Receive 4.0 GHz Transmit 6.1 GHz  
 Interference Objectives: Long Term -156.0 dBW/MHz 20% -154.0 dBW/4 kHz  
 Short Term -146.0 dBW/MHz 0.01% -131.0 dBW/4 kHz  
 0.0025%  
 Max Available RF Power 0.0 (dBW/4 kHz)

Azimuth (°)	Horizon Elevation (°)	Antenna Discrimination (°)	Receive 4.0 GHz		Transmit 6.1 GHz	
			Horizon Gain (dBi)	Coordination Distance (km)	Horizon Gain (dBi)	Coordination Distance (km)
0	2.10	99.69	-10.00	192.30	-10.00	100.00
5	2.81	98.16	-10.00	175.83	-10.00	100.00
10	3.38	93.21	-10.00	160.95	-10.00	100.00
15	3.49	88.25	-10.00	158.56	-10.00	100.00
20	3.36	83.28	-10.00	161.37	-10.00	100.00
25	3.62	78.31	-10.00	155.59	-10.00	100.00
30	3.59	73.35	-10.00	156.37	-10.00	100.00
35	3.76	68.38	-10.00	152.80	-10.00	100.00
40	3.70	63.43	-10.00	154.08	-10.00	100.00
45	3.57	58.48	-10.00	156.82	-10.00	100.00
50	3.26	53.56	-10.00	163.69	-10.00	100.00
55	2.98	48.65	-10.00	171.84	-10.00	100.00
60	3.12	43.71	-9.01	173.77	-9.01	100.00
65	3.46	38.75	-7.71	172.66	-7.71	100.00
70	3.62	33.83	-6.23	176.96	-6.23	100.00
75	3.52	28.98	-4.55	187.87	-4.55	100.00
80	4.05	24.02	-2.51	187.42	-2.51	100.00
85	3.95	19.28	-0.13	201.81	-0.13	100.00
90	3.87	14.70	2.82	217.29	2.82	111.78
95	2.93	11.05	5.92	261.79	5.92	139.03
100	3.41	7.63	9.94	280.43	9.94	146.85
105	3.42	7.12	10.69	286.10	10.69	150.10
110	4.19	9.12	8.00	245.76	8.00	126.63
115	4.25	13.02	4.13	218.15	4.13	110.93
120	4.31	16.90	1.30	203.68	1.30	100.00
125	4.48	20.61	-0.85	189.33	-0.85	100.00
130	4.28	24.45	-2.71	182.51	-2.71	100.00
135	4.73	27.73	-4.07	165.64	-4.07	100.00
140	4.02	31.62	-5.50	171.95	-5.50	100.00
145	4.57	34.42	-6.42	155.93	-6.42	100.00
150	4.16	37.65	-7.40	157.84	-7.40	100.00
155	3.08	41.12	-8.35	177.92	-8.35	100.00
160	2.70	43.72	-9.02	183.23	-9.02	100.00
165	3.08	45.23	-9.39	172.82	-9.39	100.00
170	3.98	45.70	-9.50	150.71	-9.50	100.00
175	4.30	46.15	-9.61	145.06	-9.61	100.00
180	4.68	46.03	-9.58	139.69	-9.58	100.00
185	5.65	44.82	-9.29	131.35	-9.29	100.00

**Coordination Values****NUEVO, CA**

Licensee Name INTELSAT, LLC  
 Latitude (NAD 83) 33° 47' 46.0" N  
 Longitude (NAD 83) 117° 5' 14.0" W  
 Ground Elevation (AMSL) 548.61 m / 1799.9 ft  
 Antenna Centerline (AGL) 11.0 m / 36.1 ft  
 Antenna Model Vertex Corporation 16.4 Meter  
 Antenna Mode Receive 4.0 GHz Transmit 6.1 GHz  
 Interference Objectives: Long Term -156.0 dBW/MHz 20% -154.0 dBW/4 kHz  
 Short Term -146.0 dBW/MHz 0.01% -131.0 dBW/4 kHz  
 0.0025%  
 Max Available RF Power 0.0 (dBW/4 kHz)

Azimuth (°)	Horizon Elevation (°)	Antenna Discrimination (°)	Receive 4.0 GHz		Transmit 6.1 GHz	
			Horizon Gain (dBi)	Coordination Distance (km)	Horizon Gain (dBi)	Coordination Distance (km)
190	6.16	43.60	-8.99	127.43	-8.99	100.00
195	6.27	42.30	-8.66	127.55	-8.66	100.00
200	6.66	40.29	-8.13	125.38	-8.13	100.00
205	6.50	38.33	-7.59	129.31	-7.59	100.00
210	6.13	36.13	-6.95	134.78	-6.95	100.00
215	5.48	33.75	-6.21	144.81	-6.21	100.00
220	6.13	30.14	-4.98	143.33	-4.98	100.00
225	5.92	27.07	-3.81	153.87	-3.81	100.00
230	5.75	23.36	-2.21	159.59	-2.21	100.00
235	5.57	19.92	-0.48	175.92	-0.48	100.00
240	5.61	16.09	1.83	188.80	1.83	100.00
245	5.68	12.16	4.88	205.34	4.88	100.00
250	5.18	8.50	8.77	233.82	8.77	117.09
255	4.63	4.81	14.95	291.97	14.95	148.35
260	4.47	1.05	31.49	733.46	31.49	474.26
265	4.27	4.86	14.84	298.96	14.84	153.53
270	4.29	9.78	7.25	238.29	7.25	122.33
275	4.36	14.75	2.78	208.42	2.78	104.39
280	3.17	19.83	-0.44	213.68	-0.44	111.84
285	2.38	24.89	-2.90	218.20	-2.90	117.51
290	1.22	29.98	-4.92	241.06	-4.92	135.73
295	1.12	34.94	-6.58	234.57	-6.58	133.63
300	0.00	40.02	-8.06	297.94	-8.06	188.62
305	0.00	44.97	-9.32	289.62	-9.32	183.74
310	0.00	49.93	-10.00	285.28	-10.00	181.13
315	0.00	54.89	-10.00	285.28	-10.00	181.13
320	0.00	59.86	-10.00	285.28	-10.00	181.13
325	0.00	64.83	-10.00	285.28	-10.00	181.13
330	0.00	69.80	-10.00	285.28	-10.00	181.13
335	0.00	74.78	-10.00	285.28	-10.00	181.13
340	0.00	79.75	-10.00	285.28	-10.00	181.13
345	0.00	84.73	-10.00	285.28	-10.00	181.13
350	0.24	89.71	-10.00	280.29	-10.00	176.89
355	1.56	94.69	-10.00	206.36	-10.00	111.35

## 5. CERTIFICATION

I HEREBY CERTIFY THAT I AM THE TECHNICALLY QUALIFIED PERSON RESPONSIBLE FOR THE PREPARATION OF THE FREQUENCY COORDINATION DATA CONTAINED IN THIS APPLICATION, THAT I AM FAMILIAR WITH PARTS 101 AND 25 OF THE FCC RULES AND REGULATIONS, THAT I HAVE EITHER PREPARED OR REVIEWED THE FREQUENCY COORDINATION DATA SUBMITTED WITH THIS APPLICATION, AND THAT IT IS COMPLETE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



JEFFREY E. COWLES  
PRINCIPAL FREQUENCY PLANNER  
COMSEARCH  
19700 JANELIA FARM BLVD.  
ASHBURN, VIRGINIA 20147

DATED: FEBRUARY 23, 2004

# EXHIBIT B

## Analysis of Non-Ionizing Radiation for a 16.4-Meter Earth Station System

This report analyzes the non-ionizing radiation levels for a 16.4-meter earth station system. The analysis and calculations performed in this report comply with the methods described in the FCC Office of Engineering and Technology Bulletin, No. 65 first published in 1985 and revised in 1997 in Edition 97-01. The radiation safety limits used in the analysis are in conformance with the FCC R&O 96-326, Bulletin No. 65 and the FCC R&O specifies that there are two separate tiers of exposure limits that are dependant on the situation in which the exposure takes place and/or the status of the individuals who are subject to the exposure. The Maximum Permissible Exposure (MPE) limits for persons in a General Population/Uncontrolled environment are shown in Table 1. The General Population/Uncontrolled MPE is a function of transmit frequency and is for an exposure period of thirty minutes or less. The MPE limits for persons in an Occupational/Controlled environment are shown in Table 2. The Occupational MPE is a function of transmit frequency and is for an exposure period of six minutes or less. The purpose of the analysis described in this report is to determine the power flux density levels of the earth station in the far-field, near-field, transition region, between the subreflector or feed and main reflector surface, at the main reflector surface, and between the antenna edge and the ground and to compare these levels to the specified MPEs.

Table 1. Limits for General Population/Uncontrolled Exposure (MPE)

Frequency Range (MHz)	Power Density (mW/cm <sup>2</sup> )
30-300	0.2
300-1500	Frequency (MHz)*(0.8/1200)
1500-100,000	1.0

Table 2. Limits for Occupational/Controlled Exposure (MPE)

Frequency Range (MHz)	Power Density (mW/cm <sup>2</sup> )
30-300	1.0
300-1500	Frequency (MHz)*(4.0/1200)
1500-100,000	5.0

Table 3. Formulas and Parameters Used for Determining Power Flux Densities

Parameter	Symbol	Formula	Value	Units
Antenna Diameter	D	Input	16.4	m
Antenna Surface Area	A <sub>surface</sub>	$\pi D^2 / 4$	211.24	m <sup>2</sup>
Subreflector Diameter	D <sub>sr</sub>	Input	178.0	cm
Area of Subreflector	A <sub>sr</sub>	$\pi D_{sr}^2 / 4$	24884.56	cm <sup>2</sup>
Frequency	F	Input	6175	MHz
Wavelength	$\lambda$	300 / F	0.048583	m
Transmit Power	P	Input	1000.00	W
Antenna Gain (dBi)	G <sub>es</sub>	Input	59.0	dBi
Antenna Gain (factor)	G	$10^{G_{es}/10}$	794328.2	n/a
Pi	$\pi$	Constant	3.1415927	n/a
Antenna Efficiency	$\eta$	$G\lambda^2/(\pi^2 D^2)$	0.71	n/a

## 1. Far Field Distance Calculation

The distance to the beginning of the far field can be determined from the following equation:

$$\begin{aligned} \text{Distance to the Far Field Region} \quad R_{ff} &= 0.60 D^2 / \lambda \\ &= 3321.7 \text{ m} \end{aligned} \quad (1)$$

The maximum main beam power density in the far field can be determined from the following equation:

$$\begin{aligned} \text{On-Axis Power Density in the Far Field} \quad S_{ff} &= G P / (4 \pi R_{ff}^2) \\ &= 5.729 \text{ W/m}^2 \\ &= 0.573 \text{ mW/cm}^2 \end{aligned} \quad (2)$$

## 2. Near Field Calculation

Power flux density is considered to be at a maximum value throughout the entire length of the defined Near Field region. The region is contained within a cylindrical volume having the same diameter as the antenna. Past the boundary of the Near Field region, the power density from the antenna decreases linearly with respect to increasing distance.

The distance to the end of the Near Field can be determined from the following equation:

$$\begin{aligned} \text{Extent of the Near Field} \quad R_{nf} &= D^2 / (4 \lambda) \\ &= 1384.0 \text{ m} \end{aligned} \quad (3)$$

The maximum power density in the Near Field can be determined from the following equation:

$$\begin{aligned} \text{Near Field Power Density} \quad S_{nf} &= 16.0 \eta P / (\pi D^2) \\ &= 13.374 \text{ W/m}^2 \\ &= 1.337 \text{ mW/cm}^2 \end{aligned} \quad (4)$$

## 3. Transition Region Calculation

The Transition region is located between the Near and Far Field regions. The power density begins to decrease linearly with increasing distance in the Transition region. While the power density decreases inversely with distance in the Transition region, the power density decreases inversely with the square of the distance in the Far Field region. The maximum power density in the Transition region will not exceed that calculated for the Near Field region. The power density calculated in Section 1 is the highest power density the antenna can produce in any of the regions away from the antenna. The power density at a distance  $R_t$  can be determined from the following equation:

$$\begin{aligned} \text{Transition Region Power Density} \quad S_t &= S_{nf} R_{nf} / R_t \\ &= 1.337 \text{ mW/cm}^2 \end{aligned} \quad (5)$$

#### 4. Region between the Main Reflector and the Subreflector

Transmissions from the feed assembly are directed toward the subreflector surface, and are reflected back toward the main reflector. The most common feed assemblies are waveguide flanges, horns or subreflectors. The energy between the subreflector and the reflector surfaces can be calculated by determining the power density at the subreflector surface. This can be determined from the following equation:

$$\begin{aligned} \text{Power Density at the Subreflector} \quad S_{sr} &= 4000 P / A_{sr} & (6) \\ &= 160.742 \text{ mW/cm}^2 \end{aligned}$$

#### 5. Main Reflector Region

The power density in the main reflector is determined in the same manner as the power density at the subreflector. The area is now the area of the main reflector aperture and can be determined from the following equation:

$$\begin{aligned} \text{Power Density at the Main Reflector Surface} \quad S_{\text{surface}} &= 4 P / A_{\text{surface}} & (7) \\ &= 18.936 \text{ W/m}^2 \\ &= 1.894 \text{ mW/cm}^2 \end{aligned}$$

#### 6. Region between the Main Reflector and the Ground

Assuming uniform illumination of the reflector surface, the power density between the antenna and the ground can be determined from the following equation:

$$\begin{aligned} \text{Power Density between Reflector and Ground} \quad S_g &= P / A_{\text{surface}} & (8) \\ &= 4.734 \text{ W/m}^2 \\ &= 0.473 \text{ mW/cm}^2 \end{aligned}$$

## 7. Summary of Calculations

Table 4. Summary of Expected Radiation levels for Uncontrolled Environment

Region	Calculated Maximum Radiation Power Density Level (mW/cm <sup>2</sup> )		Hazard Assessment
1. Far Field ( $R_{ff} = 3321.7$ m)	$S_{ff}$	0.573	Satisfies FCC MPE
2. Near Field ( $R_{nf} = 1384.0$ m)	$S_{nf}$	1.337	Potential Hazard
3. Transition Region ( $R_{nf} < R_t < R_{ff}$ )	$S_t$	1.337	Potential Hazard
4. Between Main Reflector and Subreflector	$S_{sr}$	160.742	Potential Hazard
5. Main Reflector	$S_{surface}$	1.894	Potential Hazard
6. Between Main Reflector and Ground	$S_g$	0.473	Satisfies FCC MPE

Table 5. Summary of Expected Radiation levels for Controlled Environment

Region	Calculated Maximum Radiation Power Density Level (mW/cm <sup>2</sup> )		Hazard Assessment
1. Far Field ( $R_{ff} = 3321.7$ m)	$S_{ff}$	0.573	Satisfies FCC MPE
2. Near Field ( $R_{nf} = 1384.0$ m)	$S_{nf}$	1.337	Satisfies FCC MPE
3. Transition Region ( $R_{nf} < R_t < R_{ff}$ )	$S_t$	1.337	Satisfies FCC MPE
4. Between Main Reflector and Subreflector	$S_{sr}$	160.742	Potential Hazard
5. Main Reflector	$S_{surface}$	1.894	Satisfies FCC MPE
6. Between Main Reflector and Ground	$S_g$	0.473	Satisfies FCC MPE

It is the applicant's responsibility to ensure that the public and operational personnel are not exposed to harmful levels of radiation.



## 8. Conclusions

Based upon the above analysis, it is concluded that harmful levels of radiation may exist in those regions noted for the Uncontrolled (Table 4) Environment.

The antenna is installed at the Intelsat, LLC facility in Nuevo, California. The facility is surrounded by a fence, which will restrict any public access. The earth station will be marked with the standard radiation hazard warnings, as well as the area in the vicinity of the earth station to inform those in the general population, who might be working or otherwise present in or near the direct path of the main beam.

The applicant will ensure that the main beam of the antenna will be pointed at least one diameter away from any building, or other obstacles in those areas that exceed the MPE levels. Since one diameter removed from the center of the main beam the levels are down at least 20 dB, or by a factor of 100, these potential hazards do not exist for either the public, or for earth station personnel.

Finally, the earth station's operating personnel will not have access to areas that exceed the MPE levels, while the earth station is in operation. The transmitter will be turned off during periods of maintenance, so that the MPE standard of  $5.0 \text{ mw/cm}^2$  will be complied with for those regions in close proximity to the main reflector, which could be occupied by operating personnel.

# EXHIBIT C

EXHIBIT C  
Page 1 of 1

**FAA Notification Not Required**

Per PART 17[17.14(a)] of the FCC rules, FAA notification is not required, as the antenna structure is located in an area with structures of equal or greater heights.


# EXHIBIT D

Exhibit D  
Response to Question 21

Intelsat LLC seeks to operate this earth station on both a common carrier and non-common carrier basis. However, the electronic response to Question 21 only permits an applicant to check one box. Accordingly, Intelsat LLC checked one box—the box marked non-common carrier—and submits this exhibit to make clear that both boxes—the box marked non-common carrier and the box marked common carrier—should be checked.

# EXHIBIT F

INTELSAT, LLC  
(Call Sign: E020314)

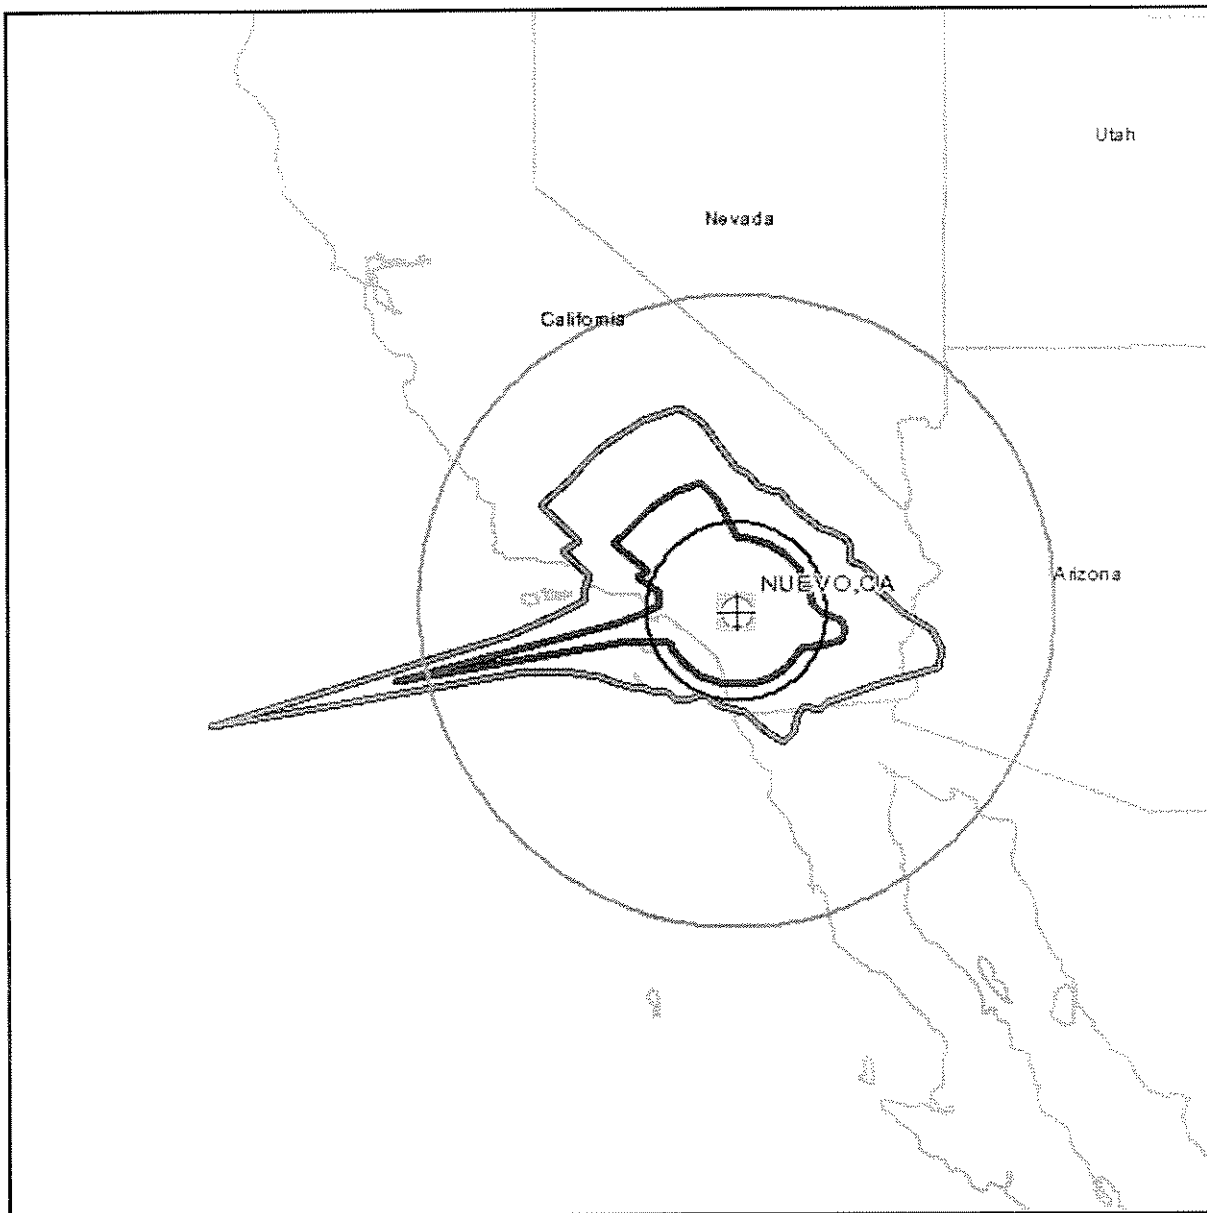


**Legend:**

Scale: 1:10,000,000

Great Circle: 6.1 GHz 

4.0 GHz 

Precipitation Scatter: 6.1 GHz 

4.0 GHz 

Earth Station Site: 



**COMSEARCH**<sup>®</sup>  
19700 Janelia Farm Boulevard  
Ashburn, VA 20147

Country (ies):

Mexico