

FIGURE 5
T-11N

MAOR/NAOR Beam EIRP Contours


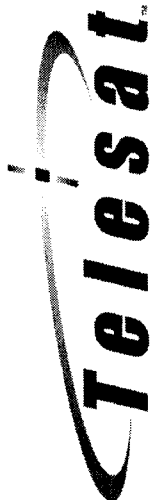



FIGURE 5 T-11N

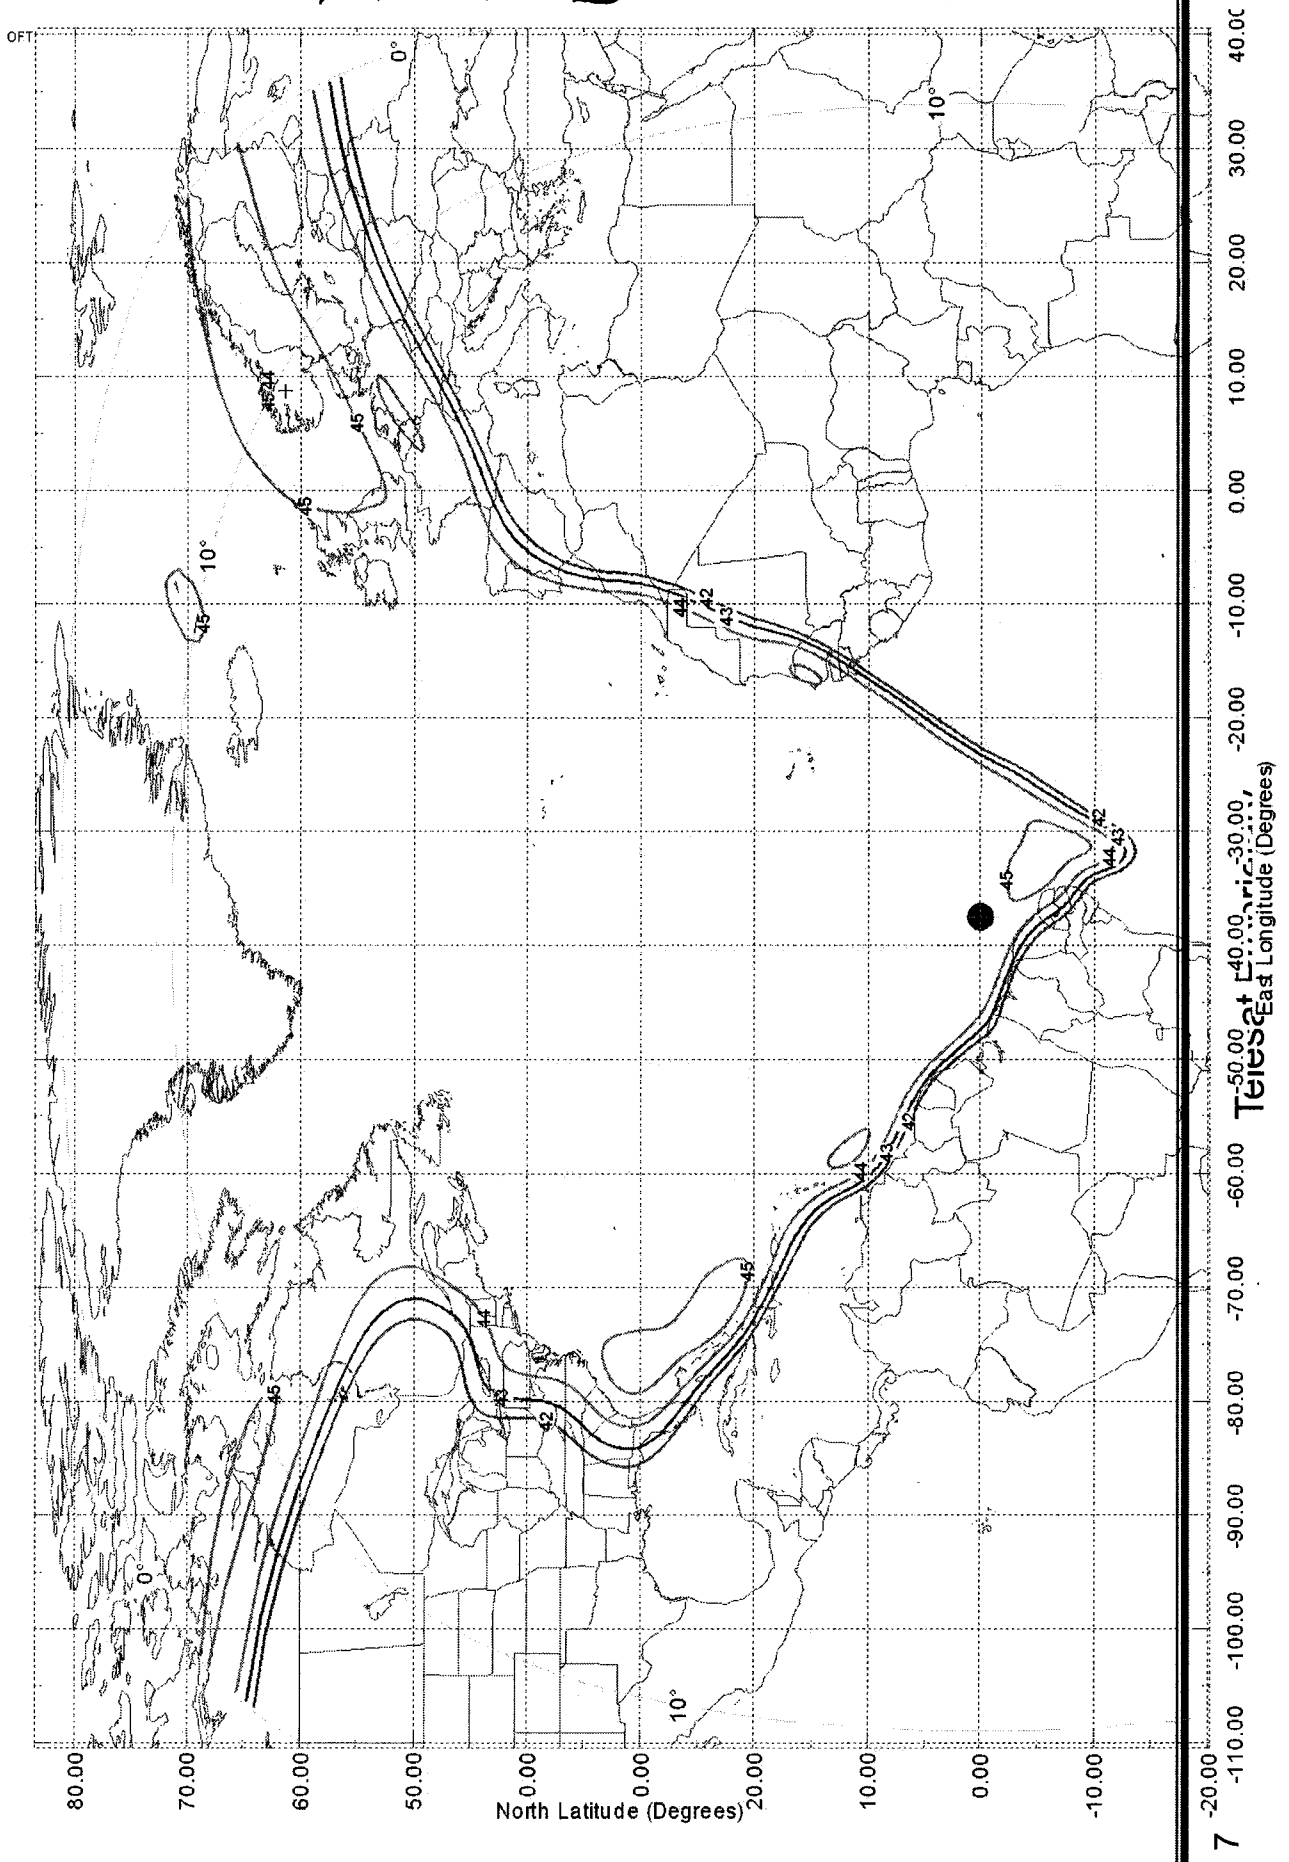

US Beam EIRP Contours



FIGURE 5 T-11N

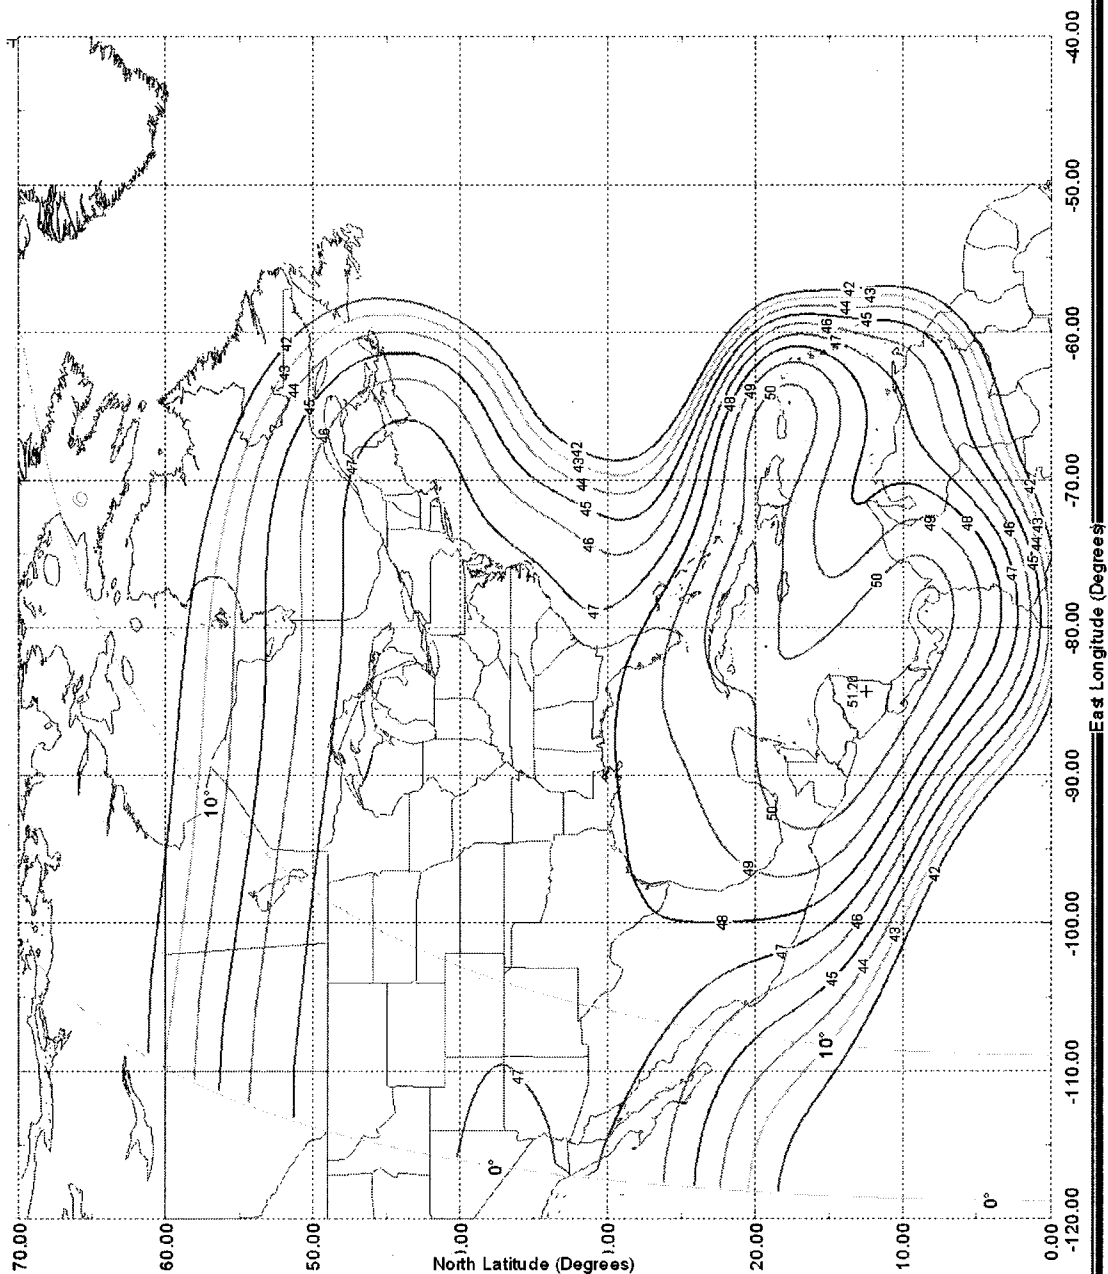

Telesat Proprietary

FIGURE 5



FIGURE 5


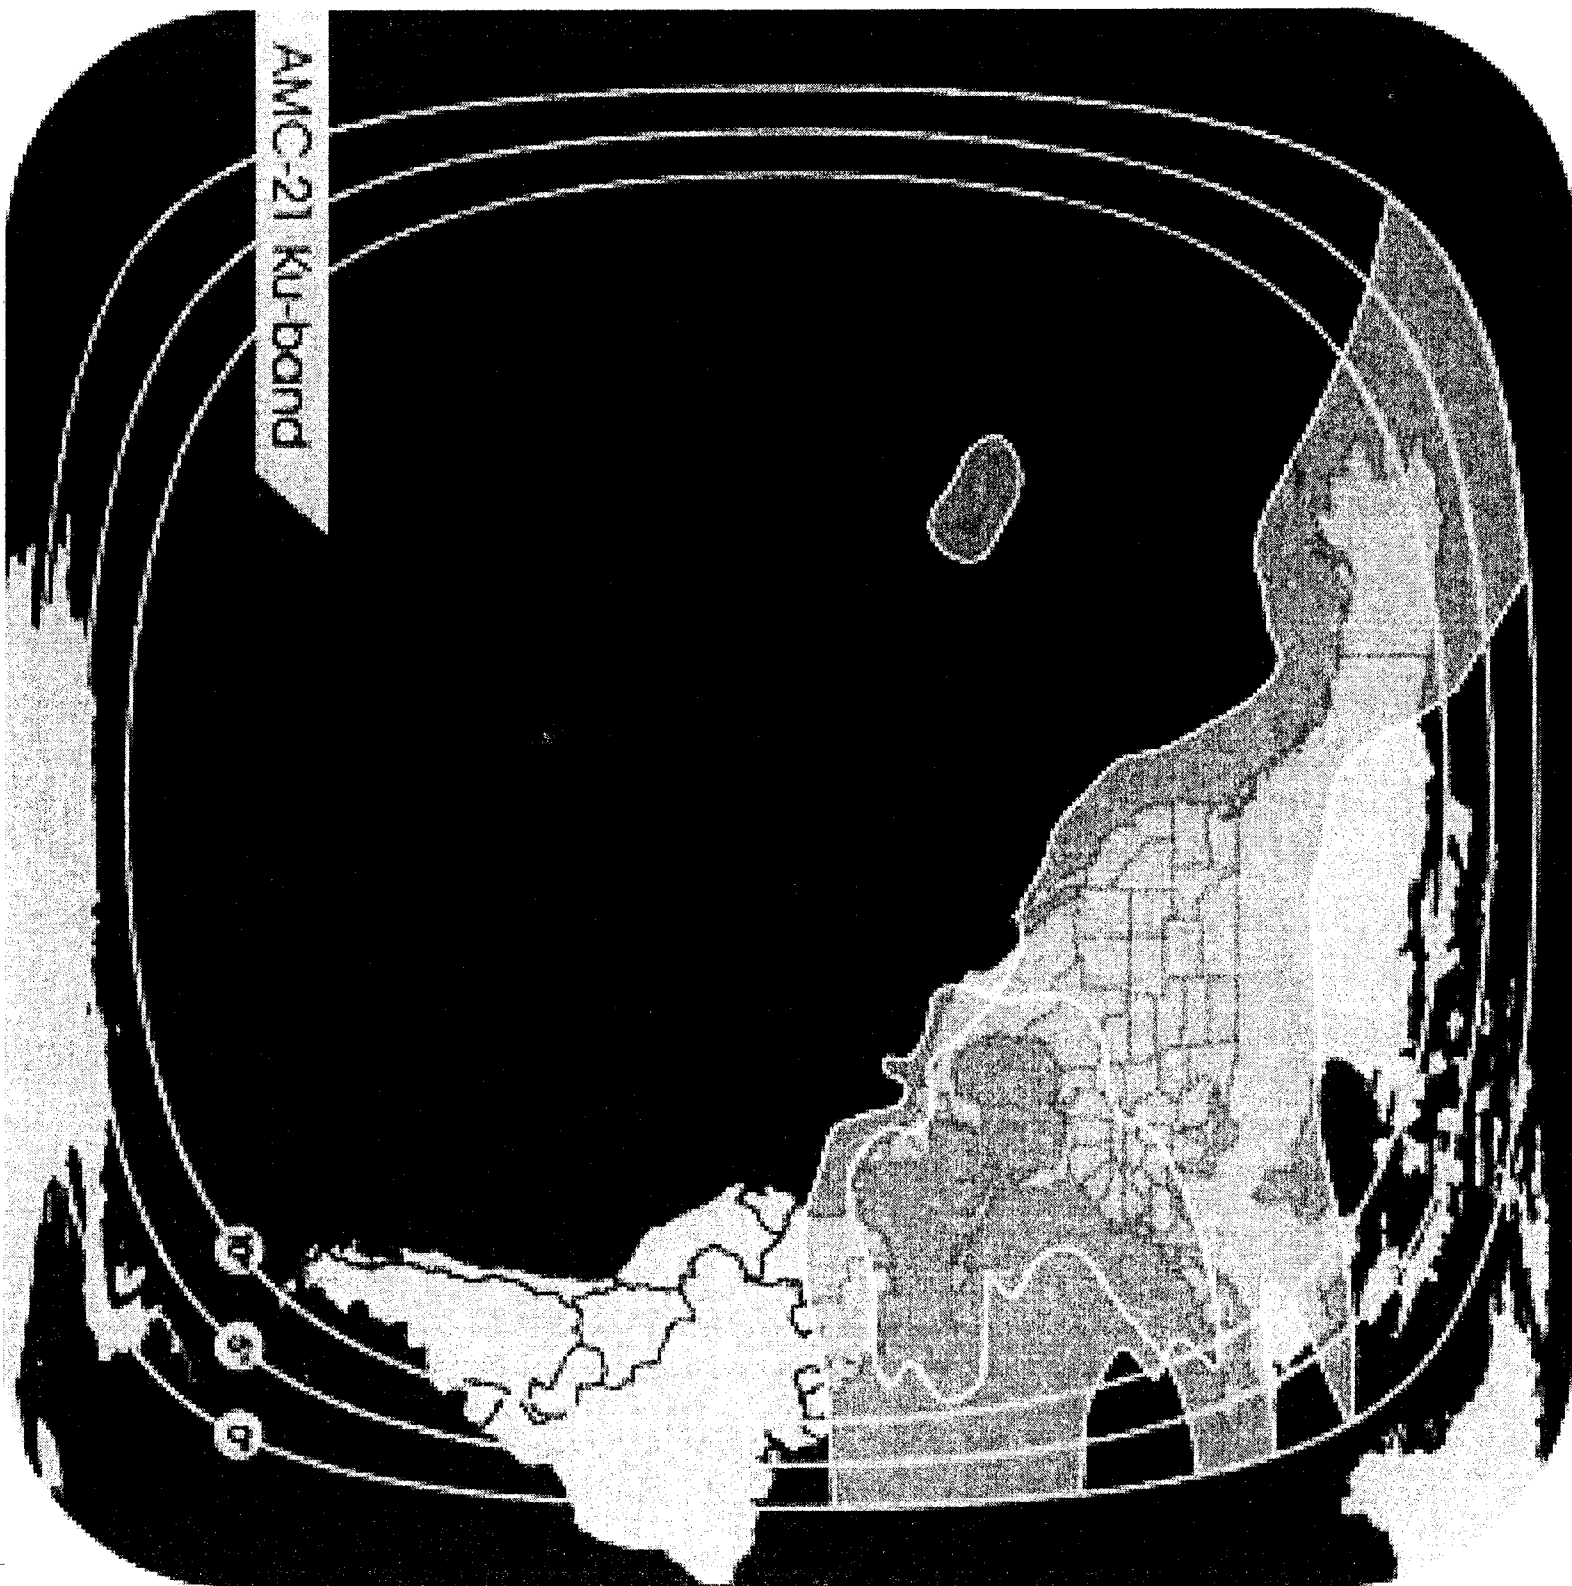


Figure 5

ESTRELLA DO SUL 1

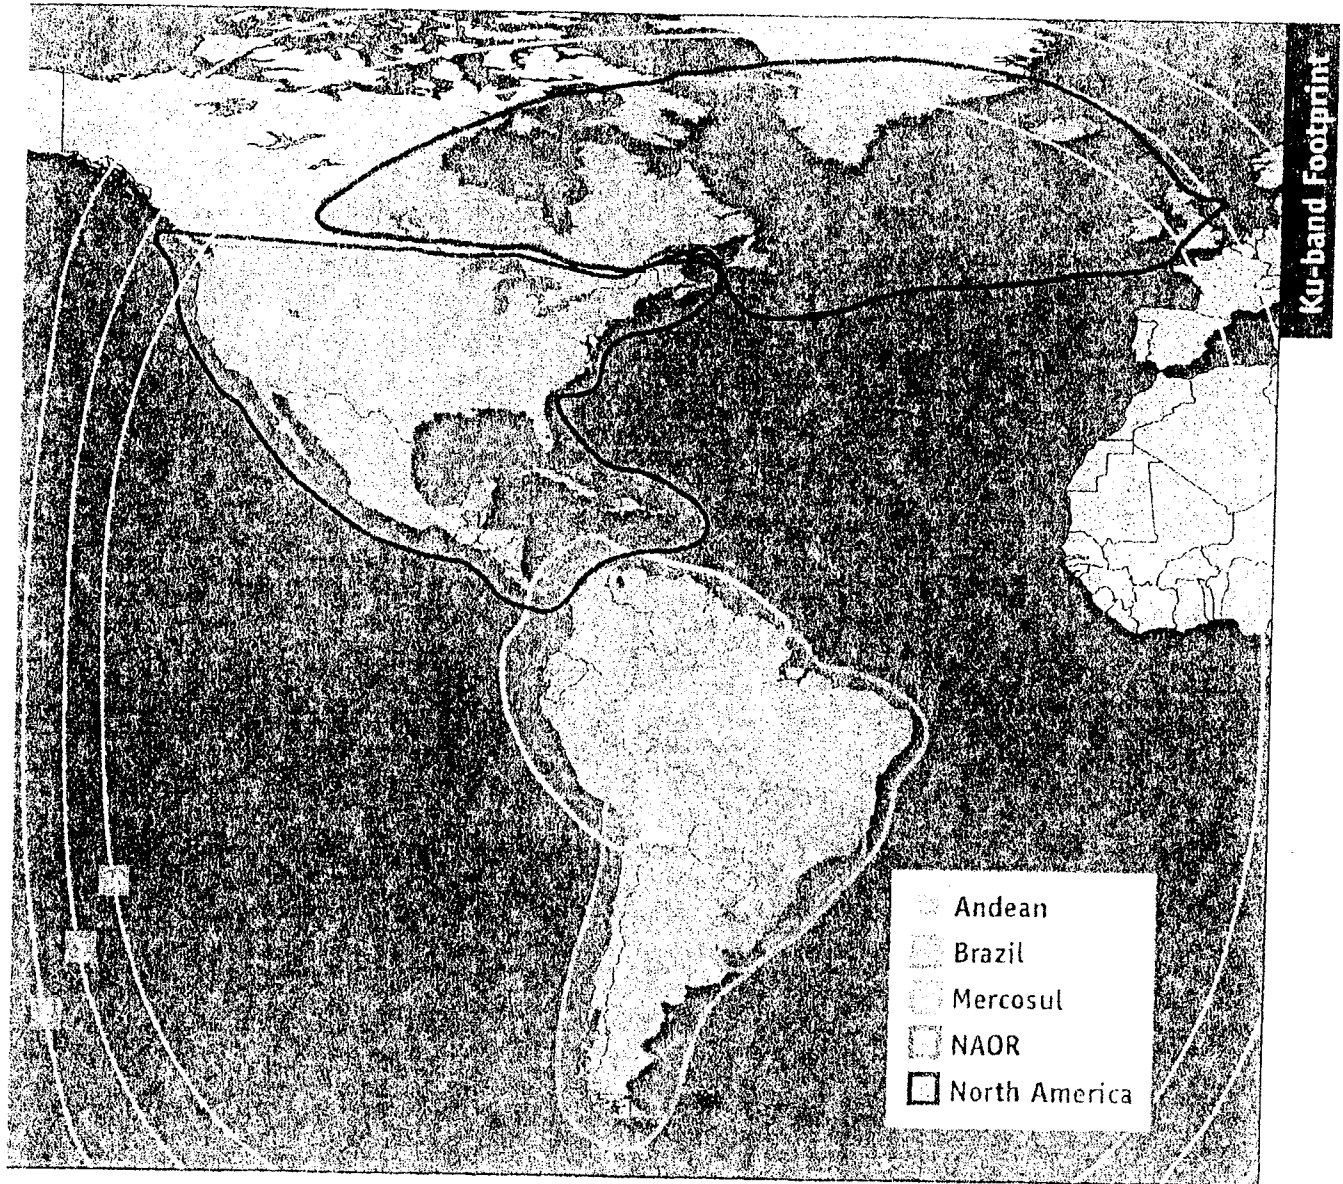

u-band Payload

Transponders
3 MHz and 36 MHz

Modulation
Orthogonal Linear

Frequency
Standard


Uplink: 14 to 14.5 GHz
Downlink: 11.7 to 12.2 GHz

Extended

Uplink: 13.75 to 14 GHz
Downlink: 11.45 to 11.7 GHz

Saturation Flux Density
-68 to -96 dBW/m²

Figure 5

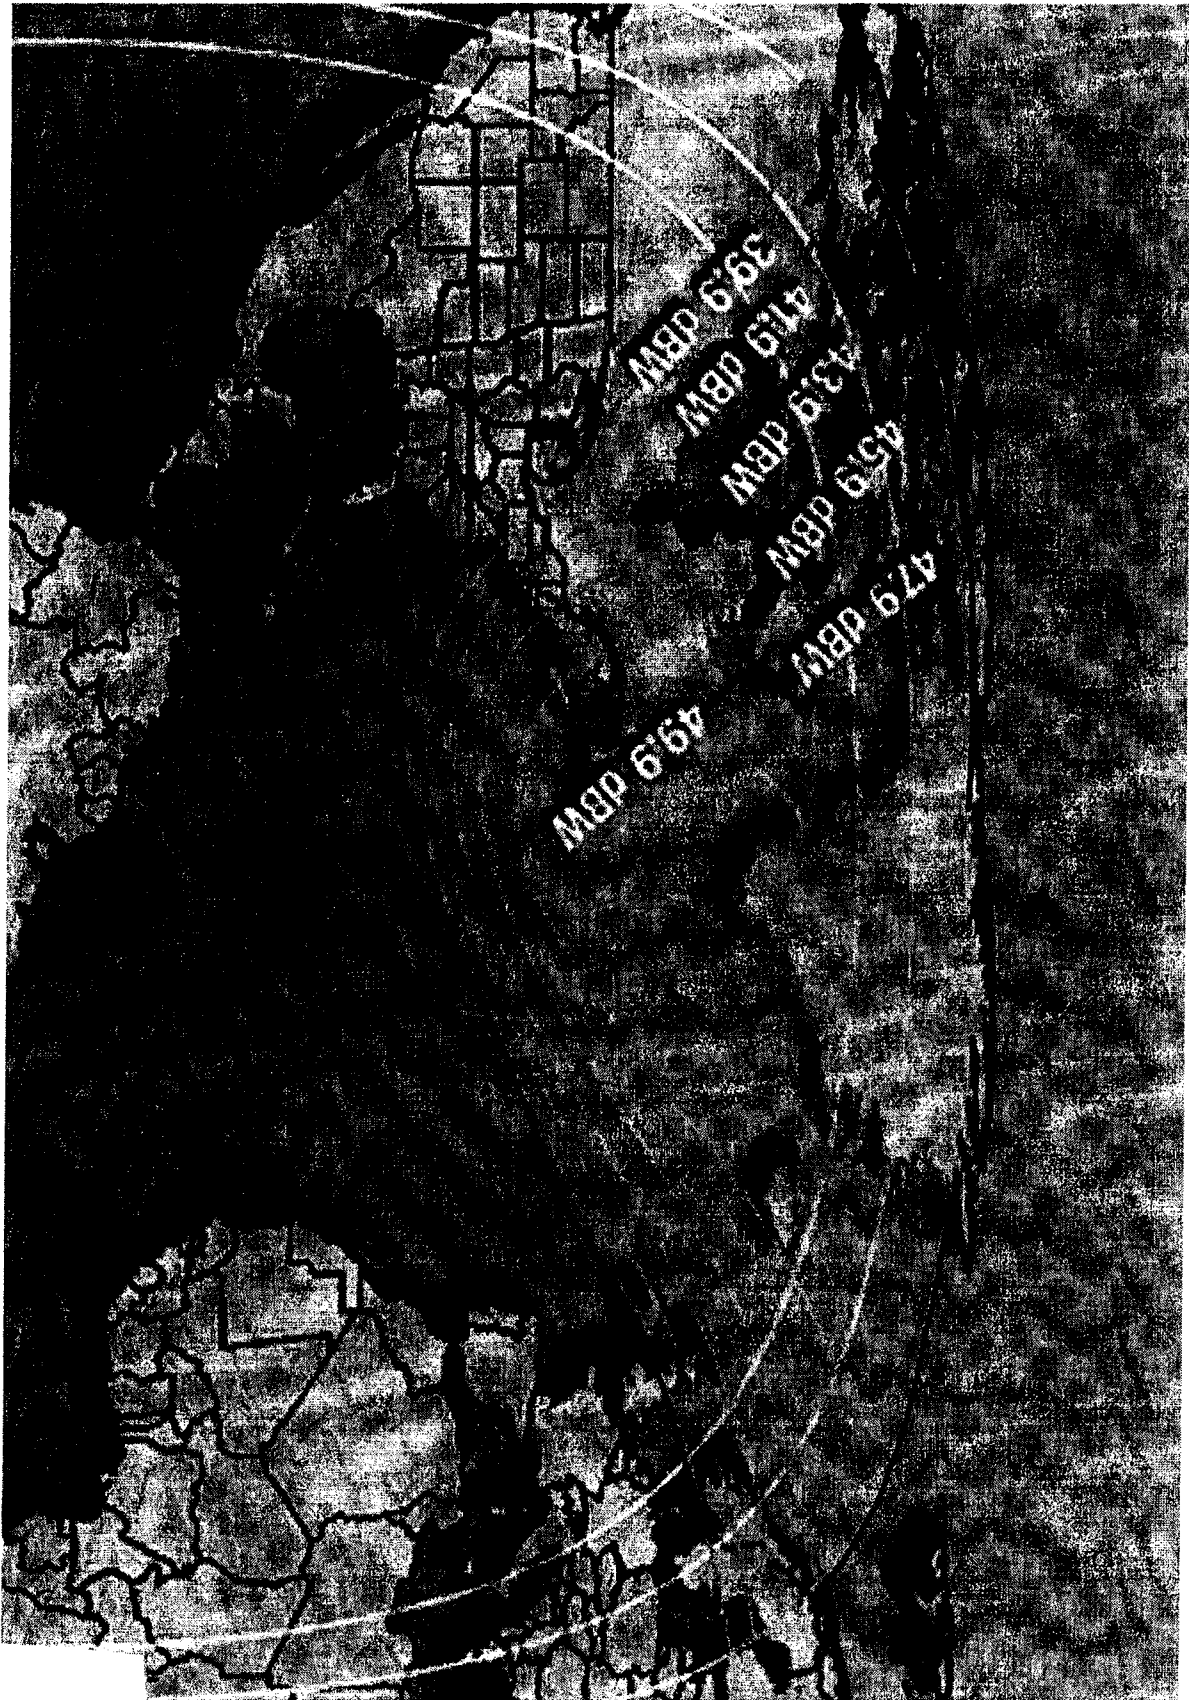

INTELSAT 705 #1

Figure 5
INTELSAT 705 #2

