

Request for Special Temporary Authority

O3b Limited (“O3b”), pursuant to Section 25.120 of the Commission’s rules,¹ hereby respectfully requests special temporary authority (“STA”) to operate two earth stations at the same location in Bristow, Virginia (collectively, the “Bristow Integration Earth Station”) that will communicate with the satellite system operated by O3b. In this filing, O3b seeks a 60-day STA for the period between March 23, 2015 and May 22, 2015. O3b proposes to operate the Bristow Integration Earth Station during this term in accordance with the parameters specified in the attached Schedule B, which subsequently will be filed with a license application for the Bristow Integration Earth Station that O3b will be filing in the near future (the “Bristow Integration Earth Station License Application”).

The STA requested herein will be used to integrate and test new 1.2m earth station terminals, all of which are technically identical, before they are deployed to customers or demonstration sites. No more than two of these new 1.2m earth station terminals will be operated at one time. As discussed below, grant of the requested authority is in the public interest as it will allow O3b to properly evaluate new terminals before deployment to customer sites.

Test Details and Public Interest Showing

The Bristow Integration Earth Station will communicate with O3b’s UK-authorized, Ka-band, Medium Earth Orbit, non-geostationary satellite orbit (“NGSO”) Fixed-Satellite Service (“FSS”) system.²

The frequencies to be used by the Bristow Integration Earth Station are:

- 27.6-28.4 GHz, 28.6-29.1 GHz (uplink)
- 17.8-18.6 GHz, 18.8-19.3 GHz (downlink)

The Bristow Integration Earth Station antennas will be mounted on fixed platforms. Although the pointing angle of the antennas will change as O3b’s in-orbit satellites are tracked, the platform will remain stationary during operation.

The Bristow Integration Earth Station will consist of two (2) 1.2m earth station terminals. Each earth station terminal will consist of two (2) 1.2m Orbit Communications antennas. O3b has previously been granted an STA to operate the same 1.2m earth station terminal at the O3b facility in Bristow, Virginia³ as well as at a number of other locations around the United States.⁴

Grant of this STA request will serve the public interest, convenience and necessity by allowing O3b to integrate and test new 1.2m earth station terminals and prepare them for commercial use

¹ 47 C.F.R. § 25.120.

² O3b’s first four satellites were launched on June 25, 2013. O3b’s next four satellites was launched on July 10, 2014. O3b launched another 4 satellites on December 18, 2014, bringing the total number of satellites in the constellation to 12.

³ See O3b Limited, File No. SES-STA-20140912-00730, granted October 22, 2014 (“O3b Bristow STA”).

⁴ See O3b Limited, File No. SES-STA-20131228-01209, granted April 29, 2014; O3b Limited, File No. SES-STA-20140731-00627, granted September 16, 2014 (“O3b DTS STA Application”); O3b Limited, File No. SES-STA-20140819-00666, granted October 27, 2014, 2014 (“O3b Oil Comm STA Application”); O3b Limited, File No. SES-STA-20141022-00816, granted December 10, 2014.

before they are deployed to customers or demonstration sites. An STA will also permit O3b to conduct customer demonstrations at the Bristow facility should the need arise. This will ensure that customers around the globe continue to receive high quality service from O3b.

The O3b Satellite System

In its initial FCC application, which sought authority for a gateway earth station located in Hawaii, O3b stated that it planned to operate eight NGSO satellites that would be spaced equally, *i.e.*, at 45° intervals.⁵ The Commission granted this application.⁶ The Commission subsequently granted O3b special temporary authority, and O3b has sought regular authority, to operate up to two of the Eight Operating Satellites to serve as spares, with the remaining satellites evenly distributed in O3b's authorized orbital plane.⁷

O3b launched another four satellites on December 18, 2014. Prior to the launch, O3b filed a Petition for Declaratory Ruling ("Petition") seeking market access for the new four satellites and to consolidate under a single authorization all of O3b's authority to use its space stations to serve the U.S. market.⁸ In the Petition O3b requested that it be permitted to operate up to three of its twelve space stations as spares with the remaining space stations evenly distributed in O3b's authorized orbital plane. The Commission recently granted the Petition.⁹

Earth Station Technical Parameters

The following documents containing technical details of the operations proposed under the requested STA are attached hereto:

- FCC Form 312, Schedule B. O3b proposes to operate the Bristow Integration Earth Station during this 60-day term in accordance with the parameters specified in the attached Schedule B.
- Link Budgets. Representative links for the Bristow Integration Earth Station are provided.
- Antenna Characteristics. Characteristics of the 1.2m Orbit Communications Antenna are provided for the Commission's convenience.
- Radiation Hazard Study. The radiation hazard analysis for the 1.2m Orbit Communications antenna is provided. As described therein, O3b will follow procedures to mitigate potential radiation hazards in controlled and uncontrolled environments.

⁵ See Application for Hawaii Gateway Earth Station, File No. SES-LIC-20100723-00952, Legal Narrative, Section III and Attachment A thereto (Technical Statement), Section A.2.

⁶ See O3b Hawaii Gateway License.

⁷ See FCC File Nos. SES-STA-20140814-00656, SES-STA-20140814-00657, SES-STA-20140814-00658, SES-MOD-20140814-00652, SES-MOD-20140814-00654, SES-MOD-20140814-00655, and SES-AMD-20140814-00653.

⁸ See O3b Limited, Call Sign S2935, File No. SAT-LOI-20141029-00118 ("O3b PDR Application").

⁹ See *id.*

- Comsearch Reports. Comsearch Reports are provided for bands in which terrestrial frequencies have primary allocations. Comsearch notified operators within a coordination zone calculated using the ITU RR Appendix 7 guidelines.
 - 27.6-28.35 GHz band. As stated in the attached Frequency Coordination Report, Comsearch has notified all existing and proposed LMDS licensees that are within the coordination contours of the Bristow Integration Earth Station and that potentially could be affected by O3b's transmissions in the 27.6-28.35 GHz portion of the Ka-band. No objections were received from any of these parties.
 - 18.3-18.6 GHz band. As stated in the attached Interference Analysis Report, for operations in the 18.3-18.6 GHz band, the Bristow Integration Earth Station will operate satisfactorily within the 18 GHz microwave environment, and there will be no restrictions of its operation due to interference considerations.

Further, O3b incorporates by reference the following technical parameters previously provided by O3b:

- Schedule S. In its Petition, O3b submitted a Schedule S describing its satellite system's technical characteristics.¹⁰ The Schedule S correctly described the O3b satellite system for that application, and numerically enveloped all of the necessary parameters for future earth station applications. O3b will operate its Bristow Integration Earth Station within the parameters described in O3b's Schedule S.
- U.S. Government Coordination. O3b has completed all necessary coordination with U.S. government satellite networks operating in Ka-band, including GSO and NGSO networks, as well as their associated specific earth stations filed under 9.7A and 9.7B of the ITU Radio Regulations through other administrations. O3b has also completed coordination, according to US footnote 334 of the FCC table of frequency allocations, with the U.S. government, and this US334 coordination agreement specifically provides for additional earth stations in U.S. territory operating with O3b's satellites, such as the Bristow Integration Earth Station. As a result, O3b's existing US334 coordination agreement covers the use of the Bristow Integration Earth Station as requested in this STA request.
- Antenna Patterns. O3b previously submitted measured 30 GHz band antenna performance data for the 1.2m Orbit Communications antennas to the Commission in a number of recent STA requests.¹¹

¹⁰ See O3b PDR Application.

¹¹ See O3b Limited, File No. SES-STA-20131228-01209, filed December 23, 2013 ("O3b CODA STA Application"), and which was placed on Public Notice on April 2, 2014 and granted on April 29, 2014. See also O3b Limited, File No. SES-STA-20140731-00627, filed July 31, 2014; O3b Limited, File No. SES-STA-20140819-00666, filed Aug. 19, 2014.

Proposed Spectrum Use

O3b's proposed Bristow Integration Earth Station operations in shared bands are consistent with the Commission's rules and policies. O3b addresses each of these bands below.

UPLINK

27.6-28.35 GHz – Secondary uplink band shared with primary LMDS.

The 27.6-28.35 GHz uplink band is allocated to the local multipoint distribution service ("LMDS") on a primary basis. FSS operations are allocated on a secondary basis in the same band. Accordingly, O3b's proposed operations in this band must not cause harmful interference to primary LMDS stations.

The Comsearch coordination report submitted with O3b's Bristow Integration Earth Station License Application demonstrates that O3b can operate its Bristow Integration Earth Station on a secondary basis in this band without causing harmful interference to LMDS licensees. Comsearch sent a coordination notice to all existing and proposed terrestrial licensees within the Comsearch coordination contours of the Bristow Integration Earth Station site. No objections were received from any of the incumbent licensees. Furthermore, O3b has had two 2.4m antennas operating in these channels at its Bristow, VA facility since August, 2013 and has not received an interference complaint.¹²

28.35-28.4 GHz – Secondary uplink band shared with primary GSO FSS stations.

In the 28.35-28.4 GHz band, there is a primary allocation for GSO FSS systems and a secondary allocation for NGSO FSS systems. O3b's Bristow Integration Earth Station transmissions in this band will be consistent with their secondary status vis-à-vis GSO FSS transmissions. The Commission has allowed similar secondary use of frequencies in the Ka-band uplink allocated to GSO FSS on a primary basis where applicants are prepared to accept interference from primary operations and can demonstrate that their proposed operations are not likely to cause harmful interference to primary operations.¹³ O3b satisfies both of these standards.

As a secondary user of the 28.35-28.4 GHz band in the United States, O3b makes no claim of protection from interference from U.S.-licensed GSO FSS networks in this band segment. As for O3b's uplink operations in the 28.35-28.4 GHz band, the ITU has developed uplink equivalent power flux density limits ("EPFD_{up}") limits to protect co-frequency GSO FSS operations from unacceptable interference from NGSO FSS systems operating in the same frequencies. Specifically, in accordance with Article 22 of the ITU Radio Regulations, if the applicable EPFD_{up} limits are met, the NGSO FSS satellite system is considered to have met its obligations to protect GSO FSS networks from unacceptable interference. O3b demonstrated that its Hawaii Gateway Earth Station operating at the authorized power levels will meet the applicable ITU EPFD_{up} limits in all frequency ranges where these limits apply,

¹² See O3b Limited, File No. SES-STA-20130617-00497, granted August 27, 2014 ("O3b NOC STA").

¹³ *Northrop Grumman Space & Missions Systems Corporation*, 24 FCC Rcd 2330, at ¶¶ 72-73 (Int'l Bur. 2009); *contactMEO Communications, LLC*, 21 FCC Rcd 4035, at ¶¶ 23-24, (Int'l Bur., 2006).

due to the inherent angular separation between the O3b and geostationary orbits when viewed from the Earth at latitudes away from the equator.¹⁴

The Bristow Integration Earth Station is located further north in latitude than the Hawaii Gateway Earth Station,¹⁵ which results in an even greater angular separation between the O3b and geostationary orbits as viewed from the Earth and an even greater assurance that the applicable ITU EPFD_{up} limits will be met by O3b's proposed operations. The proposed Bristow Integration Earth Station operations, therefore, also will meet the applicable ITU EPFD_{up} limits. In any event, O3b confirms that its operations will be on a secondary basis relative to U.S.-licensed GSO FSS networks in the same band.

28.6-29.1 GHz – Primary uplink band for licensed NGSO FSS Systems.

Under the Commission's Ka-band frequency plan, the frequencies 28.6-29.1 GHz may be used on a primary basis by licensed NGSO FSS systems.¹⁶ O3b recognizes, however, that operations under an STA for the Bristow Integration Earth Station will be on a secondary, non-harmful interference basis. As shown below, these Bristow Integration Earth Station operations will provide the requisite protection to allocated services operating in this band.

Avoidance of interference to GSO FSS systems. The proposed operations will not cause any interference into, or require protection from, any co-frequency GSO satellites. As previously shown,¹⁷ there is an inherent angular separation between the O3b and GSO arcs from the perspective of earth stations located away from the equator. The Bristow Integration Earth Station is located further north in latitude than the Hawaii Gateway Earth Station,¹⁸ which results in an even greater angular separation between the O3b and geostationary orbits as viewed from the Earth. This means that the angular separation between the O3b and GSO arcs from the Bristow Integration Earth Station will be greater than the separation accepted by the Commission when it approved O3b's Hawaii Gateway Earth Station. This ensures that GSO FSS systems will be adequately protected.

Avoidance of interference to or from Fixed Service (i.e., terrestrial) stations. Interference from the O3b Bristow Integration Earth Station transmissions into U.S. terrestrial Fixed Service ("FS") receivers in the 28 GHz band is a non-issue because there is no allocation in the Commission's Ka-band Frequency Plan for FS stations operating in the 28.6-29.1 GHz band in the United States.¹⁹

¹⁴ O3b Hawaii License Application, FCC File No. SES-LIC-20100723-00952, Technical Attachment at A.10.1.

¹⁵ The O3b Hawaii gateway latitude is 21° 40' 17.8" N; the Bristow Integration Earth Station latitude is 38° 47' 00" N.

¹⁶ See *In the Matter of Rulemaking to Amend Parts 1, 2, 21, and 25 of the Commission's Rules to Redesignate the 27.5-29.5 GHz Frequency Band, to Reallocate the 29.5-30.0 GHz Frequency Band, to Establish Rules and Policies for Local Multipoint Distribution Service and for Fixed Satellite Services*, 11 FCC Rcd. 19005, ¶¶ 59-62 and 79 (1996). See also *In the Matter of Redesignation of the 17.7-19.7 GHz Frequency Band, Blanket Licensing of Satellite Earth Stations in the 17.7-20.2 GHz and 27.5-30.0 GHz Frequency Bands, and the Allocation of Additional Spectrum in the 17.3-17.8 GHz and 24.75-25.25 GHz Frequency Bands for Broadcast Satellite-Service Use*, 15 FCC Rcd 13430, ¶ 28 (2000).

¹⁷ O3b Hawaii License Application, FCC File No. SES-LIC-20100723-00952, Technical Attachment at A.10.1.

¹⁸ See n. 17, *supra*.

¹⁹ See *In the Matter of Verizon Washington D.C., Application for Renewal of License for Common Carrier Fixed Point to Point Microwave Station KGC79*, 26 FCC Rcd 13511, 13516 (WTB 2011).

DOWNLINK

Now that O3b's Petition has been granted, the Commission already has approved the technical characteristics of the transmissions of O3b's space stations to O3b's entire service area, including Bristow. Out of an abundance of caution, however, O3b is including information about these space station transmissions in this STA request.

17.8-18.3 GHz – Primary downlink band for licensed FS Systems.

This frequency band is allocated on a primary basis to FS, and there is no secondary allocation for NGSO FSS in the band. O3b's operations in this band pursuant to the requested STA will be on a secondary, non-interference basis.

In this case, O3b's proposed use of the 17.8-18.3 GHz frequency band for downlink operations will not cause harmful interference to FS operations in the same band. This is because O3b will meet the PFD limits at the earth's surface prescribed by the ITU for the protection of terrestrial services in this band. O3b also agrees to accept interference from FS operations in the band.

In addition, an Interference Analysis Report from Comsearch submitted with O3b's Bristow Integration Earth Station License Application indicates that there will be no restrictions of O3b's operations due to interference considerations.

18.3-18.6 GHz – Non-conforming downlink band shared with primary GSO FSS stations.

The 18.3-18.6 GHz band is allocated in the United States on a primary basis to GSO FSS. In the 18.3-18.6 GHz downlink band, the ITU has developed downlink equivalent power flux density ("EPFD_{down}") limits to protect GSO FSS networks from unacceptable interference from NGSO FSS systems operating in the same frequencies. Specifically, in accordance with Article 22 of the ITU Radio Regulations, if the applicable EPFD_{down} limits are met, the NGSO FSS satellite system is considered to have met its obligations to protect GSO FSS networks from unacceptable interference. O3b confirms that its system will meet the applicable ITU EPFD_{down} limits in all frequency ranges where these limits apply.²⁰

As an example of how these limits will be satisfied, O3b provided EPFD_{down} calculations for transmissions to its Hawaii Gateway Earth Station.²¹ O3b also showed how the EPFD_{down} limits can be satisfied at all latitudes.²² O3b is able to satisfy the limits by taking advantage of the inherent angular separation of the O3b and the GSO orbits when viewed from the surface of the Earth at latitudes away

²⁰ See ITU Radio Regulations, Article 22. See also O3b Hawaii License Application, FCC File No. SES-LIC-20100723-00952, Technical Attachment at A.10.1 for a discussion of O3b's compliance with the operational limits in Article 22 of the ITU Radio Regulations. See also Letter from Brian D. Weimer, to Marlene H. Dortch, in re O3b Application for Hawaii Earth Station, File No. SES-LIC-20100723-00952 (Apr. 22, 2011), Annex A.

²¹ O3b Hawaii License Application, FCC File No. SES-LIC-20100723-00952, Technical Attachment at A.10.1.

²² See id.

from the equator.²³ Based on these prior showings, it can be seen that transmissions to O3b's Bristow Integration Earth Station will be within the EPFD_{down} limits.

18.8-19.3 GHz – Primary downlink band for licensed NGSO FSS Systems.

Under the Commission's Ka-band frequency plan, the frequencies 18.8-19.3 GHz may be used on a primary basis by licensed NGSO FSS systems.²⁴ O3b recognizes, however, that operations under an STA for the Bristow Integration Earth Station operations will be on a secondary, non-harmful interference basis. The Bristow Integration Earth Station STA operations will provide the requisite protection to GSO FSS networks and terrestrial stations operating in this band.

Avoidance of interference to GSO FSS systems. This band is not allocated for GSO FSS networks.²⁵ Nevertheless, the proposed operations will not cause any interference into, or require protection from, any co-frequency GSO satellites. As previously shown,²⁶ there is an inherent angular separation between the O3b and GSO arcs from the perspective of earth stations located away from the equator. As mentioned above, the Bristow Integration Earth Station is located further north in latitude than the Hawaii Gateway Earth Station, which results in an even greater angular separation between the O3b and geostationary orbits as viewed from the Earth. This means that the angular separation between the O3b and GSO arcs from the Bristow Integration Earth Station will be even greater than the separation accepted by the Commission when it approved O3b's Hawaii Gateway Earth Station. This ensures that GSO FSS systems will be adequately protected.

However, because the operations O3b proposes in this STA request will be conducted on a secondary basis, O3b agrees to accept any interference that its Bristow Integration Earth Station may receive from 18.8-19.3 GHz band GSO FSS networks

Avoidance of interference to or from Fixed Service (i.e., terrestrial) stations. FS stations operating in the 18.8-19.3 GHz band are no longer co-primary with FSS users in this band.²⁷ However, because the operations O3b proposes in this STA request will be conducted on a secondary basis, O3b agrees to accept any interference that its Bristow Integration Earth Station may receive from 18.8-19.3 GHz band FS stations. O3b will protect the 18.8-19.3 GHz band FS stations by complying with the space station PFD limits specified in Section 25.208 of the FCC rules.

²³ See *id.*

²⁴ See *In the Matter of Rulemaking to Amend Parts 1, 2, 21, and 25 of the Commission's Rules to Redesignate the 27.5-29.5 GHz Frequency Band, to Reallocate the 29.5-30.0 GHz Frequency Band, to Establish Rules and Policies for Local Multipoint Distribution Service and for Fixed Satellite Services*, 11 FCC Rcd. 19005, ¶¶59-62 and 79 (1996). See also *In the Matter of Redesignation of the 17.7-19.7 GHz Frequency Band, Blanket Licensing of Satellite Earth Stations in the 17.7-20.2 GHz and 27.5-30.0 GHz Frequency Bands, and the Allocation of Additional Spectrum in the 17.3-17.8 GHz and 24.75-25.25 GHz Frequency Bands for Broadcast Satellite-Service Use*, 15 FCC Rcd 13430, ¶ 28 (2000).

²⁵ See *id.*

²⁶ O3b Hawaii License Application, FCC File No. SES-LIC-20100723-00952, Technical Attachment at A.10.1.

²⁷ See 47 C.F.R. § 101.85(b)(2).

Conclusion

The requested STA will allow O3b to evaluate and demonstrate O3b system's operational capabilities and will not result in harmful interference to other authorized spectrum users. Accordingly, and for good cause shown, O3b respectfully requests that its STA be granted in time for it to commence testing under this 60-day STA on March 23, 2015.

SATELLITE EARTH STATION AUTHORIZATIONS

FCC Form 312 - Schedule B:(Technical and Operational Description)

Location of Earth Station Site		
E1. Site Identifier: Bristow Integration Antennas E2. Contact Name: Randy Taylor E3. Street: 8000 Gainsford Court	E5. Call Sign: E6. Phone Number: 720-838-3189 E7. City: Bristow E8. County: Prince William	
E4. State: VA E10. Area of Operation: Fixed E11. Latitude: 38° 46' 59.9" N E12. Longitude: 77° 34' 25.3" W E13. Lat/Lon Coordinates are: E14. Site Elevation (AMSL): 86.32 meters	E9. Zip Code: 20136 <input type="radio"/> NAD-27 <input checked="" type="radio"/> NAD-83	N/A
E15. If the proposed antenna(s) operate in the Fixed Satellite Service (FSS) with geostationary satellites, do(es) the proposed antenna(s) comply with the antenna gain patterns specified in Section 25.209(a) and (b) as demonstrated by the manufacturer's qualification measurement? If NO, provide a technical analysis showing compliance with two-degree spacing policy.	<input type="radio"/> Yes <input type="radio"/> No <input checked="" type="radio"/> N/A	
E16. If the proposed antenna(s) do not operate in the Fixed Satellite Service (FSS), or if they operate in the Fixed Satellite Service (FSS) with non-geostationary satellites, do(es) the proposed antenna(s) comply with the antenna gain patterns specified in Section 25.209(a2) and (b) as demonstrated by the manufacturer's qualification measurements?	<input checked="" type="radio"/> Yes <input type="radio"/> No N/A	
E17. Is the facility operated by remote control? If YES, provide the location and telephone number of the control point.	<input type="radio"/> Yes <input checked="" type="radio"/> No	
E18. Is frequency coordination required? If YES, attach a frequency coordination report as	<input checked="" type="radio"/> Yes <input type="radio"/> No	
E19. Is coordination with another country required? If YES, attach the name of the country(ies) and plot of coordination contours as	<input type="radio"/> Yes <input checked="" type="radio"/> No	
E20. FAA Notification - (See 47 CFR Part 17 and 47 CFR part 25.113(c)) Where FAA notification is required, have you attached a copy of a completed FCC Form 854 and or the FAA's study regarding the potential hazard of the structure to aviation? FAILURE TO COMPLY WITH 47 CFR PARTS 17 AND 25 WILL RESULT IN THE RETURN OF THIS APPLICATION.	<input type="radio"/> Yes <input checked="" type="radio"/> No	

POINTS OF COMMUNICATION

Satellite Name: Eq. If you selected OTHER, please enter the following:	
E21. Common Name:	E22. ITU Name:
E23. Orbit Location:	E24. Country:

POINTS OF COMMUNICATION (Destination Points)

E25. Site Identifier:

E26. Common Name:	E27. Country:
-------------------	---------------

ANTENNA

Site ID	E28. Antenna Id	E29. Quantity	E30. Manufacturer	E31. Model	E32. Antenna Size	E41/42. Antenna Gain Transmit and/or Receive (___dBi at _____GHz)		
Bristow 1.2m	Orbit 1.2m	2	Orbit Communications	AL-7103-Ka	1.2	42.6 dBi at 19.2		
						46.0 dBi at 28.3 GHz		
E28. Antenna Id	E33/34. Diameter Minor/Major(meters)		E35. Above Ground Level (meters)	E36. Above Sea Level (meters)	E37. Building Height Above Ground Level (meters)	E38. Total Input Power at antenna flange (Watts)	E39. Maximum Antenna Height Above Rooftop (meters)	E40. Total EIRP for all carriers (dBW)
Orbit 1.2m	1.2/1.2		2	75	0.0	20.0	2.0	60.5

FREQUENCY

E28. Antenna Id	E43/44. Frequency Bands(MHz)	E45. T/R Mode	E46. Antenna Polarization(H,V,L,R)	E47. Emission Designator	E48. Maximum EIRP per Carrier(dBW)	E49. Maximum EIRP Density per Carrier(dBW/4kHz)
Orbit 1.2m	17800-18600	R	Left and Right Circular	216MG7D	45.6	-1.7
E50. Modulation and Services Various Modulations up to 32APSK; Digital Data Link						
Orbit 1.2m	17800-18600	R	Left and Right Circular	54MG7D	45.6	4.3
E50. Modulation and Services Various Modulations up to 32APSK; Digital Data Link						
Orbit 1.2m	18800-19300	R	Left and Right Circular	216MG7D	45.6	-1.7
E50. Modulation and Services Various Modulations up to 32APSK; Digital Data Link						
Orbit 1.2m	18800-19300	R	Left and Right Circular	54MG7D	45.6	4.3
E50. Modulation and Services Various Modulations up to 32APSK; Digital Data Link						
Orbit 1.2m	27600-28400	T	Left and Right Circular	216MG7D	60.5	13.3
E50. Modulation and Services Various Modulations up to 32APSK; Digital Data Link						
Orbit 1.2m	27600-28400	T	Left and Right Circular	54MG7D	60.5	19.3
E50. Modulation and Services Various Modulations up to 32APSK; Digital Data Link						

Orbit 1.2m	28600-29100	T	Left and Right Circular	216MG7D	60.5	12.3
E50. Modulation and Services Various Modulations up to 32APSK; Digital Data Link						
Orbit 1.2m	28600-29100	T	Left and Right Circular	54MG7D	60.5	19.3
E50. Modulation and Services Various Modulations up to 32APSK; Digital Data Link						

FREQUENCY COORDINATION

E28. Antenna Id	E51. Satellite Orbit Type	E52/53. Frequency Limits(MHz)	E54/55. Range of Satellite Arc E/W Limit	E56. Earth Station Azimuth Angle Eastern Limit	E57. Antenna Elevation Angle Eastern Limit	E58. Earth Station Azimuth Angle Western Limit	E59. Antenna Elevation Angle Western Limit	E60. Maximum EIRP Density toward the Horizon(dBW/4kHz)
GD 2.4	Non-Geostationary	17800-18600	NON-GEO	122.22	20.0	238.54	10.0	0.0
GD 2.4	Non-Geostationary	18800-19300	NON-GEO	122.22	20.0	238.54	10.0	0.0
GD 2.4	Non-Geostationary	27600-28400	NON-GEO	122.22	20.0	238.54	10.0	-39.8
GD 2.4	Non-Geostationary	28600-29100	NON-GEO	122.22	20.0	238.54	10.0	-39.8

REMOTE CONTROL POINT LOCATION

E61. Call Sign				E65. Phone Number			
NOTE: Please enter the callsign of the controlling station, not the callsign for which this application is being filed.							
E62. Street Address							
E63. City			E67. County			E64/68. State/Country	E66. Zip Code

ANNEX 1 – Link Budgets

Representative link budgets for the 1.2m Orbit Communications antenna at the Bristow Integration Earth Station are provided on the following two pages.

O3b Networks Link Analysis - Tier2 Service for Bristow/U.S.A.

ECM Link Budget Rpt - 9/5/2014		Tier2	Tier2
Parameters	Unit	Clear Sky	
Ground parameters		Teleport	Telco
Location		Vernon/U.S.A.	Bristow/U.S.A.
Latitude	(deg)	34.16	38.75
Longitude (East)	(deg)	260.71	-77.20
E/S Range to SV	(km)	10102.65	10314.59
E/S Elevation to SV	(deg)	30.87	28.03
E/S Altitude	(km)	0.00	54.00
SV Beam Identifier	(#)	12	
Telco Offset to Beam Center	(km)	0.26	
Modulation Parameters		Forward	
Enter Receiver	Type	MEOLink	
Percentage of Bandwidth	(%)	100%	
Allocated Bandwidth	(MHz)	216	
Channel Symbol Rate	(Msps)	180	
Channel Modulation Type		8PSK	
Channel FEC Rate		0.66	
Channel Throughput	(Mbps)	355.12	
Uplink		Forward	
E/S Carrier Frequencies	(MHz)	28020	
E/S Tx HPA Power Level	(W)	500	
E/S Tx OBO	(dB)	-10	
E/S Tx Antenna Gain (7.3m)	(dB)	65.31	
E/S Tx EIRP Per Channel	(dBW)	75.11	
E/S Tx RF Link Availability	(%)	Clear	
E/S Tx Spreading Loss	(dB)	-151.08	
Satellite		Forward	
SV Rx G/T	(dB/K)	5.44	
SV Tx OBO	(dB)	-3.80	
SV Tx EIRP Per Channel/Carrier	dBW	44.74	
Downlink		Forward	
E/S Rx Carrier Frequency	(MHz)	18220	
E/S Rx Rf Link Availability	(%)	Clear	
E/S Rx Antenna Gain (1.2m)	(dBi)	44.19	
E/S Rx Effective G/T	(dB/K)	20.70	
Total Link		Forward	
Carrier/Noise Bandwidth	(dB)	51.93	
Carrier/Noise Uplink	(dB)	23.84	
Carrier/Noise Downlink	(dB)	12.47	
Carrier/Intermodulation Im (C/Im)	(dB)	25.00	
(C/N)- Total Actual (Es/No)	(dB)	11.01	
(C/N)-Total Required	(dB)	8.48	
(Eb/No)-Total Actual	(dB)	7.51	
(Eb/No)-Total Required	(dB)	4.98	
Excess Margin	(dB)	2.53	
Fade Margin	(dB)	13.26	

#1

O3b Networks Link Analysis - Tier2 Service for Bristow/U.S.A.

ECM Link Budget Rpt - 9/5/2014		Tier2	Tier2
Parameters	Unit	Clear Sky	
Ground parameters		Teleport	Telco
Location		Vernon/U.S.A.	Bristow/U.S.A.
Latitude	(deg)	34.16	38.75
Longitude (East)	(deg)	260.71	-77.20
E/S Range to SV	(km)	10102.65	10314.59
E/S Elevation to SV	(deg)	30.87	28.03
E/S Altitude	(km)	0.00	54.00
SV Beam Identifier	(#)	12	
Telco Offset to Beam Center	(km)	0.26	
Modulation Parameters		Return	
Enter Receiver	Type	MEOLink	
Percentage of Bandwidth	(%)	50%	
Allocated Bandwidth	(MHz)	108	
Channel Symbol Rate	(Msps)	90	
Channel Modulation Type		QPSK	
Channel FEC Rate		0.60	
Channel Throughput	(Mbps)	106.40	
Uplink		Return	
E/S Carrier Frequencies	(MHz)	28020	
E/S Tx HPA Power Level	(W)	20	
E/S Tx OBO	(dB)	-4.17	
E/S Tx Antenna Gain (1.2m)	(dB)	48.50	
E/S Tx EIRP Per Channel	(dBW)	56.55	
E/S Tx RF Link Availability	(%)	Clear	
E/S Tx Spreading Loss	(dB)	-151.08	
Satellite		Return	
SV Rx G/T	(dB/K)	5.79	
SV Tx OBO	(dB)	-15.26	
SV Tx EIRP Per Channel/Carrier	dBW	33.00	
Downlink		Return	
E/S Rx Carrier Frequency	(MHz)	18220	
E/S Rx Rf Link Availability	(%)	Clear	
E/S Rx Antenna Gain (7.3m)	(dBi)	61.91	
E/S Rx Effective G/T	(dB/K)	40.46	
Total Link		Return	
Carrier/Noise Bandwidth	(dB)	45.00	
Carrier/Noise Uplink	(dB)	7.84	
Carrier/Noise Downlink	(dB)	23.73	
Carrier/Intermodulation Im (C/Im)	(dB)	25.00	
(C/N)- Total Actual (Es/No)	(dB)	6.24	
(C/N)-Total Required	(dB)	3.78	
(Eb/No)-Total Actual	(dB)	5.01	
(Eb/No)-Total Required	(dB)	2.55	
Excess Margin	(dB)	2.46	
Fade Margin	(dB)	8.49	

#2

ANNEX 2 –Terminal Characteristics

The O3b 1.2 meter (“1.2m”) terminals offers service data rates of up to 150 Mbps. The figure below shows this terminal.

Figure: O3b’s 1.2 meter terminal



The 1.2m terminal is fully stabilized to account for the movement of the O3b satellite in its orbit. Each antenna is enclosed within a radome to protect it from the environment.

The Commission’s rules for C-band and Ku-band maritime terminals include a pointing accuracy requirement and a shut-off requirement. In these bands, there must be a pointing error of less than 0.2° between the orbital location of the target satellite and the axis of the main lobe of each maritime terminals antenna.³⁵ O3b observes these requirements with its 1.2m Orbit terminal operations, and the manufacturer of O3b’s 1.2m terminals has certified that the terminals comply with these requirements.

The internal controller software continuously monitors the instantaneous antenna tracking error and will cease transmissions within 100ms if an unexpected event occurs that causes the tracking error to exceed 0.5 degrees. Transmissions will not restart until the tracking error, relative to the target O3b satellite, is less than 0.2 degrees.

The 1.2m terminals are no smaller in antenna size than the range of antenna sizes that O3b has previously described to the Commission as its “Tier 2” service.³⁶ Therefore these 1.2m terminals present no new technical issues in terms of interference with respect to GSO or other NGSO satellite networks or terrestrial operators.

³⁵ See 47 C.F.R. §§ 25.221(a)(6) and 25.222(a)(6).

³⁶ See O3b’s Hawaii application, FCC File No. SES-LIC-20100723-00952, Technical Attachment at Section A.5.

Annex 3 – Radiation Hazard Study

The Radiation Hazard study for the Orbit Communications 1.2 meter antenna is provided on the following pages.

Radiation Hazard Study

The study in this section analyzes the potential RF human exposure levels caused by the Electro Magnetic (EM) fields of an Orbit AL-7103-Ka, 1.20 m antenna, operating with a maximum power at the flange of 20 Watts. The mathematical analysis performed below complies with the methods described in the FCC Office of Engineering and Technology (OET) Bulletin No. 65 (1985 rev. 1997) R&O 96-3 26 in "Evaluating Compliance with FCC Guidelines for Human Exposure to RF EM Fields, OET Bulletin 65 (Edition 97-01), Supplement B, FCC Office of Engineering & Technology, November 1997".

Maximum Permissible Exposure

There are two separate levels of exposure limits. The first applies to persons in the general population who are in an uncontrolled environment. The second applies to trained personnel in a controlled environment. According to 47 C.F.R. § 1.1310, the Maximum Permissible Exposure (MPE) limits for frequencies above 1.5 GHz are as follows:

- * General Population / Uncontrolled Exposure: 1.0 mW/cm²
- * Occupational / Controlled Exposure: 5.0 mW/cm²

The purpose of this study is to determine the power flux density levels for the earth station under study as compared with the MPE limits. This comparison is done in each of the following regions:

1. Far-field region
2. Near-field region
3. Transition region
4. The region between the feed and the antenna surface
5. The main reflector region
6. The region between the antenna edge and the ground

Input Parameters

The following input parameters were used in the calculations:

<u>Input Parameter</u>	<u>Value</u>	<u>Unit</u>	<u>Symbol</u>
Antenna Diameter	1.20	m	D
Antenna Transmit Gain	48.50	dBi	G
Transmit Frequency	29100.0	MHz	f
Antenna Feed Flange Diam.	6.00	cm	d
Power Input to the Antenna	20.00	Watts	P

Calculated Parameters

The following values were calculated using the above input parameters and the corresponding formula:

<u>Calculated Parameter</u>	<u>Value</u>	<u>Unit</u>	<u>Symbol</u>	<u>Formula</u>
Antenna Surface Area	1.13	m ²	A	$\pi D^2/4$
Area of Antenna Flange	28.3	cm ²	a	$\pi d^2/4$
Antenna Efficiency	0.53	real	η	$g\lambda^2/(\pi^2 D^2)$
Gain Factor	70795	real	g	$10^{(G/10)}$
Wavelength	0.010	m	λ	$300/f$

Behavior of EM Fields as a Function of Distance

The behavior of the characteristics of EM fields varies depending on the distance from the radiating antenna. These characteristics are analyzed in three primary regions: the near-field region, the far-field region and the transition region. Of interest also are the region between the antenna main reflector and the subreflector, the region of the main reflector area and the region between the main reflector and ground.

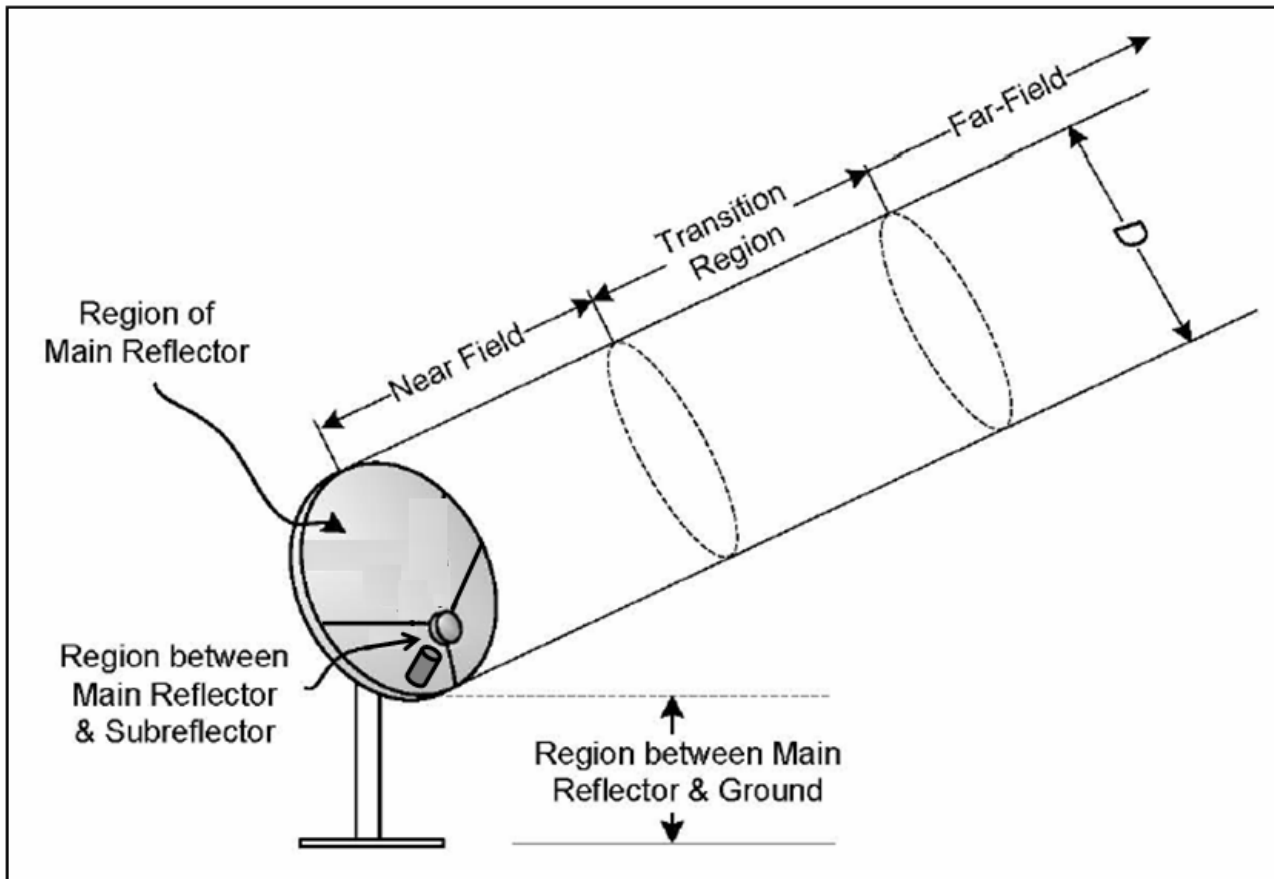


Figure 1. Electro-Magnetic Fields as a Function of Distance

For parabolic aperture antennas with circular cross sections, such as the antenna under study, the near-field, far-field and transition region distances are calculated as follows:

<u>Calculated Parameter</u>	<u>Value</u>	<u>Unit</u>	<u>Symbol</u>	<u>Formula</u>
Near-Field Distance	34.92	m	Rnf	$D^2/(4\lambda)$
Distance to Far-Field	83.81	m	Rff	$0.6D^2/\lambda$
Distance of Transition Region	34.92	m	Rt	$Rt=Rnf$

The distance in the transition region is between the near and far fields. Thus, $Rnf \leq Rt \leq Rff$. However, the power density in the transition region will not exceed the power density in the near-field. Therefore, for purposes of the present analysis, the distance of the transition region can equate the distance to the near-field.

Power Flux Density Calculations

The power flux density is considered to be at a maximum through the entire length of the near-field. This region is contained within a cylindrical volume with a diameter, D , equal to the diameter of the antenna. In the transition region and the far-field, the power density decreases inversely with the square of the distance. The following equations are used to calculate power density in these regions:

<u>Calculated Parameter</u>	<u>Value</u>	<u>Unit</u>	<u>Symbol</u>	<u>Formula</u>
Power Density in the Near-Field	3.74	mW/cm ²	Snf	$16\eta P/(\pi D^2)$
Power Density in the Far-Field	1.60	mW/cm ²	Sff	$gP/(4\pi Rff^2)$
Power Density in the Transition Region	3.74	mW/cm ²	St	$Snf \cdot Rnf/Rt$

The region between the main reflector and the subreflector is confined to within a conical shape defined by the feed assembly. The most common feed assemblies are waveguide flanges. This energy is determined as follows:

<u>Calculated Parameter</u>	<u>Value</u>	<u>Unit</u>	<u>Symbol</u>	<u>Formula</u>
Power Density at the Feed Flange	2829.4	mW/cm ²	Sfa	$4P/a$

The power density in the main reflector is determined similarly to the power density at the feed flange; except that the area of the reflector is used.

<u>Calculated Parameter</u>	<u>Value</u>	<u>Unit</u>	<u>Symbol</u>	<u>Formula</u>
Power Density at Main Reflector	7.07	mW/cm ²	Ssurface	$4P/A$

The power density between the reflector and ground, assuming uniform illumination of the reflector surface, is calculated as follows:

<u>Calculated Parameter</u>	<u>Value</u>	<u>Unit</u>	<u>Symbol</u>	<u>Formula</u>
Power Density between Reflector & Gnd	1.77	mW/cm ²	Sg	P/A

Summary of Calculations

Table 1 below summarizes the calculated power flux density values for each region. In a controlled environment, the only regions that exceed FCC limitations are the regions between the main reflector and the sub-reflector as well as the main reflector region. These regions are only accessible by trained technicians who, as a matter of procedure, turn off transmit power before performing any work in these areas.

Table 1. Power Flux Density for Each Region:

<u>Calculated Parameter</u>	<u>Unit</u>	<u>Exposure Limit</u>	
		<u>Uncontrolled Environment</u>	<u>Controlled Environment</u>
Power Densities	mW/cm²	≤ 1 mW/cm²	≤ 5 mW/cm²
Far Field Calculation	1.60	Exceeds limitations	Satisfies FCC MPE
Near Field Calculation	3.74	Exceeds limitations	Satisfies FCC MPE
Transition Region	3.74	Exceeds limitations	Satisfies FCC MPE
Region between Main & Subreflector	2829.4	Exceeds limitations	Exceeds limitations
Main Reflector Region	7.07	Exceeds limitations	Exceeds limitations
Region between Main Reflector & Gnd	1.77	Exceeds limitations	Satisfies FCC MPE

The above analysis confirms the presence of hazardous power flux densities at the 1.20 m terminal which will require physical and operational protections to manage General Population and Occupational exposure.

The terminals at the Bristow, Virginia facility will be enclosed in a fence designed to control access to the antenna area for RF safety, and security purposes. The size of the enclosed area will consider the RF hazards, moving antenna 'swept volume', and the surrounding terrain. In addition to fencing, the area will contain signage which clearly states the standard Radiation Hazard warning.

O3b will ensure antenna tracking geometry maintains angular limits which equates to at least one antenna diameter of separation between the antennas's main beam and nearby buildings and other occupied areas where the calculated General Population MPE levels may be exceeded.

Finally, to mitigate the risk of hazardous emissions exposure to operators and maintenance personnel, the antenna system will have an "Emergency Stop" safety switch located on the an outdoor enclosure adjacent to the antennas. Personnel with access to the antenna area will be trained to ensure that HPA's are off and system motion is disabled via the Emergency Stop switch before working in the vicinity or on the antenna systems directly.

Annex 4 – The Comsearch Reports

The Comsearch reports for the 18 GHz band and the 28 GHz band are provided on the following pages.

Ka-Band Earth Station – Bristow, VA

Frequency Coordination Report

28 GHz



Prepared on Behalf of
O3b Networks USA, LLC

January 2, 2015





Table of Contents

1. Summary of Results	- 1 -
2. 28 GHz Common Carrier and LTTS Coordination	- 1 -
3. 28 GHz LMDS Coordination	- 2 -
4. Earth Station Coordination Data	- 3 -
5. Contact Information	- 13 -

1. Summary of Results

On behalf of Ob3 Networks, Comsearch performed a coordination notice for all existing and proposed terrestrial licenses within the coordination contours of their proposed Ka-Band earth station in Bristow, VA, which will transmit at 28 GHz¹. Prior-notification letters were sent to the licensees and a copy of the notification data is provided in section four of this report. The earth station coordination was finalized on January 2, 2015.

No objections were received from any of the incumbent 28 GHz licensees. Our notification to the LMDS incumbents was performed under the assumption that the earth station would be operating on a secondary basis to LMDS Block A operations and a contact at O3b Networks has been provided in case any concerns may arise in the future.

2. 28 GHz Common Carrier and LTTS Coordination

In accordance with FCC Rules and Regulations, the Ka-Band earth station in Bristow, VA was prior-coordinated by Comsearch. A notification letter and datasheets for this earth station were sent to the following 28 GHz common carrier fixed microwave licensee on December 1, 2014. This licensee is authorized to operate temporary fixed operations from 27.5 – 29.5 GHz on a nationwide basis.

Licensee	Authorized Geographic Area
Verizon	Continental US

A notification letter and datasheets for the Ka-Band earth station in Bristow, VA were also sent to the following 28 GHz local television transmission licensee on December 1, 2014. This licensee is authorized to operate temporary fixed operations from 27.5 – 29.5 GHz on a nationwide basis.

Licensee	Authorized Geographic Area
Information Super Station, LLC	Continental US

No objections were received from the common carrier or local television transmission service incumbents.

¹ The proposed earth station will operate in the 27.6 – 28.4 GHz portion of the Ka-Band.



3. 28 GHz LMDS Coordination

A Notification letter was sent to the following 28 GHz LMDS licensees on December 1, 2014. The proposed earth station will operate on frequencies that overlap Block A of the LMDS service. The total frequency allocation for Block A of the LMDS spectrum appears below.

Block A: 27.500-28.350 GHz
29.100-29.250 GHz
31.075-31.225 GHz

Licensee	Market	Market Name
Sprint ²	BTA029	Baltimore, MD
Nextlink/XO	BTA029	Baltimore, MD
Nextlink/XO	BTA374	Richmond-Petersburg, VA
Nextlink/XO	BTA461 ³	Washington, DC

No objections were received from the LMDS incumbents.

² Sprint is leasing LMDS spectrum from Nextlink Wireless / XO in the Baltimore, MD Basic Trading Area (BTA).

³ The proposed earth station will be located inside BTA461.



4. Earth Station Coordination Data

This section presents the data pertinent to the proposed Ka-Band earth station in Bristow, VA. This data was circulated to all incumbent licensees in the shared 28 GHz frequency ranges.



O3b Networks USA, LLC
Ka-Band Earth Station – Bristow, VA
Frequency Coordination Report
28 GHz

Date: 11/26/2014
 Job Number: <PCNJobCode>

Administrative Information

Status ENGINEER PROPOSAL
 Call Sign <PCNCallSign>
 Licensee Code O3BNET
 Licensee Name O3b Networks USA, LLC.

Site Information **BRISTOW, VA**

Venue Name
 Latitude (NAD 83) 38° 46' 59.9" N
 Longitude (NAD 83) 77° 34' 25.3" W
 Climate Zone A
 Rain Zone 2
 Ground Elevation (AMSL) 86.32 m / 283.2 ft

Link Information

Satellite Type Medium Earth Orbit
 Mode TR - Transmit-Receive
 Modulation Digital
 Minimum Elevation Angle 14.0°
 Azimuth Range 0.0° to 360°
 Antenna Centerline (AGL) 2.74 m / 9.0 ft

Antenna Information

		Receive - FCC32			Transmit - FCC32
Manufacturer		AVL			AVL
Model		0.85 Meter			0.85 Meter
Gain / Diameter		42.6 dBi / 0.85 m			46.0 dBi / 0.85 m
3-dB / 15-dB Beamwidth		1.30° / 3.20°			0.90° / 2.10°
Max Available RF Power	(dBW/4 kHz)			-34.6	
	(dBW/MHz)			-10.6	
Maximum EIRP	(dBW/4 kHz)			11.4	
	(dBW/MHz)			35.4	
Interference Objectives:	Long Term	-156.0 dBW/MHz	20%	-151.0 dBW/4 kHz 20%	
	Short Term	-146.0 dBW/MHz	0.01%	-128.0 dBW/4 kHz 0.0025%	

Frequency Information

	Receive 18.0 GHz	Transmit 28.0 GHz
Emission / Frequency Range (MHz)	216MG7D / 17800.0 - 18300.0	216MG7D / 27600.0 - 28350.0
Max Great Circle Coordination Distance	152.8 km / 95.0 mi	100.0 km / 62.1 mi
Precipitation Scatter Contour Radius	100.0 km / 62.1 mi	100.0 km / 62.1 mi



**O3b Networks USA, LLC
Ka-Band Earth Station – Bristow, VA
Frequency Coordination Report
28 GHz**

Coordination Values	BRISTOW, VA		
Licensee Name	O3b Networks USA, LLC.		
Latitude (NAD 83)	38° 46' 59.9" N		
Longitude (NAD 83)	77° 34' 25.3" W		
Ground Elevation (AMSL)	86.32 m / 283.2 ft		
Antenna Centerline (AGL)	2.74 m / 9.0 ft		
Antenna Model	AVL 0.85 Meter		
Antenna Mode	Receive 18.0 GHz		Transmit 28.0 GHz
Interference Objectives: Long Term	-156.0 dBW/MHz	20%	-151.0 dBW/4 kHz 20%
Short Term	-146.0 dBW/MHz	0.01%	-128.0 dBW/4 kHz 0.0025%
Max Available RF Power	-28.7 (dBW/4 kHz)		

Azimuth (°)	Horizon Elevation (°)	Antenna Discrimination (°)	Receive 18.0 GHz		Transmit 28.0 GHz	
			Horizon Gain (dBi)	Coordination Distance (km)	Horizon Gain (dBi)	Coordination Distance (km)
0	0.00	97.86	-10.00	102.69	-10.00	100.00
5	0.00	92.86	-10.00	100.00	-10.00	100.00
10	0.00	87.86	-10.00	100.00	-10.00	100.00
15	0.00	82.86	-10.00	100.00	-10.00	100.00
20	0.00	77.86	-10.00	100.00	-10.00	100.00
25	0.00	72.86	-10.00	101.29	-10.00	100.00
30	0.00	67.86	-10.00	102.77	-10.00	100.00
35	0.00	62.86	-10.00	111.38	-10.00	100.00
40	0.00	57.87	-10.00	111.30	-10.00	100.00
45	0.00	52.87	-10.00	107.85	-10.00	100.00
50	0.00	47.87	-10.00	117.19	-10.00	100.00
55	0.00	42.87	-10.00	119.46	-10.00	100.00
60	0.00	37.87	-10.00	136.18	-10.00	100.00
65	0.00	32.87	-9.61	137.25	-9.61	100.00
70	0.00	27.88	-8.45	140.51	-8.45	100.00
75	0.00	22.88	-7.17	144.23	-7.17	100.00
80	0.00	17.89	-5.76	148.51	-5.76	100.00
85	0.00	12.90	-4.11	135.89	-4.11	100.00
90	0.00	7.92	-2.26	125.73	-2.26	100.00
95	0.00	3.02	-0.26	126.08	-0.26	100.00
100	0.00	2.34	1.84	124.84	1.84	100.00
105	0.00	7.20	3.58	127.73	3.58	100.00
110	0.00	12.18	4.14	129.58	4.14	100.00
115	0.00	17.17	3.35	124.78	3.35	100.00
120	0.00	22.16	1.55	117.39	1.55	100.00
125	0.00	27.15	-0.48	109.90	-0.48	100.00
130	0.00	32.15	-2.17	102.60	-2.17	100.00
135	0.00	37.15	-3.59	100.00	-3.59	100.00
140	0.00	42.15	-4.79	100.00	-4.79	100.00
145	0.00	47.15	-5.85	100.00	-5.85	100.00
150	0.00	52.15	-6.86	107.53	-6.86	100.00
155	0.00	57.14	-7.56	105.36	-7.56	100.00
160	0.00	62.14	-8.17	110.40	-8.17	100.00
165	0.00	67.14	-8.62	110.33	-8.62	100.00
170	0.00	72.14	-8.94	110.66	-8.94	100.00
175	0.00	77.14	-9.12	107.56	-9.12	100.00
180	0.00	82.14	-9.24	120.19	-9.24	100.00
185	0.00	87.14	-9.14	110.69	-9.14	100.00



**O3b Networks USA, LLC
Ka-Band Earth Station – Bristow, VA
Frequency Coordination Report
28 GHz**

Coordination Values	BRISTOW, VA		
Licensee Name	O3b Networks USA, LLC.		
Latitude (NAD 83)	38° 46' 59.9" N		
Longitude (NAD 83)	77° 34' 25.3" W		
Ground Elevation (AMSL)	86.32 m / 283.2 ft		
Antenna Centerline (AGL)	2.74 m / 9.0 ft		
Antenna Model	AVL 0.85 Meter		
Antenna Mode	Receive 18.0 GHz		Transmit 28.0 GHz
Interference Objectives: Long Term	-156.0 dBW/MHz	20%	-151.0 dBW/4 kHz 20%
Short Term	-146.0 dBW/MHz	0.01%	-128.0 dBW/4 kHz 0.0025%
Max Available RF Power	-28.7 (dBW/4 kHz)		

Azimuth (°)	Horizon Elevation (°)	Antenna Discrimination (°)	Receive 18.0 GHz		Transmit 28.0 GHz		Coordination Distance (km)
			Horizon Gain (dBi)	Coordination Distance (km)	Horizon Gain (dBi)	Coordination Distance (km)	
190	0.00	92.14	-8.92	106.93	-8.92	100.00	
195	0.00	97.14	-8.68	122.08	-8.68	100.00	
200	0.00	102.14	-8.34	140.85	-8.34	100.00	
205	0.00	107.14	-7.77	142.50	-7.77	100.00	
210	0.00	112.14	-7.01	143.99	-7.01	100.00	
215	0.00	117.14	-6.15	140.73	-6.15	100.00	
220	0.00	122.13	-5.14	140.35	-5.14	100.00	
225	0.00	127.13	-3.95	143.55	-3.95	100.00	
230	0.00	132.13	-2.56	150.70	-2.56	100.00	
235	0.00	137.13	-0.83	146.44	-0.83	100.00	
240	0.00	142.13	1.14	145.14	1.14	100.00	
245	0.00	147.13	2.82	149.31	2.82	100.00	
250	0.00	152.12	3.58	152.84	3.58	100.00	
255	0.00	157.12	3.03	150.09	3.03	100.00	
260	0.00	162.11	1.47	144.59	1.47	100.00	
265	0.00	167.10	-0.44	135.38	-0.44	100.00	
270	0.00	172.08	-2.35	128.54	-2.35	100.00	
275	0.00	176.98	-4.12	123.33	-4.12	100.00	
280	0.00	177.66	-5.73	121.00	-5.73	100.00	
285	0.00	172.80	-7.16	117.96	-7.16	100.00	
290	0.00	167.82	-8.43	106.79	-8.43	100.00	
295	0.00	162.83	-9.60	101.06	-9.60	100.00	
300	0.00	157.84	-10.00	100.00	-10.00	100.00	
305	0.00	152.85	-10.00	100.00	-10.00	100.00	
310	0.00	147.85	-10.00	100.00	-10.00	100.00	
315	0.00	142.85	-10.00	100.00	-10.00	100.00	
320	0.00	137.85	-10.00	100.07	-10.00	100.00	
325	0.00	132.85	-10.00	100.00	-10.00	100.00	
330	0.00	127.85	-10.00	100.00	-10.00	100.00	
335	0.00	122.86	-10.00	100.00	-10.00	100.00	
340	0.00	117.86	-10.00	100.00	-10.00	100.00	
345	0.00	112.86	-10.00	100.00	-10.00	100.00	
350	0.00	107.86	-10.00	100.00	-10.00	100.00	
355	0.00	102.86	-10.00	103.63	-10.00	100.00	



O3b Networks USA, LLC
Ka-Band Earth Station – Bristow, VA
Frequency Coordination Report
28 GHz

Date: 11/26/2014
 Job Number: <PCNJobCode>

Administrative Information

Status: ENGINEER PROPOSAL
 Call Sign: <PCNCallSign>
 Licensee Code: O3BNET
 Licensee Name: O3b Networks USA, LLC.

Site Information

BRISTOW, VA

Venue Name
 Latitude (NAD 83): 38° 46' 59.9" N
 Longitude (NAD 83): 77° 34' 25.3" W
 Climate Zone: A
 Rain Zone: 2
 Ground Elevation (AMSL): 86.32 m / 283.2 ft

Link Information

Satellite Type: Medium Earth Orbit
 Mode: TR - Transmit-Receive
 Modulation: Digital
 Minimum Elevation Angle: 10.0°
 Azimuth Range: 0.0° to 360°
 Antenna Centerline (AGL): 2.74 m / 9.0 ft

Antenna Information

Receive - FCC32

Transmit - FCC32

Manufacturer		Orbit		Orbit
Model		1.2 Meter		1.2 Meter
Gain / Diameter		45.0 dBi / 1.2 m		48.0 dBi / 1.2 m
3-dB / 15-dB Beamwidth		0.90° / 2.10°		0.60° / 1.40°
Max Available RF Power	(dBW/4 kHz)			-28.7
	(dBW/MHz)			-4.7
Maximum EIRP	(dBW/4 kHz)			19.3
	(dBW/MHz)			43.3
Interference Objectives:	Long Term	-156.0 dBW/MHz	20%	-151.0 dBW/4 kHz 20%
	Short Term	-146.0 dBW/MHz	0.01%	-128.0 dBW/4 kHz 0.0025%

Frequency Information

Receive 18.0 GHz

Transmit 28.0 GHz

Emission / Frequency Range (MHz): 54M0G7D - 216MG7D / 17800.0 - 18300.0 54M0G7D - 216MG7D / 27600.0 - 28350.0

Max Great Circle Coordination Distance	169.4 km / 105.2 mi	100.0 km / 62.1 mi
Precipitation Scatter Contour Radius	100.0 km / 62.1 mi	100.0 km / 62.1 mi



O3b Networks USA, LLC
Ka-Band Earth Station – Bristow, VA
Frequency Coordination Report
28 GHz

Coordination Values	BRISTOW, VA		
Licensee Name	O3b Networks USA, LLC.		
Latitude (NAD 83)	38° 46' 59.9" N		
Longitude (NAD 83)	77° 34' 25.3" W		
Ground Elevation (AMSL)	86.32 m / 283.2 ft		
Antenna Centerline (AGL)	2.74 m / 9.0 ft		
Antenna Model	Orbit 1.2 Meter		
Antenna Mode	Receive 18.0 GHz		Transmit 28.0 GHz
Interference Objectives: Long Term	-156.0 dBW/MHz	20%	-151.0 dBW/4 kHz 20%
Short Term	-146.0 dBW/MHz	0.01%	-128.0 dBW/4 kHz 0.0025%
Max Available RF Power	-28.7 (dBW/4 kHz)		

Azimuth (°)	Horizon Elevation (°)	Antenna Discrimination (°)	Receive 18.0 GHz		Transmit 28.0 GHz	
			Horizon Gain (dBi)	Coordination Distance (km)	Horizon Gain (dBi)	Coordination Distance (km)
0	0.00	97.86	-10.00	102.69	-10.00	100.00
5	0.00	92.86	-10.00	100.00	-10.00	100.00
10	0.00	87.86	-10.00	100.00	-10.00	100.00
15	0.00	82.86	-10.00	100.00	-10.00	100.00
20	0.00	77.86	-10.00	100.00	-10.00	100.00
25	0.00	72.86	-10.00	101.29	-10.00	100.00
30	0.00	67.86	-10.00	102.77	-10.00	100.00
35	0.00	62.86	-10.00	111.38	-10.00	100.00
40	0.00	57.87	-10.00	111.30	-10.00	100.00
45	0.00	52.87	-10.00	107.85	-10.00	100.00
50	0.00	47.87	-10.00	117.19	-10.00	100.00
55	0.00	42.87	-10.00	119.46	-10.00	100.00
60	0.00	37.87	-9.75	136.88	-10.00	100.00
65	0.00	32.87	-8.56	140.20	-9.75	100.00
70	0.00	27.88	-7.24	144.03	-8.56	100.00
75	0.00	22.88	-5.76	148.51	-7.24	100.00
80	0.00	17.89	-4.06	153.83	-5.76	100.00
85	0.00	12.90	-2.04	142.04	-4.06	100.00
90	0.00	7.92	0.34	132.30	-2.04	100.00
95	0.00	3.02	3.08	135.20	0.34	100.00
100	0.00	2.34	6.03	137.49	3.08	100.00
105	0.00	7.20	7.93	151.88	6.03	100.00
110	0.00	12.18	6.95	139.00	7.93	100.00
115	0.00	17.17	4.31	127.80	6.95	100.00
120	0.00	22.16	1.63	117.62	4.31	100.00
125	0.00	27.15	-0.48	109.90	1.63	100.00
130	0.00	32.15	-2.17	102.60	-0.48	100.00
135	0.00	37.15	-3.59	100.00	-2.17	100.00
140	0.00	42.15	-4.79	100.00	-3.59	100.00
145	0.00	47.15	-5.85	100.00	-4.79	100.00
150	0.00	52.15	-6.86	107.53	-5.85	100.00
155	0.00	57.14	-7.56	105.36	-6.86	100.00
160	0.00	62.14	-8.17	110.40	-7.56	100.00
165	0.00	67.14	-8.62	110.33	-8.17	100.00
170	0.00	72.14	-8.94	110.66	-8.62	100.00
175	0.00	77.14	-9.12	107.56	-8.94	100.00
180	0.00	82.14	-9.24	120.19	-9.12	100.00
185	0.00	87.14	-9.14	110.69	-9.24	100.00



**O3b Networks USA, LLC
Ka-Band Earth Station – Bristow, VA
Frequency Coordination Report
28 GHz**

Coordination Values	BRISTOW, VA		
Licensee Name	O3b Networks USA, LLC.		
Latitude (NAD 83)	38° 46' 59.9" N		
Longitude (NAD 83)	77° 34' 25.3" W		
Ground Elevation (AMSL)	86.32 m / 283.2 ft		
Antenna Centerline (AGL)	2.74 m / 9.0 ft		
Antenna Model	Orbit 1.2 Meter		
Antenna Mode	Receive 18.0 GHz		Transmit 28.0 GHz
Interference Objectives: Long Term	-156.0 dBW/MHz	20%	-151.0 dBW/4 kHz 20%
Short Term	-146.0 dBW/MHz	0.01%	-128.0 dBW/4 kHz 0.0025%
Max Available RF Power	-28.7 (dBW/4 kHz)		

Azimuth (°)	Horizon Elevation (°)	Antenna Discrimination (°)	Receive 18.0 GHz		Transmit 28.0 GHz		Coordination Distance (km)
			Horizon Gain (dBi)	Coordination Distance (km)	Horizon Gain (dBi)	Coordination Distance (km)	
190	0.00	92.14	-8.92	106.93	-9.14	100.00	
195	0.00	97.14	-8.68	122.08	-8.92	100.00	
200	0.00	102.14	-8.34	140.85	-8.68	100.00	
205	0.00	107.14	-7.77	142.50	-8.34	100.00	
210	0.00	112.14	-7.01	143.99	-7.77	100.00	
215	0.00	117.14	-6.15	140.73	-7.01	100.00	
220	0.00	122.13	-5.14	140.35	-6.15	100.00	
225	0.00	127.13	-3.95	143.55	-5.14	100.00	
230	0.00	132.13	-2.56	150.70	-3.95	100.00	
235	0.00	137.13	-0.83	146.44	-2.56	100.00	
240	0.00	142.13	1.28	145.60	-0.83	100.00	
245	0.00	147.13	3.89	153.10	1.28	100.00	
250	0.00	152.12	6.33	163.46	3.89	100.00	
255	0.00	157.12	7.11	169.39	6.33	100.00	
260	0.00	162.11	2.84	159.20	7.11	100.00	
265	0.00	167.10	0.24	145.74	5.48	100.00	
270	0.00	172.08	-2.06	135.17	2.84	100.00	
275	0.00	176.98	-4.04	128.96	0.24	100.00	
280	0.00	177.66	-5.75	125.53	-2.06	100.00	
285	0.00	172.80	-7.23	121.70	-4.04	100.00	
290	0.00	167.82	-8.55	109.89	-5.75	100.00	
295	0.00	162.83	-9.74	103.64	-7.23	100.00	
300	0.00	157.84	-10.00	100.00	-8.55	100.00	
305	0.00	152.85	-10.00	100.00	-9.74	100.00	
310	0.00	147.85	-10.00	100.00	-10.00	100.00	
315	0.00	142.85	-10.00	100.00	-10.00	100.00	
320	0.00	137.85	-10.00	100.07	-10.00	100.00	
325	0.00	132.85	-10.00	100.00	-10.00	100.00	
330	0.00	127.85	-10.00	100.00	-10.00	100.00	
335	0.00	122.86	-10.00	100.00	-10.00	100.00	
340	0.00	117.86	-10.00	100.00	-10.00	100.00	
345	0.00	112.86	-10.00	100.00	-10.00	100.00	
350	0.00	107.86	-10.00	100.00	-10.00	100.00	
355	0.00	102.86	-10.00	103.63	-10.00	100.00	



Date: 11/26/2014

Job Number: <PCNJobCode>

Administrative Information

Status ENGINEER PROPOSAL
 Call Sign <PCNCallSign>
 Licensee Code O3BNET
 Licensee Name O3b Networks USA, LLC.

Site Information

BRISTOW, VA

Venue Name
 Latitude (NAD 83) 38° 46' 59.9" N
 Longitude (NAD 83) 77° 34' 25.3" W
 Climate Zone A
 Rain Zone 2
 Ground Elevation (AMSL) 86.32 m / 283.2 ft

Link Information

Satellite Type Medium Earth Orbit
 Mode TR - Transmit-Receive
 Modulation Digital
 Minimum Elevation Angle 14.0°
 Azimuth Range 0.0° to 360°
 Antenna Centerline (AGL) 2.74 m / 9.0 ft

Antenna Information

		Receive - FCC32		Transmit - FCC32	
Manufacturer		AVL		AVL	
Model		2.4 Meter		2.4 Meter	
Gain / Diameter		51.3 dBi / 2.4 m		54.7 dBi / 2.4 m	
3-dB / 15-dB Beamwidth		0.23° / 0.60°		0.14° / 0.32°	
Max Available RF Power	(dBW/4 kHz)			-31.5	
	(dBW/MHz)			-7.5	
Maximum EIRP	(dBW/4 kHz)			23.2	
	(dBW/MHz)			47.2	
Interference Objectives:	Long Term	-156.0 dBW/MHz	20%	-151.0 dBW/4 kHz 20%	
	Short Term	-146.0 dBW/MHz	0.01%	-128.0 dBW/4 kHz 0.0025%	

Frequency Information

	Receive 18.0 GHz	Transmit 28.0 GHz
Emission / Frequency Range (MHz)	216MG7D / 17800.0 - 18300.0	216MG7D / 27600.0 - 28350.0
Max Great Circle Coordination Distance	152.8 km / 95.0 mi	100.0 km / 62.1 mi
Precipitation Scatter Contour Radius	100.0 km / 62.1 mi	100.0 km / 62.1 mi



**O3b Networks USA, LLC
Ka-Band Earth Station – Bristow, VA
Frequency Coordination Report
28 GHz**

Coordination Values	BRISTOW, VA		
Licensee Name	O3b Networks USA, LLC.		
Latitude (NAD 83)	38° 46' 59.9" N		
Longitude (NAD 83)	77° 34' 25.3" W		
Ground Elevation (AMSL)	86.32 m / 283.2 ft		
Antenna Centerline (AGL)	2.74 m / 9.0 ft		
Antenna Model	AVL 2.4 Meter		
Antenna Mode	Receive 18.0 GHz		Transmit 28.0 GHz
Interference Objectives: Long Term	-156.0 dBW/MHz	20%	-151.0 dBW/4 kHz 20%
Short Term	-146.0 dBW/MHz	0.01%	-128.0 dBW/4 kHz 0.0025%
Max Available RF Power	-31.5 (dBW/4 kHz)		

Azimuth (°)	Horizon Elevation (°)	Antenna Discrimination (°)	Receive 18.0 GHz		Transmit 28.0 GHz	
			Horizon Gain (dBi)	Coordination Distance (km)	Horizon Gain (dBi)	Coordination Distance (km)
0	0.00	97.86	-10.00	102.69	-10.00	100.00
5	0.00	92.86	-10.00	100.00	-10.00	100.00
10	0.00	87.86	-10.00	100.00	-10.00	100.00
15	0.00	82.86	-10.00	100.00	-10.00	100.00
20	0.00	77.86	-10.00	100.00	-10.00	100.00
25	0.00	72.86	-10.00	101.29	-10.00	100.00
30	0.00	67.86	-10.00	102.77	-10.00	100.00
35	0.00	62.86	-10.00	111.38	-10.00	100.00
40	0.00	57.87	-10.00	111.30	-10.00	100.00
45	0.00	52.87	-10.00	107.85	-10.00	100.00
50	0.00	47.87	-10.00	117.19	-10.00	100.00
55	0.00	42.87	-10.00	119.46	-10.00	100.00
60	0.00	37.87	-10.00	136.18	-10.00	100.00
65	0.00	32.87	-9.61	137.25	-9.61	100.00
70	0.00	27.88	-8.45	140.51	-8.45	100.00
75	0.00	22.88	-7.17	144.23	-7.17	100.00
80	0.00	17.89	-5.76	148.51	-5.76	100.00
85	0.00	12.90	-4.11	135.89	-4.11	100.00
90	0.00	7.92	-2.26	125.73	-2.26	100.00
95	0.00	3.02	-0.26	126.08	-0.26	100.00
100	0.00	2.34	1.84	124.84	1.84	100.00
105	0.00	7.20	3.58	127.73	3.58	100.00
110	0.00	12.18	4.14	129.58	4.14	100.00
115	0.00	17.17	3.35	124.78	3.35	100.00
120	0.00	22.16	1.55	117.39	1.55	100.00
125	0.00	27.15	-0.48	109.90	-0.48	100.00
130	0.00	32.15	-2.17	102.60	-2.17	100.00
135	0.00	37.15	-3.59	100.00	-3.59	100.00
140	0.00	42.15	-4.79	100.00	-4.79	100.00
145	0.00	47.15	-5.85	100.00	-5.85	100.00
150	0.00	52.15	-6.86	107.53	-6.86	100.00
155	0.00	57.14	-7.56	105.36	-7.56	100.00
160	0.00	62.14	-8.17	110.40	-8.17	100.00
165	0.00	67.14	-8.62	110.33	-8.62	100.00
170	0.00	72.14	-8.94	110.66	-8.94	100.00
175	0.00	77.14	-9.12	107.56	-9.12	100.00
180	0.00	82.14	-9.24	120.19	-9.24	100.00
185	0.00	87.14	-9.14	110.69	-9.14	100.00



**O3b Networks USA, LLC
Ka-Band Earth Station – Bristow, VA
Frequency Coordination Report
28 GHz**

Coordination Values	BRISTOW, VA		
Licensee Name	O3b Networks USA, LLC.		
Latitude (NAD 83)	38° 46' 59.9" N		
Longitude (NAD 83)	77° 34' 25.3" W		
Ground Elevation (AMSL)	86.32 m / 283.2 ft		
Antenna Centerline (AGL)	2.74 m / 9.0 ft		
Antenna Model	AVL 2.4 Meter		
Antenna Mode	Receive 18.0 GHz		Transmit 28.0 GHz
Interference Objectives: Long Term	-156.0 dBW/MHz	20%	-151.0 dBW/4 kHz 20%
Short Term	-146.0 dBW/MHz	0.01%	-128.0 dBW/4 kHz 0.0025%
Max Available RF Power	-31.5 (dBW/4 kHz)		

Azimuth (°)	Horizon Elevation (°)	Antenna Discrimination (°)	Receive 18.0 GHz		Transmit 28.0 GHz		Coordination Distance (km)
			Horizon Gain (dBi)	Coordination Distance (km)	Horizon Gain (dBi)	Coordination Distance (km)	
190	0.00	92.14	-8.92	106.93	-8.92	100.00	
195	0.00	97.14	-8.68	122.08	-8.68	100.00	
200	0.00	102.14	-8.34	140.85	-8.34	100.00	
205	0.00	107.14	-7.77	142.50	-7.77	100.00	
210	0.00	112.14	-7.01	143.99	-7.01	100.00	
215	0.00	117.14	-6.15	140.73	-6.15	100.00	
220	0.00	122.13	-5.14	140.35	-5.14	100.00	
225	0.00	127.13	-3.95	143.55	-3.95	100.00	
230	0.00	132.13	-2.56	150.70	-2.56	100.00	
235	0.00	137.13	-0.83	146.44	-0.83	100.00	
240	0.00	142.13	1.14	145.14	1.14	100.00	
245	0.00	147.13	2.82	149.31	2.82	100.00	
250	0.00	152.12	3.58	152.84	3.58	100.00	
255	0.00	157.12	3.03	150.09	3.03	100.00	
260	0.00	162.11	1.47	144.59	1.47	100.00	
265	0.00	167.10	-0.44	135.38	-0.44	100.00	
270	0.00	172.08	-2.35	128.54	-2.35	100.00	
275	0.00	176.98	-4.12	123.33	-4.12	100.00	
280	0.00	177.66	-5.73	121.00	-5.73	100.00	
285	0.00	172.80	-7.16	117.96	-7.16	100.00	
290	0.00	167.82	-8.43	106.79	-8.43	100.00	
295	0.00	162.83	-9.60	101.06	-9.60	100.00	
300	0.00	157.84	-10.00	100.00	-10.00	100.00	
305	0.00	152.85	-10.00	100.00	-10.00	100.00	
310	0.00	147.85	-10.00	100.00	-10.00	100.00	
315	0.00	142.85	-10.00	100.00	-10.00	100.00	
320	0.00	137.85	-10.00	100.07	-10.00	100.00	
325	0.00	132.85	-10.00	100.00	-10.00	100.00	
330	0.00	127.85	-10.00	100.00	-10.00	100.00	
335	0.00	122.86	-10.00	100.00	-10.00	100.00	
340	0.00	117.86	-10.00	100.00	-10.00	100.00	
345	0.00	112.86	-10.00	100.00	-10.00	100.00	
350	0.00	107.86	-10.00	100.00	-10.00	100.00	
355	0.00	102.86	-10.00	103.63	-10.00	100.00	



5. Contact Information

For questions or information regarding the 28 GHz Frequency Coordination Report, please contact:

Contact person:	Joanna Lynch
Title:	Manager, Spectrum & Data Solutions
Company:	Comsearch
Address:	19700 Janelia Farm Blvd., Ashburn, VA 20147
Telephone:	703-726-5711
Fax:	703-726-5599
Email:	jlynch@comsearch.com
Web site:	www.comsearch.com

INTERFERENCE ANALYSIS REPORT

Prepared for
O3b Networks USA, LLC.
BRISTOW, VA
(0.85, 1.2 and 2.4 meter)
Satellite Earth Station

Prepared By:
COMSEARCH
19700 Janelia Farm Boulevard
Ashburn, VA 20147
January 02, 2015

TABLE OF CONTENTS

1. CONCLUSIONS	3
2. SUMMARY OF RESULTS	4
3. SUPPLEMENTAL SHOWING	5
4. EARTH STATION COORDINATION DATA.....	6
5. CERTIFICATION.....	16

1. CONCLUSIONS

An interference study considering all existing, proposed and prior coordinated microwave facilities within the coordination contours of the proposed earth station demonstrates that this site will operate satisfactorily with the 18 GHz common carrier microwave environment. Further, there will be no restrictions of its operation due to interference considerations.

2. SUMMARY OF RESULTS

A number of great circle interference cases were identified during the interference study of the proposed earth station. Each of the cases, which exceeded the interference objective on a line-of-sight basis, was profiled and the propagation losses estimated using NBS TN101 (Revised) techniques. The losses were found to be sufficient to reduce the signal levels to acceptable magnitudes in every case.

3. SUPPLEMENTAL SHOWING

Pursuant to Part 25.203(c) of the FCC Rules and Regulations, the satellite earth station proposed in this application was coordinated by Comsearch using computer techniques and in accordance with Part 25 of the FCC Rules and Regulations.

Coordination data for this earth station was sent to the below listed carriers with a letter dated 11/26/2014.

Company

APC Realty and Equipment CO LLC
Airband Communications Inc
Arlington County Emergency Comm Ctr
B.F. SAUL COMPANY
Believe Wireless, LLC
Blaze Broadband
Blue Ridge Carriers
CBS Broadcasting Inc
CBS Communication Services Inc
Calvert, County of
Clearwire Spectrum Holdings III, LLC
ECW Wireless, LLC
Enoch Pratt Free Library
George Washington University
Loudoun Wireless LLC
Loudoun, County of
Maryland Port Administration
Maryland, State Of - MDOT - MTA
NBC Telemundo License LLC
New Cingular Wireless PCS LLC - VA
Old Dominion LLC
PEG Bandwidth, LLC
Prince William, County of
Radio One Inc
RapidDSL & Wireless, Inc.
Red Zebra Broadcasting Licensee, LLC
Shenandoah Personal Communications, LLC
Sprint Spectrum L.P.
Telecom Transport Management, Inc
Telegia Communications Inc.
Virginia Cellular LLC
Virginia Everywhere, LLC
WASHINGTON CABLE SYSTEMS INC
WKYSFM, INC
Washington Metro Area Transit Police Dep
World Class Wireless, LLC

4. EARTH STATION COORDINATION DATA

This section presents the data pertinent to frequency coordination of the proposed earth station that was circulated to all carriers within its coordination contours.

Date: 11/26/2014
 Job Number: <PCNJobCode>

Administrative Information

Status: ENGINEER PROPOSAL
 Call Sign: <PCNCallSign>
 Licensee Code: O3BNET
 Licensee Name: O3b Networks USA, LLC.

Site Information

BRISTOW, VA

Venue Name:
 Latitude (NAD 83): 38° 46' 59.9" N
 Longitude (NAD 83): 77° 34' 25.3" W
 Climate Zone: A
 Rain Zone: 2
 Ground Elevation (AMSL): 86.32 m / 283.2 ft

Link Information

Satellite Type: Medium Earth Orbit
 Mode: TR - Transmit-Receive
 Modulation: Digital
 Minimum Elevation Angle: 14.0°
 Azimuth Range: 0.0° to 360°
 Antenna Centerline (AGL): 2.74 m / 9.0 ft

Antenna Information

Receive - FCC32

Transmit - FCC32

Manufacturer	AVL	AVL
Model	0.85 Meter	0.85 Meter
Gain / Diameter	42.6 dBi / 0.85 m	46.0 dBi / 0.85 m
3-dB / 15-dB Beamwidth	1.30° / 3.20°	0.90° / 2.10°
Max Available RF Power (dBW/4 kHz)		-34.6
(dBW/MHz)		-10.6
Maximum EIRP (dBW/4 kHz)		11.4
(dBW/MHz)		35.4
Interference Objectives:	Long Term	-156.0 dBW/MHz 20%
	Short Term	-146.0 dBW/MHz 0.01%
		-151.0 dBW/4 kHz 20%
		-128.0 dBW/4 kHz 0.0025%

Frequency Information

Receive 18.0 GHz

Transmit 28.0 GHz

Emission / Frequency Range (MHz)	216MG7D / 17800.0 - 18300.0	216MG7D / 27600.0 - 28350.0
Max Great Circle Coordination Distance	152.8 km / 95.0 mi	100.0 km / 62.1 mi
Precipitation Scatter Contour Radius	100.0 km / 62.1 mi	100.0 km / 62.1 mi

Coordination Values**BRISTOW, VA**

Licensee Name O3b Networks USA, LLC.
 Latitude (NAD 83) 38° 46' 59.9" N
 Longitude (NAD 83) 77° 34' 25.3" W
 Ground Elevation (AMSL) 86.32 m / 283.2 ft
 Antenna Centerline (AGL) 2.74 m / 9.0 ft
 Antenna Model AVL 0.85 Meter
 Antenna Mode Receive 18.0 GHz Transmit 28.0 GHz
 Interference Objectives: Long Term -156.0 dBW/MHz 20% -151.0 dBW/4 kHz 20%
 Short Term -146.0 dBW/MHz 0.01% -128.0 dBW/4 kHz 0.0025%
 Max Available RF Power -28.7 (dBW/4 kHz)

Azimuth (°)	Horizon Elevation (°)	Antenna Discrimination (°)	Receive 18.0 GHz		Transmit 28.0 GHz	
			Horizon Gain (dBi)	Coordination Distance (km)	Horizon Gain (dBi)	Coordination Distance (km)
0	0.00	97.86	-10.00	102.69	-10.00	100.00
5	0.00	92.86	-10.00	100.00	-10.00	100.00
10	0.00	87.86	-10.00	100.00	-10.00	100.00
15	0.00	82.86	-10.00	100.00	-10.00	100.00
20	0.00	77.86	-10.00	100.00	-10.00	100.00
25	0.00	72.86	-10.00	101.29	-10.00	100.00
30	0.00	67.86	-10.00	102.77	-10.00	100.00
35	0.00	62.86	-10.00	111.38	-10.00	100.00
40	0.00	57.87	-10.00	111.30	-10.00	100.00
45	0.00	52.87	-10.00	107.85	-10.00	100.00
50	0.00	47.87	-10.00	117.19	-10.00	100.00
55	0.00	42.87	-10.00	119.46	-10.00	100.00
60	0.00	37.87	-10.00	136.18	-10.00	100.00
65	0.00	32.87	-9.61	137.25	-9.61	100.00
70	0.00	27.88	-8.45	140.51	-8.45	100.00
75	0.00	22.88	-7.17	144.23	-7.17	100.00
80	0.00	17.89	-5.76	148.51	-5.76	100.00
85	0.00	12.90	-4.11	135.89	-4.11	100.00
90	0.00	7.92	-2.26	125.73	-2.26	100.00
95	0.00	3.02	-0.26	126.08	-0.26	100.00
100	0.00	2.34	1.84	124.84	1.84	100.00
105	0.00	7.20	3.58	127.73	3.58	100.00
110	0.00	12.18	4.14	129.58	4.14	100.00
115	0.00	17.17	3.35	124.78	3.35	100.00
120	0.00	22.16	1.55	117.39	1.55	100.00
125	0.00	27.15	-0.48	109.90	-0.48	100.00
130	0.00	32.15	-2.17	102.60	-2.17	100.00
135	0.00	37.15	-3.59	100.00	-3.59	100.00
140	0.00	42.15	-4.79	100.00	-4.79	100.00
145	0.00	47.15	-5.85	100.00	-5.85	100.00
150	0.00	52.15	-6.86	107.53	-6.86	100.00
155	0.00	57.14	-7.56	105.36	-7.56	100.00
160	0.00	62.14	-8.17	110.40	-8.17	100.00
165	0.00	67.14	-8.62	110.33	-8.62	100.00
170	0.00	72.14	-8.94	110.66	-8.94	100.00
175	0.00	77.14	-9.12	107.56	-9.12	100.00
180	0.00	82.14	-9.24	120.19	-9.24	100.00
185	0.00	87.14	-9.14	110.69	-9.14	100.00

Coordination Values**BRISTOW, VA**

Licensee Name O3b Networks USA, LLC.
 Latitude (NAD 83) 38° 46' 59.9" N
 Longitude (NAD 83) 77° 34' 25.3" W
 Ground Elevation (AMSL) 86.32 m / 283.2 ft
 Antenna Centerline (AGL) 2.74 m / 9.0 ft
 Antenna Model AVL 0.85 Meter

Antenna Mode	Receive 18.0 GHz		Transmit 28.0 GHz
Interference Objectives: Long Term	-156.0 dBW/MHz	20%	-151.0 dBW/4 kHz 20%
Short Term	-146.0 dBW/MHz	0.01%	-128.0 dBW/4 kHz 0.0025%
Max Available RF Power		-28.7 (dBW/4 kHz)	

Azimuth (°)	Horizon Elevation (°)	Antenna Discrimination (°)	Receive 18.0 GHz		Transmit 28.0 GHz	
			Horizon Gain (dBi)	Coordination Distance (km)	Horizon Gain (dBi)	Coordination Distance (km)
190	0.00	92.14	-8.92	106.93	-8.92	100.00
195	0.00	97.14	-8.68	122.08	-8.68	100.00
200	0.00	102.14	-8.34	140.85	-8.34	100.00
205	0.00	107.14	-7.77	142.50	-7.77	100.00
210	0.00	112.14	-7.01	143.99	-7.01	100.00
215	0.00	117.14	-6.15	140.73	-6.15	100.00
220	0.00	122.13	-5.14	140.35	-5.14	100.00
225	0.00	127.13	-3.95	143.55	-3.95	100.00
230	0.00	132.13	-2.56	150.70	-2.56	100.00
235	0.00	137.13	-0.83	146.44	-0.83	100.00
240	0.00	142.13	1.14	145.14	1.14	100.00
245	0.00	147.13	2.82	149.31	2.82	100.00
250	0.00	152.12	3.58	152.84	3.58	100.00
255	0.00	157.12	3.03	150.09	3.03	100.00
260	0.00	162.11	1.47	144.59	1.47	100.00
265	0.00	167.10	-0.44	135.38	-0.44	100.00
270	0.00	172.08	-2.35	128.54	-2.35	100.00
275	0.00	176.98	-4.12	123.33	-4.12	100.00
280	0.00	177.66	-5.73	121.00	-5.73	100.00
285	0.00	172.80	-7.16	117.96	-7.16	100.00
290	0.00	167.82	-8.43	106.79	-8.43	100.00
295	0.00	162.83	-9.60	101.06	-9.60	100.00
300	0.00	157.84	-10.00	100.00	-10.00	100.00
305	0.00	152.85	-10.00	100.00	-10.00	100.00
310	0.00	147.85	-10.00	100.00	-10.00	100.00
315	0.00	142.85	-10.00	100.00	-10.00	100.00
320	0.00	137.85	-10.00	100.07	-10.00	100.00
325	0.00	132.85	-10.00	100.00	-10.00	100.00
330	0.00	127.85	-10.00	100.00	-10.00	100.00
335	0.00	122.86	-10.00	100.00	-10.00	100.00
340	0.00	117.86	-10.00	100.00	-10.00	100.00
345	0.00	112.86	-10.00	100.00	-10.00	100.00
350	0.00	107.86	-10.00	100.00	-10.00	100.00
355	0.00	102.86	-10.00	103.63	-10.00	100.00

Date: 11/26/2014
 Job Number: <PCNJobCode>

Administrative Information

Status: ENGINEER PROPOSAL
 Call Sign: <PCNCallSign>
 Licensee Code: O3BNET
 Licensee Name: O3b Networks USA, LLC.

Site Information

BRISTOW, VA

Venue Name
 Latitude (NAD 83): 38° 46' 59.9" N
 Longitude (NAD 83): 77° 34' 25.3" W
 Climate Zone: A
 Rain Zone: 2
 Ground Elevation (AMSL): 86.32 m / 283.2 ft

Link Information

Satellite Type: Medium Earth Orbit
 Mode: TR - Transmit-Receive
 Modulation: Digital
 Minimum Elevation Angle: 10.0°
 Azimuth Range: 0.0° to 360°
 Antenna Centerline (AGL): 2.74 m / 9.0 ft

Antenna Information

Receive - FCC32

Transmit - FCC32

Manufacturer		Orbit		Orbit
Model		1.2 Meter		1.2 Meter
Gain / Diameter		45.0 dBi / 1.2 m		48.0 dBi / 1.2 m
3-dB / 15-dB Beamwidth		0.90° / 2.10°		0.60° / 1.40°
Max Available RF Power	(dBW/4 kHz)			-28.7
	(dBW/MHz)			-4.7
Maximum EIRP	(dBW/4 kHz)			19.3
	(dBW/MHz)			43.3
Interference Objectives:	Long Term	-156.0 dBW/MHz	20%	-151.0 dBW/4 kHz 20%
	Short Term	-146.0 dBW/MHz	0.01%	-128.0 dBW/4 kHz 0.0025%

Frequency Information

Receive 18.0 GHz

Transmit 28.0 GHz

Emission / Frequency Range (MHz)	54M0G7D - 216MG7D / 17800.0 - 18300.0	54M0G7D - 216MG7D / 27600.0 - 28350.0
Max Great Circle Coordination Distance	169.4 km / 105.2 mi	100.0 km / 62.1 mi
Precipitation Scatter Contour Radius	100.0 km / 62.1 mi	100.0 km / 62.1 mi

Coordination Values**BRISTOW, VA**

Licensee Name O3b Networks USA, LLC.
 Latitude (NAD 83) 38° 46' 59.9" N
 Longitude (NAD 83) 77° 34' 25.3" W
 Ground Elevation (AMSL) 86.32 m / 283.2 ft
 Antenna Centerline (AGL) 2.74 m / 9.0 ft
 Antenna Model Orbit 1.2 Meter
 Antenna Mode Receive 18.0 GHz Transmit 28.0 GHz
 Interference Objectives: Long Term -156.0 dBW/MHz 20% -151.0 dBW/4 kHz 20%
 Short Term -146.0 dBW/MHz 0.01% -128.0 dBW/4 kHz 0.0025%
 Max Available RF Power -28.7 (dBW/4 kHz)

Azimuth (°)	Horizon Elevation (°)	Antenna Discrimination (°)	Receive 18.0 GHz		Transmit 28.0 GHz	
			Horizon Gain (dBi)	Coordination Distance (km)	Horizon Gain (dBi)	Coordination Distance (km)
0	0.00	97.86	-10.00	102.69	-10.00	100.00
5	0.00	92.86	-10.00	100.00	-10.00	100.00
10	0.00	87.86	-10.00	100.00	-10.00	100.00
15	0.00	82.86	-10.00	100.00	-10.00	100.00
20	0.00	77.86	-10.00	100.00	-10.00	100.00
25	0.00	72.86	-10.00	101.29	-10.00	100.00
30	0.00	67.86	-10.00	102.77	-10.00	100.00
35	0.00	62.86	-10.00	111.38	-10.00	100.00
40	0.00	57.87	-10.00	111.30	-10.00	100.00
45	0.00	52.87	-10.00	107.85	-10.00	100.00
50	0.00	47.87	-10.00	117.19	-10.00	100.00
55	0.00	42.87	-10.00	119.46	-10.00	100.00
60	0.00	37.87	-9.75	136.88	-10.00	100.00
65	0.00	32.87	-8.56	140.20	-9.75	100.00
70	0.00	27.88	-7.24	144.03	-8.56	100.00
75	0.00	22.88	-5.76	148.51	-7.24	100.00
80	0.00	17.89	-4.06	153.83	-5.76	100.00
85	0.00	12.90	-2.04	142.04	-4.06	100.00
90	0.00	7.92	0.34	132.30	-2.04	100.00
95	0.00	3.02	3.08	135.20	0.34	100.00
100	0.00	2.34	6.03	137.49	3.08	100.00
105	0.00	7.20	7.93	151.88	6.03	100.00
110	0.00	12.18	6.95	139.00	7.93	100.00
115	0.00	17.17	4.31	127.80	6.95	100.00
120	0.00	22.16	1.63	117.62	4.31	100.00
125	0.00	27.15	-0.48	109.90	1.63	100.00
130	0.00	32.15	-2.17	102.60	-0.48	100.00
135	0.00	37.15	-3.59	100.00	-2.17	100.00
140	0.00	42.15	-4.79	100.00	-3.59	100.00
145	0.00	47.15	-5.85	100.00	-4.79	100.00
150	0.00	52.15	-6.86	107.53	-5.85	100.00
155	0.00	57.14	-7.56	105.36	-6.86	100.00
160	0.00	62.14	-8.17	110.40	-7.56	100.00
165	0.00	67.14	-8.62	110.33	-8.17	100.00
170	0.00	72.14	-8.94	110.66	-8.62	100.00
175	0.00	77.14	-9.12	107.56	-8.94	100.00
180	0.00	82.14	-9.24	120.19	-9.12	100.00
185	0.00	87.14	-9.14	110.69	-9.24	100.00

Coordination Values**BRISTOW, VA**

Licensee Name O3b Networks USA, LLC.
 Latitude (NAD 83) 38° 46' 59.9" N
 Longitude (NAD 83) 77° 34' 25.3" W
 Ground Elevation (AMSL) 86.32 m / 283.2 ft
 Antenna Centerline (AGL) 2.74 m / 9.0 ft
 Antenna Model Orbit 1.2 Meter
 Antenna Mode Receive 18.0 GHz Transmit 28.0 GHz
 Interference Objectives: Long Term -156.0 dBW/MHz 20% -151.0 dBW/4 kHz 20%
 Short Term -146.0 dBW/MHz 0.01% -128.0 dBW/4 kHz 0.0025%
 Max Available RF Power -28.7 (dBW/4 kHz)

Azimuth (°)	Horizon Elevation (°)	Antenna Discrimination (°)	Receive 18.0 GHz		Transmit 28.0 GHz		Coordination Distance (km)
			Horizon Gain (dBi)	Coordination Distance (km)	Horizon Gain (dBi)	Coordination Distance (km)	
190	0.00	92.14	-8.92	106.93	-9.14	100.00	100.00
195	0.00	97.14	-8.68	122.08	-8.92	100.00	100.00
200	0.00	102.14	-8.34	140.85	-8.68	100.00	100.00
205	0.00	107.14	-7.77	142.50	-8.34	100.00	100.00
210	0.00	112.14	-7.01	143.99	-7.77	100.00	100.00
215	0.00	117.14	-6.15	140.73	-7.01	100.00	100.00
220	0.00	122.13	-5.14	140.35	-6.15	100.00	100.00
225	0.00	127.13	-3.95	143.55	-5.14	100.00	100.00
230	0.00	132.13	-2.56	150.70	-3.95	100.00	100.00
235	0.00	137.13	-0.83	146.44	-2.56	100.00	100.00
240	0.00	142.13	1.28	145.60	-0.83	100.00	100.00
245	0.00	147.13	3.89	153.10	1.28	100.00	100.00
250	0.00	152.12	6.33	163.46	3.89	100.00	100.00
255	0.00	157.12	7.11	169.39	6.33	100.00	100.00
260	0.00	162.11	2.84	159.20	7.11	100.00	100.00
265	0.00	167.10	0.24	145.74	5.48	100.00	100.00
270	0.00	172.08	-2.06	135.17	2.84	100.00	100.00
275	0.00	176.98	-4.04	128.96	0.24	100.00	100.00
280	0.00	177.66	-5.75	125.53	-2.06	100.00	100.00
285	0.00	172.80	-7.23	121.70	-4.04	100.00	100.00
290	0.00	167.82	-8.55	109.89	-5.75	100.00	100.00
295	0.00	162.83	-9.74	103.64	-7.23	100.00	100.00
300	0.00	157.84	-10.00	100.00	-8.55	100.00	100.00
305	0.00	152.85	-10.00	100.00	-9.74	100.00	100.00
310	0.00	147.85	-10.00	100.00	-10.00	100.00	100.00
315	0.00	142.85	-10.00	100.00	-10.00	100.00	100.00
320	0.00	137.85	-10.00	100.07	-10.00	100.00	100.00
325	0.00	132.85	-10.00	100.00	-10.00	100.00	100.00
330	0.00	127.85	-10.00	100.00	-10.00	100.00	100.00
335	0.00	122.86	-10.00	100.00	-10.00	100.00	100.00
340	0.00	117.86	-10.00	100.00	-10.00	100.00	100.00
345	0.00	112.86	-10.00	100.00	-10.00	100.00	100.00
350	0.00	107.86	-10.00	100.00	-10.00	100.00	100.00
355	0.00	102.86	-10.00	103.63	-10.00	100.00	100.00

Date: 11/26/2014

Job Number: <PCNJobCode>

Administrative Information

Status ENGINEER PROPOSAL
Call Sign <PCNCallSign>
Licensee Code O3BNET
Licensee Name O3b Networks USA, LLC.

Site Information**BRISTOW, VA**

Venue Name
Latitude (NAD 83) 38° 46' 59.9" N
Longitude (NAD 83) 77° 34' 25.3" W
Climate Zone A
Rain Zone 2
Ground Elevation (AMSL) 86.32 m / 283.2 ft

Link Information

Satellite Type Medium Earth Orbit
Mode TR - Transmit-Receive
Modulation Digital
Minimum Elevation Angle 14.0°
Azimuth Range 0.0° to 360°
Antenna Centerline (AGL) 2.74 m / 9.0 ft

Antenna Information**Receive - FCC32****Transmit - FCC32**

Manufacturer	AVL	AVL	
Model	2.4 Meter	2.4 Meter	
Gain / Diameter	51.3 dBi / 2.4 m	54.7 dBi / 2.4 m	
3-dB / 15-dB Beamwidth	0.23° / 0.60°	0.14° / 0.32°	
Max Available RF Power (dBW/4 kHz)		-31.5	
(dBW/MHz)		-7.5	
Maximum EIRP (dBW/4 kHz)		23.2	
(dBW/MHz)		47.2	
Interference Objectives:	Long Term	-156.0 dBW/MHz 20%	-151.0 dBW/4 kHz 20%
	Short Term	-146.0 dBW/MHz 0.01%	-128.0 dBW/4 kHz 0.0025%

Frequency Information**Receive 18.0 GHz****Transmit 28.0 GHz**

Emission / Frequency Range (MHz)	216MG7D / 17800.0 - 18300.0	216MG7D / 27600.0 - 28350.0
Max Great Circle Coordination Distance	152.8 km / 95.0 mi	100.0 km / 62.1 mi
Precipitation Scatter Contour Radius	100.0 km / 62.1 mi	100.0 km / 62.1 mi

Coordination Values**BRISTOW, VA**

Licensee Name O3b Networks USA, LLC.
 Latitude (NAD 83) 38° 46' 59.9" N
 Longitude (NAD 83) 77° 34' 25.3" W
 Ground Elevation (AMSL) 86.32 m / 283.2 ft
 Antenna Centerline (AGL) 2.74 m / 9.0 ft
 Antenna Model AVL 2.4 Meter
 Antenna Mode Receive 18.0 GHz Transmit 28.0 GHz
 Interference Objectives: Long Term -156.0 dBW/MHz 20% -151.0 dBW/4 kHz 20%
 Short Term -146.0 dBW/MHz 0.01% -128.0 dBW/4 kHz 0.0025%
 Max Available RF Power -31.5 (dBW/4 kHz)

Azimuth (°)	Horizon Elevation (°)	Antenna Discrimination (°)	Receive 18.0 GHz		Transmit 28.0 GHz	
			Horizon Gain (dBi)	Coordination Distance (km)	Horizon Gain (dBi)	Coordination Distance (km)
0	0.00	97.86	-10.00	102.69	-10.00	100.00
5	0.00	92.86	-10.00	100.00	-10.00	100.00
10	0.00	87.86	-10.00	100.00	-10.00	100.00
15	0.00	82.86	-10.00	100.00	-10.00	100.00
20	0.00	77.86	-10.00	100.00	-10.00	100.00
25	0.00	72.86	-10.00	101.29	-10.00	100.00
30	0.00	67.86	-10.00	102.77	-10.00	100.00
35	0.00	62.86	-10.00	111.38	-10.00	100.00
40	0.00	57.87	-10.00	111.30	-10.00	100.00
45	0.00	52.87	-10.00	107.85	-10.00	100.00
50	0.00	47.87	-10.00	117.19	-10.00	100.00
55	0.00	42.87	-10.00	119.46	-10.00	100.00
60	0.00	37.87	-10.00	136.18	-10.00	100.00
65	0.00	32.87	-9.61	137.25	-9.61	100.00
70	0.00	27.88	-8.45	140.51	-8.45	100.00
75	0.00	22.88	-7.17	144.23	-7.17	100.00
80	0.00	17.89	-5.76	148.51	-5.76	100.00
85	0.00	12.90	-4.11	135.89	-4.11	100.00
90	0.00	7.92	-2.26	125.73	-2.26	100.00
95	0.00	3.02	-0.26	126.08	-0.26	100.00
100	0.00	2.34	1.84	124.84	1.84	100.00
105	0.00	7.20	3.58	127.73	3.58	100.00
110	0.00	12.18	4.14	129.58	4.14	100.00
115	0.00	17.17	3.35	124.78	3.35	100.00
120	0.00	22.16	1.55	117.39	1.55	100.00
125	0.00	27.15	-0.48	109.90	-0.48	100.00
130	0.00	32.15	-2.17	102.60	-2.17	100.00
135	0.00	37.15	-3.59	100.00	-3.59	100.00
140	0.00	42.15	-4.79	100.00	-4.79	100.00
145	0.00	47.15	-5.85	100.00	-5.85	100.00
150	0.00	52.15	-6.86	107.53	-6.86	100.00
155	0.00	57.14	-7.56	105.36	-7.56	100.00
160	0.00	62.14	-8.17	110.40	-8.17	100.00
165	0.00	67.14	-8.62	110.33	-8.62	100.00
170	0.00	72.14	-8.94	110.66	-8.94	100.00
175	0.00	77.14	-9.12	107.56	-9.12	100.00
180	0.00	82.14	-9.24	120.19	-9.24	100.00
185	0.00	87.14	-9.14	110.69	-9.14	100.00

Coordination Values**BRISTOW, VA**


Licensee Name O3b Networks USA, LLC.
 Latitude (NAD 83) 38° 46' 59.9" N
 Longitude (NAD 83) 77° 34' 25.3" W
 Ground Elevation (AMSL) 86.32 m / 283.2 ft
 Antenna Centerline (AGL) 2.74 m / 9.0 ft
 Antenna Model AVL 2.4 Meter

Antenna Mode	Receive 18.0 GHz		Transmit 28.0 GHz
Interference Objectives: Long Term	-156.0 dBW/MHz	20%	-151.0 dBW/4 kHz 20%
Short Term	-146.0 dBW/MHz	0.01%	-128.0 dBW/4 kHz 0.0025%
Max Available RF Power		-31.5 (dBW/4 kHz)	

Azimuth (°)	Horizon Elevation (°)	Antenna Discrimination (°)	Receive 18.0 GHz		Transmit 28.0 GHz	
			Horizon Gain (dBi)	Coordination Distance (km)	Horizon Gain (dBi)	Coordination Distance (km)
190	0.00	92.14	-8.92	106.93	-8.92	100.00
195	0.00	97.14	-8.68	122.08	-8.68	100.00
200	0.00	102.14	-8.34	140.85	-8.34	100.00
205	0.00	107.14	-7.77	142.50	-7.77	100.00
210	0.00	112.14	-7.01	143.99	-7.01	100.00
215	0.00	117.14	-6.15	140.73	-6.15	100.00
220	0.00	122.13	-5.14	140.35	-5.14	100.00
225	0.00	127.13	-3.95	143.55	-3.95	100.00
230	0.00	132.13	-2.56	150.70	-2.56	100.00
235	0.00	137.13	-0.83	146.44	-0.83	100.00
240	0.00	142.13	1.14	145.14	1.14	100.00
245	0.00	147.13	2.82	149.31	2.82	100.00
250	0.00	152.12	3.58	152.84	3.58	100.00
255	0.00	157.12	3.03	150.09	3.03	100.00
260	0.00	162.11	1.47	144.59	1.47	100.00
265	0.00	167.10	-0.44	135.38	-0.44	100.00
270	0.00	172.08	-2.35	128.54	-2.35	100.00
275	0.00	176.98	-4.12	123.33	-4.12	100.00
280	0.00	177.66	-5.73	121.00	-5.73	100.00
285	0.00	172.80	-7.16	117.96	-7.16	100.00
290	0.00	167.82	-8.43	106.79	-8.43	100.00
295	0.00	162.83	-9.60	101.06	-9.60	100.00
300	0.00	157.84	-10.00	100.00	-10.00	100.00
305	0.00	152.85	-10.00	100.00	-10.00	100.00
310	0.00	147.85	-10.00	100.00	-10.00	100.00
315	0.00	142.85	-10.00	100.00	-10.00	100.00
320	0.00	137.85	-10.00	100.07	-10.00	100.00
325	0.00	132.85	-10.00	100.00	-10.00	100.00
330	0.00	127.85	-10.00	100.00	-10.00	100.00
335	0.00	122.86	-10.00	100.00	-10.00	100.00
340	0.00	117.86	-10.00	100.00	-10.00	100.00
345	0.00	112.86	-10.00	100.00	-10.00	100.00
350	0.00	107.86	-10.00	100.00	-10.00	100.00
355	0.00	102.86	-10.00	103.63	-10.00	100.00

5. CERTIFICATION

I HEREBY CERTIFY THAT I AM THE TECHNICALLY QUALIFIED PERSON RESPONSIBLE FOR THE PREPARATION OF THE FREQUENCY COORDINATION DATA CONTAINED IN THIS APPLICATION, THAT I AM FAMILIAR WITH PARTS 101 AND 25 OF THE FCC RULES AND REGULATIONS, THAT I HAVE EITHER PREPARED OR REVIEWED THE FREQUENCY COORDINATION DATA SUBMITTED WITH THIS APPLICATION, AND THAT IT IS COMPLETE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

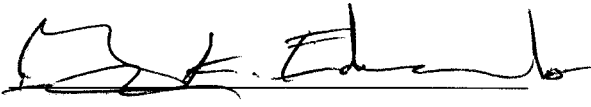BY: 

Gary K. Edwards
Senior Manager
COMSEARCH
19700 Janelia Farm Boulevard
Ashburn, VA 20147

DATED: January 02, 2015