



FCC RF Test Report

FCC ID : UZ7ET45BB
EQUIPMENT : Tablet
BRAND NAME : Zebra
MODEL NAME : ET45BB
APPLICANT : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
MANUFACTURER : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Jun. 08, 2022 ~ Jul. 26, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION..... 5

 1.1 Product Feature of Equipment Under Test..... 5

 1.2 Product Specification of Equipment Under Test..... 5

 1.3 Modification of EUT 5

 1.4 Testing Location 6

 1.5 Test Software..... 6

 1.6 Applicable Standards..... 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7

 2.1 Carrier Frequency Channel 7

 2.2 Test Mode..... 8

 2.3 Connection Diagram of Test System..... 9

 2.4 Support Unit used in test configuration and system 10

 2.5 EUT Operation Test Setup 10

 2.6 Measurement Results Explanation Example..... 10

3 TEST RESULT 11

 3.1 6dB and 99% Bandwidth Measurement 11

 3.2 Output Power Measurement..... 18

 3.3 Power Spectral Density Measurement 20

 3.4 Conducted Band Edges and Spurious Emission Measurement 28

 3.5 Radiated Band Edges and Spurious Emission Measurement 38

 3.6 AC Conducted Emission Measurement..... 42

 3.7 Antenna Requirements 44

4 LIST OF MEASURING EQUIPMENT..... 45

5 UNCERTAINTY OF EVALUATION..... 46

APPENDIX A. AC CONDUCTED EMISSION TEST RESULT

APPENDIX B. RADIATED SPURIOUS EMISSION

APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR230405B	Rev. 01	Initial issue of report	Aug. 03, 2022



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Peak Output Power	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	≤ 20dBc	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 13.58 dB at 2485.480 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 15.92 dB at 0.187 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Tablet
Brand Name	Zebra
Model Name	ET45BB
FCC ID	UZ7ET45BB
HW Version	EV2-2
SW Version	ET45USERDEBUG 11 11-10-12.00-RG-U00-PRD-GSE MXJ release-keys
MFD	07MAY22
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Specification of Accessory				
Battery	Brand Name	Zebra	Model Number	BT-000456

Supported Unit used in test configuration and system				
AC Adapter	Brand Name	Zebra	Part Number	PWR-WUA5V12W0US
Earphone 1	Brand Name	Zebra	Part Number	HDST-35MM-PTVP-01
Earphone 2	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
USB Cable (Type C to Type A)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01

1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	Bluetooth LE 1Mbps: 5.92 dBm (0.0039 W) Bluetooth LE 2Mbps: 6.20 dBm (0.0042 W)
99% Occupied Bandwidth	Bluetooth LE 1Mbps: 1.059MHz Bluetooth LE 2Mbps: 2.058MHz
Antenna Type / Gain	IFA Antenna with gain 0.9 dBi
Type of Modulation	Bluetooth LE : GFSK

1.3 Modification of EUT

No modifications are made to the EUT during all test items.



1.4 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309

1.5 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	



2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz Mode 2: Bluetooth Tx CH19_2440 MHz Mode 3: Bluetooth Tx CH39_2480 MHz
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz Mode 2: Bluetooth Tx CH19_2440 MHz Mode 3: Bluetooth Tx CH39_2480 MHz
AC Conducted Emission	Mode 1: LTE Band 5 Idle + Bluetooth Link + WLAN Link (2.4G) + Battery(BT-000456) + USB Cable(CBL-TC5X-USBC2A-01) + Charging from AC Adapter (PWR-WUA5V12W0US)
Remark: The AC Conduction and RSE are tested with accessories from the worst case of Part 15B report.	

2.3 Connection Diagram of Test System

For Conducted Emission

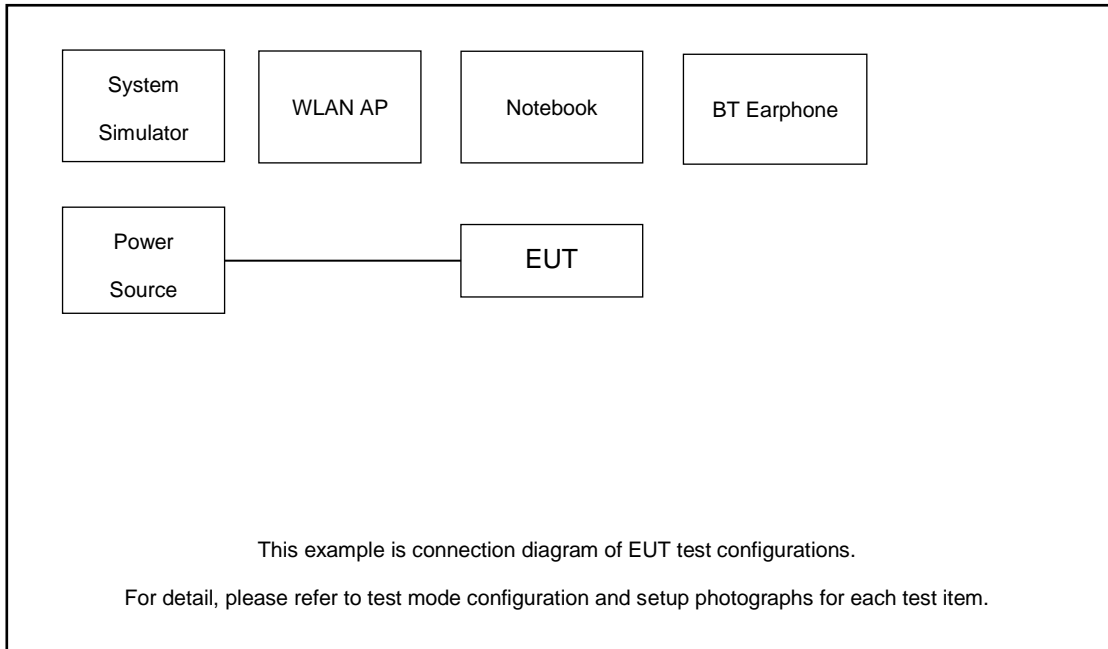

For Radiated Emission

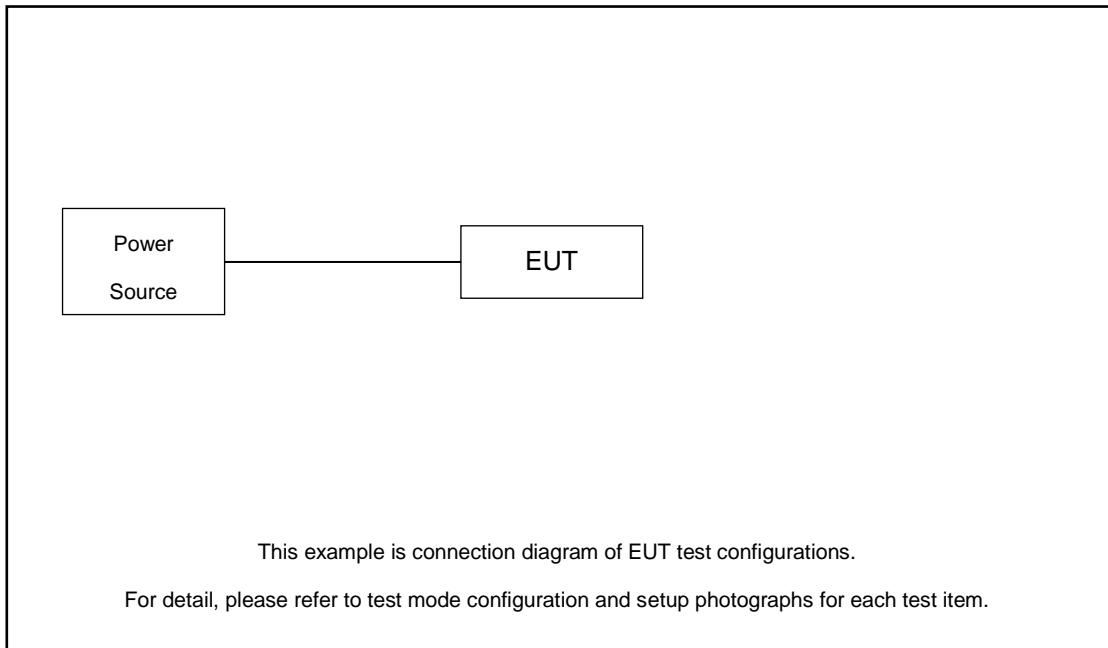



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
2.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
3.	Notebook	Lenovo	V130-15IKB005	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 2.89 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 2.89 + 10 = 12.89 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.


3.1.4 Test Setup






3.1.5 Test Result of 6dB Bandwidth

Test Mode	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	2402	0.680	2401.67	2402.35	0.50	PASS
	2440	0.680	2439.66	2440.34	0.50	PASS
	2480	0.690	2479.65	2480.34	0.50	PASS
BLE_2M	2402	1.200	2401.41	2402.61	0.50	PASS
	2440	1.250	2439.36	2440.60	0.50	PASS
	2480	1.240	2479.36	2480.60	0.50	PASS

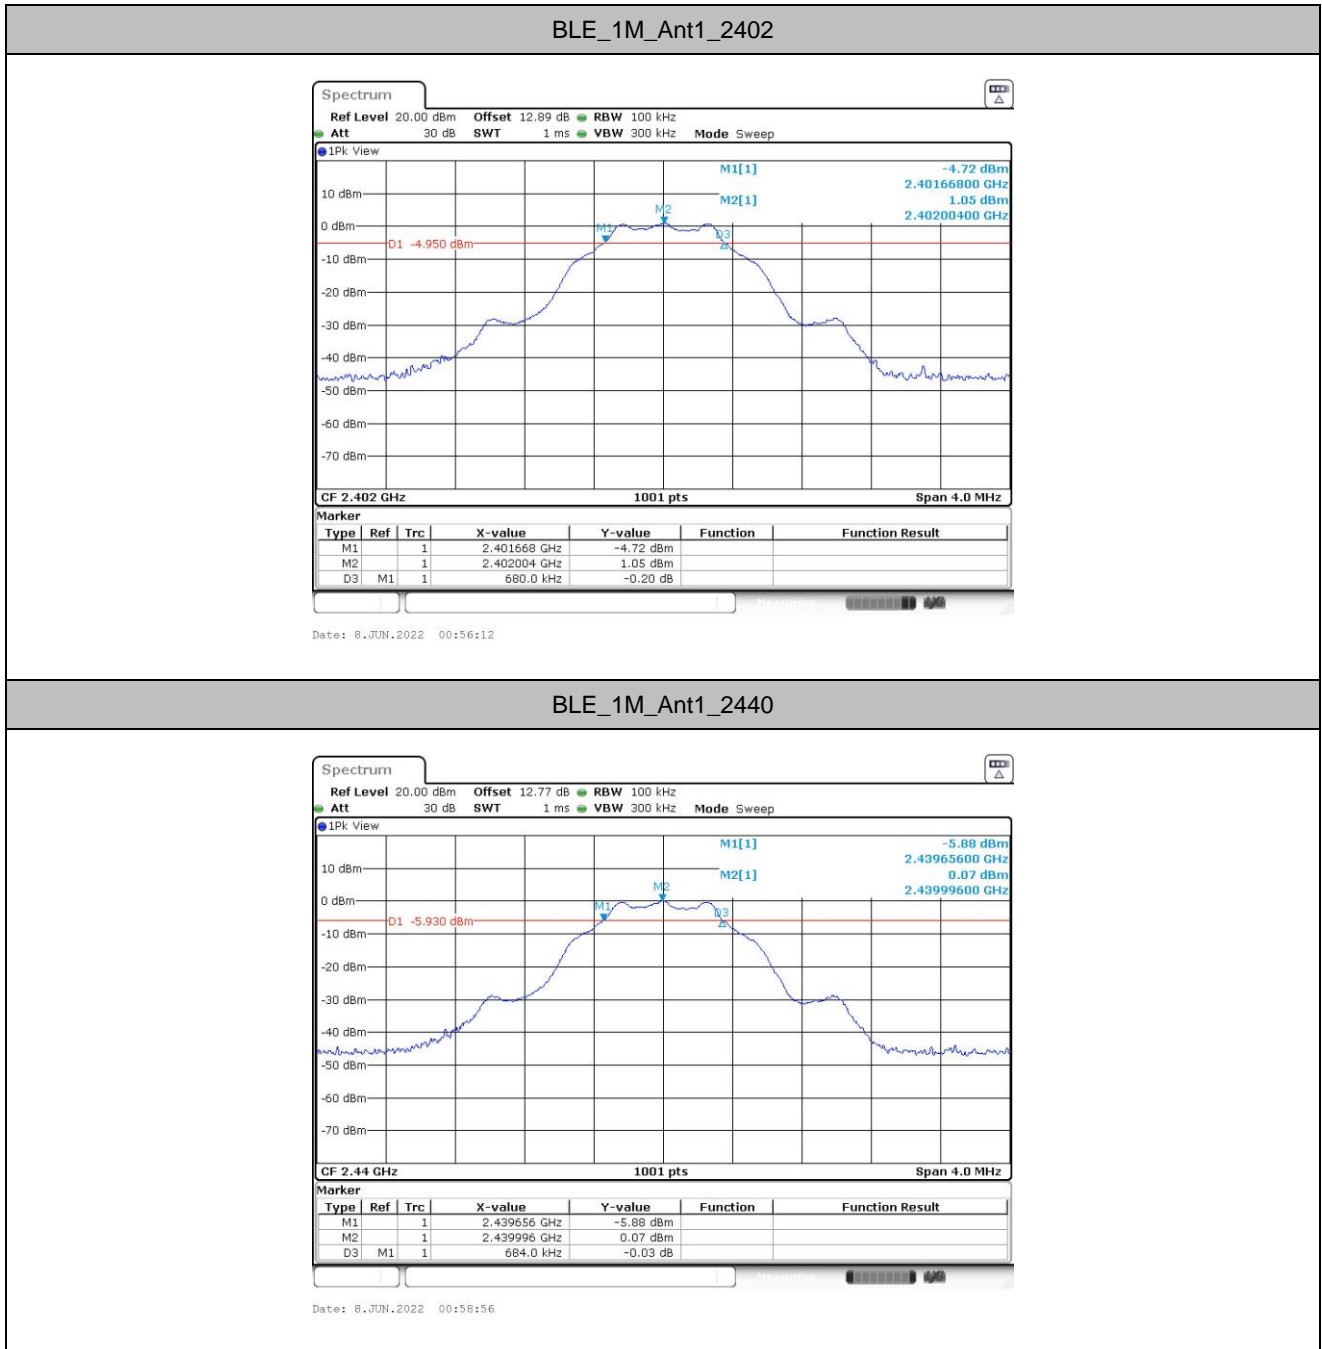




BLE_1M_Ant1_2480

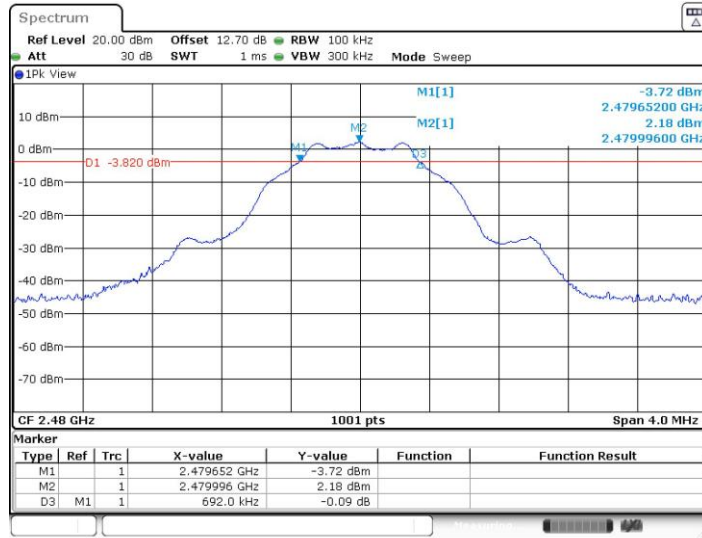


BLE_2M_Ant1_2402

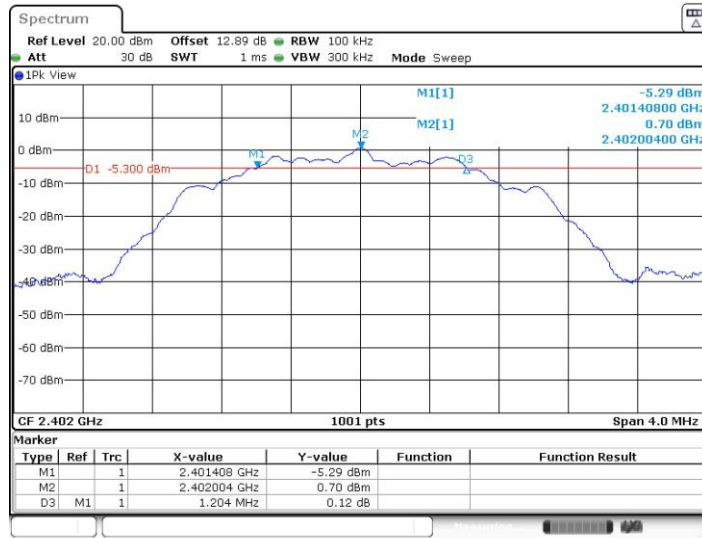




BLE_2M_Ant1_2440

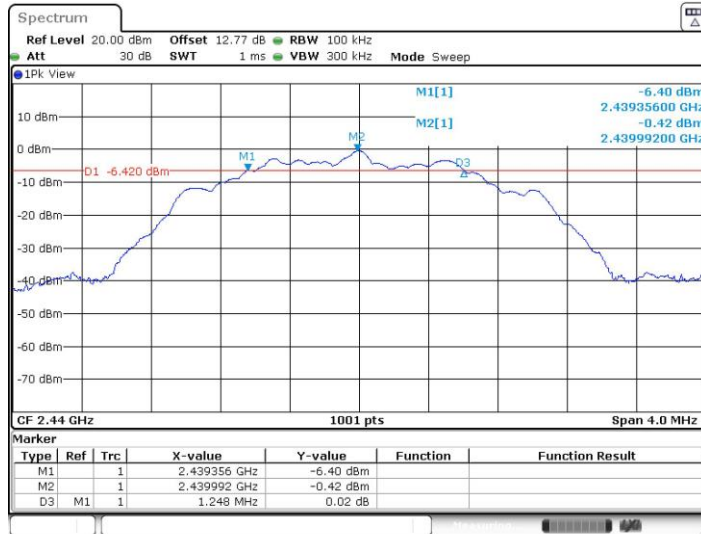

Date: 8.JUN.2022 01:10:25

BLE_2M_Ant1_2480

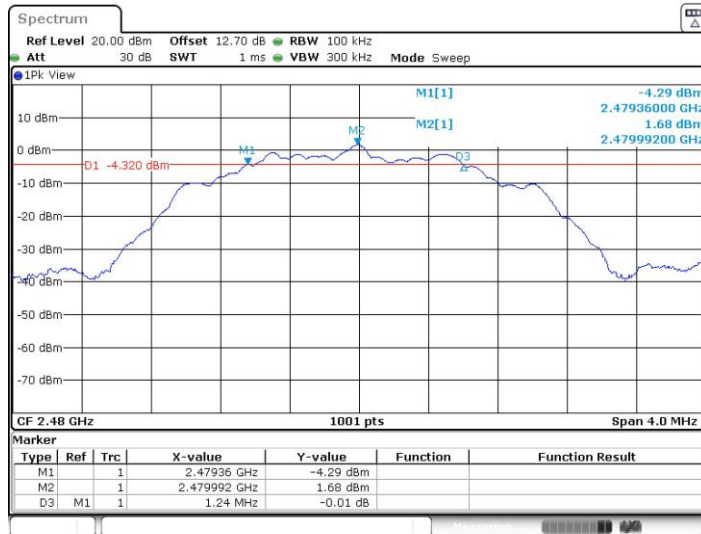


Date: 8.JUN.2022 01:12:59




3.1.6 Test Result of 99% Occupied Bandwidth

Test Mode	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	2402	1.055	2401.489	2402.543	---	---
	2440	1.059	2439.481	2440.539	---	---
	2480	1.055	2479.477	2480.531	---	---
BLE_2M	2402	2.058	2400.997	2403.055	---	---
	2440	2.054	2438.989	2441.043	---	---
	2480	2.058	2478.985	2481.043	---	---

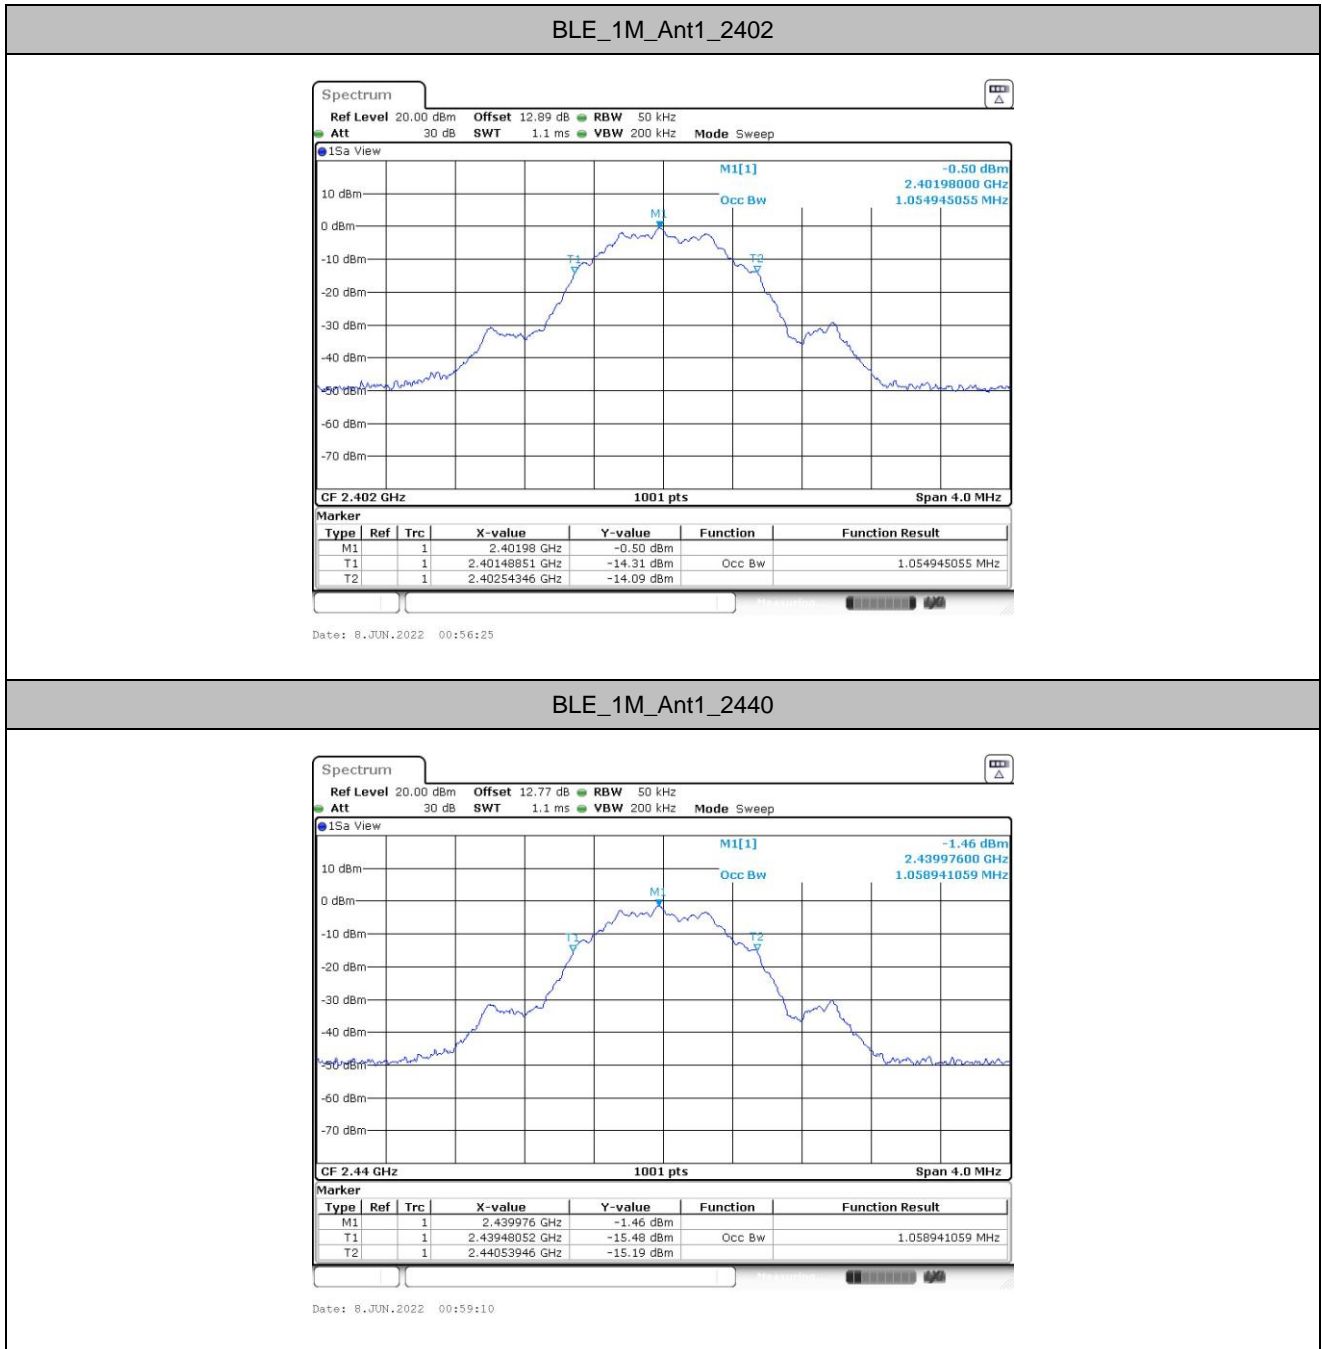




BLE_1M_Ant1_2480

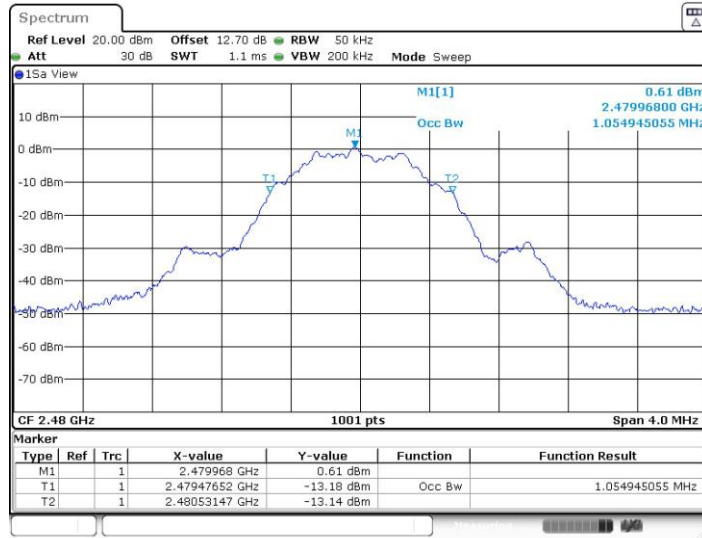

Date: 8.JUN.2022 01:03:24


BLE_2M_Ant1_2402

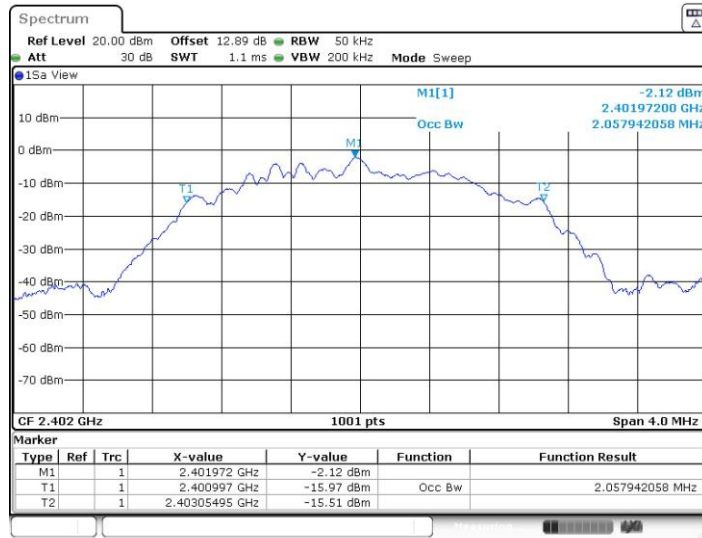

Date: 8.JUN.2022 01:06:39




BLE_2M_Ant1_2440

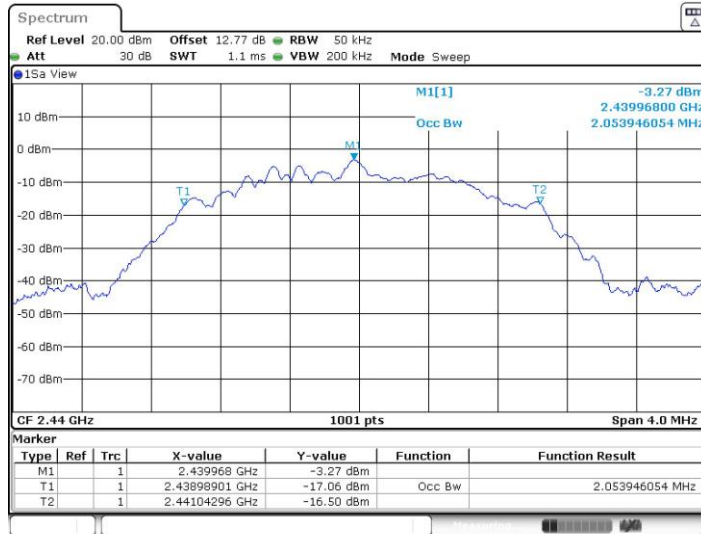

Date: 8.JUN.2022 01:10:38

BLE_2M_Ant1_2480

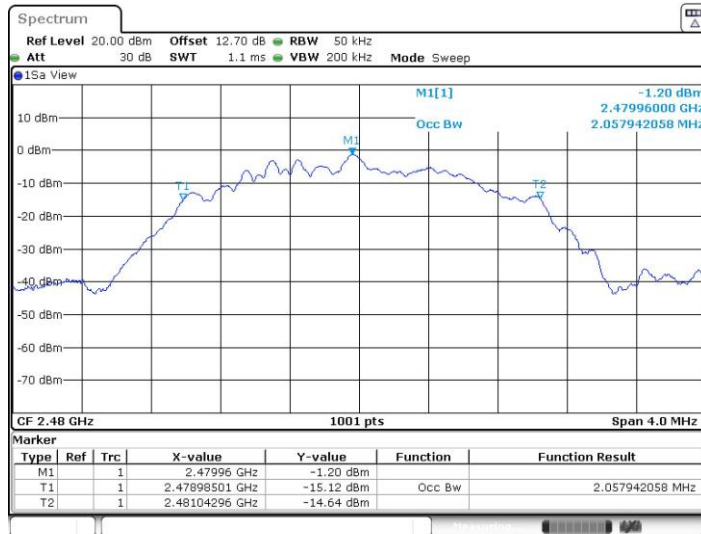

Date: 8.JUN.2022 01:13:12

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

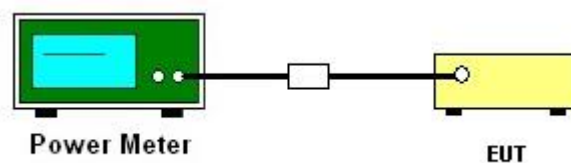



3.2.5 Test Result of Peak Output Power

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	5.35	30.00	0.90	6.25	36.00	Pass
BLE	1Mbps	1	19	2440	5.65	30.00	0.90	6.55	36.00	Pass
BLE	1Mbps	1	39	2480	5.92	30.00	0.90	6.82	36.00	Pass

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	5.57	30.00	0.90	6.47	36.00	Pass
BLE	2Mbps	1	19	2440	5.86	30.00	0.90	6.76	36.00	Pass
BLE	2Mbps	1	39	2480	6.20	30.00	0.90	7.10	36.00	Pass

3.2.6 Test Result of Average Output Power (Reporting Only)

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	2.17	4.20
BLE	1Mbps	1	19	2440	2.17	4.74
BLE	1Mbps	1	39	2480	2.17	4.92

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	2Mbps	1	0	2402	5.08	4.33
BLE	2Mbps	1	19	2440	5.08	4.69
BLE	2Mbps	1	39	2480	5.08	4.99

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

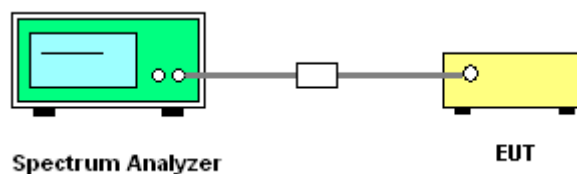




3.3.5 Test Result of Power Spectral Density

Test Mode	Freq(MHz)	Max.Point[MHz]	Result[dBm]
BLE_1M	2402	2402.00	1.12
	2440	2439.99	0.13
	2480	2479.99	2.24
BLE_2M	2402	2402.00	0.75
	2440	2439.99	-0.37
	2480	2479.98	1.72




3.3.6 Test Result of Power Spectral Density Plots (100kHz)

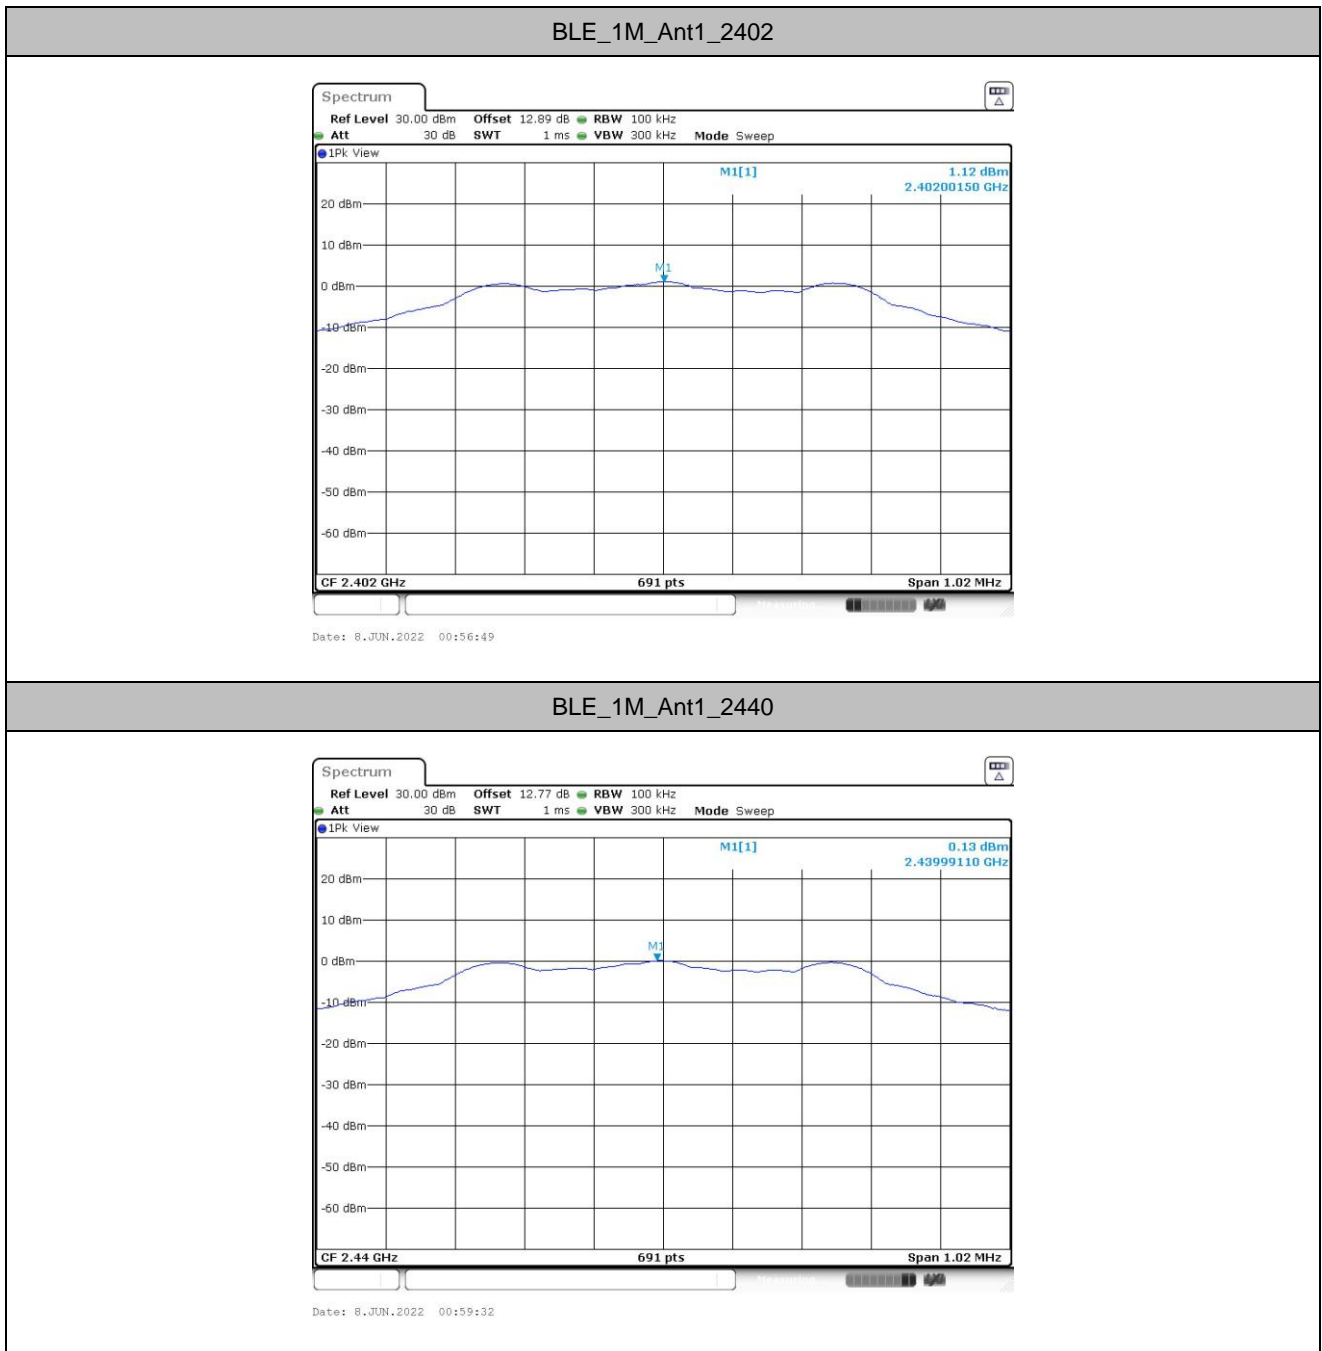




BLE_1M_Ant1_2480

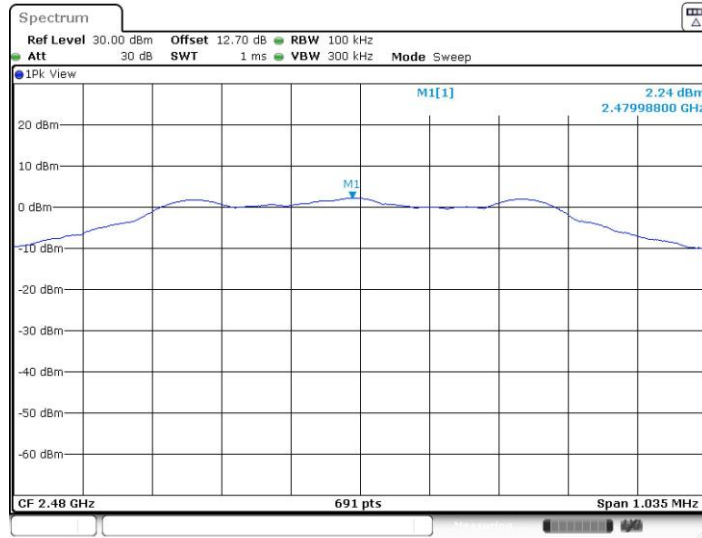


BLE_2M_Ant1_2402

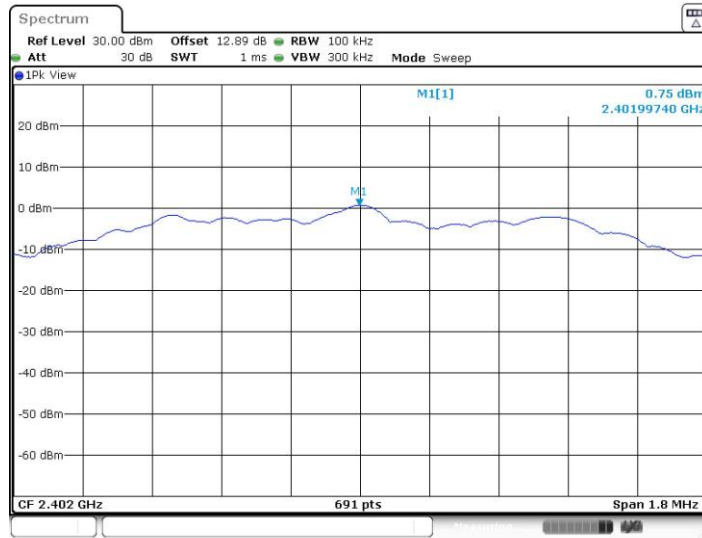




BLE_2M_Ant1_2440

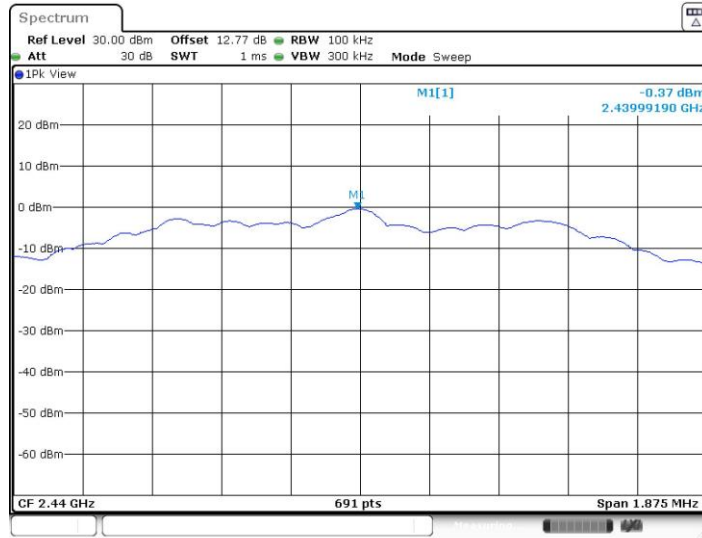


BLE_2M_Ant1_2480

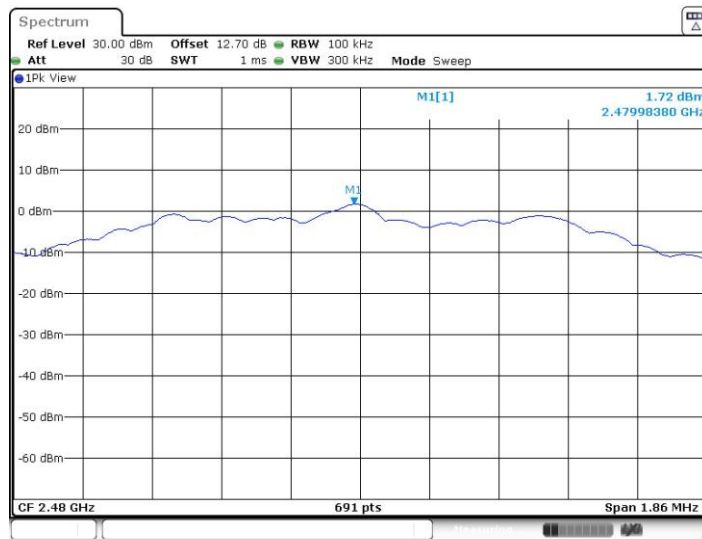




3.3.7 Test Result of Power Spectral Density Plots (3kHz)

Test Mode	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	2402	-14.02	≤8.00	PASS
	2440	-14.98	≤8.00	PASS
	2480	-12.81	≤8.00	PASS
BLE_2M	2402	-16.15	≤8.00	PASS
	2440	-17.29	≤8.00	PASS
	2480	-15.16	≤8.00	PASS

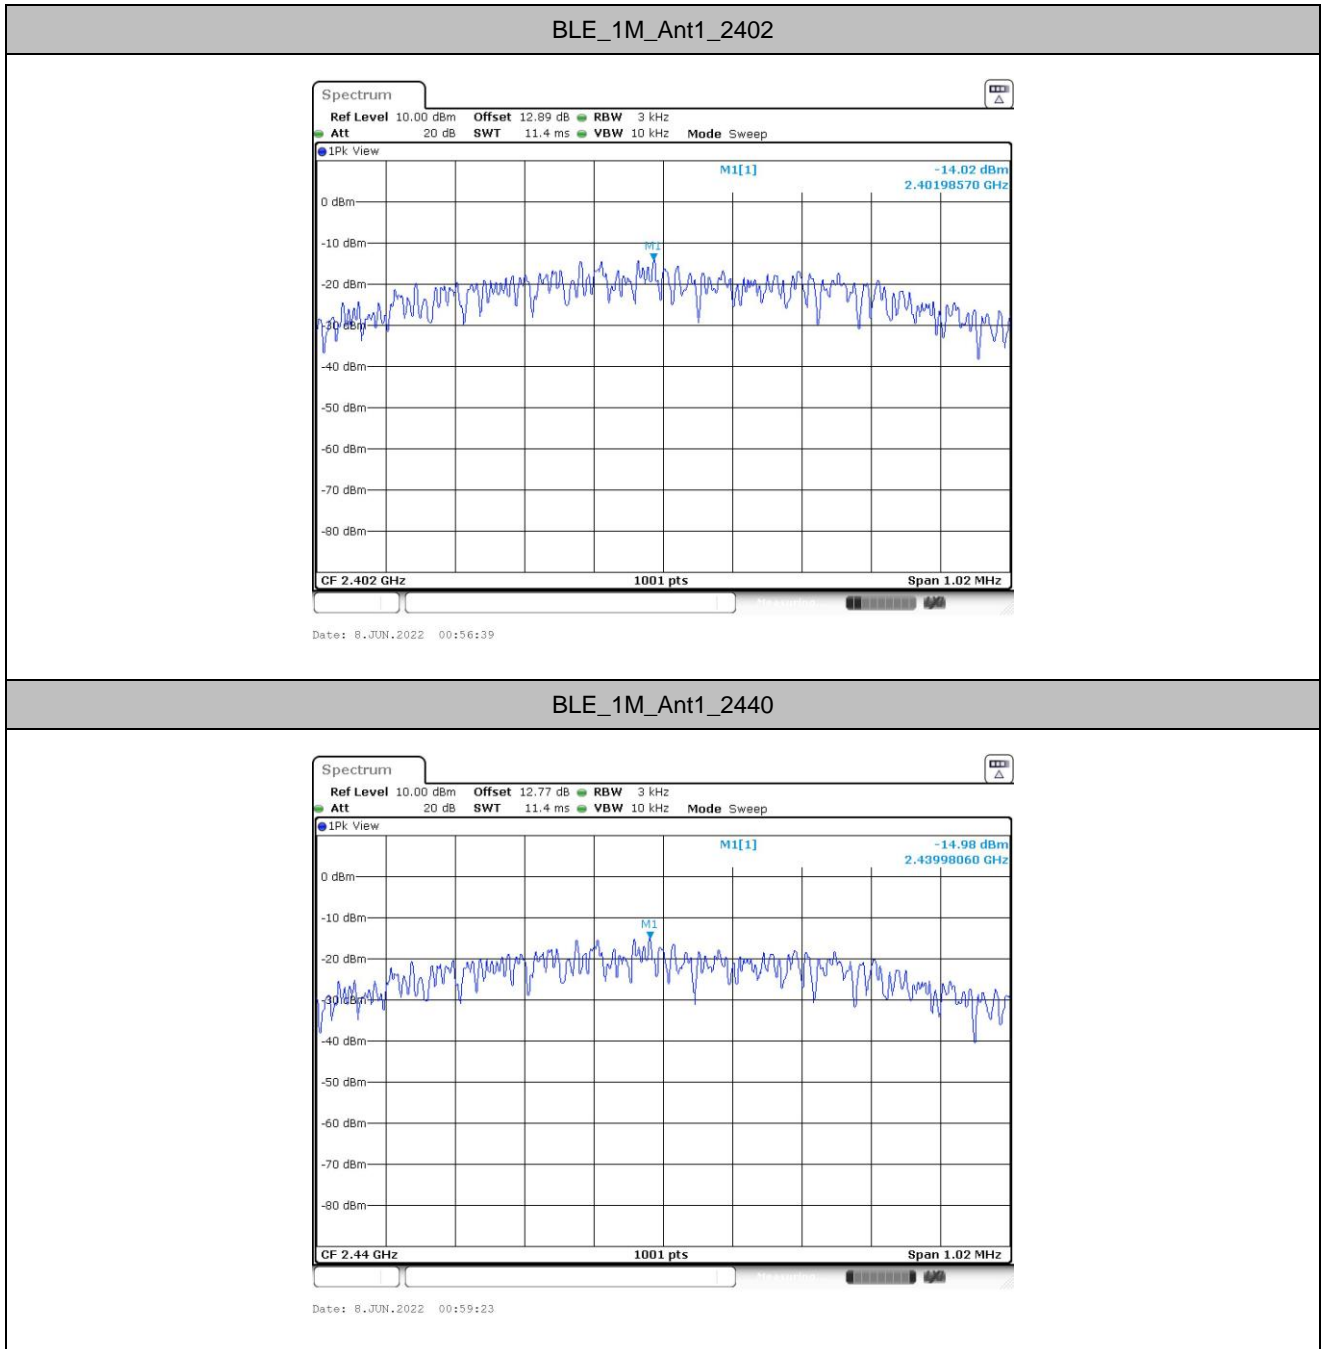




BLE_1M_Ant1_2480

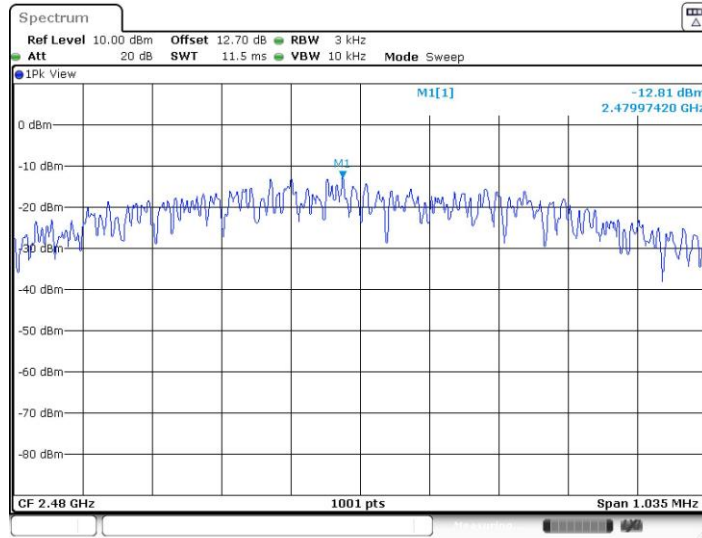

Date: 8 JUN. 2022 01:03:37


BLE_2M_Ant1_2402

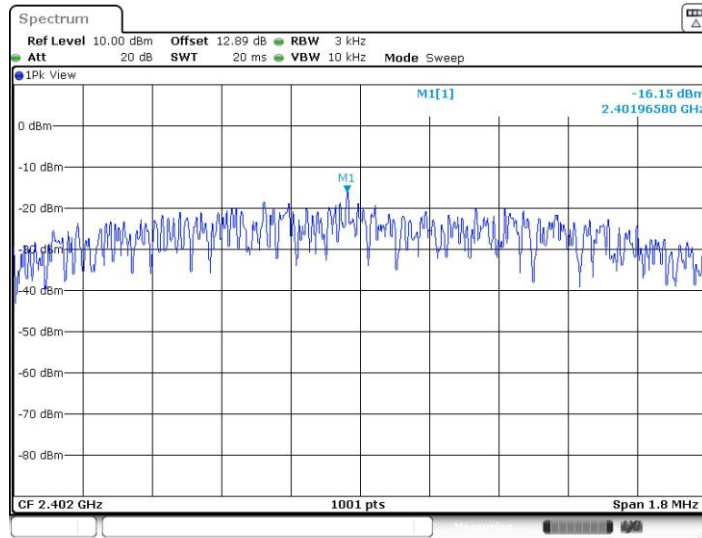

Date: 8 JUN. 2022 01:06:53




BLE_2M_Ant1_2440

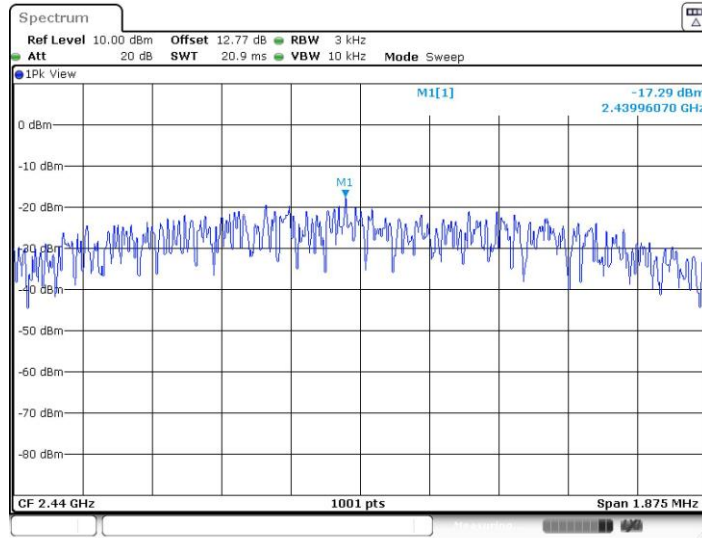

Date: 8.JUN.2022 01:10:51

BLE_2M_Ant1_2480

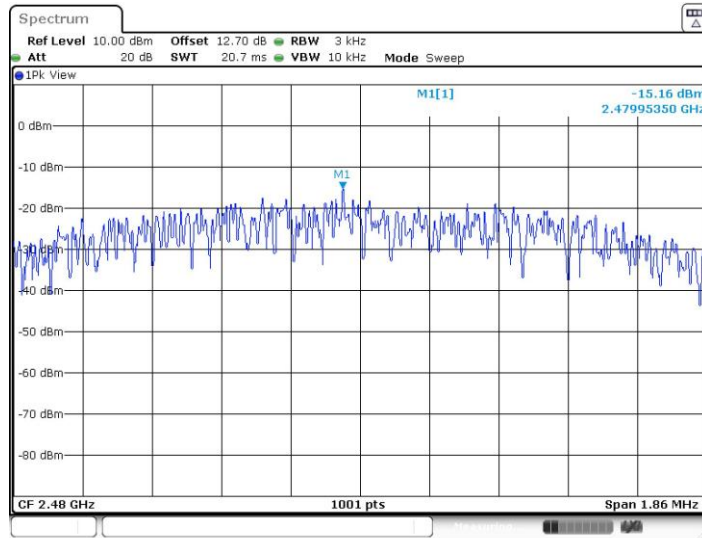

Date: 8.JUN.2022 01:13:26

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



3.4.4 Test Setup

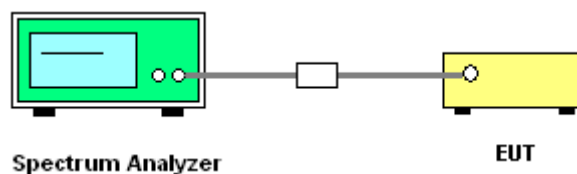




3.4.5 Test Result of Conducted Band Edges Plots

Test Mode	CH Name	Frequency[MHz]	Ref Level[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Low	2402	1.12	-43.22	≤-18.88	PASS
	High	2480	2.24	-42.49	≤-17.76	PASS
BLE_2M	Low	2402	0.75	-41.59	≤-19.25	PASS
	High	2480	1.72	-42.63	≤-18.28	PASS

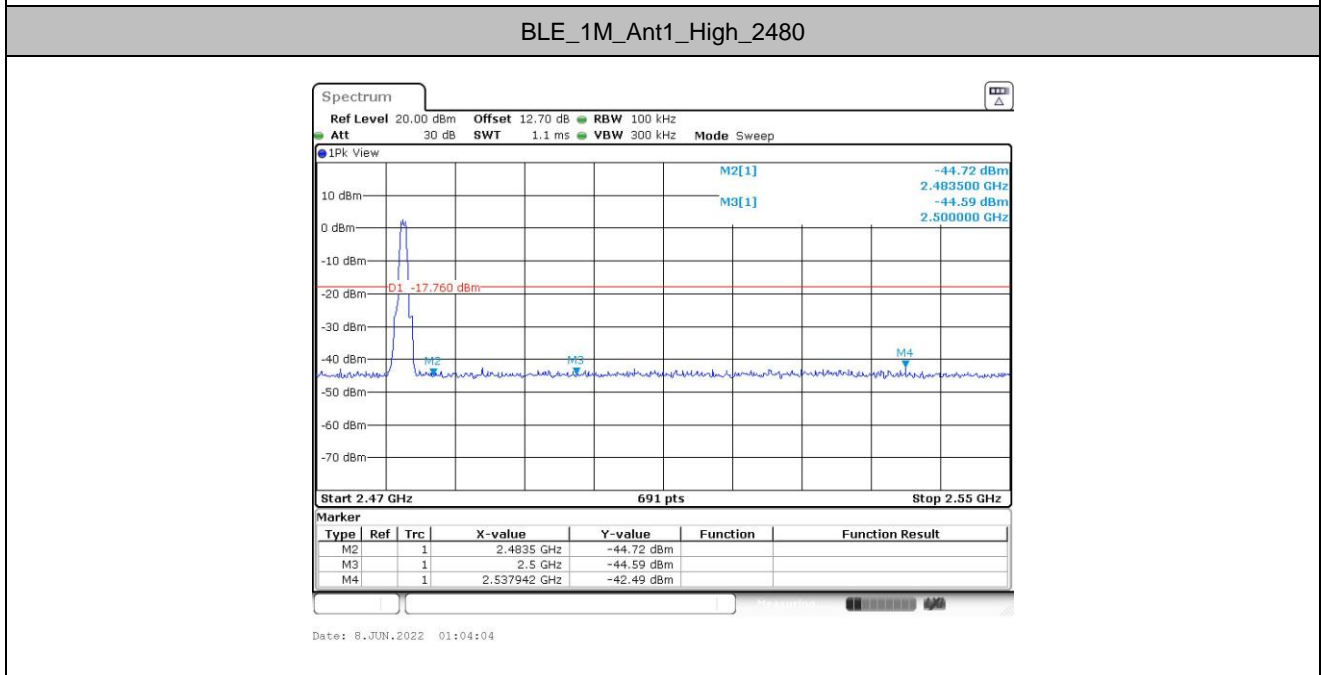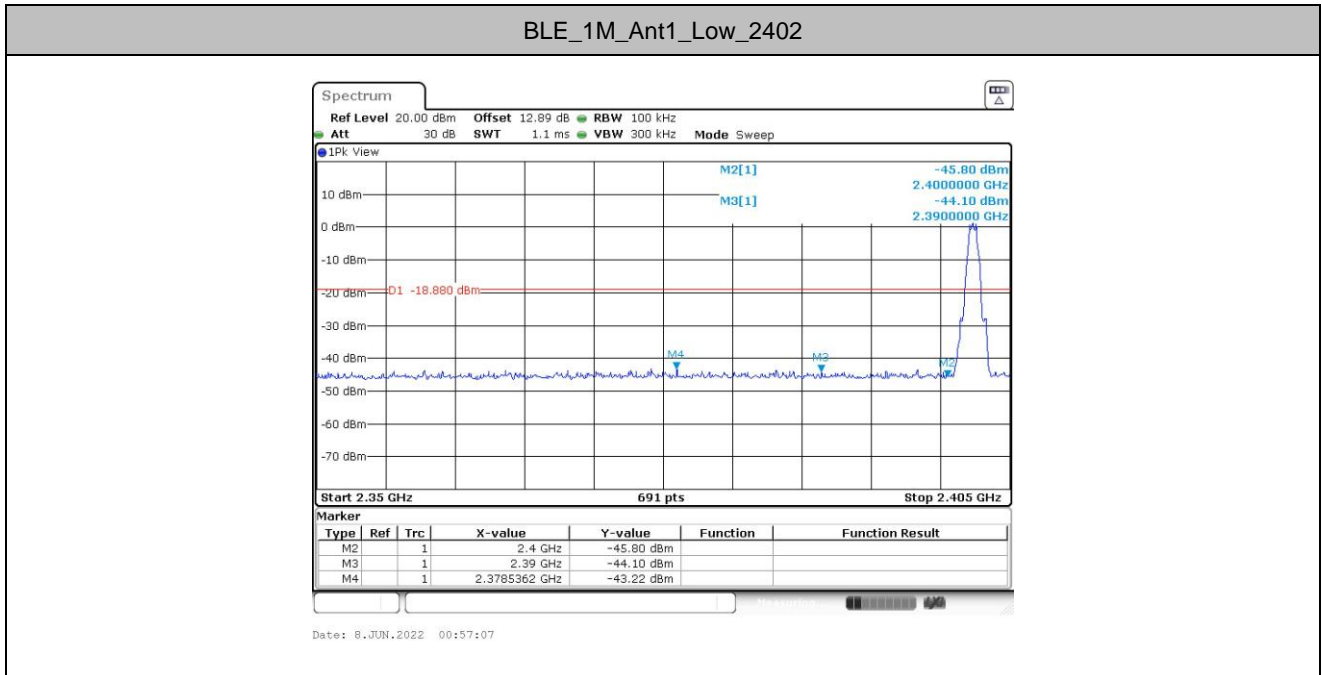




BLE_2M_Ant1_Low_2402

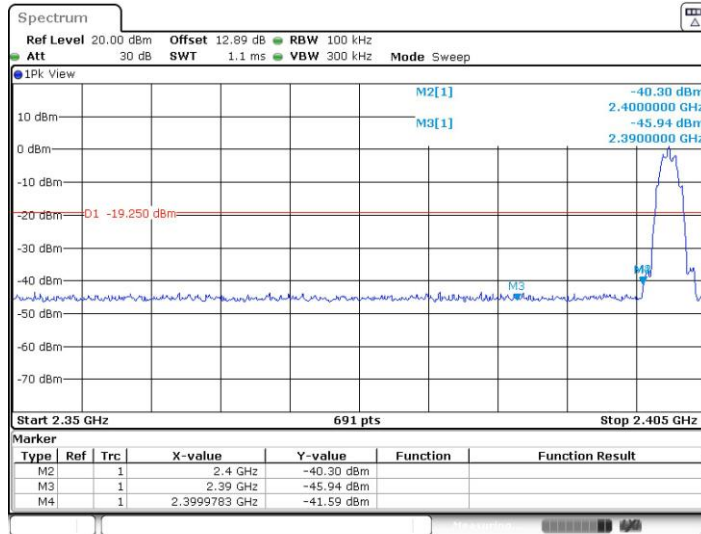

Date: 8.JUN.2022 01:07:19

BLE_2M_Ant1_High_2480

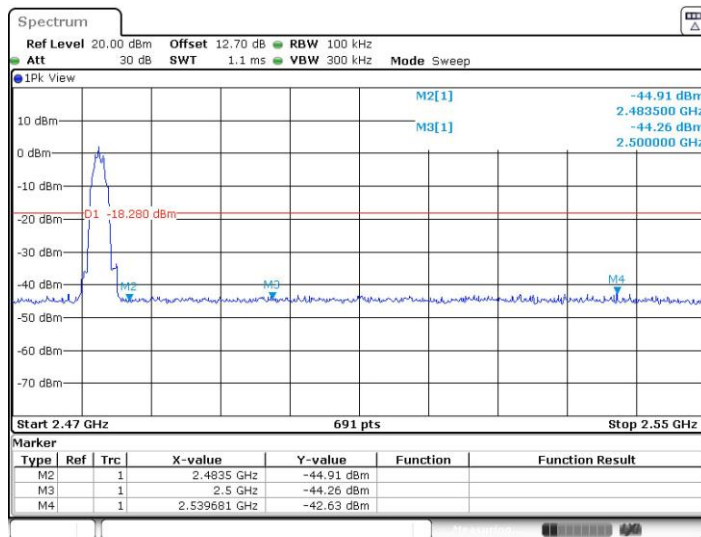

Date: 8.JUN.2022 01:13:54




3.4.6 Test Result of Conducted Spurious Emission Plots


Test Mode	Frequency[MHz]	FreqRange [MHz]	Ref Level [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	2402	30~1000	1.12	-54.66	≤-18.88	PASS
		1000~26500	1.12	-45.81	≤-18.88	PASS
	2440	30~1000	0.13	-54.44	≤-19.87	PASS
		1000~26500	0.13	-46.19	≤-19.87	PASS
	2480	30~1000	2.24	-54.36	≤-17.76	PASS
		1000~26500	2.24	-41.95	≤-17.76	PASS
BLE_2M	2402	30~1000	0.75	-54.31	≤-19.25	PASS
		1000~26500	0.75	-40.82	≤-19.25	PASS
	2440	30~1000	-0.37	-54.76	≤-20.37	PASS
		1000~26500	-0.37	-42.71	≤-20.37	PASS
	2480	30~1000	1.72	-54.07	≤-18.28	PASS
		1000~26500	1.72	-44.6	≤-18.28	PASS



BLE_1M_Ant1_2402_30~1000

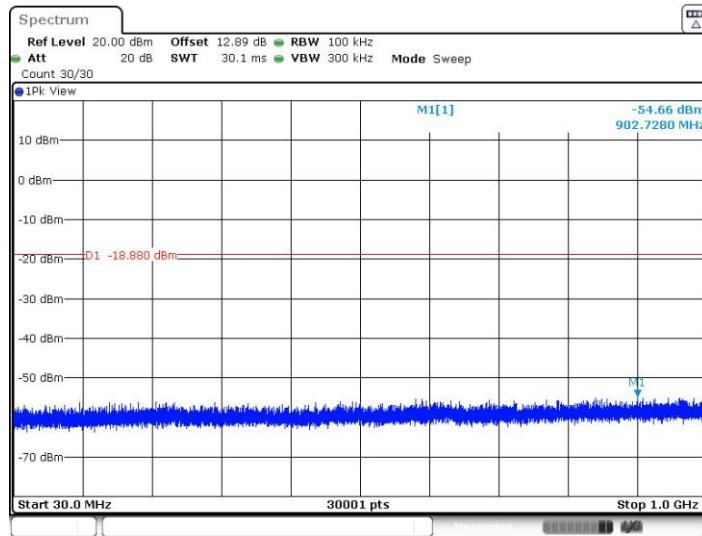


BLE_1M_Ant1_2402_1000~26500

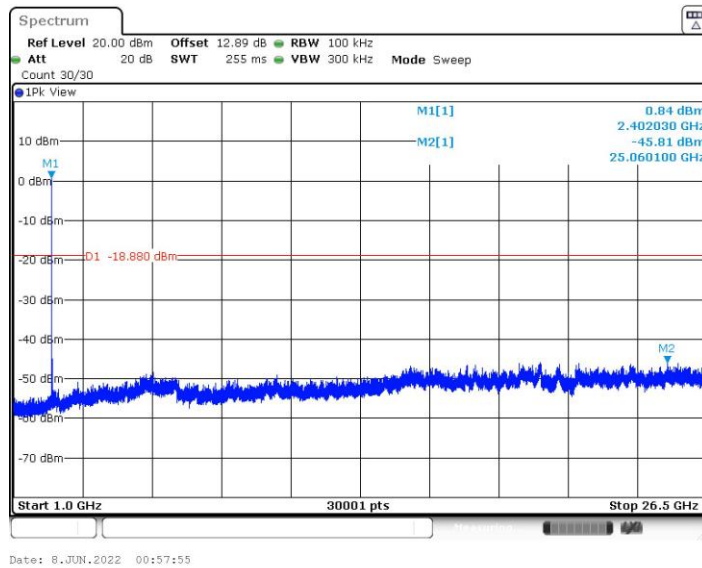




BLE_1M_Ant1_2440_30~1000

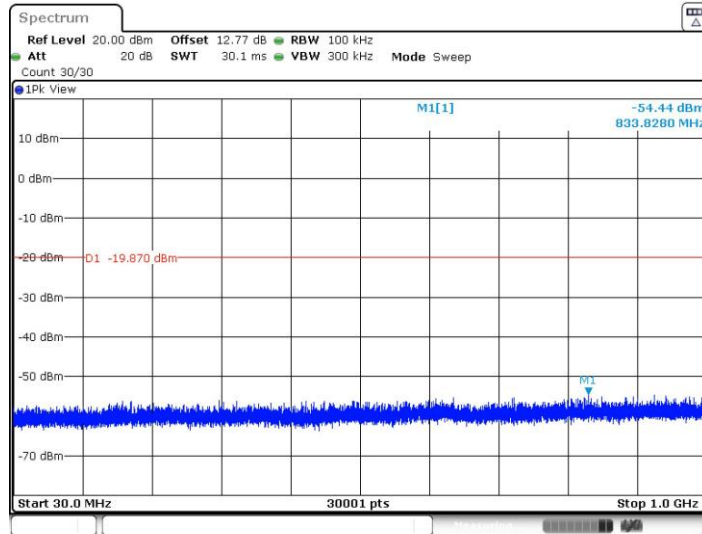

Date: 8 JUN. 2022 00:59:41


BLE_1M_Ant1_2440_1000~26500

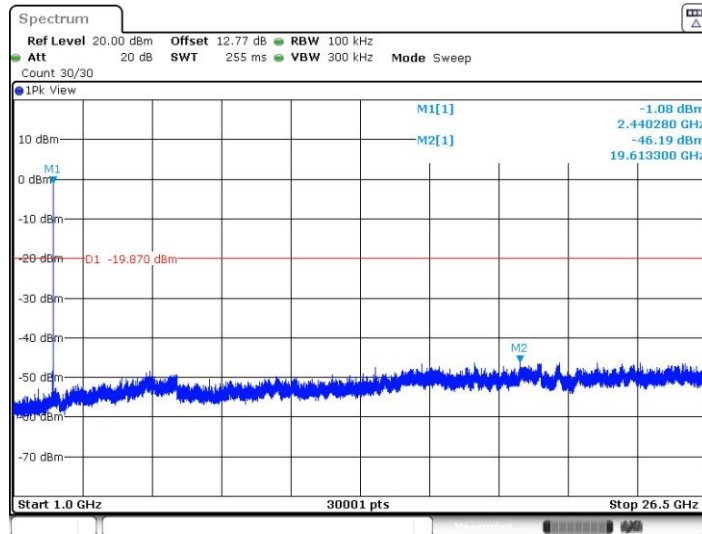

Date: 8 JUN. 2022 01:00:18




BLE_1M_Ant1_2480_30~1000

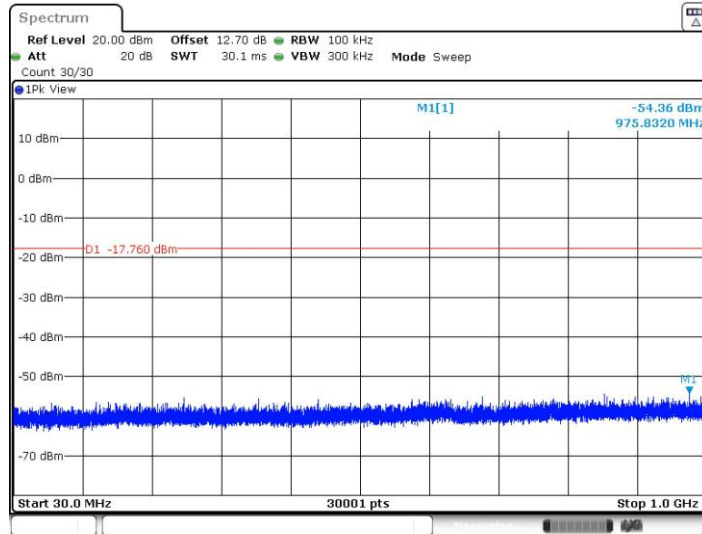

Date: 8.JUN.2022 01:04:14


BLE_1M_Ant1_2480_1000~26500

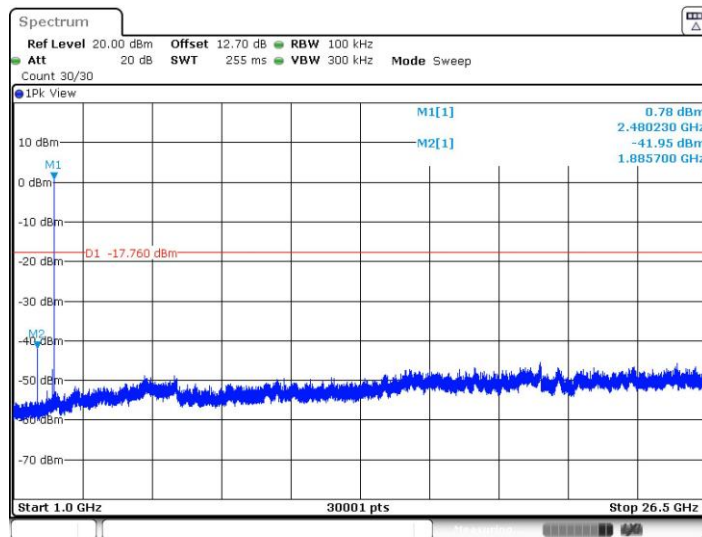


Date: 8.JUN.2022 01:04:51



BLE_2M_Ant1_2402_30~1000

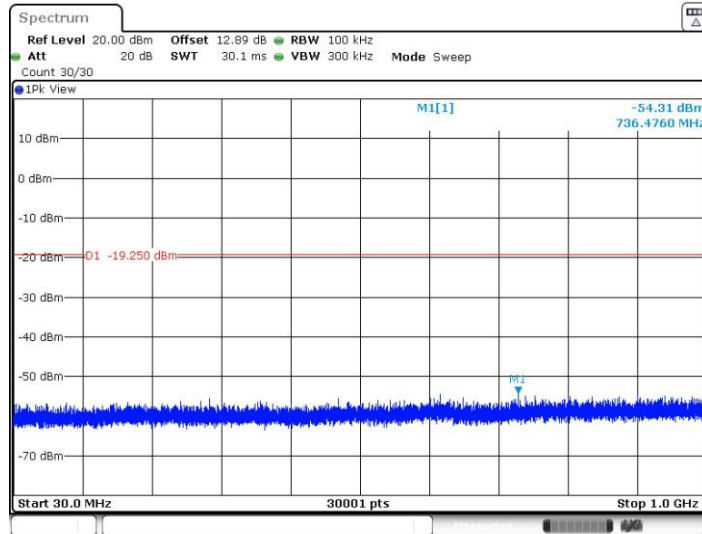


BLE_2M_Ant1_2402_1000~26500

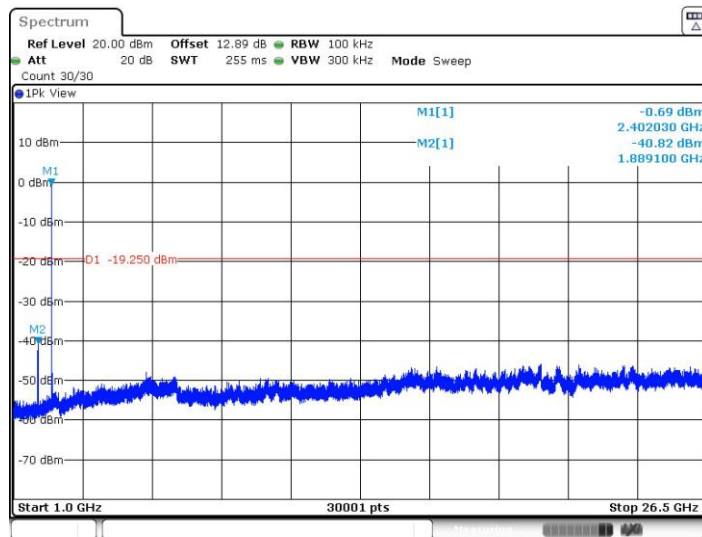




BLE_2M_Ant1_2440_30~1000

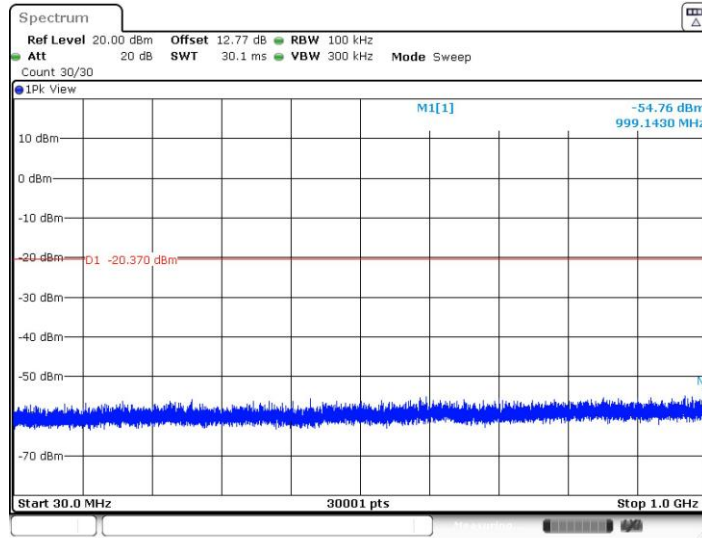

Date: 8.JUN.2022 01:11:08


BLE_2M_Ant1_2440_1000~26500

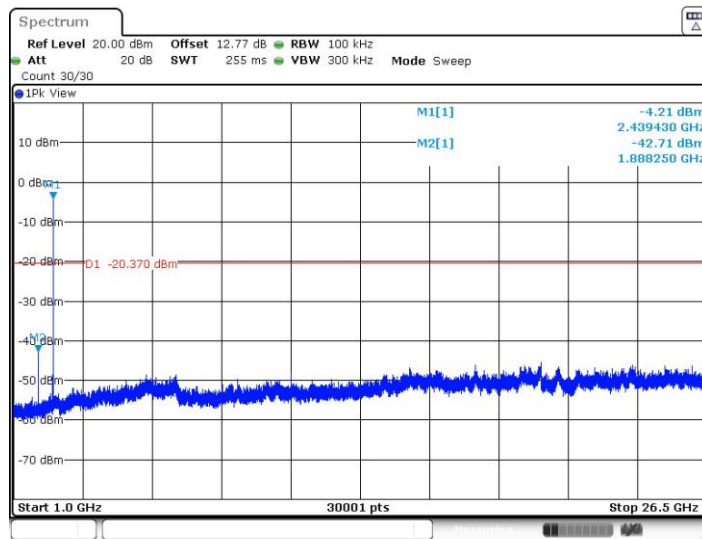

Date: 8.JUN.2022 01:11:45




BLE_2M_Ant1_2480_30~1000

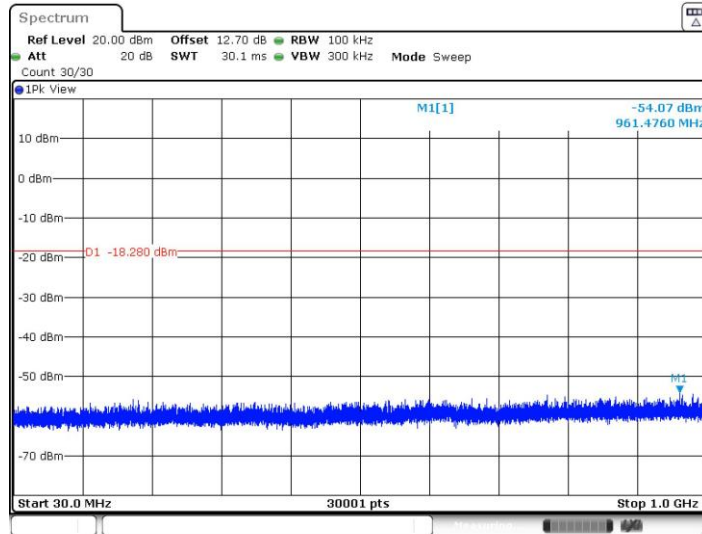

Date: 8 JUN. 2022 01:14:03

BLE_2M_Ant1_2480_1000~26500

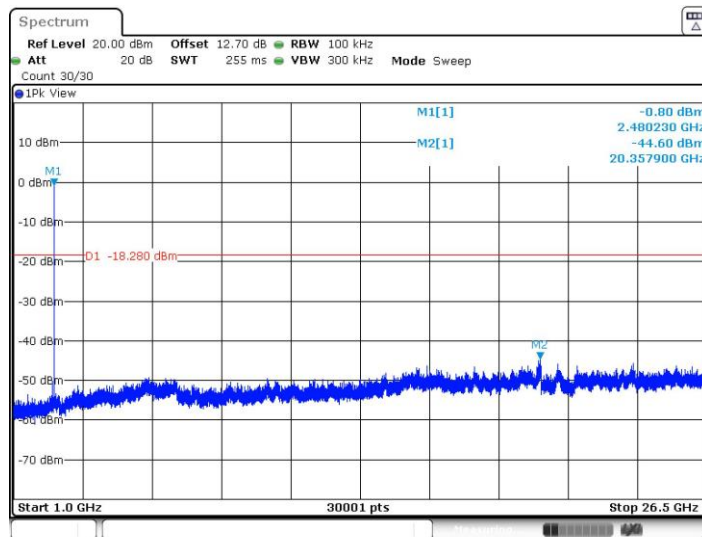

Date: 8 JUN. 2022 01:14:39



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

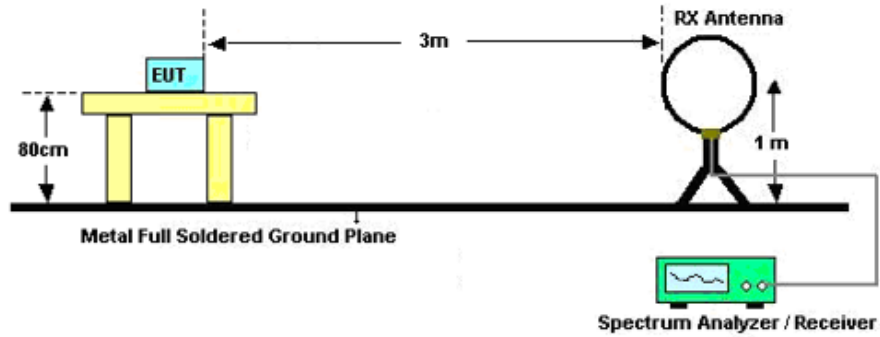

For radiated emissions from 30MHz to 1GHz

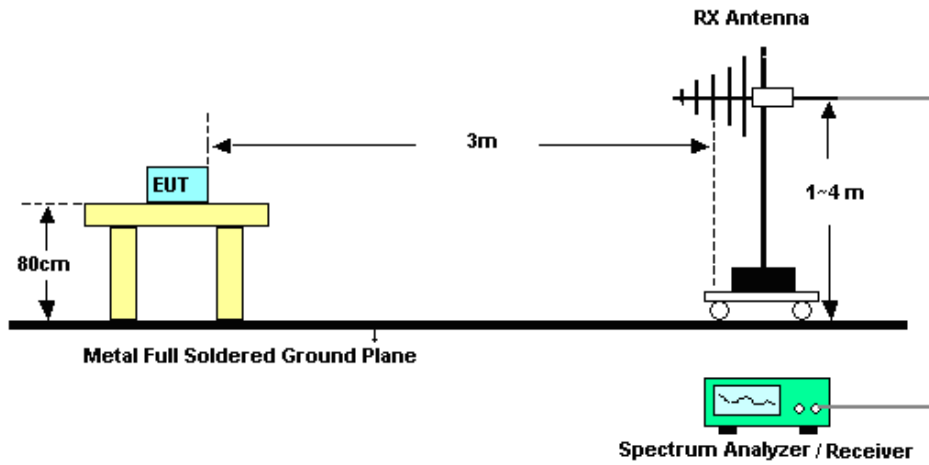

For radiated emissions above 1GHz

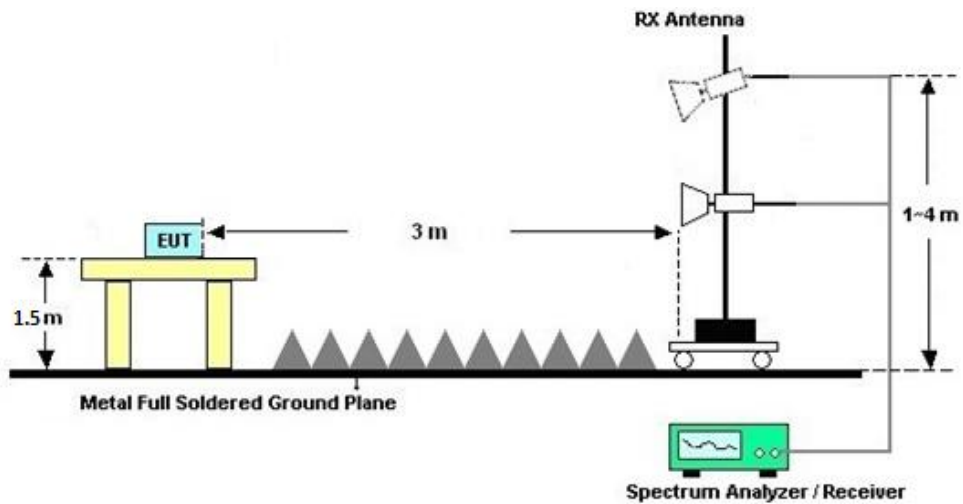



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B&C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix B&C.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

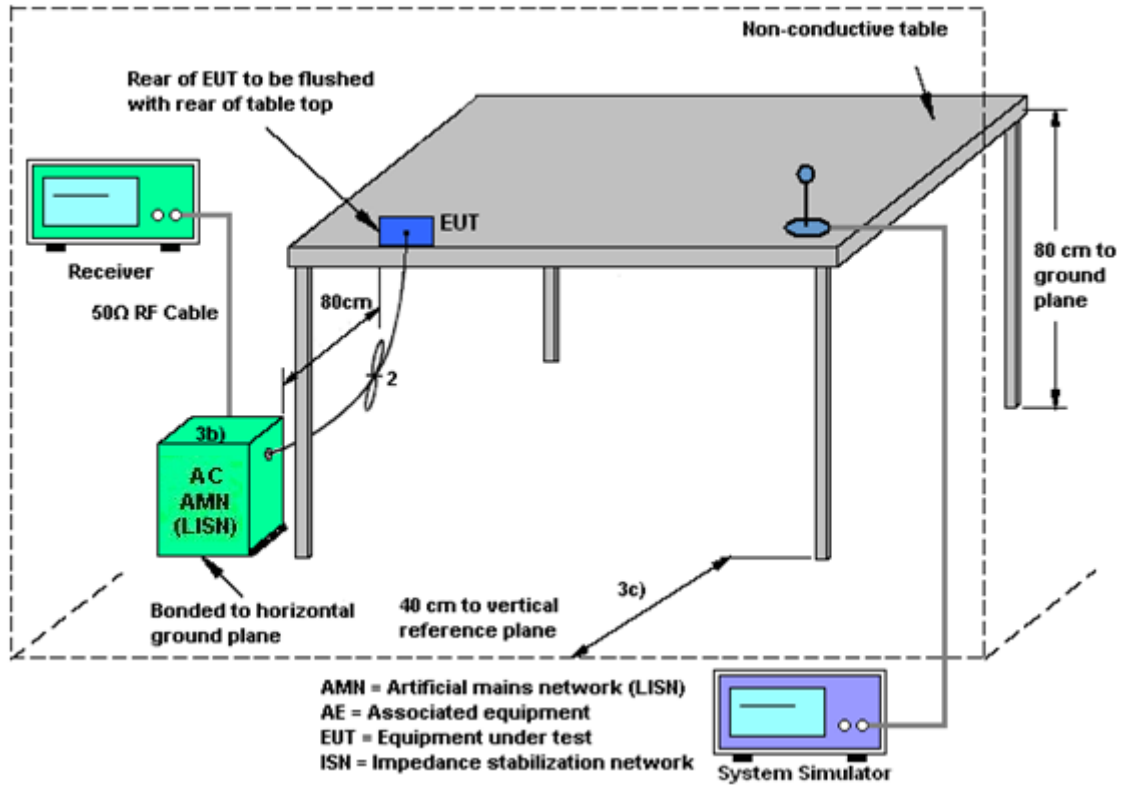

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Jun. 08, 2022	Oct. 13, 2022	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Jun. 08, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Jun. 08, 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 16, 2021	Jul. 17, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44G,MAX 30dB	Mar. 24, 2022	Jul. 17, 2022	Mar. 23, 2023	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Jul. 17, 2022	Oct. 29, 2022	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	Jun. 03, 2022	Jul. 17, 2022	Jun. 02, 2023	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 08, 2021	Jul. 17, 2022	Nov. 07, 2022	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Jul. 17, 2022	Jan. 04, 2023	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	380826	9KHz-1GHz	Jul. 11, 2022	Jul. 17, 2022	Jul. 10, 2023	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2022	Jul. 17, 2022	Jan. 04, 2023	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2012228	1Ghz-18Ghz	Oct. 16, 2021	Jul. 17, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 16, 2021	Jul. 17, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 17, 2022	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 17, 2022	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 17, 2022	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 20, 2022	Jul. 26, 2022	Apr. 19, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2021	Jul. 26, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 20, 2022	Jul. 26, 2022	Apr. 19, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2021	Jul. 26, 2022	Oct. 13, 2022	Conduction (CO01-KS)

NCR: No Calibration Required.



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.56 dB
Conducted Emissions	±0.92 dB
Occupied Channel Bandwidth	±0.03 %
Conducted Power Spectral Density	±0.54 dB

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)


Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

----- THE END -----



Appendix A. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

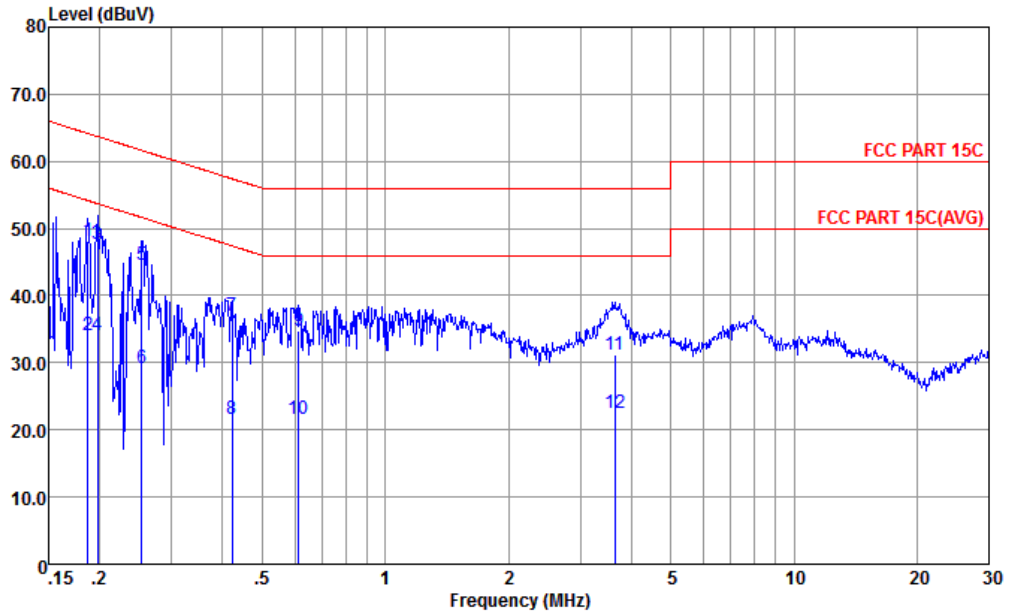


Site : CO01-KS
 Condition : FCC PART 15C LISN-060105-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.187	48.23	-15.92	64.15	37.80	0.04	10.39	QP
2	0.187	34.03	-20.12	54.15	23.60	0.04	10.39	Average
3	0.198	47.61	-16.10	63.71	37.20	0.04	10.37	QP
4	0.198	34.01	-19.70	53.71	23.60	0.04	10.37	Average
5	0.253	44.59	-17.05	61.64	34.20	0.06	10.33	QP
6	0.253	29.29	-22.35	51.64	18.90	0.06	10.33	Average
7	0.421	36.95	-20.47	57.42	26.60	0.09	10.26	QP
8	0.421	21.65	-25.77	47.42	11.30	0.09	10.26	Average
9	0.614	34.84	-21.16	56.00	24.49	0.11	10.24	QP
10	0.614	21.54	-24.46	46.00	11.19	0.11	10.24	Average
11	3.642	31.21	-24.79	56.00	20.80	0.16	10.25	QP
12	3.642	22.61	-23.39	46.00	12.20	0.16	10.25	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

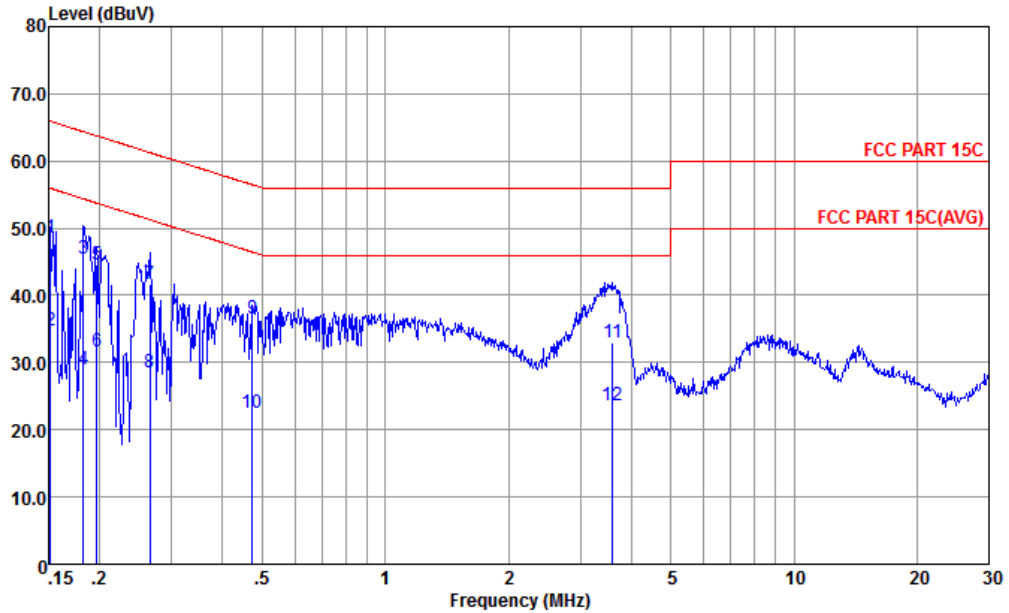

Site : CO01-KS
 Condition : FCC PART 15C LISN-060105-N NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.152	48.49	-17.42	65.91	37.90	0.11	10.48	QP
2	0.152	34.69	-21.22	55.91	24.10	0.11	10.48	Average
3	0.182	45.40	-18.97	64.37	34.90	0.10	10.40	QP
4	0.182	29.00	-25.37	54.37	18.50	0.10	10.40	Average
5	0.197	44.57	-19.19	63.76	34.10	0.10	10.37	QP
6	0.197	31.67	-22.09	53.76	21.20	0.10	10.37	Average
7	0.266	41.62	-19.63	61.25	31.20	0.10	10.32	QP
8	0.266	28.62	-22.63	51.25	18.20	0.10	10.32	Average
9	0.474	36.55	-19.90	56.45	26.20	0.11	10.24	QP
10	0.474	22.55	-23.90	46.45	12.20	0.11	10.24	Average
11	3.603	33.01	-22.99	56.00	22.60	0.16	10.25	QP
12	3.603	23.71	-22.29	46.00	13.30	0.16	10.25	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix B. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

BLE (1M) (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2332.36	48.41	-25.59	74	45.51	32.79	7.01	36.9	311	300	P	H
		2381.37	38.69	-15.31	54	35.6	32.86	7.1	36.87	311	300	A	H
	*	2402	99.41	-	-	96.26	32.88	7.13	36.86	311	300	P	H
	*	2402	97.73	-	-	94.58	32.88	7.13	36.86	311	300	A	H
		2312.99	48.09	-25.91	74	45.25	32.77	6.98	36.91	101	262	P	V
		2388.65	38.69	-15.31	54	35.57	32.88	7.1	36.86	101	262	A	V
	*	2402	98.38	-	-	95.23	32.88	7.13	36.86	101	262	P	V
	*	2402	97.07	-	-	93.92	32.88	7.13	36.86	101	262	A	V
BLE CH 19 2440MHz		2350.17	49.05	-24.95	74	46.09	32.81	7.04	36.89	376	231	P	H
		2377.73	39.14	-14.86	54	36.05	32.86	7.1	36.87	376	231	A	H
		2497.24	48.41	-25.59	74	44.94	33	7.28	36.81	376	231	P	H
		2485.6	39.37	-14.63	54	35.96	32.98	7.25	36.82	376	231	A	H
	*	2440	94.23	-	-	90.94	32.94	7.19	36.84	376	231	P	H
	*	2440	92.8	-	-	89.51	32.94	7.19	36.84	376	231	A	H
		2314.42	48.23	-25.77	74	45.39	32.77	6.98	36.91	100	275	P	V
		2363.04	39.06	-14.94	54	36.04	32.83	7.07	36.88	100	275	A	V
		2497.18	48.45	-25.55	74	44.98	33	7.28	36.81	100	275	P	V
		2490.04	39.39	-14.61	54	35.95	33	7.25	36.81	100	275	A	V
	*	2440	94.82	-	-	91.53	32.94	7.19	36.84	100	275	P	V
	*	2440	93.24	-	-	89.95	32.94	7.19	36.84	100	275	A	V



BLE CH 39 2480MHz		2483.62	49.02	-24.98	74	45.61	32.98	7.25	36.82	292	224	P	H
		2495.26	39.44	-14.56	54	35.97	33	7.28	36.81	292	224	A	H
	*	2480	97.64	-	-	94.23	32.98	7.25	36.82	292	224	P	H
	*	2480	96.06	-	-	92.65	32.98	7.25	36.82	292	224	A	H
		2494.9	48.74	-25.26	74	45.27	33	7.28	36.81	107	261	P	V
		2495.56	39.38	-14.62	54	35.91	33	7.28	36.81	107	261	A	V
	*	2480	97.75	-	-	94.34	32.98	7.25	36.82	107	261	P	V
	*	2480	96.62	-	-	93.21	32.98	7.25	36.82	107	261	A	V
Remark	<ol style="list-style-type: none"> 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 												



2.4GHz 2400~2483.5MHz
BLE (1M) (Harmonic @ 3m)

Table with 14 columns: BLE, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include BLE CH 00 2402MHz, BLE CH 19 2440MHz, BLE CH 39 2480MHz, and a Remark section.



2.4GHz 2400~2483.5MHz

BLE (2M) (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2380.33	48.81	-25.19	74	45.72	32.86	7.1	36.87	309	303	P	H
		2363.56	39.77	-14.23	54	36.75	32.83	7.07	36.88	309	303	A	H
	*	2402	99.66	-	-	96.51	32.88	7.13	36.86	309	303	P	H
	*	2402	97.17	-	-	94.02	32.88	7.13	36.86	309	303	A	H
		2361.22	48.96	-25.04	74	45.94	32.83	7.07	36.88	101	262	P	V
		2346.01	39.67	-14.33	54	36.71	32.81	7.04	36.89	101	262	A	V
	*	2402	99.26	-	-	96.11	32.88	7.13	36.86	101	262	P	V
	*	2402	96.5	-	-	93.35	32.88	7.13	36.86	101	262	A	V
BLE CH 19 2440MHz		2359.4	48.76	-25.24	74	45.74	32.83	7.07	36.88	270	305	P	H
		2385.27	39.82	-14.18	54	36.73	32.86	7.1	36.87	270	305	A	H
		2494.78	48.71	-25.29	74	45.24	33	7.28	36.81	270	305	P	H
		2485.48	40.42	-13.58	54	37.01	32.98	7.25	36.82	270	305	A	H
	*	2440	95.47	-	-	92.18	32.94	7.19	36.84	270	305	P	H
	*	2440	92.97	-	-	89.68	32.94	7.19	36.84	270	305	A	H
		2379.29	48.75	-25.25	74	45.66	32.86	7.1	36.87	112	259	P	V
		2386.83	39.93	-14.07	54	36.81	32.88	7.1	36.86	112	259	A	V
		2488.96	48.6	-25.4	74	45.16	33	7.25	36.81	112	259	P	V
		2491	40.37	-13.63	54	36.93	33	7.25	36.81	112	259	A	V
	*	2440	95.17	-	-	91.88	32.94	7.19	36.84	112	259	P	V
	*	2440	92.46	-	-	89.17	32.94	7.19	36.84	112	259	A	V



BLE CH 39 2480MHz		2498.68	48.54	-25.46	74	45.07	33	7.28	36.81	155	224	P	H
		2485.48	40.42	-13.58	54	37.01	32.98	7.25	36.82	155	224	A	H
	*	2480	98.25	-	-	94.84	32.98	7.25	36.82	155	224	P	H
	*	2480	95.5	-	-	92.09	32.98	7.25	36.82	155	224	A	H
	*	2499.1	48.77	-25.23	74	45.3	33	7.28	36.81	111	261	P	V
	*	2490.4	39.95	-14.05	54	36.51	33	7.25	36.81	111	261	A	V
		2480	97.91	-	-	94.5	32.98	7.25	36.82	111	261	P	V
		2480	95	-	-	91.59	32.98	7.25	36.82	111	261	A	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



2.4GHz 2400~2483.5MHz
BLE (2M) (Harmonic @ 3m)

Table with 14 columns: BLE, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include BLE CH 00 (2402MHz) and BLE CH 19 (2440MHz) and BLE CH 39 (2480MHz) with multiple frequency entries.

Remark

- 1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		55.22	19.03	-20.97	40	36.92	14.2	1.11	33.2	-	-	P	H
		149.31	22.94	-20.56	43.5	36.38	17.51	1.85	32.8	-	-	P	H
		252.13	26.72	-19.28	46	37.95	19.43	2.43	33.09	-	-	P	H
		561.56	29.82	-16.18	46	32.97	25.81	3.62	32.58	-	-	P	H
		732.28	28.39	-17.61	46	30.77	26.22	4.14	32.74	-	-	P	H
		830.25	30.3	-15.7	46	31.38	27.08	4.4	32.56	-	-	P	H
		69.77	23.27	-16.73	40	41.81	13.2	1.26	33	-	-	P	V
		183.26	29.52	-13.98	43.5	43.76	16.7	2.06	33	-	-	P	V
		256.01	30.24	-15.76	46	41.38	19.49	2.45	33.08	-	-	P	V
		424.79	27.05	-18.95	46	33.51	23.15	3.14	32.75	-	-	P	V
		558.65	29.24	-16.76	46	32.38	25.83	3.61	32.58	-	-	P	V
	719.67	29.87	-16.13	46	32.52	26.01	4.1	32.76	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots

Note symbol





-L	Low channel location
-R	High channel location







2.4GHz 2400~2483.5MHz
BLE(1M) (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
6	Horizontal	Fundamental
Peak	<pre> Site Condition : 030405-KS FCC PART 15C 3m 3317 SN 79957 HORIZONTAL RBW 1000.000kHz VBW 3000.000kHz SMT Auto Project : (FR)230405 Mode : F Plane : Y Full-directivity IMEI Freq Level Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas MHz dBuV/m dB dBuV/m dBuV dBm dBm dBm cm deg 1 2332.36 48.41 -25.59 74.00 45.51 32.79 7.01 36.90 311 300 Peak HORIZONTAL </pre>	<pre> Site Condition : 030405-KS FCC PART 15C 3m 3317 SN 79957 HORIZONTAL RBW 1000.000kHz VBW 3000.000kHz SMT Auto Project : (FR)230405 Mode : F Plane : Y Full-directivity IMEI Freq Level Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas MHz dBuV/m dB dBuV/m dBuV dBm dBm dBm cm deg 1 * 2402.00 99.41 25.41 74.00 96.26 32.88 7.13 36.86 311 300 Peak HORIZONTAL </pre>
Avg.	<pre> Site Condition : 030405-KS FCC PART 15C (AVG) 3m 3317 SN 79957 HORIZONTAL RBW 1000.000kHz VBW 2.700kHz SMT Auto Project : (FR)230405 Mode : F Plane : Y Full-directivity IMEI Freq Level Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas MHz dBuV/m dB dBuV/m dBuV dBm dBm dBm cm deg 1 2381.37 38.69 -15.31 54.00 35.60 32.86 7.10 36.87 311 300 Average HORIZONTAL </pre>	<pre> Site Condition : 030405-KS FCC PART 15C (AVG) 3m 3317 SN 79957 HORIZONTAL RBW 1000.000kHz VBW 2.700kHz SMT Auto Project : (FR)230405 Mode : F Plane : Y Full-directivity IMEI Freq Level Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas MHz dBuV/m dB dBuV/m dBuV dBm dBm dBm cm deg 1 * 2402.00 97.73 43.73 54.00 94.58 32.88 7.13 36.86 311 300 Average HORIZONTAL </pre>

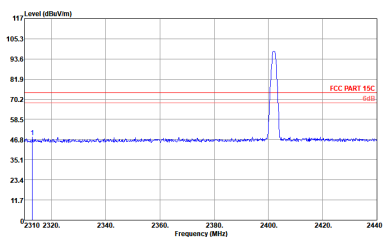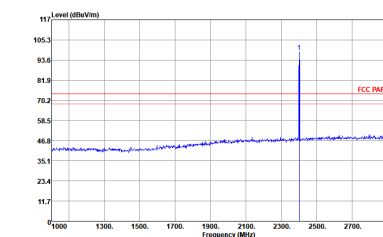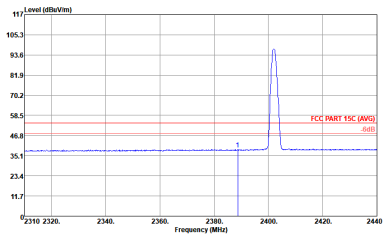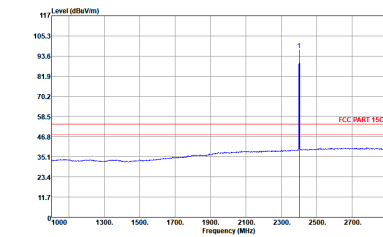

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																			
ANT	BLE CH00 2402MHz																																																																			
6	Vertical	Fundamental																																																																		
Peak	 <p>Site : 030M5-KS Condition : FCC PART 15C 3a 3317 SN 75957 VERTICAL Project : RSM 1000 000kHz VSW 3.000 000kHz SWT Auto Mode : 4 Plane : Y Full-directivity : IME1</p> <table border="1"> <thead> <tr> <th>IME1</th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>#14 Limit</th> <th>ReadAntenna Level</th> <th>Cable Preamp Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dB%</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2312.99</td> <td>48.09</td> <td>-25.91</td> <td>74.00</td> <td>45.25</td> <td>32.77</td> <td>6.98</td> <td>36.91</td> <td>101</td> <td>262 Peak VERTICAL</td> </tr> </tbody> </table>	IME1	Freq	Level	Over Limit	#14 Limit	ReadAntenna Level	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBμV/m	dB	dBμV/m	dBμV	dB%	dB	cm	deg		1	2312.99	48.09	-25.91	74.00	45.25	32.77	6.98	36.91	101	262 Peak VERTICAL	 <p>Site : 030M5-KS Condition : FCC PART 15C 3a 3317 SN 70957 VERTICAL Project : RSM 1000 000kHz VSW 3.000 000kHz SWT Auto Mode : 4 Plane : Y Full-directivity : IME1</p> <table border="1"> <thead> <tr> <th>IME1</th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>#14 Limit</th> <th>ReadAntenna Level</th> <th>Cable Preamp Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dB%</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>98.38</td> <td>24.38</td> <td>74.00</td> <td>95.23</td> <td>32.88</td> <td>7.13</td> <td>36.86</td> <td>101</td> <td>262 Peak VERTICAL</td> </tr> </tbody> </table>	IME1	Freq	Level	Over Limit	#14 Limit	ReadAntenna Level	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBμV/m	dB	dBμV/m	dBμV	dB%	dB	cm	deg		1	2402.00	98.38	24.38	74.00	95.23	32.88	7.13	36.86	101	262 Peak VERTICAL
	IME1	Freq	Level	Over Limit	#14 Limit	ReadAntenna Level	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
	MHz	dBμV/m	dB	dBμV/m	dBμV	dB%	dB	cm	deg																																																											
1	2312.99	48.09	-25.91	74.00	45.25	32.77	6.98	36.91	101	262 Peak VERTICAL																																																										
IME1	Freq	Level	Over Limit	#14 Limit	ReadAntenna Level	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																										
	MHz	dBμV/m	dB	dBμV/m	dBμV	dB%	dB	cm	deg																																																											
1	2402.00	98.38	24.38	74.00	95.23	32.88	7.13	36.86	101	262 Peak VERTICAL																																																										
Avg	 <p>Site : 030M5-KS Condition : FCC PART 15C (AVG) 3a 3317 SN 75957 VERTICAL Project : RSM 1000 000kHz VSW 3.700kHz SWT Auto Mode : 4 Plane : Y Full-directivity : IME1</p> <table border="1"> <thead> <tr> <th>IME1</th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>#14 Limit</th> <th>ReadAntenna Level</th> <th>Cable Preamp Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dB%</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.65</td> <td>38.69</td> <td>-15.31</td> <td>54.00</td> <td>35.57</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>101</td> <td>262 Average VERTICAL</td> </tr> </tbody> </table>	IME1	Freq	Level	Over Limit	#14 Limit	ReadAntenna Level	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBμV/m	dB	dBμV/m	dBμV	dB%	dB	cm	deg		1	2388.65	38.69	-15.31	54.00	35.57	32.88	7.10	36.86	101	262 Average VERTICAL	 <p>Site : 030M5-KS Condition : FCC PART 15C (AVG) 3a 3317 SN 70957 VERTICAL Project : RSM 1000 000kHz VSW 3.700kHz SWT Auto Mode : 4 Plane : Y Full-directivity : IME1</p> <table border="1"> <thead> <tr> <th>IME1</th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>#14 Limit</th> <th>ReadAntenna Level</th> <th>Cable Preamp Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dB%</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>97.07</td> <td>43.07</td> <td>54.00</td> <td>93.92</td> <td>32.88</td> <td>7.13</td> <td>36.86</td> <td>101</td> <td>262 Average VERTICAL</td> </tr> </tbody> </table>	IME1	Freq	Level	Over Limit	#14 Limit	ReadAntenna Level	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBμV/m	dB	dBμV/m	dBμV	dB%	dB	cm	deg		1	2402.00	97.07	43.07	54.00	93.92	32.88	7.13	36.86	101	262 Average VERTICAL
	IME1	Freq	Level	Over Limit	#14 Limit	ReadAntenna Level	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
	MHz	dBμV/m	dB	dBμV/m	dBμV	dB%	dB	cm	deg																																																											
1	2388.65	38.69	-15.31	54.00	35.57	32.88	7.10	36.86	101	262 Average VERTICAL																																																										
IME1	Freq	Level	Over Limit	#14 Limit	ReadAntenna Level	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																										
	MHz	dBμV/m	dB	dBμV/m	dBμV	dB%	dB	cm	deg																																																											
1	2402.00	97.07	43.07	54.00	93.92	32.88	7.13	36.86	101	262 Average VERTICAL																																																										

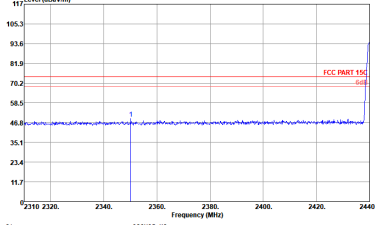
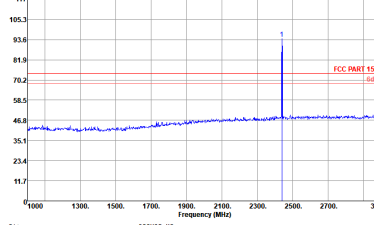
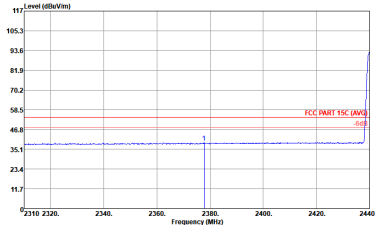
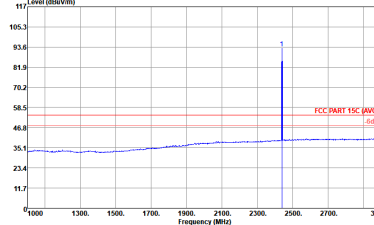


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																									
ANT	BLE CH19 2440MHz - L																																																																									
6	Horizontal	Fundamental																																																																								
Peak	 <p>Site Condition : 03D005-K5 FCC PART 15C 3e 3317 5N 70957 HORIZONTAL RSM 1000.000kHz VBR 3000.000kHz SWT Auto Project : FR230405 Mode : S Plane : Y</p> <p>Full-directivity IEI : #14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2350.17</td> <td>49.05</td> <td>-24.95</td> <td>74.00</td> <td>46.09</td> <td>32.81</td> <td>7.04</td> <td>36.89</td> <td>376</td> <td>231 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Line	Level Factor	Loss Factor					dB	dB	dB	dB	cm	deg			1	2350.17	49.05	-24.95	74.00	46.09	32.81	7.04	36.89	376	231 Peak	HORIZONTAL	 <p>Site Condition : 03D005-K5 FCC PART 15C 3e 3317 5N 70957 HORIZONTAL RSM 1000.000kHz VBR 3000.000kHz SWT Auto Project : FR230405 Mode : S Plane : Y</p> <p>Full-directivity IEI : #14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2440.00</td> <td>94.23</td> <td>20.23</td> <td>74.00</td> <td>90.94</td> <td>32.94</td> <td>7.19</td> <td>36.84</td> <td>376</td> <td>231 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Line	Level Factor	Loss Factor					dB	dB	dB	dB	cm	deg			1	2440.00	94.23	20.23	74.00	90.94	32.94	7.19	36.84	376	231 Peak	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																			
Level	Line	Level Factor	Loss Factor																																																																							
dB	dB	dB	dB	cm	deg																																																																					
1	2350.17	49.05	-24.95	74.00	46.09	32.81	7.04	36.89	376	231 Peak	HORIZONTAL																																																															
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																			
Level	Line	Level Factor	Loss Factor																																																																							
dB	dB	dB	dB	cm	deg																																																																					
1	2440.00	94.23	20.23	74.00	90.94	32.94	7.19	36.84	376	231 Peak	HORIZONTAL																																																															
Avg.	 <p>Site Condition : 03D005-K5 FCC PART 15C (AVG) 3e 3317 5N 70957 HORIZONTAL RSM 1000.000kHz VBR 2.7000kHz SWT Auto Project : FR230405 Mode : S Plane : Y</p> <p>Full-directivity IEI : #14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2377.73</td> <td>39.14</td> <td>-14.86</td> <td>54.00</td> <td>36.05</td> <td>32.86</td> <td>7.10</td> <td>36.87</td> <td>376</td> <td>231 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Line	Level Factor	Loss Factor					dB	dB	dB	dB	cm	deg			1	2377.73	39.14	-14.86	54.00	36.05	32.86	7.10	36.87	376	231 Average	HORIZONTAL	 <p>Site Condition : 03D005-K5 FCC PART 15C (AVG) 3e 3317 5N 70957 HORIZONTAL RSM 1000.000kHz VBR 2.7000kHz SWT Auto Project : FR230405 Mode : S Plane : Y</p> <p>Full-directivity IEI : #14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2440.00</td> <td>92.80</td> <td>38.80</td> <td>54.00</td> <td>89.51</td> <td>32.94</td> <td>7.19</td> <td>36.84</td> <td>376</td> <td>231 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Line	Level Factor	Loss Factor					dB	dB	dB	dB	cm	deg			1	2440.00	92.80	38.80	54.00	89.51	32.94	7.19	36.84	376	231 Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																			
Level	Line	Level Factor	Loss Factor																																																																							
dB	dB	dB	dB	cm	deg																																																																					
1	2377.73	39.14	-14.86	54.00	36.05	32.86	7.10	36.87	376	231 Average	HORIZONTAL																																																															
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																			
Level	Line	Level Factor	Loss Factor																																																																							
dB	dB	dB	dB	cm	deg																																																																					
1	2440.00	92.80	38.80	54.00	89.51	32.94	7.19	36.84	376	231 Average	HORIZONTAL																																																															



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
6	Horizontal	Fundamental
Peak	<pre> Site : 032005-KS Condition : FCC PART 15C 3e 3317 SN 70957 HORIZONTAL Project : RSR 1000 000KHz VSW 3000 000KHz SRT-Auto Mode : S Plane : Y Full-directivity IME1 : #14 Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas Freq Level Limit Lim Level Factor Loss Factor --- deg 1 2497.24 48.41 -25.59 74.00 44.94 33.00 7.28 36.81 376 231 Peak HORIZONTAL </pre>	Left blank
Avg.	<pre> Site : 032005-KC Condition : FCC PART 15C (AVG) 3e 3317 SN 70957 HORIZONTAL Project : RSR 1000 000KHz VSW 2.700000 SRT-Auto Mode : C Plane : Y Full-directivity IME1 : #14 Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas Freq Level Limit Lim Level Factor Loss Factor --- deg 1 2485.00 39.37 -14.63 54.00 35.96 32.98 7.25 36.82 376 231 Average HORIZONTAL </pre>	Left blank

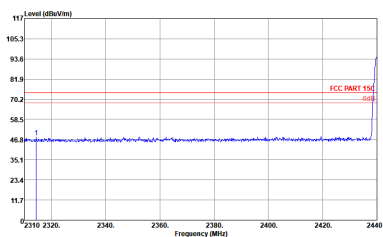
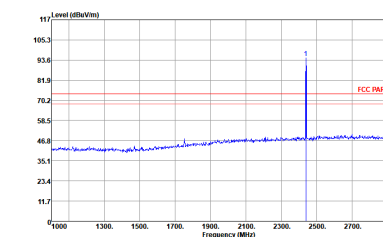
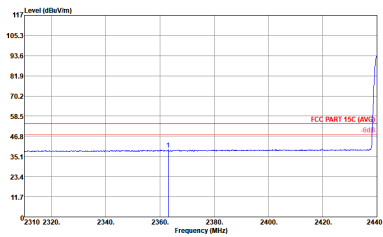
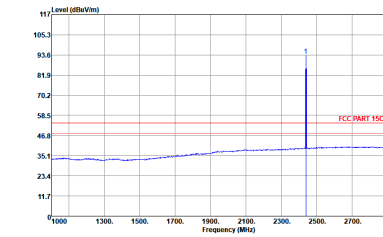


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																	
ANT	BLE CH19 2440MHz - L																																																																	
6	Vertical	Fundamental																																																																
Peak	 <p>Site : 030M5-KS Condition : FCC PART 15C 3e 3317 SN 75957 VERTICAL Project : RSM 1000 000KHz VSW 3000 000KHz SWT Auto FR2230405 Mode : S Plane : Y</p> <p>Full-directivity IME1</p> <table border="1"> <thead> <tr> <th>IME1</th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>ReadAntenna Line</th> <th>Cable Preamp Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBm</th> <th></th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2314.42</td> <td>48.13</td> <td>-25.77</td> <td>74.00</td> <td>45.39</td> <td>32.77</td> <td>6.98</td> <td>36.91</td> <td>100</td> <td>275 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	IME1	Freq	Level	Over Limit	ReadAntenna Line	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBm		dB	dB	cm	deg			1	2314.42	48.13	-25.77	74.00	45.39	32.77	6.98	36.91	100	275 Peak	VERTICAL	 <p>Site : 030M5-KS Condition : FCC PART 15C 3e 3317 SN 75957 VERTICAL Project : RSM 1000 000KHz VSW 3000 000KHz SWT Auto FR2230405 Mode : S Plane : Y</p> <p>Full-directivity IME1</p> <table border="1"> <thead> <tr> <th>IME1</th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>ReadAntenna Line</th> <th>Cable Preamp Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBm</th> <th></th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2440.00</td> <td>94.82</td> <td>20.82</td> <td>74.00</td> <td>91.53</td> <td>32.94</td> <td>7.19</td> <td>36.84</td> <td>100</td> <td>275 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	IME1	Freq	Level	Over Limit	ReadAntenna Line	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBm		dB	dB	cm	deg			1	2440.00	94.82	20.82	74.00	91.53	32.94	7.19	36.84	100	275 Peak	VERTICAL
IME1	Freq	Level	Over Limit	ReadAntenna Line	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
	MHz	dBm		dB	dB	cm	deg																																																											
1	2314.42	48.13	-25.77	74.00	45.39	32.77	6.98	36.91	100	275 Peak	VERTICAL																																																							
IME1	Freq	Level	Over Limit	ReadAntenna Line	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
	MHz	dBm		dB	dB	cm	deg																																																											
1	2440.00	94.82	20.82	74.00	91.53	32.94	7.19	36.84	100	275 Peak	VERTICAL																																																							
Avg.	 <p>Site : 030M5-KS Condition : FCC PART 15C (AVG) 3e 3317 SN 75957 VERTICAL Project : RSM 1000 000KHz VSW 3.700KHz SWT Auto FR2230405 Mode : S Plane : Y</p> <p>Full-directivity IME1</p> <table border="1"> <thead> <tr> <th>IME1</th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>ReadAntenna Line</th> <th>Cable Preamp Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBm</th> <th></th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2363.04</td> <td>39.06</td> <td>-14.94</td> <td>54.00</td> <td>36.04</td> <td>32.83</td> <td>7.07</td> <td>36.88</td> <td>100</td> <td>275 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	IME1	Freq	Level	Over Limit	ReadAntenna Line	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBm		dB	dB	cm	deg			1	2363.04	39.06	-14.94	54.00	36.04	32.83	7.07	36.88	100	275 Average	VERTICAL	 <p>Site : 030M5-KS Condition : FCC PART 15C (AVG) 3e 3317 SN 75957 VERTICAL Project : RSM 1000 000KHz VSW 3.700KHz SWT Auto FR2230405 Mode : S Plane : Y</p> <p>Full-directivity IME1</p> <table border="1"> <thead> <tr> <th>IME1</th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>ReadAntenna Line</th> <th>Cable Preamp Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBm</th> <th></th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2440.00</td> <td>93.24</td> <td>39.24</td> <td>54.00</td> <td>89.95</td> <td>32.94</td> <td>7.19</td> <td>36.84</td> <td>100</td> <td>275 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	IME1	Freq	Level	Over Limit	ReadAntenna Line	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBm		dB	dB	cm	deg			1	2440.00	93.24	39.24	54.00	89.95	32.94	7.19	36.84	100	275 Average	VERTICAL
IME1	Freq	Level	Over Limit	ReadAntenna Line	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
	MHz	dBm		dB	dB	cm	deg																																																											
1	2363.04	39.06	-14.94	54.00	36.04	32.83	7.07	36.88	100	275 Average	VERTICAL																																																							
IME1	Freq	Level	Over Limit	ReadAntenna Line	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
	MHz	dBm		dB	dB	cm	deg																																																											
1	2440.00	93.24	39.24	54.00	89.95	32.94	7.19	36.84	100	275 Average	VERTICAL																																																							



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																	
ANT	BLE CH19 2440MHz - R																																	
6	Vertical	Fundamental																																
Peak	<p>Site : 03065-KS Condition : FCC PART 15C 3e 3317.0N 70597 VERTICAL Project : RSM 1000 000KHU VSM 3000 000KHU SMT.Auto Mode : Q Plane : Y Full-directivity : Y</p> <table border="1"> <thead> <tr> <th>IME1</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Poa</th> <th>T/Poa</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2497.18</td> <td>48.45</td> <td>-25.55</td> <td>74.00</td> <td>44.98</td> <td>33.00</td> <td>7.28</td> <td>36.81</td> <td>100</td> <td>275 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	IME1	Line	Level	Factor	Loss	Factor	A/Poa	T/Poa	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	2497.18	48.45	-25.55	74.00	44.98	33.00	7.28	36.81	100	275 Peak	VERTICAL	Left blank
IME1	Line	Level	Factor	Loss	Factor	A/Poa	T/Poa	Remark	Pol/Phas																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																											
1	2497.18	48.45	-25.55	74.00	44.98	33.00	7.28	36.81	100	275 Peak	VERTICAL																							
Avg.	<p>Site : 03065-KS Condition : FCC PART 15C (AVG) 3e 3317.0N 70597 VERTICAL Project : RSM 1000 000KHU VSM 3000 000KHU SMT.Auto Mode : Q Plane : Y Full-directivity : Y</p> <table border="1"> <thead> <tr> <th>IME1</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Poa</th> <th>T/Poa</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2490.04</td> <td>39.39</td> <td>-14.61</td> <td>54.00</td> <td>35.95</td> <td>33.00</td> <td>7.25</td> <td>36.81</td> <td>100</td> <td>275 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	IME1	Line	Level	Factor	Loss	Factor	A/Poa	T/Poa	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	2490.04	39.39	-14.61	54.00	35.95	33.00	7.25	36.81	100	275 Average	VERTICAL	Left blank
IME1	Line	Level	Factor	Loss	Factor	A/Poa	T/Poa	Remark	Pol/Phas																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																											
1	2490.04	39.39	-14.61	54.00	35.95	33.00	7.25	36.81	100	275 Average	VERTICAL																							

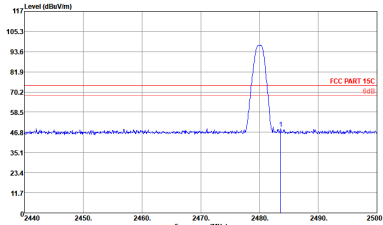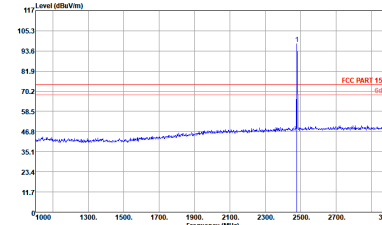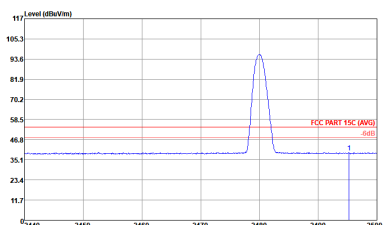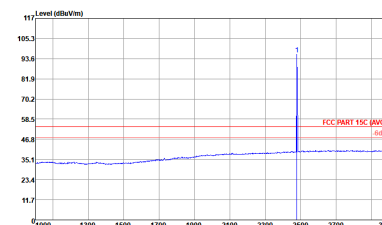

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																								
ANT	BLE CH39 2480MHz																																																																								
6	Horizontal	Fundamental																																																																							
<p>Pe ak</p>  <p>Site Condition : 032005-KS FCC PART 15C 3e 3317.5N 75957 HORIZONTAL RSM 1000.000kHz VSW 3.000 SWR:Auto Project : FR230405 Mode : 0 Plane : Y Full-directivity : #14 IE1</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.02</td> <td>49.02</td> <td>-14.98</td> <td>74.00</td> <td>45.61</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>292</td> <td>224 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	MEI	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg			1	2483.02	49.02	-14.98	74.00	45.61	32.98	7.25	36.82	292	224 Peak	HORIZONTAL	 <p>Site Condition : 032005-KS FCC PART 15C 3e 3317.5N 75957 HORIZONTAL RSM 1000.000kHz VSW 3.000 SWR:Auto Project : FR230405 Mode : 0 Plane : Y Full-directivity : #14 IE1</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2480.00</td> <td>97.64</td> <td>23.64</td> <td>74.00</td> <td>94.23</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>292</td> <td>224 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	MEI	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg			1 *	2480.00	97.64	23.64	74.00	94.23	32.98	7.25	36.82	292	224 Peak	HORIZONTAL
MEI	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																														
	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg																																																																
1	2483.02	49.02	-14.98	74.00	45.61	32.98	7.25	36.82	292	224 Peak	HORIZONTAL																																																														
MEI	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																														
	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg																																																																
1 *	2480.00	97.64	23.64	74.00	94.23	32.98	7.25	36.82	292	224 Peak	HORIZONTAL																																																														
<p>Avg .</p>  <p>Site Condition : 032005-KS FCC PART 15C (AVG) 3e 3317.5N 75957 HORIZONTAL RSM 1000.000kHz VSW 3.700 SWR:Auto Project : FR230405 Mode : 0 Plane : Y Full-directivity : #14 IE1</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2495.26</td> <td>39.44</td> <td>-14.56</td> <td>54.00</td> <td>35.97</td> <td>33.00</td> <td>7.28</td> <td>36.81</td> <td>292</td> <td>224 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	MEI	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg			1	2495.26	39.44	-14.56	54.00	35.97	33.00	7.28	36.81	292	224 Average	HORIZONTAL	 <p>Site Condition : 032005-KS FCC PART 15C (AVG) 3e 3317.5N 75957 HORIZONTAL RSM 1000.000kHz VSW 3.700 SWR:Auto Project : FR230405 Mode : 0 Plane : Y Full-directivity : #14 IE1</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2480.00</td> <td>96.06</td> <td>42.06</td> <td>54.00</td> <td>92.65</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>292</td> <td>224 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	MEI	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg			1 *	2480.00	96.06	42.06	54.00	92.65	32.98	7.25	36.82	292	224 Average	HORIZONTAL
MEI	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																														
	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg																																																																
1	2495.26	39.44	-14.56	54.00	35.97	33.00	7.28	36.81	292	224 Average	HORIZONTAL																																																														
MEI	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																														
	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg																																																																
1 *	2480.00	96.06	42.06	54.00	92.65	32.98	7.25	36.82	292	224 Average	HORIZONTAL																																																														



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																															
ANT	BLE CH39 2480MHz																																																																															
6	Vertical	Fundamental																																																																														
Peak	<p>Site Condition : 030605-KS Condition : FCC PART 15C 3m 3317 SN 70907 VERTICAL Project : RSM 1000 000KHz VSW 3000 000KHz SWT Auto Mode : 0 Plane : Y Full-directivity : Y MEI :</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>Line</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Poa</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2494.90</td> <td>48.14</td> <td>-25.26</td> <td>74.00</td> <td>45.27</td> <td>33.00</td> <td>7.28</td> <td>36.81</td> <td>107</td> <td>261</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	MEI	Freq	Level	Over	Limit	Line	ReadAntenna	Cable	Preamp	A/Poa	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	dB	cn	deg		1	2494.90	48.14	-25.26	74.00	45.27	33.00	7.28	36.81	107	261	Peak	VERTICAL	<p>Site Condition : 030605-KS Condition : FCC PART 15C 3m 3317 SN 70907 VERTICAL Project : RSM 1000 000KHz VSW 3000 000KHz SWT Auto Mode : 0 Plane : Y Full-directivity : Y MEI :</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>Line</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Poa</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>97.75</td> <td>23.75</td> <td>74.00</td> <td>94.34</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>107</td> <td>261</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	MEI	Freq	Level	Over	Limit	Line	ReadAntenna	Cable	Preamp	A/Poa	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	dB	cn	deg		1	2480.00	97.75	23.75	74.00	94.34	32.98	7.25	36.82	107	261	Peak	VERTICAL
MEI	Freq	Level	Over	Limit	Line	ReadAntenna	Cable	Preamp	A/Poa	T/Pos	Remark	Pol/Phas																																																																				
	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	dB	cn	deg																																																																					
1	2494.90	48.14	-25.26	74.00	45.27	33.00	7.28	36.81	107	261	Peak	VERTICAL																																																																				
MEI	Freq	Level	Over	Limit	Line	ReadAntenna	Cable	Preamp	A/Poa	T/Pos	Remark	Pol/Phas																																																																				
	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	dB	cn	deg																																																																					
1	2480.00	97.75	23.75	74.00	94.34	32.98	7.25	36.82	107	261	Peak	VERTICAL																																																																				
Av g.	<p>Site Condition : 030605-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 70907 VERTICAL Project : RSM 1000 000KHz VSW 3.7000KHz SWT Auto Mode : 0 Plane : Y Full-directivity : Y MEI :</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>Line</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Poa</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2495.56</td> <td>39.38</td> <td>-14.62</td> <td>54.00</td> <td>35.91</td> <td>33.00</td> <td>7.28</td> <td>36.81</td> <td>107</td> <td>261</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	MEI	Freq	Level	Over	Limit	Line	ReadAntenna	Cable	Preamp	A/Poa	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	dB	cn	deg		1	2495.56	39.38	-14.62	54.00	35.91	33.00	7.28	36.81	107	261	Average	VERTICAL	<p>Site Condition : 030605-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 70907 VERTICAL Project : RSM 1000 000KHz VSW 3.7000KHz SWT Auto Mode : 0 Plane : Y Full-directivity : Y MEI :</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>Line</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Poa</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>96.62</td> <td>42.62</td> <td>54.00</td> <td>93.21</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>107</td> <td>261</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	MEI	Freq	Level	Over	Limit	Line	ReadAntenna	Cable	Preamp	A/Poa	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	dB	cn	deg		1	2480.00	96.62	42.62	54.00	93.21	32.98	7.25	36.82	107	261	Average	VERTICAL
MEI	Freq	Level	Over	Limit	Line	ReadAntenna	Cable	Preamp	A/Poa	T/Pos	Remark	Pol/Phas																																																																				
	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	dB	cn	deg																																																																					
1	2495.56	39.38	-14.62	54.00	35.91	33.00	7.28	36.81	107	261	Average	VERTICAL																																																																				
MEI	Freq	Level	Over	Limit	Line	ReadAntenna	Cable	Preamp	A/Poa	T/Pos	Remark	Pol/Phas																																																																				
	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	dB	cn	deg																																																																					
1	2480.00	96.62	42.62	54.00	93.21	32.98	7.25	36.82	107	261	Average	VERTICAL																																																																				



2.4GHz 2400~2483.5MHz
BLE(1M) (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH00 2402MHz	
6	Horizontal	Vertical
Peak Avg.	<pre> Site : 030405-KS Condition : FCC PART 15C 3m 3317.5M 70957 HORIZONTAL Project : RW 1000.000MHz VSW 3000.000MHz SWT Auto Modem : J Plane : Y Full-directivity IMEI : #14 Freq Level Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas MHz dBuV/m dB dBuV/m dBuV dBm dBm cm deg 1 4800.00 39.58 -34.42 74.00 60.56 34.19 10.20 65.37 300 0 Peak HORIZONTAL </pre>	<pre> Site : 030405-KS Condition : FCC PART 15C 3m 3317.5M 70957 VERTICAL Project : RW 1000.000MHz VSW 3000.000MHz SWT Auto Modem : J Plane : Y Full-directivity IMEI : #14 Freq Level Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas MHz dBuV/m dB dBuV/m dBuV dBm dBm cm deg 1 4800.00 40.32 -33.68 74.00 61.30 34.19 10.20 65.37 100 0 Peak VERTICAL </pre>







BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																	
ANT	BLE CH19 2440MHz																																																																																																	
6	Horizontal	Vertical																																																																																																
Peak Avg.	<p>Site : 032605-K5 Condition : FCC PART 15C 3m 2417.5M 75007 HORIZONTAL Project : RSM 1000 000KHz VSWR 3000 000KHz SWT:Auto Mode : S Plane : 0 Full-directivity : Y</p> <table border="1"> <thead> <tr> <th>IME1</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>cm</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4875.00</td> <td>39.77</td> <td>-34.28</td> <td>74.00</td> <td>40.62</td> <td>34.23</td> <td>10.29</td> <td>45.42</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>42.42</td> <td>-31.58</td> <td>74.00</td> <td>59.79</td> <td>35.87</td> <td>12.72</td> <td>65.96</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	IME1	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	cm			1	4875.00	39.77	-34.28	74.00	40.62	34.23	10.29	45.42	300	0 Peak	HORIZONTAL	2	7320.00	42.42	-31.58	74.00	59.79	35.87	12.72	65.96	300	0 Peak	HORIZONTAL	<p>Site : 032605-K5 Condition : FCC PART 15C 3m 2417.5M 75007 VERTICAL Project : RSM 1000 000KHz VSWR 3000 000KHz SWT:Auto Mode : S Plane : 0 Full-directivity : Y</p> <table border="1"> <thead> <tr> <th>IME1</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>cm</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4875.00</td> <td>40.48</td> <td>-33.54</td> <td>74.00</td> <td>61.38</td> <td>34.23</td> <td>10.29</td> <td>45.42</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>42.38</td> <td>-31.62</td> <td>74.00</td> <td>59.79</td> <td>35.87</td> <td>12.72</td> <td>65.96</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	IME1	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	cm			1	4875.00	40.48	-33.54	74.00	61.38	34.23	10.29	45.42	100	0 Peak	VERTICAL	2	7320.00	42.38	-31.62	74.00	59.79	35.87	12.72	65.96	100	0 Peak	VERTICAL
	IME1	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																						
	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	cm																																																																																									
1	4875.00	39.77	-34.28	74.00	40.62	34.23	10.29	45.42	300	0 Peak	HORIZONTAL																																																																																							
2	7320.00	42.42	-31.58	74.00	59.79	35.87	12.72	65.96	300	0 Peak	HORIZONTAL																																																																																							
IME1	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																							
	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	cm																																																																																									
1	4875.00	40.48	-33.54	74.00	61.38	34.23	10.29	45.42	100	0 Peak	VERTICAL																																																																																							
2	7320.00	42.38	-31.62	74.00	59.79	35.87	12.72	65.96	100	0 Peak	VERTICAL																																																																																							







BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																					
ANT	BLE CH39 2480MHz																																																																																					
6	Horizontal	Vertical																																																																																				
Peak	<p>Site : 03DH05-KS Condition : FCC PART 15C 3e 3317.58 75957 HORIZONTAL Project : RSM 1000 000KHz VSW 3000 000KHz SWT Auto Mode : 0 Plane : Y Full-directivity : #14 MEI</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Poa</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Level</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4965.00</td> <td>41.11</td> <td>-32.89</td> <td>74.00</td> <td>41.89</td> <td>34.28</td> <td>10.41</td> <td>65.47</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>42.88</td> <td>-31.12</td> <td>74.00</td> <td>40.51</td> <td>35.89</td> <td>12.79</td> <td>66.31</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Poa	T/Pos	Remark	Pol/Phas	Level	Level	Level	Loss	Factor	Factor	dB	dB	dB	1	4965.00	41.11	-32.89	74.00	41.89	34.28	10.41	65.47	300	0 Peak	HORIZONTAL	2	7440.00	42.88	-31.12	74.00	40.51	35.89	12.79	66.31	300	0 Peak	HORIZONTAL	<p>Site : 03DH05-KS Condition : FCC PART 15C 3e 3317.58 75957 VERTICAL Project : RSM 1000 000KHz VSW 3000 000KHz SWT Auto Mode : 0 Plane : Y Full-directivity : #14 MEI</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Poa</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Level</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4965.00</td> <td>41.03</td> <td>-33.08</td> <td>74.00</td> <td>41.80</td> <td>34.28</td> <td>10.41</td> <td>65.47</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>41.99</td> <td>-32.01</td> <td>74.00</td> <td>59.82</td> <td>35.89</td> <td>12.79</td> <td>66.31</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Poa	T/Pos	Remark	Pol/Phas	Level	Level	Level	Loss	Factor	Factor	dB	dB	dB	1	4965.00	41.03	-33.08	74.00	41.80	34.28	10.41	65.47	100	0 Peak	VERTICAL	2	7440.00	41.99	-32.01	74.00	59.82	35.89	12.79	66.31	100	0 Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Poa	T/Pos	Remark	Pol/Phas																																																																													
Level	Level	Level	Loss	Factor	Factor	dB	dB	dB																																																																														
1	4965.00	41.11	-32.89	74.00	41.89	34.28	10.41	65.47	300	0 Peak	HORIZONTAL																																																																											
2	7440.00	42.88	-31.12	74.00	40.51	35.89	12.79	66.31	300	0 Peak	HORIZONTAL																																																																											
Over	Limit	ReadAntenna	Cable	Preamp	A/Poa	T/Pos	Remark	Pol/Phas																																																																														
Level	Level	Level	Loss	Factor	Factor	dB	dB	dB																																																																														
1	4965.00	41.03	-33.08	74.00	41.80	34.28	10.41	65.47	100	0 Peak	VERTICAL																																																																											
2	7440.00	41.99	-32.01	74.00	59.82	35.89	12.79	66.31	100	0 Peak	VERTICAL																																																																											







2.4GHz 2400~2483.5MHz
BLE(2M) (Band Edge @ 3m)

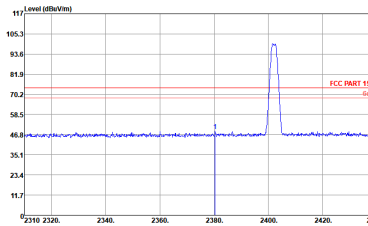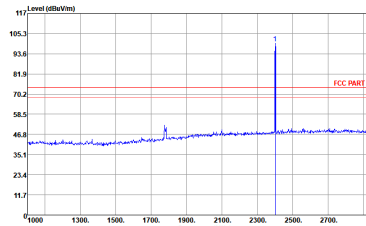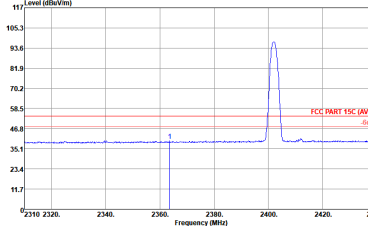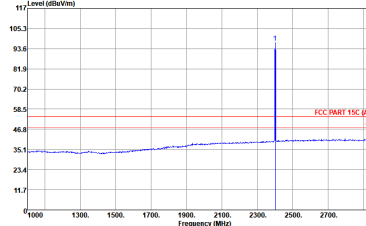BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																			
ANT	BLE CH00 2402MHz																																																																			
6	Horizontal	Fundamental																																																																		
<p>Peak</p>	 <p>Site Condition : 030805-KS FCC PART 15C 3e 3317 SN 79957 HORIZONTAL RFR 1000.000MHz VWR 3000.000Hz SWT Auto Project (FR) 230405 Mode Y Plane Y Full-directivity IME1</p> <table border="1"> <thead> <tr> <th>IME1</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2380.33</td> <td>48.81</td> <td>-25.19</td> <td>74.00</td> <td>45.72</td> <td>32.86</td> <td>7.10</td> <td>36.87</td> <td>309</td> <td>303 Peak HORIZONTAL</td> </tr> </tbody> </table>	IME1	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg		1	2380.33	48.81	-25.19	74.00	45.72	32.86	7.10	36.87	309	303 Peak HORIZONTAL	 <p>Site Condition : 030805-KS FCC PART 15C 3e 3317 SN 79957 HORIZONTAL RFR 1000.000MHz VWR 3000.000Hz SWT Auto Project (FR) 230405 Mode Y Plane Y Full-directivity IME1</p> <table border="1"> <thead> <tr> <th>IME1</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>99.66</td> <td>25.66</td> <td>74.00</td> <td>96.51</td> <td>32.88</td> <td>7.13</td> <td>36.86</td> <td>309</td> <td>303 Peak HORIZONTAL</td> </tr> </tbody> </table>	IME1	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg		1	2402.00	99.66	25.66	74.00	96.51	32.88	7.13	36.86	309	303 Peak HORIZONTAL
IME1	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																											
1	2380.33	48.81	-25.19	74.00	45.72	32.86	7.10	36.87	309	303 Peak HORIZONTAL																																																										
IME1	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																											
1	2402.00	99.66	25.66	74.00	96.51	32.88	7.13	36.86	309	303 Peak HORIZONTAL																																																										
<p>Avg.</p>	 <p>Site Condition : 030805-KS FCC PART 15C (AVG) 3e 3317 SN 79957 HORIZONTAL RFR 1000.000MHz VWR 3.000Hz SWT Auto Project (FR) 230405 Mode Y Plane Y Full-directivity IME1</p> <table border="1"> <thead> <tr> <th>IME1</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2383.56</td> <td>39.77</td> <td>-14.23</td> <td>54.00</td> <td>36.75</td> <td>32.83</td> <td>7.07</td> <td>36.88</td> <td>309</td> <td>303 Average HORIZONTAL</td> </tr> </tbody> </table>	IME1	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg		1	2383.56	39.77	-14.23	54.00	36.75	32.83	7.07	36.88	309	303 Average HORIZONTAL	 <p>Site Condition : 030805-KS FCC PART 15C (AVG) 3e 3317 SN 79957 HORIZONTAL RFR 1000.000MHz VWR 3.000Hz SWT Auto Project (FR) 230405 Mode Y Plane Y Full-directivity IME1</p> <table border="1"> <thead> <tr> <th>IME1</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>97.17</td> <td>43.17</td> <td>54.00</td> <td>94.02</td> <td>32.88</td> <td>7.13</td> <td>36.86</td> <td>309</td> <td>303 Average HORIZONTAL</td> </tr> </tbody> </table>	IME1	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg		1	2402.00	97.17	43.17	54.00	94.02	32.88	7.13	36.86	309	303 Average HORIZONTAL
IME1	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																											
1	2383.56	39.77	-14.23	54.00	36.75	32.83	7.07	36.88	309	303 Average HORIZONTAL																																																										
IME1	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																											
1	2402.00	97.17	43.17	54.00	94.02	32.88	7.13	36.86	309	303 Average HORIZONTAL																																																										

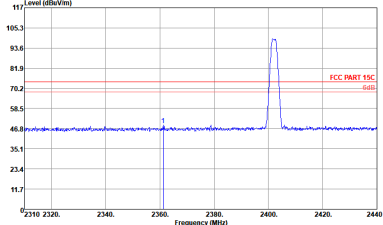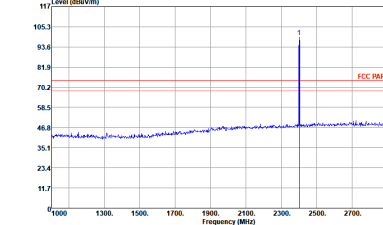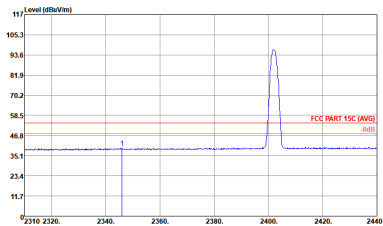
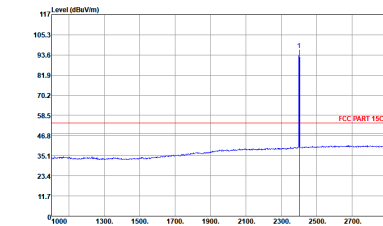


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																																																																									
ANT	BLE CH00 2402MHz																																																																																																																									
6	Vertical	Fundamental																																																																																																																								
Peak	 <p>Site : 030605-KS Condition : FCC PART 15C 3e 3317.0M 75957 VERTICAL Project : RSM 1000.000kHz VSW 3.000.000kHz SWT Auto Mode : 7 Plane : Y</p> <table border="1"> <thead> <tr> <th colspan="12">Full-directivity</th> </tr> <tr> <th colspan="12">IME1</th> </tr> <tr> <th>IME1</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV/m</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> </tr> </thead> <tbody> <tr> <td>1</td> <td>2361.22</td> <td>48.18</td> <td>-25.04</td> <td>74.00</td> <td>45.94</td> <td>32.83</td> <td>7.07</td> <td>36.88</td> <td>101</td> <td>262 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Full-directivity												IME1												IME1	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	2361.22	48.18	-25.04	74.00	45.94	32.83	7.07	36.88	101	262 Peak	VERTICAL	 <p>Site : 030605-KS Condition : FCC PART 15C 3e 3317.0M 75957 VERTICAL Project : RSM 1000.000kHz VSW 3.000.000kHz SWT Auto Mode : 7 Plane : Y</p> <table border="1"> <thead> <tr> <th colspan="12">Full-directivity</th> </tr> <tr> <th colspan="12">IME1</th> </tr> <tr> <th>IME1</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV/m</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2402.00</td> <td>99.26</td> <td>25.26</td> <td>74.00</td> <td>96.11</td> <td>32.88</td> <td>7.13</td> <td>36.86</td> <td>101</td> <td>262 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Full-directivity												IME1												IME1	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 *	2402.00	99.26	25.26	74.00	96.11	32.88	7.13	36.86	101	262 Peak	VERTICAL
Full-directivity																																																																																																																										
IME1																																																																																																																										
IME1	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																															
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	2361.22	48.18	-25.04	74.00	45.94	32.83	7.07	36.88	101	262 Peak	VERTICAL																																																																																																															
Full-directivity																																																																																																																										
IME1																																																																																																																										
IME1	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																															
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1 *	2402.00	99.26	25.26	74.00	96.11	32.88	7.13	36.86	101	262 Peak	VERTICAL																																																																																																															
Avg	 <p>Site : 030605-KS Condition : FCC PART 15C (AVG) 3e 3317.0M 75957 VERTICAL Project : RSM 1000.000kHz VSW 5.000kHz SWT Auto Mode : 7 Plane : Y</p> <table border="1"> <thead> <tr> <th colspan="12">Full-directivity</th> </tr> <tr> <th colspan="12">IME1</th> </tr> <tr> <th>IME1</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV/m</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> </tr> </thead> <tbody> <tr> <td>1</td> <td>2364.01</td> <td>39.67</td> <td>-14.33</td> <td>54.00</td> <td>38.71</td> <td>32.81</td> <td>7.04</td> <td>36.89</td> <td>101</td> <td>262 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Full-directivity												IME1												IME1	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	2364.01	39.67	-14.33	54.00	38.71	32.81	7.04	36.89	101	262 Average	VERTICAL	 <p>Site : 030605-KS Condition : FCC PART 15C (AVG) 3e 3317.0M 75957 VERTICAL Project : RSM 1000.000kHz VSW 5.000kHz SWT Auto Mode : 7 Plane : Y</p> <table border="1"> <thead> <tr> <th colspan="12">Full-directivity</th> </tr> <tr> <th colspan="12">IME1</th> </tr> <tr> <th>IME1</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV/m</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2402.00</td> <td>96.50</td> <td>42.50</td> <td>54.00</td> <td>93.35</td> <td>32.88</td> <td>7.13</td> <td>36.86</td> <td>101</td> <td>262 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Full-directivity												IME1												IME1	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 *	2402.00	96.50	42.50	54.00	93.35	32.88	7.13	36.86	101	262 Average	VERTICAL
Full-directivity																																																																																																																										
IME1																																																																																																																										
IME1	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																															
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	2364.01	39.67	-14.33	54.00	38.71	32.81	7.04	36.89	101	262 Average	VERTICAL																																																																																																															
Full-directivity																																																																																																																										
IME1																																																																																																																										
IME1	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																															
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1 *	2402.00	96.50	42.50	54.00	93.35	32.88	7.13	36.86	101	262 Average	VERTICAL																																																																																																															

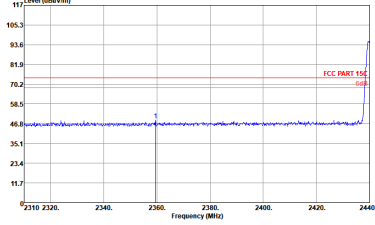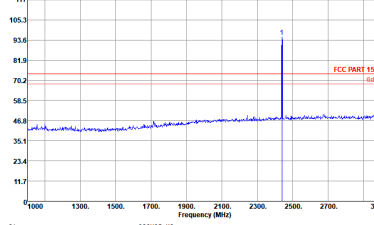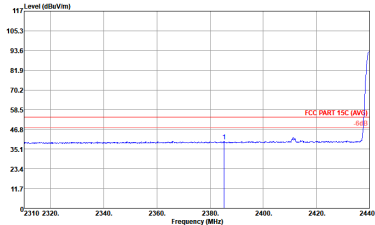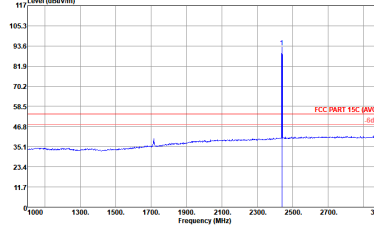

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																																																	
ANT	BLE CH19 2440MHz - L																																																																																																	
6	Horizontal	Fundamental																																																																																																
Peak	 <p>Site Condition : 030605-KS FCC PART 15C 3e 3317 SN 70957 HORIZONTAL RSM 1000.000kHz VSW 3.000 0.00kHz SWT Auto Project : FR230405 Mode : S Plane : Y</p> <table border="1"> <thead> <tr> <th colspan="2">Full-directivity</th> <th colspan="2">#14</th> <th colspan="2">ReadAntenna</th> <th colspan="2">Cable Preamp</th> <th colspan="2">A/Pos</th> <th colspan="2">T/Pos</th> <th colspan="2">Remark</th> <th colspan="2">Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> <th>dB</th> <th>deg</th> <th>dB</th> <th>deg</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2359.40</td> <td>48.76</td> <td>-25.24</td> <td>74.00</td> <td>45.74</td> <td>32.83</td> <td>7.07</td> <td>36.88</td> <td>270</td> <td>305</td> <td>Peak</td> <td>HORIZONTAL</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Full-directivity		#14		ReadAntenna		Cable Preamp		A/Pos		T/Pos		Remark		Pol/Phas		Freq	Level	Limit	Line	Level Factor	Loss Factor	dB	dB	cn	deg	dB	deg	dB	deg	dB	deg	1	2359.40	48.76	-25.24	74.00	45.74	32.83	7.07	36.88	270	305	Peak	HORIZONTAL				 <p>Site Condition : 030605-KS FCC PART 15C 3e 3317 SN 70957 HORIZONTAL RSM 1000.000kHz VSW 3.000 0.00kHz SWT Auto Project : FR230405 Mode : S Plane : Y</p> <table border="1"> <thead> <tr> <th colspan="2">Full-directivity</th> <th colspan="2">#14</th> <th colspan="2">ReadAntenna</th> <th colspan="2">Cable Preamp</th> <th colspan="2">A/Pos</th> <th colspan="2">T/Pos</th> <th colspan="2">Remark</th> <th colspan="2">Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> <th>dB</th> <th>deg</th> <th>dB</th> <th>deg</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2440.00</td> <td>95.47</td> <td>21.47</td> <td>74.00</td> <td>92.18</td> <td>32.94</td> <td>7.19</td> <td>36.84</td> <td>270</td> <td>305</td> <td>Peak</td> <td>HORIZONTAL</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Full-directivity		#14		ReadAntenna		Cable Preamp		A/Pos		T/Pos		Remark		Pol/Phas		Freq	Level	Limit	Line	Level Factor	Loss Factor	dB	dB	cn	deg	dB	deg	dB	deg	dB	deg	1	2440.00	95.47	21.47	74.00	92.18	32.94	7.19	36.84	270	305	Peak	HORIZONTAL			
Full-directivity		#14		ReadAntenna		Cable Preamp		A/Pos		T/Pos		Remark		Pol/Phas																																																																																				
Freq	Level	Limit	Line	Level Factor	Loss Factor	dB	dB	cn	deg	dB	deg	dB	deg	dB	deg																																																																																			
1	2359.40	48.76	-25.24	74.00	45.74	32.83	7.07	36.88	270	305	Peak	HORIZONTAL																																																																																						
Full-directivity		#14		ReadAntenna		Cable Preamp		A/Pos		T/Pos		Remark		Pol/Phas																																																																																				
Freq	Level	Limit	Line	Level Factor	Loss Factor	dB	dB	cn	deg	dB	deg	dB	deg	dB	deg																																																																																			
1	2440.00	95.47	21.47	74.00	92.18	32.94	7.19	36.84	270	305	Peak	HORIZONTAL																																																																																						
Avg.	 <p>Site Condition : 030605-KS FCC PART 15C (AVG) 3e 3317 SN 70957 HORIZONTAL RSM 1000.000kHz VSW 3.000kHz SWT Auto Project : FR230405 Mode : S Plane : Y</p> <table border="1"> <thead> <tr> <th colspan="2">Full-directivity</th> <th colspan="2">#14</th> <th colspan="2">ReadAntenna</th> <th colspan="2">Cable Preamp</th> <th colspan="2">A/Pos</th> <th colspan="2">T/Pos</th> <th colspan="2">Remark</th> <th colspan="2">Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> <th>dB</th> <th>deg</th> <th>dB</th> <th>deg</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2385.27</td> <td>39.82</td> <td>-14.18</td> <td>54.00</td> <td>36.73</td> <td>32.86</td> <td>7.10</td> <td>36.87</td> <td>270</td> <td>305</td> <td>Average</td> <td>HORIZONTAL</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Full-directivity		#14		ReadAntenna		Cable Preamp		A/Pos		T/Pos		Remark		Pol/Phas		Freq	Level	Limit	Line	Level Factor	Loss Factor	dB	dB	cn	deg	dB	deg	dB	deg	dB	deg	1	2385.27	39.82	-14.18	54.00	36.73	32.86	7.10	36.87	270	305	Average	HORIZONTAL				 <p>Site Condition : 030605-KS FCC PART 15C (AVG) 3e 3317 SN 70957 HORIZONTAL RSM 1000.000kHz VSW 3.000kHz SWT Auto Project : FR230405 Mode : S Plane : Y</p> <table border="1"> <thead> <tr> <th colspan="2">Full-directivity</th> <th colspan="2">#14</th> <th colspan="2">ReadAntenna</th> <th colspan="2">Cable Preamp</th> <th colspan="2">A/Pos</th> <th colspan="2">T/Pos</th> <th colspan="2">Remark</th> <th colspan="2">Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> <th>dB</th> <th>deg</th> <th>dB</th> <th>deg</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2440.00</td> <td>92.97</td> <td>38.97</td> <td>54.00</td> <td>89.68</td> <td>32.94</td> <td>7.19</td> <td>36.84</td> <td>270</td> <td>305</td> <td>Average</td> <td>HORIZONTAL</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Full-directivity		#14		ReadAntenna		Cable Preamp		A/Pos		T/Pos		Remark		Pol/Phas		Freq	Level	Limit	Line	Level Factor	Loss Factor	dB	dB	cn	deg	dB	deg	dB	deg	dB	deg	1	2440.00	92.97	38.97	54.00	89.68	32.94	7.19	36.84	270	305	Average	HORIZONTAL			
Full-directivity		#14		ReadAntenna		Cable Preamp		A/Pos		T/Pos		Remark		Pol/Phas																																																																																				
Freq	Level	Limit	Line	Level Factor	Loss Factor	dB	dB	cn	deg	dB	deg	dB	deg	dB	deg																																																																																			
1	2385.27	39.82	-14.18	54.00	36.73	32.86	7.10	36.87	270	305	Average	HORIZONTAL																																																																																						
Full-directivity		#14		ReadAntenna		Cable Preamp		A/Pos		T/Pos		Remark		Pol/Phas																																																																																				
Freq	Level	Limit	Line	Level Factor	Loss Factor	dB	dB	cn	deg	dB	deg	dB	deg	dB	deg																																																																																			
1	2440.00	92.97	38.97	54.00	89.68	32.94	7.19	36.84	270	305	Average	HORIZONTAL																																																																																						

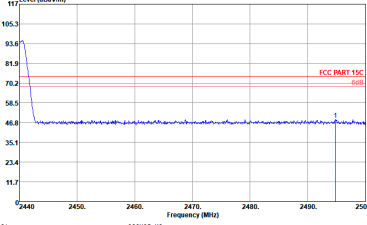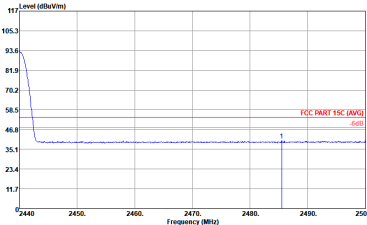

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
6	Horizontal	Fundamental
<p>Peak</p>	 <pre> Site: 032005-KS Condition: FCC PART 15C 3m 2440 2494.78 2494.78 HORIZONTAL Project: RSM 1000 000KHz VSW:3000 000KHz SRT:Auto Mode: (FR) 230405 Plane: B Full-directivity: Y IMEI: #14 ----- Freq Level Over Limit ReadAntenna Cable Preamp A.Pos T.Pos Remark Pol/Phas MHz dBuV/m dB dBuV/m dB/dB dB/dB dB/dB dB/dB cm deg 1 2494.78 48.71 -25.29 74.00 45.24 33.00 7.28 36.81 270 305 Peak HORIZONTAL </pre>	<p>Left blank</p>
<p>Avg.</p>	 <pre> Site: 032005-KS Condition: FCC PART 15C (AVG) 3m 2440 2494.48 2494.48 HORIZONTAL Project: RSM 1000 000KHz VSW:3.000000 SRT:Auto Mode: (FR) 230405 Plane: B Full-directivity: Y IMEI: #14 ----- Freq Level Over Limit ReadAntenna Cable Preamp A.Pos T.Pos Remark Pol/Phas MHz dBuV/m dB dBuV/m dB/dB dB/dB dB/dB dB/dB cm deg 1 2494.48 40.42 -13.58 54.00 37.01 32.98 7.25 36.82 270 305 Average HORIZONTAL </pre>	<p>Left blank</p>







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																															
ANT	BLE CH19 2440MHz - L																																																																															
6	Vertical	Fundamental																																																																														
<p>Peak</p>	<p>Site : 030605-KS Condition : FCC PART 15C 3m 3317 SN 70957 VERTICAL Project : RSM 1000 000KHz VSW 3000 000KHz SWT Auto Mode : 0 Plane : Y Full-directivity : Y MEI : #14</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>Line</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2379.29</td> <td>48.75</td> <td>-25.25</td> <td>74.00</td> <td>45.66</td> <td>32.86</td> <td>7.10</td> <td>36.87</td> <td>112</td> <td>259</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	MEI	Freq	Level	Over	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBV/m	dB	dBV/m	dB	dBV/m	dB	dB	cm	deg			1	2379.29	48.75	-25.25	74.00	45.66	32.86	7.10	36.87	112	259	Peak	VERTICAL	<p>Site : 030605-KS Condition : FCC PART 15C 3m 3317 SN 70957 VERTICAL Project : RSM 1000 000KHz VSW 3000 000KHz SWT Auto Mode : 0 Plane : Y Full-directivity : Y MEI : #14</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>Line</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2440.00</td> <td>95.17</td> <td>21.17</td> <td>74.00</td> <td>91.88</td> <td>32.94</td> <td>7.19</td> <td>36.84</td> <td>112</td> <td>259</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	MEI	Freq	Level	Over	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBV/m	dB	dBV/m	dB	dBV/m	dB	dB	cm	deg			1	2440.00	95.17	21.17	74.00	91.88	32.94	7.19	36.84	112	259	Peak	VERTICAL
MEI	Freq	Level	Over	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
	MHz	dBV/m	dB	dBV/m	dB	dBV/m	dB	dB	cm	deg																																																																						
1	2379.29	48.75	-25.25	74.00	45.66	32.86	7.10	36.87	112	259	Peak	VERTICAL																																																																				
MEI	Freq	Level	Over	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
	MHz	dBV/m	dB	dBV/m	dB	dBV/m	dB	dB	cm	deg																																																																						
1	2440.00	95.17	21.17	74.00	91.88	32.94	7.19	36.84	112	259	Peak	VERTICAL																																																																				
<p>Avg.</p>	<p>Site : 030605-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 70957 VERTICAL Project : RSM 1000 000KHz VSW 3.000KHz SWT Auto Mode : 0 Plane : Y Full-directivity : Y MEI : #14</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>Line</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2386.83</td> <td>39.93</td> <td>-14.07</td> <td>54.00</td> <td>36.81</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>112</td> <td>259</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	MEI	Freq	Level	Over	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBV/m	dB	dBV/m	dB	dBV/m	dB	dB	cm	deg			1	2386.83	39.93	-14.07	54.00	36.81	32.88	7.10	36.86	112	259	Average	VERTICAL	<p>Site : 030605-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 70957 VERTICAL Project : RSM 1000 000KHz VSW 3.000KHz SWT Auto Mode : 0 Plane : Y Full-directivity : Y MEI : #14</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>Line</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2440.00</td> <td>92.46</td> <td>38.46</td> <td>54.00</td> <td>89.17</td> <td>32.94</td> <td>7.19</td> <td>36.84</td> <td>112</td> <td>259</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	MEI	Freq	Level	Over	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBV/m	dB	dBV/m	dB	dBV/m	dB	dB	cm	deg			1	2440.00	92.46	38.46	54.00	89.17	32.94	7.19	36.84	112	259	Average	VERTICAL
MEI	Freq	Level	Over	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
	MHz	dBV/m	dB	dBV/m	dB	dBV/m	dB	dB	cm	deg																																																																						
1	2386.83	39.93	-14.07	54.00	36.81	32.88	7.10	36.86	112	259	Average	VERTICAL																																																																				
MEI	Freq	Level	Over	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
	MHz	dBV/m	dB	dBV/m	dB	dBV/m	dB	dB	cm	deg																																																																						
1	2440.00	92.46	38.46	54.00	89.17	32.94	7.19	36.84	112	259	Average	VERTICAL																																																																				



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																								
ANT	BLE CH19 2440MHz - R																																								
6	Vertical	Fundamental																																							
Peak	<p>Site : 03065-KS Condition : FCC PART 15C 3m 3317 SN 70597 VERTICAL Project : RBM 1000 0200KHz VSW 3000 000KHz SMT.Auto Mode : 0 Plane : Y Full-directivity : Y</p> <table border="1"> <thead> <tr> <th>IME1</th> <th>Line</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Poa</th> <th>T/Poa</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <td></td> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV/m</td> <td>dBuV</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> <td></td> </tr> </thead> <tbody> <tr> <td>1</td> <td></td> <td>2488.96</td> <td>48.60</td> <td>-25.40</td> <td>74.00</td> <td>45.16</td> <td>33.00</td> <td>7.25</td> <td>36.81</td> <td>112</td> <td>259 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	IME1	Line	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poa	T/Poa	Remark	Pol/Phas			MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg			1		2488.96	48.60	-25.40	74.00	45.16	33.00	7.25	36.81	112	259 Peak	VERTICAL	Left blank
IME1	Line	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poa	T/Poa	Remark	Pol/Phas																													
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																															
1		2488.96	48.60	-25.40	74.00	45.16	33.00	7.25	36.81	112	259 Peak	VERTICAL																													
Avg.	<p>Site : 03065-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 70597 VERTICAL Project : RBM 1000 0200KHz VSW 3000 000KHz SMT.Auto Mode : 0 Plane : Y Full-directivity : Y</p> <table border="1"> <thead> <tr> <th>IME1</th> <th>Line</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Poa</th> <th>T/Poa</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <td></td> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV/m</td> <td>dBuV</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> <td></td> </tr> </thead> <tbody> <tr> <td>1</td> <td></td> <td>2491.00</td> <td>40.37</td> <td>-13.63</td> <td>54.00</td> <td>36.93</td> <td>33.00</td> <td>7.25</td> <td>36.81</td> <td>112</td> <td>259 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	IME1	Line	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poa	T/Poa	Remark	Pol/Phas			MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg			1		2491.00	40.37	-13.63	54.00	36.93	33.00	7.25	36.81	112	259 Average	VERTICAL	Left blank
IME1	Line	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poa	T/Poa	Remark	Pol/Phas																													
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																															
1		2491.00	40.37	-13.63	54.00	36.93	33.00	7.25	36.81	112	259 Average	VERTICAL																													

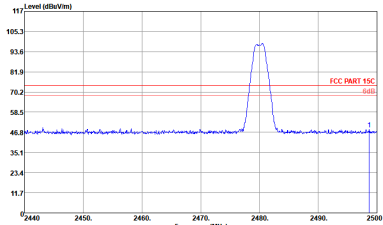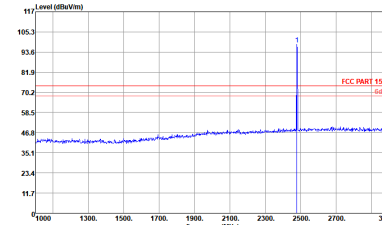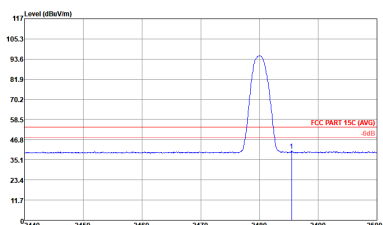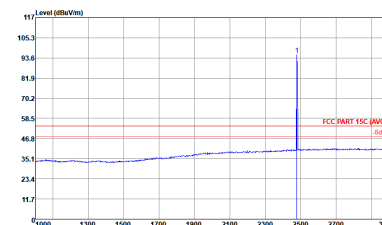

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																																																																											
ANT	BLE CH39 2480MHz																																																																																																																											
6	Horizontal	Fundamental																																																																																																																										
Peak	 <p>Site Condition : 030605-KS FCC PART 15C 3e 3317.5M 75957 HORIZONTAL RSM 1000.000kHz VSW 3.000.000kHz SWT Auto Project : FR2230405 Mode : Y Plane : Y</p> <table border="1"> <thead> <tr> <th colspan="12">Full-directivity</th> </tr> <tr> <th colspan="12">IME1</th> </tr> <tr> <th>IME1</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> <th colspan="3"></th> </tr> <tr> <th>Hz</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2498.68</td> <td>48.54</td> <td>-25.46</td> <td>74.00</td> <td>45.07</td> <td>33.00</td> <td>7.28</td> <td>36.81</td> <td>155</td> <td>224</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Full-directivity												IME1												IME1	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas				Hz	dB	dB	dB	dB	dB	dB	deg	deg	cm	deg		1	2498.68	48.54	-25.46	74.00	45.07	33.00	7.28	36.81	155	224	Peak	HORIZONTAL	 <p>Site Condition : 030605-KS FCC PART 15C 3e 3317.5M 75957 HORIZONTAL RSM 1000.000kHz VSW 3.000.000kHz SWT Auto Project : FR2230405 Mode : Y Plane : Y</p> <table border="1"> <thead> <tr> <th colspan="12">Full-directivity</th> </tr> <tr> <th colspan="12">IME1</th> </tr> <tr> <th>IME1</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> <th colspan="3"></th> </tr> <tr> <th>Hz</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>98.25</td> <td>24.25</td> <td>74.00</td> <td>94.84</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>155</td> <td>224</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Full-directivity												IME1												IME1	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas				Hz	dB	dB	dB	dB	dB	dB	deg	deg	cm	deg		1	2480.00	98.25	24.25	74.00	94.84	32.98	7.25	36.82	155	224	Peak	HORIZONTAL
Full-directivity																																																																																																																												
IME1																																																																																																																												
IME1	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																				
Hz	dB	dB	dB	dB	dB	dB	deg	deg	cm	deg																																																																																																																		
1	2498.68	48.54	-25.46	74.00	45.07	33.00	7.28	36.81	155	224	Peak	HORIZONTAL																																																																																																																
Full-directivity																																																																																																																												
IME1																																																																																																																												
IME1	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																				
Hz	dB	dB	dB	dB	dB	dB	deg	deg	cm	deg																																																																																																																		
1	2480.00	98.25	24.25	74.00	94.84	32.98	7.25	36.82	155	224	Peak	HORIZONTAL																																																																																																																
Av g.	 <p>Site Condition : 030605-KS FCC PART 15C (AVG) 3e 3317.5M 75957 HORIZONTAL RSM 1000.000kHz VSW 3.000.000kHz SWT Auto Project : FR2230405 Mode : Y Plane : Y</p> <table border="1"> <thead> <tr> <th colspan="12">Full-directivity</th> </tr> <tr> <th colspan="12">IME1</th> </tr> <tr> <th>IME1</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> <th colspan="3"></th> </tr> <tr> <th>Hz</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.48</td> <td>40.42</td> <td>-13.58</td> <td>54.00</td> <td>37.01</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>155</td> <td>224</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Full-directivity												IME1												IME1	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas				Hz	dB	dB	dB	dB	dB	dB	deg	deg	cm	deg		1	2485.48	40.42	-13.58	54.00	37.01	32.98	7.25	36.82	155	224	Average	HORIZONTAL	 <p>Site Condition : 030605-KS FCC PART 15C (AVG) 3e 3317.5M 75957 HORIZONTAL RSM 1000.000kHz VSW 3.000.000kHz SWT Auto Project : FR2230405 Mode : Y Plane : Y</p> <table border="1"> <thead> <tr> <th colspan="12">Full-directivity</th> </tr> <tr> <th colspan="12">IME1</th> </tr> <tr> <th>IME1</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> <th colspan="3"></th> </tr> <tr> <th>Hz</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>95.50</td> <td>41.50</td> <td>54.00</td> <td>92.09</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>155</td> <td>224</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Full-directivity												IME1												IME1	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas				Hz	dB	dB	dB	dB	dB	dB	deg	deg	cm	deg		1	2480.00	95.50	41.50	54.00	92.09	32.98	7.25	36.82	155	224	Average	HORIZONTAL
Full-directivity																																																																																																																												
IME1																																																																																																																												
IME1	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																				
Hz	dB	dB	dB	dB	dB	dB	deg	deg	cm	deg																																																																																																																		
1	2485.48	40.42	-13.58	54.00	37.01	32.98	7.25	36.82	155	224	Average	HORIZONTAL																																																																																																																
Full-directivity																																																																																																																												
IME1																																																																																																																												
IME1	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																				
Hz	dB	dB	dB	dB	dB	dB	deg	deg	cm	deg																																																																																																																		
1	2480.00	95.50	41.50	54.00	92.09	32.98	7.25	36.82	155	224	Average	HORIZONTAL																																																																																																																





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																															
ANT	BLE CH39 2480MHz																																																																															
6	Vertical	Fundamental																																																																														
Peak	<p>Site Condition : 032065-K5 FCC PART 15C 3m 3317 SN 75957 VERTICAL RSM 1000.000kHz VSW 3.000 0.000dB SWT:Auto Project : (FR)230405 Mode : Y Plane : Y Full-directivity : MEI :</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>#14</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2499.10</td> <td>48.77</td> <td>-25.23</td> <td>74.00</td> <td>45.30</td> <td>33.00</td> <td>7.28</td> <td>36.81</td> <td>111</td> <td>261</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	MEI	Freq	Level	Over	Limit	#14	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBV/m	dB	dBV/m	dB	dB	dB	dB	dB	dB	deg		1	2499.10	48.77	-25.23	74.00	45.30	33.00	7.28	36.81	111	261	Peak	VERTICAL	<p>Site Condition : 032065-K5 FCC PART 15C 3m 3317 SN 75957 VERTICAL RSM 1000.000kHz VSW 3.000 0.000dB SWT:Auto Project : (FR)230405 Mode : Y Plane : Y Full-directivity : MEI :</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>#14</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>97.91</td> <td>23.91</td> <td>74.00</td> <td>94.00</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>111</td> <td>261</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	MEI	Freq	Level	Over	Limit	#14	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBV/m	dB	dBV/m	dB	dB	dB	dB	dB	dB	deg		1	2480.00	97.91	23.91	74.00	94.00	32.98	7.25	36.82	111	261	Peak	VERTICAL
MEI	Freq	Level	Over	Limit	#14	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
	MHz	dBV/m	dB	dBV/m	dB	dB	dB	dB	dB	dB	deg																																																																					
1	2499.10	48.77	-25.23	74.00	45.30	33.00	7.28	36.81	111	261	Peak	VERTICAL																																																																				
MEI	Freq	Level	Over	Limit	#14	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
	MHz	dBV/m	dB	dBV/m	dB	dB	dB	dB	dB	dB	deg																																																																					
1	2480.00	97.91	23.91	74.00	94.00	32.98	7.25	36.82	111	261	Peak	VERTICAL																																																																				
Avg.	<p>Site Condition : 032065-K5 FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL RSM 1000.000kHz VSW 5.0000dB SWT:Auto Project : (FR)230405 Mode : Y Plane : Y Full-directivity : MEI :</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>#14</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2490.40</td> <td>39.95</td> <td>-14.05</td> <td>54.00</td> <td>36.51</td> <td>33.00</td> <td>7.25</td> <td>36.81</td> <td>111</td> <td>261</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	MEI	Freq	Level	Over	Limit	#14	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBV/m	dB	dBV/m	dB	dB	dB	dB	dB	dB	deg		1	2490.40	39.95	-14.05	54.00	36.51	33.00	7.25	36.81	111	261	Average	VERTICAL	<p>Site Condition : 032065-K5 FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL RSM 1000.000kHz VSW 5.0000dB SWT:Auto Project : (FR)230405 Mode : Y Plane : Y Full-directivity : MEI :</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>#14</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>95.00</td> <td>41.00</td> <td>54.00</td> <td>91.59</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>111</td> <td>261</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	MEI	Freq	Level	Over	Limit	#14	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBV/m	dB	dBV/m	dB	dB	dB	dB	dB	dB	deg		1	2480.00	95.00	41.00	54.00	91.59	32.98	7.25	36.82	111	261	Average	VERTICAL
MEI	Freq	Level	Over	Limit	#14	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
	MHz	dBV/m	dB	dBV/m	dB	dB	dB	dB	dB	dB	deg																																																																					
1	2490.40	39.95	-14.05	54.00	36.51	33.00	7.25	36.81	111	261	Average	VERTICAL																																																																				
MEI	Freq	Level	Over	Limit	#14	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
	MHz	dBV/m	dB	dBV/m	dB	dB	dB	dB	dB	dB	deg																																																																					
1	2480.00	95.00	41.00	54.00	91.59	32.98	7.25	36.82	111	261	Average	VERTICAL																																																																				



2.4GHz 2400~2483.5MHz
BLE(2M) (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																			
ANT	BLE CH00 2402MHz																																																																			
6	Horizontal	Vertical																																																																		
Peak Avg.	<p>Site : 030405-KS Condition : FCC PART 15C 3m 3317 SM 79957 HORIZONTAL Project : HSE 1500 000MHz V98 3000 000MHz SET Auto Model : FRI 230405 Plane : T Full-directivity : IMEI :</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Full-directivity</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>IMEI</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>48.00</td> <td>39.90</td> <td>-34.10</td> <td>74.00</td> <td>60.88</td> <td>34.19</td> <td>10.20</td> <td>65.37</td> <td>300</td> <td>0 Peak HORIZONTAL</td> </tr> </tbody> </table>	IMEI	Full-directivity	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	IMEI	Level	Limit	Line	Level	Factor	Loss	Factor	cm	deg		1	48.00	39.90	-34.10	74.00	60.88	34.19	10.20	65.37	300	0 Peak HORIZONTAL	<p>Site : 030405-KS Condition : FCC PART 15C 3m 3317 SM 79957 VERTICAL Project : HSE 1500 000MHz V98 3000 000MHz SET Auto Model : FRI 230405 Plane : T Full-directivity : IMEI :</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Full-directivity</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>IMEI</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>48.00</td> <td>40.64</td> <td>-33.56</td> <td>74.00</td> <td>61.62</td> <td>34.19</td> <td>10.20</td> <td>65.37</td> <td>100</td> <td>0 Peak VERTICAL</td> </tr> </tbody> </table>	IMEI	Full-directivity	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	IMEI	Level	Limit	Line	Level	Factor	Loss	Factor	cm	deg		1	48.00	40.64	-33.56	74.00	61.62	34.19	10.20	65.37	100	0 Peak VERTICAL
IMEI	Full-directivity	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																										
IMEI	Level	Limit	Line	Level	Factor	Loss	Factor	cm	deg																																																											
1	48.00	39.90	-34.10	74.00	60.88	34.19	10.20	65.37	300	0 Peak HORIZONTAL																																																										
IMEI	Full-directivity	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																										
IMEI	Level	Limit	Line	Level	Factor	Loss	Factor	cm	deg																																																											
1	48.00	40.64	-33.56	74.00	61.62	34.19	10.20	65.37	100	0 Peak VERTICAL																																																										

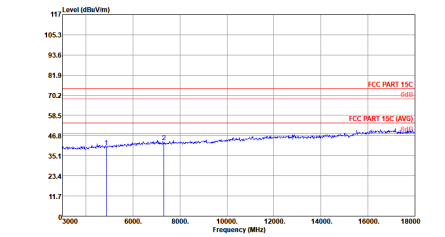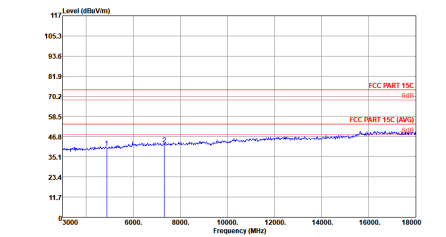

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																	
ANT	BLE CH19 2440MHz																																																																																																	
6	Horizontal	Vertical																																																																																																
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03D05-KS Condition : FCC PART 15C 3m 3317.5M 75957 HORIZONTAL Project : RSM 1000.000KHz VSW 3000.000KHz SWT Auto Mode : 8 Plane : Y Full-directivity : Y</p> <table border="1"> <thead> <tr> <th>#1</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Poa</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4875.00</td> <td>40.05</td> <td>-33.95</td> <td>74.00</td> <td>40.95</td> <td>34.23</td> <td>10.29</td> <td>65.42</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>43.15</td> <td>-30.85</td> <td>74.00</td> <td>40.52</td> <td>35.87</td> <td>12.72</td> <td>65.96</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	#1	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poa	T/Pos	Remark	Pol/Phas						Level	Loss	Factor					1	4875.00	40.05	-33.95	74.00	40.95	34.23	10.29	65.42	300	0 Peak	HORIZONTAL	2	7320.00	43.15	-30.85	74.00	40.52	35.87	12.72	65.96	300	0 Peak	HORIZONTAL	 <p>Site : 03D05-KS Condition : FCC PART 15C 3m 3317.5M 75957 VERTICAL Project : RSM 1000.000KHz VSW 3000.000KHz SWT Auto Mode : 8 Plane : Y Full-directivity : Y</p> <table border="1"> <thead> <tr> <th>#1</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Poa</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4875.00</td> <td>40.51</td> <td>-33.49</td> <td>74.00</td> <td>41.41</td> <td>34.23</td> <td>10.29</td> <td>65.42</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>42.28</td> <td>-31.72</td> <td>74.00</td> <td>59.65</td> <td>35.87</td> <td>12.72</td> <td>65.96</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	#1	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poa	T/Pos	Remark	Pol/Phas						Level	Loss	Factor					1	4875.00	40.51	-33.49	74.00	41.41	34.23	10.29	65.42	100	0 Peak	VERTICAL	2	7320.00	42.28	-31.72	74.00	59.65	35.87	12.72	65.96	100	0 Peak	VERTICAL
#1	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poa	T/Pos	Remark	Pol/Phas																																																																																							
					Level	Loss	Factor																																																																																											
1	4875.00	40.05	-33.95	74.00	40.95	34.23	10.29	65.42	300	0 Peak	HORIZONTAL																																																																																							
2	7320.00	43.15	-30.85	74.00	40.52	35.87	12.72	65.96	300	0 Peak	HORIZONTAL																																																																																							
#1	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Poa	T/Pos	Remark	Pol/Phas																																																																																							
					Level	Loss	Factor																																																																																											
1	4875.00	40.51	-33.49	74.00	41.41	34.23	10.29	65.42	100	0 Peak	VERTICAL																																																																																							
2	7320.00	42.28	-31.72	74.00	59.65	35.87	12.72	65.96	100	0 Peak	VERTICAL																																																																																							



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																																																									
ANT	BLE CH39 2480MHz																																																																																																																																									
6	Horizontal	Vertical																																																																																																																																								
Peak	<p>Site : 03D05-KS Condition : FCC PART 15C 3m 3317.3M 7095F HORIZONTAL Project : RSM 1000.000KHz VSW 3000.000KHz SWT:Auto Mode : 0 Plane : Y</p> <table border="1"> <thead> <tr> <th colspan="11">Full-directivity</th> </tr> <tr> <th colspan="11">IMEI</th> </tr> <tr> <th>#14</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Poa</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>dB</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4965.00</td> <td>40.59</td> <td>-33.41</td> <td>74.00</td> <td>61.17</td> <td>34.28</td> <td>10.41</td> <td>45.47</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>42.33</td> <td>-31.67</td> <td>74.00</td> <td>59.96</td> <td>35.89</td> <td>12.79</td> <td>66.31</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Full-directivity											IMEI											#14	Over	Limit	ReadAntenna	Cable Preamp	A/Poa	T/Pos	Remark	Pol/Phas			Freq	Level	dB	Line	Level	Factor	Loss	dB	dB	dB	dB	1	4965.00	40.59	-33.41	74.00	61.17	34.28	10.41	45.47	300	0 Peak	HORIZONTAL	2	7440.00	42.33	-31.67	74.00	59.96	35.89	12.79	66.31	300	0 Peak	HORIZONTAL	<p>Site : 03D05-KS Condition : FCC PART 15C 3m 3317.3M 7095F VERTICAL Project : RSM 1000.000KHz VSW 3000.000KHz SWT:Auto Mode : 0 Plane : Y</p> <table border="1"> <thead> <tr> <th colspan="11">Full-directivity</th> </tr> <tr> <th colspan="11">IMEI</th> </tr> <tr> <th>#14</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Poa</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>dB</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4965.00</td> <td>40.59</td> <td>-33.41</td> <td>74.00</td> <td>61.17</td> <td>34.28</td> <td>10.41</td> <td>45.47</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>42.33</td> <td>-31.77</td> <td>74.00</td> <td>59.86</td> <td>35.89</td> <td>12.79</td> <td>66.31</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Full-directivity											IMEI											#14	Over	Limit	ReadAntenna	Cable Preamp	A/Poa	T/Pos	Remark	Pol/Phas			Freq	Level	dB	Line	Level	Factor	Loss	dB	dB	dB	dB	1	4965.00	40.59	-33.41	74.00	61.17	34.28	10.41	45.47	100	0 Peak	VERTICAL	2	7440.00	42.33	-31.77	74.00	59.86	35.89	12.79	66.31	100	0 Peak	VERTICAL
	Full-directivity																																																																																																																																									
IMEI																																																																																																																																										
#14	Over	Limit	ReadAntenna	Cable Preamp	A/Poa	T/Pos	Remark	Pol/Phas																																																																																																																																		
Freq	Level	dB	Line	Level	Factor	Loss	dB	dB	dB	dB																																																																																																																																
1	4965.00	40.59	-33.41	74.00	61.17	34.28	10.41	45.47	300	0 Peak	HORIZONTAL																																																																																																																															
2	7440.00	42.33	-31.67	74.00	59.96	35.89	12.79	66.31	300	0 Peak	HORIZONTAL																																																																																																																															
Full-directivity																																																																																																																																										
IMEI																																																																																																																																										
#14	Over	Limit	ReadAntenna	Cable Preamp	A/Poa	T/Pos	Remark	Pol/Phas																																																																																																																																		
Freq	Level	dB	Line	Level	Factor	Loss	dB	dB	dB	dB																																																																																																																																
1	4965.00	40.59	-33.41	74.00	61.17	34.28	10.41	45.47	100	0 Peak	VERTICAL																																																																																																																															
2	7440.00	42.33	-31.77	74.00	59.86	35.89	12.79	66.31	100	0 Peak	VERTICAL																																																																																																																															



Emission below 1GHz
2.4GHz BLE (LF)


BLE	2.4GHz 2400~2483.5MHz																																																																																																																																																																																	
ANT	BLE LF																																																																																																																																																																																	
1	Horizontal	Vertical																																																																																																																																																																																
QP / Peak	<p>Site : 030405-K3 Condition : FCC PART 15C 3m (2400-2483.5) HORIZONTAL EIRP : 100.000000 W/300.000000 dBi Auto Project : FR230405B mode : 2 Full-directivity : 1</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>IMEI</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Poa</th> <th>T/Poa</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> <th>7</th> <th>8</th> <th>9</th> <th>10</th> <th>11</th> </tr> </thead> <tbody> <tr> <td>55.22</td> <td>19.83</td> <td>-20.97</td> <td>46.00</td> <td>36.97</td> <td>14.30</td> <td>1.11</td> <td>32.20</td> <td>---</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>149.31</td> <td>22.94</td> <td>-20.54</td> <td>43.50</td> <td>36.38</td> <td>17.51</td> <td>1.83</td> <td>32.80</td> <td>---</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>292.13</td> <td>26.19</td> <td>-19.28</td> <td>46.00</td> <td>37.89</td> <td>19.43</td> <td>2.43</td> <td>33.99</td> <td>---</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>541.54</td> <td>29.82</td> <td>-16.18</td> <td>46.00</td> <td>32.97</td> <td>25.81</td> <td>3.62</td> <td>32.58</td> <td>---</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>722.38</td> <td>28.39</td> <td>-17.01</td> <td>46.00</td> <td>30.77</td> <td>20.22</td> <td>4.14</td> <td>32.74</td> <td>---</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>830.25</td> <td>30.30</td> <td>-15.70</td> <td>46.00</td> <td>31.38</td> <td>27.08</td> <td>4.40</td> <td>32.56</td> <td>---</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	IMEI	IMEI	Over	Limit	ReadAntenna	Cable	Preamp	A/Poa	T/Poa	Remark	Poi/Phas	1	2	3	4	5	6	7	8	9	10	11	55.22	19.83	-20.97	46.00	36.97	14.30	1.11	32.20	---	Peak	HORIZONTAL	149.31	22.94	-20.54	43.50	36.38	17.51	1.83	32.80	---	Peak	HORIZONTAL	292.13	26.19	-19.28	46.00	37.89	19.43	2.43	33.99	---	Peak	HORIZONTAL	541.54	29.82	-16.18	46.00	32.97	25.81	3.62	32.58	---	Peak	HORIZONTAL	722.38	28.39	-17.01	46.00	30.77	20.22	4.14	32.74	---	Peak	HORIZONTAL	830.25	30.30	-15.70	46.00	31.38	27.08	4.40	32.56	---	Peak	HORIZONTAL	<p>Site : 030405-K3 Condition : FCC PART 15C 3m (2400-2483.5) VERTICAL EIRP : 100.000000 W/300.000000 dBi Auto Project : FR230405B mode : 2 Full-directivity : 1</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>IMEI</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Poa</th> <th>T/Poa</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> <th>7</th> <th>8</th> <th>9</th> <th>10</th> <th>11</th> </tr> </thead> <tbody> <tr> <td>66.77</td> <td>23.27</td> <td>-18.73</td> <td>46.00</td> <td>41.81</td> <td>13.20</td> <td>1.26</td> <td>33.00</td> <td>---</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>183.26</td> <td>29.22</td> <td>-13.98</td> <td>43.50</td> <td>43.76</td> <td>16.70</td> <td>2.06</td> <td>33.00</td> <td>---</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>356.01</td> <td>30.24</td> <td>-13.76</td> <td>46.00</td> <td>41.88</td> <td>19.49</td> <td>2.45</td> <td>33.98</td> <td>---</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>424.79</td> <td>27.00</td> <td>-18.95</td> <td>46.00</td> <td>33.51</td> <td>23.15</td> <td>3.14</td> <td>32.75</td> <td>---</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>558.65</td> <td>29.24</td> <td>-16.76</td> <td>46.00</td> <td>32.88</td> <td>20.83</td> <td>3.01</td> <td>32.58</td> <td>---</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>719.47</td> <td>29.87</td> <td>-16.13</td> <td>46.00</td> <td>32.52</td> <td>20.01</td> <td>4.10</td> <td>32.76</td> <td>---</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	IMEI	IMEI	Over	Limit	ReadAntenna	Cable	Preamp	A/Poa	T/Poa	Remark	Poi/Phas	1	2	3	4	5	6	7	8	9	10	11	66.77	23.27	-18.73	46.00	41.81	13.20	1.26	33.00	---	Peak	VERTICAL	183.26	29.22	-13.98	43.50	43.76	16.70	2.06	33.00	---	Peak	VERTICAL	356.01	30.24	-13.76	46.00	41.88	19.49	2.45	33.98	---	Peak	VERTICAL	424.79	27.00	-18.95	46.00	33.51	23.15	3.14	32.75	---	Peak	VERTICAL	558.65	29.24	-16.76	46.00	32.88	20.83	3.01	32.58	---	Peak	VERTICAL	719.47	29.87	-16.13	46.00	32.52	20.01	4.10	32.76	---	Peak	VERTICAL
	IMEI	IMEI	Over	Limit	ReadAntenna	Cable	Preamp	A/Poa	T/Poa	Remark	Poi/Phas																																																																																																																																																																							
1	2	3	4	5	6	7	8	9	10	11																																																																																																																																																																								
55.22	19.83	-20.97	46.00	36.97	14.30	1.11	32.20	---	Peak	HORIZONTAL																																																																																																																																																																								
149.31	22.94	-20.54	43.50	36.38	17.51	1.83	32.80	---	Peak	HORIZONTAL																																																																																																																																																																								
292.13	26.19	-19.28	46.00	37.89	19.43	2.43	33.99	---	Peak	HORIZONTAL																																																																																																																																																																								
541.54	29.82	-16.18	46.00	32.97	25.81	3.62	32.58	---	Peak	HORIZONTAL																																																																																																																																																																								
722.38	28.39	-17.01	46.00	30.77	20.22	4.14	32.74	---	Peak	HORIZONTAL																																																																																																																																																																								
830.25	30.30	-15.70	46.00	31.38	27.08	4.40	32.56	---	Peak	HORIZONTAL																																																																																																																																																																								
IMEI	IMEI	Over	Limit	ReadAntenna	Cable	Preamp	A/Poa	T/Poa	Remark	Poi/Phas																																																																																																																																																																								
1	2	3	4	5	6	7	8	9	10	11																																																																																																																																																																								
66.77	23.27	-18.73	46.00	41.81	13.20	1.26	33.00	---	Peak	VERTICAL																																																																																																																																																																								
183.26	29.22	-13.98	43.50	43.76	16.70	2.06	33.00	---	Peak	VERTICAL																																																																																																																																																																								
356.01	30.24	-13.76	46.00	41.88	19.49	2.45	33.98	---	Peak	VERTICAL																																																																																																																																																																								
424.79	27.00	-18.95	46.00	33.51	23.15	3.14	32.75	---	Peak	VERTICAL																																																																																																																																																																								
558.65	29.24	-16.76	46.00	32.88	20.83	3.01	32.58	---	Peak	VERTICAL																																																																																																																																																																								
719.47	29.87	-16.13	46.00	32.52	20.01	4.10	32.76	---	Peak	VERTICAL																																																																																																																																																																								



Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 1Mbps	60.65	0.380	2.634	2.7KHz
Bluetooth LE 2Mbps	31.02	0.194	5.149	5.6KHz

Bluetooth LE 1Mbps

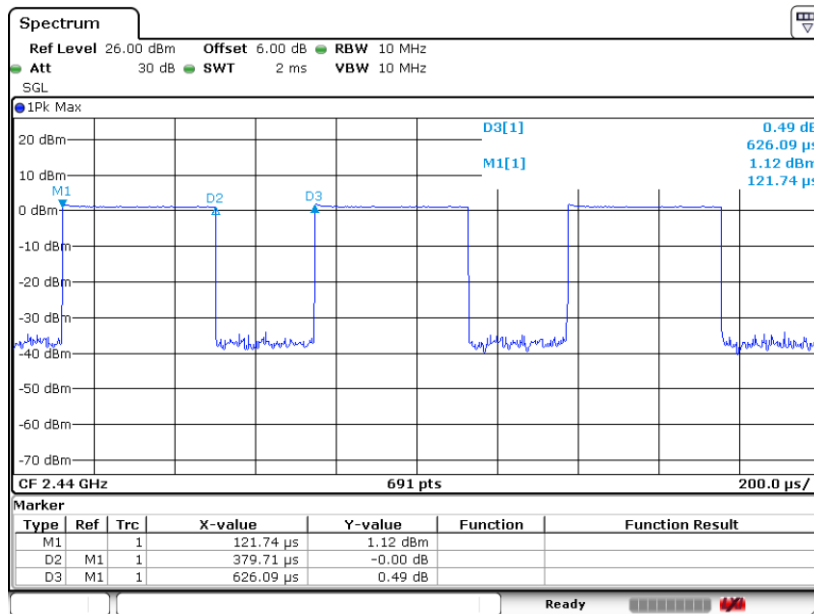



Bluetooth LE 2Mbps

