



Hangzhou Taogu Information Technology Co.,Ltd.

DRM3 User Manual

ETHERNT

WIFI

Full Function Serial Network/Wireless Module

1	BRIEF INTRODUCTION	4
2	SUMMARIZE.....	4
2.1	TECHNICAL SPECIFICATIONS	4
2.2	HARDWARE EXPLANATION	6
2.2.1	Mechanical Dimensions.....	6
2.2.2	Pins and Interface.....	6
3	QUICK START	8
3.1	RESTORE FACTORY SETTINGS	8
3.2	CONFIGURATE NETWORK PARAMETER	8
3.3	CONFIGURATE SERIAL NETWORK PARAMETER	8
4	FUNCTION DESCRIPTION.....	8
4.1	SERIAL TO ETHERNET	8
4.2	SERIAL TO WIFI CLIENT	9
4.3	SERIAL TO WIFI AP	9
4.4	DEFAULT MODE	10
4.5	SERIAL WORK MODE SWITCHING	10
4.6	SERIAL-NET DATA CONVERSION	12
4.7	PARAMETER CONFIGURATION DIRECTION	14
5	WEB CONFIGURATION	14
5.1	WEB NETWORK CONFIGURATION	15
5.1.1	Serial to Ethernet-dynamic ip	15
5.1.2	Serial to Ethernet-static ip	16
5.1.3	Serial to WIFI CLIENT-dynamic ip	16
5.1.4	Serial to WIFI CLIENT-static ip.	16
5.1.5	Serial to WIFI AP	17
5.2	WEB SERIAL CONFIGURATION	17
5.3	SUBMITTING ALTERATION.....	18
6	SERIAL AT COMMAND CONFIGURATION.....	19
6.1	ACCESS TO AT COMMAND MODE	19
6.2	AT COMMAND	19
6.2.1	netmode.....	21
6.2.2	wifi_conf.....	21

6.2.3	Channel	22
6.2.4	dhcpc	22
6.2.5	net_ip	23
6.2.6	net_dns	23
6.2.7	dhcpd.....	23
6.2.8	dhcpd_ip	23
6.2.9	dhcpd_dns	24
6.2.10	dhcpd_time	24
6.2.11	net_commit	24
6.2.12	out_trans	25
6.2.13	remoteip	25
6.2.14	remoteport.....	25
6.2.15	remotepro	25
6.2.16	timeout	26
6.2.17	mode	26
6.2.18	uart	26
6.2.19	uartpacklen.....	27
6.2.20	uartpacktimeout	27
6.2.21	escape.....	27
6.2.22	tcp_auto.....	27
6.2.23	save	27
6.2.24	reconn	28
6.2.25	ver	28
6.2.26	Clport.....	28
6.2.27	RTS	28
6.2.28	XON_XOFF	29
6.2.29	net_wanip.....	29
6.2.30	tcp_client_check	29
6.2.31	S2N_Stat	30
6.2.32	Get_MAC	30
6.2.33	wifi_ConState	30
6.2.34	wifi_Scan	30
6.2.35	suspend	30
6.2.36	C2_remoteip	31
6.2.37	C2_remoteport	31

6.2.38	C2_remotepro	31
6.2.39	C2_timeout	32
6.2.40	C2_mode.....	32
6.2.41	C2_uart	32
6.2.42	C2_uartpacklen	33
6.2.43	C2_uartpacktimeout.....	33
6.2.44	C2_tcp_auto	33
6.2.45	C2_tcp_client_check.....	33
6.3	AT COMMAND CONTROL CODE ROUTION.....	34
6.3.1	Inquiry configuration information	34
6.3.2	Serial to Ethernet(Dynamic ip address)	35
6.3.3	Serial to Ethernet(static ip address)	36
6.3.4	Serial to wifi client(dynamic IP address)	36
6.3.5	Serial to wifi client(static IP address)	37
6.3.6	Serial to wifi AP	38
6.3.7	Restore factory value	39
7	SERIAL CONFIGURATION TOOLS	40
7.1	SEARCHING THE MODULE.....	41
7.2	SET EACH PARAMETERS.....	41
7.3	SUBMIT THE CONFIGURATION.....	42
7.4	USER DATA RETENTION.....	43
7.5	INQUIRY CONFIGURATION.....	43
7.6	ACCESS TO TRANSPARENT TRANSMISSION MODE	43
7.7	RESTORE FACTORY FACTORY VALUE SETTING	43
8	DEVICE SEARCH TOOLS	44
9	RESTORE FACTORY SETTINGS	44
10	FIRMWARE UPGRADE	46
APPENDIX A DOCUMENT REVISION RECORD		47

1 Brief Introduction

DRM3 is a new low-cost embedded UART-ETH-WIFI module (serial port - Ethernet - Wireless network) developed by Shenzhen Hi-Link (HK) co., Ltd

This product is an embedded module based on the universal serial interface network standard, built-in TCP / IP protocol stack, enabling the user serial port, Ethernet, wireless network (wifi) interface between the conversions.

Through the DRM3 module, the traditional serial devices do not need to change any configuration; data can be transmitted through the Internet network. Provide a quick solution for the user' s serial devices to transfer data via Ethernet.

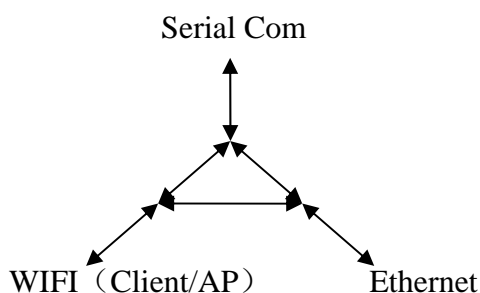


Chart 1. F-structure

2 Summarize

2.1 Technical Specifications

Table2-1TechnicalSpecifcatios

Network standard	wireless: IEEE 802.11n、IEEE 802.11g、IEEE 802.11b
	wired: IEEE 802.3、IEEE 802.3u
Wireless transmission rate	11n: maximum up to 150Mbps
	11g: maximum up to 54Mbps
	11b: maximum up to 11Mbps
Tracks number	1-14
Frequency range	2.4-2.4835G
Emission power	12-15DBM
Interface	2 Ethernet,2 serial,1 usb （host/slave）,GPIO
Antenna	
Antenna type	nboard antenna / External Antenna
Functional Parameters	
WIFI work mode	Client/AP/Router
WDS Function	Support WDS wireless bridge connection
Wireless security	Wireless MAC address filtering
	Wireless security function switch
	64/128/152 bit WEP encryption
	WPA-PSK/WPA2-PSK、WPA/WPA2 security mechanism
Network management	Remote Web management
	Configuration file import and export
	WEB software upgrade
Serial to Ethernet	
Maximum transmissiorate	500000bps
TCP connection	Max connection number>20
UDP connection	Max connection number>20
Serial baud rate	1200~500000bps
Other Parameters	
Status indicator	Status indicator
Environmental standard	Operating temperature: -20-70℃
	Operating humidity: 10%-90%RH（noncondensing）
	Storage temperature: -40-80℃
	Storage humidity: 5%-90%RH（noncondensing）
Additional properties	Frequency bandwidth optional: 20MHz、40MHz, Automatic

2.2 Hardware Explanation

2.2.1 Mechanical Dimensions

DRM3 Mechanical Dimensions is shown in the following picture:

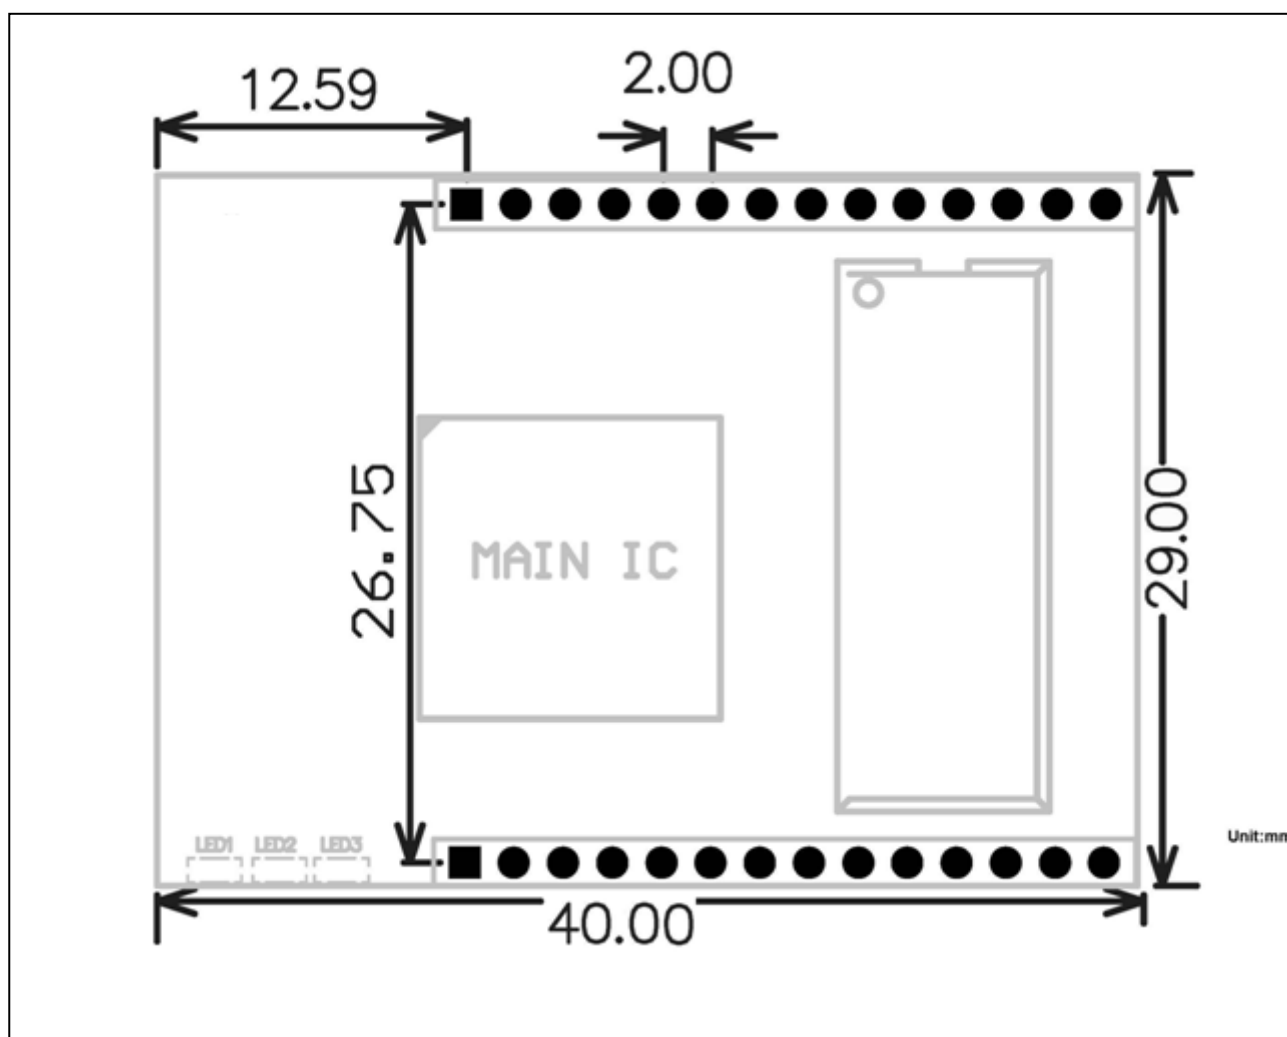


Chart 2.Dimensions Unit:mm

2.2.2 Pins and Interface

The Pin of this product as shown above is defined as follows:

Table2-2 module pin interface

No	Function	Direction	Explanation
1	VCC	Power In	5V power supply input
2	GND	GND	Power Ground
3	WLAN_LED	0	WIFI start-up indicate (valid on

			High
4	VDD	Power Out	3.3V power output
5	LINK2	0	Net port 2 connection indicate (Valid on lower level)
6	USB_P	I/O	USB signal+
7	USB_M	I/O	USB signal-
8	STA/GPIO_0	I/O	Status indication/GPIO_0 (valid on low level)
9	GPIO_1	I/O	GPIO_1
10	ES/RST	I	Exit transparent transmission mode/restore factory value
11	TXOP2	A	Net port 2 TX-P
12	TXON2	A	Net port 2 TX-N
13	RXIP1	A	Net port 1 RX-P
14	RXIN1	A	Net port 1 RX-N
15	RXIN2	A	Net port 2 RX-P
16	RXIP2	A	Net port 2 RX-P
17	TXON1	A	Net port 1 TX-N
18	TXOP1	A	Net port 1 TX-P
19	RTS_N/GPIO_2	I/O	Uart 2 RTS
20	UART_RX	I	Uart 1 RX
21	UART_TX	0	Uart 1 TX
22	RXD/GPIO_3	I/O	Uart 2 RX
23	LINK1	I/O	Net port 1 connection indication(valid on low level)
24	CTS_N/GPIO_4	0	Uart 2 CTS
25	WPS/RST	I	WPS button/restore factory value
26	TXD/GPIO_5	0	Uart 2 TX
27	VDD_1_8	Power Out	Net port 1.8V output
28	VCC	Power In	5V input

Notes: The I/O port level voltage is 3.3 V

3 Quick Start

3.1 Restore factory settings

In order to ensure that all of the configuration process is correct, bring the module to restore the factory settings first. If it is already in factory mode, you can skip this step. Power on the module with 5V (350mA) electric source, wait about 30 seconds, After starting, Lower ES/RST pin more than Trst, release of ES/RST feet, the system will automatically restart. After rebooting the system the module is already in Factory mode.

3.2 Configure network parameter

Set the PC to static IP mode and then connect it with the module via Ethernet or wifi. The IP address is set to 192.168.16.100/255.255.255.0, gateway 192.168.16.254. The (wifi default ssid and the default password, see this document.) open the browser <http://192.168.16.254>, enter the web configuration page, default user name and password is admin / admin. Modify the network parameters through the web. Now, the module' s IP address is 192.168.16.254. Configuration details can be seen in 5.

3.3 Configure serial network parameter

Opens the browser <http://192.168.16.254/ser2net.asp>, enter the serial-to-network web configuration page. Configure the serial-to-network parameters as needed through a web page. Configuration details can be seen in 5.2.

4 Function Description

The module can be divided into four major modes: default mode, serial to Ethernet, serial to WIFI CLIENT and serial to WIFI AP. .

4.1 Serial to Ethernet

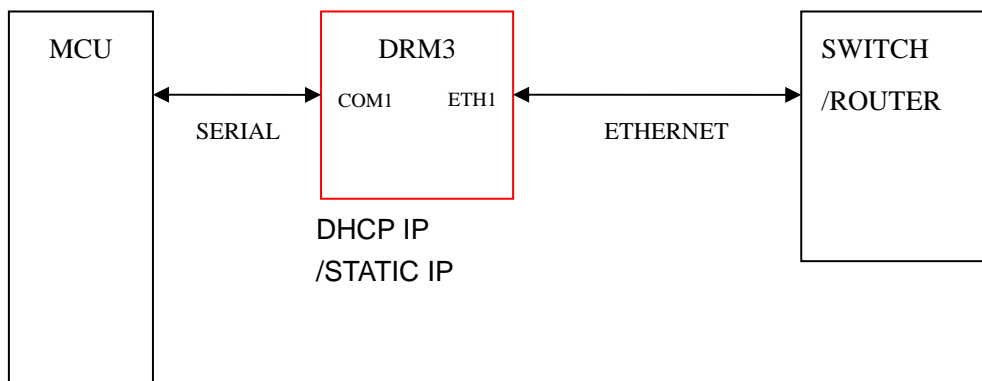


Chart3.serial to Ethernet model

In this mode, ETH1 enable, WIFI, ETH2 function close. Through the appropriate settings, the

data between COM1 and ETH1 network can achieve mutual conversion.

Ethernet can be configured as dynamic IP address (DHCP), can also be configured as static IP address (STATIC).

4.2 Serial to WIFI CLIENT

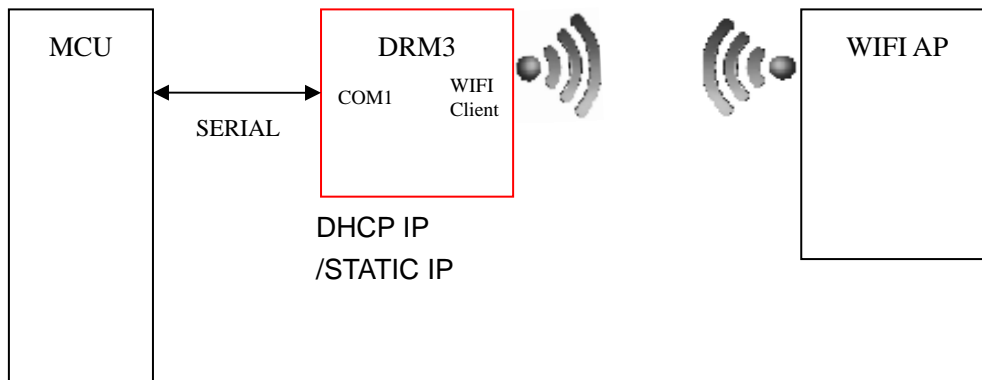


Chart 4.Serial to WIFI CLIENT model

In this mode, WIFI enable, module works in the client mode, ETH1, ETH2 function close. Through the appropriate settings, the data between COM1 and WIFI network can achieve mutual conversion.

WIFI CLIENT can be configured as dynamic IP address (DHCP), can also be configured as static IP address (STATIC).

WIFI safety: support all encryption methods at present.

4.3 Serial to WIFI AP

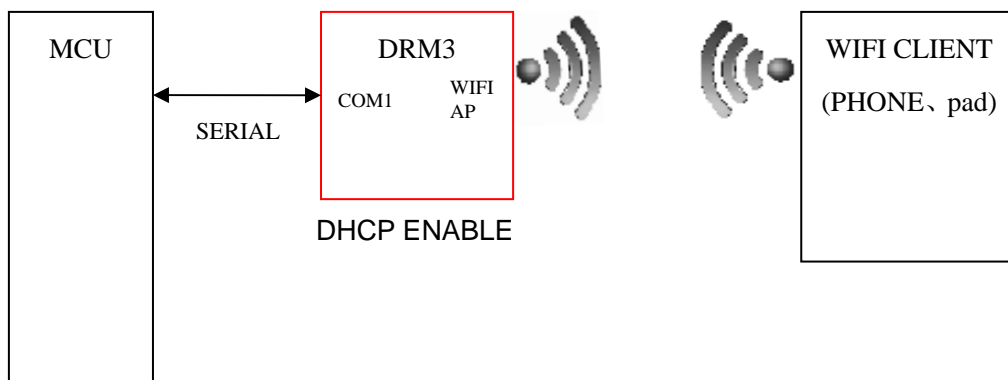


Chart 5. Serial to WIFI AP model

In this mode, WIFI enable, module works in the AP mode, ETH1, ETH2 function close.

Through the appropriate settings, the data between COM1 and WIFI network can achieve mutual conversion.

WIFI safety: support all encryption methods at present.

In this mode, WIFI device can connect with the module and become the device under WIFI LAN.

4.4 Default mode

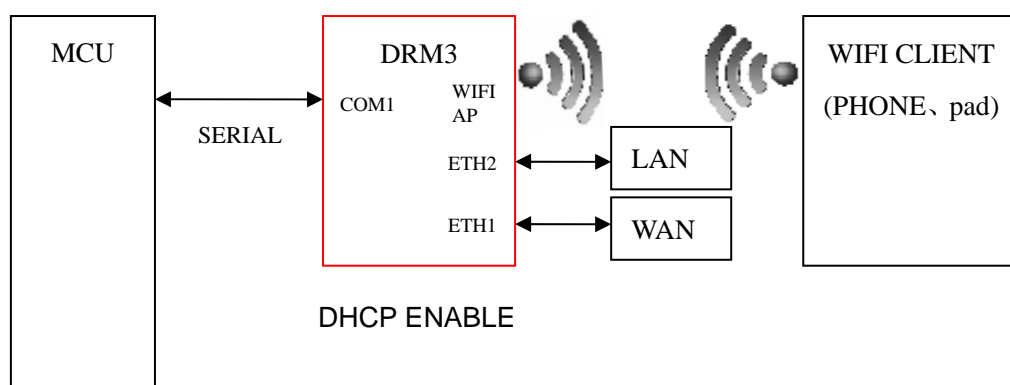


Chart 6.Default mode model

In this mode, WIFI enable, module works in the AP mode, ETH1, ETH2 function enable. ETH1 works as WAN, ETH2 works as LAN. Through the appropriate settings, the data between COM1 and network can achieve mutual conversion.

WIFI safety: support all encryption methods at present.

In this mode, WIFI device can connect with the module and become the device under WIFI LAN.

WAN default IP is dynamic IP address. LAN, WIFI for the same local area network, enabled by default DHCP server.

4.5 Serial work mode switching

Module serial work status is defined as two modes: transparent transmission mode, the AT command mode

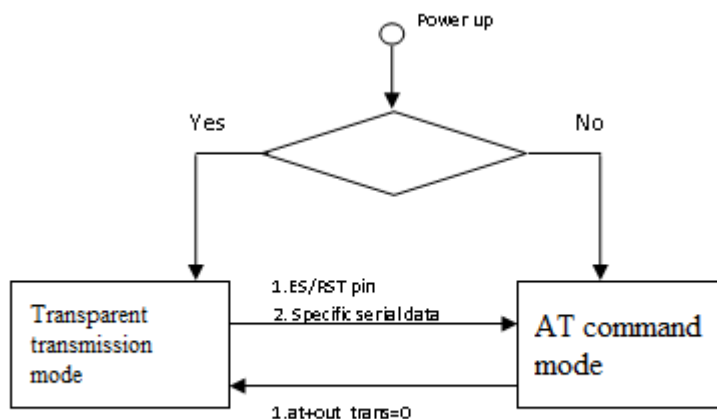


Chart 7. Serial work mode switching

After power-on normally, the module will check whether the current network serial port configuration is normal, if the network connection is normal, the module automatically enters transparent transmission mode, and otherwise the module will enter AT command mode.

There are two kinds of methods for transparent mode entering AT command mode:

1. ES/RST pin

In any state, to maintain the time of ES / RST pin' low level greater than T_{es} and less than T_{rst} , the module will immediately enter the AT command mode.

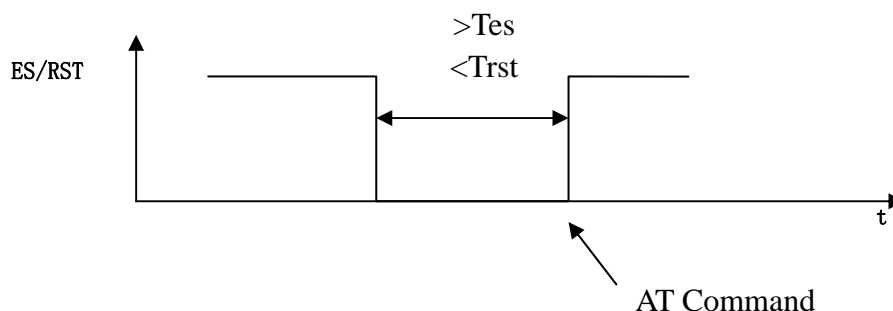


Chart 8. ES/RST Exit transparent transmission mode

2. Specific serial data

When serial exit pass-through feature is turned on, you can send specific serial data to make the module exit transparent transmission mode. Serial exit pass-through process is as follows:

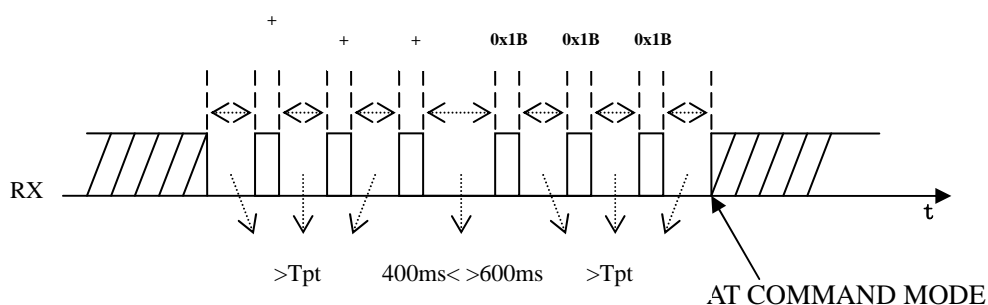


Chart 9. Serial exit transparent transmission mode

Notes:

Tpt: Serial framing time

The group frame time interval is greater than continuous send three "+", and then wait for about 500ms (400ms < 600ms) framing interval is greater than the time to send three consecutive 0x1B. The modules will exit the transparent transmission mode.

Notes: This function only can be used in the case of serial exit pass-through feature is turned on.

4.6 Serial-net data conversion

There are four mode for serial-net conversion: TCP Server、TCP Clinet、UDP Server、UDP Client。

TCP Server

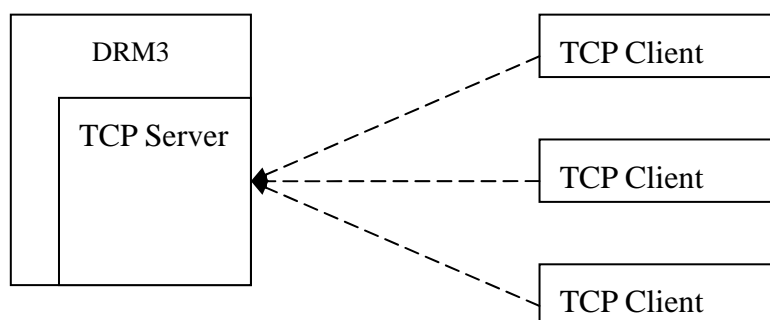


Chart 10. TCP Server

In this mode, the module is listening on the specified port, waiting for TCP Client connection, if connected, all TCP data is sent directly to the serial port end, the data of the serial end sent to TCP Clie n end

TCP Client

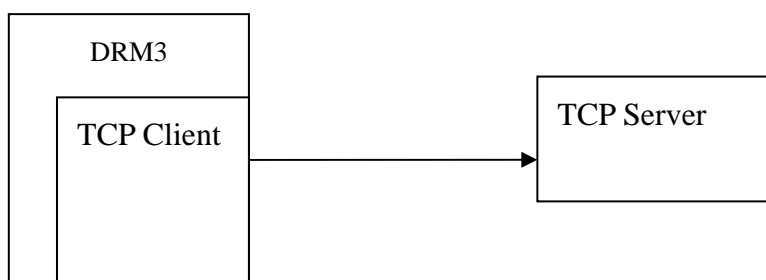


Chart 11.TCP Client

In this mode, the module is connected to the specified domain / IP port. All the data sent from the TCP Server-side end will be sent directly to the serial port, the data from the serial end sent to the TCP Server-side. Abnormal network disconnect will cause the module active reconnect. TCP Active reconnection function enable, TCP Server initiative disconnected, the module will immediately take the initiative to reconnect, and otherwise the module will not reconnect.

UDP Server

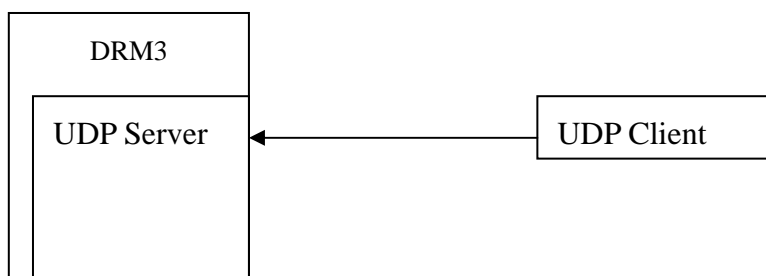


Chart 12.UDP Server

In this mode, the module opens the local designated port, once received the data sent to the port, the module will send the data to the serial port, and record the remote ip, port. The module will record only the last information on the remote connection. Serial received data will be sent directly to the recorded remote ip, port.

UDP Client

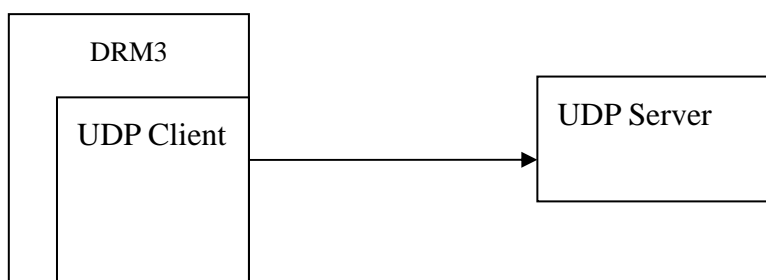


Chart 13.UDP Client

In this mode, the module directly sends the serial data to the specified ip, port. The serial data returned from the server-side will be distributed to serial port.

4.7 Parameter configuration direction

The module provides two ways for the configuration parameters:

- 1.WEB page;
2. Serial AT command.

Access to WEB configuration page requires the confirmation of the module' s IP addresses, as well as the user name and password that authenticated by WEB.

Configuring parameters through the serial port AT command needs to make the module into the AT command mode first.

Serial configuration tool HLK-RM04_CONFIG: Configure the module through AT command, provide a easier and convenient configuration process through the configuration combination of each parameter.

5 WEB configuration

Serial2Net Settings

NetMode:

	Current	Updated
Serial Configure:	115200,8,n,1	<input type="text" value="115200, 8, n, 1"/>
Serial Framing Lenth:	64	<input type="text" value="64"/>
Serial Framing Timeout:	10 milliseconds	<input type="text" value="10"/> milliseconds (< 256, 0 for no timeout)
Network Mode:	client	<input type="text" value="Client"/>
Remote Server Domain/IP:	192.168.11.245	<input type="text" value="192.168.11.245"/>
Locale/Remote Port Number:	8080	<input type="text" value="8080"/>
Network Protocol:	tcp	<input type="text" value="TCP"/>
Network Timeout:	0 seconds	<input type="text" value="0"/> seconds (< 256, 0 for no timeout)

Chart 14.WEB configuration page

Through the correct module address (default address:http://192.168.16.254/ser2net.asp),you can access to the WEB configuration page.

The page can be divided into 3 areas: :

- 1 Network configuration area
- 2 Serial function configuration areas
- 3 Configuration submit area

5.1WEBnetwork configuration

Net mode selection: :

Default - default work mode

ETH-SERIAL - Serial to Ethernet

WIFI (CLIENT)-SERIAL - serial to WIFI CLIENT

WIFI (AP)-SERIAL) - Serial to WIFI AP

Choose different work mode, the web will show you different page.Mode configuration page is as follows:

5.1.1Serial to Ethernet-dynamic ip

NetMode:

IP Type:

Chart 15. Serial to Ethernet-dynamic

5.1.2 Serial to Ethernet-static ip

NetMode:	ETH-SERIAL
IP Type:	STATIC
IP Address:	192.168.11.254
Subnet Mask:	255.255.255.0
Default Gateway:	192.168.11.1
Primary DNS Server:	192.168.11.1
Secondary DNS Server:	8.8.8.8

Chart 16. Serial to Ethernet-static

5.1.3 Serial to WIFI CLIENT-dynamic ip

NetMode:	WIFI (CLIENT)-SERIAL
SSID:	DRM3
Encrypt Type:	WPA2 AES
Password:	12345678
IP Type:	DHCP

Chart17. serial to WIFI CLIENT dynamic

5.1.4 Serial to WIFI CLIENT-static ip

NetMode:	WIFI (CLIENT)-SERIAL ▼
SSID:	DRM3
Encrypt Type:	WPA2 AES ▼
Password:	12345678
IP Type:	STATIC ▼
IP Address:	192.168.11.254
Subnet Mask:	255.255.255.0
Default Gateway:	192.168.11.1
Primary DNS Server:	192.168.11.1
Secondary DNS Server:	8.8.8.8

Chart 18. Serial to WIFI CLIENT-static

5.1.5 Serial to WIFI AP

NetMode:	WIFI (AP)-SERIAL ▼
SSID:	DRM3
Encrypt Type:	WPA2 AES ▼
Password:	12345678
IP Address:	192.168.11.254
Subnet Mask:	255.255.255.0

Chart 19. Serial to WIFI AP

5.2 WEB serial configuration

Serial Web configuration page (ser2net.asp) is as follows:

	Current	Updated
Serial Configure:	115200,8,n,1	<input type="text" value="115200,8,n,1"/>
Serial Framing Lenth:	64	<input type="text" value="64"/>
Serial Framing Timeout:	10 milliseconds	<input type="text" value="10"/> milliseconds (< 256, 0 for no timeout)
Network Mode:	none	<input type="text" value="None"/>
Remote Server Domain/IP:	192.168.11.245	<input type="text" value="192.168.11.245"/>
Locale/Remote Port Number:	8080	<input type="text" value="8080"/>
Network Protocol:	tcp	<input type="text" value="TCP"/>
Network Timeout:	0 seconds	<input type="text" value="0"/> seconds (< 256, 0 for no timeout)

Chart 20. web serial configuration

Current shows the current configuration , **Updated** shows the current revision parameters. **Submit** submit the revision.

Serial Configure: Serial configuration.fomat: Baud rate, data bits, parity bit, stop bit.
For example: “115200,8,n,1” .

Serial Framing Lenth: The Lenth of Serial Framing

Serial Framing Timeout: The time of Serial Framing

Network Mode: choose Client、 Server or none。

Remote Server Domain/IP: Remote Server Domain/IP address

For expmale: 192. 168. 11. 245 or www.drykt.com 。

Locale/Remote Port Number: The specified parameter is not the same under the different network modes. Client specifies the port number on the remote, Server specified local port number.

Network Protocol: Use tcp or udp Protocol

Network Timeout: Under the server network mode, no data transmission within the timeout period, the connection will be disconnected. 0 specifies never disconnected.

5.3 Submitting Alteration


Click the button ‘Apply’ to submit the configuration of the current page. If some parameters of the network have changed, the submission process may take about 25 seconds. If you only modify the serial functional configuration, the submission process will be completed soon.

Click the button ‘Cancel’ to reload the page, the modified configuration will be lost.。

6 Serial AT command configuration

6.1 Access to AT command mode

Module in network fault, such as fault allocation situation will automatically exit the transparent transmission mode, enter AT instruction mode. In any condition, keep ES/RST feet low level of time but more than T_{es} and less than T_{rst} , the module will enter AT instruction mode immediately.

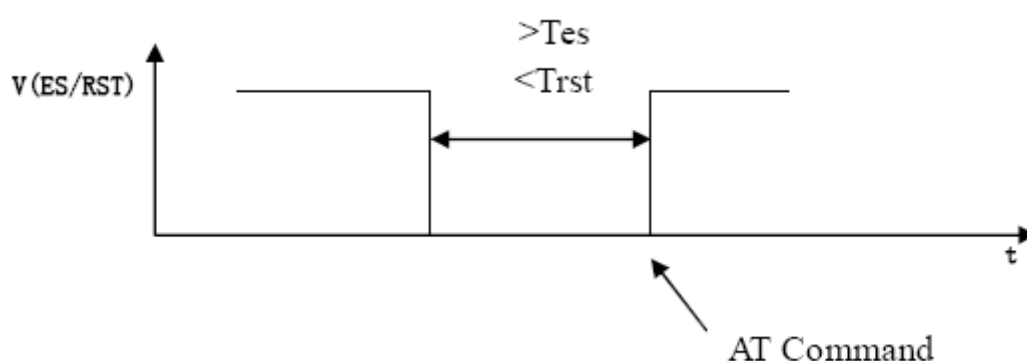

6.2 AT Command

In AT mode, you can configure the system parameters through the serial port AT instruction. Instruction format is as follows:

`At+[command]=[value]\r`

According to the different command, module will return a different return value.

For example: `"at+remoteip=192.168.11.133\r"` set remote ip address as 192.168.11.133.

For example: `"at+remoteip=? \r"` Inquiry remote ip address.

At command is as follows:

netmode	Network mode
wifi_conf	WiFi configuration
Channel	WiFi channel
dhcpc	DHCP client configuration
net_ip	Network ip address
net_dns	Network dns address
dhcpcd	DHCP server configuration
dhcpcd_ip	DHCP server ip address
dhcpcd_dns	DHCP server dns address
dhcpcd_time	DHCP sever time allocation

net_commit	Submit network configuration
out_trans	Exit transparent transmission mode
remoteip	Remote server domain name or IP address
remoteport	The local or distal port number
remoteproto	Network Protocol type
timeout	Network timeout
mode	Network mode
uart	Serial port configuration
uartpacklen	Serial group frame length
uartpacktimeout	Serial framing time
escape	Serial exiting the Pass-through
tcp_auto	TCP automatic reconnection
save	Save the configuration and start service
reconn	Restart services
default	Restore factory value settings
reboot	Restart the module
ver	The version of module
CLport	TCP/UDP CLIENT local port
RTS	Serial output indication (485)
XON_XOFF	XON/XOFF flow control enable
net_wanip	wan ip address
tcp_client_check	TCP CLIENT remote status detection
S2N_Stat	Serial function status
Get_MAC	Get MAC address
wifi_ConState	WiFi CLIENT connection status
wifi_Scan	WiFi scan
suspend	System suspend
C2_uart	Serial 2 uart configuration
C2_mode	Serial 2 Serial network mode
C2_remoteip	Serial 2 remote server domain name or IP address
C2_port	Serial 2 local or remote port
C2_CLport	Serial 2 TCP/UDP CLIENT local port
C2_protocol	Serial 2 network protocol type
C2_timeout	Serial 2 network timeout

C2_uartpacklen	Serial 2 Serial group fram length
C2_uartpacktimeout	Serial 2 Serial group fram time
C2_tcp_auto	Serial 2 TCP Automatic reconnection
C2_tcp_client_check	Serial 2 TCP CLIENT remote status detection

6.2.1 netmode

Function:

Network mode setting

Format:

at+netmode=<netmode>\r

Parameters:

network mode

value	meaning
0	Default setup
1	Ethernet
2	WiFi client
3	WiFi AP

6.2.2 wifi_conf

Function:

Wireless parameter setting

Format:

at+wifi_conf=<ssid>, <encrypt type>, <password> \r

Parameters:

ssid: Network SSID

encrypt type: Encryption mode

Encryption mode

value	meaning
none	Open network
wep_open	Wep encryption, open authentication method
wep	wep encryption, encryption authentication
wpa_tkip	wpa tkip
wpa_aes	wpa aes
wpa2_tkip	wpa2 tkip
wpa2_aes	wpa2 aes
wpawpa2_tkip	wpa/wpa2 tkip
wpawpa2_aes	wpa/wpa2 aes
auto	Automatic selection

6.2.3 Channel

Function:

WiFi wireless channel select

Format:

at+Channel=<Channel>\r

Parameter:

Channel:0-14

6.2.4 dhcpc

Function:

Dhcp client enable

Format:

at+dhcpc=<dhcpc>\r

Parameter:

Dhcp client enable

value	meaning
0	Static ip address
1	Dynamic ip address

6.2.5 net_ip

Function:

Network mode setting. This parameter is not valid when Dhcp client feature is turned on.

Format:

at+Net_ip=<ip>, <mask>, <gateway>\r

Parameters:

Ip: Ip address

Mask: Subnet mask

Gateway: Gateway Network Ele

6.2.6 net_dns

Function:

Network mode setting. This parameter is not valid when Dhcp client feature is turned on

Format:

at+Net_dns=<dns1>, <dns2>\r

Parameters:

dns1: Major DNS address

dns2: Minor DNS address

6.2.7 dhcpd

Function:

DHCP server enable. This parameter is not valid when the network mode is AP.

Format:

At+dhcpd=<dhcpd>\r

Parameters:

Dhcp servers enable

value	meaning
0	close
1	open

6.2.8 dhcpd_ip

Function:

Dhcp server IP setting

Format:

At+Dhcpd_ip=<ip start>, <ip end>, <mask>, <gateway>\r

parameters:

Ip start: Ip started address

Ip end: Ip ended address

Mask: Subnet mask

Gateway: Gateway Network Element

6.2.9 dhcpd_dns

Function:

Dhcp server dns setting

Format:

At+Dhcpd_dns=<dns1>, <dns2>\r

parameters:

dns1: Major dns address

dns2: Minor dns address

6.2.10 dhcpd_time

Function:

Dhcp server dns setting

Format:

At+Dhcpd_time=<time >\r

parameters:

time: Dhcp effective time assigned to device.

6.2.11 net_commit

Function:

Submit to network setting. Network configuration parameters set to be submitted by this parameter to save the entry into force.

Format:

At+ Net_commit=< Net_commit >\r

Parameters:

Submit to network setting

value	meaning
-------	---------

0	invalid
1	submit

6.2.12 out_trans

Function:

Exit the transparent transmission mode.

Format:

At+out_trans=<out_trans>\r

Parameters:

Exit the transparent transmission mode

value	meaning
0	In the transparent transmission mode
1	Exit the transparent transmission mode

6.2.13 remoteip

Function:

Remote ip or domain name setting

Format:

At+remoteip=< remoteip >\r

Parameters:

Remote server domain name or IP address

6.2.14 remoteport

Function:

Remote port setting

Format:

At+ remoteport=<remoteport>\r

Parameters:

Remoteport: Remote port

6.2.15 remotepro

Function:

Protocol Type setting

Format:

At+ remotepro=<remotepro>\r

Parameters:

remotepro parameters setting

alue	meaning
None	No protocol
Tcp	Tcp protocol
Udp	Udp protocol

6.2.16 timeout

Function:

Network time-out

Format:

At+timeout=<timeout>\r

Parameters:

Network time-out server . Network mode, when there is not any data transfer during the time-out, the connection will be disconnected. 0 specifies never disconnected.

6.2.17 mode

Function:

The conversion mode setting

Format:

At+mode=<mode>\r

Parameters:

mode setting

value	meaning
None	No protocol
Client	Tcp protocol
Server	Udp protocol

6.2.18 uart

Function:

Serial configuration setting

Format:

At+uart=<baud>, <data>, <parity>, <stop>\r

Parameters:

Baud: Baud rate

Data: Data bits

Parity: Parity bit

Stop: length of stop bit

6.2.19 uartpacklen

Function:

Serial framing length setting

Format:

At+uartpacklen=<uartpacklen>\r

Parameters:

uartpacklen: Serial framing length (Unit: bit)

6.2.20 uartpacktimeout

Function:

Serial framing time setting

Format:

At+uartpacktimeout=<uartpacktimeout>\r

Parameters:

uartpacktimeout: Serial framing time (unit: ms) .

6.2.21 escape

Function:

Serial exiting the Pass-through enable

Format:

At+escape=<escape>\r

Parameters:

escape: 0 - close, 1 - enable.

6.2.22 tcp_auto

Function:

TCP automatic reconnection

Format:

At+tcp_auto=<tcp_auto>\r

Parameters:

tcp_auto: 0 - close, 1 - enable.

6.2.23 save

Function:

Submitted to serial converter configuration and restart the service.

Format:

At+save=<save>\r

Parameters:

submit to network setting

value	meaning
0	invalid
1	submit

6.2.24 reconn

Function:

Restart serial transformation service

Format:

At+ reconn =< reconn >\r

Parameters:

reconn

value	meaning
0	invalid
1	Restart serial transformation service

6.2.25 ver

Function:

Inquiry the firmware versio

Format:

At+ ver =? \r

Parameters:

None

6.26 Clport

Function:

TCP/UDP CLIENT local port

Format:

At+ CLport=< CLport>\r

Parameters:

Clport: Local port

6.2.27 RTS

Function:

Serial output instructions. 485 programs typically require a separate pin to indicate 485 transceiver receiving or sending state. This Function enabled, GPIO_1 pin indicates the serial port output state as an output pin.

Format:

At+ RTS =< RTS >\r

Parameters:

RTS

value	meaning
0	Close
1	open

6.2.28 XON_XOFF

Function:

XON/XOFF flow control enabled

Format:

At+ XON_XOFF=< XON_XOFF >\r

Parameters:

XON_XOFF

value	meaning
0	Close
1	open

6.2.29 net_wanip

Function:

wan ip address

Format:

At+ net_wanip =? \r

Parameters:

None

6.2.30 tcp_client_check

Function:

TCP CLIENT remote status detection

Format:

At+ tcp_client_check =< tcp_client_check >\r

Parameters:

tcp_client_check

value	meaning
0	Close

1	open
---	------

6.2.31 S2N_Stat

Function:

Serial Function status

Format:

At+ S2N_Stat =? \r

Parameters:

None

6.2.32 Get_MAC

Function:

Get MAC address

Format:

At+ Get_MAC =? \r

Parameters:

None

6.2.33 wifi_ConState

Function:

WiFi CLIENT connection status

Format:

At+ wifi_ConState =? \r

Parameters:

None

6.2.34 wifi_Scan

Function:

WiFi Scan

Format:

At+ wifi_Scan =? \r

Parameters:

None

6.2.35 suspend

Function:

System suspend

Format:

At+ suspend =< suspend >\r

Parameters:

suspend	
value	meaning
0	awake
1	suspend

6.2.36 C2_remoteip

Function:

Serial 2 remote ip or domain name setting

Format:

At+ C2_remoteip=< remoteip >\r

Parameters:

Remote server domain name or IP address

6.2.37 C2_remoteport

Function:

Serial 2 remote port setting

Format:

At+ C2_remoteport=<remoteport>\r

Parameters:

Remoteport

6.2.38 remotepro

Function:

Serial 2 Protocol type setting

Format:

At+ C2_remotepro=<remotepro>\r

Parameters:

remotepro	
value	meaning

None	none
Tcp	Tcp Protocal
Udp	Udp Protocal

6.2.39 C2_timeout

Function:

Serial 2 network timeout

Format:

At+ C2_timeout=<timeout>\r

Parameters:

Network timeout, in the server network mode, if there is none data transfer during the timeout period, the connection will be disconnected. 0 specifies never disconnected.

6.2.40 C2_mode

Function:

Serial 2 Convert mode setting

Format:

At+ C2_mode=<mode>\r

Parameters:

mode	
value	meaning
None	None
Client	clinet
Server	server

6.2.41 C2_uart

Function:

Serial 2 uart configuration setting

Format:

At+ C2_uart=<baud>, <data>, <parity>, <stop>\r

Parameters:

Baud: Baud rate

Data: Data bit

Parity: Parity bit

Stop: length of stop bit

6.2.42 C2_uartpacklen

Function:

Serial 2 uart group fram length setting

Format:

At+ C2_uartpacklen =<uartpacklen>\r

Parameters:

uartpacklen: length of uart group fram (Unit: byte)

6.2.43 C2_uartpacktimeout

Function:

Serial 2 uart group fram time setting

Format:

At+ C2_uartpacktimeout=<uaktimertpacout>\r

Parameters:

uartpacktimeout uart group fram time (Unit: ms)

6.2.44 C2_tcp_auto

Function:

Serial 2 TCP reconnect automaticly. When this Function turned on, regardless of any cause disconnected, the module will continue to try to re-establish the connection.

Format:

At+ C2_tcp_auto=<tcp_auto>\r

Parameters:

tcp_auto: 0 - Close, 1 - enable

6.2.45 C2_tcp_client_check

Function:

Serial 2 TCP CLIENT remote status detection

Format:

At+ C2_tcp_client_check =< tcp_client_check >\r

Parameters:

tcp_client_check

value	meaning
-------	---------

0	Close
1	open

6.3 AT command control code roution

6.3.1 Inquiry configuration information

Code:

```
char *query="\n\nat+netmode=?\r\n|\nat+wifi_conf=?\r\n|\nat+dhcpd=?\r\n|\nat+dhcpd_ip=?\r\n|\nat+dhcpd_dns=?\r\n|\nat+dhcpd_time=?\r\n|\nat+dhcpc=?\r\n|\nat+net_ip=?\r\n|\nat+net_dns=?\r\n|\nat+net_wanip=?\r\n|\nat+remoteip=?\r\n|\nat+remoteport=?\r\n|\nat+remotepro=?\r\n|\nat+timeout=?\r\n|\nat+mode=?\r\n|\nat+uart=?\r\n|\nat+uartpacklen=?\r\n|\nat+uartpacktimeout=?\r\n|\nat+ver=?\r\n|\n";
```

```
Com_send(query);
```

Run,return:

```
at+netmode=? 0
at+wifi_conf=? DRM3,wpa2_aes,12345678
at+dhcpd=? 0
at+dhcpd_ip=? 192.168.14.1,192.168.15.254,255.255.254.0,192.168.15.254
at+dhcpd_dns=? 192.168.15.254,0.0.0.0
at+dhcpd_time=? 86400
at+dhcpc=? 1
at+net_ip=? 192.168.15.254,255.255.254.0,192.168.11.1
at+net_dns=? 192.168.11.1,0.0.0.0
```

```
at+net_wanip=? ,,  
at+remoteip=? 192.168.11.245  
at+remoteport=? 8080  
at+remotepro=? tcp  
at+timeout=? 0  
at+mode=? server  
at+uart=? 115200,8,n,1  
at+uartpacklen=? 64  
at+uartpacktimeout=? 10  
at+ver=? V1.39(Dec 6 2012)
```

6.3.2 Serial to Ethernet(Dynamic ip address)

Code:

```
char *commands_eth="\n|\n|\nat+netmode=1|r|n|\nat+dhcpc=1|r|n|\n|\nat+remoteip=192.168.11.245|r|n|\nat+remoteport=8080|r|n|\nat+remotepro=tcp|r|n|\nat+timeout=0|r|n|\nat+mode=server|r|n|\nat+uart=115200,8,n,1|r|n|\nat+uartpacklen=64|r|n|\nat+uartpacktimeout=10|r|n|\nat+net_commit=1|r|n|\nat+reconn=1|r|n|\n";
```

```
Com_send(commands_eth);
```

Run and return:

```
at+netmode=1 ok  
at+dhcpc=1  
at+remoteip=192.168.11.245 ok  
at+remoteport=8080 ok  
at+remotepro=tcp  
at+timeout=0 ok  
at+mode=server  
at+uart=115200,8,n,1 ok  
at+uartpacklen=64 ok  
at+uartpacktimeout=10 ok
```

```
at+net_commit=1
```

6.3.3 Serial to Ethernet(static ip address)

Code:

```
char *commands_eth_static="\n|\nat+netmode=1|r|\n|\nat+dhcpc=0|r|\n|\nat+net_ip=192.168.11.254,255.255.255.0,192.168.11.1|r|\n|\nat+net_dns=192.168.11.1,8.8.8.8|r|\n|\nat+remoteip=192.168.11.245|r|\n|\nat+remoteport=8080|r|\n|\nat+remoteport=tcp|r|\n|\nat+timeout=0|r|\n|\nat+mode=server|r|\n|\nat+uart=115200,8,n,1|r|\n|\nat+uartpacklen=64|r|\n|\nat+uartpacktimeout=10|r|\n|\nat+net_commit=1|r|\n|\nat+reconn=1|r|\n|\n";\n\nCom_send(commands_eth_static);
```

Run and return:

```
at+netmode=1 ok\nat+dhcpc=0\nat+net_ip=192.168.11.254,255.255.255.0,192.168.11.1 ok\nat+net_dns=192.168.11.1,8.8.8.8 ok\nat+remoteip=192.168.11.245 ok\nat+remoteport=8080 ok\nat+remoteport=tcp\nat+timeout=0 ok\nat+mode=server\nat+uart=115200,8,n,1 ok\nat+uartpacklen=64 ok\nat+uartpacktimeout=10 ok\nat+net_commit=1
```

6.3.4 Serial to wifi client(dynamic IP address)

Code:

```
char *commands_wifi_client="\n|\n|
```

```
at+netmode=2\r\n|\n|\nat+wifi_conf=DRM3, wpa2_aes, 12345678\r\n|\n|\nat+dhcpc=1\r\n|\n|\nat+remoteip=192. 168. 11. 245\r\n|\n|\nat+remoteport=8080\r\n|\n|\nat+remoteport=tcp\r\n|\n|\nat+timeout=0\r\n|\n|\nat+mode=server\r\n|\n|\nat+uart=115200, 8, n, 1\r\n|\n|\nat+uartpacklen=64\r\n|\n|\nat+uartpacktimeout=10\r\n|\n|\nat+net_commit=1\r\n|\n|\nat+reconn=1\r\n|\n|\n";
```

```
Com_send(commands_wifi_client);
```

Run and return:

```
at+netmode=2 ok
at+wifi_conf=DRM3,wpa2_aes,12345678 ok
at+dhcpc=1
at+remoteip=192.168.11.245 ok
at+remoteport=8080 ok
at+remoteport=tcp
at+timeout=0 ok
at+mode=server
at+uart=115200,8,n,1 ok
at+uartpacklen=64 ok
at+uartpacktimeout=10 ok
at+net_commit=1
```

6.3.5 Serial to wifi client(static IP address)

Code:

```
char *commands_wifi_client_static="\n|\nat+netmode=2\r\n|\n|\nat+wifi_conf=DRM3, wpa2_aes, 12345678\r\n|\n|\nat+dhcpc=0\r\n|\n|\nat+net_ip=192. 168. 11. 254, 255. 255. 255. 0, 192. 168. 11. 1\r\n|\n|\nat+net_dns=192. 168. 11. 1, 8. 8. 8. 8\r\n|\n|\nat+remoteip=192. 168. 11. 245\r\n|\n|\n";
```

```
at+remoteport=8080\r\n|
at+remoteport=tcp\r\n|
at+timeout=0\r\n|
at+mode=server\r\n|
at+uart=115200,8,n,1\r\n|
at+uartpacklen=64\r\n|
at+uartpacktimeout=10\r\n|
at+net_commit=1\r\n|
at+reconn=1\r\n|
";

Com_send(commands_wifi_client_static);
```


Run and return:

```
at+netmode=2 ok
at+wifi_conf=DRM3,wpa2_aes,12345678 ok
at+dhcpc=0
at+net_ip=192.168.11.254,255.255.255.0,192.168.11.1 ok
at+net_dns=192.168.11.1,8.8.8.8 ok
at+remoteip=192.168.11.245 ok
at+remoteport=8080 ok
at+remoteport=tcp
at+timeout=0 ok
at+mode=server
at+uart=115200,8,n,1 ok
at+uartpacklen=64 ok
at+uartpacktimeout=10 ok
at+net_commit=1
```

6.3.6 Serial to wifi AP

Code:

```
char *commands_wifi_ap="\r\n|
at+netmode=3\r\n|
at+wifi_conf=DRM3,wpa2_aes,0000000000\r\n|
at+dhcpcd=1\r\n|
at+dhcpcd_ip=192.168.16.100,192.168.16.200,255.255.255.0,192.168.16.254\r\n|
at+dhcpcd_dns=192.168.16.254,8.8.8.8\r\n|
at+dhcpcd_time=86400\r\n|
at+net_ip=192.168.16.254,255.255.255.0,192.168.16.254\r\n|
at+net_dns=192.168.16.254,8.8.8.8\r\n|
\r\n|
```



```
Com_send(commands_wifi_ap);
```

```
at+netmode=3 ok
at+wifi_conf=DRM3,wpa2_aes,0000000000 ok
at+dhcpcd=1 ok
at+dhcpcd_ip=192.168.16.100,192.168.16.200,255.255.255.0,192.168.16.254 ok
at+dhcpcd_dns=192.168.16.254,8.8.8.8 ok
at+dhcpcd_time=86400 ok
at+net_ip=192.168.16.254,255.255.255.0,192.168.16.254 ok
at+net_dns=192.168.16.254,8.8.8.8 ok
at+remoteip=192.168.11.245 ok
at+remoteport=8080 ok
at+remoteproto=tcp
at+timeout=0 ok
at+mode=server
at+uart=115200,8,n,1 ok
at+uartpacklen=64 ok
at+uartpacktimeout=10 ok
at+net_commit=1
```

```
Com send(commands device default);
```


Run and return:

t+default=1

After 30s, the modules start normally, all configuration parameters change to the factory configuration.

7 Serial configuration tools

DRM3_CONFIG is a configuration tools that configurate the module through the serial port. Tool interface is as follows:

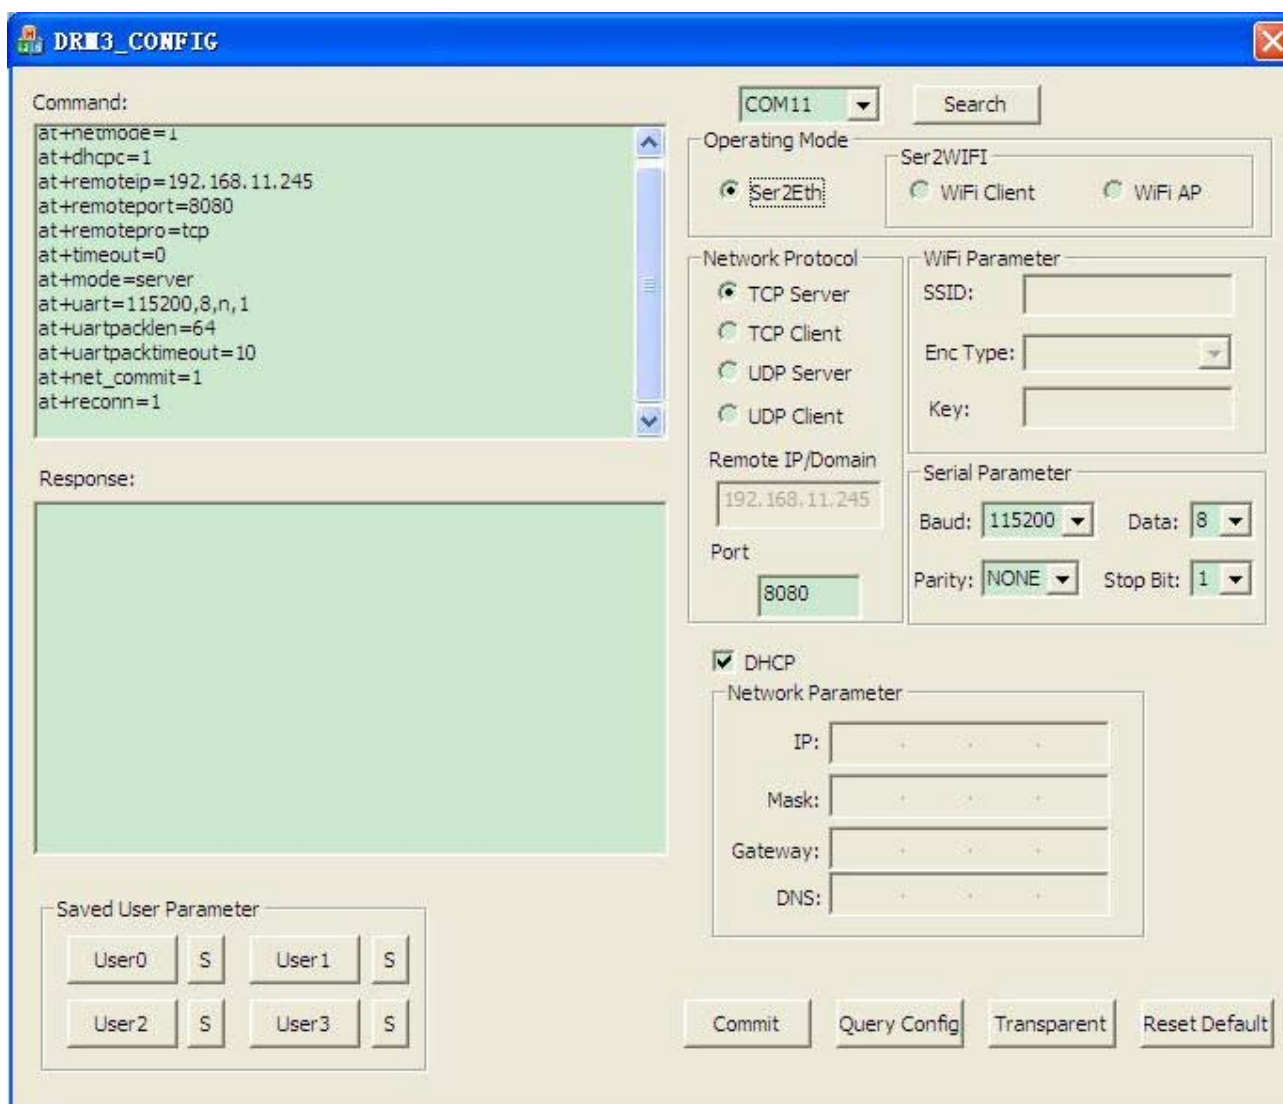


Chart15. Configuration tools interface

Description:

1. 'Com 11' stands for configuration serial option
2. Search: module searching button
3. Operation mode: work mode selection

4. Wifi Parameter: wireless parameter configuration
5. Network Protocol: Network protocol selection
6. Serial Parameter: Serial parameter configuration
7. IP: Network IP address configuration
8. Commit: submit the configuration
9. Query config: Inquiry the configuration
10. Transparent: Access to transparent transmission mode
11. Reset Default: Restore the factory value setting
12. Saved User Parameter: User parameter holding area

13. Command: Ready for sent AT instruction area

14. Response: AT instruction return information area

7.1 Searching the Module

Through the "configure serial port choice" choose PC serial number and click on the "search module" button, the tool will use the specified serial search the module DRM3, the module will be searched if it has been connected and in AT instruction mode . The module information will be found in the AT instruction return information area. Shown as below:

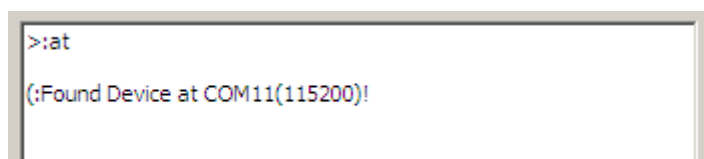


Chart16. searching the module

At this time, The PC and module have been able to establish the normal AT command communication. All the AT interactive orders need to process based on the normal AT instruction communication.

7.2 Set each Parameters

Configure the required function through the configuration items 3, 4, 5, 6, 7. The Configuration and modification information would immediately create the matching AT command in the ready for sent AT instruction area. The generated AT instruction will not send to the module at once. Shown as below:

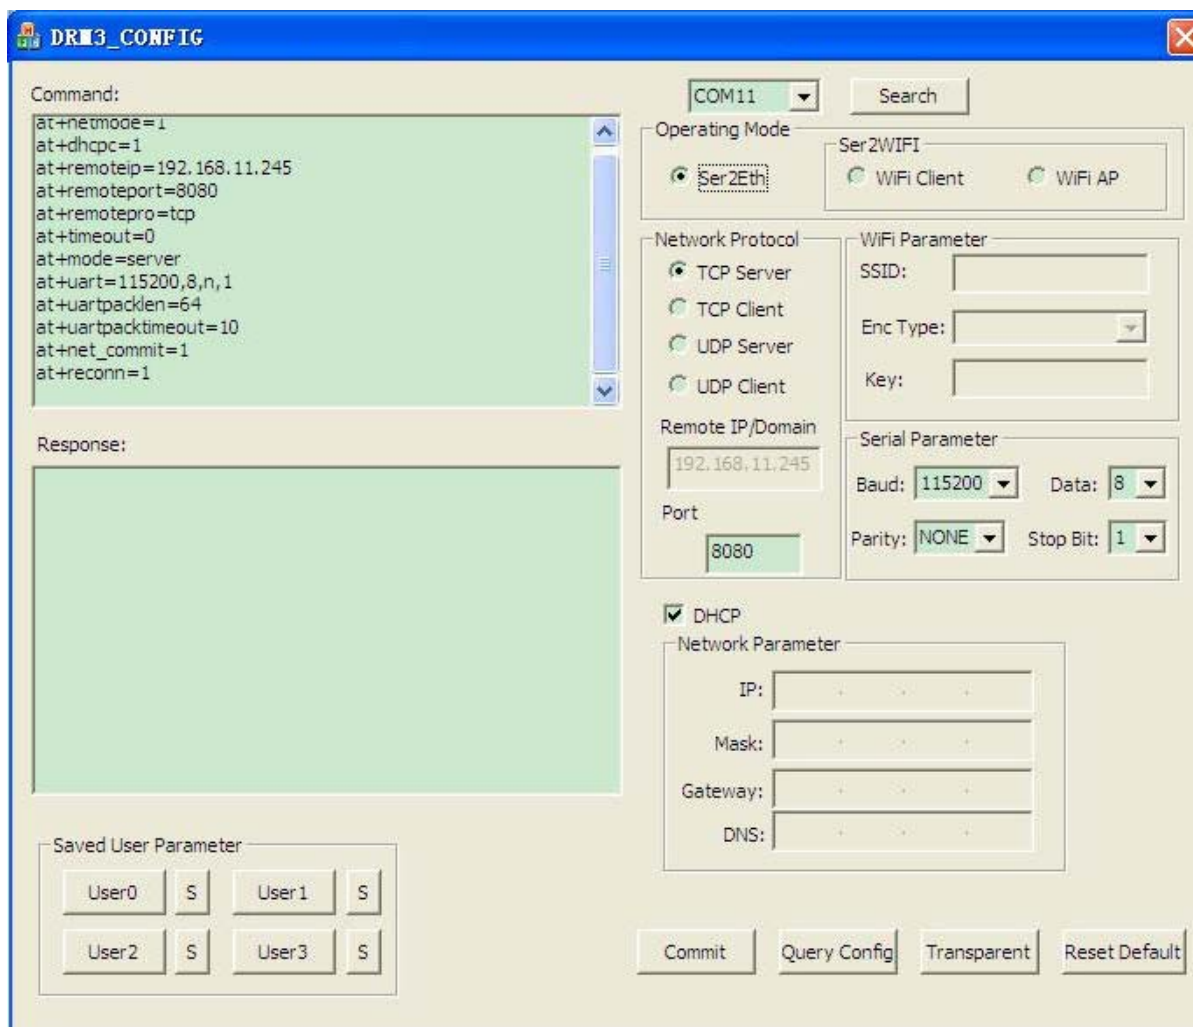


Chart17. Serial configuration tool generates AT command

7.3 Submit the configuration

Click the submit configuration button, the tool will send the AT instruction in the ready for sent area to the module immediately. The information of command execution results will be shown in AT instruction return information area.

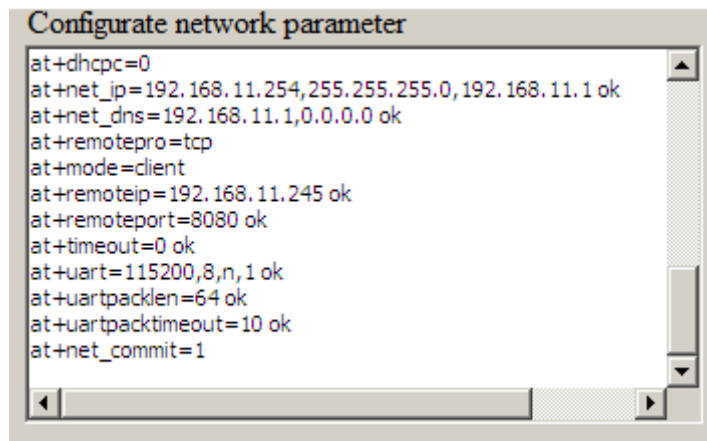


Chart 18. Serial configuration tools instruction execution

7.4 User Data Retention

The user parameter holding area provides parameter saving function. Through this function you can save up four sets of parameters at most, respectively, user0 user1, user2, user3. Click "S" button, it will pop up a confirmation dialog shown as below:

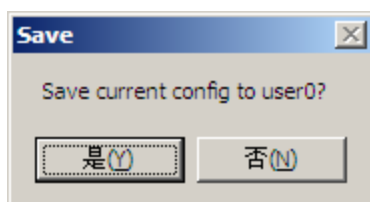


Chart 19. Pop-up Dialog of parameter saving

Click on the button "yes", the instruction in the ready for sent AT instruction area will save for user0 parameter group. After this step, when you click "user0" anytime, this parameter group can be called immediately, and covered to the ready for sent AT instruction area.

The stored user parameter will save as text file in the tools contents, file name, respectively, user0, user1, user2, user3.

7.5 Inquiry configuration

Click on the button 'inquiry', The tool will send a series of AT instructions immediately to the module to inquire the current configuration of the module, the result of execution will show in AT instruction return information area at once, each configuration items will make corresponding change with the return information.

7.6 Access to transparent transmission mode

If the module has already in the AT instruction mode, click on the button 'T/T', you can access to the transparent transmission mode at once.

7.7 Restore factory factory value setting

Click on the button 'reset', the tool will pop up a confirmed box shown as below:

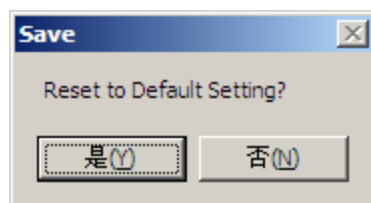


Chart 20. Pop-up box for reset default setting

Click on the button 'yes', The tools will send AT instruction immediately, after about 30 seconds, the module will access to the default state.

8 Device Search tools

DRM3_Discover is a search tool of network end used to search the module.
DRM3. The interface is as follows:

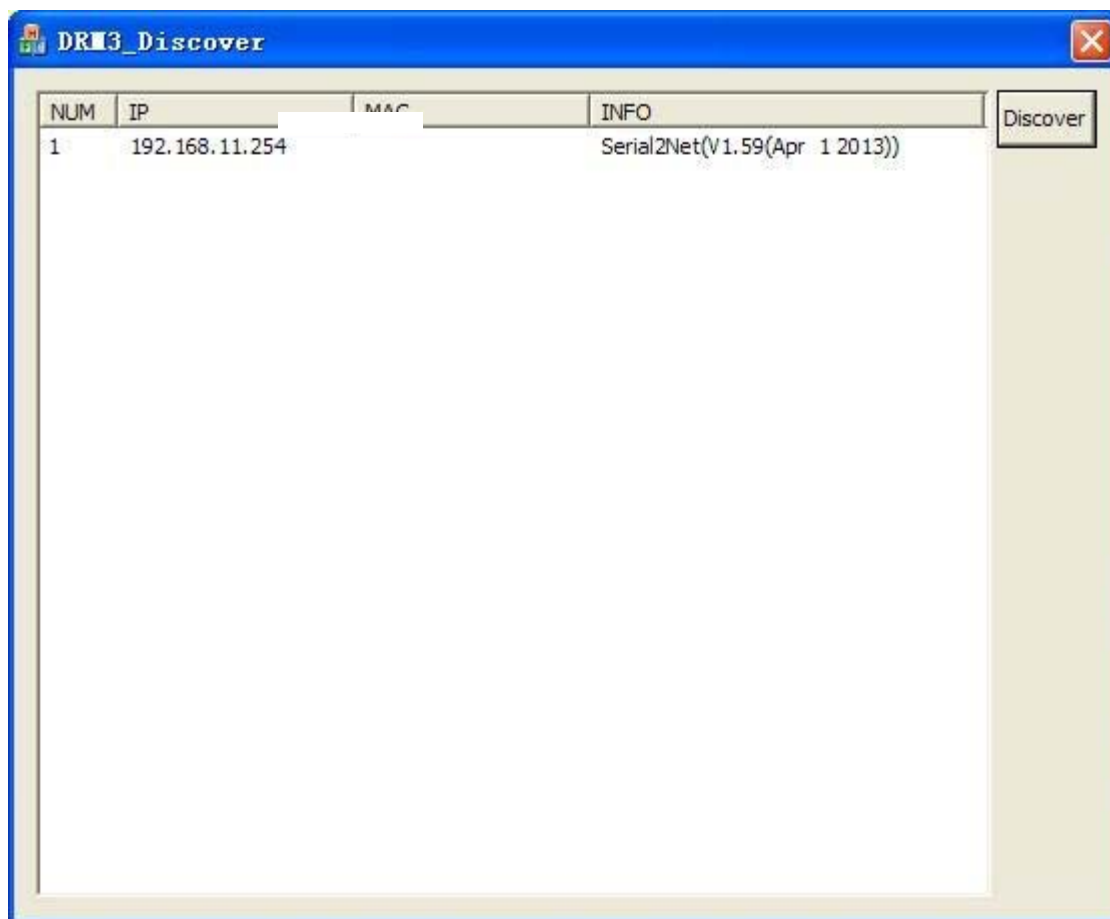



Chart 21. Device search tools

Click on the button "Discover", the tools will search all the DRM3 module connected with PC in the LAN. The module being searched will show in the information box soon. The module information including: IP address, MAC address and version of it.

9 Restore factory Settings

support the following ways to restore the factory settings

1. Through the Web page.
2. Through the serial port AT instruction
3. By keeping the ES/RST pin low level time greater than Trst.

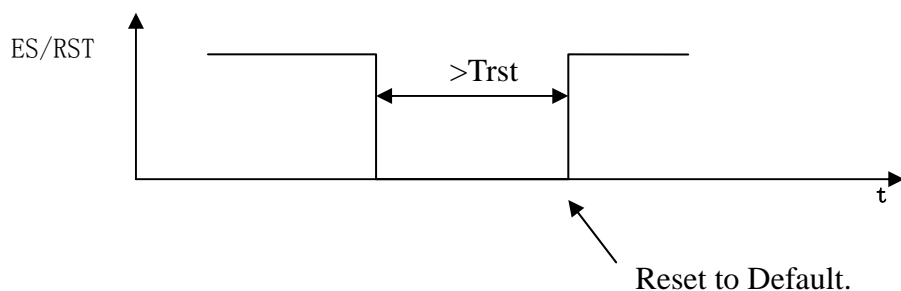

Factory setting parameter values see the following list:

netmode	0
wifi_conf	DRM3, wpa2_aes, 12345678
Channel	1
dhcpc	1
net_ip	192. 168. 11. 254, 255. 255. 255. 0, 192. 168. 11. 1
net_dns	192. 168. 11. 1, 8. 8. 8. 8
dhcpd	1
dhcpd_ip	192. 168. 16. 100, 192. 168. 16. 200, 255. 255. 255. 0, 192. 168. 16. 1
dhcpd_dns	192. 168. 16. 1, 8. 8. 8. 8
dhcpd_time	86400
remoteip	192. 168. 11. 245
remoteport	8080
remotepro	tcp
timeout	0
mode	server
uart	115200, 8, n, 1
uartpacklen	64
uartpacktimeout	10
escape	0
escape2	1
tcp_auto	1
IP address	192. 168. 16. 254
Wifi password	12345678
Web username/password	admin/admin
Tes	100ms
Trst	6s

Tescape2	2000ms
C2_uart	57600, 8, n, 1
C2_mode	0
C2_remoteip	192. 168. 1. 245
C2_port	8081
C2_CLport	0
C2_protocol	1
C2_timeout	0
C2_uartpacklen	64
C2_uartpacktimeout	10
C2_tcp_auto	1
C2_tcp_client_check	1

10 Firmware upgrade

1. Restore the factory value.
2. pc can connect with module through Ethernet, ip 为:192.168.16.123/255.255.255.0.
Browser visits 192.168.16.254. Username / password: admin/admin。
3. Open the following page. Select the appropriate firmware, click apply upgrades. Wait about 1.5 minutes. Can not cut out the upgrade process, otherwise it may cause damage to the module.



Chart 23. Firmware upgrade

Appendix A document revision record

Version number	Revision range	Date
1.00	Draft version	2012-9-10
1.10		2012-12-17
1.20	Firmware v1.41	2013-01-04
1.21	Add part of the AT instruction description	2013-04-29
1.30	Add serial port 2 and add exit Function2	2013-06-29

Contact us:

Mr Chen

Hangzhou Taogu Information Technology co.,Ltd

Add:Room 903-5,NO.111 Hushu South Road,Gongshu District,Hangzhou,Zhejiang,China

Tel: +86 0571 85390625 QQ: 312571707

Email:15305817598@drykt.com Web:www.drykt.com

FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Please notice that if the FCC identification number is not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module. This exterior label can use wording such as the following: "Contains FCC ID: 2AP7X-DRM3" any similar wording that expresses the same meaning may be used.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This module is to be installed only in mobile or fixed applications, to generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structure(s) and the body of the user or nearby persons.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The module is limited to OEM installation ONLY.

The OEM integrator is responsible for ensuring that the end-user has no manual instruction to remove or install module.

A separate approval is required for all other operating configurations, including portable configurations with respect to Part 2.1093 and difference antenna configurations.

There is requirement that the grantee provide guidance to the host manufacturer for compliance with Part 15B requirements.