




## Quick Start Guide



Wi-Fi 6 AX1800 Dual-Radio In-Wall AP  
Model: MI13

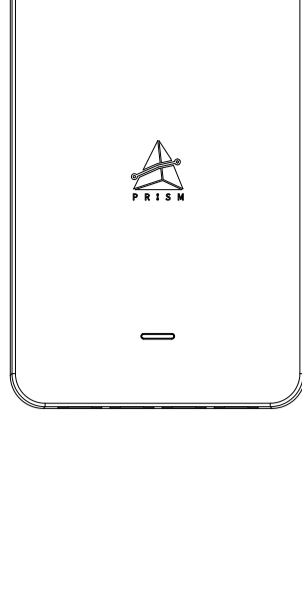

## Your AP

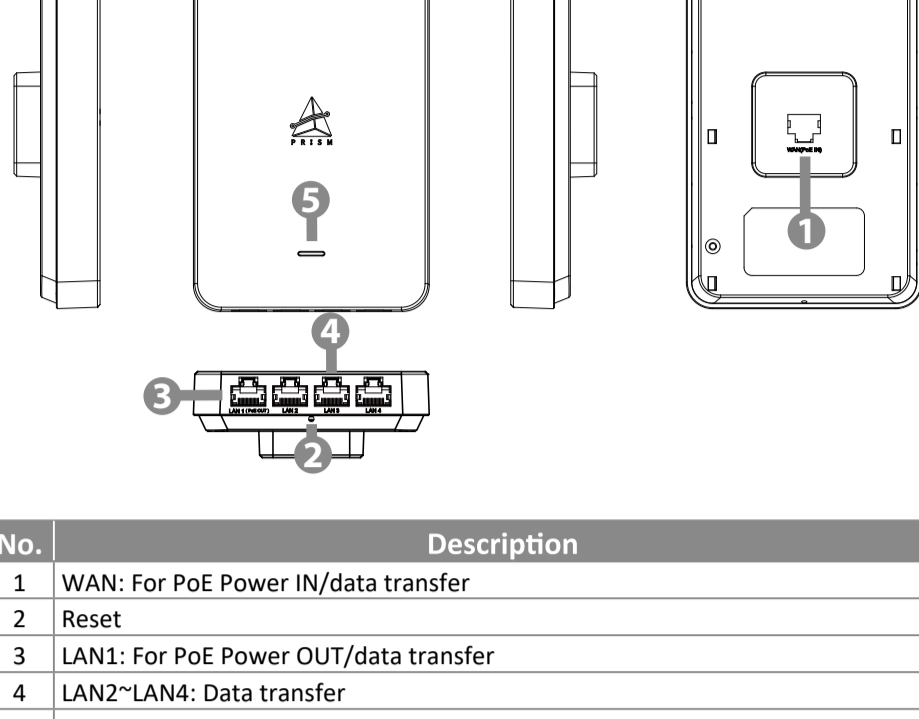

No.	Description
1	WAN: For PoE Power IN/data transfer
2	Reset
3	LAN1: For PoE Power OUT/data transfer
4	LAN2~LAN4: Data transfer
5	LED


LED Status	Definition
Flash Green / Off every second	The device is booting up
Flash Green / Blue every second	The device has lost network connectivity
Steady Green	The device is operated in standalone mode
Flash Blue / Off every second	The device is connecting to PrismX
Steady Blue	The device is operated in cloud mode
Flash Red / Off every second	The device status abnormal
Flash Green / Red every second	FW upgrading

## Installing the Wall Mount

- Secure the mounting bracket to the wall using 2 screws
- Connect RJ45 cable (with PoE) to WAN port of your AP



- Secure your AP to the mounting bracket



## Accessing the AP's Settings Menu


### Via Wi-Fi

- Configure your PC's IP setting to DHCP to automatically retrieve an IP address.
- Connect your PC's Wi-Fi to the SSID printed on the rear of the AP that corresponds to the frequency of the connection (2.4G / 5G) using the password "passphrase"
- Enter the IP address 192.168.2.1 in your browser.
- In the PRISM login screen use the following login:  
**Username:** prism  
**Password:** prism




### Via WAN (RJ-45)

- Configure your PC's IP setting to static and then set the IP address to any address from 192.168.19.2 to 192.168.19.250.
- Connect your PC's network port to the WAN port on the AP.
- Enter the IP address 192.168.19.1 in your browser.
- In the PRISM login screen use the following login:  
**Username:** prism  
**Password:** prism

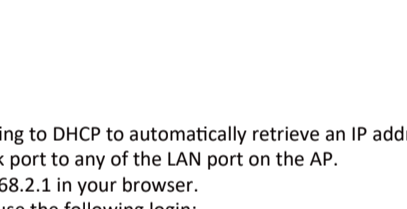

### Via LAN (RJ-45)

- Configure your PC's IP setting to DHCP to automatically retrieve an IP address.
- Connect your PC's network port to any of the LAN port on the AP.
- Enter the IP address 192.168.2.1 in your browser.
- In the PRISM login screen use the following login:  
**Username:** prism  
**Password:** prism

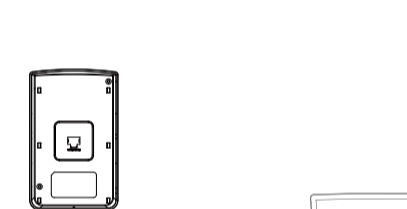

## Regulatory Statements

### IC Warning

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement."

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

Selon les règlements d'Industrie Canada, cet émetteur radio ne peut fonctionner qu'à l'aide d'une antenne d'un type et d'un gain maximal (ou moindre) approuvé pour l'émetteur par Industrie Canada. Pour réduire les interférences radioélectriques potentielles avec d'autres utilisateurs, le type d'antenne et son gain doivent être choisis de telle sorte que la puissance équivalente rayonnée (p.i.r.e.) ne soit pas supérieure à celle nécessaire pour une communication réussie.

**STATEMENT OF RADIATION EXPOSURE:**  
This equipment complies with the limites of exposure to IC radiation established for an uncontrolled environment. This equipment must be installed and used with a minimum of 20cm distance between the radiation source and your body.

**DÉCLARATION D'EXPOSITION AUX RADIATIONS:**  
Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20cm de distance entre la source de rayonnement et votre corps.

The device for operation in the band 5150–5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems.

les dispositifs fonctionnant dans la bande 5150-5250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux.

This device complies with **CAN ICES-3 (B)/NMB-3(B)**.

**FCC statement**  
This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:  
(1) this device may not cause harmful interference, and  
(2) this device must accept any interference received, including interference that may cause undesired operation.

**FCC Radiation Exposure Statement:**  
The equipment complies with FCC Radiation exposure limits set forth for uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

RED 2014/53/EU  
Declaration of Conformity Hereby, **Suzhou WINTECH Electronics Technology Co., Ltd.** declares that this **Wi-Fi 6 AX1800 Dual-Radio In-Wall AP** product is in compliance with essential requirements and other relevant provisions of Directive 2014/53/EU.

2.4GWi-Fi Frequency range: 2412-2472MHz, Maximum E.I.R.P: 18.09dBm  
5G Wi-Fi Frequency range: 5180-5240MHz, Maximum E.I.R.P: 22.03dBm  
5260-5320MHz, Maximum E.I.R.P: 22.08dBm  
5500-5700MHz, Maximum E.I.R.P: 24.93dBm  
5745-5825MHz, Maximum E.I.R.P: 13.67dBm

The device complies with RF specifications when the device used at 20cm form your body.

The device support wlan 5G(5150-5250MHz), and wlan 5G(5180-5240MHz) only used to indoor.

