



LTE Band 25_15MHz					
Channel	Frequency (MHz)	Peak To Average Ratio (dB)		Max. Limit (dB)	Result
		QPSK	16QAM		
26115	1857.5	4.85	6.05	13	Pass
26365	1882.5	4.86	6.14	13	Pass
26615	1907.5	4.53	5.61	13	Pass

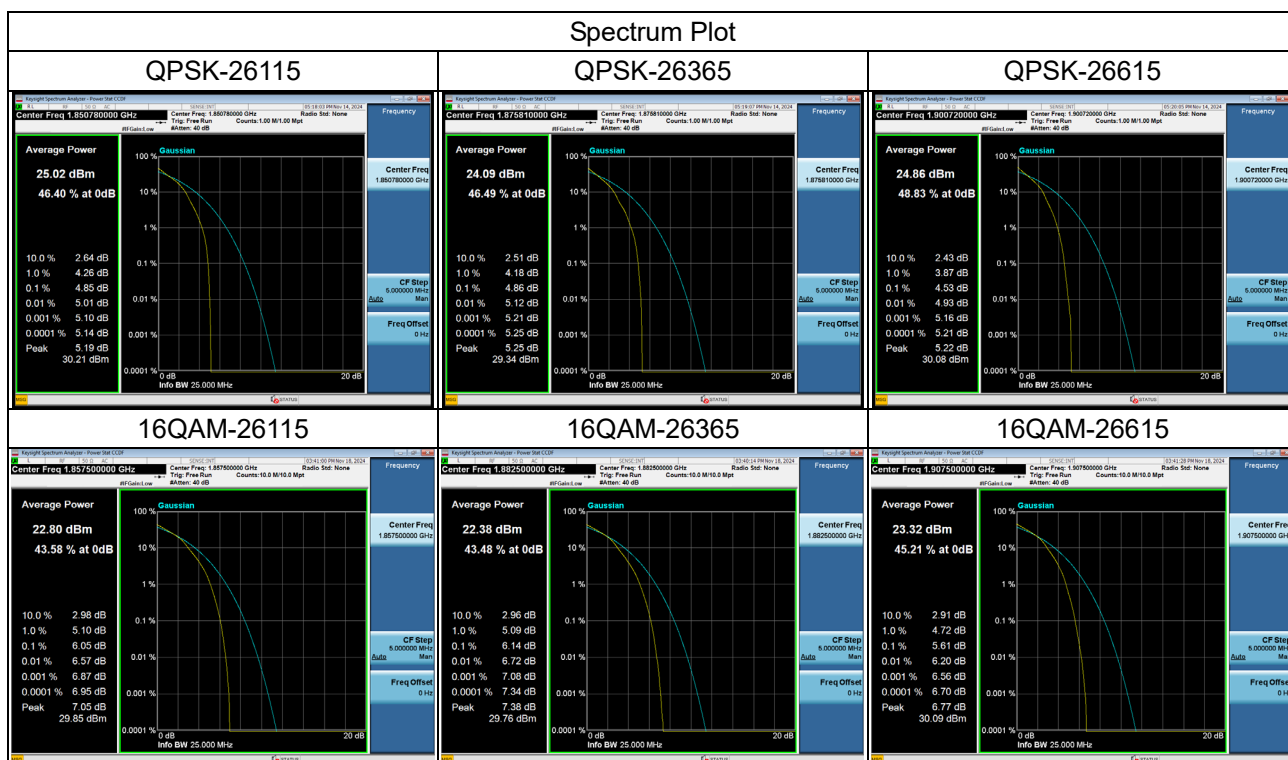

LTE Band 25_20MHz					
Channel	Frequency (MHz)	Peak To Average Ratio (dB)		Max. Limit (dB)	Result
		QPSK	16QAM		
26140	1860	4.65	6.03	13	Pass
26365	1882.5	4.69	6.25	13	Pass
26590	1905	4.84	5.91	13	Pass

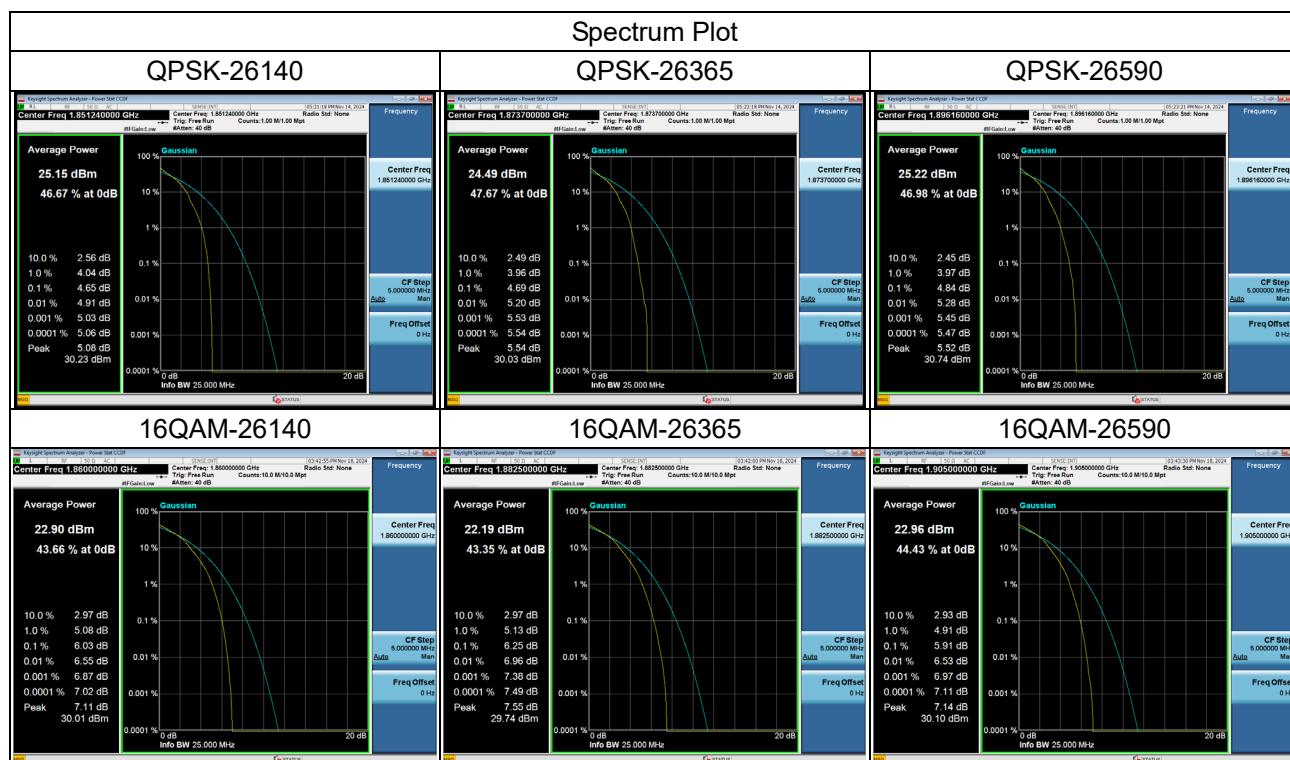

APPENDIX I - FREQUENCY STABILITY

Test Mode	LTE Band 2_20MHz
-----------	------------------

Frequency error versus temperature and supply voltage								
Temperature (°C)	Lowest channel Frequency error(MHz)	Highest channel Frequency error(MHz)	Reference point:-13dBm		Frequency calculation value (MHz) Limit: The resulting frequencies must remain within the band		Verdict	worst ppm
			f _L (MHz)	f _H (MHz)	Lowest channel limit: 1850MHz	Highest channel limit: 1910MHz		Record only
50	-0.00000332	-0.00001833	1850.570000	1909.630000	1850.569997	1909.630018	Pass	-0.0096
40	0.00002032	-0.00000813			1850.569980	1909.630008	Pass	0.0109
30	-0.00001025	-0.00000851			1850.569990	1909.630009	Pass	-0.0055
20	0.00000242	0.00000689			1850.569998	1909.630007	Pass	0.0036
10	0.00001455	-0.00001626			1850.569985	1909.630016	Pass	-0.0086
0	0.00000362	-0.00000847			1850.569996	1909.630008	Pass	-0.0045
-10	0.00001752	-0.00000923			1850.569982	1909.630009	Pass	0.0094
-20	0.00000851	-0.00000623			1850.569991	1909.630006	Pass	0.0046
-30	-0.00000432	-0.00001625			1850.569996	1909.630016	Pass	-0.0086
Minimum voltage	0.00000743	-0.00000256			1850.569993	1909.630003	Pass	0.0040
Maximum voltage	-0.00000843	-0.00000648			1850.569992	1909.630006	Pass	-0.0045
Nominal voltage	0.00001233	-0.00000735			1850.569988	1909.630007	Pass	0.0066

Note: Nominal voltage= 12V, Maximum voltage= 13.8V, Minimum voltage= 10.2V.

Test Mode	LTE Band 25_20MHz
-----------	-------------------

Frequency error versus temperature and supply voltage

Temperature (°C)	Lowest channel Frequency error(MHz)	Highest channel Frequency error(MHz)	Reference point:-13dBm		Frequency calculation value (MHz) Limit:The resulting frequencies must remain within the band		Verdict	worst ppm
			f _L (MHz)	f _H (MHz)	Lowest channel limit:1850MHz	Highest channel limit:1915MHz		Record only
50	0.00000582	-0.00000733	1850.46 00	1914.35 00	1850.459994	1914.350007	Pass	-0.0038
40	0.00001232	0.00000358			1850.459988	1914.350004	Pass	0.0066
30	0.00001657	0.0000354			1850.459983	1914.350035	Pass	0.0186
20	-0.00001753	-0.00001232			1850.459982	1914.350012	Pass	-0.0094
10	0.00000432	0.00000248			1850.459996	1914.350002	Pass	0.0023
0	0.00000853	-0.00001252			1850.459991	1914.350013	Pass	-0.0066
-10	0.00001353	0.00000242			1850.459986	1914.350002	Pass	0.0073
-20	-0.0000023	-0.00000123			1850.459998	1914.350001	Pass	-0.0012
-30	0.00001539	0.00000442			1850.459985	1914.350004	Pass	0.0083
Minimum voltage	-0.00001236	0.00000835			1850.459988	1914.350008	Pass	-0.0066
Maximum voltage	-0.00000474	0.00000233			1850.459995	1914.350002	Pass	-0.0025
Nominal voltage	0.00000531	0.00000464			1850.459995	1914.350005	Pass	0.0029

Note: Nominal voltage= 12V, Maximum voltage= 13.8V, Minimum voltage= 10.2V.

End of Test Report