

348 mm

250 mm

125 mm

rock space

Install Guide


Wireless Range Extender
Model: RSD0606

LED	Color	Description
◇	Red	Solid: The device is starting. Blinking Slowly: The device is negotiating with a router/AP. Detecting signal with auto-extending feature (hasn't developed yet). Blinking quickly: The device is performing WPS negotiation to a router/AP.
	Green	Solid: Extended successfully, the WiFi signal is strong.
	Orange	Solid: Extended successfully, the WiFi signal is poor. Blinking: Extended successfully, the WiFi signal is very poor.


Button	Description
● RST	Use the end of a paper clip or a similar object to press and hold this button for about 8 seconds, and then release it to restore the extender to factory settings.
◇	Press this button and then (within 2 minutes) press WPS button on a router/AP to establish a WPS connection.


Option 1: Use Web Browser to Extender Your WiFi


- 1 Plug the extender (RSD0606) into an electrical outlet near your wireless router.

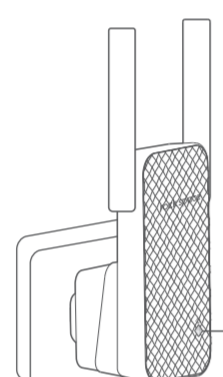



The LED indicator on the extender will be solid red when it is starting, and then starts blinking indicating successful start.
- 2 Use your computer to search and connect to the extender's WiFi. The default WiFi (SSID: rockspace XXXXXX) is on the product label on the extender's back panel.

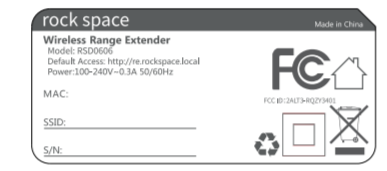

- 3 Launch a web browser, type the default login domain name <http://re.rockspace.local> or default login IP address **192.168.0.254** into the address bar, and tap **Enter** on the keyboard.

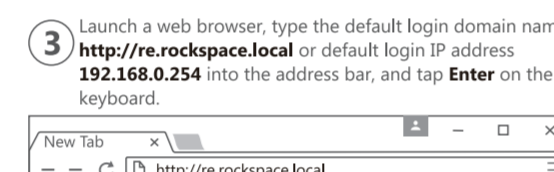
- 4 Select the WiFi name (SSID) you want to extend, and click **Next**.


- 5 Enter the WiFi password of the selected WiFi name (if any), and click **Finish**.

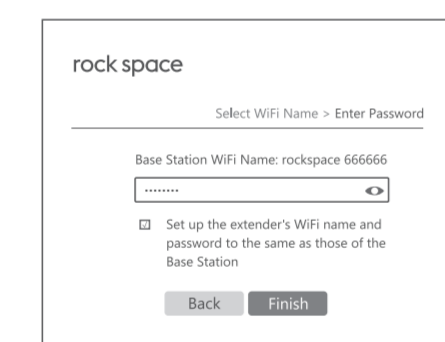
- 6 The device is performing extending process. Wait for a moment.


- 7 Extended successfully.

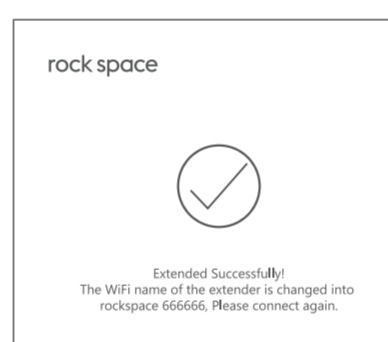


Tips If you don't want to set up the extender's WiFi name and password to the same as those of the selected WiFi name, uncheck the option before **Set up the extender's WiFi name and password to the same as those of the Base Station**, customize the extender's WiFi name and password, and then click **Finish**.

- 8 Relocate the extender to other electrical outlet. Observe the LED indicator on the extender to choose an optimum extended location for best WiFi performance.


Poor Signal

Blinking Orange Solid Orange Solid Green

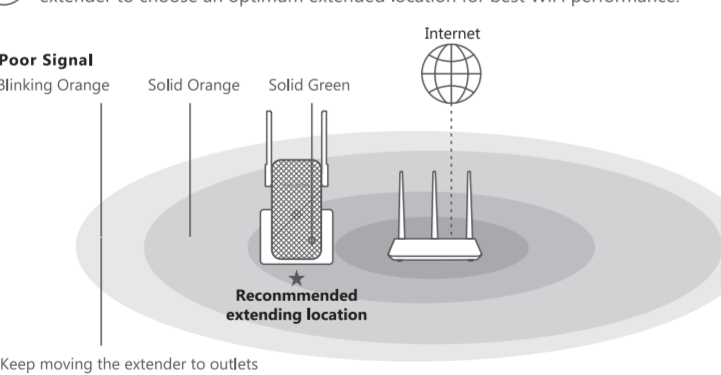


Keep moving the extender to outlets closer to the router until the LED indicator on the extender lights solid green.

Tips 1. You can also log in to the extender's web UI to check the WiFi signal strength (40%~79% is the optimum extending location).
2. Keep the extender away from Bluetooth devices, microwave, refrigerator, etc. to minimize signal interference.
- 9 Enjoy your WiFi! The extender's WiFi name and password are the same as those of your router.

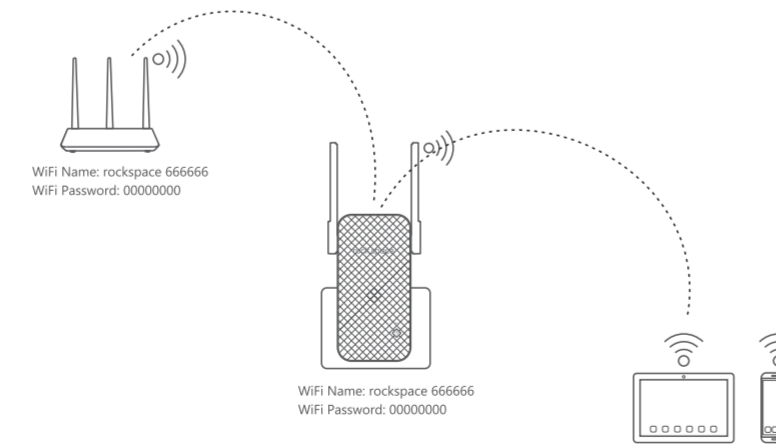


Option 2: Use WPS Button to Extender Your WiFi

- 1 Plug the extender (RSD0606) into an electrical outlet near your wireless router (with WPS enabled).

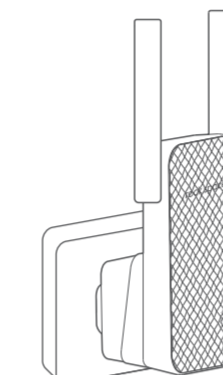


The LED indicator on the extender will be solid red when it is starting, and then starts blinking indicating successful start.
- 2 Press the WPS button on your router, and then (within 2 minutes) press the button on the extender.

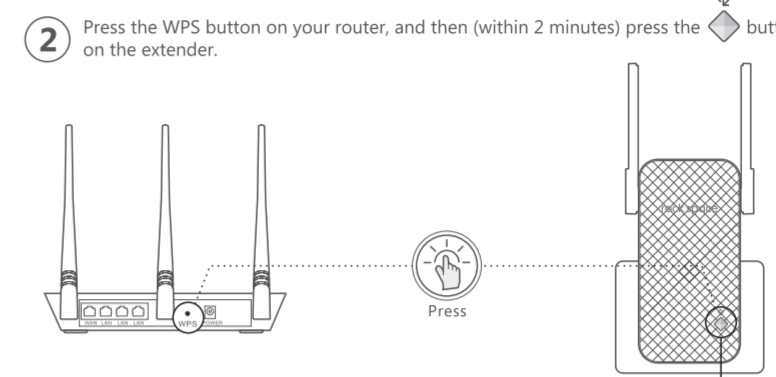

When the LED indicator turns to solid green, it indicates that a successful WPS connection has been established.
- 3 Relocate the extender to other electrical outlet. Observe the LED indicator on the extender to choose an optimum extended location for best WiFi performance.


Poor Signal

Blinking Orange Solid Orange Solid Green

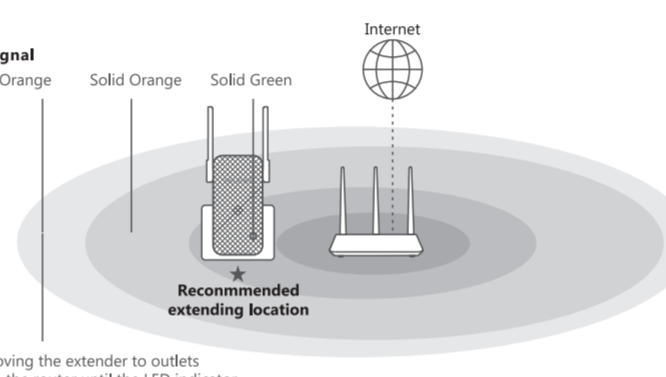


Keep moving the extender to outlets closer to the router until the LED indicator on the extender lights solid green.

Tips 1. You can also log in to the extender's web UI to check the WiFi signal strength (40%~79% is the optimum extending location).
2. Keep the extender away from Bluetooth devices, microwave, refrigerator, etc. to minimize signal interference.
- 4 Enjoy your WiFi! The extender's WiFi name and password are the same as those of your router.

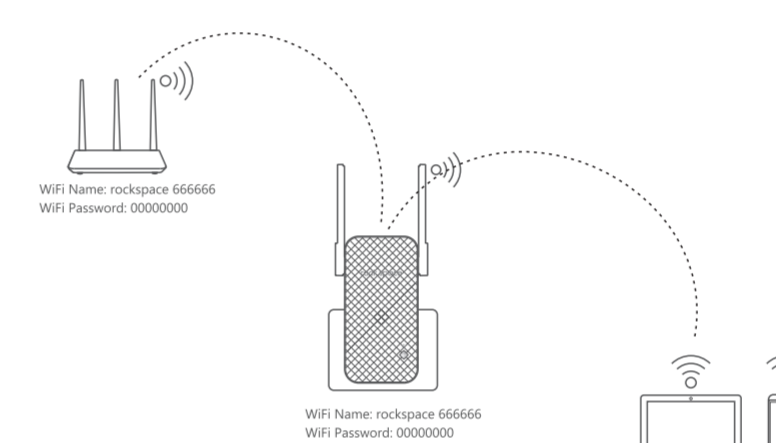

Position the antennas as shown in the figure below for best WiFi performance.

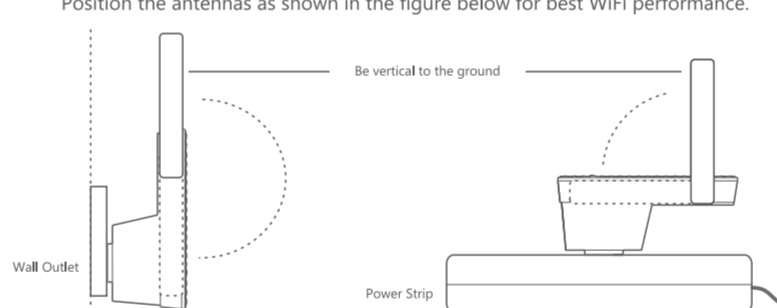

FAQ

Q1: I cannot log in to the extender's User Interface, what should I do?

A1:
Before extending
1. Use your computer to connect to the WiFi name (SSID) on the label of the extender's back panel.
2. Launch a web browser, type 192.168.0.254 or <http://re.rockspace.local> into the address bar and tap Enter on the keyboard.
After extending
1. Use your computer to connect to the extended WiFi name (if you customize the WiFi name of the extender, connect that).
2. Launch a web browser, type re.rockspace.hk into the address bar and tap Enter on the keyboard.

Q2: What should I do if my router has no WPS button?

A2: Follow Option 1: Use Web Browser to Extend Your WiFi to set up the extender.

Contact

Shenzhen Rengjing Excellent Investment Co., Ltd.
 Address: 3/F, Block A7, Nanshan iPark,
 No.1003 Xuyuan Road,
 Nanshan District, Shenzhen, China
 Email: techsupport@rockspace.cc

Please go to this website to download specific using instructions
<http://rockspace.hk/en/news-details.aspx?id=12>

250*348mm

70g书纸 双面单黑