
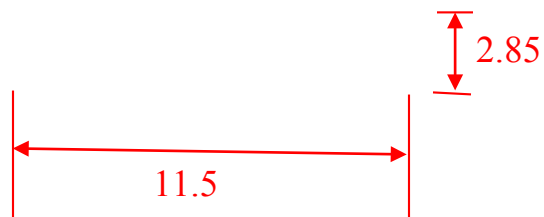


## Coil type Antenna Specification

### Summary

ITEM	ANT SPEC					
Model Name	SKS-DS-03					
Center Frequency	Horizontal			Vertical		
	2402M Hz	2440M Hz	2480M Hz	2402M Hz	2440M Hz	2480M Hz
	-2.83	-1.47	-0.11	-6.84	-3.95	-2.81
MAX. Gain	-0.11 dBi					
Polarization	Horizontal and Vertical					
Azimuth Beam Pattern	Omni-directional					
Impedance	50 Ohm					
Antenna Length						
Manufacture	Shenzhen ShiKeShu Photoelectric Co., Ltd					


Antenna Photo & Length (mm)

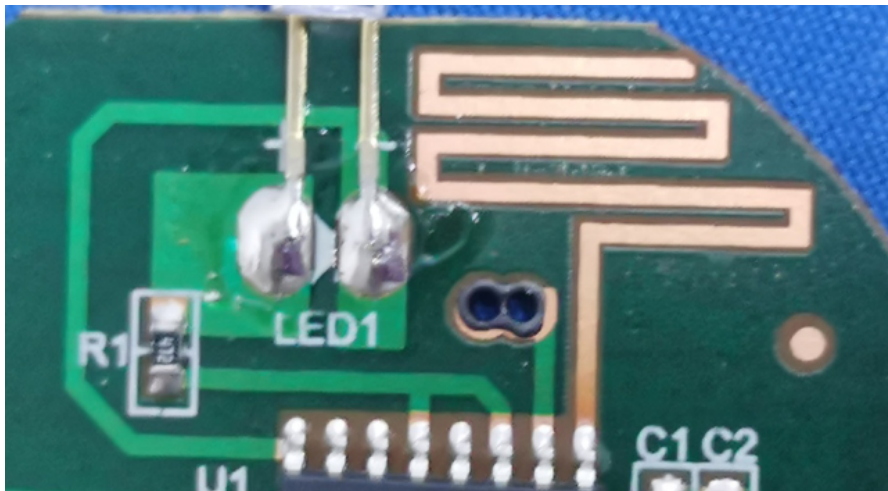

Horizontal: 2402 MHz 2440 MHz 2480 MHz

Power (dBm)

Max: 0 Min: -40 Scale: 5/div

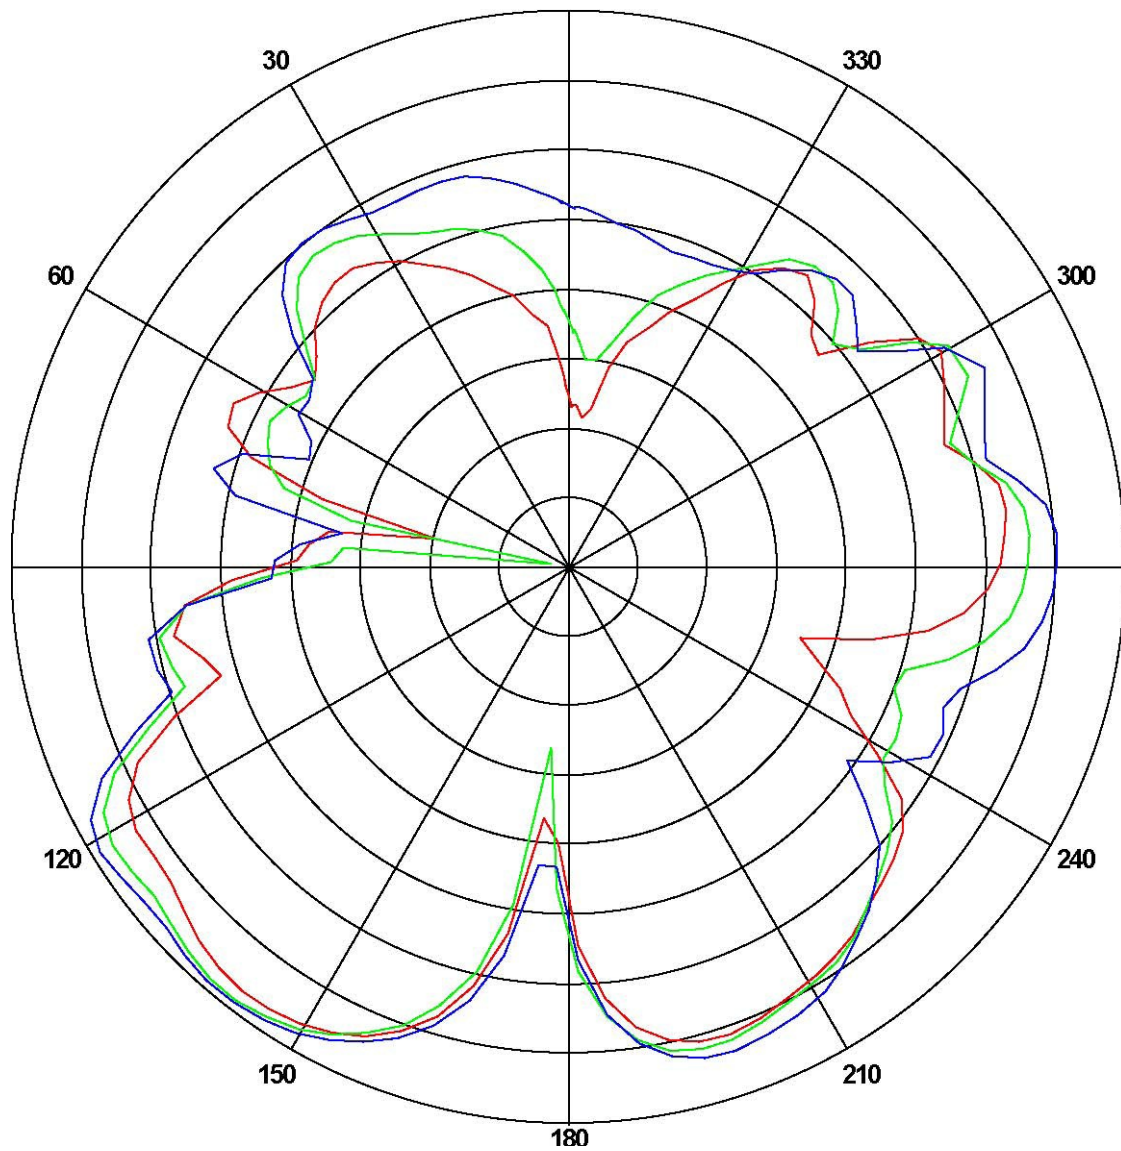


Frequency (MHz)	Gain(dBi)		
	Max	Min	Avg
2402	-2.83	-30.08	-7.18
2440	-1.47	-36.56	-7.48
2480	-0.11	-22.03	-6.59

Vertical: 2402 MHz 2440 MHz 2480 MHz

Power (dBm)

Max: 0 Min: -30 Scale: 5/div

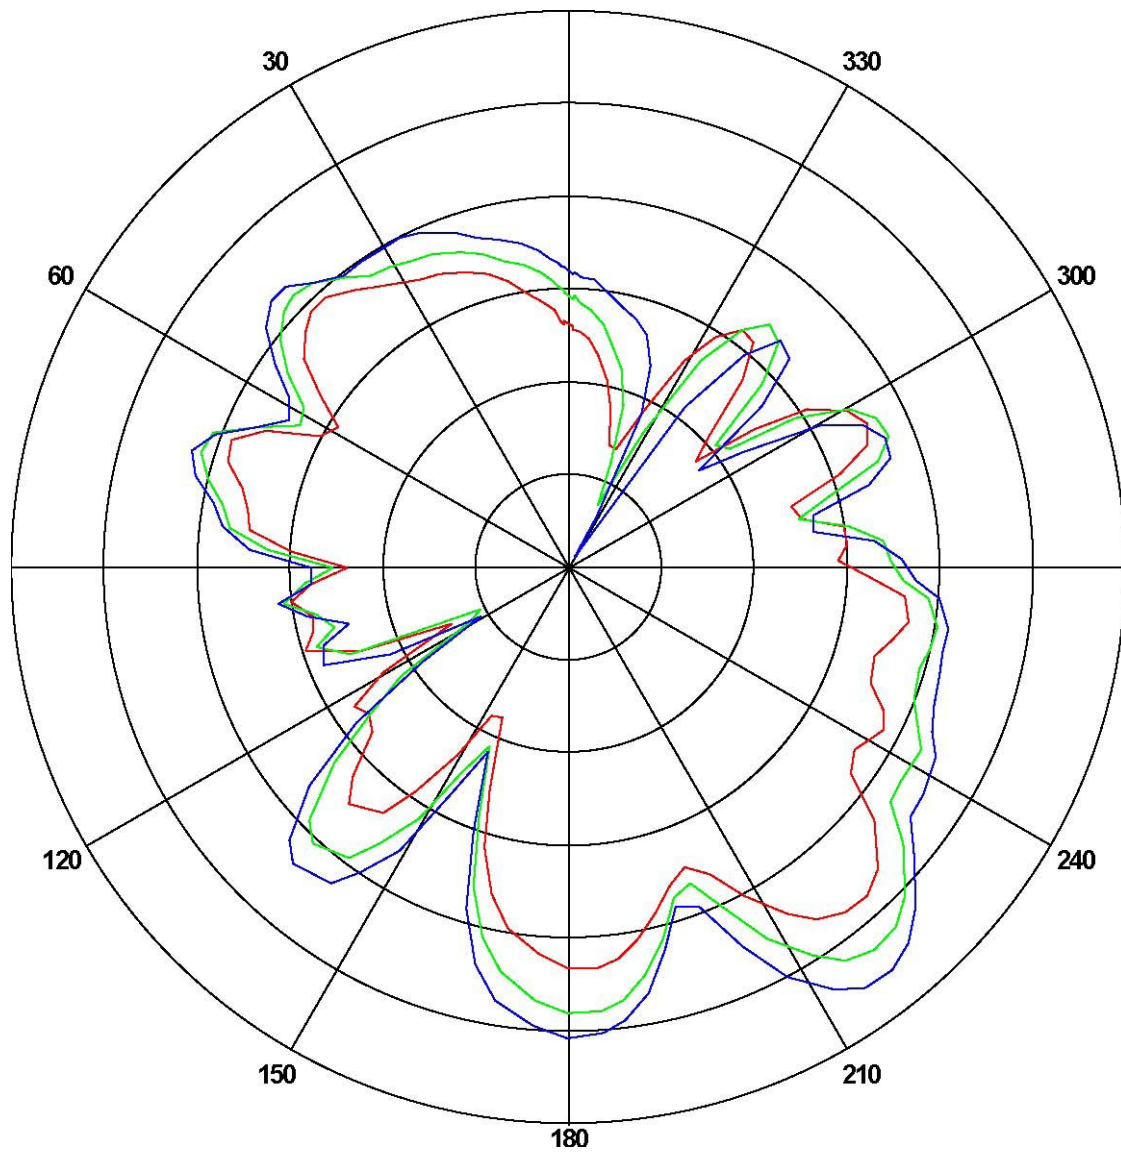

Frequency (MHz)	Gain(dBi)		
	Max	Min	Avg
2402	-6.84	-22.14	-12.42
2440	-3.95	-24.58	-10.47
2480	-2.81	-29.52	-9.20