




Appendix E

RF Test Data for 5.8G WIFI (Conducted Measurement)

Product Name: 4K Android TV™ Dongle

Test Model: i-217D1

Environmental Conditions

Temperature:	23.5 ° C
Relative Humidity:	52.2%
ATM Pressure:	100.0 kPa
Test Engineer:	 Mark Chen
Supervised by:	 Li Huan



E.1 Min emission bandwidth


Test Result

TestMode	Antenna	Channel	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant0	5745	14.960	5737.560	5752.520	0.5	PASS
		5785	15.120	5777.440	5792.560	0.5	PASS
		5825	15.080	5817.440	5832.520	0.5	PASS
11N20SISO	Ant0	5745	15.040	5737.440	5752.480	0.5	PASS
		5785	15.080	5777.440	5792.520	0.5	PASS
		5825	15.080	5817.440	5832.520	0.5	PASS
11N40SISO	Ant0	5755	35.040	5737.480	5772.520	0.5	PASS
		5795	35.120	5777.400	5812.520	0.5	PASS
11AC20SISO	Ant0	5745	15.120	5737.440	5752.560	0.5	PASS
		5785	15.240	5777.480	5792.720	0.5	PASS
		5825	15.080	5817.440	5832.520	0.5	PASS
11AC40SISO	Ant0	5755	35.040	5737.480	5772.520	0.5	PASS
		5795	35.040	5777.480	5812.520	0.5	PASS
11AC80SISO	Ant0	5775	75.040	5737.400	5812.440	0.5	PASS




Test Graphs


11A_Ant0_5745

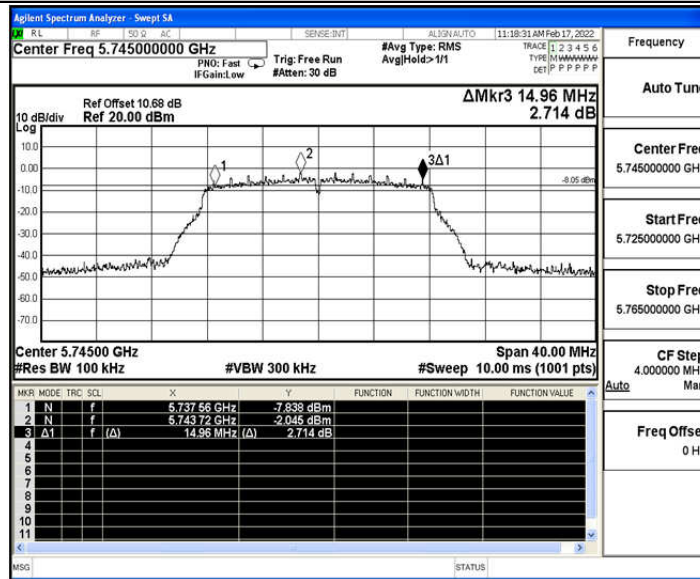


11A_Ant0_5785

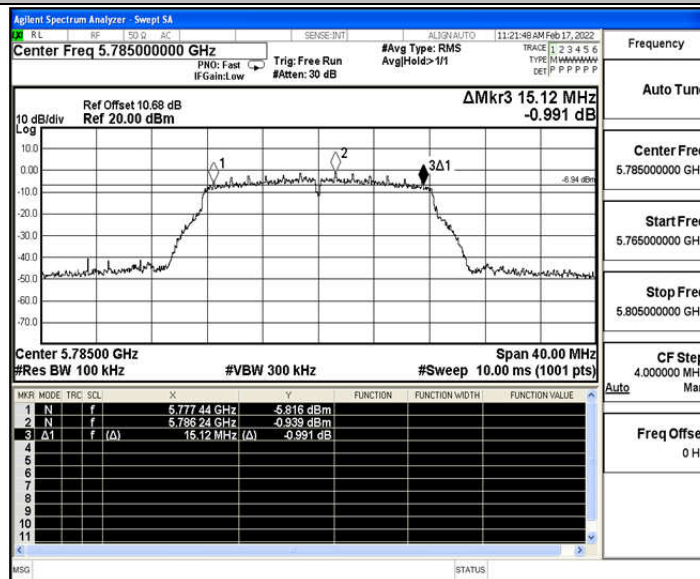


11A_Ant0_5825

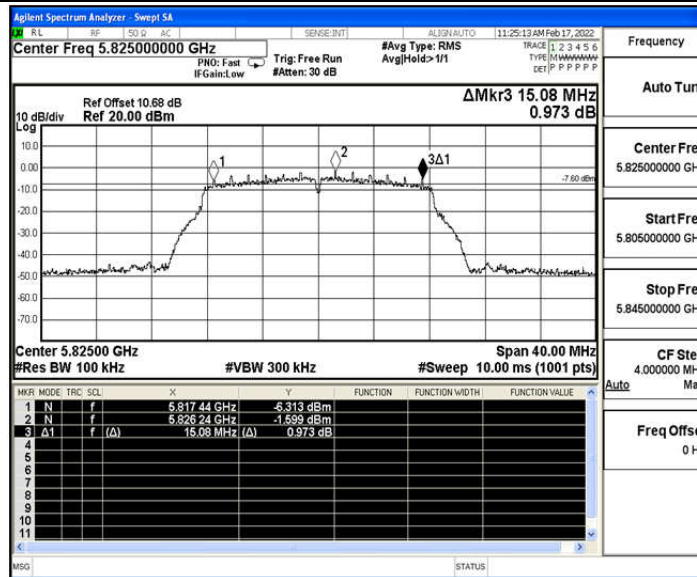

11N20SISO_Ant0_5745

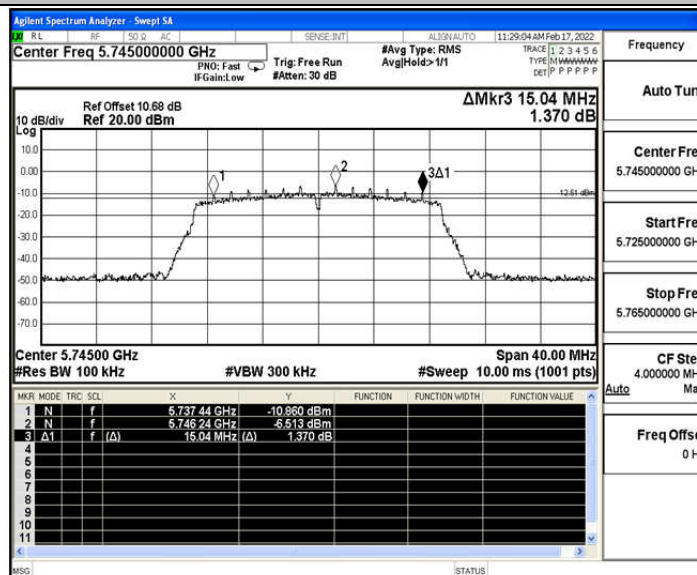


11N20SISO_Ant0_5785

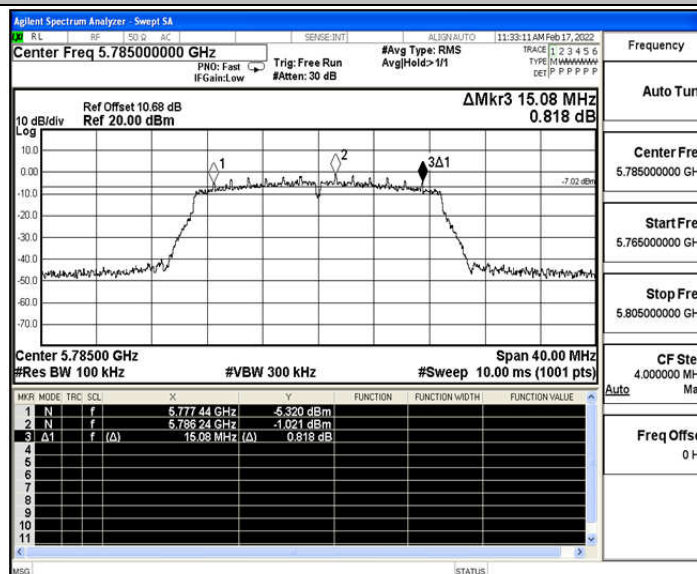





11N20SISO_Ant0_5825

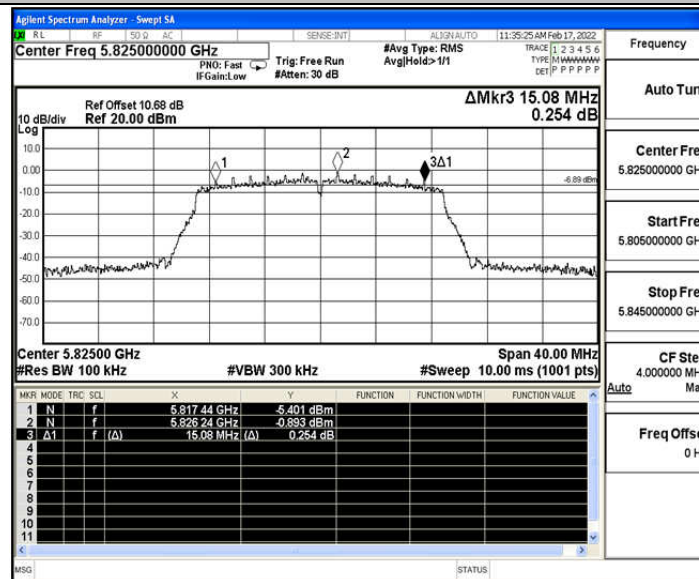


11N40SISO_Ant0_5755

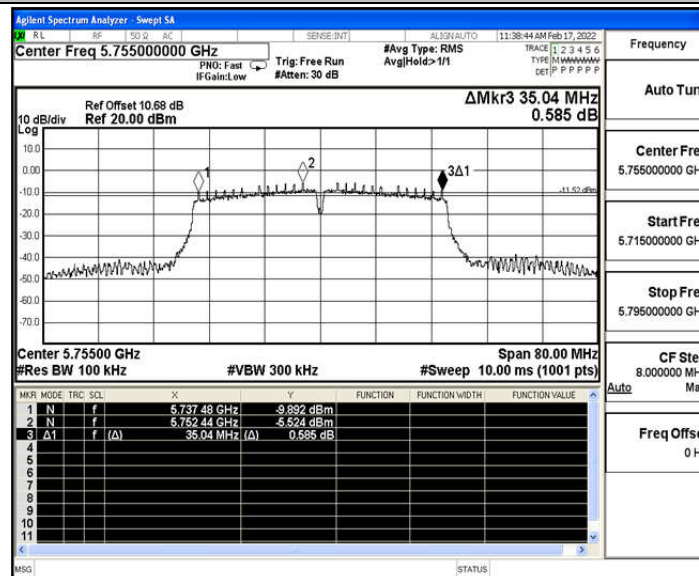


11N40SISO_Ant0_5795

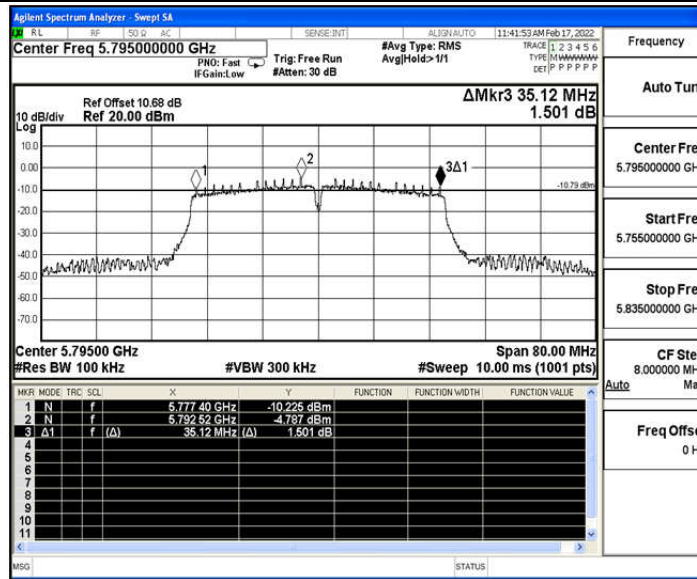

11AC20SISO_Ant0_5745

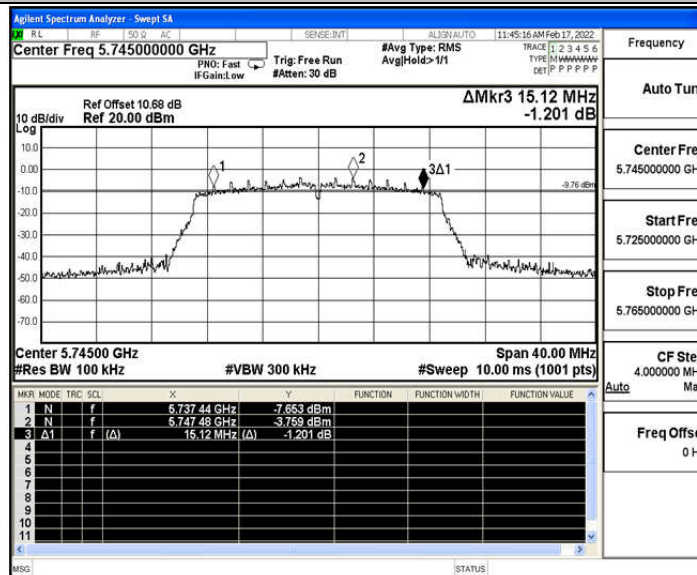


11AC20SISO_Ant0_5785

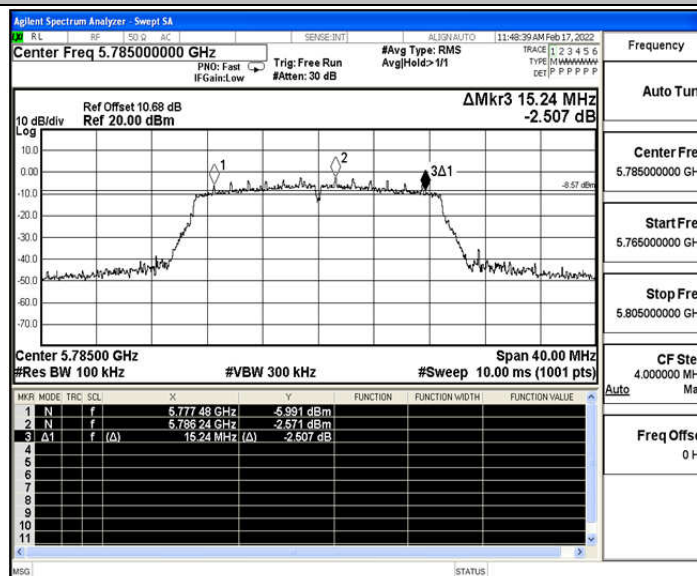





11AC20SISO_Ant0_5825

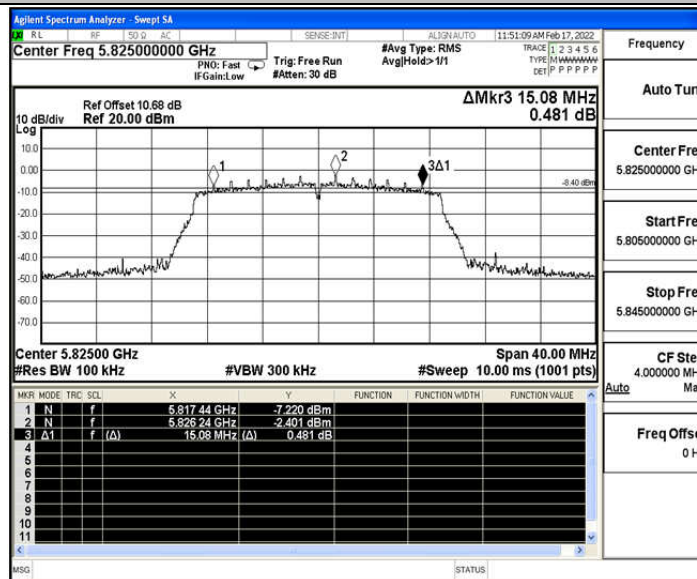


11AC40SISO_Ant0_5755

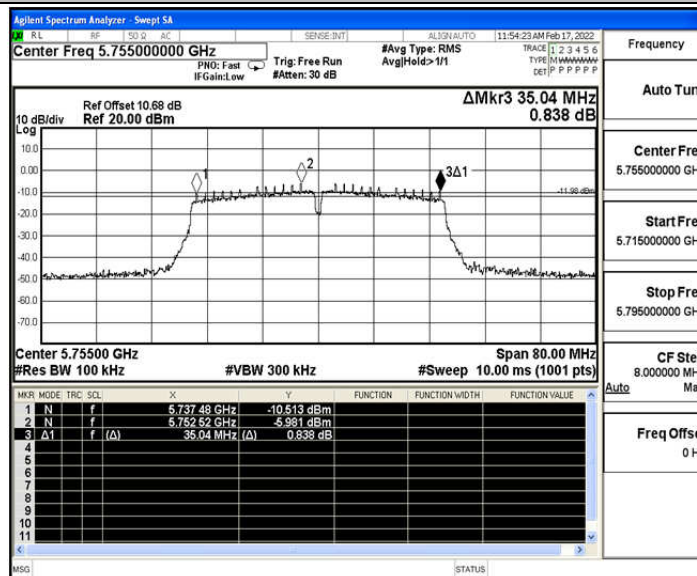

11AC40SISO_Ant0_5795

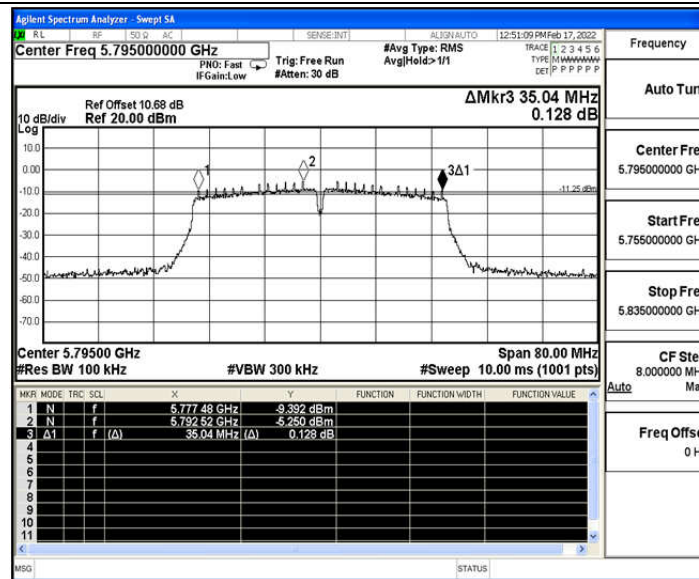

11AC80SISO_Ant0_5775

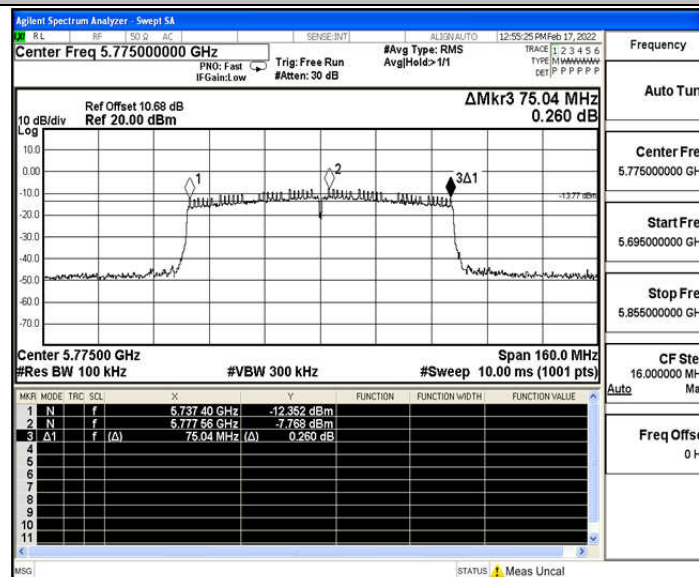




Test Result

TestMode	Antenna	Channel	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	15.120	5737.440	5752.560	0.5	PASS
		5785	15.080	5777.440	5792.520	0.5	PASS
		5825	15.120	5817.440	5832.560	0.5	PASS
11N20SISO	Ant1	5745	15.080	5737.440	5752.520	0.5	PASS
		5785	15.120	5777.440	5792.560	0.5	PASS
		5825	15.080	5817.440	5832.520	0.5	PASS
11N40SISO	Ant1	5755	35.040	5737.480	5772.520	0.5	PASS
		5795	35.040	5777.480	5812.520	0.5	PASS
11AC20SISO	Ant1	5745	15.040	5737.480	5752.520	0.5	PASS
		5785	15.120	5777.440	5792.560	0.5	PASS
		5825	15.080	5817.440	5832.520	0.5	PASS
11AC40SISO	Ant1	5755	35.040	5737.480	5772.520	0.5	PASS
		5795	35.040	5777.480	5812.520	0.5	PASS
11AC80SISO	Ant1	5775	75.200	5737.400	5812.600	0.5	PASS




Test Graphs


11A_Ant1_5745

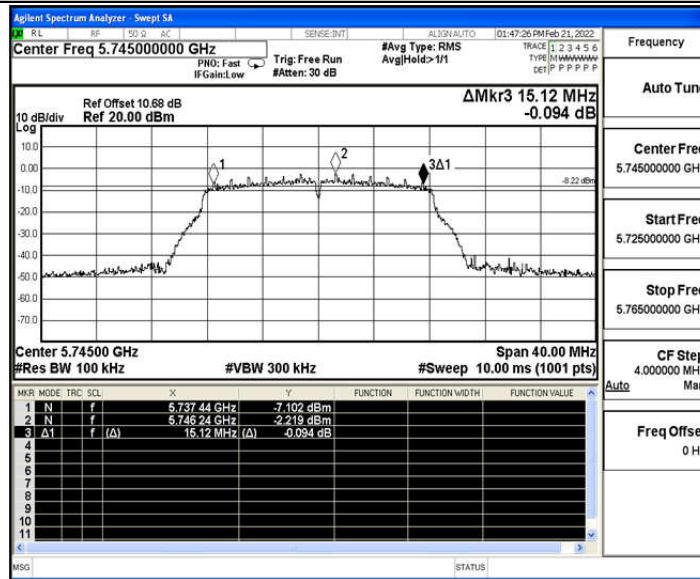


11A_Ant1_5785

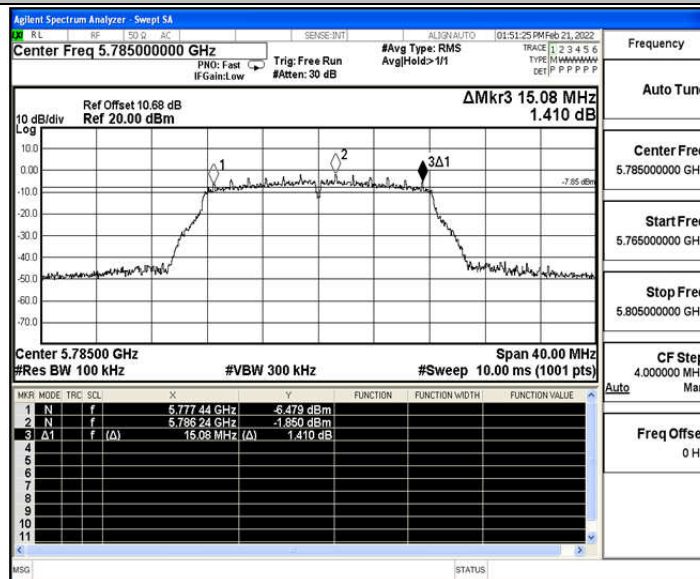


11A_Ant1_5825

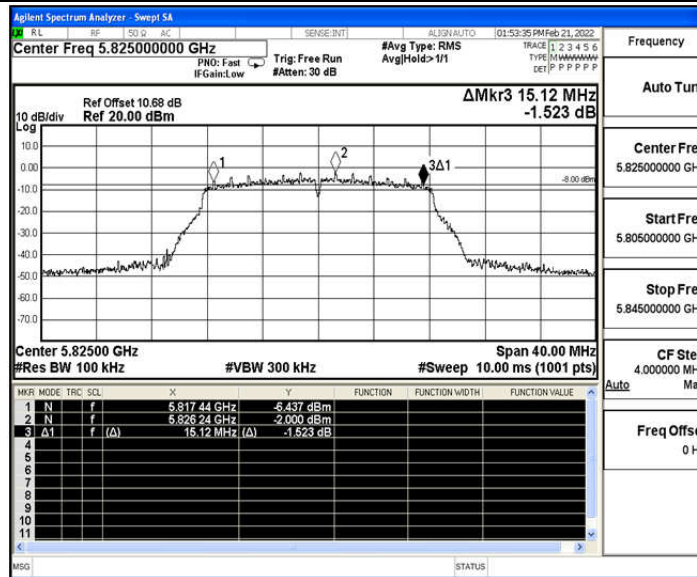

11N20SISO_Ant1_5745

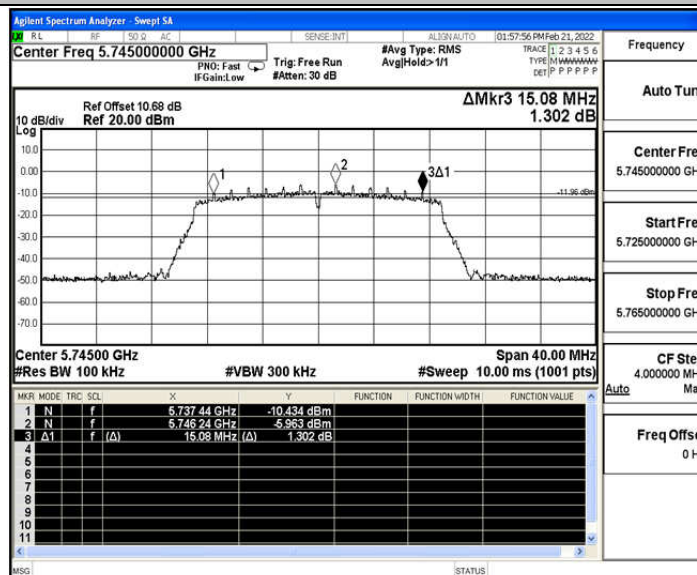


11N20SISO_Ant1_5785

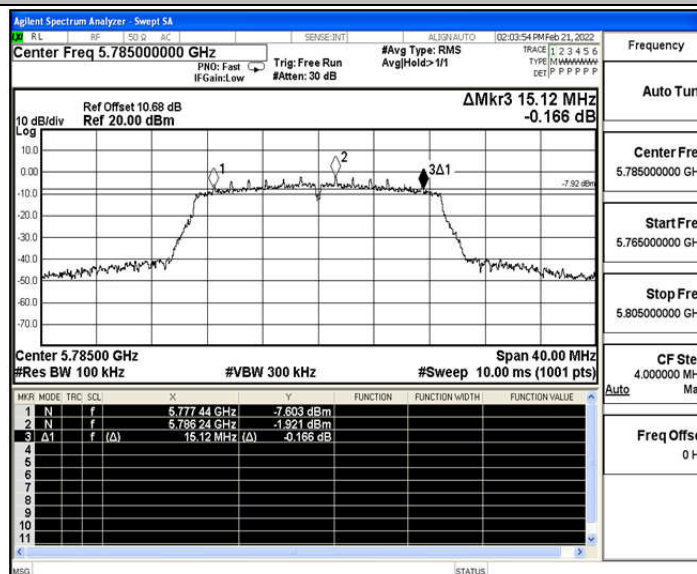





11N20SISO_Ant1_5825

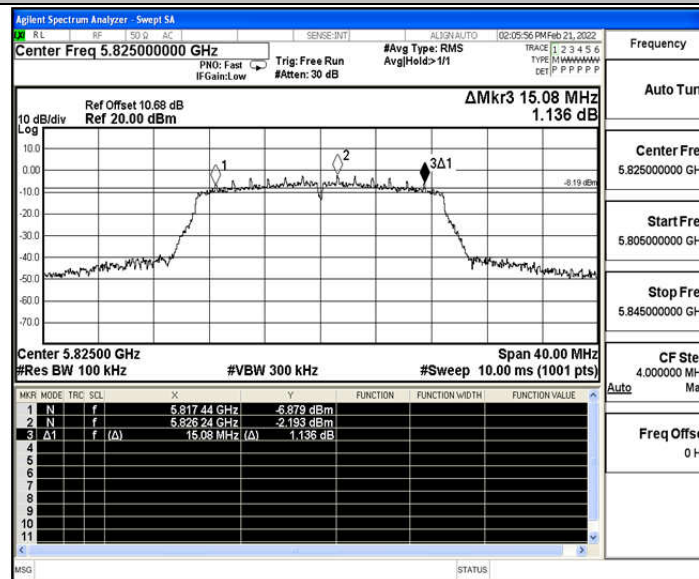


11N40SISO_Ant1_5755

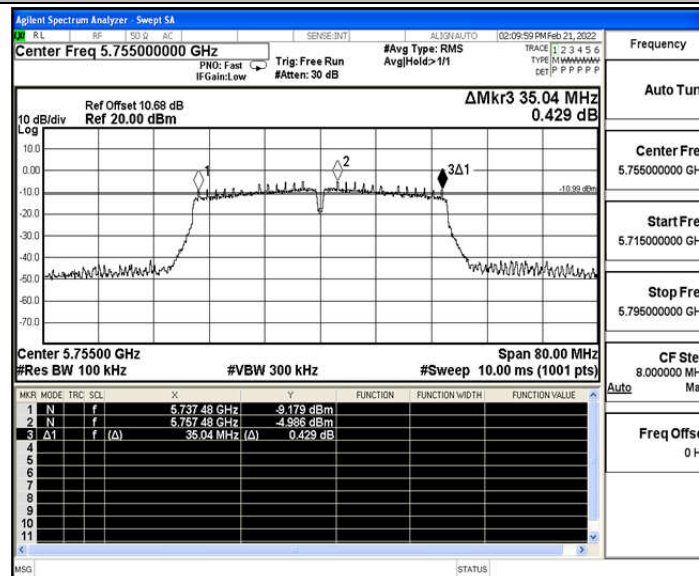


11N40SISO_Ant1_5795

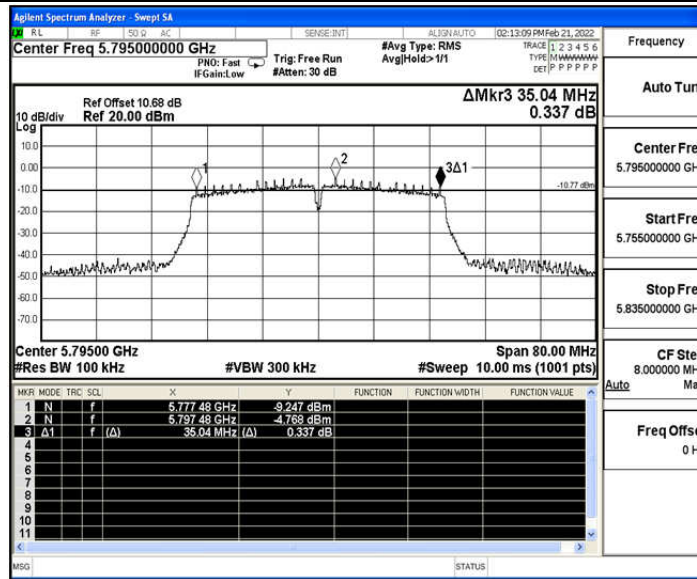

11AC20SISO_Ant1_5745

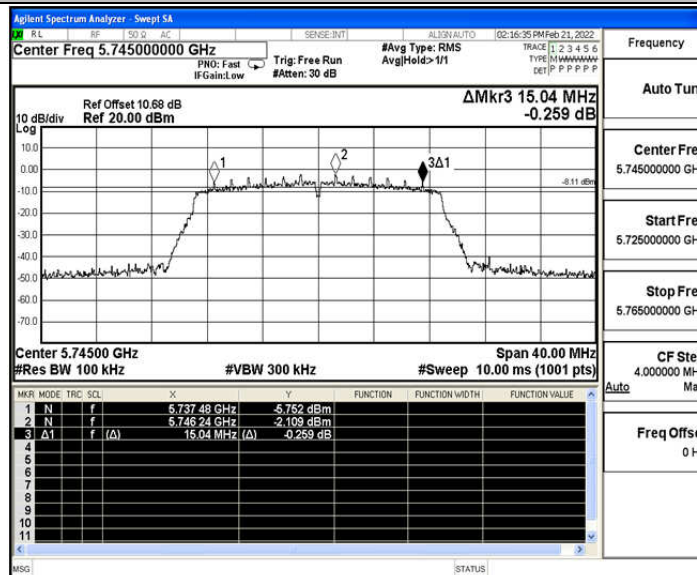


11AC20SISO_Ant1_5785

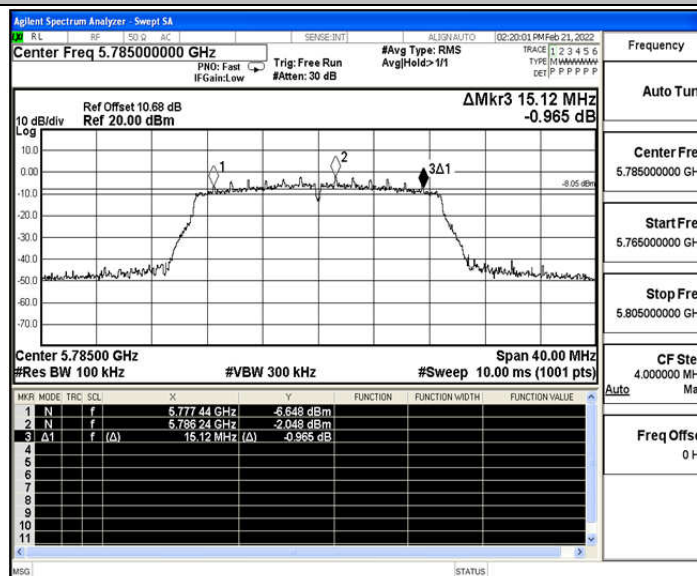





11AC20SISO_Ant1_5825

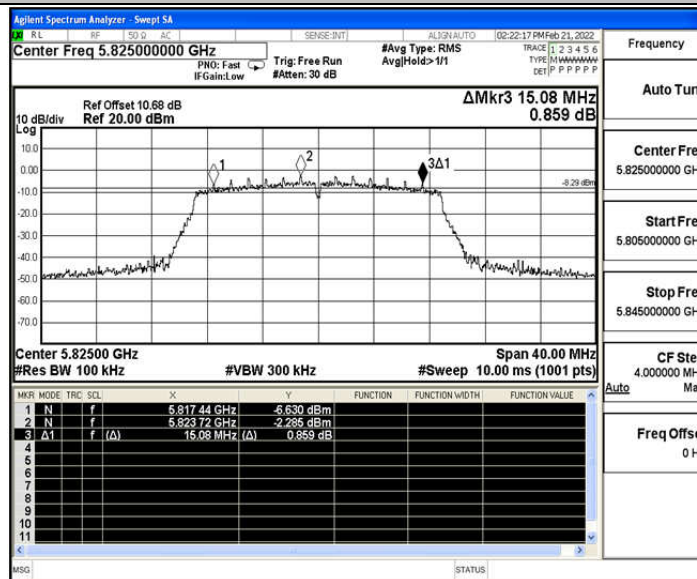


11AC40SISO_Ant1_5755

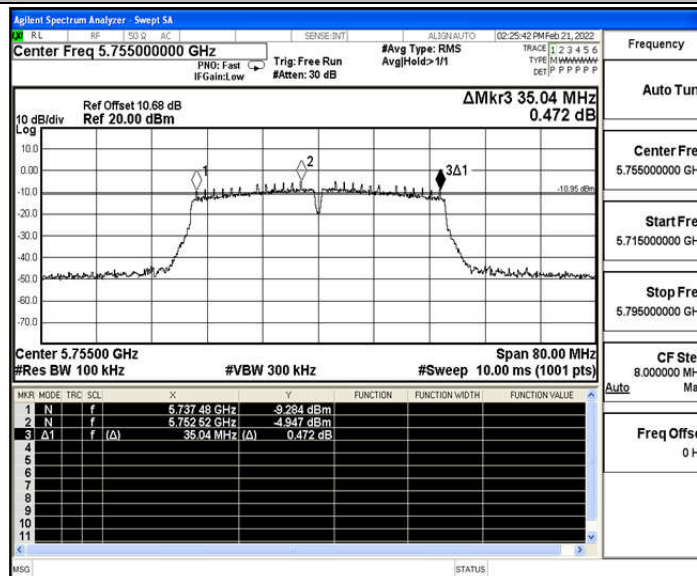

11AC40SISO_Ant1_5795

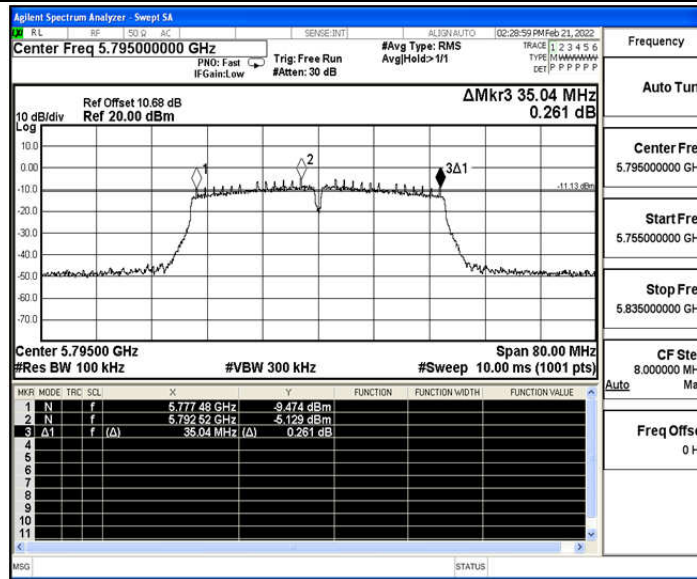

11AC80SISO_Ant1_5775

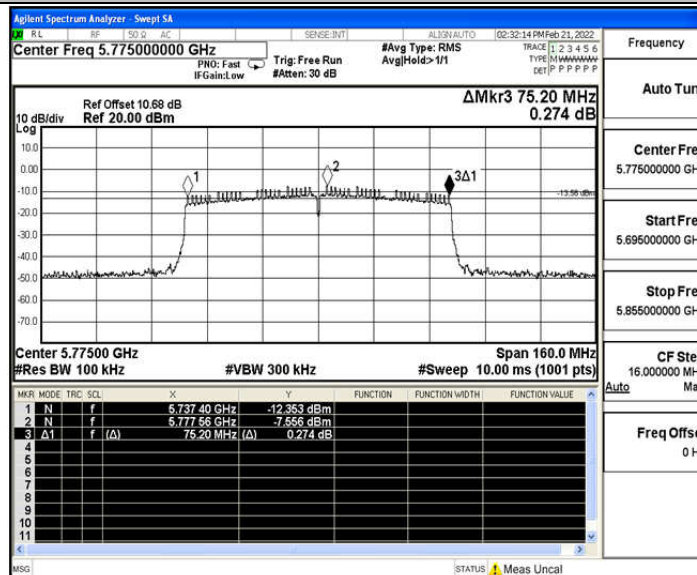



E.2 Maximum conducted output power

Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11A	Ant0	5745	8.89	≤30.00	PASS
		5785	9.69	≤30.00	PASS
		5825	9.36	≤30.00	PASS
11N20SISO	Ant0	5745	8.71	≤30.00	PASS
		5785	9.49	≤30.00	PASS
		5825	9.64	≤30.00	PASS
11N40SISO	Ant0	5755	7.70	≤30.00	PASS
		5795	8.41	≤30.00	PASS
11AC20SISO	Ant0	5745	7.14	≤30.00	PASS
		5785	7.95	≤30.00	PASS
		5825	7.93	≤30.00	PASS
11AC40SISO	Ant0	5755	7.17	≤30.00	PASS
		5795	7.81	≤30.00	PASS
11AC80SISO	Ant0	5775	7.68	≤30.00	PASS

Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	5745	8.26	≤30.00	PASS
		5785	8.62	≤30.00	PASS
		5825	8.57	≤30.00	PASS
11N20SISO	Ant1	5745	8.07	≤30.00	PASS
		5785	8.45	≤30.00	PASS
		5825	8.38	≤30.00	PASS
11N40SISO	Ant1	5755	8.18	≤30.00	PASS
		5795	8.47	≤30.00	PASS
11AC20SISO	Ant1	5745	8.22	≤30.00	PASS
		5785	8.56	≤30.00	PASS
		5825	8.39	≤30.00	PASS
11AC40SISO	Ant1	5755	7.59	≤30.00	PASS
		5795	7.94	≤30.00	PASS
11AC80SISO	Ant1	5775	7.87	≤30.00	PASS

**MIMO**

TestMode	Channel	Result[dBm]			Limit[dBm]	Verdict
		Ant 0	Ant 1	MIMO		
11N20SISO	5745	8.71	8.07	11.41	≤30.00	PASS
	5785	9.49	8.45	12.01	≤30.00	PASS
	5825	9.64	8.38	12.07	≤30.00	PASS
11N40SISO	5755	7.70	8.18	10.96	≤30.00	PASS
	5795	8.41	8.47	11.45	≤30.00	PASS
11AC20SISO	5745	7.14	8.22	10.72	≤30.00	PASS
	5785	7.95	8.56	11.28	≤30.00	PASS
	5825	7.93	8.39	11.18	≤30.00	PASS
11AC40SISO	5755	7.17	7.59	10.40	≤30.00	PASS
	5795	7.81	7.94	10.89	≤30.00	PASS
11AC80SISO	5775	7.68	7.87	10.79	≤30.00	PASS

Note: The Duty Cycle Factor is compensated in the graph.



E.3 Maximum power spectral density

Test Result

TestMode	Antenna	Channel	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant0	5745	-4.34	≤30.00	PASS
		5785	-3.48	≤30.00	PASS
		5825	-3.95	≤30.00	PASS
11N20SISO	Ant0	5745	-4.71	≤30.00	PASS
		5785	-3.93	≤30.00	PASS
		5825	-3.79	≤30.00	PASS
11N40SISO	Ant0	5755	-8.58	≤30.00	PASS
		5795	-8.12	≤30.00	PASS
11AC20SISO	Ant0	5745	-6.31	≤30.00	PASS
		5785	-5.5	≤30.00	PASS
		5825	-5.47	≤30.00	PASS
11AC40SISO	Ant0	5755	-9.22	≤30.00	PASS
		5795	-8.57	≤30.00	PASS
11AC80SISO	Ant0	5775	-11.72	≤30.00	PASS

Test Result

TestMode	Antenna	Channel	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant1	5745	-4.93	≤30.00	PASS
		5785	-4.59	≤30.00	PASS
		5825	-4.62	≤30.00	PASS
11N20SISO	Ant1	5745	-5.39	≤30.00	PASS
		5785	-4.9	≤30.00	PASS
		5825	-5.07	≤30.00	PASS
11N40SISO	Ant1	5755	-8.21	≤30.00	PASS
		5795	-7.78	≤30.00	PASS
11AC20SISO	Ant1	5745	-5.13	≤30.00	PASS
		5785	-4.82	≤30.00	PASS
		5825	-5.04	≤30.00	PASS
11AC40SISO	Ant1	5755	-8.79	≤30.00	PASS
		5795	-9.62	≤30.00	PASS
11AC80SISO	Ant1	5775	-11.54	≤30.00	PASS

**MIMO**

TestMode	Channel	Result [dBm/MHz]			Limit[dBm/MHz]	Verdict
		Ant 0	Ant 1	MIMO		
11N20SISO	5745	-4.71	-5.39	-2.03	≤30.00	PASS
	5785	-3.93	-4.9	-1.38	≤30.00	PASS
	5825	-3.79	-5.07	-1.37	≤30.00	PASS
11N40SISO	5755	-8.58	-8.21	-5.38	≤30.00	PASS
	5795	-8.12	-7.78	-4.94	≤30.00	PASS
11AC20SISO	5745	-6.31	-5.13	-2.67	≤30.00	PASS
	5785	-5.5	-4.82	-2.14	≤30.00	PASS
	5825	-5.47	-5.04	-2.24	≤30.00	PASS
11AC40SISO	5755	-9.22	-8.79	-5.99	≤30.00	PASS
	5795	-8.57	-9.62	-6.05	≤30.00	PASS
11AC80SISO	5775	-11.72	-11.54	-8.62	≤30.00	PASS


Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.

2.The Duty Cycle Factor and RBW Factor is compensated in the graph.




Test Graphs


11A_Ant0_5745

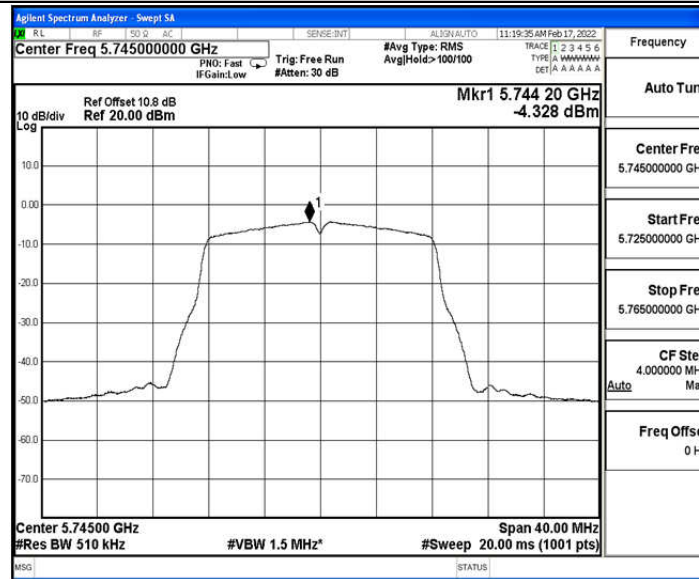


11A_Ant0_5785

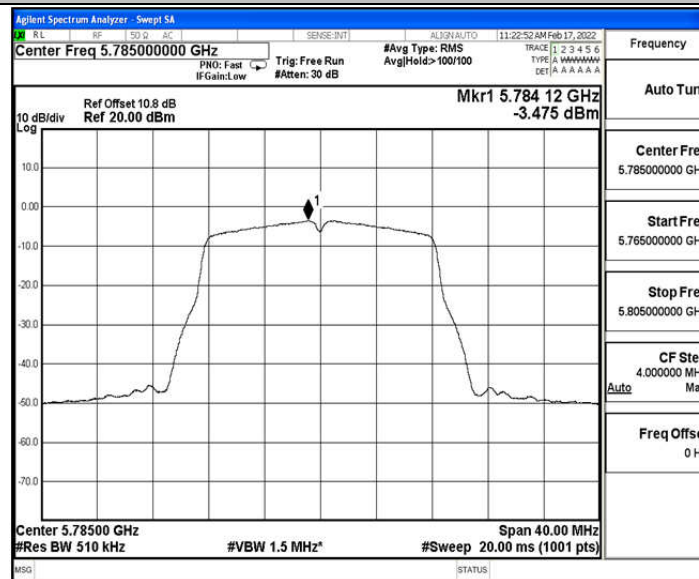


11A_Ant0_5825

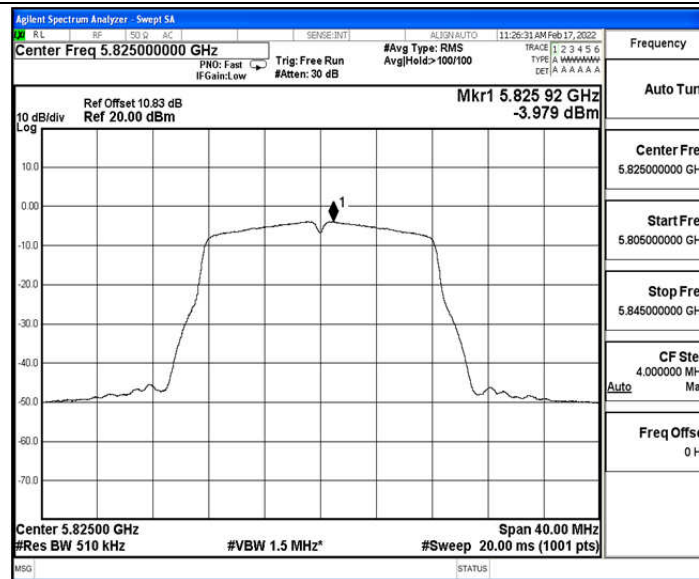

11N20SISO_Ant0_5745

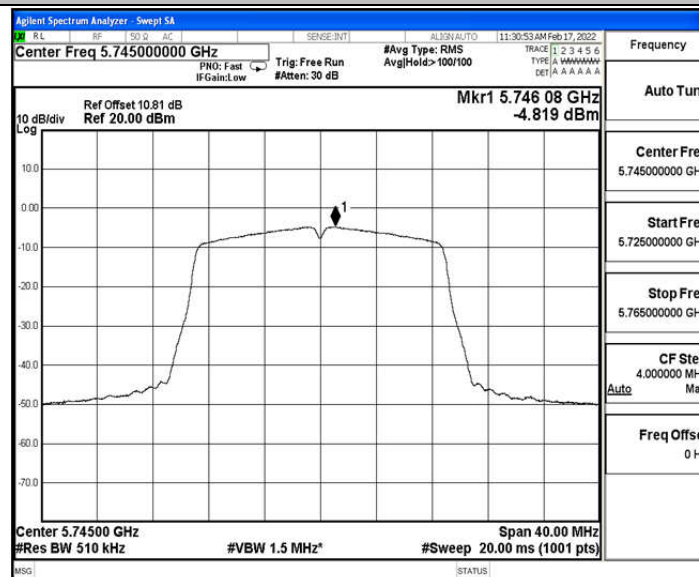


11N20SISO_Ant0_5785

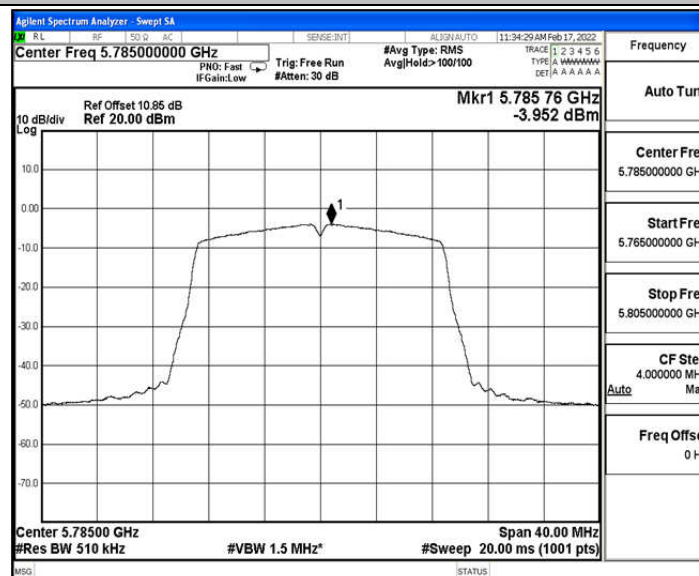





11N20SISO_Ant0_5825

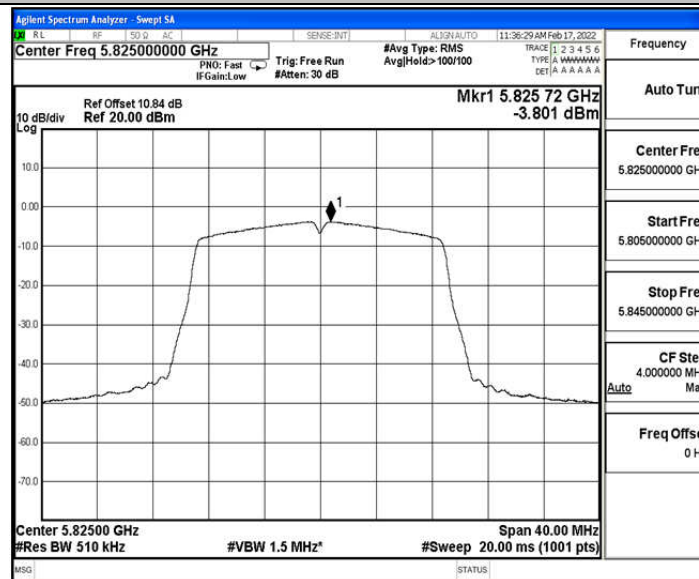


11N40SISO_Ant0_5755

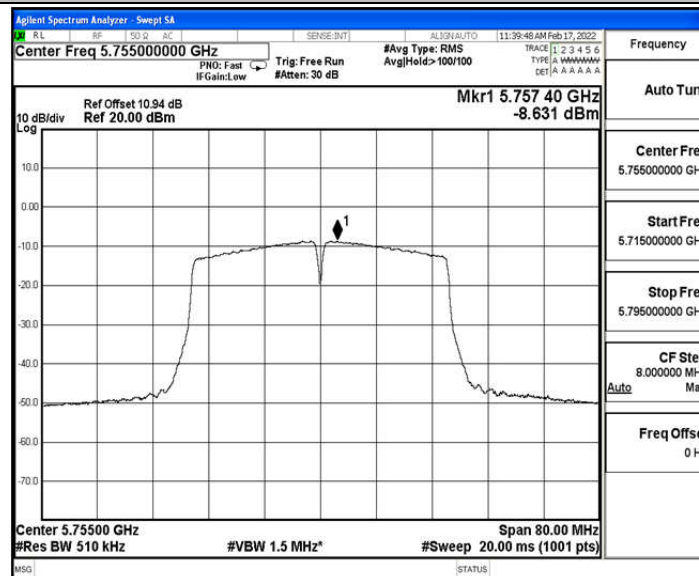


11N40SISO_Ant0_5795

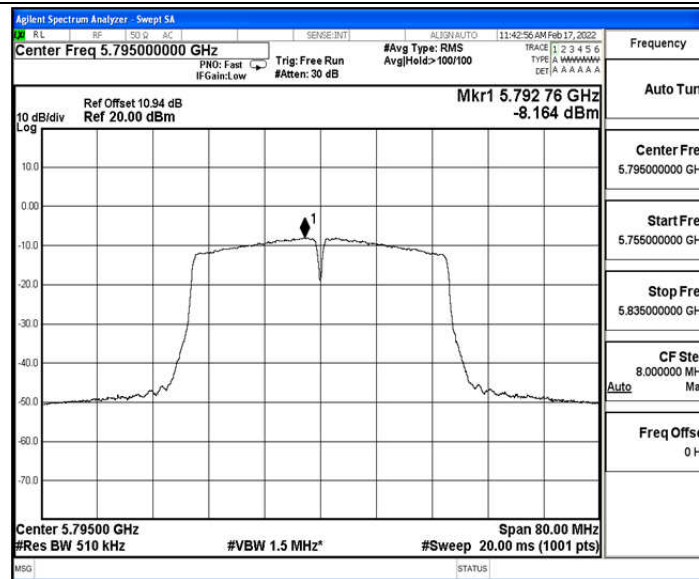

11AC20SISO_Ant0_5745

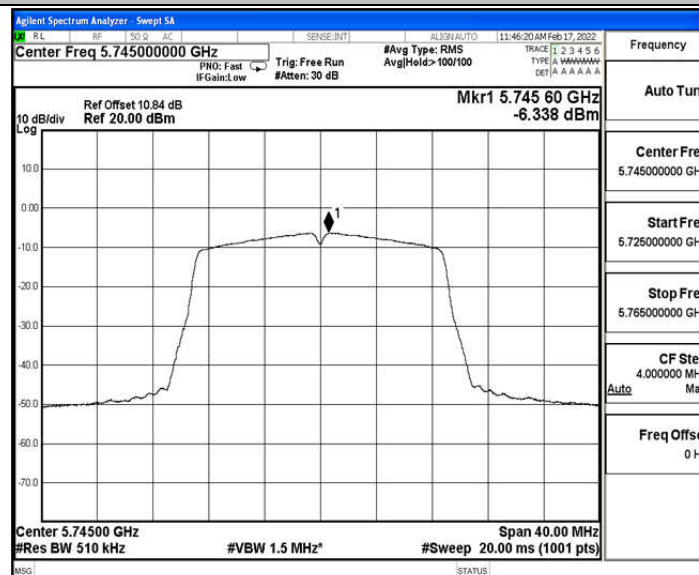


11AC20SISO_Ant0_5785

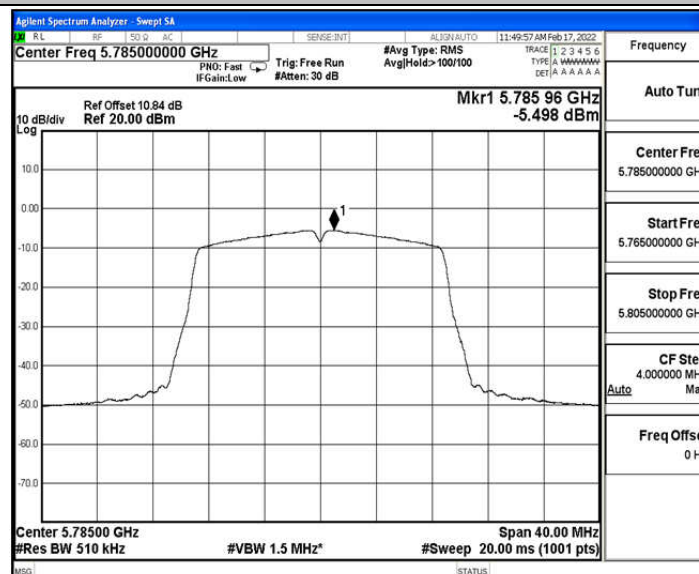





11AC20SISO_Ant0_5825

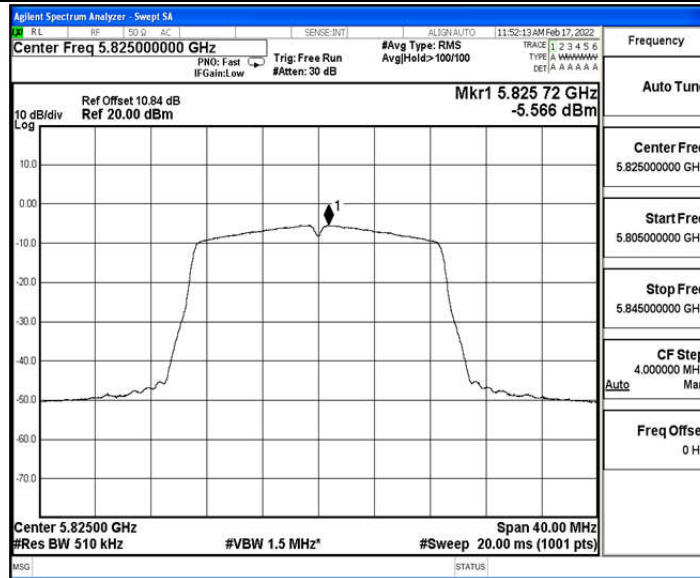


11AC40SISO_Ant0_5755

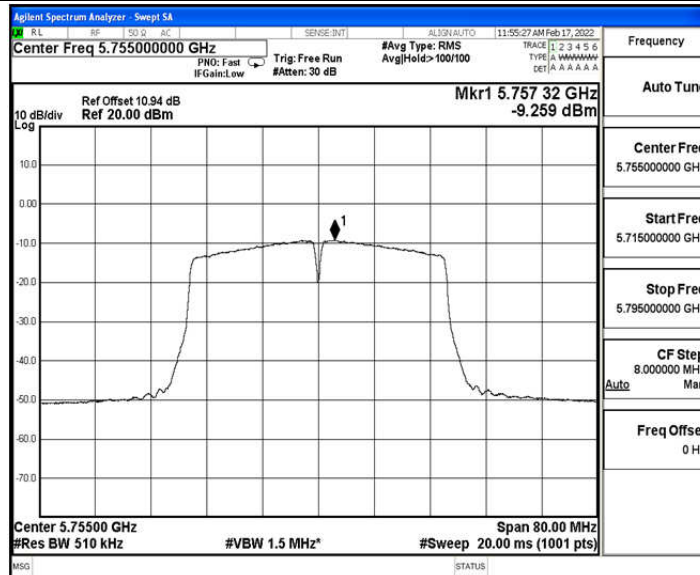

11AC40SISO_Ant0_5795

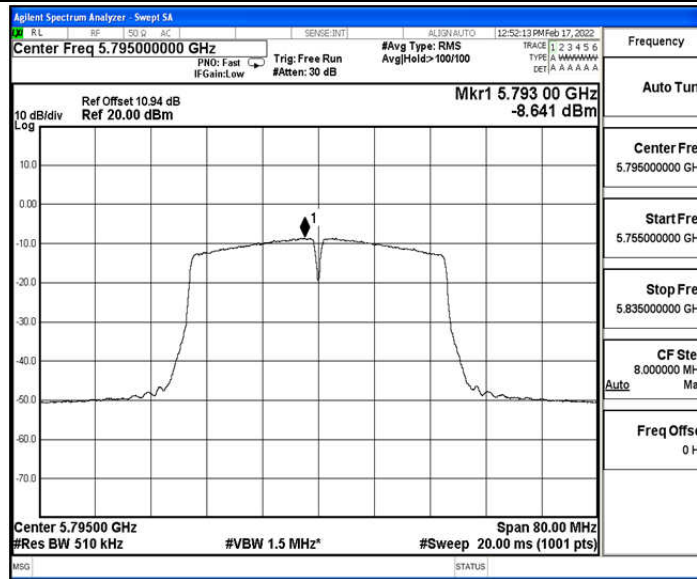


11AC80SISO_Ant0_5775

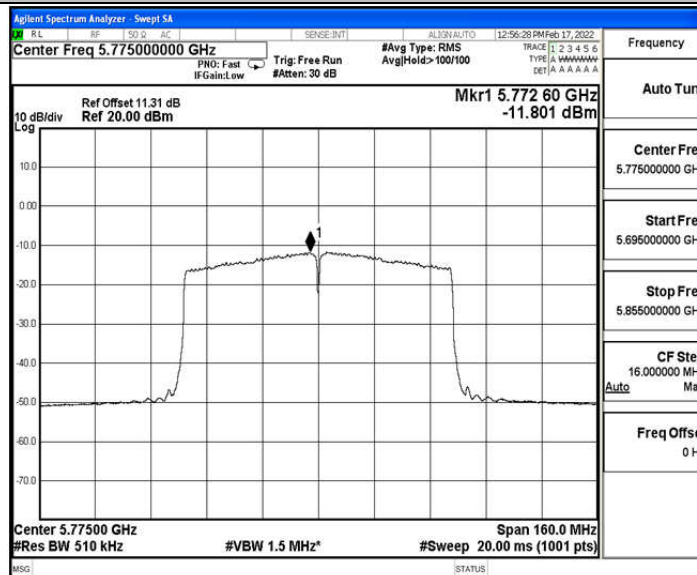




Test Graphs


11A_Ant1_5745

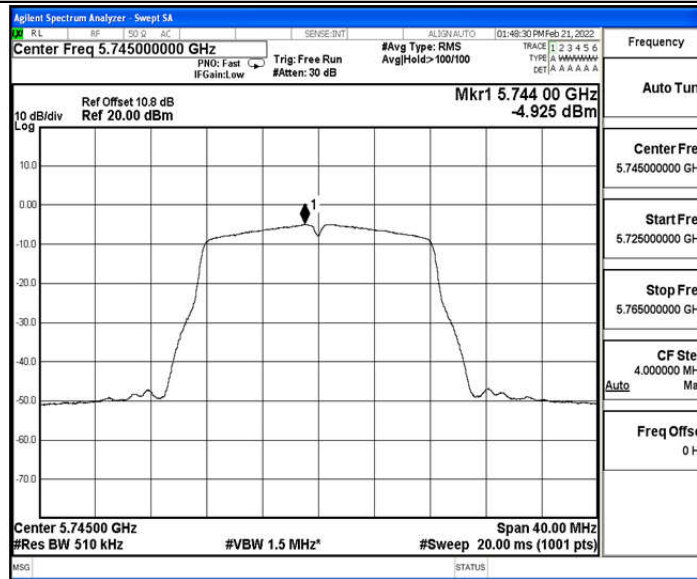


11A_Ant1_5785

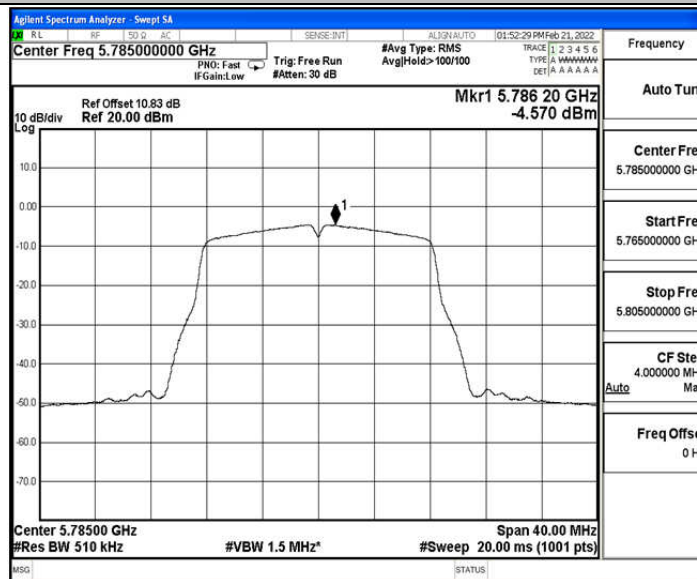


11A_Ant1_5825

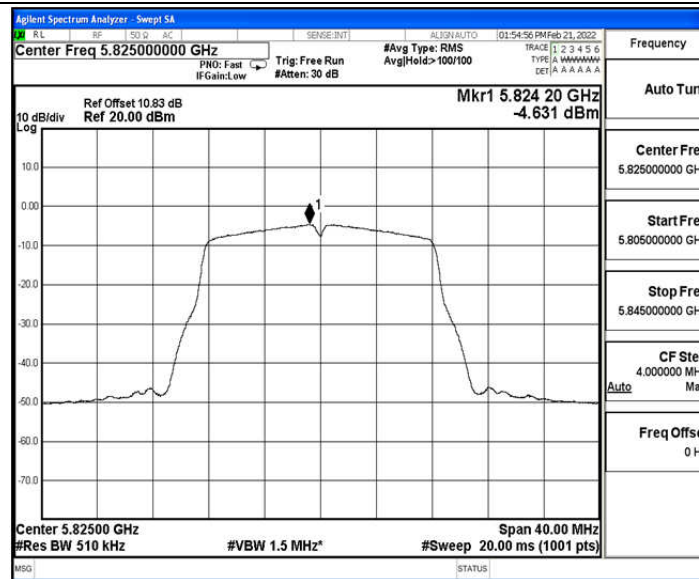

11N20SISO_Ant1_5745

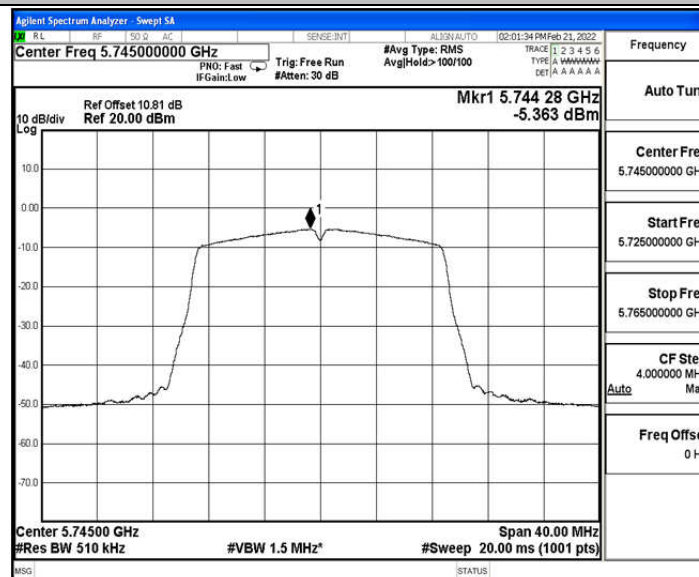


11N20SISO_Ant1_5785

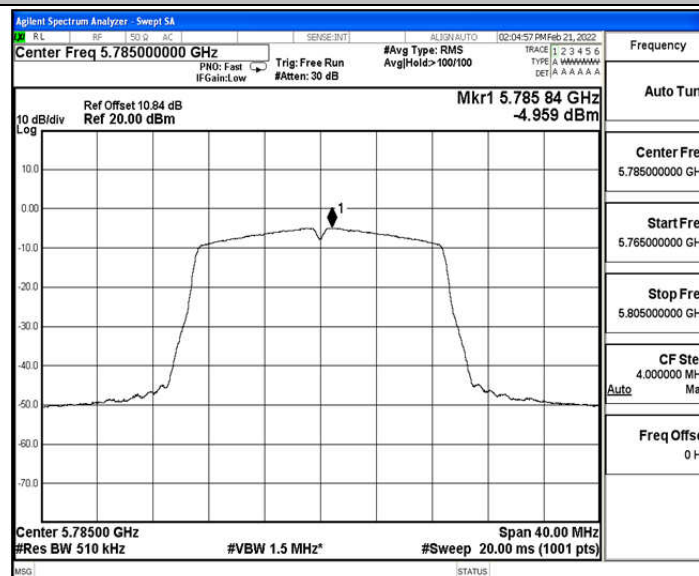





11N20SISO_Ant1_5825

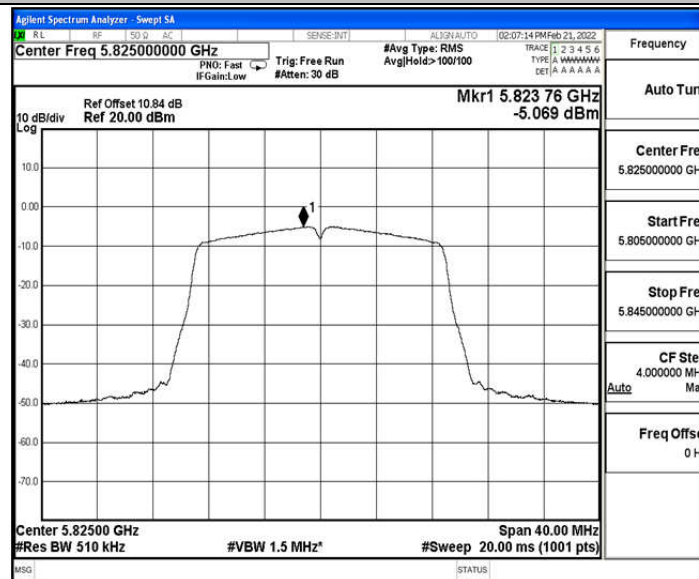


11N40SISO_Ant1_5755

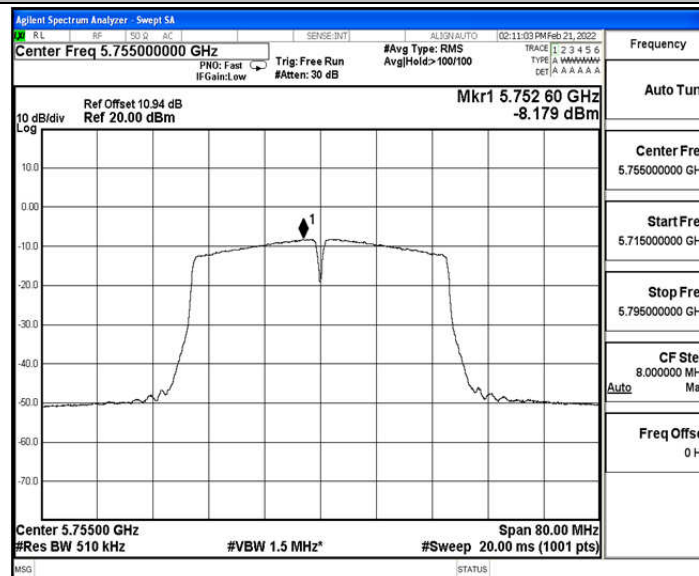


11N40SISO_Ant1_5795

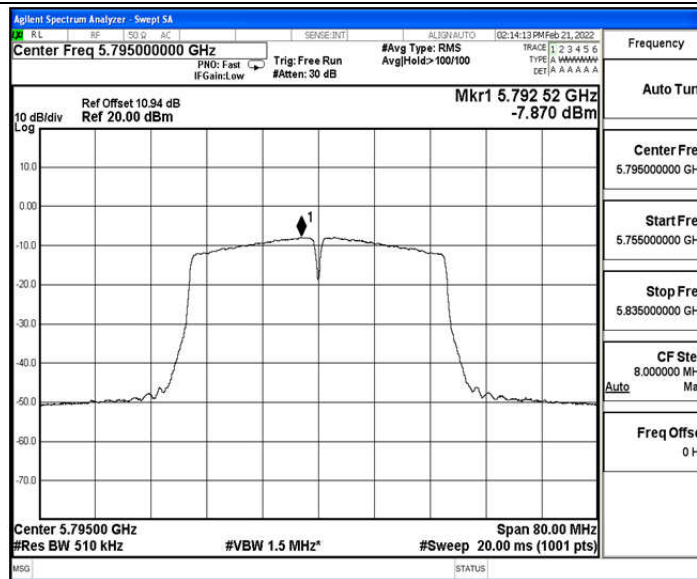

11AC20SISO_Ant1_5745

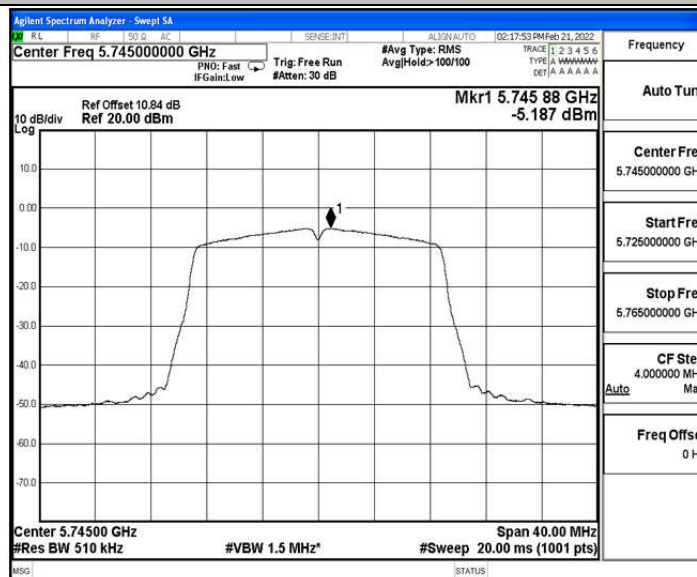


11AC20SISO_Ant1_5785

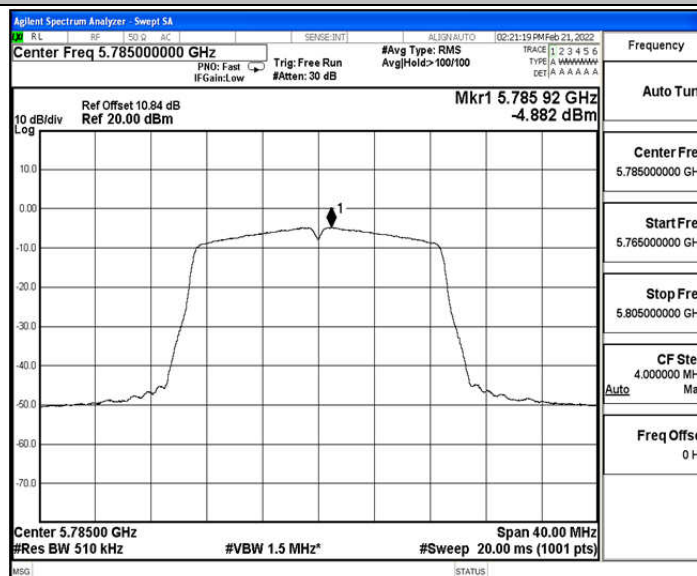





11AC20SISO_Ant1_5825

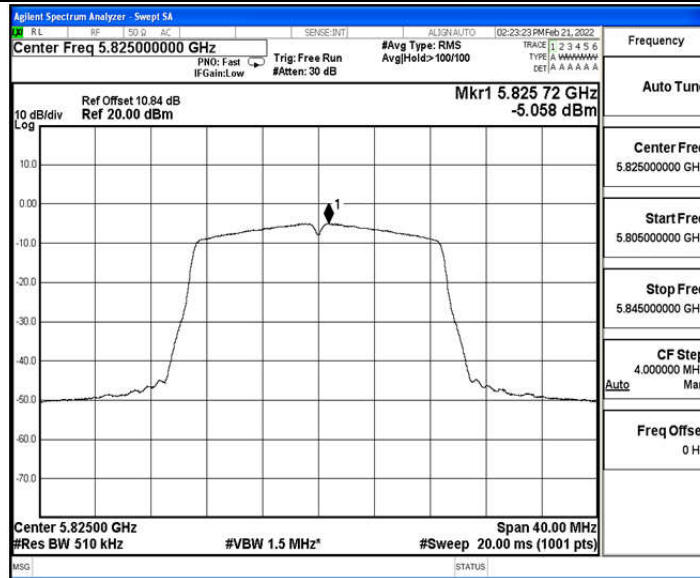


11AC40SISO_Ant1_5755

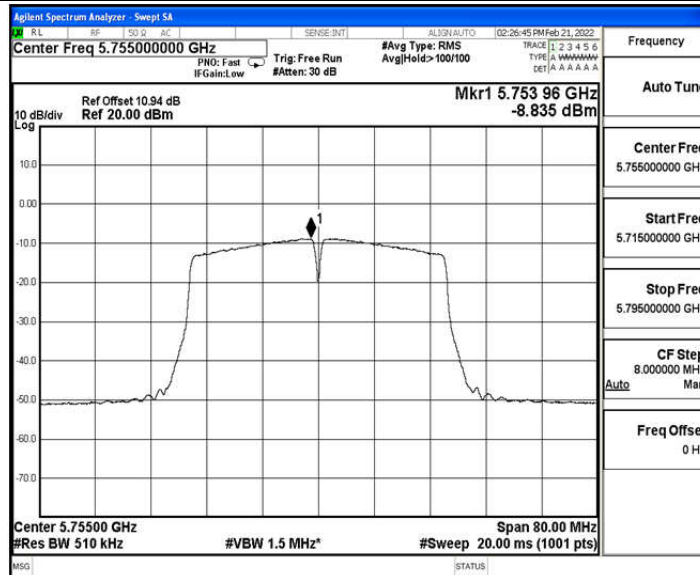

11AC40SISO_Ant1_5795

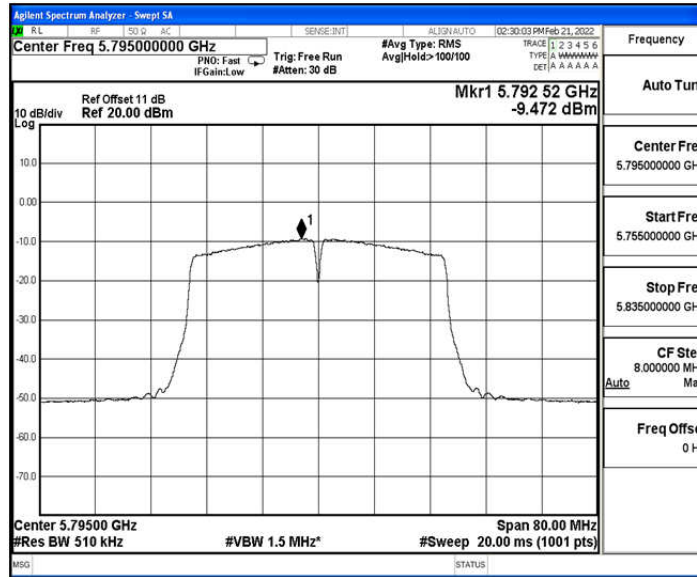

11AC80SISO_Ant1_5775

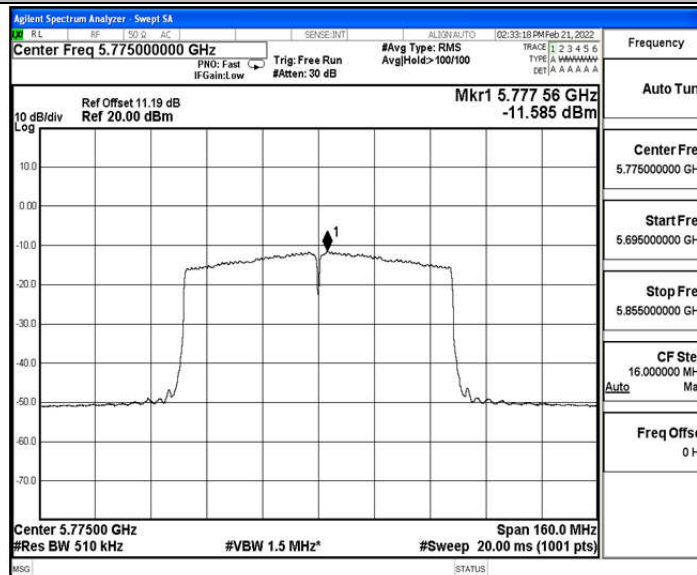



E.4 Emissions in Restricted Bands

Test Result

TestMode	Antenna	ChName	Channel	Detector	Freq. [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
11A	Ant0	Low	5745	Peak	5650.000	-37.235	≤-27.00	---	---	PASS
				Peak	5700.000	-37.24	≤10.00	---	---	PASS
				Peak	5720.000	-35	≤15.60	---	---	PASS
				Peak	5725.000	-28.43	≤27.00	---	---	PASS
		High	5825	Peak	5850.000	-37.131	≤15.60	---	---	PASS
				Peak	5855.000	-35.92	≤27.00	---	---	PASS
				Peak	5875.000	-36.59	≤15.60	---	---	PASS
				Peak	5925.000	-37.18	≤10.00	---	---	PASS
11N20SI SO	Ant0	Low	5745	Peak	5650.000	-37.667	≤-27.00	---	---	PASS
				Peak	5700.000	-37.11	≤10.00	---	---	PASS
				Peak	5720.000	-28.21	≤15.60	---	---	PASS
				Peak	5725.000	-26.45	≤27.00	---	---	PASS
		High	5825	Peak	5850.000	-29.128	≤15.60	---	---	PASS
				Peak	5855.000	-36.72	≤27.00	---	---	PASS
				Peak	5875.000	-36.29	≤15.60	---	---	PASS
				Peak	5925.000	-37.33	≤10.00	---	---	PASS
11N40SI SO	Ant0	Low	5755	Peak	5650.000	-37.518	≤-27.00	---	---	PASS
				Peak	5700.000	-36.82	≤10.00	---	---	PASS
				Peak	5720.000	-28.26	≤15.60	---	---	PASS
				Peak	5725.000	-25.92	≤27.00	---	---	PASS
		High	5795	Peak	5850.000	-36.315	≤15.60	---	---	PASS
				Peak	5855.000	-37.64	≤27.00	---	---	PASS
				Peak	5875.000	-37.39	≤15.60	---	---	PASS
				Peak	5925.000	-37.69	≤10.00	---	---	PASS
11AC20S ISO	Ant0	Low	5745	Peak	5650.000	-37.921	≤-27.00	---	---	PASS
				Peak	5700.000	-37.89	≤10.00	---	---	PASS
				Peak	5720.000	-37.27	≤15.60	---	---	PASS
				Peak	5725.000	-36.21	≤27.00	---	---	PASS
		High	5825	Peak	5850.000	-37.364	≤15.60	---	---	PASS
				Peak	5855.000	-36.9	≤27.00	---	---	PASS
				Peak	5875.000	-36.44	≤15.60	---	---	PASS
				Peak	5925.000	-37.78	≤10.00	---	---	PASS
11AC40S ISO	Ant0	Low	5755	Peak	5650.000	-37.052	≤-27.00	---	---	PASS
				Peak	5700.000	-35.4	≤10.00	---	---	PASS
				Peak	5720.000	-35.87	≤15.60	---	---	PASS
				Peak	5725.000	-30.8	≤27.00	---	---	PASS
		High	5795	Peak	5850.000	-36.728	≤15.60	---	---	PASS



				Peak	5855.000	-36.94	≤27.00	---	---	PASS
				Peak	5875.000	-37.23	≤15.60	---	---	PASS
				Peak	5925.000	-38.16	≤10.00	---	---	PASS
11AC80S ISO	Ant0	Low	5775	Peak	5650.000	-37.101	≤-27.00	---	---	PASS
				Peak	5700.000	-37.01	≤10.00	---	---	PASS
				Peak	5720.000	-35.87	≤15.60	---	---	PASS
				Peak	5725.000	-33.14	≤27.00	---	---	PASS
		High	5775	Peak	5850.000	-37.082	≤15.60	---	---	PASS
				Peak	5855.000	-36.27	≤27.00	---	---	PASS
				Peak	5875.000	-37.37	≤15.60	---	---	PASS
				Peak	5925.000	-36.37	≤10.00	---	---	PASS

Test Result

TestMode	Antenna	ChName	Channel	Detector	Freq. [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
11A	Ant1	Low	5745	Peak	5650.000	-37.58	≤-27.00	---	---	PASS
				Peak	5700.000	-36.43	≤10.00	---	---	PASS
				Peak	5720.000	-36.54	≤15.60	---	---	PASS
				Peak	5725.000	-33.13	≤27.00	---	---	PASS
		High	5825	Peak	5850.000	-36.589	≤15.60	---	---	PASS
				Peak	5855.000	-36.02	≤27.00	---	---	PASS
				Peak	5875.000	-37.27	≤15.60	---	---	PASS
				Peak	5925.000	-37.22	≤10.00	---	---	PASS
11N20SI SO	Ant1	Low	5745	Peak	5650.000	-37.38	≤-27.00	---	---	PASS
				Peak	5700.000	-37.48	≤10.00	---	---	PASS
				Peak	5720.000	-36.62	≤15.60	---	---	PASS
				Peak	5725.000	-30.36	≤27.00	---	---	PASS
		High	5825	Peak	5850.000	-36.056	≤15.60	---	---	PASS
				Peak	5855.000	-37.05	≤27.00	---	---	PASS
				Peak	5875.000	-37.17	≤15.60	---	---	PASS
				Peak	5925.000	-37.14	≤10.00	---	---	PASS
11N40SI SO	Ant1	Low	5755	Peak	5650.000	-37.472	≤-27.00	---	---	PASS
				Peak	5700.000	-37.08	≤10.00	---	---	PASS
				Peak	5720.000	-29.8	≤15.60	---	---	PASS
				Peak	5725.000	-30.47	≤27.00	---	---	PASS
		High	5795	Peak	5850.000	-37.033	≤15.60	---	---	PASS
				Peak	5855.000	-36.7	≤27.00	---	---	PASS
				Peak	5875.000	-37.53	≤15.60	---	---	PASS
				Peak	5925.000	-37.26	≤10.00	---	---	PASS
11AC20S ISO	Ant1	Low	5745	Peak	5650.000	-38.102	≤-27.00	---	---	PASS
				Peak	5700.000	-37.14	≤10.00	---	---	PASS
				Peak	5720.000	-37.4	≤15.60	---	---	PASS



		High	5825	Peak	5725.000	-36.73	≤ 27.00	- - -	- - -	PASS
				Peak	5850.000	-36.241	≤ 15.60	---	---	PASS
				Peak	5855.000	-36.31	≤ 27.00	---	---	PASS
				Peak	5875.000	-36.92	≤ 15.60	---	---	PASS
				Peak	5925.000	-37.5	≤ 10.00	- - -	- - -	PASS
11AC40S ISO	Ant1	Low	5755	Peak	5650.000	-37.412	≤ -27.00	---	---	PASS
				Peak	5700.000	-36.58	≤ 10.00	---	---	PASS
				Peak	5720.000	-35.9	≤ 15.60	---	---	PASS
				Peak	5725.000	-36.25	≤ 27.00	- - -	- - -	PASS
		High	5795	Peak	5850.000	-36.646	≤ 15.60	---	---	PASS
				Peak	5855.000	-36.99	≤ 27.00	---	---	PASS
				Peak	5875.000	-37.1	≤ 15.60	---	---	PASS
				Peak	5925.000	-37.22	≤ 10.00	- - -	- - -	PASS
11AC80S ISO	Ant1	Low	5775	Peak	5650.000	-37.268	≤ -27.00	---	---	PASS
				Peak	5700.000	-37.38	≤ 10.00	---	---	PASS
				Peak	5720.000	-34.12	≤ 15.60	---	---	PASS
				Peak	5725.000	-34.36	≤ 27.00	- - -	- - -	PASS
		High	5775	Peak	5850.000	-36.642	≤ 15.60	---	---	PASS
				Peak	5855.000	-35.3	≤ 27.00	---	---	PASS
				Peak	5875.000	-38.06	≤ 15.60	---	---	PASS
				Peak	5925.000	-37.06	≤ 10.00	- - -	- - -	PASS



MIMO

TestMode	Channel	Detector	Freq. [MHz]	Ant0 [dBm]	Ant1 [dBm]	Sum [dBm]	Limit [dBm]	Verdict
11N20	5745	Peak	5650.000	-37.667	-37.38	-34.51	≤-27.00	PASS
		Peak	5700.000	-37.11	-37.48	-34.28	≤10.00	PASS
		Peak	5720.000	-28.21	-36.62	-27.62	≤15.60	PASS
		Peak	5725.000	-26.45	-30.36	-24.97	≤27.00	PASS
	5825	Peak	5850.000	-29.128	-36.056	-28.33	≤15.60	PASS
		Peak	5855.000	-36.72	-37.05	-33.87	≤27.00	PASS
		Peak	5875.000	-36.29	-37.17	-33.70	≤15.60	PASS
		Peak	5925.000	-37.33	-37.14	-34.22	≤10.00	PASS
11N40	5755	Peak	5650.000	-37.518	-37.472	-34.48	≤-27.00	PASS
		Peak	5700.000	-36.82	-37.08	-33.94	≤10.00	PASS
		Peak	5720.000	-28.26	-29.8	-25.95	≤15.60	PASS
		Peak	5725.000	-25.92	-30.47	-24.61	≤27.00	PASS
	5795	Peak	5850.000	-36.315	-37.033	-33.65	≤15.60	PASS
		Peak	5855.000	-37.64	-36.7	-34.13	≤27.00	PASS
		Peak	5875.000	-37.39	-37.53	-34.45	≤15.60	PASS
		Peak	5925.000	-37.69	-37.26	-34.46	≤10.00	PASS
11AC20	5745	Peak	5650.000	-37.921	-38.102	-35.00	≤-27.00	PASS
		Peak	5700.000	-37.89	-37.14	-34.49	≤10.00	PASS
		Peak	5720.000	-37.27	-37.4	-34.32	≤15.60	PASS
		Peak	5725.000	-36.21	-36.73	-33.45	≤27.00	PASS
	5825	Peak	5850.000	-37.364	-36.241	-33.76	≤15.60	PASS
		Peak	5855.000	-36.9	-36.31	-33.58	≤27.00	PASS
		Peak	5875.000	-36.44	-36.92	-33.66	≤15.60	PASS
		Peak	5925.000	-37.78	-37.5	-34.63	≤10.00	PASS
11AC40	5755	Peak	5650.000	-37.052	-37.412	-34.22	≤-27.00	PASS
		Peak	5700.000	-35.4	-36.58	-32.94	≤10.00	PASS
		Peak	5720.000	-35.87	-35.9	-32.87	≤15.60	PASS
		Peak	5725.000	-30.8	-36.25	-29.71	≤27.00	PASS
	5795	Peak	5850.000	-36.728	-36.646	-33.68	≤15.60	PASS
		Peak	5855.000	-36.94	-36.99	-33.95	≤27.00	PASS
		Peak	5875.000	-37.23	-37.1	-34.15	≤15.60	PASS
		Peak	5925.000	-38.16	-37.22	-34.65	≤10.00	PASS
11AC80	5775	Peak	5650.000	-37.101	-37.268	-34.17	≤-27.00	PASS
		Peak	5700.000	-37.01	-37.38	-34.18	≤10.00	PASS
		Peak	5720.000	-35.87	-34.12	-31.90	≤15.60	PASS
		Peak	5725.000	-33.14	-34.36	-30.70	≤27.00	PASS
	5775	Peak	5850.000	-37.082	-36.642	-33.85	≤15.60	PASS
		Peak	5855.000	-36.27	-35.3	-32.75	≤27.00	PASS
		Peak	5875.000	-37.37	-38.06	-34.69	≤15.60	PASS
		Peak	5925.000	-36.37	-37.06	-33.69	≤10.00	PASS




Note:

1. The Antenna Gain is compensated in the graph.
2. For transmitters operating in 5150-5350 GHz band and 5470-5725 GHz band: The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.




Test Graphs


11A_Ant0_Low_5745_Peak

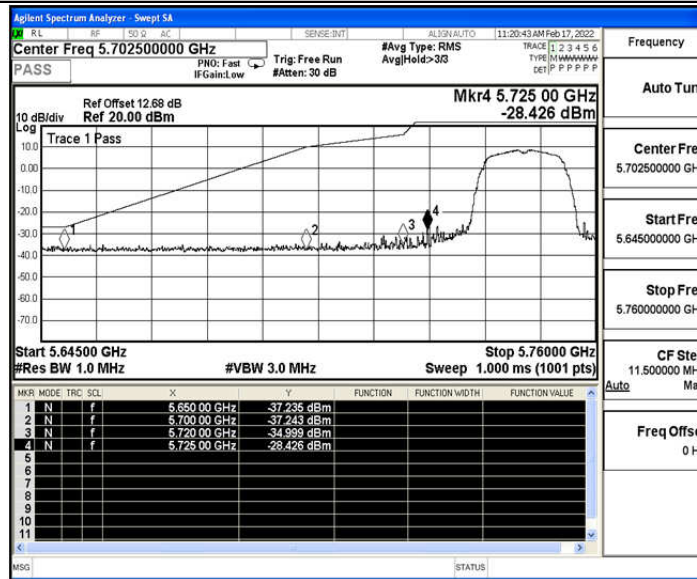


11A_Ant0_High_5825_Peak

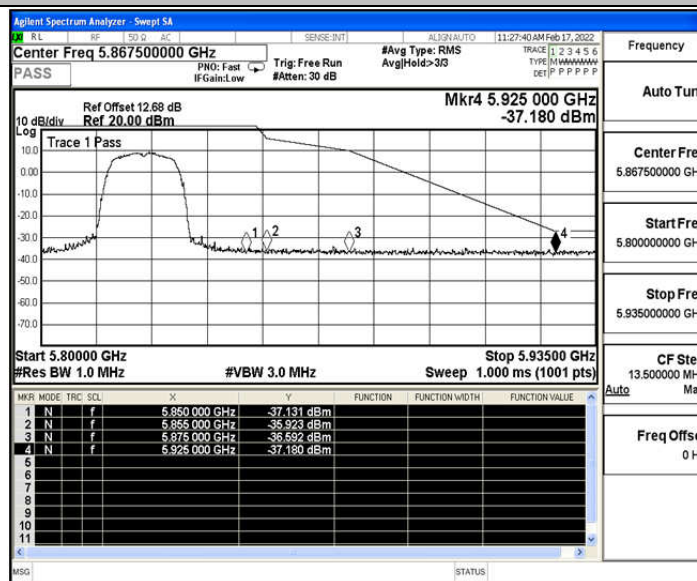


11N20SISO_Ant0_Low_5745_Peak

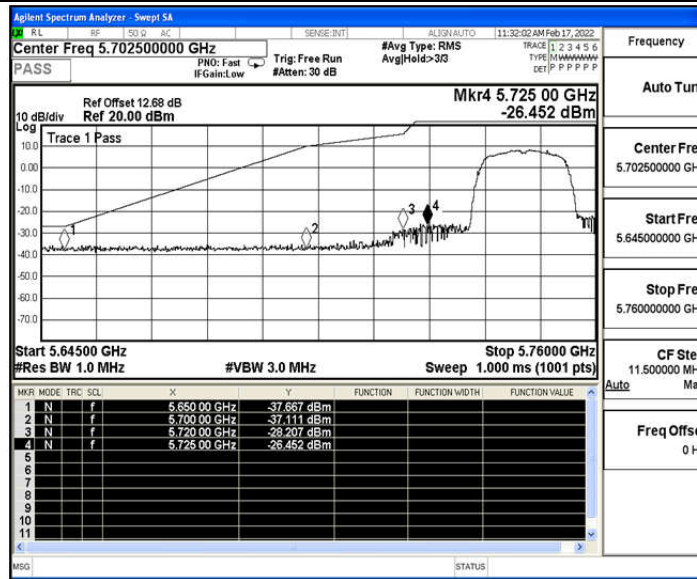

11N20SISO_Ant0_High_5825_Peak

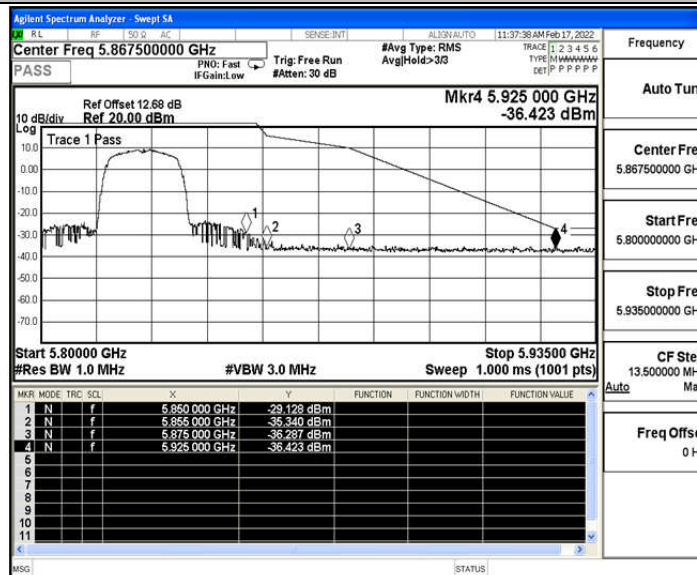


11N40SISO_Ant0_Low_5755_Peak

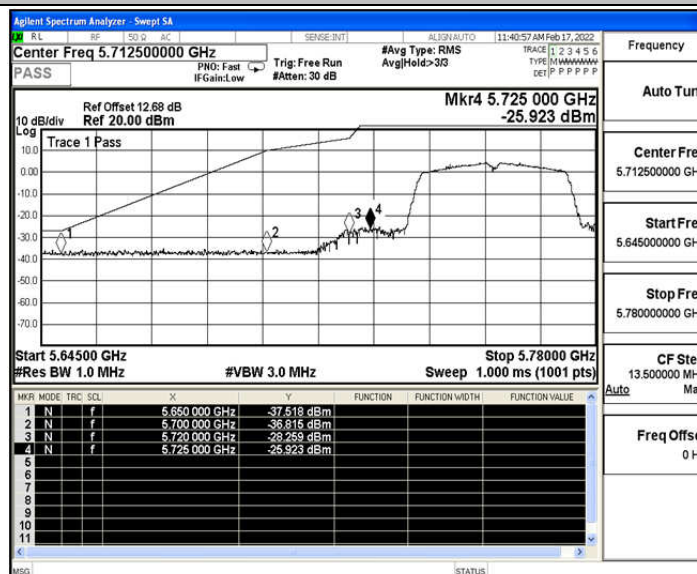





11N40SISO_Ant0_High_5795_Peak

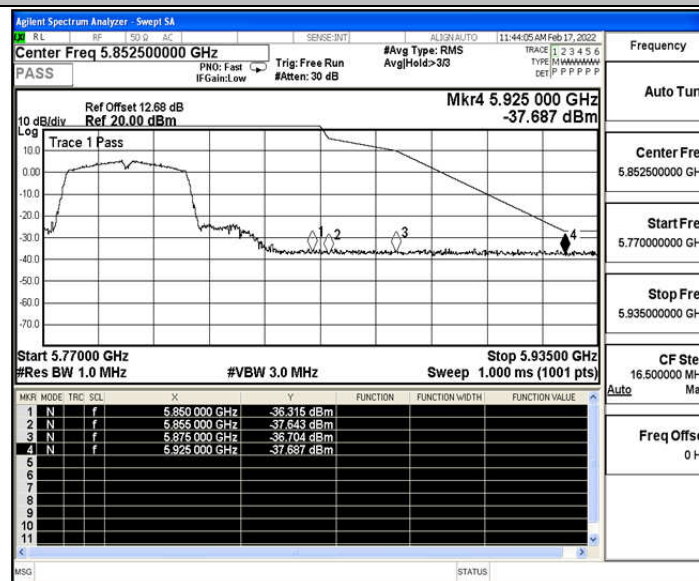


11AC20SISO_Ant0_Low_5745_Peak

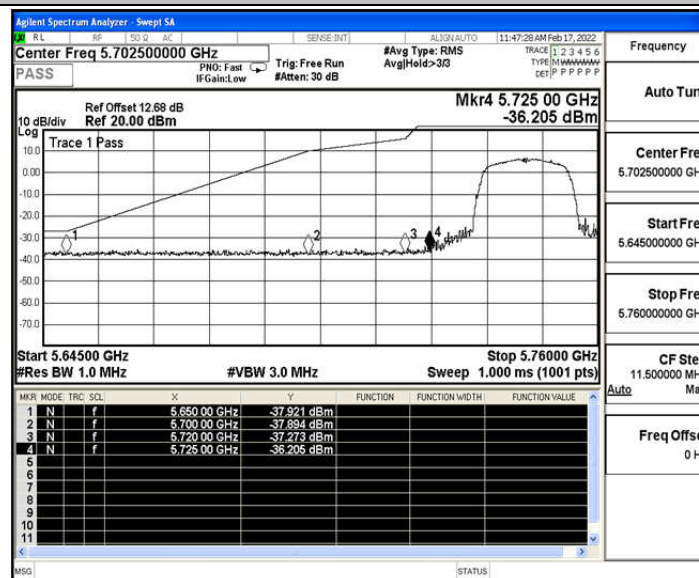


11AC20SISO_Ant0_High_5825_Peak

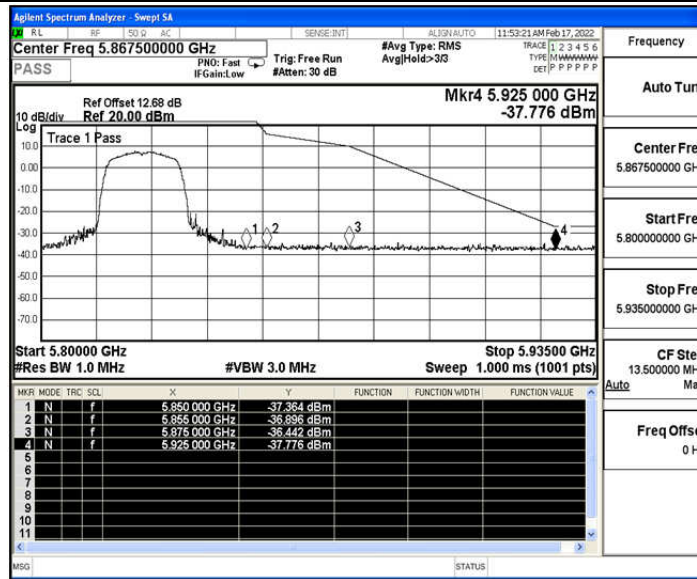

11AC40SISO_Ant0_Low_5755_Peak

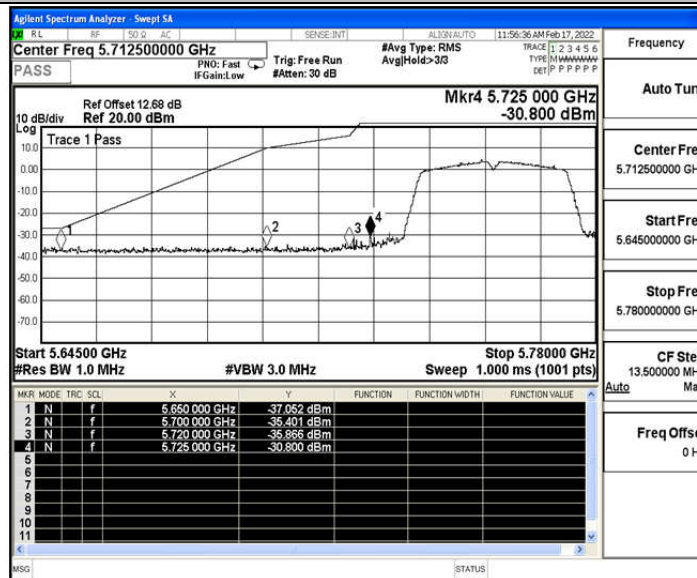


11AC40SISO_Ant0_High_5795_Peak

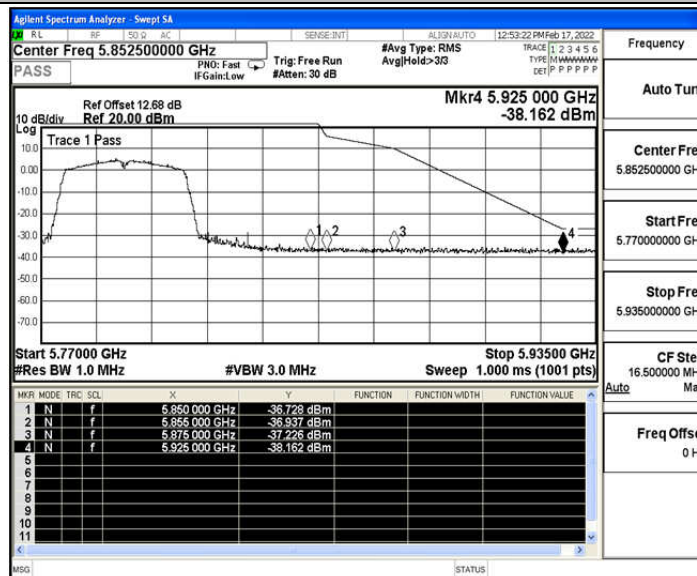



11AC80SISO_Ant0_Low_5775_Peak

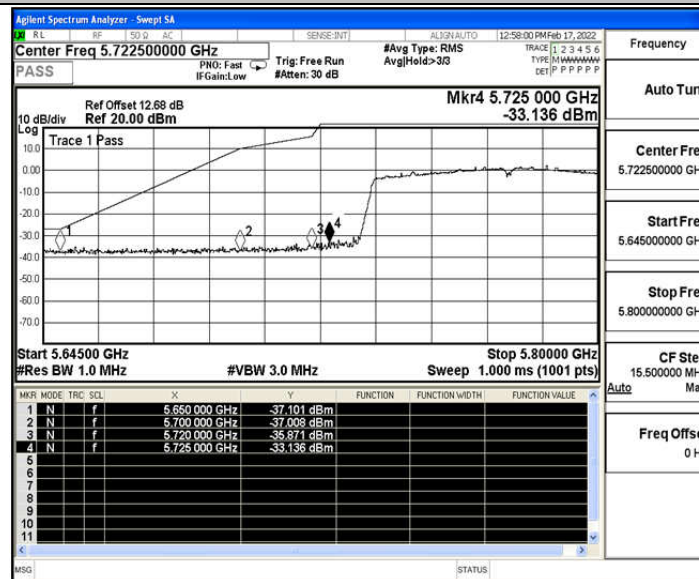

11AC80SISO_Ant0_High_5775_Peak

