

Appendix B.4: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth


Conducted Spurious Emission

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	0.79	0.79	---	PASS
			30~1000	0.79	-61.3	≤-19.21	PASS
			1000~26500	0.79	-53.07	≤-19.21	PASS
		2440	Reference	0.15	0.15	---	PASS
			30~1000	0.15	-62.35	≤-19.85	PASS
			1000~26500	0.15	-53.13	≤-19.85	PASS
		2480	Reference	0.84	0.84	---	PASS
			30~1000	0.84	-62.59	≤-19.16	PASS
			1000~26500	0.84	-51.69	≤-19.16	PASS
BLE_2M	Ant1	2402	Reference	-0.26	-0.26	---	PASS
			30~1000	-0.26	-56.9	≤-20.26	PASS
			1000~26500	-0.26	-52.69	≤-20.26	PASS
		2440	Reference	-0.52	-0.52	---	PASS
			30~1000	-0.52	-63.01	≤-20.52	PASS
			1000~26500	-0.52	-53.48	≤-20.52	PASS
		2480	Reference	-1.36	-1.36	---	PASS
			30~1000	-1.36	-61.39	≤-21.36	PASS
			1000~26500	-1.36	-52.39	≤-21.36	PASS

BLE 1M Ant1 2402 0-Reference



BLE 1M Ant1 2402 30-1000

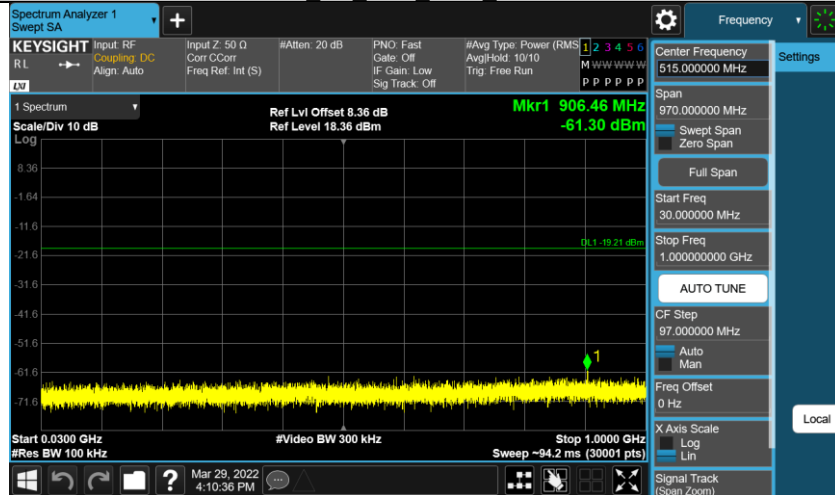


BLE 1M Ant1 2402 1000-26500




BLE 1M Ant1 2440 0-Reference



BLE 1M Ant1 2440 30-1000

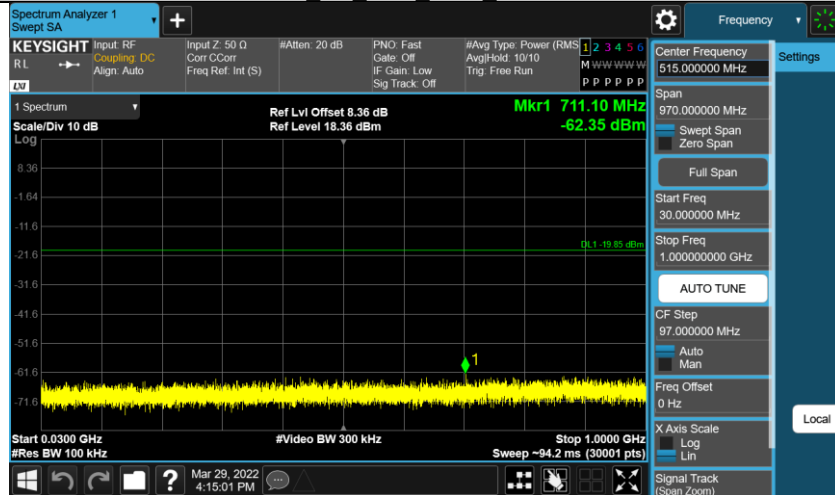


BLE 1M Ant1 2440 1000-26500

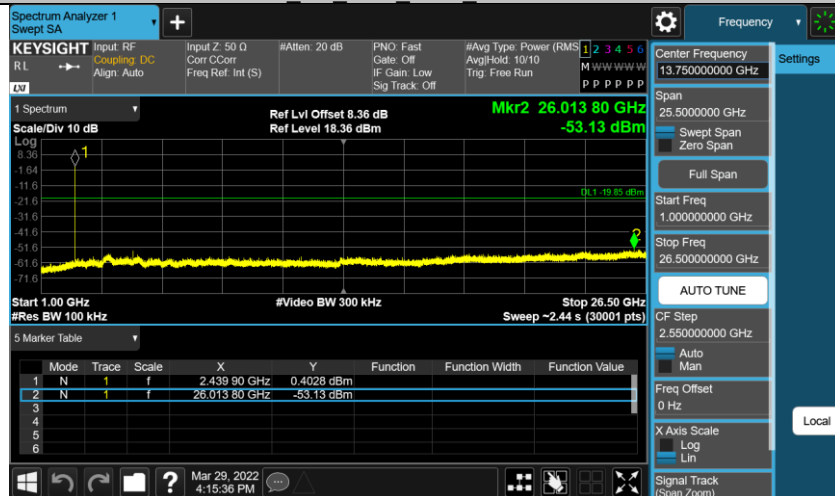


BLE 1M Ant1 2480 0-Reference



BLE 1M Ant1 2480 30-1000

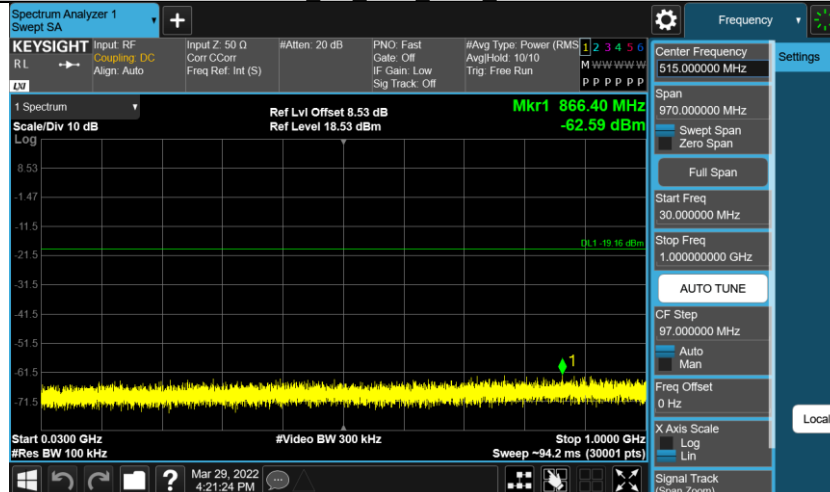


BLE 1M Ant1 2480 1000-26500

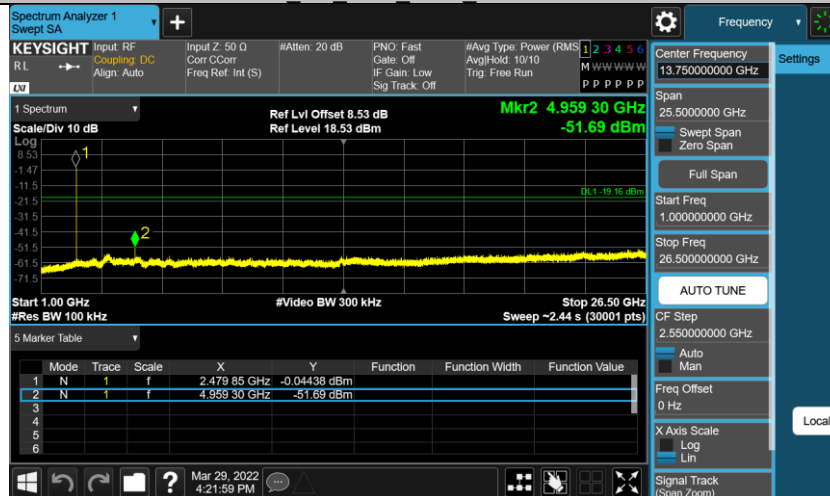


BLE 2M Ant1 2402 0-Reference




BLE 2M Ant1 2402 30-1000

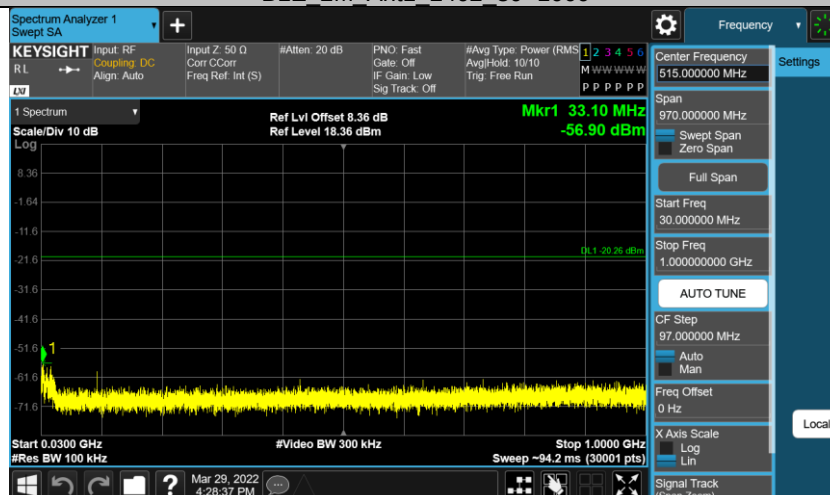


BLE 2M Ant1 2402 1000-26500

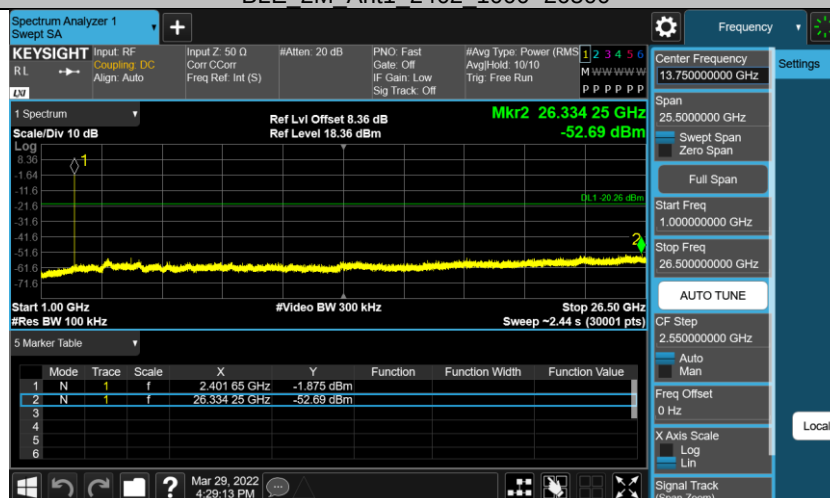


BLE 2M Ant1 2440 0-Reference

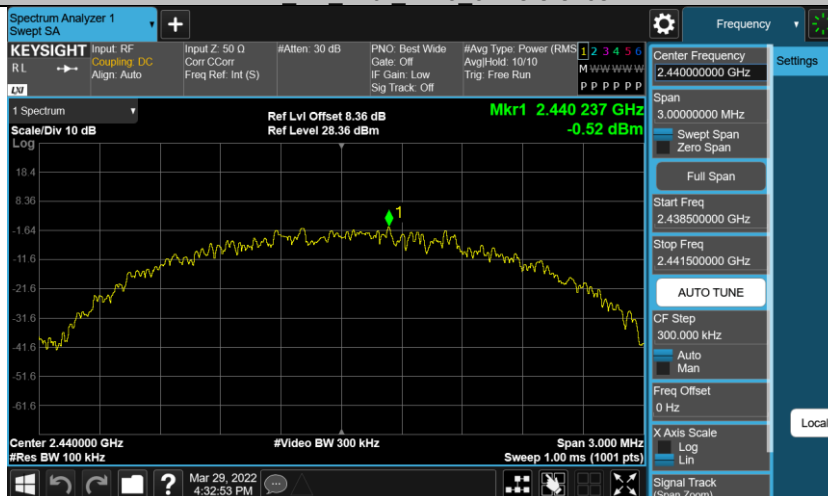

BLE 2M Ant1 2440 30-1000

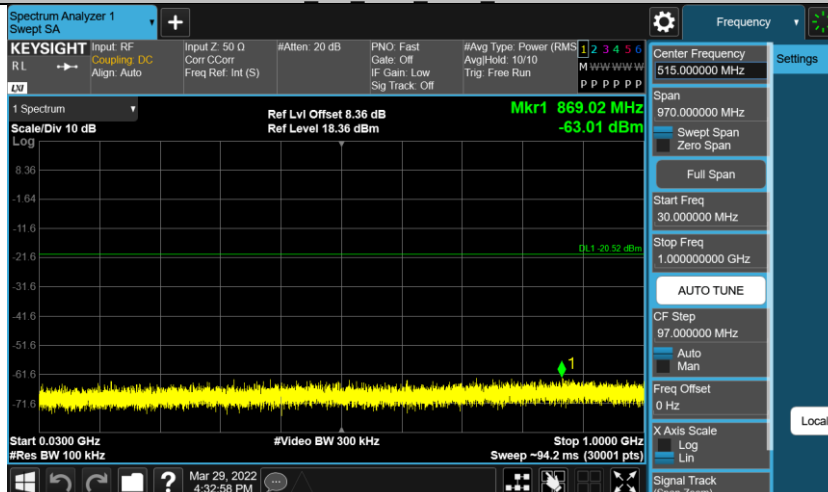


BLE 2M Ant1 2440 1000-26500

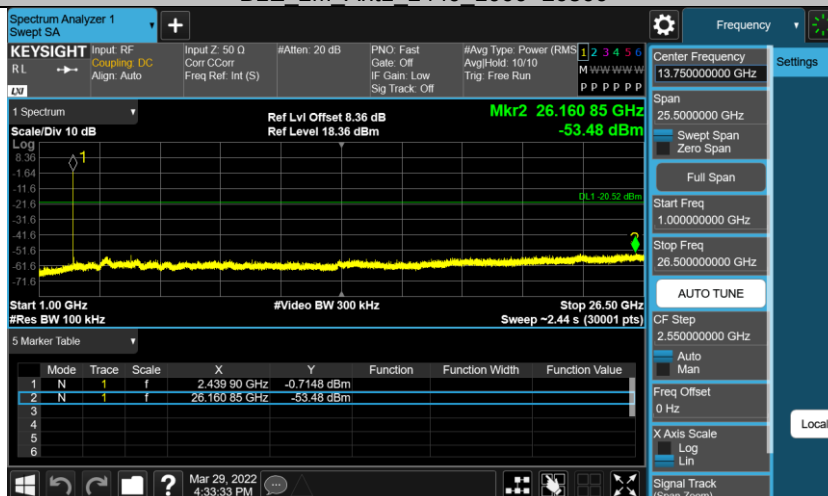


BLE 2M Ant1 2480 0~Reference



BLE 2M Ant1 2480 30~1000

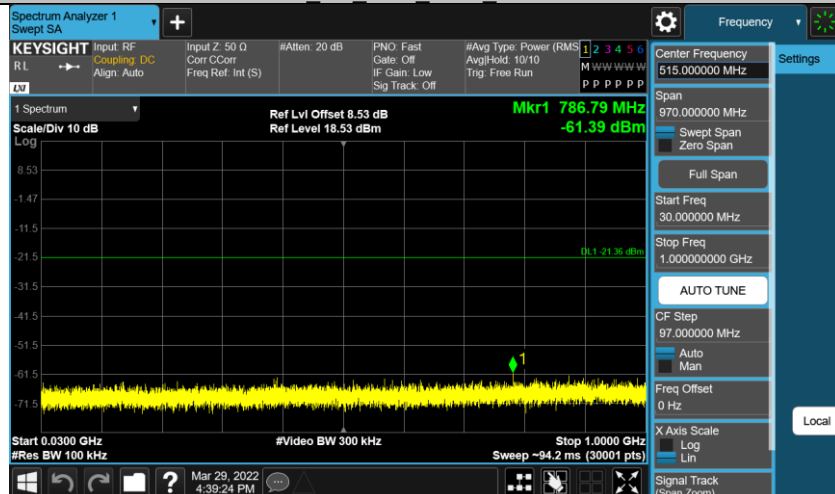


BLE 2M Ant1 2480 1000~26500

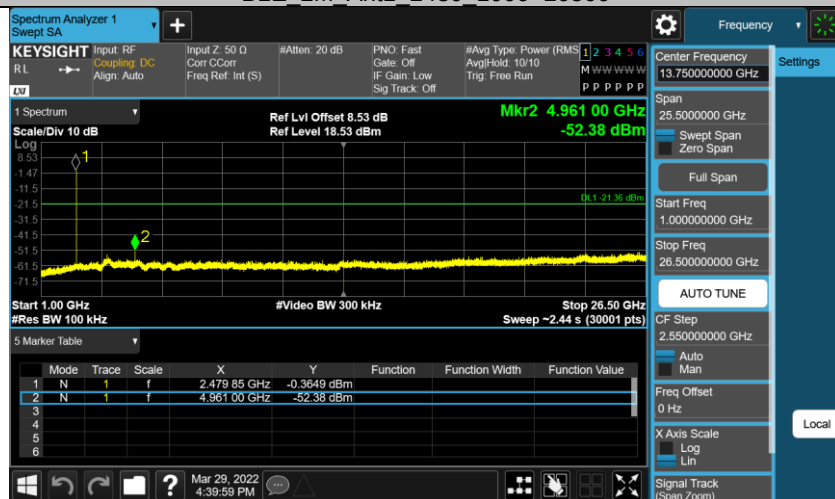


Band Edge

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	1.85	-50.28	≤-18.15	PASS
		High	2480	1.48	-49.67	≤-18.53	PASS
BLE_2M	Ant1	Low	2402	0.08	-32.53	≤-19.92	PASS
		High	2480	1.03	-49.97	≤-18.97	PASS


BLE 1M Ant1 Low 2402

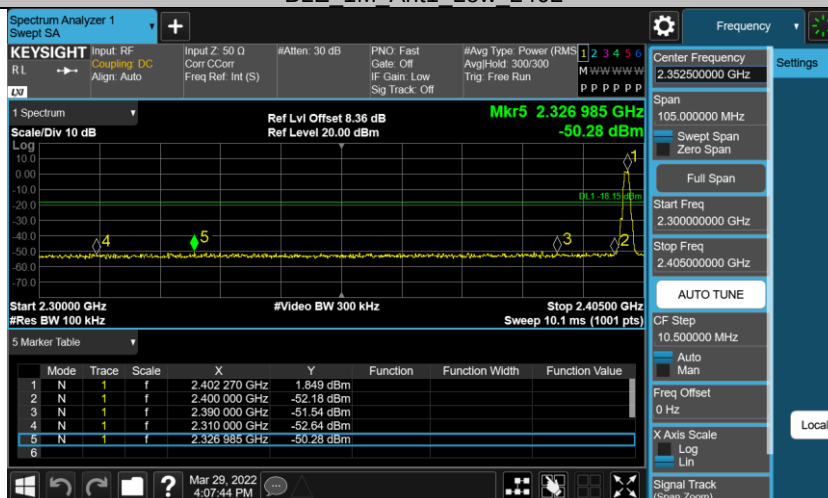


BLE 1M Ant1 High 2480

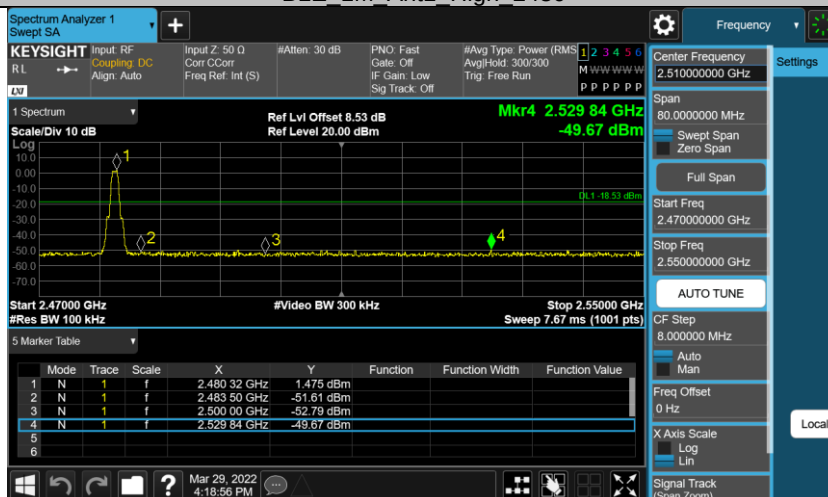

BLE 2M Ant1 Low 2402

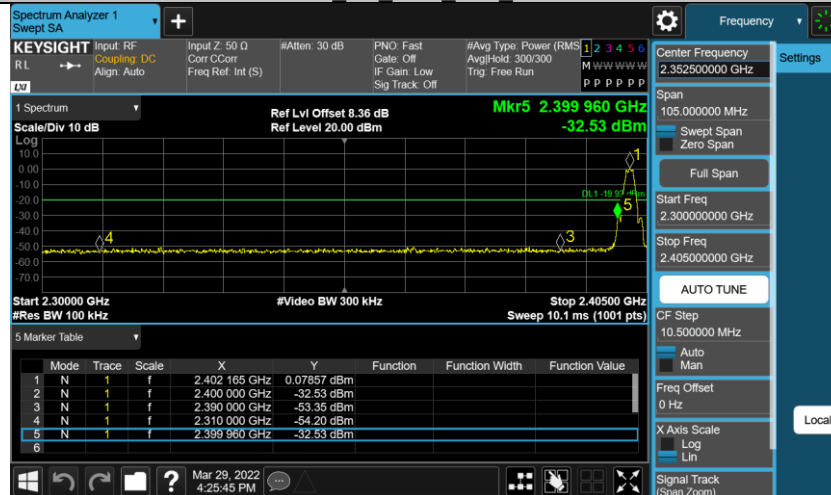

BLE 2M Ant1 High 2480

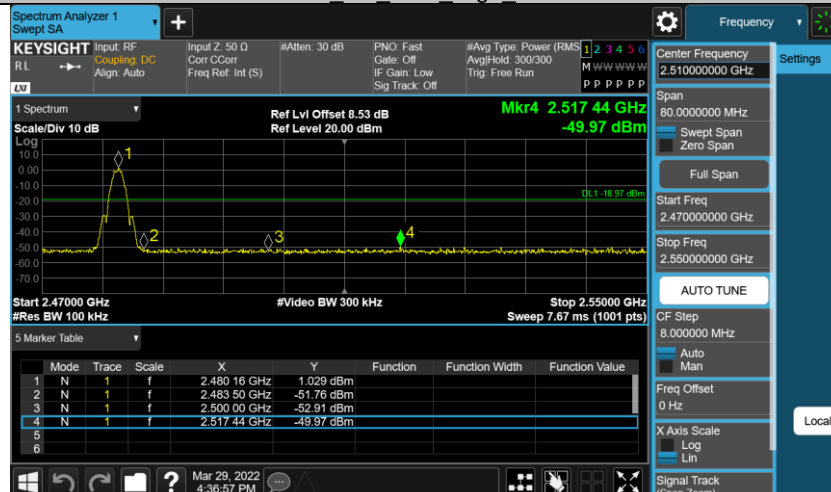

Appendix B.5: Test Results of Radiated Spurious Emissions


Note:

- 1) This testing was carried out on all modes, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30 MHz to 1GHz

EUT Information

EUT Name:	Xiaomi Electric Scooter 4
Model:	DDHBC06ZM
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168364236/A003229996-002
Test Voltage:	Battery
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

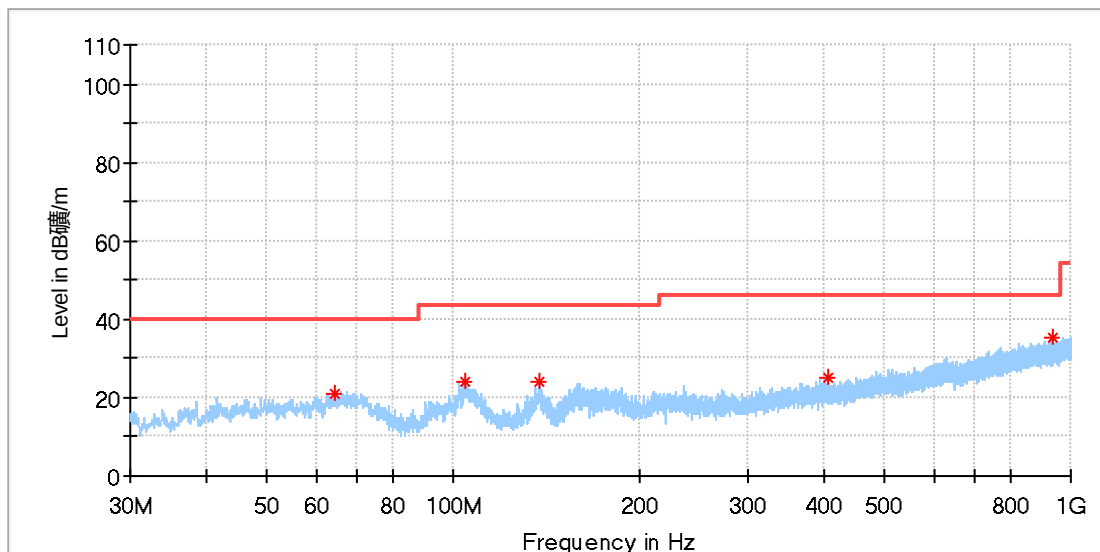

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
64.483500	21.09	40.00	18.91	100.0	H	221.0	-19.9
104.302000	24.10	43.50	19.40	100.0	H	0.0	-18.8
138.106500	23.91	43.50	19.59	100.0	H	31.0	-22.2
405.002000	25.10	46.00	20.90	100.0	H	131.0	-13.6
936.465000	35.34	46.00	10.66	100.0	H	281.0	-4.6

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: Xiaomi Electric Scooter 4
Model: DDHBC06ZM
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168364236/A003229996-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

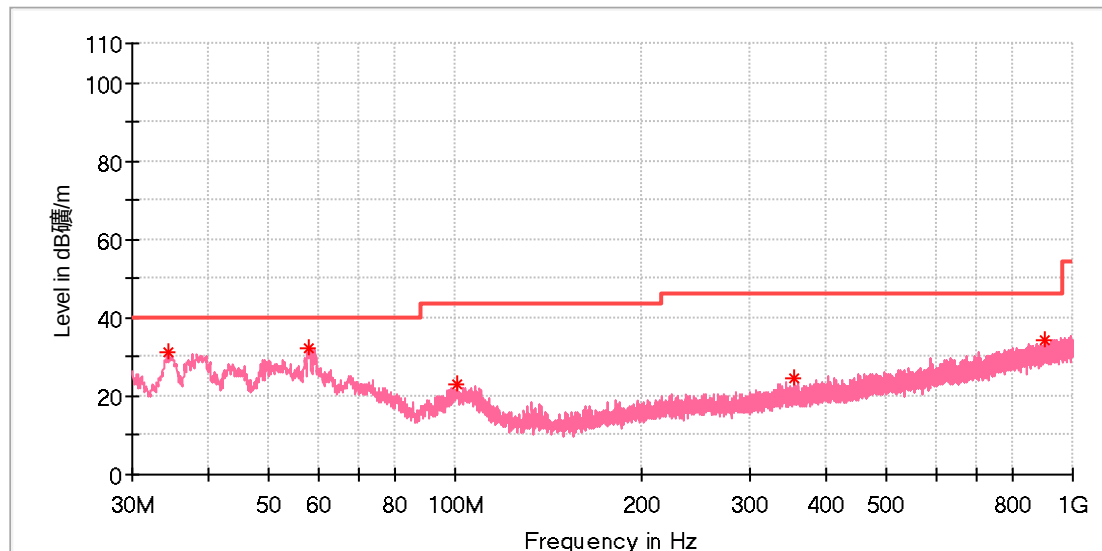

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
34.365000	31.33	40.00	8.67	100.0	V	119.0	-22.2
58.130000	32.26	40.00	7.74	100.0	V	297.0	-18.8
100.567500	23.08	43.50	20.42	100.0	V	276.0	-19.0
354.562000	24.37	46.00	21.63	100.0	V	111.0	-14.7
898.247000	34.27	46.00	11.73	100.0	V	284.0	-5.0

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Xiaomi Electric Scooter 4
Model:	DDHBC06ZM
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168364236/A003229996-002
Test Voltage:	Battery
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

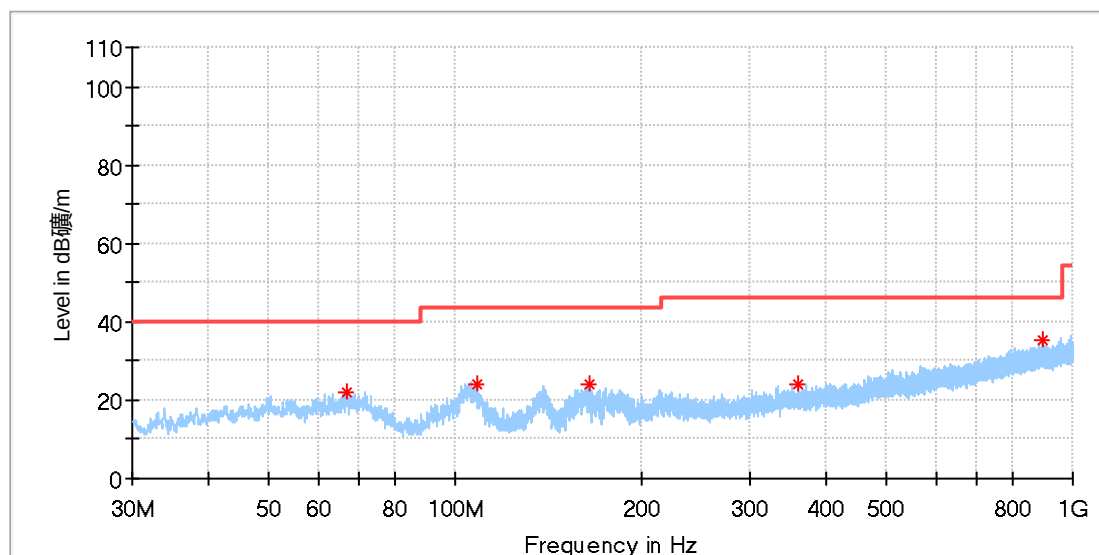

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
66.957000	22.15	40.00	17.85	100.0	H	18.0	-20.8
108.279000	24.27	43.50	19.23	100.0	H	0.0	-19.0
164.393500	23.81	43.50	19.69	100.0	H	48.0	-21.5
357.860000	23.86	46.00	22.14	100.0	H	195.0	-14.7
892.233000	35.41	46.00	10.59	100.0	H	6.0	-5.0

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Xiaomi Electric Scooter 4
Model: DDHBC06ZM
Test Mode: BLE 1M_High channel
Order No/Sample No: 168364236/A003229996-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

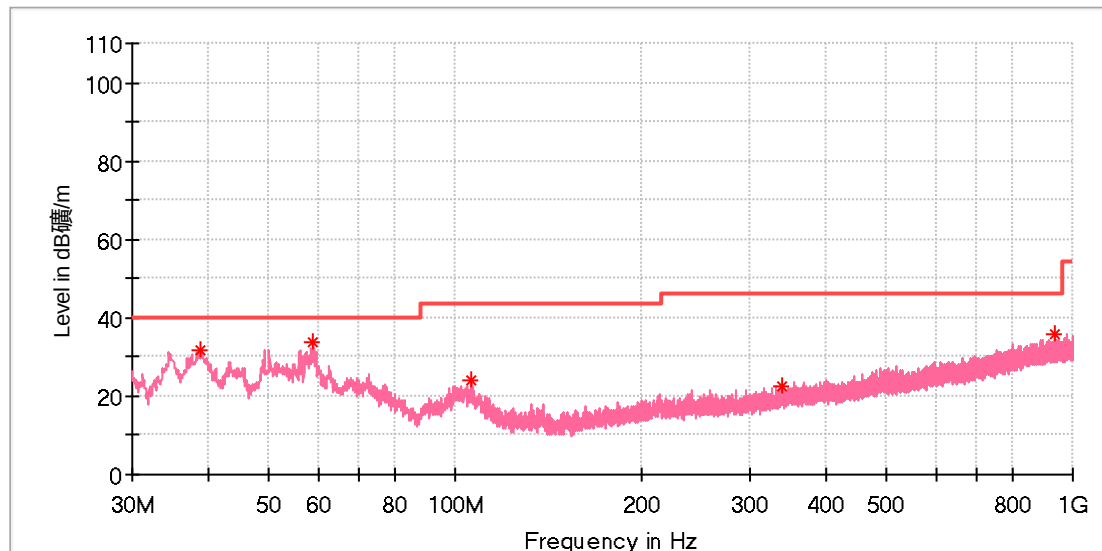

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
38.681500	31.61	40.00	8.39	100.0	V	341.0	-20.5
58.906000	33.63	40.00	6.37	100.0	V	333.0	-18.9
106.484500	23.85	43.50	19.66	100.0	V	228.0	-18.8
338.072000	22.68	46.00	23.32	100.0	V	326.0	-15.1
932.148500	35.62	46.00	10.38	100.0	V	209.0	-4.7

Final_Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

1GHz-18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	Xiaomi Electric Scooter 4
Model:	DDHBC06ZM
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168364236/A003229996-002
Test Voltage:	Battery
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

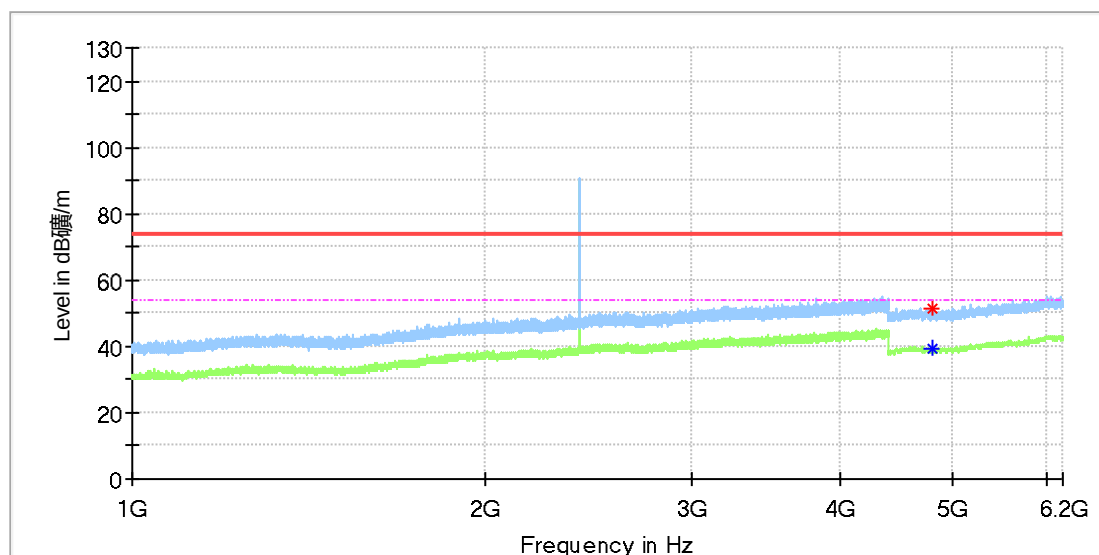

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4802.000000	---	39.43	54.00	14.57	100.0	H	155.0	11.8
4803.000000	51.40	---	74.00	22.60	100.0	H	162.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Xiaomi Electric Scooter 4
Model: DDHBC06ZM
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168364236/A003229996-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

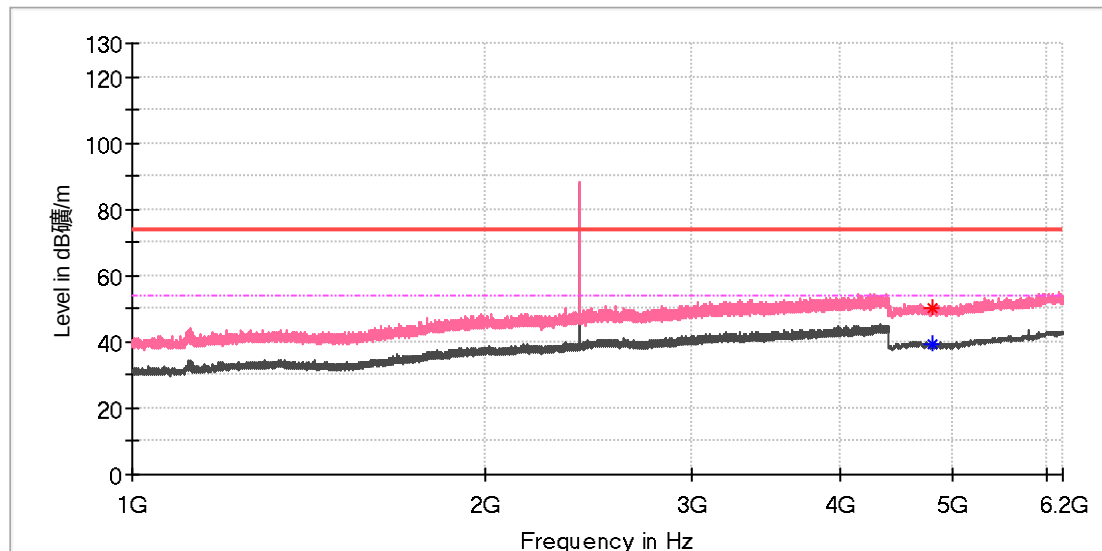

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4805.000000	---	39.06	54.00	14.94	100.0	V	227.0	11.8
4806.000000	50.34	---	74.00	23.66	100.0	V	234.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Xiaomi Electric Scooter 4
Model: DDHBC06ZM
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168364236/A003229996-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

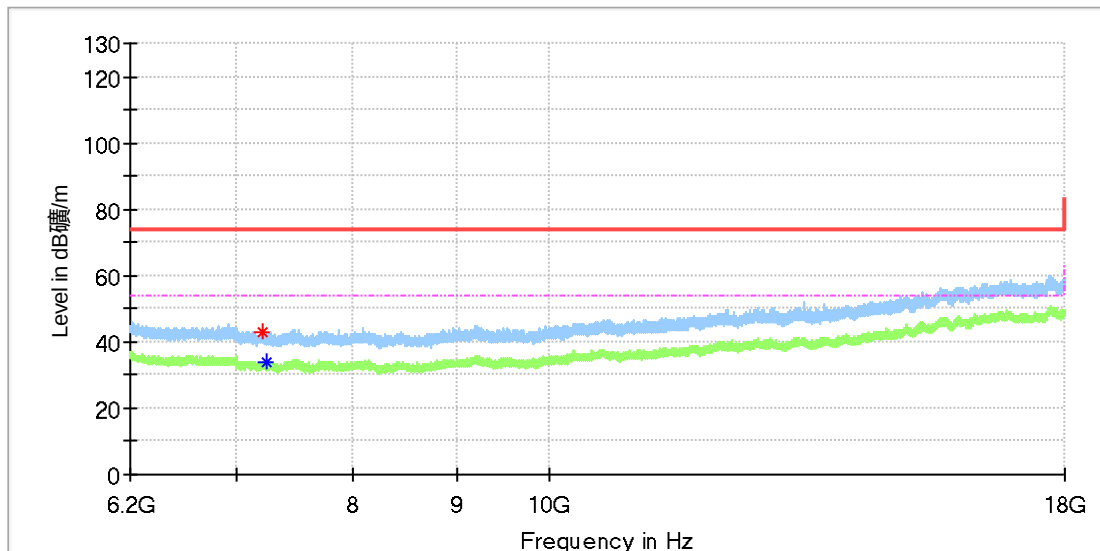

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7211.358333	43.03	---	74.00	30.97	100.0	H	217.0	8.7
7236.925000	---	34.13	54.00	19.87	100.0	H	9.0	8.6

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Xiaomi Electric Scooter 4
Model: DDHBC06ZM
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168364236/A003229996-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

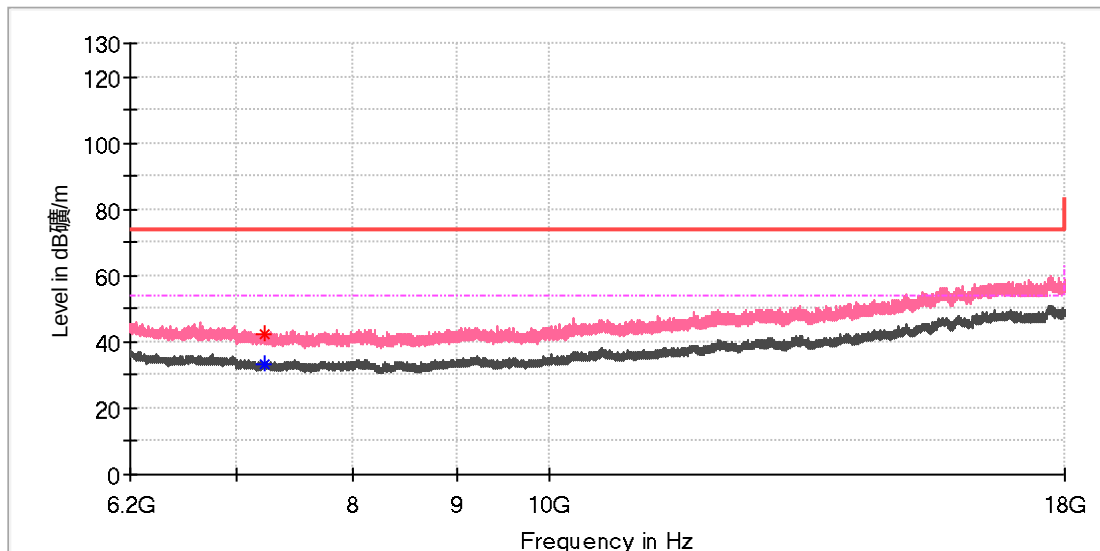

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7219.716667	---	33.53	54.00	20.47	100.0	V	209.0	8.7
7233.975000	42.04	---	74.00	31.96	100.0	V	171.0	8.6

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Xiaomi Electric Scooter 4
 Model: DDHBC06ZM
 Test Mode: BLE 1M_Mid channel
 Order No/Sample No: 168364236/A003229996-002
 Test Voltage: Battery
 Remark: Temp 22 Humi:52%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

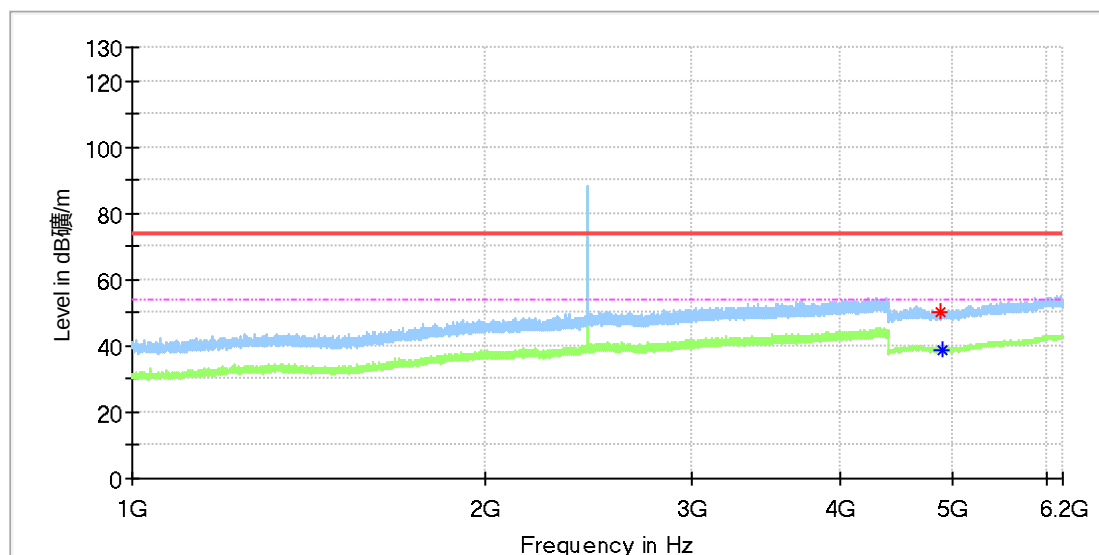

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4878.000000	50.05	---	74.00	23.95	100.0	H	25.0	11.8
4889.000000	---	38.79	54.00	15.21	100.0	H	55.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Xiaomi Electric Scooter 4
Model: DDHBC06ZM
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168364236/A003229996-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

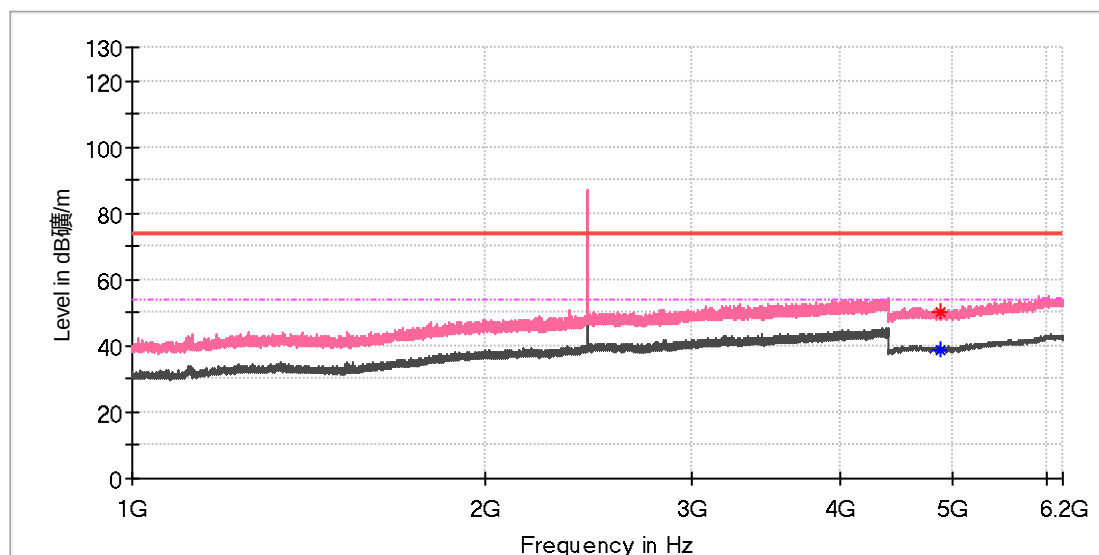

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4879.000000	---	38.93	54.00	15.07	100.0	V	107.0	11.8
4885.500000	49.93	---	74.00	24.07	100.0	V	51.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Xiaomi Electric Scooter 4
Model: DDHBC06ZM
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168364236/A003229996-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

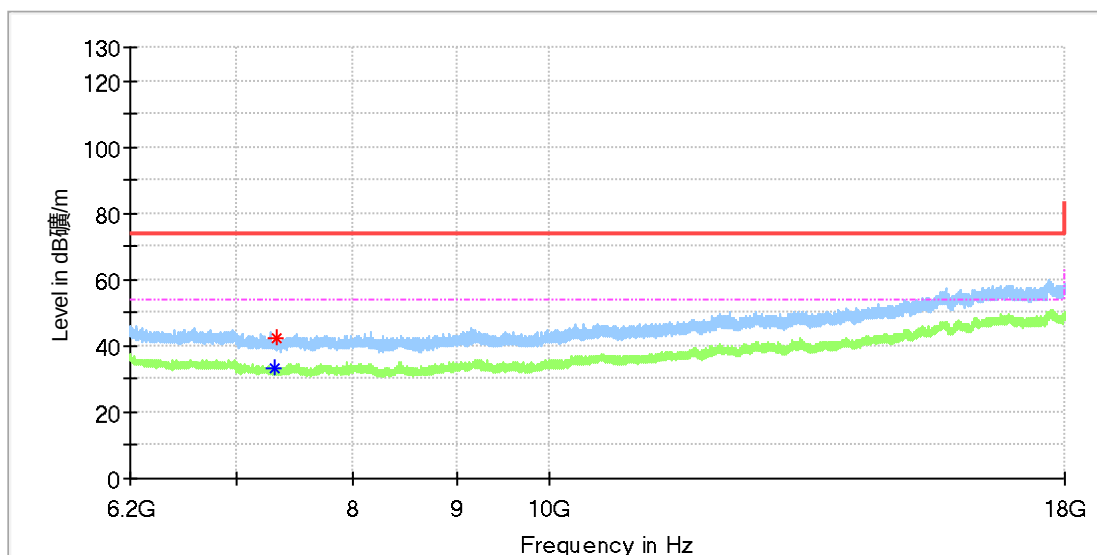

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7304.775000	---	33.44	54.00	20.56	100.0	H	298.0	8.3
7324.441667	42.09	---	74.00	31.91	100.0	H	346.0	8.2

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Xiaomi Electric Scooter 4
Model: DDHBC06ZM
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168364236/A003229996-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

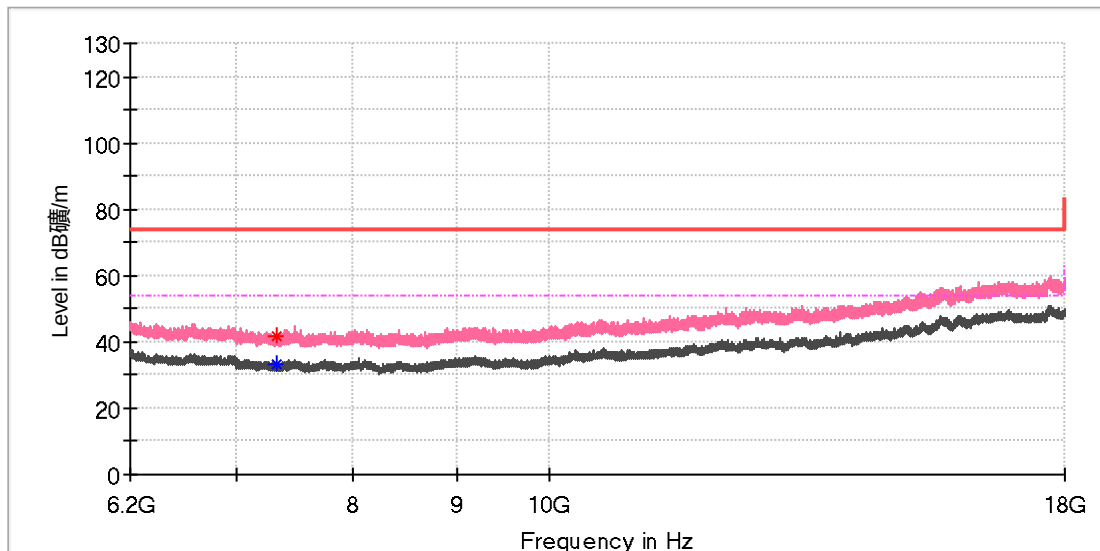

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7323.950000	---	33.32	54.00	20.68	100.0	V	28.0	8.2
7329.358333	41.79	---	74.00	32.21	100.0	V	188.0	8.1

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Xiaomi Electric Scooter 4
 Model: DDHBC06ZM
 Test Mode: BLE 1M_High channel
 Order No/Sample No: 168364236/A003229996-002
 Test Voltage: Battery
 Remark: Temp 22 Humi:52%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

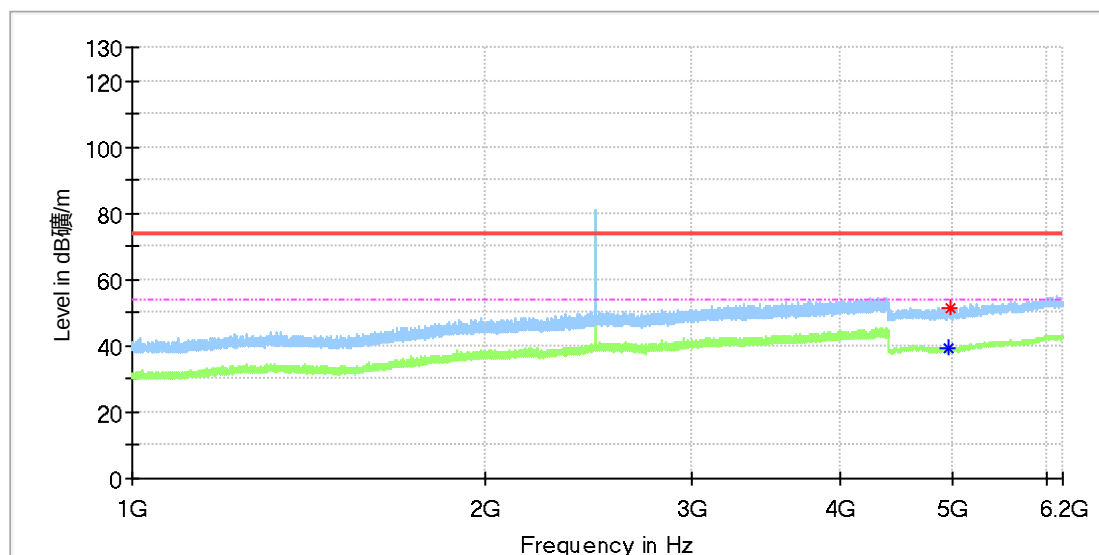

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4950.500000	---	39.57	54.00	14.43	100.0	H	222.0	11.8
4969.000000	51.27	---	74.00	22.73	100.0	H	160.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Xiaomi Electric Scooter 4
Model: DDHBC06ZM
Test Mode: BLE 1M_High channel
Order No/Sample No: 168364236/A003229996-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

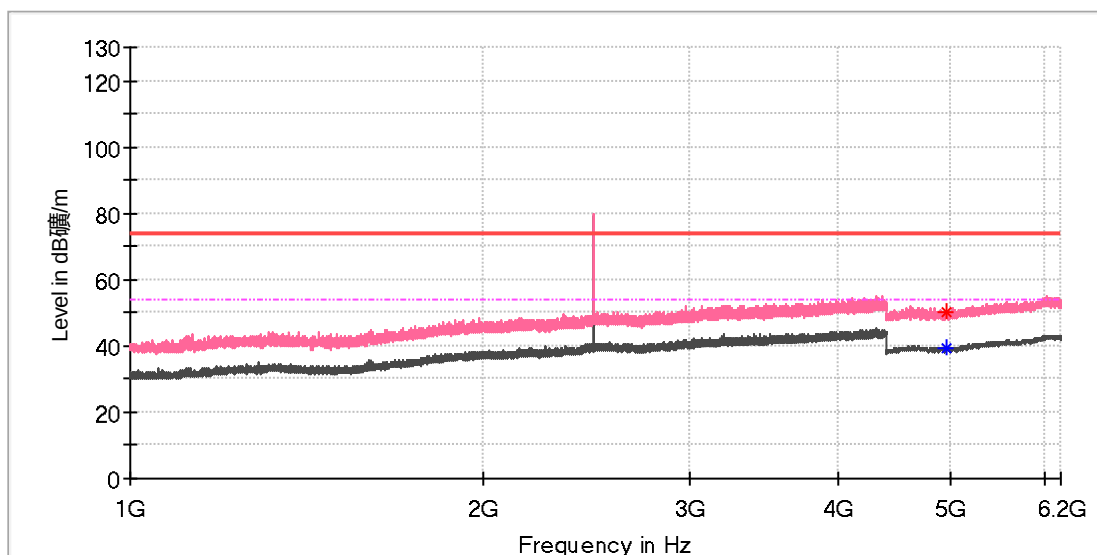

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4956.500000	---	39.48	54.00	14.52	100.0	V	235.0	11.8
4959.000000	50.28	---	74.00	23.72	100.0	V	98.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Xiaomi Electric Scooter 4
Model: DDHBC06ZM
Test Mode: BLE 1M_High channel
Order No/Sample No: 168364236/A003229996-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

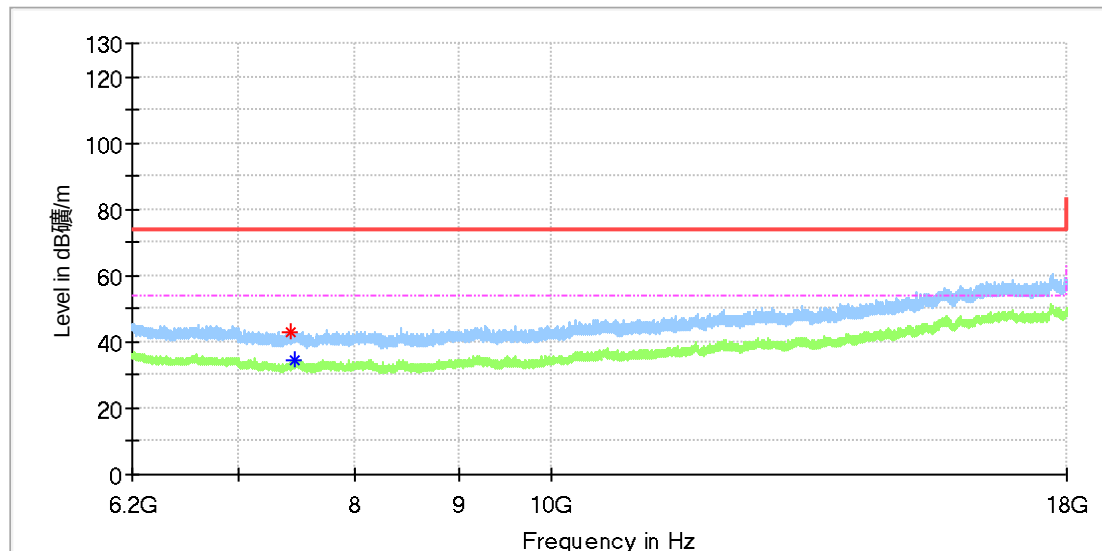

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7433.100000	42.72	---	74.00	31.28	100.0	H	215.0	8.4
7456.700000	---	34.23	54.00	19.77	100.0	H	19.0	8.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Xiaomi Electric Scooter 4
Model: DDHBC06ZM
Test Mode: BLE 1M_High channel
Order No/Sample No: 168364236/A003229996-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

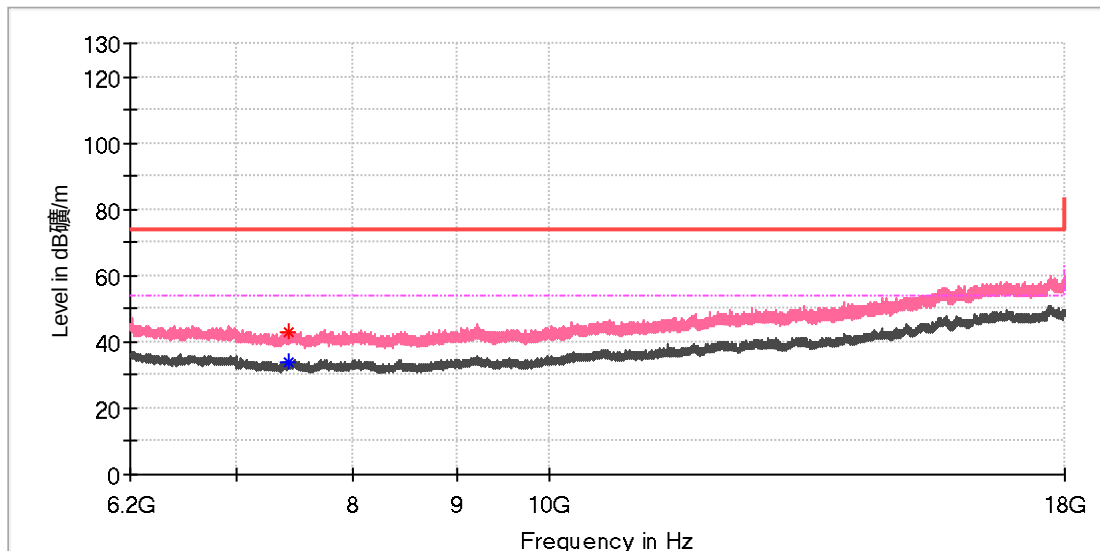

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7423.266667	---	33.91	54.00	20.09	100.0	V	198.0	8.4
7434.575000	43.02	---	74.00	30.98	100.0	V	51.0	8.4


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix B.6: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	Xiaomi Electric Scooter 4
Model:	DDHBC06ZM
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168364236/A003229996-002
Test Voltage:	Battery
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

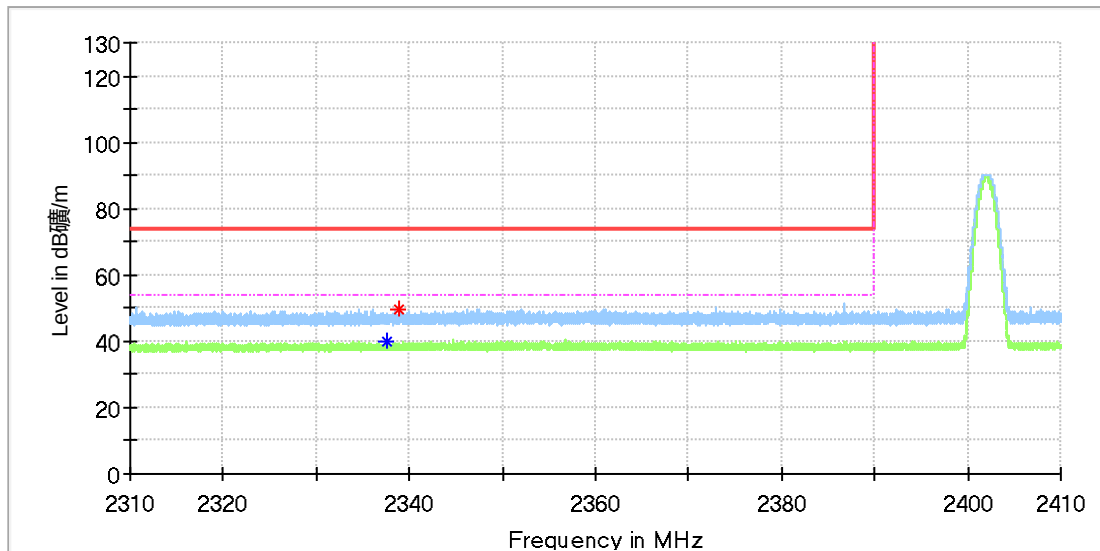

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2337.580000	---	39.71	54.00	14.29	100.0	H	5.0	6.8
2338.985000	49.57	---	74.00	24.43	100.0	H	326.0	6.8

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Xiaomi Electric Scooter 4
Model: DDHBC06ZM
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168364236/A003229996-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

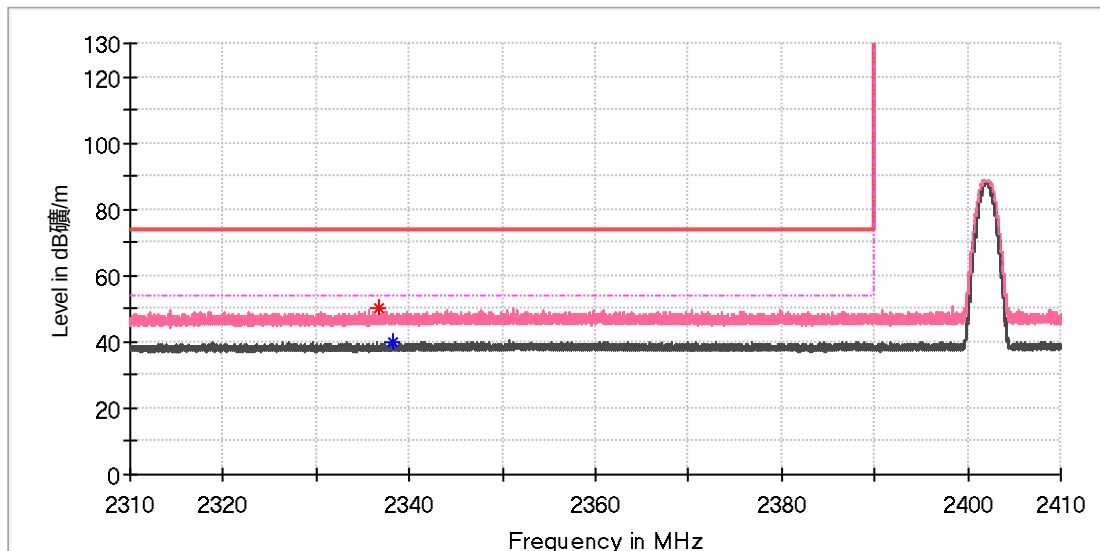

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2336.790000	49.97	---	74.00	24.03	100.0	V	0.0	6.8
2338.200000	---	40.07	54.00	13.93	100.0	V	47.0	6.8

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Xiaomi Electric Scooter 4
Model: DDHBC06ZM
Test Mode: BLE 1M_High channel
Order No/Sample No: 168364236/A003229996-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

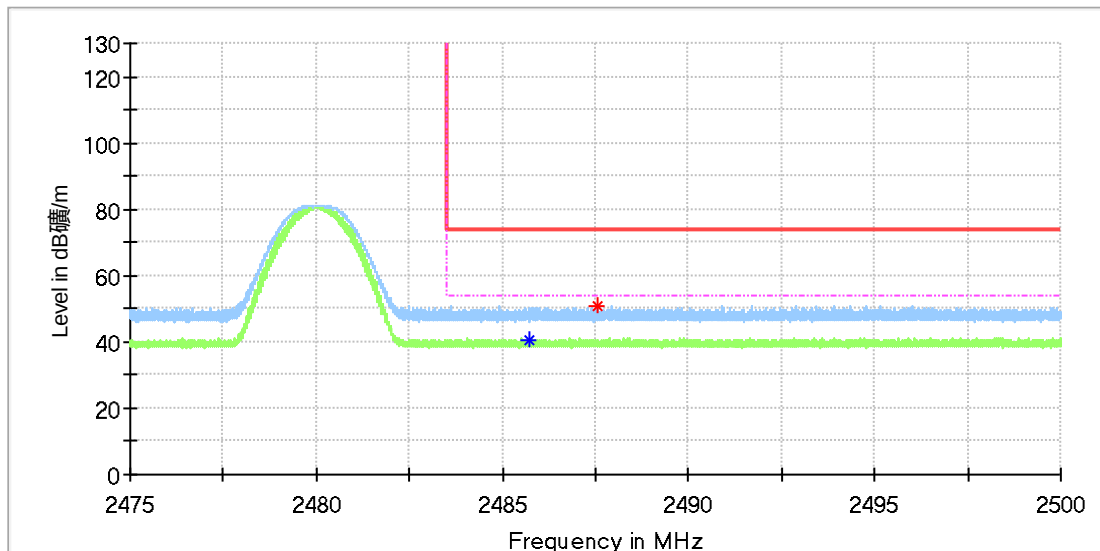

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2485.721250	---	40.75	54.00	13.25	100.0	H	87.0	7.4
2487.560000	50.83	---	74.00	23.17	100.0	H	252.0	7.4

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Xiaomi Electric Scooter 4
Model: DDHBC06ZM
Test Mode: BLE 1M_High channel
Order No/Sample No: 168364236/A003229996-002
Test Voltage: Battery
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

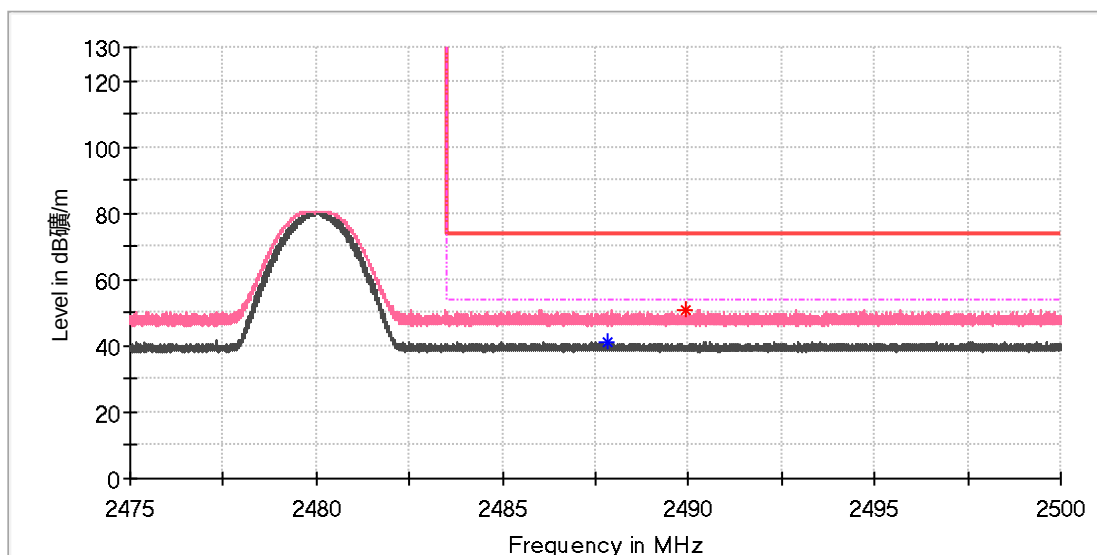

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2487.848750	---	40.94	54.00	13.06	100.0	V	124.0	7.4
2489.925000	50.58	---	74.00	23.42	100.0	V	56.0	7.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---