

Antenna Specification


Specifications

Manufacture: Shenzhen Qingmai Bicycle Co.,Ltd

Summary

ITEM	SPEC.	
Model Name	PCB Antenna	
Center Frequency	2402 MHz	-2.36dBi
	2441 MHz	1.00 dBi
	2480 MHz	-2.74 dBi
MAX. GAIN	1dBi	
Polarization	Horizontal	
Azimuth Beam Pattern	Omni-directional	
Impedance	50 Ω	
Antenna Length	10.53mm	

Antenna Photo & Length (mm)

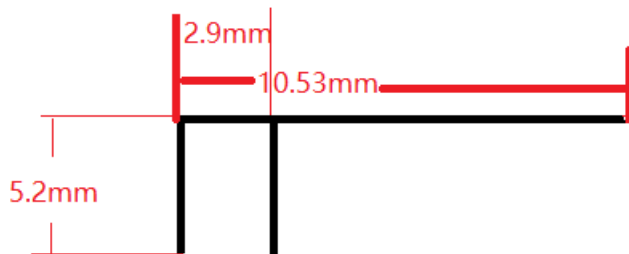


1. Result

Center Frequency	Maximum Ant Gain	
2402MHz	H	-2.36 dBi
	V	-3.43 dBi
2441 MHz	H	1.00 dBi
	V	-3.85 dBi
2480 MHz	H	-4.74 dBi
	V	-5.75 dBi

2. Main antenna : 2402 MHz

2.1 Horizontal

◆ XY-plane

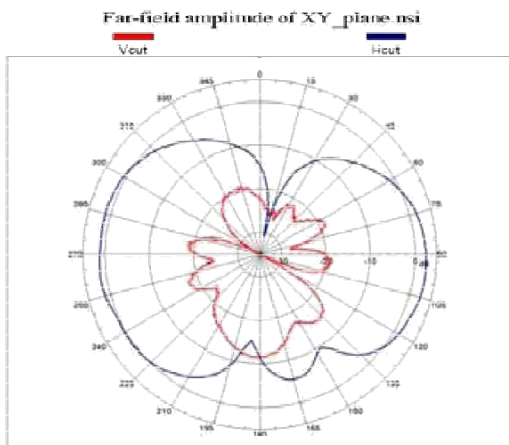


Unit : dBi

	Peak gain	Avg. gain
H cut	-2.36	-7.43
V cut	-11.01	-13.04
Total	-1.78	-8.05

2.2 Vertical

◆ XZ-plane

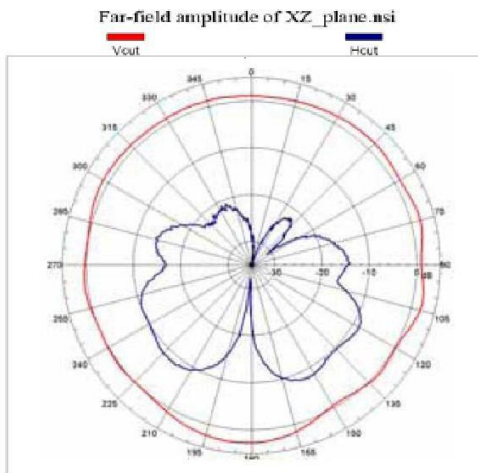


	Peak gain	Avg. gain
H cut	-3.43	-8.44
V cut	-7.07	-9.47
Total	-2.02	-7.20

3. Main antenna : 2441 MHz

3.1 Horizontal

◆ XY-plane

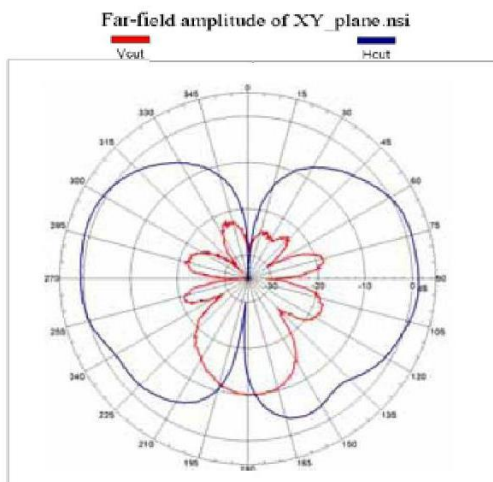


Unit : dBi

	Peak gain	Avg. gain
H cut	1.00	-7.60
V cut	-2.25	-5.27
Total	-1.13	-5.31

3.2 Vertical

◆ XZ-plane

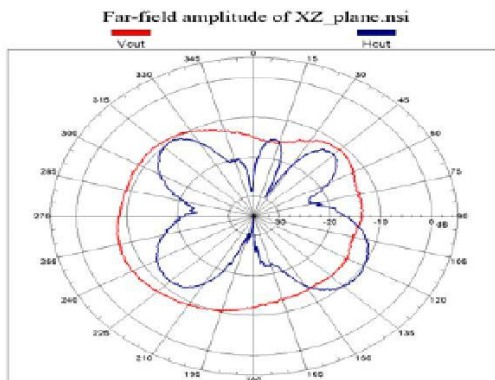


	Peak gain	Avg. gain
H cut	-3.85	-8.39
V cut	-7.02	-12.30
Total	-5.80	-8.78

4. Main antenna : 2480 MHz

4.1 Horizontal


◆ YZ-plane

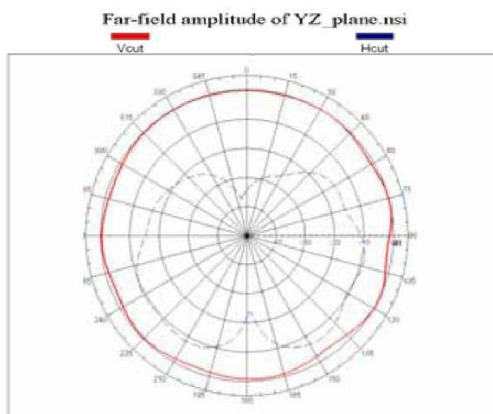

	Peak gain	Avg. gain
H cut	-1.74	-5.75
V cut	-6.47	-11.05
Total	-1.52	-7.49

4.2 Vertical

◆ YZ-plane

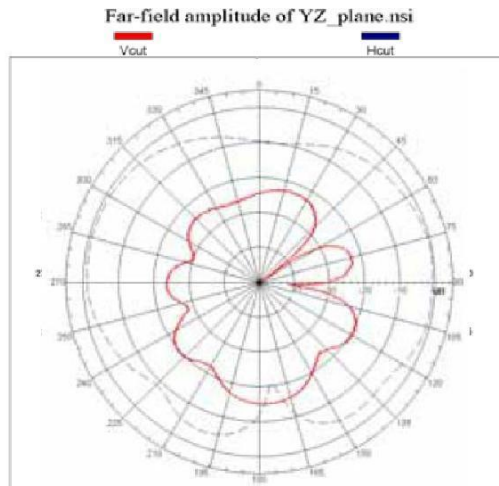

	Peak gain	Avg. gain
H cut	-5.75	-9.75
V cut	-12.47	-16.23
Total	-4.52	-8.72

2. Antenna performance

