


Quick Installation Guide Wireless N300 Mini Router

DIR-513A Mini Router



- +Portable
- +D-link One-Touch App Support
- +Three modes support (Router/AP/Repeater)
- +USB Power Supply

DIR-513A mode

- ※ **LED Indicators:**
Blue: Repeater mode
Red: Router mode
Green: AP mode
- ※ **Repeater mode:**
DIR-513A would relay your wireless signal to extend your wireless.
- ※ **Router mode:**
DIR-513A would make a local network to share your Internet access.
- ※ **AP mode:**
DIR-513A would change your Ethernet signal to be wireless signal for your mobile devices.

D-link One Touch App available



DIR-513A support D-link One-Touch App for setting easily. You should search the key of "D-link One-Touch" from Google Play Market and App Store to download the software.

Repeater mode Setting

① Insert the DIR-513A into the power socket.



② Wait for about 10 seconds.

③ Click this ico from your mobile devices and open the D-link One-Touch App



④ Click to Set.



⑤ Find and click the SSID of the "dlink-513a-z"



Repeater Setting

⑥ Find and set the D-link DIR-513A.



⑦ Set the device password which is used to control DIR-513A.




⑧ Change the mode to the Repeater mode.




Repeater mode setting

- ⑨ Search for the SSID which you want to extend and click to select. ⑩ Enter the wireless password.

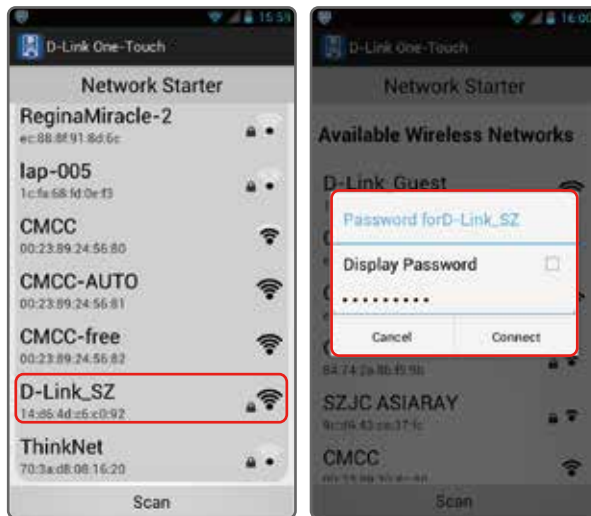

Repeater mode setting

- ⑪ Finish the setting and confirm the network configuration. ⑫ Please keep the picture of setting profile for future using.

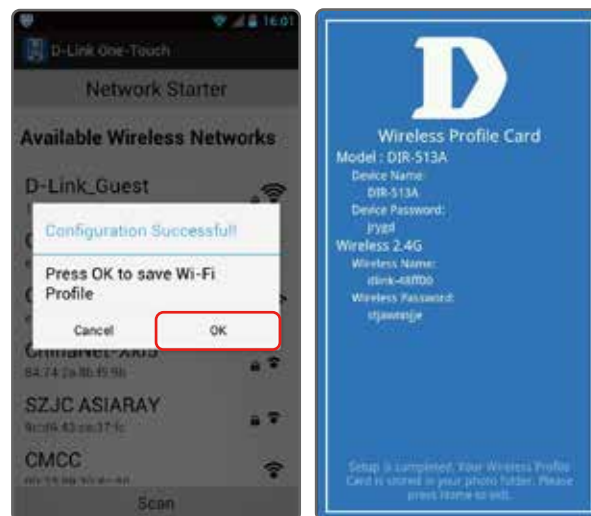

AP/Router mode Setting

① Insert the DIR-513A into the power socket.



② Wait for about 10 seconds.


③ Click this ico from your mobile devices and open the D-link One-Touch App



④ Click to Set.



⑤ Find and click the SSID of the "dlink-513a-z"

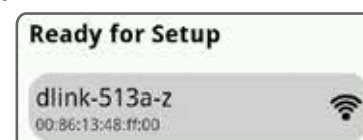


AP mode Setting

- ① Set the device password which is used to control DIR-513A. Change the mode to the AP mode. ② Enter the wireless name and Encryption Key. Select the Encryption mode which you want to.



AP mode setting


- ③ Finish the setting and confirm the network configuration. ④ Please keep the picture of setting profile for future using.

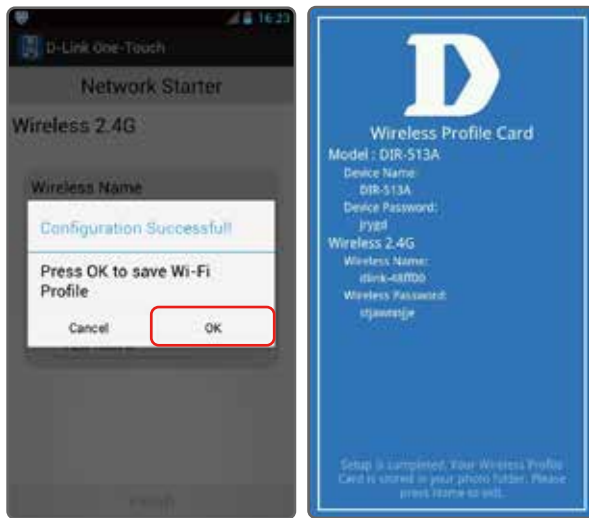

8

Router mode setting


- ① Set the device password which is used to control DIR-513A. Change the mode to the Router mode. ② Select the connection type such as DHCP, PPPoE or Static.

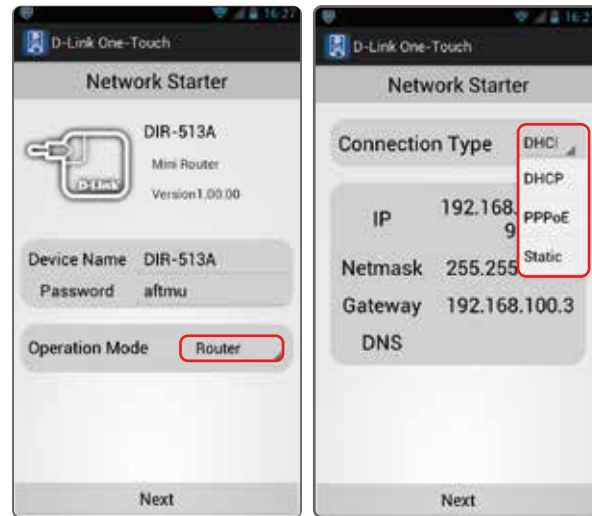

9

Router mode setting

- ④ Enter the wireless name and Encryption Key. Select the Encryption mode which you want to. ⑤ Finish the setting and confirm the network configuration.

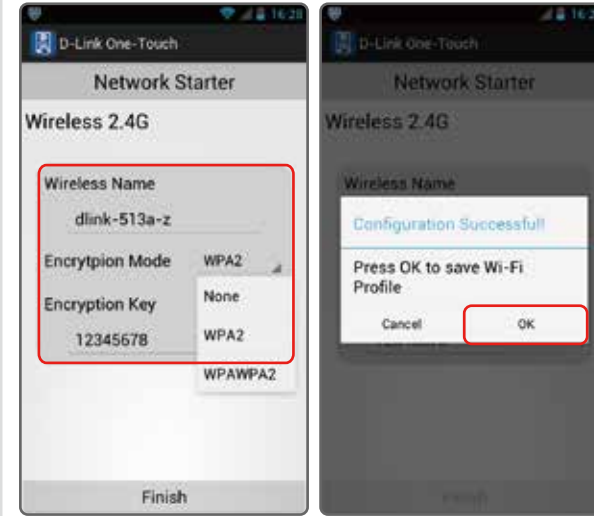

10

Router mode setting

- ⑥ Please keep the picture of setting profile for future using.




11

Software upgrade mode

- ① Click the software upgrade. ② Find and set D-link DIR-513A.




- ③ Enter in the user name and password. ④ Start download.

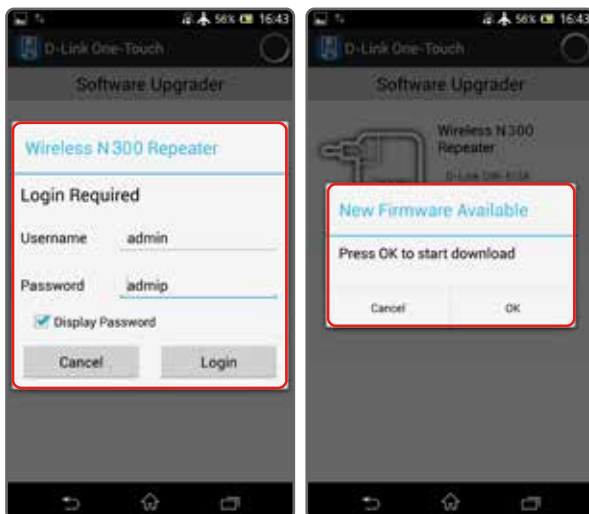

12

Software upgrade mode

- ⑤ Show the rate of upgrade progress. ⑥ Finish the software upgrade.

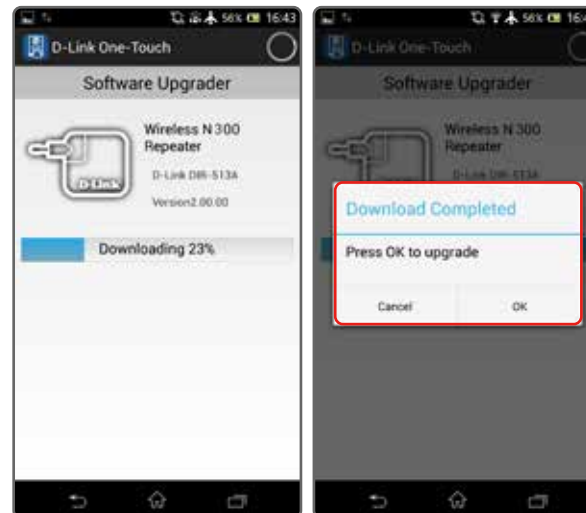

13

TECHNICAL SUPPORT

FCC RF Exposure Compliance

This equipment complies with radio frequency (RF) exposure limits adopted by the Federal Communications Commission for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator & your body.

14

TECHNICAL SUPPORT

15

