

## Authoring Template: Data Sheet *(updated January 2021)*

### Purpose

Provides customers with the key features, benefits, and specifications of a product—typically a hardware series or a software release. The customer should gain a good understanding of the product, its capabilities and differentiators, and how it fits in their environment. Include product specification tables. Include ordering information or an abbreviated ordering guide. Give IT/network managers an effective, succinct summary to learn more, request a demo, or talk to a sales rep. Use the data sheet as a companion document with a Technical Decision Maker (TDM) Presentation.

### Audience

Customer technical decision makers.

### Length

2 - 4 pages, depending on the length of the specification tables and ordering information/guide

### Style/Tone

Use Cisco Brand Language, which is simple, direct, and conversational, as appropriate in the Overview, Value Statement, and Features and Benefits sections. Do not force this tone in technical sections.

Learn about Cisco brand language:

- Cisco Brand Language 1-Page [Cheat Sheet](#)
- Cisco Brand Language Employee Community: [Winning with Words](#)

**IMPORTANT:** DO NOT DELETE ANY FIELDS. IF A SECTION IS NOT APPLICABLE, TYPE “N/A” INTO THE FIELD.

TEMPLATE CONTENT STARTS HERE -----

Writer: Please read instructions and example in the gray box and provide your text in the space below the box where indicated.

## Data Sheet

### SECTION 1 | Table of Contents

**Instructions:** Type each major content section heading, with a maximum of 9 section headings. If providing a document history, that must be the last section heading. Up to 35 characters (with spaces) for each section heading.

**Example:**

Product Overview  
Features and Benefits  
Product Specifications  
Licensing  
Ordering Information  
Warranty Information  
Cisco and Partner Services  
Document History

<< Write content section heading here >>

<< Write content section heading here >>

<< Write content section heading here >>

<< Etc. >>

<< Document History >> (*if relevant* and you include this heading, always end your listing with this)

### SECTION 2 | Document Headline

**Instructions:** Name of product/product series as listed in the Cisco [Hierarchy Management Platform \(HMP\)](#). Up to 80 characters.

**Example:**

Cisco 4400 Series Integrated Services Router

Cisco Catalyst IR1800 Rugged Series Routers

### SECTION 3 | Value Statement

**Instructions:** Provide a short sentence that positions the product and highlights the main benefit to the customer. Up to 30 words.

**Example:**

Cisco® Integrated Services Routers (ISRs) revolutionize the branch office by making Internet cloud connections “business class” and easing IT ops.

Cisco Catalyst IR1800 Rugged Series Routers deliver performance, security, and flexibility to help you accelerate your digitization journey at the edge.

### SECTION 4 | Product Overview

**Instructions:** Provide a high-level overview of the product. What is it? How does it work in the network? How will the customer (specify which segment) use it? What are the primary business benefits and/or what is the primary technical value? You may include an image such as a product photo. This section should be no more 2–3 paragraphs. 150 –200 words.

**Example:**

The Cisco 4400 Series Integrated Services Router (ISR) revolutionizes WAN communications in today’s branch offices, which are struggling to deliver rich content and application services over bandwidth-constrained last-mile links. The Cisco 4400 Series ISRs specifically address the growing need for application-aware networking in branch offices of highly distributed enterprises. These locations tend to be supported by lean IT resources yet increasingly need to communicate with not only the data center but also across the public Internet to cloud services. The design and services of the Cisco 4400s help elevate the networking experiences in branches to rival those of expensive, business-class Multiprotocol Label Switching (MPLS) networks.

These platforms are purpose built to support Cisco® Intelligent WAN (IWAN) architecture. Cisco IWAN enables businesses to deliver an uncompromised experience over any connection. With Cisco ISR 4400 series, IT organizations can right-size their branch-office connections using less-expensive WAN transport options without affecting performance, security, or reliability. With Cisco IWAN, traffic is dynamically routed based on application, endpoint, and network conditions to deliver the best-quality experience. The realized savings from IWAN not only pays for the infrastructure upgrades, but also frees resources for business innovation.

The Cisco® Catalyst® IR1800 Rugged Series Routers are secure, high-performance, 5G cellular routers with a modular design and Wi-Fi 6 support. The series is purpose-built for mobile and remote use cases in multiple industries. Designed with a high level of modularity, they can be customized to help you reduce costs and make your networking investments ready for the future, keeping in mind the needs of tomorrow. With high bandwidth and throughputs from 5G and Wi-Fi 6, they enable you to power seamless experiences and drive efficiency.

The Catalyst IR1800 Series offers enterprise-grade security from the hardware to the network communications all the way to the industrial assets. The routers are powered by Cisco IOS® XE, Cisco’s fully programmable next-generation operating system.

Scale and simplify operations at the edge with powerful network management tools such as the Cisco IoT Operations Dashboard, Cisco DNA Center, and Cisco vManage for configuration, monitoring, and troubleshooting.

The IR1800 Series is built to withstand the harsh environments found in transportation, public safety, and oil and gas applications. Automotive certifications and features such as Controller Area Network (CAN) bus support, dead reckoning and Global Navigation Satellite System (GNSS), and ignition power management make it ideal for secure, reliable connectivity in transit and public safety applications, including first responder vehicles, passenger fleets, service fleets, and commercial truck fleets.

### Use cases

#### **Passenger and service fleets**

Keep your fleet vehicles connected wherever they go and effectively track them in real time through built-in GPS systems. Power a seamless experience for passengers on board with Wi-Fi 6.

Reduce unplanned maintenance and repairs and minimize operating expenses with route optimization. Centrally manage all fleet vehicles through a single dashboard.

#### **Public safety**

Improve public safety and security, provide better response time, and increase cost efficiencies with secure, reliable access to real-time data in police cars and first responder vehicles. Move critical video data and other sensitive information from incident commanders to field officers over a secure network.

#### **Mass transit**

Enable fast and reliable on-board Wi-Fi, location-based services, and automated ticketing for passengers. Enhance passenger monitoring using video, both on board and within the station environment. Know the exact location to provide an estimated time of arrival with GPS.

Use data insights from the vehicles to gain operational efficiencies and reduce maintenance costs.

#### **Oil and gas**

Monitor pipelines, adjust valve pressure, optimize production, and prevent unplanned downtime.

Enable machine visibility and equipment monitoring to prevent faults before they occur while reducing costs.

## SECTION 5 | Features and Benefits (call-out box near top)

**Instructions:** Provide 5–7 primary features and the associated benefits in bulleted or table format. Benefits should outline the operational or business value of the feature and lead with active verbs. 3–5 words per feature, up to 10 words per benefit (some features may have multiple benefits).

### Example:

**Table 1.** Features and benefits

Feature	Benefit
<b>Cisco Radio Resource Management (RRM)</b>	Minimizes unpredictability of the RF medium with automated network self-healing Helps reduce dead spots and ensure high-availability client connections
<b>Cisco Clean Air Express spectrum intelligence</b>	Identifies and classifies RF interference; automatically applies remedial actions to avoid it
<b>Cisco Client Link 3.0 beamforming</b>	Enables access point to optimize the signal-to-noise ratio (SNR) exactly at the position of the client device Improves downlink performance to all mobile devices while improving client’s battery life
<b>Cisco Band Select</b>	Improves performance of client connections in mixed-client environments Nudges dual-band client radios off the cluttered 2.4-GHz band and onto a less congested 5-GHz connection Makes 5-GHz channels more attractive to clients by delaying probe responses to clients on 2.4-GHz channels
<b>Unified Wireless Network</b>	Integrates easily with existing wired LAN with Layer 3 mobility across multiple sites Scales to 18,000 APs
<b>Cisco Video Stream</b>	Improves multimedia performance over wireless and wired networks

## Key features and benefits

**Table 1.** Features and benefits

Feature	Benefit
<b>Reliable connectivity for mission-critical mobile environments</b>	<ul style="list-style-type: none"> <li>The modular IR1800 with dual cellular slots is capable of running multiple cellular services at once for mission-critical applications, allowing dual cellular band redundancy.</li> <li>Supports modular IEEE 802.11ax Wi-Fi 6. The dual-radio Wi-Fi (2.4 and 5 GHz) can provide access point capability and also backhaul capability (in a stationary condition) to connect to infrastructure Wi-Fi.</li> <li>Certified for transportation, making it ideal for transit and public safety applications.</li> <li>With dead reckoning GNSS, provides the exact location and path of fleet vehicles, even in environments with no cellular connectivity and no line-of-sight satellite connectivity.</li> <li>Ignition power management keeps the router running while the vehicle is turned off and protects the battery from over-discharging by the router.</li> <li>Offers native CAN bus support, allowing the extraction of vehicle data that can be used for telematics, enabling predictive maintenance, reducing the cost of fuel, and enhancing safety.</li> </ul>
<b>Modular design</b>	<ul style="list-style-type: none"> <li>Ultra-modular design supports evolving business and technical needs, protecting your investment.</li> <li>Supports multiple different modules, including public or private 4G/LTE and 5G, Wi-Fi 6, FirstNet certified public safety LTE, SSD, and advanced GNSS, thus providing a high level of flexibility to choose the desired configuration to suit individual deployments.</li> </ul>
<b>Security</b>	<ul style="list-style-type: none"> <li>Provides end-to-end multilayer enterprise-grade security that is part of Cisco’s ultra-secure and advanced Cisco IOS XE operating system.</li> <li>For added security, the IR1800 supports advanced enterprise-grade security suites such as unified threat detection for deployments requiring a higher level of enterprise-class security.</li> <li>Supports Cisco Cyber Vision, providing visibility into industrial assets connected to the router (post FCS).</li> </ul>
<b>Edge computing</b>	<ul style="list-style-type: none"> <li>Comes with built-in edge compute resources and Cisco IOx support to securely run your own applications at the edge.</li> </ul>

	<ul style="list-style-type: none"> <li>• Supports Cisco's Edge Intelligence suite to unlock business intelligence.</li> </ul>
<b>Integrated storage</b>	<ul style="list-style-type: none"> <li>• Provides support to expand the internal storage to save multimedia and mission-critical data at the edge with its field-replaceable industrial-grade SSD.</li> </ul>
<b>SD-WAN</b>	<ul style="list-style-type: none"> <li>• Supports Cisco IOS XE SD-WAN technology to effectively manage hundreds of disparate locations, lowering TCO and operating at scale.</li> <li>• Support advanced SD-WAN security on IR1835 with 8GB memory.</li> </ul>

## SECTION 6 | Prominent Feature/Differentiator/Capability (headline needed)

**Instructions:** This section should focus on the primary and, if necessary, secondary features that differentiate the product from the competition and bring significant operational and business value to customers. For hardware products, this could be architectural features, integration capabilities, or application services. For software, this could be security, application management, multivendor operability, and so forth. Limit content to 1-2 short paragraphs per feature with its own subhead. You may include bullets. From 100–150 words per section, up to 15 words per bullet (optional).

### Example:

#### **Integrated Network Security for Data, Voice, and Mobility**

Security is essential to protecting the intellectual property and continuity of your business. As you extend your company's workplace to mobile users and other remote employees, you need to guarantee anytime, anywhere access that's flexible but secure.

The Cisco IOS XE Security technology package for the Cisco 4400 Series addresses the scope of these requirements. The package contains advanced application inspection and control, firewall, and encryption architectures for more scalable and manageable VPN networks. The Cisco 4400 Series offers onboard hardware-based encryption acceleration to provide greater IPsec throughput with less overhead for the route processor when compared with software-based encryption solutions. Cisco ISRs offer a comprehensive and adaptable security, with features such as:

- **Secure connectivity:** Secures collaborative communications with Group Encrypted Transport VPN, Dynamic Multipoint VPN (DMVPN), Flex VPN, or Easy VPN
- **Integrated threat control:** Responds to sophisticated network attacks and threats using Cisco IOS XE Zone-Based Firewall
- **Identity management:** Protects endpoints intelligently using technologies such as authentication, authorization, and accounting (AAA) and public key infrastructure (PKI)

## Cisco Catalyst IR1800 Rugged Series Routers portfolio

Cisco Catalyst IR1800 Rugged Series Routers are best-in-class ruggedized routers designed for assets that are mobile or on the move, stationary or remote. These highly flexible and modular routers are 5G ready and adopt the latest Wi-Fi 6 standards. The IR1800 Series consists of four models: IR1821-K9, IR1831-K9, IR1833-K9, and IR1835-K9.

## Cisco Catalyst IR1800 Portfolio

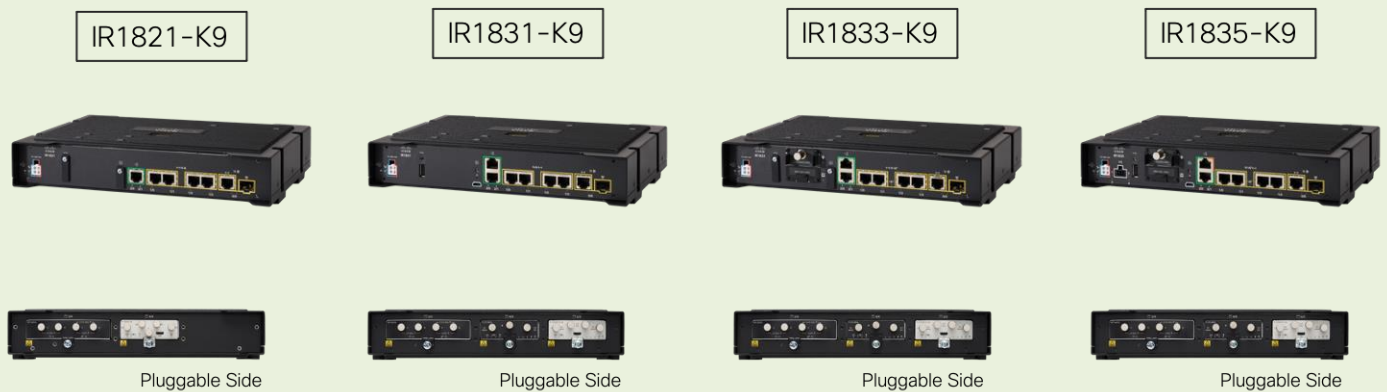


Figure 1. Models in the Catalyst IR1800 Series

The table below explains the top-level features of the models in the IR1800 Series.

Table 2. Comparison of key features

Feature	IR1821-K9	IR1831-K9	IR1833-K9	IR1835-K9
Processor	600 MHz	600 MHz	600 MHz	1200 MHz
Memory	4 GB	4 GB	4 GB	8 GB
Pluggable slots (cellular)	1	2	2	2
Wide pluggable slot (Wi-Fi)	1	1	1	1
CAN bus	✓	✓	✓	✓
Ignition power management	✓	✓	✓	✓
Gigabit Ethernet (GE) LAN (x4)	✓	✓	✓	✓
Combo RJ-45/SFP GE WAN port (L3) (x1)	✓	✓	✓	✓
Micro USB console	✓	✓	✓	✓
Power over Ethernet (PoE)/PoE+	–	–	✓	✓
SSD slot	–	–	✓	✓
Automotive dead reckoning GNSS slot	–	–	✓	✓
Digital I/O (x4)	–	–	–	✓

Serial interface	RS-232 (1)	RS-232 (2)	RS-232 (2)	RS-232 (1), RS-232/485 (1)
------------------	------------	------------	------------	-------------------------------

Placement of IR1800 interface ports

# Catalyst IR1821-K9



**Figure 2. IR1821-K9 interface ports**



# Catalyst IR1831-K9



Figure 3. IR1831-K9 interface ports

# Catalyst IR1833-K9

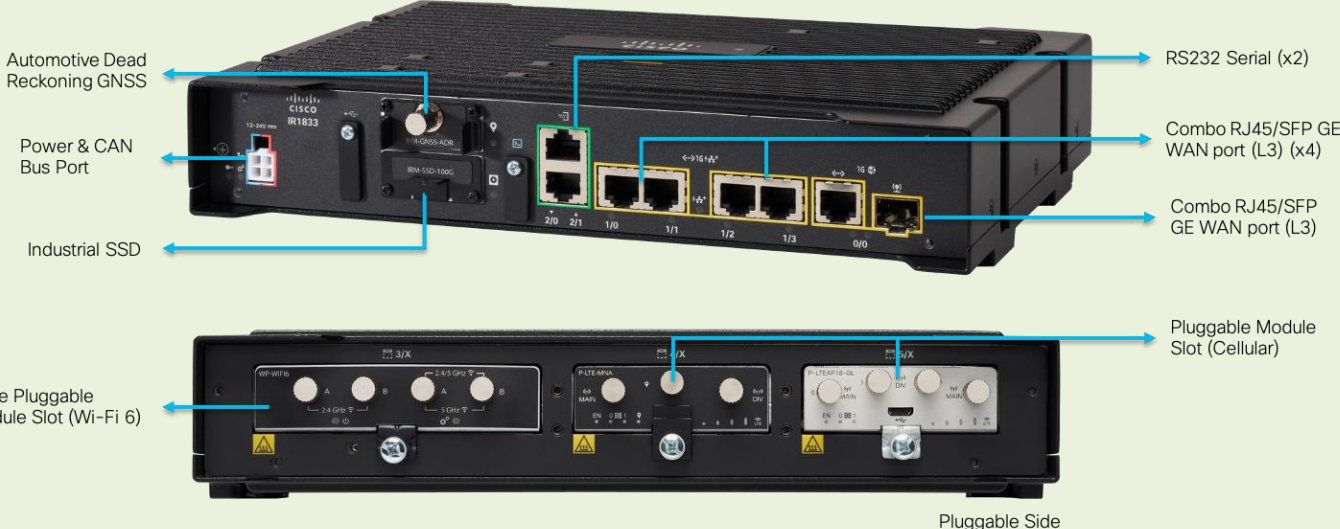
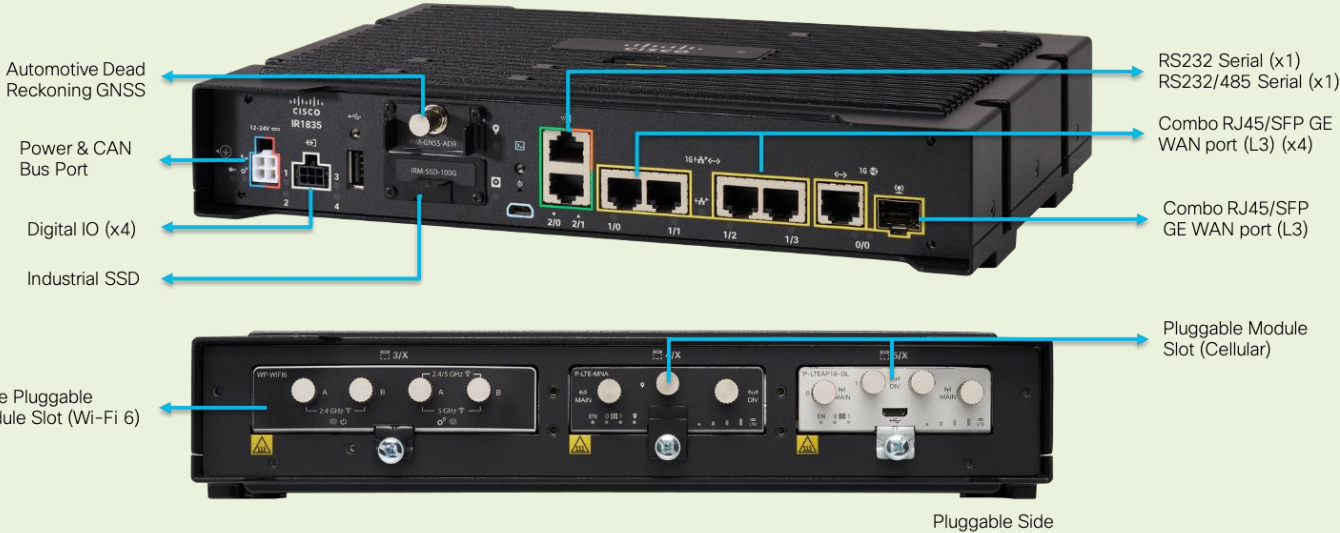


Figure 4. IR1833-K9 interface ports

# Catalyst IR1835-K9



**Figure 5. IR1835-K9 interface ports**

# Catalyst IR1800- Top View

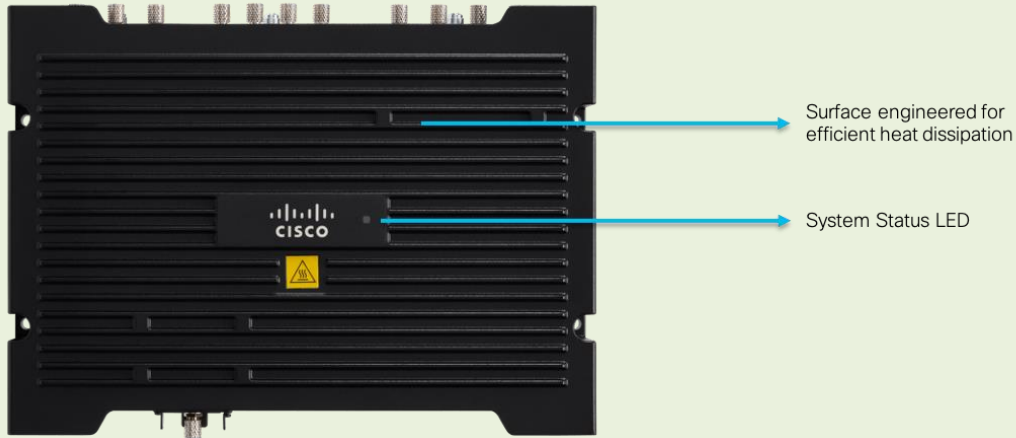


Figure 6. Top view

The Catalyst IR1800 Series also introduces Wi-Fi 6 in a pluggable form factor.<sup>1</sup> This ruggedized wide pluggable module provides the latest in Wi-Fi technology and is compatible with the latest wireless controllers from Cisco. The module can run in Control and Provisioning of Wireless Access Points (CAPWAP) mode and embedded wireless controller (EWC) mode, as well as Work Group Bridge (WGB) mode.

<sup>1</sup> Wi-Fi 6 module will be available on the IR1800 in 2HCY21.

# Wi-Fi 6 Wide Pluggable Module



Figure 7. Wi-Fi 6 wide pluggable module

The Catalyst IR1800 Wi-Fi 6 supports the following deployment scenarios and modes.

## Wi-Fi 6 Deployment Scenarios

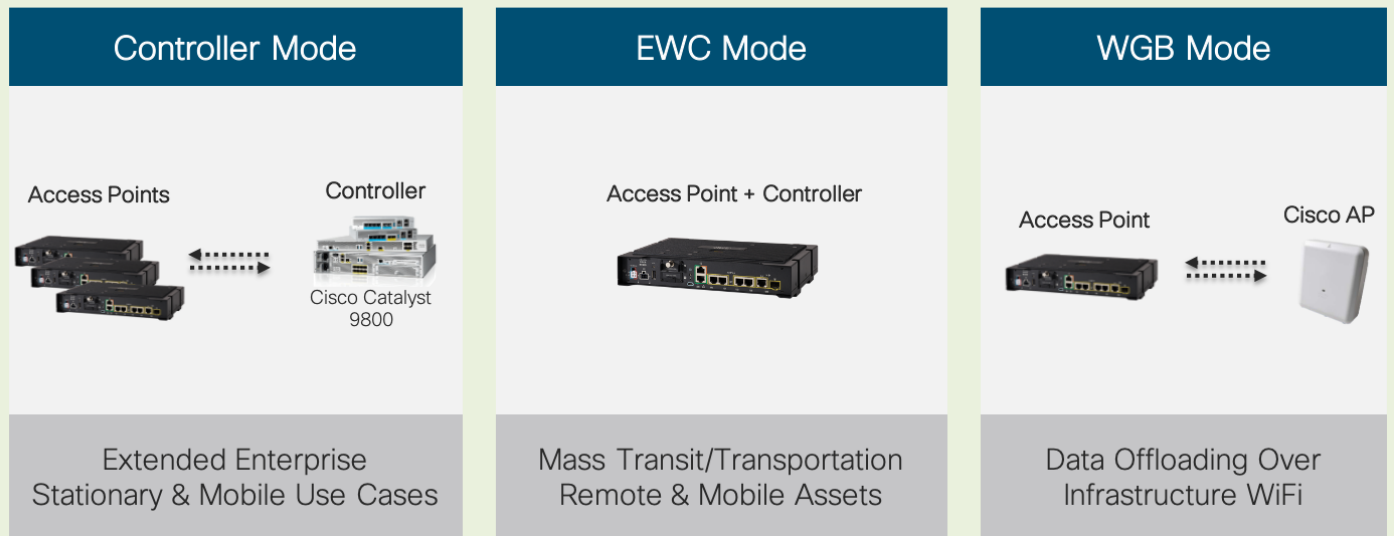


Figure 7. Wi-Fi 6 deployment scenarios

### Memory specifications

Table 3. Memory specifications

Feature	Specification
Default and maximum DRAM	<ul style="list-style-type: none"> <li>4 GB (IR1821, IR1831, IR1833)</li> <li>8 GB (IR1835)</li> </ul>
Default and maximum flash memory	<ul style="list-style-type: none"> <li>4 GB (IR1821, IR1831, IR1833)</li> <li>8 GB (IR1835)</li> </ul>
Expandable SSD storage	<ul style="list-style-type: none"> <li>Cisco's industrial-grade field-replaceable 100-GB storage (IRM-SSD-100G) (IR1833 and IR1835 only)</li> </ul>
Backup flash storage	<ul style="list-style-type: none"> <li>Provides an added layer of protection from improper shutdown cycles, thus preventing any kind of memory corruptions.</li> </ul>

### Physical specifications

Table 4. Physical specifications

Feature	Specification
Physical dimensions (H x W x D)	<ul style="list-style-type: none"> <li>2.20 x 11.04 x 8.06 in. (55.9 x 280.4 x 204.7 mm)</li> <li>2.20 x 11.04 x 9.73 in. (55.9 x 280.4 x 247.0 mm) with additional IP54-KIT (IR1800-IP54-KIT)</li> </ul>
Weight	<ul style="list-style-type: none"> <li>2.4 kg (5.3 lb) (without any modules)</li> </ul>

<b>IP rating</b>	<ul style="list-style-type: none"> <li>• 3.1 kg (6.8 lb) (fully configured)</li> <li>• IP40 rated</li> <li>• IP54 rated with additional IP54-KIT (IR1800-IP54-KIT)</li> </ul>
<b>Mounting options</b>	<ul style="list-style-type: none"> <li>• DIN rail</li> <li>• Panel mount</li> </ul>

## Power specifications

**Table 5. Power specifications**

Feature	Specification
<b>Power input</b>	<ul style="list-style-type: none"> <li>• Nominal voltage: +12V and +24V</li> <li>• Minimum and maximum input voltage: 9V - 36V</li> <li>• Minimum and maximum input current: 7.56A - 1.89A</li> </ul>
<b>Power consumption (at 12V)</b>	<ul style="list-style-type: none"> <li>• At idle: 10.8W</li> <li>• Typical: 29W</li> <li>• Maximum: 33.5W (without PoE)</li> <li>• Maximum: 68W (with PoE)</li> </ul>

When powering the vehicle through OBD2 connector in a vehicle, maximum current value must be matched with OBD2 fusing.

## Interfaces

**Table 6. Interfaces**

Feature	Specification
<b>WAN interfaces</b>	<ul style="list-style-type: none"> <li>• Pluggable Interface Module slots <ul style="list-style-type: none"> <li>• IR1821: 1x for Cisco Cellular Pluggable Interface Modules</li> <li>• IR183, IR1833, IR1835: 2x for Cisco Cellular Pluggable Interface Modules</li> </ul> </li> <li>• Wide interface pluggable module slots- <ul style="list-style-type: none"> <li>• 1x on all IR1800 models for Cisco Wi-Fi 6 Wide Interface Pluggable Module</li> </ul> </li> <li>• Combo 10/100/1000 Mbps Ethernet port (RJ-45 and SFP) (1x on all IR1800 models)</li> </ul>
<b>LAN interfaces</b>	<ul style="list-style-type: none"> <li>• 4x 10/100/1000 Mbps RJ-45 Ethernet ports</li> </ul>
<b>Asynchronous serial interfaces</b>	<ul style="list-style-type: none"> <li>• IR1821: 1x RS-232 DTE port</li> <li>• IR1831, IR1833: 1x RS-232 DTE port and 1x RS-232 DCE port</li> <li>• IR1835: 1x RS-232 DTE port and 1x RS-232 DCE/RS-422/RS-485 port</li> </ul>
<b>Console</b>	<ul style="list-style-type: none"> <li>• 1 micro-USB port</li> </ul>
<b>Automotive dead reckoning GNSS</b>	<ul style="list-style-type: none"> <li>• IR1833, IR1835: 1x slot for automotive dead reckoning GNSS module (IRM-GNSS-ADR)</li> </ul>
<b>Expandable storage</b>	<ul style="list-style-type: none"> <li>• IR1833, IR1835: 1x slot for Cisco's industrial 100-GB SSD (IRM-SSD-100G)</li> </ul>
<b>Power input/CAN bus combo</b>	<ul style="list-style-type: none"> <li>• 4-pin Molex Mini-Fit port for power and CAN bus (see accessories for more details)</li> </ul>
<b>Digital I/O</b>	<ul style="list-style-type: none"> <li>• IR1835: 4x digital I/O ports + Ignition signal/switching.</li> </ul>
<b>Ignition power management</b>	<ul style="list-style-type: none"> <li>• All IR1800 models have automatic ignition power management capability for Ignition sense.</li> <li>• IR1835 supports Ignition power management with Ignition signal switching.</li> </ul>
<b>USB port</b>	<ul style="list-style-type: none"> <li>• 1x USB 2.0 Type A</li> </ul>
<b>Status LEDs</b>	<ul style="list-style-type: none"> <li>• Top surface- <ul style="list-style-type: none"> <li>• 1x system status LED</li> </ul> </li> </ul>

- Front surface
  - 1x ignition power management LED
  - 1x system status LED
  - 4x Gigabit Ethernet LEDs
  - 2x Combo Gigabit Ethernet-SFP LEDs
  - IR1833, IR1835: 1x expandable storage LED
  - IR1833, IR1835: 1x automotive dead reckoning GNSS LED
  - IR1835: 4x digital I/O LEDs
- Cellular and Wi-Fi modules have power and status LEDs on the modules

## Environmental specifications

**Table 7. Environmental specifications**

Feature	Specification
Environmental operating temperature range	<ul style="list-style-type: none"> <li>• -40° to 140°F (-40° to 60°C) in a sealed NEMA cabinet with no airflow</li> <li>• -40° to 158°F (-40° to 70°C) in a vented cabinet with 40 linear feet per minute (LFM) of air</li> <li>• -40° to 167°F (-40° to 75°C) in a forced air enclosure with 200 LFM of air</li> <li>• Type tested at 85°C for 16 hours</li> <li>• Refer to the IR1800 Hardware Installation Guide (HIG) for the operating temperature range for pluggable cellular modules and wide pluggable Wi-Fi modules</li> </ul>
Operating altitude	<ul style="list-style-type: none"> <li>• Maximum altitude: 13.800 ft per IEC 68-2-41</li> </ul>

## Standards and industry specifications

**Table 8. Standards and industry specifications**

Feature	Specification
Mechanical	<ul style="list-style-type: none"> <li>• SAE J1455 (Automobile Standard)</li> <li>• Temperature cycle stress test</li> <li>• Active 10-day temperature and humidity test</li> <li>• MIL STD 810G (Military Standard)</li> <li>• Method 514.6, Category 4 – Random Vibration</li> <li>• Method 516.6, Procedure V – Crash Hazard Shock</li> <li>• Method 516.6, Procedure I – Functional Shock</li> </ul>
Automotive	<ul style="list-style-type: none"> <li>• UNECE R10</li> <li>• CISPR25</li> <li>• ISO 7637 – 2</li> <li>• ISO 11452 – 2/4</li> </ul>
Hazardous locations and ITE safety	<ul style="list-style-type: none"> <li>• UL 121201 (Class I, Div. 2, groups A-D)</li> <li>• CSA 213 (Class I, Div. 2, groups A-D)</li> <li>• UL/CSA 60079-0, -15 (Class I, Zone 2, Gc/IIC)</li> <li>• IEC 60079-0, 7 -15 IECEx test report (Class I, Zone 2, Gc/IIC)</li> <li>• EN 60079-0, 7, 15 ATEX certificate (Class I, Zone 2, Gc/IIC)</li> <li>• UL/CSA 60950-1</li> <li>• UL/CSA 62368-1</li> <li>• IEC/EN 60950-1</li> </ul>

<b>EMC</b>	<ul style="list-style-type: none"> <li>• IEC/EN 62368-1</li> <li>• FCC part 47 CFR Part 15 Subpart B Class A</li> <li>• EN 5032/CISPR 32 Class A</li> <li>• VCCI Class A, AS/NZS CISPR 32 Class A</li> <li>• CISPR 11 Class A, ICES 003 Class A</li> <li>• CNS 13438 Class A, KN 32 Class A</li> <li>• EN 300 386</li> <li>• CISPR35/EN 55035</li> <li>• EN/IEC61000-4-2 (ESD - Air/Contact Charge)</li> <li>• EN/IEC61000-4-3 (Radiated Immunity)</li> <li>• EN/IEC61000-4-4 (Electro Fast Transients Burst)</li> <li>• EN/IEC61000-4-5 (Surge)</li> <li>• EN/IEC61000-4-6 (Conducted Immunity)</li> <li>• EN/IEC61000-4-8 (Power Frequency Magnetic Field Immunity)</li> <li>• EN/IEC61000-4-9 (Pulse Magnetic Field Immunity)</li> <li>• EN/IEC61000-4-11 (Voltage Disturbance Immunity)</li> </ul>
<b>Radio (cellular)</b>	<ul style="list-style-type: none"> <li>• FCC 47 CFR Part 22,24,27</li> <li>• FCC 47 CFR Part 2 MPE</li> <li>• RSS 102, 132, 133</li> <li>• AS/NZ: ACMA EMR, AS/CA S042.1, 4</li> <li>• Japan MIC Article 2, 9</li> <li>• EN 301 489-1,19,52</li> <li>• EN 301 908-1,2,13</li> <li>• EN 301 511</li> <li>• EN 303 413</li> <li>• EN 62311 MPE</li> </ul>
<b>Radio (Wi-Fi)</b>	<ul style="list-style-type: none"> <li>• FCC CFR Part 15.247, 15.407</li> <li>• RSS 247 Issues 5</li> <li>• EN 300 328 , EN 301 893</li> <li>• AS/NZ 4268:2018</li> <li>• 2018.7 (MSIT notice 2018-38), 2017.9 (MSIT notice # 2017-10)</li> <li>• NOTACNCANEH N° 14/2013, NOTACNCANEH N° 14/2013</li> <li>• Act n° 14448 (2017-12-04)</li> <li>• MIIT R-2002-353, MIIT R-2002-277, MIIT R-2012-620</li> <li>• LP0002;2018</li> <li>• Résolution 1985/2017 + Res. 1517/2018 + Res. 855/2019</li> </ul>

**IR1800-compatible pluggable WAN modules**



## Cellular pluggable modules

Table 9. LTE (3GPP Category 4) modules

Feature	P-LTE-MNA	P-LTE-VZ	P-LTE-US	P-LTE-GB
<b>LTE bands</b>	LTE bands 2, 4, 5, 12, 13, 14, 17, and 66  FDD LTE 1700 MHz and 2100 MHz (band 66 Ext AWS), 700 MHz (bands 17, 14, 13, 12), 850 MHz (band 5 CLR), 1700 MHz and 2100 MHz (band 4 AWS), 1900 MHz (band 2)	LTE bands 4 and 13  FDD LTE 700 MHz (band 13), 1700 MHz and 2100 MHz (band 4 AWS)	LTE bands 2, 4, 5, and 12  FDD LTE 700 MHz (band 17), 700 MHz (band 12), 850 MHz (band 5 CLR), 1700 MHz and 2100 MHz (band 4 AWS)	LTE bands 1, 3, 7, 8, 20, and 28  FDD LTE 700 MHz (band 28), 800 MHz (band 20), 900 MHz (band 8), 1800 MHz (band 3), 2100 MHz (band 1), and 2600 MHz (band 7)
<b>Backward compatibility</b>	UMTS, HSPA+ (bands 2,4,5)	-	HSPA+ (bands 2, 4, 5)	UMTS, HSPA+ (bands 1, 8), EDGE, GSM, GPRS (900/1800)
<b>Theoretical download and upload speeds</b>	150 and 50 Mbps	150 and 50 Mbps	150 and 50 Mbps	150 and 50 Mbps
<b>United States</b>	Multicarrier (AT&T and Verizon)	Verizon	AT&T	-
<b>Europe</b>	-	-	-	Yes
<b>Band 14</b>	Yes	-	-	-
<b>FirstNet Ready</b>	Approved by AT&T FirstNet (IR1800 platform certification pending)	-	-	-

## LTE (3GPP Category 4) modules

Feature	P-LTE-IN	P-LTE-JN
<b>LTE bands</b>	LTE bands 1, 3, 5, 8, 40, and 41*  FDD LTE 2100 MHz (band 1), 1800 MHz (band 3), 850 MHz (band 5), 900 MHz (band 8) TDD LTE 2300 MHz (band 40), 2500 MHz (band 41) *Band 41 supported frequency range: (2535 to 2655 MHz)	LTE bands 1, 3, 8, 11, 18, 19, and 21  FDD LTE 2100 MHz (band 1), 1800 MHz (band 3), 900 MHz (band 8), 1500 MHz (band 11), 850 MHz (bands 18, 19), 1500 MHz (band 21)
<b>Backward compatibility</b>	HSPA+, UMTS (bands 1, 8)	HSPA+, UMTS (bands 1, 6, 19)
<b>Theoretical download and upload speeds</b>	150 and 50 Mbps	150 and 50 Mbps
<b>India</b>	Yes	-
<b>Japan</b>	-	Yes (NTT Docomo, KDDI, Softbank)
<b>China</b>	Yes	-

Table 10: LTE Advanced (3GPP Category 6) modules

Feature	P-LTEA-EA	P-LTEA-LA
<b>LTE bands</b>	LTE bands 1-5, 7, 8, 12, 13, 20, 25, 26, 29, 30, and 41 FDD LTE 700 MHz (band 12), 700 MHz (band 29), 800 MHz (band 20), 850 MHz (band 5 CLR), 850 MHz (band 26 Low), 900 MHz (band 8), 1800 MHz (band 3), 1900 MHz (band 2), 1900 MHz (PCS band 25), 1700 MHz and 2100 MHz (band 4 AWS), 2100 MHz (band 1), 2300 MHz (band 30), or 2600 MHz (band 7) TDD LTE 2500 MHz (band 41) Carrier aggregation band combinations: 1+8; 2+(2,5,12,13,29); 3+(7,20); 4+(4,5,12,13,29); 7+(7,20); 12+30, 5+30, and 41+41	LTE bands 1, 3, 5, 7, 8, 18, 19, 21, 28, 38, 39, 40, and 41 FDD LTE 700 MHz (band 28), 850 MHz (band 5 CLR), 850 MHz (bands 18 and 19 Low), 900 MHz (band 8), 1500 MHz (band 21), 1800 MHz (band 3), 2100 MHz (band 1), or 2600 MHz (band 7) TDD LTE 1900 MHz (band 39), 2300 MHz (band 40), 2500 MHz (band 41), or 2600 MHz (band 38) Carrier aggregation band combinations: 1+(8,18,19,21); 3+(5,7,19,28); 7+(5,7,28); 19+21, 38+38, 39+39,40+40, and 41+41
<b>Theoretical download and upload speeds<sup>3</sup></b>	300 and 50 Mbps	300 and 50 Mbps
<b>Dying Gasp</b>	Yes	Yes
<b>United States</b>	AT&T & Verizon	–
<b>Europe</b>	Yes	–
<b>Band 14</b>	Yes	–
<b>Canada</b>	Yes	–
<b>Australia and New Zealand</b>	–	Yes (approved by Telstra)
<b>Japan</b>	–	Yes (NTT Docomo, KDDI, Softbank)
<b>India, Singapore, Malaysia, Thailand</b>	–	Yes
<b>China</b>	–	Yes
<b>United Arab Emirates</b>	Yes	–

**Table 11. LTE Advanced Pro (3GPP Category 18) modules**

Feature	P-LTEAP18-GL
<b>LTE bands</b>	LTE bands 1-5, 7, 8, 12-14, 17, 18-20, 25, 26, 28-30, 32, 38-43, 46, 48, 66, and 71. FDD LTE 600 MHz (band 71), 700 MHz (bands 12, 13, 14, 17, 28, and 29), 800 MHz (band 20), 850 MHz (bands 5, 18, 19, and 26), 900 MHz (band 8), 1500 MHz (band 32), 1700 MHz (bands 4 and 66), 1800 MHz (band 3), 1900 MHz (bands 2 and 25), 2100 MHz (band 1), 2300 MHz (band 30), 2600 MHz (band 7) TDD LTE 1900 MHz (band 39), 2300 MHz (band 40), 2500 MHz (band 41), 2600 MHz (band 38), 3500 MHz (bands 42 and 48), 3700 MHz (band 43), 5200 MHz (band 46)
<b>Theoretical download and upload speeds<sup>3</sup></b>	1.2 Gbps/200 Mbps
<b>Dying Gasp</b>	Yes
<b>United States</b>	Multicarrier (AT&T and Verizon)
<b>Europe</b>	Yes
<b>Canada</b>	Yes
<b>Australia</b>	Yes
<b>China</b>	Yes
<b>Japan</b>	Yes
<b>Band 14</b>	Yes
<b>FirstNet certification</b>	Yes (IR1800 platform certification pending)
<b>Band 48 (CBRS)</b>	Yes

## Wi-Fi 6 pluggable module performance (support from Cisco IOS XE 17.6 onward)

**Table 12. Wi-Fi 6 pluggable module performance**

Feature	WP-WIFI6 Wi-Fi performance
<b>Supported wireless LAN controllers</b>	<ul style="list-style-type: none"> <li>• Cisco Catalyst 9800 Series Wireless Controllers</li> </ul>
<b>802.11ax capabilities</b>	<ul style="list-style-type: none"> <li>• 2x2 uplink/downlink multiuser multiple-input multiple-output (MU-MIMO) with two spatial streams</li> <li>• Uplink/downlink orthogonal frequency-division multiple access (OFDMA)</li> <li>• Target Wake Time (TWT)</li> <li>• Basic Service Set (BSS) coloring</li> <li>• Maximum ratio combining (MRC)</li> <li>• 802.11ax beamforming</li> <li>• 20-, 40-, and 80-MHz channels</li> <li>• PHY data rates up to 1.488 Gbps (80 MHz with 5 GHz and 20 MHz with 2.4 GHz)</li> <li>• Packet aggregation: Aggregate MAC Protocol Data Unit (A-MPDU) (transmit and receive), Aggregate MAC Service Data Unit (A-MSDU) (transmit and receive)</li> <li>• 802.11 Dynamic Frequency Selection (DFS)</li> <li>• Cyclic shift diversity (CSD) support</li> <li>• Wi-Fi Protected Access 3 (WPA3) support</li> </ul>
<b>802.11ac capabilities</b>	<ul style="list-style-type: none"> <li>• 2x2 downlink MU-MIMO with 2 spatial streams</li> <li>• MRC</li> <li>• 802.11ac beamforming</li> <li>• 20-, 40-, and 80-MHz channels</li> <li>• PHY data rates up to 866.7 Mbps (80 MHz with 5 GHz)</li> <li>• Packet aggregation: A-MPDU (transmit and receive), A-MSDU (transmit and receive)</li> <li>• 802.11 DFS</li> <li>• CSD support</li> <li>• WPA3 support</li> </ul>
<b>802.11n version 2.0 (and related) capabilities</b>	<ul style="list-style-type: none"> <li>• 2x2 MIMO with 2 spatial streams</li> <li>• MRC</li> <li>• 802.11n and 802.11a/g</li> <li>• 20- and 40-MHz channels</li> <li>• PHY data rates up to 444.4 Mbps (40 MHz with 5 GHz and 20 MHz with 2.4 GHz)</li> <li>• Packet aggregation: A-MPDU (transmit and receive), A-MSDU (transmit and receive)</li> <li>• 802.11 DFS</li> <li>• CSD support</li> </ul>
<b>Indicators</b>	<ul style="list-style-type: none"> <li>• Status LED indicates boot loader status, association status, operating status, boot loader warnings, and boot loader errors</li> <li>• Power LED indicates power status to module</li> </ul>
<b>Dimensions (W x L x H)</b>	3.66 x 3.29 x 0.85 in. (9.30 x 8.36 x 2.16 cm)

**Available transmit power settings (max/min)**

- 2.4 GHz – total with two active antennas
  - 23 dBm (200 mW) max for complementary code-keying (CCK) rates
  - 21 dBm (125 mW) max for OFDM rates
    - -7 dBm (0.2 mW) min
- 5 GHz – total with two active antennas
  - 20 dBm (100 mW) max
  - -7 dBm (0.2 mW) min

## Cisco Small Form-Factor Pluggable (SFP) modules

The IR1800 offers Ethernet (copper and fiber) uplink options through SFP modules (software support post-FCS).

### Supported Ethernet SFP modules

The Ethernet SFP module provides connections to other devices. These field-replaceable transceiver modules provide the uplink interfaces. RJ-45 connectors allow for copper connections.

Table 13. Supported SFP modules

GE SFP	Distance	Fiber	Classification
GLC-SX-MM-RGD	220 to 550 m	MMF	Industrial (-40° to +85°C)
GLC-LX-SM-RGD	550 m to 10 km	MMF/SMF	Industrial (-40° to +85°C)
GLC-ZX-SM-RGD	70 km	SMF	Industrial (-40° to +85°C)
GLC-SX-MMD	220 to 550 m	MMF	Extended (-5° to +85°C)
GLC-LH-SMD	550 m to 10 km	MMF/SMF	Extended (-5° to +85°C)
GLC-ZX-SMD	70 km	SMF	Extended (-5° to +85°C)
GLC-BX-U	10 km	SMF	Commercial (0° to +70°C)
GLC-BX-D	10 km	SMF	Commercial (0° to +70°C)
GLC-LH-MMD	550 m to 10 km	MMF/SMF	Extended (-5° to +85°C)
GLC-EX-SMD	40 km	SMF	Extended (-5° to +85°C)
GLC-FE-100FX-RGD	2 km	MMF	Industrial (-40C to +85C)
GLC-FE-100LX-RGD	10 km	SMF	Industrial (-40C to +85C)
GLC-FE-100FX	2 km	MMF	Commercial (0C to +70C)
GLC-FE-100LX	10 km	SMF	Commercial (0C to +70C)
GLC-FE-100EX	40 km	SMF	Commercial (0C to +70C)
GLC-FE-100ZX	80 km	SMF	Commercial (0C to +70C)
GLC-FE-100BX-U	10 km	SMF	Commercial (0C to +70C)
GLC-FE-100BX-D	10 km	SMF	Commercial (0C to +70C)
GLC-TE	100 m	N/A (RJ-45)	Extended (-5C to +85C)

## Other IR1800-compatible pluggable modules

### Automotive dead reckoning GNSS module

The IR1800 Series introduces an advanced automotive dead reckoning GNSS pluggable module (for the IR1833-K9 and IR1835-K9 platforms): IRM-GNSS-ADR.

The module is a powerful automotive-grade GNSS system equipped with automotive dead reckoning software, an embedded 6-axis sensor micro-electromechanical system (MEMS), and a powerful core. Whenever GNSS coverage is missing or compromised, the IRM-GNSS-ADR provides accurate estimates of a vehicle's or moving device's position and velocity by combining speed and heading data from internal sensors with on-board diagnostics (OBD-II) data from the vehicle's CAN bus.

This multiconstellation, pluggable module is ideal for telematics applications that require continuous and reliable accuracy for navigation and tracking.

The table below shows detailed specifications for the automotive dead reckoning GNSS module.

Table 14. Automotive dead reckoning GNSS specifications

Feature	Specification
Frequency bands supported	<ul style="list-style-type: none"> <li>• GPS (L1)</li> <li>• GLONASS (L1, FDMA) (supported in future software releases)</li> <li>• Galileo (E1) (supported in future software releases)</li> <li>• BeiDou (B1) (supported in future software releases)</li> </ul>
Standards	<ul style="list-style-type: none"> <li>• NMEA, RTCM 104</li> </ul>
GNSS channels	<ul style="list-style-type: none"> <li>• 48-channel GNSS architecture</li> </ul>
Positional accuracy	<ul style="list-style-type: none"> <li>• 1.6 m (CEP50)</li> </ul>
Frequency	<ul style="list-style-type: none"> <li>• 10 Hz navigation, SBAS, 1PPS</li> </ul>
A-GPS support	<ul style="list-style-type: none"> <li>• Yes, local ephemeris prediction, server predicted ephemeris (future software support)</li> </ul>
Jammer rejection	<ul style="list-style-type: none"> <li>• Yes</li> </ul>
MEMS sensors	<ul style="list-style-type: none"> <li>• Embedded 6-axis (3D gyro + 3D accelerometer)</li> </ul>

## 100-GB additional storage module

The IR1800 Series supports memory expansion to 100 GB (for the IR1833-K9 and IR1835-K9 platforms): IRM-SSD-100G. This pluggable industrial SSD can be used to store mission-critical data and applications or multimedia files.

Table 15. SSD specifications

Feature	Specification
SSD memory	100 GB
Endurance	33 terabytes written (TBW)
Replacement recommendation	Replacement recommended when wear ratio reaches 90%

## Accessories

The Catalyst IR1800 Series introduces multiple new accessories, including a new 7-in-1 antenna, a set of OBD-II cables, and an IP54 kit.

Table 16. Compatible antennas

Antenna	Description
<b>ANT-7-5G4WL2G1-O</b>	7-in-1 outdoor vehicle mount antenna- 4G LTE SMA x4, Wi-Fi dual band RP-SMA x2, GNSS SMA x1
<b>LTE-ANTM2-SMA-D</b>	4G LTE dipole antenna 698-960, 1448-1511, 1710-2690 MHz, SMA
<b>5G-ANTM-SMA-D</b>	5G Sub-6 & LTE Advanced Pro capable dipole antenna, SMA
<b>W-ANTM2050D-RPSMA</b>	Wi-Fi dual band swivel dipole antenna, RP-SMA
<b>ANT-4G-OMNI-OUT-N</b>	Outdoor omnidirectional 4G antenna, N connector
<b>ANT-5G-OMNI-OUT-N</b>	Outdoor omnidirectional 617 – 5950 MHz antenna, N connector
<b>4G-LTE-ANTM-O-3-B</b>	3-in-1 outdoor black antenna, 4G LTE SMA x2, GPS SMA x1
<b>ANT-3-4G2G1-O</b>	3-in-1 outdoor antenna- 4G LTE TNC x2, GPS SMA x1
<b>ANT-2-4G2-O</b>	2-in-1 outdoor vehicle mount antenna- 4G LTE TNC x2
<b>ANT-5-4G2WL2G1-O</b>	5-in-1 outdoor vehicle mount antenna- 4G LTE TNC x2, Wi-Fi dual band RP-TNC x2, GPS SMA x1
<b>5G-ANTM-O-4-B</b>	9-in-1 outdoor antenna- 5G Sub-6 GHz / 4G LTE SMA x4, Wi-Fi dual band RP-SMA x2, GPS SMA x1

Please refer to the antenna guide for all the antenna options available for the industrial routers:

<https://www.cisco.com/c/en/us/td/docs/routers/connectedgrid/antennas/installing-combined/industrial-routers-and-industrial-wireless-antenna-guide.html>

[https://www.cisco.com/c/dam/td-xml/en\\_us/iot/antennas/scenarios/Antenna-Installation-Scenarios.pdf](https://www.cisco.com/c/dam/td-xml/en_us/iot/antennas/scenarios/Antenna-Installation-Scenarios.pdf)

Table 17. OBD-II cables

Cable	Description (all OBD-II cables are 4.35 m in length)
<b>OBD2-J1962YA-MF4</b>	OBD-II (J1962) Type A to IR1800 cable with type 1 Y-splitting bypass harness
<b>OBD2-J1962YB-MF4</b>	OBD-II (J1962) Type B to IR1800 cable with type 2 Y-splitting bypass harness
<b>OBD2-J1939Y2-MF4</b>	OBD-II (J1939) Type 2 heavy duty diagnostic harness for Volvo/Mack
<b>OBD2-J1939Y1-MF4</b>	OBD-II (J1939) Type 1 to IR1800 cable with type 1 y-splitting bypass harness and auxiliary (discrete voltage) inputs
<b>OBD2-J1708Y-MF4</b>	OBD-II (J1708) to IR1800 cable with type 1 y-splitting bypass harness and auxiliary (discrete voltage) inputs
<b>OBD2-J1962VMB-MF4</b>	J1962-VM-Type B Volvo & Mack

OBD-II cables provide power and CAN bus connectivity to the Catalyst IR1800.

Note: when powering an IR1800 from an ODB2 connector, fusing must match the maximum power consumption requirement of the IR1800 variant attached to it. OBD2 connectors generally fuse at 60W.

#### IP54 kit

The IR1800 Series is IP40 rated by design. This IP rating can further be improved to IP54 with an additional IP54 kit (IR1800-IP54-KIT).

# Catalyst IR1800 with IP54 Kit

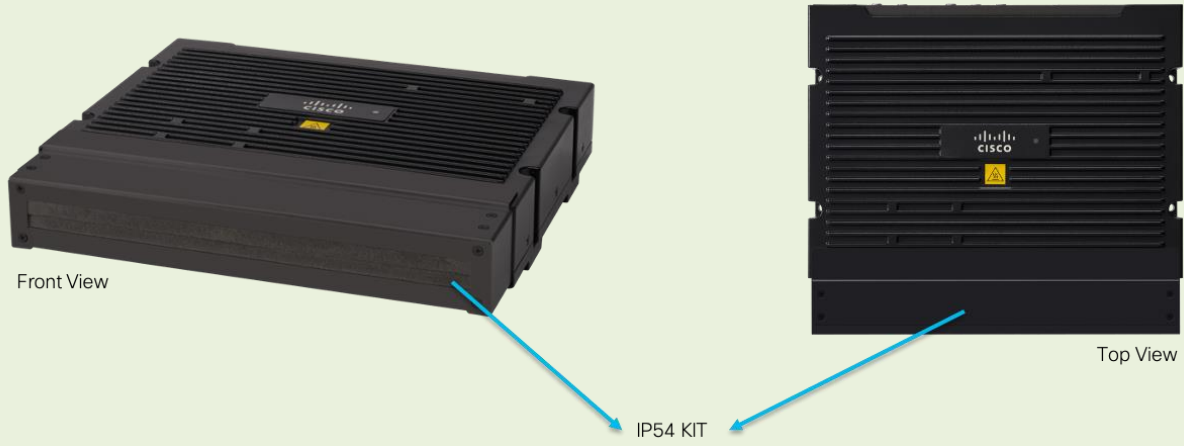


Figure X. Catalyst IR1800 with IP54 kit

## SECTION 7 | Platform Support/Compatibility (if relevant) Software details

**Instructions:** Use tables or bullet points, whichever is best, to display information about which hardware platforms your software product runs on, which third-party products it works with, or other relationships among products that customers want to know about. Keep it brief, with just a simple listing.

### Example:

#### Platform Support

Cisco IOS IPS is available in certain software feature sets on the 87x routers, Integrated Services Routers, SR520, 720x and 7301 routers listed in Table 2. Starting with IOS 15.0(1)M Release, IOS IPS feature is also supported on the 88x, 89x routers and next-generation Integrated Services Routers, with an optional license that enables use of that and other features when installed.

**Table 2.** IPS Feature Availability Based on IOS Image Types

Product Family	Platforms Supported	IOS Images (Feature Sets) Supported
800	871, 876, 877, 878	Advanced IP Services
1800	1801, 1802, 1803, 1811, 1812, 1841, 1861	Advanced Security, Advanced Enterprise, and Advanced IP Services
2800	2801, 2811, 2821, 2851	Advanced Security, Advanced Enterprise, and Advanced IP Services

## Section 7 | Software details and management options

### Software details

The Catalyst IR1800 Series runs on Cisco's latest ultra-secure Cisco IOS XE. The table below details key features of Cisco IOS XE on the IR1800.

**Table 18.** Software details

Feature	Description
Cisco IOS Software requirements	<ul style="list-style-type: none"> <li>• Cisco IOS XE Software: Universal Cisco IOS Software image</li> <li>• Cisco IOS XE Software Release 17.5.1 or later</li> <li>• Cisco IOS XE Software: Unified image for Autonomous and Controller (SD-WAN) mode</li> <li>• Routing Information Protocol Versions 1 and 2 (RIPv1 and RIPv2) and RIPv6 (IPv6)</li> <li>• Generic Routing Encapsulation (GRE) and Multipoint GRE (MGRE)</li> <li>• Standard 802.1d Spanning Tree Protocol (STP)</li> <li>• Network Address Translation (NAT)</li> <li>• Dynamic Host Configuration Protocol (DHCP) server, relay, and client for IPv4 and IPv6</li> <li>• Dynamic DNS (DDNS)</li> <li>• DNS proxy</li> <li>• DNS spoofing</li> </ul>
IPv4 and IPv6 services features	<ul style="list-style-type: none"> <li>• Access control lists (ACLs) for IPv4 and IPv6</li> <li>• IPv4 and IPv6 multicast</li> <li>• IP Service-Level Agreement (IP SLA)</li> <li>• Open Shortest Path First (OSPF) v2 and v3</li> <li>• Multiprotocol Border Gateway Protocol (MP-BGP)</li> <li>• Enhanced Interior Gateway Routing Protocol (EIGRP) for IPv4 and IPv6</li> <li>• Virtual Route Forwarding (VRF) Lite</li> <li>• Next-Hop Resolution Protocol (NHRP)</li> <li>• Asynchronous serial data encapsulation and relay</li> <li>• Layer 2 Tunneling Protocol (L2TP) v3 over subinterfaces and VLAN</li> </ul>



## Security features

### Secure connectivity

- Trusted Anchor Module (TAM)
- Hardware-accelerated encryption with minimal impact to system performance
- Next-Generation Encryption (NGE) and Quantum Computing Resistant (QCR) algorithms such as AES- 256, SHA-384, and SHA-512
- Public-Key Infrastructure (PKI) support
- 20 IPsec tunnels
- Cisco Easy VPN solution client and server
- NAT transparency
- Dynamic Multipoint VPN (DMVPN)
- Tunnel-less Group Encrypted Transport VPN (GETVPN)
- Flex VPN
- IPsec stateful failover
- Secure Sockets Layer (SSL) VPN for secure remote access
- VRF-aware IPsec
- IPsec over IPv6

### Cisco IOS Firewall

- Zone-based policy firewall
- VRF-aware stateful inspection routing firewall
- Stateful inspection transparent firewall
- Advanced application inspection and control
- Secure HTTP (HTTPS), FTP, and Telnet Authentication Proxy
- Dynamic and static port security
- Firewall stateful failover
- VRF-aware firewall

### Integrated threat control

- Control-Plane Policing (CoPP)
- Flexible packet matching
- Network foundation protection

## Quality of service (QoS) features

- Provides LTE QoS with support for up to 8 concurrent bearers on each cellular WAN interface for traffic classification and prioritization
- Provides traffic precedence to delay-sensitive and mission-critical services
- Facilitates low-latency routing of delay-sensitive industrial applications
- Supported on all LAN and WAN interfaces, including cellular
- Low Latency Queuing (LLQ)
- Weighted Fair Queuing (WFQ)
- Class-Based WFQ (CBWFQ)
- Class-Based Traffic Shaping (CBTS)
- Class-Based Traffic Policing (CBTP)
- Policy-Based Routing (PBR)
- Class-Based QoS MIB
- Class of Service (CoS) to Differentiated Services Code Point (DSCP) mapping
- Class-Based Weighted Random Early Detection (CBWRED)
- Resource Reservation Protocol (RSVP)
- Real-Time Transport Protocol (RTP) header compression (cRTP)
- Differentiated Services (DiffServ)
- QoS pre-classify and pre-fragmentation

<b>High-availability features</b>	<ul style="list-style-type: none"> <li>• Dual active LTE backhaul</li> <li>• Virtual Router Redundancy Protocol (VRRP) (RFC 2338)</li> <li>• Hot Standby Router Protocol (HSRP)</li> <li>• Dual SIM support on the LTE module for cellular failover</li> <li>• WAN monitoring to handle dual-SIM failover</li> </ul>
<b>IPv6 features</b>	<ul style="list-style-type: none"> <li>• IPv6 addressing architecture</li> <li>• IPv6 unicast and multicast forwarding</li> <li>• IPv6 ACLs</li> <li>• IPv6 over cellular, including DHCP Prefix Delegation</li> <li>• IPv6 routing (Static, RIPng, OSPFv3, EIGRP, MP-BGP)</li> <li>• IPv6 domain name resolution</li> <li>• IPv6 DHCP services</li> </ul>

The Catalyst IR1800 supports multiple management solutions to deploy and manage large-scale deployments at their various stages.

**Table 19.** Supported management solutions

Operational phase	Application	Description
<b>Device staging and configuration for a few routers</b>	Cisco WebUI	A GUI-based device-management tool that simplifies provisioning of devices for a small-scale deployment through easy-to-use wizards.
<b>Deploy, manage, monitor, and maintain IoT routers and assets at scale</b>	Cisco IoT Operations Dashboard	<ul style="list-style-type: none"> <li>• A cloud-based dashboard that empowers OT/IT collaboration to deploy, monitor, and gain insights from Cisco networking devices and the assets they connect, simply and securely at scale.</li> <li>• Rapid-scaling zero-touch deployment and secure enrollment for tens of thousands of routers</li> <li>• Enhanced security: Role-based access and user audit trail and secure communications for data transport across networks, VPN tunnels, geo-fencing, alerts, and notifications for data and physical security.</li> <li>• Increased reliability: Reliable communications over cellular or Ethernet networks, lifecycle management, and 24/7 real-time monitoring and alerts.</li> </ul>
<b>Extend your enterprise network to configure, monitor, and manage industrial assets</b>	Cisco Digital Network Architecture (Cisco DNA) with SD-WAN	<ul style="list-style-type: none"> <li>• Cisco DNA offers a network infrastructure that is not only fully programmable and open to third-party innovation, but can also fully and seamlessly integrate the cloud as an infrastructure component.</li> <li>• Simplifies and automates processes and workflow by bringing the notion of user-aware and application-aware policies into the foreground of network operations.</li> <li>• With Cisco DNA, the network can provide continuous feedback to simplify and optimize network operations.</li> <li>• Single management dashboard for configuration and management of WAN.</li> <li>• Cisco SD-WAN (vManage) automates application flexibility over multiple connections, such as the internet, MPLS, and wireless 4G LTE/5G (advanced SDWAN security features only available on IR1835)..</li> </ul>

The Catalyst IR1800 supports multiple embedded management capabilities.

Table 20. Embedded management capabilities

Feature	Description
<b>Cisco IOS Embedded Event Manager (EEM)</b>	A distributed and customized approach to event detection and recovery.  Provides the ability to monitor events and take corrective or any other desired action when the monitored events, such as a high or low threshold, occur.
<b>Cisco IOS XE IP SLA</b>	Helps assure the performance of new, business-critical IP applications as well as IP services by actively monitoring and reliably reporting traffic statistics such as jitter, response time, packet loss, and connectivity.
<b>Simple Network Management Protocol (SNMP), Syslog, NetFlow</b>	Open-standards-based network monitoring and accounting tools, such as SNMP for 3G, 4G, ignition power, ADR-GNSS, mSATA, etc., provide a common management platform for many different devices.
<b>LTE network management and diagnostics</b>	A dedicated diagnostic port on a cellular module enables logging of data during debugging sessions that can be analyzed by industry-standard tools such as Spirent Universal Diagnostic Monitor (UDM).
<b>Cisco IOS XE telemetry/YANG model</b>	Telemetry is an automated communications process by which measurements and other data are collected at remote or inaccessible points and transmitted to the receiving equipment for monitoring. Telemetry provides a mechanism to stream YANG-modeled data to a data collector.

## SECTION 8 | Licensing (if relevant)

**Instructions:** Provide a sentence or paragraph explaining licensing for your software at a high level, then build a table to show the details customers need.

### Example:

#### Licensing

Cisco Unity Express user license levels are available on the network module (NME-CUE) and advanced integration module (AIM-CUE) for Version 7.0 and earlier.

**Table 3.** Licensing

License Level: Number of Mailboxes	GDMs	Hours of Storage	Concurrent Voicemail and Automated-Attendant Ports and Sessions
12	5	300	8-24
25	10	300	8-24
50	15	300	8-24

## Software licensing

The Catalyst IR1800 introduces a dual network stack along with throughput licenses. Appropriate combinations can be selected according to need.

### Network stack

There are two network stacks:

- Network Essentials
- Network Advantage

These stacks provide various capabilities. The Network Essentials license offers the essential elements of routing and security necessary for typical IoT deployments. The Network Advantage license enables advanced features such as MPLS, L2TPv3 for a highly scalable and cost-effective solution, mobile IP for seamless migration between networks, and application-aware QoS policies for built-in intelligence, in addition to the features offered by Network Essentials.

The figure below explains the capabilities provided by the licenses.

# IR1800 - Features and licenses

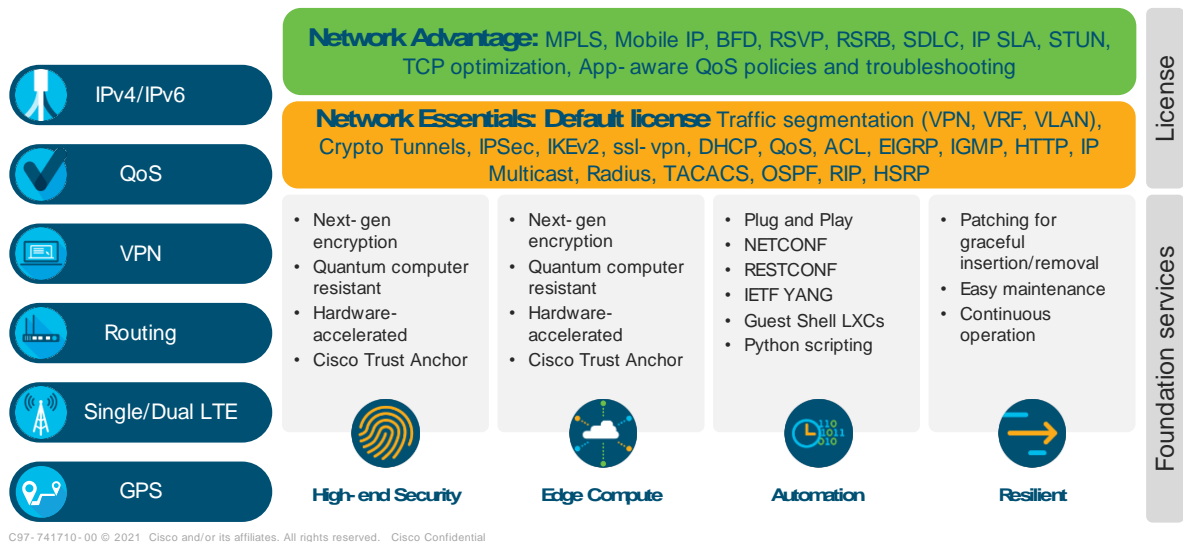


Figure X. Licensing details

## Throughput licenses

The IR1800 has three throughput license options.

Table 21. Licenses and throughput

License	Tier	Aggregate throughput	Comment
Default (DEF)	T0	30 Mbps	This is the default tier with 30 Mbps aggregate throughput.
Performance (PERF)	T1	200 Mbps	This tier provides 200 Mbps aggregate throughput.
Boost (BOOS)	T2	Uncapped	This tier allows the device to use its full hardware capacity.

Select an appropriate combination of network stack and throughput tier based on your requirements.

Export regulations require HSEC license as a mandatory attach with Boost License.

A single Cisco IOS XE universal image encompassing all functions is delivered with the product. Software feature licenses are preinstalled at the factory, depending on the selection made at the time of purchase, simplifying software delivery and decreasing the operational costs of the deployment. Licenses can be upgraded after deployment by going through the [Cisco Smart License activation](#) process. For a more detailed overview of Cisco licensing, go to [cisco.com/go/licensingguide](https://cisco.com/go/licensingguide).

## SECTION 9 | Product Sustainability

**Instructions:** Help enable our sales teams and customers to easily recognize the sustainability features of our products and how our products can help them meet their sustainability goals.

In your product’s datasheet, copy the introductory sentences and the accompanying table. Use the table to highlight specific environmental sustainability features of the product. Suggested topics include:

- % Packaging foam reduction from previous generation
- Carbon Footprint
- Eco-Design compliance (EU ErP Lot, Etc.)
- Environmental certifications (EPEAT, Energy Star, etc.)
- Energy consumption information (idle, typical or max energy consumption)
- Hardware or Software enabled energy saving features
- Letter of Volatility (Mention of volatile vs non-volatile memory)
- MTBF
- Product/Packaging Material (ex. Post-consumer recycled resin (PCR) included)
- Packaging efficiency (ex. units shipped per pallet)
- Power calculator links
- Power supply information (ex. type, 80+ efficiency rating, max power output, power factor)
- Product weight or packaging weight

If information is already available on the data sheet, put the table number or section name in the reference column of the table and add a hyperlink to the section of the data sheet that contains the information. Include any topics that are applicable to your product, even if it’s not included in the above list.

**The goal is to allow the customer to easily see all of the environmental sustainability features of the product and navigate to them in the data sheet.**

**For software data sheets, delete out SECTION 9 | Product Sustainability.**

**Note:** Do not reference in the data sheet whether the product complies with any RoHS, REACH or WEEE regulation. RoHS compliance information is available from the [Product Approval Status tool](#).

If you find that a sustainability-related topic is missing or you have question about how to fill out the two tables, contact [csr\\_inquiries@cisco.com](mailto:csr_inquiries@cisco.com) to receive assistance.

### Example:

Information about Cisco’s environmental, social and governance (ESG) initiatives and performance is provided in Cisco’s CSR and sustainability [reporting](#).

**Table 4.** Cisco Environmental Sustainability Information

Sustainability Topic		Reference
General	Information on product-material-content laws and regulations	<a href="#">Materials</a>
	Information on electronic waste laws and regulations, including our products, batteries and packaging	<a href="#">WEEE Compliance</a>
	Information on product takeback and reuse program	<a href="#">Cisco Takeback and Reuse Program</a>
	Sustainability Inquiries	Contact: <a href="mailto:csr_inquiries@cisco.com">csr_inquiries@cisco.com</a>
	Countries and Regions Supported	<a href="#">Table 6: Regulatory Compliance</a>
Power	Power (Including Pluggable)	<a href="#">Table 11: Card Specifications</a>
Material	Product packaging weight and materials	Contact: <a href="mailto:environment@cisco.com">environment@cisco.com</a>
	Weight	<a href="#">Table 11: Card Specifications</a>

## Product Sustainability

Information about Cisco’s environmental sustainability policies and initiatives for our products, solutions, operations, and extended operations or supply chain is provided in the “Environmental Sustainability” section of Cisco’s [Corporate Social Responsibility \(CSR\) Report](#).

Reference links to information about key environmental sustainability topics (mentioned in the “Environmental Sustainability” section of the CSR Report) are provided in the following table:

**Table 22. Cisco environmental sustainability information**

Sustainability topic		Reference
General	Information on product-material-content laws and regulations	<a href="#">Materials</a>
	Information on electronic waste laws and regulations, including our products, batteries and packaging	<a href="#">WEEE Compliance</a>
	Information on product takeback and reuse program	<a href="#">Cisco Takeback and Reuse Program</a>
	Sustainability inquiries	Contact: <a href="mailto:csr_inquiries@cisco.com">csr_inquiries@cisco.com</a>
Power	Power specifications and consumption	<a href="#">Table 5</a>
Material	Product packaging weight and materials	<a href="#">Table 4</a>

Cisco makes the packaging data available for informational purposes only. It may not reflect the most current legal developments, and Cisco does not represent, warrant, or guarantee that it is complete, accurate, or up to date. This information is subject to change without notice.

**Instructions:** Provide a listing of product specifications in table format. Included below are some standard categories of specifications. Add what you need and delete the ones you do not use. If you will have multiple aspects to one specification, you may create a separate table to display all the relevant information. Be sure to number and label tables appropriately.

### Example:

#### Product Specifications

**Table 5.** Specifications of Cisco 4000 Family Integrated Services Routers

Services and Slot Density	Cisco 4451-X
Total onboard WAN or LAN 10/100/1000 ports	4
RJ-45-based ports	4
SFP-based ports	4
Enhanced service-module slots	2
Doublewide service-module slots	1 (assumes no singlewide SM-X modules installed)
NIM slots	3

<< Provide product specifications using the table below >>

### Product Specifications

**Table XX.** XXXXXX<<Table caption goes here>>



**Instructions:** List the system requirements that must be in place in order to install the hardware product or use the software. Included below are some standard requirements categories. Add what you need and delete the ones you do not use.

### Example:

**Table 6.** System Requirements

Feature	Description
Disk space	Enter requirement description
Hardware	Enter requirement description
Memory	Enter requirement description
Software	Enter requirement description

<< Provide system requirements here using the table below >>

### System Requirements

**Table XX.** XXXXXX<<Table caption goes here>>

Feature	Description



## SECTION 12 | Ordering Information <or Ordering Guide>

**Instructions:** Help customers understand all the components or parts they need to purchase in order to install and use the product. This section also provides a direct link to the Cisco Ordering Home Page and lists part numbers for customer convenience. If your group has created a specific ordering guide for this product or series, please include a hyperlink to that tool in this section or if the guide is 4 pages or less, please include it here in this document.

### Example: Ordering Information

The Cisco 4400 Series is available. To order, please visit [the Cisco Ordering Home Page](#) <or Cisco 4400 Series ISR Ordering Guide [with hyperlink] if available.

For additional product numbers, including the Cisco 4400 Series bundle offerings, please check the Cisco 4400 Series Integrated Services Router Price List [include hyperlink] or contact your local Cisco account representative. To place an order, visit [the Cisco Ordering Home Page](#). To download software, visit the [Cisco Software Central](#).

**Table 7.** Cisco ISR 4000 Series Ordering Information

Part #	Product Description
ISR4451-X/K9	ISR 4451 with 4 onboard GE, 3 NIM slots, 1 ISC slot, 2 SM slots, 8 GB Flash Memory default, 2 GB DRAM default (data plane), 4 GB DRAM default (control plane)
ISR4431/K9	ISR 4431 with 4 onboard GE, 3 NIM slots, 1 ISC slot, 8GB Flash Memory default, 2 GB DRAM default (data plane), 4 GB DRAM default (control plane)

### Ordering information

The Catalyst IR1800 Series is a Smart License-enabled product. Cisco Smart Accounts and Virtual Accounts are required to order the product. For more information on how to order the Catalyst IR1800 and Cisco Smart Accounts, visit the [Cisco Smart Account user guide](#).

Ordering the Catalyst IR1800 can be divided into three major sections:

1. Operating system and licenses (step 2)
2. Pluggable modules (steps 3 through 7)
3. Accessories (step 8 and later)

To place an order, select the right product IDs from the tables below in sequential order.

**Table 23.** Product ordering process

Step 1: Select the base platform.

Hardware (chassis)	Description
IR1821-K9	Cisco Catalyst IR1821 Rugged Router
IR1831-K9	Cisco Catalyst IR1831 Rugged Router
IR1833-K9	Cisco Catalyst IR1833 Rugged Router
IR1835-K9	Cisco Catalyst IR1835 Rugged Router

Step 2: Select the network stack and throughput tier.

Licenses			
Network Essentials	Network Advantage	Throughput tier	Aggregate throughput
SL-1800-NE/DEF-K9	SL-1800-NA/DEF-K9	T0 (default)	30 Mbps
SL-1800-NE/PERF-K9	SL-1800-NA/PERF-K9	T1 (Performance)	200 Mbps
SL-1800-NE/BOOS-K9	SL-1800-NA/BOOS-K9	T2 (Boost)	Uncapped

The T2 (Boost) license requires an additional mandatory **L-18-HSEC-K9** license.

Upgrade licenses will be available post-FCS.

### Step 3: Select the cellular pluggable modules.

Cellular module	Description
P-LTEAP18-GL(=)	Category 18 LTE module for North America, Europe, and Asia Pacific
P-LTEA-EA(=)	Category 6 LTE module for North America, Europe, and Middle East
P-LTEA-LA(=)	Category 6 LTE module for Asia Pacific and Latin America
P-LTE-MNA(=)	Category 4 LTE module for AT&T, FirstNet Ready and Verizon, US
P-LTE-US(=)	Category 4 LTE module for AT&T, U.S
P-LTE-VZ(=)	Category 4 LTE module for Verizon, U.S
P-LTE-GB(=)	Category 4 LTE module for Europe
P-LTE-IN(=)	Category 4 LTE module for India
P-LTE-JN(=)	Category 4 LTE module for Japan

### Step 4: Select the option of a preinstalled Verizon SIM card (if required).

Verizon SIM card	Description
LTE-SIM-VZ(=)	Verizon SIM (preinstalled) for zero-touch deployment

### Step 5: Select the Wi-Fi 6 pluggable module.

Wi-Fi 6 pluggable module		
CAPWAP mode	EWC mode	Description
WP-WIFI6-x(=)	WP-WIFI6-EWC-x(=)	<p>Wi-Fi 6 can be shipped in CAPWAP mode or embedded wireless controller (EWC) mode based on the product ID selected</p> <p>'x' denotes the country/regional code for Wi-Fi frequency (e.g., A/B/C, etc.)</p> <p><a href="#">Wireless LAN Compliance Lookup</a> can be used to choose the right country/regional code</p>

### Step 6: Select the automotive dead reckoning pluggable GNSS module (only for IR1833-K9 and IR1835-K9).

Dead reckoning GNSS	Description
IRM-GNSS-ADR(=)	Automotive dead reckoning GNSS pluggable module

### Step 7: Select the additional 100-GB SSD module (only for IR1833-K9 and IR1835-K9).

SSD	Description
IRM-SSD-100G(=)	100-GB industrial-grade field-replaceable SSD

Step 8: Select the power adapter and appropriate mating cord (if using a power brick and power cable).

Power supply and cables	Description
PWR-MF4-125W-AC(=)	AC to DC power adapter for IR1800- 125W
IR-PWR-G2A-NA(=)	Power Cord - North America
IR-PWR-G2A-BR(=)	Power Cord - Brazil
IR-PWR-G2A-AU(=)	Power Cord – Australia
IR-PWR-G2A-CE(=)	Power Cord – Central Europe
IR-PWR-G2A-ISR(=)	Power Cord – Israel
IR-PWR-G2A-ID(=)	Power Cord - India
IR-PWR-G2A-UK(=)	Power Cord - United Kingdom
IR-PWR-G2A-ITA(=)	Power Cord – Italy
IR-PWR-G2A-AR(=)	Power Cord – Argentina
IR-PWR-G2A-JP(=)	Power Cord – Japan
IR-PWR-G2A-AP(=)	Power Cord – Asia Pacific
IR-PWR-G2A-CN(=)	Power Cord – China
IR-PWR-G2A-SA(=)	Power Cord – South Africa
IR-PWR-G2A-SWI(=)	Power Cord - Switzerland

Step 9: Select the right OBD-II cable (for on-the-move/vehicle deployments).

(An OBD-II cable can be used to power the IR1800 from the OBD-II port of a vehicle, along with connecting to the CAN bus of the vehicle for vehicle data.)

OBD-II cable	Description
OBD2-J1962YA-MF4(=)	OBD-II (J1962) Type A to IR1800 cable with type 1 Y-splitting bypass harness
OBD2-J1962YB-MF4(=)	OBD-II (J1962) Type B to IR1800 cable with type 2 Y-splitting bypass harness
OBD2-J1939Y2-MF4(=)	OBD-II (J1939) Type 2 heavy duty diagnostic harness for Volvo/Mack
OBD2-J1939Y1-MF4(=)	OBD-II (J1939) Type 1 to IR1800 cable with type 1 y-splitting bypass harness and auxiliary (discrete voltage) inputs
OBD2-J1708Y-MF4(=)	OBD-II (J1708) to IR1800 cable with type 1 y-splitting bypass harness and auxiliary (discrete voltage) inputs
OBD2-J1962VMB-MF4(=)	J1962-VM-Type B Volvo & Mack

Step 10: Select the right antennas and antenna stand for the use case/deployment.

Antenna	Description
ANT-7-5G4WL2G1-O(=)	7-in-1 outdoor vehicle mount antenna- 4G LTE SMA x4, Wi-Fi dual band RP-SMA x2, GNSS SMA x1
LTE-ANTM2-SMA-D(=)	4G LTE dipole antenna 698-960, 1448-1511, 1710-2690 MHz, SMA
5G-ANTM-SMA-D(=)	5G Sub-6 & LTE Advanced Pro capable dipole antenna, SMA
W-ANTM2050D-RPSMA(=)	Wi-Fi dual band swivel dipole antenna, RP-SMA
ANT-4G-OMNI-OUT-N(=)	Outdoor omnidirectional 4G antenna, N connector
ANT-5G-OMNI-OUT-N(=)	Outdoor omnidirectional 617 – 5950 MHz antenna, N connector
4G-LTE-ANTM-O-3-B(=)	3-in-1 outdoor black antenna, 4G LTE SMA x2, GPS SMA x1
ANT-3-4G2G1-O(=)	3-in-1 outdoor antenna- 4G LTE TNC x2, GPS SMA x1
ANT-2-4G2-O(=)	2-in-1 outdoor vehicle mount antenna- 4G LTE TNC x2
ANT-5-4G2WL2G1-O(=)	5-in-1 outdoor vehicle mount antenna- 4G LTE TNC x2, Wi-Fi dual band RP-TNC x2, GPS SMA x1
5G-ANTM-O-4-B(=)	9-in-1 outdoor antenna- 5G Sub-6 GHz / 4G LTE SMA x4, Wi-Fi dual band RP-SMA x2, GPS SMA x1

Step 11: Select the DIN rail (if using a DIN rail mount).

Mounting option	Description
IR1800-DINRAIL(=)	DIN rail mount

Step 12: Select the IP54 Kit (if you require an IP54 system).

IP54 option	Description
IR1800-IP54-KIT(=)	IP54 Kit for IR1800

Step 13: Select the appropriate SFP module (if needed).

Ethernet SFP	Distance	Fiber	Classification
GLC-SX-MM-RGD	220 to 550 m	MMF	Industrial (-40C to +85C)
GLC-LX-SM-RGD	550 m to 10 km	MMF/SMF	Industrial (-40C to +85C)
GLC-ZX-SM-RGD	70 km	SMF	Industrial (-40C to +85C)
GLC-SX-MMD	220 to 550 m	MMF	Extended (-5C to +85C)
GLC-LH-SMD	550 m to 10 km	MMF/SMF	Extended (-5C to +85C)
GLC-ZX-SMD	70 km	SMF	Extended (-5C to +85C)
GLC-BX-U	10 km	SMF	Commercial (0C to +70C)
GLC-BX-D	10 km	SMF	Commercial (0C to +70C)
GLC-LH-MMD	550 m to 10 km	MMF/SMF	Extended (-5C to +85C)
GLC-EX-SMD	40 km	SMF	Extended (-5C to +85C)
GLC-FE-100FX-RGD	2 km	MMF	Industrial (-40C to +85C)
GLC-FE-100LX-RGD	10 km	SMF	Industrial (-40C to +85C)
GLC-FE-100FX	2 km	MMF	Commercial (0C to +70C)
GLC-FE-100LX	10 km	SMF	Commercial (0C to +70C)
GLC-FE-100EX	40 km	SMF	Commercial (0C to +70C)
GLC-FE-100ZX	80 km	SMF	Commercial (0C to +70C)
GLC-FE-100BX-U	10 km	SMF	Commercial (0C to +70C)
GLC-FE-100BX-D	10 km	SMF	Commercial (0C to +70C)
GLC-TE	100 m	NA (RJ-45)	Extended (-5C to +85C)

Step 14: Select other accessories as needed.

Other accessories	Description
<b>Power cable</b>	
CAB-PWR-15-MF4	Power cable when directly connecting to a DC source (such as a vehicle battery) NOTE: It is preferred to use an OBD-II cable for a quick and clean installation
<b>RF cables</b>	
CAB-L240-10-SM-TM	SMA(m)-straight to TNC(m)-straight, LMR-240-DB, 10 ft.
CAB-L240-15-SM-TM	SMA(m)-straight to TNC(m)-straight, LMR-240-DB, 15 ft.
CAB-L240-20-SM-TM	SMA(m)-straight to TNC(m)-straight, LMR-240-DB, 20 ft.
LTE-AE-MAG-SMA	Magnetic SMA antenna stand, SMA(f)-straight to TNC(f)-straight, LMR-195 plenum rated, 1 ft.
CAB-L240-10-SM-NM	SMA(m)-straight to N(m)-straight, LMR-240-FRDB, 10 ft.
CAB-L-10-RSP-RTP	RP-SMA(male) to RP-SMA(female), 10 ft.

<b>CAB-L195-10-SM-SF</b>	SMA(m) to SMA(f), LMR-195, 10 ft.
<b>CAB-L240-20-SM-SF</b>	SMA(m) to SMA(f), LMR-240, 20 ft.
<b>CAB-L400-20-N-N</b>	N(m)-straight to N(m)-right angle, LMR-400-DB, 20 ft.
<b>RF adapters</b>	
<b>LTE-ADPT-SM-TF</b>	SMA(m)-straight to TNC(f)-straight adapter
<b>AIR-ACC370-NF-NF</b>	N(f)-straight to N(f)-straight adapter
<b>Ethernet cable</b>	
<b>CAB-ETH-S-RJ45</b>	Yellow Cable for Ethernet, Straight through,RJ-45,15 feet
<b>Console cable</b>	
<b>CAB-USB-UB</b>	USB Type A to USB Micro-B (2m)
<b>Digital I/O cable</b>	
<b>CAB-IO-MF6</b>	Mating connector for Alarm-In / Digital I/O / Ignition Sense
<b>Lighting arresters</b>	
<b>ACC-LA-G-SM-SF</b>	SMA(m) to SMA(f)- straight, GDT, DC to 6 GHz
<b>CGR-LA-NF-NF</b>	N(f)-straight to N(f)-straight, GDT, DC to 6 GHz
<b>CGR-LA-NM-NF</b>	N(f)-straight to N(m)-straight, GDT, DC to 6 GHz
<b>4G-ACC-OUT-LA</b>	TNC(f)-straight to TNC(m)-straight, HPF, 698 to 2700 MHz (does not support GNSS)
<b>ACC-LA-G-TM-TF</b>	TNC(f)-straight to TNC(m)-straight, GDT, DC to 6 GHz

## Ordering the IR1800 bundled with the Cisco IoT Operations Dashboard

Select the product ID as described in the table below.

**Table 24. IR1800 and Cisco IoT Operations Dashboard bundle**

Bundle product ID	Description
<b>IR1800-IOTOC</b>	Bundled product ID for IoT Operations Dashboard subscription and IR1800 hardware

A detailed data sheet and ordering guide for the IR1800 with Cisco IoT Operations Dashboard can be found at [Cisco IoT Operations Dashboard Datasheet](#), [Cisco IoT Operations Dashboard Ordering Guide](#).

## SECTION 13 | Warranty Information

**Instructions:** Provide a brief sentence highlighting the warranty of the hardware or software product.

**Example:**

### Warranty Information

Cisco 4400 Series Integrated Services Routers have a 90-day limited liability warranty.

The Catalyst IR1800 Series comes with a Cisco 3-year limited hardware warranty. Adding a contract for a technical service offering, such as Cisco Smart Net Total Care<sup>®</sup> Service, provides benefits not available with the warranty, including access to OS updates, Cisco.com online resources, and Cisco Technical Assistance Center (TAC) support services. The table below shows the available technical services.

Find more information about [Cisco product warranties](#).

Learn more about [Cisco Technical Services](#).

Table 25. Technical services

#### Cisco Smart Net Total Care Service

- Global access to the Cisco TAC 24 hours daily
- Unrestricted access to the extensive Cisco.com resources, communities, and tools
- Next-business-day (NBD), 8x5x4, 24x7x4, and 24x7x2 advance hardware replacement and onsite parts replacement and installation available
- Ongoing operating system software updates within the licensed feature set
- Proactive diagnostics and real-time alerts on Cisco Smart Call Home-enabled devices

#### Cisco Smart Foundation Service

- NBD advance hardware replacement, as available
- Business-hours access to Small and Medium-Sized Business (SMB) Cisco TAC (access levels vary by region)
- Access to Cisco.com SMB knowledge base
- Online technical resources through the Cisco Smart Foundation portal
- OS software bug fixes and patches

## SECTION 14 | ~~Cisco and Partner Services~~

**Instructions:** Provide information on relevant services available to support the Cisco product. Include appropriate links as necessary. Up to 100 words.

**Example:**

### Cisco and Partner Services for the Branch Office

Services from Cisco and our certified partners can help you transform the branch-office experience and accelerate business innovation and growth. We have the depth and breadth of expertise to create a clear, replicable, optimized branch-office footprint across technologies. Planning and design services align technology with business goals and can increase the accuracy, speed, and efficiency of your deployment. Technical services can help you improve operational efficiency, save money, and mitigate risk. Optimization services are designed to continuously improve performance and help your team succeed with new technologies. For more information, please visit <http://www.cisco.com/go/services>.

## SECTION 15 | Cisco Capital

**Instructions:** Please include this boilerplate in your Data Sheet copy.

### **Flexible payment options make it easier than ever to get the Cisco technology you need.**

Cisco Capital delivers leading-edge payment solutions, allowing you to stay focused on what's most important—your business. We can help you drive business outcomes, accelerate innovation and digital transformation, and adapt to market dynamics faster with flexible payment options tailored to your specific business needs. Reduce the total cost of ownership, conserve capital and accelerate growth. We help you realize the full benefits of Cisco technology today, and in the future, and pay for it in the way that best suits your business requirements. Whether you are looking for a pay-as-you consume model, or need to bundle Cisco hardware, software, services, subscriptions and third-party solutions, [learn more](#) about how Cisco Capital can help.

### **Cisco Capital**

#### **Flexible payment solutions to help you achieve your objectives**

Cisco Capital® makes it easier to get the right technology to achieve your objectives, enable business transformation, and stay competitive. We can help you reduce the total cost of ownership, conserve capital, and accelerate growth. In more than 100 countries, our flexible payment solutions can help you acquire hardware, software, services, and complementary third-party equipment in easy, predictable payments. [Learn more.](#)

**Instructions:** Provide a custom “call to action” and provide a URL that gives the reader a place to go for more information or next steps. Both the subhead and resource referral should be tied to solving the business problems. Examples of next steps: request a demo; sign up for a free assessment; or contact a virtual sales rep. (Do not use time-sensitive offers or links that will expire in less than one year.) Consider directing readers to white papers, solution overviews, case studies, or other marketing materials. Up to 100 words.

#### **Example:**

#### **Speed and protect your company's data—anywhere, anytime.**

Does your business have the measures and security in place to guarantee safe, anywhere, anytime access to corporate resources? Start delivering an uncompromised experience over any connection with the Cisco 4400 Series Integrated Services Router. For additional information, visit [provide appropriate Cisco url ]

Learn more about the Cisco Catalyst IR1800 Rugged Series Routers: <https://www.cisco.com/go/IR1800>

Learn more about the industrial routing portfolio: <https://www.cisco.com/c/en/us/solutions/internet-of-things/iot-routers-and-gateways.html>

**Example:**

**Document History**

**Table 8.** Document History

New or Revised Topic	Described In	Date
Added new linecards: a. Access- 48 port PoE+. B. Core - 24/48 port 1G SFP. Added new power supply options - 2100W AC, 3200W DC. Added RESTCONF support.	Ordering Information	Mar. 31, 2018
Added Sup-1XL, 120 G/slot, core optimized. Corrected references to Catalyst 9000 switches, rather than Catalyst 9000 series switches. Corrected references to Cisco IOS XE, rather than IOS-XE.	Sup-1XL, 120 G/slot	Dec. 15, 2017

<< Provide document history information here >>

**Table XX.** Document History

New or Revised Topic	Described In	Date