

Lenovo Chromebook Duet (11", 9)
Lenovo Chromebook Duet EDU G2
User Guide



Lenovo

Read this first

Before using this documentation and the product it supports, ensure that you read and understand the following:

- *Safety and Warranty Guide*
- *Setup Guide*
- [Generic Safety and Compliance Notices](#)

First Edition (August 2024)

© Copyright Lenovo 2024.

LIMITED AND RESTRICTED RIGHTS NOTICE: If data or software is delivered pursuant to a General Services Administration "GSA" contract, use, reproduction, or disclosure is subject to restrictions set forth in Contract No. GS-35F-05925.

Contents

Discover your Chromebook	ii	Use the keyboard shortcuts (for selected models)	18
Chapter 1. Meet your Chromebook	1	Use the touchpad (for selected models)	19
Front	1	Use the camera	20
Rear	2	Use audio	20
Top	3	Connect to an external display	20
Bottom	4	Connect to Bluetooth devices	20
Left	5	Set the power plan	21
Right	6	Chapter 3. CRU replacement	23
Folio keyboard (for selected models)	7	What are CRUs	23
Features and specifications	8	Chapter 4. Help and support	25
Statement on USB transfer rate	9	Frequently asked questions	25
Operating environment	9	Lenovo Customer Support Center	25
Chapter 2. Get started with your Chromebook	11	Get help from Google	26
Charge your Chromebook	11	Appendix A. Safety instructions for teachers, parents and adult supervisors.	29
Connect to Wi-Fi	11	Appendix B. Open source information.	31
Combination of Chromebook and folio keyboard (for selected models)	12	Appendix C. Notices and trademarks.	33
Use the kickstand (for selected models)	12		
Use the Lenovo USI Pen 2 Magnetic (for selected models)	15		
Use the power button	16		
Use the touch screen.	17		

Discover your Chromebook

Thank you for choosing a Lenovo® Chromebook™! We are dedicated to delivering the best solution to you.

Before starting your tour, please read the following information:


- This guide applies to Lenovo product models listed below. Illustrations in this guide may look slightly different from your product model.

Model name	Machine type (MT)
LNV CB Duet 11M889	83HH
LNV CB Duet 11M889 1	
LNV CB Duet 11M889 2	
LNV Chrome Duet EDU G2	83HJ, 83HK
LNV Chrome Duet EDU G2 1	
LNV Chrome Duet EDU G2 2	

- For further compliance information, refer to the *Generic Safety and Compliance Notices* at https://pcsupport.lenovo.com/docs/generic_notices.
- Depending on the model, some optional accessories, features, software programs, and user interface instructions might not be applicable to your Chromebook.
- Documentation content is subject to change without notice. To get the latest documentation, go to <https://pcsupport.lenovo.com>.

Chapter 1. Meet your Chromebook

Front

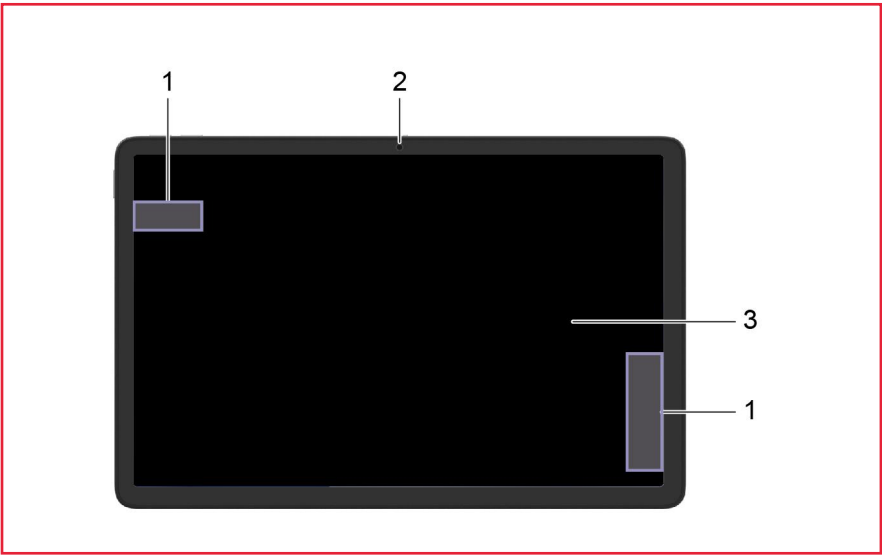

1. Wireless antennas	Send and receive radio waves for the built-in wireless local area network (LAN) and Bluetooth module. Note: The antennas are not visible from the outside of the Chromebook.
2. Front camera	Capture still and moving images for taking photos, recording videos, and video chatting.
3. Screen	Display text, graphics, and videos. Support multi-touch function.

Rear

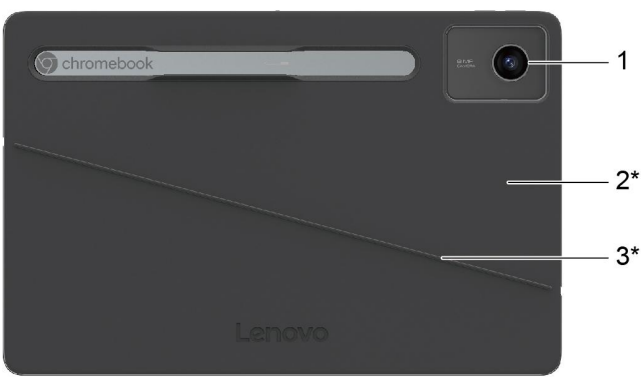


Figure 1. LNV CB Duet 11M889



Figure 2. LNV Chrome Duet EDU G2




Figure 3. Lenovo USI Pen 2 Magnetic

1. Rear camera	Capture still and moving images for taking photos, recording videos, and video chatting.
2. Kickstand	Support your Chromebook when it is placed on a surface.
3. Kickstand hinge	Pivot the kickstand.
4. Lenovo USI Pen 2 Magnetic	The pen enables you to write and draw in a natural manner.


* for selected models

Top



1. Volume buttons	Press the buttons to increase or decrease the system volume.
2. Microphones	Capture or record sound and voice.
3. Camera cover	Cover or uncover the camera lens. Note: The camera cover helps you better protect your privacy.
4. Multi-purpose USB Type-C® connector	This multi-purpose connector can be used to connect devices that utilize the USB data transfer technology and display devices. It also supports USB Power Delivery. Note: When connecting display devices, you need to use appropriate cables and adapters (if needed) according to the connection capabilities of the display device.

Bottom



1. Pogo pin with guide pin


The pogo pin with guide pin enables you to attach the keyboard to your Chromebook magnetically.

Left



1. Multi-purpose USB Type-C connector	This multi-purpose connector can be used to connect devices that utilize the USB data transfer technology and display devices. It also supports USB Power Delivery. Note: When connecting display devices, you need to use appropriate cables and adapters (if needed) according to the connection capabilities of the display device.
2. Charging light	Indicate the ac power status and the battery status. See “AC power status indicator behavior” on page 11.
3. Combo audio jack	Connect headphones or headsets with a 3.5 mm (0.14 inch), 4-pole plug. Note: This jack does not support standalone external microphones. If you use headsets, choose one with a single plug.
4. Speaker	Produce sound.
5. Power button	Press the button to turn on the Chromebook or put the Chromebook into sleep mode. Notes: When you finish working with your Chromebook, shut it down to save power. • Click  in the system tray. • Press the power button.

Right



1. Speaker

Produce sound.

Folio keyboard (for selected models)



1. Pogo pin with guide pin	The pogo pin with guide pin enables you to attach the keyboard to your Chromebook magnetically.
2. Keyboard	Enter characters and interact with programs. Note: The keyboard also includes function keys and key combinations for changing settings and performing tasks quickly.
3. Touchpad	Perform finger touch and all the functions of a traditional mouse. Note: The touchpad also supports multi-touch function.

Features and specifications

Note: Specifications might change without notice. Some specifications are model-specific and might not apply to the Chromebook model that you purchased.

Dimensions	Tablet: • Width: 255.37 mm (10.05 inches) • Depth: 166.92 mm (6.57 inches) • Thickness: 7.6 mm (0.30 inches)
Weight	Tablet: approximately 0.57 kg (1.26 lb)
ac power adapter	• Input: 100 V ac–240 V ac, 50 Hz–60 Hz • Output: – 10 V dc, 3 A, or – 15 V dc, 3 A • Power: – 30 W, or – 45 W
Battery pack	• Capacity: 29 Wh • Number of cells: 2 Note: The battery capacity is the typical or average capacity as measured in a specific test environment. Capacities measured in other environments may differ but are no lower than the rated capacity (see product label).
Memory	• Type: On-board Low Power Double Data Rate 4X (LPDDR4X) • Capacity: – 4 G, or – 8 G • Number of physical slots: 0
Secondary storage device	• Type: Solid-state drive (SSD) • Capacity: – 64 G, or – 128 G Note: The capacity of the storage device displayed in the operating system is typically lower than the nominal capacity.
Screen	• Multi-touch screen • Display resolution: 1200 × 1920 pixels • Size: 278.1 mm (10.95 inches)

Connectors and slots

- Audio connector
- Multi-purpose USB Type-C connector × 2
 - Support power input up to 30 W/45 W using the included power adapter
 - Support power output up to
 - 15 W (5 V, 3 A) (One USB Type-C connector is working.)
 - 7.5 W (5 V, 1.5 A) (Both USB Type-C connectors are working.)
 - Support USB 3.2 Gen 1
 - Support maximum signaling rate of 5 Gbps
 - Support USB Power Delivery
 - Support DisplayPort™ Alt Mode (DisplayPort 1.2 compliant. Support maximum output resolution of 3840 × 2160, at 60 Hz frame rate and color depth of 8 bits.)

Note: Data rates and performance ratings are dependent on connected devices and cables if they are used. For DisplayPort connection through a USB Type-C connector, the listed maximum output capacity is only available on external displays with a DisplayPort, a Mini DisplayPort, or a USB Type-C connector that supports DisplayPort Alternate Mode. For connections using a converter or an adapter, the actual output resolution may be lower.

Network

Bluetooth and Wi-Fi® combo adapter

Statement on USB transfer rate

Depending on many factors such as the processing capability of the host and peripheral devices, file attributes, and other factors related to system configuration and operating environments, the actual transfer rate using the various USB connectors on this device will vary and will be slower than the data rate listed below for each corresponding device.

USB device	Data rate (Gbit/s)
USB 3.2 Gen 1	5

Operating environment

Maximum altitude (without pressurization)

3048 m (10 000 ft)

Temperature

- Operating: 5°C to 35°C (41°F to 95°F)
- Storage: 5°C to 43°C (41°F to 109°F)

Note: When you charge the battery, its temperature must be no lower than 10°C (50°F).

Relative humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage: 5% to 95% at wet-bulb temperature 27°C (81°F)

The folio keyboard bottom cover and kickstand cover are polyurethane (PU). Handle your keyboard and kickstand cover with care so that you can enjoy this product for a long time. If possible, place your

Chromebook in a well-ventilated and dry area without direct exposure to sunshine. Do not use or store your Chromebook in dusty, dirty areas, or extremely hot or cold areas.

Chapter 2. Get started with your Chromebook


Charge your Chromebook

The USB Type-C connector on your Chromebook works as the power connector. Plug in the ac power adapter to charge the built-in battery pack and provide power to the Chromebook.

Connect to ac power

CAUTION:

All plugs must be firmly and securely inserted into receptacles.

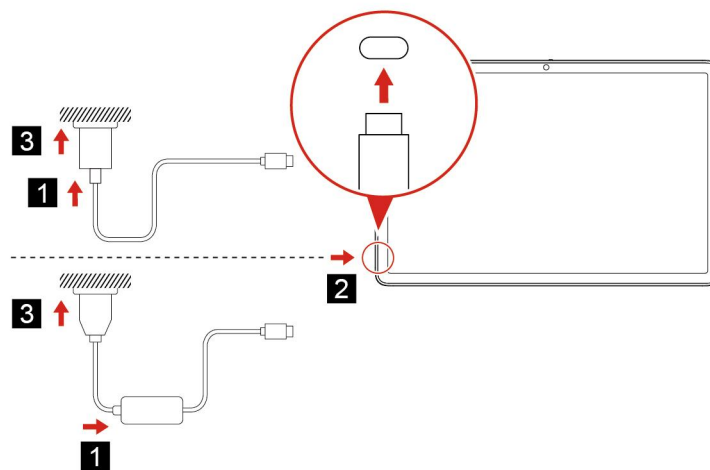

1. Connect the power cord to the ac power adapter.
2. Plug the power adapter into the USB Type-C connector of the Chromebook.
3. Plug the power cord into an electrical outlet.

AC power status indicator behavior

The ac power status indicator is next to the USB Type-C connector. The following table shows the indicator behaviors and the indicated power and battery status.

AC power status indicator	Power status	Battery status
on (red)	plugged in	being charged, remaining power is less than 5%
on (amber)	plugged in	being charged, remaining power is between 5% and 97%
on (green)	plugged in	fully charged (97% to 100%)
off	unplugged	discharging


Connect to Wi-Fi

To connect your Chromebook to Wi-Fi:

1. Click your system tray.
2. Click the network icon and turn on the wireless feature.
3. Select an available network to connect. Provide required information if needed.

Combination of Chromebook and folio keyboard (for selected models)

Align the connector of the keyboard with the Chromebook and then attach the Chromebook in the direction shown by the arrow.

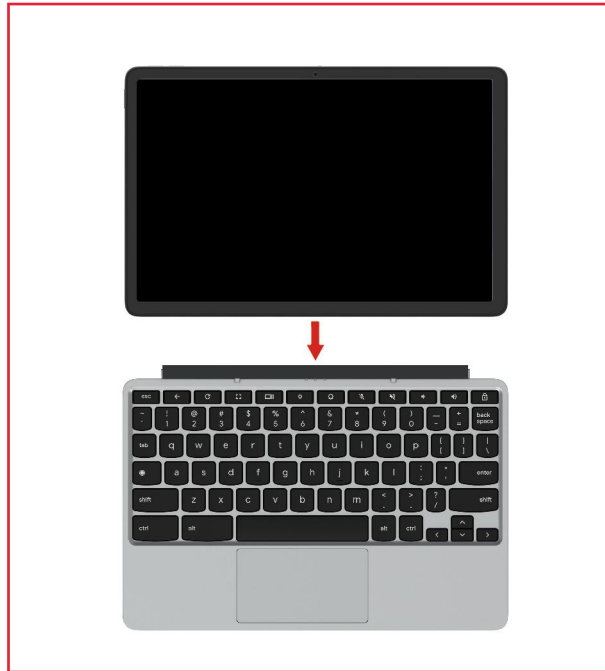


Note: The pogo bar separates when the folio keyboard is flipped to the rear of the Chromebook.


Use the kickstand (for selected models)

Your Chromebook has a stand cover that is built in with a kickstand. Pivot the kickstand from the pits on both sides of the Chromebook to open position as shown.

LVN CB Duet 11M889

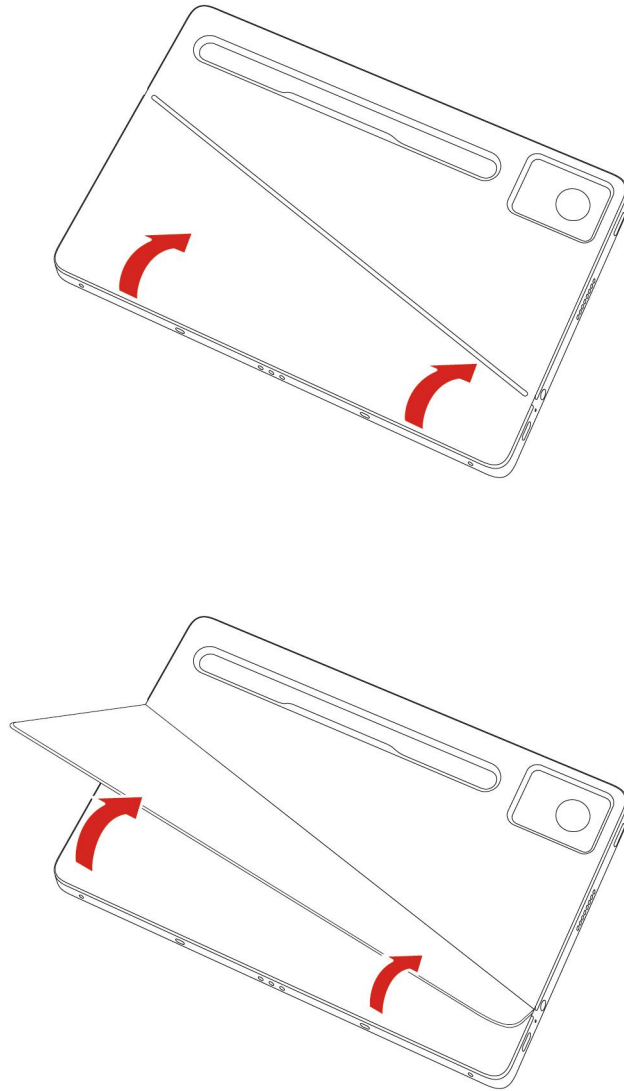


LVN Chrome Duet EDU G2

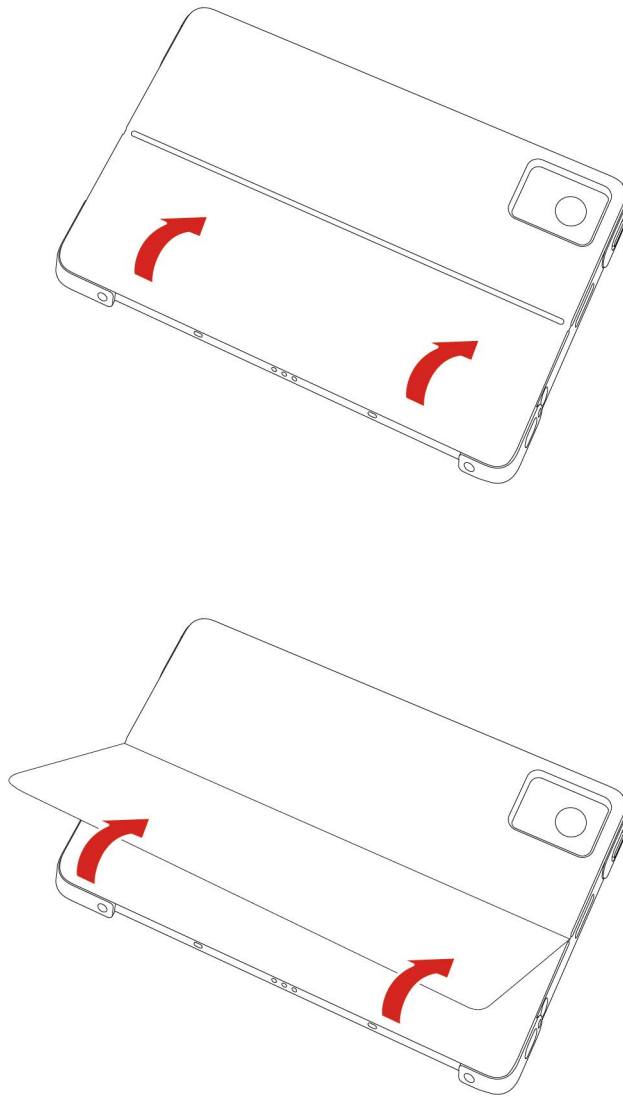


With the kickstand open, you can use the Chromebook in the following modes:

- LVN CB Duet 11M889:
 - a** Landscape mode without folio keyboard attached
 - b** Landscape mode with folio keyboard attached
 - c** Stylus mode
 - d** Portrait mode without folio keyboard attached

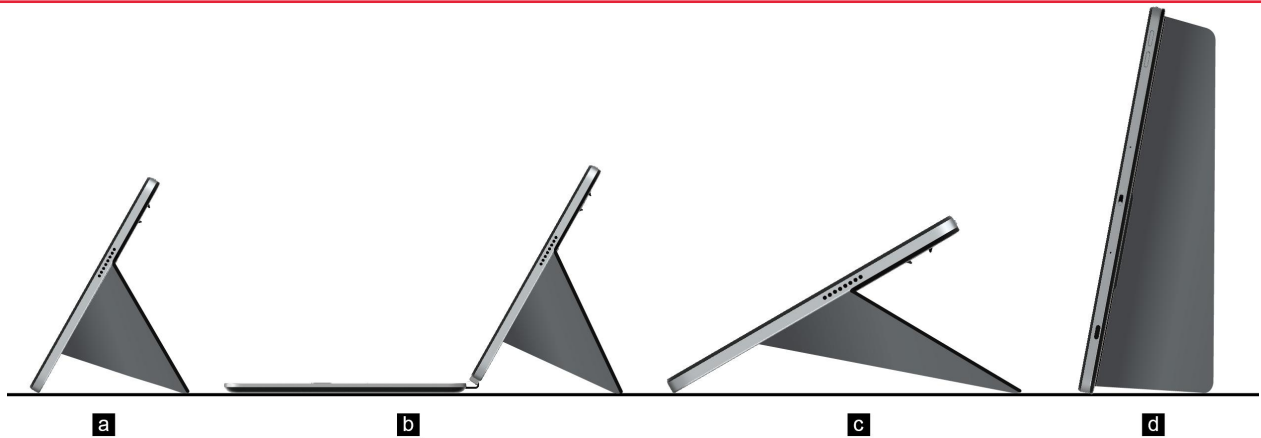

- LNV Chrome Duet EDU G2:
 - a** Landscape mode without folio keyboard attached
 - b** Landscape mode with folio keyboard attached
 - c** Stylus mode

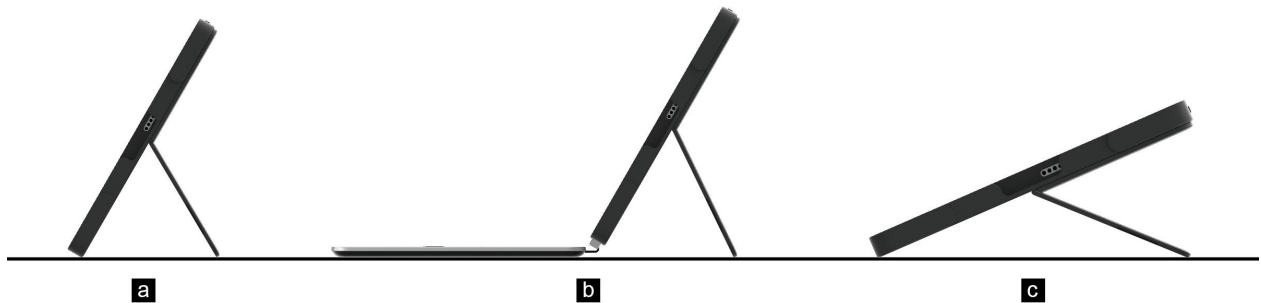

The multi-positional kickstand enables you to set the Chromebook at different angles for a comfortable user experience. The recommended screen angles are:

- Landscape mode: About 120°
- Portrait mode: About 100° (for LNV CB Duet 11M889)

Attention: Using the kickstand at an improper angle or under the load may damage the kickstand.

Use the Lenovo USI Pen 2 Magnetic (for selected models)

Your Chromebook might come with a Lenovo USI Pen 2 Magnetic (referred to as the pen in this section). The pen enables you to write and draw in a natural manner.

Notes:

- The pen is not waterproof. Take care not to drop the pen in water.
- The pen contains pressure sensors. Do not push the tip of the pen for an extended period of time. Do not subject the pen to shock or vibration.





Figure 4. Pen overview

Name	Description
1. End cap	Unscrew the end cap to install or replace a battery.
2. Pen tip	To click, tap on the screen with the tip. To double-click, tap twice.

Before first use

An insulation pad may be included in the Lenovo USI Pen 2 Magnetic to prevent capacity loss during shipping. The first time you use the pen, check and remove the insulation pad. **(2)**

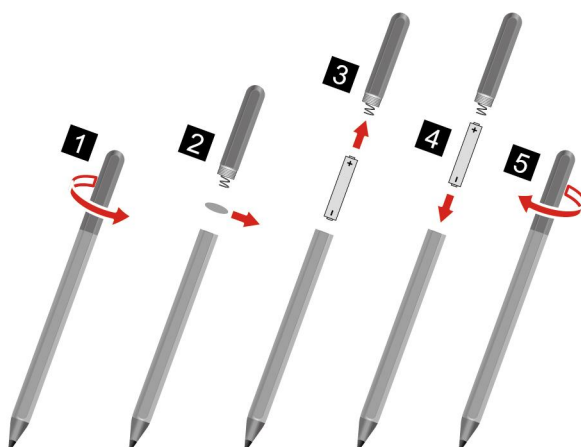

CAUTION:

The Lenovo USI Pen 2 Magnetic uses AAAA battery. Replace with the right battery.

Use the power button


Press the power button to start the Chromebook. You also can use the power button to put your Chromebook to sleep or wake your Chromebook.

The power button is on the left side of the tablet.

Use the touch screen

You can navigate the screen with simple touch gestures.


Note: Some gestures might not be available depending on the app you use.



Tap once to open an app or perform an action on an open app, such as **Copy**, **Save**, and **Delete**, depending on the app.



Tap and hold to right-click to open a shortcut menu.



Slide to scroll through items.



Drag.




Zoom out.



Zoom in.



Tap with two fingers to open a shortcut menu.



Swipe upwards to unfold the app Launcher.

Maintenance tips:

- Turn off the Chromebook before cleaning the multi-touch screen.
- Use a dry, soft, and lint-free cloth or a piece of absorbent cotton to remove fingerprints or dust from the multi-touch screen. Do not apply solvents to the cloth.
- The multi-touch screen is a glass panel covered with a plastic film. Do not apply pressure or place any metallic object on the screen, which might damage the touch panel or cause it to malfunction.
- Do not use fingernails, gloved fingers, or inanimate objects for input on the screen.
- Regularly calibrate the accuracy of the finger input to avoid a discrepancy.

Use the keyboard shortcuts (for selected models)

The function keys on the keyboard help you work more easily and effectively.

	Go to the previous page
	Reload your current page
	Hide the tabs and the App Launcher in full-screen mode
	Show all windows in overview mode
	Decrease the brightness of the Chromebook screen
	Increase the brightness of the Chromebook screen
	Mute the microphone
	Mute the speakers
	Decrease the volume
	Increase the volume
	Lock the Chromebook screen

Your Chromebook also supports some key combinations.

ctrl + 	Take a screenshot
alt + 	Switch the Caps Lock function
 + l	Lock your Chromebook screen
ctrl + alt + ?	View all keyboard shortcuts

To change the keyboard settings:

1. Click the setting icon in the system tray, and then click **Device → Keyboard**.
2. Follow the on-screen instructions to change the settings as you prefer.


Use the touchpad (for selected models)

The entire touchpad surface is sensitive to finger touch and movement. You can use the touchpad to perform all the pointing, clicking, and scrolling functions of a traditional mouse.


Use the touch gestures

Notes:


- When using two or more fingers, ensure that you position your fingers slightly apart.
- Some gestures are only available when you are using certain apps.
- If the touchpad surface is stained with oil, turn off the Chromebook first. Then, gently wipe the touchpad surface with a soft and lint-free cloth moistened with lukewarm water or Chromebook cleaner.




Tap once to select or open an item.




Tap twice quickly to display a shortcut menu.




Two-finger zoom in or zoom out.



Scroll through items.



Open the task view.



Show the current window.

To change the settings:

1. Click the setting icon in the system tray, and then click **Device → Touchpad**.

2. Follow the on-screen instructions to change the settings as you prefer.

If **Enable tap-to-click** is turned on, you can tap or press the touchpad. Otherwise, you can only press the touchpad to achieve the clicking function of a traditional mouse.

Use the camera

The built-in camera can be used for video calling or video conferencing. The indicator next to the camera turns on when the camera is activated.

To take photos with the camera:

1. Click the Launcher button.
2. Click **Camera** and take photos.

Use audio

You can connect headphones or a headset with a 3.5-mm (0.14-inch), 4-pole plug to the audio connector to listen to the sound from your Chromebook.

To play a saved audio or video:

1. Click the Launcher button, and then select **Files**.
2. Double-click a file to open it in the media player.

To adjust the volume, click the system tray, and then adjust the volume as you prefer.

Connect to an external display

You can use the Chromebook's USB Type-C connectors to connect a projector or an external display.

1. Use a USB Type-C to USB Type-C cable (not supplied) to connect your Chromebook to an external display.

Note: If the external display does not support input through USB Type-C connector, you may need to purchase and use adapters. Lenovo provides various USB Type-C accessories at <https://www.lenovo.com/accessories>, to help you expand your Chromebook functionality.

2. Connect the external display to an electrical outlet.
3. Turn on the external display.

To change display settings:

1. Click your system tray, and then click **Settings**.
2. In the **Device** section, click **Displays**.
3. Follow the on-screen instructions to change the display settings as you desire.

Connect to Bluetooth devices

Your Chromebook supports Bluetooth feature. You can connect your Chromebook to a Bluetooth keyboard, mouse, speakers, or other Bluetooth devices.

Note: The Bluetooth devices must be within a short distance, usually 10 meters (33 feet), from the Chromebook.

1. Click your system tray, and then click the Bluetooth icon.

2. Turn on **Bluetooth**.
3. Select the device you want to pair and follow the on-screen instructions.

Set the power plan

For ENERGY STAR® compliant Chromebooks, the following power plan takes effect when your Chromebooks have been idle for a specified duration:

Table 1. Default power plan (when plugged into ac power)

- | |
|--|
| <ul style="list-style-type: none">• Turn off the display: After seven minutes and 30 seconds• Put the Chromebook into sleep: After eight minutes and 30 seconds |
|--|

To reset the power plan to achieve the best balance between performance and power saving:

1. Click the setting icon in the system tray, and then click **Device → Power**.
2. Follow the on-screen instructions to change the settings as you prefer.

To wake your Chromebooks from sleep mode, press the power button or any key on the keyboard.

Chapter 3. CRU replacement

Customer Replaceable Units (CRUs) are parts that can be replaced by the customer. The Chromebooks contain the following types of CRUs:

- **Self-service CRUs:** Refer to parts that can be replaced easily by customers themselves or by trained service technicians at an additional cost.
- **Optional-service CRUs:** Refer to parts that can be replaced by customers with a greater skill level. Trained service technicians can also provide service to replace the parts under the type of warranty designated for the customer's machine.

If you intend on installing a CRU, Lenovo will ship the CRU to you. CRU information and replacement instructions are shipped with your product and are available from Lenovo at any time upon request. You might be required to return the defective part that is replaced by the CRU. When return is required: (1) return instructions, a prepaid shipping label, and a container will be included with the replacement CRU; and (2) you might be charged for the replacement CRU if Lenovo does not receive the defective CRU within thirty (30) days of your receipt of the replacement CRU. For full details, see the Lenovo Limited Warranty documentation at https://www.lenovo.com/warranty/llw_02.

What are CRUs

Refer to the following CRU list for your Chromebook.

Self-service CRUs

- ac power adapter
- Folio keyboard*
- Kickstand (for LNV CB Duet 11M889)*
- Lenovo USI Pen 2 Magnetic*
- Power cord

* for selected models

Note: Replacement of any parts not listed above, including the built-in rechargeable battery, should be done by a qualified repair technician or by ensuring that you carefully follow all instructions provided by Lenovo. You can also find Lenovo-authorized repair facilities by going to: <https://support.lenovo.com/partnerlocator> for more information.

Chapter 4. Help and support

Frequently asked questions

What do I do if my Chromebook stops responding?

1. Press and hold the power button until the Chromebook turns off. Then, restart the Chromebook.
2. If step 1 does not work:
 - For models with an emergency reset hole: Insert a straightened paper clip into the emergency reset hole to cut off power supply temporarily. Then, restart the Chromebook with ac power connected.
 - For models without an emergency reset hole:
 - For models with the removable battery, remove the removable battery and disconnect all power sources. Then, reconnect to ac power and restart the Chromebook.
 - For models with the built-in battery, disconnect all power sources. Press and hold the power button for about seven seconds. Then, reconnect to ac power and restart the Chromebook.

What do I do if I spill liquid on the Chromebook?

1. Carefully unplug the ac power adapter and turn off the Chromebook immediately. The more quickly you stop the current from passing through the Chromebook the more likely you will reduce damage from short circuits.
Attention: Although you might lose some data or work by turning off the Chromebook immediately, leaving the Chromebook on might make your Chromebook unusable.
2. Do not try to drain out the liquid by turning over the Chromebook. If your Chromebook has keyboard drainage holes on the bottom, the liquid will be drained out through the holes.
3. Wait until you are certain that all the liquid is dry before turning on your Chromebook.

How do I disinfect my Chromebook?

1. Squeeze out excess liquid from wipe or disinfecting cloth before using. Recommended wipes are hydrogen peroxide wipes and alcohol based wipes. Do not use wipes containing sodium hypochlorite (bleach).
2. Gently wipe the Chromebook thoroughly, being careful to ensure no liquid drips into the Chromebook. Do not wipe on connector pins.
3. After disinfecting, follow the cleaning procedure from the wipe supplier to minimize chemical buildup of disinfectant residue.
4. Always allow the Chromebook to completely dry prior to any use.

For more information about cleaning and disinfecting, go to <https://support.lenovo.com/in/en/solutions/ht035676>.

How do I find accessibility information?

<https://www.lenovo.com/accessibility>

Lenovo Customer Support Center

If you have tried to correct the problem yourself and still need help, you can call Lenovo Customer Support Center.

Before you contact Lenovo

Record product information and problem details before you contact Lenovo.

Product information	Problem symptoms and details
• Product name • Machine type and serial number	• What is the problem? Is it continuous or intermittent? • Any error message or error code? • What operating system are you using? Which version? • Which software applications were running at the time of the problem? • Can the problem be reproduced? If so, how?

Note: The product name and serial number can usually be found on the bottom of the Chromebook, either printed on a label or etched on the cover.

Telephone numbers

For a list of the Lenovo Support phone numbers for your country or region, go to <https://pcsupport.lenovo.com/supportphonenumberlist> for the latest phone numbers.

Note: Phone numbers are subject to change without notice. If the number for your country or region is not provided, contact your Lenovo reseller or Lenovo marketing representative.

Services available during the warranty period

- Problem determination - Trained personnel are available to assist you with determining if you have a hardware problem and deciding what action is necessary to fix the problem.
- Lenovo hardware repair - If the problem is determined to be caused by Lenovo hardware under warranty, trained service personnel are available to provide the applicable level of service.
- Engineering change management - Occasionally, there might be changes that are required after a product has been sold. Lenovo or your reseller, if authorized by Lenovo, will make selected Engineering Changes (ECs) that apply to your hardware available.

Services not covered

- Replacement or use of parts not manufactured for or by Lenovo or nonwarranted parts
- Identification of software problem sources
- Configuration of UEFI BIOS as part of an installation or upgrade
- Changes, modifications, or upgrades to device drivers
- Installation and maintenance of network operating systems (NOS)
- Installation and maintenance of programs

For the terms and conditions of the Lenovo Limited Warranty that apply to your Lenovo hardware product, go to:

- https://www.lenovo.com/warranty/llw_02
- <https://pcsupport.lenovo.com/warrantylookup>

Get help from Google

After signing in to your Chromebook, start Get Help from the app Launcher. The Get Help app provides comprehensive instructions on using your Chromebook.

In addition, if you are interested in visiting the Chromebook Help Center and Community, go to <http://support.google.com/chromebook>.

Appendix A. Safety instructions for teachers, parents and adult supervisors

This Chromebook is intended for use as a child development tool primarily by children, 6 years of age or above. There must be supervision by an adult. It is a must to have a thorough explanation to children on safe and proper handling of the Chromebook, battery pack, and ac power adapter.



DANGER

- For ITE with power supplies not intended to be handled by children: As with all electrical products, precautions should be observed handling and use to prevent electric shock. The ac power adapter should not be handled by children.
- The Chromebook should not be placed on the bare skin (lap) of the child for long periods. The Chromebook should be placed on a flat surface, like desktop, if your child intends to use it for more than a few minutes.
- The Chromebook (including the ac power adapter and the battery pack, as applicable) should not be left in the rain or subjected to exposure to water. If cleaning is necessary do not immerse it in water; wipe clean with damp cloth.
- The Chromebook (including the ac power adapter and the battery pack, as applicable) should not be dropped, crushed (stepped on) or otherwise abused.
- An adult should caution his or her child about the potential trip hazard as posed by the cable between a power source and the Chromebook.
- The power supply (adapter) should not be handled by the children.

Chocking Hazard — Small parts. Not suitable for children under age 3.

An adult should inspect the Chromebook (including the ac power adapter and the battery pack, as applicable) periodically for damage. Similarly, if a child notices damaged/broken parts, this should be reported to the teacher/parents/adult supervisors immediately. Damaged parts may be replaced through service provided by Lenovo.



DANGER

ELECTRICALLY OPERATED PRODUCT. Not recommended for children under 3 years of age (or other intended age range). As with all electrical products, precautions should be observed during handling and use of electrical products to reduce the risk of electric shock.

Appendix B. Open source information

Your Chromebook may include software made publicly available by Google and other third parties, including software licensed under the General Public License and/or the Lesser General Public License (the “open source software”).

You may obtain a copy of the corresponding source code for any such open source software licensed under the General Public License and/or the Lesser General Public License (or any other license requiring us to make a written offer to provide corresponding source code to you) from Lenovo for a period of three years without charge except for the cost of media, shipping, and handling, upon written request to Lenovo. This offer is valid to anyone in receipt of this device. You may send your request in writing to the address below accompanied by a check or money order for \$5 to:

*Lenovo Legal Department
Attn: Open Source Team / Source Code Requests
8001 Development Dr.
Morrisville, NC 27560*

As part of your request, please include a “UNAME” and a “CHROME VERSION” of this device available by typing: “Chrome://system” in a Chrome Browser’s address bar. Be sure to provide a return address.

The open source software is distributed in hope it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See for example the GNU General Public License and/or the Lesser General Public License for more information.

To view additional information regarding licenses, acknowledgments and required copyright notices for the open source software used in your device, type: “Chrome://credits” in the Chrome Browser’s address bar.

This device may include certain pre-installed application programs or pre-configured links for downloading application programs published by parties other than Lenovo. Such third-party application programs may include open source software made publicly available by the respective publishers of those application programs. You may obtain the corresponding source code for any such open source software directly from the publisher of the applicable application program, to the extent permitted under the relevant open source software license agreement. Additional information is provided by the publisher of each application program within the menu structure of its application program.

Appendix C. Notices and trademarks

Notices

Lenovo may not offer the products, services, or features discussed in this document in all countries. Consult your local Lenovo representative for information on the products and services currently available in your area. Any reference to a Lenovo product, program, or service is not intended to state or imply that only that Lenovo product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any Lenovo intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any other product, program, or service.

Lenovo may have patents or pending patent programs covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

*Lenovo (United States), Inc.
8001 Development Drive
Morrisville, NC 27560
U.S.A.
Attention: Lenovo Director of Licensing*

LENOVO PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

Changes are made periodically to the information herein; these changes will be incorporated in new editions of the publication. To provide better service, Lenovo reserves the right to improve and/or modify the products and software programs described in the manuals included with your Chromebook, and the content of the manual, at any time without additional notice.

The software interface and function and hardware configuration described in the manuals included with your Chromebook might not match exactly the actual configuration of the Chromebook that you purchase. For the configuration of the product, refer to the related contract (if any) or product packing list, or consult the distributor for the product sales. Lenovo may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

The products described in this document are not intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. The information contained in this document does not affect or change Lenovo product specifications or warranties. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of Lenovo or third parties. All information contained in this document was obtained in specific environments and is presented as an illustration. The result obtained in other operating environments may vary.

Lenovo may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Any references in this publication to non-Lenovo Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this Lenovo product, and use of those Web sites is at your own risk.

Any performance data contained herein was determined in a controlled environment. Therefore, the result obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

This document is copyrighted by Lenovo and is not covered by any open source license, including any Linux® agreement(s) which may accompany software included with this product. Lenovo may update this document at any time without notice.

For the latest information or any questions or comments, contact or visit the Lenovo Web site:

<https://pcsupport.lenovo.com>

Trademarks

Lenovo and Lenovo logo are trademarks of Lenovo. ENERGY STAR is a registered trademark of the U.S. Environmental Protection Agency. Google and Chromebook are trademarks or registered trademarks of Google LLC. DisplayPort is a trademark of the Video Electronics Standards Association. USB Type-C is a registered trademark of USB Implementers Forum. Wi-Fi is a registered trademark of Wi-Fi Alliance. All other trademarks are the property of their respective owners.

Lenovo

Regulatory Notice for LNV Chrome Duet EDU G2 and LNV CB Duet 11M889



Lenovo

First Edition (May 2024)

© Copyright Lenovo 2024.

Contents

Chapter 1. Notice for users in USA and Canada 1

Approved wireless devices	1
Preinstalled wireless LAN module	1
Simultaneous use of RF transmitters.	2
Canada — Innovation, Science and Economic Development (ISED)	2
Approved wireless devices.	2
Preinstalled wireless LAN module	2
Low power license-exempt radiocommunication devices	2
Exposure of humans to RF fields (RSS-102)	3
Canada — Innovation, Sciences et Développement économique (ISED)	3
Périphériques sans fil homologués	3
Module réseau local sans fil préinstallé	3
Appareils de radio-communication basse tension sans licence d'utilisation	3
Conformité des appareils de radiocommunication aux limites d'exposition humaine aux radiofréquences (CNR-102)	4
Location of the FCC ID and IC ID	4
Electronic emission notices	4
Federal Communications Commission (FCC) Declaration of Conformity	4
Usage environment and your health	5

Chapter 2. European Union (EU) / United Kingdom (UK) Compliance. 7

UK declaration of conformity.	7
EU declaration of conformity.	7
English	7
Bulgarian	7
Croatian	8
Czech	8
Danish	9
Dutch	9
Estonian	9

Finnish	10
French	10
German	10
Greek	11
Hungarian	11
Italian	11
Latvian	12
Lithuanian	12
Norwegian	12
Polish	13
Portuguese.	13
Romanian	14
Slovenian	14
Slovakian	14
Spanish	15
Swedish	15
Turkish	15

Chapter 3. 日本のユーザーへの通知 . . 17

日本国内で無線 LAN アダプターおよび Bluetooth アダプターをご使用になる場合の注意	17
無線 LAN 製品ご使用時におけるセキュリティに関するご注意.	17
使用環境および快適に使用するために	18
無線通信機能(モジュールを含む)を持つパーソナルコンピュータの比吸収率 (Body SAR) について	18

Chapter 4. Regulatory notices for other countries/regions 21

Notice for users in Mexico (Nota para uso en Mexico)	21
Notice for users in Taiwan region	21
根據NCC低功率電波輻射性電機管理辦法規定	21
Trademarks	xxiii

Chapter 1. Notice for users in USA and Canada

Note: The statements below regarding FCC are only valid for products that are shipped to the United States.

Read this document before using your computer. This computer complies with the radio frequency and safety standards of any country or region in which it has been approved for wireless use. Install and use your computer according to the following instructions.

The latest Regulatory Notice manual is available on the Lenovo Web site. To download the manual, go to <http://www.lenovo.com/support> and then follow the on-screen instructions.

Lisez ce document avant d'utiliser votre ordinateur. Cet ordinateur est conforme aux normes de fréquence radioélectrique et de sécurité du pays ou de la région où son utilisation sans fil est autorisée. Installez et utilisez votre ordinateur en vous conformant aux instructions ci-dessous.

La dernière version du manuel Regulatory Notice est disponible sur le site Web de Lenovo. Pour télécharger le document, rendez-vous sur <http://www.lenovo.com/support> et suivez les instructions à l'écran.

Approved wireless devices

This system contains the following wireless devices and underwent the certification process of FCC CFR 47 Part 2 section 1093, Part 15 Subpart C and Subpart E, Part 27, Part 22 Subpart H, Part 24 Subpart E, and Part 90 under each respective FCC ID below.

Type 1: Preinstalled wireless LAN with Bluetooth function

- FCC ID: O57DUET11M889 (Model: LNV Chrome Duet EDU G2, LNV CB Duet 11M889)

Notes:

- The wireless LAN and Bluetooth features operate at different frequencies exclusively and transmit radio frequencies simultaneously.
- Operation of transmitters in the 5.925-7.125 GHz band is prohibited for control of or communications with unmanned aircraft systems.

Preinstalled wireless LAN module

The wireless LAN module in your computer is preinstalled by Lenovo®, and you are prohibited to replace with other wireless adapter or remove it. If the device requires replacement due to some problem during warranty, it must be serviced by a Lenovo authorized servicer.

1. FCC RF exposure compliance

The radiated output power of the wireless LAN module authorized to use for your computer is far below the FCC radio frequency exposure limits. Nevertheless, it shall be used in such a manner that the potential for human contact during normal operation is minimized as follows:

CAUTION:

The total radiated energy from the antennas connected to the installed wireless LAN module, conforms to the FCC limit of the SAR (Specific Absorption Rate) requirement, regarding 47 CFR Part 2 section 1093, when the computer was tested in either conventional notebook or tablet computer orientations.

The transmission antennas for the wireless LAN module are located in the LCD cover. See the *User Guide* for the location of the antennas.

2. Radio Frequency interference requirements

Each device has been tested and found to comply with the limits for a Class B digital device pursuant to FCC Part 15 Subpart B. Refer to “Electronic emission notices” on page 4.

When you use a wireless LAN module in the 802.11 a/n/ac/ax/be transmission mode, note that high power radars are allocated as primary users of the 5250 to 5350 MHz and 5650 to 5850 MHz bands. These radar stations can cause interference with and/or damage this device.

Simultaneous use of RF transmitters

Your computer is approved for simultaneous use of one of the approved wireless LAN modules, the approved wireless WAN module, and the approved NFC module.

Make sure of the following conditions when you use any other external RF option device:

- When you use any other RF option device, you are requested to confirm that the device conforms to the RF Safety requirement and is approved to use for your computer.
- You must follow the RF Safety instructions of the RF option device that are included in the user manual of the RF option device.
- If the RF option device is prohibited to use in conjunction with another transmitters, you must turn off all other wireless features in your computer.

Canada — Innovation, Science and Economic Development (ISED)

Approved wireless devices

This system contains the following wireless devices and the IC certification number is as below. The IC certification number is indicated on the bottom cover of your system.

Type 1: Preinstalled wireless LAN with Bluetooth function

- IC: 10407A-DUET11M889 (Model: LNV Chrome Duet EDU G2, LNV CB Duet 11M889)

Preinstalled wireless LAN module

The IC Certification number for the wireless LAN module is shown on the enclosure of your computer. For the location of the IC Certification number, see the *User Guide*.

Attention: The wireless LAN module in your computer is preinstalled by Lenovo, and you are prohibited to replace with other wireless adapter nor remove it. If the device requires replacement due to some problem during warranty, it must be serviced by a Lenovo authorized servicer.

Low power license-exempt radiocommunication devices

Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.

When you use a wireless LAN module in the 802.11 a/n/ac/ax/be transmission mode, note the following:

- The devices for the band 5150–5350 MHz are only for indoor usage to reduce potential for harmful interference to co-channel Mobile Satellite systems

- High power radars are allocated as primary users (meaning they have priority) of 5250–5350 MHz and 5650–5850 MHz and these radars could cause interference and/or damage to LE-LAN (Licence-Exempt Local Area Network) devices.
- The maximum antenna gain permitted for devices in the 5250-5350 MHz, 5470-5725 MHz, and 5725-5825 MHz bands complies with the e.i.r.p. limit.
- Devices operating in the 5925-7125 MHz band shall not be used for control of or communications with unmanned aircraft systems.

Exposure of humans to RF fields (RSS-102)

The computer employs low gain integral antennas that do not emit RF field in excess of Health Canada limits for the general population; consult Safety Code 6, obtainable from Health Canada's Web site at: <http://www.hc-sc.gc.ca/>

The radiated energy from the antennas connected to the wireless modules conforms to the Canada Portable RF exposure limit regarding ISED RSS-102 Issue 5, Section 4 set forth for an uncontrolled environment, and are safe for intended operation in the conventional setting. Further RF exposure reduction can be achieved if the product can be kept as far as possible from the user body or set the device to lower output power if such function is available.

Refer to “Product overview” in *User Guide* for the antennas location.

Canada — Innovation, Sciences et Développement économique (ISED)

Périphériques sans fil homologués

Ce système contient les périphériques sans fil suivants et le numéro d'homologation IC indiqué ci-dessous.

Type 1: Réseau local sans fil avec fonction Bluetooth préinstallés

- IC: 10407A-DUET11M889 (Modèle: LNV Chrome Duet EDU G2, LNV CB Duet 11M889)

Module réseau local sans fil préinstallé

Le numéro de certification IC correspondant au module de réseau local sans fil figure sur le boîtier de votre ordinateur. Pour connaître l'emplacement du numéro de certification IC, reportez-vous à la *guide d'utilisation*.

Attention: Le module réseau local sans fil est préinstallé sur votre ordinateur par Lenovo et il est interdit au client de le remplacer par un autre adaptateur sans fil ou de le supprimer. Si le périphérique doit être remplacé à cause d'un problème survenu pendant la période de garantie, l'opération doit être effectuée par un technicien agréé Lenovo.

Appareils de radio-communication basse tension sans licence d'utilisation

Le fonctionnement de ce type d'appareil est soumis aux deux conditions suivantes:

1. Cet appareil ne peut pas causer de perturbations électromagnétiques.
2. Cet appareil doit accepter toutes les perturbations reçues, y compris celles susceptibles d'occasionner un fonctionnement indésirable.

Lorsque vous utilisez un module de réseau local sans fil dans le mode de transmission 802.11 a/n/ac/ax/be, tenez compte des remarques suivantes:

- Les appareils destinés à la bande 5150–5350 MHz devront être exclusivement utilisés en intérieur afin de réduire les risques de perturbations électromagnétiques gênantes sur les systèmes de satellite mobile dans un même canal. otential for harmful interference to co-channel Mobile Satellite systems
- Les radars à forte puissance sont désignés comme les utilisateurs principaux (c'est-à-dire qu'ils sont prioritaires) des bandes 5250-5350 MHz et 5650-5850 MHz. Ils peuvent provoquer des perturbations électromagnétiques sur les appareils de type LE-LAN (réseau de communication local sans licence) ou les endommager.
- Le gain d'antenne maximal autorisé pour les appareils dans les bandes de fréquence 5250-5350 MHz, 5470-5725 MHz et 5725-5825 MHz est conforme à la limite p.i.r.e (puissance isotrope rayonnée équivalente).
- Les appareils fonctionnant dans la bande de 5 925 à 7 125 MHz ne doivent pas être utilisés pour commander ou communiquer avec des drones.

Conformité des appareils de radiocommunication aux limites d'exposition humaine aux radiofréquences (CNR-102)

Les ordinateurs utilisent des antennes intégrales à faible gain qui n'émettent pas un champ électromagnétique supérieur aux normes imposées par Santé Canada pour la population. Consultez le Code de sécurité 6 sur le site Web de Santé Canada à l'adresse: <http://www.hc-sc.gc.ca/>

radiofréquences émises par les appareils portables au Canada telle que définie par Industrie Canada dans la section 4 du document CNR-102, version 5 pour un environnement non contrôlé et permet d'affecter sans danger le produit à l'usage auquel il est destiné. La réduction de l'exposition aux radiofréquences est possible si le produit peut être conservé aussi loin que possible du corps de l'utilisateur ou en définissant une puissance de sortie plus faible si une telle fonction est disponible.

Reportez-vous à la section « Découvrir votre ordinateur » du Guide d'utilisation pour connaître l'emplacement des antennes.

Location of the FCC ID and IC ID

If you purchased your computer in the United States or Canada, and the computer includes factory-preinstalled wireless modules, a piece of text containing identification strings for these modules (FCC ID and IC ID) is visible on the computer's bottom cover. The text may either be laser etched on the bottom cover or on a physical label affixed to it. To obtain the FCC ID or IC ID for the factory-preinstalled wireless module, check the bottom cover for strings directly after "FCC ID" or "IC ID".

Electronic emission notices

Federal Communications Commission (FCC) Declaration of Conformity

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult an authorized dealer or service representative for help.

Lenovo is not responsible for any radio or television interference caused by unauthorized changes or modifications to this equipment. Unauthorized changes or modifications could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

Responsible Party:

Lenovo (United States) Incorporated
8001 Development Drive
Morrisville, NC 27560
Email address: FCC@lenovo.com



Usage environment and your health

The wireless device installed in the computer operates within the guidelines identified by radio frequency (RF) safety standards and recommendations; therefore, Lenovo believes this product is safe for use by consumers. These standards and recommendations reflect the consensus of the worldwide scientific community, and result from deliberations of panels and committees of scientists, who continually review and interpret the extensive research literature.

In some situations or environments, the use of wireless devices might be restricted by the proprietor of a building or responsible representatives of an organization. For example, these situations and areas might include the following:

- On board of airplanes, in hospitals, or near petrol stations, blasting areas (with electro-explosive devices), medical implants, or body-worn electronic medical devices, such as pace makers.
- In any other environment where the risk of interference to other devices or services is perceived or identified as harmful.

If you are uncertain of the policy that applies to the use of wireless devices in a specific area (such as an airport or hospital), you are encouraged to ask for authorization to use a wireless device prior to turning on the computer.

Chapter 2. European Union (EU) / United Kingdom (UK) Compliance

UK declaration of conformity



Hereby, Lenovo declares that the wireless equipment listed in this document is in compliance with the UK Radio Equipment Regulations SI 2017 No. 1206.

The full text of the system UK declaration of conformity is available at: <https://www.lenovo.com/us/en/compliance/uk-doc>

UK RF exposure information

This device meets the UK requirements and the International Commission on Non-Ionizing Radiation Protection (ICNIRP) guidelines for general public's exposure to electromagnetic fields. To limit RF exposure, and comply with the RF exposure requirements, use this device under good radio signal conditions and keep the antennas at a minimum separation distance of 20 cm from the user's body.

For devices that have a SAR test value (as listed in "" on page), where the location of the antennas is close to the user's body (< 20 cm), you can find the SAR values in the *Setup Guide* that came with your device.

EU declaration of conformity



English

Hereby, Lenovo declares that the wireless equipment listed in this document is in compliance with the EU Radio Equipment Directive 2014/53/EU.

The full text of the system EU Declaration of Conformity is available at: <https://www.lenovo.com/us/en/compliance/eu-doc>

EU RF exposure information

This device meets the EU requirements and the International Commission on Non-Ionizing Radiation Protection (ICNIRP) guidelines for general public's exposure to electromagnetic fields. To limit RF exposure, and comply with the RF exposure requirements, use this device under good radio signal conditions and keep the antennas at a minimum separation distance of 20 cm from the user's body.

For devices that have a SAR test value (as listed in "" on page), where the location of the antennas is close to the user's body (< 20 cm), you can find the SAR values in the *Setup Guide* that came with your device.

Bulgarian

С настоящото Lenovo Pte. Ltd. декларира, че безжичното оборудване, споменато в този раздел, съответства на Директивата на ЕС за радиооборудване 2014/53/EC.

Пълният текст на декларацията за съответствие на ЕС относно системата е наличен на <https://www.lenovo.com/us/en/compliance/eu-doc>.

Информация на ЕС за РЧ излагането

Това устройство отговаря на изискванията на ЕС и на указанията на Международната комисия за защита срещу нейонизиращите лъчения (МКЗНЛ) относно излагането на населението на електромагнитни полета.

За да се ограничи РЧ излагането и да се осигури съответствие с изискванията за РЧ излагане, използвайте това устройство при добри условия на радиосигнала и дръжте антените на разстояние най-малко 20 см от тялото на потребителя.

За устройства, за които е посочена стойност при измерване на SAR (както е вписано в "" on page), където разположението на антените е близо до тялото на потребителя (< 20 cm), можете да откриете стойностите на SAR в *Ръководството за настройка*, което се предоставя с устройството.

Croatian

Tvrtka Lenovo ovime izjavljuje da je bežična oprema navedena u ovom dokumentu u skladnosti s EU Direktivom o radijskoj opremi 2014/53/EU.

Potpuni tekst EU izjave o skladnosti sustava dostupan je na <https://www.lenovo.com/us/en/compliance/eu-doc>.

EU informacije o izloženosti RF-u

Ovaj uređaj ispunjava zahtjeve EU-a i smjernice Međunarodne komisije za zaštitu od neionizirajućeg zračenja (ICNIRP) vezano za izloženost stanovništva elektromagnetskim poljima.

Zbog ograničavanja izloženosti RF-u i udovoljavanja zahtjevima izloženosti RF-u upotrebljavajte ovaj uređaj u uvjetima dobrog radijsignala te neka antene budu na minimalnoj udaljenosti od 20 cm od tijela korisnika.

Za uređaje koji imaju vrijednost ispitivanja SAR-a (kako je navedeno u "" on page), gdje je lokacija antena blizu tijela korisnika (< 20 cm), vrijednosti SAR-a možete pronaći u *Vodiču za postavljanje* koji ste dobili s uređajem.

Czech

Společnost Lenovo tímto prohlašuje, že bezdrátová zařízení uvedená v tomto dokumentu splňují základní i další relevantní požadavky směrnice EU o rádiových zařízeních 2014/53/EU.

Úplný text EU prohlášení o shodě systému je k dispozici na adrese <https://www.lenovo.com/us/en/compliance/eu-doc>.

Informace o expozici RF pro zákazníky z EU

Toto zařízení splňuje požadavky EU stanovené pro expozici veřejnosti elektromagnetickým polím a související pokyny Mezinárodní komise pro ochranu před neionizačním zářením (ICNIRP).

V zájmu omezení expozice RF polím a dodržení požadavků na expozici RF polím toto zařízení používejte při dobrém rádiovém signálu a udržujte antény vzdálené alespoň 20 cm od těla uživatele.

Pokud má zařízení stanovenou zkušební hodnotu SAR (jejich seznam je uveden v části "" on page), naleznete hodnoty SAR pro umístění antén do blízkosti těla uživatele (<20 cm) v *Návodu k nastavení*, který je dodáván společně se zařízením.

Danish

Lenovo erklærer hermed, at det trådløse udstyr, der er angivet i dette dokument, overholder EU-direktivet om radioudstyr 2014/53/EU.

Hele teksten til EU's overensstemmelseserklæring for systemet er tilgængelig på <https://www.lenovo.com/us/en/compliance/eu-doc>.

EU-oplysninger om eksponering for radiofrekvensstråling

Denne enhed overholder EU-kravene og retningslinjerne fra ICNIRP (International Commission on Non-ionizing Radiation Protection) for offentlig eksponering for elektromagnetiske stråler.

For at begrænse eksponeringen for radiofrekvensstråling skal denne enhed bruges under gode radiosignalforhold, og antennerne skal holdes i en afstand på mindst 20 cm fra brugerens krop.

For enheder, der har en SAR-testværdi (som angivet i "" on page), hvor placeringen af antennerne er tæt på brugerens krop (< 20 cm), kan du finde SAR-værdierne i den *Opsætningsvejledning*, der fulgte med enheden.

Dutch

Hierbij verklaart Lenovo dat de draadloze apparatuur die in dit document wordt vermeld, voldoet aan EU-richtlijn 2014/53/EU inzake radioapparatuur.

De volledige tekst van de EU-conformiteitsverklaring voor het systeem is beschikbaar op <https://www.lenovo.com/us/en/compliance/eu-doc>.

EU-informatie over RF-blootstelling

Dit apparaat voldoet aan de EU-vereisten en de richtlijnen van de ICNIRP (International Commission on Non-ionizing Radiation Protection) voor blootstelling van het algemene publiek aan elektromagnetische velden.

Om RF-blootstelling te beperken en te voldoen aan de vereisten voor RF-blootstelling, dient u dit apparaat te gebruiken in situaties met een goede signaalontvangst en de antenne op ten minste 20 cm van het lichaam van de gebruiker te houden.

Voor apparaten met een SAR-testwaarde (zoals vermeld in "" on page), waarbij de antenne zich dicht bij het lichaam van de gebruiker (< 20 cm) bevindt, vindt u de SAR-waarden in de *installatiegids* die bij uw apparaat werd geleverd.

Estonian

Siinkohal kinnitab ettevõtte Lenovo et käesolevas dokumendis kirjeldatud juhtmeta seadmed on kooskõlas ELi raadioseadmete direktiiviga 2014/53/EL.

Süsteemi ELi vastavusdeklaratsiooni täielik tekst on saadaval siin: <https://www.lenovo.com/us/en/compliance/eu-doc>.

ELi raadiosagedusega kokkupuudet käsitlev teave

See seade vastab EL nõuetele ja rahvusvahelise mitteioniseeriva kiirguse eest kaitsmise komisjoni (ICNIRP) juhiste elanikkonna elektromagnetväljadega kokkupuute kohta.

Raadiosageduse kiirguse piiramiseks ja nõuete täitmiseks sellega kokkupuutel kasutage seda seadet kohtades, kus on hea raadiosignaal ning hoidke antenne vähemalt 20 cm kasutaja kehast kaugemal.

Seadmetel, millel on SAR-testi väärtus sellest (loetletud "" on page), kui antennid asuvad kasutaja keha lähedal (<20 cm). SAR-i väärtused leiate seadmega kaasasolevast *Seadistusjuhendist*.

Finnish

Lenovo ilmoittaa täten, että tässä asiakirjassa mainittu langaton laite on EU:n radiolaitedirektiivin 2014/53/EU mukainen.

Järjestelmän EU-vaatimustenmukaisuusvakuutuksen koko teksti on saatavilla osoitteessa <https://www.lenovo.com/us/en/compliance/eu-doc>.

Radiotaajuuksille altistumista koskevat tiedot (EU)

Tämä laite täyttää EU:n vaatimukset sekä kansainvälinen ionisoimattoman säteilyn toimikunnan (ICNIRP) ohjeistukset koskien ihmisten altistumista sähkömagneettisille kentille.

Käytä tätä laitetta olosuhteissa, joissa on hyvä radiosignaali, ja pidä antennit vähintään 20 cm etäisyydellä käyttäjän kehosta rajoittaaksesi radiotaajuuksille altistumista ja noudattaaksesi radiotaajuuksille altistumista koskevia vaatimuksia.

Jos laitteella on SAR-testiarvo (katso luettelo kohdasta "" on page) ja antennien sijainti on lähellä käyttäjän kehoa (<20 cm), löydät SAR-arvot laitteesi mukana toimitetusta *asennusoppaasta*.

French

Par la présente, Lenovo déclare que les équipements sans fil listés dans ce document sont conformes à la directive 2014/53/UE sur les équipements radio de l'UE.

Le texte complet de la déclaration européenne de conformité du système est disponible à l'adresse <https://www.lenovo.com/us/en/compliance/eu-doc>.

Informations sur l'exposition aux radiofréquences au sein de l'UE

Ce périphérique répond aux exigences de l'Union européenne et aux directives de la Commission internationale sur la protection anti-ionisation par rayonnement (ICNIRP) concernant l'exposition du public aux champs électromagnétiques.

Pour limiter l'exposition aux radiofréquences et répondre aux exigences en matière d'exposition aux radiofréquences, utilisez ce périphérique dans de bonnes conditions de signal radio et respectez une distance minimale de 20 cm entre les antennes et le corps de l'utilisateur.

Les valeurs DAS (telles que répertoriées dans "" on page) des périphériques dont les antennes sont proches du corps de l'utilisateur (< 20 cm) sont répertoriées dans le *guide de configuration* fourni avec votre périphérique.

German

Hiermit erklärt Lenovo dass das in diesem Dokument aufgelistete Funkgerät die EU-Funkanlagen-Richtlinie 2014/53/EU erfüllt.

Der vollständige Wortlaut der EU-Konformitätserklärung für das System ist unter <https://www.lenovo.com/us/en/compliance/eu-doc> verfügbar.

EU-Informationen zur Belastung durch Funkwellen

Dieses Gerät erfüllt die EU-Anforderungen und die ICNIRP-Richtlinien (International Commission on Non-ionizing Radiation Protection) zur Belastung der Allgemeinheit durch elektromagnetische Felder.

Um die Belastung durch Funkwellen einzuschränken und die Anforderungen zur Belastung durch Funkwellen zu erfüllen, verwenden Sie das Gerät unter guten Funksignalbedingungen und halten Sie die Antennen mindestens 20 cm vom Körper des Benutzers fern.

Für Geräte mit einem SAR-Testwert (aufgelistet in “” on page), bei denen die Position der Antennen nahe am Körper des Benutzers (< 20 cm) liegt, finden Sie die SAR-Werte in der *Einrichtungsanleitung* Ihres Geräts.

Greek

Με το παρόν, η Lenovo δηλώνει ότι ο ασύρματος εξοπλισμός που αναγράφεται στο παρόν έγγραφο συμμορφώνεται με την Οδηγία περί Ραδιοεξοπλισμού 2014/53/ΕΕ της ΕΕ.

Το πλήρες κείμενο της Δήλωσης Συμμόρφωσης ΕΕ για το σύστημα είναι διαθέσιμο στη διεύθυνση <https://www.lenovo.com/us/en/compliance/eu-doc>.

Πληροφορίες περί Έκθεσης σε ραδιοσυχνότητες (RF) για την ΕΕ

Αυτή η συσκευή πληροί τις απαιτήσεις της ΕΕ και τις κατευθυντήριες γραμμές της Διεθνούς Επιτροπής για την προστασία από μη ιοντίζουσες ακτινοβολίες (ICNIRP) για την έκθεση του κοινού σε ηλεκτρομαγνητικά πεδία.

Για να περιορίσετε την έκθεση σε ραδιοσυχνότητες (RF) και να συμμορφώσετε με τις απαιτήσεις για την έκθεση σε ραδιοσυχνότητες, χρησιμοποιήστε αυτήν τη συσκευή σε συνθήκες καλού σήματος ραδιοεπικοινωνίας και φροντίστε ώστε οι κεραίες να είναι σε ελάχιστη απόσταση 20 cm από το σώμα σας.

Για συσκευές που έχουν τιμή δοκιμής SAR (όπως αναγράφεται στη “” on page), όπου η θέση των κεραιών είναι κοντά στο σώμα του χρήστη (< 20 cm), μπορείτε να ανατρέξετε στις τιμές SAR στον *Οδηγό χρήσης* που συνοδεύει τη συσκευή σας.

Hungarian

A Lenovo kijelenti, hogy a jelen dokumentumban említett vezeték nélküli készülék megfelel a 2014/53/EU számú, EU Rádióberendezésekről szóló direktívában foglaltaknak.

A rendszer EU-s megfelelőségi nyilatkozatának teljes szövege a következő weboldalon olvasható: <https://www.lenovo.com/us/en/compliance/eu-doc>.

EU rádiófrekvenciás kitettséggel kapcsolatos információk

Ez az eszköz megfelel az Európai Unió követelményeknek, és a Nemzetközi Nem Ionizáló Sugárzás Elleni Védelmi Bizottság lakosság elektromágneses mezőknek való kitettségére vonatkozó irányelveinek.

A rádiófrekvenciás kitettség korlátozásának, és a rádiófrekvenciának való kitettség követelményeinek való megfelelés érdekében megfelelő erősségű rádiójelek mellett használja az eszközt, és az antennákat tartsa a felhasználó testétől legalább 20 cm távolságra.

Azon fajlagos energiaeinyelési tesztértékkel rendelkező (a “” on page listában felsorolt) eszközök fajlagos energiaeinyelési értékeiket, amelyeknél az antennák a felhasználó testéhez közel vannak (< 20 cm), az eszközhöz kapott *Felhasználói kézikönyvben* találja.

Italian

Con la presente documentazione, Lenovo dichiara che l'apparecchiatura wireless indicata in questo documento è conforme alla direttiva EU 2014/53/EU sulle apparecchiature radio.

Il testo integrale della dichiarazione di conformità dei sistemi dell'UE è disponibile all'indirizzo <https://www.lenovo.com/us/en/compliance/eu-doc>.

Informazioni sull'esposizione alle frequenze radio per l'UE

Questo dispositivo soddisfa i requisiti dell'UE e le linee guida della Commissione internazionale sulla protezione dalle radiazioni non ionizzanti (ICNIRP) per l'esposizione generale dei consumatori ai campi elettromagnetici.

Per limitare l'esposizione alle frequenze radio e soddisfare i requisiti di esposizione alle frequenze radio, utilizzare questo dispositivo in buone condizioni di segnale radio e mantenere le antenne a una distanza minima di 20 cm dal corpo dell'utente.

Per dispositivi che hanno un valore di test SAR (come elencato in “” on page), in cui la posizione delle antenne è vicina al corpo dell'utente (< 20 cm), è possibile trovare i valori SAR nella *Guida all'installazione* fornita con il dispositivo.

Latvian

Ar šo uzņēmums Lenovo paziņo, ka šajā dokumentā norādītais bezvadu aprīkojums atbilst ES Direktīvai 2014/53/EK par radioiekārtām.

Pilns ES atbilstības deklarācijas teksts ir pieejams šajā interneta adresē: <https://www.lenovo.com/us/en/compliance/eu-doc>.

ES informācija par pakļaušanu RF iedarbībai

Šī ierīce atbilst ES prasībām un Starptautiskās nejonizējošā starojuma aizsardzības komisijas (SNSAK) vadlīnijām par vispārējo sabiedrības pakļaušanu elektromagnētisko lauku iedarbībai.

Lai ierobežotu pakļaušanu RF iedarbībai un ievērotu pakļaušanas RF iedarbībai prasībām, izmantojiet ierīci laba radio signāla apstākļos un uzturiet antenas vismaz 20 cm atstatumā no lietotāja ķermeņa.

Ierīcēm, kurām ir SAR testa vērtība (kā norādīts šeit: “” on page), kad antenu atrašanās vieta ir tuvu lietotāja ķermenim (<20 cm), varat atrast SAR vērtības *iestatīšanas rokasgrāmatā*, kas piegādāta kopā ar ierīci.

Lithuanian

Lenovo pareiškia, kad šiame dokumente nurodyta belaidė įranga atitinka ES radijo įrangos direktyvos 2014/53/ES reikalavimus.

Visą sistemą ES atitiktis deklaracijos tekstą galite rasti adresu <https://www.lenovo.com/us/en/compliance/eu-doc>.

Informacija apie ES reikalavimus dėl RD poveikio

Šis įrenginys atitinka ES reikalavimus ir Tarptautinės apsaugos nuo nejonizuojančiosios spinduliuotės komisijos (toliau – TANSK) elektromagnetinių laukų poveikio plačiajai visuomenei gaires.

Kad būtų apribotas RD poveikis ir laikomasi reikalavimų dėl RD poveikio, šį įrenginį reikia naudoti esant geroms radijo signalų sąlygoms, o tarp antenų ir naudotojo kūno turi būti ne mažesnis nei 20 cm atstumas.

Įrenginio, kuriam nustatyta SSS bandymo vertė (kaip nurodyta “” on page) ir kurio antenos yra arti (<20 cm) naudotojo kūno, SSS vertes rasite prie įrenginio pridėdamame *sąrankos vadove*.

Norwegian

Lenovo erklærer herved at det trådløse utstyret som er oppført i dette kapittelet, er i samsvar med direktiv 2014/53/EU om radioutstyr.

Hele teksten til EUs samsvarserklæring finner du her <https://www.lenovo.com/us/en/compliance/eu-doc>.

EU RF-eksponeringsinformasjon

Denne enheten oppfyller EUs krav og ICNIRPs (International Commission on Non-Ionizing Radiation Protection) retningslinjer for allmennhetens eksponering for elektromagnetiske felt.

For å begrense RF-eksponering og oppfylle RF-eksponeringskravene, bør denne enheten brukes under gode radiosignalforhold og antennene bør ha en minimumsavstand på 20 cm til brukerens kropp.

For enheter som har en SAR-testverdi (som oppført i “” on page), der antennes plassering er nær brukerens kropp (<20 cm), kan du finne SAR-verdiene i *Installasjonsveiledningen* som fulgte med enheten.

Polish

Firma Lenovo niniejszym oświadcza, że urządzenia bezprzewodowe wymienione w tym dokumencie spełniają wymagania dyrektywy UE w sprawie sprzętu radiowego 2014/53/EU.

Pełna treść deklaracji zgodności systemu z wymaganiami UE jest dostępna pod adresem <https://www.lenovo.com/us/en/compliance/eu-doc>.

Informacje o narażeniu na działanie częstotliwości radiowych UE

Urządzenie to spełnia wymagania UE oraz wytyczne Międzynarodowej Komisji Ochrony przed Promieniowaniem Niejonizującym (ICNIRP) dotyczące narażenia ogółu ludności na oddziaływanie pól elektromagnetycznych.

Aby ograniczyć narażenie na działanie częstotliwości radiowych i spełniać wymagania dotyczące narażenia na działanie częstotliwości radiowych, należy używać tego urządzenia w warunkach dobrego sygnału radiowego i umieścić anteny w odległości co najmniej 20 cm od ciała użytkownika.

W przypadku urządzeń, które mają wartość testu SAR (zgodnie z listą “” on page), gdzie umiejscowienie anten znajduje się blisko ciała użytkownika (mniej niż 20 cm), wartości SAR można znaleźć w *Podręczniku konfiguracji* dołączonym do urządzenia.

Portuguese

A Lenovo declara por este meio que o equipamento sem fios listado neste documento está em conformidade com a Diretiva de Equipamento de Rádio da UE 2014/53/UE.

O texto integral da Declaração de Conformidade do sistema para a UE está disponível em <https://www.lenovo.com/us/en/compliance/eu-doc>.

Informação sobre exposição a RF para a UE

Este dispositivo cumpre os requisitos da UE e as diretrizes da Comissão Internacional de Proteção contra Radiação Não Ionizante (ICNIRP) referentes à exposição do público em geral a campos eletromagnéticos.

Para limitar a exposição a RF e cumprir os requisitos de exposição a RF, utilize este dispositivo num ambiente com boas condições de sinal de rádio e mantenha as antenas a 20 cm ou mais de distância em relação ao seu corpo.

No caso dos dispositivos para os quais exista um valor de SAR obtido em testes (conforme indicado em “” on page) com as antenas próximas do corpo do utilizador (< 20 cm), os valores de SAR podem ser encontrados no *Guia de Configuração* fornecido com o seu dispositivo.

Romanian

Prin prezenta, Lenovo declară că echipamentul fără fir prezentat în acest document este în conformitate cu Directiva UE privind echipamentele radio 2014/53/UE.

Textul complet al Declarației de conformitate UE pentru sistem este disponibil la <https://www.lenovo.com/us/en/compliance/eu-doc>.

Informații UE privind expunerea la RF

Acest dispozitiv îndeplinește cerințele UE și regulile Comisiei internaționale pentru protecția împotriva radiațiilor neionizante (ICNIRP) pentru expunerea publicului larg la câmpuri electromagnetice.

Pentru a limita expunerea la RF și pentru a respecta cerințele de expunere la RF, utilizați acest dispozitiv în condiții de semnal radio bun și păstrați antenele la o distanță minimă de 20 cm de corpul utilizatorului.

Pentru dispozitive cu o valoare de test SAR (după cum se listează în "" on page), în situațiile în care antenele sunt amplasate aproape de corpul utilizatorului (< 20 cm), puteți găsi valorile SAR în *Ghidul de configurare* furnizat cu dispozitivul dvs.

Slovenian

Lenovo s tem izjavlja, da je brezžična oprema, navedena v tem dokumentu, skladna z direktivo EU o radijski opremi 2014/53/EU.

Celotno besedilo izjave EU o skladnosti za sistem je na voljo na naslovu <https://www.lenovo.com/us/en/compliance/eu-doc>.

Informacije o izpostavljenosti radiofrekvenčnemu sevanju v EU

Ta naprava izpolnjuje zahteve EU in smernice Mednarodne komisije za zaščito pred neionizirajočim sevanjem (ICNIRP) v zvezi z izpostavljenostjo splošne javnosti elektromagnetnim poljem.

Za omejitev izpostavljenosti radiofrekvenčnim valovom in zagotavljanje skladnosti z zahtevami glede izpostavljenosti radiofrekvenčnim valovom to napravo uporabljajte pri dobrih pogojih radijskega signala in antene hranite na razdalji najmanj 20 cm od uporabnikovega telesa.

Za naprave, ki imajo vrednost preizkusa SAR (kot je navedeno tukaj: "" on page), kjer je lokacija anten blizu uporabnikovega telesa (< 20 cm), so vrednosti SAR na voljo v dokumentu *Navodila za nastavitve*, ki je bil priložen napravi.

Slovakian

Spoločnosť Lenovo týmto vyhlasuje, že bezdrôtové zariadenie uvedené v tomto dokumente je v súlade so smernicou Európskej únie o rádiových zariadeniach 2014/53 EÚ.

Úplné znenie vyhlásenia EÚ o zhode pre systém je k dispozícii na adrese: <https://www.lenovo.com/us/en/compliance/eu-doc>.

Informácie o vystavení vysokofrekvenčnému žiareniu v EÚ

Toto zariadenie vyhovuje požiadavkám EÚ a smerniciam Medzinárodnej komisie pre ochranu pred neionizujúcim žiarením (ICNIRP), ktoré upravujú vystavenie širokej verejnosti elektromagnetickým poliam.

Ak chcete obmedziť vystavenie vysokofrekvenčnému žiareniu a dodržiavať požiadavky na vystavenie vysokofrekvenčnému žiareniu, používajte toto zariadenie v dobrých podmienkach rádiového signálu a udržiavajte antény vo vzdialenosti minimálne 20 cm od tela používateľa.

V prípade zariadení s testovacou hodnotou SAR (uvedená v časti “” on page), pri ktorých je umiestnenie antén v blízkosti tela používateľa (< 20 cm), nájdete hodnoty SAR v *Príručke o nastavení* dodanej so zariadením.

Spanish

Mediante el presente documento, Lenovo declara que el equipo inalámbrico indicado en este documento cumple con la Directiva de Equipos de Radio 2014/53/UE de la UE.

El texto completo de la declaración de conformidad de la UE correspondiente al sistema está disponible en <https://www.lenovo.com/us/en/compliance/eu-doc>.

Información de exposición a radiofrecuencia de la UE

Este dispositivo cumple los requisitos de la UE y con las directrices de la Comisión Internacional de Protección contra la Radiación No Ionizante (ICNIRP) para exposición del público general a campos electromagnéticos.

Para limitar la exposición a radiofrecuencia y cumplir con los requisitos de exposición a radiofrecuencia, utilice este dispositivo en buenas condiciones de señal de radio y mantenga las antenas a una distancia mínima de separación de 20 cm del cuerpo del usuario.

Para dispositivos que tienen un valor de prueba de SAR (como se indica en “” on page), donde la ubicación de las antenas está cerca del cuerpo del usuario (< 20 cm), puede encontrar los valores de SAR en la *Guía de configuración* que viene con su dispositivo.

Swedish

Härmed intygar Lenovo att den trådlösa utrustning som beskrivs i detta dokument överensstämmer med EU:s direktiv för radioutrustning 2014/53/EU.

Den fullständiga texten i EU:s deklaration om överensstämmelse finns tillgänglig på <https://www.lenovo.com/us/en/compliance/eu-doc>.

EU:s information om exponering för radiovågor

Denna enhet uppfyller EU:s krav och ICNIRP:s (International Commission on Non-Ionizing Radiation Protection) riktlinjer gällande allmänhetens exponering för elektromagnetiska fält.

För att begränsa exponering för radiovågor och uppfylla kraven för exponering bör enheten användas i goda radiosignalförhållanden och med minst 20 cm avstånd mellan antennerna och användarens kropp.

För enheter som har ett SAR-testvärde (enligt förteckningen i “” on page), där antennerna är placerade nära (<20 cm) användarens kropp, hittar du SAR-värdena i den *Installationshandbok* som medföljde enheten.

Turkish

Lenovo bu belgede listelenen kablosuz cihazların AB Radyo Ekipmanları Yönetmeliği 2014/53/EU ile uyumlu olduğunu beyan eder.

Sistemin AB Uyumluluk Bildirimi tam metni <https://www.lenovo.com/us/en/compliance/eu-doc> adresinde bulunmaktadır.

AB radyo frekanslara maruz kalma bilgileri

Bu cihaz, kamunun elektromanyetik alanlara maruz kalmasına yönelik AB gerekliliklerini ve Uluslararası İyonize Olmayan Radyasyondan Korunma Komisyonu (ICNIRP) yönergelerini karşılamaktadır.

Radyo frekansına maruz kalmayı sınırlandırmak ve radyo frekansına maruz kalma gerekliliklerine uymak için bu cihazı güçlü radyo sinyali koşullarında kullanın ve antenleri kullanıcının vücudundan en az 20 cm uzaklıkta tutun.

SAR test değerine sahip cihazlar (“” on page bölümünde listelenen cihazlar) için antenlerin konumu kullanıcının vücuduna yakındır (20 cm'den az). SAR değerlerini cihazınızla birlikte gelen *Kurulum Kılavuzu*'nda bulabilirsiniz.

Chapter 3. 日本のユーザーへの通知

内蔵無線アダプターを日本国内でご使用になる際の注意

日本国内で無線 LAN アダプターおよび Bluetooth アダプターをご使用になる場合の注意

本製品が装備する無線アダプターは、電波法および電気通信事業法により技術基準認証を下記のとおり取得しています。本製品に組み込まれた無線設備を他の機器で使用する場合は、当該機器が上記と同じく認証を受けていることをご確認ください。認証されていない機器での使用は、電波法の規定により認められていません。

(5GHz/6GHzの場合)

5GHz帯(W52/53)及び6GHz帯(LPI)は屋内使用限定（登録局との通信を除く）。

(2.4GHz の場合)

この機器の使用周波数帯では、電子レンジ等の産業・科学・医療用機器のほか工場の製造ライン等で使用されている移動体識別用の構内無線局（免許を要する無線局）および特定小電力無線局（免許を要しない無線局）並びにアマチュア無線局（免許を要する無線局）が運用されています。

1. この機器を使用する前に、近くで移動体識別用の構内無線局及び特定小電力無線局並びにアマチュア無線局が運用されていないことを確認してください。
2. 万一、この機器から移動体識別用の構内無線局に対して電波干渉の事例が発生した場合には、速やかに使用周波数を変更するかまたは電波の発射を停止した上で、下記連絡先にご連絡頂き、混信回避のための処置等についてご相談ください。
3. その他、この機器からの移動体識別用の特定小電力無線局あるいはアマチュア無線局に対して有害な電波干渉の事例が発生した場合など何かお困りのことが起きたときには、次の連絡先にお問い合わせください。

連絡先: スマートセンター (スマートセンターのご利用方法は、次のホームページでご確認頂けます。 <http://www.lenovo.com/jp/lsmartctr>)



Bluetooth アダプターの場合 この機器が、2.4 GHz 周波数帯 (2400 から 2483.5 MHz) を使用する周波数ホッピング (FH) 方式の無線装置で、干渉距離が約 80 m であることを意味します。

無線 LAN 製品ご使用時におけるセキュリティに関するご注意

無線 LAN では、LAN ケーブルを使用する代わりに、電波を利用してパソコン等と無線アクセスポイント間で情報のやり取りを行うため、電波の届く範囲であれば自由に LAN 接続が可能であるという利点があります。その反面、電波はある範囲内であれば障害物（壁等）を越えてすべての場所に届くため、セキュリティに関する設定を行っていない場合、以下のような問題が発生する可能性があります。

- 通信内容を盗み見られる 悪意ある第三者が、電波を故意に傍受し、
 - ID やパスワード又はクレジットカード番号等の個人情報
 - メールの内容等の通信内容を盗み見られる可能性があります。
- 不正に侵入される 悪意ある第三者が、無断で個人や会社内のネットワークへアクセスし、
 - 個人情報や機密情報を取り出す (情報漏洩)

- 特定の人物になりすまして通信し、不正な情報を流す (なりすまし)
- 傍受した通信内容を書き換えて発信する (改ざん)
- コンピュータウイルスなどを流しデータやシステムを破壊する (破壊)などの行為をされてしまう可能性があります。

本来、無線 LAN カードや無線アクセスポイントは、これらの問題に対応するためのセキュリティの仕組みを持っていますので、無線 LAN 製品のセキュリティに関する設定を行って製品を使用することで、その問題が発生する可能性は少なくなります。

セキュリティの設定を行わないで使用した場合の問題を充分理解した上で、お客様自身の判断と責任においてセキュリティに関する設定を行い、製品を使用することをお奨めします。

使用環境および快適に使用するために

無線LAN/BluetoothアダプターおよびWiGigアダプターは、ほかの無線装置のように無線周波数電磁波を発生します。しかしながら、これらの無線装置が発する電磁波が人体へ与える影響は、頭部等へ直接接触して使用される携帯電話などの機器とは異なり、とても弱いレベルのものです。

無線LAN/BluetoothアダプターおよびWiGigアダプターは、無線周波数に関する安全基準や勧告などのガイドラインに従って動作するもので、Lenovo®は、消費者が内蔵ワイヤレス・カードを使用しても安全であると考えます。これらの標準および勧告は、科学者団体の合意や広範な研究文献を頻繁に検討、調査している科学者のパネルや委員会の審議の結果を反映しています。

状況や環境によって、建物の所有者や組織の代表責任者が無線LAN/BluetoothアダプターおよびWiGigアダプターの使用を制限することがあります。たとえば、次のような場合や場所です。

- 飛行機の搭乗中、病院内、あるいはガソリンスタンド、(電気式発火装置のある)爆発の危険のある場所、医療用インプラント、またはペースメーカーなどの装着式医療用電子機器の近くで、内蔵ワイヤレス・カードを使用すること。
- 他の装置や機能に対して有害と認識または確認されている妨害を起こす危険性がある場合。

特定の場所で(たとえば空港や病院など)ワイヤレス・デバイスの使用が許可されているかどうか分からない場合は、Lenovoの電源を入れる前に無線LAN/BluetoothアダプターおよびWiGigアダプターを使用してもよいかどうかをお尋ねください

無線通信機能(モジュールを含む)を持つパーソナルコンピュータの比吸収率 (Body SAR) について

以下の機種は、Body SARの対象となる無線通信機(モジュールを含む)*1を搭載しており、国が定めた電波の人体吸収に関する技術基準および電波防護の国際ガイドラインに適合しています。対象モジュールを搭載しているパーソナルコンピュータは、国が定めた電波の人体吸収に関する技術基準*2ならびに、これと同等な国際ガイドラインが推奨する電波防護の許容値を遵守するように設計されています。この国際ガイドラインは世界保健機関(WHO)が支持するガイドラインと同等のものとなっており、その許容値は使用者の年齢や健康状況に関係なく十分な安全率(約50倍の安全率)となっています。国の法律および国際ガイドラインは電波防護の許容値を人体に吸収される電波の平均エネルギー量を表す比吸収率(SAR: Specific Absorption Rate)で定めており、対象モジュールを搭載しているパーソナルコンピュータに対する局所SARの許容値は2.0W/kg(手首から先を除く手足は4W/kg)です。

Body SARについて、さらに詳しい情報をお知りになりたい方は、下記のホームページをご参照ください。

総務省 電波利用ホームページ

<https://www.tele.soumu.go.jp/>
<https://www.tele.soumu.go.jp/j/sys/ele/pr/>

Notes:

1. 2014 年 4 月 1 日現在、対象となる無線通信機（モジュールを含む）は、携帯電話、衛星携帯電話および WiMAX。
2. 技術基準については、電波法関連省令（無線設備規則第 14 条の 2）で規定されています。

Chapter 4. Regulatory notices for other countries/regions

This chapter provides wireless information about the following countries/regions.

Notice for users in Mexico (Nota para uso en Mexico)

Note: Para información adicional por favor buscar el número de el certificado inalámbrico de IFT en el cartón de empaque.

Advertencia: En Mexico la operación de este equipo está sujeta a las siguientes dos condiciones: (1) es posible que este equipo o dispositivo no cause interferencia perjudicial y (2) este equipo o dispositivo debe aceptar cualquier interferencia, incluyendo la que pueda causar su operación no deseada

Notice for users in Taiwan region

根據NCC低功率電波輻射性電機管理辦法規定

取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前述合法通信，指依電信管理法規定作業之無線電通信。低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。高增益指向性天線只得應用於固定式點對點系統。

Trademarks

LENOVO and the LENOVO logo are trademarks of Lenovo.

All other trademarks are the property of their respective owners. © 2019 Lenovo