

User Manual

System Requirement

- Win 98, Win 2000, ME or Win XP Operating System
- IBM PC or compatible
- Available PS2 or USB port
- CD-ROM or DVD-ROM drive

Hardware Installation

1. Connecting the receiver module

For USB Interface (If no PS/2 Port)

- Plug the receiver cable into the USB port of your system.
- System will automatically detect for new hardware.



Follow system instruction for setup

For PS/2 (If no USB port)



- Connect the PS/2 adaptor to the USB connector of the receiver, and plug into the mouse PS/2 port.
- Connect the PS/2 cable (blue) to the keyboard PS/2 port
- Restart your system.




2. Load batteries in RF keyboard and optical mouse (2 AA batteries for both keyboard and mouse)

3. Synchronizing the receiver and wireless keyboard and mouse

A. Press the connect button on top of the receiver, then press the button on the bottom of keyboard within 10 seconds.



Receiver

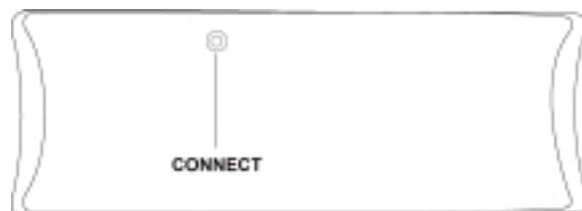

Keyboard

- B. Press the connect button in front of the receiver, then use a sharp point object to press the connect button on the bottom side of the mouse within 10 seconds.



Receiver



Mouse

- C. If the keyboard did not connect, please repeat step A again.
D. If the mouse did not connect, please repeat step B again

4. Adjusting the keyboard stand

For more comfortable typing positions, there are 3 ways to adjust the angle or height of your keyboard. Please **"PUSH"** the keyboard legs up or down. DO NOT **"PULL"** the keyboard stand.



PUSH UP



PUSH DOWN



PUSH UP & DOWN


Software Installation

- Insert CD Driver into CD-ROM or DVD drive.
- The system should run automatically; if not, double click “setup.exe”
- The onscreen setup will guide you through rest of the process.
- After the software installation is completed, you will be prompted to restart your computer.

Keyboard Hotkey Definition Software Installation

- Insert CD Driver into CD-ROM or DVD drive.
- The system should run automatically; if not, double click “setup.exe”
- The onscreen setup will guide you through rest of the process.
- After the software installation is completed, you will be prompted to restart your computer.

Keyboard Hotkey Definition

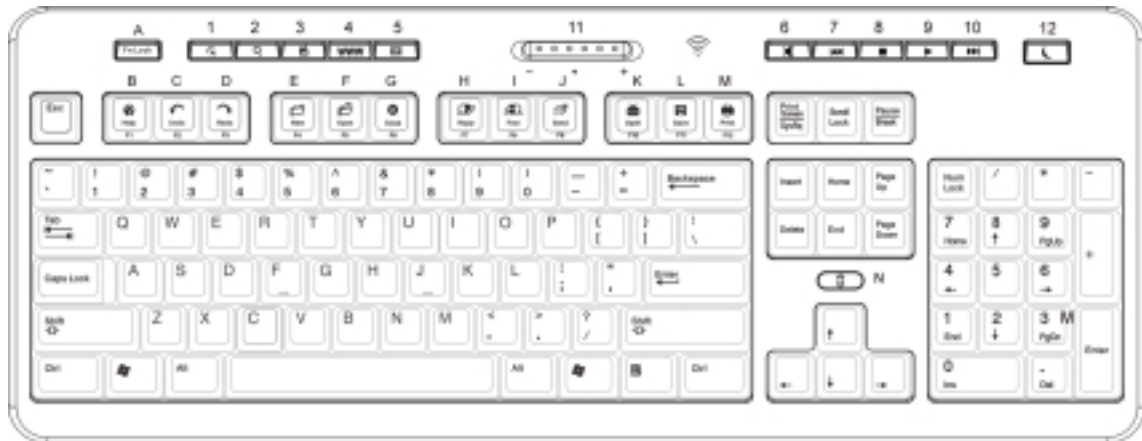


Internet Function

Item	Function	Description
1		Shortcut. Programmable hotkey.
2		Default search website.
3		Favorite folder.
4	WWW	World Wide Web.
5		Default email application.














Multimedia Function

Item	Function	Description
6		Mute
7		Previous Track
8		Stop
9		Play
10		Next Track
11		Volume Up and Volume Down

ACPI Function

Item	Function	Description
12		Sleep/ Wake up

Enhanced Function

		Description
A	Fn Lock	Function lock: Enhanced function keys for F1 to F12. Enables key functions between commands on the side of keys, and commands on the top of keys. When “Fn Lock is” on, the commands on the top of keys will be enabled.
B		Help: Open the “Help” function for the active window.
C		Undo: Cancel the previous function
D		Redo: Cancel the previous undo action
E		New: Create a new document or file
F		Open: Open a document or file
G		Close: Close a document or file at in active window
H		Reply: Reply to the email in the active window.
I		Fwd: Forward the email in the active window
J		Send: Send the email in the active window
K		Check: Check the spellings in the active window
L		Save: Save the document or file in the active window
M		Print: Print the document contents in the active window
N		Scroll Lock: Enables arrow keys (Up, Down) to the “Page up”, “Page Down” function by pushing the “Scroll Lock” button.

Configuring Your Keyboard Programmable Hot Keys

Right click AirTouch Royal Keyboard icon and chose Option to configure your hot keys.

Configuring Num/Caps/Scroll Lock Functions on Screen

Right click AirTouch Royal Keyboard icon and chose Option to open or close the Num/Caps/Scroll Lock icons.

Please right click your AirTouch Royal keyboard icon on system tool bar and chose **Help** for more function instruction.

Important Information for RF Product

- For optimal performance, place the receiver at least 8 inches (20 cm) away from any electronics devices (ex. computer, monitor, etc.) to avoid interference.
- Do not place receiver on metal surface.
- When you discover others keyboard and mouse interfering with yours, please **Reset** the keyboard and mouse again.
- After installing the driver, Num/Caps/Scroll Lock Functions will show on Screen.
- When you plug in the receiver into PS/2 port, please do make sure your PC is **Power Off**.
- The mouse uses a fast and sensitive 800 CPI optical sensor. It will move faster than normal optical mouse. Please change moving speed from **mice setting**.

FCC Warning!

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by on or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

The user manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

