

1. Effective (Isotropic) Radiated Power Output Data

1.1 GSM850_ERP

1.1.1 Test Result

Band: GSM850									
ENV	Mode		Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)		Verdict	
	Network	Subset				Result	Limit		
NTNV	GSM	GSM	824.2	32.78	0.30	30.93	<=38.45	Pass	
			836.6	32.81	0.30	30.96	<=38.45	Pass	
			848.8	32.85	0.30	31.00	<=38.45	Pass	
	GPRS	1 TX Slot	824.2	32.78	0.30	30.93	<=38.45	Pass	
			2 TX Slots	824.2	31.94	0.30	30.09	<=38.45	Pass
			3 TX Slots	824.2	30.03	0.30	28.18	<=38.45	Pass
			4 TX Slots	824.2	28.99	0.30	27.14	<=38.45	Pass
		2 TX Slots	836.6	32.81	0.30	30.96	<=38.45	Pass	
			836.6	31.97	0.30	30.12	<=38.45	Pass	
			836.6	30.08	0.30	28.23	<=38.45	Pass	
			836.6	29.05	0.30	27.20	<=38.45	Pass	
		3 TX Slots	848.8	32.83	0.30	30.98	<=38.45	Pass	
			848.8	31.99	0.30	30.14	<=38.45	Pass	
			848.8	30.13	0.30	28.28	<=38.45	Pass	
			848.8	29.07	0.30	27.22	<=38.45	Pass	
	EGPRS	1 TX Slot	824.2	27.16	0.30	25.31	<=38.45	Pass	
			824.2	26.01	0.30	24.16	<=38.45	Pass	
			824.2	23.84	0.30	21.99	<=38.45	Pass	
			824.2	22.43	0.30	20.58	<=38.45	Pass	
		2 TX Slots	836.6	26.67	0.30	24.82	<=38.45	Pass	
			836.6	25.74	0.30	23.89	<=38.45	Pass	
			836.6	23.59	0.30	21.74	<=38.45	Pass	
			836.6	22.17	0.30	20.32	<=38.45	Pass	
		3 TX Slots	848.8	26.52	0.30	24.67	<=38.45	Pass	
			848.8	25.46	0.30	23.61	<=38.45	Pass	
			848.8	23.28	0.30	21.43	<=38.45	Pass	
			848.8	21.97	0.30	20.12	<=38.45	Pass	

Note1: ERP=Conducted Power+Antenna Gain-2.15

2. Frequency Stability

2.1 GSM850

2.1.1 Test Result

Band: GSM850							
Network	Frequency (MHz)	Temp. (°C)	Voltage (VDC)	Freq. Error (Hz)	Freq. vs. Rated (ppm)		Verdict
					Result	Limit	
GSM	824.2	20	3.27	8.394	0.0102	-2.5 to 2.5	Pass
			3.85	10.170	0.0123	-2.5 to 2.5	Pass
			4.43	4.585	0.0056	-2.5 to 2.5	Pass
		-30	3.85	5.004	0.0061	-2.5 to 2.5	Pass
			-20	3.85	6.974	0.0085	-2.5 to 2.5
		-10	3.85	3.293	0.0040	-2.5 to 2.5	Pass
		0	3.85	4.423	0.0054	-2.5 to 2.5	Pass
		10	3.85	4.681	0.0057	-2.5 to 2.5	Pass

	836.6	30	3.85	4.649	0.0056	-2.5 to 2.5	Pass
		40	3.85	5.618	0.0068	-2.5 to 2.5	Pass
		50	3.85	2.873	0.0035	-2.5 to 2.5	Pass
		20	3.27	7.232	0.0086	-2.5 to 2.5	Pass
			3.85	9.201	0.0110	-2.5 to 2.5	Pass
			4.43	10.880	0.0130	-2.5 to 2.5	Pass
		-30	3.85	7.393	0.0088	-2.5 to 2.5	Pass
		-20	3.85	10.783	0.0129	-2.5 to 2.5	Pass
		-10	3.85	10.525	0.0126	-2.5 to 2.5	Pass
		0	3.85	7.749	0.0093	-2.5 to 2.5	Pass
		10	3.85	11.978	0.0143	-2.5 to 2.5	Pass
		30	3.85	7.749	0.0093	-2.5 to 2.5	Pass
	40	3.85	9.105	0.0109	-2.5 to 2.5	Pass	
	50	3.85	6.522	0.0078	-2.5 to 2.5	Pass	
	848.8	20	3.27	8.297	0.0098	-2.5 to 2.5	Pass
			3.85	4.907	0.0058	-2.5 to 2.5	Pass
			4.43	6.134	0.0072	-2.5 to 2.5	Pass
		-30	3.85	6.457	0.0076	-2.5 to 2.5	Pass
		-20	3.85	5.811	0.0068	-2.5 to 2.5	Pass
		-10	3.85	8.007	0.0094	-2.5 to 2.5	Pass
		0	3.85	8.782	0.0103	-2.5 to 2.5	Pass
10		3.85	8.653	0.0102	-2.5 to 2.5	Pass	
30		3.85	4.681	0.0055	-2.5 to 2.5	Pass	
40		3.85	7.716	0.0091	-2.5 to 2.5	Pass	
50		3.85	8.814	0.0104	-2.5 to 2.5	Pass	
GPRS		824.2	20	3.27	6.167	0.0075	-2.5 to 2.5
	3.85			3.035	0.0037	-2.5 to 2.5	Pass
	4.43			4.681	0.0057	-2.5 to 2.5	Pass
	-30		3.85	5.715	0.0069	-2.5 to 2.5	Pass
	-20		3.85	4.972	0.0060	-2.5 to 2.5	Pass
	-10		3.85	5.424	0.0066	-2.5 to 2.5	Pass
	0		3.85	1.969	0.0024	-2.5 to 2.5	Pass
	10		3.85	4.165	0.0051	-2.5 to 2.5	Pass
	30		3.85	6.102	0.0074	-2.5 to 2.5	Pass
	40		3.85	3.325	0.0040	-2.5 to 2.5	Pass
	50		3.85	5.133	0.0062	-2.5 to 2.5	Pass
	836.6		20	3.27	7.845	0.0094	-2.5 to 2.5
		3.85		5.650	0.0068	-2.5 to 2.5	Pass
		4.43		7.135	0.0085	-2.5 to 2.5	Pass
		-30	3.85	9.944	0.0119	-2.5 to 2.5	Pass
		-20	3.85	5.489	0.0066	-2.5 to 2.5	Pass
		-10	3.85	2.583	0.0031	-2.5 to 2.5	Pass
		0	3.85	7.845	0.0094	-2.5 to 2.5	Pass
		10	3.85	5.844	0.0070	-2.5 to 2.5	Pass
		30	3.85	3.390	0.0041	-2.5 to 2.5	Pass
		40	3.85	7.749	0.0093	-2.5 to 2.5	Pass
50		3.85	5.004	0.0060	-2.5 to 2.5	Pass	
848.8		20	3.27	5.359	0.0063	-2.5 to 2.5	Pass
	3.85		4.585	0.0054	-2.5 to 2.5	Pass	
	4.43		1.905	0.0022	-2.5 to 2.5	Pass	
	-30	3.85	3.422	0.0040	-2.5 to 2.5	Pass	
	-20	3.85	2.680	0.0032	-2.5 to 2.5	Pass	
	-10	3.85	1.453	0.0017	-2.5 to 2.5	Pass	
	0	3.85	6.102	0.0072	-2.5 to 2.5	Pass	
	10	3.85	0.678	0.0008	-2.5 to 2.5	Pass	
	30	3.85	2.551	0.0030	-2.5 to 2.5	Pass	
	40	3.85	4.585	0.0054	-2.5 to 2.5	Pass	
	50	3.85	-0.194	-0.0002	-2.5 to 2.5	Pass	
	EGPRS	824.2	20	3.27	0.032	0.0000	-2.5 to 2.5

			3.85	-1.356	-0.0016	-2.5 to 2.5	Pass	
			4.43	-3.455	-0.0042	-2.5 to 2.5	Pass	
		-30	3.85	1.743	0.0021	-2.5 to 2.5	Pass	
		-20	3.85	2.841	0.0034	-2.5 to 2.5	Pass	
		-10	3.85	-0.517	-0.0006	-2.5 to 2.5	Pass	
		0	3.85	-2.809	-0.0034	-2.5 to 2.5	Pass	
		10	3.85	0.646	0.0008	-2.5 to 2.5	Pass	
		30	3.85	-4.907	-0.0060	-2.5 to 2.5	Pass	
		40	3.85	0.161	0.0002	-2.5 to 2.5	Pass	
		50	3.85	-4.940	-0.0060	-2.5 to 2.5	Pass	
	836.6	20		3.27	-2.292	-0.0027	-2.5 to 2.5	Pass
				3.85	-2.744	-0.0033	-2.5 to 2.5	Pass
				4.43	2.615	0.0031	-2.5 to 2.5	Pass
		-30	3.85	1.324	0.0016	-2.5 to 2.5	Pass	
		-20	3.85	0.291	0.0003	-2.5 to 2.5	Pass	
		-10	3.85	-0.387	-0.0005	-2.5 to 2.5	Pass	
		0	3.85	-2.066	-0.0025	-2.5 to 2.5	Pass	
		10	3.85	-3.810	-0.0046	-2.5 to 2.5	Pass	
		30	3.85	-0.710	-0.0008	-2.5 to 2.5	Pass	
		40	3.85	-4.423	-0.0053	-2.5 to 2.5	Pass	
	50	3.85	-0.969	-0.0012	-2.5 to 2.5	Pass		
	848.8	20		3.27	-6.715	-0.0079	-2.5 to 2.5	Pass
				3.85	-4.262	-0.0050	-2.5 to 2.5	Pass
				4.43	-8.104	-0.0095	-2.5 to 2.5	Pass
		-30	3.85	-1.582	-0.0019	-2.5 to 2.5	Pass	
		-20	3.85	-1.937	-0.0023	-2.5 to 2.5	Pass	
		-10	3.85	-1.033	-0.0012	-2.5 to 2.5	Pass	
		0	3.85	-3.132	-0.0037	-2.5 to 2.5	Pass	
		10	3.85	-1.259	-0.0015	-2.5 to 2.5	Pass	
		30	3.85	-5.650	-0.0067	-2.5 to 2.5	Pass	
40		3.85	-4.585	-0.0054	-2.5 to 2.5	Pass		
50	3.85	-6.296	-0.0074	-2.5 to 2.5	Pass			



3. Modulation Characteristics

3.1 GSM850

3.1.1 Test Result

Band: GSM850						
ENV	Mode		Frequency (MHz)	Modulation Characteristics		Verdict
	Network	Subset		Result	Limit	
NTNV	GSM	GSM	836.6	Refer To Test Graph		Pass
	GPRS	1 TX Slot	836.6	Refer To Test Graph		Pass
	EGPRS	1 TX Slot	836.6	Refer To Test Graph		Pass


3.1.2 Test Graph

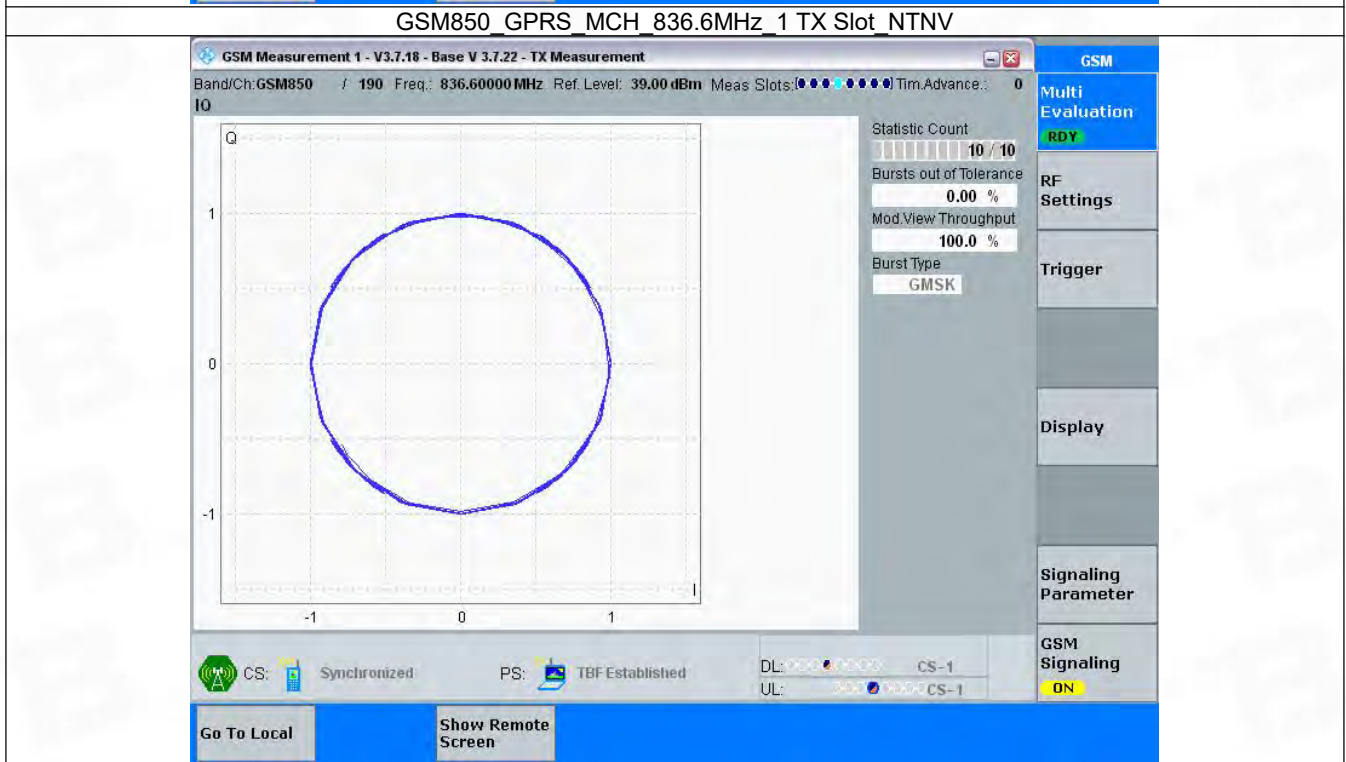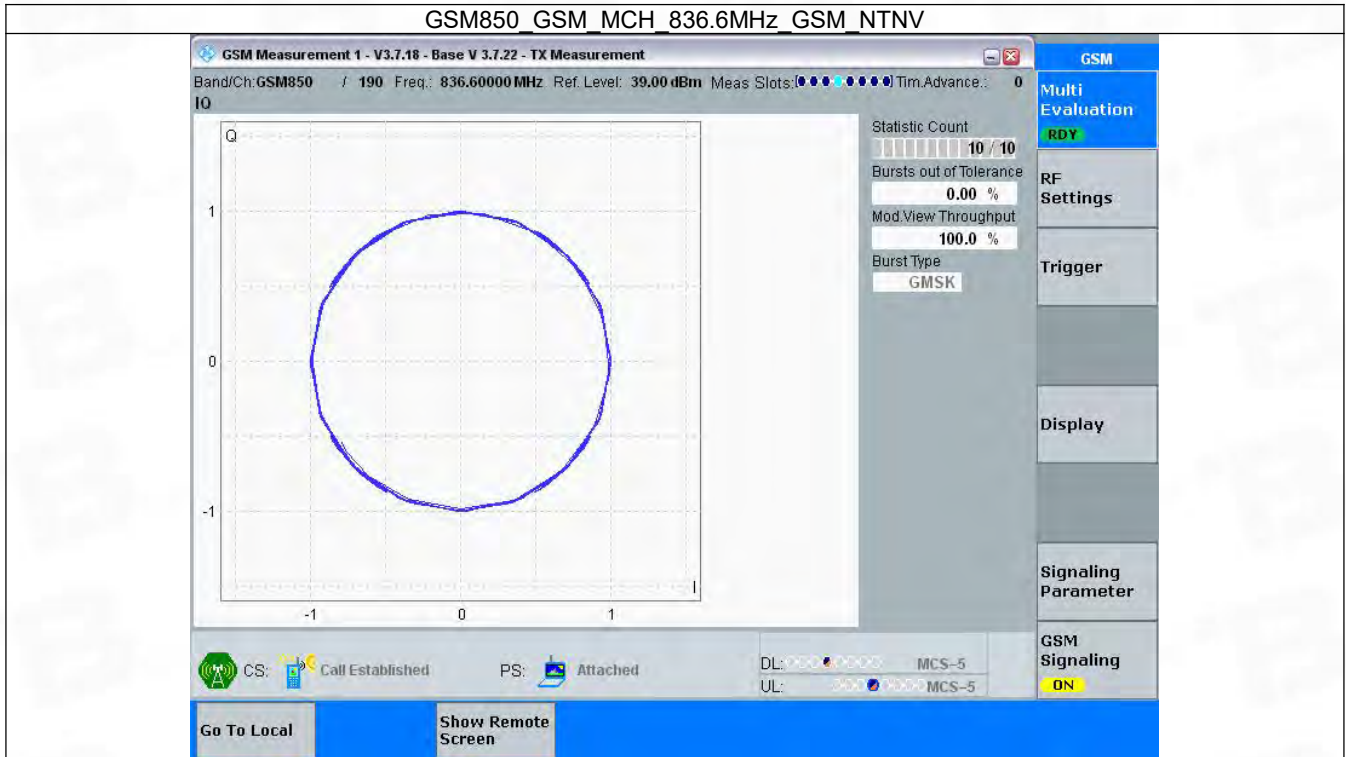

GSM850 EGPRS MCH 836.6MHz 1 TX Slot NTNV

GSM Measurement 1 - V3.7.18 - Base V 3.7.22 - TX Measurement

Band/Ch: GSM850 / 190 Freq.: 836.60000 MHz Ref. Level: 42.23 dBm Meas Slots: 0 / 10 Tim. Advance.: 0

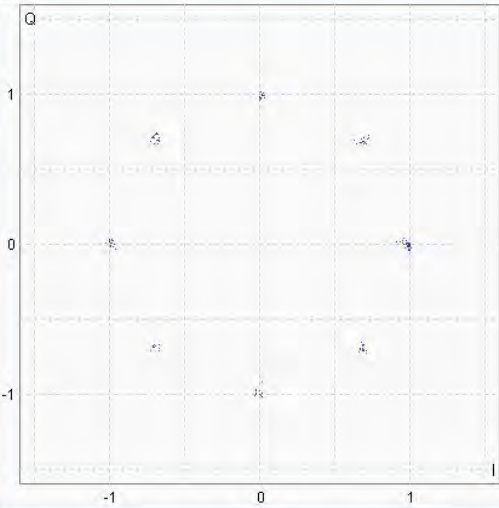

Statistic Count: 10 / 10
Bursts out of Tolerance: 0.00 %
Mod. View Throughput: 100.0 %
Burst Type: 8PSK

Multi Evaluation **RDY**

RF Settings

Trigger

Display

Signaling Parameter

GSM Signaling **ON**

CS: Synchronized PS: TBF Established DL: MCS-5 UL: MCS-5

Go To Local **Show Remote Screen**



4. 99% & 26dB Bandwidth

4.1 GSM850_OBW


4.1.1 Test Result

Band: GSM850						
ENV	Mode		Frequency (MHz)	99% Occupied Bandwidth (MHz)		Verdict
	Network	Subset		Result	Limit	
NTNV	GSM	GSM	824.2	0.247	/	Pass
			836.6	0.244	/	Pass
			848.8	0.248	/	Pass
	GPRS	1 TX Slot	824.2	0.247	/	Pass
			836.6	0.246	/	Pass
			848.8	0.242	/	Pass
	EGPRS	1 TX Slot	824.2	0.247	/	Pass
			836.6	0.252	/	Pass
			848.8	0.233	/	Pass


4.1.2 Test Graph

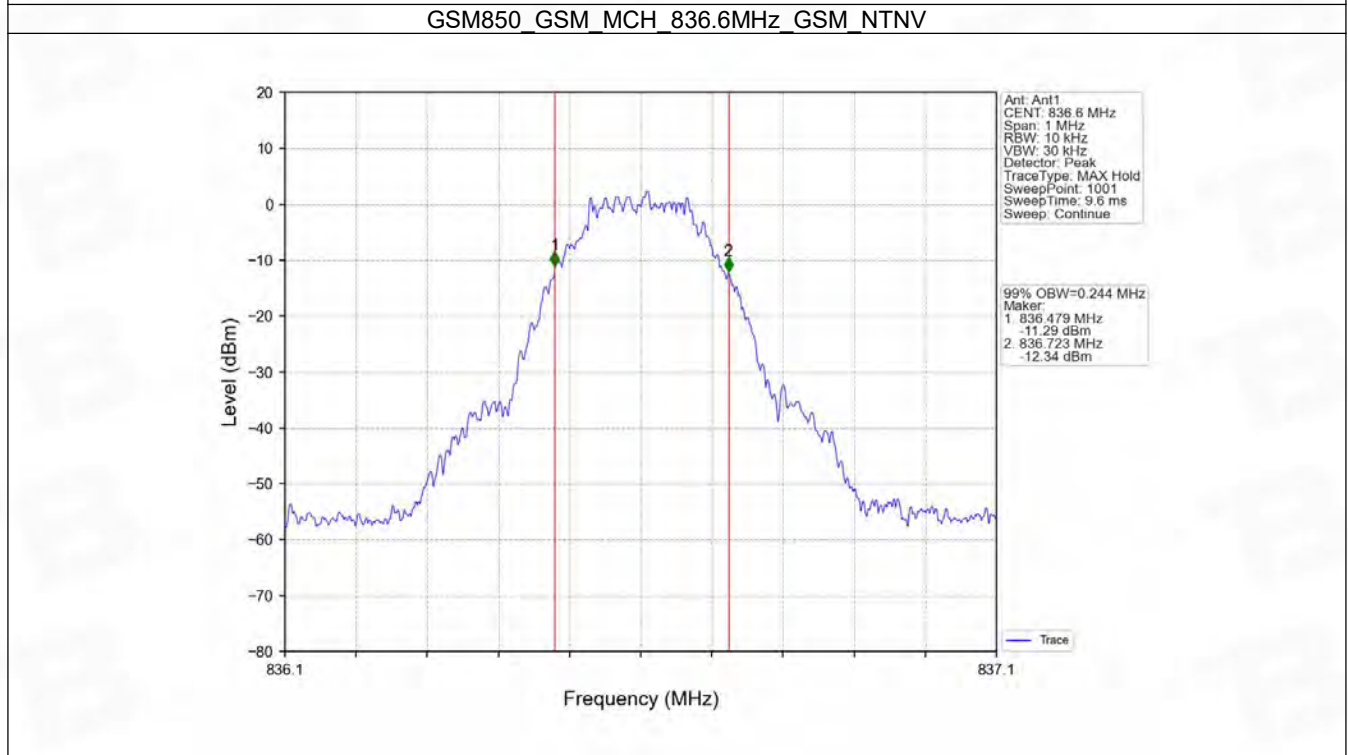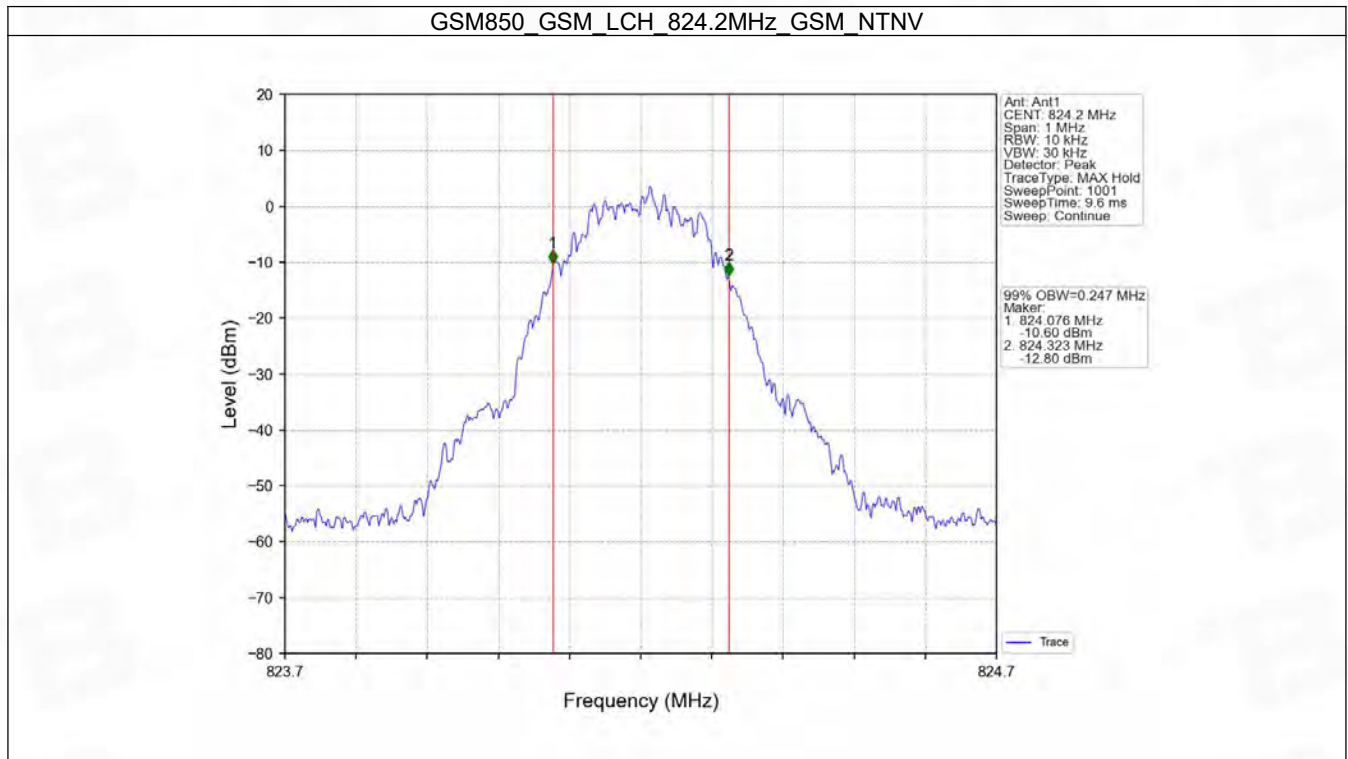


GSM850_GSM_HCH_848.8MHz_GSM_NTNV

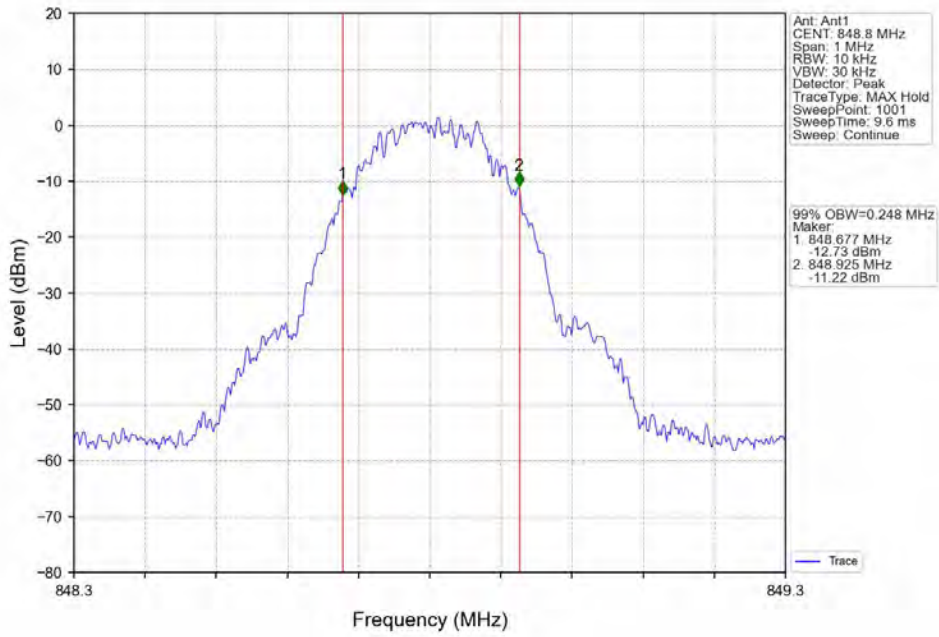


GSM850_GPRS_LCH_824.2MHz_1 TX Slot_NTNV

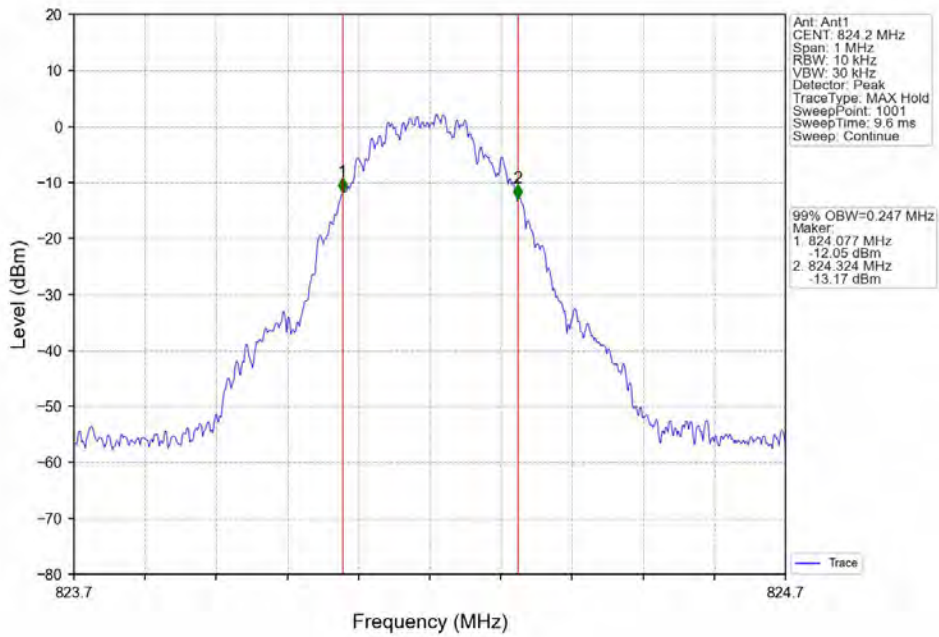


GSM850_GPRS_MCH_836.6MHz_1 TX Slot_NTNV

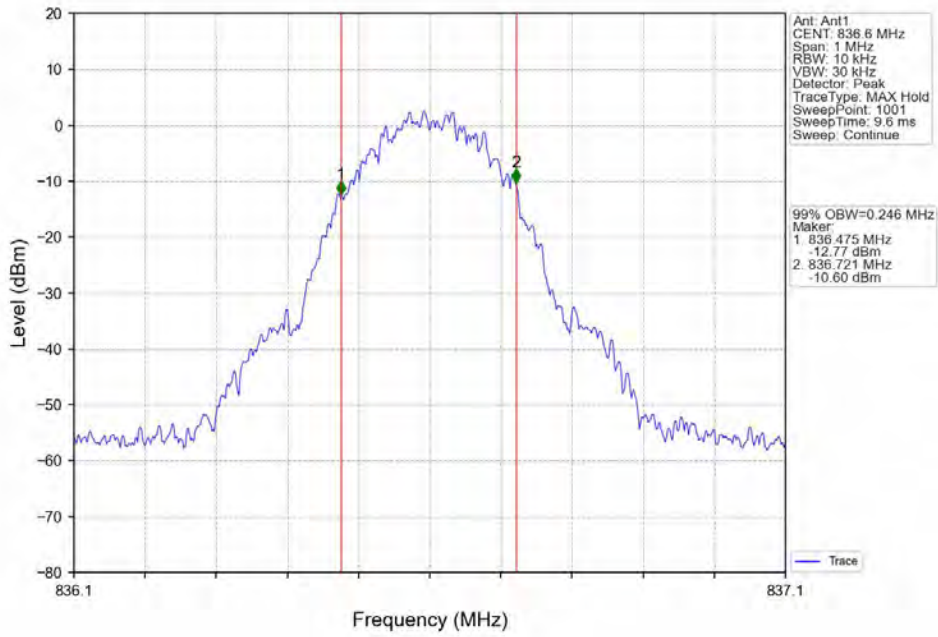


GSM850_GPRS_HCH_848.8MHz_1 TX Slot_NTNV

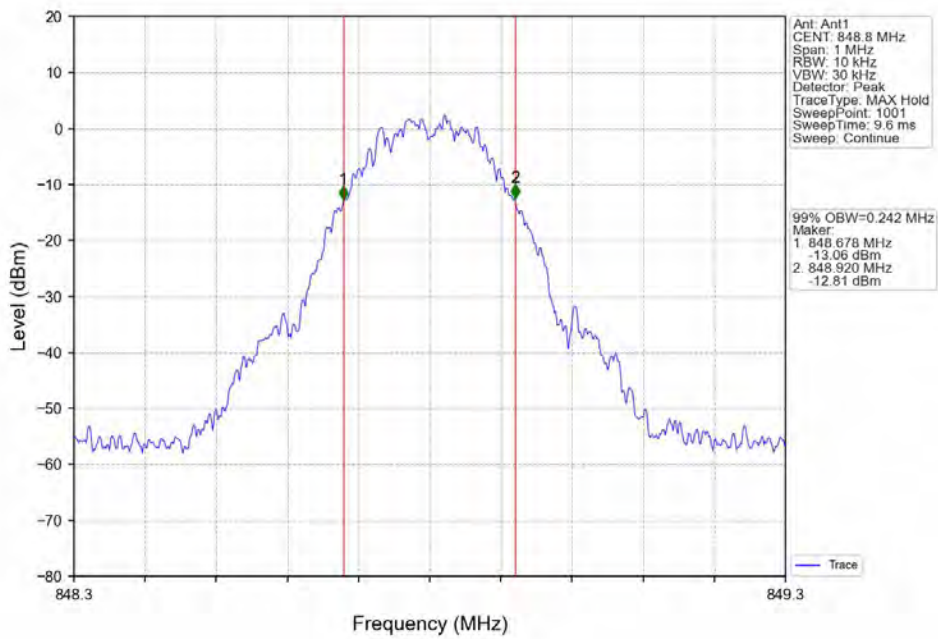


GSM850 EGPRS LCH 824.2MHz 1 TX Slot_NTNV

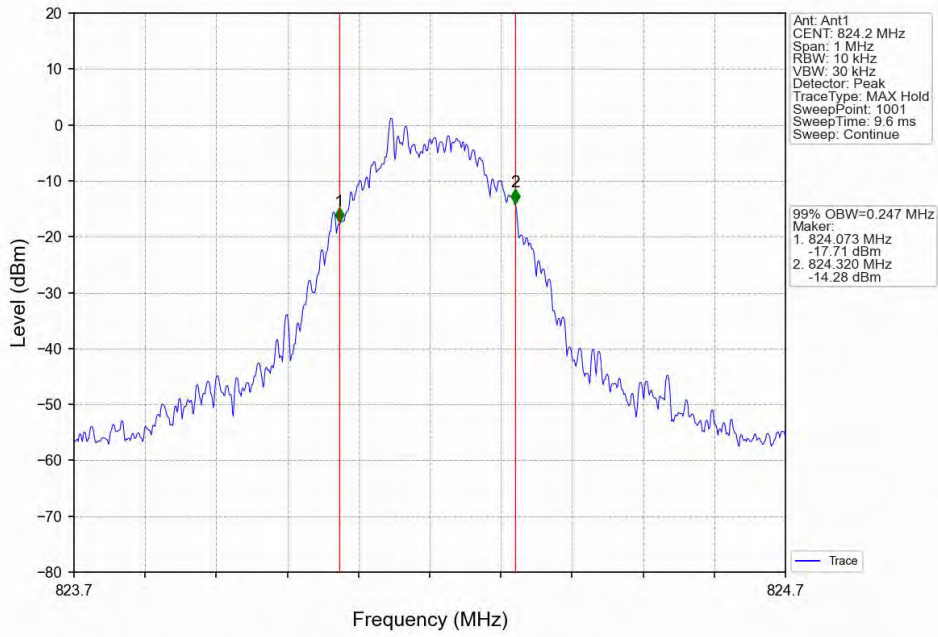

GSM850 EGPRS MCH 836.6MHz 1 TX Slot_NTNV

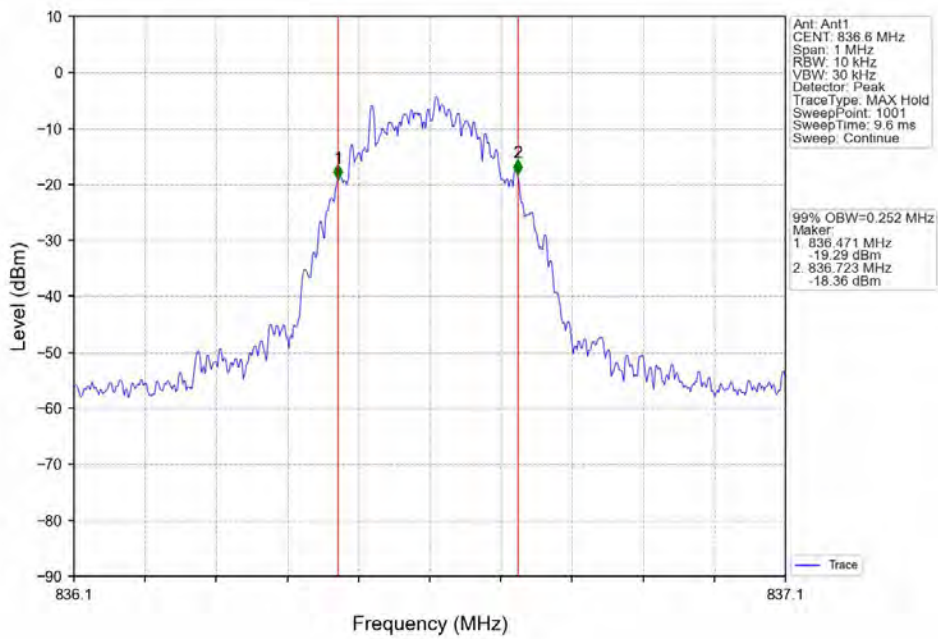

GSM850 EGPRS HCH 848.8MHz 1 TX Slot NTNV


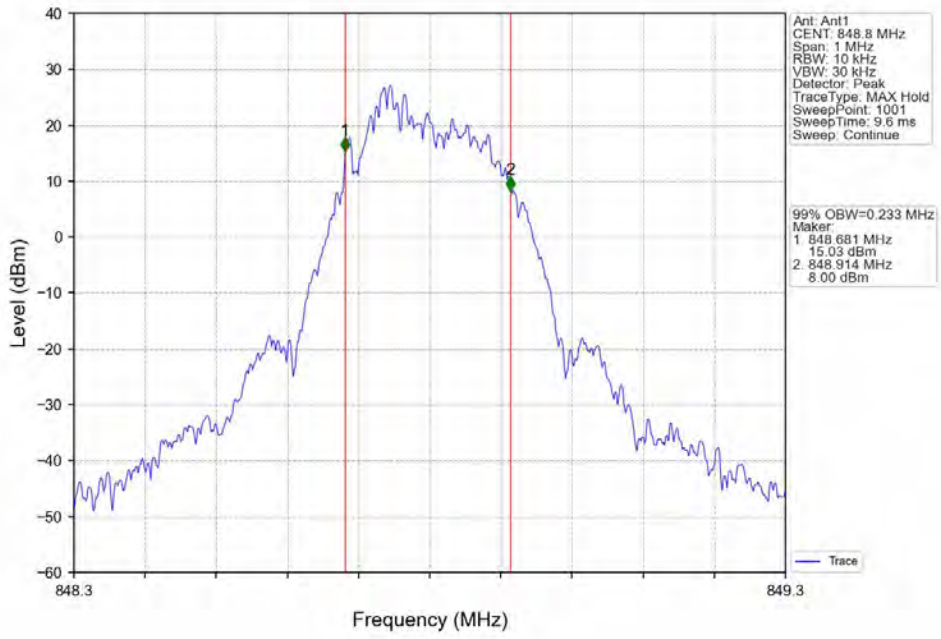


4.2 GSM850_XDB


4.2.1 Test Result

Band: GSM850						
ENV	Mode		Frequency (MHz)	26dB Bandwidth (MHz)		Verdict
	Network	Subset		Result	Limit	
NTNV	GSM	GSM	824.2	0.317	/	Pass
			836.6	0.317	/	Pass
			848.8	0.322	/	Pass
	GPRS	1 TX Slot	824.2	0.323	/	Pass
			836.6	0.314	/	Pass
			848.8	0.317	/	Pass
	EGPRS	1 TX Slot	824.2	0.310	/	Pass
			836.6	0.321	/	Pass
			848.8	0.285	/	Pass


4.2.2 Test Graph

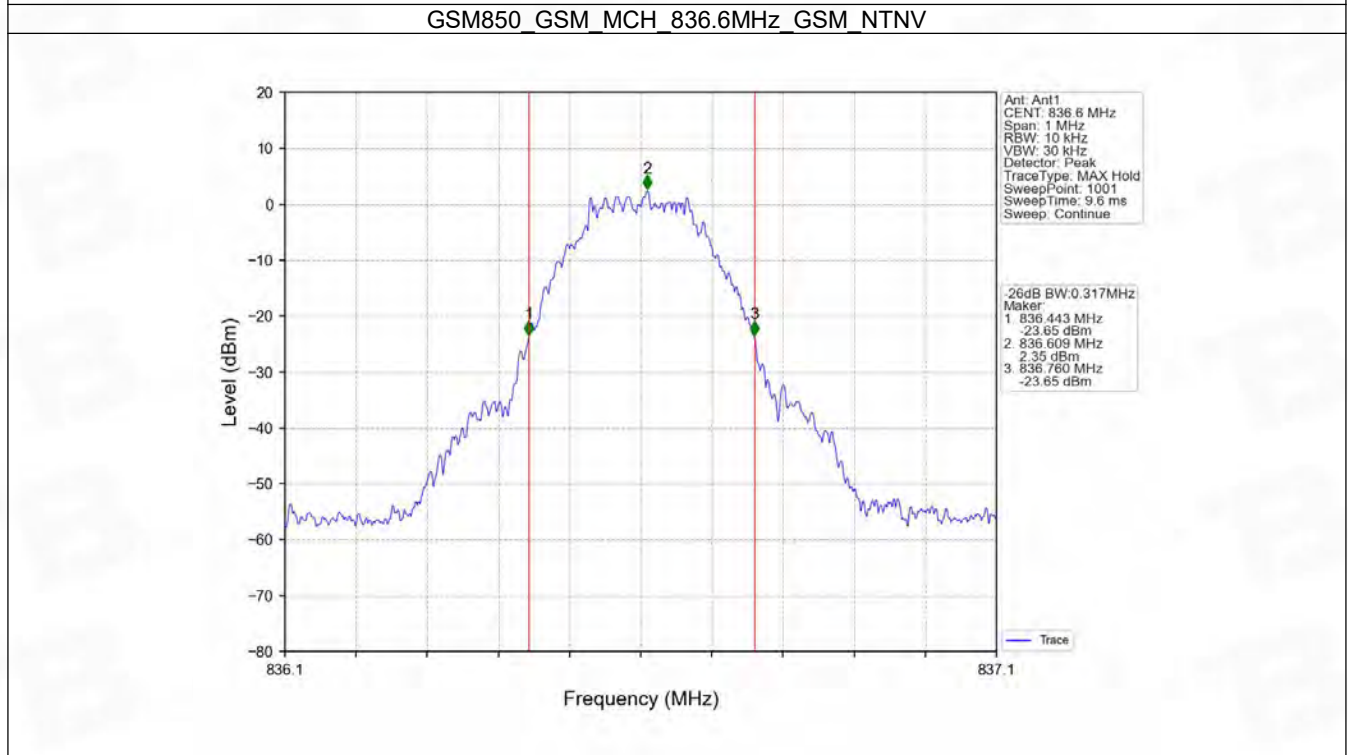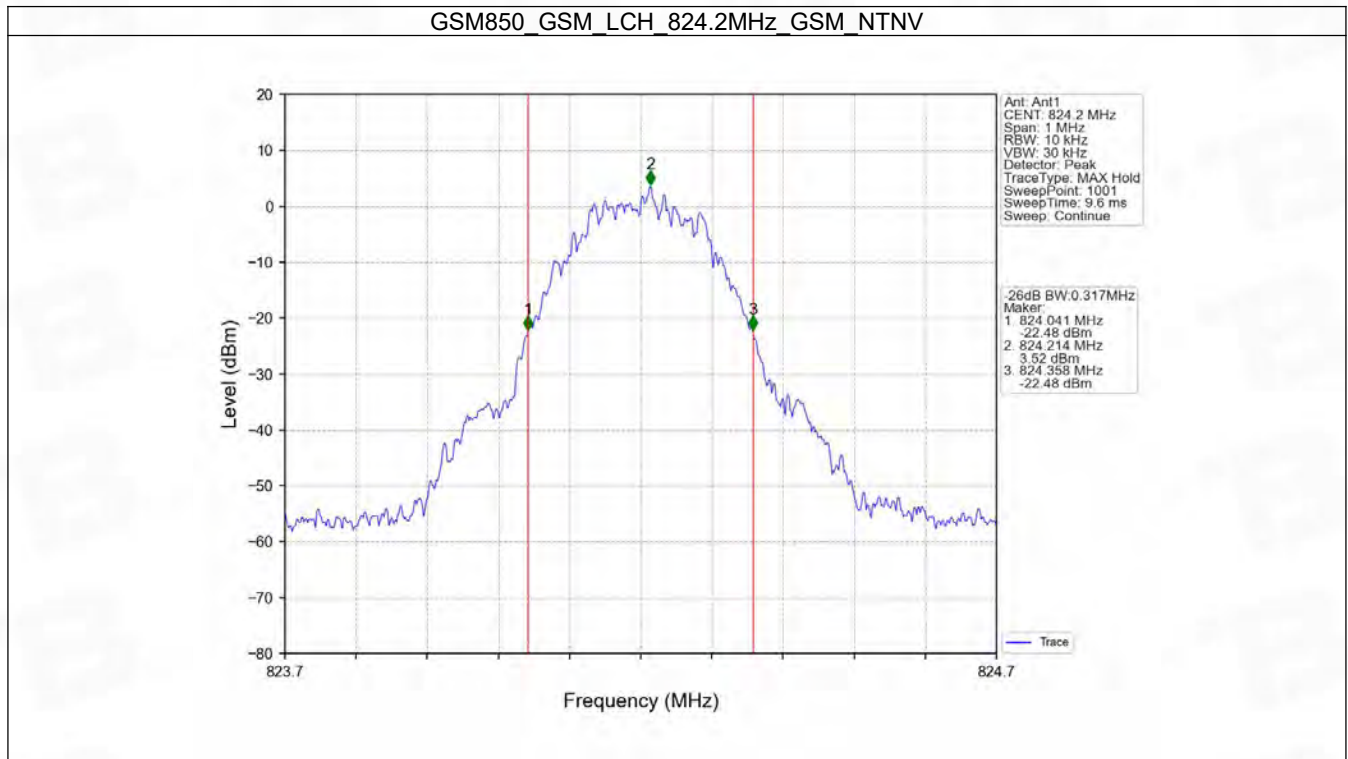


GSM850_GSM_HCH_848.8MHz_GSM_NTNV

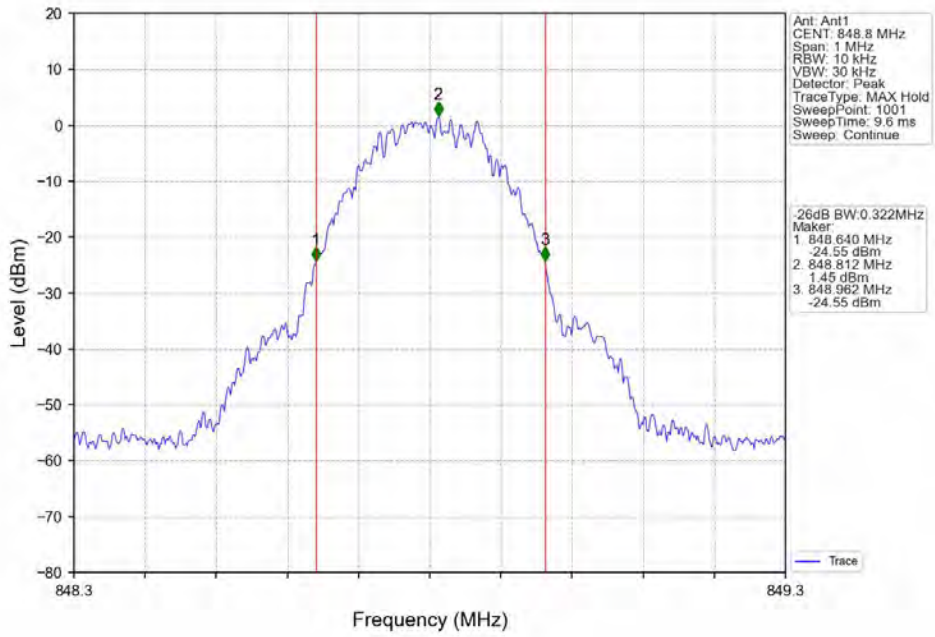


GSM850_GPRS_LCH_824.2MHz_1 TX Slot_NTNV

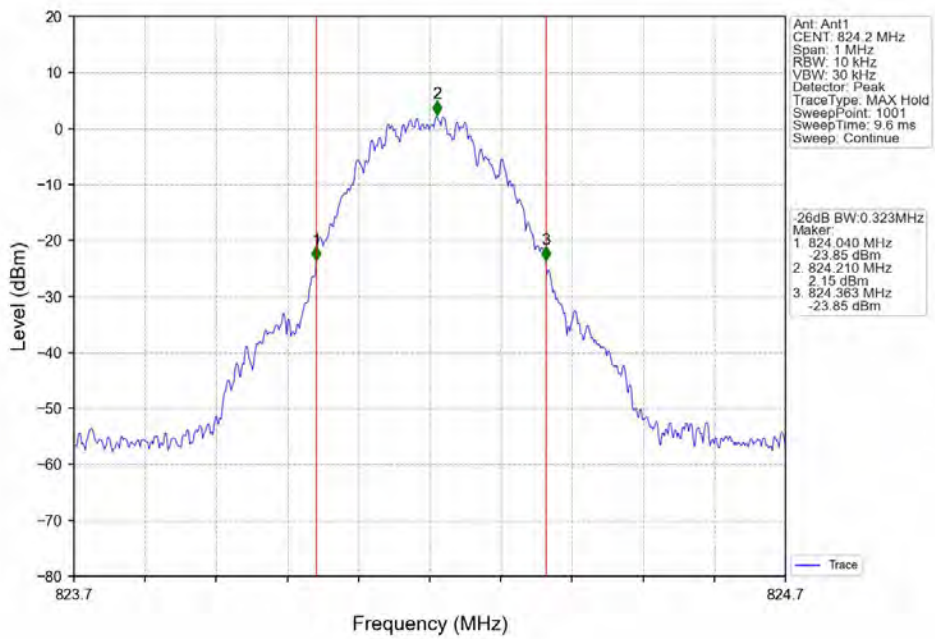


GSM850_GPRS_MCH_836.6MHz_1 TX Slot_NTNV

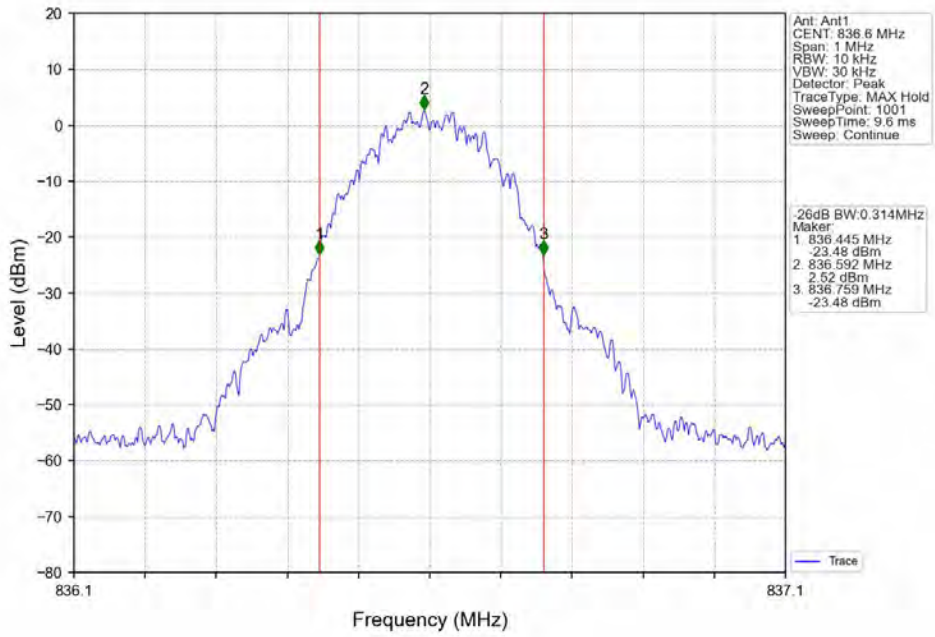


GSM850_GPRS_HCH_848.8MHz_1 TX Slot_NTNV

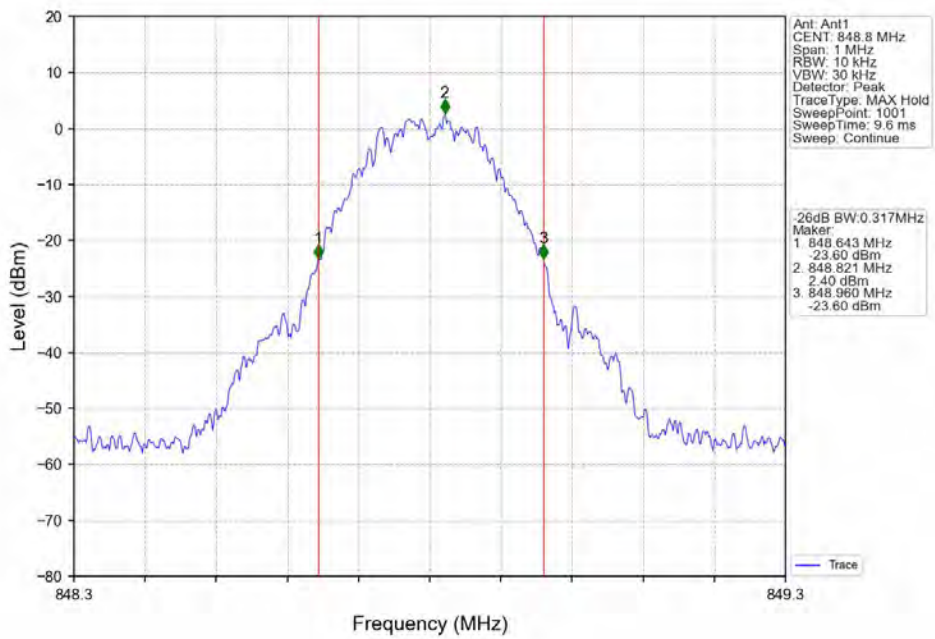


GSM850 EGPRS LCH 824.2MHz 1 TX Slot_NTNV

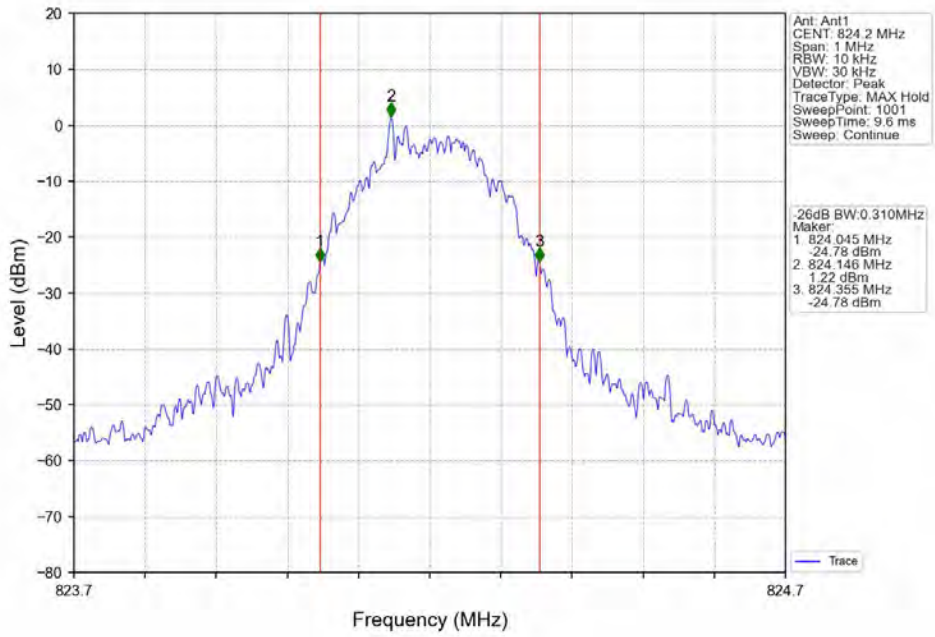

GSM850 EGPRS MCH 836.6MHz 1 TX Slot_NTNV

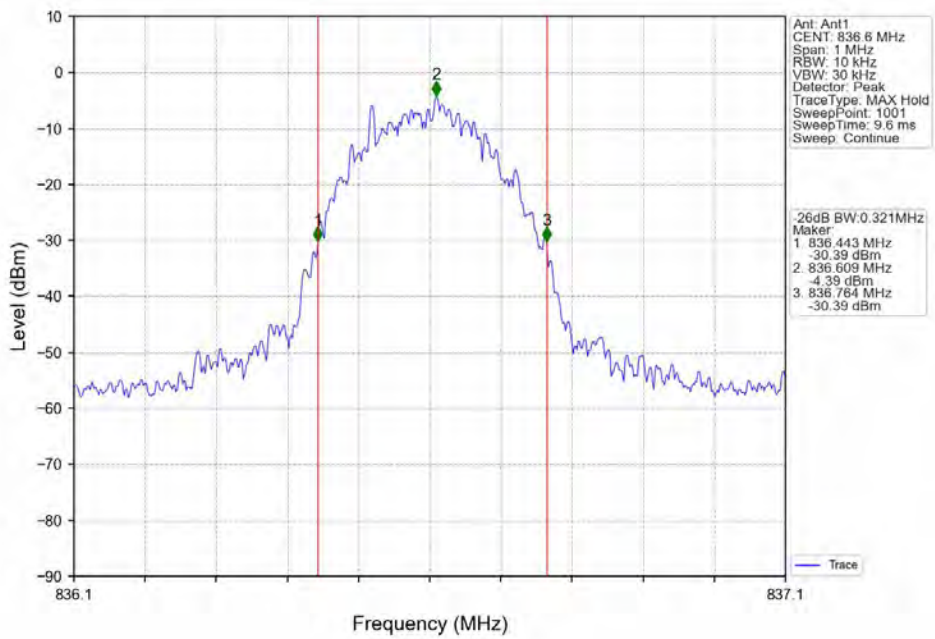

GSM850 EGPRS HCH 848.8MHz 1 TX Slot NTN

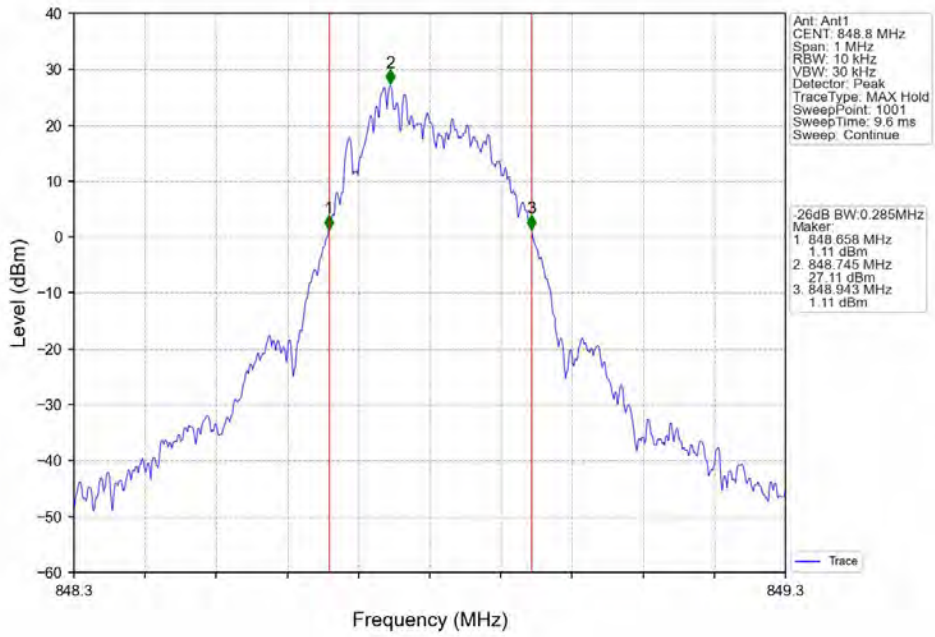



5. Peak-Average Ratio

5.1 GSM850


5.1.1 Test Result

Band: GSM850						
ENV	Mode		Frequency (MHz)	Peak-Average Ratio (dB)		Verdict
	Network	Subset		Result	Limit	
NTNV	GSM	GSM	824.2	9.24	<=13	Pass
			836.6	8.91	<=13	Pass
			848.8	9.63	<=13	Pass
	GPRS	4 TX Slots	824.2	3.59	<=13	Pass
			836.6	3.57	<=13	Pass
			848.8	3.56	<=13	Pass
	EGPRS	4 TX Slots	824.2	7.36	<=13	Pass
			836.6	10.79	<=13	Pass
			848.8	11.04	<=13	Pass


5.1.2 Test Graph

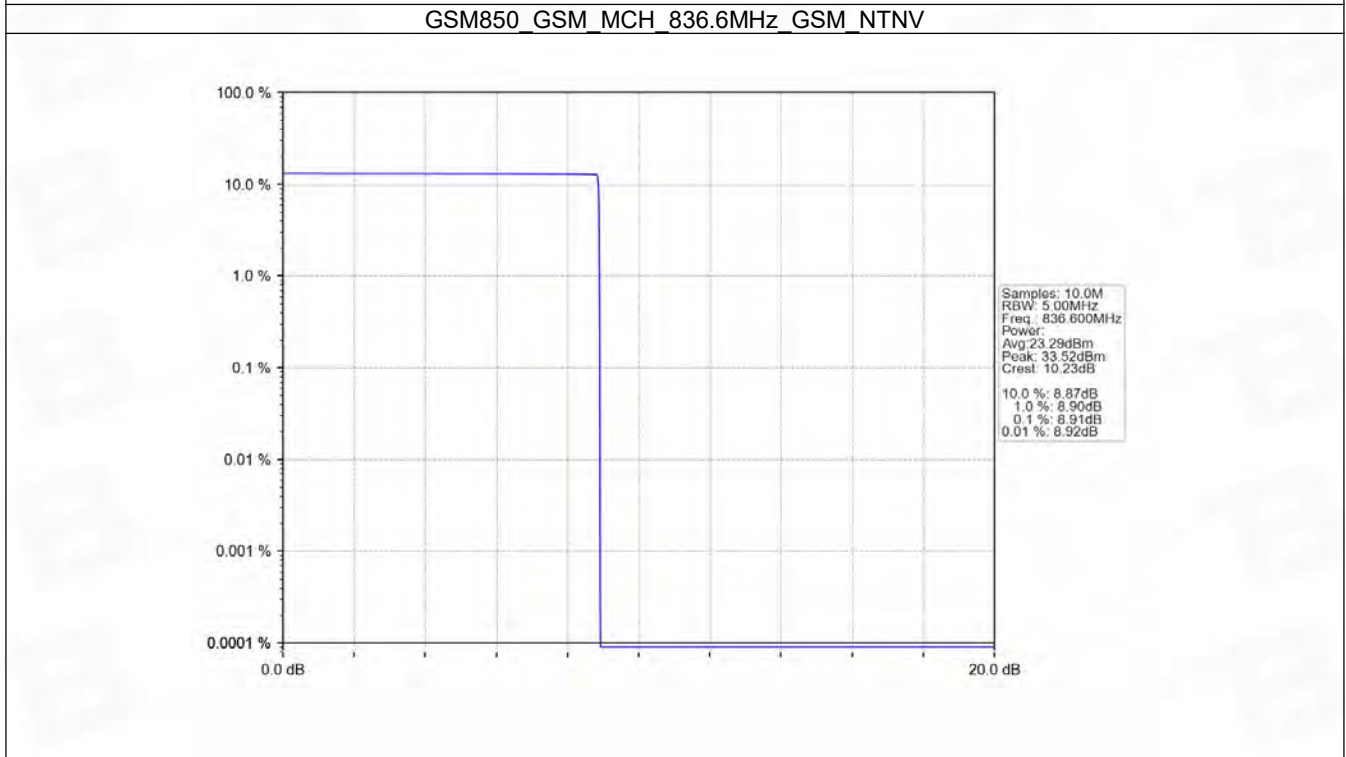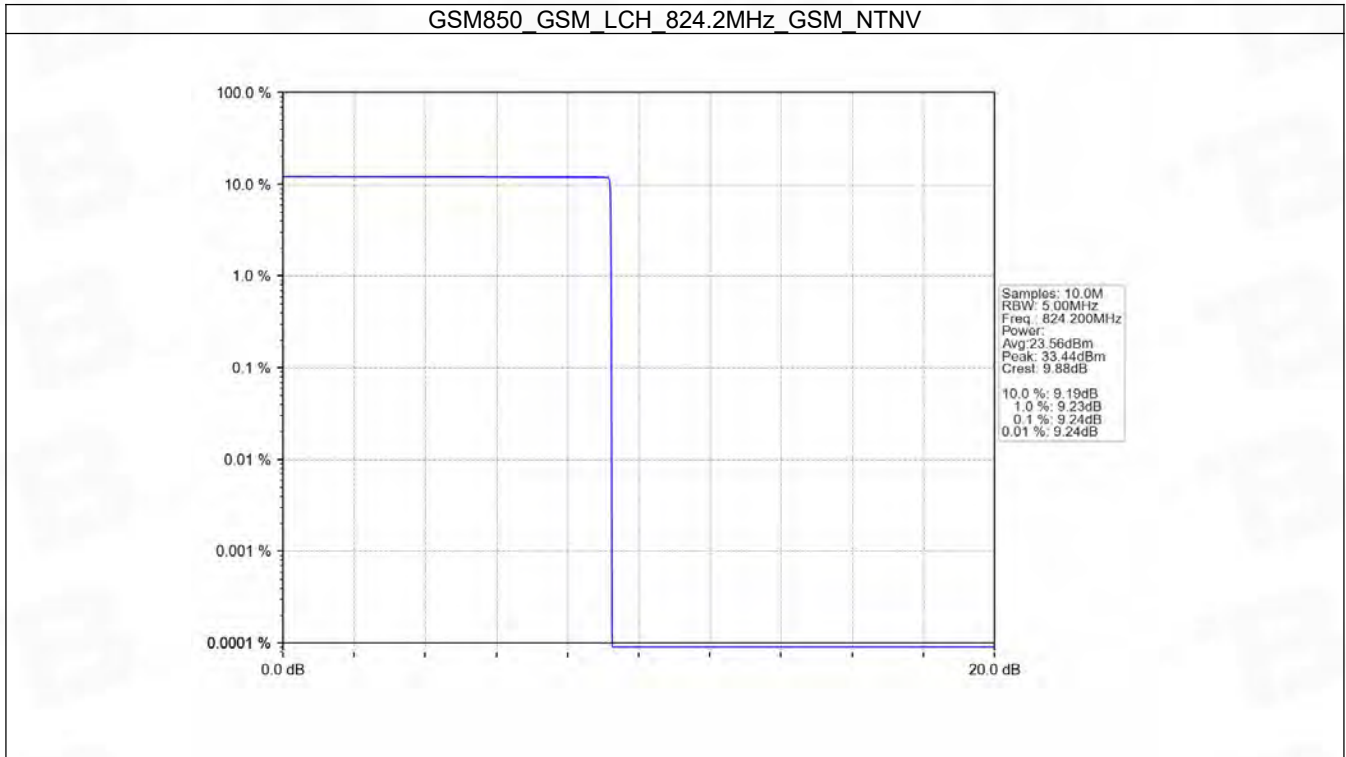


GSM850_GSM_HCH_848.8MHz_GSM_NTNV

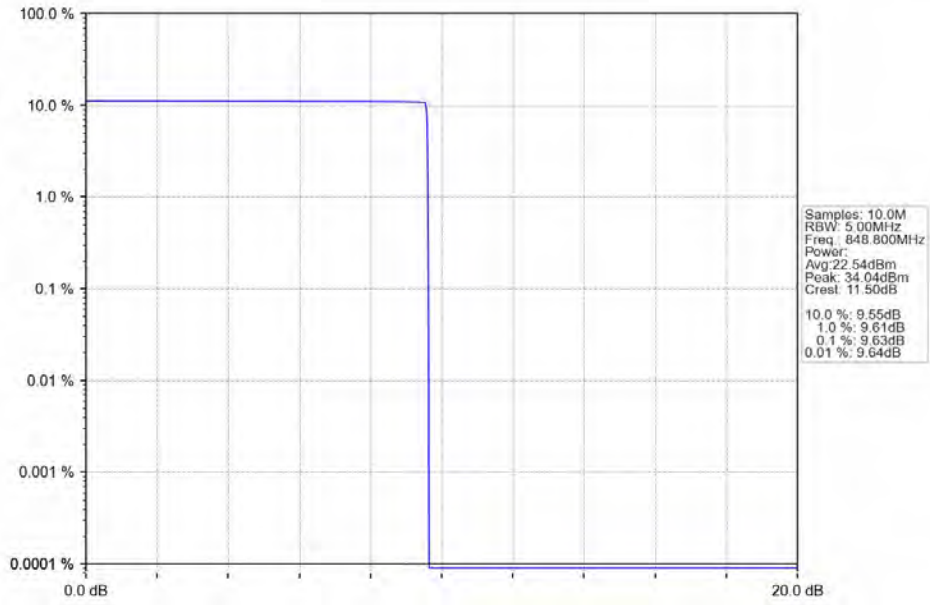


GSM850_GPRS_LCH_824.2MHz_4 TX Slots_NTNV

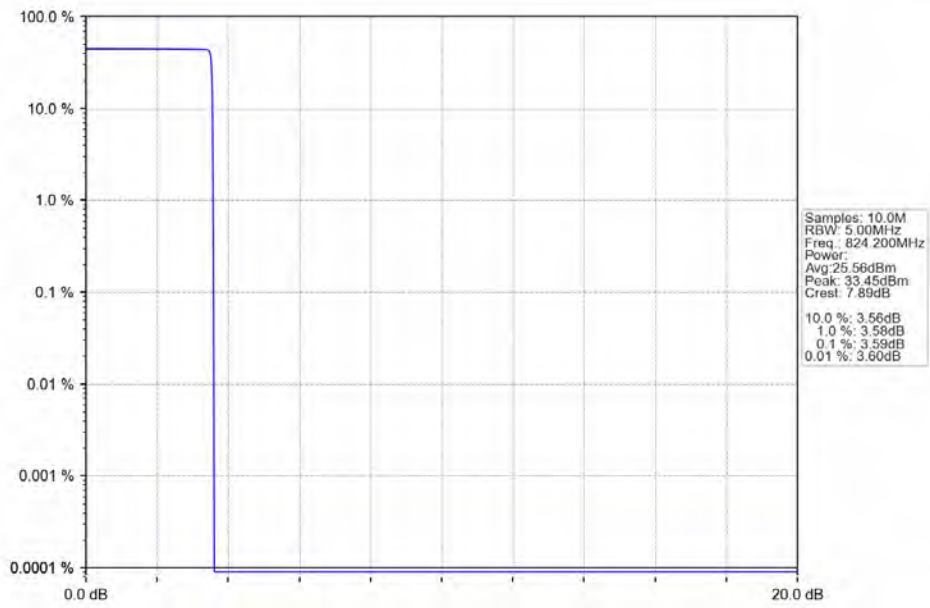


GSM850 GPRS MCH 836.6MHz 4 TX Slots NTV

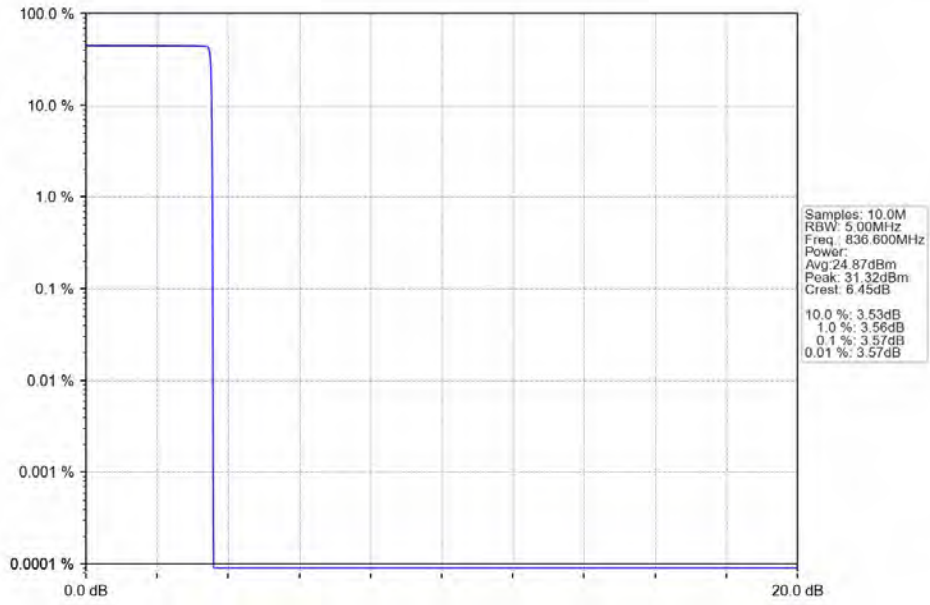


GSM850 GPRS HCH 848.8MHz 4 TX Slots NTV

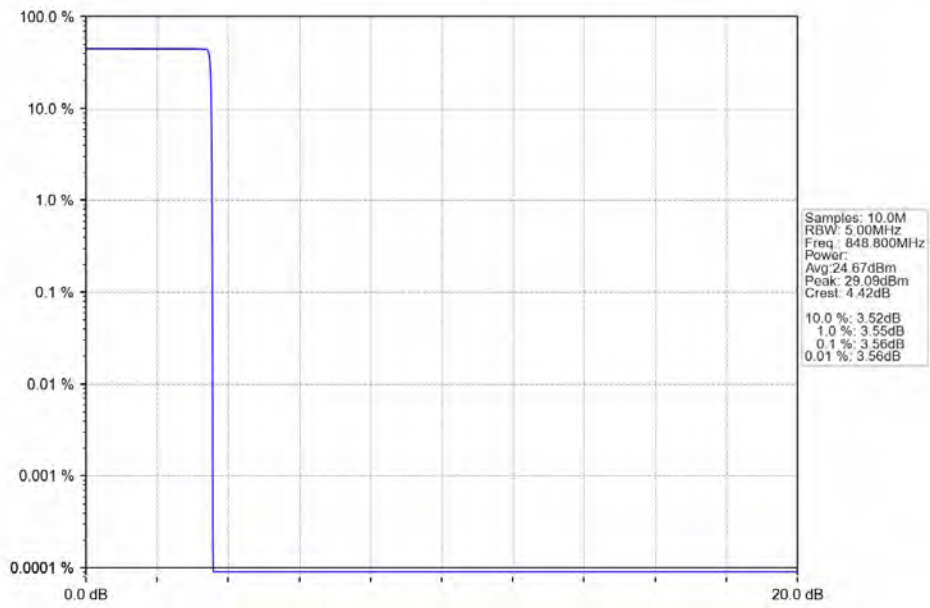


GSM850_EGPRS_LCH_824.2MHz_4 TX Slots_NTNV

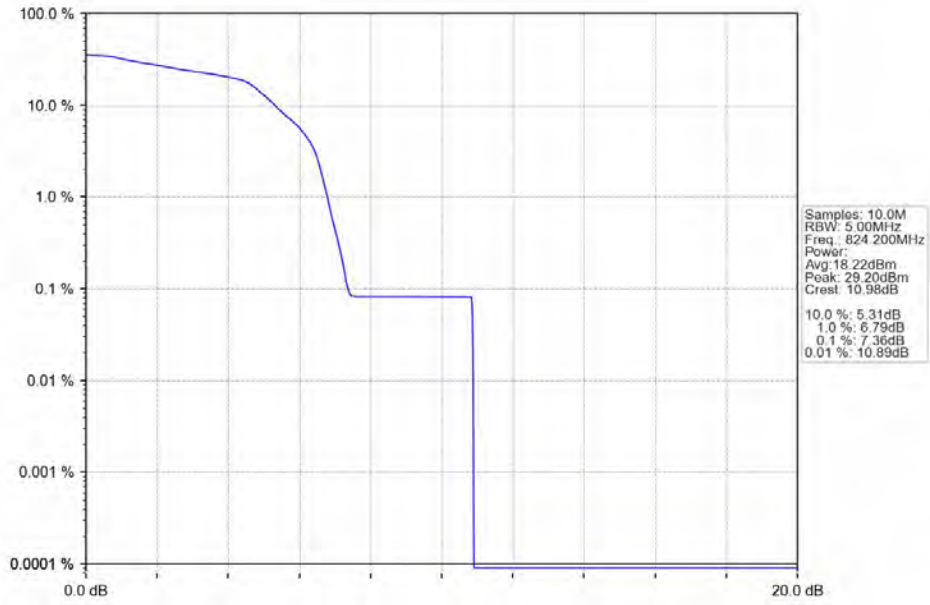

GSM850_EGPRS_MCH_836.6MHz_4 TX Slots_NTNV

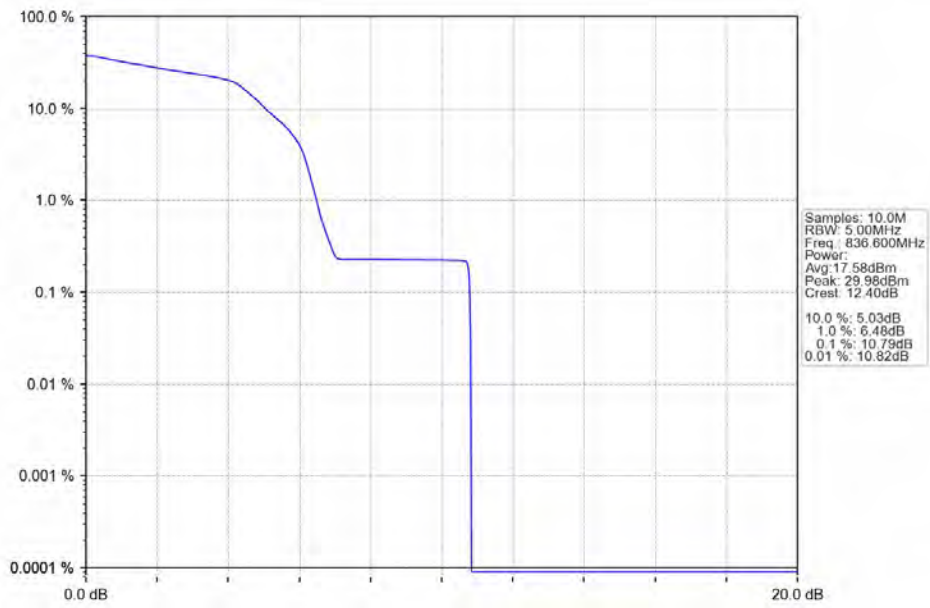

GSM850_EGPRS_HCH_848.8MHz_4_TX_Slots_NTNV

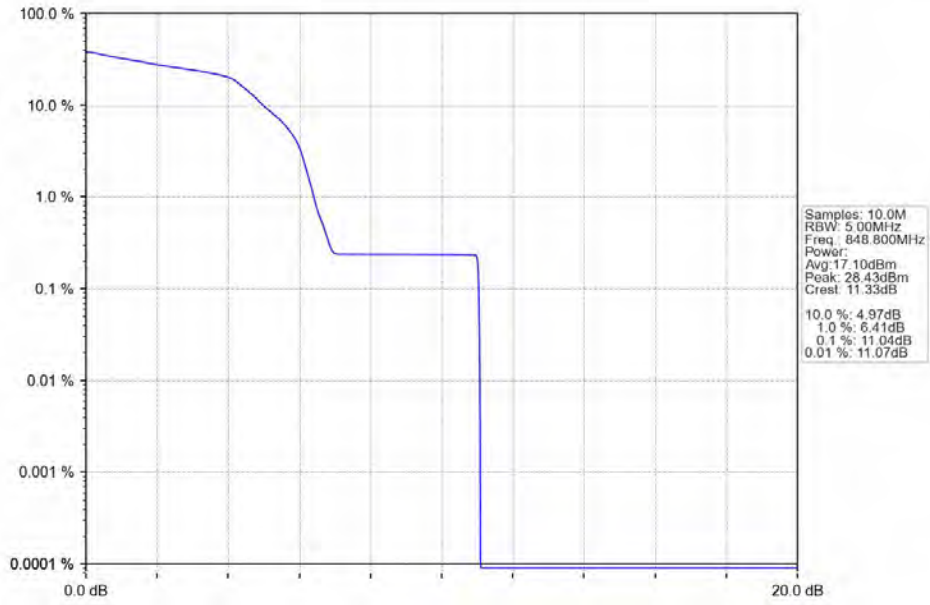



6. Spurious Emission

6.1 GSM850


6.1.1 Test Result

Band: GSM850						
ENV	Mode		Frequency (MHz)	Spurious Emission		Verdict
	Network	Subset		Result	Limit	
NTNV	GSM	GSM	824.2	Refer To Test Graph		Pass
			836.6	Refer To Test Graph		Pass
			848.8	Refer To Test Graph		Pass
	GPRS	1 TX Slot	824.2	Refer To Test Graph		Pass
			836.6	Refer To Test Graph		Pass
			848.8	Refer To Test Graph		Pass
	EGPRS	1 TX Slot	824.2	Refer To Test Graph		Pass
			836.6	Refer To Test Graph		Pass
			848.8	Refer To Test Graph		Pass


6.1.2 Test Graph

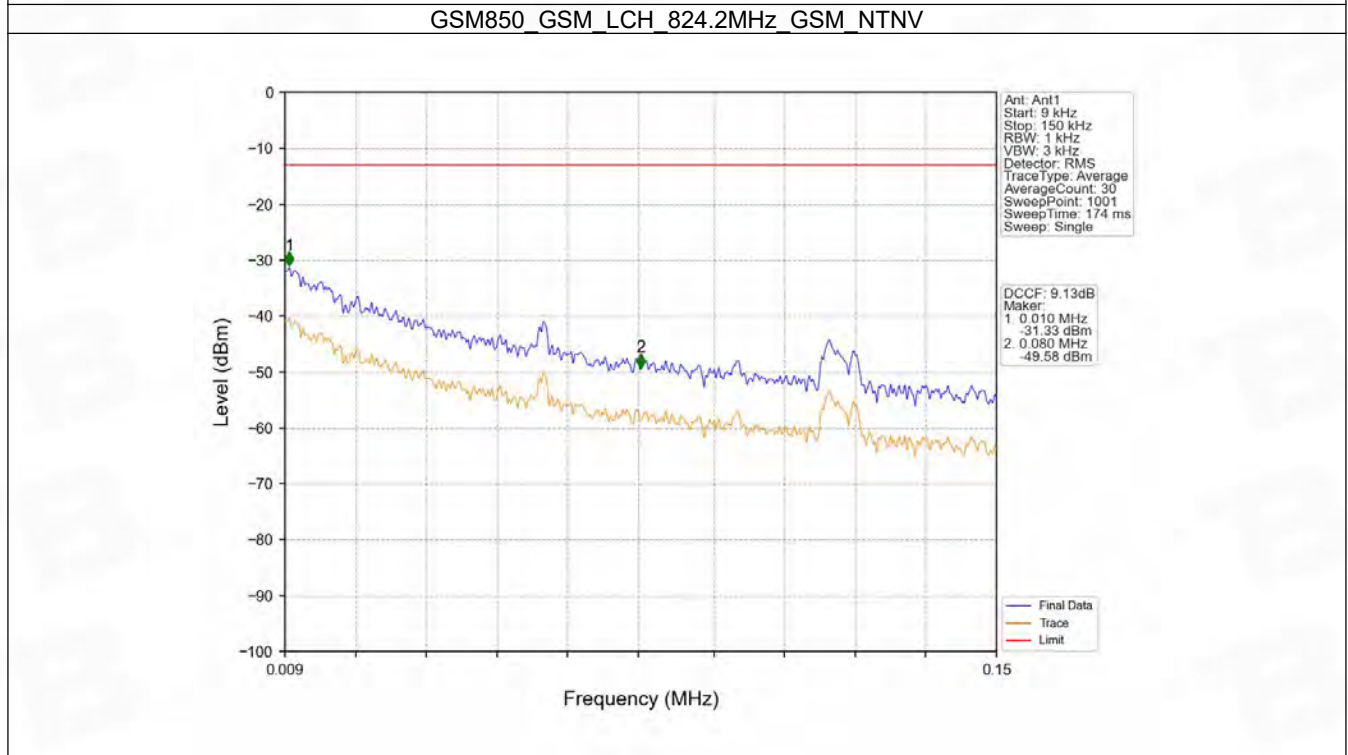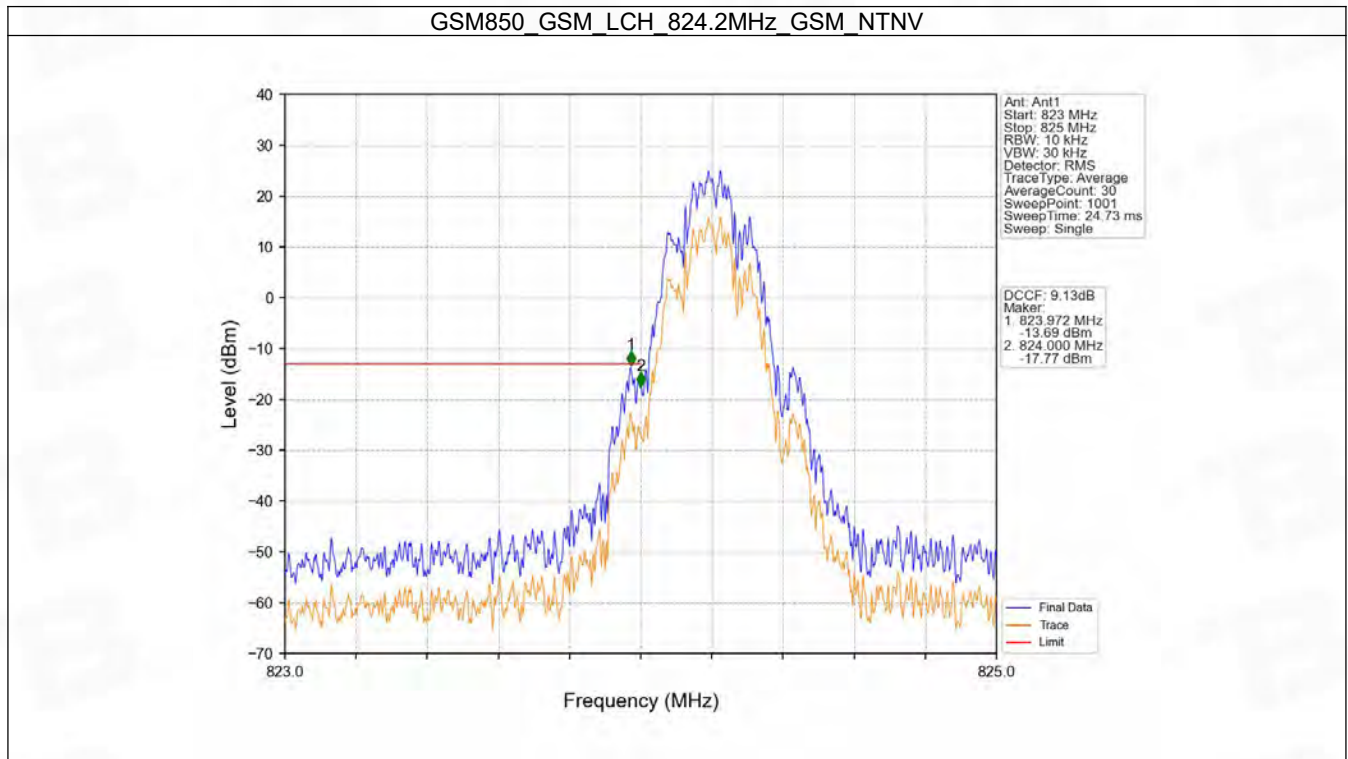


GSM850_GSM_LCH_824.2MHz_GSM_NTNV

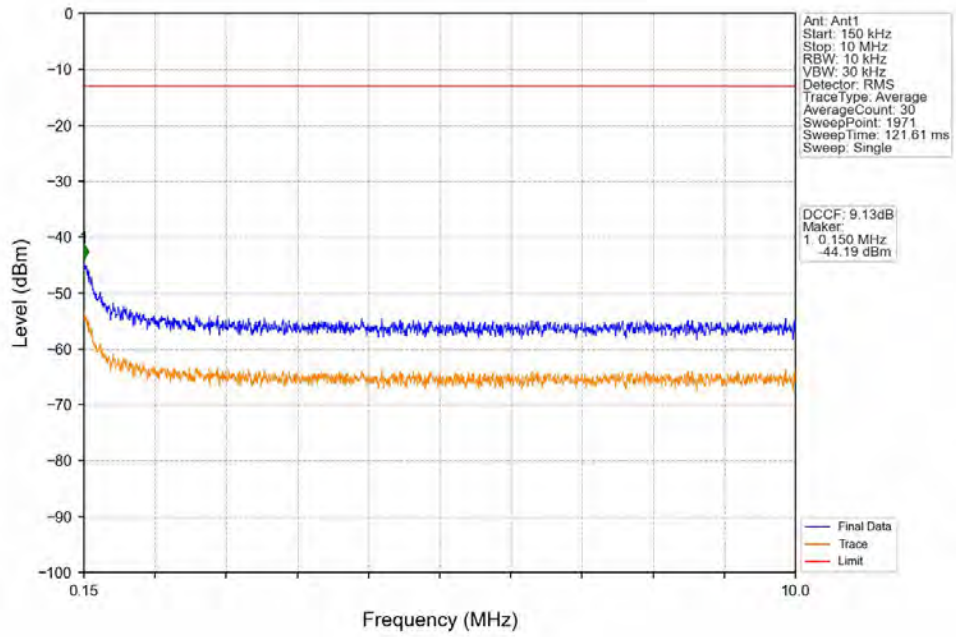


GSM850_GSM_LCH_824.2MHz_GSM_NTNV

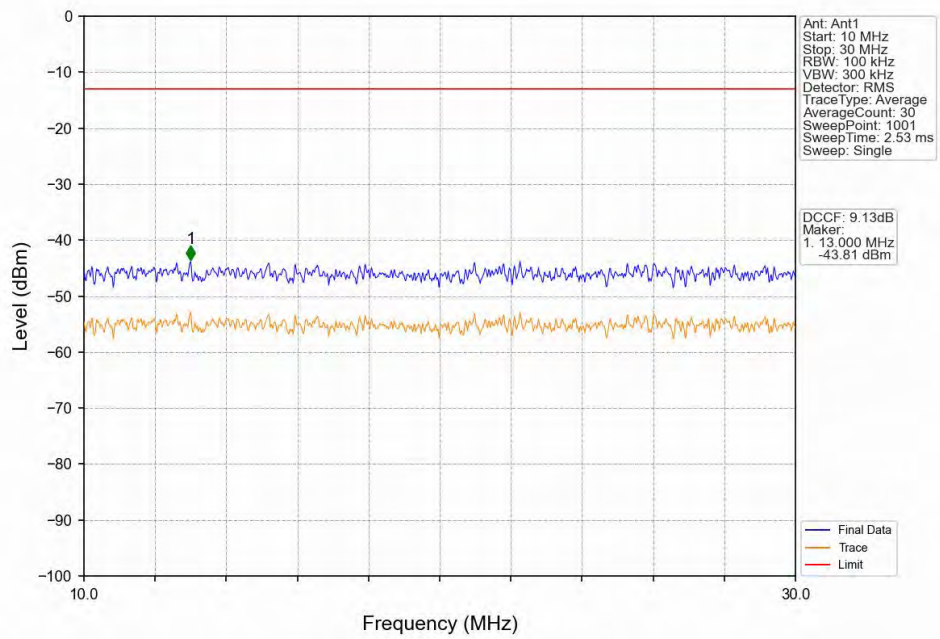


GSM850 GSM LCH 824.2MHz GSM_NTNV

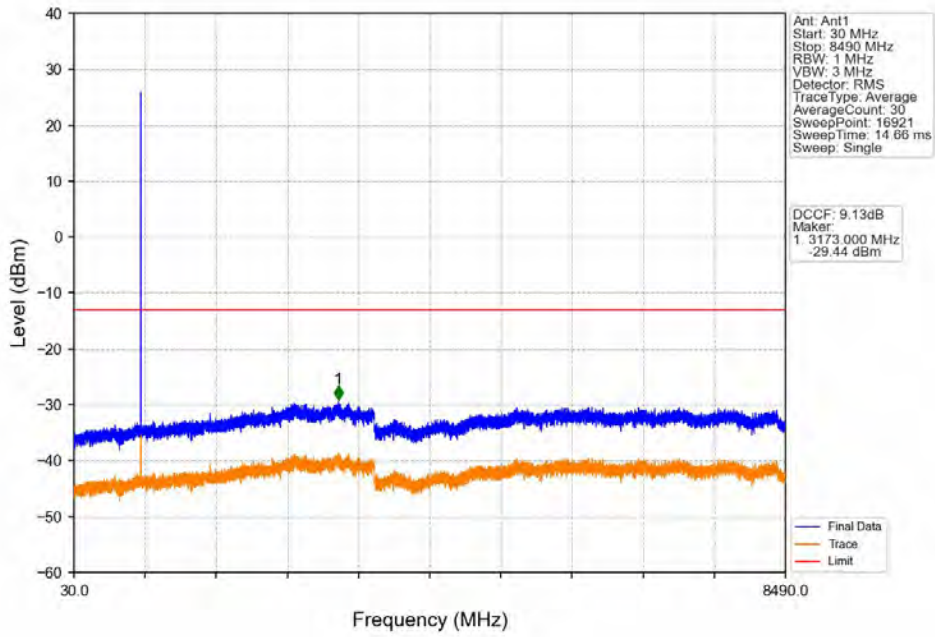


GSM850 GSM MCH 836.6MHz GSM_NTNV

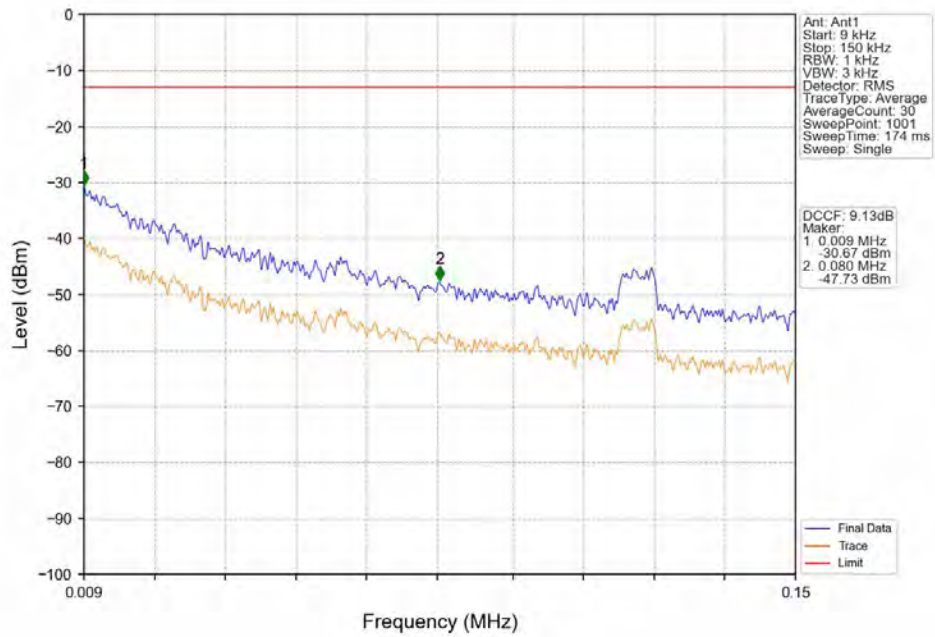


GSM850 GSM_MCH_836.6MHz GSM_NTNV

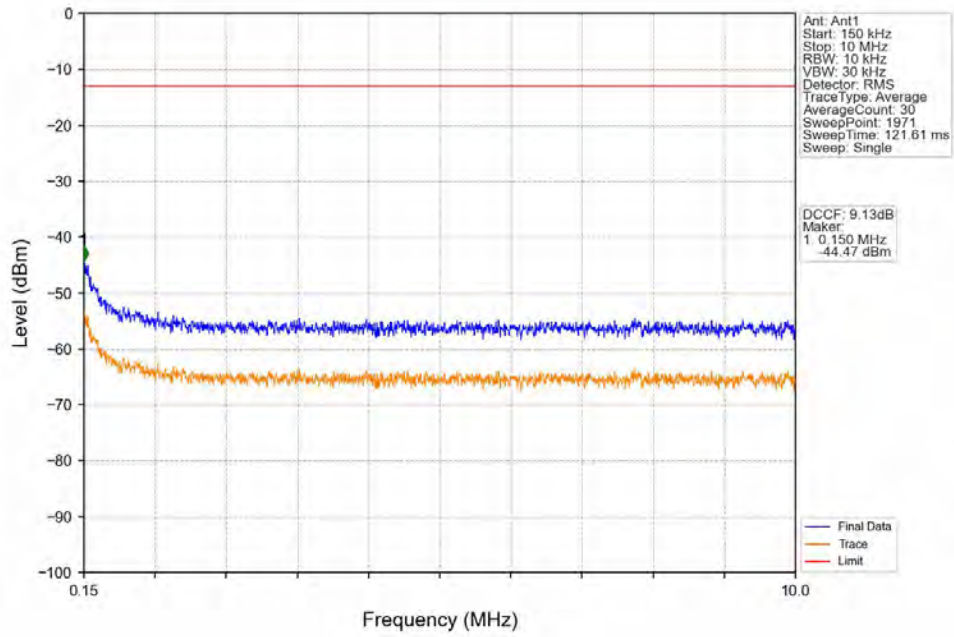


GSM850 GSM_MCH_836.6MHz GSM_NTNV

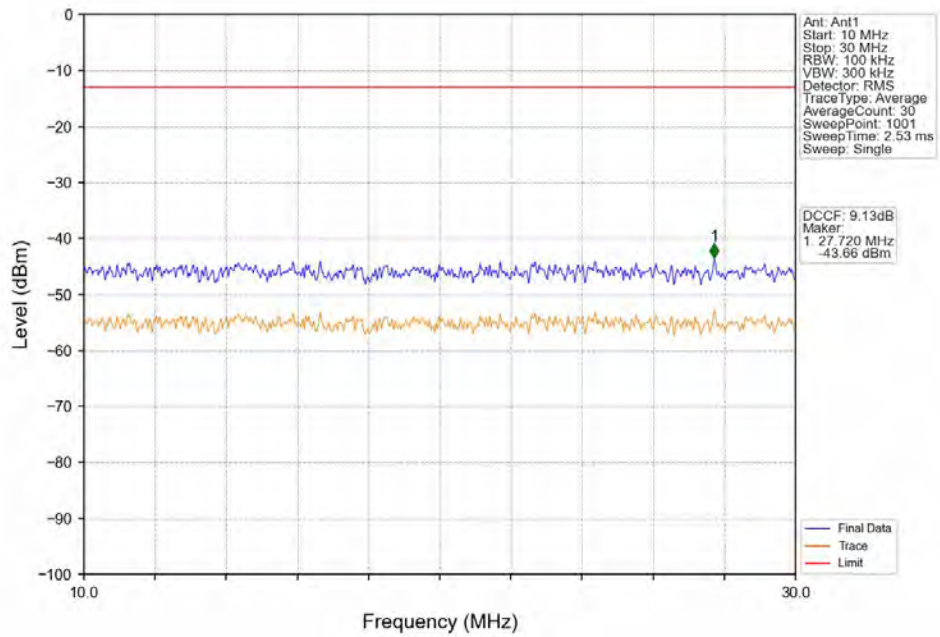


GSM850 GSM_MCH_836.6MHz_GSM_NTNV

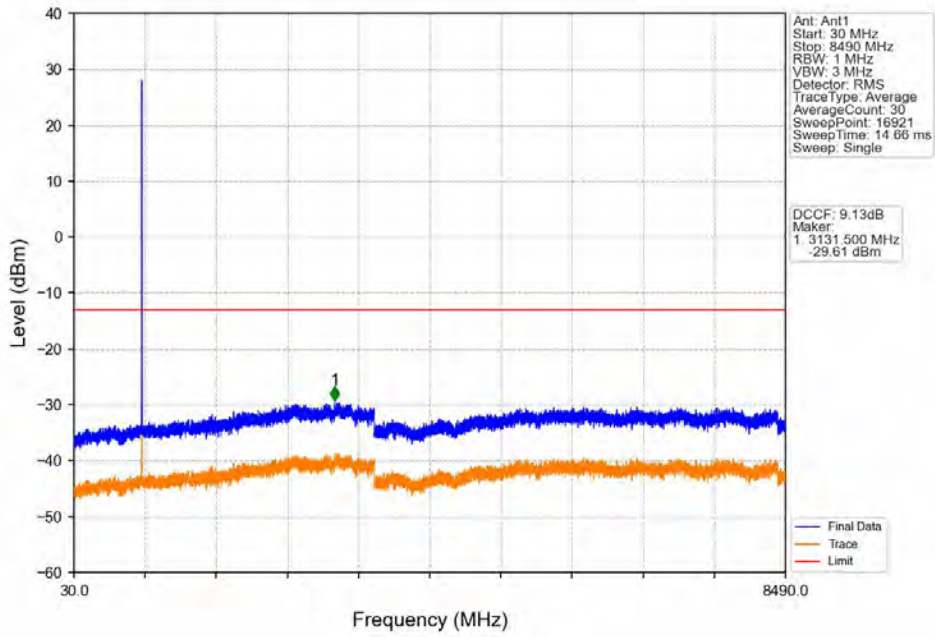


GSM850 GSM_HCH_848.8MHz_GSM_NTNV

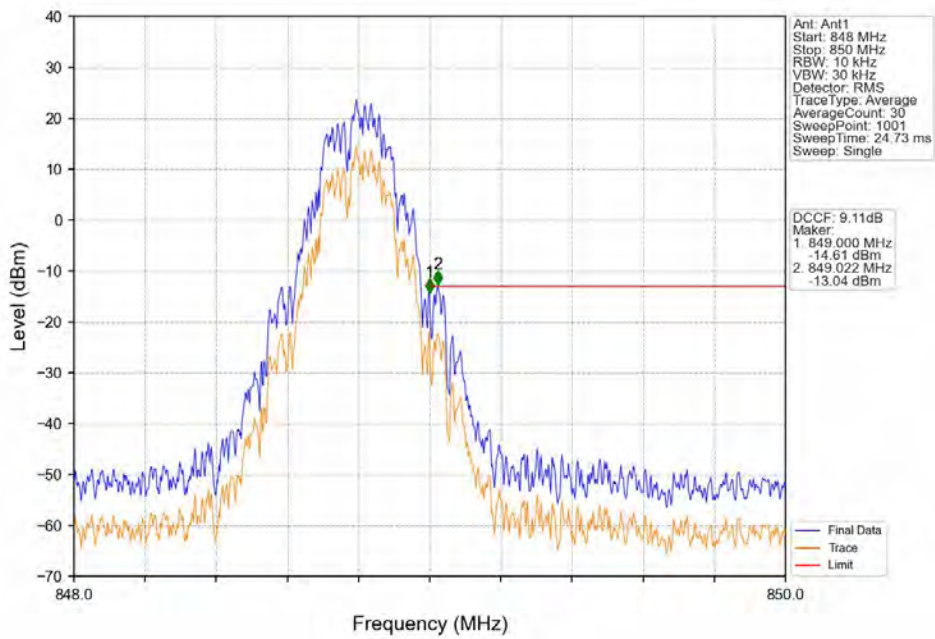


GSM850_GSM_HCH_848.8MHz_GSM_NTNV

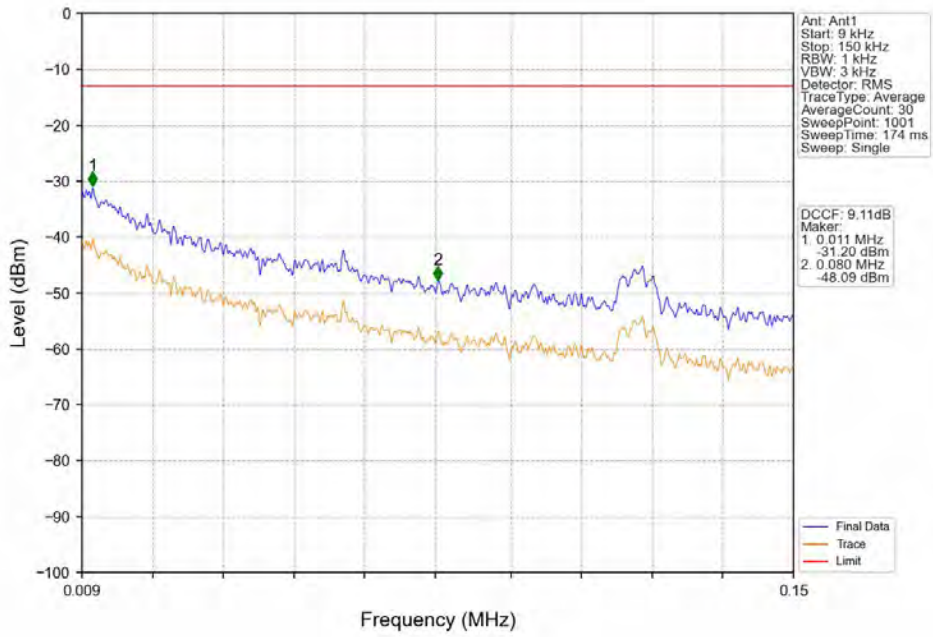


GSM850_GSM_HCH_848.8MHz_GSM_NTNV

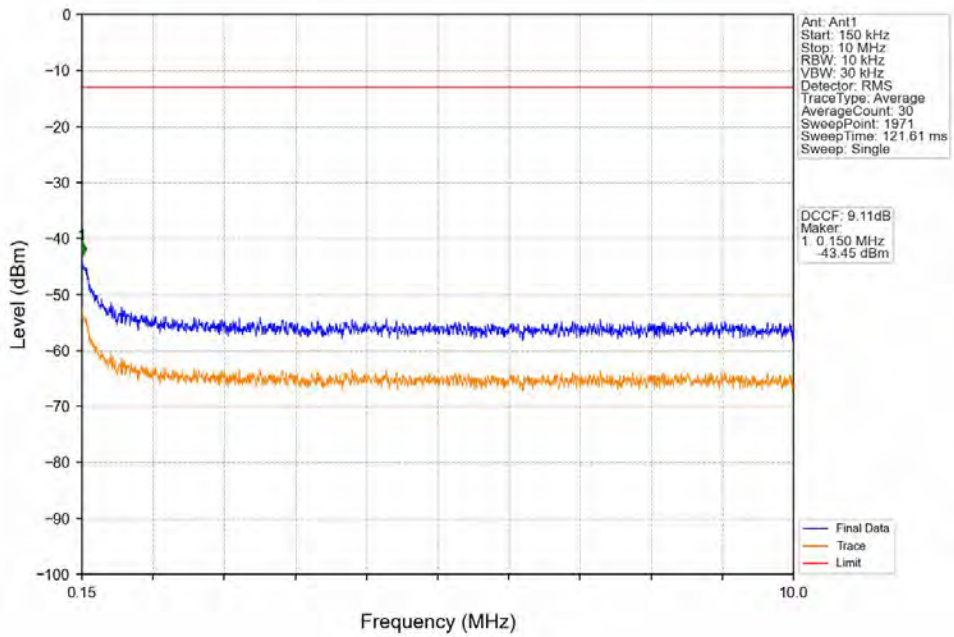


GSM850_GSM_HCH_848.8MHz_GSM_NTNV

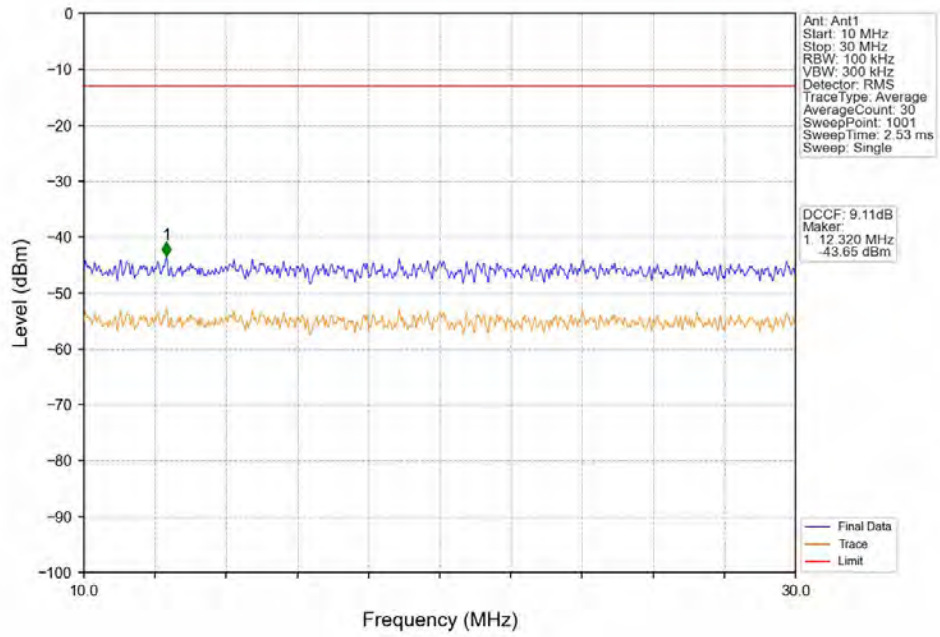


GSM850_GSM_HCH_848.8MHz_GSM_NTNV

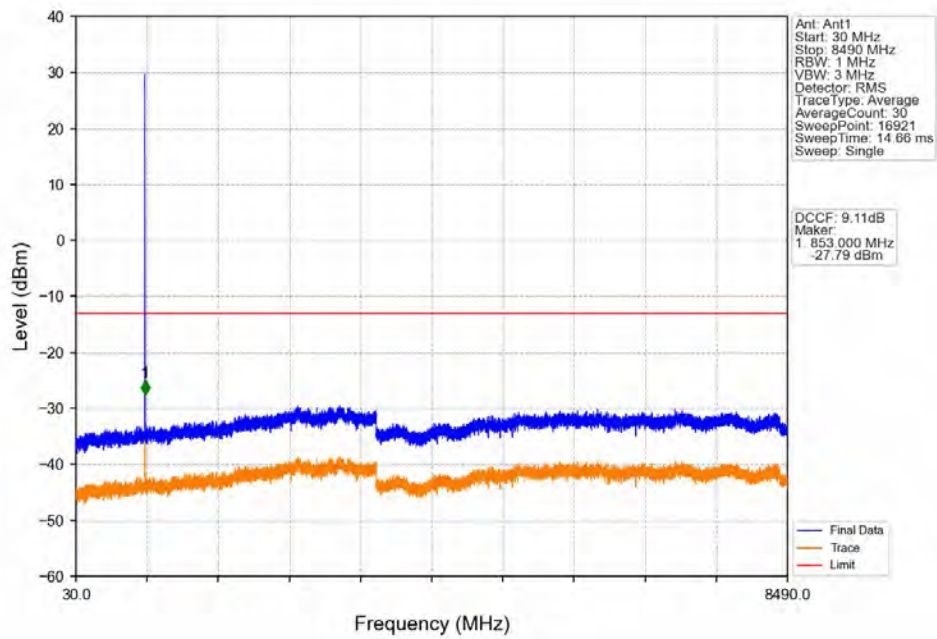


GSM850_GPRS_LCH_824.2MHz_1 TX Slot_NTNV

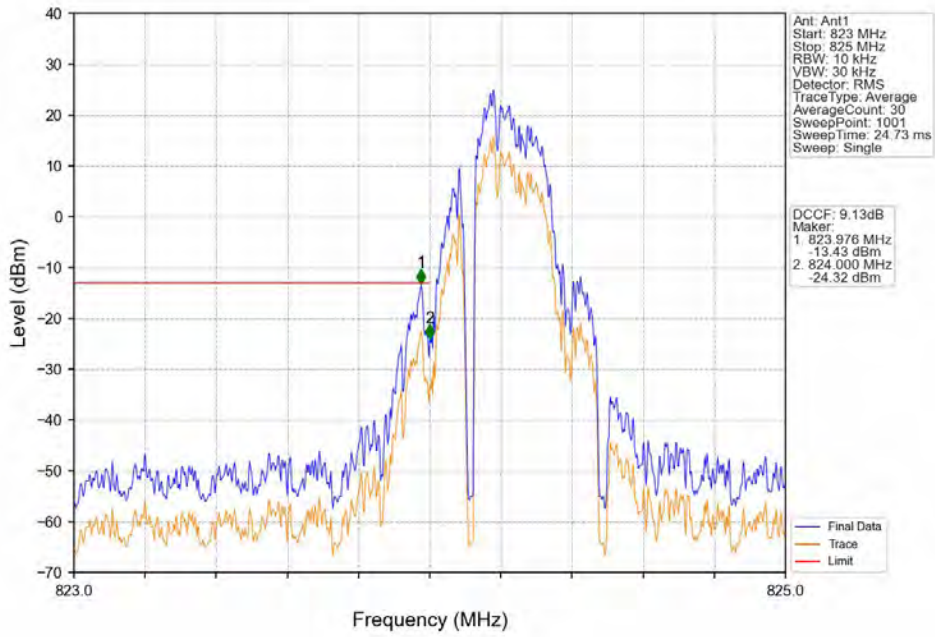


GSM850_GPRS_LCH_824.2MHz_1 TX Slot_NTNV

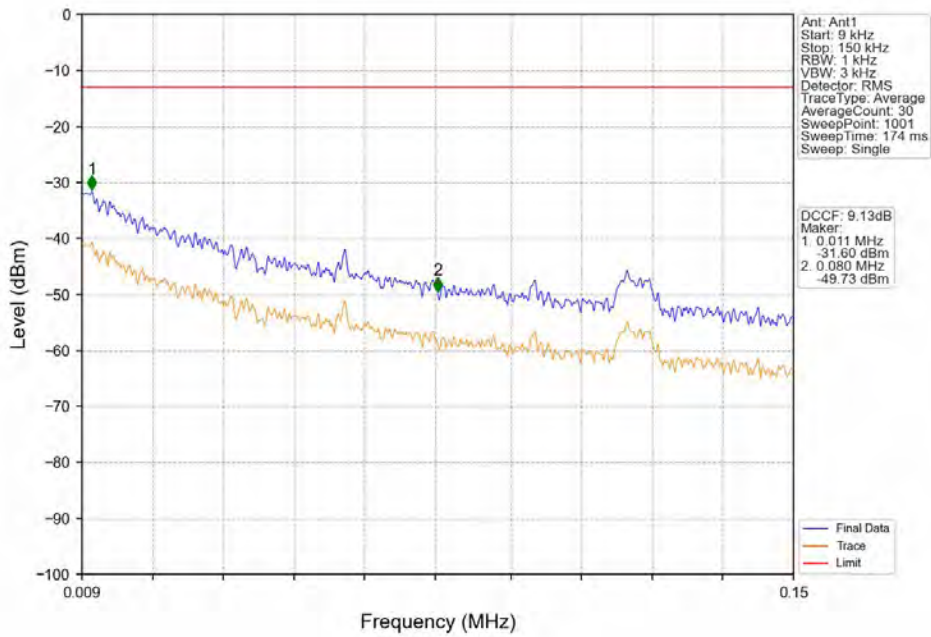


GSM850_GPRS_LCH_824.2MHz_1 TX Slot_NTNV

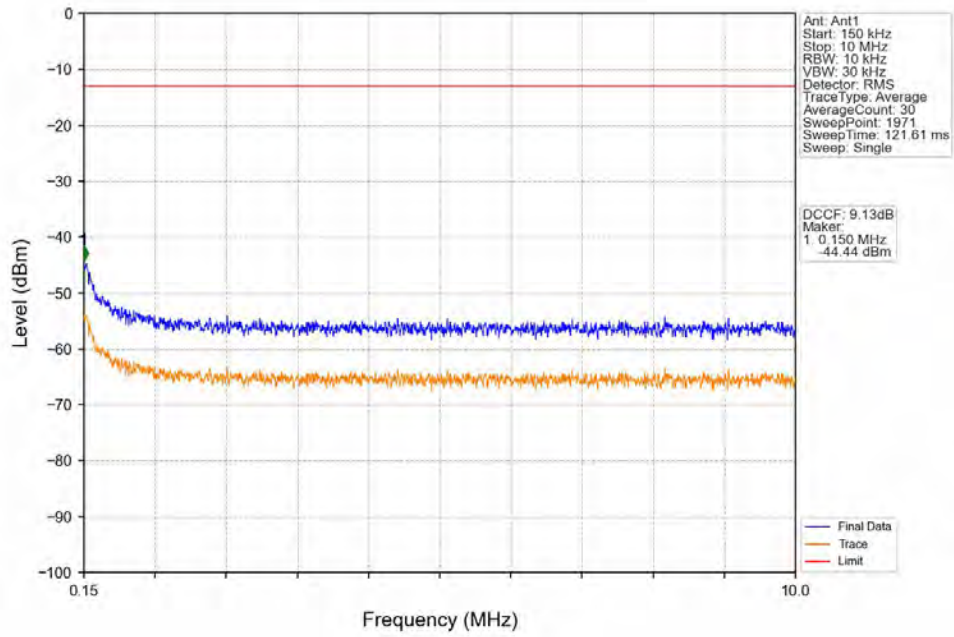


GSM850_GPRS_LCH_824.2MHz_1 TX Slot_NTNV

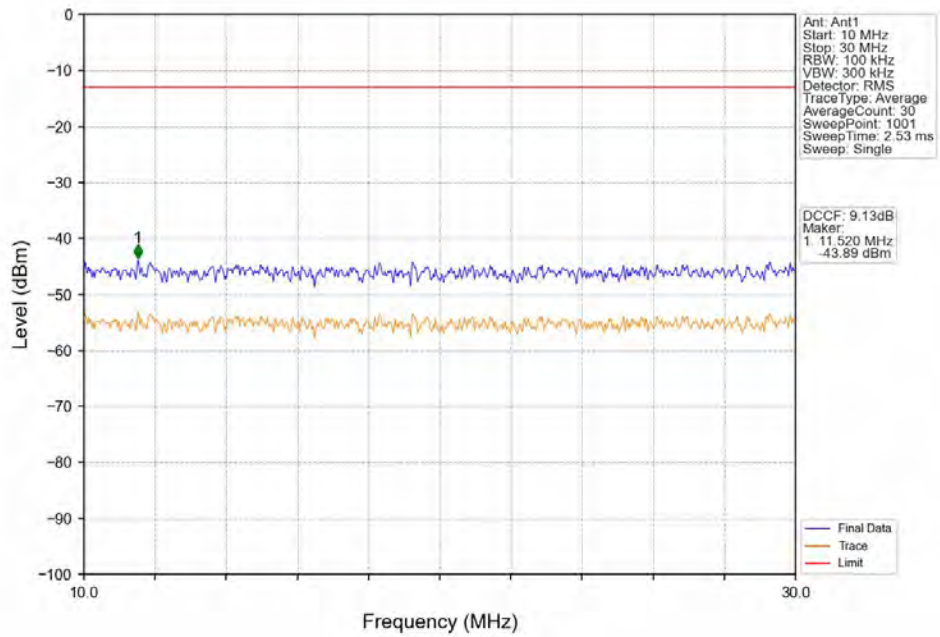


GSM850_GPRS_LCH_824.2MHz_1 TX Slot_NTNV

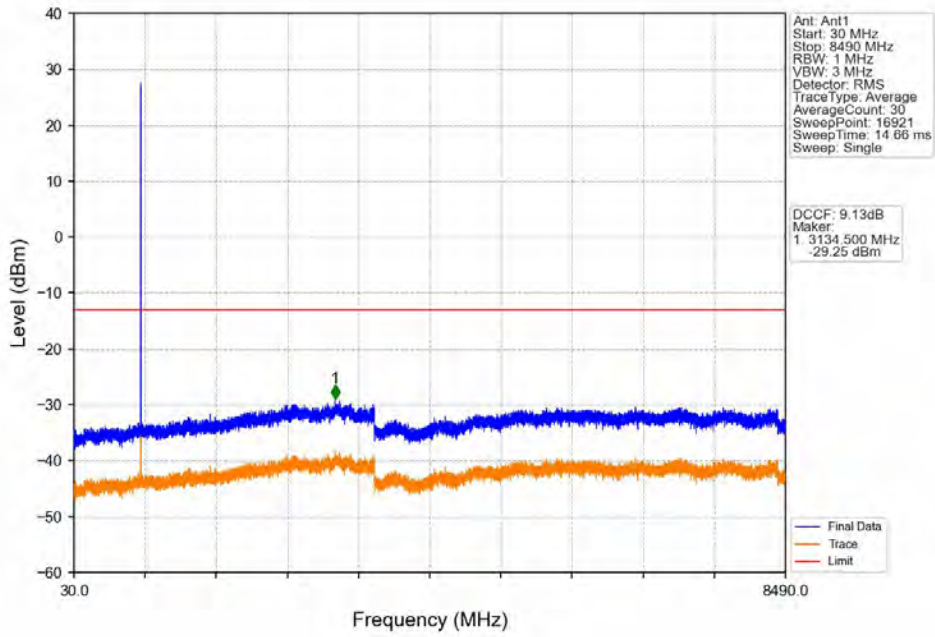


GSM850_GPRS_MCH_836.6MHz_1 TX Slot_NTNV

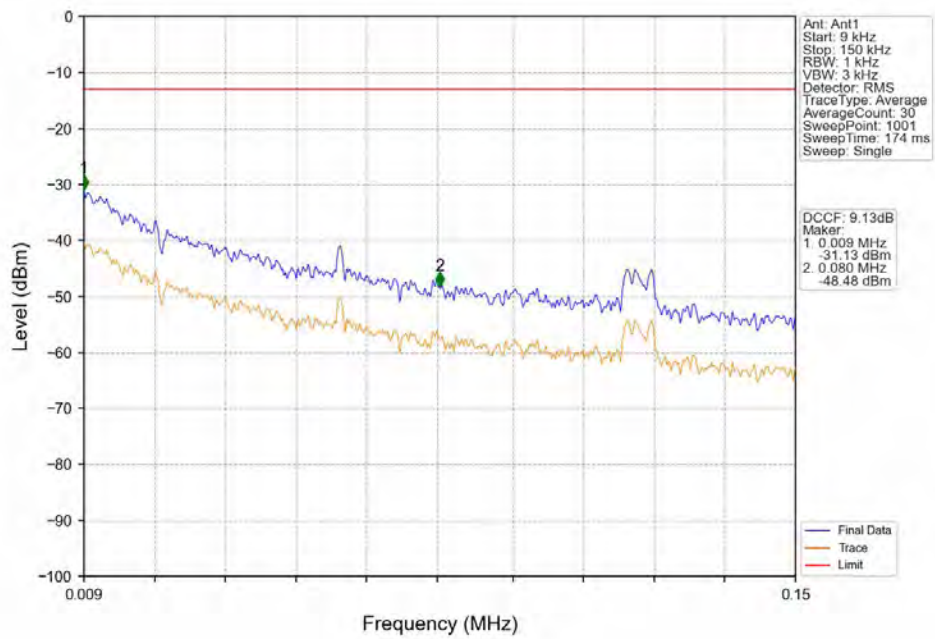


GSM850_GPRS_MCH_836.6MHz_1 TX Slot_NTNV

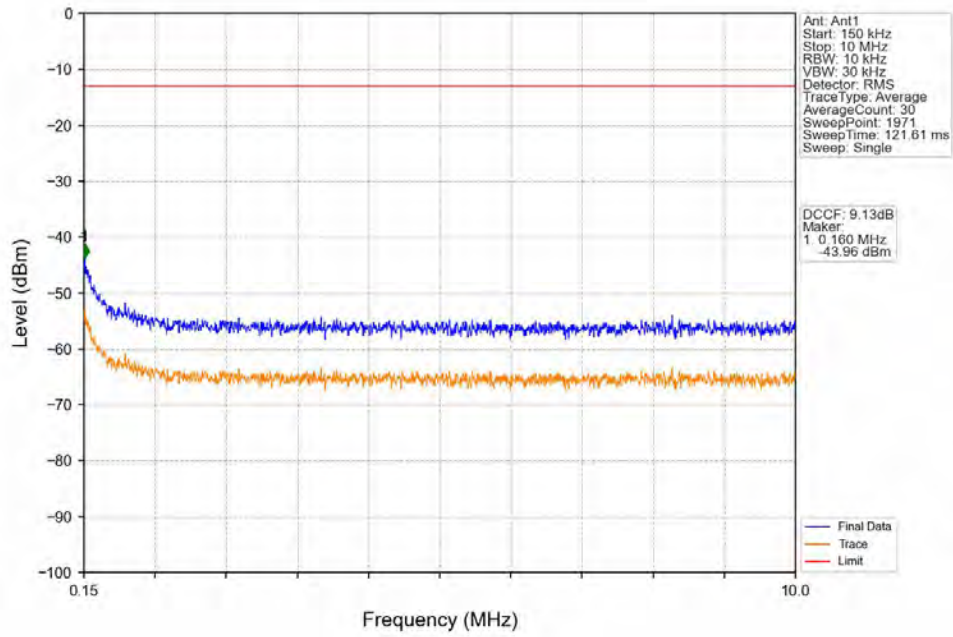


GSM850_GPRS_MCH_836.6MHz_1 TX Slot_NTNV

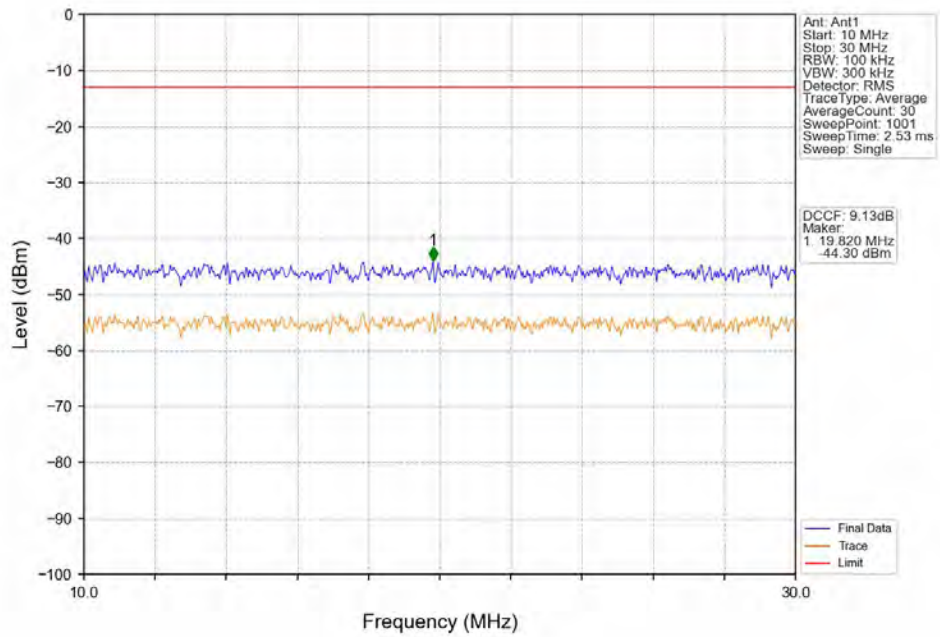


GSM850_GPRS_MCH_836.6MHz_1 TX Slot_NTNV

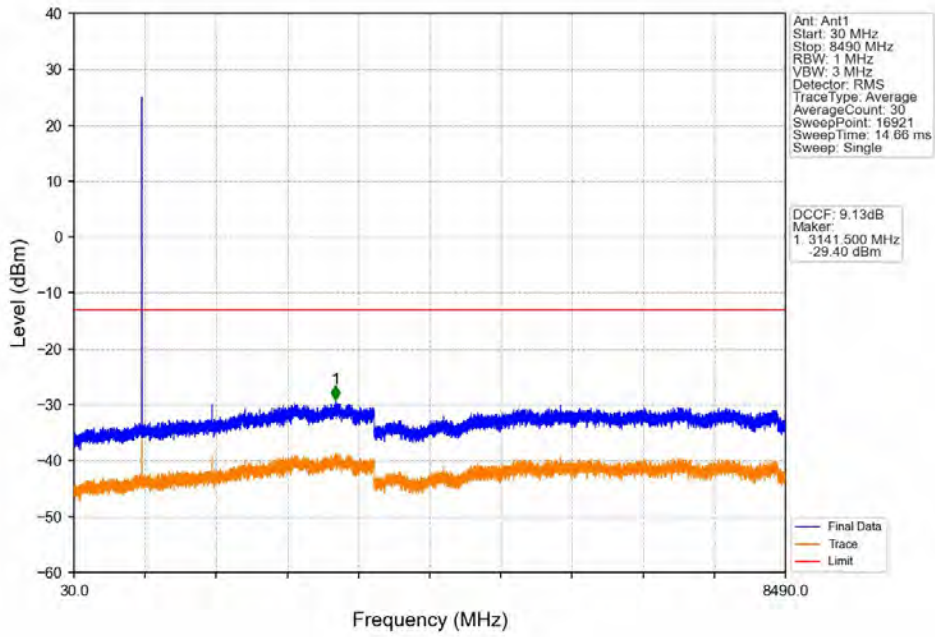


GSM850_GPRS_HCH_848.8MHz_1 TX Slot_NTNV

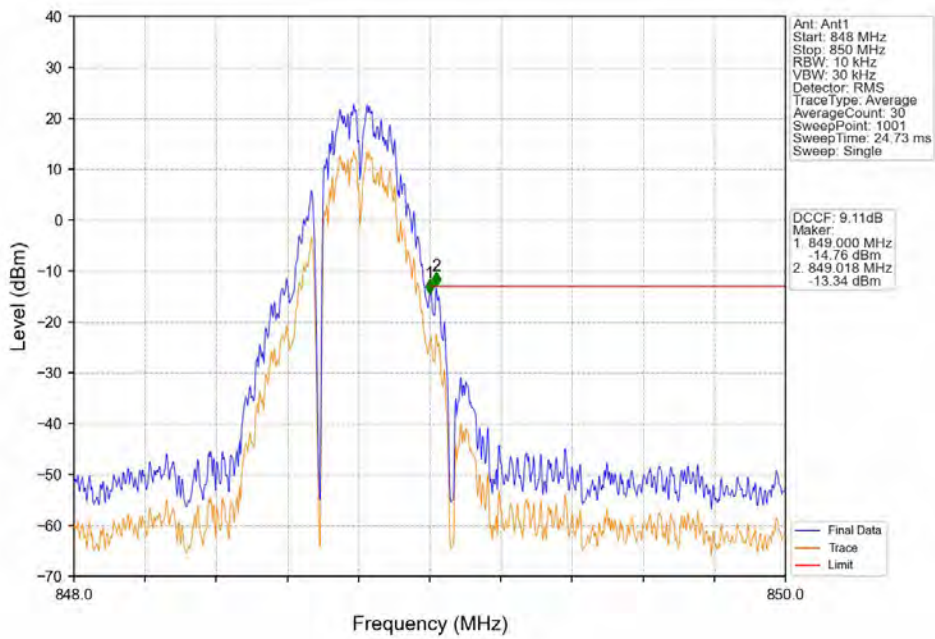


GSM850_GPRS_HCH_848.8MHz_1 TX Slot_NTNV

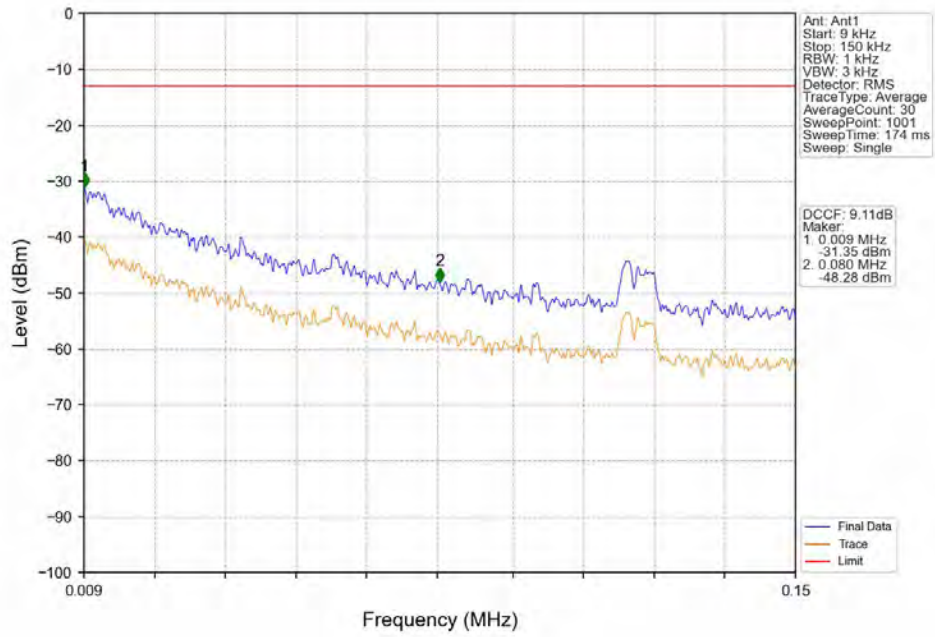


GSM850_GPRS_HCH_848.8MHz_1 TX Slot_NTNV

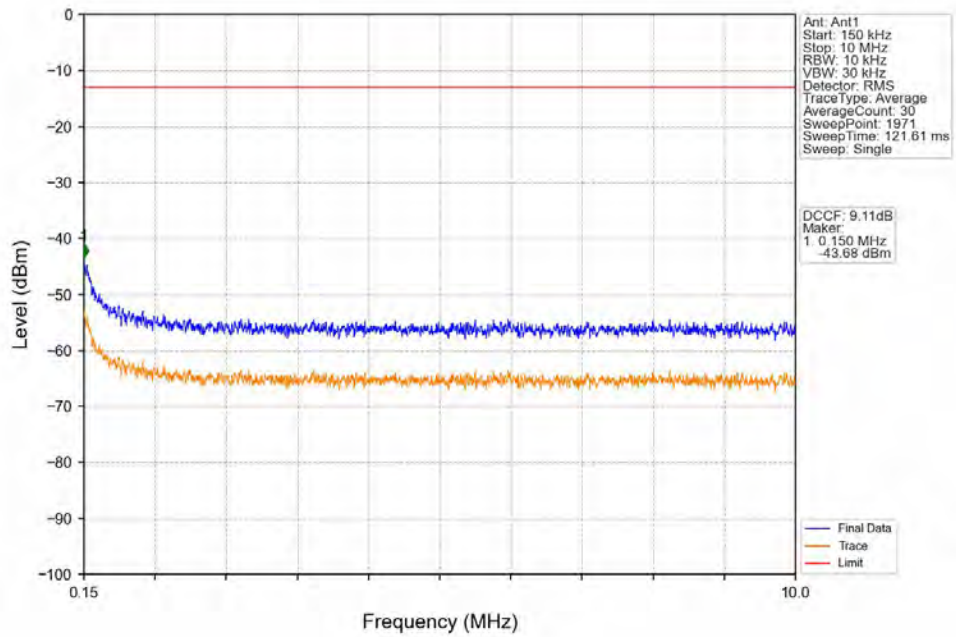


GSM850_GPRS_HCH_848.8MHz_1 TX Slot_NTNV

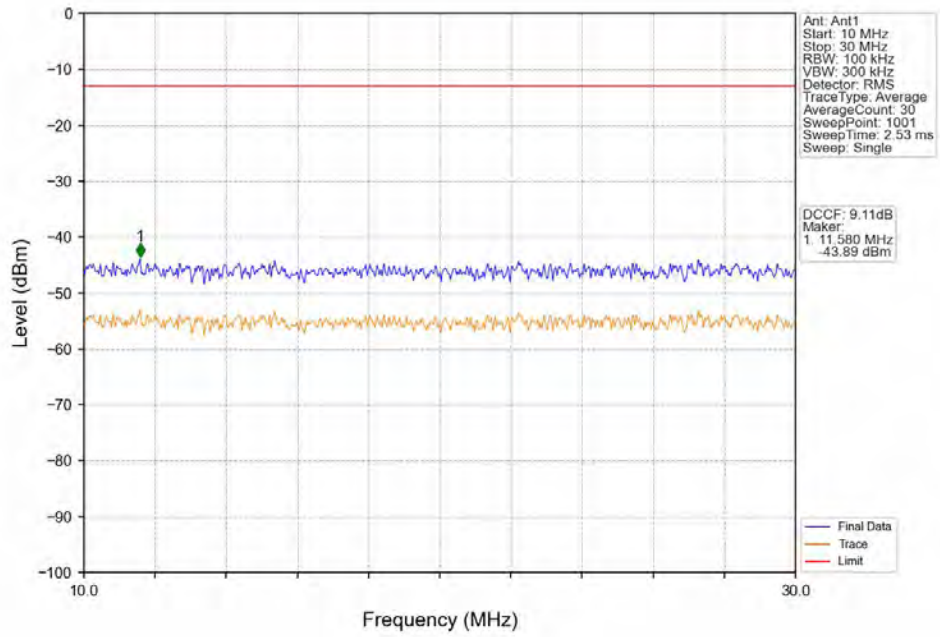


GSM850_GPRS_HCH_848.8MHz_1 TX Slot_NTNV

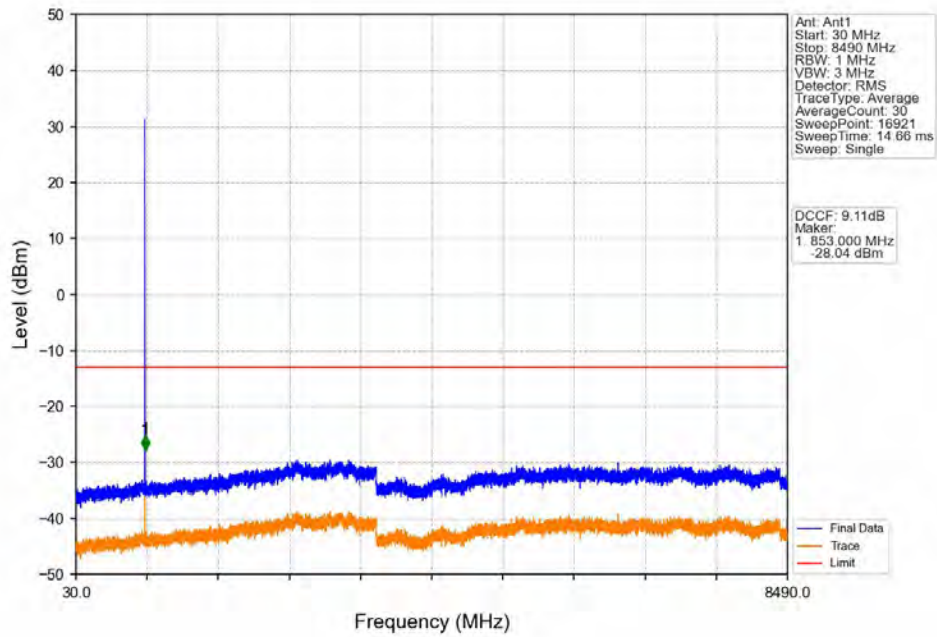


GSM850 EGPRS LCH 824.2MHz_1 TX Slot_NTNV

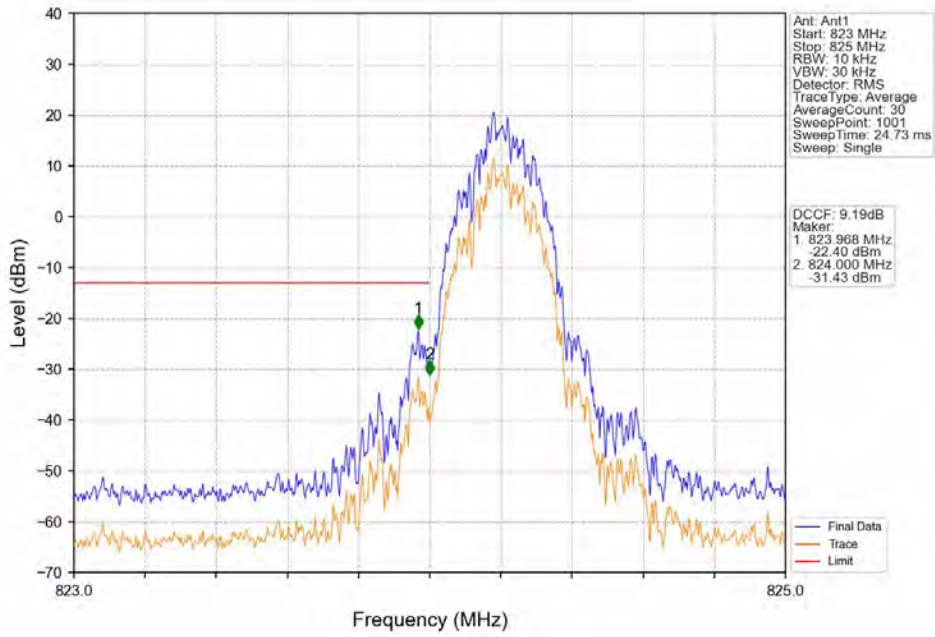


GSM850 EGPRS LCH 824.2MHz_1 TX Slot_NTNV

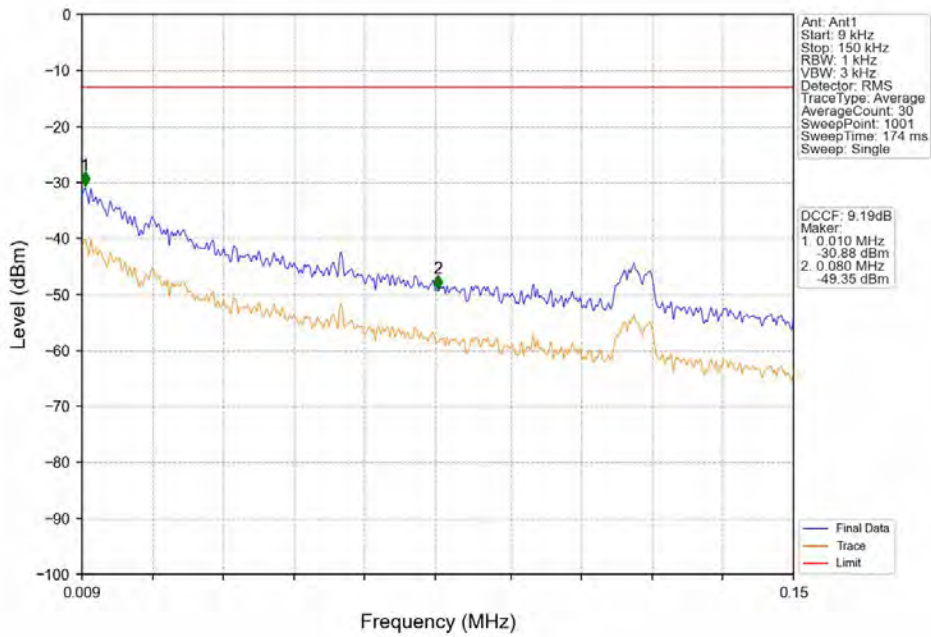


GSM850 EGPRS LCH 824.2MHz_1 TX Slot_NTNV

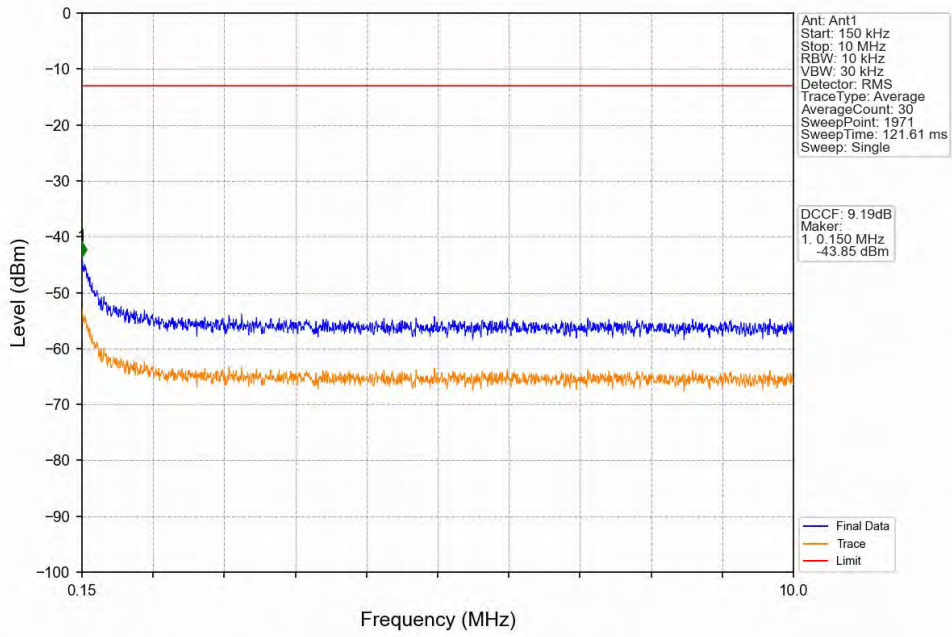


GSM850 EGPRS LCH 824.2MHz_1 TX Slot_NTNV

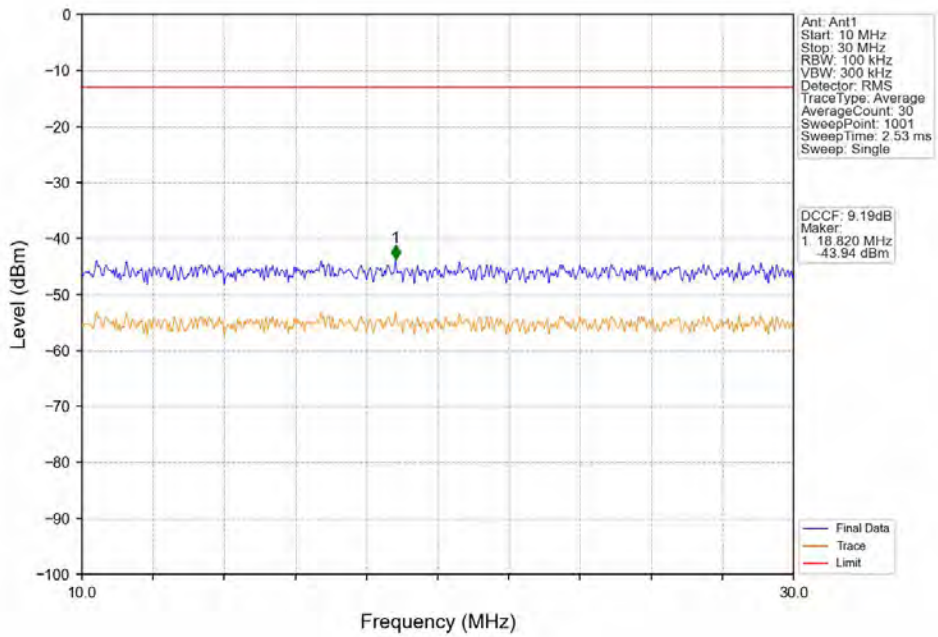


GSM850 EGPRS LCH 824.2MHz 1 TX Slot NTN

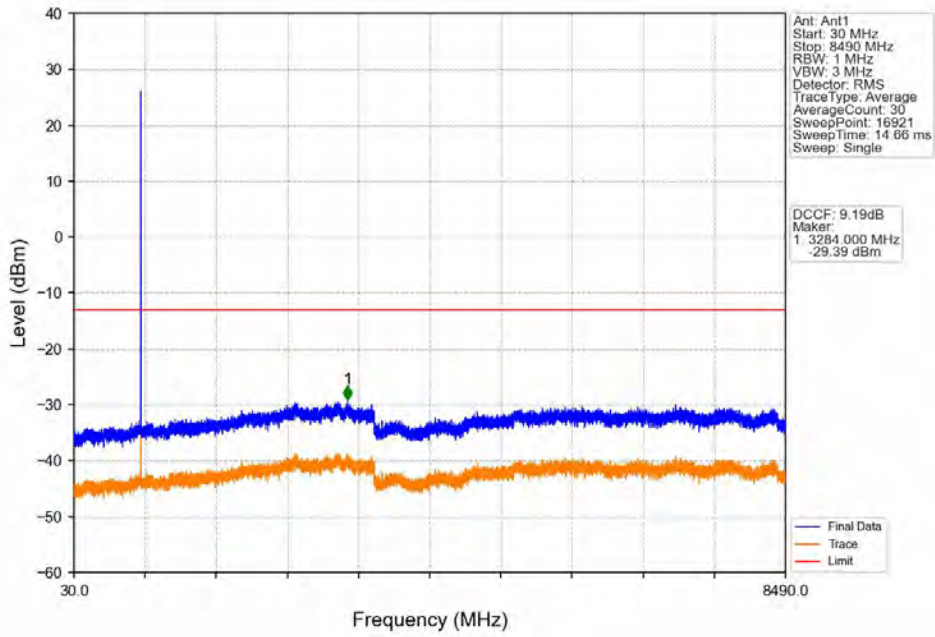


GSM850 EGPRS MCH 836.6MHz 1 TX Slot NTN

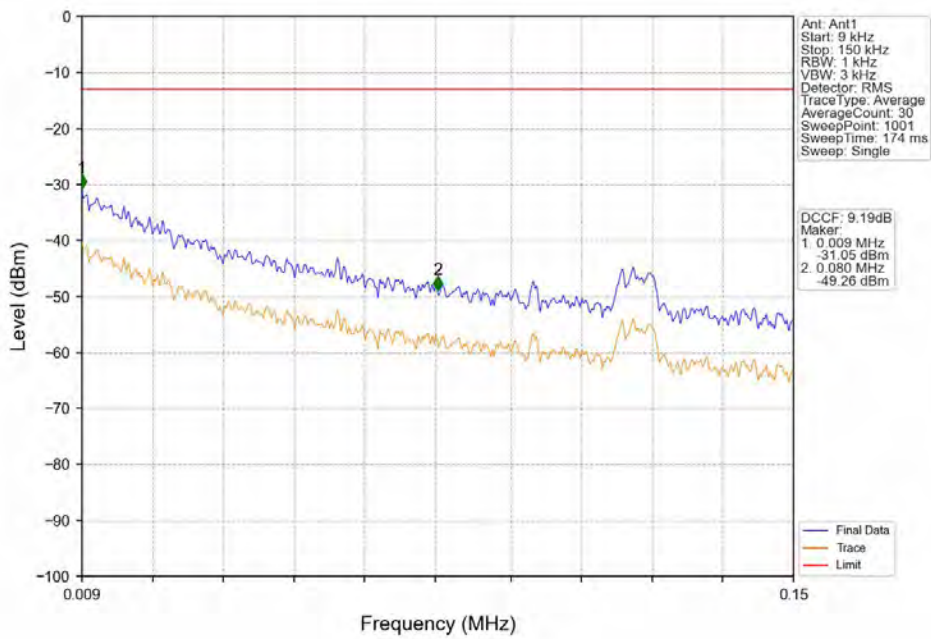


GSM850_EGPRS_MCH_836.6MHz_1_TX_Slot_NTNV

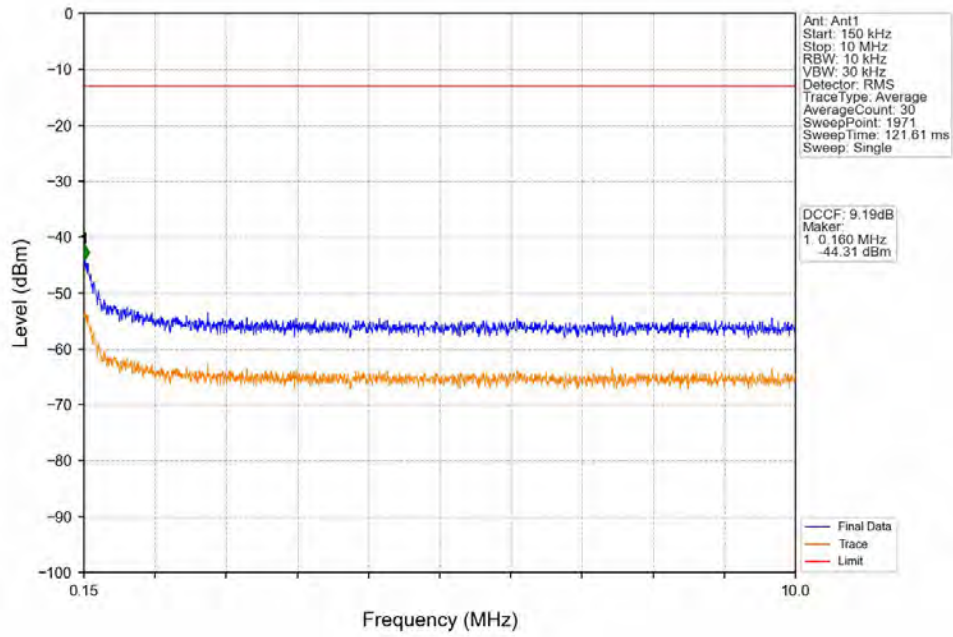


GSM850_EGPRS_MCH_836.6MHz_1_TX_Slot_NTNV

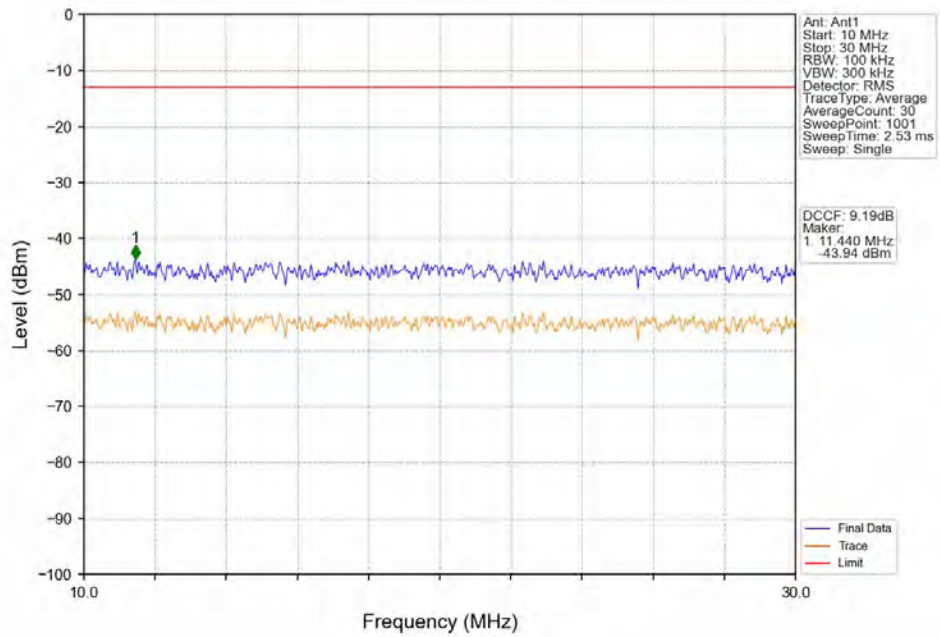


GSM850 EGPRS MCH 836.6MHz 1 TX Slot_NTNV

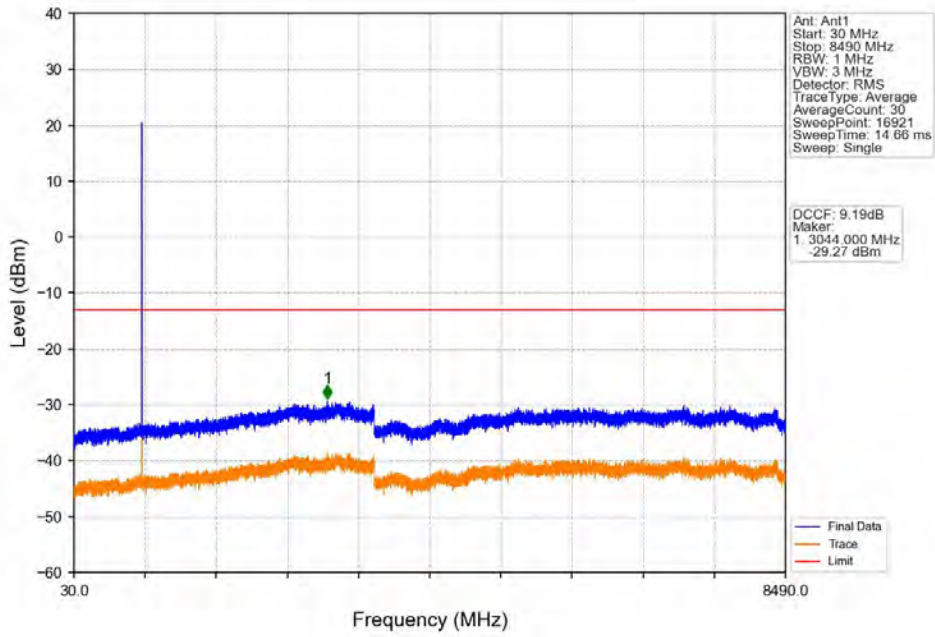


GSM850 EGPRS HCH 848.8MHz 1 TX Slot_NTNV

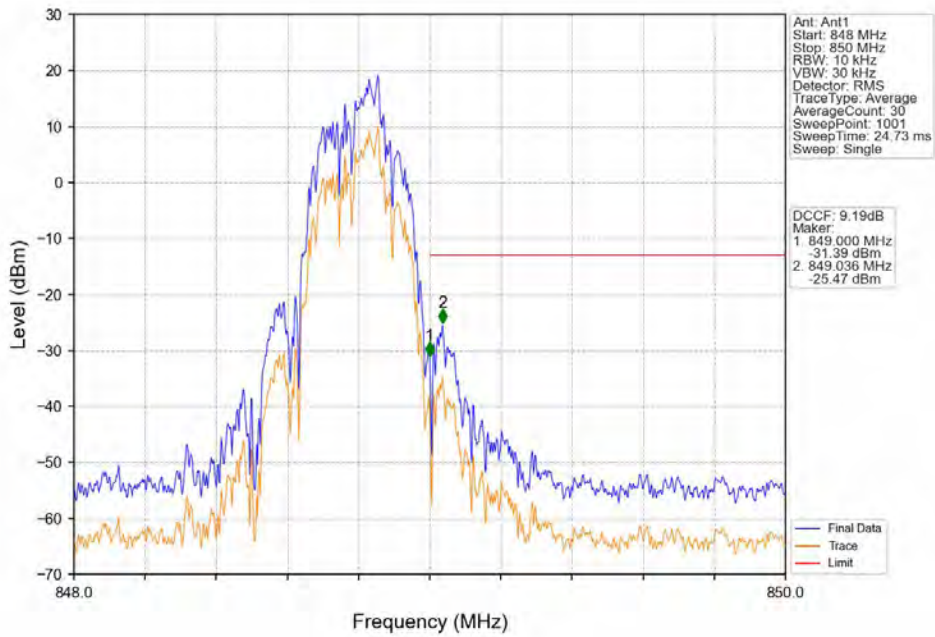


GSM850_EGPRS_HCH_848.8MHz_1_TX_Slot_NTNV

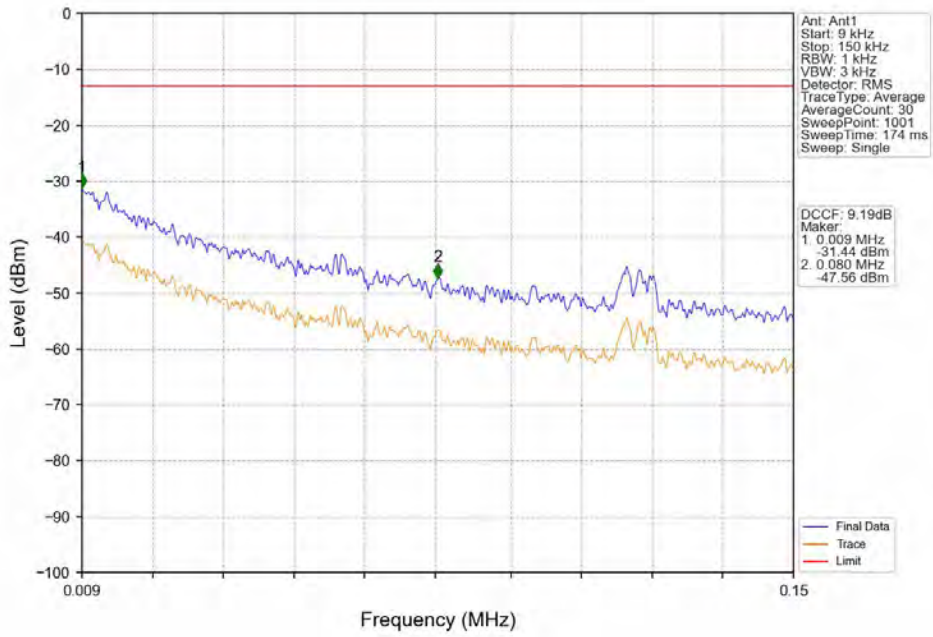


GSM850_EGPRS_HCH_848.8MHz_1_TX_Slot_NTNV

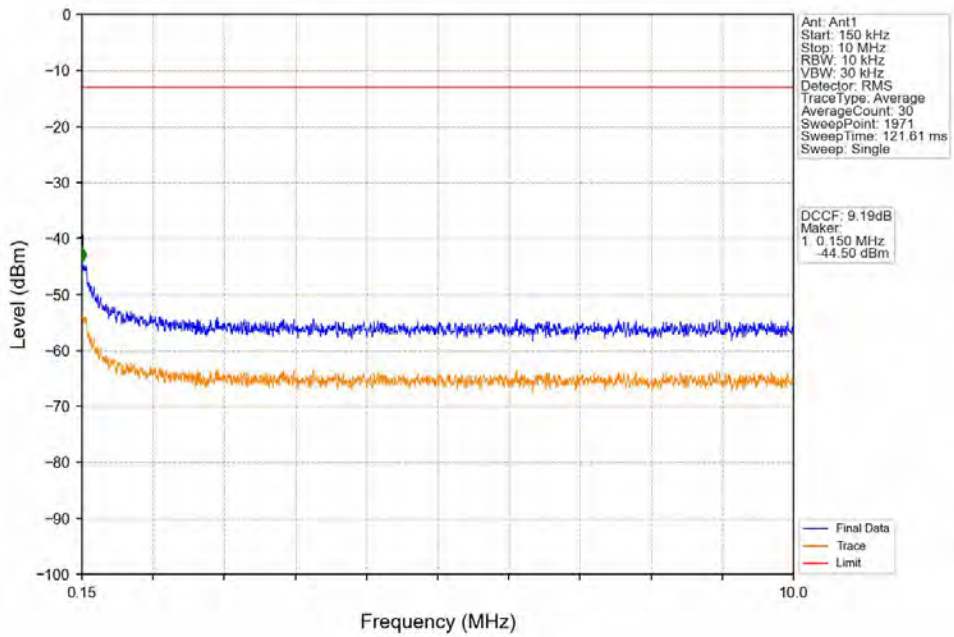

GSM850 EGPRS HCH 848.8MHz 1 TX Slot NTN

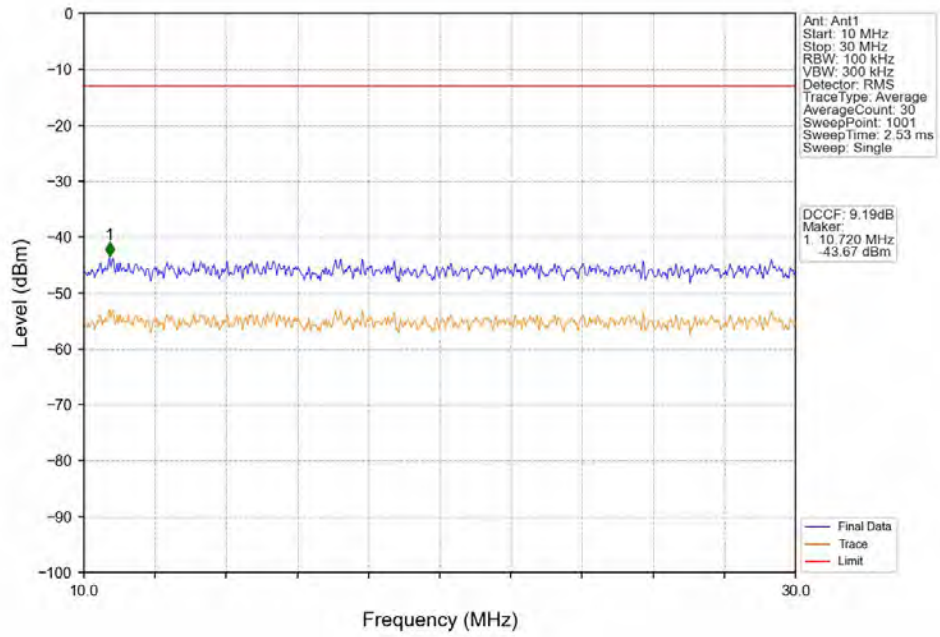

GSM850 EGPRS HCH 848.8MHz 1 TX Slot NTN

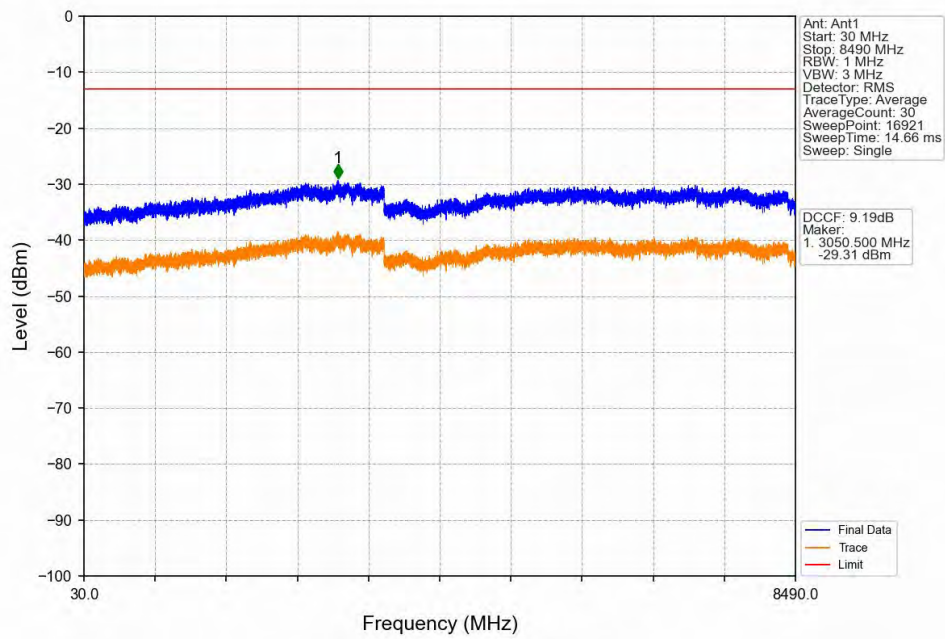

7. Form731

7.1 Form731_Power

7.1.1 Test Result

Band	BW	Lower Freq	High Freq	MAX Power (W)	Value	Hz/ppm	Emission Designator	Rule Parts	MAX Power (dBm)
GSM850	0.2	824.2	848.8	1.9275	0.0143	ppm	248KGXW	22H	32.85
GSM850	0.2	824.2	848.8	0.5200	0.0095	ppm	252KG7W	22H	27.16

7.2 Form731_ERP

7.2.1 Test Result

Band	BW	Lower Freq	High Freq	MAX Power (W)	Value	Hz/ppm	Emission Designator	Rule Parts	MAX Power (dBm)
GSM850	0.2	824.2	848.8	1.2589	0.0143	ppm	248KGXW	22H	31.00
GSM850	0.2	824.2	848.8	0.3396	0.0095	ppm	252KG7W	22H	25.31