

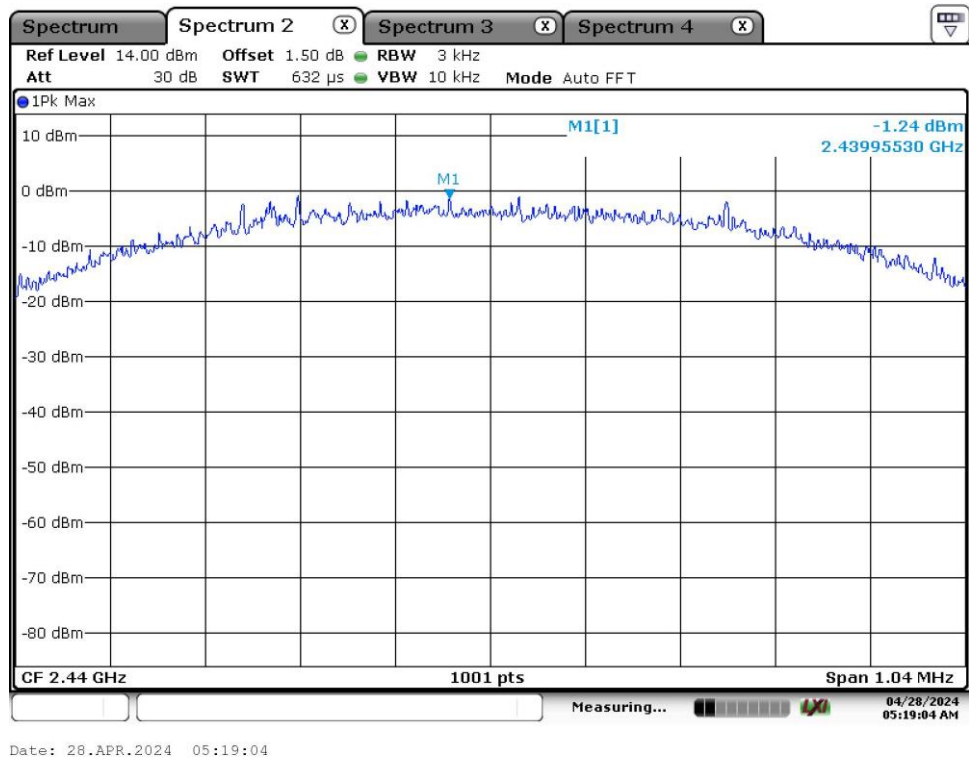


Appendix A: Test Results of Bluetooth LE

APPENDIX A: TEST RESULTS OF BLUETOOTH LE	1
APPENDIX A.1: TEST RESULTS OF CONDUCTED POWER SPECTRAL DENSITY	2
APPENDIX A.2: TEST RESULTS OF 6dB BANDWIDTH	4
APPENDIX A.3: TEST RESULTS OF 99% BANDWIDTH	7
APPENDIX A.4: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 kHz BANDWIDTH	10
<i>Band Edge</i>	10
<i>Conducted Spurious Emission</i>	11
APPENDIX A.5: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	14
<i>30 MHz to 1GHz</i>	14
<i>1GHz-18GHz</i>	16
APPENDIX A.6: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS	28
APPENDIX A.7: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS	32

Appendix A.1: Test Results of Conducted Power Spectral Density

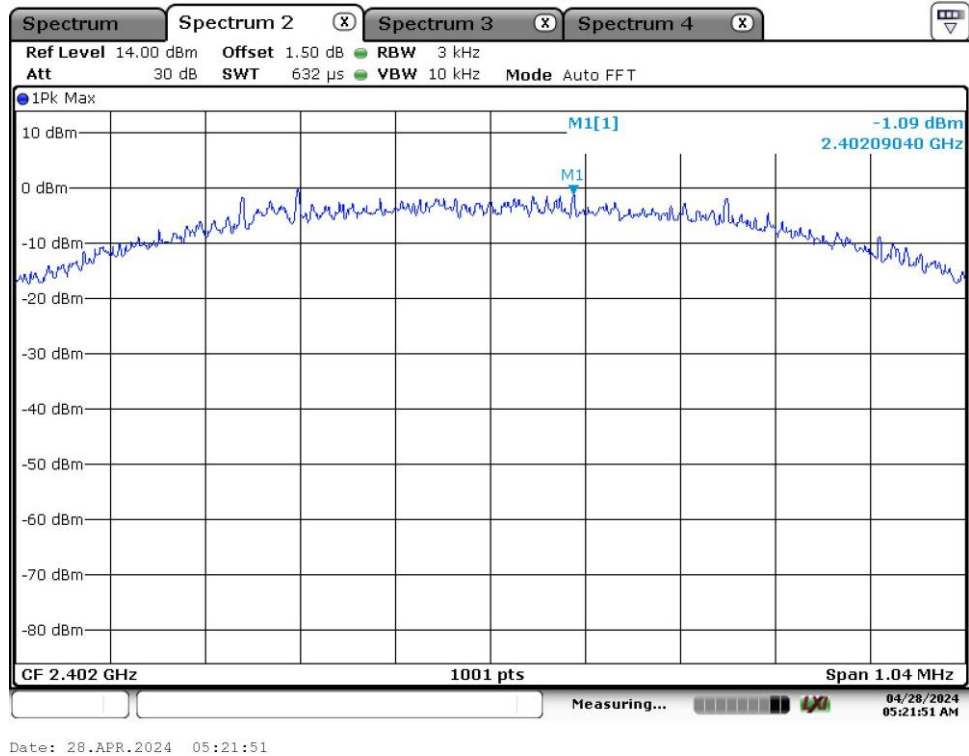

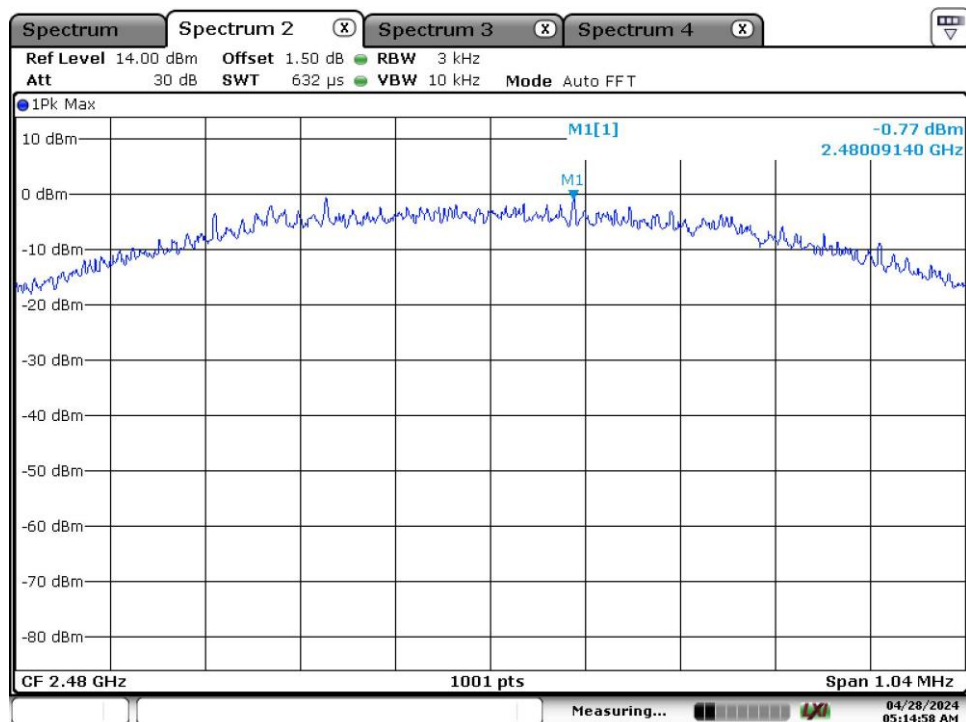

Date: 28.APR.2024 05:14:58

Appendix A.2: Test Results of 6dB Bandwidth

Minimum Emission Bandwidth 6 dB (2402 MHz; 20.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	0.693070	0.500000	---	2401.663366	2402.356436

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2402.000000	7.0	PASS

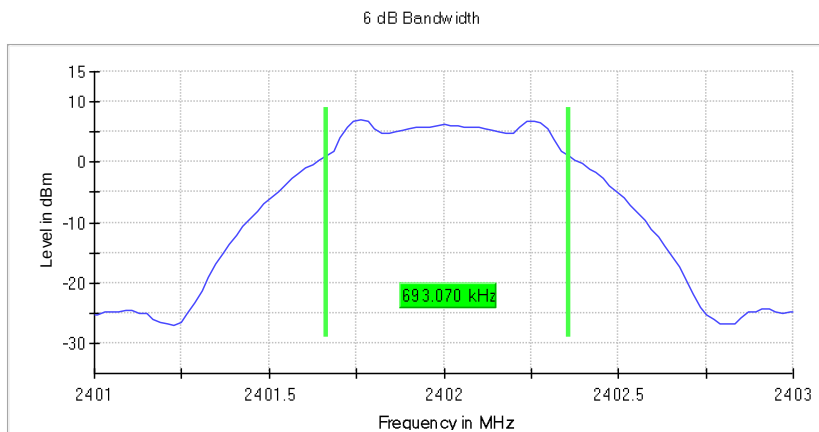

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
Sweptime	18.938 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.07 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2440 MHz; 20.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	0.712872	0.500000	---	2439.643564	2440.356436

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2440.000000	6.6	PASS

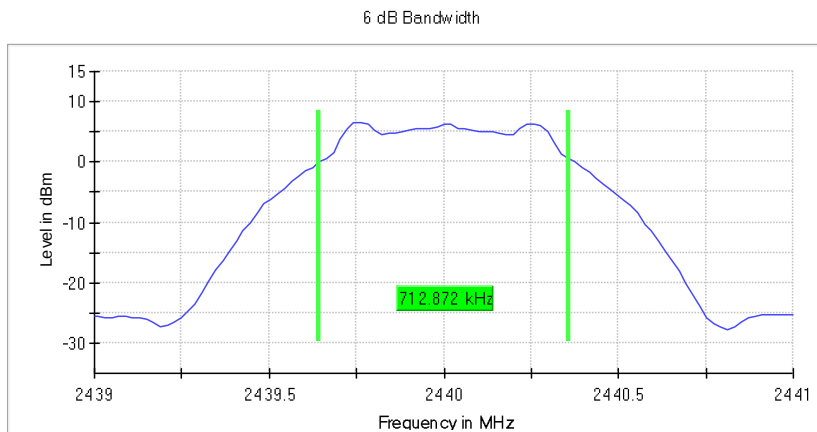

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43900 GHz	2.43900 GHz
Stop Frequency	2.44100 GHz	2.44100 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
Sweeptime	18.938 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.00 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2480 MHz; 20.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	0.693070	0.500000	---	2479.663366	2480.356436

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2480.000000	6.8	PASS

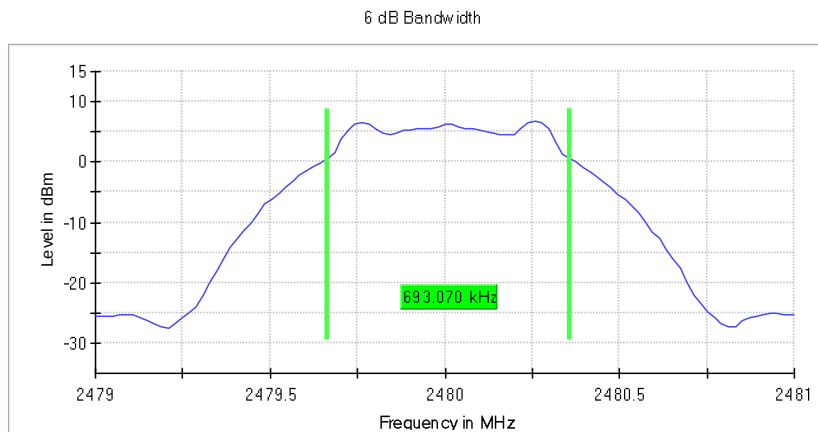

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
Sweeptime	18.938 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.06 dB	0.50 dB

Appendix A.3: Test Results of 99% Bandwidth

Occupied Channel Bandwidth 99% (2402 MHz; 20.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	1.025000	---	---	2401.497500	2402.522500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

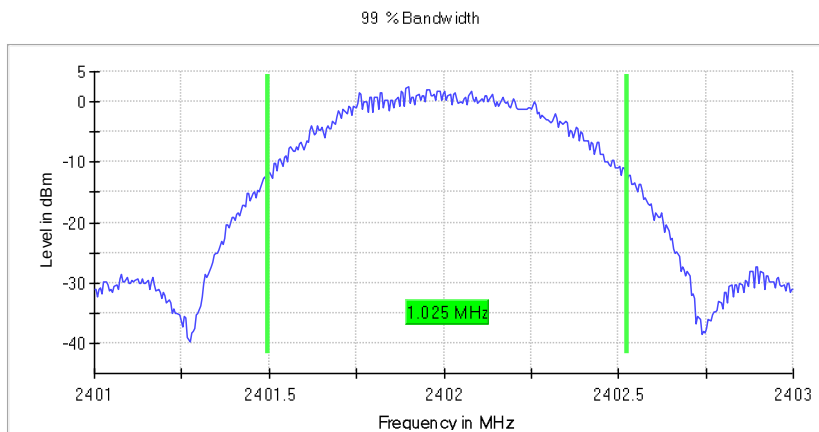

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweptime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	52 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.30 dB

Occupied Channel Bandwidth 99% (2440 MHz; 20.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	1.020000	---	---	2439.502500	2440.522500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2440.000000	PASS

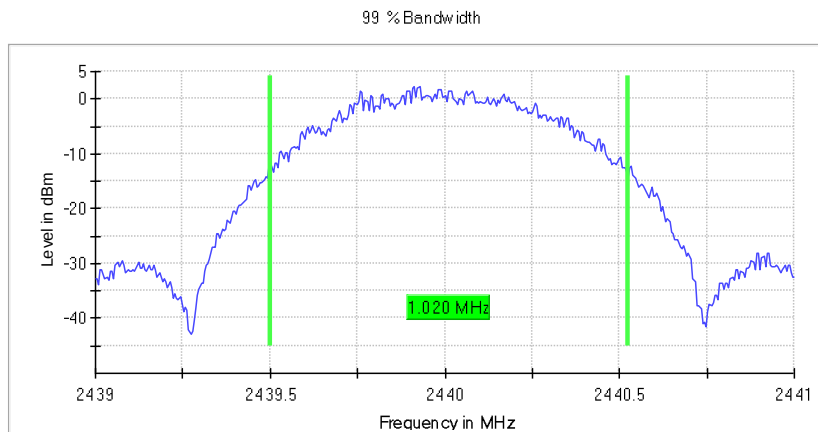

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43900 GHz	2.43900 GHz
Stop Frequency	2.44100 GHz	2.44100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweeptime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	28 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.30 dB

Occupied Channel Bandwidth 99% (2480 MHz; 20.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	1.015000	---	---	2479.502500	2480.517500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

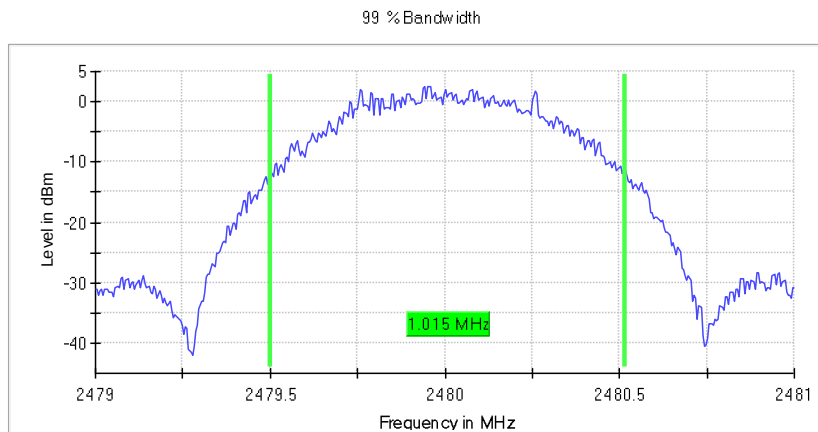


Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweeptime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	56 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.30 dB


Appendix A.4: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth

Band Edge

Low Channel:

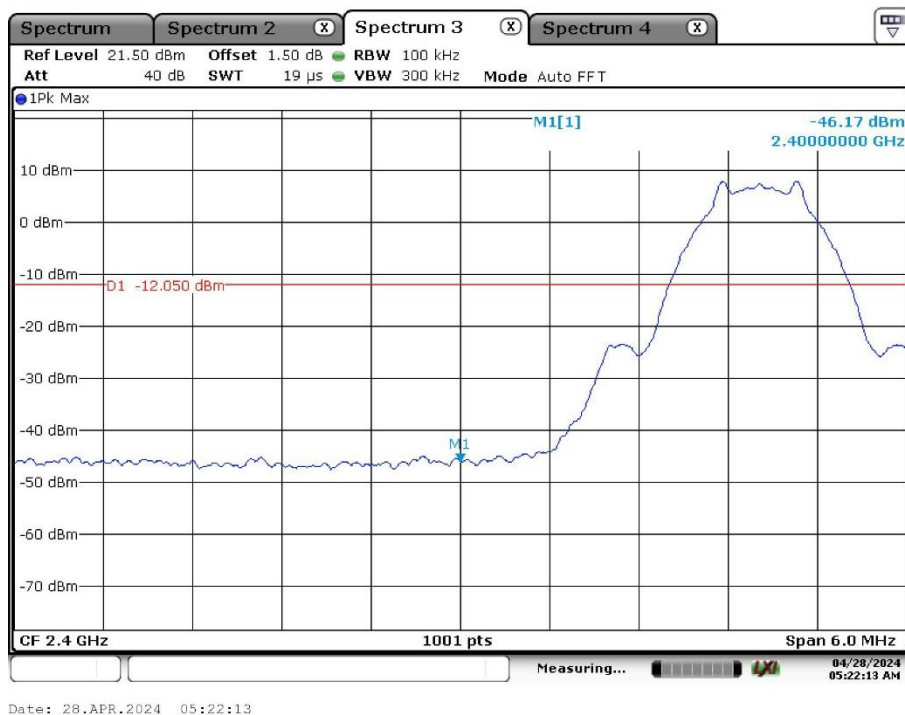


High Channel:

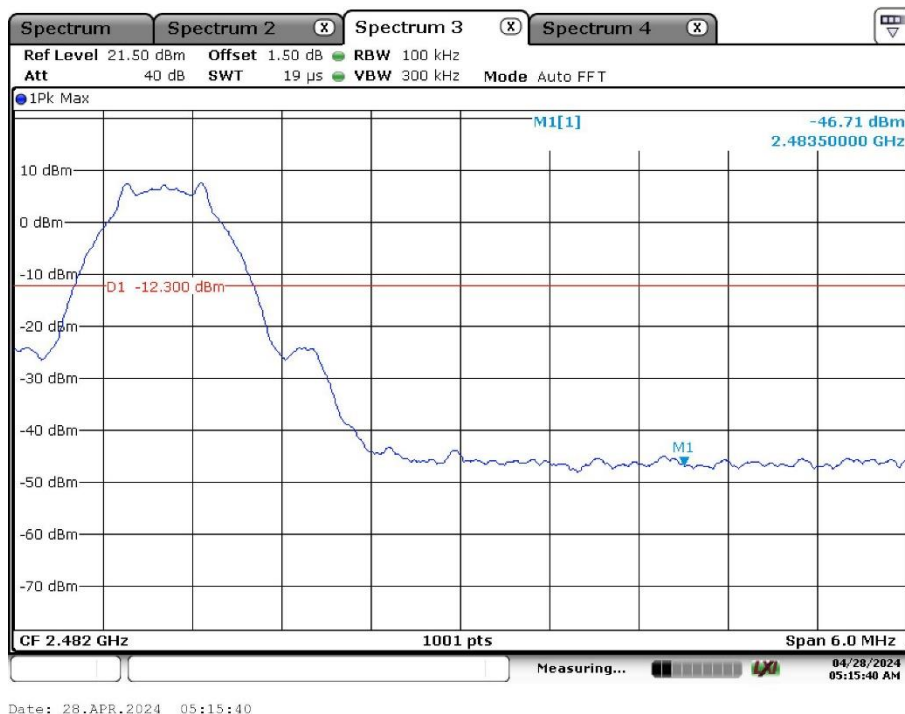


Conducted Spurious Emission

Low Channel:

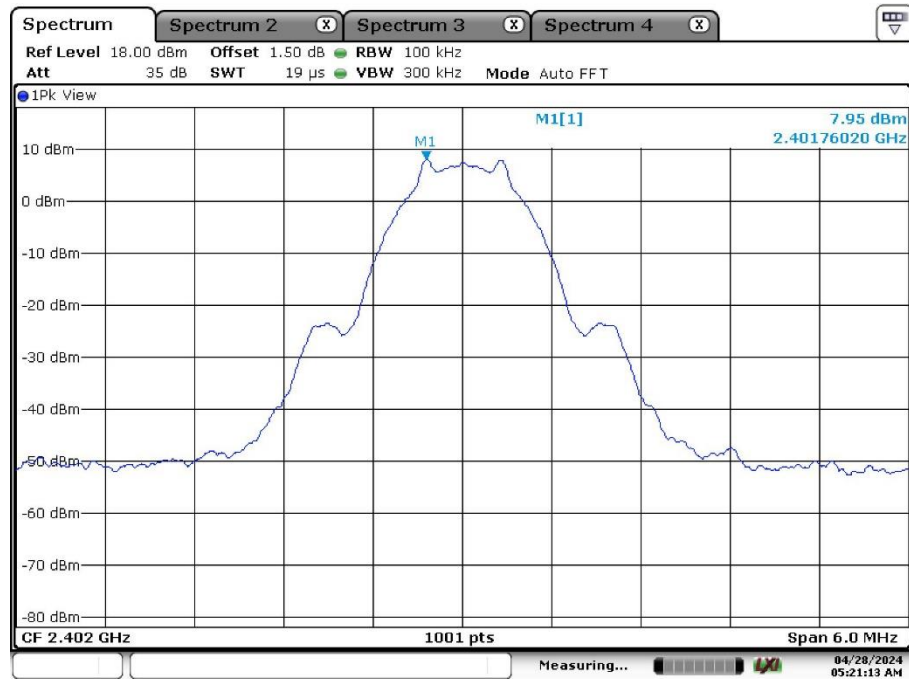


Date: 28.APR.2024 05:21:13

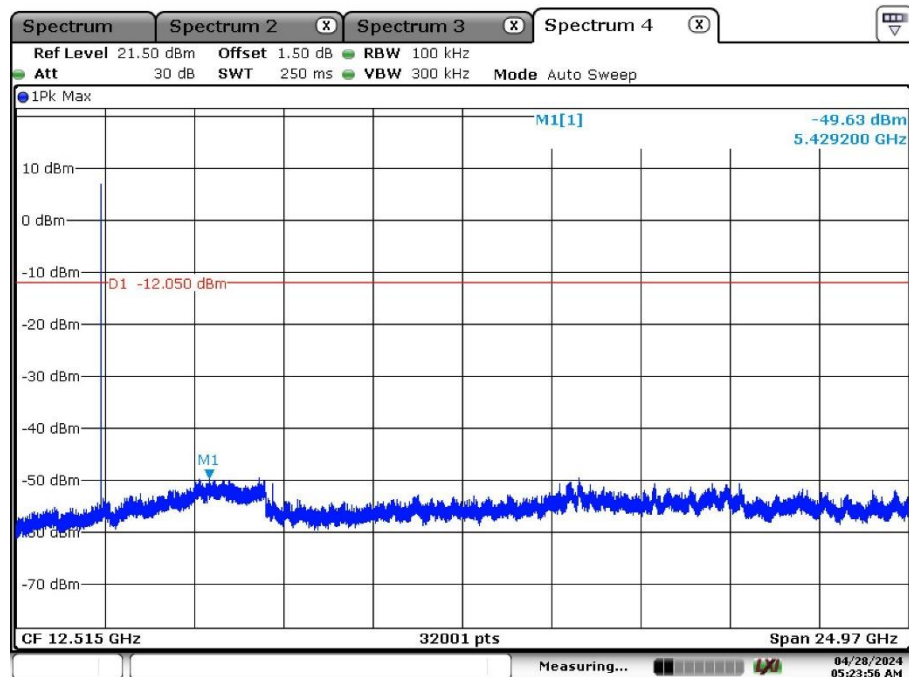


Date: 28.APR.2024 05:23:57

Middle Channel:

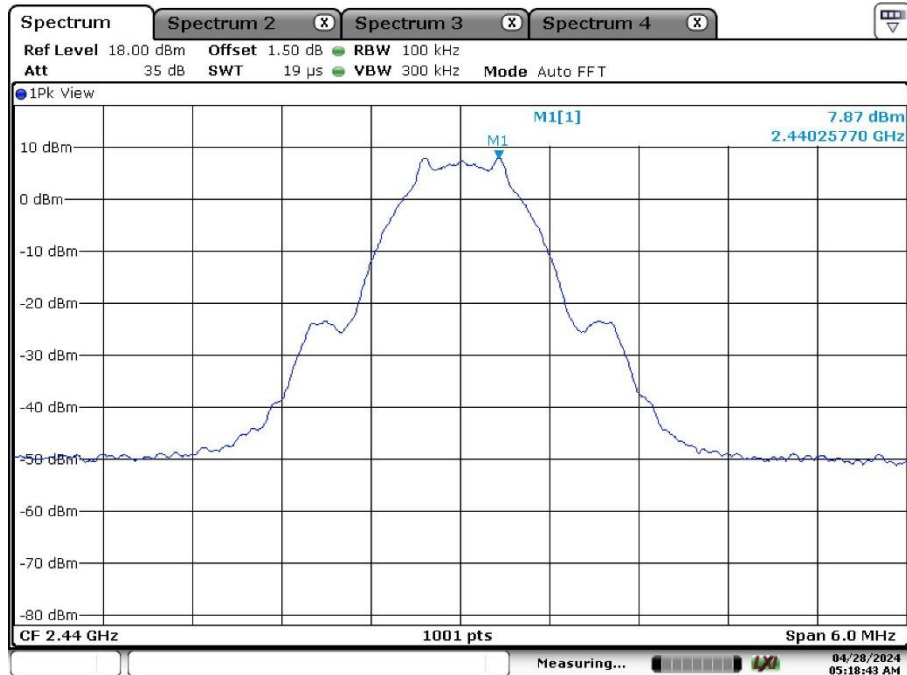


Date: 28.APR.2024 05:18:44

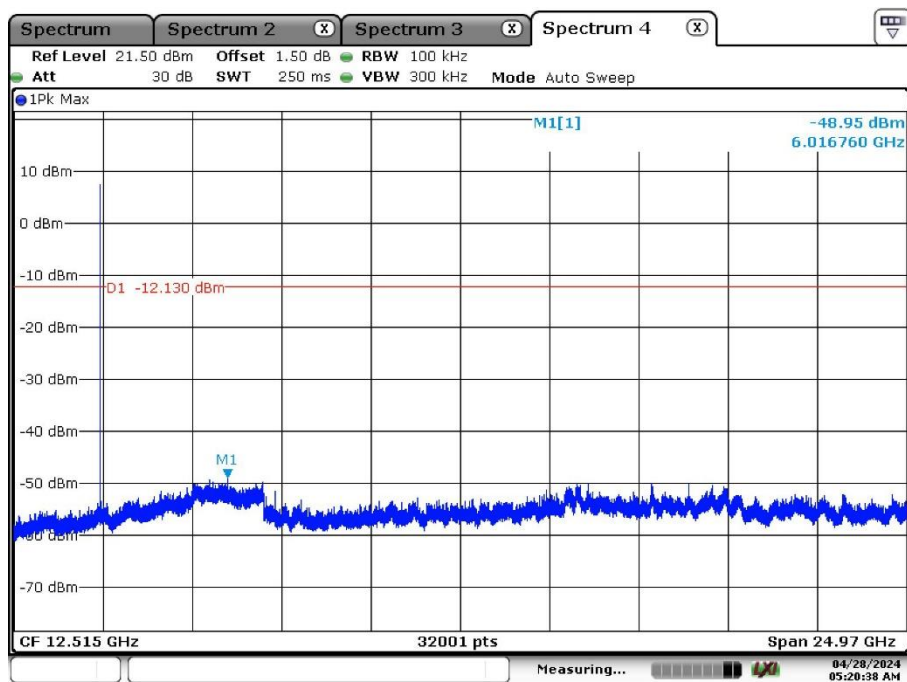


Date: 28.APR.2024 05:20:38

High Channel:

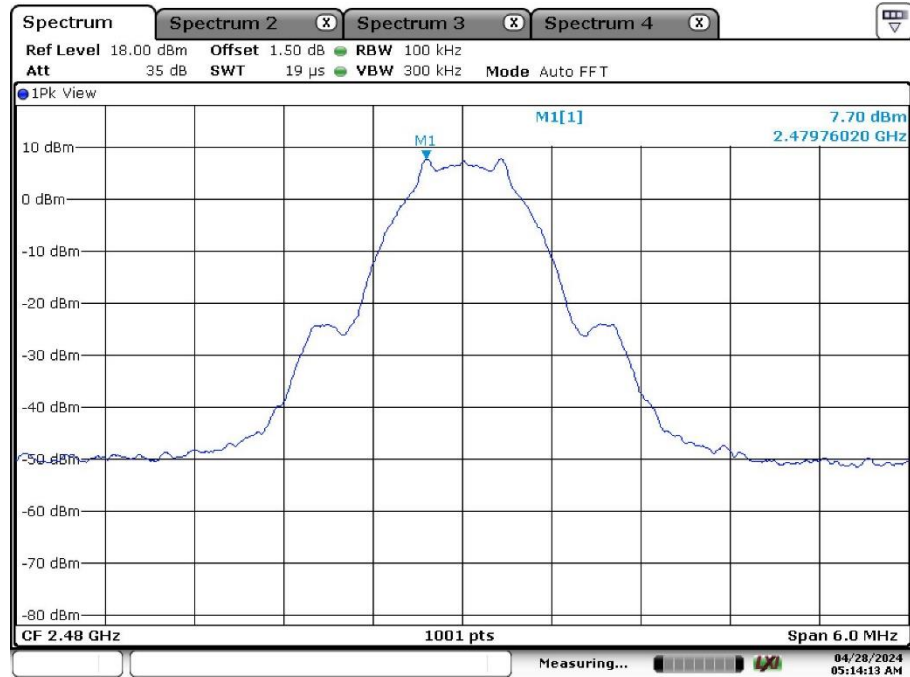

Date: 28.APR.2024 05:14:13

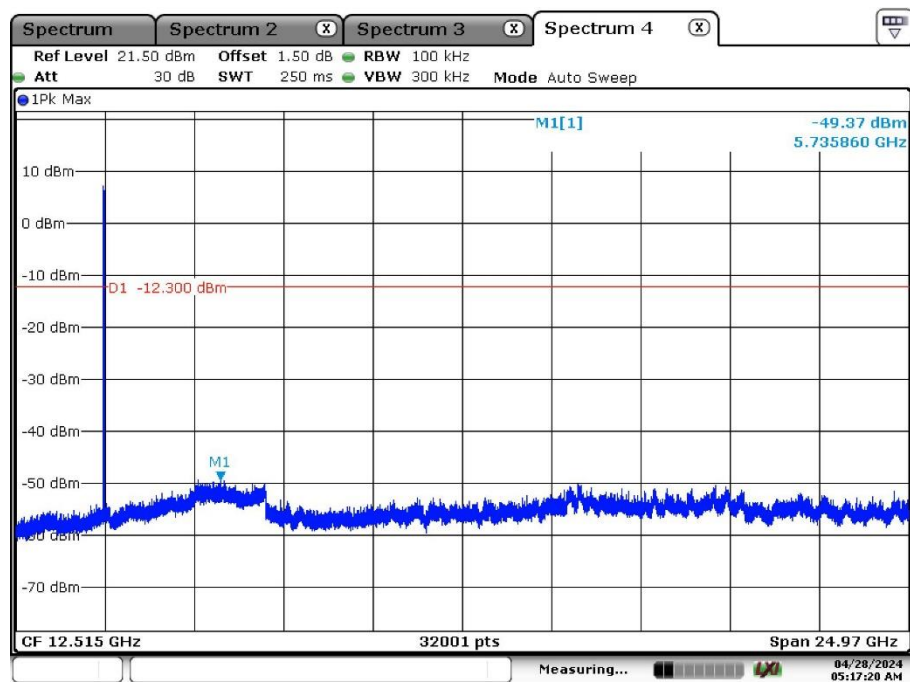

Date: 28.APR.2024 05:17:20

Appendix A.5: Test Results of Radiated Spurious Emissions


Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30 MHz to 1GHz

EUT Information

EUT Name:	Automatic Cleaning and Charging Station
Model:	YJCB017
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168467698/A003687613-026
Test Voltage:	AC 120V, 60Hz
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

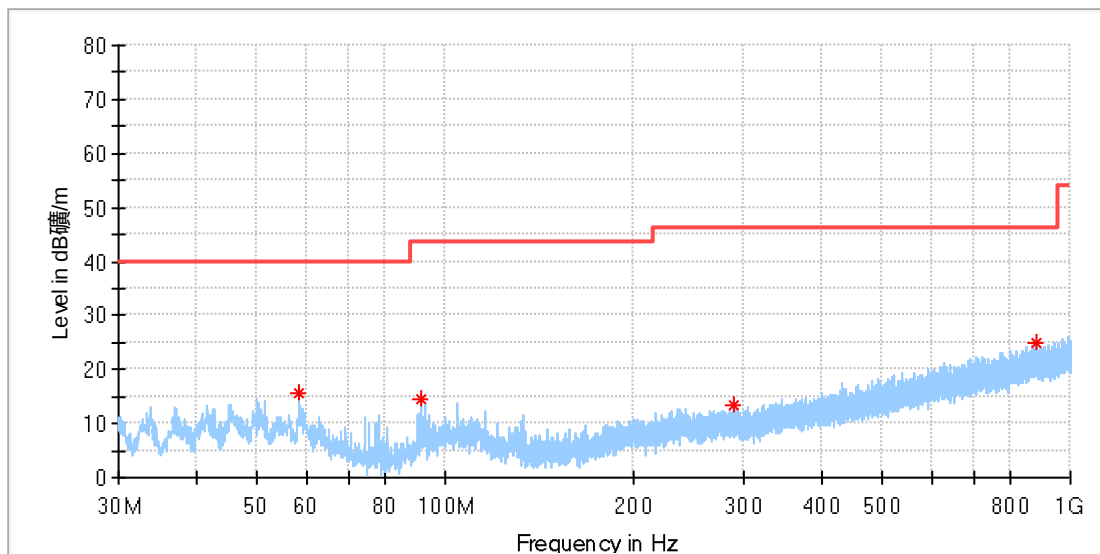

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
58.428462	15.79	40.00	24.21	100.0	H	253.0	-19.1
91.595000	14.58	43.50	28.92	100.0	H	136.0	-20.9
290.258462	13.47	46.00	32.53	100.0	H	324.0	-16.9
882.033077	25.05	46.00	20.95	100.0	H	110.0	-5.6

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: Automatic Cleaning and Charging Station
Model: YJCB017
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168467698/A003687613-026
Test Voltage: AC 120V, 60Hz
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

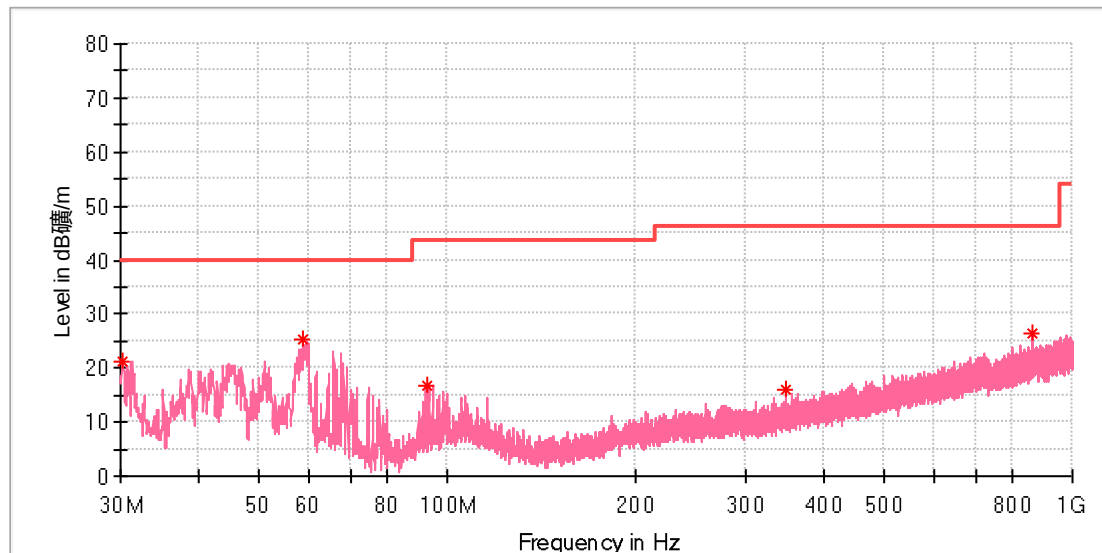

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.223846	21.39	40.00	18.61	100.0	V	2.0	-23.3
58.726923	25.32	40.00	14.68	100.0	V	65.0	-19.2
92.490385	16.84	43.50	26.66	100.0	V	251.0	-20.7
347.824231	15.83	46.00	30.17	100.0	V	234.0	-15.2
864.349231	26.53	46.00	19.47	100.0	V	244.0	-5.7

Final_Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

1GHz-18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	Automatic Cleaning and Charging Station
Model:	YJCB017
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168467698/A003687613-026
Test Voltage:	AC 120V, 60Hz
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

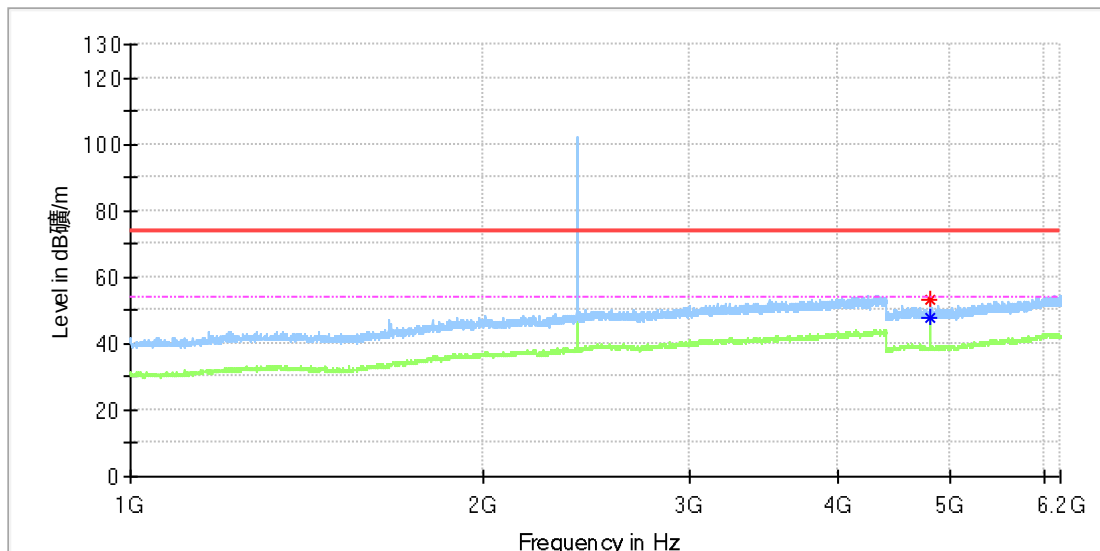

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4804.000000	---	47.73	54.00	6.27	150.0	H	42.0	11.8
4804.500000	53.16	---	74.00	20.84	150.0	H	312.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Automatic Cleaning and Charging Station
Model: YJCB017
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168467698/A003687613-026
Test Voltage: AC 120V, 60Hz
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

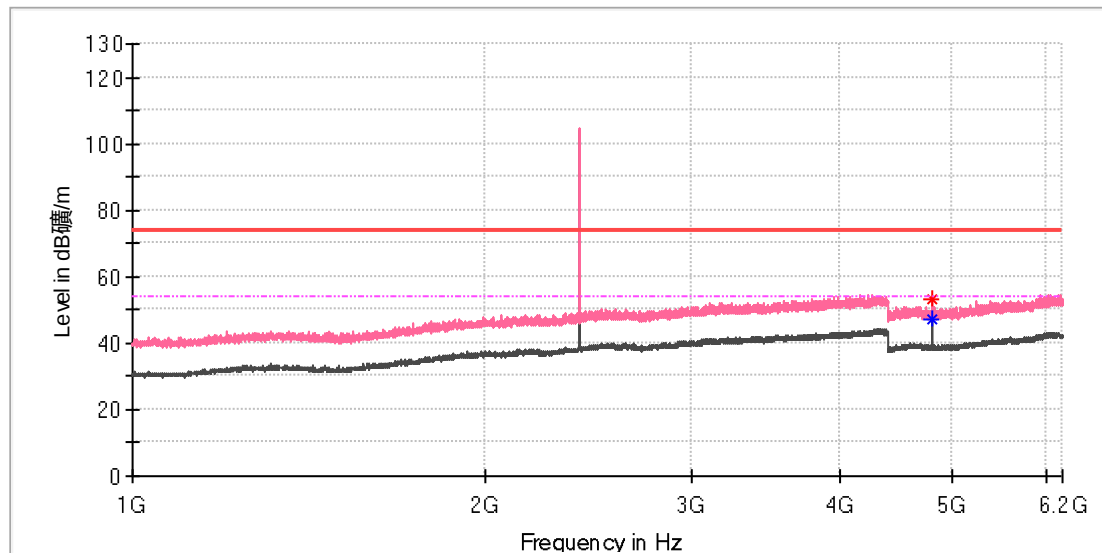

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4804.000000	53.00	---	74.00	21.00	150.0	V	16.0	11.8
4804.000000	---	47.04	54.00	6.96	150.0	V	16.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Automatic Cleaning and Charging Station
Model: YJCB017
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168467698/A003687613-026
Test Voltage: AC 120V, 60Hz
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

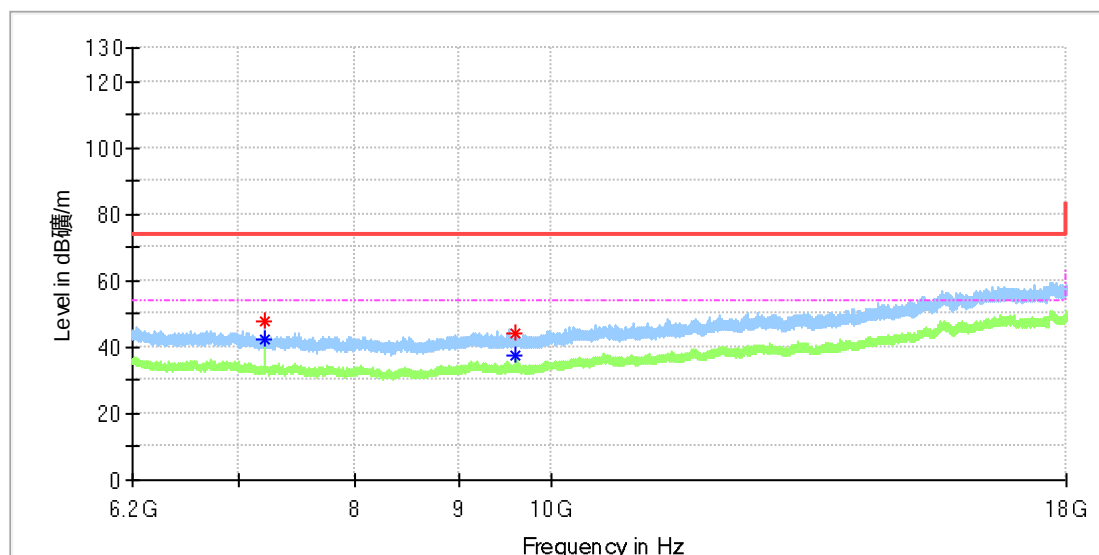

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.458333	47.86	---	74.00	26.14	150.0	H	32.0	8.8
7205.950000	---	42.17	54.00	11.83	150.0	H	32.0	8.8
9606.758333	44.11	---	74.00	29.89	150.0	H	347.0	10.4
9607.250000	---	37.50	54.00	16.50	150.0	H	347.0	10.4

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Automatic Cleaning and Charging Station
Model: YJCB017
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168467698/A003687613-026
Test Voltage: AC 120V, 60Hz
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

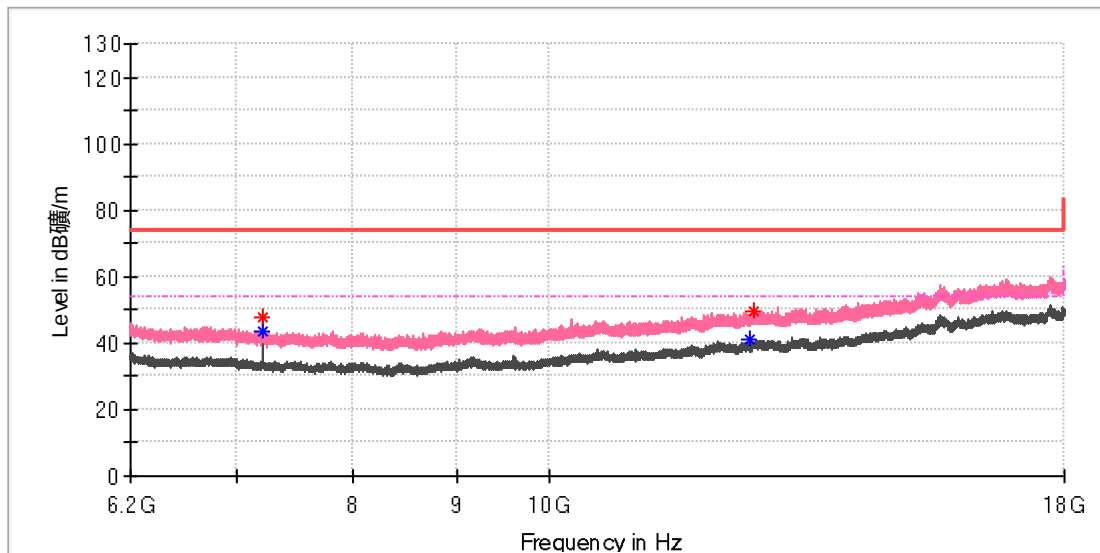

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.458333	47.55	---	74.00	26.45	150.0	V	23.0	8.8
7206.441667	---	43.42	54.00	10.58	150.0	V	12.0	8.8
12574.458333	---	40.90	54.00	13.10	150.0	V	147.0	14.8
12637.391667	49.54	---	74.00	24.46	150.0	V	282.0	15.0

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Automatic Cleaning and Charging Station
Model: YJCB017
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168467698/A003687613-026
Test Voltage: AC 120V, 60Hz
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

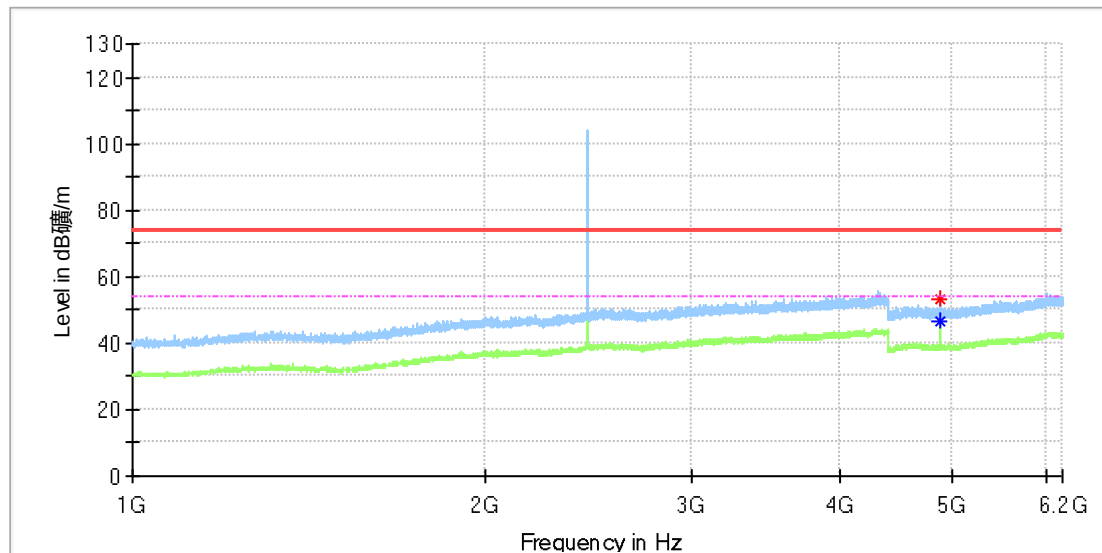

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4879.500000	52.95	---	74.00	21.05	150.0	H	43.0	11.8
4880.000000	---	46.63	54.00	7.37	150.0	H	48.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Automatic Cleaning and Charging Station
Model: YJCB017
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168467698/A003687613-026
Test Voltage: AC 120V, 60Hz
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

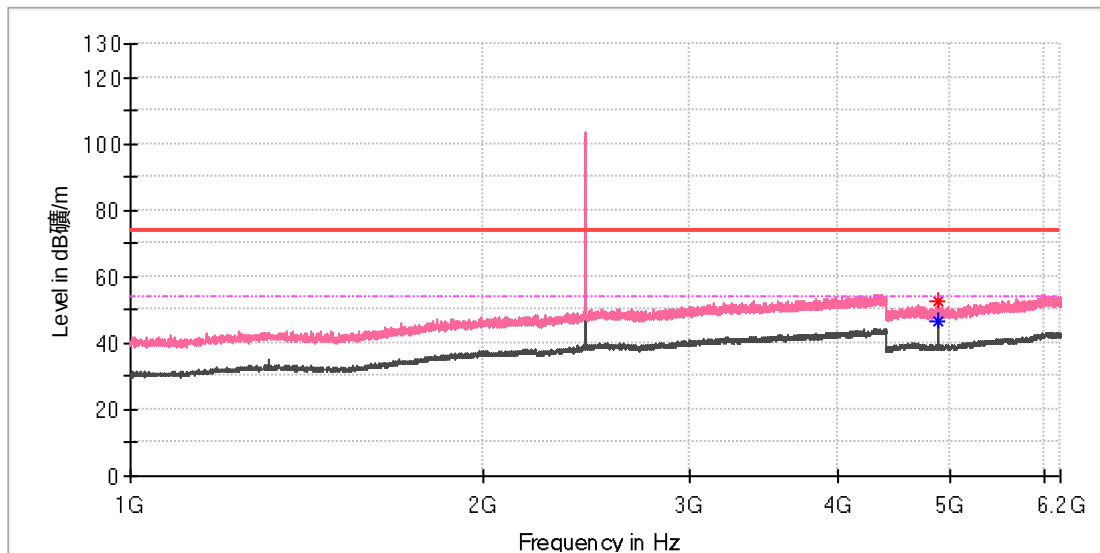

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4880.000000	52.39	---	74.00	21.61	150.0	V	13.0	11.8
4880.000000	---	46.35	54.00	7.65	150.0	V	13.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Automatic Cleaning and Charging Station
Model: YJCB017
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168467698/A003687613-026
Test Voltage: AC 120V, 60Hz
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

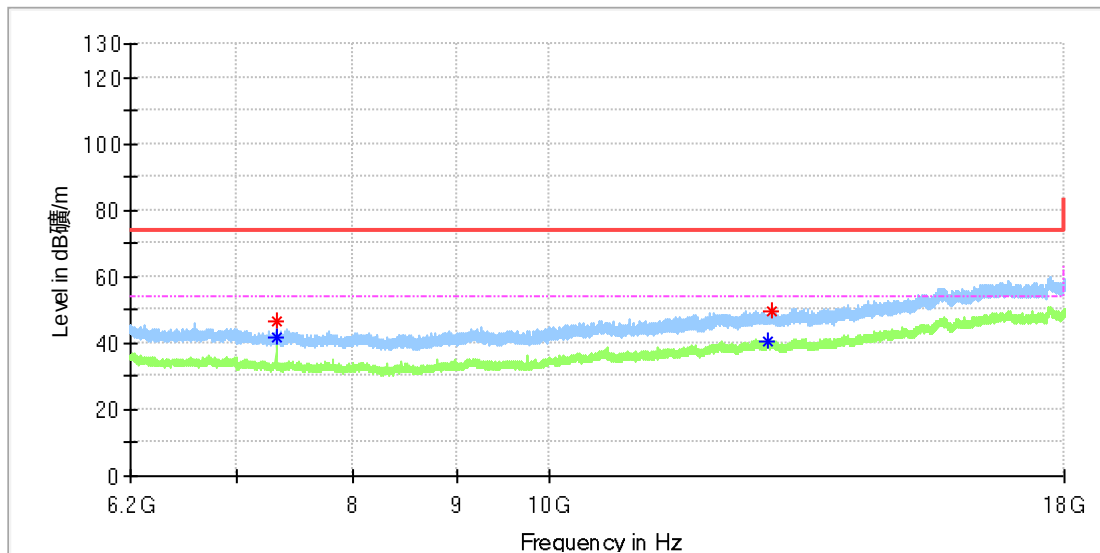

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7319.033333	46.63	---	74.00	27.37	150.0	H	0.0	8.2
7320.508333	---	41.72	54.00	12.28	150.0	H	33.0	8.2
12844.383333	---	40.76	54.00	13.24	150.0	H	166.0	15.3
12894.041667	49.84	---	74.00	24.16	150.0	H	130.0	15.5

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Automatic Cleaning and Charging Station
Model: YJCB017
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168467698/A003687613-026
Test Voltage: AC 120V, 60Hz
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

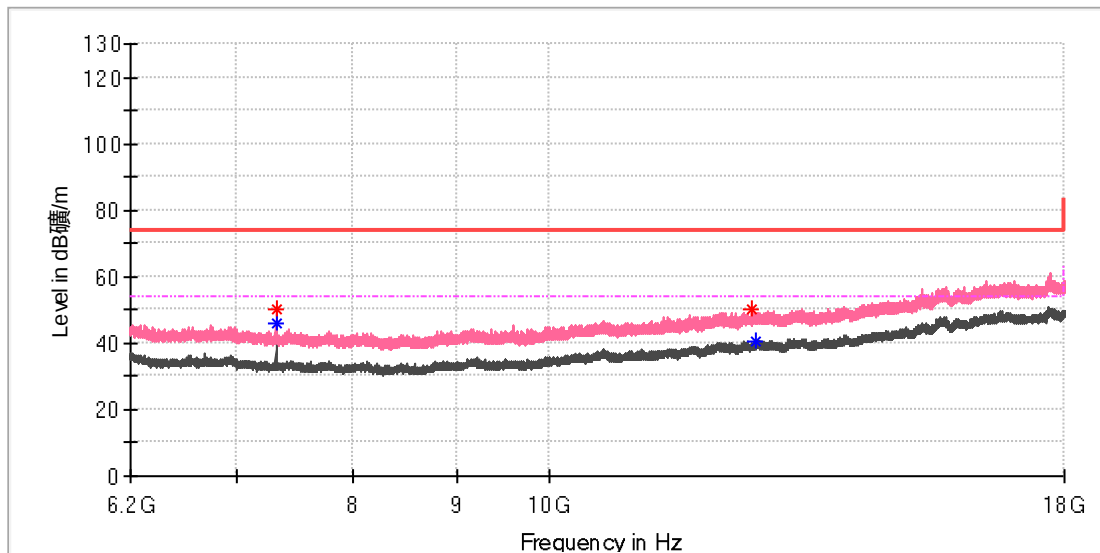

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7320.508333	50.04	---	74.00	23.96	150.0	V	22.0	8.2
7320.508333	---	45.87	54.00	8.13	150.0	V	22.0	8.2
12606.908333	49.91	---	74.00	24.09	150.0	V	247.0	14.9
12668.366667	---	40.71	54.00	13.29	150.0	V	138.0	15.1

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Automatic Cleaning and Charging Station
Model: YJCB017
Test Mode: BLE 1M_High channel
Order No/Sample No: 168467698/A003687613-026
Test Voltage: AC 120V, 60Hz
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

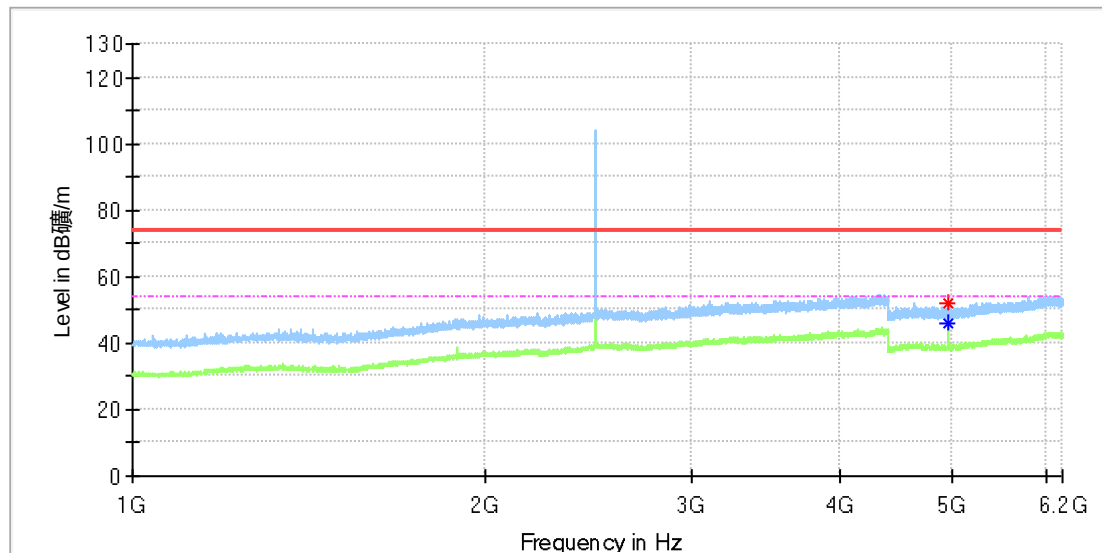

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4959.500000	52.03	---	74.00	21.97	150.0	H	33.0	11.8
4960.000000	---	45.68	54.00	8.32	150.0	H	27.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Automatic Cleaning and Charging Station
Model: YJCB017
Test Mode: BLE 1M_High channel
Order No/Sample No: 168467698/A003687613-026
Test Voltage: AC 120V, 60Hz
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

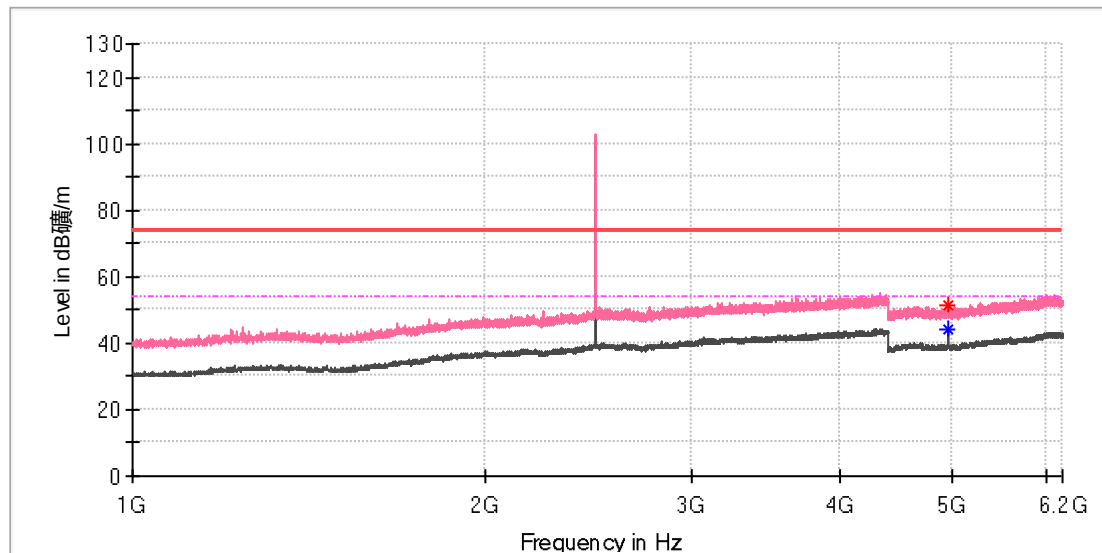

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4959.500000	51.58	---	74.00	22.42	150.0	V	5.0	11.8
4960.000000	---	44.41	54.00	9.59	150.0	V	17.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Automatic Cleaning and Charging Station
Model: YJCB017
Test Mode: BLE 1M_High channel
Order No/Sample No: 168467698/A003687613-026
Test Voltage: AC 120V, 60Hz
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

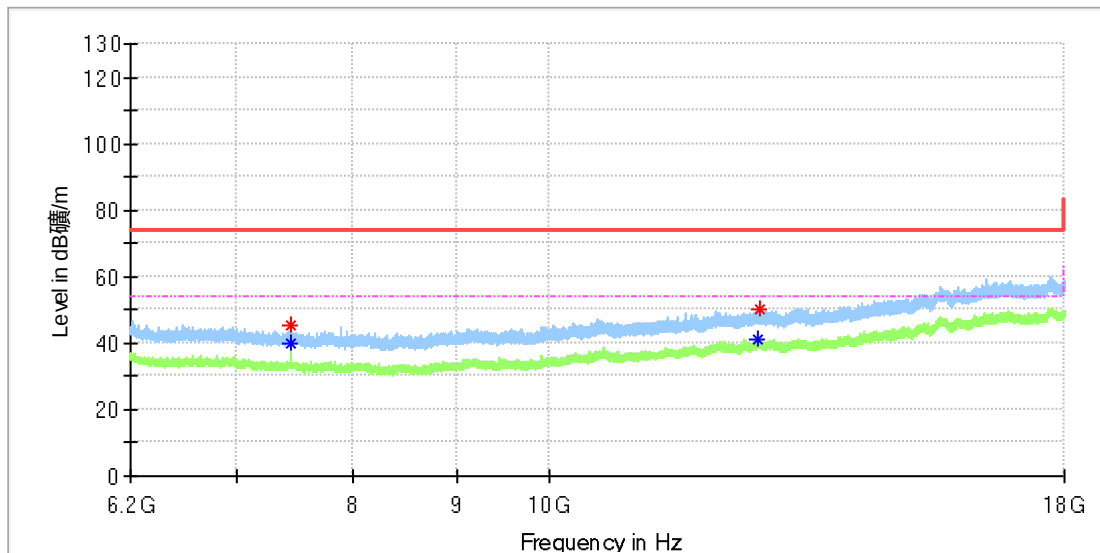

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7440.475000	45.56	---	74.00	28.44	150.0	H	308.0	8.4
7440.475000	---	39.77	54.00	14.23	150.0	H	308.0	8.4
12680.166667	---	40.97	54.00	13.03	150.0	H	174.0	15.1
12706.225000	50.17	---	74.00	23.83	150.0	H	187.0	15.1

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Automatic Cleaning and Charging Station
Model: YJCB017
Test Mode: BLE 1M_High channel
Order No/Sample No: 168467698/A003687613-026
Test Voltage: AC 120V, 60Hz
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

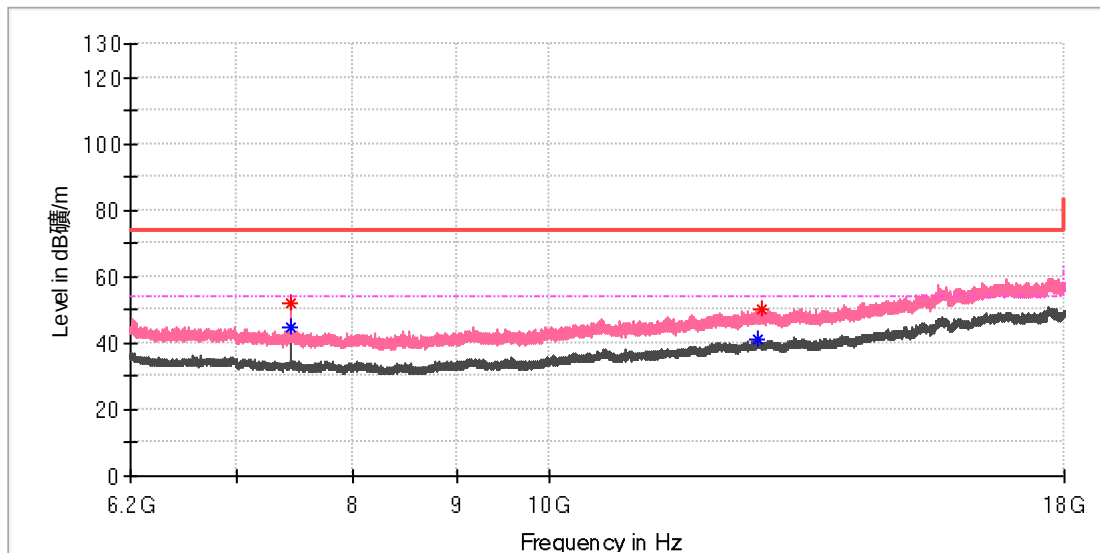

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.983333	---	44.46	54.00	9.54	150.0	V	21.0	8.4
7440.475000	51.77	---	74.00	22.23	150.0	V	21.0	8.4
12679.675000	---	41.19	54.00	12.81	150.0	V	80.0	15.1
12749.000000	50.43	---	74.00	23.57	150.0	V	32.0	15.2


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix A.6: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	Automatic Cleaning and Charging Station
Model:	YJCB017
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168467698/A003687613-026
Test Voltage:	AC 120V, 60Hz
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

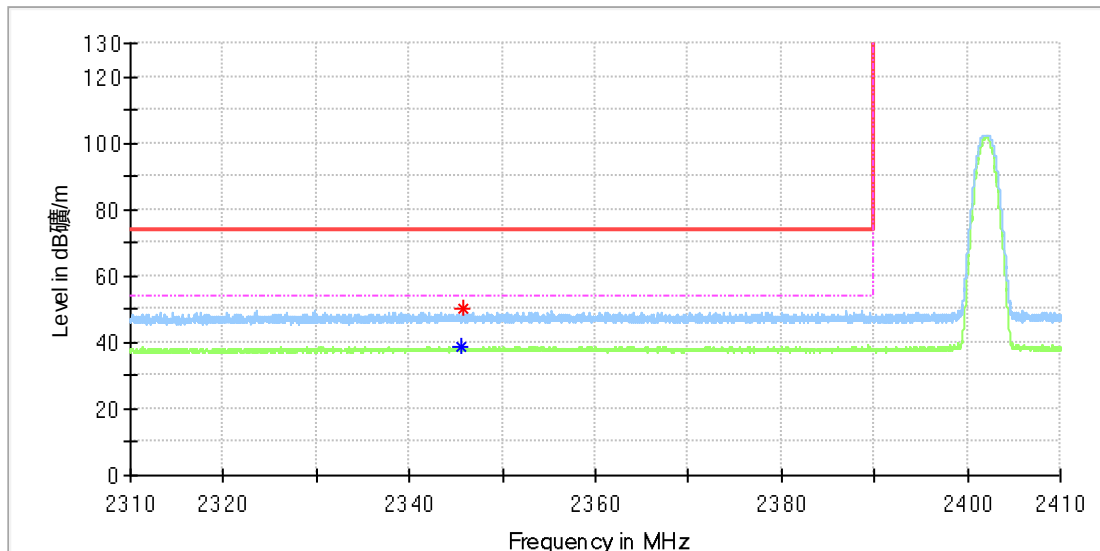

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2345.455882	---	38.59	54.00	15.41	150.0	H	166.0	6.9
2345.676471	50.29	---	74.00	23.71	150.0	H	65.0	6.9

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Automatic Cleaning and Charging Station
Model: YJCB017
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168467698/A003687613-026
Test Voltage: AC 120V, 60Hz
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

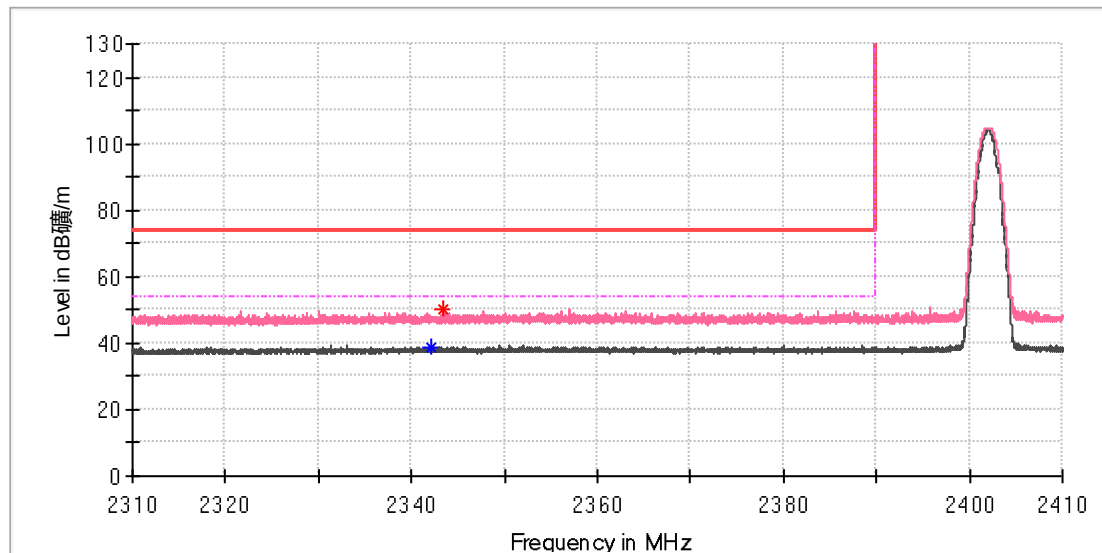

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2342.117647	---	38.82	54.00	15.18	150.0	V	0.0	6.8
2343.470588	50.24	---	74.00	23.76	150.0	V	70.0	6.9

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Automatic Cleaning and Charging Station
Model: YJCB017
Test Mode: BLE 1M_High channel
Order No/Sample No: 168467698/A003687613-026
Test Voltage: AC 120V, 60Hz
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

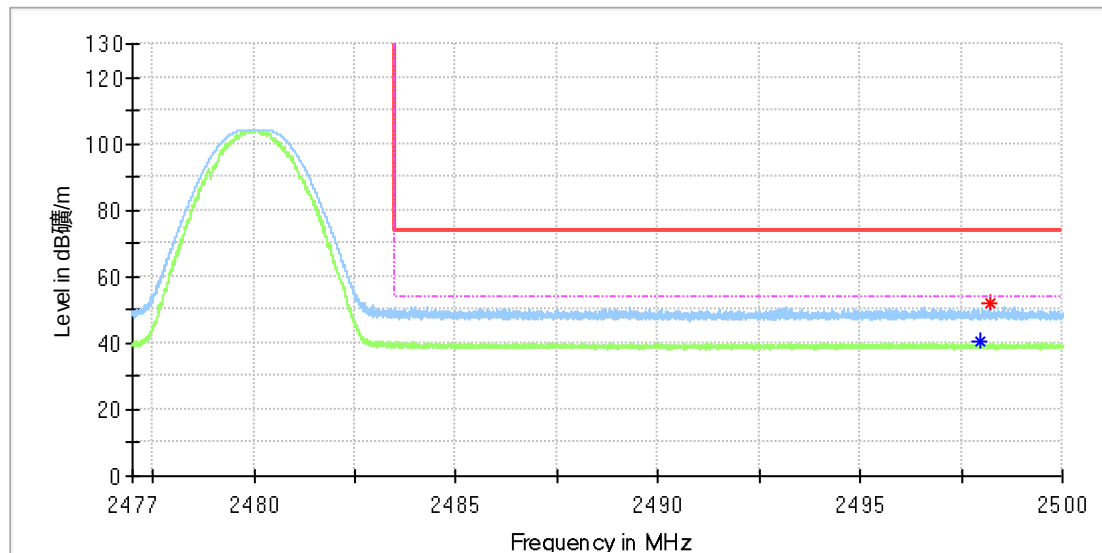

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2497.948529	---	40.25	54.00	13.75	150.0	H	108.0	7.4
2498.191177	51.76	---	74.00	22.24	150.0	H	142.0	7.4

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Automatic Cleaning and Charging Station
Model:	YJCB017
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168467698/A003687613-026
Test Voltage:	AC 120V, 60Hz
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

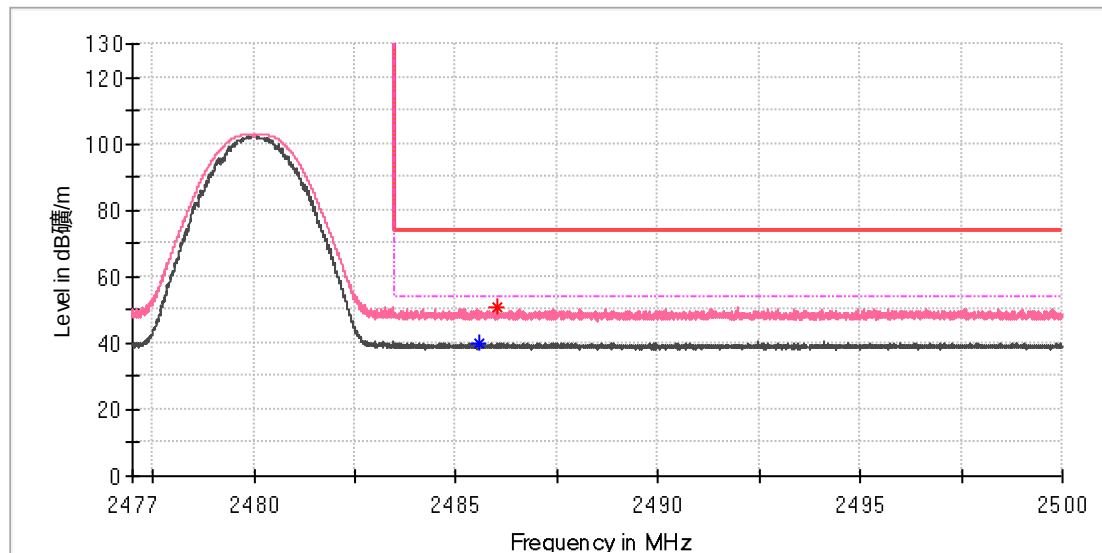

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2485.564706	---	39.97	54.00	14.03	150.0	V	359.0	7.4
2486.023530	50.77	---	74.00	23.23	150.0	V	67.0	7.4


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix A.7: Test Results of Conducted Emission on AC Mains

EUT Information

EUT Name: Automatic Cleaning and Charging Station
Order Number: 168467698 280
Model: YJCB017
Test Mode: Charging+ Normal working
Test Voltage: AC 120V/60Hz
Test Standard: FCC Part 15
Test By./Review By: Dawn Shen/Shower Dai
Tem./Hum./Pressure: 23.9°C/52.7%/101kPa
Remark: SR1

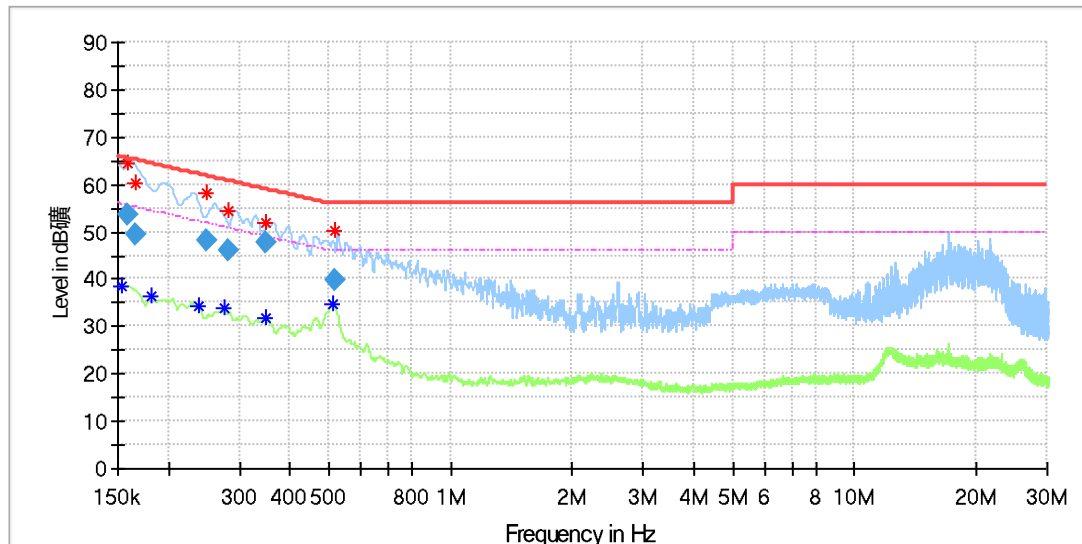

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.153317	---	38.66	55.82	17.16	L1	9.6
0.158000	64.62	---	65.30	0.67	L1	9.7
0.165092	60.28	---	63.69	3.41	L1	9.8
0.181508	---	36.37	54.42	18.04	L1	9.7
0.237892	---	34.44	52.17	17.73	L1	9.8
0.247917	58.02	---	62.35	4.33	L1	9.8
0.276033	---	33.95	50.93	16.98	L1	9.8
0.281275	54.60	---	60.40	5.80	L1	9.8
0.346925	51.97	---	58.64	6.67	L1	9.9
0.350658	---	31.70	48.95	17.24	L1	9.9
0.513175	---	34.68	46.00	11.32	L1	9.9
0.516000	50.10	---	56.00	5.90	L1	9.9

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.158000	53.58	---	65.57	11.99	1000.0	9.000	L1	9.6
0.165092	49.35	---	65.20	15.85	1000.0	9.000	L1	9.7
0.247917	48.27	---	61.83	13.56	1000.0	9.000	L1	9.8
0.281275	45.95	---	60.78	14.83	1000.0	9.000	L1	9.8
0.346925	47.82	---	59.04	11.22	1000.0	9.000	L1	9.9
0.516000	39.62	---	56.00	16.38	1000.0	9.000	L1	9.9

EUT Information

EUT Name: Automatic Cleaning and Charging Station
Order Number: 168467698 280
Model: YJCB017
Test Mode: Charging+ Normal working
Test Voltage: AC 120V/60Hz
Test Standard: FCC Part 15
Test By:/Review By: Dawn Shen/Shower Dai
Tem./Hum./Pressure: 23.9°C/52.7%/101kPa
Remark: SR1

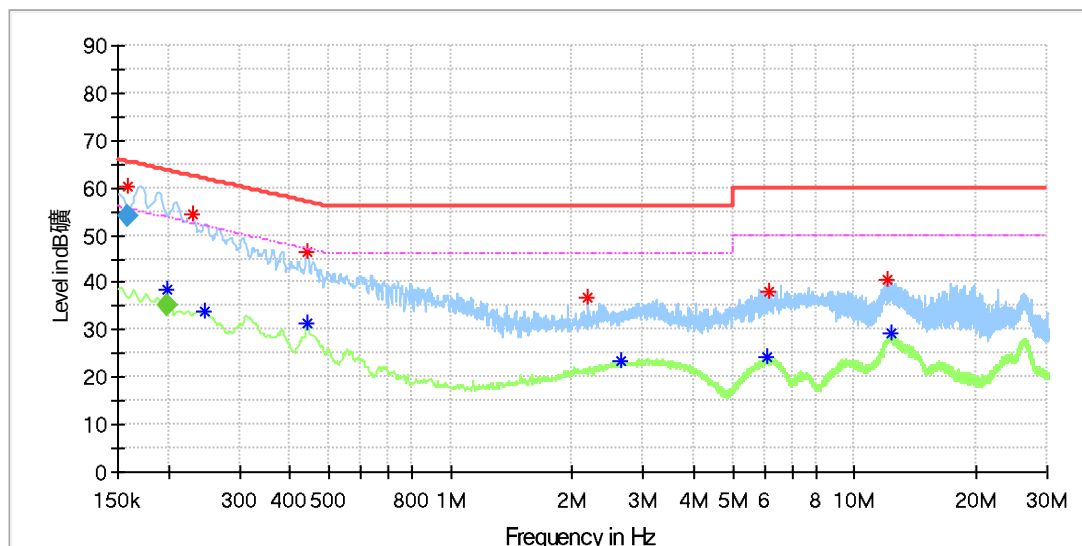

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.158000	60.31	---	64.89	4.58	N	9.8
0.198000	---	38.43	55.21	16.78	N	9.8
0.229600	54.28	---	62.46	8.19	N	9.7
0.246183	---	33.85	51.89	18.04	N	9.7
0.440208	46.60	---	57.06	10.46	N	9.7
0.443525	---	31.33	47.00	15.66	N	9.7
2.188092	37.00	---	56.00	19.00	N	9.9
2.627550	---	23.51	46.00	22.49	N	10.0
6.040400	---	24.35	50.00	25.65	N	9.9
6.144875	38.24	---	60.00	21.76	N	9.9
12.075075	40.66	---	60.00	19.34	N	10.1
12.361967	---	29.12	50.00	20.88	N	10.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.158000	53.87	---	65.57	11.70	1000.0	9.000	N	9.8
0.198000	---	35.04	53.69	18.66	1000.0	9.000	N	9.7