


GY-Z6S 英文说明书, 正反彩印

封面


3 IN 1 Fast Wireless Charger

User manual



Notice: To ensure charging 3 devices safely and efficiently, you must use 9V/2A adapter and quick charge cable, if including 15W fast charging phones, you must use 9V/2.7A or 12V/2A adapter and quick charge cable (if not use the appropriate adapter and quick charge cable, the charger may not charge phone fast, or may not charge 3 devices simultaneously, or may even damage the charger)

Product Appearance

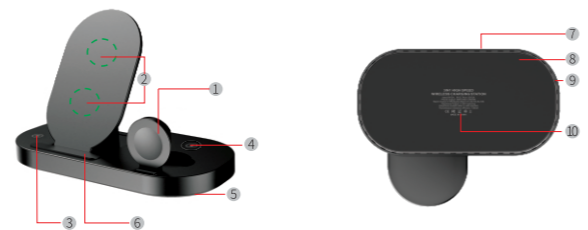


- ① Wireless Charge Watch magnetically area
- ② Wireless charge area for Phone
- ③ Touch sensitive key
- ④ Wireless charge area for TWS earphone
- ⑤ LED Intelligent light ring
- ⑥ Non-slip mat
- ⑦ Type-C port
- ⑧ Non-slip mat
- ⑨ Heat dissipation Holes
- ⑩ Product tag

Product Introduction

The 3-in-1 wireless charger, a compact charging house, powered from only one outlet, can charge 3 devices simultaneously. When charge your mobile phone, apple watches, and your AirPods 2 or AirPods Pro or some other TWS, just put them on, wireless charging will automatically start, all this will make your desk clean and tidy, and make your life easier. The charger is so space-saving designed can help you integrate your mobile phone intelligent and life very well, especially for Apple user. Besides, it is fashion that the light ring is so colorful and has Running water light effect showing the charging state, if you want to turn off or turn on the light just touch the touch-sensitive key.

Operation Steps

- Connect the charger to a 9V/2A,9V/2.7A or 12V/2A adapter through a Type-C quick charge cable to switch on the power;
- Put your phone on then charge;
- Put the apple watch on and suck it up to charge (roll the watch band to minimize to charge better);
- Plug your earphone on then charge;

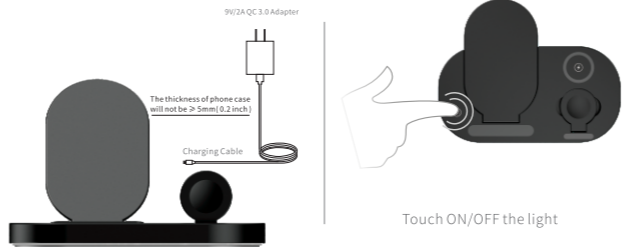

Touch ON/OFF the light

LED light ring instructions

- Green light is on: Standby mode or not charging the phone
- Blue light is breathing: Wireless charging the phone
- Blue and Green light flash: Foreign body is detected or the phone is misaligned (the phone charging will automatically stop)

Charging Schematic Diagram



Charging 3 Apple devices simultaneously

Vertically or horizontally

AirPods2/AirPods Pro
Apple iWatch
S1/S2/S3/S4/S5

Other TWS earbuds
which support
wireless charging

Applicable Devices

1.Smart Phone

- Apple: iPhone 12,12 Pro,12 Pro Max,12 mini,SE,11,11 Pro,11 Pro Max, Xs, Xs Max, XR,X,8,8 Plus;
- Samsung: Galaxy S: 20 5G,20+ 5G,20 Ultra 5G,10,10+, 10e,9,9+,8,8+,7,7 edge,6,6 edge,6 edge+, 6 G9209,6 Active;Galaxy Note:20,20 Ultra 5G,10,10e,10+,9,8,7,6,5;
- LG: G2(VS980,Verizon version),G3,G6,G6+,G7,G7 ThinQ,G7+ ThinQ,G8,G8 ThinQ,V30,V30+,V35,V40 ThinQ,V50,V50 ThinQ, LG Lucid2 (VS870),LG Optimus F5 (As870),LG Optimus Vu 3,Spectrum 2,Optimus G Pro,Optimus Vu11,Optimus LTE 2,etc.
- MOTOROLA: Droid Turbo,Droid Turbo2,Droid 5,Moto Maxx,Ultra M,Moto X Force
- Huawei: P:40 Pro,40 Pro+,30 Pro; Mate:40 RS,40 Pro,40 Pro+,30 5G,30 Pro,30 RS,20 Pro,20 RS,RS;
- Xiaomi: 10,10 Pro,9,9Pro,Mix 3,Mix 2s;

Including other devices with wireless charging receiver built-in;

other some devices need to add a wireless charging receiver
(Note: All devices must meet the Qi standard).

2.Smart Watch:
Apple: iWatch S1,S2,S3,S4,S5,S6,SE.

3.Earphone:
Apple: AirPods 2, AirPods Pro;

Product Specification

Input: 9V/2A,9V/2.7A or 12V/2A (must use 9V/2.7A or 12V/2A when charging 3 devices including 15W charging phone)

Phone Output: 15W/10W/7.5W/5W

Watch Output: 2.5W (Apple iWatch S1,S2,S3,S4,S5,S6,SE)

Earphone Output: 3W (TWS Earphone: Apple AirPods 2, Pro; and more)

Input Interface: Type-C port

Transmission Distance(Phone): ≤8mm

Conversion Rate(Phone): ≥73%

Product Size:174.2X137.5X15.8mm

Accessories List

Wireless Charger*1, Type-C quick charge cable*1,User manual*1

Attention

- Please keep the charger away from water or other liquid;
- If you need to clean the charger, please make sure it is not connected power supply;
- Using Environment temperature remains 0-45°C.
- Charging environment of smart phone will not be ≤55°C (≤131°F)

Answer questions

1.If you're experiencing interrupted or slow charging, check the following:

- The back of your phone should not have any metal, pop sockets, or credit cards.
- Put the phone in the center of the charging surface (this lets the charging coil in your phone line up with the one inside the wireless charger).
- The wireless charging coil on Sony phones is located slightly below center.
- Phone cases should be no thicker than 5 mm for effective charging.
- Check whether the adapter is QC3.0 fast charger.

2.If you're failing to charge your device, please try out the following:

- Please restart your cell phone and test with other USB cable.
- Please check whether the indicator turns on or not.
- Please check the Adapter is QC3.0 Quick Charger (Output:9V /2A) or not, iPhone original adapter does not match the wireless charger.
- Please check your Phone case thickness(≤5mm), Metal ring or Magnetic Pad will not be available.

3.If you're using the recommended wireless charger with the QC3.0 Adapter and have removed any potential charging obstructions, but are still experiencing issues, try:

- Replacing the cable connecting your the wireless charger.
- Rebooting your phone.
- Unplug the adapter and reinsert.

FCC Warning Statement
RF Exposure: A distance of 15 cm shall be maintained between the antenna and users, and the transmitter may not be co-located with any other transmitter or antenna.

CE FC RoHS