



PMN:Bluetooth Speaker

**StageGofree User Manual**

**Dear customer**

**Thank you for purchasing the Portable speaker Stage Gofree . To ensure correct operation, please read this user manual carefully.**

### **Important Safety Instructions**

- ◆ Do not use the speaker in special cold and hot environments.
- ◆ Please avoid the speaker dropping or hitting with a hard object, it may cause other hardware damage.
- ◆ Take care when charging the speaker, excessive prolonged charging will damage the battery lifetime. Charge the speaker to full capacity when using for the first time.
- ◆ When battery low, the indicator light will flash and voice prompt “battery low”, please charge speaker in time.
- ◆ If does not use this speaker for long time, please charge at least once within one month, in order to prevent the lithium battery from causing and damaging because of excessive consumption.
- ◆ Adjust the volume to appropriate level to avoid disturbing others.

### **Features**

- **Bluetooth 5.3 stereo music and mobile hands-free function**

- **Aux-in**

Work as the external speaker by connecting to the audio source of computer, mobile, PSP/MP3/MP4 etc.

- **USB Flash Disk Music playing**

Support MP3/WAV/WMA/FLAC/APE music format, capacity up to 32G

- **EQ adjustment**

- **Support light show with different lighting mode**

- **IPX7 Waterproof**

- **TWS Function**

### **Technical Data**

**Bluetooth Version:** 5.3

**Output:** RMS 20W

**Battery Capacity:** 7.4V 2000 mAh, 14.8Wh

**Battery Type:** Lithium 18650 battery

**Input Rating:** DC 5V 2A

**Driver:** 50mm full range driver\*2+ passive radiator\*1

**Impedance:** 4 Ω

**Charging time:** 3 hours @ 5V 2A

**Total Playing / Usage time:** ≥ 6 hours @100% volume

**Dimensions:** D170.6mm\*W56.1mm\*H77.45mm


**Net Weight:** 517 g



**Aux In:** 3.5mm

### **Package Contents**

Speaker, Type-C charging Cable,Aux in Cable, User Manual

### **Slot and Keys**

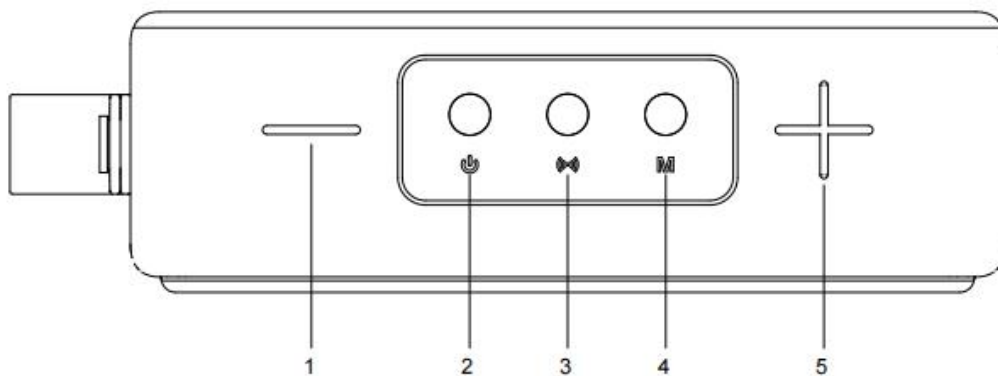

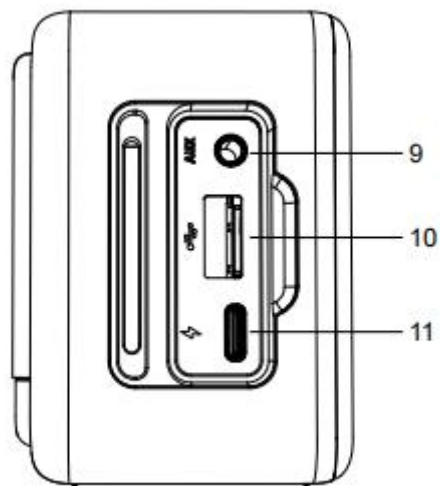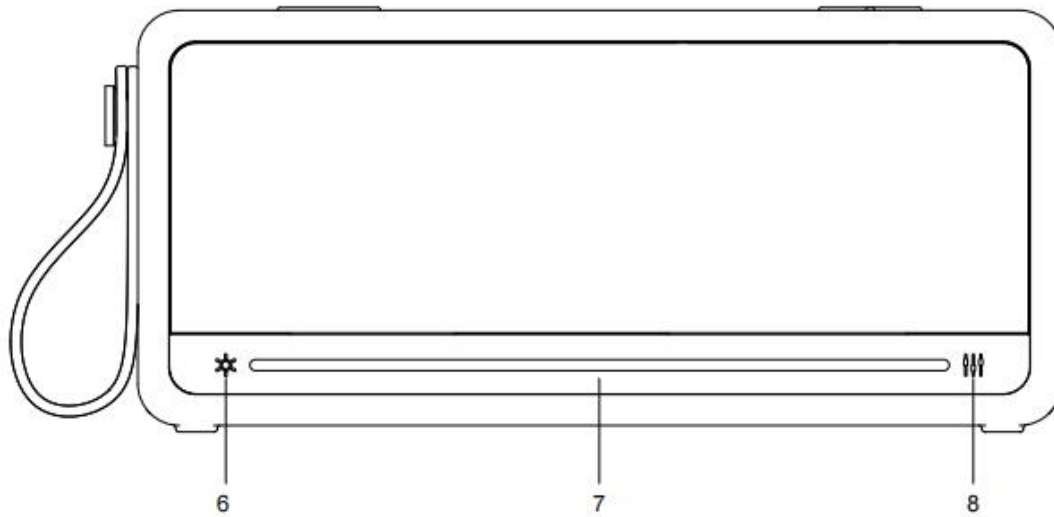

1. —

Long press: Previous track  
Short press: Volume down

2. 

Long press: Power on/off  
Short press: Play/Pause

3. 

Long press: Enter/Exit TWS mode

Short press: Enter Bluetooth mode

Triple press: Disconnect the Bluetooth Pairing

4. 


Long press: Disconnect/Reconnect the Bluetooth pairing

Short press: Mode switching

5. 

Long press: Next track

Short press: Volume up

6. 

Long press: Turn off/on the light


Short press: Switch the light mode

7.  Light bar


8. 

Short press: Switch the EQ mode

Normal - Bass - 3D surround


9.  USB disk port & Power output port

10.  Aux in port  




11.  Charging port

## **Operation Instructions**



### **1. Power on/off**

1) Long press the  button for 2s to power on/off the speaker. The default working mode is Bluetooth mode and the speaker will prompt "Bluetooth mode".



### **2. Bluetooth**

- 1) Long press  button to power on the speaker, the default working mode is Bluetooth mode.
- 2) Turn on the Bluetooth of your phone, search for nearby devices. The 'Stage Gofree' will be found on your mobile pairing list, please connect it.
- 3) Please turn on your phone's music player and speaker will be played the selected music.
- 4) The speaker will pair with the latest used Bluetooth device automatically. Long press the  button to disconnected Bluetooth connection, the speaker will prompt "Bluetooth pairing". Then other Bluetooth devices can find and pair with the speaker.

### **3. Mobile hands-free function**

- 1) Short press the  button to pick up/ hand off the phone call.
- 2) Double press the  button to reject the phone call.

### **4. TWS function**

- 1) Power on the 2pcs M5 speakers (ensure both speakers are in Bluetooth waiting to pair status).
- 2) Long press  button for 3 seconds on either one speaker to enter TWS mode.
- 3) After two speakers paired, they will prompt "TWS paired" . In TWS mode, turn off one of speakers, the other one will power off automatically. Two speakers will pair again after these two speakers power on.
- 4) Long press  button for 2s on either one speaker to disconnect the TWS pairing.

### **5. USB Music Playing**

Inserting the USB Flash Disk into the speaker, the speaker will automatically enter the

USB mode and prompt “USB mode”.

**Please Note:** *The USB Flash Disk supporting memory up to 32G, and support the audio format at MP3, WMA, WAV,APE,FLAC.*

## **6. Aux in Mode**

Use the 3.5mm audio cable included to connect the speaker and an audio source (PC, MP3/MP4, mobile phone). Then the speaker will prompt “Aux in” mode and will be played music from the audio source.

## **7. Charging function**

When speaker with low battery capacity, the speaker will prompt “**battery low**” and the battery indicate will flash in Orange. Please charge the battery via a USB adaptor immediately. During charging, the light bar is in red and will show the battery level.

### **Note:**

- 1.Please use the good quality adaptor to charge the speaker.We suggest use the adaptor specification at 5V/2A.*
- 2.When speaker with low battery capacity, please charge the speaker immediately.*
- 3.Do not charge in a sub-zero environment, charging below zero may cause damage to the battery.*
- 4.Do not use the speaker while charging, the output power is lower than normal working status.*

## **Troubleshooting**

### **1. What should I do if the speaker can not pair with the Bluetooth device and play music accordingly?**

- (1) Please check the specification/ the manual of the Bluetooth device (your mobile or computer), and check if the device can support the A2DP stereo audio transmission. If yes, please turn on the A2DP stereo mode.
- (2) Ensure the speaker is under the Bluetooth pairing status, if there are many Bluetooth devices nearby, “Stage Gofree” will not easy to be found. Please turn off other Bluetooth devices.

### FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: Reorient or relocate the receiving antenna. Increase the separation between the equipment and receiver.

. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

. Consult the dealer or an experienced radio/TV technician for help. Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

### RF Exposure Information

The device was evaluated to meet general RF exposure requirements. This equipment should be installed and used with a minimum distance of 0 mm between the radiator and your body.



## **ISED Statement**

English: This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

The digital apparatus complies with Canadian CAN ICES-3 (B)/NMB-3(B).

French: Cet appareil contient des émetteurs/récepteurs exempts de licence qui sont conformes aux RSS exemptés de licence d'Innovation, Sciences et Développement économique Canada. L'exploitation est soumise aux deux conditions suivantes :

- (1) Cet appareil ne doit pas provoquer d'interférences.
- (2) Cet appareil doit accepter toute interférence, y compris les interférences susceptibles de provoquer un fonctionnement indésirable de l'appareil.

L'appareil numérique du ciem conforme canadien peut - 3 (b) / nmb - 3 (b).

This device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS 102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

cet appareil est conforme à l'exemption des limites d'évaluation courante dans la section 2.5 du cnr - 102 et conformité avec rss 102 de l'exposition aux rf, les utilisateurs peuvent obtenir des données canadiennes sur l'exposition aux champs rf et la conformité.

This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment.

Cet équipement est conforme aux limites d'exposition aux rayonnements du Canada établies pour un environnement non contrôlé.

The device has been evaluated to meet general RF exposure requirement. This equipment should be installed and operated with minimum distance 0mm between the radiator & your body.

L'appareil a été évalué pour répondre aux exigences générales d'exposition aux RF. Cet équipement doit être installé et utilisé avec une distance minimale de 0 mm entre le radiateur et votre corps.