

95X65MM

1

2

3

4

5

智能家居摄像机



APP: CareCam Pro



快速操作指南
V1.1

APP下载

扫描说明书封面的二维码或者在应用商城搜索“CareCam Pro”下载并安装APP;注册账号并登陆。

无线连接摄像机



摄像机接通电源后,等待10-15秒听到“Welcome to use!”提示音;然后长按“RESET”复位键3-5秒,听到“叮”的声音后松开按键,待摄像机重启完成;打开CareCam Pro APP。



第一步
点击界面上“+”之后,选择“添加设备”。




第二步
先确认摄像机属于“WiFi摄像机”或者属于“4G摄像机”类型,然后选择“设备扫描”,勾选“摄像机发出“Welcome to use”提示音”进入下一步。

第三步
选择WiFi名称并输入WiFi密码,点击“连接WiFi”<4G摄像机无需此操作>。




第四步
将手机上的二维码正对着摄像机镜头,摄像机发出“OK”即配置成功,点击“我听到“OK”提示音”。

第五步
等待完成配置,给摄像机取个名字,点击“下一步”完成添加。

更多使用技巧,请在APP界面“?”->“帮助”->“常见问题”里查看。

设备分享添加

- 1 点击设备列表上的分享图标进入分享设备界面。
- 2 点击“分享给家人”,选择分享方式,家人在身边请点击“通过二维码邀请”,对方打开APP后,点击“扫一扫”,扫描分享的二维码完成分享添加;家人不在身边,请点击“通过账号邀请”,输入对方的APP账号,再点击“确定”完成分享添加。


TF卡录像设置

- 1 将设备断开电源后,将TF卡插入卡槽内,注意插卡方向,然后再接设备电源。
- 2 在APP设备列表上,点击设备的设置图标进入设置界面。
- 3 点击“存储卡”,选择TF卡“格式化”,完成后点击“返回”设置界面。
- 4 点击“录制码流选择”,请选择“高清”或“超清”。
- 5 点击“定时录制”,把“开关”打开状态,选择需要录制的时段并点击“保存”,TF录像设置完成。
- 6 TF卡录像回放,点击“SD卡查询”进入录像回放界面。

云存储录像


点击设备云录制图标,进入云录制套餐购买,选择适合的套餐并购买,购买成功后在设备列表的设备名称后面云存储图标亮起。注意:选择“事件存储”套餐,需要在报警设置里面把“移动侦测”或“人型侦测”功能打开才可以录像。

APP界面图标功能介绍




情景切换 查看设备信息 云存储 TF卡录像回放 设备设置

监控画面



设备设置 图像画质切换 监听开关 本地录像 本地截图 灯光开关 全屏监控

附加功能



方向盘控制 语音对讲 智能家居

PC观看指南

PC端软件下载

直接通过浏览器输入<http://yyp2p.cn/care>,点击Care PC下载到电脑并安装。

登录客户端

在电脑上安装好的客户端双击打开,输入手机APP注册的账号及密码,然后点击“登录”即可观看该账号下的所有设备。

如果以上方式无法正常连接,请检查:

- 1 确保路由正常连接,没有禁止接入或隐藏WiFi
- 2 WiFi名称不能带有中文汉字或特殊字符
- 3 确保路由开启的是2.4G网络,不支持5G网络

安全使用注意事项

表示“仅适用于海拔2000米以下地区安全使用” 表示“仅适用于非热带气候条件下安全使用”

更多使用技巧,请在APP界面“?”->“帮助”->“常见问题”里查看。

6

7

8


9

10

Smart home video camera



APP: CareCam Pro




Quick installation guide
V1.1


APP download

Scan the QR code on the front cover of the manual or search for "Carecam Pro" in the app store to download and install the APP; register for an account and log in.

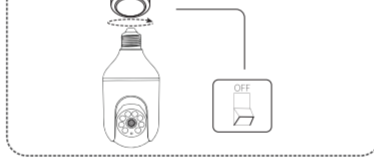

Wireless connect with camera



After the camera is powered on, wait for 10 - 15 seconds to hear the "Welcome to use!", then long press the "RESET" reset button for 3 to 5 seconds, release the button after hearing the "ding" sound and wait for the camera to restart Done; Open the Carecam Pro APP.





The first step
After clicking "+" on the interface, select "Add Device".

The Second step
First confirm that the camera belongs to the "WiFi camera" or "4G camera" type, and then select "Device Scan Code", check the "I heard Welcome to use" prompt tone to enter the next step.

The third step
Select the WiFi name and enter the WiFi password, and click "Connect WiFi" <This operation is not required for 4G cameras>.

The fourth step
Point the QR code on the mobile phone directly to the camera lens. The camera sends "OK", which means the configuration is successful. Click "I heard the OK prompt".

The fifth step
Wait for the configuration to complete, give the camera a name, and click "Next" to complete the addition.

For more usage tips, please check in the app interface "?" -> "Help" -> "Frequently Asked Questions".

Adding by camera sharing

- 1 Click the share icon on the device list to enter the share device interface.
- 2 Click "Share device to family" and choose the sharing method. Please click "Invite by QR code" when the family is around. After the be shared person opens the app, click "Scan" to scan the shared QR code to complete sharing. When the family is not around, please click "Invite by Account", enter the other's APP account, and click "OK" to complete sharing and adding.


TF card recording settings

- 1 After disconnecting the device from the power supply, insert the TF card into the card slot. Be careful of the direction of the card, and then power on the device.
- 2 On the APP device list, click the device's setting icon to enter the setting interface.
- 3 Click "Memory Card", select TF Card "Format", and click "Return" to set the interface.
- 4 Click "Record Stream Select", please select "HD" or "Super Clear".
- 5 Click "Times Recording", turn "Switch" on, select the time period you want to record and click "Save". The TF recording setting is complete.
- 6 TF card video playback, click "SD card query" to enter the video playback interface.

Cloud storage video


Click the device's cloud recording icon, to enter the cloud recording package purchase, select the appropriate package and purchase, after the purchase is successful, the cloud storage icon will light up behind the device name in the device list. Note: To select the "Event Storage" package, you need to turn on the "Motion Detection" or "Human Detection" function in the alarm settings to record.

APP interface icon function introduction




scene switch View alarm information Cloud storage TF card video playback Device settings

Monitor watch



Device settings Image quality switching Sound switch Local Mobile tool Full screen monitoring

Additional features



Steering wheel controls Voice intercom Smart home

PC Viewing Guide

Step 1: PC software download
Enter <http://yyp2p.cn/care> directly through the computer browser, click Care PC to download to the computer and install.

Step 2: Log in to the client
Install the client on your computer, double-click to open it, enter the account and password registered by the mobile app, and then click "Login" to watch all the devices under the account.

If the above method cannot connect normally, please check:

- 1 Make sure your router is properly connected, there is no WiFi disabled or hidden
- 2 The name of WiFi cannot contain Chinese characters or special characters
- 3 ensure your router is on a 2.4G network and does not support 5G networks

Precautions for safe use

is only suitable for safe use in areas below 2000 meters above sea level
For safe use in non-tropical climates only

For more usage tips, please check in the app interface "?" -> "Help" -> "Frequently Asked Questions".

正面

反面

FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- . Reorient or relocate the receiving antenna.
- . Increase the separation between the equipment and receiver.
- . Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- . Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

RF Exposure Information

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.