



chamelo

EYEWEAR

Music Shield

瞬时变光蓝牙音频墨镜

Instant Dimming Bluetooth Audio Sunglasses

使用说明书

Instruction manual

声明

首先对您使用本公司的产品表示感谢！在使用之前请先阅读此说明书，正确使用此产品。为了更好地服务，本用户手册的内容可能变更。因为产品的性能和功能而发生的变更，将不做另行通知。


产品简介

Music Shield是一款依据液晶调光膜技术开发的智能蓝牙音频调光眼镜。本产品具有操作简便，瞬时变光等特点，适用于跑步、骑行、登山、滑雪等场景；改善强光及弱光环境下眼睛的视觉功能和视觉效果。

提示

1. 使用本产品前请仔细阅读说明书，并保留本说明书。
2. 首次使用，请先将本产品充满电。
3. 如果产品长期(超过两周)不充电，使用前请对其充电。
4. 请在0°C~35°C环境下对产品进行充电。

产品说明

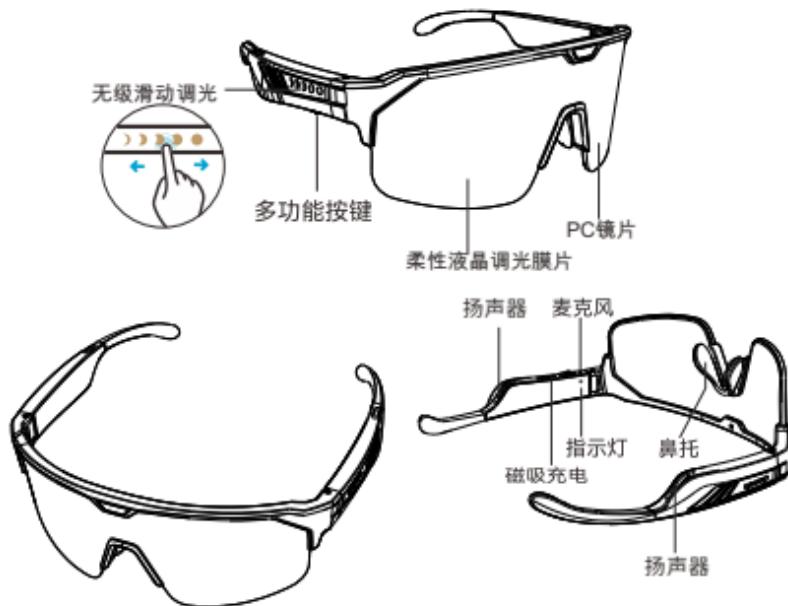

智能调光电控墨镜镜片透过率(镜片暗透变化)分多档,透过率约为20%~65%。用户使用时可以根据自身环境情况调整镜片透过率,保障了环境变化下良好的视觉效果。

型号	Music Shield
镜架材质	TR- 90, PC
镜片材质	柔性调光LCD +PC材质镜片
无级调光	20%~65%
蓝牙版本	V5.3
支持协议	HFP/A2DP/AVRCP
传输距离	≥12米
喇叭类型	双喇叭,立体声
音乐时长	6.5H(70%音量)
通话时长	6.0H
变光时长	>100H(在不播放音乐和不通话条件下)
充电时长	2.5H
充电输入	DC 5V ⋯ 1A
电池容量	180mAh
净重	眼镜重量 50g

包装清单

- ① 眼镜 ✓
- ② 充电线 ✓
- ③ 眼镜盒 + 眼镜袋 ✓
- ④ 说明书 ✓

功能特点

1.开关

开机:长按多功能按键2秒,直到蓝灯亮起,听到“Power on”提示音。

关机:长按多功能按键5秒,直到红灯亮起,听到“Power off”提示音。

2.配对

新机开机后,自动进入蓝牙配对模式;红蓝灯交替闪烁。

打开要连接的设备蓝牙(如手机、播放器等)设备,搜索并连接Chamelo Music Shield听到“Connected”提示音为配对成功,可以用Chamelo Music Shield随意播放音乐和接打电话。

如果连接失败,Chamelo Music Shield将在5分钟后进入待机模式,单击多功能按键后再次唤醒蓝牙功能。

3.配对新的蓝牙设备

只有在配对模式下,Chamelo Music Shield眼镜才能被搜索并与新的蓝牙设备连接。

4.自动连接

如果Chamelo Music Shield已经连接过的设备,再次打开蓝牙会自动与设备连接。

5.音乐切换

播放/暂停:在播放音乐的状态下单击多功能按键。

下一曲:在播放音乐状态下双击多功能按键。

上一曲:在播放音乐状态下三击多功能按键。

6.接听电话/拒接电话

接听/挂断电话:在来电/通话的状态下单击多功能按键。

拒接电话:在来电的状态下双击多功能按键。

7.语音助手

在连接状态下长按多功能按键2秒可以启动Siri或google voice assistant (适用于iphone、安卓大部分机型)。

8.充电和电池低点亮提示

充电:请使用原装充电线进行充电,充电时红灯长亮,充满绿灯常亮。

电池低点亮提示:红灯闪2下并有“嘟嘟”提示音,请尽快充电。

9.无级滑动调光功能

无级滑动调光,轻松应对各种环境光线。使用时,可以通过前后滑动右侧镜腿进行循环切换镜片透过率,镜片透过率分多档,透过率20%~65%。

10.抗紫外线功能

镜片具有抗紫外线功能,能有效抵抗UVA/UVB,保护使用者的眼睛。

11.长续航,尽情使用。

一次充电可连续使用100小时(仅变光模式,在不播放音乐和不通话条件下)。

12.磁吸式充电

磁吸充电设计,靠近接头即可自动吸附,插拔无阻节省操作。

注意事项

- 1.请勿以任何理由拆除或维修改装本产品，否则可能会导致起火，电子击穿甚至彻底损坏本产品。
- 2.请勿将产品直接接触液体弄湿，泡在液体里，或直接接触化学试剂。眼镜进水后请在阴凉环境下自然晾干或用吹风机慢慢吹干回复室温后使用（使用吹风机时请避免温度过高，以防烤伤眼镜）。
- 3.清洁镜片时，应使用用水湿润过的眼镜布进行擦拭，再用干燥眼镜布拭干。尽量使用绒而且吸水性较强眼镜布轻轻抹拭干净，注意不要太用力。擦拭时，眼镜布要朝着同一个方向擦拭，不能来回擦拭，也不能在镜片上转着圈擦。
- 4.镜腿采用轻质合成材料制成，有一定的打开范围。不可过度或者反方向掰扯镜腿，可能会导致镜腿断裂。
- 5.不能将眼镜放在阳光下长时间暴晒，否则易变形、老化、折断。
- 6.请勿将充电线磁吸端靠近金属物体，防止磁吸金属物体后引起的短路危险。
- 7.长期不使用时请用配套的眼镜袋装好，尽量不要受压和跌落。
- 8.嵌入式 LCD 薄膜（液晶薄膜）对压力敏感。因此，请避免不必要的变形或挤压镜片。这可能会造成不可逆转的损害。镜片上的黑点或黑点表明存在此类损坏。

重要安全信息

- 1.在使用本设备前，请先阅读所有安全信息以确保正确和安全使用。
- 2.使用未经本制造商认可的电源，充电器或电池，可能引发火灾，爆炸或其他危险。
- 3.本眼镜使用时，最低透过率为20%，有可能会影响开车安全，如仍佩戴，出现问题本公司不予承担一切法律责任。
- 4.请使用本制造商认可且与此型号设备配套的配件。
- 5.请在温度0°C—35°C 范围内使用本设备，并在温度 0°C—40°C下存放该设备及其配件，以及温度0°C—35°C下充电。当环境温度过高或过低时，可能会引起设备故障。
- 6.该设备使用不可拆卸的内置电池，请勿自行更换电池，以免损坏电池或设备。
- 7.若充电完毕，请断开充电器与本设备的连接，并从电源插座上拔掉充电器，连续充电时间请勿超过12小时。
- 8.电池禁止拆卸，撞击，挤压或投入火中，若出现严重膨胀，请勿继续使用。
- 9.请勿置于高温环境中，电池过热可能会引起爆炸。
- 10.请保持设备干燥。

11.若设备或其他任何部件不能正常工作,请勿自行维修任何产品。

产品三包凭证

真诚地感谢您购买本产品!

为了更好地享受“三包”权益,请您购买本产品后妥善保管购买发票及三包凭证。购买发票及三包凭证需填写完整正确。

保修原则

- 1.按照正常使用且未违反上述注意事项,因产品质量问题而引起的本产品硬件故障均属于保修范围。在保修期内,予以保修。本保修条例适用于智能液晶调光墨镜系列产品,以上产品系列实行“7日内保换”、“一年保修”。
- 2.正常使用指无“人为或不可抗力造成的损坏”。
- 3.保换条件:直接用户在购买7日内,发现产品硬件有故障问题,可以凭购机发票到购买地点进行更换。
- 4.保修:保修期内,在正常使用情况下出现功能失效,本公司负责免费保修,主要指调光镜片不工作,不包括硬件外壳、说明书、包装物和其他消耗品等,不包括邮寄和上门服务费。

- 5.对于超过保修期的产品本公司可以提供有偿维修,在正常使用情况下出现功能失效,本公司可以负责维修,收取一定的元器件、配件成本费和人工费。

- 6.保换条件是包装盒内所有物件完整,并且外观没有磨损、污迹,产品主机、外盒序列号一致。

注1:更换产品的颜色不在产品保换范围之内。

注2:请您在购机时仔细查看外观是否有破损、购机后产品外观的破损将不在保换范围之内。

- 7.保修:保修期内,在正常使用情况下出现功能失效,本公司负责免费保修。

- 8.维修:维修期内,在正常使用情况下出现功能失效,本公司负责维修,收取一定的元器件、配件成本费。

- 9.以下情况不能享受免费保修服务,但提供维修服务,只收取元器件、配件和劳务成本费。

①违反上述“注意事项”的规定:

②人为因素造成的损坏,包括非正常工作环境下使用、不按说明书使用、维护、保养引起的损坏等。

③因不可抗拒力(如水灾、火灾、地震、雷击、电压异常等)造成的损坏。

④超过保修期的产品。

⑤无购买凭证、凭证与产品型号不符或者涂改的。

10.如不能出示有效购机发票将均按超保修期办理,收取元器件、配件维修成本费。

保修方法

在委托修理时,请持购机发票或者发票复印件与当地销售商联系,也可直接致电唯酷服务热线:+86-756-8819942。

联系我们

地址:中国广东省珠海市横琴新区环岛东路1889号创意谷19栋113室。

电话:+86-756-8819942

邮箱:support@wicue.com

网站:www.wicue.com

产品维修记录

序号	产品型号	故障描述	故障原因	处理情况	购买日期	送修日期	交验日期
1							
2							
3							

注：请保存好维修工单，维修记录方为有效。

Statement

Thank you for using this product. Before using this product, please read the manual carefully, so that you can correctly use it. These instructions may change due to hardware or software update.


Product Description

Music Shield is an intelligent Bluetooth audio dimming glasses developed with liquid crystal dimming film technology. The Music Shield is characterized by easy operation and instantaneous color change, and can be used for running, cycling, climbing, skiing, and other scenarios; it also improves the visual function and visual effect of the eyes in both bright and low-light environments.

Notice

- ①Please read the manual carefully before using this product, and keep this manual.
- ②Please fully charge the product before using it for the first time.
- ③If the product is not charged for a long time (more than two weeks), please charge it before use.
- ④Please charge the product in an environment of 0°C~35°C.

Product description

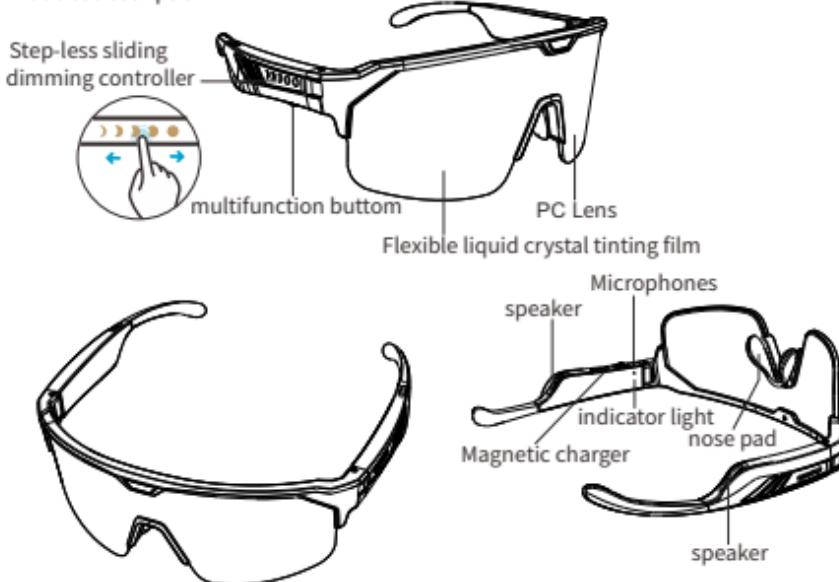

Intelligent dimming electrically controlled sunglasses lens transmittance (lens dark transmittance change) is divided into several grades, the transmittance rate is about 20%~65%. Users can adjust the lens transmittance rate according to their own environment, which guarantees the good visual effect under the environment change.

Model	Music shield
Frame Material	TR- 90, PC
Lens Material	Flexible liquid crystal tinting film +PC
Transmittance	20%~65%
Bluetooth version	V5.3
Supported Protocols	HFP/A2DP/AVRCP
Transmission distance	≥12M
Speaker type	Dual speaker, Stereo sound
Duration of music	6.5H(70% volume)
Duration of calls	6.0H
Duration of Switching	>100H(Without music and calls)
Charging time	2.5H
Charge Input	DC 5V ⋯ 1A
Battery capacity	180mAh
Net weight	Weight of glasses 50g

List of items

- ① Electronic sunglasses √
- ④ User manual √
- ② Charging cable √
- ③ Sunglasses bag + with cleaning cloth √

Product introduction

1. Switch

Power on: Press and hold the multi-function button for 2 second until the blue light turns on and you hear the "Power on" tone.

Power off: Press and hold the multifunction button for 5 seconds until the red light turns on and you hear the "Power off" tone.

2. Switch

After the new machine is turned on, it automatically enters the Bluetooth pairing mode; the red and blue lights flash alternately. Turn on the Bluetooth of the device you want to connect (e.g. cell phone, player, etc.), search for and connect to Chamelo MusicShield and hear the "Connected" tone for successful pairing, you can use Chamelo MusicShield to freely play music and receive calls. If the connection fails, Chamelo MusicShield will enter standby mode after 5 minutes, click the multi-function button to wake up the Bluetooth function again.

3. Pairing a new Bluetooth device

The Chamelo Music Shield glasses can only be searched for and connected to a new Bluetooth device when in pairing mode.

4. Automatic connection

If Chamelo Music Shield has already been connected to a device, turning on Bluetooth again will automatically connect to the device.

5. Music switching

Play/Pause: Click the multifunction button while the music is playing.

Next Song: Double-tap the multifunction button while the music is playing.

Previous Song: Triple-tap the multifunction button while the music is playing.

6. Answer/reject calls

Answering/hanging up a call: click the multifunction button in the

Rejecting a call: Double-tap the multifunction button in the incoming call.

7. Voice assistant

Long press the multi-function button for 2 seconds in the connected state can start Siri or google voiceassistant (for iphone, android most models).

8. Charging and Battery Low Tips

Charging: Use the original charging cable for charging. The red light will turn on when charging, and the green light will remain on when the battery is full. Battery low indicator: The red light blinks twice and a beep sounds, so charge the battery as soon as possible.

9. Infinitely sliding dimming function

Sliding dimming makes it easy to respond to a variety of ambient light conditions. When in use, the lens transmittance can be switched cyclically by sliding the right lens leg back and forth, and the lens transmittance is divided into several levels, ranging from 20% to 65%.

10. Anti-UV function

The lenses are UV resistant and can effectively resist UVA/UVB to protect the user's eyes.

11. Long battery life

Up to 100 hours of continuous use on a single charge (light-change mode only, without music or calls).

12. Magnetic Charging

Magnetic charging design, close to the connector can be automatically attached, plugging and unplugging can be easy operation.

Precautions

1. Do not dismantle or repair or modify the product for any reason, as doing so may cause a fire, electrical breakdown or even complete damage to the product.
2. Do not wet the product in direct contact with liquids, soak it in liquids, or expose it to chemicals directly. After water ingress, dry your eyeglasses in a cool environment or use a hair dryer to dry them slowly and return them to room temperature (avoid excessive temperatures when using a hair dryer to prevent eyeglasses from being burned).
3. When cleaning glasses, use a cloth moistened with water to wipe them, then dry them with a dry cloth. Try to wipe gently with a soft, absorbent cloth and be careful not to be too forceful. When wiping, use the cloth in the same direction, not back and forth, and do not rub in circles on the lens.
4. The temples are made of lightweight synthetic material and have a certain opening range. Do not pull the temples excessively or in the opposite direction, as this may cause them to break.
5. Do not leave the glasses in the sun for a long time, otherwise they will be easily deformed, degraded or broken.
6. Do not place the magnetic end of the charging cable close to metal objects to prevent short-circuiting caused by magnetic attraction to metal objects.
7. When glasses are not used for a long period of time, store them in the pouch that comes with them and keep them away from pressure and drops.
8. The embedded LCD film (liquid crystal dimming film) is sensitive to pressure. Therefore, avoid distorting or squeezing the lens unnecessarily. This may cause irreversible damage. A black spot or black point on the mirror indicates such damage.

Important safety information

1. Before using this equipment, please read all safety information to ensure proper and safe use.
2. Use of power supplies, chargers or batteries not approved by the manufacturer may cause fire, explosion or other hazards.
3. The minimum transmittance rate when using these glasses is 20%, which may affect driving safety, so if you wear these glasses, the company will not be held legally responsible for any problems that may occur.
4. Use accessories approved by the manufacturer and compatible with this model of equipment.
5. Use the device within the temperature range of 0°C to 35°C, store the device and its accessories at temperatures of 0°C to 40°C, and charge it at temperatures of 0°C to 35°C. The device may malfunction when the temperature is too high or too low. When the temperature is too high or too low, it may cause the device to malfunction.
6. The device uses a non-removable built-in battery, please do not replace the battery yourself to avoid damage to the battery or the device.
7. If the charging is finished, please disconnect the charger from the device and unplug the charger from the power outlet, and do not charge continuously for more than 12 hours.
8. Batteries should not be disassembled, smashed, crushed or put in a fire; do not use them if they swell significantly.
9. Do not place in a high temperature environment, overheating of the battery may cause explosion.
10. Please keep the equipment dry.
11. If the equipment or any other parts can not work properly, do not repair any product yourself.

Product maintenance record and other

We sincerely thank you for purchasing the product! In order to enjoy the "replace, return, repair" rights better, please keep the receipt and product maintenance record of the product properly after purchase. The receipt and product maintenance record should be filled in completely and correctly.

Warranty Principles

1. Hardware failures of this product caused by product quality issues are covered by the warranty if the product is used in accordance with normal usage and does not violate the above precautions. The warranty is valid for the duration of the warranty period. This warranty applies to the Smart LCD Dimming Sunglasses series, which are covered by a 7-day replacement warranty and a one-year warranty.

2. Normal use means the absence of "human or force majeure damage".

3. Replacement conditions: Direct users can have the product replaced at the place of purchase with the purchase invoice if they find that the hardware of the product is defective within 7 days of purchase.

4. Warranty(repair): During the warranty period, if the function fails under normal use, we are responsible for free warranty. Failure to function mainly means that the dimming mirror does not work, excluding hardware cases, manuals, packaging and other consumables, etc., and excluding the cost of postage and on-site service.

5. For products that have exceeded the warranty period, we can provide paid repair services. If the product fails to function under normal use, we can be responsible for repairing the product, charging a certain amount for the cost of components and accessories, as well as a manual labor fee.

6. Warranty conditions are that all items in the box are complete, and there is no scratches or stains on the product, and the serial number of the product host and outer box are identical.

Note 1: Replacement of product with another color is not covered by the product warranty.

Note 2: Please check the appearance of the product carefully for damage when purchasing the product, and any damage to the appearance of the product after purchase will not be covered by the warranty.

7. **Warranty:** During the warranty period, the company is responsible for free warranty if the function fails under normal use.

8. **Maintenance:** maintenance period, in the normal use of the function failure, the company is responsible for maintenance, charge a certain amount of components, accessories cost.

9. The following cases are not eligible for free warranty service, but repair service is provided, and only the cost of components, accessories and labor is charged.

①Violation of the above "precautions":

② damage caused by human factors, including the use of non-normal working environment, not in accordance with the instructions for use, maintenance caused by the damage.

③ Damage caused by force majeure (e.g. flood, fire, earthquake, lightning strike, abnormal voltage, etc.).

④Products that are out of warranty.

⑤No purchase vouchers, vouchers do not match the product model or are altered.

10. If you can not provide a valid purchase invoice, the product will be handled in accordance with the over-warranty period, the maintenance will be charged for components, accessories and maintenance costs.

Repair warranty method

When you need repairs, please contact your local seller with the purchase invoice or a copy of the invoice, or call the wicue Repair Hotline directly:

86-0756-8819942.

Contact us

Address: Room 113, Building 19, Creative valley, 1889 Huandao east road, Hengqin new district, Zhuhai city.

TEL: 86-0756-8819942

Email: support@wicue.com

Website: www.wicue.com

Product maintenance records

	Model No.			Date of purchase	
No.	Fault description	Cause of failure	Disposition	Maintenance date	Date of return
1					
2					
3					

Note: Please keep the record for maintenance.

はじめに

この度は、弊社製品をご購入いただきまして、誠にありがとうございます。本製品を安全に、また正しくお使いいただくために、この取り扱い説明書をよくお読みください。本ユ-ザ-マニュアルの内容は、より良いサ-ビスを提供するために変更されることがあります。製品の性能・機能による変更は予告なく行われます。

製品紹介

Music shield サングラスは、フィルム液晶技術を用いて開発した、ブル-トウ-ス機能付きスマ-ト調光サングラスです。本製品は簡単な操作で瞬時にカラ-チエンジできることが特徴で、日常、旅行、ドライブ、パ-ティ-などのシンに適しています。操作性、携帯性などに優れ、サイクリング、ドライブ、ハイキング、フィッシング、スキ-などのシンに適し、強い光や弱い光の環境下で目の視機能・視覚効果を高め、快適な視界を得ながら安全性を向上させることができます。

ご使用にあたって

- 1.本製品をご使用になる前に、この取扱説明書をよくお読みになり、大切に保管してください。
- 2.初回使用する場合は、まず製品をフル充電してください。
- 3.長期間(2週間以上)充電しない場合は、充電してからご使用ください。
- 4.充電は0°C~35°Cの環境で行ってください。

商品説明

無段階スライド調光



マルチファンクションボタン

LCフレキシブル液晶フィルム

マイク

マグネット式充電

スピーカー

インジケータランプ

鼻パット

スピーカー



インテリジェント調光電気制御サングラスレンズ透過率(レンズ暗透過率変化)はいくつかの等級に分けられ、透過率は約20%~65%である。使用者は自分の環境に応じてレンズの透過率を調整することができ、環境の変化に対して良好な視覚効果。

品番	Chamelo Music shield
フレーム素材	TR-90, PC
フレーム素材	フレキシブル液晶フィルム +Pcレンズ
透過率	20%~65%
ブルートゥース	V5.3
対応プロトコル	HFP/A2DP/AVRCP
転送距離	12M未満
スピーカー-タイプ	ダブルスピーカー、ステレオ
音楽のみ使用時間	6.5 時間(70%音量)
通話のみ使用時間	6.0時間
調光時間	>100時間(音楽と通話なし)
充電時間	2.5 時間
受電入力	DC 5V ⇄ 1A
電池容量	180mAh
重量	本体50g

本体及び付属品

お買い上げいただいたパッケージの中には以下のものが入っています。お使いになる前に、必ずご確認ください。万一、不足しているものがあった場合は、お買い上げの販売店にお問い合わせください。

- ①サングラス(本体):1個
- ②充電ケーブル:1個
- ③ケース:1個
- ④クリーニングクロス:1枚
- ⑤取扱説明書(本書):1冊

Music shield の機能と特長

1.スイッチ

ON:マルチファンクションボタンを長押しするとインジケータ-ランプが青色に点灯し、[Power on]の音声が流れます。

OFF:マルチファンクションボタンを長押しするとインジケータ-ランプが赤色に点灯し、[Power off]の音声が流れます

2.ペアリング

マルチファンクションキーを長押しして電源を入れると、インジケータランプは赤色と青色に交互に点滅し自動的にBluetoothペアリングモードに入ります。このペアリングモードでのみ、Chamelo Music Shieldが新しいBluetoothデバイスと接続できます。接続したいデバイス（例えば：スマートフォン、音楽プレーヤーなど）のBluetooth機能をオンにして、Chamelo Music Shieldを検索し、「Connected」の音声が聞こえたら、ペアリングが成功したことを示します。Chamelo Music Shieldで音楽を再生したり電話ができる接続（失敗した場合：Chamelo Music Shieldは5分後に待機モードに入ります）。

3.自動接続

Chamelo Music Shieldが接続したことがあるデバイスの場合、Bluetoothを再度オンにすると自動的に接続されます。

4.音楽の切り替え

・時停止：音楽を再生している状態で、マルチファンクションボタンを

1回クリックすると時停止します。再度、1回クリックすると再生します。

次の曲：音楽を再生している状態で、マルチファンクションボタンを

次の曲音楽を再生している状態で、マルチファンクションボタンを。

前の曲：音楽を再生している状態で、マルチファンクションボタンを

3回クリックすると、前の曲に戻ります。

5.通話と拒否

着信応答：着信中にマルチファンクションボタンを1回クリックします。

着信拒否：着信中にマルチファンクションボタンを2回クリックします。

6.音声を自動認識

接続された状態で、マルチファンクションボタンを数秒間長押しすると、SiriまたはGoogle Voice Assistantが起動します。（iPhone、Androidのほとんどの機種に対応します）。

7.充電

バッテリーが少なくなると赤いランプが点滅し、「ドゥ、ドゥ-」という音が鳴りますので、すみやかに充電してください。充電には専用の充電ケーブルを使用してください。充電中は赤いランプが点灯し続け、充電完了後は緑色のランプが点灯します。

8.スライド調光機能

右テンブルの先端部分に触れて前後にスライドさせることで、レンズ透過率の切り替えが可能です。レンズ透過率は20%~65%の範囲で5段階[切り替わり]、様々な環境に対応します。

9.紫外線カット

紫外線(UVA/UVB)をカットし、紫外線からユ-ザの目を保護します。

10.バッテリ-性能

1回の充電で調光機能を100時間使用できます。使用時間は、音楽を聞いている時間、通話時間によって変わります。

11.マグネット式充電

マグネット式充電方式を採用しているので、充電ケ-ブルのコネクタ-を近づけると自動で接続されます。

注意事項

1.本製品を分解、修理、改造しないでください。火災や故障の原因となる可能性があります。

2.本体に直接液体や化学薬品をかけたり、浸すなど漏らすことは避けてください。液体が付着した場合、暗所で自然乾燥させるか、ヘアドライヤ-の冷風を当ててゆっくり乾燥させてください。

3.本体に直接液体や化学薬品をかけたり、浸すなど漏らすことは避けてください。液体が付着した場合、暗所で自然乾燥させるか、ヘアドライヤ-の冷風を当ててゆっくり乾燥させてください。

4.テンブルフレームには軽量な合成素材を使用し、一定の開口幅を持たせていますので、テンブルフレーム^過度に力を加えたり、反対方向に曲げたりしないでください。

5.本製品は、変形、老化、破損しやすいので、長時間日光に当たる場所に放置しないでください。変形や破損する可能性があります。

6.金属物の磁気吸引によりショ-トする危険性があるため、充電ケ-ブルの磁気側を金属に近づけないでください。

7.長時間使用しないときは、サングラスケ-スに入れ、負荷をかけたり落としたりしないように注意してください。

8.レンズ部のフィルム液晶パネルは圧力に弱く、精密機器ですので、レンズを変形させたり、圧迫しないでください。これにより、レンズには黒点等の回復不能な損傷が生じる可能性があります。

安全上のご注意

- 1.ご使用前にすべての安全上のご注意をお読みください。
- 2.メ・カ・が認定していない電源、充電器、電池を使用すると、火災、爆発等の危険性があります。
- 3.このサングラスの最低透過率は20%であり、夜間運転や視界が悪い環境での運転は安全性に影響を与える可能性があります。万が一事故等が発生しても弊社は法的な責任は負いません。
- 4.メ・カ・が認定した付属品をご使用ください。
- 5.本製品は0°C~35°Cの温度範囲での使用及び充電を行ってください。また、-10°C~40°Cの温度範囲で保管してください。
- 6.本製品は取り外しきれない内蔵バッテリ-を使用しています。バッテリ-や本製品が損傷する恐れがありますので、お客様ご自身で、分解やバッテリ-交換を行わないでください。
- 7.充電完了後は、本体から充電ケ-ブルを取り外してください。連続充電時間は12時間を超えないようにしてください。
- 8.電池を分解したり、叩いたり、曲がったり、火にかけたりしないでください。また、激しく膨張した場合は、使用しないでください。
- 9.高温の環境下に置かないでください。バッテリ-が温度上昇して爆発する恐れがあります。
- 10.本体を濡らさないようにご注意ください。
- 11.本体やその他の部品に異常がある場合は、お客様で自身での修理は行わないでください。

保証について

保証書は、「お買い上げ日」など記入の上、内容をよくお読みいただき、領収書またはレシ-トと一緒に大切に保管してください。

保証範囲

- 1.本製品は、ウイキュ-・オプトロニクス・ジャパン株式会社によって確認された製造上の欠陥に対して、無償で交換をいたします。又、取扱説明書の「注意事項」及び「安全上での注意」に従った正常な使用状態で、保証期間内に故障した場合、無償で修理を行います。尚、交換・修理はサングラス本体のみを対象とし、付属品に関しましては別途料金をいただきます。

- 2.正常な使用とは、「人為的または不可抗力による損害」がないこと。
- 3.初期不良品:到着日を含めて8日以内にご連絡下さい。迅速に交換対応させていただきます。送料は弊社負担とさせていただきます。
- 4.保証期間:お買い上げ日より1年間を保証期間とします。取扱説明書[従った正常な使用状態で、サングラス本体の機能不良が生じた場合、送料を除いた無償保証の責任を負うものとします。尚、無償保証はサングラス本体のみを対象とし、取扱説明書、パッケージ、その他の付属品に関しましては対象外といたします。]
- 5.1年間の保証期間終了後は有償にて修理を承ります。修理費用など詳細については、下記お問い合わせ窓口までご連絡ください。
- 6.保証対象は、本体含め外箱、付属品全て揃っている状態で、摩耗や汚れがないと
注1:カラ-交換は製品保証の対象外です。
注2:購入時に外装の破損がないかよく確認してください。購入後の外装の破損は保証の対象外です。
- 7.保証期間中、下記①~⑤を除<正常な使用状態で機能的な不具合が生じた場合、当社が責任を持って無償で保証します。
 - ①上記「注意事項Jに反すること。
 - ②異常な使用、取扱説明書に従わない使用、損傷に起因する保守・修理など、人為的な要因による損傷。
 - ③不可抗力による損害(例:水害、火災、地震、落雷、電圧異常など)。
 - ④保証期間が終了した商品。
 - ⑤領収書がない商品、領収書と一致していない商品。保証、修理、交換については、下記お問い合わせ窓口までお問い合わせください。
お問い合わせ窓口
株式会社 ウィキュ ーダイレクト
住所: 東京都中央区日本橋富沢町16-9 名門ビル
電話: 03-6458-3033
メールアドレス: support@wicue.jp
ホームページ: <https://www.wicue.jp/>

品名			
品番		カラー	
お買い上げ日			
販売店		店名:	
		住所:	
		TEL:	
		印:	
お客様		氏名:	
		住所:	
		TEL:	
		レシート	

本書は再発行致しませんので紛失しないよう大切に保管してください。

本書はお客様の法律上の権限を制限するものではありません。

工艺：128g铜版纸，封面附触感哑胶，内页正常印刷，
单黑印刷，骑马订装订成册 成品尺寸：69*89mm

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

The devices has been evaluated to meet general RF exposure requirement , the device can be used in portable exposure condition without restriction