





FEATURES BUILT-IN CLASS A/B AMPLIFIER AND MULTICOLOR ILLUMINATION OPTIONS

User Guide

These instructions cover the following part number:

MT6000





INDEX

nformation to the User	2
Before You Start	3
Getting to Know Your MT6000	4
3T Operation	5-6
Streaming Music	7
AUX Input	8
JSB Input	9
Remote Control	10
Getting Started	11
nstallation	12
Froubleshooting	13
Nire Diagram / Specifications	

•







Thank you for purchasing MT6000 ATV/UTV Sound Bar.

Please read through these instructions carefully so you will know how to operate your

After you have finished reading the instructions, keep this document in a safe place for future reference.

THIS PACKAGE CONTAINS:

(1) MT6000 All-Terrain Speaker System -----(1) Mounting Kit -----(1) Power Accessory Extension Adaptor -----(1) Remote Control ------(1) User Manual -----







BEFORE YOU START

IMPORTANT SAFETY PRECAUTIONS

- Do not operate mobile equipment while driving a motorized vehicle. Safe driving and safety consideration of others should always be your highest priority.
- In the event you should notice smoke, strange noises or odor from this product, or any other abnormal signs, immediately turn off the power. Using this product in this condition may result in permanent damage to the system.
- Set your volume control at a low setting, then slowly increase the sound until you can hear it comfortably without distortion or ear discomfort.

BE SURE TO OBSERVE THE FOLLOWING GUIDELINES:

- Do not turn up the volume too loud that you can't hear what's around you.
- Use caution or temporarily discontinue use in potentially hazardous situations.

INSTALLATION PRECAUTIONS

- Servicing of this product by persons without professional training and experience in electronic equipment and motorized vehicle accessories may be dangerous and could expose you to the risk of electric shock, injury or other hazards.
- Contact customer service for any installation, service questions or requests.
- MT6000 can be powered from a vehicle's cigarette lighter auxiliary power port, or hardwired directly to the battery through an optional relay / accessory switch.
- When wiring directly to the vehicle's battery, be sure to disconnect the batteries
 negative terminal wire before starting any wiring procedures, it is suggested that an
 optional fuse and fuse holder (not included) with minimum rating of 15 Amps be in line
 with the positive battery terminal.
- The ground cable length should not exceed 18-inches (see wiring diagram).
- The MT6000 has a weather resistant design. It should not be submerged in or under water under any circumstances.
- Use only the installation parts provided with the MT6000.
- Wash with a mild soap or detergent and lukewarm water using a clean sponge or a soft cloth. Rinse well with clean water.

VERY IMPORTANT

- DON'T clean in hot sun or on very hot days.
- DON'T use abrasive or highly alkaline cleaners on the main body.
- DON'T scrape the main body with razor blades, or other sharp instruments.
- DON'T ever use, gasoline, acetone or carbon tetrachloride.


 Λ

CAUTION: Using other mounting methods may void this warranty.







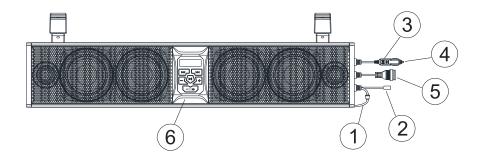


- 1 RGB Remote
- ② 3.5mm AUX-INPUT
- 3 Led Power Indicator
- 4 Cigarette Power Cable Adaptor
- ⑤ USB Jack
- 6 Control Panel





Ţ

BT OPERATION

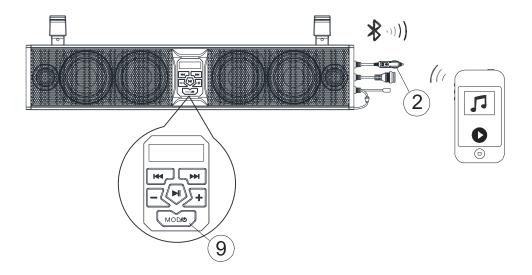

PAIRING & DISCOVERING A NEW BT CONNECTION



- Power on the *MT6000* by plugging in the male cigarette lighter adaptor into

 a female cigarette lighter receptacle.
- 2. Press the (9) button. The *MT6000* will automatically go in to pairing mode.

ANDROID users:

- a. Go into the Settings Menu of your device
- b. Enter the **BT Menu**
- c. TURN ON BT and press SCAN
- d. SOUND BAR will now be displayed under AVAILABLE DEVICES
- e. If prompted, enter passcode: 0000


iOS users:

- a. Go into the **Settings Menu** of your device
- b. Enter the BT Menu
- c. TURN ON BT and press SCAN
- d. SOUND BAR will now be displayed
- e. If prompted, enter passcode: 0000

NOTE: You have 2 minutes before you must restart this procedure over again.

- 3) If **SOUND BAR** is not seen, repeat the above steps to refresh the **Device List**
- 4) When the connection is successful, you are now ready to stream music from your favorite media player to the *MT6000*.

BT OPERATION

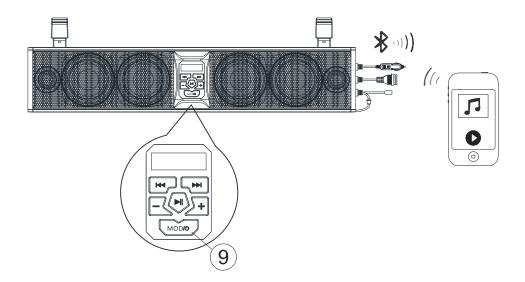

(1) RECONNECTION



- 1. Power on the $\emph{MT6000}$ and your last paired BT device.
- 2. Press the button 9. The unit will now automatically reconnect.
- 3. If your device was previously paired with the $\emph{MT6000}$, but it wasn't the last paired
 - a. Ensure no other devices are currently paired


 - b. Enter the on your device being paired
 c. SOUND BAR will display under AVAILABLE DEVICES
 d. Choose the SOUND BAR to reconnect
- 4. If the device is out of range from the MT6000, it will disconnect automatically:
 - a. The MT6000 will automatically reconnect to the device once back in range.



TIPS: To avoid battery exhaustion, be sure to occasionally run the vehicle's engine while using this product. Using this product without running the engine can drain the battery.



STREAMING MUSIC

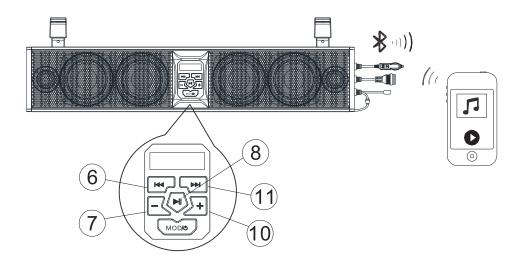

MULTIFUNCTION CONTROLLER BT OPERATION



- 1. Press the (8) **PLAY/PAUSE** once to start playing music or press the **PLAY** button from your device's touchscreen.
- 2. To skip songs or advance, press the ① NEXT TRACK button.
- 3. To select the previous song, press the 6 *PREVIOUS TRACK* button.


VOLUME CONTROL

- 7. To raise the volume, press the 10 **VOLUME UP** button or use your device's controls.
- 8. To lower the volume, press the ⑦ **VOLUME DOWN** button or use your device's controls.



TIPS: For maximum audio performance, ensure your device BT volume is set to a minimum 75% level before stowing.

AUX INPUT

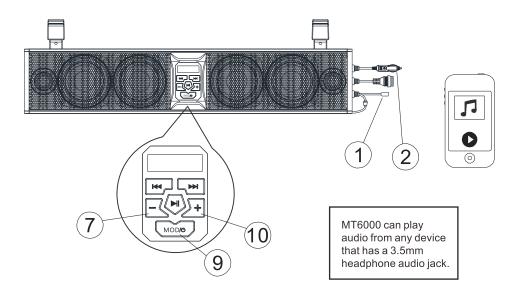

AUX-IN OPERATION



- Power on the *MT6000* by plugging in the male cigarette lighter adaptor into
 a female cigarette lighter receptacle.
- 2. Press the button (9). The *MT6000* will automatically go in to *AUX* mode.
- 3. Connect the integrated 3.5mm **AUX-IN** cable 1 to your device's headphone jack.
- 4) Route the wire back to MT6000, and secure your device.


VOLUME CONTROL

7. To raise the volume, press the 10 **VOLUME UP** button or use your device's controls.

 \bigoplus

8. To lower the volume, press the ⑦ **VOLUME DOWN** button or use your device's controls.

USB INPUT

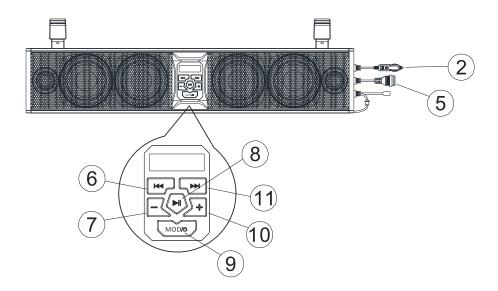

USB IN OPERATION




- Power on the *MT6000* by plugging in the male cigarette lighter adaptor into

 a female cigarette lighter receptacle.
- 2. Press the button 9. The $\emph{MT6000}$ will automatically go in to arbitrary pattem.
- 3. Insert the USB Flash drive on (5) and play the music automatically.
- 4. Press the 8 **PLAY/PAUSE** once to start playing music or pause.
- 5. To skip songs or advance, press the ① NEXT TRACK button.
- 6. To select the previous song, press the ⑥ *PREVIOUS TRACK* button.
- 7. To raise the volume, press the 10 **VOLUME UP** button or use your device's controls.
- 8. To lower the volume, press the ⑦ **VOLUME DOWN** button or use your device's controls.



TIPS: USB can play music formats MP3 and WMA. USB can provide 1A current.

REMOTE CONTROL

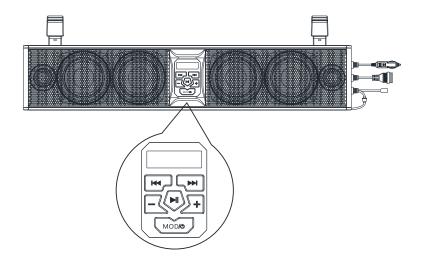


(

REMOTE CONTROL OPERATION


1) Remote control





GETTING STARTED

GETTING TO KNOW YOUR MT6000 RGB REMOTE




(





- **RGB Remote** 1
- 2 Power On / Off
- 3 Mode Up
- 4 Auto Demo
- (5) Speed Up
- 6 Brightness Up
- 7 Brightness Down
- 8 Mode Down
- 9 Color Down
- 10 Color Up
- Speed Down 11)


- 1) RF controller range: Up to 25ft (LoS)
- 2) Do not obstruct the RF remote with metal
- 3) Always keep away from small children
 4) Do not store in direct sunlight





INSTALLATION


- USE THE SUPPLIED ADJUSTABLE BRACKET TO SECURE TO RAILS.
- ALWAYS RECHECK BRACKET BEFORE EVERY RIDE.

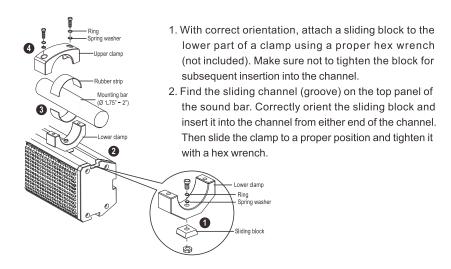



- $3.\,Attach\,the\,supplied\,rubber\,pads\,for\,secure\,clamping\,and\,abrasion\,prevention.$
- 4. Tighten the upper clamp to the lower clamp with a hex wrench. Make sure the supplied spring washers are used to provide more stable bolt tightening against vibration.

Repeat the steps above to secure the sound bar with the other clamp.

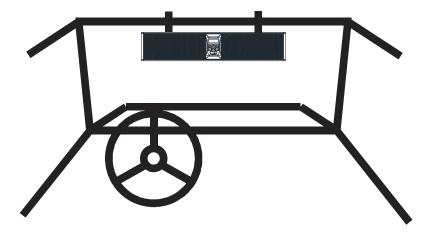





GETTING STARTED

TROUBLE	CAUSE	SOLUTION
Unit will not turn on	The fuse is blown	Check / replace the fuse
	Main acc switch not engaged	Turn switch to on position
No sound is heard	Device volume is low / muted	Turn the volume level up
	Device is paused or muted	Check your devices playing / volume status
Cannot pair BT	The BT function of the device is not enabled	Refer to the user manual of the device for how to enable the BT function
The audio quality is poor after connection with a BT enabled device	The BT reception is poor	Move the device closer to the audio system or remove any obstacle between the device
Unit has become unresponsive	Power glitch or interference	Disconnect power for 10 seconds to reset

(


DIMENSIONS







INSTALLATION

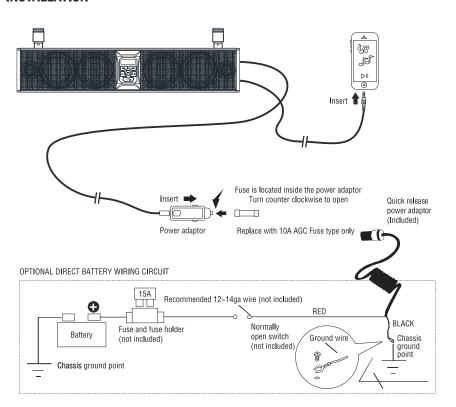





BT Version: 5.0w/ EDR A2DP Range: 33ft (10m)

SPEAKERS

Dimension: (4) 4"/101.6mm Tweeter Size: (2) 1" Soft Dome

AMPLIFER Frepuency Response: 40Hz-22kHz

GENERAL

GENERAL
Operational power: 12VDC(10-16V allowable)
MAX Current Draw: 8A
Replacement Fuse: 10AAGC TYPE
Color: Black
Weight: Ibs/ Kg
Dimensions mm WxHxD: 636 x 126 x 100
Dimensions Inches WxHxD: 25.04 x 4.96 x 3.94

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

(

FCC Warning Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- -- Reorient or relocate the receiving antenna.
- -- Increase the separation between the equipment and receiver.
- -- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- -- Consult the dealer or an experienced radio/TV technician for help. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Statement

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance of 20cm the radiator your body. This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

Your complete satisfaction is our number one goal.

Your satisfaction is why we're in business. If for any reason your experience with our product was anything less than satisfactory, please reach out to us. We'd love to have the opportunity to provide the product experience and service you deserve.

Votre entière satisfaction constitue notre objectif principal.

Nous sommes en affaires pour assurer votre satisfaction. Si jamais, pour quelque raison que ce soit, votre expérience avec un de nos produits ne s'avère pas entièrement satisfaisante, n'hésitez pas à communiquer avec nous. Nous ne demandons pas mieux que d'avoir l'occasion de vous procurer l'expérience et le service auxquels vous avez droit.

Su completa satisfacción es nuestra meta número uno.

Su satisfacción es la razón por la que estamos en el negocio, sí por alguna razón su experiencia con nuestro producto no fue satisfactoria, comuníquese con nosotros, nos encantaría tener la oportunidad de brindarle la experiencia y el servicio que usted se merece.





